

FCC Test Report (Part 1)

RF Exposure (EMF)


Test Report no.:	EMC_BO_002074 (2.0)	Date of Report:	05-APR-2017
Number of pages:	14	Project support engineer:	Frank Wittmann
Test period:	15-Jan - 05-Apr-2017		

Applicant:	Laird Dabendorf GmbH, Märkische Straße 72, 15806 Zossen, Mr. Heiko Dörschel		
Manufacturer:	Laird Dabendorf GmbH, Märkische Straße 72, 15806 Zossen, Germany		
EUT ident.:	Laird, WCH-186 (WCH-186a, WCH-186b)		
FCC ID:	RK7186-00	IC ID:	4774A-18600

Referred documents:	CFR 47, FCC rules Part 1, KDB 680106 D01 RF Exposure Wireless Charging Apps v02, Deviations or clarifications to these standards are noted in the related test result under "test method and limit".
----------------------------	--

Testing Laboratory:	novero Test Center, Meesmannstr.103, 44807 Bochum, Germany		
	Tel.:	+49 234/51668-0	
	e-mail:	Product.Validation.Bochum@lairdtech.com	
	FCC listing no.:	881111	IC recognition no.: 7847A-1
	Laboratory manager:	Jürgen Mitterer	

Test result	The EUT complies with the requirements made in the referred test documents.
--------------------	---

Approver:	Ines Baufeld	Author:	Robert Müller
Title:	Laboratory Quality Manager	Title:	Product Certification Manager
Signature:		Signature:	

This test report may not be reproduced, except in full, without written permission of testing laboratory. The test results in this test report relates only to the tested sample, which is mentioned in this test report. Novero GmbH cannot be made responsible for any generalisations or conclusions drawn from this test report. Modification of the tested sample is prohibited and leads to invalidity of this test report.

1. Summary for FCC Part 1 EMF Test Report

Date of receipt	15-Jan-2016
Testing completed	19-Jan-2016
The customer's contact person	Heiko Dörschel
Notes	none

1.1. EUT and Accessory Information

The EUT is an inductive wireless power transfer device (wireless charger) with load management operating at 111kHz. EUT is tested with a self designed and shielded receiver simulator which requests and consumes always maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Wireless charger unit	WCH-186b	00000291D02F	003	--	0532	DAB16126E
Artificial load	WCH Rec.	0001	1.0	--	--	NOV16024E
Artificial load	WCH Rec.	0004	3.4	--	--	DAB15132E
Power cable	--	--	--	--	--	DAB15194E
RF cable	--	--	--	--	--	DAB16106E
RF cable	--	--	--	--	--	DAB17003E

1.2. Summary of Test Results

Section	Section in CFR 47	Name of the test	Result
3	1.307(b), 1.1310	RF Exposure	PASS

PASS: The EUT complies with the essential requirements in the standard.
 FAIL: The EUT does not comply with the essential requirements in the standard.
 NP: The test was not performed.
 NA: The test was not applicable.


1.3. Measurement Uncertainties

Parameter	Worst Case Uncertainty	Max. Uncertainty
H-field probe 100cm ²	3.33%	<30%
H-field probe 3cm ²	4.17%	
H-field level tester	12.60%	
E-field probe+level tester	20%	

CONTENTS

1. SUMMARY FOR FCC PART 1 EMF TEST REPORT	2
1.1. EUT AND ACCESSORY INFORMATION	2
1.2. SUMMARY OF TEST RESULTS.....	2
1.3. MEASUREMENT UNCERTAINTIES	2
2. EMF TEST SETUP.....	4
3. E AND H-FIELD STRENGTH (FCC §1.307(B), §1.1310).....	5
3.1. TEST METHOD AND LIMIT	5
3.2. EMF TEST RESULTS	6
4. PROBE ISOTROPY	12
4.1. EMF TEST RESULTS	12
5. TEST EQUIPMENT	14

2. EMF Test setup

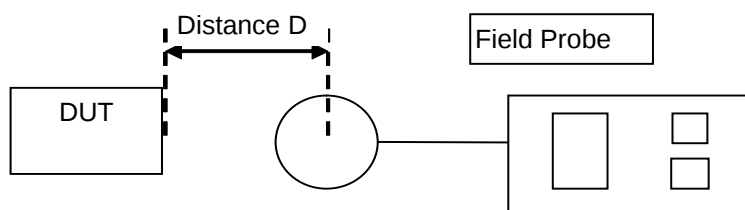

3. E and H-field strength (FCC §1.307(b), §1.1310)

EUT with DUT number	DAB16126E
Accessories with DUT numbers	Novero WCH Receiver (Receiver Simulator) DAB15194E (power cable), DAB16106E (RF cable), DAB17003E (RF cable)
Operation Voltage [V] / [Hz]	12 / DC
Result	PASS
Remarks	OP1 (worst case with 5Ω/5W load on primary coil 1)
Temp [°C] / Humidity [%RH]	23.1 / 39.5
Date of measurements	21&22-Feb-2017
Measured by	Oliver Flecke

3.1. Test method and limit

Measurement was made from all sides of the DUT in 10, 9, 8, 7, 6, 5, 4 and 3cm distance (DUT edge to the center of probe) if possible

Different probes were used to measure E and H-field separately

The highest emission level was recorded

EUT was cooled during measurements to avoid overheating and therefore power shut down

FCC limits for maximum permissible exposure

Frequency range [MHz]	Electric Field Strength Limit [V/m]	Magnetic Field Strength Limit [A/m]	Power Density [mW/cm ²]	Average Time [minutes]
(A) Limits for Occupational/Control Exposures				
0.3 – 3.0	614	1.63	*(100)	6
3.0 – 30	1842/f(MHz)	4.89/f(MHz)	*(900/f(MHz) ²)	6
30 – 300	61.4	0.163	1.0	6
300 – 1500			f(MHz)/300	6
1500 - 100000			5	6
(B) Limits for General Population/Uncontrol Exposures				
0.3 – 1.34	614	1.63	*(100)	30
1.34 – 30	824/f(MHz)	2.19/f(MHz)	*(180/f(MHz) ²)	30
30 – 300	27.5	0.073	0.2	30
300 – 1500			F(MHz)/1500	30
1500 - 100000			1.0	30

Note: According to DUT operating frequency and installation definition, the limit in bold letters (300kHz) was applied

3.2. EMF Test Results


3.2.1 E-field Strength

Detector: RMS


Operation Mode	Frequency [kHz]	Distance [cm]	Level Pos A [V/m]	Level Pos B [V/m]	Level Pos C [V/m]	Level Pos D [V/m]	Level Top [V/m]	FCC Limit [V/m]	Result
1	111	10	0.37	0.22	0.21	0.42	0.59	614	PASS
1	111	9	0.44	0.23	0.21	0.54	0.67	614	PASS
1	111	8	0.52	0.25	0.25	0.60	0.75	614	PASS
1	111	7	0.60	0.26	0.34	0.72	0.79	614	PASS
1	111	6	0.73	0.46	0.35	0.87	0.89	614	PASS
1	111	5	0.94	0.63	0.43	1.15	1.06	614	PASS
1	111	4	1.45	0.97	0.62	1.81	Note 1	614	PASS

1) not possible due to artificial load dimension


3.2.1.1 Setup photo in worst case position A

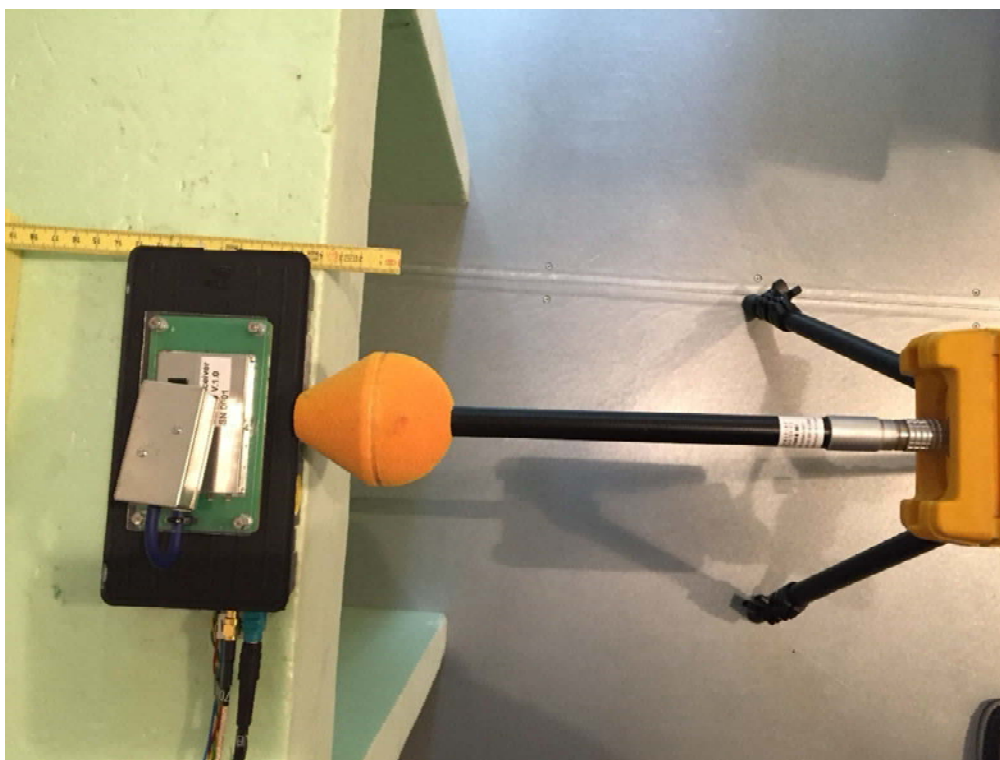


3.2.1.2 Setup photo in worst case position B

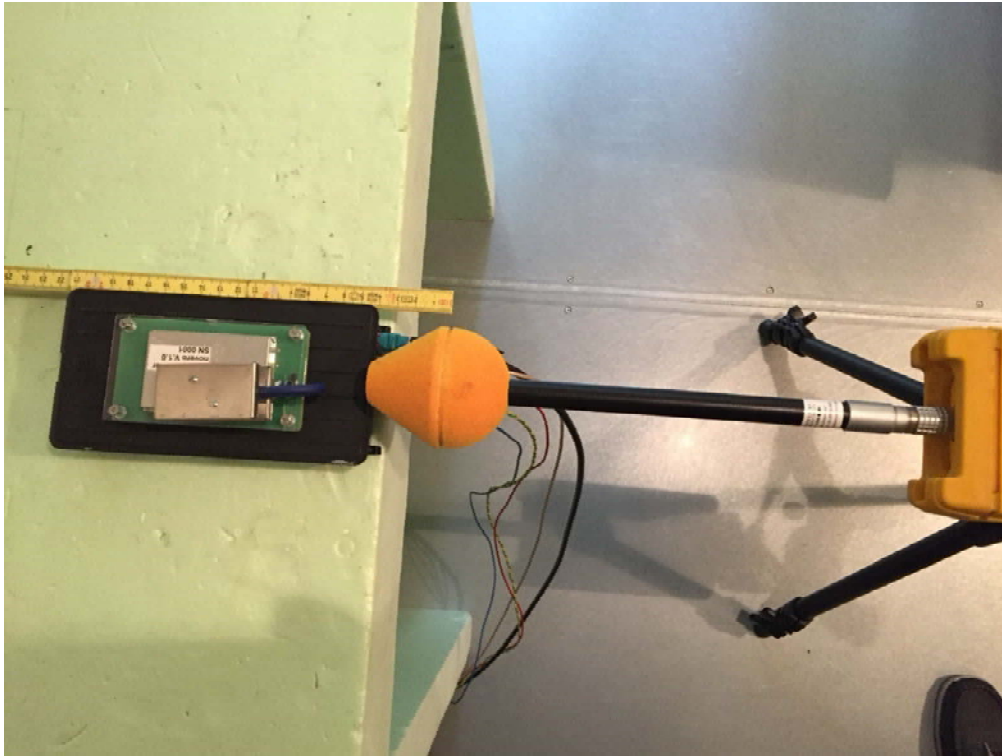

3.2.1.3 Setup photo in worst case position C

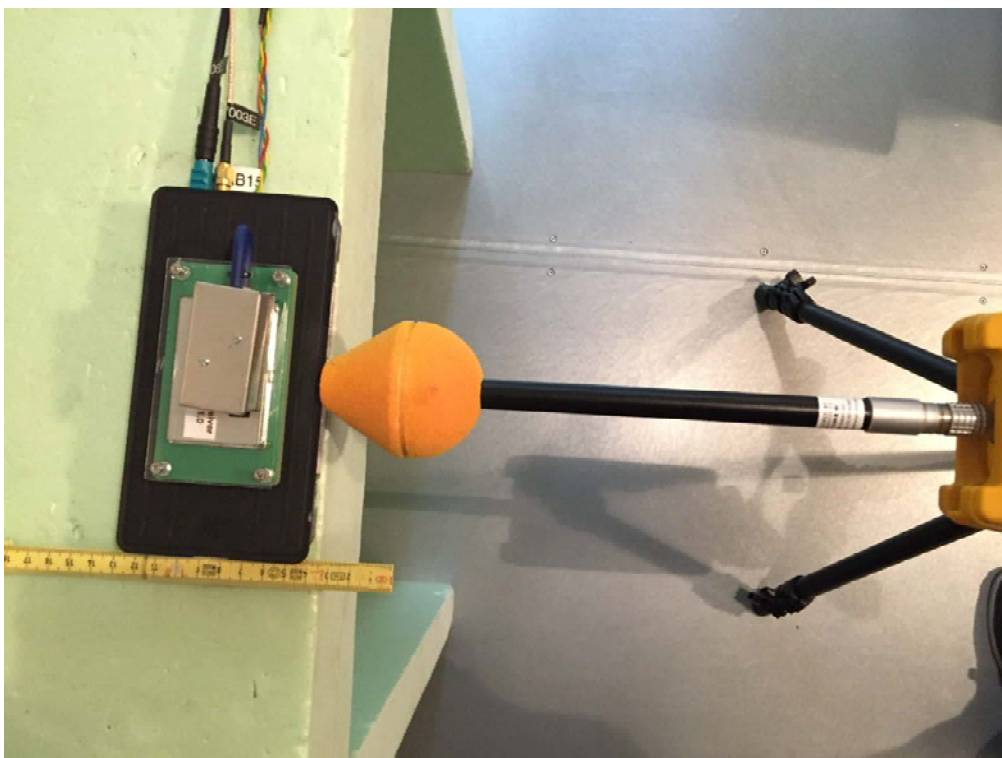

3.2.1.4 Setup photo in worst case position D

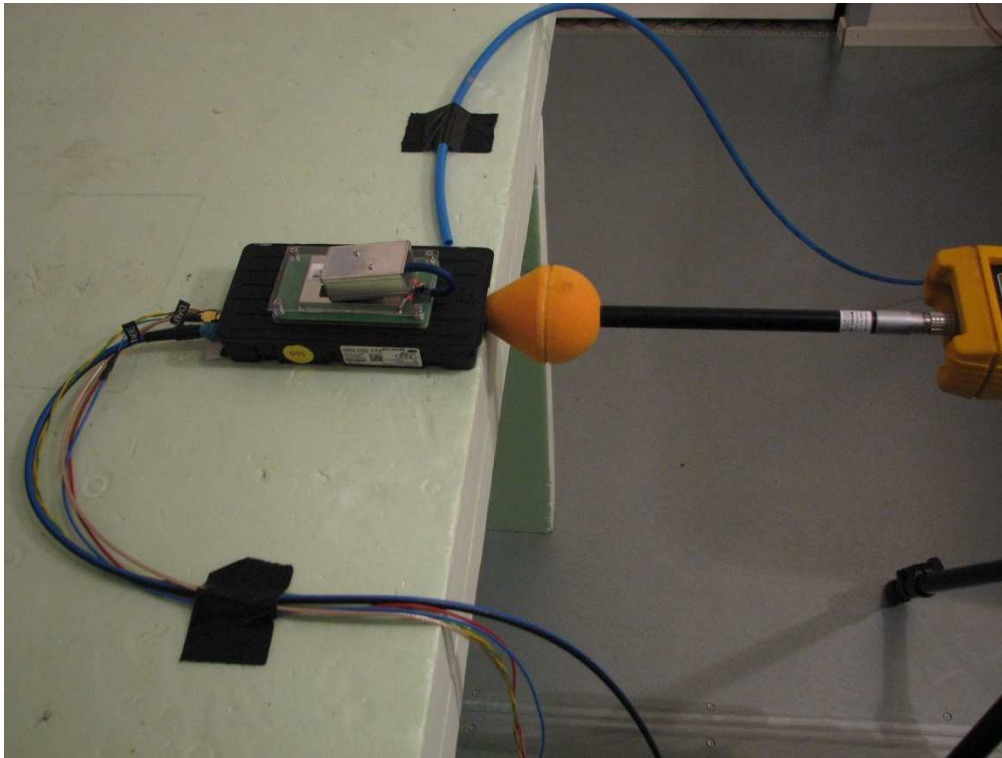

3.2.1.5 Setup photo in worst case position TOP



3.2.2 H-field Strength

Detector: RMS, Mode: 320 μ T; Range: normal; Low Cut: 10Hz


Operation Mode	Frequency [kHz]	Distance [cm]	Level Pos A [A/m]	Level Pos B [A/m]	Level Pos C [A/m]	Level Pos D [A/m]	Level TOP [A/m]	FCC Limit [A/m]	Result
1	111	10	0.16	0.11	0.16	0.11	0.65	1.63	PASS
1	111	9	0.18	0.16	0.17	0.12	0.80	1.63	PASS
1	111	8	0.22	0.33	0.20	0.13	1.16	1.63	PASS
1	111	7	0.25	0.35	0.23	0.14	1.28	1.63	PASS
1	111	6	0.33	0.36	0.26	0.16	1.50	1.63	PASS
1	111	5	0.63	0.37	0.59	0.37	--	1.63	PASS
1	111	4	0.89	0.42	0.80	0.42	--	1.63	PASS
1	111	3	1.11	0.49	1.19	0.48	--	1.63	PASS

Note1: Measurement values were transformed from μ T to A/m, where 1 A/m = 1.256 μ T

Note2: Measurements for distances 10, 9, 8, 7, 6cm were done with 100cm² probe

Note3: Measurements for distances 5, 4, 3cm were done with 3cm² probe


3.2.2.1 Setup photo in worst case position A

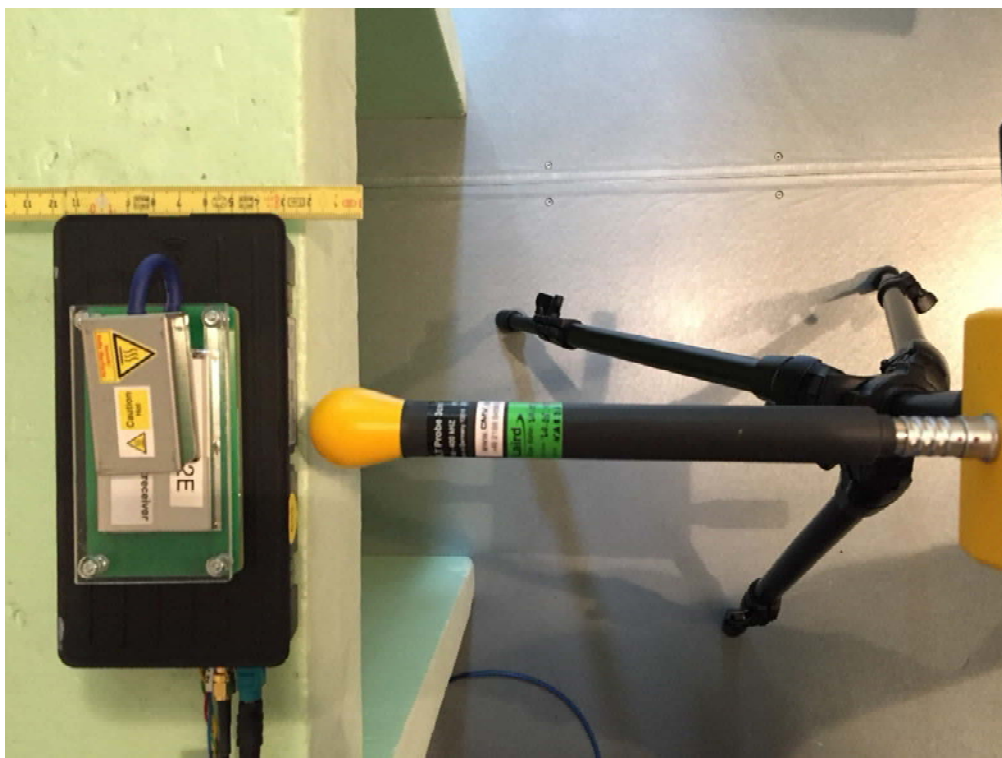

3.2.2.2 Setup photo in worst case position B




3.2.2.3 Setup photo in worst case position C

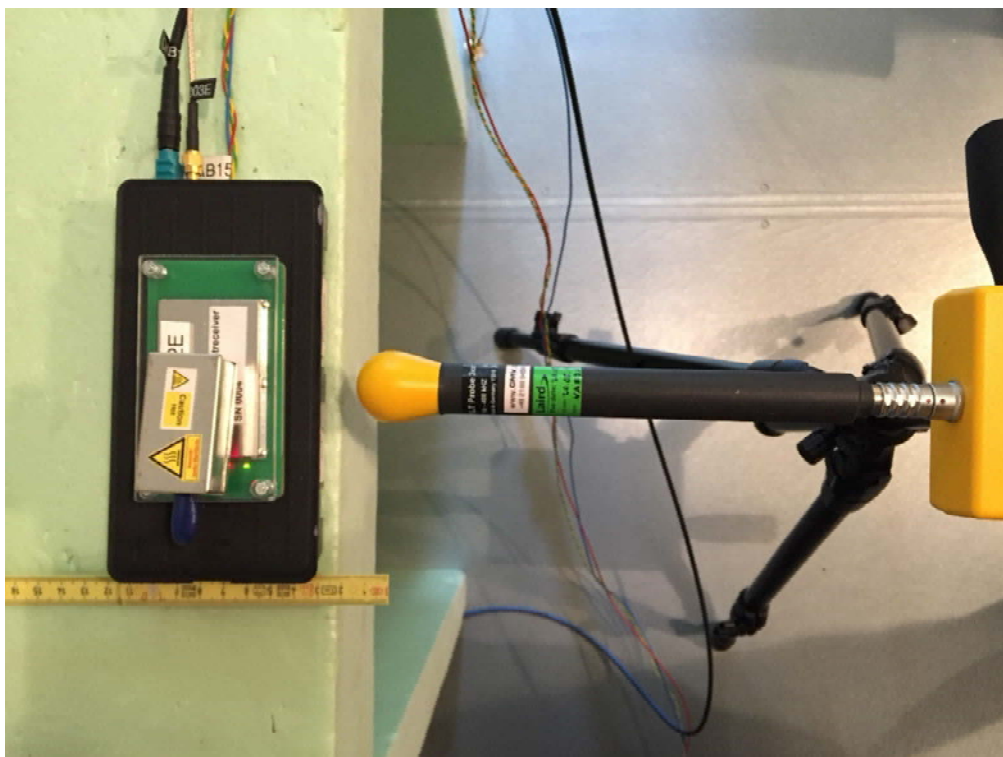

3.2.2.4 Setup photo in worst case position D



3.2.2.5 Setup photo in worst case position TOP

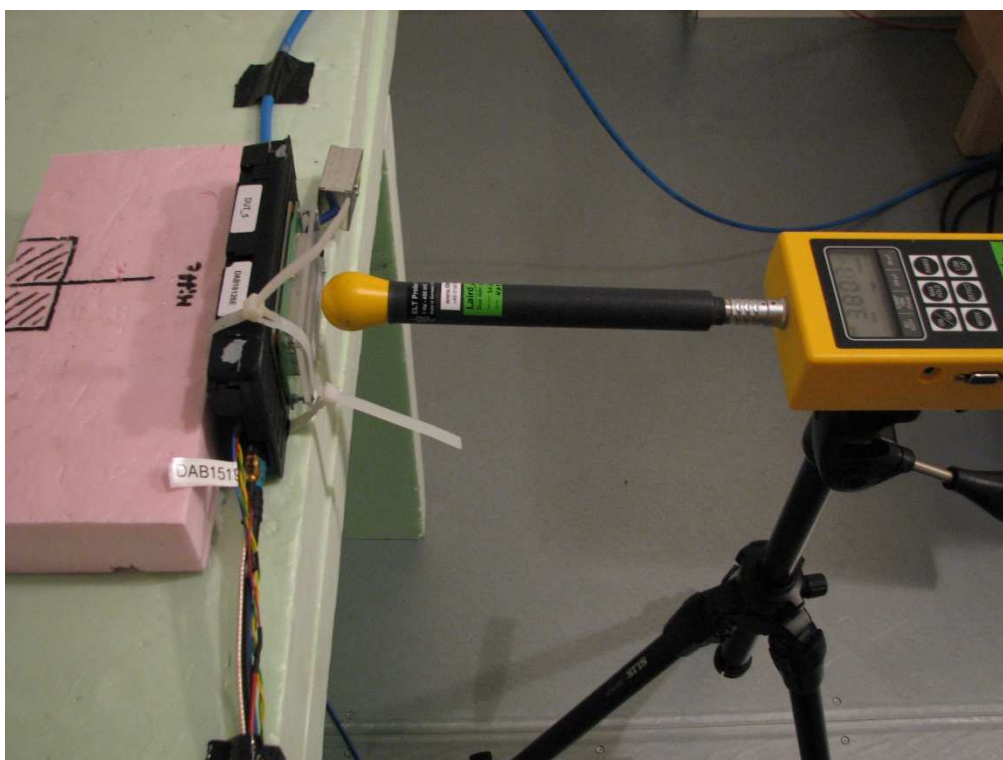

4. Probe Isotropy

4.1. Results

4.1.1 H-field Strength

Detector: RMS, Mode: 320 μ T; Range: normal; Low Cut: 10Hz

Axis	Frequency [kHz]	Distance [cm]	Level TOP [A/m]
X	111	5	1.30
Y	111	5	1.30
Z	111	5	1.31


Note1: Measurement values were transformed from μ T to A/m, where 1 A/m = 1.256 μ T

Note2: Measurements were done with 3cm² probe

4.1.1.1 Setup photo axis X



4.1.1.2 Setup photo axis Y

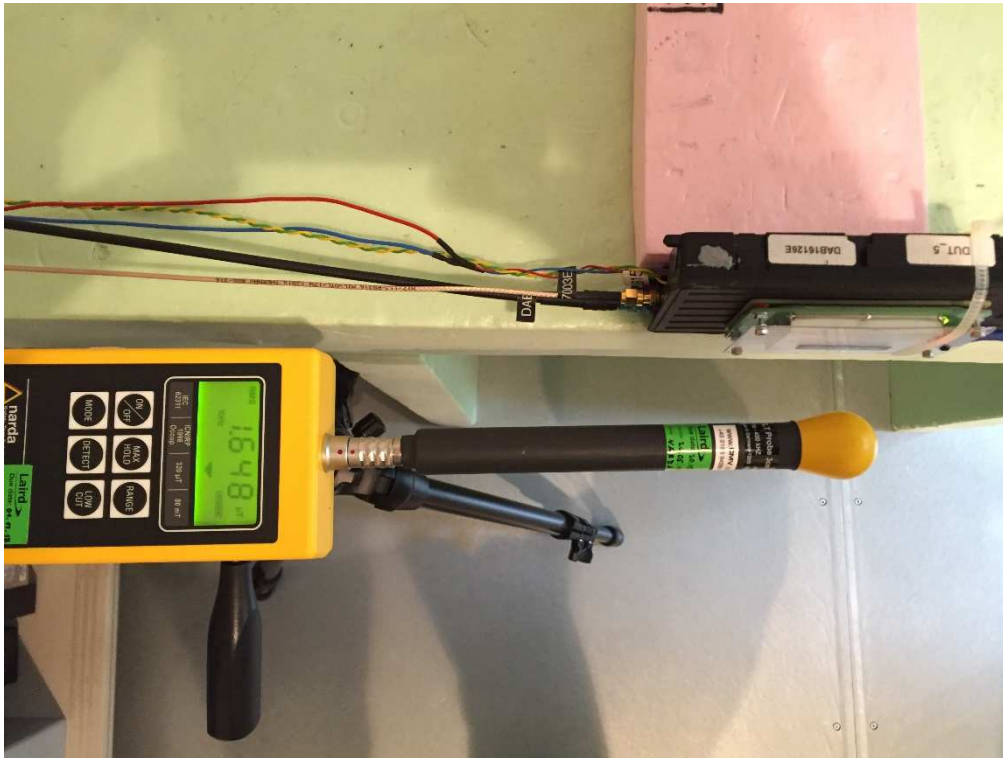

4.1.1.3 Setup photo axis Z



5. Test Equipment

Equipment	Manufacturer	Type	Serial No.	Calibration	Interval
H-field Level Meter	Narda	ELT-400	N-0385	01-Dec-14	3 years
H-field probe 3cm ²	Narda	2300/90.20	C-0111	02-Mar-14	3 years
H-field probe 100cm ²	Narda	2300/90.10	M-0823	02-Dec-14	3 years
E-field Level Meter	Wandel & Goltermann	EMR 20	P-0030	03-Dec-14	3 years
E-field probe	Wandel & Goltermann	Type8	M-0082	03-Dec-14	3 years