



RA-24-08103459-2/A Ed. 1

“This report cancels and replaces the test report n° RA-24-08103459-2/A Edition 0”

FCC CERTIFICATION RADIO Measurement Technical Report

**standard to apply:
FCC Part 15.247**

**Equipment under test:
BLUETOOTH HANDS FREE CAR KIT
CK3000**

**FCC ID :
RKXCK3000R2**


**Company:
PARROT**

1

DISTRIBUTION: Mr BEN YACOUB

Company: PARROT

Number of pages: 38 including 5 annexes

| Ed. | Date | Modified pages | Written by Name | Technical Verification Quality Approval Name Visa |
|-----|-----------|----------------|---|--|
| 1 | 15-Jan-10 | 1, 2 and 5 | M. DUMESNIL  | |

Duplication of this test report is only permitted for an integral photographic facsimile. It includes the number of pages referenced here above.

This document is the result of testing a specimen or a sample of the product submitted. It does not imply an assessment of the conformity of the whole manufactured products of the tested sample.

Conseils & Ingénierie - Tests & Mesures - Formation

Z.I. Angers - Beauzoué - 15, rue de la Claié - 49070 BEAUZOUÉ - Siret : 344 545 645 00055
 Tél. : 02 41 73 26 27 - Fax : 02 41 73 26 40 - E-mail : atlantique@emitech.fr - URL : www.emitech.fr
 Siège Social : 3, rue des Coudriers - CAP 78 - ZA de l'Observatoire - 78180 MONTIGNY LE BX
 S.A. au capital de 480 000 € - R.C.S. VERSAILLES 344 545 645 - APE 7112B



PRODUCT: BLUETOOTH HANDS FREE CAR KIT

1 | **Reference / model:** CK 3000 EVO

Serial number: not communicated

MANUFACTURER: PARROT

COMPANY SUBMITTING THE PRODUCT:

Company: PARROT

Address: 174 quai de Jemmapes
75010 PARIS
FRANCE

Responsible: Mr BEN YACOUB

DATE(S) OF TEST: 12 and 13 November 2008

TESTING LOCATION: EMITECH ATLANTIQUE laboratory at ANGERS (49) FRANCE
EMITECH ATLANTIQUE open area test site in LA POUEZE (49)
FRANCE

Registration Number by FCC: 101696/FRN: 0006 6490 08

TESTED BY: M. DUMESNIL
L. BERTHAUD

CONTENTS

| TITLE | PAGE |
|---|------|
| 1. INTRODUCTION..... | 4 |
| 2. PRODUCT DESCRIPTION | 4 |
| 3. NORMATIVE REFERENCE..... | 5 |
| 4. TEST METHODOLOGY | 5 |
| 5. ADD ATTACHMENTS FILES | 5 |
| 6. TESTS AND CONCLUSIONS | 6 |
| 7. MEASUREMENT OF RADIATED INTERFERENCE FIELD STRENGTH | 8 |
| 8. PEAK OUTPUT POWER..... | 10 |
| 9. RADIATED EMISSION OF TRANSMITTER | 12 |
| 10. BAND EDGE COMPLIANCE | 14 |
| CURVE n° 1..... | 15 |
| CURVE n° 2..... | 16 |
| ANNEX 1: OCCUPIED POWER BANDWIDTH AND CHANNEL SEPARATION..... | 17 |
| ANNEX 2: NUMBER OF HOPPING FREQUENCIES | 23 |
| ANNEX 3: AVERAGE TIME OF OCCUPANCY ON ANY FREQUENCY | 27 |
| ANNEX 4: PHOTOS OF THE EQUIPMENT UNDER TEST | 33 |
| ANNEX 5: TEST SET UP AND OPEN AREA TEST SITE | 37 |

1. INTRODUCTION

This document presents the result of RADIO test carried out on the following equipment:
BLUETOOTH HANDS FREE CAR KIT – CK3000 in accordance with normative reference.

2. PRODUCT DESCRIPTION

ITU Emission code: 1M00G7E

Class: B (residential environment)

Utilization: Bluetooth hands free car kit

Antenna type: incorporated antenna

Operating frequency range: from 2402 to 2480 Mhz

Number of channels: 79

Channel spacing: 1 MHz

Frequency generation: SAW Resonator Crystal Synthesiser

Modulation: Frequency Hopping Spread Spectrum (FHSS)

Amplitude Digital Frequency Phase

Power source: 12 Vd.c

Power level, frequency range and channels characteristics are not user adjustable.

The details pictures of the product and the circuit boards are joined with this file.

3. NORMATIVE REFERENCE

The standards and testing methods related throughout this report are those listed below. They are applied on the whole test report even though the extensions (version, date and amendment) are not repeated.

| | |
|-------------------------|--|
| 1 FCC Part 15 (2008) | Code of Federal Regulations Title 47 - Telecommunication Chapter 1 - Federal Communications Commission Part 15 - Radio frequency devices Subpart C - Intentional Radiators |
| ANSI C63.4 (2003) | Methods of Measurement of Radio-Noise Emissions from Low-voltage Electrical and Electronics Equipment in the range of 9 kHz to 40 GHz. |
| Public Notice DA 00-705 | Filing and Measurement Guideline for Frequency Hopping Spread Spectrum Systems. |

4. TEST METHODOLOGY

Radio performance tests procedures given in part 15:

- Paragraph 33: frequency range of radiated measurements
- Paragraph 35: measurement detector functions and bandwidths
- Paragraph 109: radiated emission limits
- Paragraph 203: antenna requirement
- Paragraph 205: restricted bands of operation
- Paragraph 207: conducted limits
- Paragraph 209: radiated emission limits; general requirements
- Paragraph 247: operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

5. ADD ATTACHMENTS FILES

- “**Synoptic**“
- “**Block diagram**“
- “**External photos and Product labeling**“
- “**Assembly of components**“
- “**Internal photos**“
- “**Layout pcb**“
- “**Bil of materials**“
- “**Schematics**“
- “**Product description**“
- “**User guide**“

6. TESTS AND CONCLUSIONS

6.1 intentional radiator (subpart C)

| Test procedure | Description of test | Criteria respected? | | | | Comment |
|-----------------|--|---------------------|----|-----|-----|---------------|
| | | Yes | No | NAp | NAs | |
| FCC Part 15.203 | ANTENNA REQUIREMENT | X | | | | <i>Note 1</i> |
| FCC Part 15.205 | RESTRICTED BANDS OF OPERATION | X | | | | |
| FCC Part 15.207 | CONDUCTED LIMITS | | | X | | |
| FCC Part 15.209 | RADIATED EMISSION LIMITS; general requirements | X | | | | <i>Note 2</i> |
| FCC Part 15.247 | OPERATION WITHIN THE BAND 902-928 MHZ, 2400-2483.5 MHz and 5725-5850 MHz | | | | | |
| | (a) (1) <i>hopping systems</i> | X | | | | <i>Note 3</i> |
| | (a) (1) (i) 902 – 928 MHz | | X | | | |
| | (a) (1) (ii) 5725 – 5850 MHz | | X | | | |
| | (a) (1) (iii) 2400 – 2483.5 MHz | X | | | | <i>Note 4</i> |
| | (a) (2) <i>digital modulation techniques</i> | | X | | | |
| | (b) <i>max output power</i> | X | | | | <i>Note 5</i> |
| | (c) <i>operation with directional antenna gains > 6 dBi</i> | | X | | | <i>Note 6</i> |
| | (d) <i>intentional radiator</i> | X | | | | |
| | (e) <i>peak power spectral density</i> | | X | | | |
| | (f) <i>hybrid system</i> | | X | | | |
| | (g) | X | | | | |
| | (h) | X | | | | |
| | (i) <i>RF exposure compliance</i> | X | | | | <i>Note 7</i> |
| DA 00-705 | BAND EDGE COMPLIANCE | X | | | | |

NAp: Not Applicable

NAs: Not Asked

Note 1: internal antenna (pcb antenna, see photos in annex 4).

Note 2: see FCC part 15.247 (d).

Note 3: the system hops to channel frequencies from a pseudo randomly ordered list of hopping frequencies. Each frequency is used equally on the average by the transmitter, and separated by a minimum of 20 dB bandwidth of the hopping channel (784 kHz; see annex 1).

Note 4: the frequency hopping system uses 79 channels (see annex 2).

The timing by channel is 396 μ s. During 79 channels \times 0.4 s (part 15) = 31.6 s, any channel is used 132 times, then $132 \times 396 \mu$ s = 52.27 ms, thus the average time of occupancy on any channel is less than 400 ms within a period of 0.4 s multiplied by the number of hopping channels employed, in normal operating mode (see annex 3).

Note 5: conducted measurement is not possible (integral antenna), so we used the radiated method in open field.

Note 6: the antenna gain is less than 6 dBi.

Note 7: this type of equipment uses less than 0.5 W of output power with a high signal transmitting duty factor (section 3 from Oet 65c).

6.2 unintentional radiator (subpart B)

| Test procedure | Description of test | Criteria respected? | | | | Comment |
|-----------------|------------------------------------|---------------------|----|-----|-----|------------------|
| | | Yes | No | NAp | NAs | |
| FCC Part 15.107 | CONDUCTED DISTURBANCES MEASUREMENT | | | X | | Class B |
| FCC Part 15.109 | RADIATED INTERFERENCE | X | | | | Class B |
| FCC Part 15.111 | CONDUCTED ANTENNA PART | | | X | | Integral antenna |

NAp: Not Applicable

NAs: Not Asked

6.3 Conclusion:

The sample of BLUETOOTH HANDS FREE CAR KIT – CK 3000 submitted to the tests complies with the regulations of the standard FCC Part 15 in accordance with the limits or criteria defined in this report.

7. MEASUREMENT OF RADIATED INTERFERENCE FIELD STRENGTH

Standard: FCC Part 15

Test procedure: FCC Part 15 Unintentional Radiators: Sec.15.109

Limits: Class B

Standard deviation: For $F > 1\text{GHz}$, the measurement is carried out at 3 m, instead of 10 m

Test equipment:

| TYPE | BRAND | EMITECH NUMBER |
|-----------------------------|----------------------------|----------------|
| Test receiver | Rohde & Schwarz ESVS 10 | 1219 |
| Biconical antenna | Hewlet Packard 11966 C | 728 |
| Log periodic antenna | Rohde & Schwarz HL 223 | 1999 |
| Double ridged guild antenna | Electrometrics EM 6961 | 1204 |
| Spectrum analyser | Rohde & Schwarz FSEA | 5071 |
| Spectrum analyser | Rohde & Schwarz FSP40 | 4088 |
| Open area test site | EMITECH | 1274 |
| Preamplifier | ALC ALN02 | 2648 |
| High pass filter | MICROTRONICS HPM11630 | 1673 |
| Spectrum analyser | ADVANTEST R3131 | 1628 |
| Power source | Hewlett Packard E3610A | 4195 |
| Multimeter | Fluke 77-2 | 0812 |

Test set up:

The system is tested in an open area test site (OATS).

The test unit is placed on a rotating table, 0.8 m from a ground plane. Zero degree azimuth corresponds to the front of the equipment under test.

Cables disposition of unit under test:

See photos of the test unit configuration in annex 5.

Frequency range: The highest frequency generated in the device is $f = 2480$ MHz
According the Sec.15.33 of the FCC Part 15 standard, the frequency range measured is indicated in the following table:

For unintentional radiator, including a digital device (Sec.15.33, §(b)(1) of the FCC Part 15 standard) :

| Highest frequency generated or used in the device or on which the device operates or tunes (MHz) | Upper frequency of measurement range (MHz) |
|--|--|
| Above 1000 | 5 th harmonic of the highest frequency or 40GHz, whichever is lower |

Detection mode: Quasi-peak for the range 30 MHz - 1 GHz
Average for $f > 1$ GHz

Bandwidth: 120 kHz for the range 30 MHz - 1 GHz
1 MHz for $f > 1$ GHz

Distance of antenna: class B: 3 meters

Antenna height: 1 to 4 m

Antenna polarization: vertical and horizontal

Equipment under test operating condition:

The equipment under test was powered in 13.2 Vd.c by an external power source.
The equipment under test was in continuous reception mode.

Results:

For the range 30 MHz - 1 GHz, the initial measurements are made in Peak detection mode with a spectrum analyser. Emissions with peak levels within 6 dB of the prescribed limits are re-measured using a Quasi-peak detector and noted in the following table.

Not any unintentional radiator has been detected during this test.

Applicable limits: For $30 \text{ MHz} \leq F < 88 \text{ MHz}$: 40 dB μ V/m
 $88 \text{ MHz} \leq F < 216 \text{ MHz}$: 43.5 dB μ V/m
 $216 \text{ MHz} \leq F < 960 \text{ MHz}$: 46 dB μ V/m
 $F \geq 960 \text{ MHz}$: 54 dB μ V/m

Test conclusion: RESPECTED STANDARD

8. PEAK OUTPUT POWER

Standard: FCC Part 15

Test procedure: paragraph 15.247

Test equipment:

| TYPE | BRAND | EMITECH NUMBER |
|------------------------------------|-----------------|----------------|
| Spectrum analyzer FSP 40 | Rohde & Schwarz | 4088 |
| Antenna RGA60 | Electrometrics | 1204 |
| Open site | EMITECH | 1274 |
| Power source E3610A | Hewlett Packard | 4195 |
| Radio communication analyser CMD55 | Rohde & Schwarz | 3591 |
| Multimeter 77-2 | Fluke | 0812 |

Test set up:

The system is tested in an open area test site (OATS).

The test unit is placed on a rotating table, 0.8 m from a ground plane. Zero degree azimuth corresponds to the front of the equipment under test.

We use for this measure outdoor test site. The measuring distance between the equipment and the test antenna is 3 m. The test antenna has been oriented in the two polarizations, we have recorded only the highest level.

A measurement of the electro-magnetic field is realized, with a resolution bandwidth and video bandwidth adjusted at 1 MHz.

Distance of antenna: 3 meters

Antenna height: 1 to 4 meters

Antenna polarization: vertical and horizontal

Equipment under test operating condition:

The equipment under test is blocked in continuous transmission mode, modulated by internal data signal, at the highest output power level which the transmitter is intended to operate.

The equipment under test is supplied with a stabilized power source.

Results:

Ambient temperature (°C): 21.5
 Relative humidity (%): 50

Power source: 12 Vd.c

Sample n° 1 Channel 1

| | Level dB μ V | Cable loss dB | Antenna factor dB | Electro-magnetic field (dB μ V/m): | P* (W) |
|-------------------------------|------------------------------|---------------|-------------------|--|--------|
| Normal test conditions | Nominal power source (V): 12 | 60.52 | 4.98 | 28.9 | 94.4 |

Polarization of test antenna: horizontal (height: 209 cm)

Position of equipment: in dish position (azimuth: 56 degrees)

Sample n° 1 Channel 40

| | Level dB μ V | Cable loss dB | Antenna factor dB | Electro-magnetic field (dB μ V/m): | P* (W) |
|-------------------------------|------------------------------|---------------|-------------------|--|--------|
| Normal test conditions | Nominal power source (V): 12 | 59.65 | 5.02 | 28.9 | 93.57 |

Polarization of test antenna: horizontal (height: 211 cm)

Position of equipment: in dish position (azimuth: 50 degrees)

Sample n° 1 Channel 79

| | Level dB μ V | Cable loss dB | Antenna factor dB | Electro-magnetic field (dB μ V/m): | P* (W) |
|-------------------------------|------------------------------|---------------|-------------------|--|--------|
| Normal test conditions | Nominal power source (V): 12 | 59.05 | 5.07 | 28.9 | 93.02 |

Polarization of test antenna: horizontal (height: 217 cm)

Position of equipment: in dish position (azimuth: 57 degrees)

* $P = (E \times d)^2 / (30 \times G_p)$ with $d = 3$ m and $G_p = 1.65$

Test conclusion:

RESPECTED STANDARD

9. RADIATED EMISSION OF TRANSMITTER**Standard:** FCC Part 15

Test procedure: paragraph 15.205
 paragraph 15.209
 paragraph 15.247

Test equipment:

| TYPE | BRAND | EMITECH NUMBER |
|------------------------------------|-----------------|-------------------|
| Test receiver ESH3 | Rohde & Schwarz | 1058 |
| Test receiver ESVS 10 | Rohde & Schwarz | 1219 |
| Spectrum analyzer FSP 40 | Rohde & Schwarz | 4088 |
| Loop antenna | EMCO | 1406 |
| Biconical antenna HP 11966C | Hewlett Packard | 728 |
| Log periodic antenna HL 223 | Rohde & Schwarz | 1999 |
| Open site | Emitech | 1274 |
| Antenna RGA-60 | Electrometrics | 1204 |
| Low-noise amplifier 2 to 18 GHz | Microwave DB | 1922 |
| High pass filter HP12/3200-5AA | Filtek | |
| Antenna WR42 | IMC | 1939 |
| Low-noise amplifier 18 to 26 GHz | ALC | 3036 |
| Power source E3610A | Hewlett Packard | 4195 |
| Multimeter 77-2 | Fluke | 0812 |
| Radio communication analyzer CMD55 | Rohde & Schwarz | 3591 |

Test set up:

The system is tested in an open area test site (OATS).

The test unit is placed on a rotating table, 0.8 m from a ground plane. Zero degree azimuth corresponds to the front of the equipment under test.

Frequency range: from 9 kHz to harmonic 10 ($F_{carrier} \leq 10$ GHz)

Bandwidth: 120 kHz ($F < 1$ GHz) or 100 kHz, following 15.205 or 15.247
 1 MHz ($F > 1$ GHz) or 100 kHz, following 15.205 or 15.247

Distance of antenna: between 30 m and 3 m according the frequencies and the limits.

Antenna height: 1 to 4 meters

Antenna polarization: vertical and horizontal, only the highest level is recorded.

Equipment under test operating condition:

The equipment under test is blocked in continuous transmission mode, modulated by internal data signal, at the highest output power level which the transmitter is intended to operate.

The equipment under test is supplied with a stabilized power source.

Results:

Ambient temperature (°C): 22
Relative humidity (%): 48

Power source: 12 Vd.c.

The polarity column refers to the antenna polarity at which the maximum emissions level is measured.

Not any intentional radiator has been observed during this test.

Applicable limits: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

The highest level recorded in a 100 kHz bandwidth is 94.20 dB μ V/m on channel 1.

So the applicable limit is **74.20 dB μ V/m**.

In addition, radiated emissions which fall in the restricted band, as defined in section 15.205 (a), must also comply with the radiated emission limits specified in section 15.209 (a) (see section 15.205 (c)).

Any spurious that has more than 20 dB of margin compared to the applicable limit is not necessary reported.

Test conclusion: RESPECTED STANDARD

10. BAND EDGE COMPLIANCE**Standard:** FCC Part 15.247**Test procedure:** Public Notice DA 00-705, Delta Marker method**Test equipment used:**

| TYPE | MANUFACTURER | EMITECH NUMBER |
|------------------------------------|-----------------|----------------|
| Multimeter 77-2 | fluke | 0812 |
| Spectrum analyzer FSP 40 | Rohde & Schwarz | 4088 |
| Antenna RGA-60 | Electrometrics | 1204 |
| Power source E3610A | Hewlett Packard | 4195 |
| Radio communication analyzer CMD55 | Rohde & Schwarz | 3591 |

Test set up:

The measure is realized in rear field. The field strength levels are correlated with the open side measurements at 3 m.

Test operating condition of the equipment:

The equipment is blocked in frequency hopping mode.

Results:

Lower Band Edge: from 2310 MHz to 2390 MHz, CURVE n° 1
 Upper Band Edge: from 2483.5 MHz to 2500 MHz, CURVE n° 2

Sample n°1:

| Fundamental frequency (MHz) | Field Strength Level of fundamental (dB μ V/m) | Detector (Peak or Average) | Frequency of maximum Band-edges Emission (MHz) | Delta Marker (dB)* | Calculated Max Out of Band Emission Level (dB μ V/m)** | Limit (dB μ V/m) | Margin (dB) |
|-----------------------------|--|----------------------------|--|--------------------|--|----------------------|-------------|
| 2402 | 94.4 | Peak | 2380.85 | -48.03 | 46.37 (1) | 53.98 | 7.61 |
| 2480 | 93.02 | Peak | 2484.06 | -45.69 | 47.33 (1) | 53.98 | 6.65 |

* according to step 2 of Marker-Delta Method DA 00-705.

** according to step 3 of Marker-Delta Method:


Calculated Emission Level = Field Strength Level – Delta Marker Level

(1) the peak level is lower than the average limit (53.98 dB μ V/m).

Test conclusion:


RESPECTED PUBLIC NOTICE

CURVE N° 1.

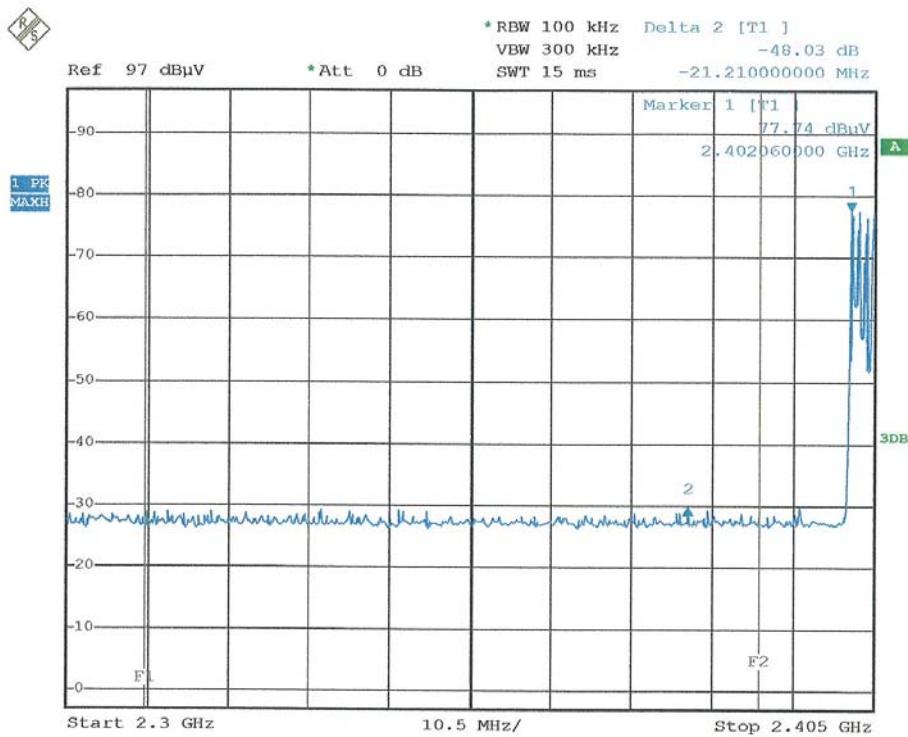

Date: 12.NOV.2008 06:25:01


CURVE N° 2.

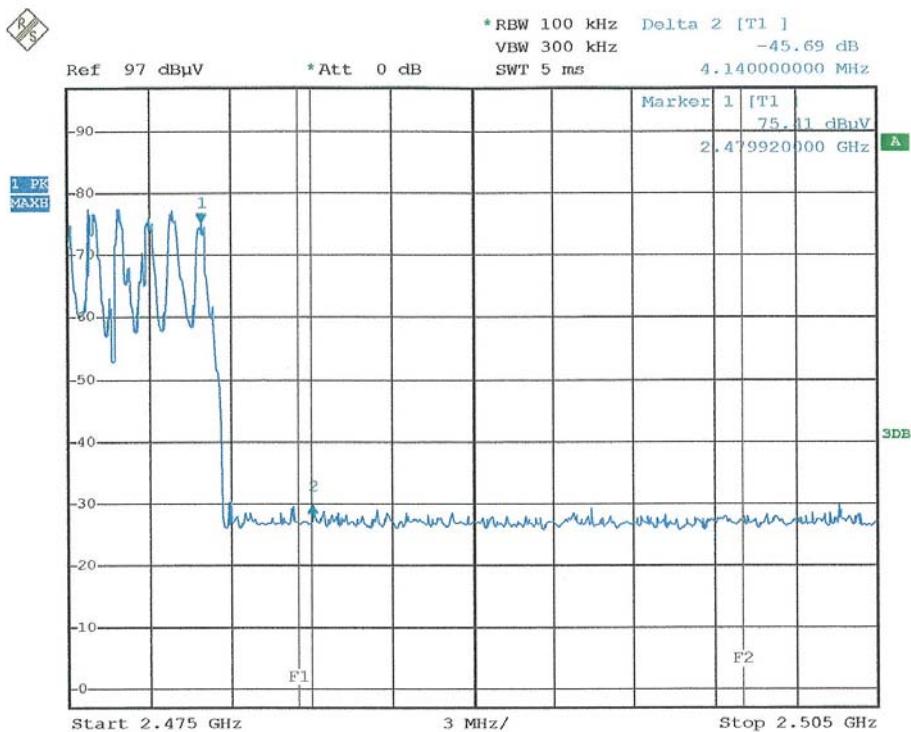


Date: 12.NOV.2008 06:27:16

□□□ End of report, 5 annexes to be forwarded □□□


ANNEX 1: OCCUPIED POWER BANDWIDTH AND CHANNEL SEPARATION

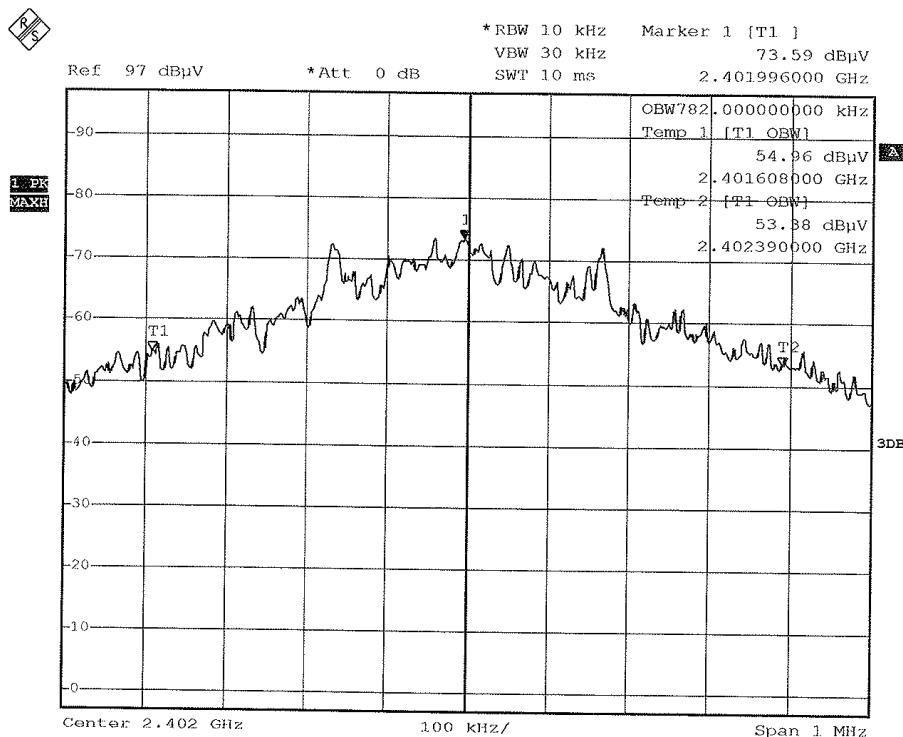


Date: 12.NOV.2008 05:40:17

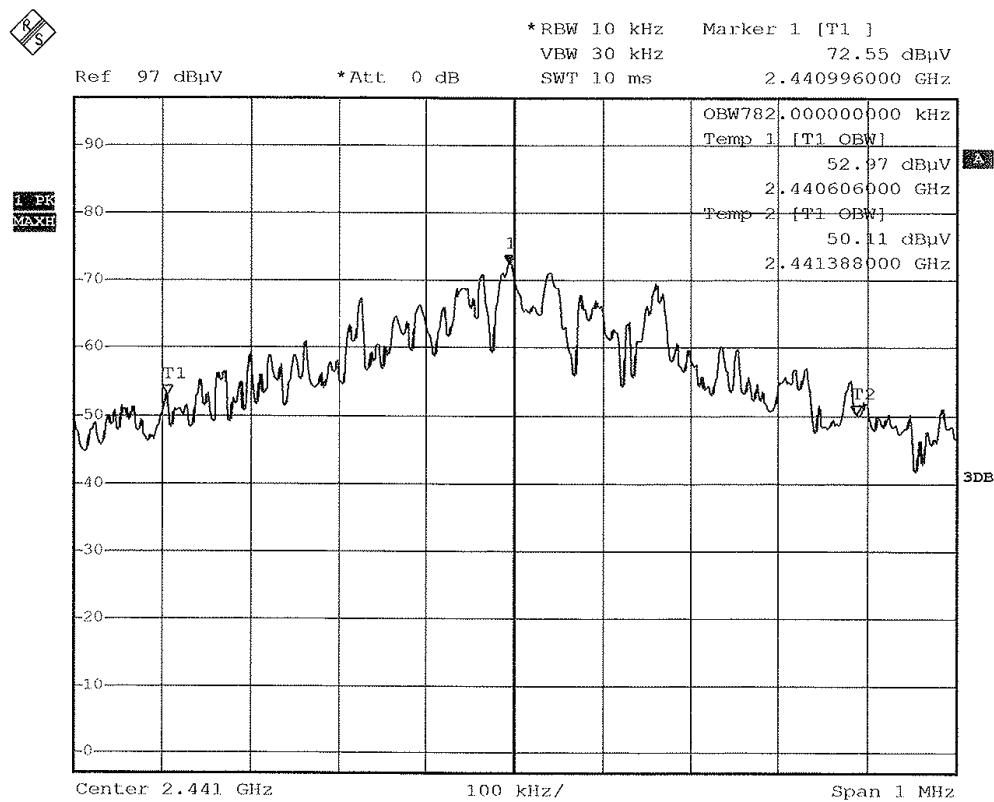


Date: 12.NOV.2008 05:42:36

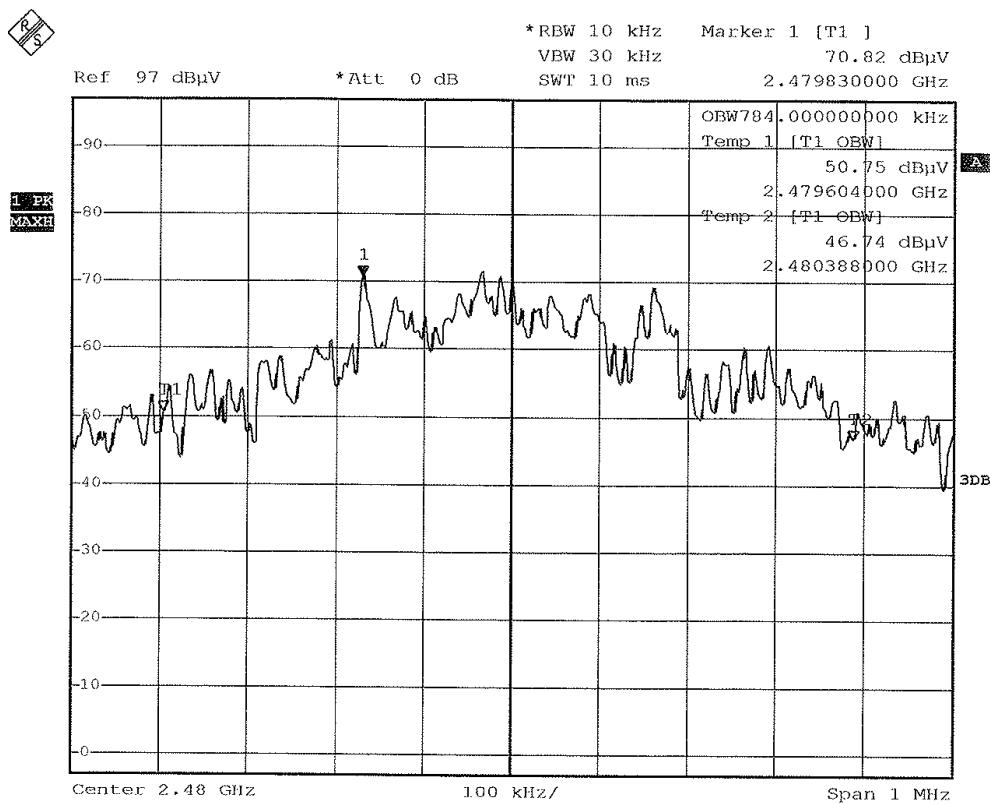


Date: 12.NOV.2008 05:44:12

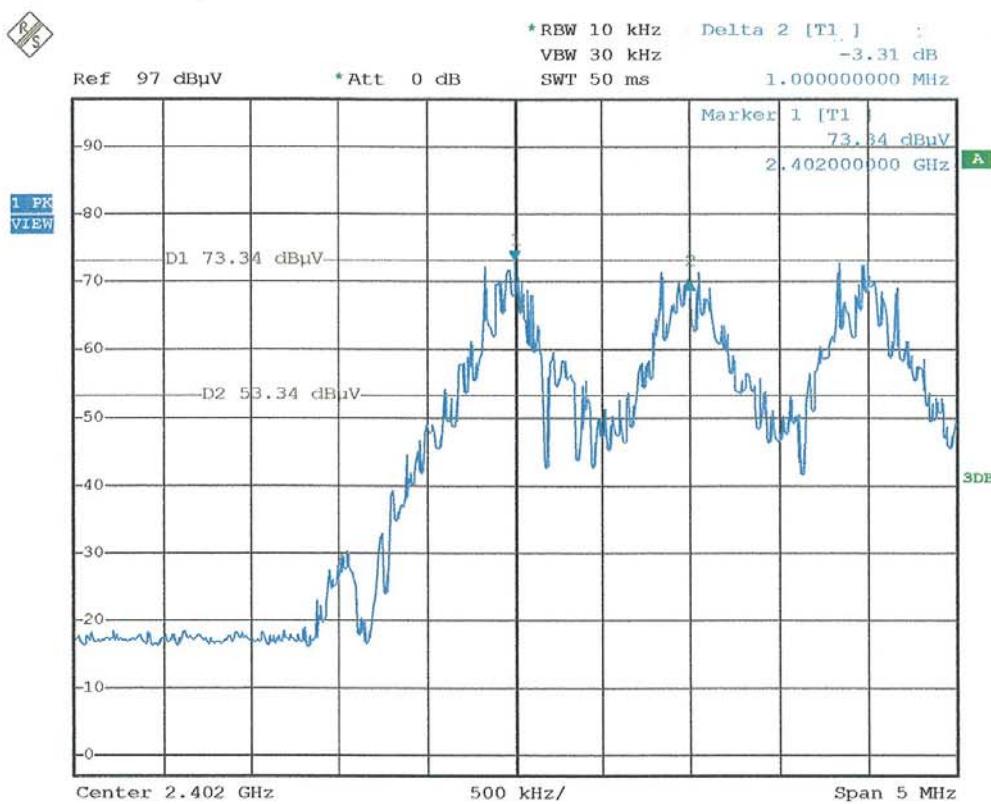

Date: 12.NOV.2008 05:51:29

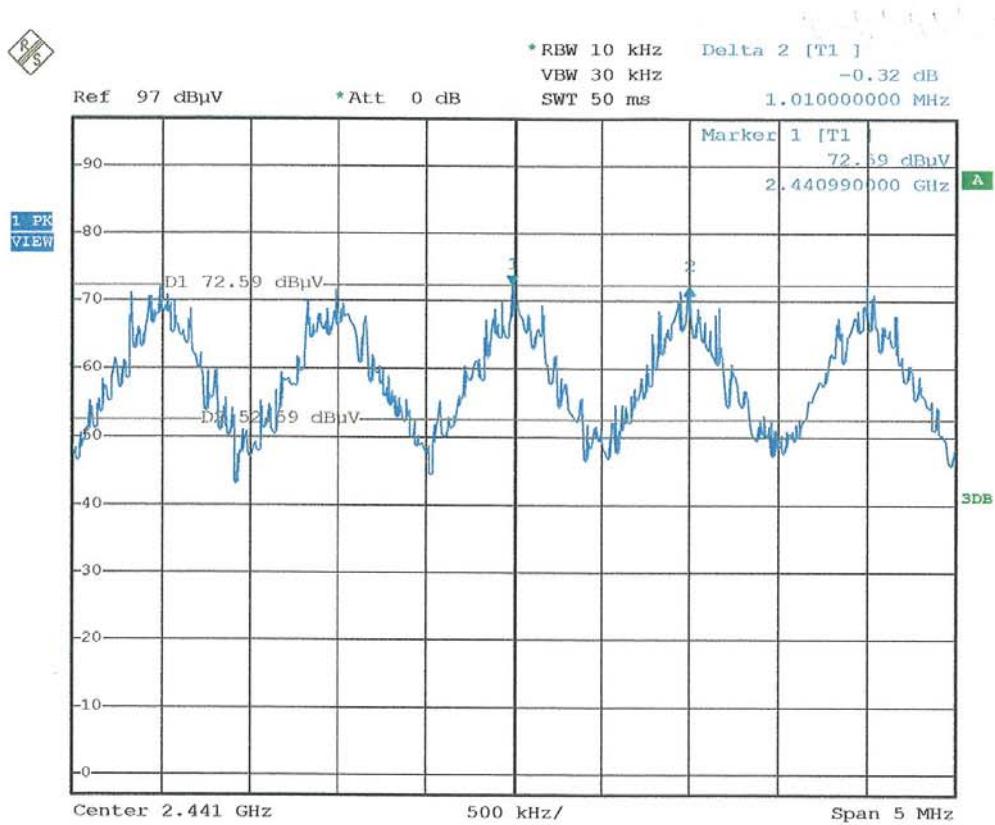


Date: 12.NOV.2008 05:57:50

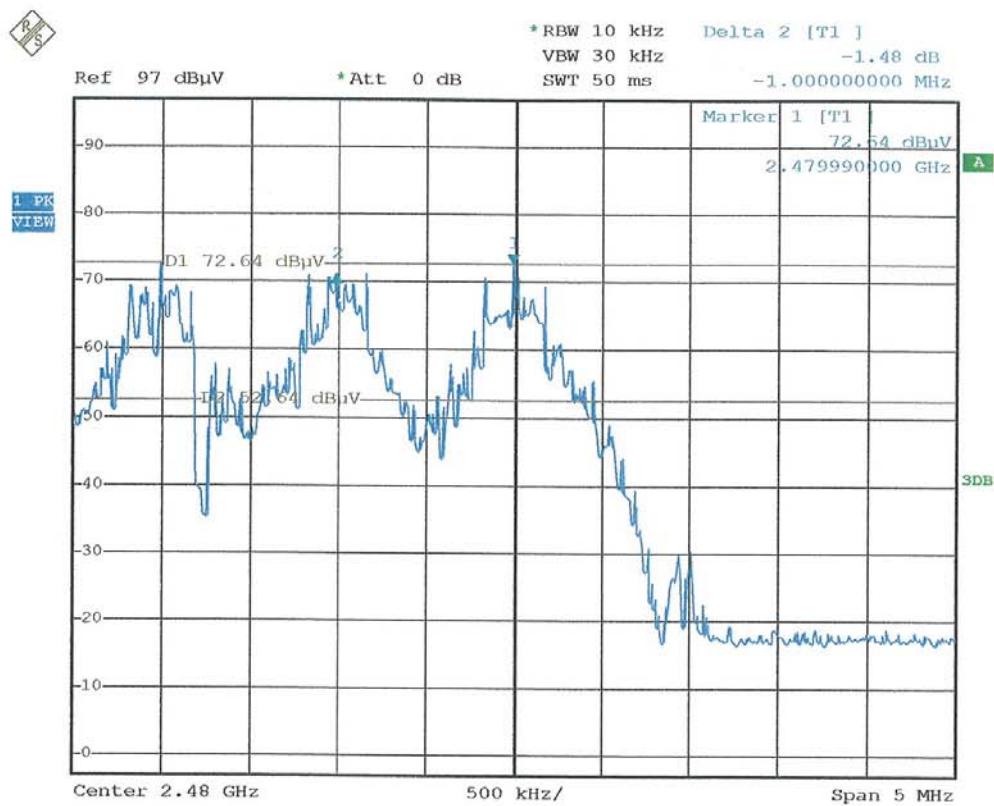


Date: 12.NOV.2008 06:02:06


ANNEX 2: NUMBER OF HOPPING FREQUENCIES

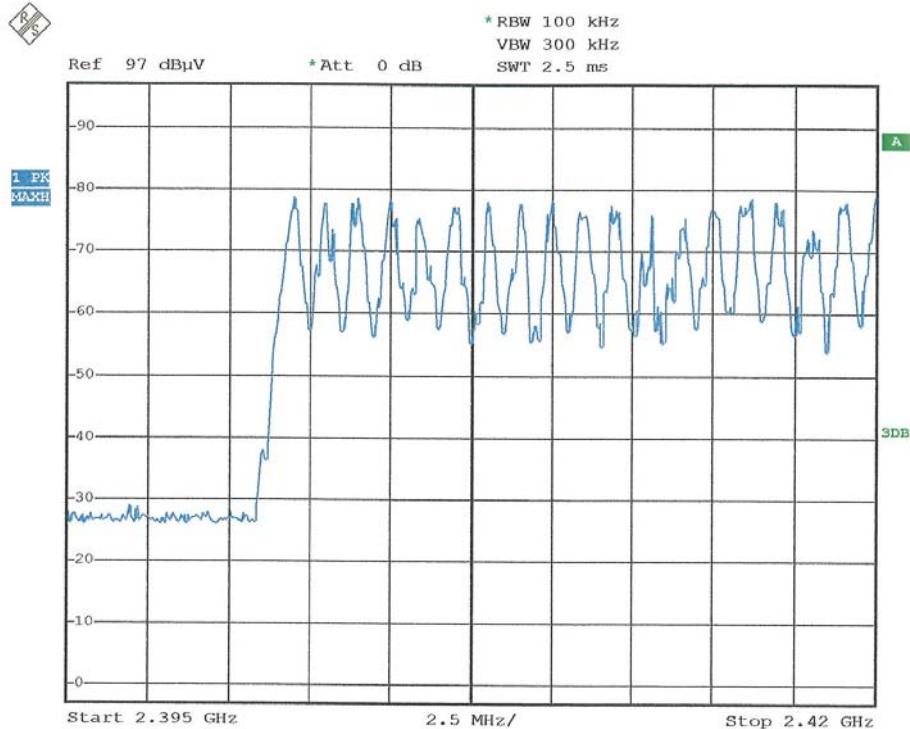


Date: 12.NOV.2008 06:04:35

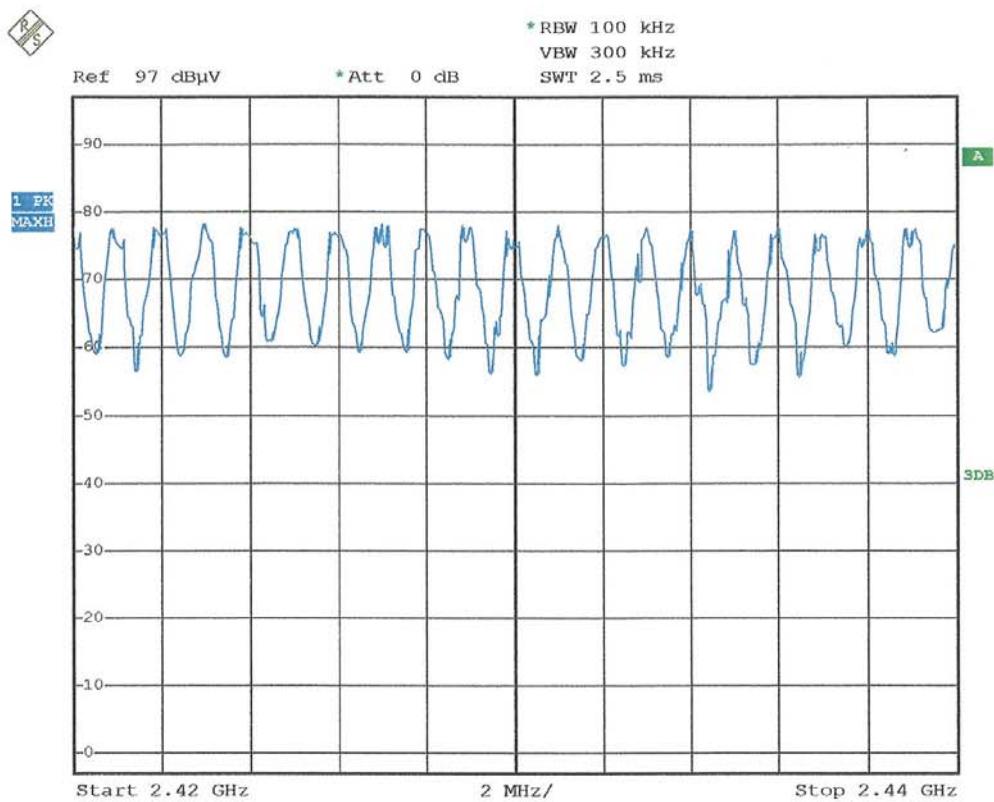

Date: 12.NOV.2008 06:08:04

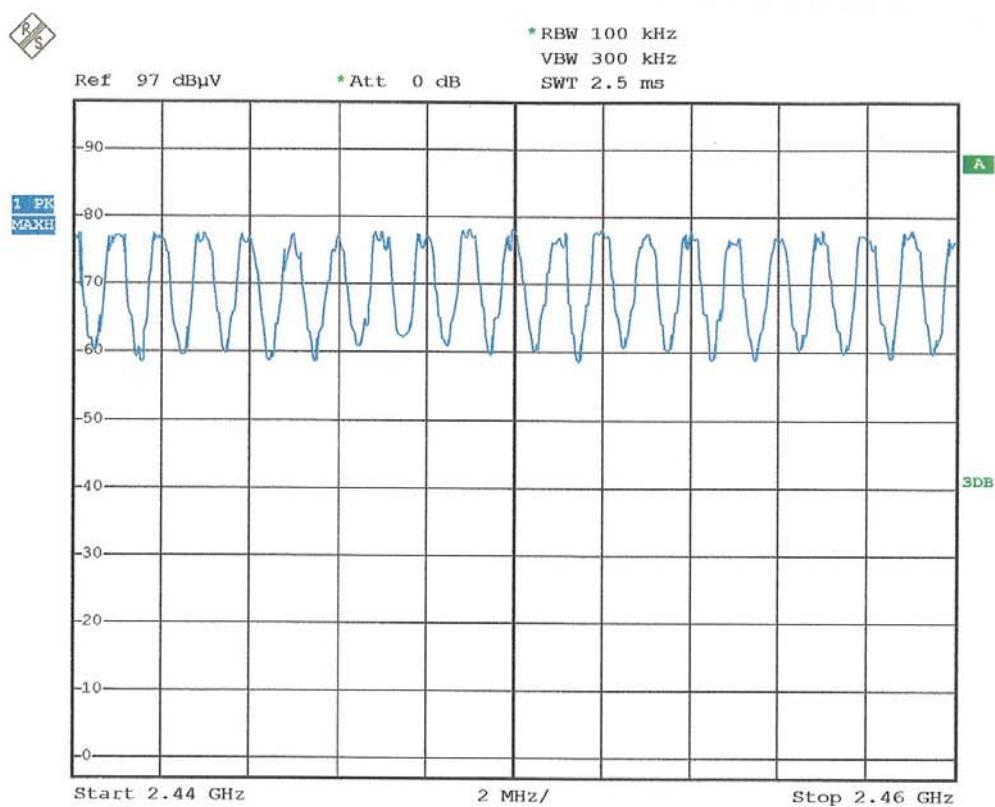


Date: 12.NOV.2008 06:13:15

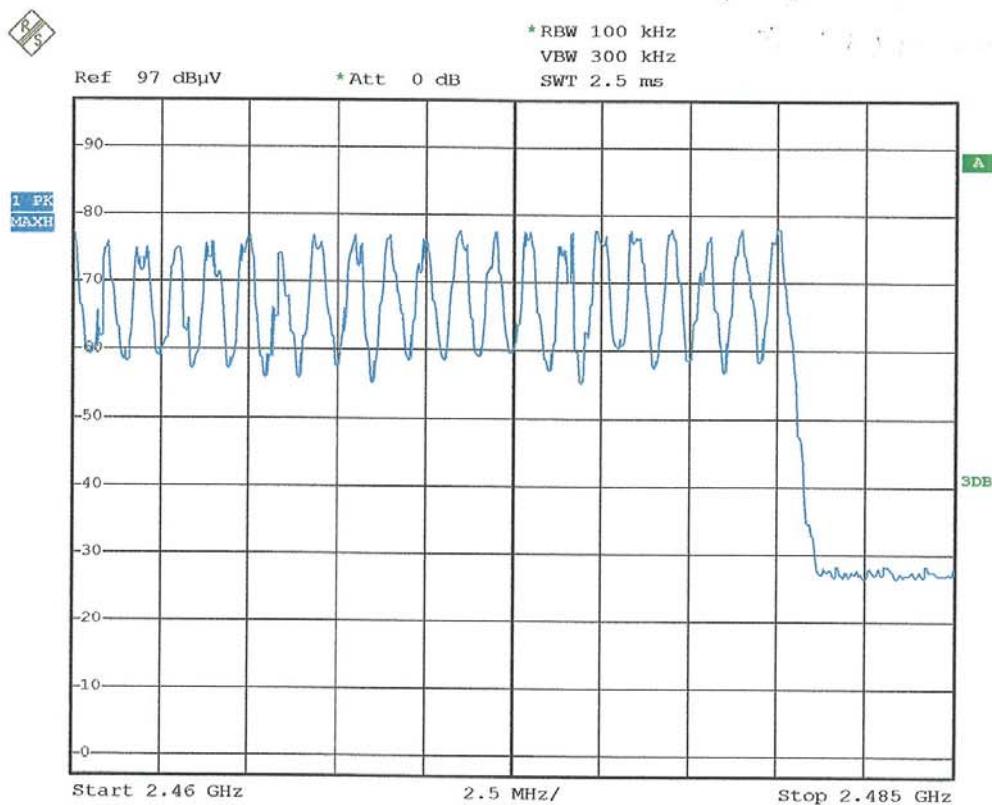


Date: 12.NOV.2008 06:16:21


ANNEX 3: AVERAGE TIME OF OCCUPANCY ON ANY FREQUENCY

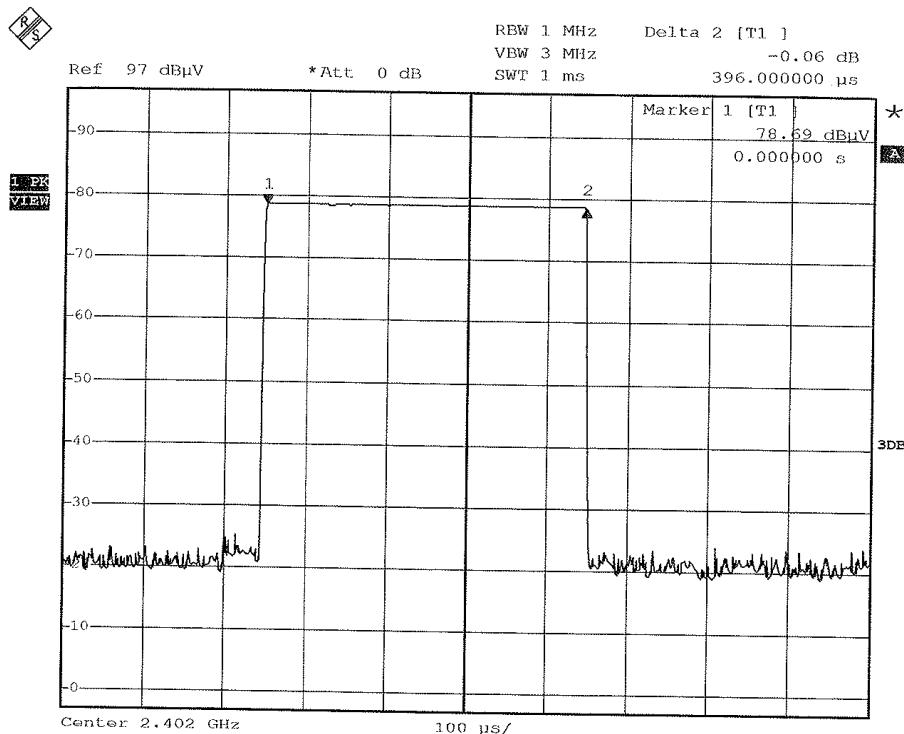


Date: 12.NOV.2008 05:45:49

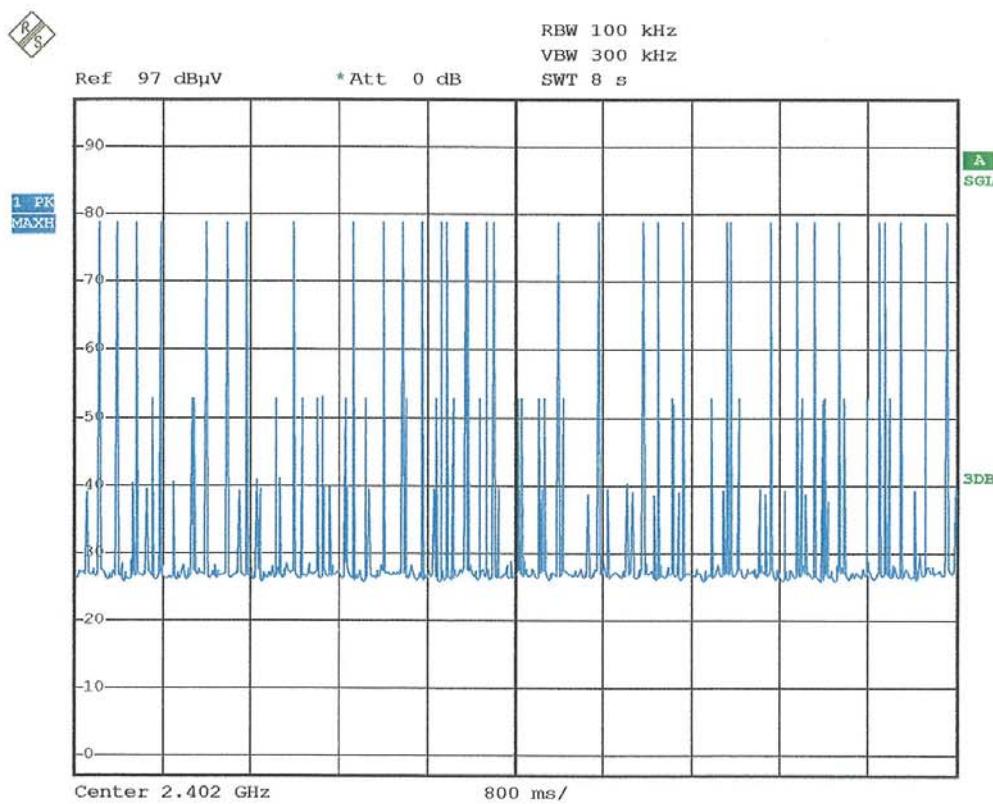


Date: 12.NOV.2008 06:18:38

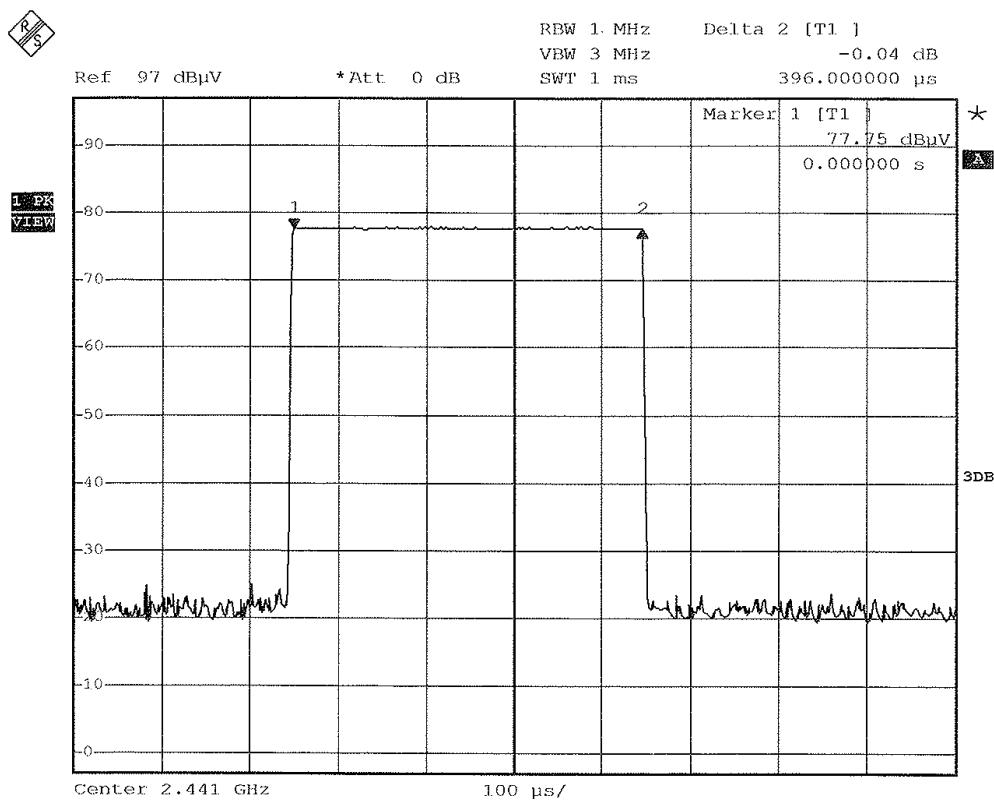


Date: 12.NOV.2008 05:46:54

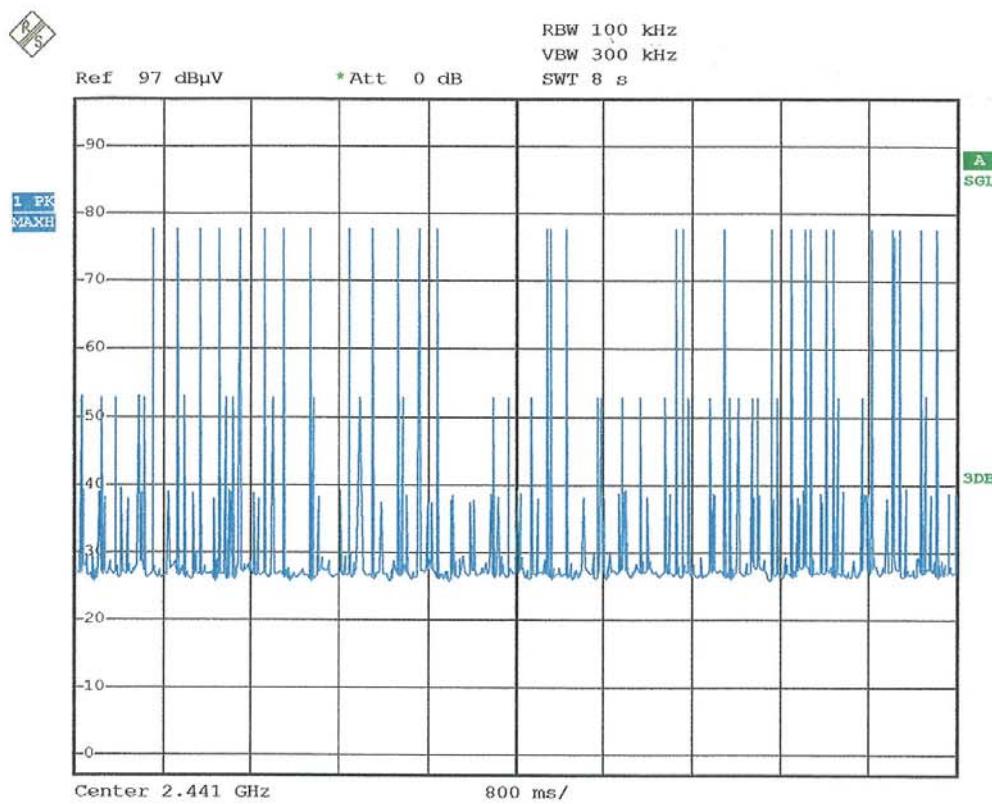

Date: 12.NOV.2008 06:20:42

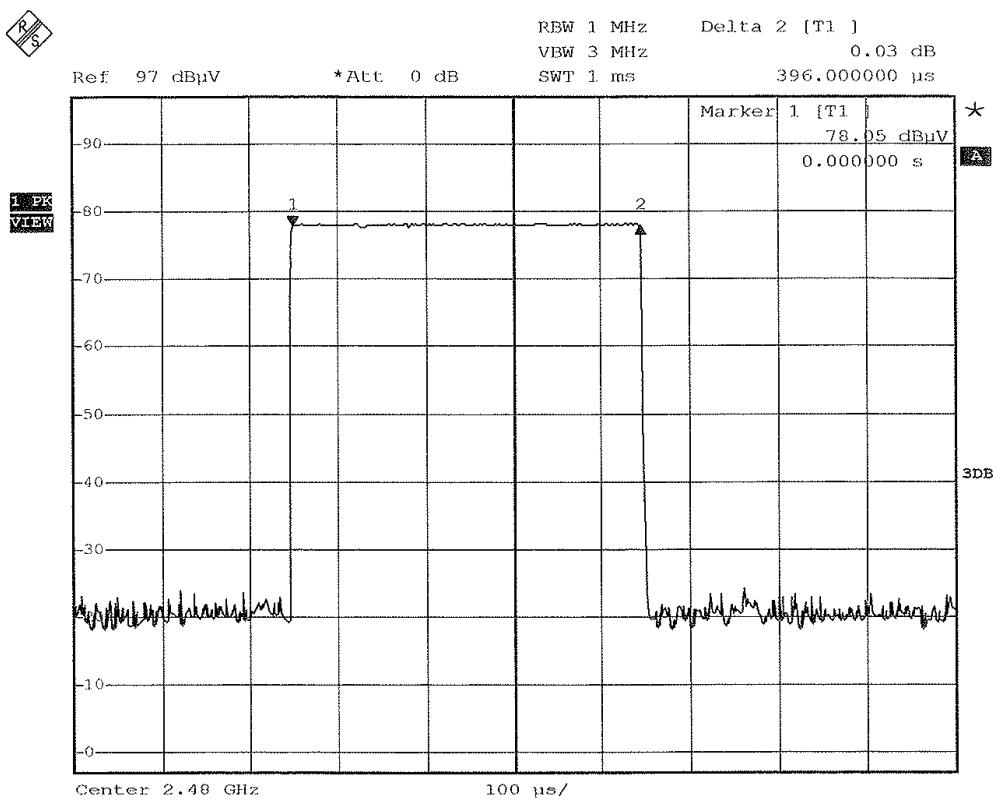

Date: 12.NOV.2008 05:47:44

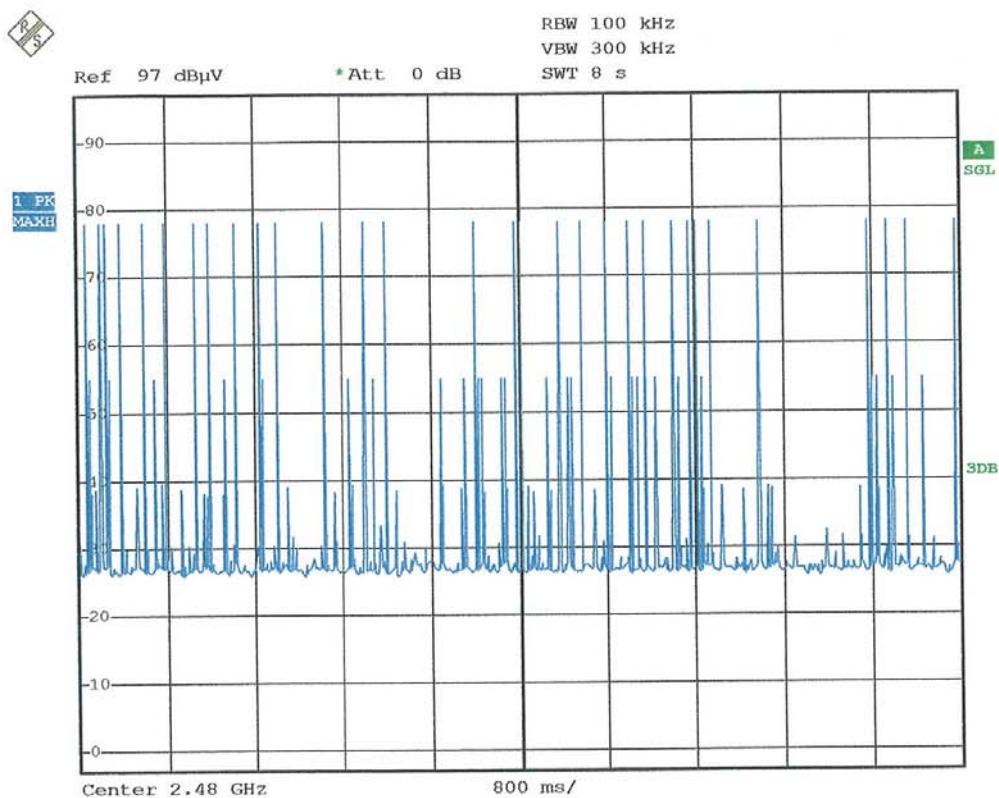


Date: 12.NOV.2008 06:22:44


ANNEX 4: PHOTOS OF THE EQUIPMENT UNDER TEST**GENERAL VIEW**




Printed circuit board : face 1

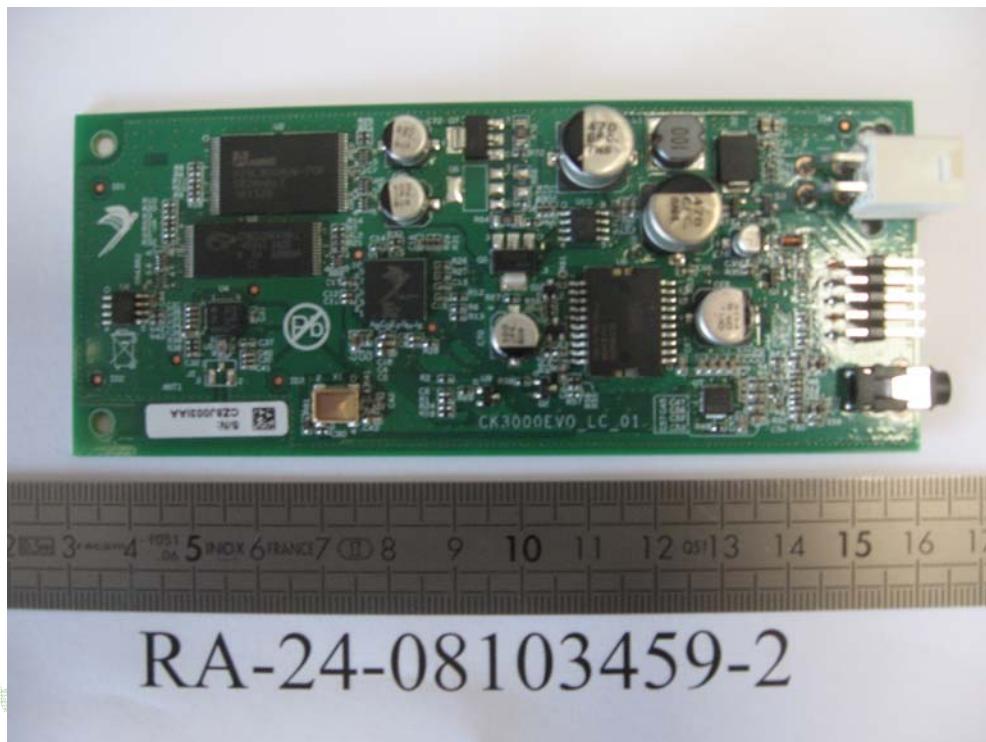


Printed circuit board : face 2

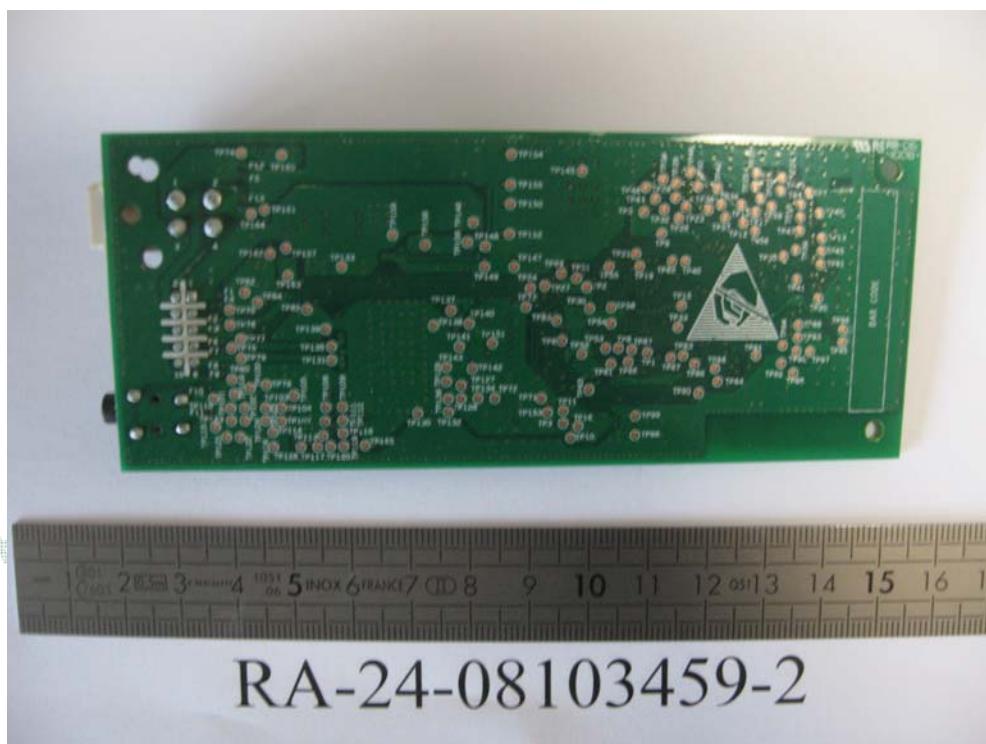

Radio module with antenna

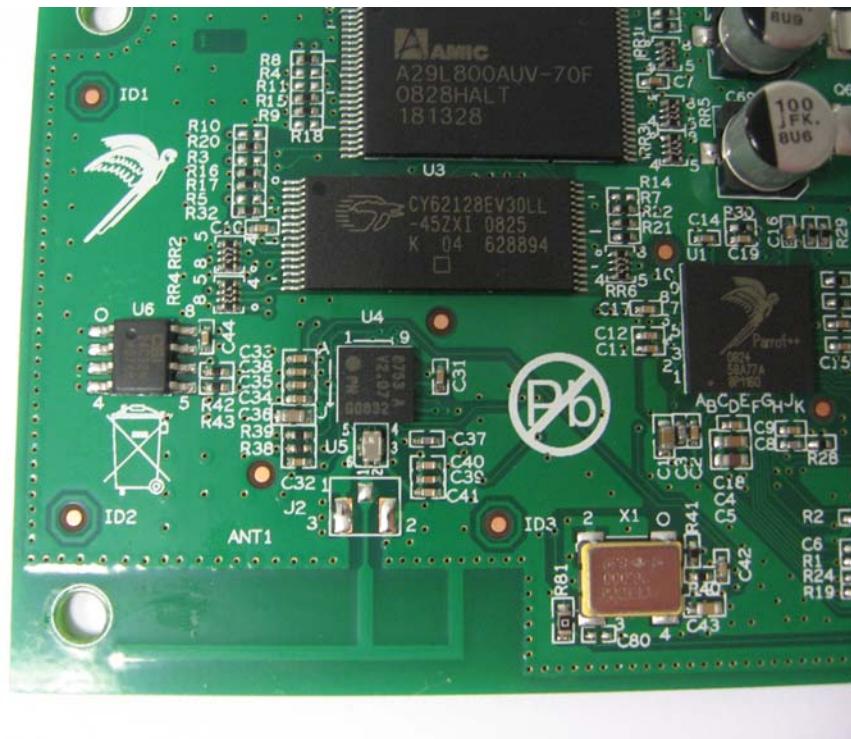

ANNEX 5: TEST SET UP AND OPEN AREA TEST SITE**TEST SET UP**

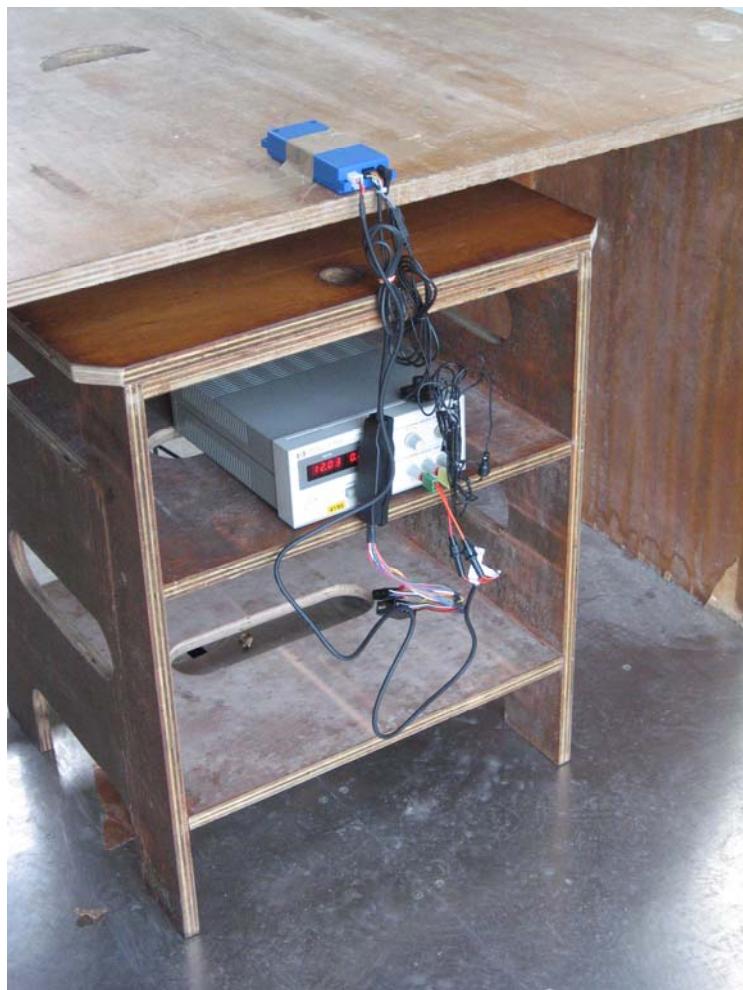**OPEN AREA TEST SITE**