

**RR051-14-106526-2-A Ed. 0**

## Certification Radio test report

**According to the standard:**  
CFR47 FCC part 15.247

**Equipment under test:**  
Parrot MINIDRONES ROLLING SPIDER

**FCC ID:**  
RKXDELOS1

**Company:**  
PARROT SA

**DISTRIBUTION:** Mr BEN YACOUB

(Company: PARROT SA)

**Number of pages: 38 with 9 appendixes**

Ed.	Date	Modified pages	Written by Name	Technical Verification and Quality Approval Name
0	24-FEB-2015	Creation	S. LOUIS 	

Duplication of this test report is only permitted for an integral photographic facsimile. It includes the number of pages referenced here above.  
This document is the result of testing a specimen or a sample of the product submitted. It does not imply an assessment of the conformity of the whole manufactured products of the tested sample.



Siège Social : Emitech - 3, rue des Coudriers - Z.A. de l'Observatoire - 78180 MONTIGNY LE BX - France  
Siret : 344 545 645 00022 - Tél. : 33 (0)1 30 57 55 55 - Fax : 33 (0)1 30 43 74 48 - E-mail : contact@emitech.fr - URL : www.emitech.fr  
S.A. au capital de 1 560 000 € - R.C.S. VERSAILLES 344 545 645 - APE 7112B

**DESIGNATION OF PRODUCT:** Parrot MINIDRONES ROLLING SPIDER

**Serial number (S/N):** Sample 1: LFTI4L8DY3AB - Low Channel  
Sample 2: LFO04D002OAA - Central Channel  
Sample 3: LFTI4L8I1KAB - High Channel  
Sample 4: LFO04D006MAA (Hopping)

**Reference / model (P/N):** Rolling-Spider

**Software version:** —

**MANUFACTURER:** PARROT SA

**COMPANY SUBMITTING THE PRODUCT:**

**Company:** PARROT SA

**Address:** 174 Quai de Jemmapes  
75010 PARIS  
FRANCE

**Responsible:** Mr BEN YACOUB

**DATE(S) OF TEST:** Between 16-FEB-2015 to 18-FEB-2015

**TESTING LOCATION:** EMITECH ANGERS laboratory at JUIGNE SUR LOIRE (49) FRANCE  
EMITECH ANGERS open area test site in JUIGNE SUR LOIRE (49)  
FRANCE  
21 rue de la Fuye  
49610 Juigne sur Loire  
France  
FCC 2.948 Listed Site Registration Number: 90469  
FCC Accredited under US-EU MRA Designation Number: FR0009  
Test Firm Registration Number: 873677

**TESTED BY:** S. LOUIS

## CONTENTS

<b>TITLE</b>	<b>PAGE</b>
<b>1. INTRODUCTION</b>	<b>4</b>
<b>2. PRODUCT DESCRIPTION</b>	<b>4</b>
<b>3. NORMATIVE REFERENCE</b>	<b>4</b>
<b>4. TEST METHODOLOGY</b>	<b>5</b>
<b>5. TEST EQUIPMENT CALIBRATION DATES</b>	<b>6</b>
<b>6. TESTS AND CONCLUSIONS</b>	<b>7</b>
<b>7. ADDITIONAL PROVISIONS TO THE GENERAL RADIATED EMISSION LIMITATIONS</b>	<b>11</b>
<b>8. MAXIMUM PEAK OUTPUT POWER</b>	<b>12</b>
<b>9. INTENTIONAL RADIATOR</b>	<b>14</b>

APPENDIX 1: Photos of the equipment under test

APPENDIX 2: Test set up

APPENDIX 3: Test equipment list

APPENDIX 4: 6 dB bandwidth

APPENDIX 5: 20 dB bandwidth

APPENDIX 6: Band edge

APPENDIX 7: Channel spacing

APPENDIX 8: Time of occupancy on any frequency

APPENDIX 9: Number of hopping channels

## 1. INTRODUCTION

This document presents the result of RADIO test carried out on the following equipment: **Parrot MINIDRONES ROLLING SPIDER** in accordance with normative reference.

## 2. PRODUCT DESCRIPTION

Class: B

Utilization: Residential use

Antenna type and gain: internal antenna, -0.6dBi

Operating frequency range: from 2400 MHz to 2483.5MHz

Number of channels: 79

Channel spacing: 1MHz

Modulation: Frequency Hopping Spread Spectrum (F.H.S.S.)

Power source: Battery LiPo, 3.7Vdc

Power level, frequency range and channels characteristics are not user adjustable.  
The details pictures of the product and the circuit boards are joined with this file.

## 3. NORMATIVE REFERENCE

The standards and testing methods related throughout this report are those listed below.  
They are applied on the whole test report even though the extensions (version, date and amendment) are not repeated.

CFR 47 FCC Part 15 (2014) Radio Frequency Devices

ANSI C63.4 2014  
Methods of measurement of Radio-Noise  
Emissions from low-voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

ANSI C63.10 2013  
Testing Unlicensed Wireless Devices.

Public Notice DA 00-705 Filing and Measurement Guideline for Frequency Hopping Spread Spectrum Systems.

#### **4. TEST METHODOLOGY**

Radio performance tests procedures given in CFR 47 part 15:

Subpart A –General

- Paragraph 19: labelling requirements
- Paragraph 21: information to user

Subpart B –Unintentional Radiators

- Paragraph 105: information to the user
- Paragraph 107: Conducted limits
- Paragraph 109: Radiated emission limits
- Paragraph 111: Antenna power conduction limits for receivers

Subpart C – Intentional Radiators

- Paragraph 203: Antenna requirement
- Paragraph 205: Restricted bands of operation
- Paragraph 207: Conducted limits
- Paragraph 209: Radiated emission limits; general requirements
- Paragraph 212: Modular transmitter
- Paragraph 215: Additional provisions to the general radiated emission limitations
- Paragraph 247: Operation within the bands 902-928 MHZ, 2400-2483.5 MHz and 5725-5850 MHz

**5. TEST EQUIPMENT CALIBRATION DATES**

Equipment	Model	Type	Last verification	Next verification	Validity
0000	BAT-EMC V3.6.0.32	Software	/	/	/
1922	Microwave DB C020180F-4B1	Low-noise amplifier	20/08/2014	20/08/2015	20/10/2015
1939	IMC WR42	Antenna	20/04/2012	20/04/2016	20/06/2016
1940	IMC WR42	Antenna	20/04/2012	20/04/2016	20/06/2016
3036	ALC Microwave ALN02-0102	Low-noise amplifier	14/05/2014	14/05/2015	14/07/2015
4088	R&S FSP40	Spectrum Analyzer	22/08/2013	22/08/2015	22/10/2015
7299	Microtronics BR50702	Reject band filter	25/10/2013	25/10/2015	25/12/2015
8511	HP 8447D	Low noise preamplifier	20/08/2014	20/08/2015	20/10/2015
8526	Schwarzbeck VHBB 9124	Biconical antenna	12/06/2012	12/06/2016	12/08/2016
8533	R&S HFH2-Z2	Loop antenna	11/02/2014	11/02/2016	11/04/2016
8535	EMCO 3115	Antenna	29/10/2012	29/10/2016	29/12/2016
8543	Schwarzbeck UHALP 9108A	Log periodic antenna	12/06/2012	12/06/2016	12/08/2016
8593	SIDT Cage 2	Anechoic chamber	/	/	/
8675	AOIP MN5102B	Multimeter	15/01/2013	15/01/2015	15/03/2015
8750	La Crosse Technology WS-9232	Meteo station	03/09/2014	03/09/2016	03/11/2016
8896	ACQUISYS GPS8	Satellite synchronized frequency standard	/	/	/

## 6. TESTS AND CONCLUSIONS

### 6.1 general

Test procedure	Description of test	Respected criteria?				Comment
		Yes	No	NAp	NAs	
FCC Part 15.19	LABELLING REQUIREMENTS				X	See certification documents
FCC Part 15.21	INFORMATION TO USER				X	See certification documents

NAp: Not Applicable

NAs: Not Asked

### LABEL SHALL CONTAIN

The label shall be located in a conspicuous location on the device

The label shall not be a stick-on, paper label. The label on these products shall be permanently affixed to the product and shall be readily visible to the purchaser at the time of purchase

### §15.19:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

### USER NOTICE SHALL CONTAIN

The user notice, not provided during tests, shall include the following informations:

### §15.21:

*Any changes or modifications to this equipment not expressly approved by PARROT may cause, harmful interference and void the FCC authorization to operate this equipment*

### 6.2 unintentional radiator (subpart B)

Test procedure	Description of test	Respected criteria?				Comment
		Yes	No	NAp	NAs	
FCC Part 15.105	INFORMATION TO THE USER				X	See certification documents
FCC Part 15.107	CONDUCTED LIMITS				X	Class B Note 1
FCC Part 15.109	RADIATED EMISSION LIMITS				X	Class B Note 1
FCC Part 15.111	ANTENNA POWER CONDUCTED LIMITS FOR RECEIVER			X		

NAp: Not Applicable

NAs: Not Asked

Note 1: Already performed. Refer Emitech test report RR051-14-101590-2-A Ed. 0

### USER NOTICE SHALL CONTAIN

The user notice, not provided during tests, shall include the following informations:

#### § 15.105:

*NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference's by one or more of the following measures:*

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

6.3 intentional radiator (subpart C)

Test procedure	Description of test	Respected criteria?				Comment
		Yes	No	NAp	NAs	
FCC Part 15.203	ANTENNA REQUIREMENT	X				Note 1
FCC Part 15.205	RESTRICTED BANDS OF OPERATION	X				
FCC Part 15.207	CONDUCTED LIMITS			X		Note 2
FCC Part 15.212	MODULAR TRANSMITTERS			X		
FCC Part 15.209	RADIATED EMISSION LIMITS; general requirements	X				Note 3
FCC part 15.215	ADDITIONAL PROVISIONS TO THE GENERAL RADIATED EMISSION LIMITATIONS					
	(a) Alternative to general radiated emission limits	X				
	(b) Unwanted emissions outside of §15.247 frequency bands	X				Note 4
	(c) 20 dB bandwidth and band-edge compliance	X				
FCC Part 15.247	OPERATION WITHIN THE BANDS 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz					
	(a) (1) Hopping systems	X				Note 5
	(a) (2) Digital modulation techniques			X		
	(b) Maximum peak output power	X				Note 6
	(c) Operation with directional antenna gains > 6 dBi			X		
	(d) Intentional radiator	X				
	(e) Peak power spectral density			X		
	(f) Hybrid system			X		
	(g) Frequency hopping requirements			X		
	(h) Frequency hopping intelligence			X		
	(i) RF exposure compliance	X				Note 7

NAp: Not Applicable

NAs: Not Asked

Note 1: Integral and dedicated antenna. Professionally installed equipment.

Note 2: The product can be connected to a computer for charging battery. When the product is connected, the radio part is not operational.

Note 3: See FCC part 15.247 (d).

Note 4: See FCC part 15.209. Unwanted emissions levels are all below the fundamental emission field strength level.

Note 5: The system hops to channel frequencies from a pseudo randomly ordered list of hopping frequencies. Each frequency is used equally on the average by the transmitter, and separated by a minimum of 25 kHz / 20 dB bandwidth of the hopping channel (1023.07 kHz; see appendix 5 and 7).

The frequency hopping system uses 79 channels (see appendix 9).

The timing by channel is 2.980968 ms (see appendix 8).

During 79 channels  $\times$  0.4 s = 31.6 s, any channel is used 89 times (see appendix 8), then  $89 \times 2.980968 \text{ ms} = 265.30 \text{ ms}$ , thus the average time of occupancy on any channel is less than 400 ms within a period of 0.4 seconds multiplied by the number of hopping channels employed, in normal operating mode.

Note 6: Conducted measurement is not possible (integral antenna), so we used the radiated method in open field.

#### RF EXPOSURE:

Note 7: In accordance with KDB 447498 D01 General RF Exposure Guidance v05r02

$PSD = EIRP/(4\pi R^2) = 1.767/(4\pi(20 \text{ cm})^2) = 0.0035 \text{ mW/cm}^2$  (limit = 1 mW/cm<sup>2</sup>).

The equipment fulfills the requirements on power density for general population/uncontrolled exposure and therefore fulfills the requirements of 47 CFR §1.1310.

## 7. ADDITIONAL PROVISIONS TO THE GENERAL RADIATED EMISSION LIMITATIONS

**Standard:** FCC Part 15

**Test procedure:** Paragraph 15.215

### **Test set up:**

Test realized in near field. All field strength measurements are correlated with the radiated maximum peak output power

### **Test operating condition of the equipment:**

The equipment under test is blocked in continuous transmission mode, modulated by internal data signal, at the highest output power level which the transmitter is intended to operate.

### **Results:**

Ambient temperature (°C): 23.2  
 Relative humidity (%): 37

Power source: battery fully charged

Lower Band Edge: from 2398 MHz to 2400 MHz  
 Upper Band Edge: from 2483.5 MHz to 2485.5 MHz

### Sample N° 4:

<u>Fundamental frequency (MHz)</u>	<u>Field Strength Level of fundamental (dB<math>\mu</math>V/m)</u>	<u>Detector (Peak or Average)</u>	<u>Frequency of maximum Band-edges Emission (MHz)</u>	<u>Delta Marker (dB)*</u>	<u>Calculated Max Out-of-Band Emission Level (dB<math>\mu</math>V/m)</u>	<u>Limit (dB<math>\mu</math>V/m)</u>	<u>Margin (dB)</u>
2402	94.7	PEAK	2399.766	46.02	48.68	74.7	26.02
2480	95.8	PEAK	2483.543	38.19	57.61	74	16.39
2480	95.8	AVERAGE	2483.543	63.40	32.40	54	21.60

\* *Marker-Delta method*

20 dB bandwidth curves are given in appendix 5; band-edge curves are given in appendix 6.

### **Test conclusion:**

RESPECTED STANDARD

## **8. MAXIMUM PEAK OUTPUT POWER**

**Standard:** FCC Part 15

**Test procedure:** paragraph 15.247 (b)

### **Test set up:**

The system is tested in anechoic chamber. The EUT is placed on a rotating table, 1.5m from a ground plane. Zero degree azimuth corresponds to the front of the device under test.

The measurement of the electro-magnetic field is realized, with a resolution bandwidth adjusted at 1 MHz and video bandwidth at 3 MHz.

**Distance of antenna:** 3 meters

**Antenna height:** 1.5 meter (in anechoic room)

**Antenna polarization:** vertical and horizontal

### **Equipment under test operating condition:**

The equipment under test is blocked in continuous modulated transmission mode, at the highest output power level at which the transmitter is intended to operate.

**Results:**

Ambient temperature (°C): 21.3  
 Relative humidity (%): 33

Power source: battery fully charged

Sample N° 1 Low Channel (2402 MHz)

	Electro-magnetic field (dB $\mu$ V/m):	Conducted power * (W)	Limit (W)
<b>Nominal supply voltage:</b>	94.9	0.001064	0.125

Polarization of test antenna: Vertical (height: 150 cm)

Position of equipment: See photos in appendix 2 (azimuth: 139 degrees)

Sample N° 2 Central Channel (2441 MHz)

	Electro-magnetic field (dB $\mu$ V/m):	Conducted power * (W)	Limit (W)
<b>Nominal supply voltage:</b>	97.1	0.001767	0.125

Polarization of test antenna: Vertical (height: 150 cm)

Position of equipment: See photos in appendix 2 (azimuth: 158 degrees)

Sample N° 3 High Channel (2480 MHz)

	Electro-magnetic field (dB $\mu$ V/m):	Conducted power * (W)	Limit (W)
<b>Nominal supply voltage:</b>	95.8	0.001310	0.125

Polarization of test antenna: Vertical (height: 150 cm)

Position of equipment: See photos in appendix 2 (azimuth: 144 degrees)

\*  $P = (E \times d)^2 / (30 \times Gp)$  with  $d = 3$  m and  $Gp = 0.87$

**Test conclusion:**

RESPECTED STANDARD

## 9. INTENTIONAL RADIATOR

## Standard: FCC Part 15

**Test procedure:** paragraph 15.205, paragraph 15.209, paragraph 15.247 (d)

## Test set up:

The measure is realized on open area test site under 1 GHz and in anechoic chamber above 1 GHz.

When the system is tested in an open area test site (OATS), the EUT is placed on a rotating table, 0.8m from a ground plane.

When the system is tested in anechoic chamber, the EUT is placed on a rotating table, 1.5m from a ground plane.

Zero degree azimuths correspond to the front of the device under test.

See photos in appendix 2.

The measurement of the electro-magnetic field is realized, with a resolution bandwidth adjusted at 100 kHz or 1 MHz and video bandwidth at 300 kHz or 3 MHz.

**Frequency range:** From 9 kHz to 25GHz (10<sup>th</sup> harmonic of the highest fundamental frequency)

**Detection mode:** Quasi-peak ( $F < 1$  GHz)      Peak / Average ( $F > 1$  GHz)

**Bandwidth:** 200Hz (9 kHz < F < 150kHz)  
9 kHz (150 kHz < F < 30MHz)  
120 kHz (30 MHz < F < 1 GHz)  
100 kHz / 1 MHz (F > 1 GHz)

**Distance of antenna:** 3 meters

**Antenna height:** 1 to 4 meters (in open area test site) / 1.5 meter (in anechoic room)

**Antenna polarization:** vertical and horizontal (only the highest level is recorded)

#### Equipment under test operating condition:

The equipment under test is blocked in continuous modulated transmission mode, at the highest output power level at which the transmitter is intended to operate.

**Results:**

Ambient temperature (°C): 22.5  
 Relative humidity (%): 33

Power source: battery fully charged

Sample N° 4 Low Channel (2402 MHz)

FREQUENCIES (MHz)	Detector P: Peak QP: Quasi-Peak Av: Average	resolution bandwidth (kHz)	Polarization H: Horizontal V: Vertical	Field strength (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
4806 <sup>(1)</sup>	P	1000	V	53.6	74	20.4
4806 <sup>(1)</sup>	Av	1000	V	31.4	54	22.6
7206	P	100	V	54.3	74.9	20.6

Sample N° 4 Central Channel (2441 MHz)

FREQUENCIES (MHz)	Detector P: Peak QP: Quasi-Peak Av: Average	resolution bandwidth (kHz)	Polarization H: Horizontal V: Vertical	Field strength (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
4880 <sup>(1)</sup>	P	1000	V	55.2	74	18.8
4880 <sup>(1)</sup>	Av	1000	V	31.5	54	22.5
7320 <sup>(1)</sup>	P	1000	V	51.7	74	22.3
7320 <sup>(1)</sup>	Av	1000	V	34.5	54	19.5

Sample N° 4 High Channel (2480 MHz)

FREQUENCIES (MHz)	Detector P: Peak QP: Quasi-Peak Av: Average	resolution bandwidth (kHz)	Polarization H: Horizontal V: Vertical	Field strength (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
4960 <sup>(1)</sup>	P	1000	V	53.6	74	20.4
4960 <sup>(1)</sup>	Av	1000	V	31.2	54	22.8
7440 <sup>(1)</sup>	P	1000	V	50.4	74	23.6
7440 <sup>(1)</sup>	Av	1000	V	35.2	54	18.8

<sup>(1)</sup> restricted bands of operation in 15.205

Note: any spurious which has more than 20 dB of margin compared to the applicable limit is not necessarily reported.

**Applicable limits:** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

The highest level recorded in a 100 kHz bandwidth is 94.9 dB $\mu$ V/m on low channel.  
So the applicable limit is 74.9 dB $\mu$ V/m.

In addition, radiated emissions which fall in the restricted band, as defined in section 15.205 (a), must also comply with the radiated emission limits specified in section 15.209 (a) (see section 15.205 (c)).

**Test conclusion:**

RESPECTED STANDARD

*□□□ End of report, 9 appendixes to be forwarded □□□*

## APPENDIX 1: Photos of the equipment under test

**CONFIDENTIAL**

## APPENDIX 2: Test set up

**CONFIDENTIAL**

## APPENDIX 3: Test equipment list

### Additional provisions to the general radiated emission limitations

TYPE	MANUFACTURER	EMITECH NUMBER
Anechoic Chamber	EMITECH	8593
Satellite synchronized frequency standard GPS8	ACQUISYS	8896
Spectrum Analyzer FSP40	Rohde & Schwarz	4088
Antenna 3115	Electrometrics	8535
Multimeter MN5102B	AOIP	8675
Meteo station WS-9232	La Crosse Technology	8750
Software	GPIBShot V2.4	-

### Maximum peak output power


TYPE	MANUFACTURER	EMITECH NUMBER
Anechoic Chamber	EMITECH	8593
Satellite synchronized frequency standard GPS8	ACQUISYS	8896
Spectrum Analyzer FSP40	Rohde & Schwarz	4088
Antenna 3115	Electrometrics	8535
Multimeter MN5102B	AOIP	8675
Meteo station WS-9232	La Crosse Technology	8750
Software	BAT-EMC V3.6.0.32	0000

**Intentional radiator**


TYPE	MANUFACTURER	EMITECH NUMBER
Anechoic Chamber	EMITECH	8593
Satellite synchronized frequency standard GPS8	ACQUISYS	8896
Spectrum Analyzer FSP40	Rohde & Schwarz	4088
Loop antenna HFH2-Z2	Rohde & Schwarz	8533
Biconical antenna VHBB 9124	Schwarzbeck	8526
Log periodic antenna UHALP 9108A	Schwarzbeck	8543
Antenna 3115	Electrometrics	8535
Antenna WR42	IMC	1939
Antenna WR42	IMC	1940
Low-noise amplifier 8447D	Hewlett Packard	8511
Low-noise amplifier C020180F-4B1	Microwave DB	1922
Low-noise amplifier ALN02-0102	ALC Microwave	3036
Reject band filter BRM50702	Microtronics	7299
Multimeter MN5102B	AOIP	8675
Meteo station WS-9232	La Crosse Technology	8750
Software	BAT-EMC V3.6.032	0000

## APPENDIX 4: 6 dB bandwidth


Low channel

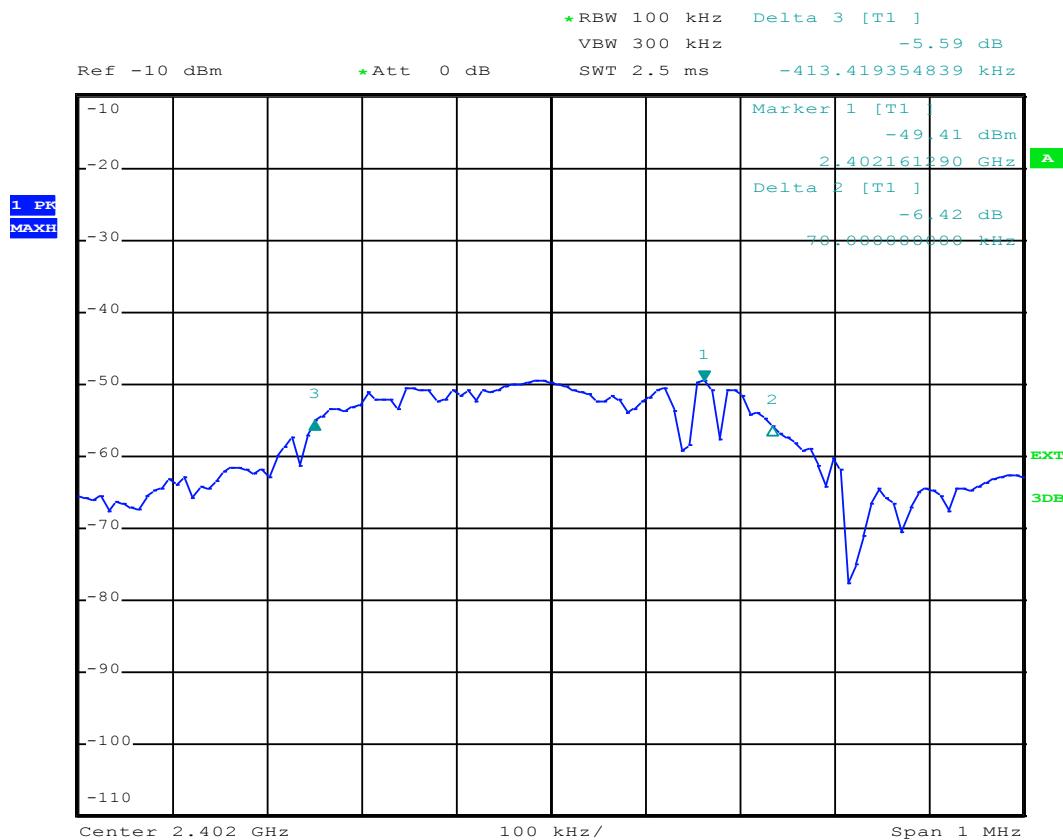

## Central channel

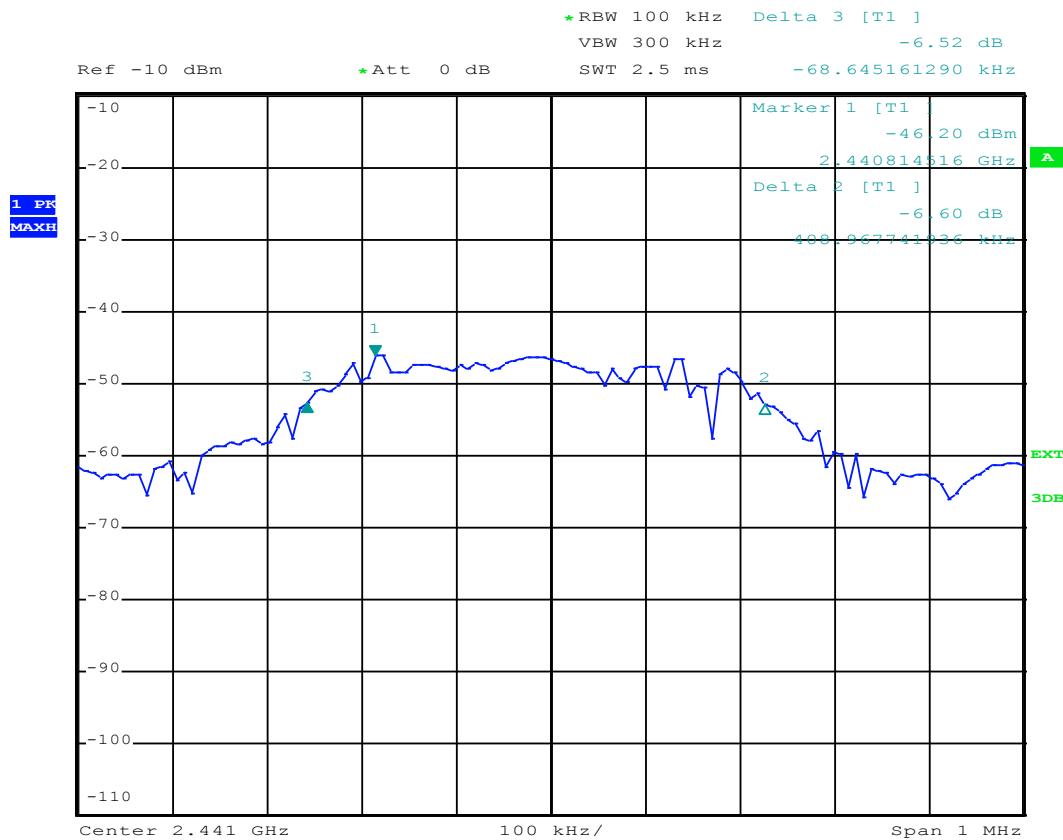


## High channel

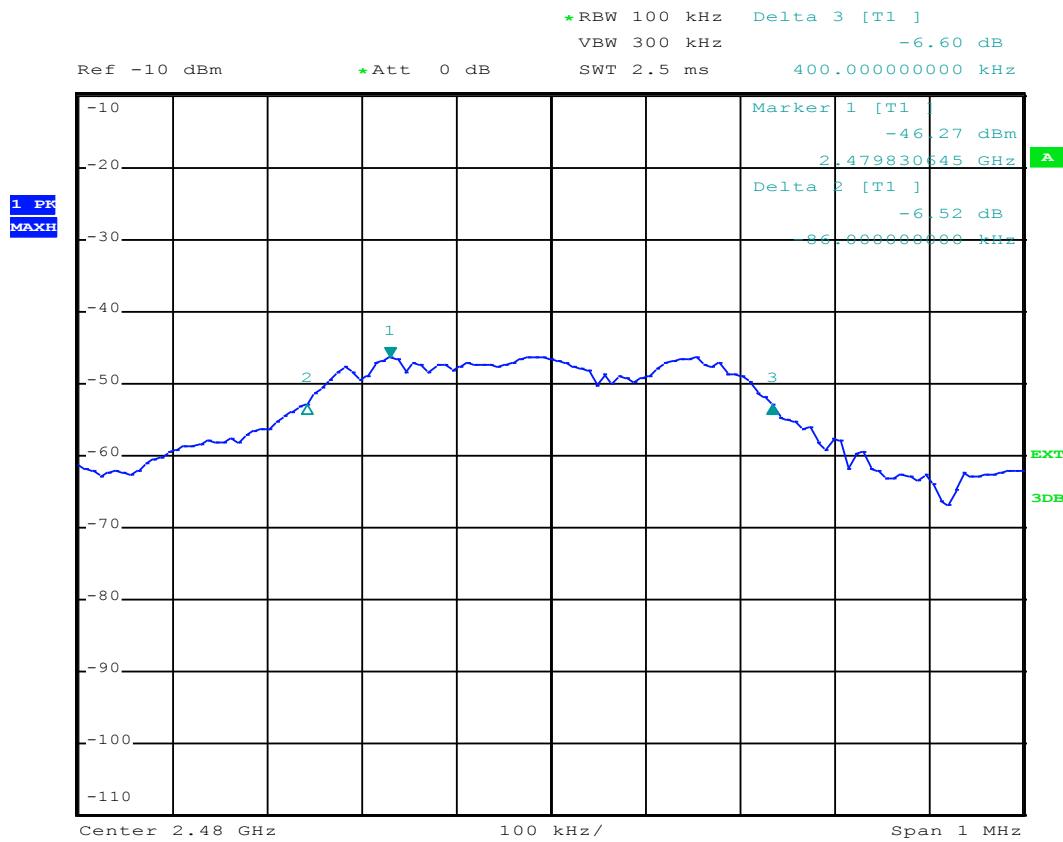

## APPENDIX 5: 20 dB bandwidth


Low channel

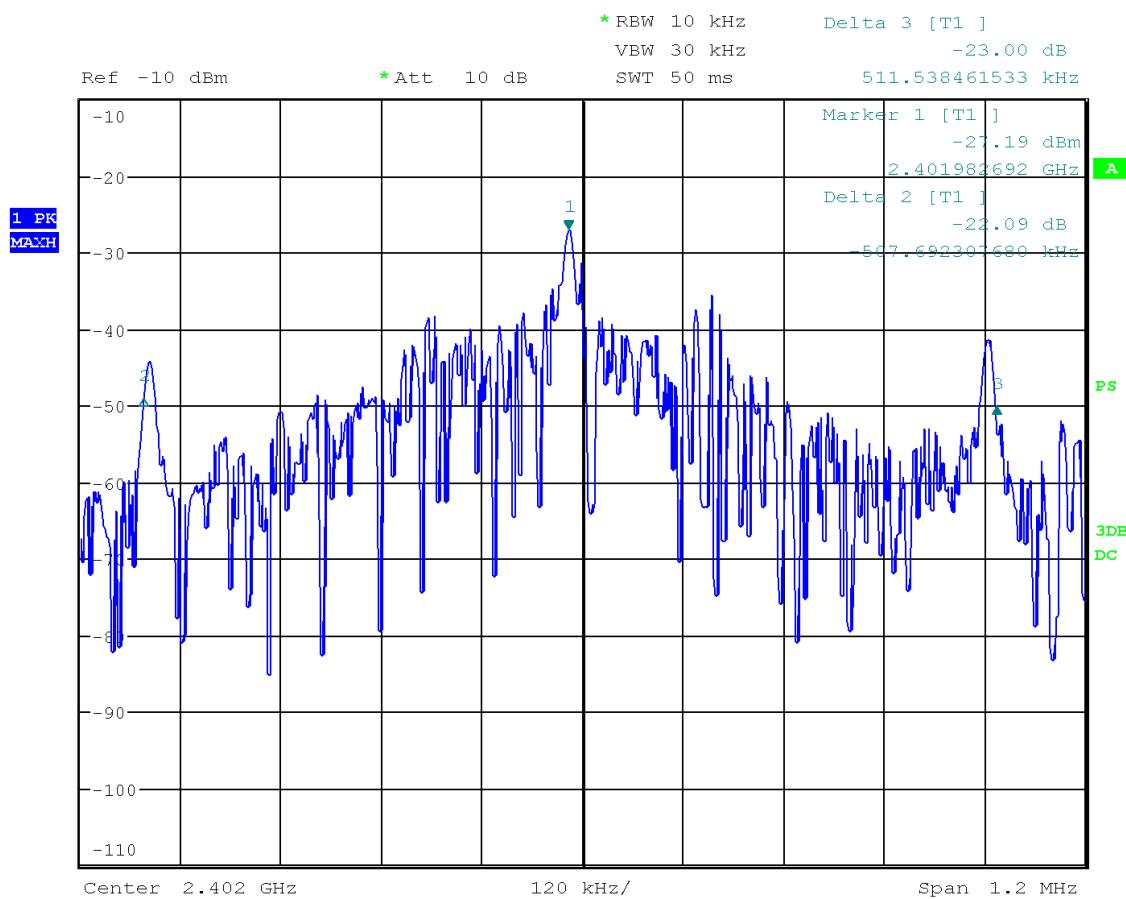

## Central channel




## High channel

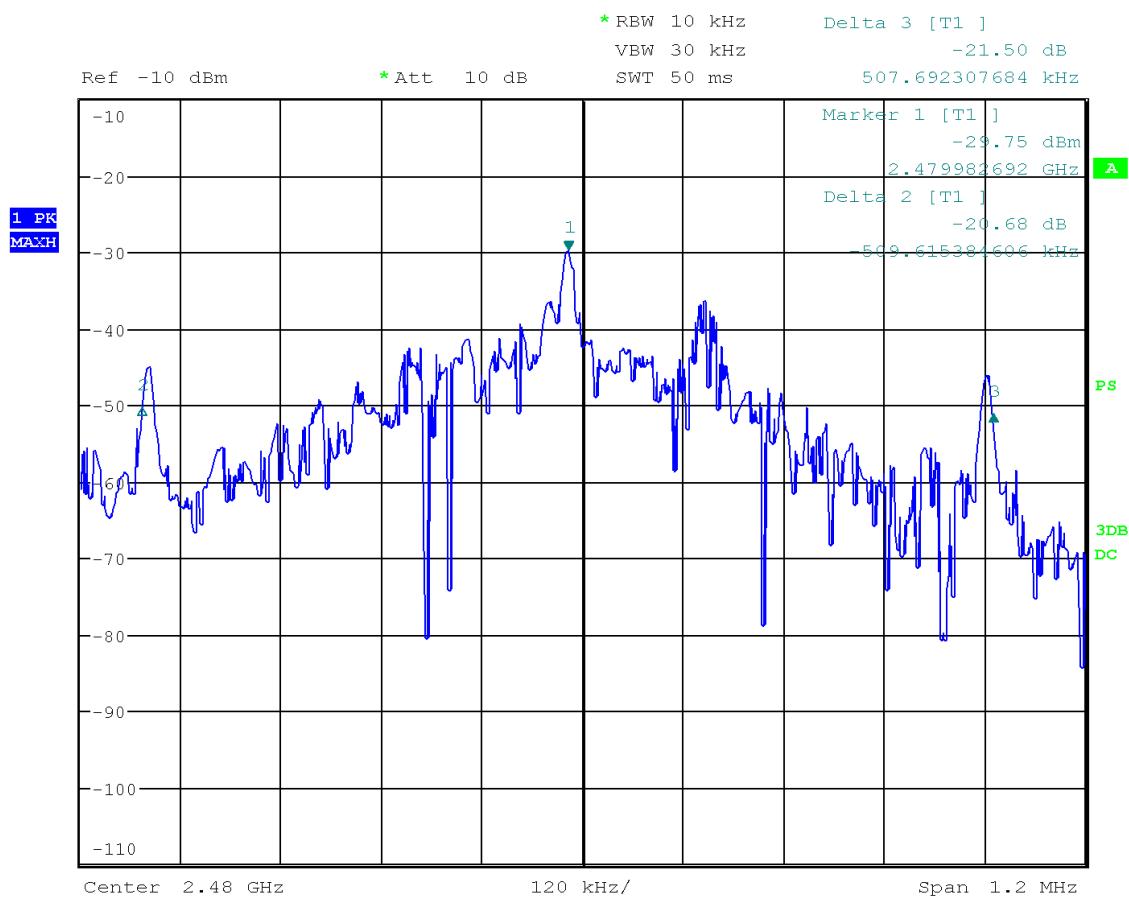


## APPENDIX 6: Band edge

Lower band edge

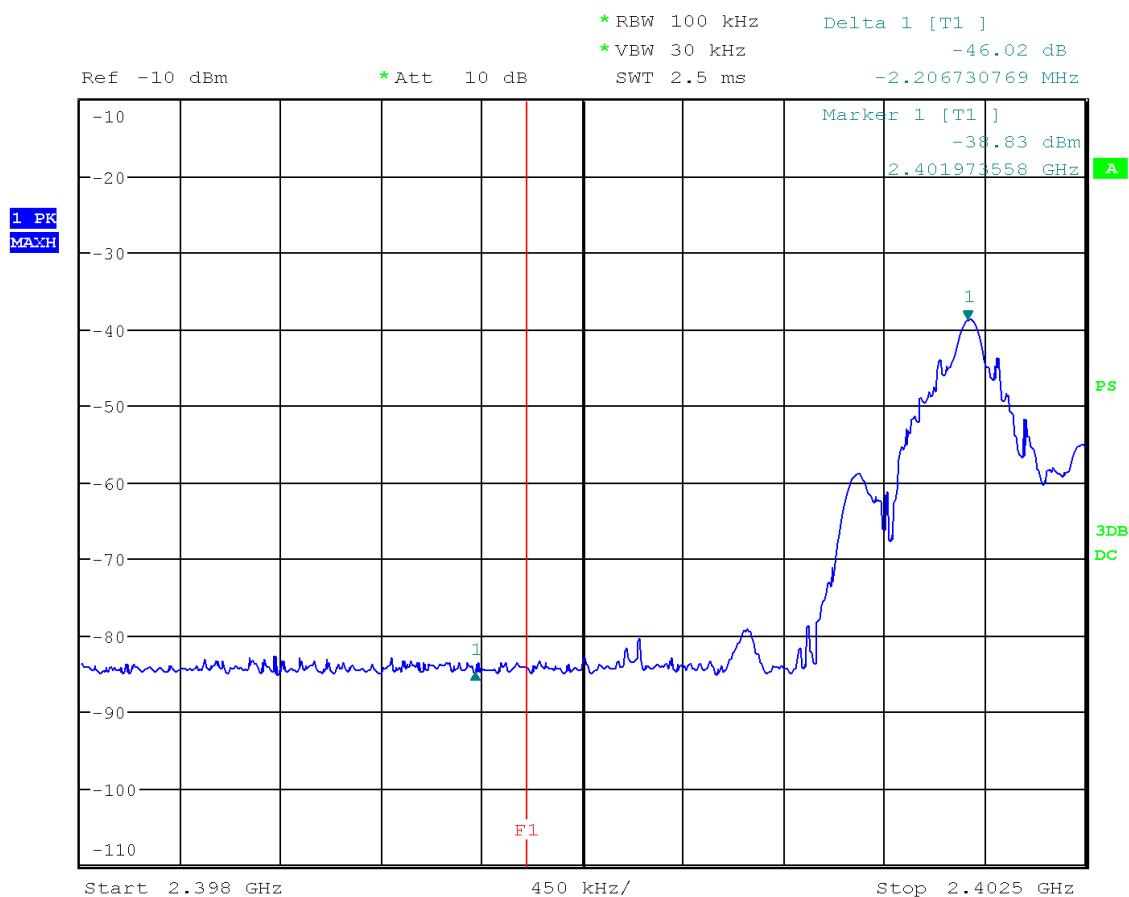

## Upper band edge

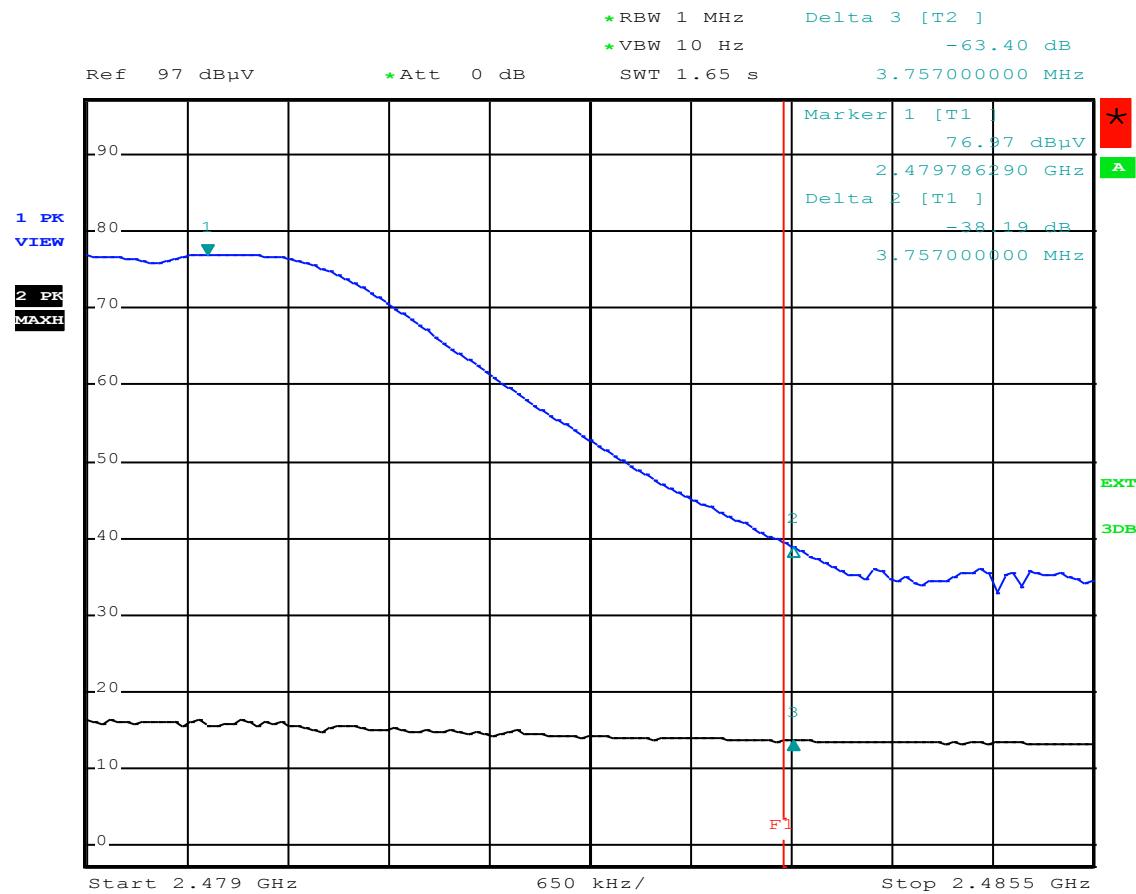


## APPENDIX 7: CHANNEL SPACING


Low channel



## Central channel

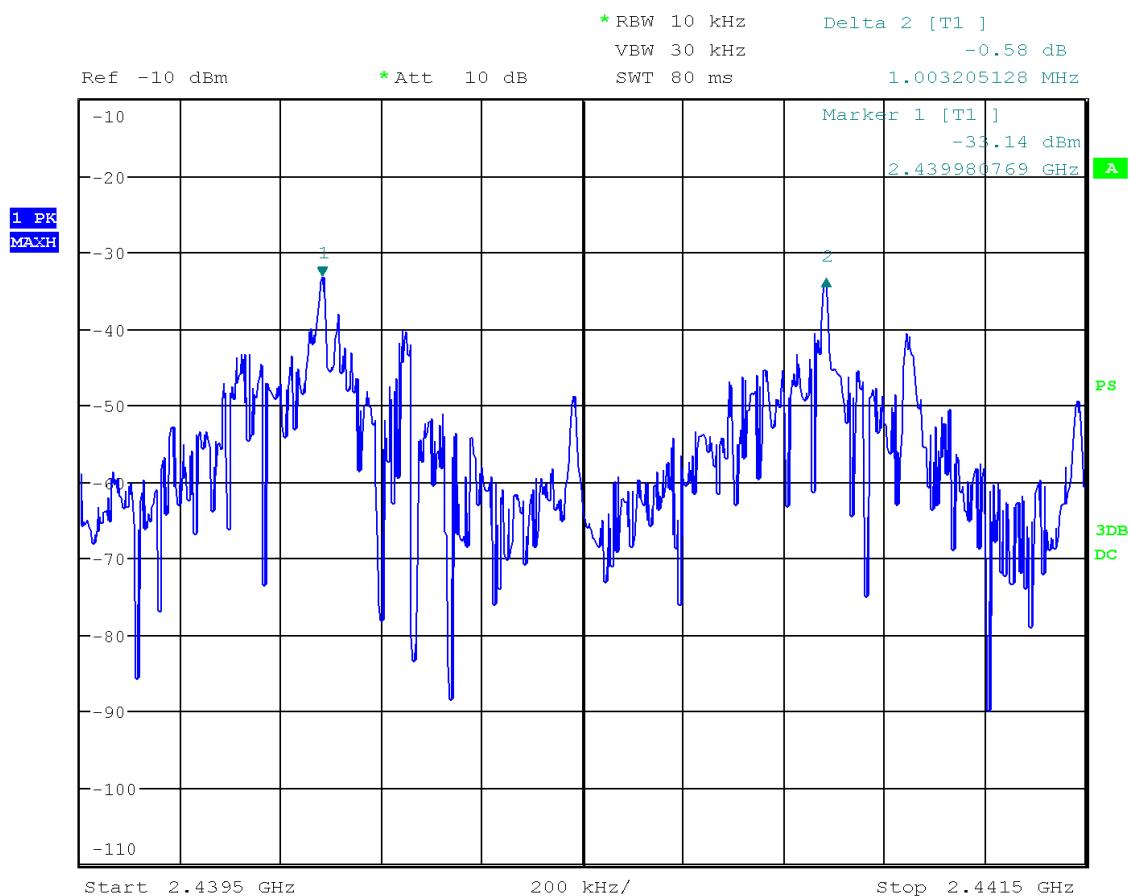



## High channel

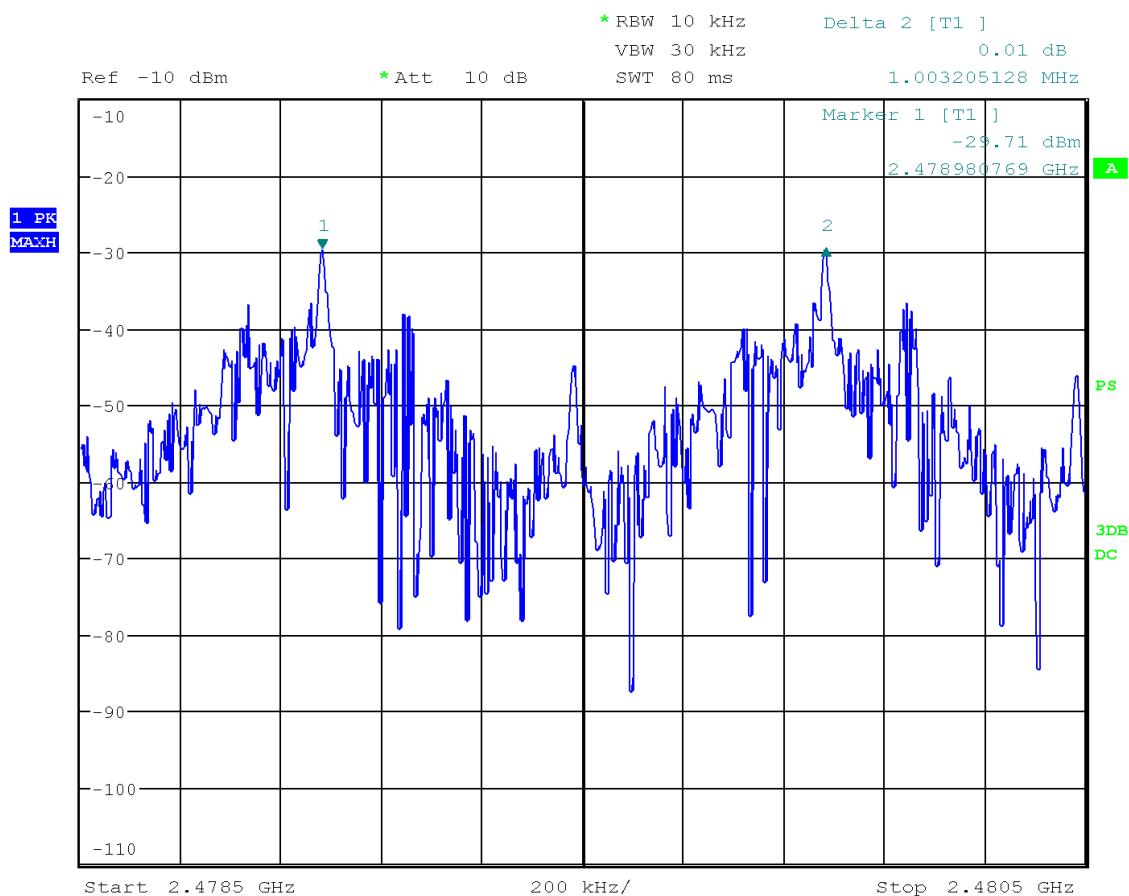


## APPENDIX 8: Time of occupancy on any frequency


Low channel

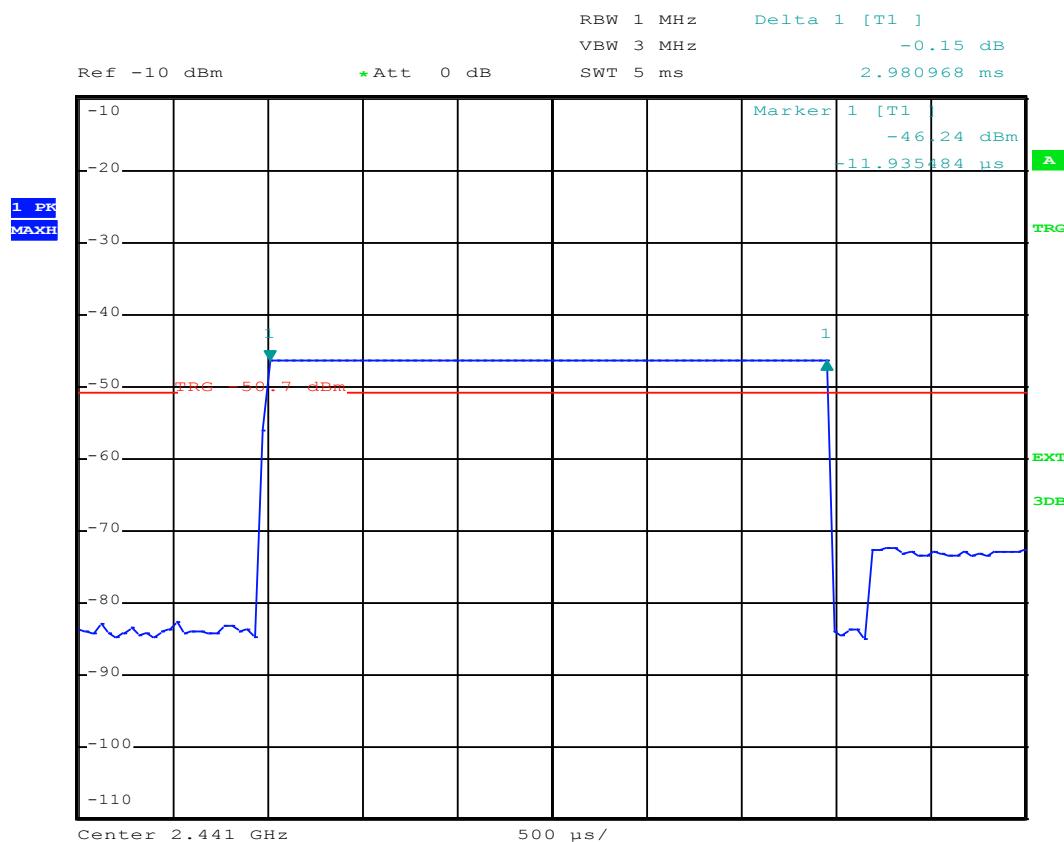

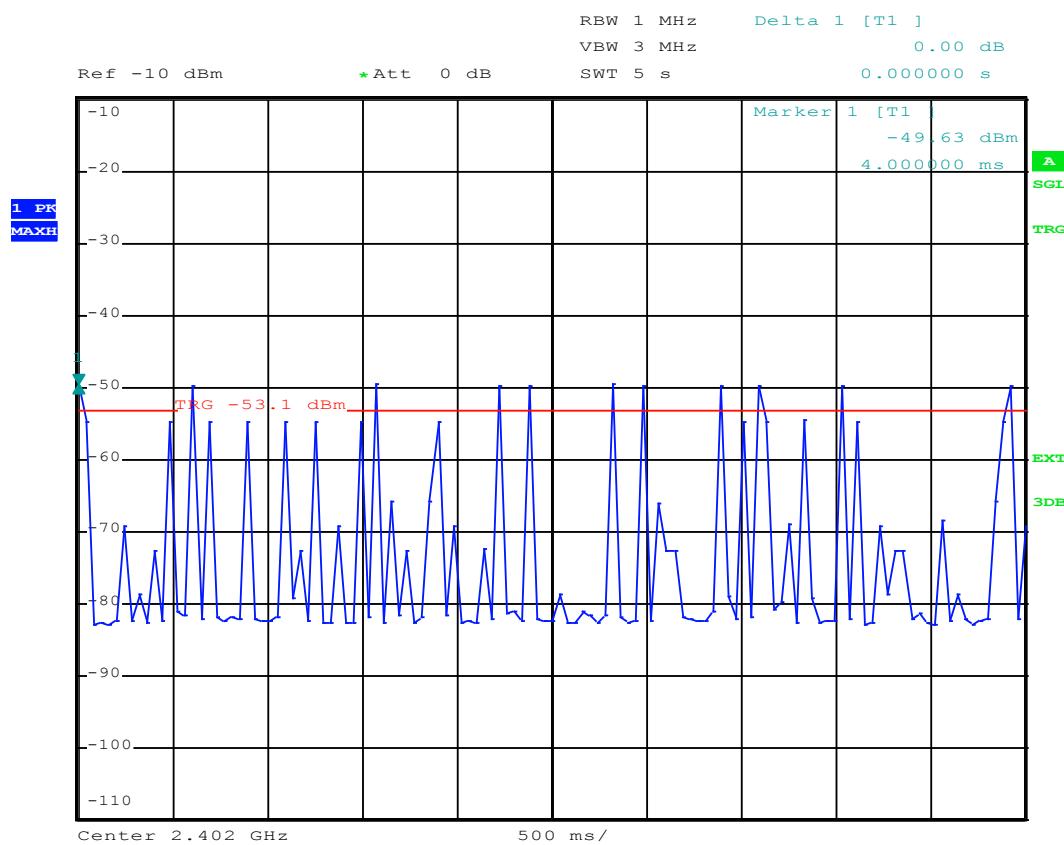



## Central channel

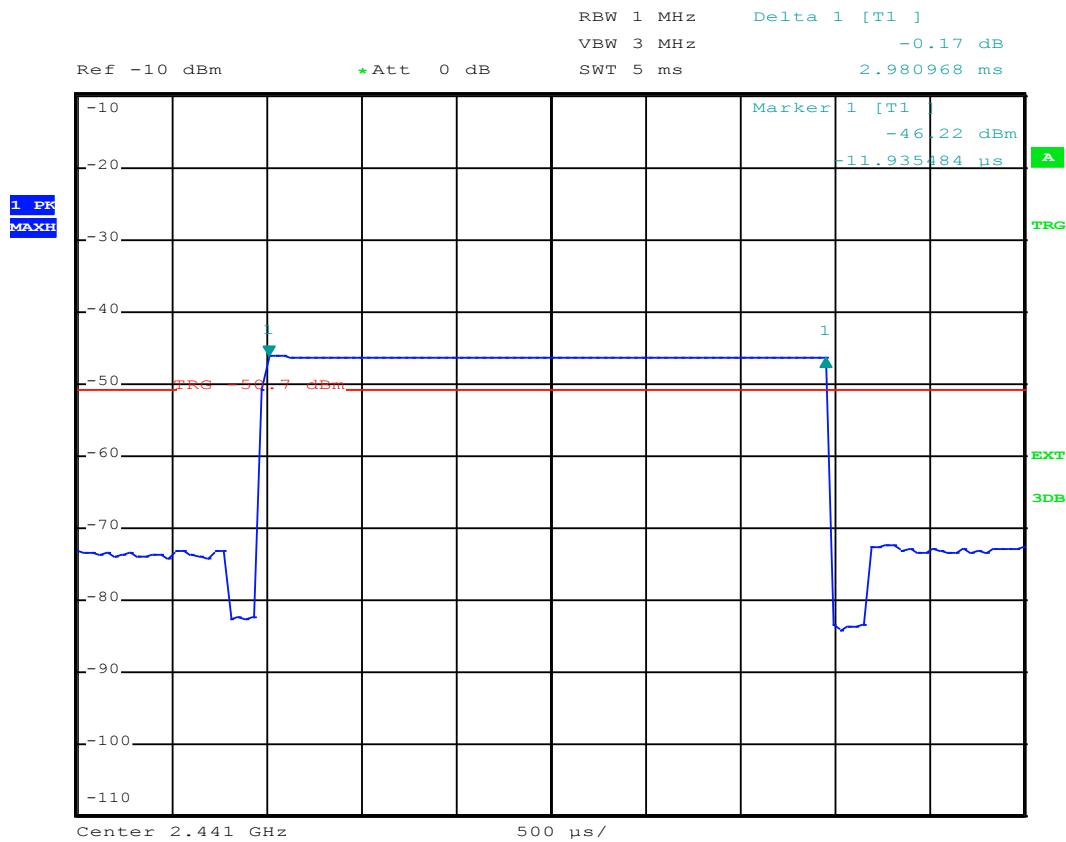

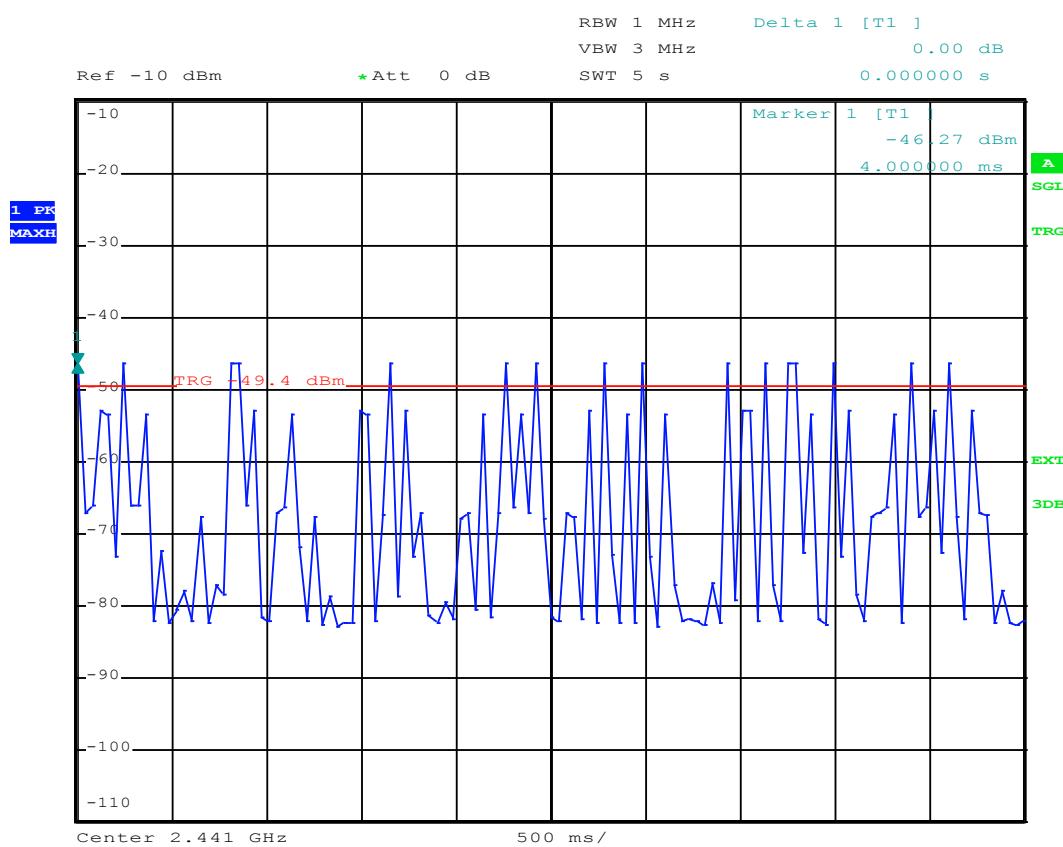

## High channel

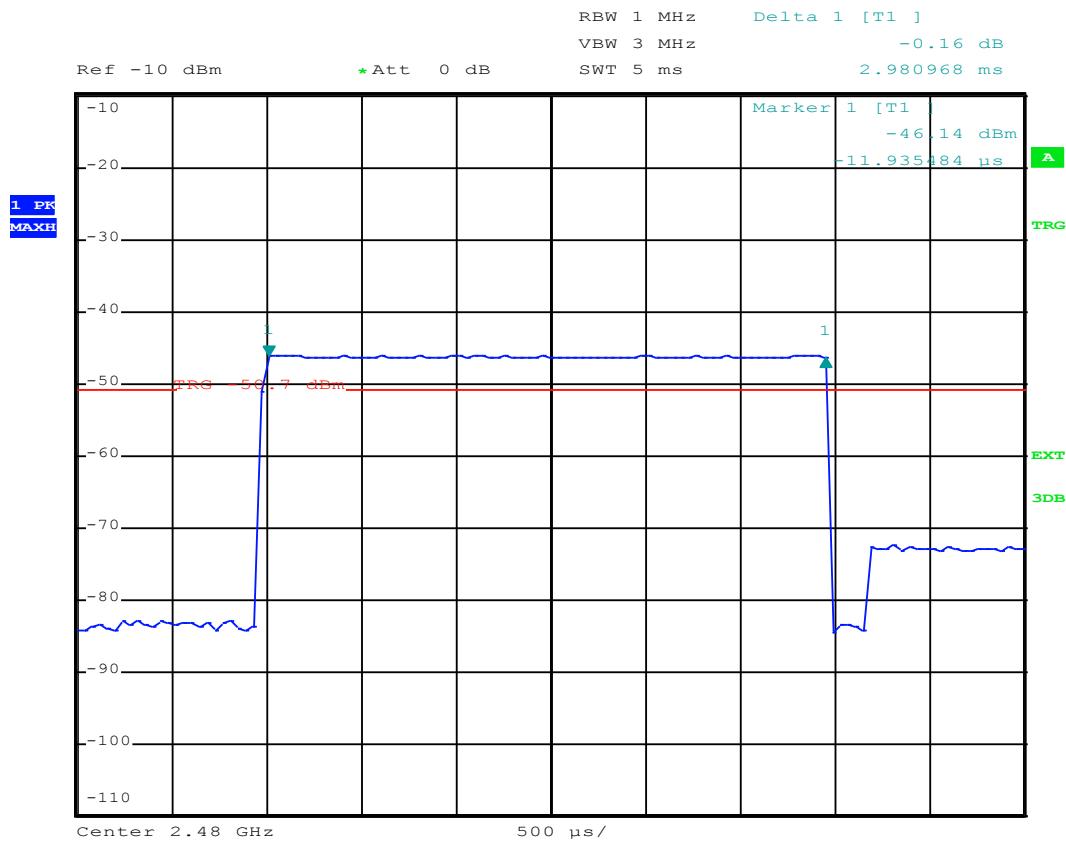

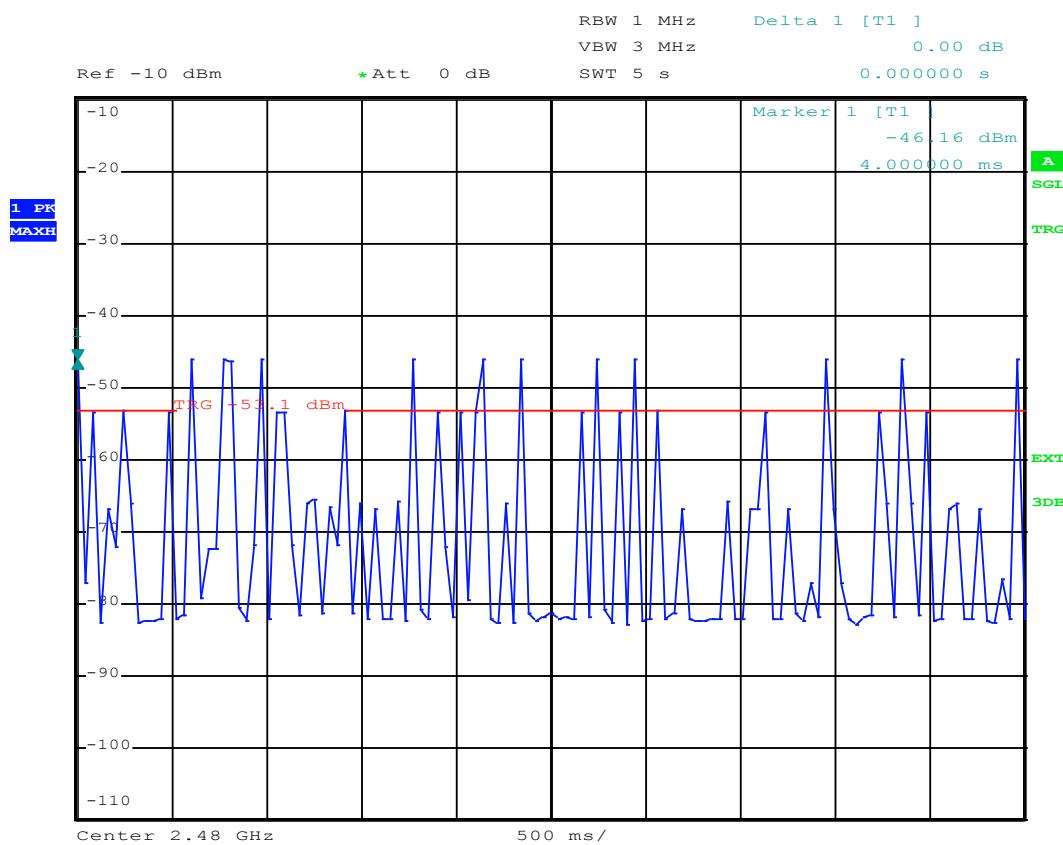

## APPENDIX 9: Number of hopping channels

Number of Hopping Frequencies	Limit hopping sequence
79	15 or $N=15/(\text{min. HFS})$

HFS : Hopping Frequency Sequence in MHz (often 1MHz)

