



InterLab[®]

Final Report on FC6000TS

Report Reference: MDE_PARRO_1312_FCCa
acc. Title 47 CFR chapter I part 15 subpart C

Date: July 21, 2013

Test Laboratory:

7Layers AG
Borsigstr. 11
40880 Ratingen
Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7Layers AG
Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
www.7Layers.com

Aufsichtsratsvorsitzender •
Chairman of the Supervisory Board:
Ralf Mertens
Vorstand • Board:
Dr. H.-J. Meckelburg

Registergericht • registered in:
Düsseldorf, HRB 44096
USt-IdNr • VAT No.:
DE 203159652
TAX No. 147/5869/0385

1 Administrative Data

1.1 Project Data

Project Responsible: Imad Hjije
Date Of Test Report: 2013/07/21
Date of first test: 2013/06/07
Date of last test: 2013/07/19

1.2 Applicant Data

Company Name: Parrot S.A.
Street: 174 quai de Jemmapes
City: 75010 Paris
Country: France
Contact Person: Mr. Bruno Pellet
Function: Qualification
Phone: +33 (0) 1 48 03 60 60
Mobile: +33 (0) 1 48 03 61 13
E-Mail: bruno.pellet.ext@parrot.com

1.3 Test Laboratory Data

The following list shows all places and laboratories involved for test result generation:


7 layers DE

Company Name : 7 layers AG
Street : Borsigstrasse 11
City : 40880 Ratingen
Country : Germany
Contact Person : Mr. Michael Albert
Phone : +49 2102 749 201
Fax : +49 2102 749 444
E Mail : michael.albert@7Layers.de

Laboratory Details

Lab ID	Identification	Responsible	Accreditation Info
Lab 1	Conducted Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAkkS-Registration no. D-PL-12140-01-01
Lab 2	Radiated Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAkkS-Registration no. D-PL-12140-01-01
Lab 3	Regulatory Bluetooth RF Test Solution	Mr. Jimmy Chatheril Mr. Sören Berentzen	DAkkS-Registration no. D-PL-12140-01-01

1.4 Signature of the Testing Responsible

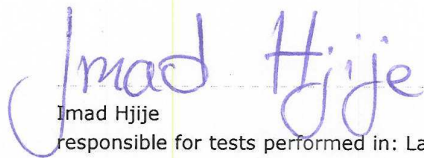
Imad Hjije
responsible for tests performed in: Lab 1, Lab 2, Lab 3

1.5 Signature of the Accreditation Responsible



7 layers AG, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0


M. Kullik [M. Kullik]

Accreditation scope responsible person
responsible for Lab 1, Lab 2, Lab 3

2 Test Object Data

2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

OUT: FC6000TS

Manufacturer:

Company Name:

See applicant data:

Contact Person:

-



2.2 Detailed Description of OUT Samples

Sample : a01

<i>OUT Identifier</i>	FC6000TS		
<i>Sample Description</i>	Sample with external antenna		
<i>Serial No.</i>	PF816001AA3D000425		
<i>HW Status</i>	01		
<i>SW Status</i>	02.07.00		
<i>Low Voltage</i>	3.1 V	<i>Low Temp.</i>	-40 °C
<i>High Voltage</i>	3.6 V	<i>High Temp.</i>	+85 °C
<i>Nominal Voltage</i>	3.3 V	<i>Normal Temp.</i>	+20 °C

Parameter List:

Parameter Description	Value	
Parameter for Scope FCC_v2		
Antenna Gain	2.18	(dBi)
Frequency_high	2480	(MHz)
Frequency_low	2402	(MHz)
Frequency_mid	2441	(MHz)

Sample : b01

<i>OUT Identifier</i>	FC6000TS		
<i>Sample Description</i>	Sample with internal antenna		
<i>Serial No.</i>	PF816008AA3E000510		
<i>HW Status</i>	02		
<i>SW Status</i>	02.07.00		
<i>Low Voltage</i>	3.1 V	<i>Low Temp.</i>	-40 °C
<i>High Voltage</i>	3.6 V	<i>High Temp.</i>	+85 °C
<i>Nominal Voltage</i>	3.3 V	<i>Normal Temp.</i>	+20 °C

Parameter List:

<i>Parameter Description</i>	<i>Value</i>	
Parameter for Scope FCC_v2		
Antenna Gain	1.7	(dBi)
Frequency_high	2480	(MHz)
Frequency_low	2402	(MHz)
Frequency_mid	2441	(MHz)

2.3 OUT Features

Features for OUT: FC6000TS

<i>Designation</i>	<i>Description</i>	<i>Allowed Values</i>	<i>Supported Value(s)</i>
Features for scope: FCC_v2			
AC	The OUT is powered by or connected to AC Mains		
BT	EUT supports Bluetooth data rate of 1 Mbps with GFSK modulation in the band 2400 MHz - 2483.5 MHz		
Eant	removable antenna supplied and type tested with the radio equipment, designed as an indispensable part of the equipment		
EDR2	EUT supports Bluetooth using data rate of 2 Mbps with PI/4 DQPSK modulation in the band 2400 MHz - 2483.5 MHz		
EDR3	EUT supports Bluetooth using data rate of 3 Mbps with 8DPSK modulation in the band 2400 MHz - 2483.5 MHz		
Iant	Integral Antenna: permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment		
TantC	temporary antenna connector, which may be only built-in for testing, designed as an example part of the equipment		

2.4 Auxiliary Equipment

<i>AE No.</i>	<i>Type Designation</i>	<i>Serial No.</i>	<i>HW Status</i>	<i>SW Status</i>	<i>Description</i>
AE AUX2					PCB antenna
AE AUX1	WB_FC6XXX_CEM_01				Test board

2.5 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

<i>Setup No.</i>	<i>List of OUT samples</i>		<i>List of auxiliary equipment</i>	
	<i>Sample No.</i>	<i>Sample Description</i>	<i>AE No.</i>	<i>AE Description</i>
A01				
	Sample: a01	Sample with external antenna	AE AUX2	PCB antenna
			AE AUX1	Test board
B01				
	Sample: b01	Sample with internal antenna	AE AUX1	Test board

3 Results

3.1 General

Documentation of tested devices:

Available at the test laboratory.

Interpretation of the test results:

The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.

In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.

In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.

Note:

1) The laboratory environmental conditions are available and recorded in the Interlab System.

2) This test report focuses on the Bluetooth part of the device.

3) The device was provided in two different Versions. One device with external antenna and another with internal antenna. The last one was not completely tested, since the only difference between the two modules is the antenna.

4) The tests were selected and performed with reference to the FCC measurement guide line "Measurement of Digital Transmission Systems Operating under Section 15.247 March 23, 2005" (KDB 558074 D01 DTS Meas Guidance v03r01) Instead of applying ANSI C63.4-1992 which is referenced in the FCC Public Note, the newer ANSI C63.4-2009 is applied.

3.2 List of the Applicable Body

(Body for Scope: FCC_v2)

<i>Designation</i>	<i>Description</i>
FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES	Subpart C - Intentional Radiators; 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

3.3 List of Test Specification

<i>Test Specification:</i>	FCC part 2 and 15
<i>Version</i>	10-1-11 Edition
<i>Title:</i>	PART 2 - GENERAL RULES AND REGULATIONS PART 15 - RADIO FREQUENCY DEVICES



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

3.4 Summary

<i>Test Case Identifier / Name</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab</i>	<i>Setup</i>
<i>Test (condition)</i>			<i>Ref.</i>	
15c.1 Conducted emissions (AC power line) §15.207				
15c.1; Mode = transmit	Passed	2013/06/21	Lab 1	A01
15c.10 Power density §15.247 (e)				
15c.10; Frequency = Highest, Data rate = 1Mbps	Passed	2013/07/19	Lab 3	A01
15c.10; Frequency = Lowest, Data rate = 1Mbps	Passed	2013/07/19	Lab 3	A01
15c.10; Frequency = Middle, Data rate = 1Mbps	Passed	2013/07/19	Lab 3	A01
15c.10; Frequency = Highest, Data rate = 2Mbps	Passed	2013/07/19	Lab 3	A01
15c.10; Frequency = Lowest, Data rate = 2Mbps	Passed	2013/07/19	Lab 3	A01
15c.10; Frequency = Middle, Data rate = 2Mbps	Passed	2013/07/19	Lab 3	A01
15c.10; Frequency = Highest, Data rate = 3Mbps	Passed	2013/07/19	Lab 3	A01
15c.10; Frequency = Lowest, Data rate = 3Mbps	Passed	2013/07/19	Lab 3	A01
15c.10; Frequency = Middle, Data rate = 3Mbps	Passed	2013/07/19	Lab 3	A01
15c.11 6dB Bandwidth §15.247 (a) (2)				
15c.11; Frequency = Lowest, Data rate = 1Mbps	Passed	2013/07/19	Lab 3	A01
15c.11; Frequency = Highest, Data rate = 1Mbps	Passed	2013/07/19	Lab 3	A01
15c.11; Frequency = Middle, Data rate = 1Mbps	Passed	2013/07/16	Lab 3	A01
15c.11; Frequency = Lowest, Data rate = 2Mbps	Passed	2013/07/19	Lab 3	A01
15c.11; Frequency = Highest, Data rate = 2Mbps	Passed	2013/07/19	Lab 3	A01
15c.11; Frequency = Middle, Data rate = 2Mbps	Passed	2013/07/16	Lab 3	A01
15c.11; Frequency = Lowest, Data rate = 3Mbps	Passed	2013/07/19	Lab 3	A01
15c.11; Frequency = Highest, Data rate = 3Mbps	Passed	2013/07/19	Lab 3	A01
15c.11; Frequency = Middle, Data rate = 3Mbps	Passed	2013/07/16	Lab 3	A01



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

<i>Test Case Identifier / Name</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab</i>	<i>Setup</i>
<i>Test (condition)</i>			<i>Ref.</i>	
15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209				
15c.2; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = low	Passed	2013/06/09	Lab 2	B01
	Passed	2013/06/07	Lab 2	A01
15c.2; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2013/06/07	Lab 2	A01
	footnote: 3 Passed	2013/06/07	Lab 2	A01
15c.2; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation	footnote: 3 Passed	2013/06/09	Lab 2	B01
15c.2; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = mid	Passed	2013/06/07	Lab 2	A01
	Passed	2013/06/07	Lab 2	A01
15c.2; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	footnote: 3 Passed	2013/06/07	Lab 2	A01
15c.2; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	footnote: 3 Passed	2013/06/09	Lab 2	B01
15c.2; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = highest	Passed	2013/06/07	Lab 2	A01
	Passed	2013/06/07	Lab 2	A01
15c.2; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	footnote: 3 Passed	2013/06/07	Lab 2	A01
15c.2; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation	footnote: 3 Passed	2013/06/07	Lab 2	A01
15c.3 Occupied bandwidth §15.247 (a) (1)				
15c.3; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2013/06/07	Lab 3	A01
15c.3; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2013/06/07	Lab 3	A01
15c.3; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2013/06/11	Lab 3	A01
15c.3; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2013/06/07	Lab 3	A01
15c.3; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2013/06/07	Lab 3	A01
15c.3; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2013/06/11	Lab 3	A01
15c.3; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2013/06/07	Lab 3	A01
15c.3; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2013/06/07	Lab 3	A01
15c.3; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2013/06/11	Lab 3	A01



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

<i>Test Case Identifier / Name</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab</i>	<i>Setup</i>
<i>Test (condition)</i>			<i>Ref.</i>	
15c.4 Peak power output §15.247 (b) (1)				
15c.4; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2013/06/11	Lab 3	B01
	Passed	2013/06/07	Lab 3	A01
15c.4; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2013/06/11	Lab 3	B01
	Passed	2013/06/07	Lab 3	A01
15c.4; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2013/06/11	Lab 3	B01
	Passed	2013/06/11	Lab 3	A01
15c.4; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2013/06/11	Lab 3	B01
	Passed	2013/06/07	Lab 3	A01
15c.4; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2013/06/11	Lab 3	B01
	Passed	2013/06/07	Lab 3	A01
15c.4; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2013/06/11	Lab 3	B01
	Passed	2013/06/11	Lab 3	A01
15c.4; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2013/06/11	Lab 3	B01
	Passed	2013/06/07	Lab 3	A01
15c.4; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2013/06/11	Lab 3	B01
	Passed	2013/06/07	Lab 3	A01
15c.4; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2013/06/11	Lab 3	B01
	Passed	2013/06/11	Lab 3	A01
15c.5 Spurious RF conducted emissions §15.247 (d)				
15c.5; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2013/06/07	Lab 3	A01
15c.5; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2013/06/07	Lab 3	A01
15c.5; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2013/06/11	Lab 3	A01
15c.5; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2013/06/07	Lab 3	A01
15c.5; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2013/06/07	Lab 3	A01
15c.5; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2013/06/11	Lab 3	A01
15c.5; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2013/06/07	Lab 3	A01
15c.5; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2013/06/07	Lab 3	A01
15c.5; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2013/06/11	Lab 3	A01



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

<i>Test Case Identifier / Name</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab</i>	<i>Setup</i>
<i>Test (condition)</i>			<i>Ref.</i>	
15c.6 Band edge compliance §15.247 (d)				
15c.6; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = conducted	Passed	2013/06/07	Lab 3	A01
15c.6; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = conducted	Passed	2013/06/07	Lab 3	A01
15c.6; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = conducted	Passed	2013/06/11	Lab 3	A01
15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = conducted	Passed	2013/06/11	Lab 3	A01
15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = radiated	Passed	2013/06/07	Lab 2	A01
15c.6; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = conducted	Passed	2013/06/07	Lab 3	A01
15c.6; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = radiated	Passed	2013/06/07	Lab 2	A01
15c.6; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = conducted	Passed	2013/06/11	Lab 3	A01
15c.6; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = radiated	Passed	2013/06/07	Lab 2	A01

3.5 Detailed Footnotes

<i>No.</i>	<i>Description</i>
3	This test case has been performed in the Frequency Range 1 to 8 GHz only, because pre-measurements have shown that no spurious emissions have been found outside this frequency range.



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

3.6 Detailed Results

3.6.1 15c.1 Conducted emissions (AC power line) §15.207

Test: 15c.1; Mode = transmit

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2013/06/21 22:37
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

AC MAINS CONDUCTED

EUT: (CX580a01)
 Manufacturer: Parrot S.A.
 Operating Condition: BT TX on 2441 MHz, loopback mode, Packettype: 1-DH1
 Test Site: 7 layers Ratingen
 Operator: Doe
 Test Specification: ANSI C63.4; FCC 15.107 / 15.207
 Comment:
 Start of Test: 21.06.2013 / 22:07:24

SCAN TABLE: "FCC Voltage"

Short Description:			FCC Voltage			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	20.0 ms	9 kHz	ESH3-Z5
			Average			

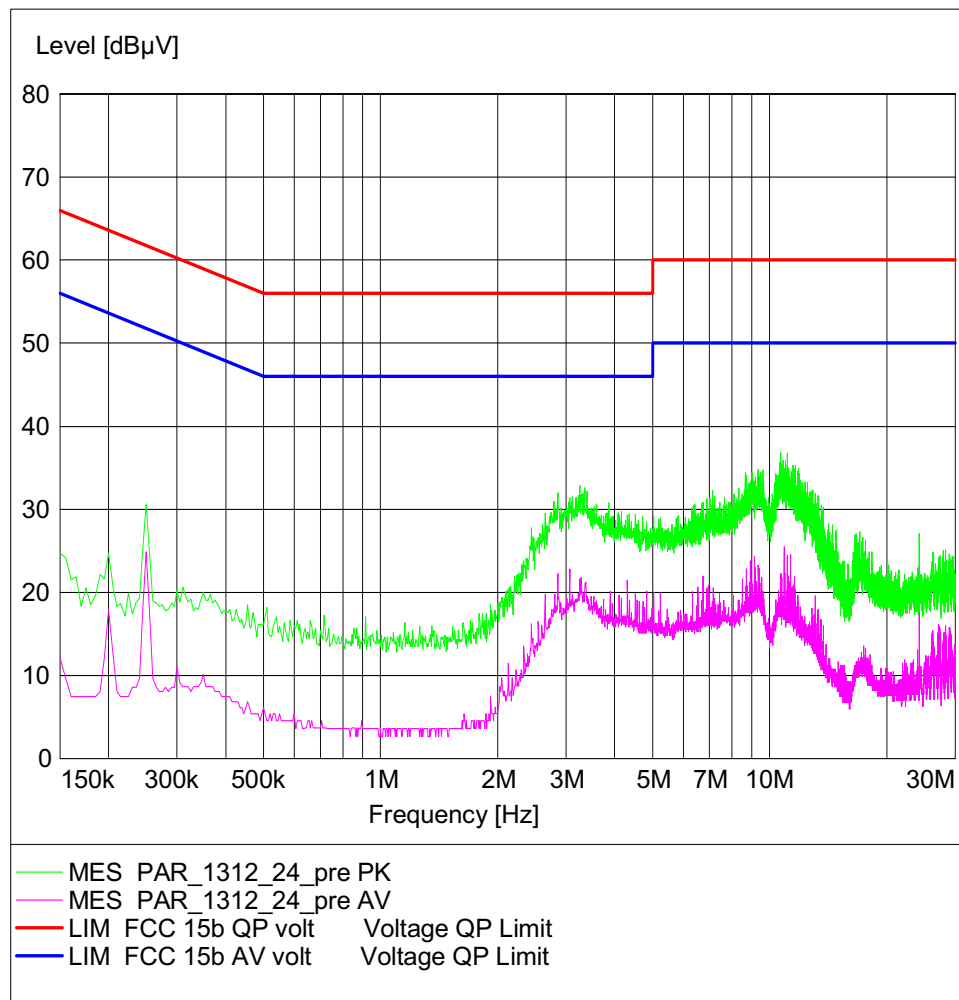



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

3.6.2 15c.10 Power density §15.247 (e)

Test1: 15c.10; Frequency = Highest, Data rate = 1Mbps

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2013/07/19 10:11
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15




Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Detailed Results:

Power Density dBm / 3 KHz
-13.020

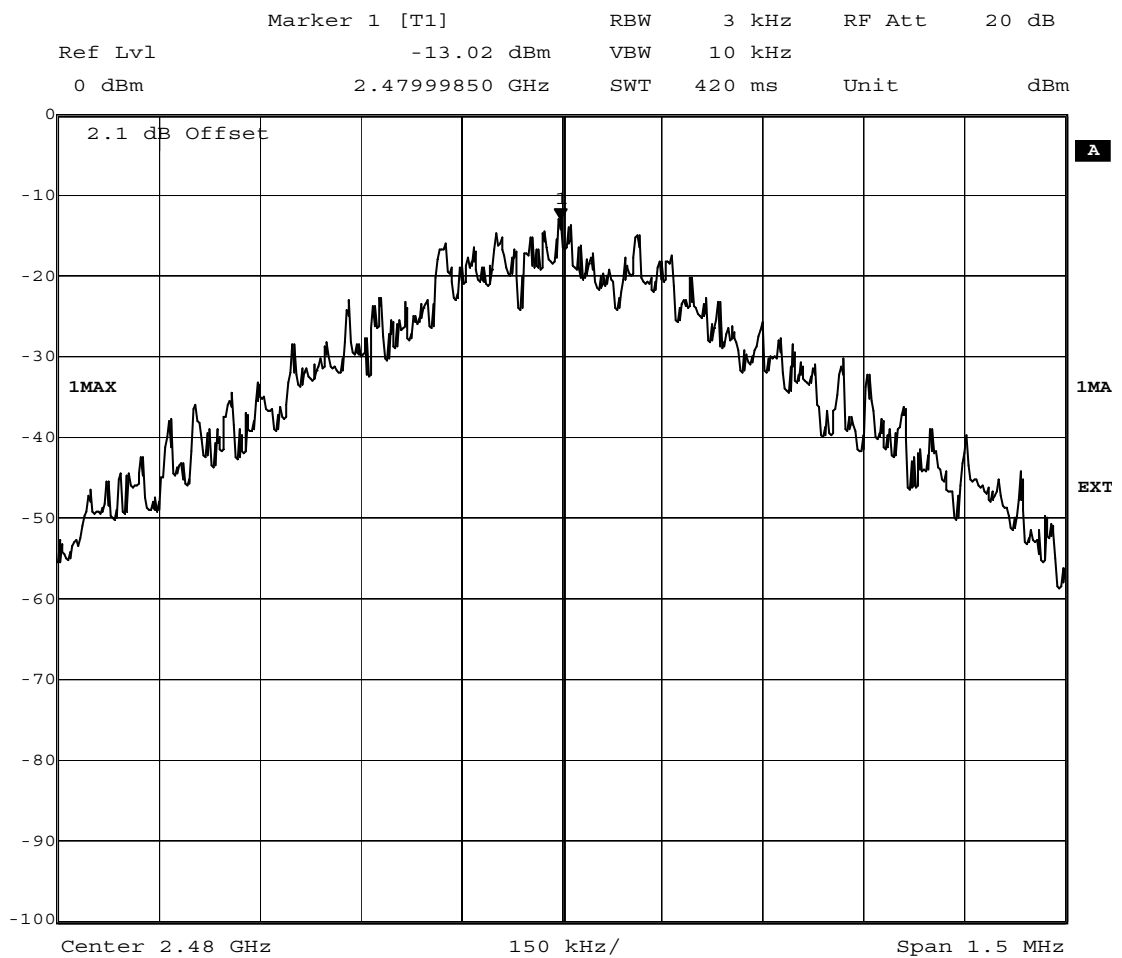

Date: 19.JUL.2013 13:24:49

Test2: 15c.10; Frequency = Highest, Data rate = 2Mbps

Result: Passed

Setup No.: A01


Date of Test: 2013/07/19 10:15

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Power Density dBm / 3 KHz
-12.860

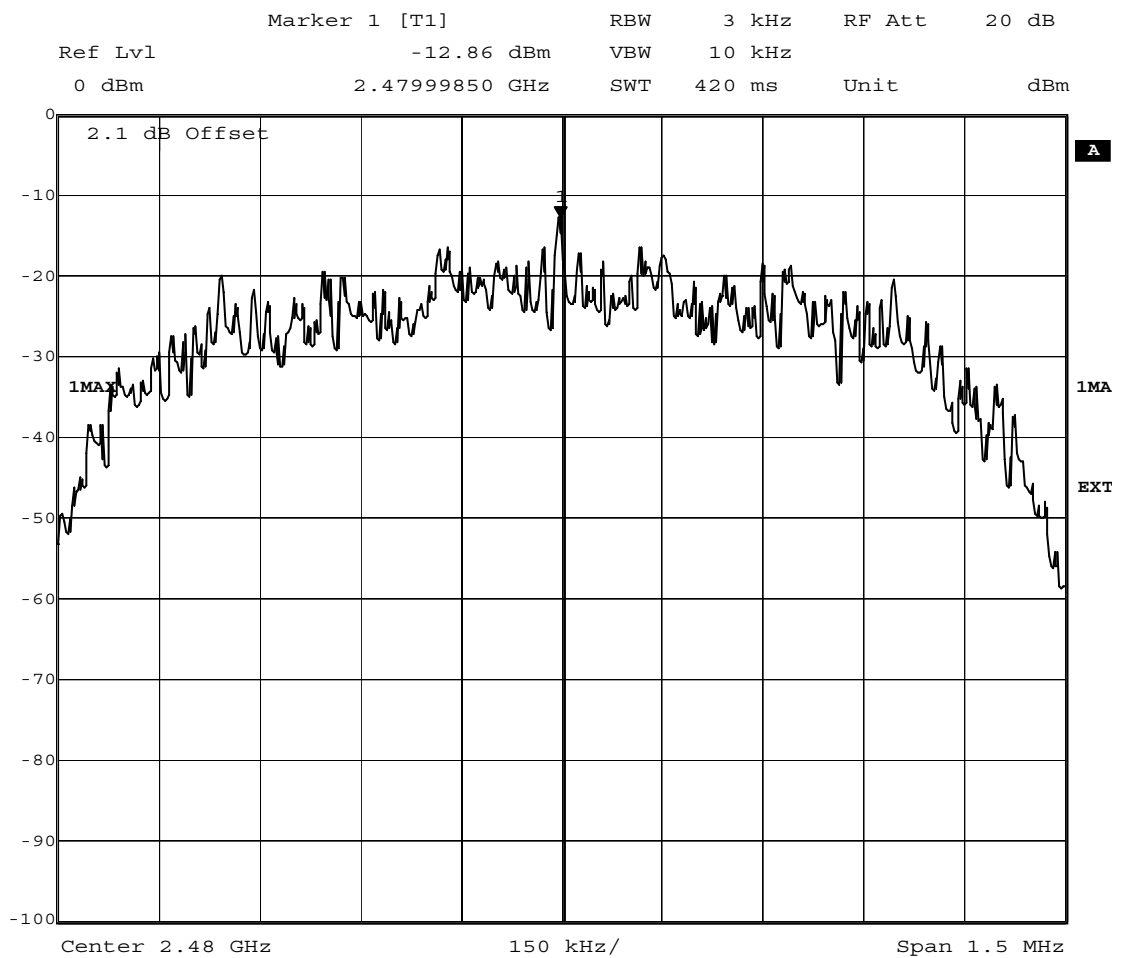

Date: 19.JUL.2013 13:29:54

Test3: 15c.10; Frequency = Highest, Data rate = 3Mbps

Result: Passed

Setup No.: A01


Date of Test: 2013/07/19 10:20

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Power Density dBm / 3 KHz
-14.430

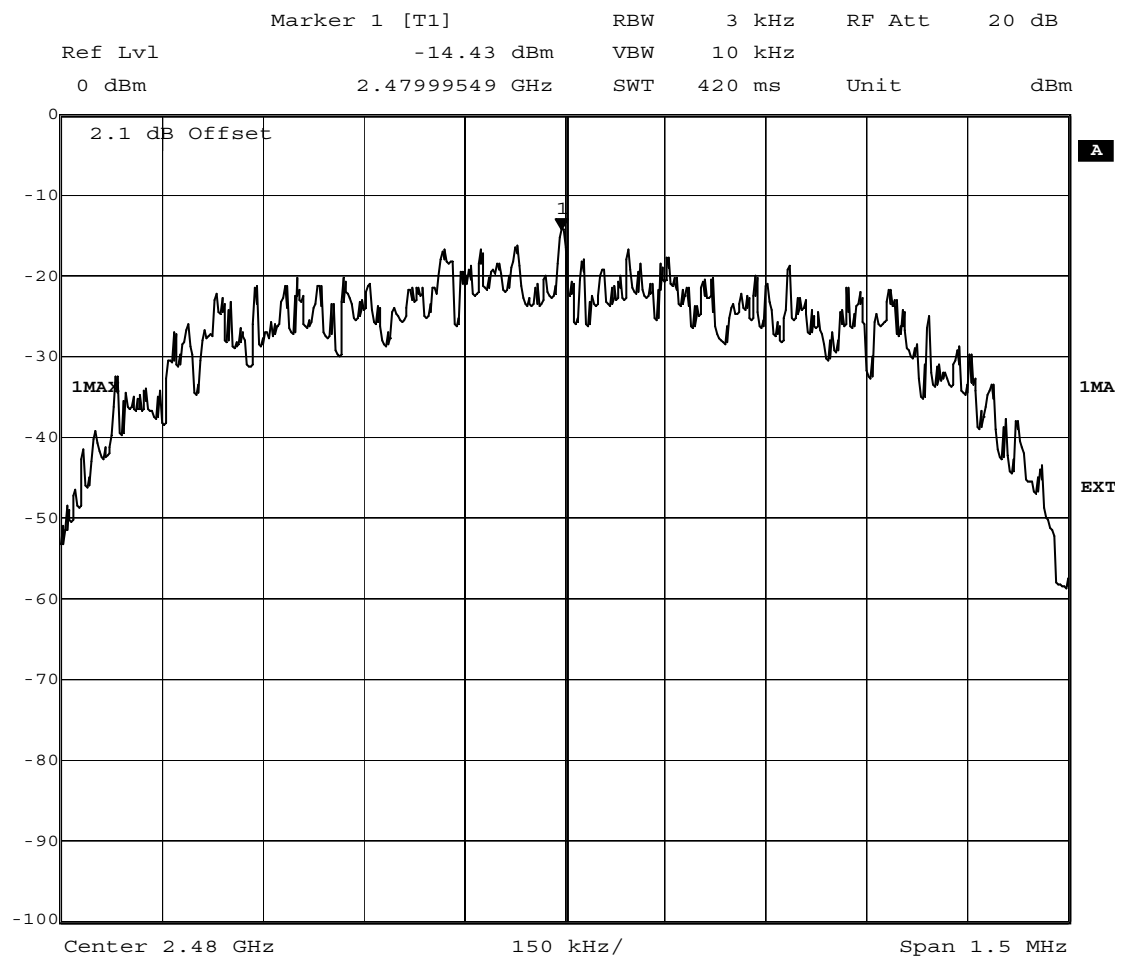

Date: 19.JUL.2013 13:34:28

Test1: 15c.10; Frequency = Lowest, Data rate = 1Mbps

Result: Passed

Setup No.: A01

Date of Test: 2013/07/19 10:12

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15




Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Detailed Results:

Power Density dBm / 3 KHz
-12.780

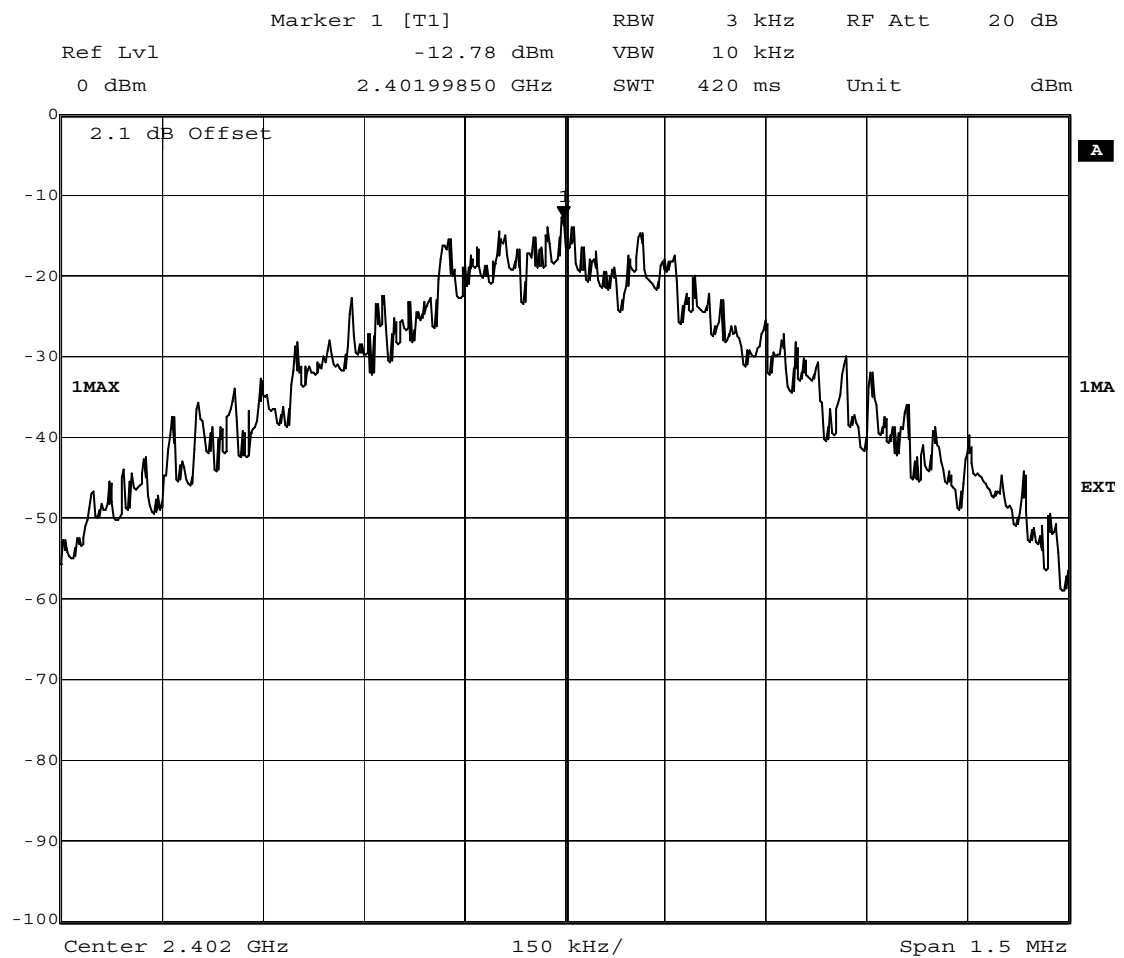

Date: 19.JUL.2013 13:26:07

Test2: 15c.10; Frequency = Lowest, Data rate = 2Mbps

Result: Passed

Setup No.: A01


Date of Test: 2013/07/19 10:21

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Power Density dBm / 3 KHz
-12.470

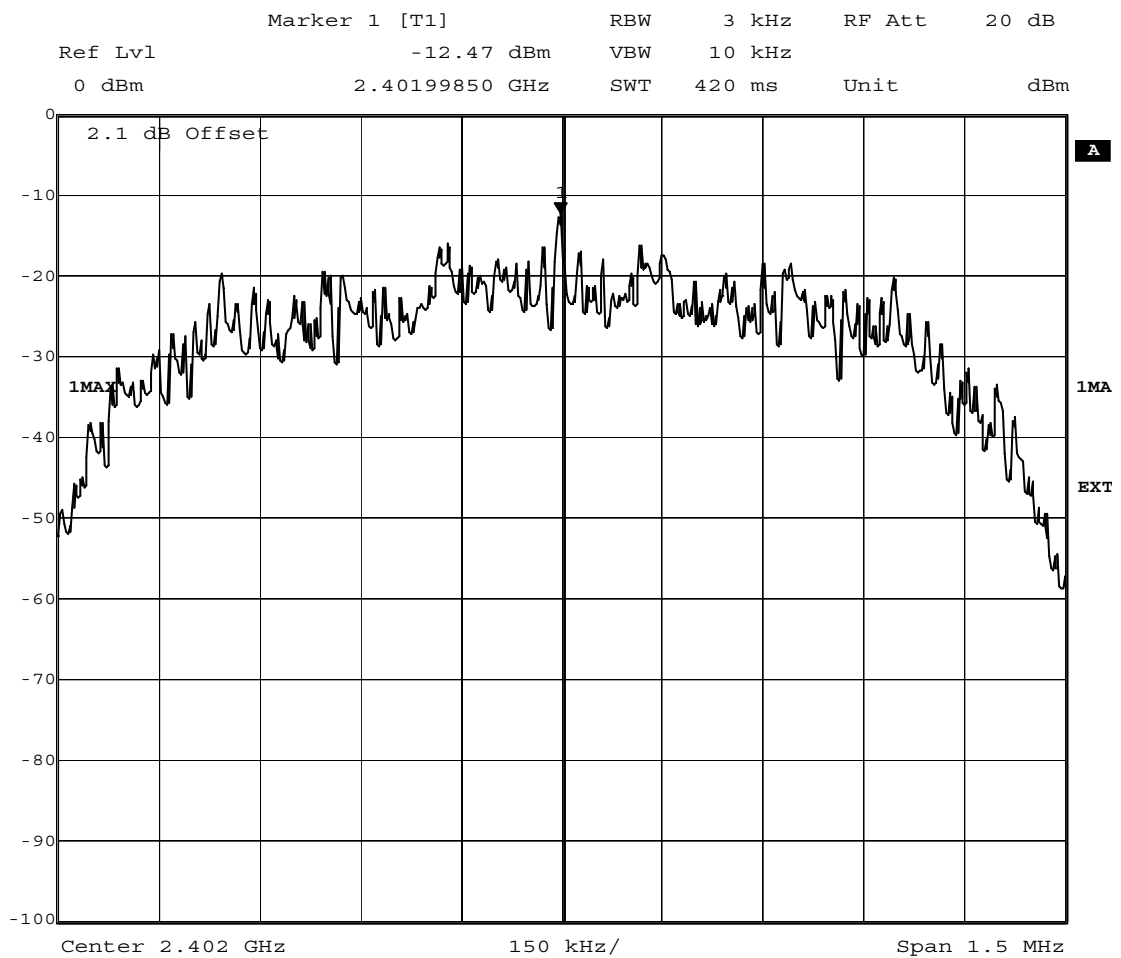

Date: 19.JUL.2013 13:27:27

Test3: 15c.10; Frequency = Lowest, Data rate = 3Mbps

Result: Passed

Setup No.: A01

Date of Test: 2013/07/19 10:25

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15




Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Detailed Results:

Power Density dBm / 3 KHz
-14.180

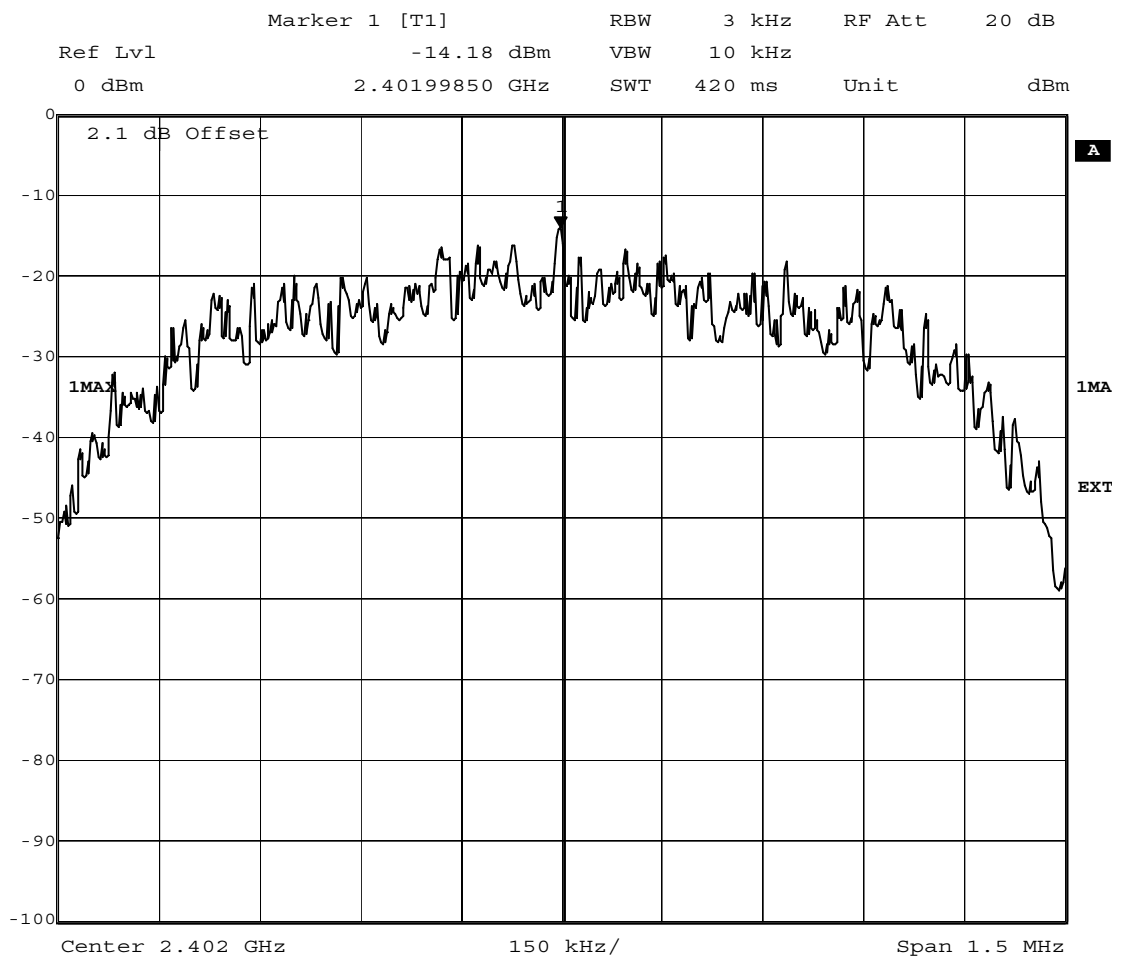

Date: 19.JUL.2013 13:31:40

Test1: 15c.10; Frequency = Middle, Data rate = 1Mbps

Result: Passed

Setup No.: A01


Date of Test: 2013/07/19 10:13

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Power Density dBm / 3 KHz
-12.750

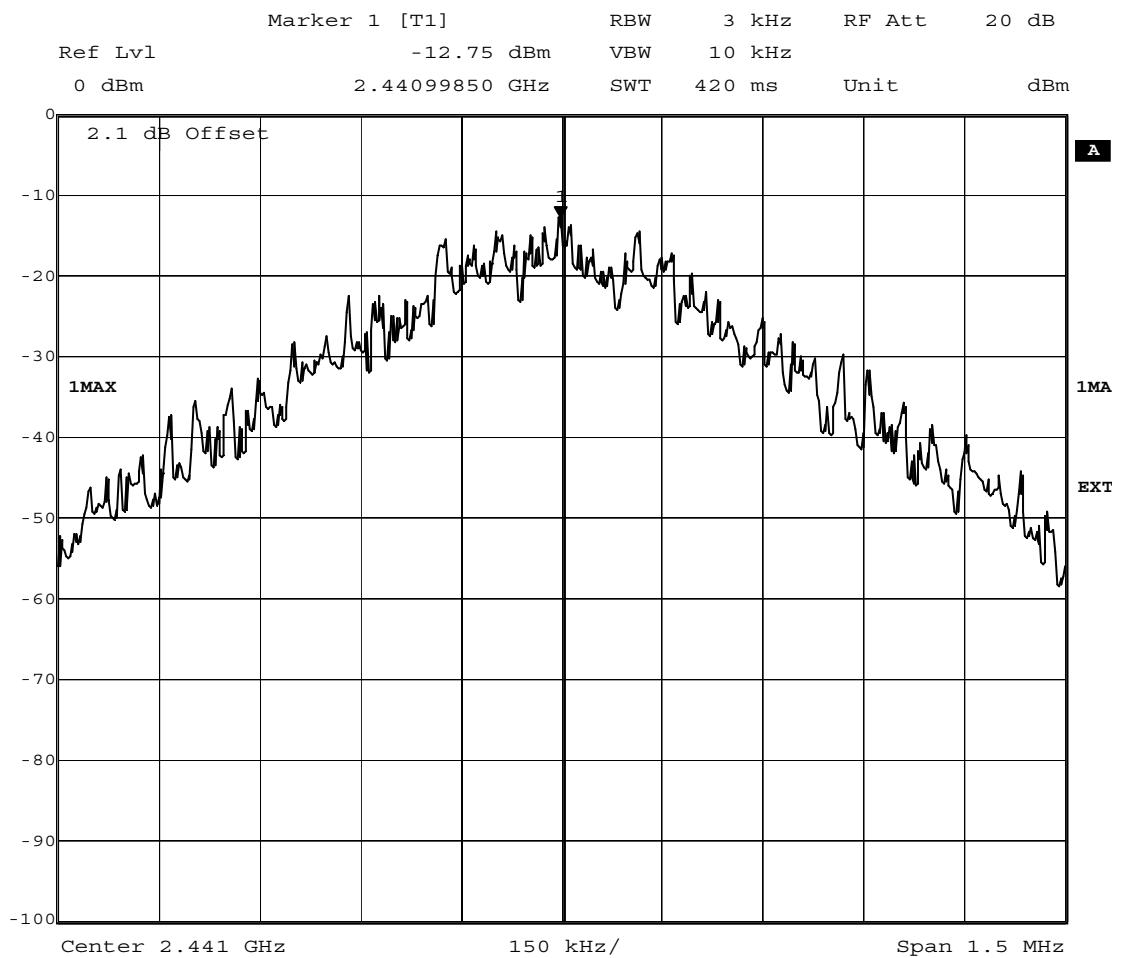

Date: 19.JUL.2013 13:23:40

Test2: 15c.10; Frequency = Middle, Data rate = 2Mbps

Result: Passed

Setup No.: A01


Date of Test: 2013/07/19 10:30

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Power Density dBm / 3 KHz
-12.530

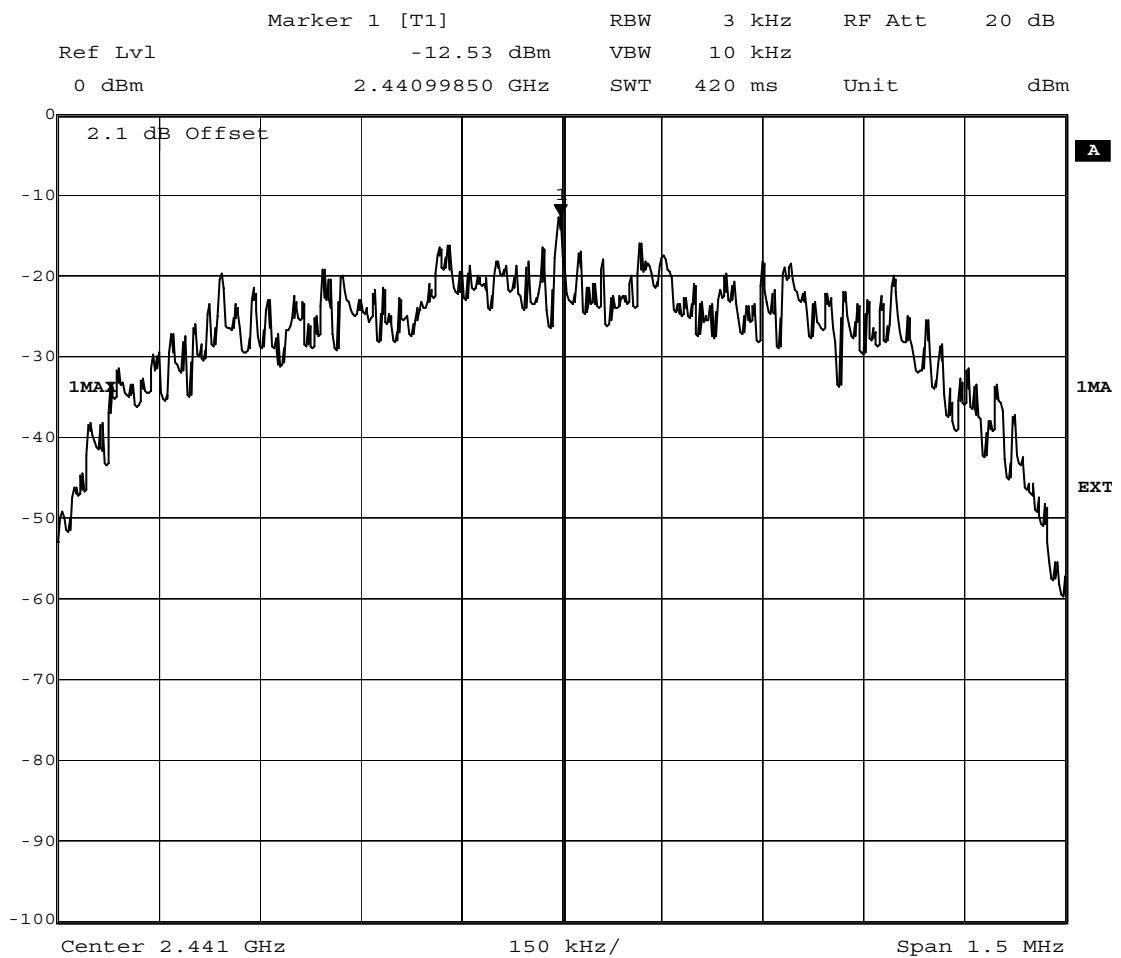

Date: 19.JUL.2013 13:28:29

Test3: 15c.10; Frequency = Middle, Data rate = 3Mbps

Result: Passed

Setup No.: A01


Date of Test: 2013/07/19 10:40

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Power Density dBm / 3 KHz
-14.230

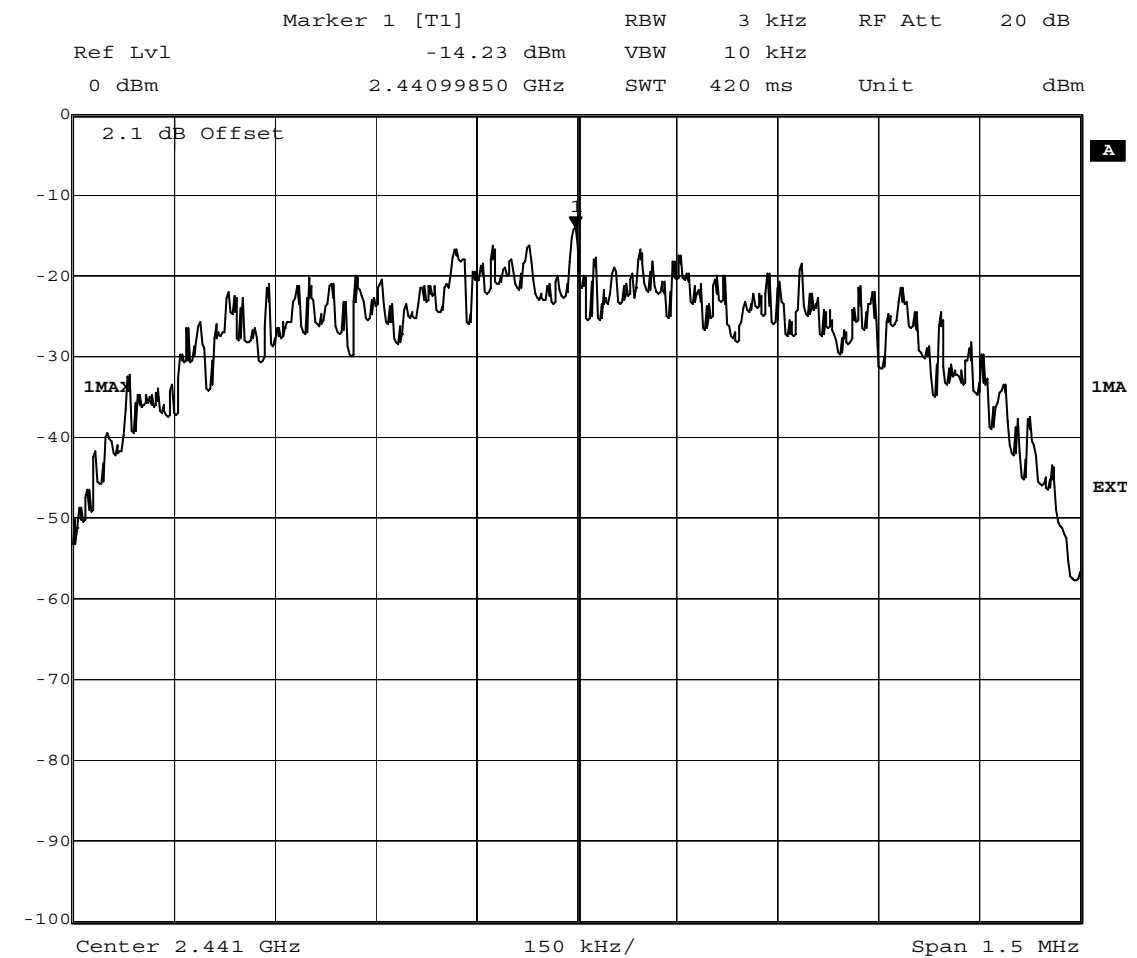

Date: 19.JUL.2013 13:33:08



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C


3.6.3 15c.11 6dB Bandwidth §15.247 (a) (2)

Test1: 15c.11; Frequency = Highest, Data rate = 1Mbps

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2013/07/16 11:01
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

6 dB bandwidth MHz
0.511

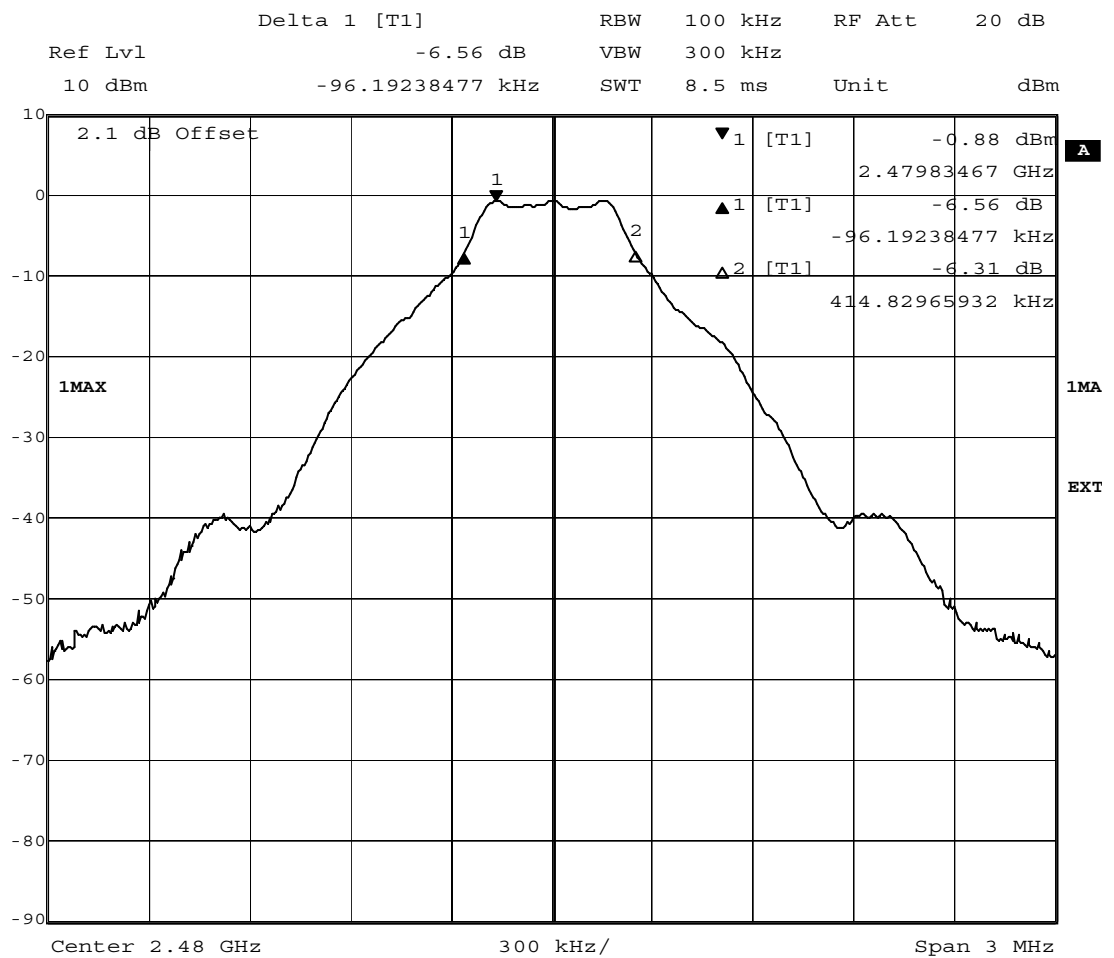

Date: 19.JUL.2013 11:15:30

Test2: 15c.11; Frequency = Highest, Data rate = 2Mbps

Result: Passed

Setup No.: A01


Date of Test: 2013/07/19 11:30

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

6 dB bandwidth MHz
1.076

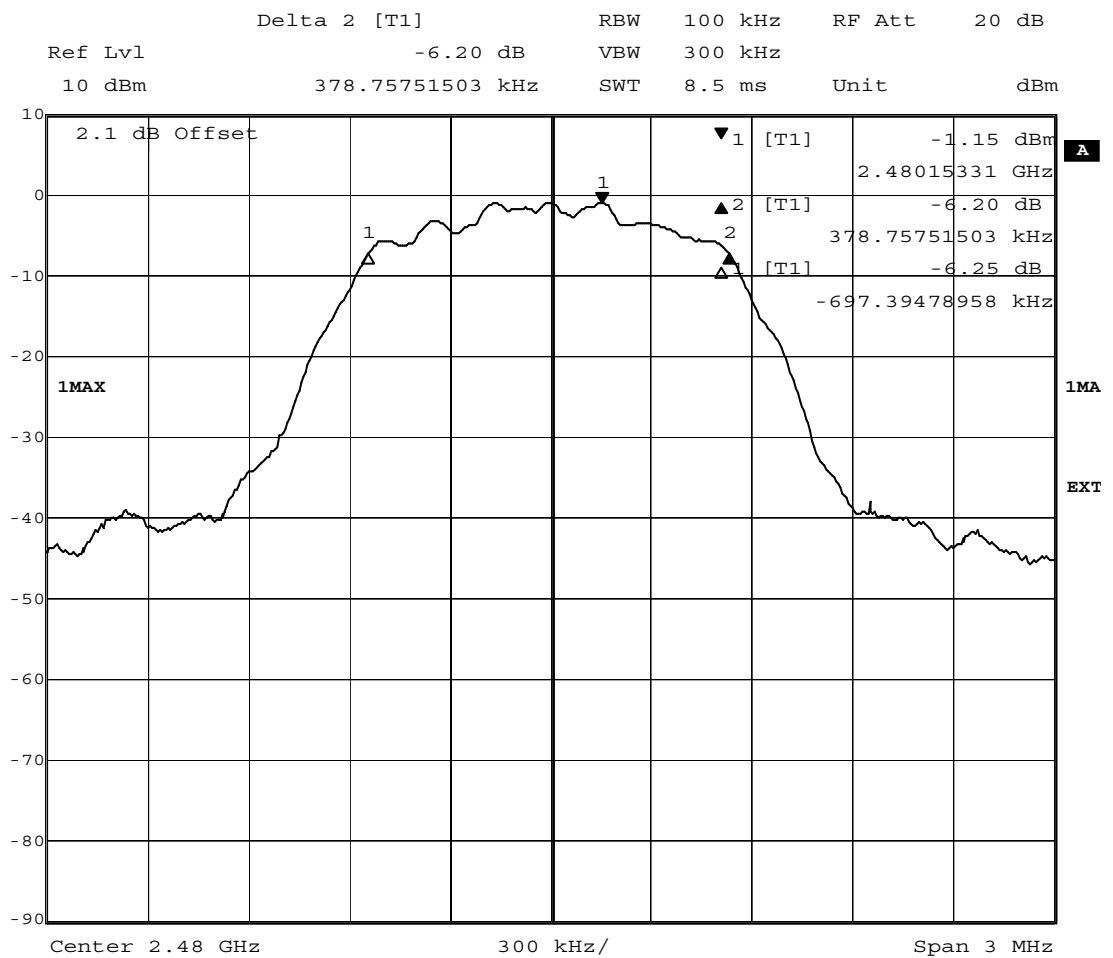

Date: 19.JUL.2013 13:10:10

Test3: 15c.11; Frequency = Highest, Data rate = 3Mbps

Result: Passed

Setup No.: A01

Date of Test: 2013/07/19 11:40

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15




Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Detailed Results:

6 dB bandwidth MHz
1.076

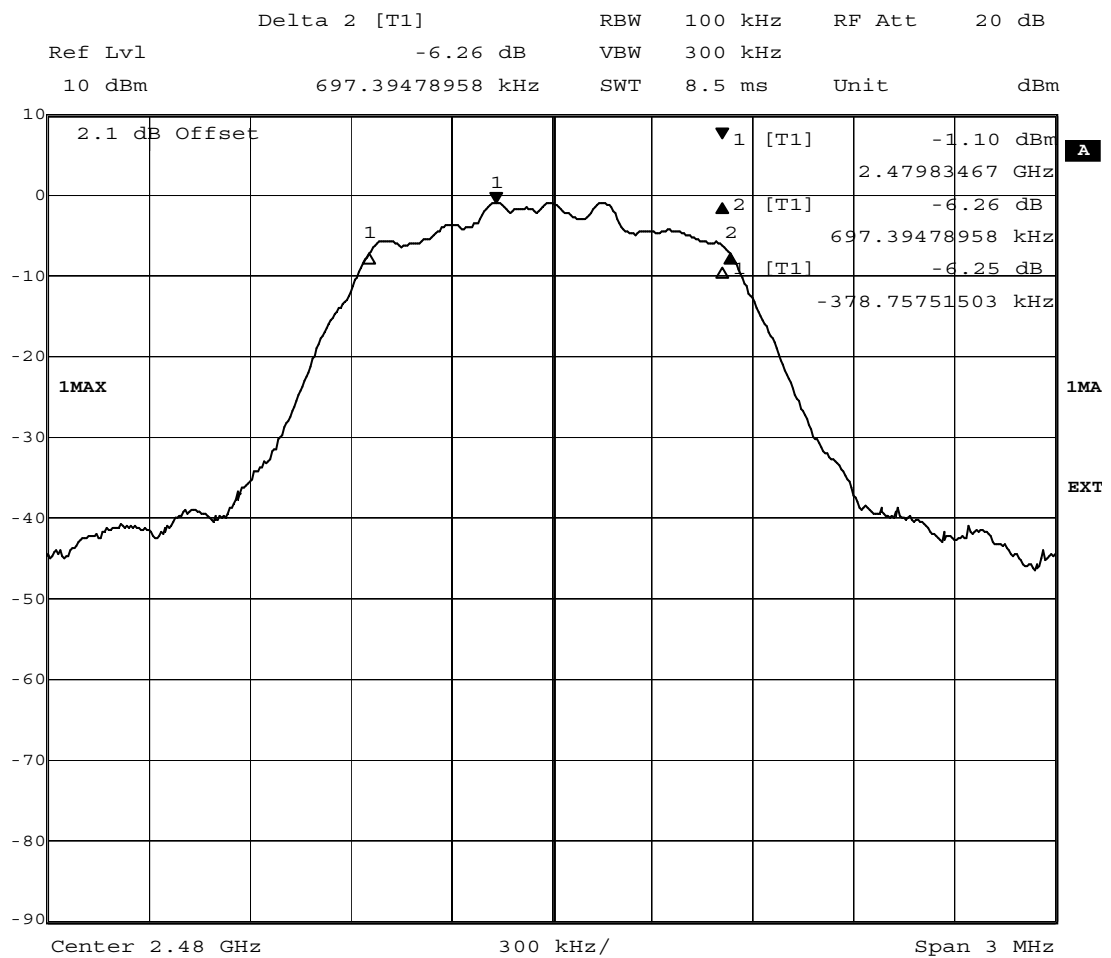

Date: 19.JUL.2013 13:05:08

Test1: 15c.11; Frequency = Lowest, Data rate = 1Mbps

Result: Passed

Setup No.: A01


Date of Test: 2013/07/16 10:59

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

6 dB bandwidth MHz
0.511

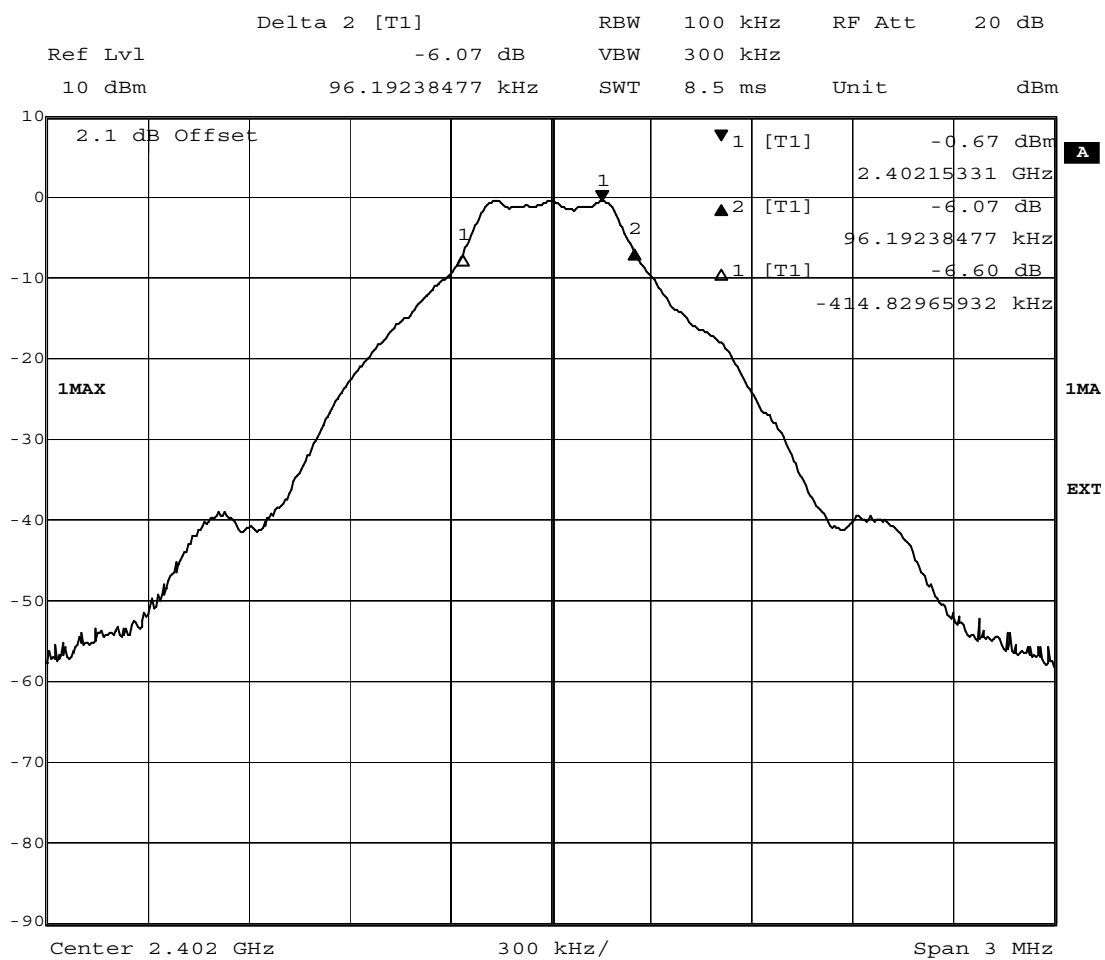

Date: 19.JUL.2013 11:12:06

Test2: 15c.11; Frequency = Lowest, Data rate = 2Mbps

Result: Passed

Setup No.: A01

Date of Test: 2013/07/19 11:10

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15




Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Detailed Results:

6 dB bandwidth MHz
1.076

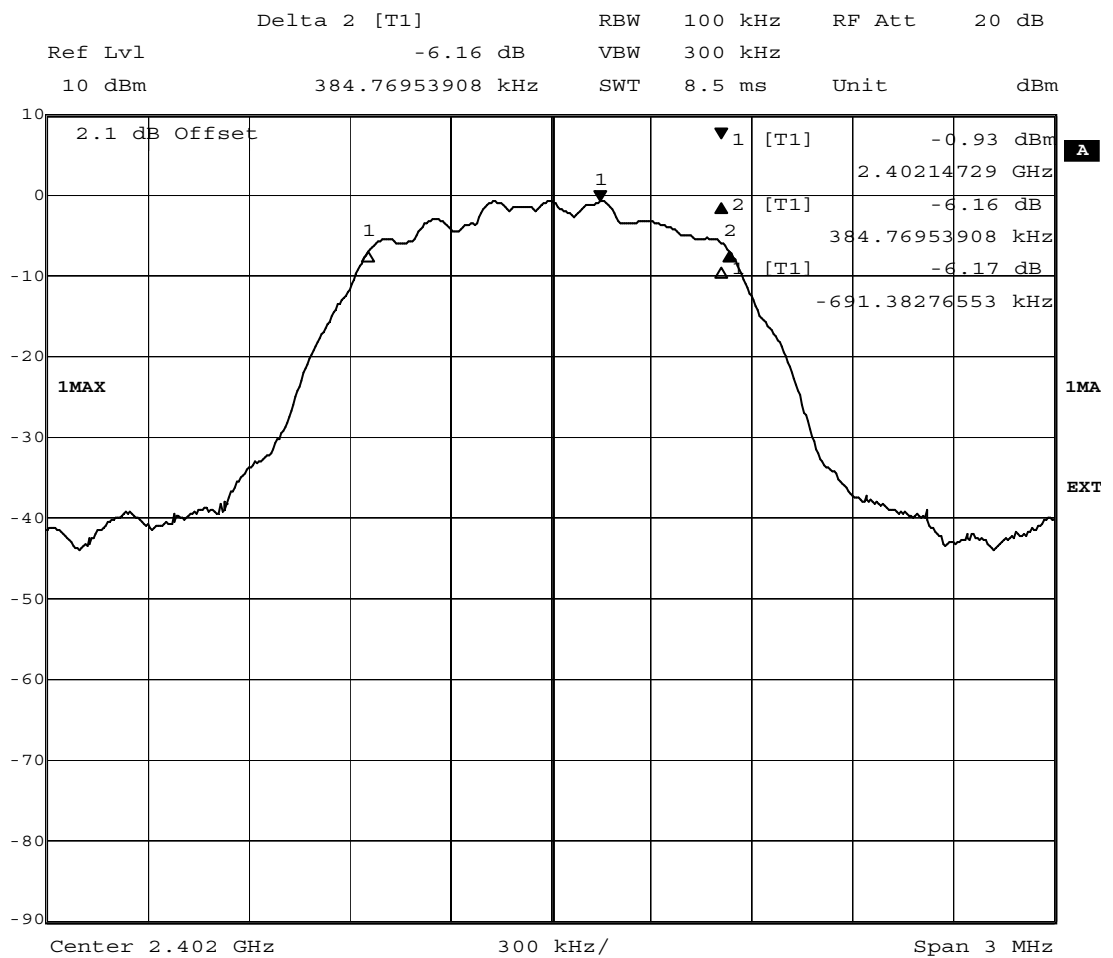

Date: 19.JUL.2013 13:07:12

Test3: 15c.11; Frequency = Lowest, Data rate = 3Mbps

Result: Passed

Setup No.: A01


Date of Test: 2013/07/19 11:20

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

6 dB bandwidth MHz
1.076

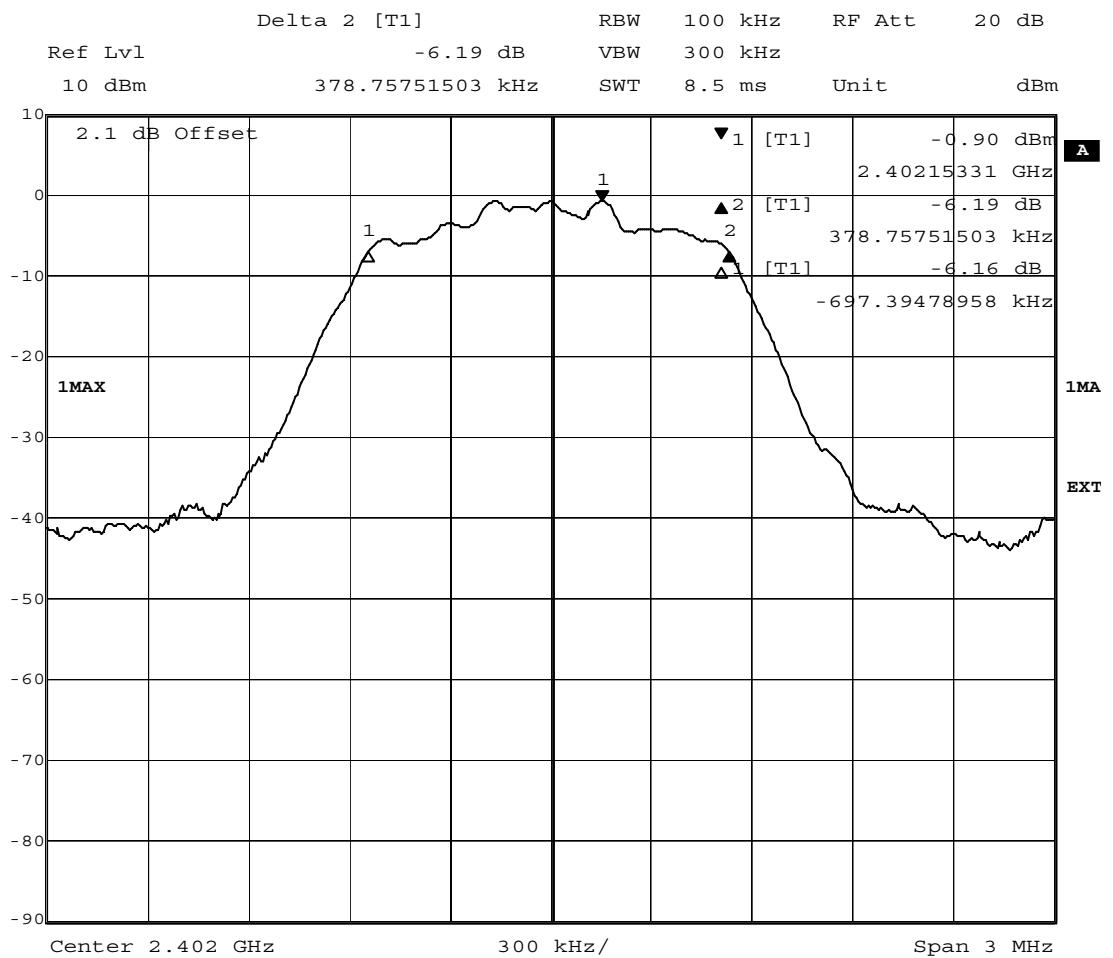

Date: 19.JUL.2013 13:03:49

Test1: 15c.11; Frequency = Middle, Data rate = 1Mbps

Result: Passed

Setup No.: A01


Date of Test: 2013/07/16 11:01

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

6 dB bandwidth MHz
0.505

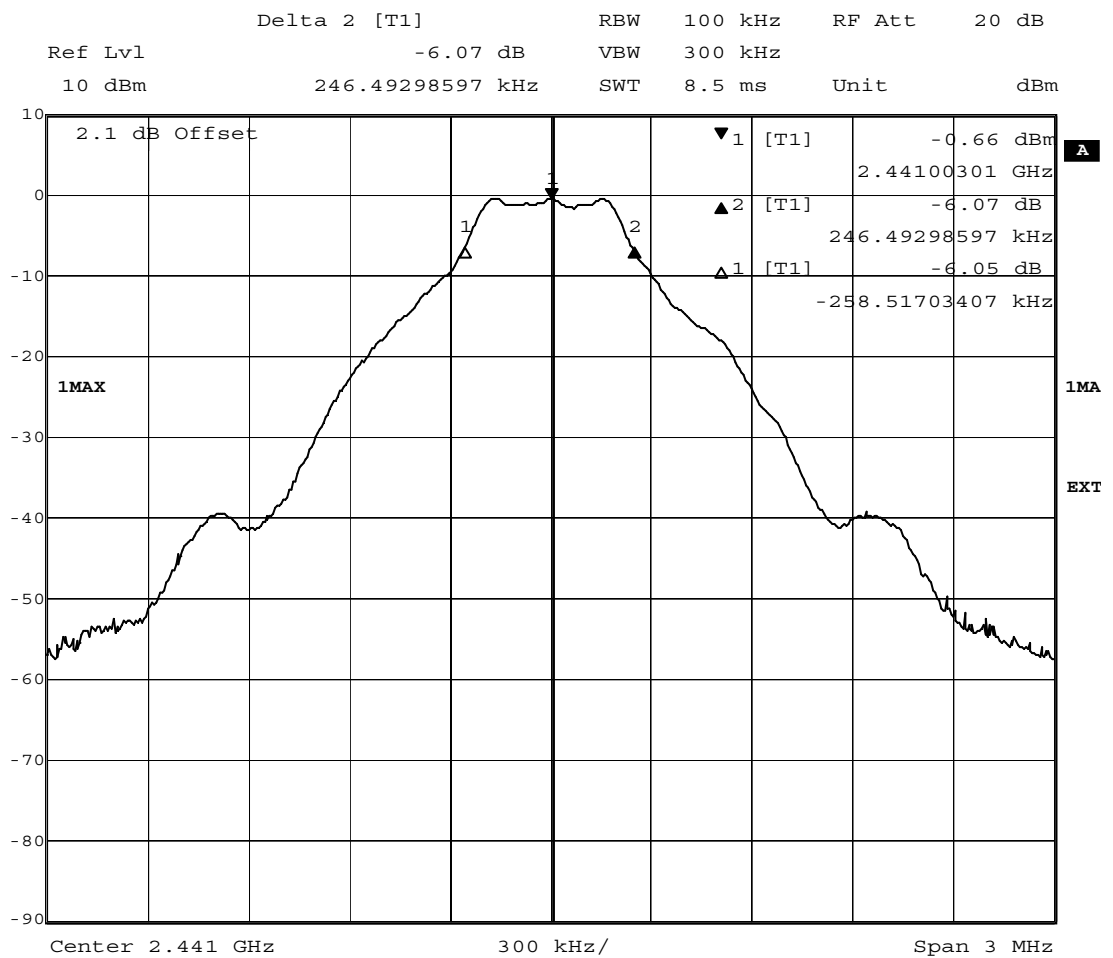

Date: 19.JUL.2013 11:13:23

Test2: 15c.11; Frequency = Middle, Data rate = 2Mbps

Result: Passed

Setup No.: A01


Date of Test: 2013/07/19 11:50

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

6 dB bandwidth MHz
1.076

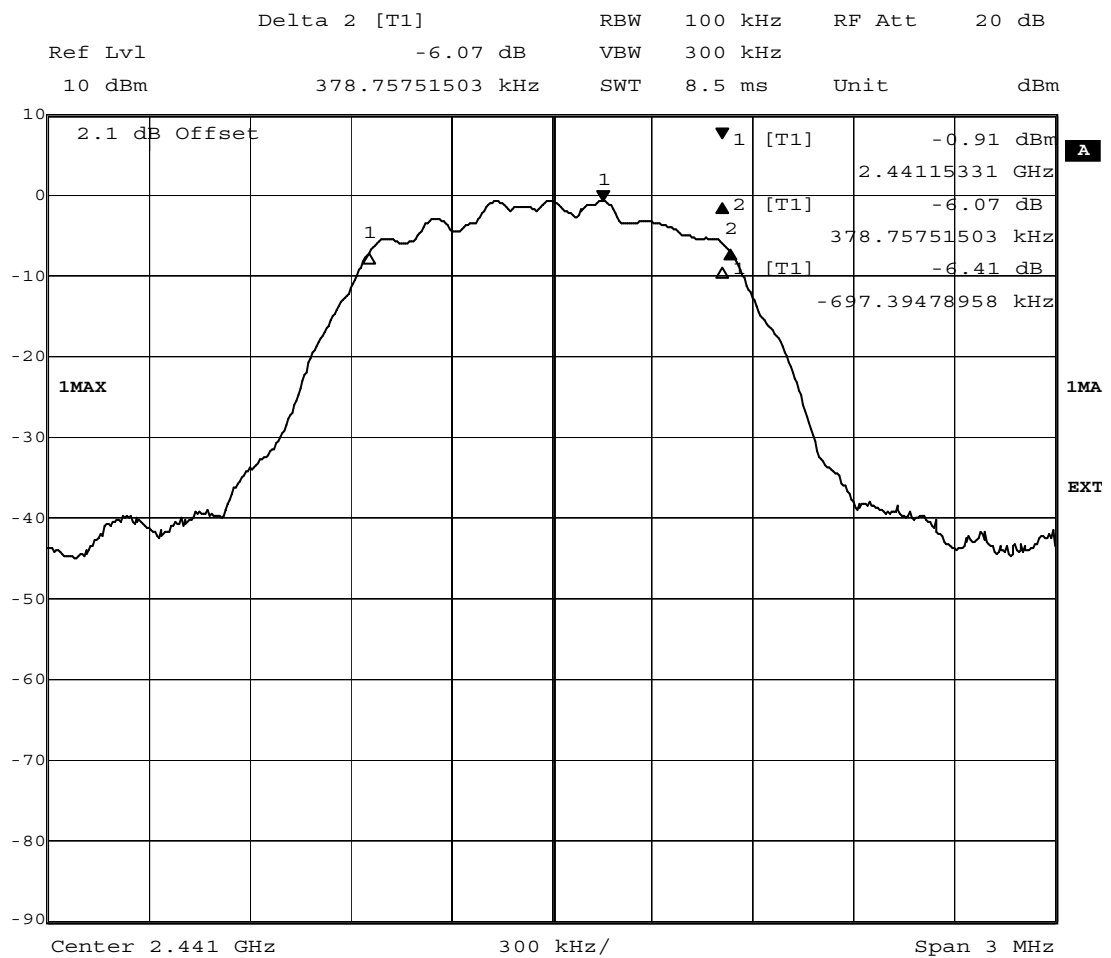

Date: 19.JUL.2013 13:08:44

Test3: 15c.11; Frequency = Middle, Data rate = 3Mbps

Result: Passed

Setup No.: A01


Date of Test: 2013/07/19 12:00

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

6 dB bandwidth MHz
1.076

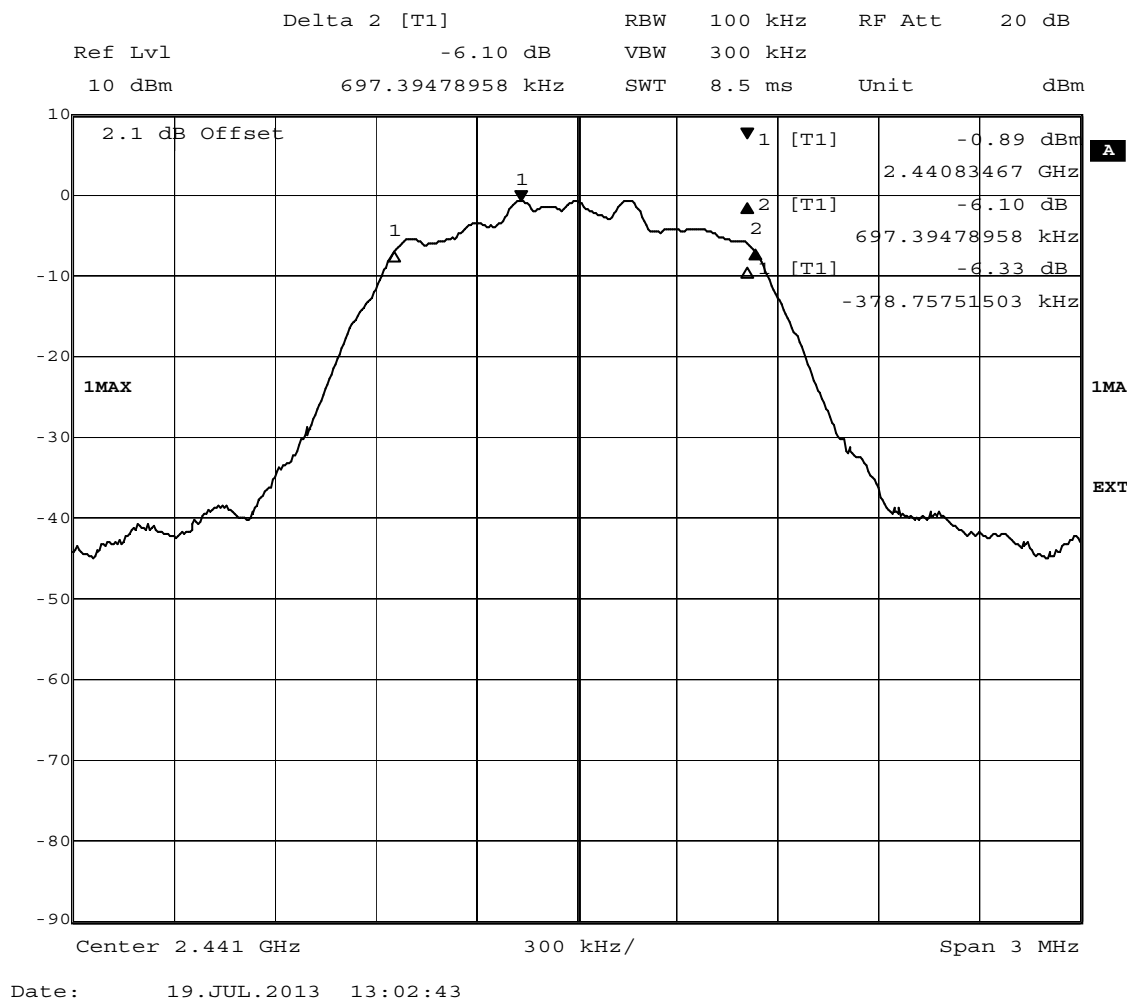

3.6.4 15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209

Test1: 15c.2; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = low

Result: Passed
Setup No.: A01
Date of Test: 2013/06/07 14:46
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2402 MHz 1-DH1

Frequency range 30 MHz - 1 GHz

Ant. Polar.	Limit QPK [dBµV]	Frequency [MHz]	Corrected value QPK [dBµV]	Margin QPK [dB]	Result
Ver + Hor					Passed

Frequency range 1 GHz - 25 GHz

Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54						Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test2: 15c.2; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = low

Result: Passed
Setup No.: B01
Date of Test: 2013/06/09 9:32
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2402 MHz 1-DH1

Frequency range 30 MHz - 1 GHz

Ant. Polar.	Limit QPK [dBµV]	Frequency [MHz]	Corrected value QPK [dBµV]	Margin QPK [dB]	Result
Ver + Hor					Passed

Frequency range 1 GHz - 25 GHz

Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	1387	45.16	36.11	28.84	17.89	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.2; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed
Setup No.: A01
Date of Test: 2013/06/07 16:08
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2402 MHz 2-DH1

Frequency range 1 GHz - 8 GHz

Ant. Polar.	Limit PK [dBμV]	Limit AV [dBμV]	Frequency [MHz]	Corrected value PK [dBμV]	Corrected value AV [dBμV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54						Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed
Setup No.: A01
Date of Test: 2013/06/07 18:15
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2402 MHz 3-DH1

Frequency range 1 GHz - 8 GHz

Ant. Polar.	Limit PK [dBμV]	Limit AV [dBμV]	Frequency [MHz]	Corrected value PK [dBμV]	Corrected value AV [dBμV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54						Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test1: 15c.2; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = mid

Result: Passed
Setup No.: A01
Date of Test: 2013/06/07 18:02
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:
Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2441 MHz 1-DH1

Frequency range 9 kHz - 1 GHz					
Ant. Polar.	Limit QPK [dBμV]	Frequency [MHz]	Corrected value QPK [dBμV]	Margin QPK [dB]	Result
Ver + Hor					Passed

Frequency range 1 GHz - 25 GHz								
Ant. Polar.	Limit PK [dBμV]	Limit AV [dBμV]	Frequency [MHz]	Corrected value PK [dBμV]	Corrected value AV [dBμV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54						Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test2: 15c.2; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = mid

Result: Passed
Setup No.: B01
Date of Test: 2013/06/09 11:33
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:
Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2441 MHz 1-DH1

Frequency range 9 kHz - 1 GHz					
Ant. Polar.	Limit QPK [dBμV]	Frequency [MHz]	Corrected value QPK [dBμV]	Margin QPK [dB]	Result
Ver + Hor					Passed

Frequency range 1 GHz - 25 GHz								
Ant. Polar.	Limit PK [dBμV]	Limit AV [dBμV]	Frequency [MHz]	Corrected value PK [dBμV]	Corrected value AV [dBμV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	1387	45.68	35.97	28.32	18.03	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed
Setup No.: A01
Date of Test: 2013/06/07 17:09
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:
Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2441 MHz 2-DH1
Frequency range 1 GHz - 8 GHz

Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54						Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2013/06/07 20:16

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:
Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2441 MHz 3-DH1
Frequency range 1 GHz - 8 GHz

Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54						Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test1: 15c.2; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = highest

Result: Passed

Setup No.: A01

Date of Test: 2013/06/07 20:04

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:
Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2480 MHz 1-DH1
Frequency range 30 MHz - 1 GHz

Ant. Polar.	Limit QPK [dBµV]	Frequency [MHz]	Corrected value QPK [dBµV]	Margin QPK [dB]	Result
Ver + Hor					Passed

Frequency range 1 GHz - 25 GHz

Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54						Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test1: 15c.2; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = highest

Result: Passed
Setup No.: B01
Date of Test: 2013/06/09 13:45
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2480 MHz 1-DH1

Frequency range 30 MHz - 1 GHz

Ant. Polar.	Limit QPK [dBμV]	Frequency [MHz]	Corrected value QPK [dBμV]	Margin QPK [dB]	Result
Ver + Hor					Passed

Frequency range 1 GHz - 25 GHz

Ant. Polar.	Limit PK [dBμV]	Limit AV [dBμV]	Frequency [MHz]	Corrected value PK [dBμV]	Corrected value AV [dBμV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	1387	45.94	36.04	28.06	17.96	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed
Setup No.: A01
Date of Test: 2013/06/07 20:10
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2480 MHz 2-DH1

Frequency range 1 GHz - 8 GHz

Ant. Polar.	Limit PK [dBμV]	Limit AV [dBμV]	Frequency [MHz]	Corrected value PK [dBμV]	Corrected value AV [dBμV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54						Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed
Setup No.: A01
Date of Test: 2013/06/07 22:17
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2480 MHz 3-DH1

Frequency range 1 GHz - 8 GHz

Ant. Polar.	Limit PK [dBμV]	Limit AV [dBμV]	Frequency [MHz]	Corrected value PK [dBμV]	Corrected value AV [dBμV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54						Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

3.6.5 15c.3 Occupied bandwidth §15.247 (a) (1)


Test: 15c.3; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2013/06/07 9:14
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
1.040

added by operator

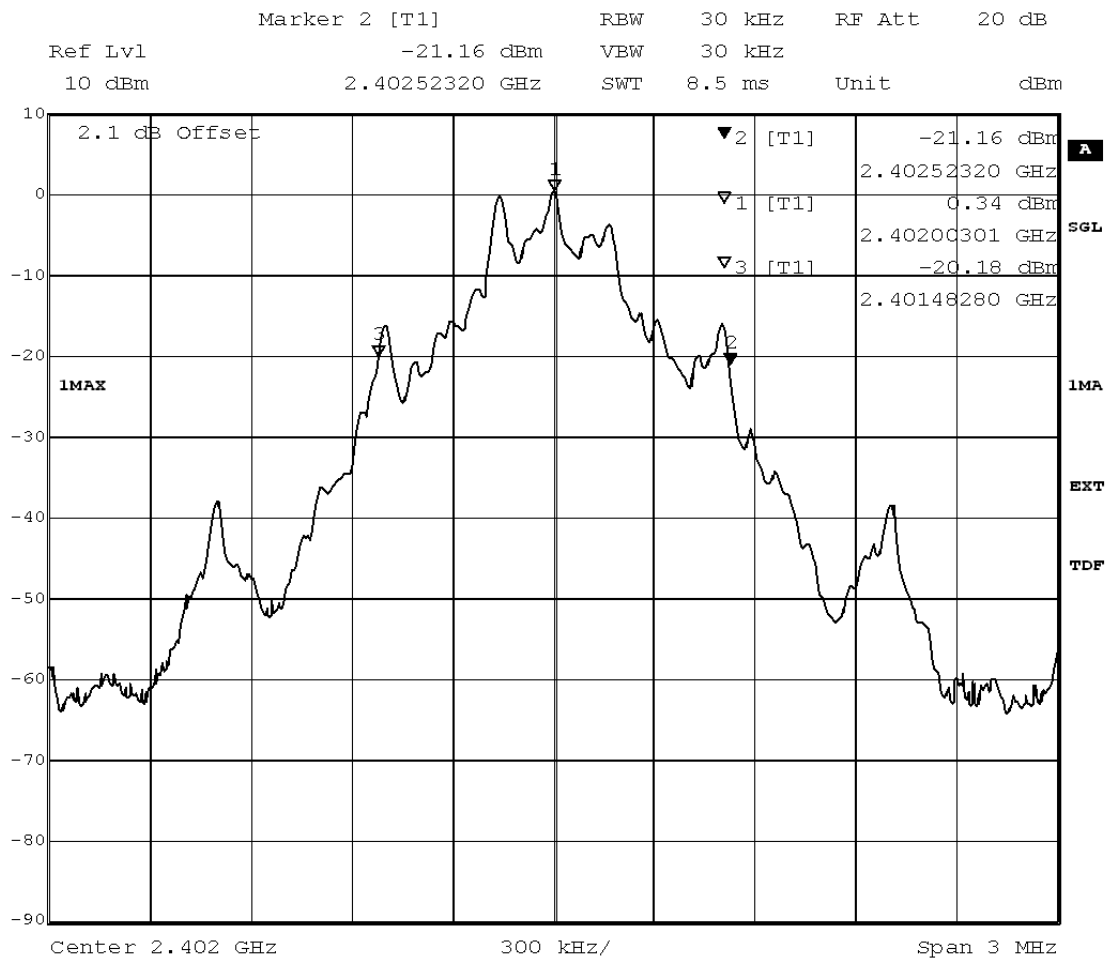

Title: 20dB Bandwidth

Comment A: CH B: 2402 MHz; 20dB bandwidth (kHz):1040.4

Date: 6.JUN.2013 09:13:03

added by operator



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C


Test: 15c.3; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2013/06/07 11:56
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
1.112

added by operator

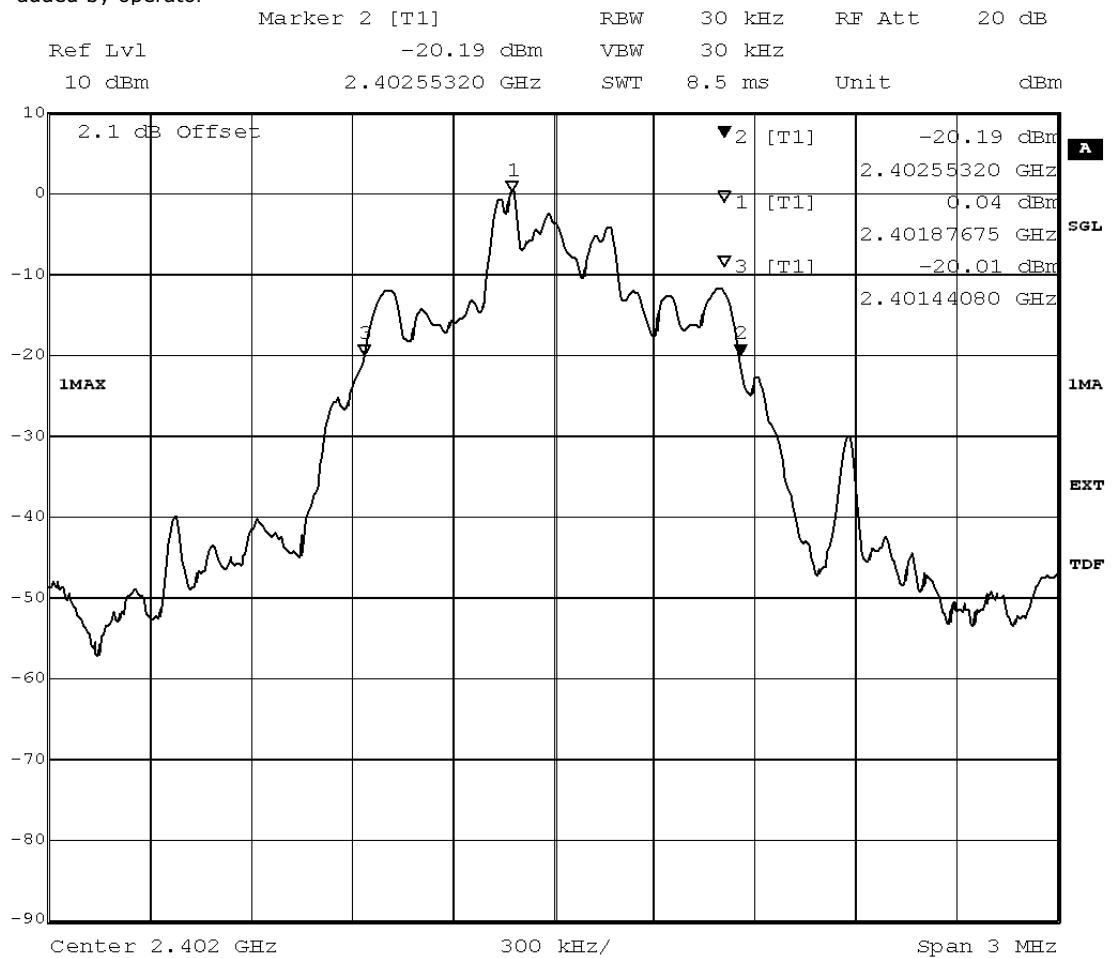

Title: 20dB Bandwidth

Comment A: CH B: 2402 MHz; 20dB bandwidth (kHz):1112.4

Date: 6.JUN.2013 09:29:48

added by operator



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C


Test: 15c.3; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2013/06/11 11:28
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
1.215

added by operator

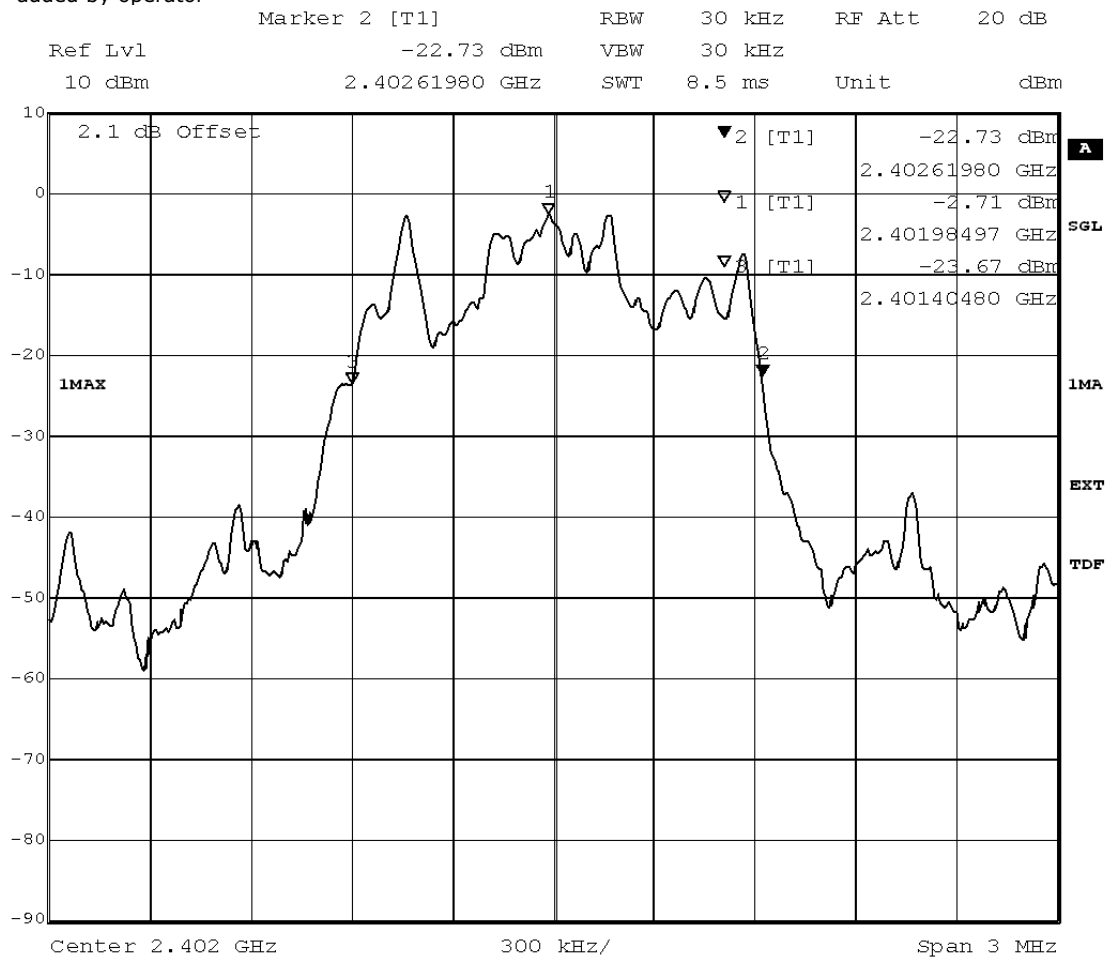

Title: 20dB Bandwidth
Comment A: CH B: 2402 MHz; 20dB bandwidth (kHz):1215
Date: 6.JUN.2013 09:50:37

added by operator



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C


Test: 15c.3; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2013/06/07 9:16
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
1.040

added by operator

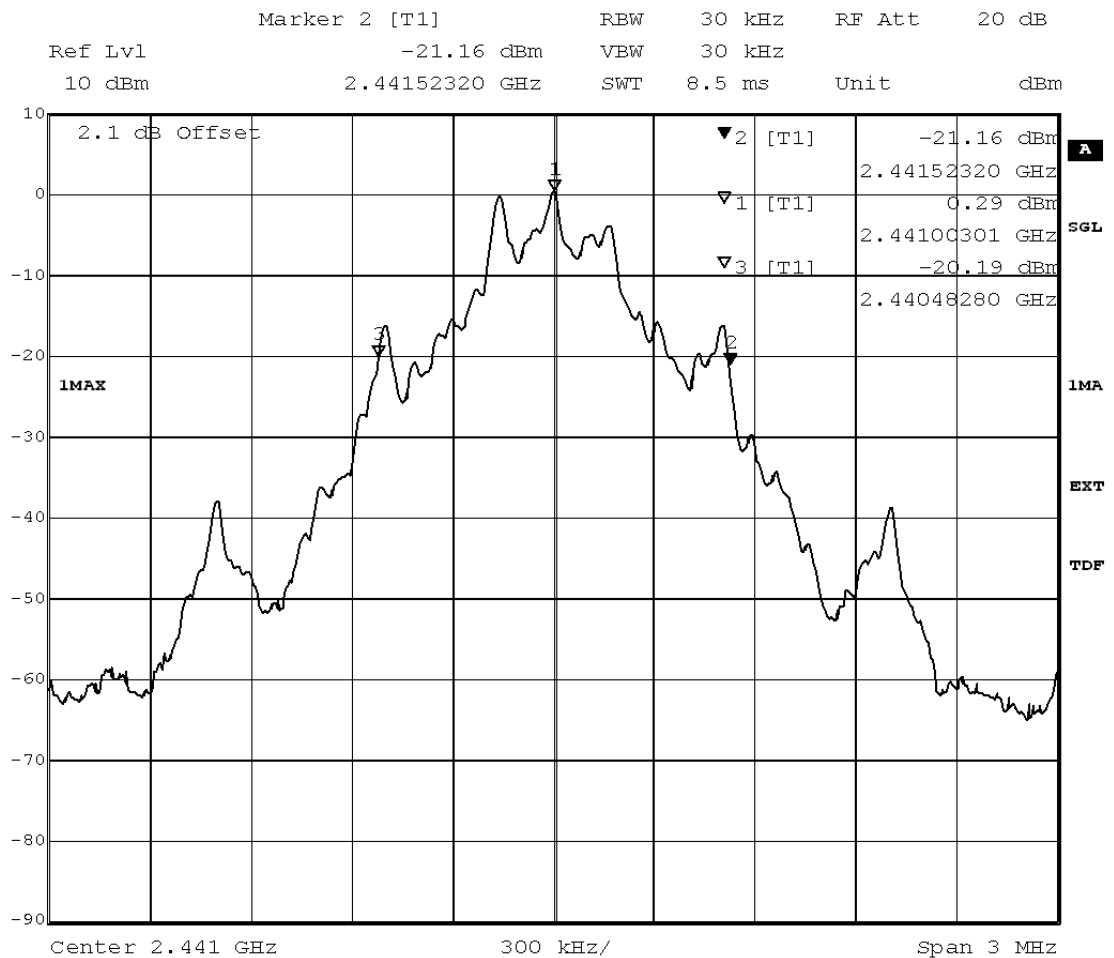

Title: 20dB Bandwidth
Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz):1040.4
Date: 6.JUN.2013 10:09:37

added by operator



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C


Test: 15c.3; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2013/06/07 14:13
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
1.040

added by operator

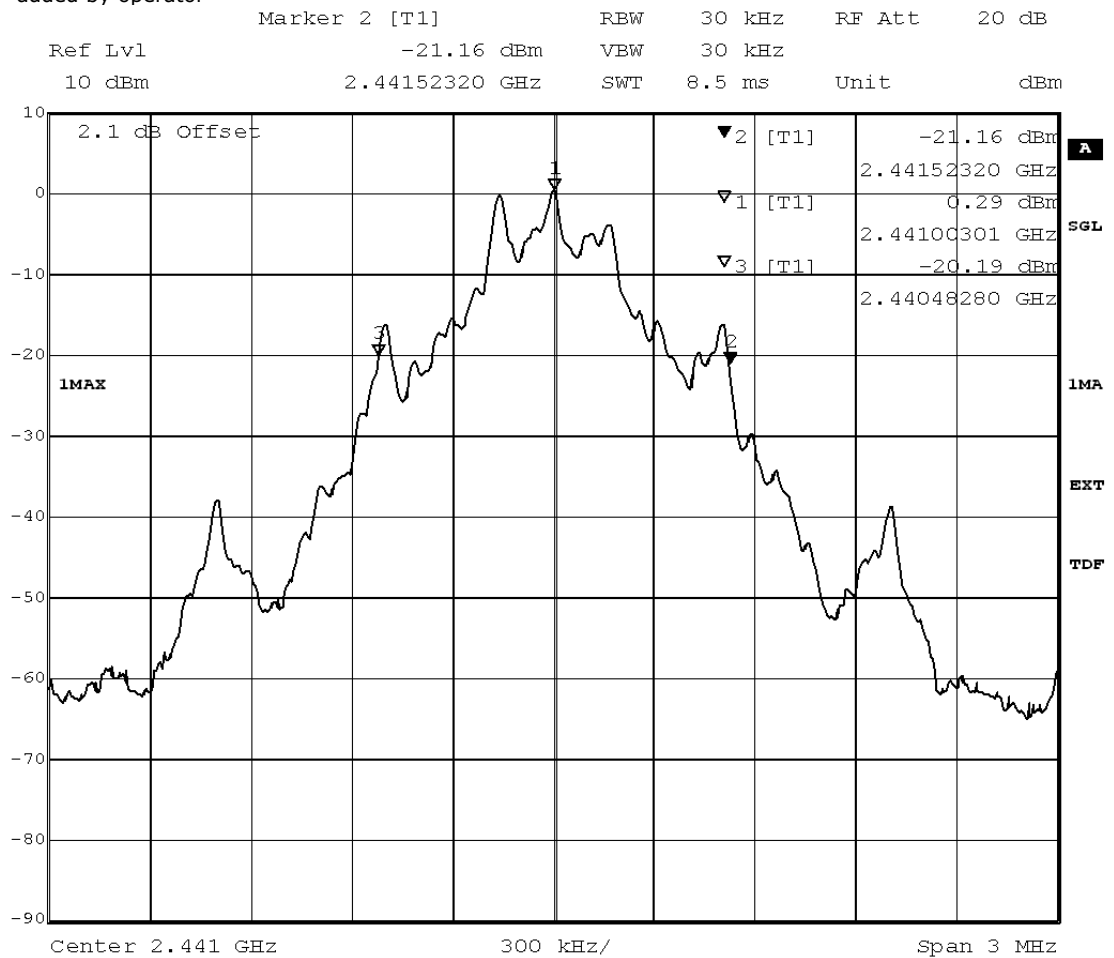

Title: 20dB Bandwidth

Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz):1040.4

Date: 6.JUN.2013 10:09:37

added by operator



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C


Test: 15c.3; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2013/06/11 11:28
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
1.215

added by operator

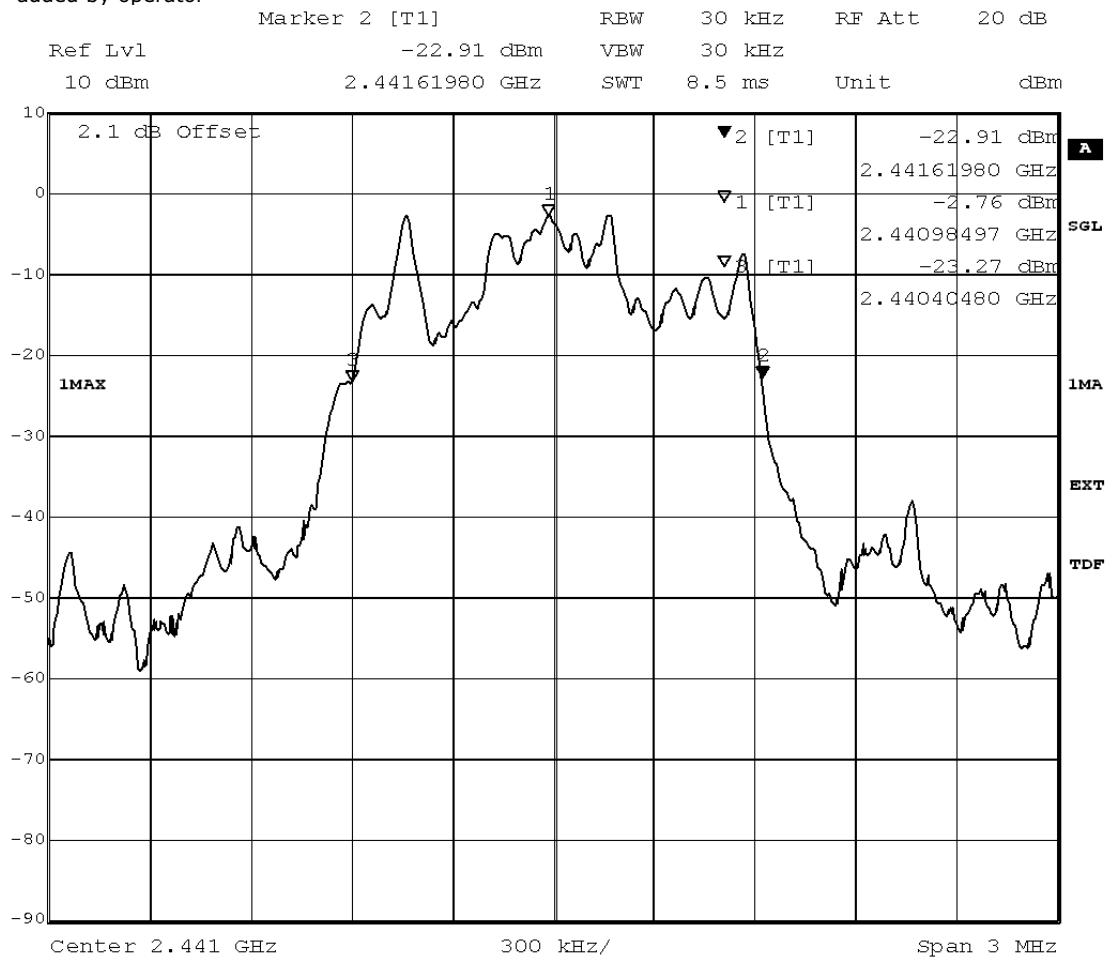

Title: 20dB Bandwidth
Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz):1215
Date: 6.JUN.2013 10:43:49

added by operator



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C


Test: 15c.3; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2013/06/07 9:16
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
1.040

added by operator

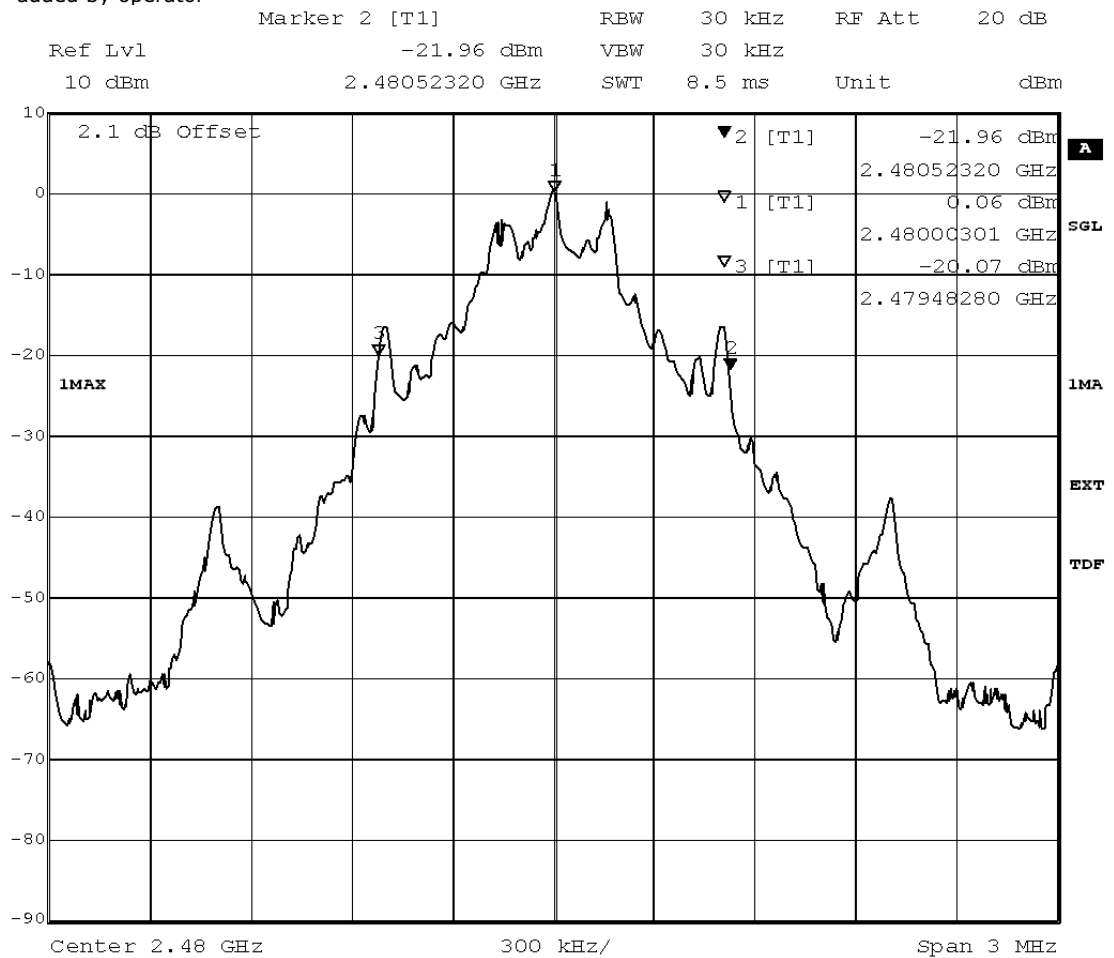

Title: 20dB Bandwidth

Comment A: CH T: 2480 MHz; 20dB bandwidth (kHz):1040.4

Date: 6.JUN.2013 11:00:59

added by operator



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C


Test: 15c.3; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2013/06/07 14:13
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
1.040

added by operator

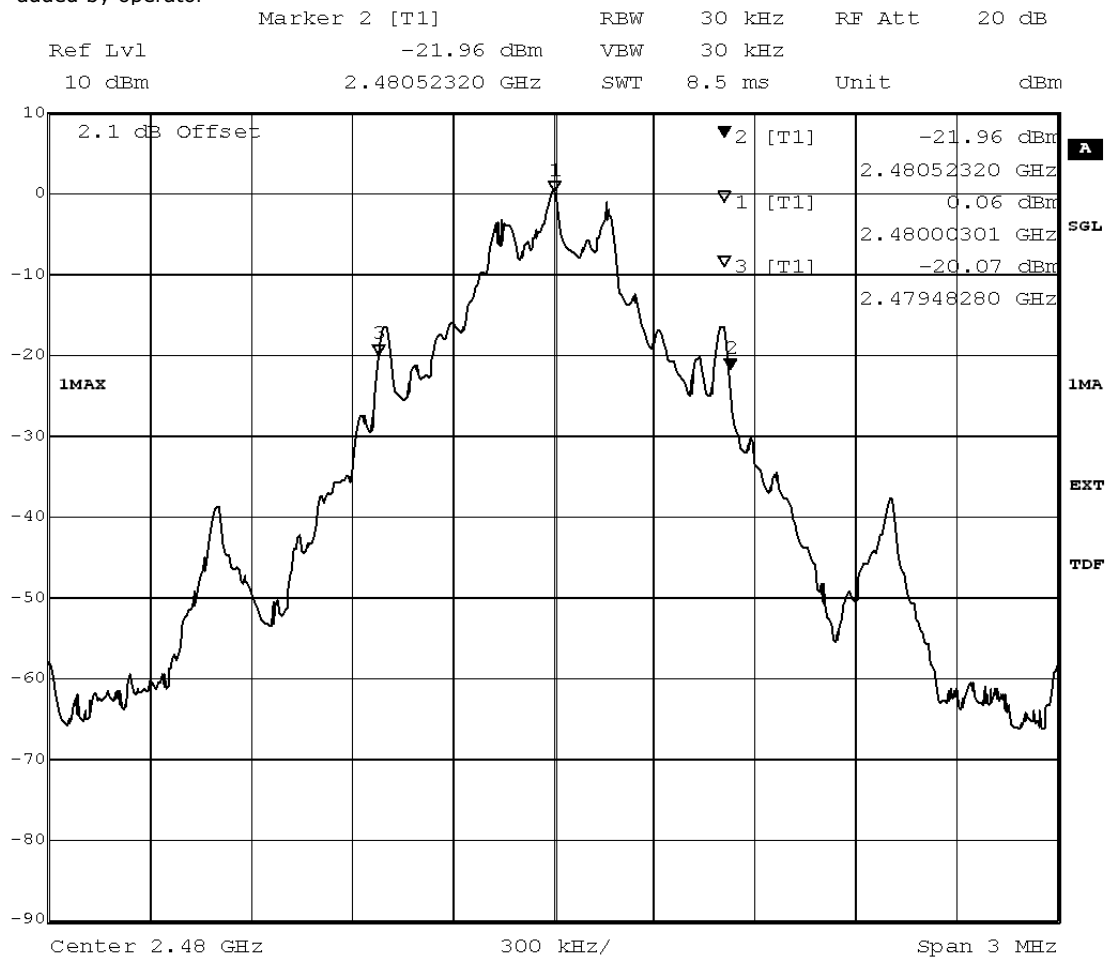

Title: 20dB Bandwidth

Comment A: CH T: 2480 MHz; 20dB bandwidth (kHz):1040.4

Date: 6.JUN.2013 11:00:59

added by operator



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C


Test: 15c.3; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2013/06/11 11:28
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
1.197

added by operator

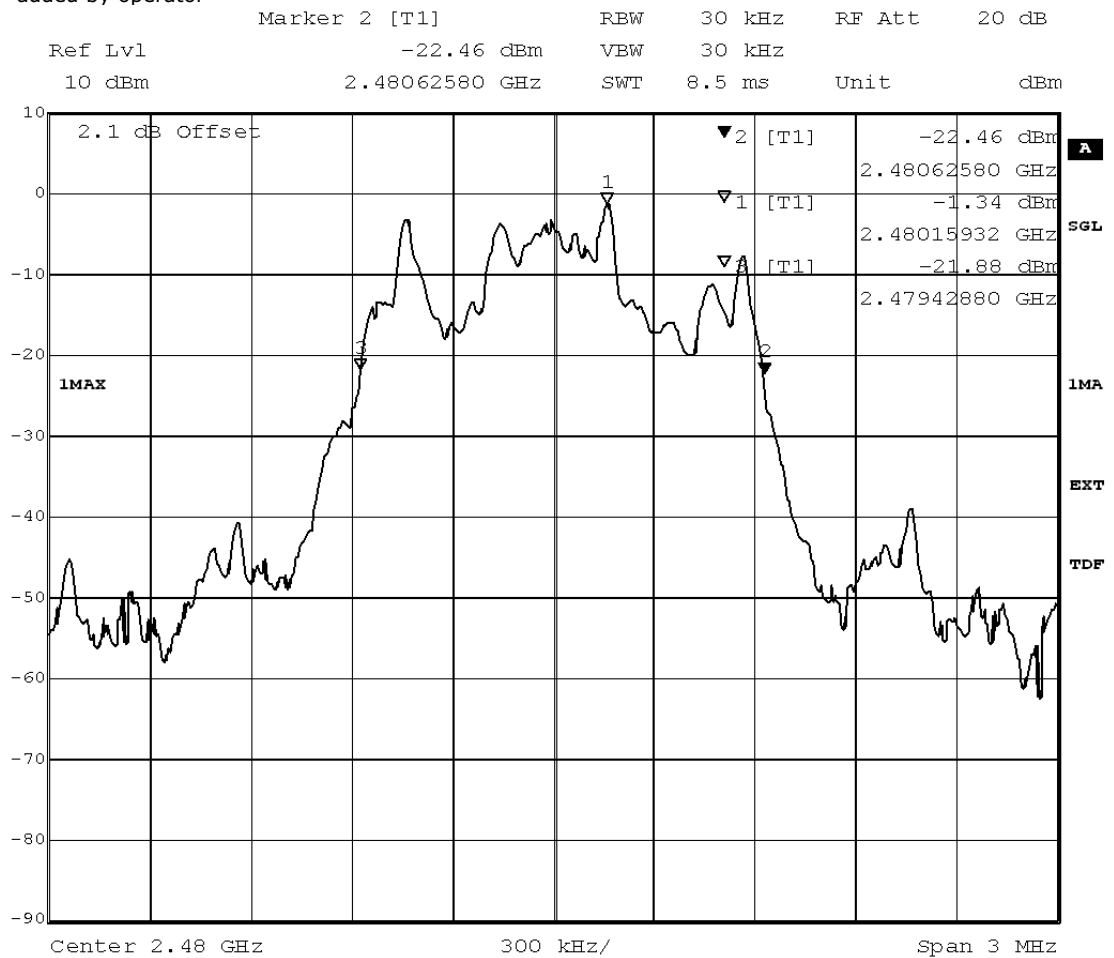

Title: 20dB Bandwidth
Comment A: CH T: 2480 MHz; 20dB bandwidth (kHz):1197
Date: 6.JUN.2013 11:38:20

added by operator



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

3.6.6 15c.4 Peak power output §15.247 (b) (1)


Test1: 15c.4; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2013/06/07 9:18
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
-0.23	2.18	1.95

added by operator

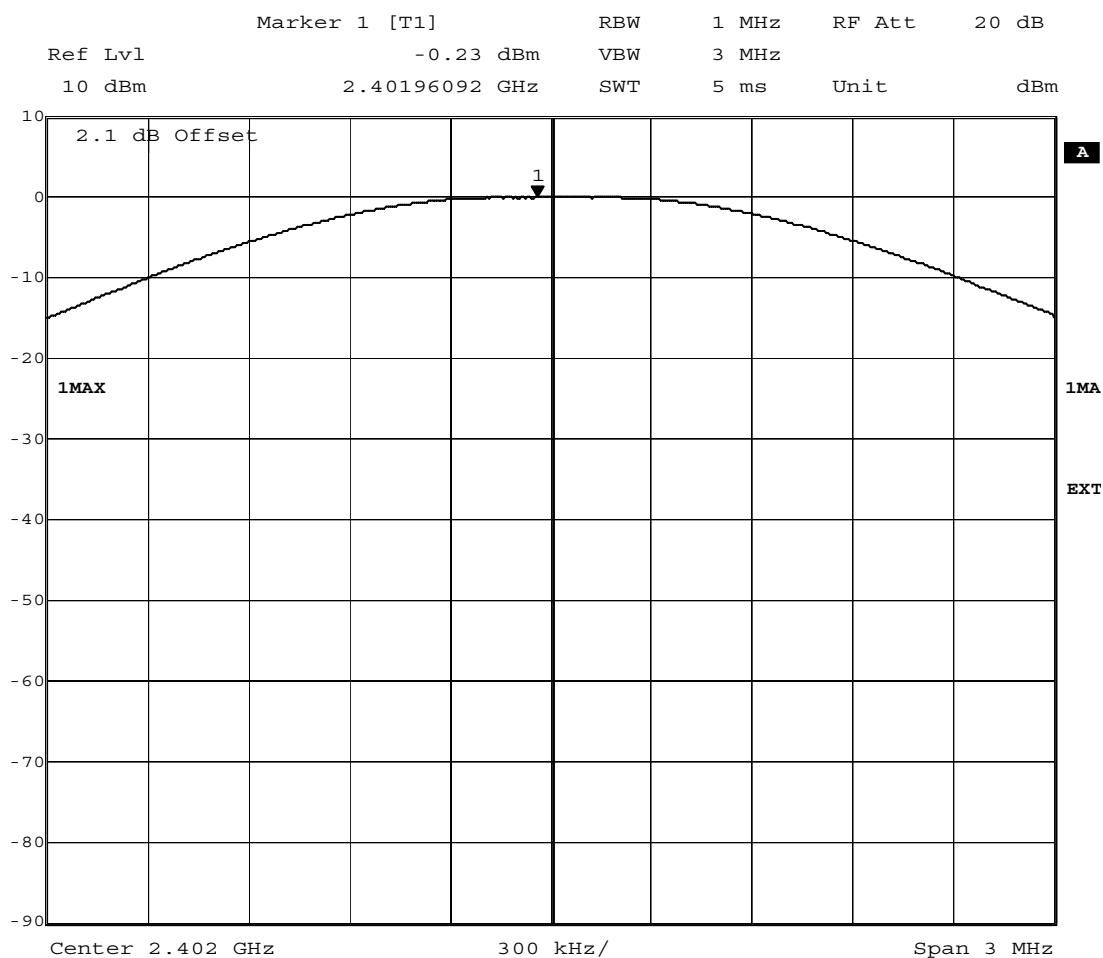

Date: 17.JUL.2013 13:46:49

Test2: 15c.4; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation

Result: Passed

Setup No.: B01


Date of Test: 2013/06/11 13:33

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
-2.02	1.70	-0.32

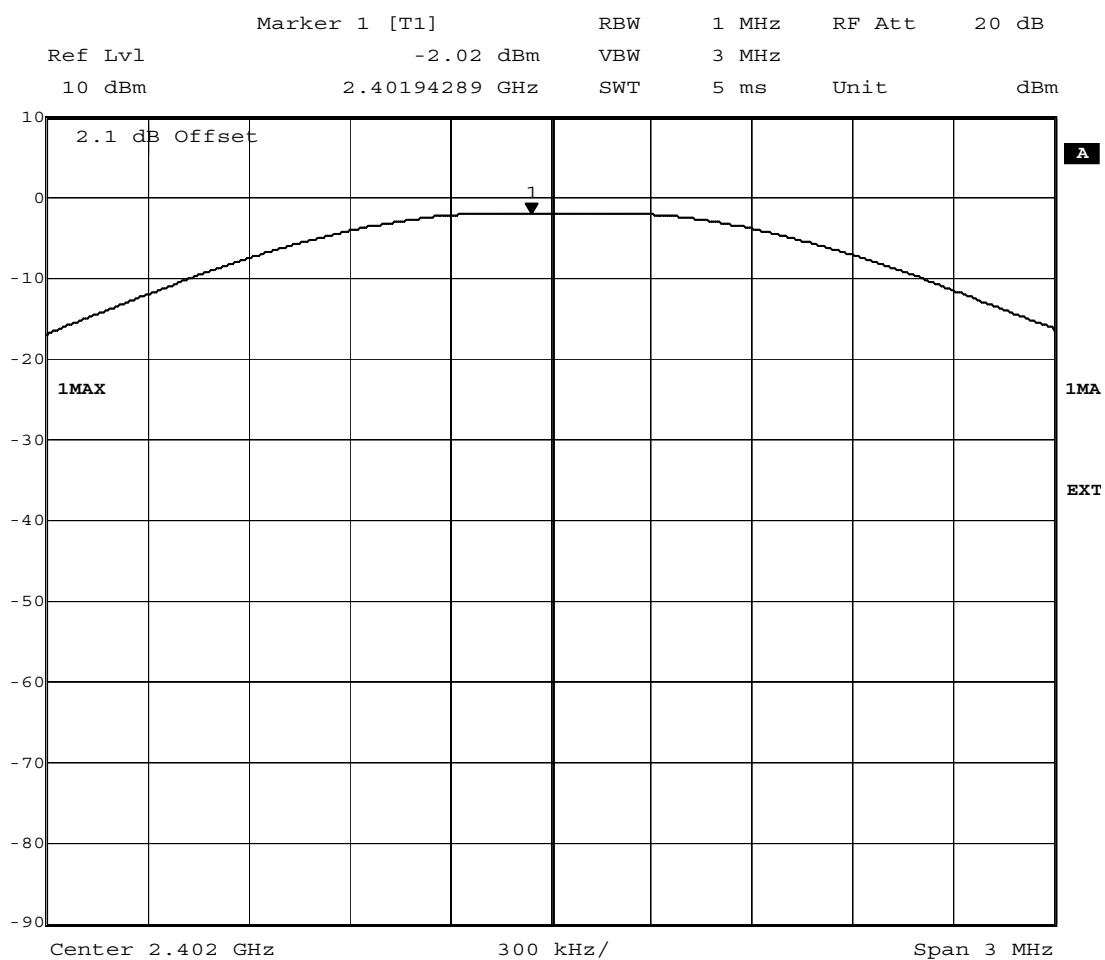

Date: 17.JUL.2013 14:06:30

Test1: 15c.4; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2013/06/07 14:22


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
1.19	2.18	3.37

added by operator

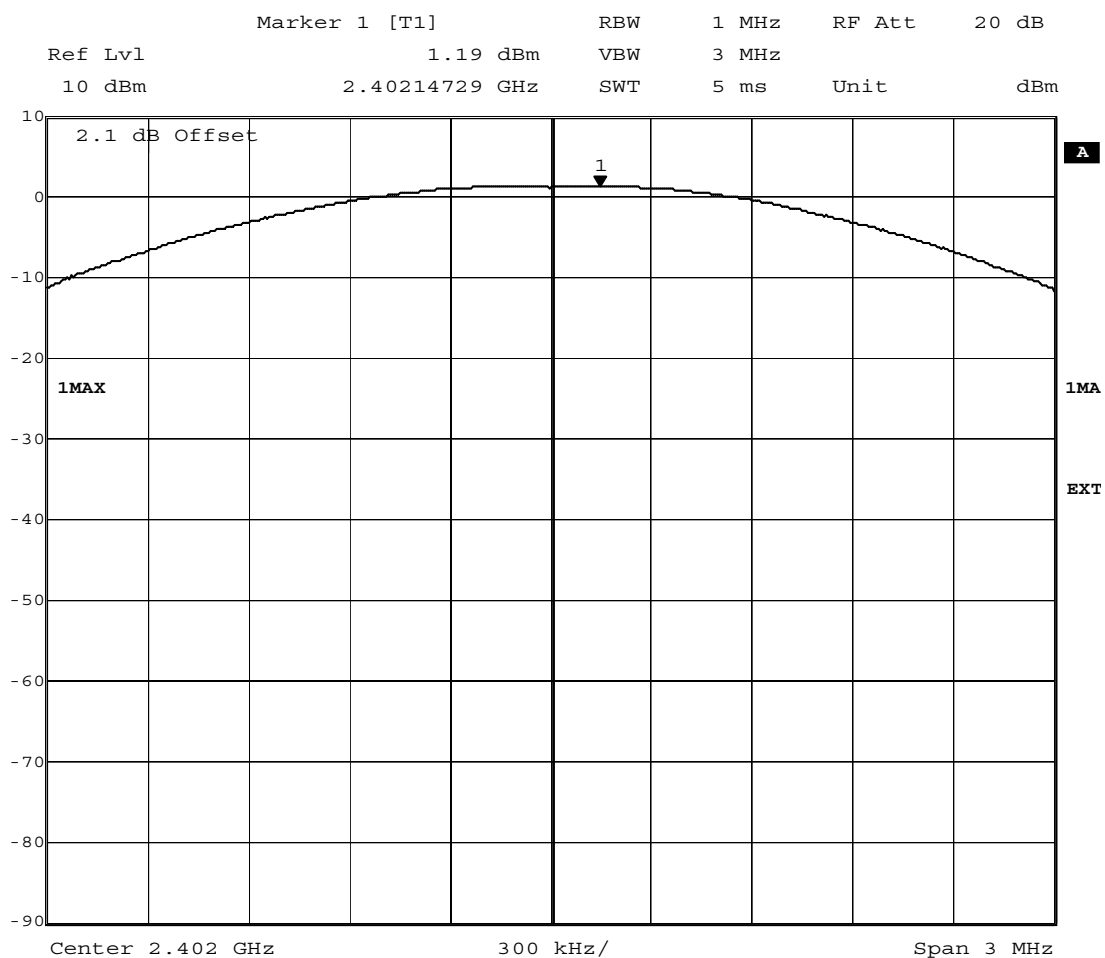

Date: 17.JUL.2013 13:48:34

Test2: 15c.4; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: B01


Date of Test: 2013/06/11 13:33

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
-0.46	1.70	1.24

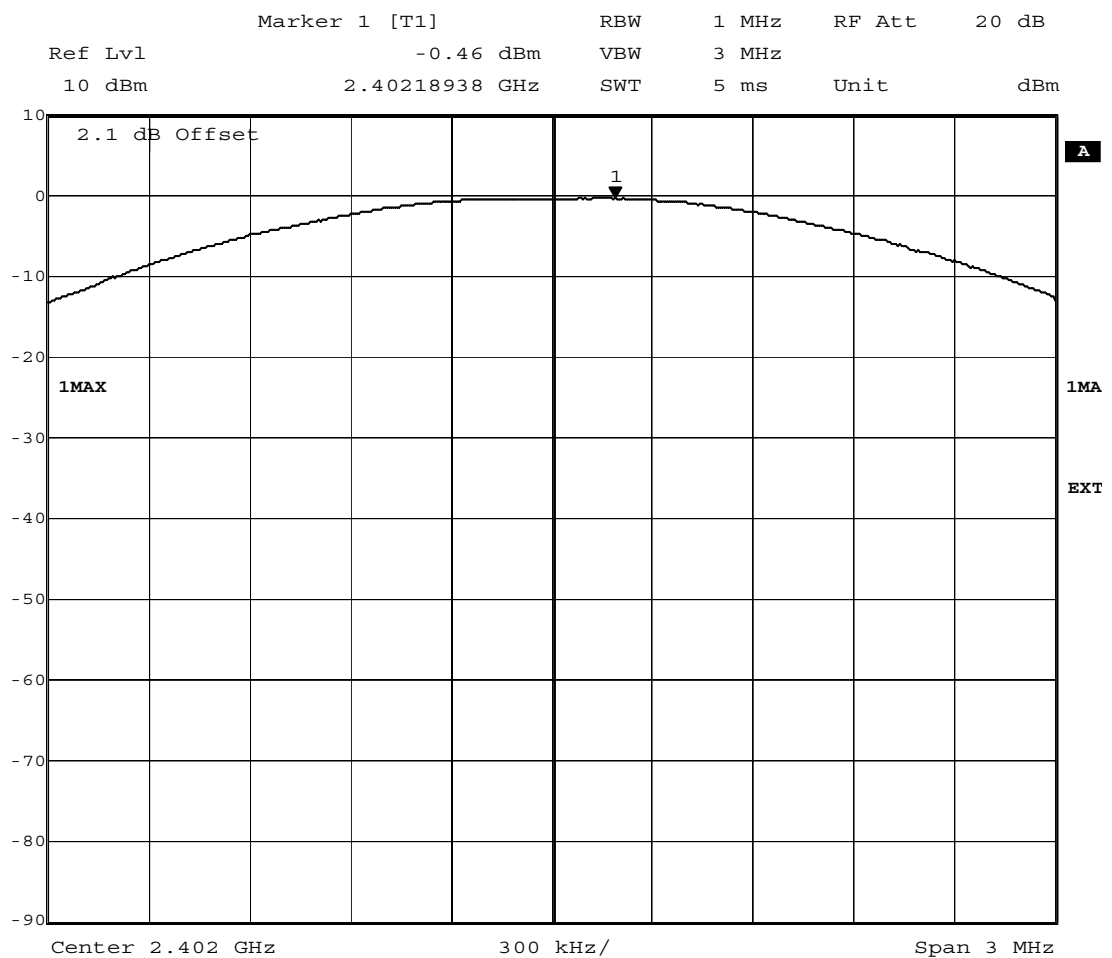

Date: 17.JUL.2013 14:07:14

Test1: 15c.4; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2013/06/11 11:29


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
1.48	2.18	3.66

added by operator

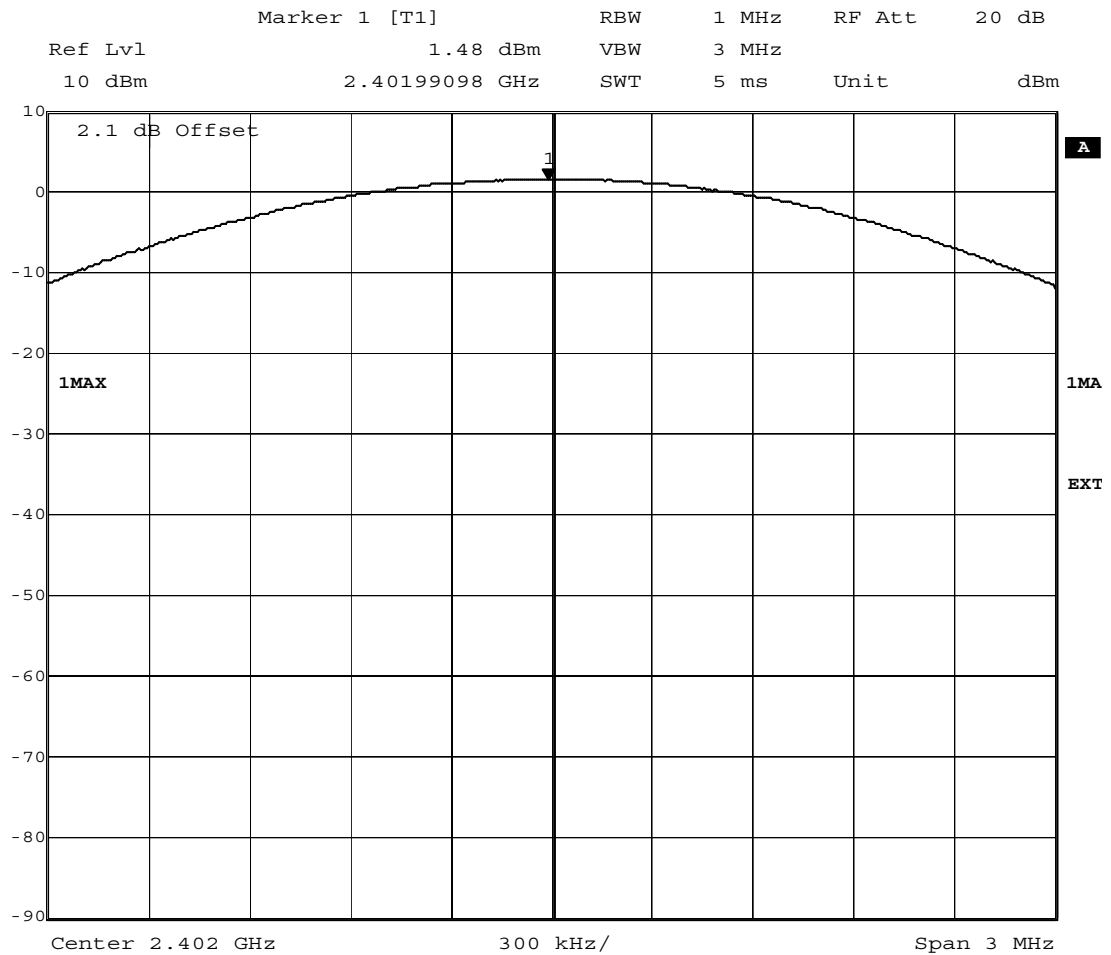

Date: 17.JUL.2013 13:51:01

Test2: 15c.4; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: B01


Date of Test: 2013/06/11 13:34

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
-0.01	1.70	1.69

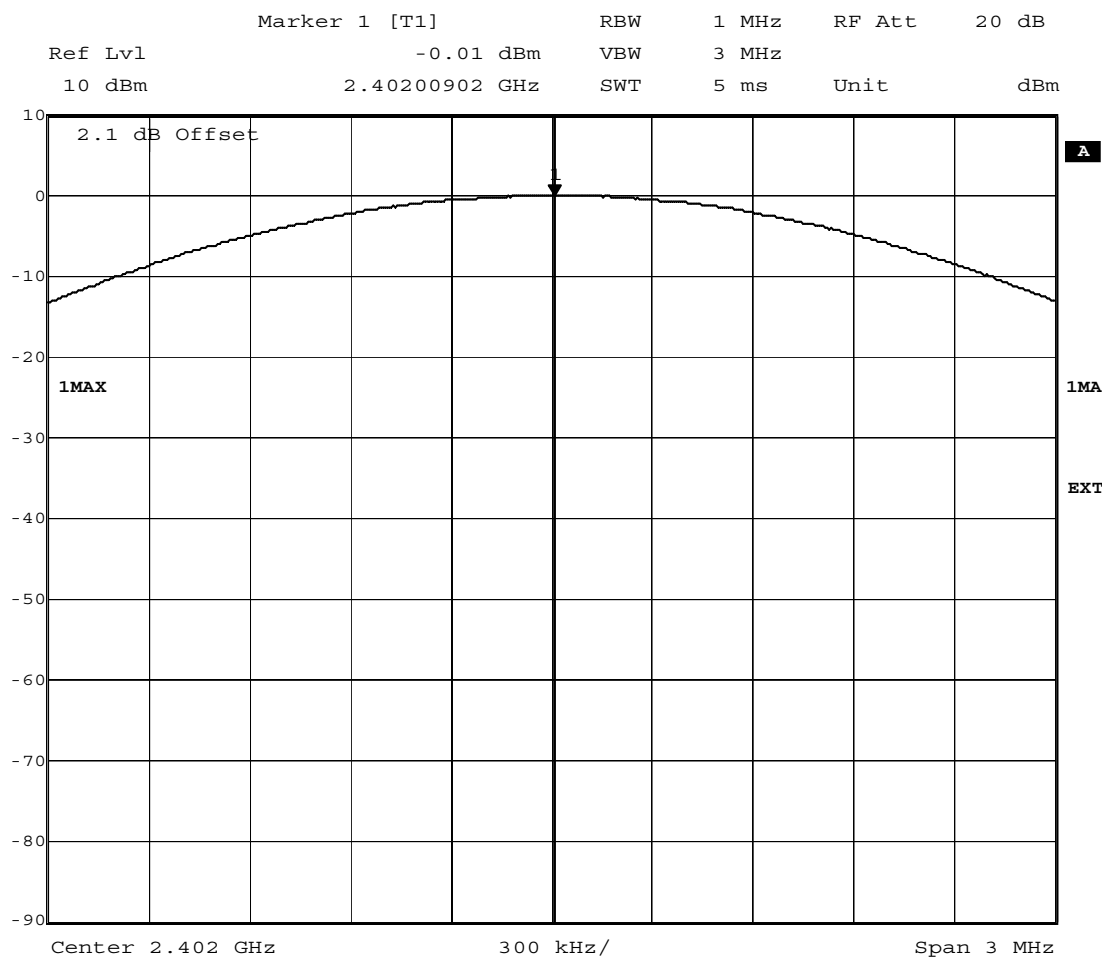

Date: 17.JUL.2013 14:07:52

Test1: 15c.4; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2013/06/07 9:18


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
-0.25	2.18	1.93

added by operator

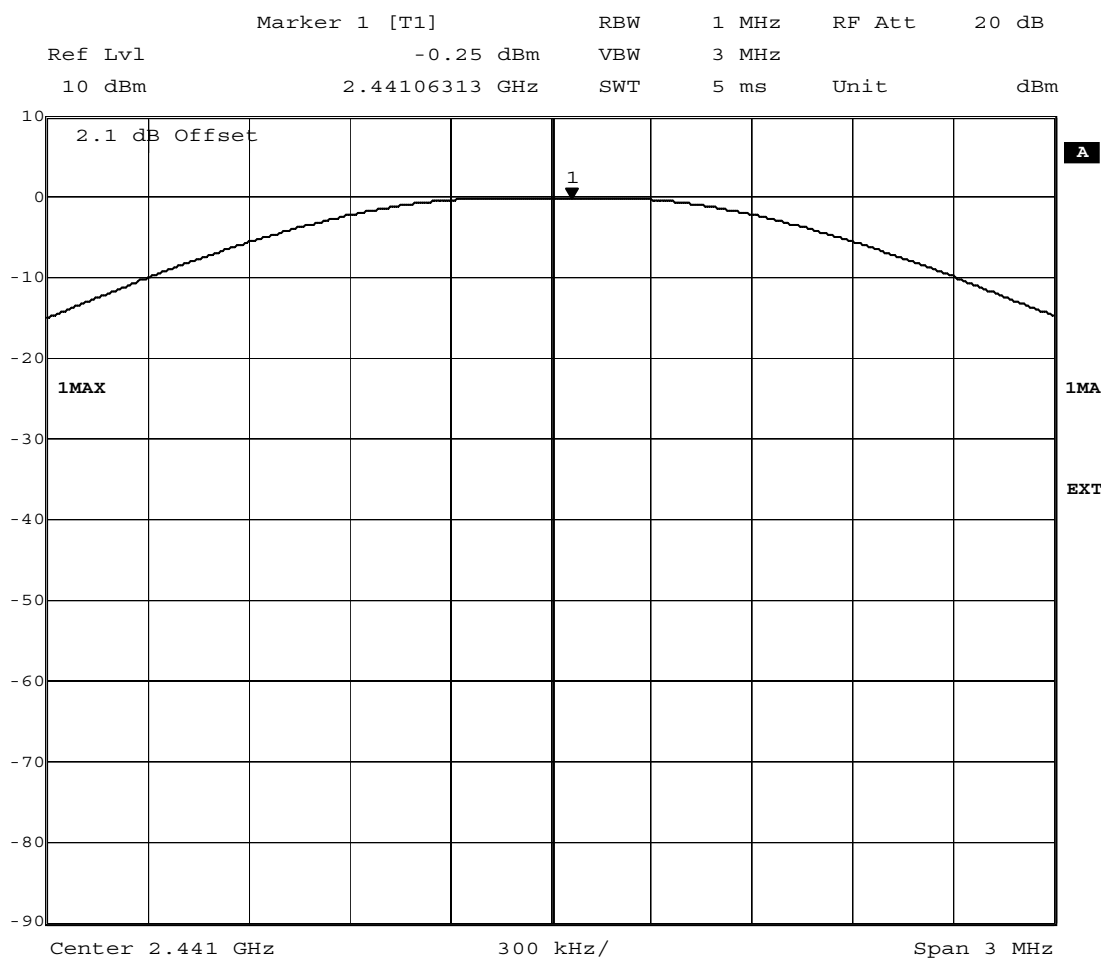

Date: 17.JUL.2013 13:52:22

Test2: 15c.4; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation

Result: Passed

Setup No.: B01


Date of Test: 2013/06/11 13:33

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
-2.32	1.70	-0.62

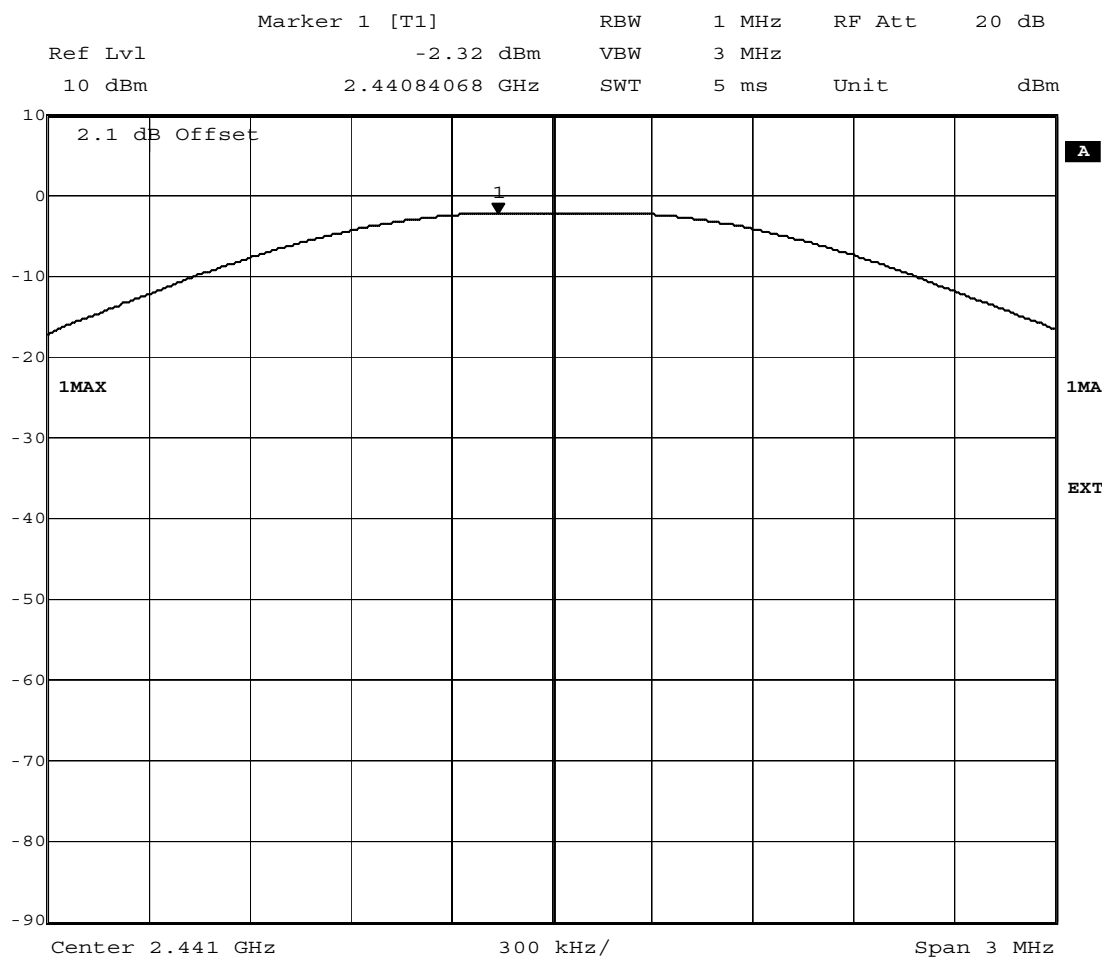

Date: 17.JUL.2013 14:08:46

Test1: 15c.4; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2013/06/07 14:22


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
1.15	2.18	3.33

added by operator

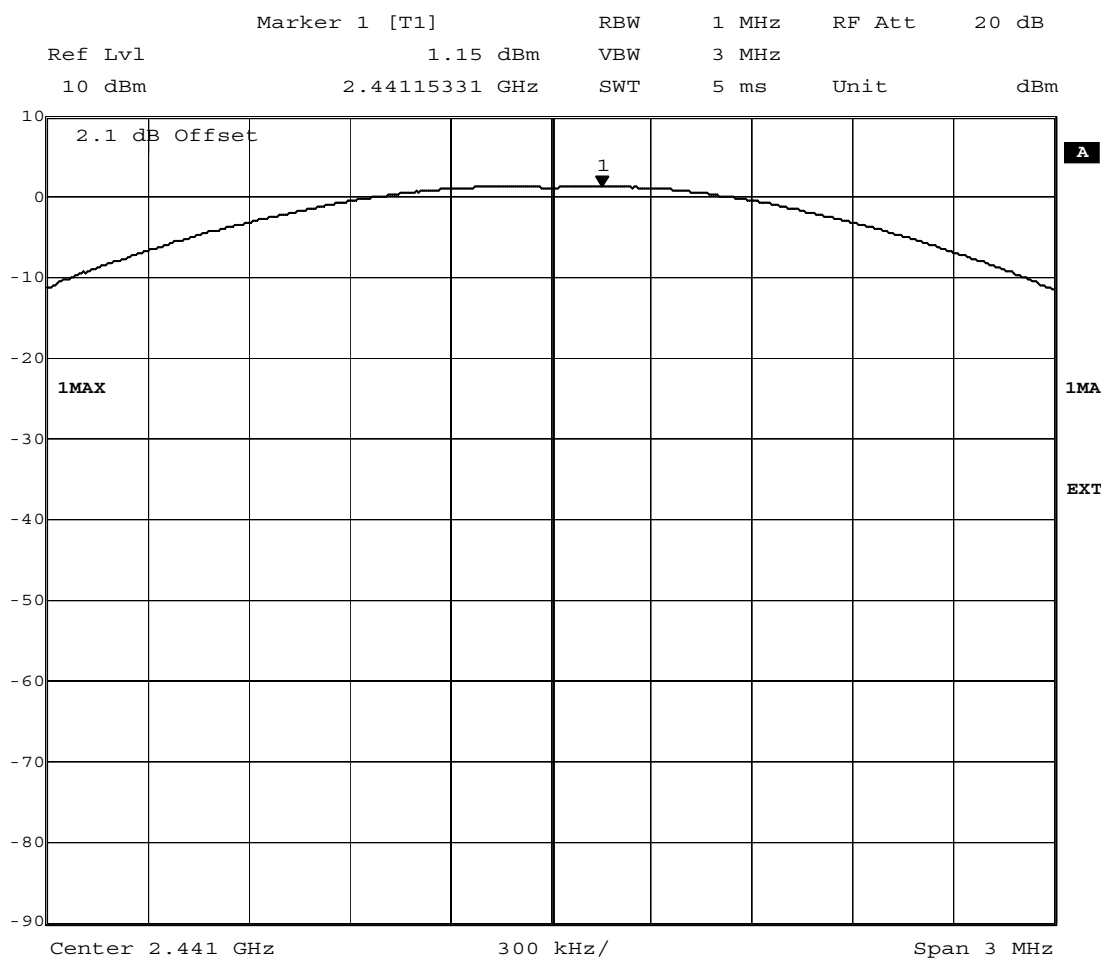

Date: 17.JUL.2013 13:53:26

Test2: 15c.4; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: B01


Date of Test: 2013/06/11 13:33

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
-0.71	1.70	0.99

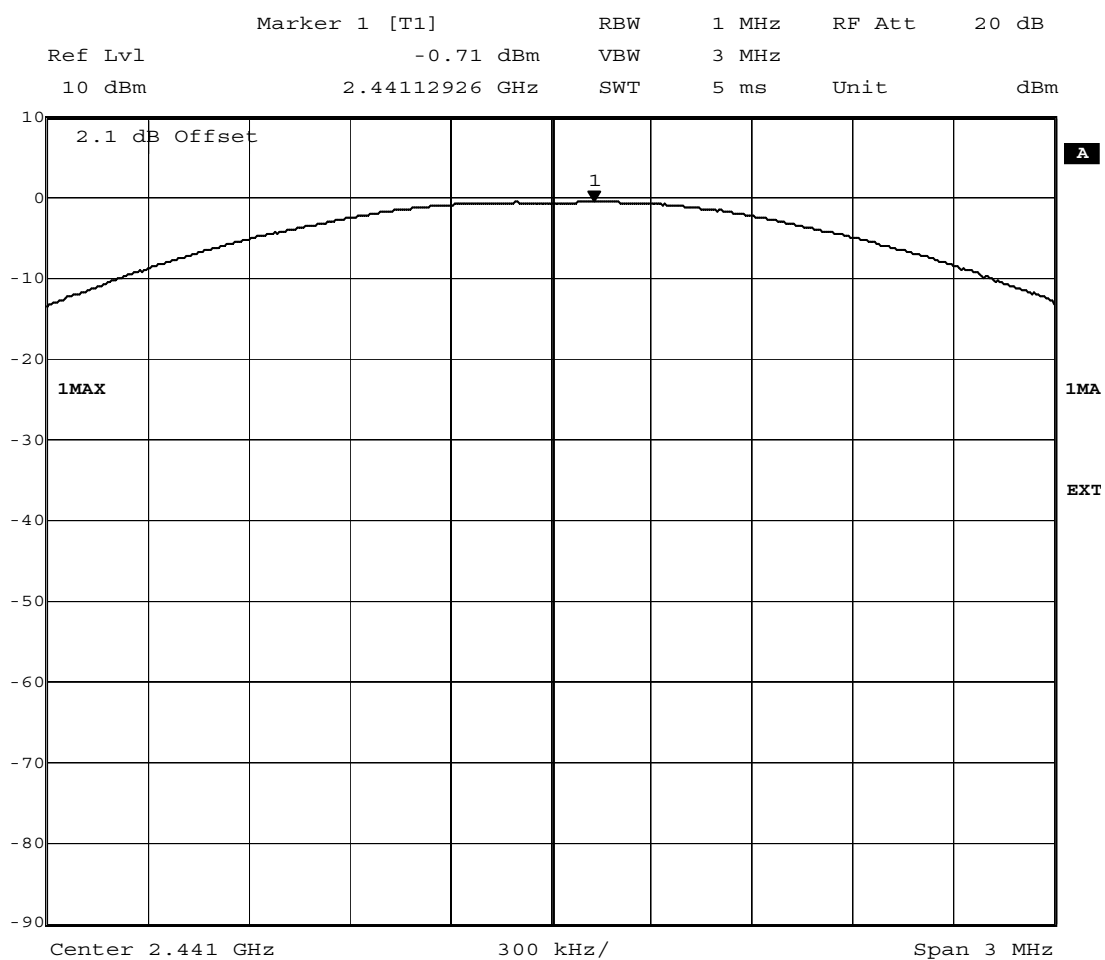

Date: 17.JUL.2013 14:09:26

Test1: 15c.4; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2013/06/11 11:30


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
1.53	2.18	3.71

added by operator

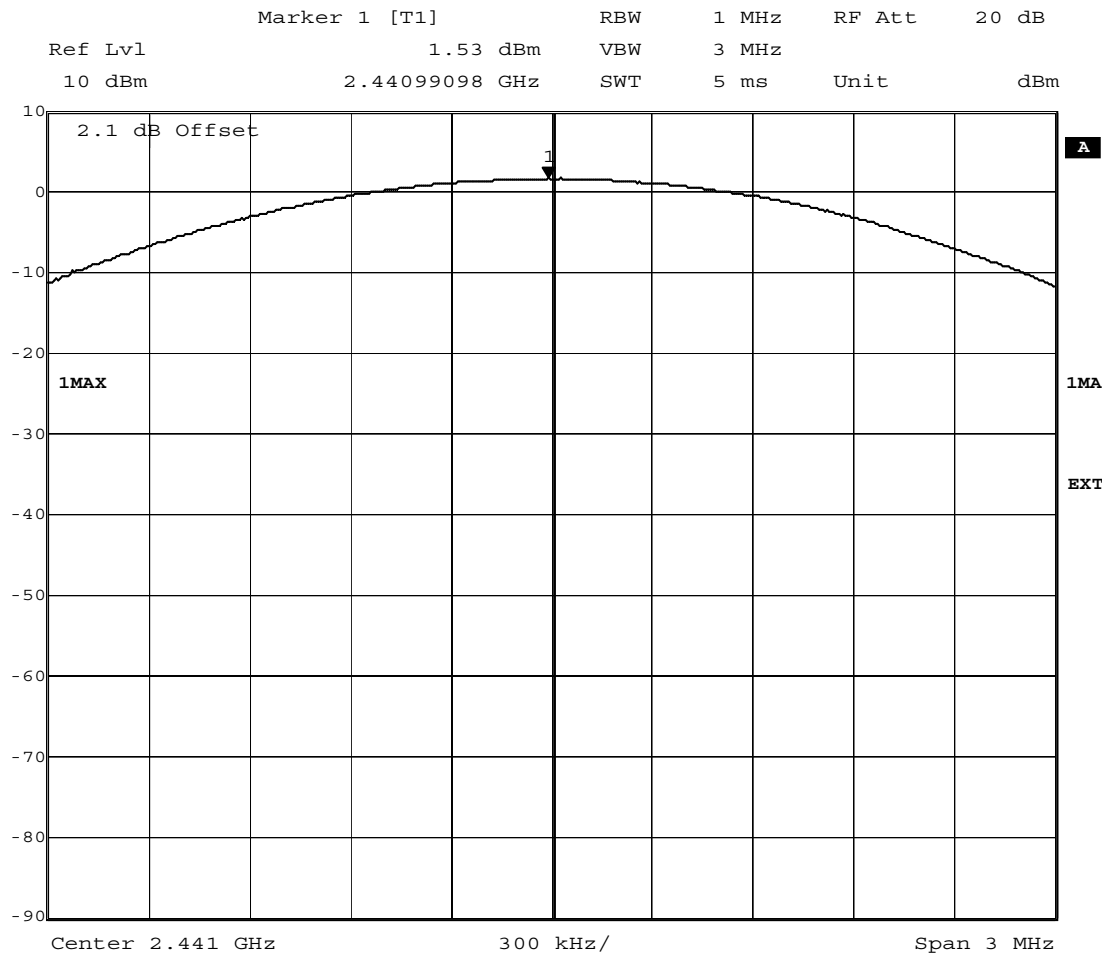

Date: 17.JUL.2013 13:54:04

Test2: 15c.4; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: B01


Date of Test: 2013/06/11 13:34

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
-0.24	1.70	1.46

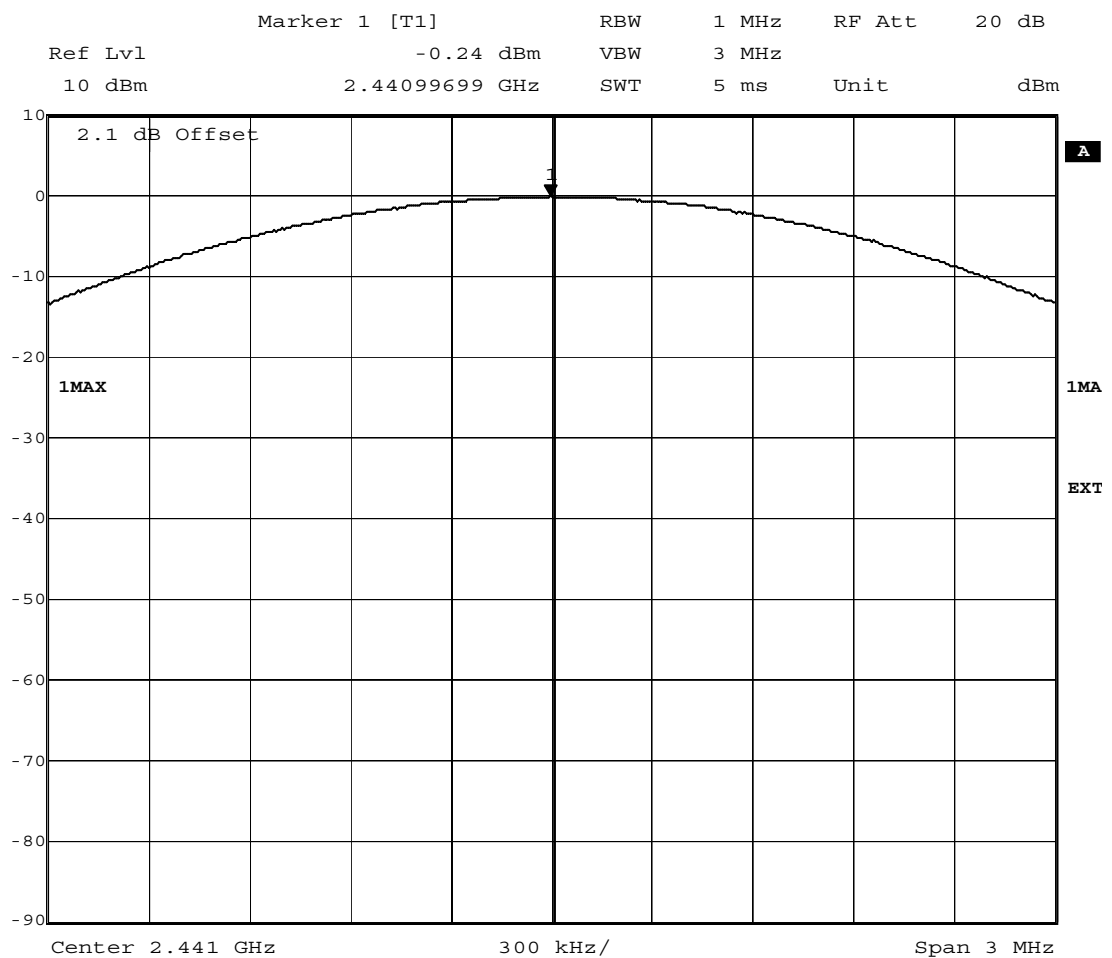

Date: 17.JUL.2013 14:09:57

Test1: 15c.4; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2013/06/07 9:18


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
-0.59	2.18	1.59

added by operator

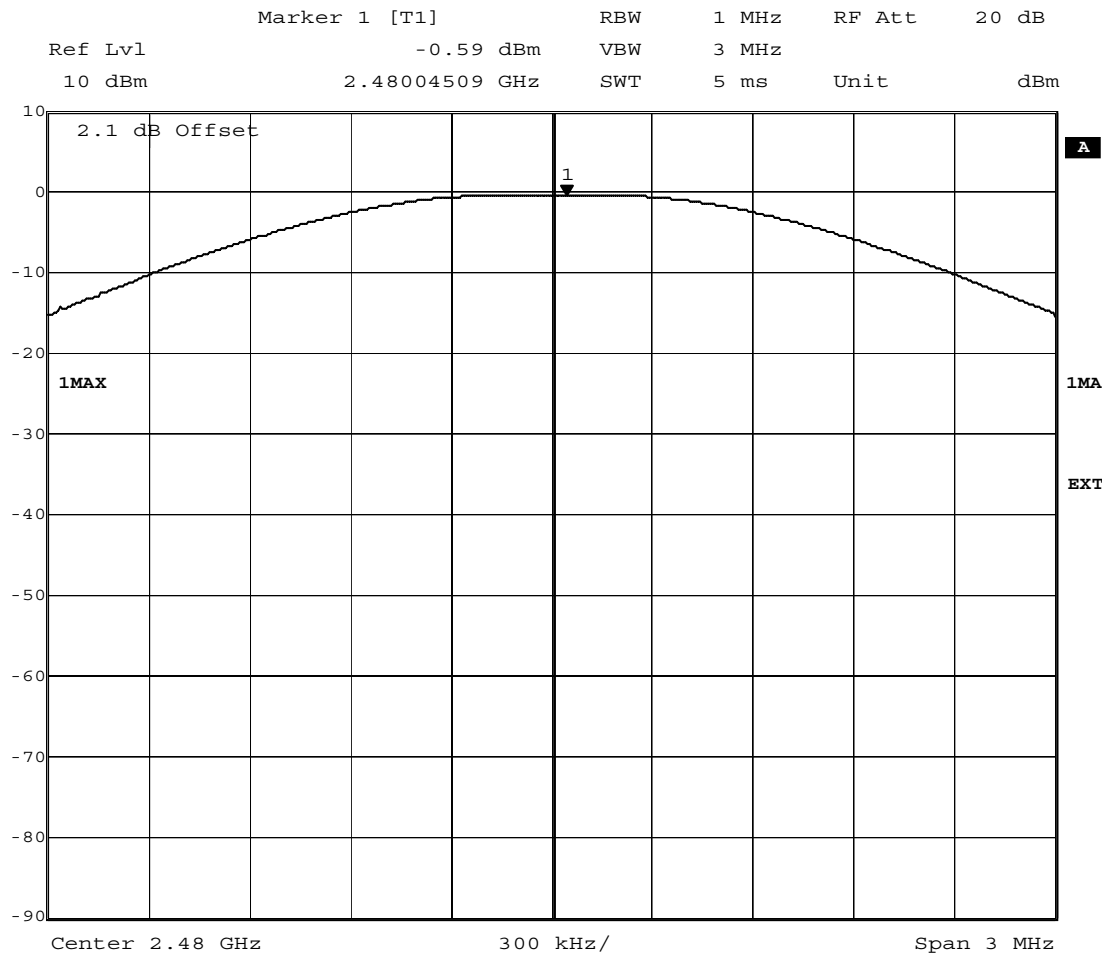

Date: 17.JUL.2013 13:55:11

Test2: 15c.4; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation

Result: Passed

Setup No.: B01


Date of Test: 2013/06/11 13:33

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
-1.47	1.70	0.23

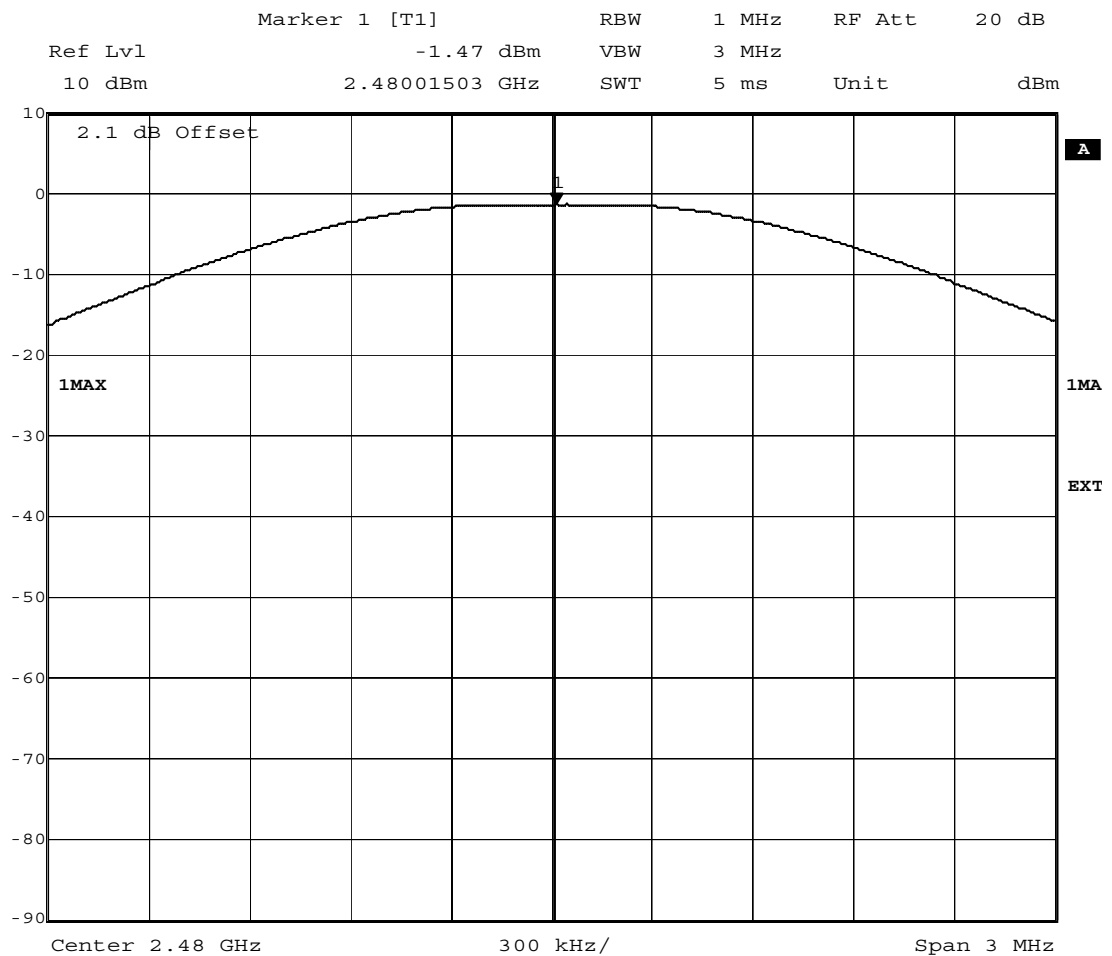

Date: 17.JUL.2013 14:10:34

Test1: 15c.4; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2013/06/07 14:22


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
0.84	2.18	3.02

added by operator

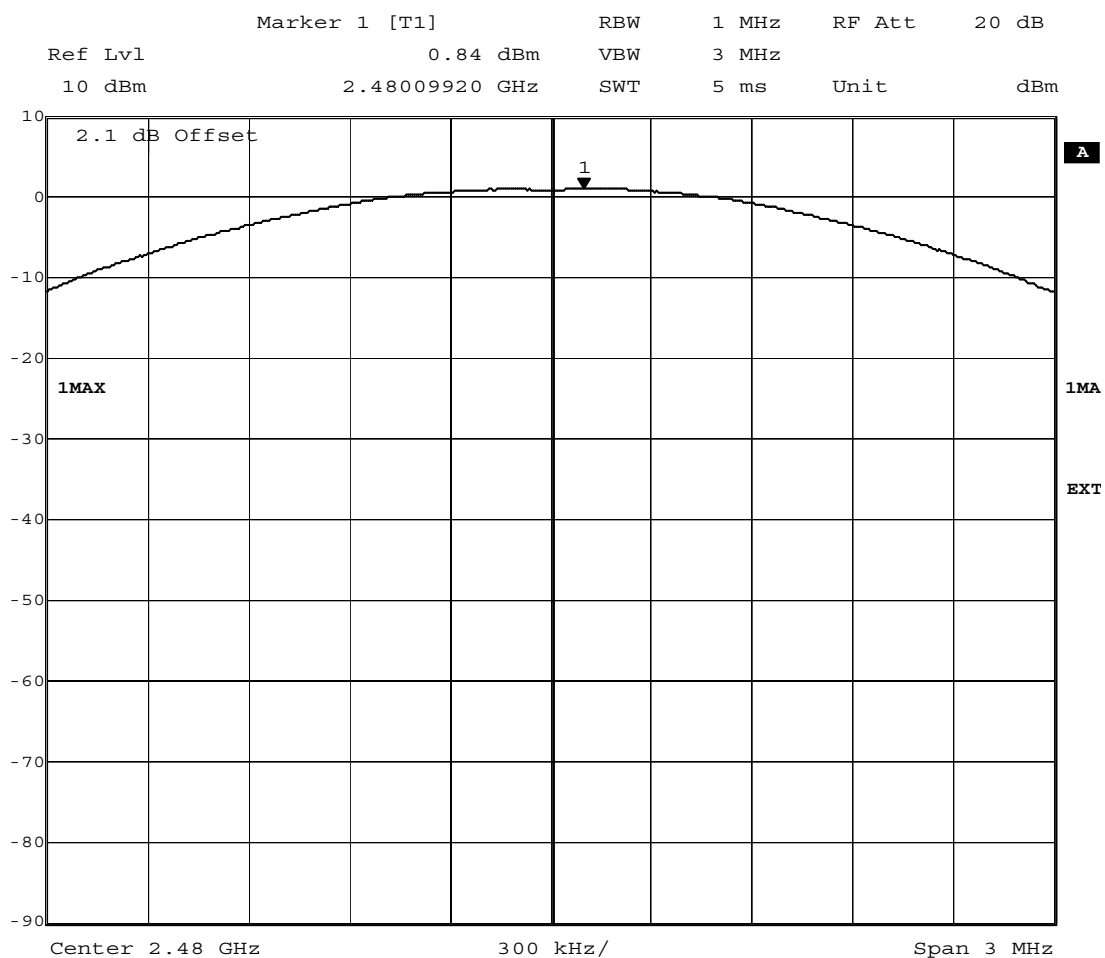

Date: 17.JUL.2013 13:55:52

Test2: 15c.4; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: B01


Date of Test: 2013/06/11 13:33

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
0.06	1.70	1.76

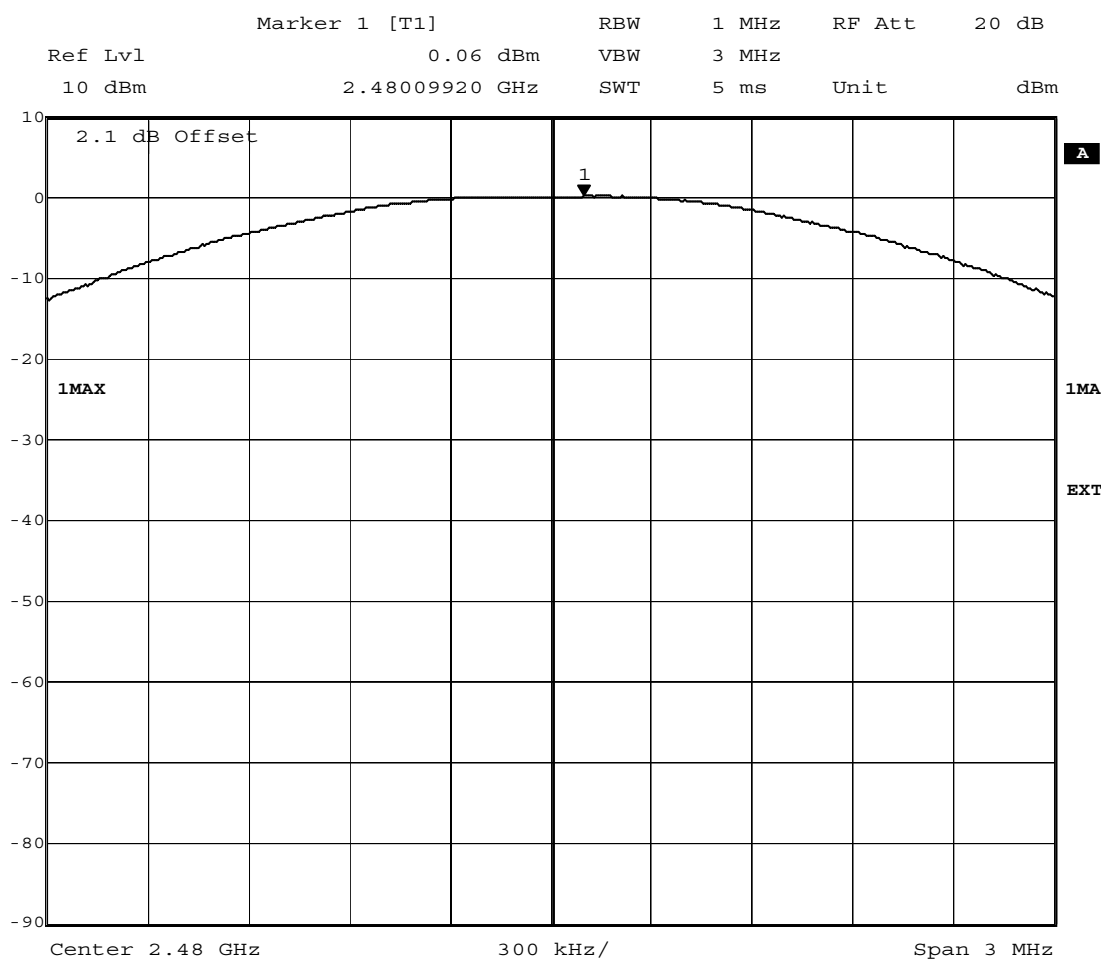

Date: 17.JUL.2013 14:11:24

Test1: 15c.4; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2013/06/11 11:30


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
1.19	2.18	3.37

added by operator

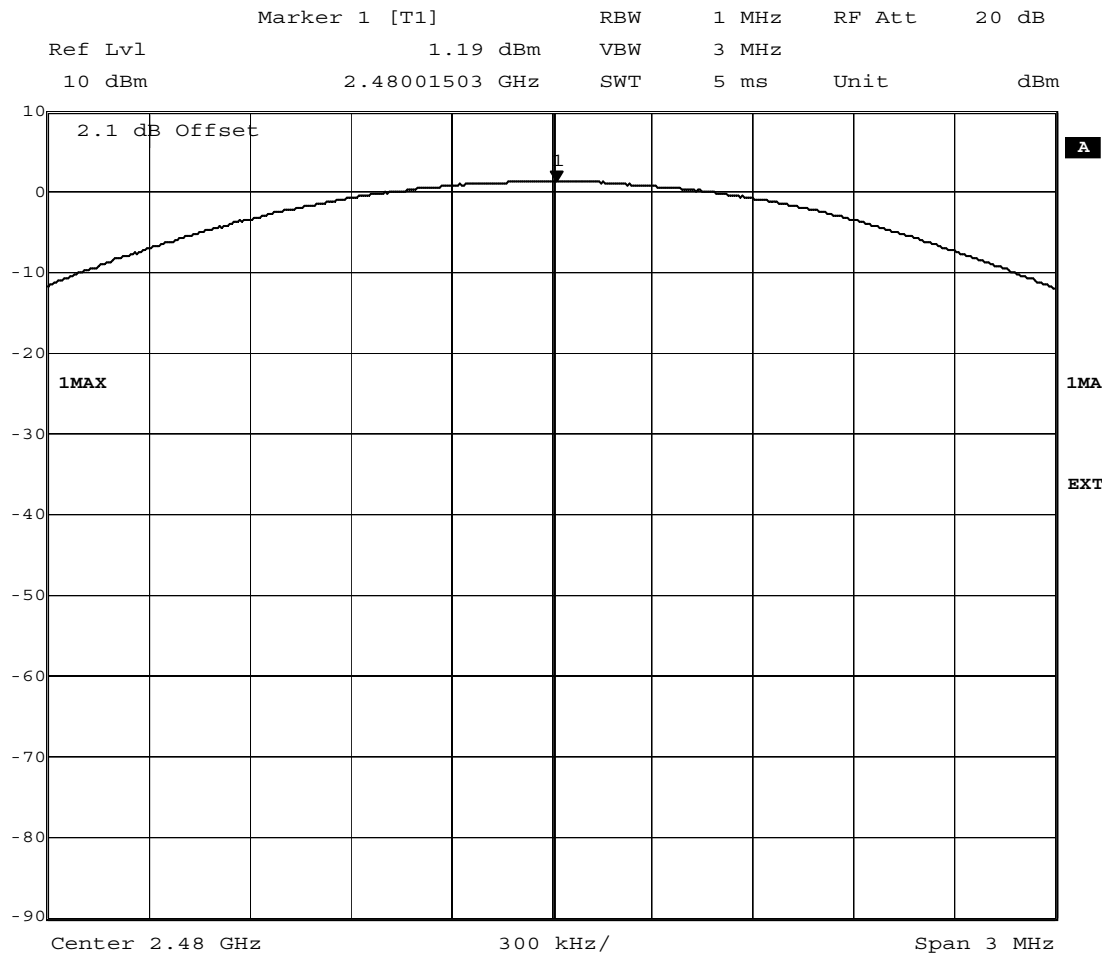

Date: 17.JUL.2013 13:56:40

Test2: 15c.4; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: B01


Date of Test: 2013/06/11 13:34

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
0.53	1.70	2.23

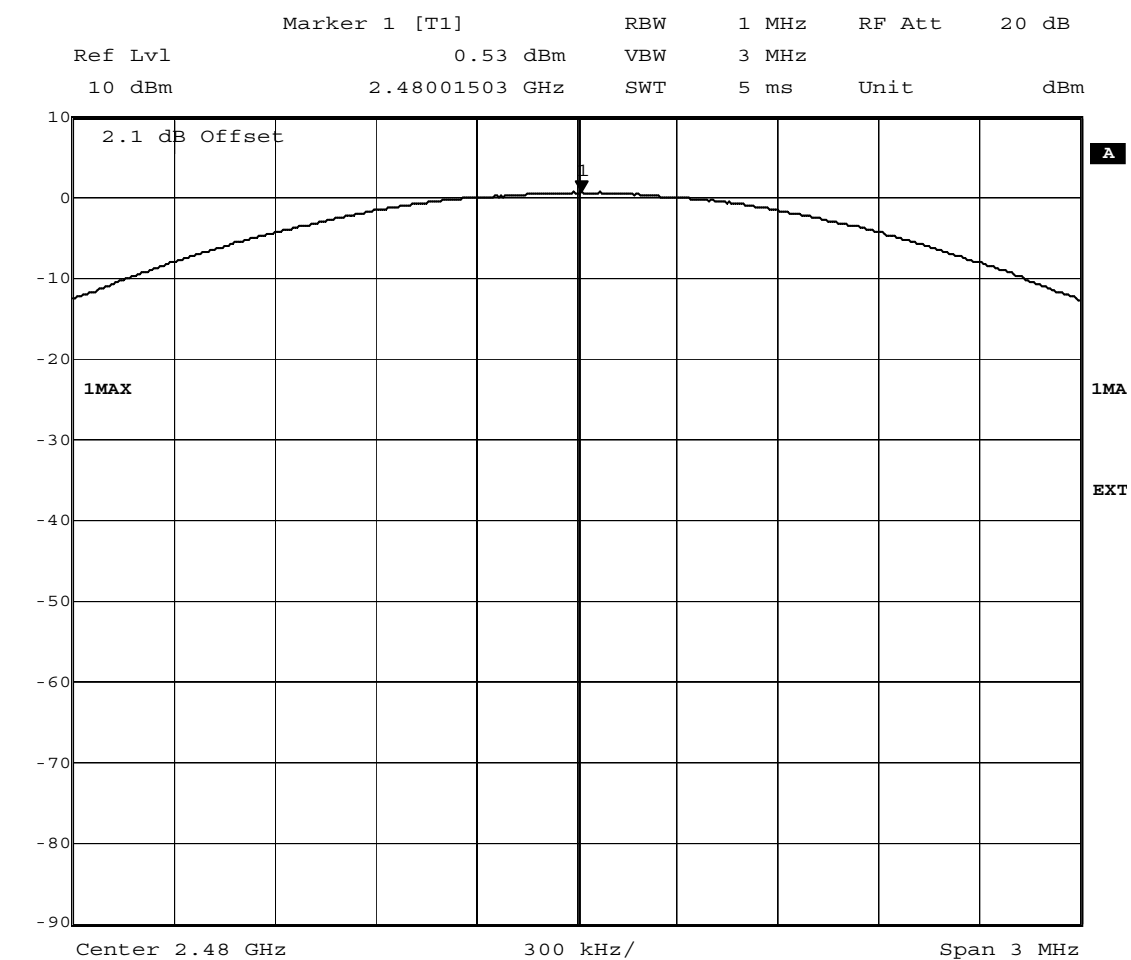

Date: 17.JUL.2013 14:12:37

3.6.7 15c.5 Spurious RF conducted emissions §15.247 (d)

Test: 15c.5; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation

Result: Passed


Setup No.: A01

Date of Test: 2013/06/07 9:19

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

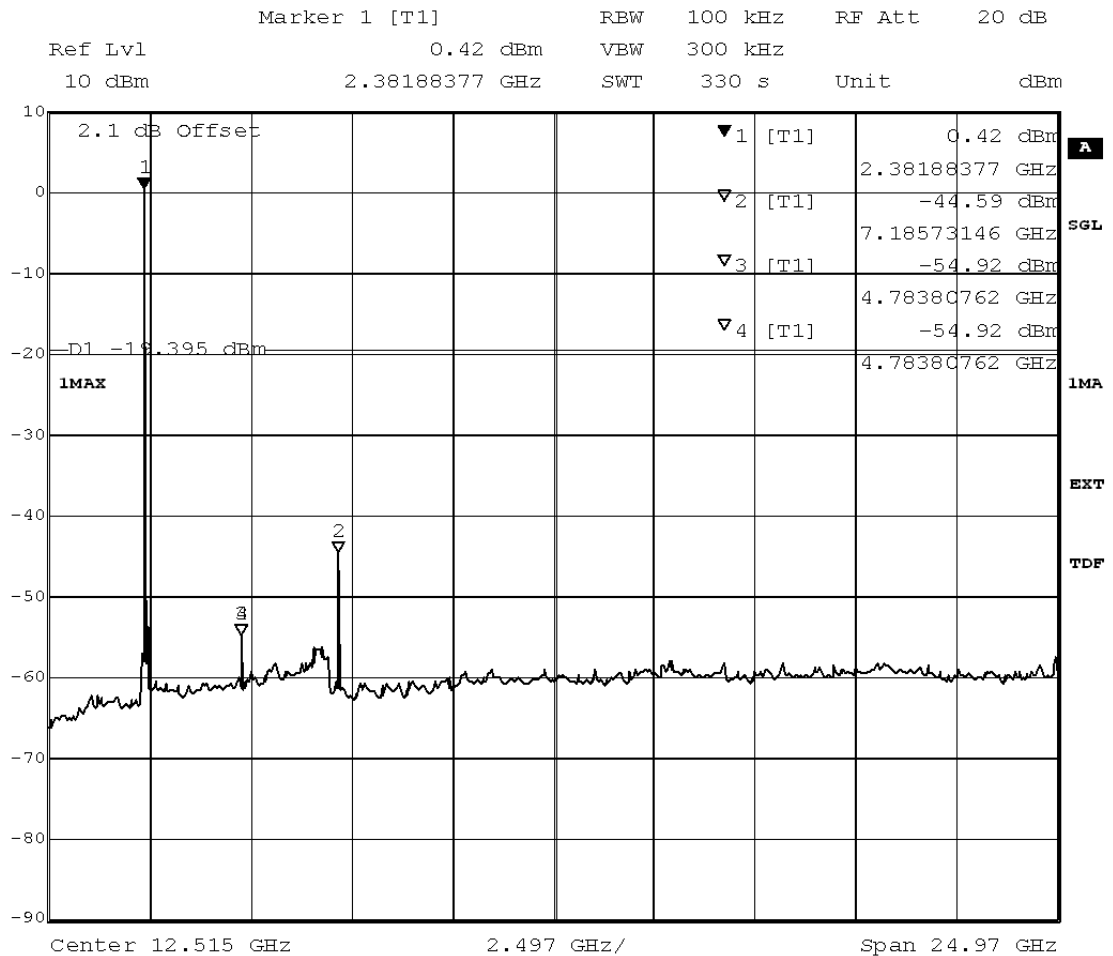

Title: spurious emissions

Comment A: CH B: 2402 MHz

Date: 6.JUN.2013 09:09:29

added by operator




Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.5; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed
Setup No.: A01
Date of Test: 2013/06/07 14:23
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

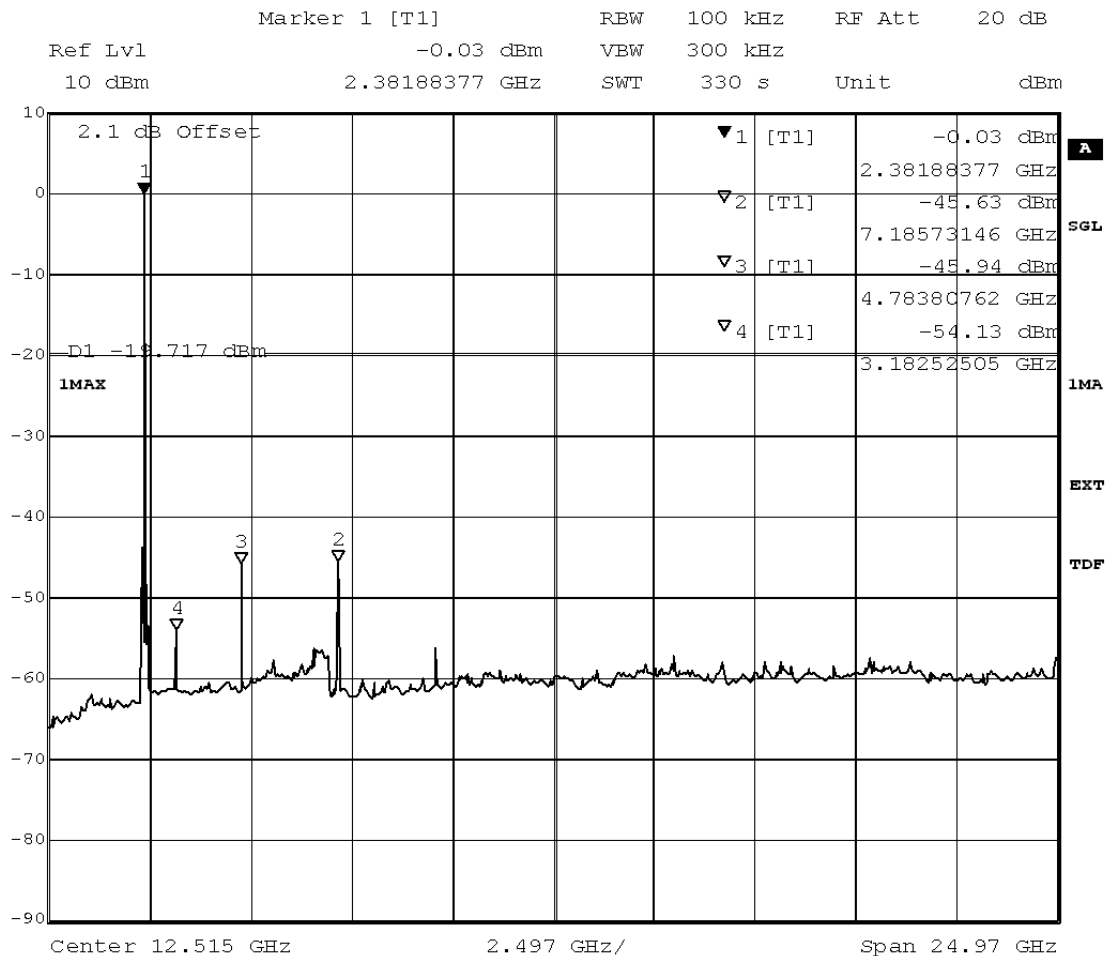


Title: spurious emissions
Comment A: CH B: 2402 MHz
Date: 6.JUN.2013 09:26:30

added by operator

Test: 15c.5; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed
Setup No.: A01
Date of Test: 2013/06/11 11:30
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

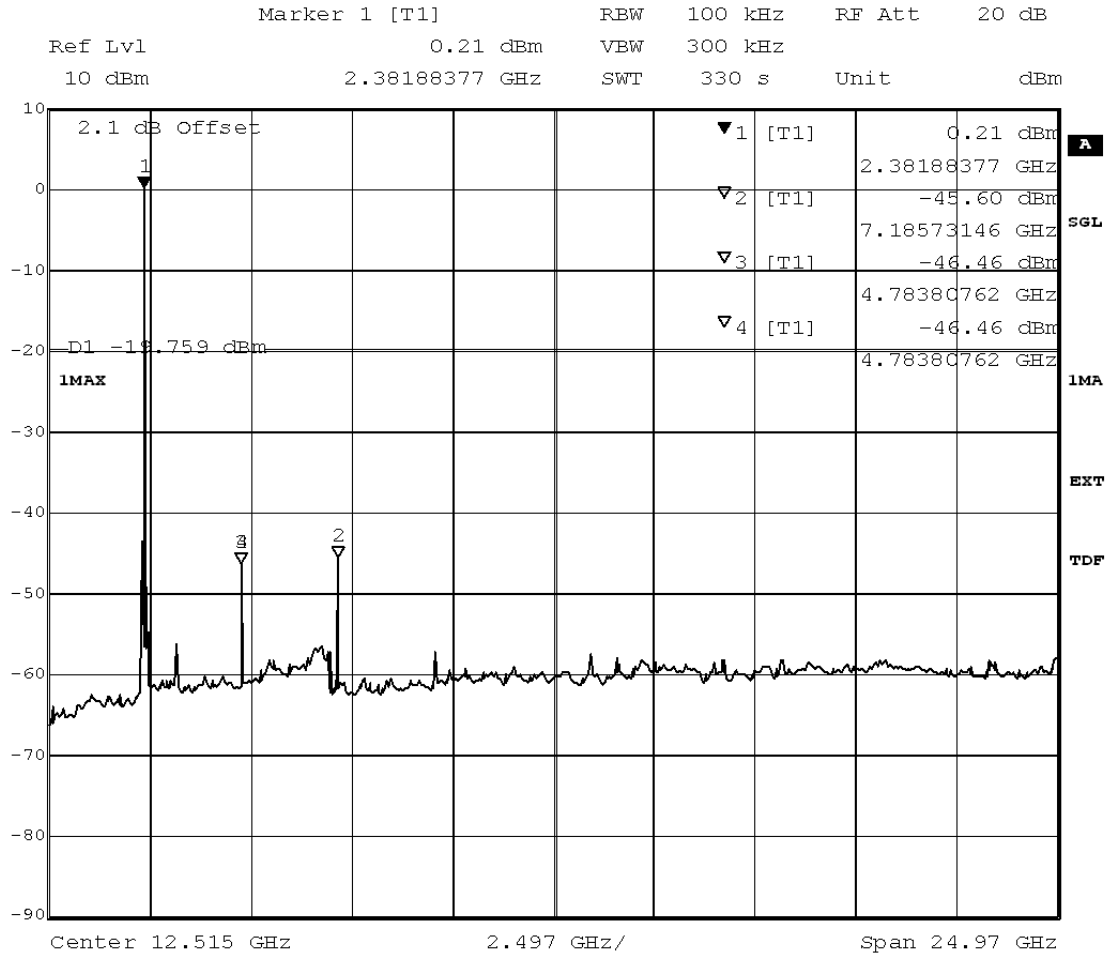

Title: spurious emissions
Comment A: CH B: 2402 MHz
Date: 6.JUN.2013 09:47:22

added by operator

Test: 15c.5; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2013/06/07 9:19


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2441		0.53		

added by operator

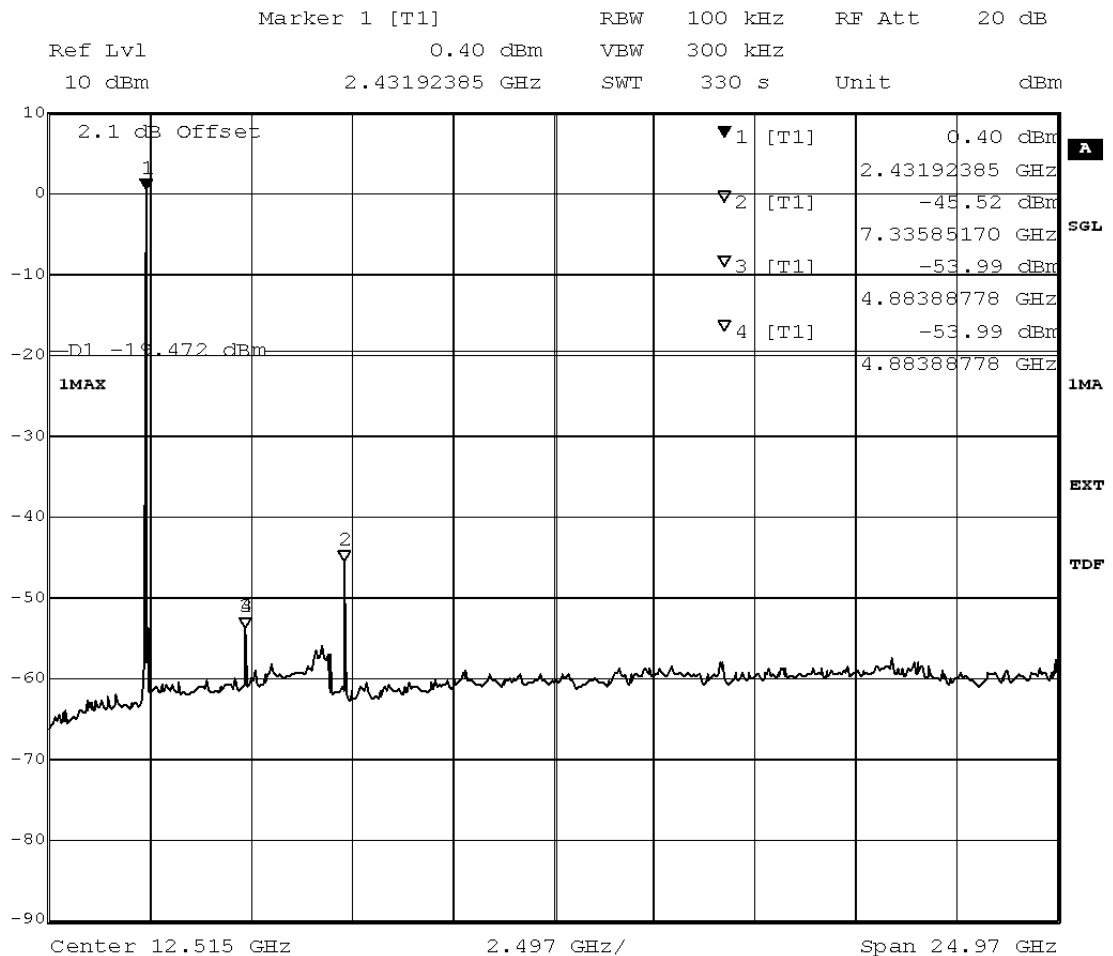

Title: spurious emissions
Comment A: CH M: 2441 MHz
Date: 6.JUN.2013 10:06:23

added by operator

Test: 15c.5; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2013/06/07 14:15


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2441		0.27		

added by operator

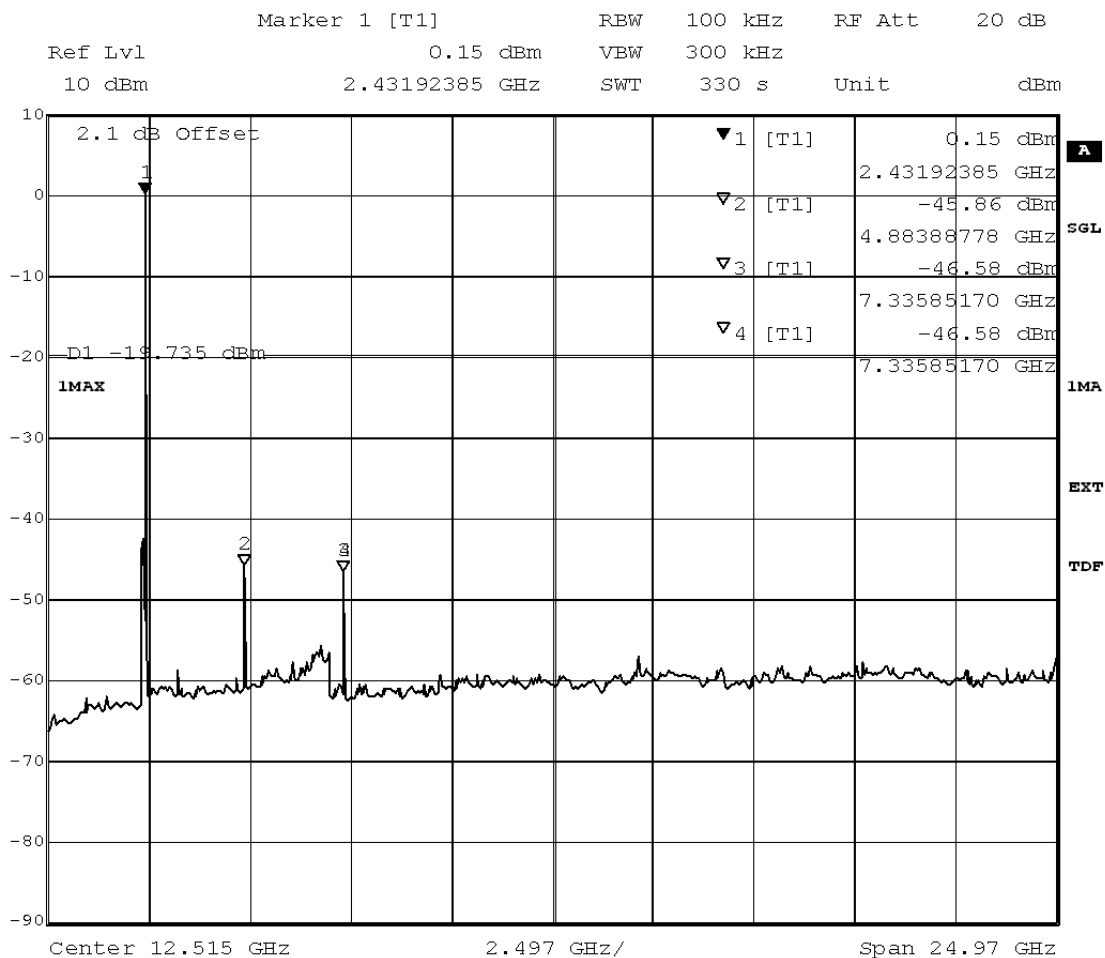

Title: spurious emissions
Comment A: CH M: 2441 MHz
Date: 6.JUN.2013 10:23:05

added by operator

Test: 15c.5; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2013/06/11 11:30


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2441		0.25		

added by operator

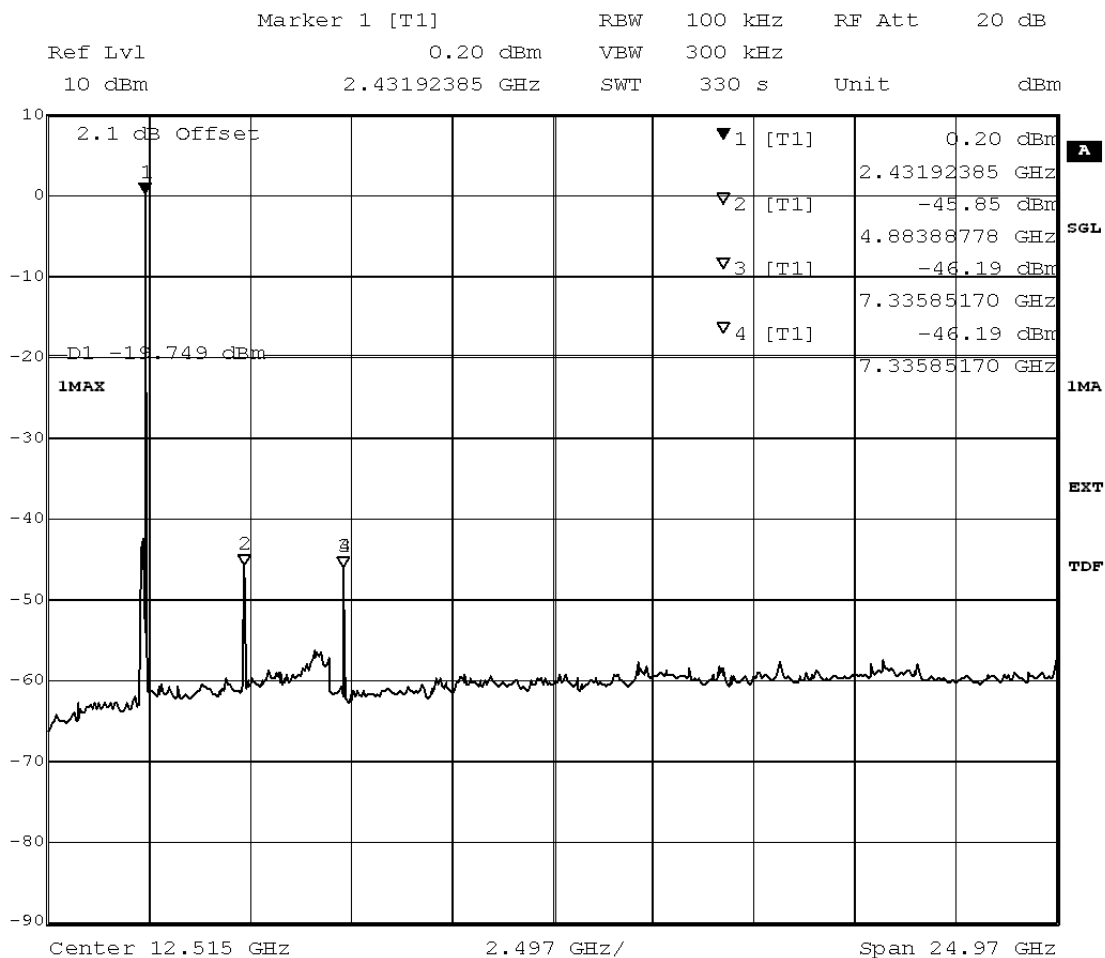

Title: spurious emissions
Comment A: CH M: 2441 MHz
Date: 6.JUN.2013 10:40:45

added by operator

Test: 15c.5; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation

Result: Passed


Setup No.: A01

Date of Test: 2013/06/07 9:19

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

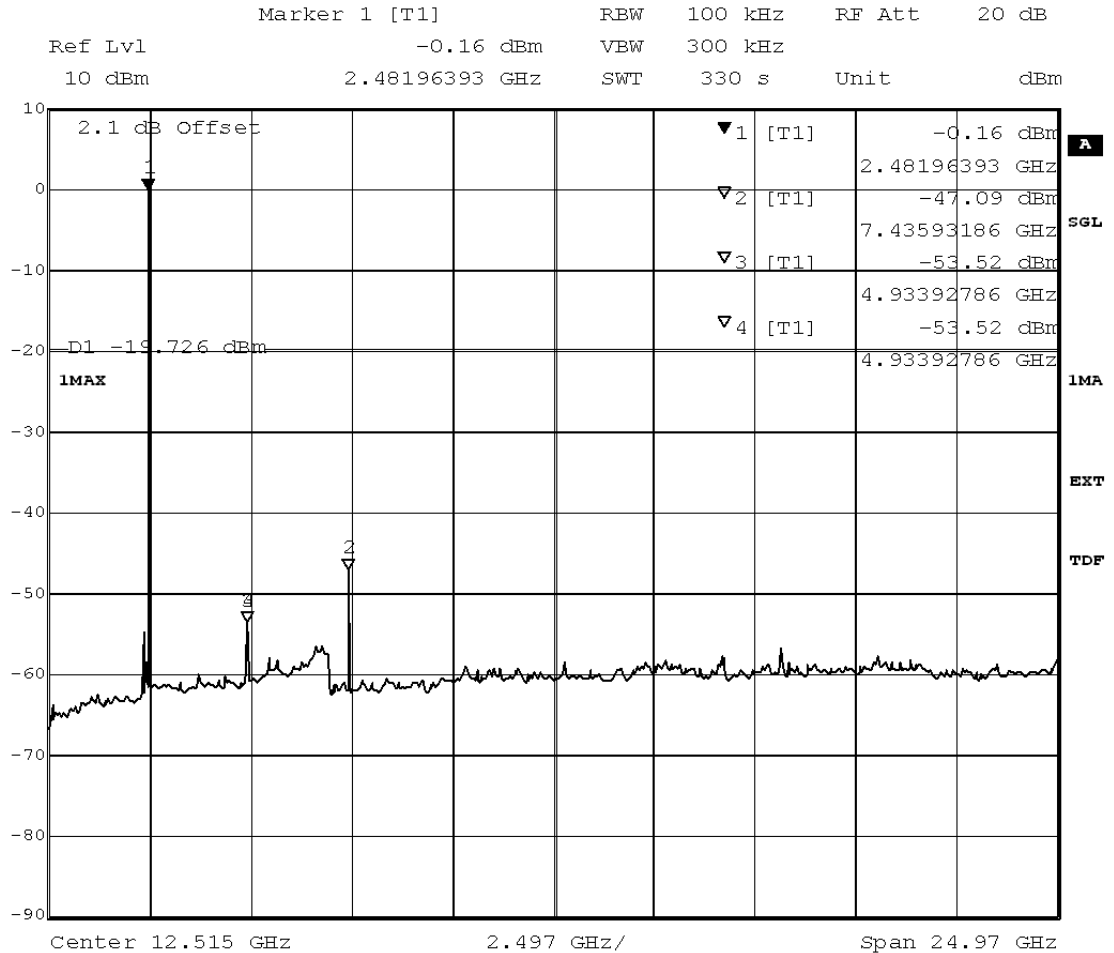

Title: spurious emissions
Comment A: CH T: 2480 MHz
Date: 6.JUN.2013 10:57:40

added by operator

Test: 15c.5; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed


Setup No.: A01

Date of Test: 2013/06/07 14:24

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

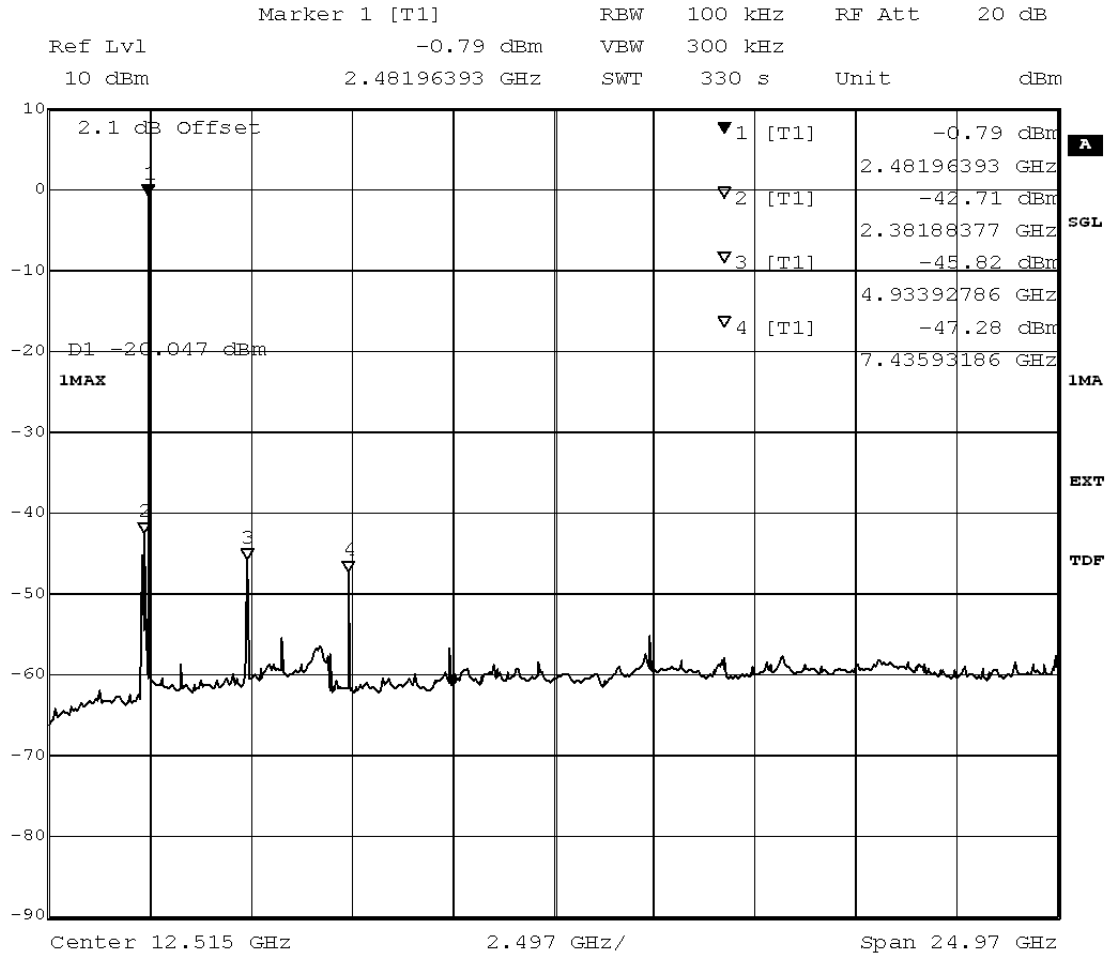

Title: spurious emissions
Comment A: CH T: 2480 MHz
Date: 6.JUN.2013 11:14:19

added by operator

Test: 15c.5; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed


Setup No.: A01

Date of Test: 2013/06/11 11:30

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

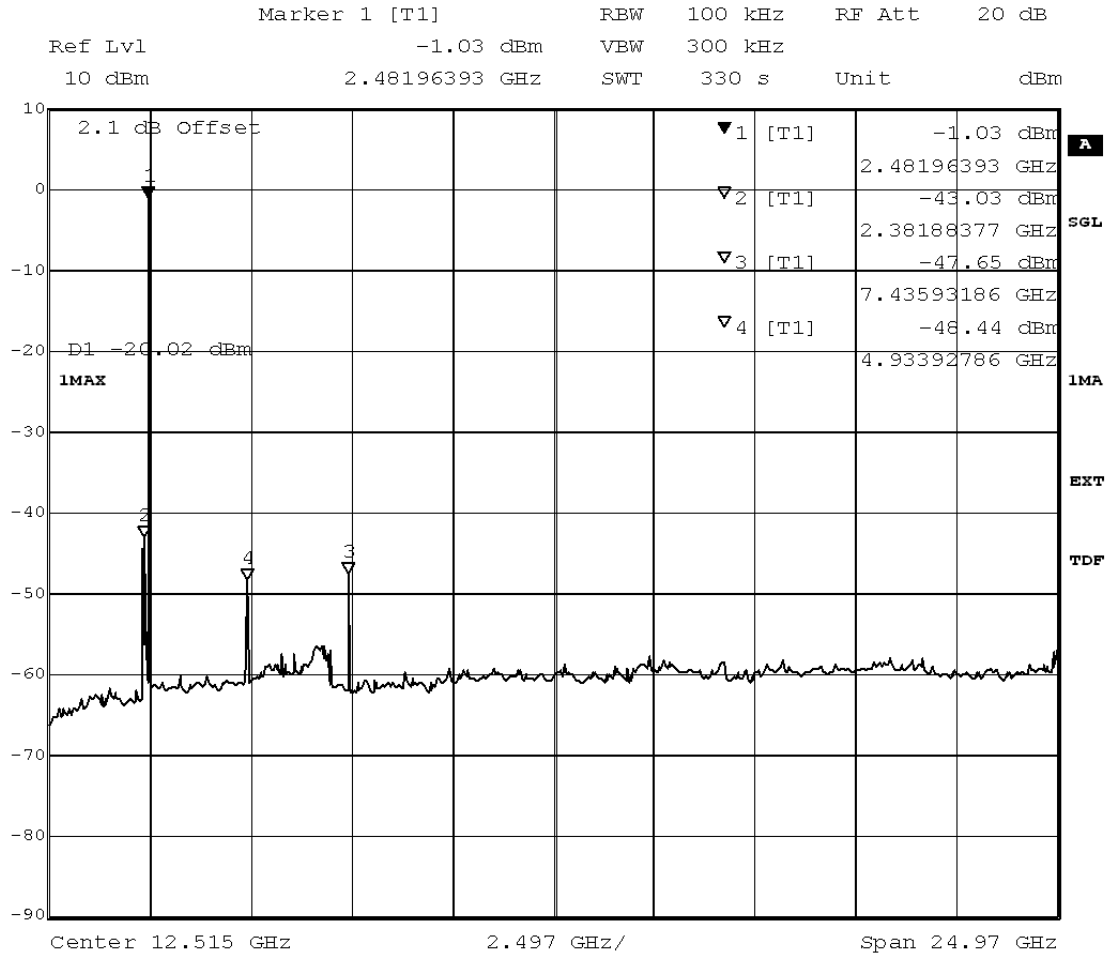

Title: spurious emissions
Comment A: CH T: 2480 MHz
Date: 6.JUN.2013 11:35:10

added by operator



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

3.6.8 15c.6 Band edge compliance §15.247 (d)


Test: 15c.6; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = conducted

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2013/06/07 9:23
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2400	-59.71	0.60	-19.40	40.31

added by operator

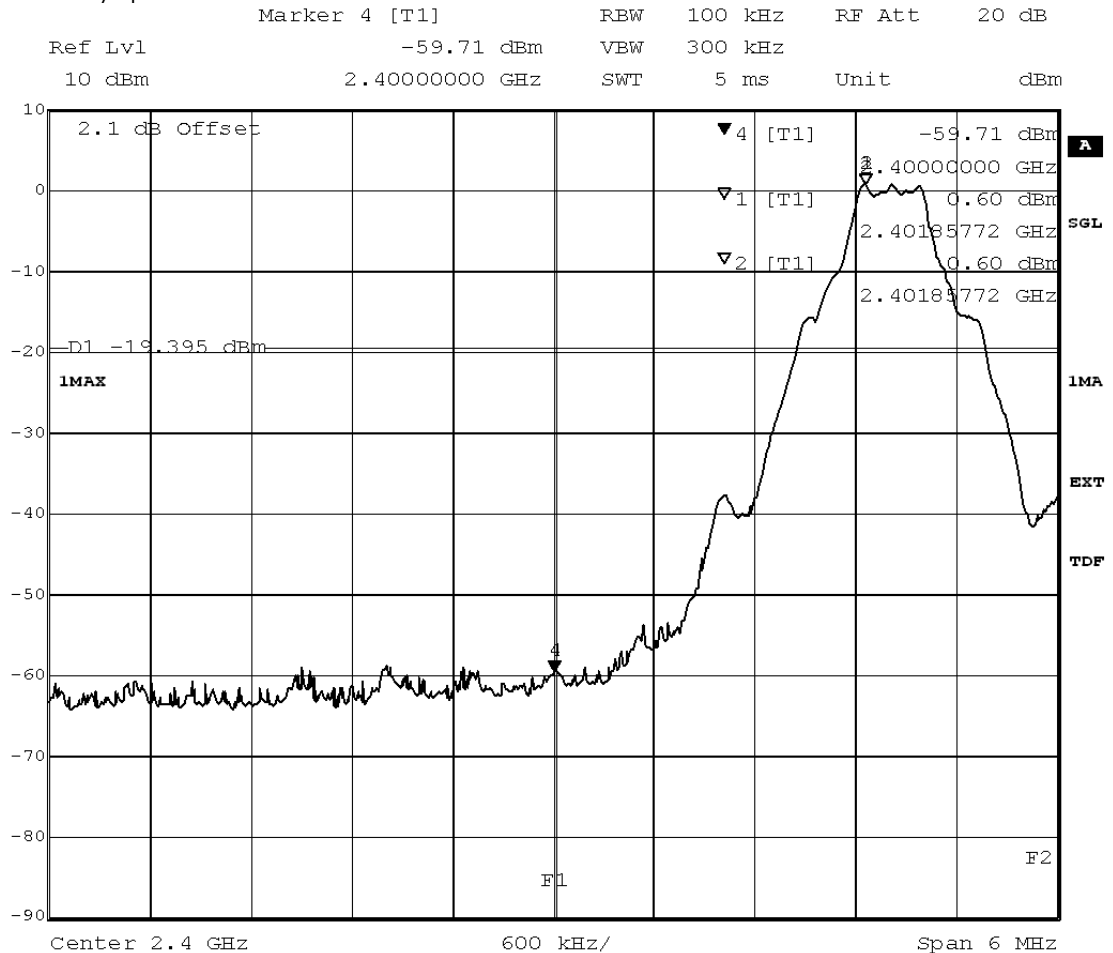

Title: Band Edge Compliance

Comment A: CH B: 2402 MHz

Date: 6.JUN.2013 08:57:32

added by operator

Test: 15c.6; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = conducted

Result: Passed

Setup No.: A01

Date of Test: 2013/06/07 14:24


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2400	-43.09	0.28	-19.72	23.37

added by operator

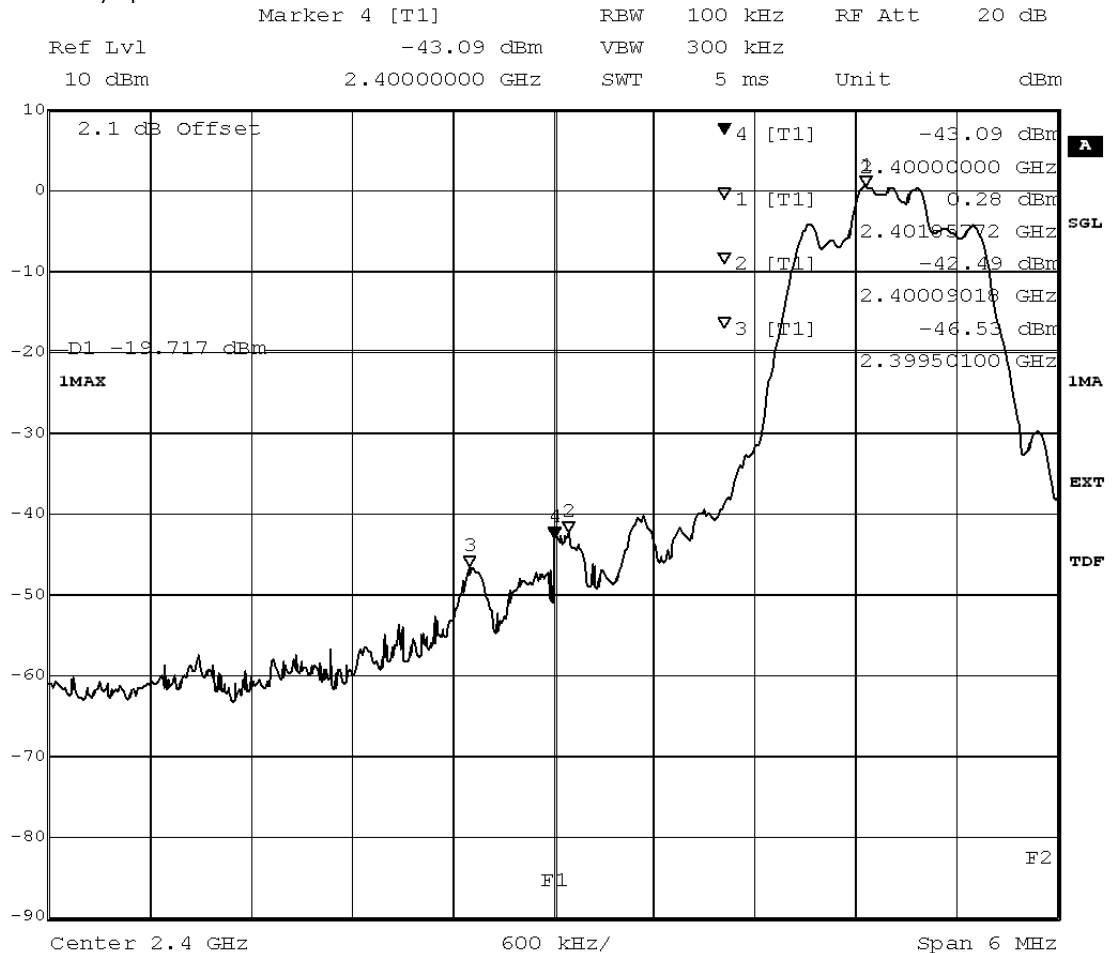

Title: Band Edge Compliance

Comment A: CH B: 2402 MHz

Date: 6.JUN.2013 09:14:33

added by operator

Test: 15c.6; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = conducted

Result: Passed

Setup No.: A01

Date of Test: 2013/06/11 11:31


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2400	-49.51	0.24	-19.76	29.75

added by operator

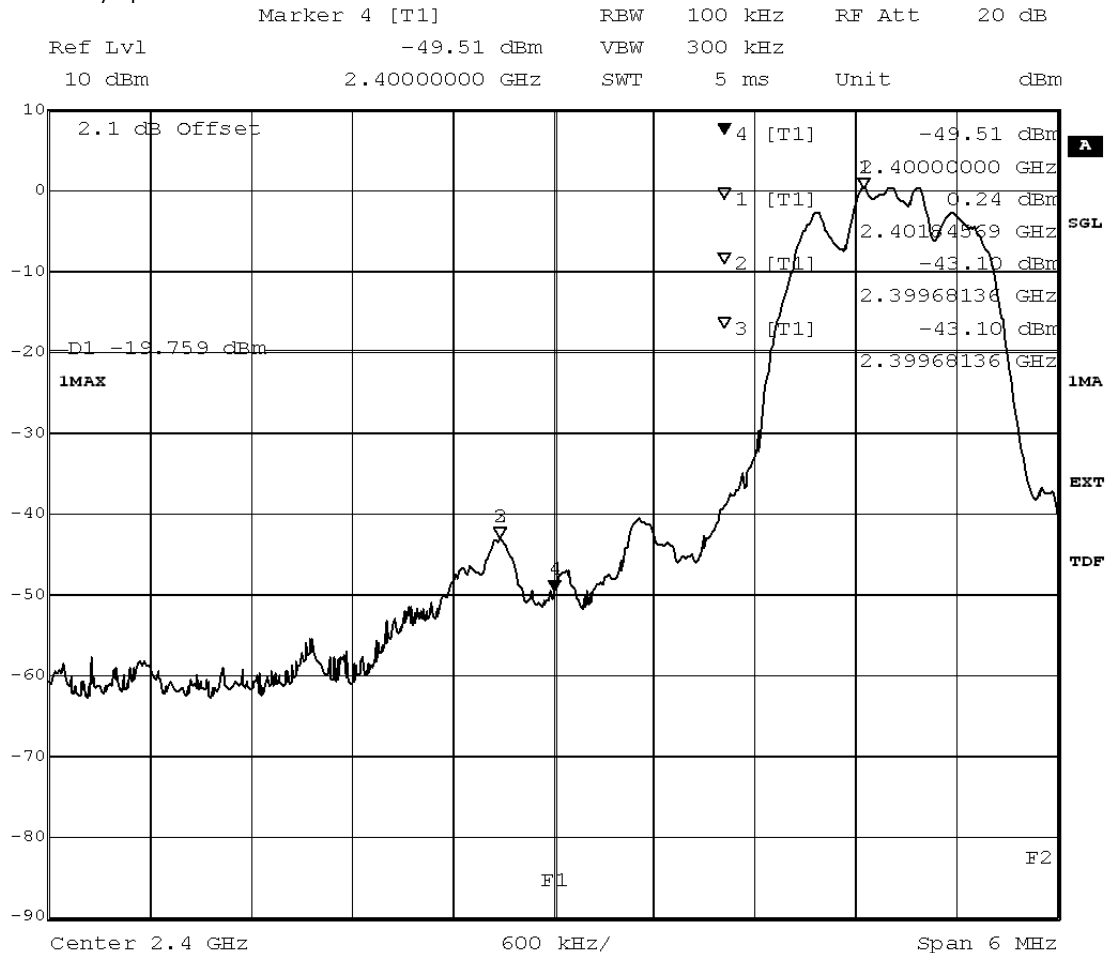

Title: Band Edge Compliance
Comment A: CH B: 2402 MHz
Date: 6.JUN.2013 09:35:24

added by operator

Test: 15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = conducted

Result: Passed

Setup No.: A01

Date of Test: 2013/06/11 11:27


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2484	-62.35	0.27	-19.73	42.62

added by operator

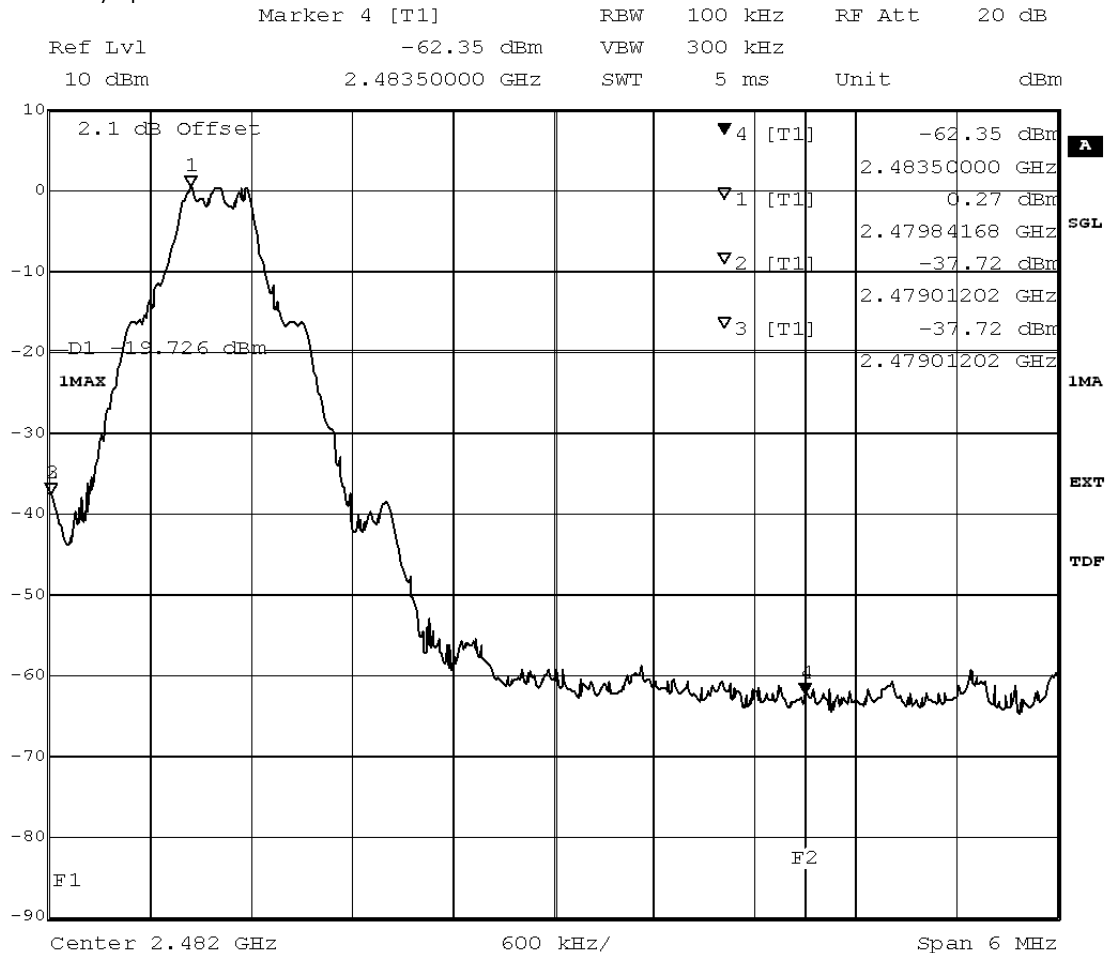

Title: Band Edge Compliance

Comment A: CH T: 2480 MHz

Date: 6.JUN.2013 10:45:43

added by operator

Test: 15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = radiated

Result: Passed

Setup No.: A01

Date of Test: 2013/06/07 17:18


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Marker: 2.4835 GHz 48.78 dB μ V/m
Delta Mk: 0 Hz -12.01 dB

Level [dB μ V/m]

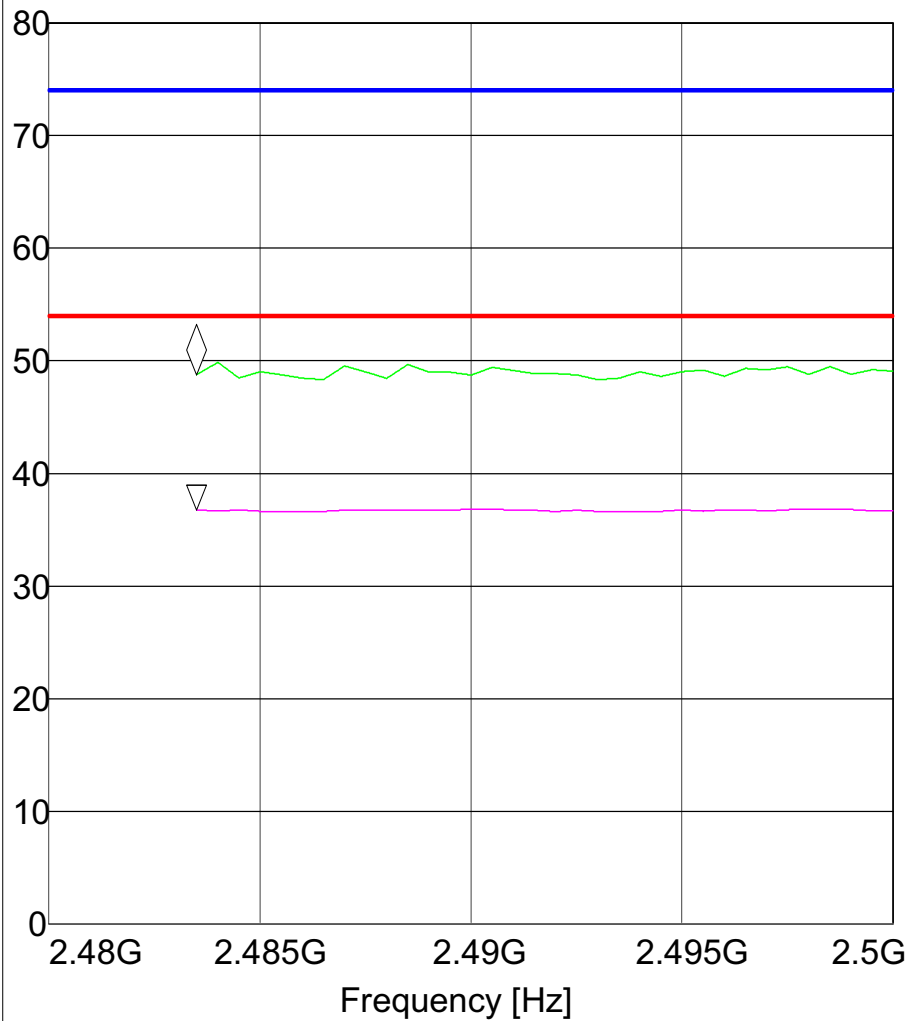

MES PAR_1312_03_pre PK
MES PAR_1312_03_pre AV
LIM FCC 15.209 3m Field Strength AV Limit
LIM FCC 15.209 3m Peak Field Strength Q-Peak Lim



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

TX on	Ant. Polar.	Limit PK [dBμV]	Limit AV [dBμV]	Frequency [MHz]	Corrected value PK [dBμV]	Corrected value AV [dBμV]	Margin PK [dB]	Margin AV [dB]	Result
2480 MHz	Ver + Hor	74	54	2483.5	48.78	36.77	25.22	17.23	Passed

**Test: 15c.6; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation,
Method = conducted**

Result: Passed

Setup No.: A01

Date of Test: 2013/06/07 14:24


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2484	-61.21	-0.05	-20.05	41.17

added by operator

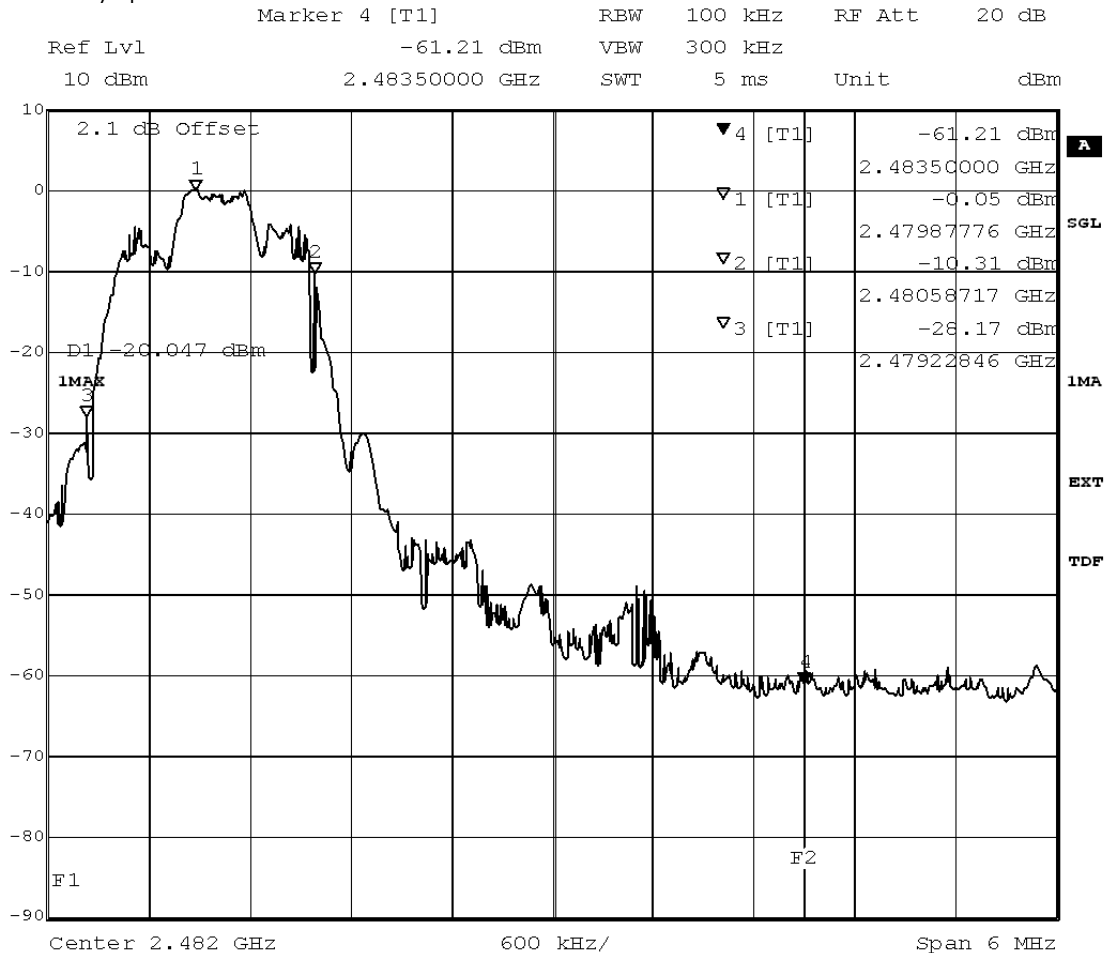

Title: Band Edge Compliance

Comment A: CH T: 2480 MHz

Date: 6.JUN.2013 11:02:21

added by operator

Test: 15c.6; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = radiated

Result: Passed

Setup No.: A01

Date of Test: 2013/06/07 18:30


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Marker: 2.4835 GHz 49.58 dB μ V/m
Delta Mk: 0 Hz -12.81 dB

Level [dB μ V/m]

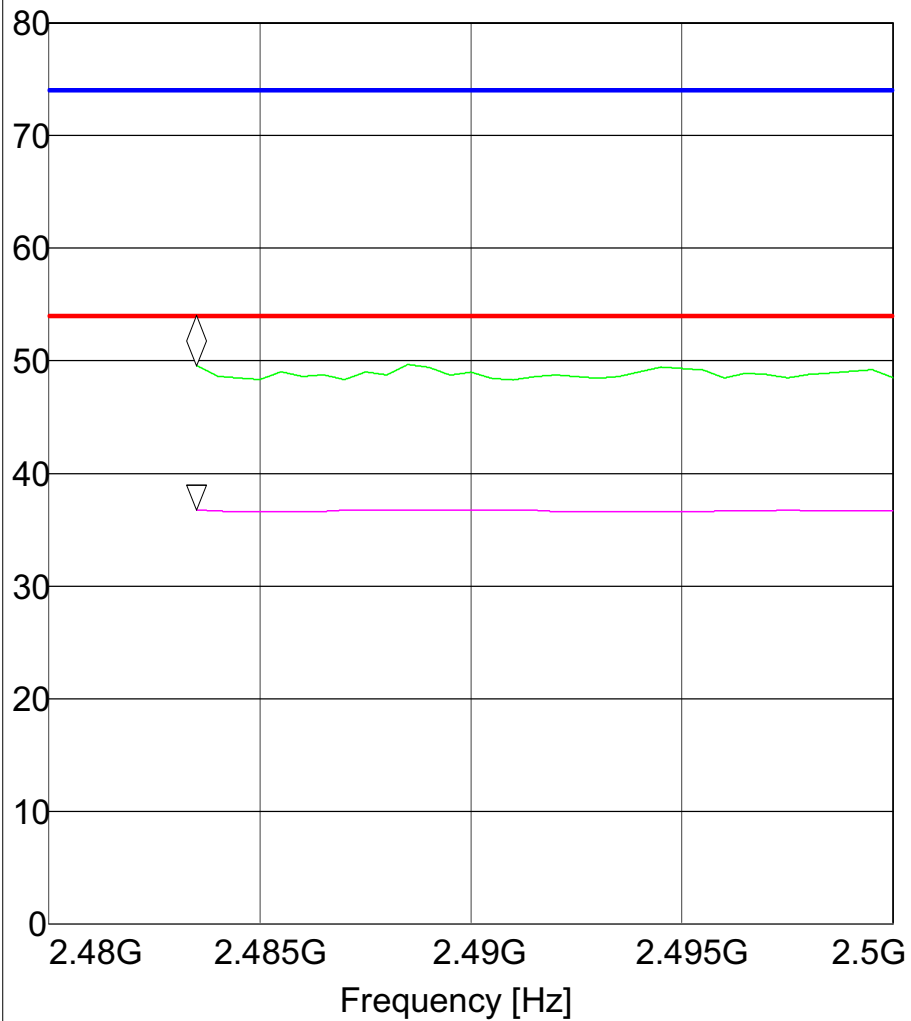

MES PAR_1312_06_pre PK
MES PAR_1312_06_pre AV
LIM FCC 15.209 3m Field Strength AV Limit
LIM FCC 15.209 3m Peak Field Strength Q-Peak Lim



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

TX on	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
2480 MHz	Ver + Hor	74	54	2483.5	49.58	36.77	24.42	17.23	Passed

Test: 15c.6; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = conducted

Result: Passed

Setup No.: A01

Date of Test: 2013/06/11 11:31


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2484	-55.96	-0.02	-20.02	35.94

added by operator

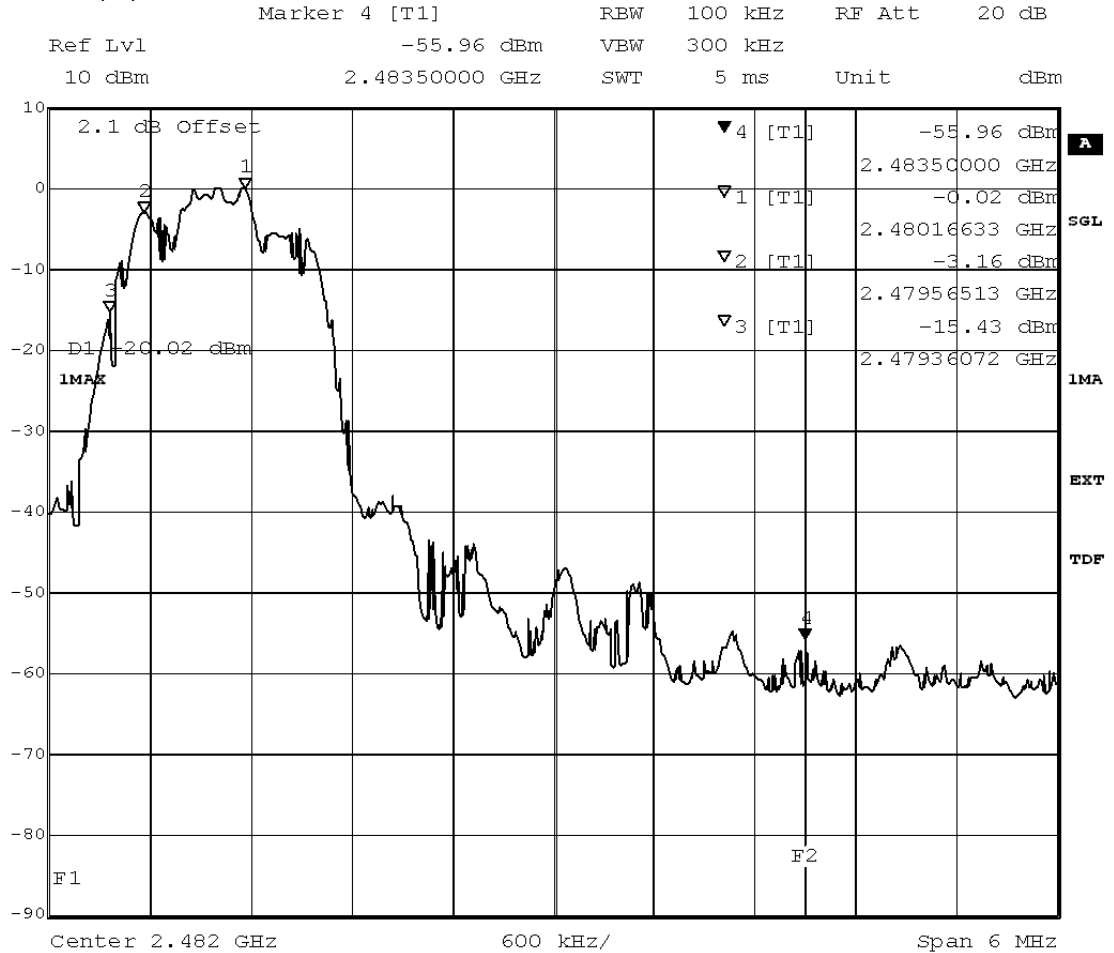

Title: Band Edge Compliance
Comment A: CH T: 2480 MHz
Date: 6.JUN.2013 11:23:12

added by operator

Test: 15c.6; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = radiated

Result: Passed

Setup No.: A01

Date of Test: 2013/06/07 20:20


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Marker: 2.4835 GHz 48.78 dB μ V/m
Delta Mk: 0 Hz -12.01 dB

Level [dB μ V/m]

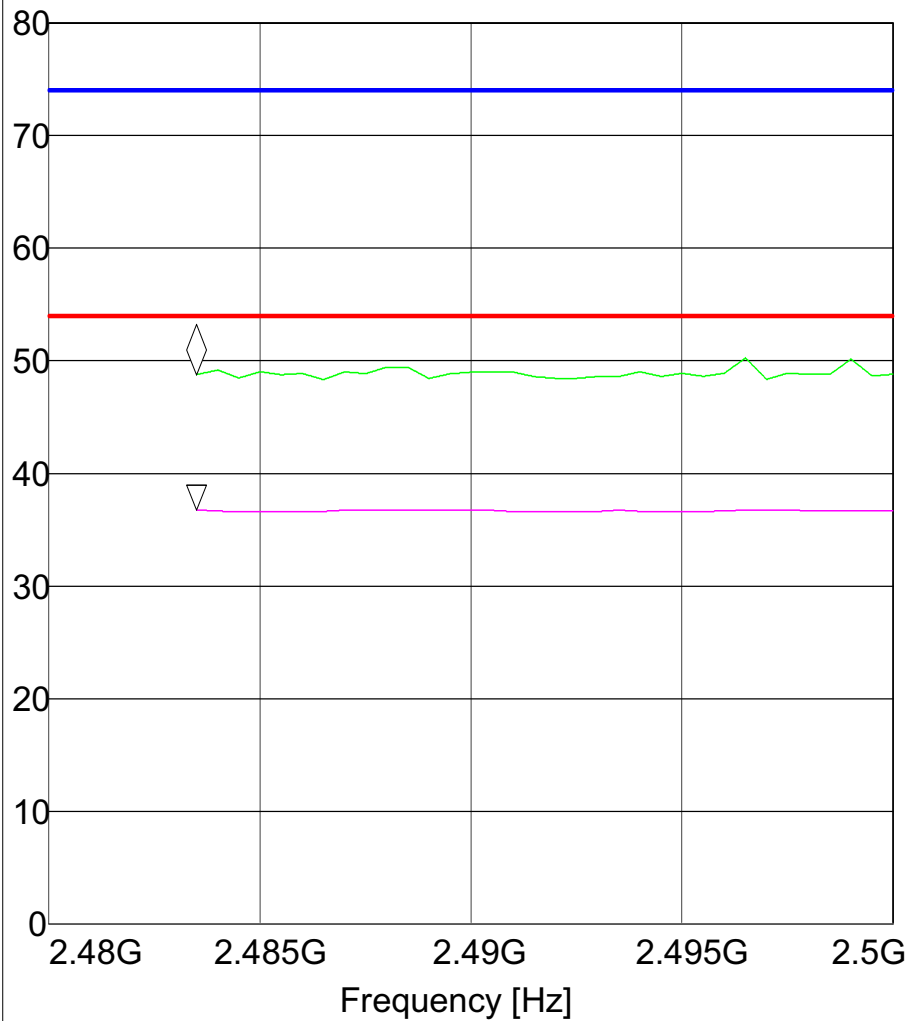

— MES PAR_1312_09_pre PK
— MES PAR_1312_09_pre AV
— LIM FCC 15.209 3m Field Strength AV Limit
— LIM FCC 15.209 3m Peak Field Strength Q-Peak Lim



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

TX on	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
2480 MHz	Ver + Hor	74	54	2483.5	48.78	36.77	25.22	17.23	Passed

4 Test Equipment Details

4.1 List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:	Lab 2		
Manufacturer:	Frankonia		
Description:	Anechoic Chamber for radiated testing		
Type:	10.58x6.38x6.00 m ³		
	<i>Calibration Details</i>	<i>Last Execution</i>	<i>Next Exec.</i>
	NSA (FCC, IC)	2011/01/10	2014/01/10

Single Devices for Anechoic Chamber

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m ³	none	Frankonia
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	FCC listing 96716 3m Part15/18		2011/01/11 2014/01/10
	IC listing 3699A-1 3m		2011/02/07 2014/02/06
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

Test Equipment Auxiliary Equipment for Conducted emissions

Lab ID:	Lab 1
Manufacturer:	Rohde & Schwarz GmbH & Co.KG
Description:	EMI Conducted Auxiliary Equipment

Single Devices for Auxiliary Equipment for Conducted emissions

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber&Suhner
Coupling-Decoupling-Network	CDN ENY41	100002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2013/03/01 2015/02/28
One-Line V-Network	ESH 3-Z6	100489	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/02/08 2014/02/07
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standart Calibration		2013/03/01 2015/02/28
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2013/03/01 2015/02/28

Test Equipment Auxiliary Equipment for Radiated emissions

Lab ID: Lab 2
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer
Antenna mast	AM 4.0	AM4.0/180/11920 513	Maturo GmbH
Antenna mast	AS 620 P	620/37	HD GmbH
Biconical Broadband Antenna	SBA 9119	9119-005	Schwarzbeck
<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>	
Standard Calibration		2009/06/04 2014/06/03	
Biconical dipole	VUBA 9117	9117-108	Schwarzbeck
<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>	
Standard Calibration		2008/10/27 2013/10/26	
Standard Calibration		2012/01/18 2015/01/17	
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01-2	Kabel Kusch
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02-2	Rosenberger Micro-Coax
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>	
Standard Calibration		2012/05/18 2015/05/17	
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>	
Standard Calibration		2012/06/26 2015/06/25	
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright
Horn Antenna Schwarzbeck 15-26 GHz BBHA 9170	BBHA 9170		
Log.-per. Antenna	HL 562 Ultralog	100609	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>	
Standart Calibration		2012/12/18 2015/12/17	
Log.-per. Antenna	HL 562 Ultralog	830547/003?	Rohde & Schwarz GmbH & Co. KG
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG

Single Devices for Auxiliary Equipment for Radiated emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2011/10/27 2014/10/26
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5-10kg/024/3790709	Maturo GmbH

Test Equipment Auxiliary Test Equipment

Lab ID:	Lab 2
Manufacturer:	see single devices
Description:	Single Devices for various Test Equipment
Type:	various
Serial Number:	none

Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Customized calibration		2011/10/19 2013/10/18
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Spectrum Analyser	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard		2012/06/13 2015/06/12
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG

Test Equipment Digital Signalling Devices

Lab ID: Lab 1, Lab 2
Description: Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
Bluetooth Signalling Unit CBT	CBT	100589	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/11/24 2014/11/23
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Initial factory calibration		2012/01/26 2014/01/25
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/11/28 2014/11/27
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04 Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22 Firmware: µP1 8v50 02.05.06 ---		2007/07/16
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/12/07 2014/12/06
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02 SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05 ---		2007/01/02
	SW: K62, K69		2008/11/03
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test Equipment Emission measurement devices

Lab ID: Lab 1, Lab 2
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer
Personal Computer	Dell	30304832059	Dell
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
Calibration Details			Last Execution Next Exec.
Standard calibration			2013/05/03 2014/05/02
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
Calibration Details			Last Execution Next Exec.
Standard calibration			2013/04/30 2014/04/29
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
Calibration Details			Last Execution Next Exec.
standard calibration			2011/05/12 2014/05/11
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
Calibration Details			Last Execution Next Exec.
Standard Calibration			2011/12/05 2013/12/04
HW/SW Status			Date of Start Date of End
Firmware-Update 4.34.4 from 3.45 during calibration			2009/12/03

Test Equipment Multimeter 12

Lab ID: Lab 3
Description: Ex-Tech 520
Serial Number: 05157876

Single Devices for Multimeter 12

Single Device Name	Type	Serial Number	Manufacturer
Digital Multimeter 12 (Multimeter)	EX520	05157876	Extech Instruments Corp.
Calibration Details			Last Execution Next Exec.
Customized calibration			2011/10/18 2013/10/17

Test Equipment Regulatory Bluetooth RF Test Solution

Lab ID: Lab 3
Description: Regulatory Bluetooth RF Tests
Type: Bluetooth RF
Serial Number: 001

Single Devices for Regulatory Bluetooth RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer
ADU 200 Relay Box 7	Relay Box	A04380	Ontrak Control Systems Inc.
Bluetooth Signalling Unit CBT	CBT	100302	Rohde & Schwarz GmbH & Co.KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard Calibration			2012/08/21 2013/08/20
Power Meter NRVD	NRVD	832025/059	
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard Calibration			2012/07/24 2013/07/23
Power Sensor NRV Z1 A	PROBE	832279/013	
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard Calibration			2012/07/23 2013/07/22
Power Supply	NGSM 32/10	2725	
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard Calibration			2011/06/15 2013/06/14
Standard calibration			2013/06/14 2014/06/19
Rubidium Frequency Normal MFS	Datum MFS	002	Datum GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard Calibration			2012/08/20 2013/08/19
Signal Analyser FSIQ26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG
Vector Signal Generator SMIQ03B	SMIQ03B	832870/017	
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard Calibration			2010/06/23 2013/06/22
Standard calibration			2013/06/22 2014/06/20

Test Equipment Shielded Room 02

Lab ID: Lab 1
Manufacturer: Frankonia
Description: Shielded Room for conducted testing
Type: 12 qm
Serial Number: none

Test Equipment Shielded Room 07

Lab ID: Lab 3
Description: Shielded Room 4m x 6m

Test Equipment T/H Logger 04

Lab ID: Lab 3
Description: Lufft Opus10
Serial Number: 7481

Single Devices for T/H Logger 04

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro Datalogger 04 (Environ)	Opus10 THI (8152.00)	7481	Lufft Mess- und Regeltechnik GmbH

Test Equipment Temperature Chamber 01

Lab ID: Lab 3
Manufacturer: see single devices
Description: Temperature Chamber KWP 120/70
Type: Weiss
Serial Number: see single devices

Single Devices for Temperature Chamber 01

Single Device Name	Type	Serial Number	Manufacturer
Temperature Chamber Weiss 01	KWP 120/70	59226012190010	Weiss Umwelttechnik GmbH
Calibration Details		Last Execution	Next Exec.
Customized calibration		2012/03/12	2014/03/11



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

5 Annex

5.1 Additional Information for Report



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Summary of Test Results

The EUT complied with all performed tests as listed in the summary section of this report.

Technical Report Summary

Type of Authorization :

Certification for an Intentional Radiator (Frequency Hopping Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15. The following subparts are applicable to the results in this test report

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

additional documents

The tests were selected and performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000. Instead of applying ANSI C63.4-1992 which is referenced in the FCC Public Note, the newer ANSI C63.4-2009 is applied.

Description of Methods of Measurements

Conducted emissions (AC power line)

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4,

Test Description

acc. Title 47 CFR chapter I part 15 subpart C

The test set-up was made in accordance to the general provisions of ANSI C 63.4.

The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 μ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads. The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.207

Frequency Range (MHz)	QP Limit (dB μ V)	AV Limit (dB μ V)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

Used conversion factor: Limit (dB μ V) = 20 log (Limit (μ V)/1 μ V).

Occupied bandwidth

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was setup to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produces the worst-case (widest) occupied bandwidth. The resolution bandwidth for measuring the reference level and the occupied bandwidth was 30 kHz.

The EUT was connected to the spectrum analyzer via a short coax cable.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Implication by the test laboratory:

Since the Bluetooth technology defines a fixed channel separation of 1 MHz this design parameter defines the maximum allowed occupied bandwidth depending on the EUT's output power:

1. Under the provision that the system operates with an output power not greater than 125 mW (21.0 dBm) : Implicit Limit: Max. 20 dB BW = $1.0 \text{ MHz} / 2/3 = 1.5 \text{ MHz}$
2. If the system output power exceeds 125 mW (21.0 dBm): Implicit Limit: Max. 20 dB BW = 1.0 MHz

Used conversion factor: Output power (dBm) = $10 \log (\text{Output power (W)} / 1\text{mW})$

The measured output power of the system is below 125 mW (21.0 dBm). For the results, please refer to the related chapter of this report. Therefore the limit is determined as 1.5 MHz.

Peak power output

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the output power measurements. The resolution bandwidth for measuring the output power was set to 3 MHz. The reference level of the spectrum analyzer was set higher than the output power of the EUT. The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (b) (1)

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:
(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

Used conversion factor: Limit (dBm) = $10 \log (\text{Limit (W)}/1\text{mW})$
==> Maximum Output Power: 30 dBm

Spurious RF conducted emissions

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements. The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: Peak-Maxhold
- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz

acc. Title 47 CFR chapter I part 15 subpart C

- Video Bandwidth (VBW): 300 kHz
- Sweep Time: 330 s

The reference value for the measurement of the spurious RF conducted emissions is determined during the test "band edge compliance" (cf. chapter 3.6). This value is used to calculate the 20 dBc limit.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

Spurious radiated emissions

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4,

Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4-2009.

The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The influence of the EUT support table that is used between 30-1000 MHz was evaluated.

The test was performed at the distance of 3 m between the EUT and the receiving antenna. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The radiated emissions measurements were made in a typical installation configuration. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is performed at 2 axes. A pre-check is also performed while the EUT is powered from both AC and DC (battery) power in order to find the worst-case operating condition.

1. Measurement up to 30 MHz

The test set-up was made in accordance to the general provisions of ANSI C63.4.

The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The radiated emissions measurements were made in a typical installation configuration.

The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

The Loop antenna HFH2-Z2 is used.

Step 1: pre-measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 – 0.15 and 0.15 – 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz – 10 kHz
- Measuring time / Frequency step: 100 ms

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 µs (BT Timing 1.25 ms)
- Turntable angle range: -180 to +180°

acc. Title 47 CFR chapter I part 15 subpart C

- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: –180 to +180°
- Turntable step size: 45°
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by $\pm 22.5^\circ$ around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by ± 25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -22.5° to $+22.5^\circ$ around the determined value
- Height variation range: -0.25 m to $+0.25$ m around the determined value

Step 4: final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18–25 GHz) are used, the steps 2–4 are omitted. Step 1 was performed with one height of the receiving antenna only.

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

For the enhanced data rate packets the test is performed as worst-case-check in order to verify that emissions have a comparable level as found at basic data rate. Typically, the measurement for these packets is performed in the frequency range 1 to 8 GHz but it depends on the emissions found during the test for the basic data rate. Please refer to the results for the used frequency range.

acc. Title 47 CFR chapter I part 15 subpart C

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Limit(dBμV/m @10m)
0.009 – 0.49	2400/F(kHz)	300	Limit (dBμV/m)+30dB
0.49 – 1.705	24000/F(kHz)	30	Limit (dBμV/m)+10dB
1.705 – 30	30	30	Limit (dBμV/m)+10dB

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Limit (dBμV/m)
30 - 88	100	3	40.0
88 - 216	150	3	43.5
216 - 960	200	3	46.0
above 960	500	3	54.0

§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dB}\mu\text{V/m)} = 20 \log (\text{Limit } (\mu\text{V/m})/1\mu\text{V/m})$

Band edge compliance

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4, FCC §15.31

Test Description

The procedure to show compliance with the band edge requirement is divided into two measurements: 1. Show compliance of the lower band edge by a conducted measurement and 2. show compliance of the higher band edge by a radiated and conducted measurement.

For the first measurement the EUT is set to transmit on the lowest channel (2402 MHz). The lower band edge is 2400 MHz.

Analyzer settings:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

For the second measurement the EUT is set to transmit on the highest channel (2480 MHz). The higher band edge is 2483.5 MHz.

Analyzer settings for conducted measurement:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

Test Requirements / Limits

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the

acc. Title 47 CFR chapter I part 15 subpart C
desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

...
Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the measurement of the lower band edge the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

For the measurement of the higher band edge the limit is "specified in Section 15.209(a)".

Power density

Standard FCC Part 15, 10-1-11 Subpart C

The test was performed according to: FCC §15.31

Test Description

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: Peak-Maxhold
- Resolution Bandwidth (RBW): 3 kHz
- Video Bandwidth (VBW): 30 kHz
- Sweep Time: Coupled

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

...
The same method of determining the conducted output power shall be used to determine the power spectral density.

FCC and IC Correlation of measurement requirements

The following tables show the correlation of measurement requirements for Bluetooth equipment and Digital Apparatus from FCC and IC standards.

Bluetooth® equipment:

Measurement	FCC reference	IC reference
Conducted emissions on AC mains	§ 15.207	RSS-Gen: 7.2.4
Occupied bandwidth	§ 15.247 (a) (1)	RSS-210: A8.1
Peak power output	§ 15.247 (b) (1)	RSS-210: A8.4
Spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen: 6; RSS-210: A8.5
Spurious radiated emissions	§ 15.247 (d)	RSS-Gen: 6; RSS-210: A8.5
Band edge compliance	§ 15.247 (d)	RSS-210: A8.5
Dwell time	§ 15.247 (a) (1) (iii)	RSS-210: A8.1
Channel separation	§ 15.247 (a) (1)	RSS-210: A8.1
No. of hopping frequencies	§ 15.247 (a) (1) (iii)	RSS-210: A8.1
Antenna requirement	§ 15.203 / 15.204	RSS-Gen: 7.1.2

Digital Apparatus:

Measurement	FCC reference	IC reference
Conducted Emissions(AC Power Line)	§15.107	ICES-003


Spurious Radiated Emissions

§15.109

ICES-003

acc. Title 47 CFR chapter I part 15 subpart C

Setup Drawings

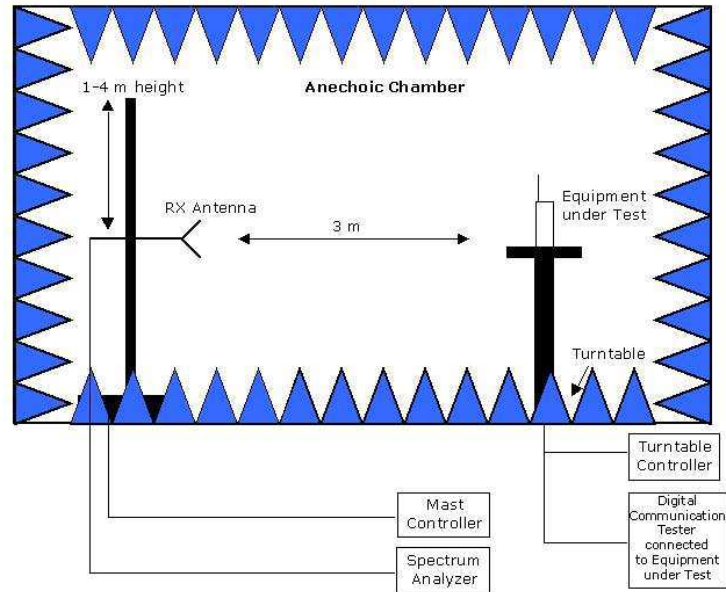

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Setup in the Anechoic chamber:

Measurements below 1 GHz: Semi-anechoic, conducting ground plane.

Measurements above 1 GHz: Fully-anechoic, absorbers on all surfaces



6 Index

1 Administrative Data	2
1.1 Project Data	2
1.2 Applicant Data	2
1.3 Test Laboratory Data	2
1.4 Signature of the Testing Responsible	3
1.5 Signature of the Accreditation Responsible	3
2 Test Object Data	3
2.1 General OUT Description	3
2.2 Detailed Description of OUT Samples	4
2.3 OUT Features	5
2.4 Auxiliary Equipment	5
2.5 Setups used for Testing	5
3 Results	6
3.1 General	6
3.2 List of the Applicable Body	6
3.3 List of Test Specification	6
3.4 Summary	7
3.5 Detailed Footnotes	10
3.6 Detailed Results	11
3.6.1 15c.1 Conducted emissions (AC power line) §15.207	11
3.6.2 15c.10 Power density §15.247 (e)	13
3.6.3 15c.11 6dB Bandwidth §15.247 (a) (2)	23
3.6.4 15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209	33
3.6.5 15c.3 Occupied bandwidth §15.247 (a) (1)	39
3.6.6 15c.4 Peak power output §15.247 (b) (1)	57
3.6.7 15c.5 Spurious RF conducted emissions §15.247 (d)	76
3.6.8 15c.6 Band edge compliance §15.247 (d)	85
4 Test Equipment Details	98



Reference: MDE_PARRO_1312_FCCa

acc. Title 47 CFR chapter I part 15 subpart C
98

4.1 List of Used Test Equipment	
5 Annex	105
5.1 Additional Information for Report	105
6 Index	114