



InterLab®

Final Report on

FC6050B

Report Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Date: August 06, 2012

Test Laboratory:

7Layers AG
Borsigstr. 11
40880 Ratingen
Germany

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7Layers AG
Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
www.7Layers.com

Aufsichtsratsvorsitzender •
Chairman of the Supervisory Board:
Ralf Mertens
Vorstand • Board:
Dr. H.-J. Meckelburg

Registergericht • registered in:
Düsseldorf, HRB 44096
USt-IdNr • VAT No.:
DE 203159652
TAX No. 147/5869/0385





1 Administrative Data

1.1 Project Data

Project Responsible: Imad Hjije
Date Of Test Report: 2012/08/06
Date of first test: 2012/06/16
Date of last test: 2012/07/10

1.2 Applicant Data

Company Name: Parrot S.A.
Street: 174 quai de Jemmapes
City: 75010 Paris
Country: Netherlands

Contact Person: Mr. Bruno Pellet
Function: Qualification
Phone: +33 (0) 1 48 03 60 60
Mobile: +33 (0) 1 48 03 61 13
E-Mail: bruno.pellet.ext@parrot.com

1.3 Test Laboratory Data

The following list shows all places and laboratories involved for test result generation:

7 layers DE

Company Name : 7 layers AG
Street : Borsigstrasse 11
City : 40880 Ratingen
Country : Germany
Contact Person : Mr. Michael Albert
Phone : +49 2102 749 201
Fax : +49 2102 749 444
E Mail : michael.albert@7Layers.de

Laboratory Details

Lab ID	Identification	Responsible	Accreditation Info
Lab 1	Conducted Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAkkS-Registration no. D-PL-12140-01-01
Lab 2	Radiated Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAkkS-Registration no. D-PL-12140-01-01
Lab 3	Regulatory Bluetooth RF Test Solution	Mr. Jimmy Chatheril Mr. Sören Berentzen	DAkkS-Registration no. D-PL-12140-01-01



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

1.4 Signature of the Testing Responsible

A handwritten signature in black ink, appearing to read 'C. Steinroeder'.

Carsten Steinroeder
responsible for tests performed in: Lab 1, Lab 2, Lab 3

1.5 Signature of the Accreditation Responsible

A handwritten signature in blue ink, appearing to read 'B. RETKA'.

Accreditation scope responsible person
responsible for Lab 1, Lab 2, Lab 3

2 Test Object Data

2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

OUT: FC6050B

Parameter List:

Parameter name	Value
Parameter for Scope FCC_v2:	
AC Power Supply	120 (V)
Antenna Gain	2.18
highest channel (BT)	2480 (MHz)
lowest channel (BT)	2402 (MHz)
mid channel (BT)	2441 (MHz)



2.2 Detailed Description of OUT Samples

Sample : a01

<i>OUT Identifier</i>	FC6050B		
<i>Sample Description</i>	Sample with external antenna		
<i>Serial No.</i>	PF811005AA2E000115		
<i>HW Status</i>	HW 02		
<i>SW Status</i>	1.08.40		
<i>Low Voltage</i>	3.1 V	<i>Low Temp.</i>	-40 °C
<i>High Voltage</i>	3.6 V	<i>High Temp.</i>	+85 °C
<i>Nominal Voltage</i>	3.3 V	<i>Normal Temp.</i>	+20 °C

Parameter List:

Parameter Description	Value
Parameter for Scope FCC_v2	
Antenna Gain	2.18 (dBi)
Frequency_high	2480 (MHz)
Frequency_low	2402 (MHz)
Frequency_mid	2441 (MHz)

Sample : b01

<i>OUT Identifier</i>	FC6050B		
<i>Sample Description</i>	condcted sample		
<i>Serial No.</i>	PF811005AA2E000118		
<i>HW Status</i>	HW 02		
<i>SW Status</i>	1.08.40		
<i>Low Voltage</i>	3.1 V	<i>Low Temp.</i>	-40 °C
<i>High Voltage</i>	3.6 V	<i>High Temp.</i>	+85 °C
<i>Nominal Voltage</i>	3.3 V	<i>Normal Temp.</i>	+20 °C

Parameter List:

Parameter Description	Value
Parameter for Scope FCC_v2	
Antenna Gain	2.18 (dBi)
Frequency_high	2480 (MHz)
Frequency_low	2402 (MHz)
Frequency_mid	2441 (MHz)

Sample : c01 int

<i>OUT Identifier</i>	FC6050B		
<i>Sample Description</i>	Sample with internal antenna		
<i>Serial No.</i>	PF811002AA2B000450		
<i>HW Status</i>	HW 02		
<i>SW Status</i>	1.08.40		
<i>Low Voltage</i>	3.1 V	<i>Low Temp.</i>	-40 °C
<i>High Voltage</i>	3.6 V	<i>High Temp.</i>	+85 °C
<i>Nominal Voltage</i>	3.3 V	<i>Normal Temp.</i>	+20 °C

Parameter List:

<i>Parameter Description</i>	<i>Value</i>
Parameter for Scope FCC_v2	
Antenna Gain	2.18 (dBi)
Frequency_high	2480 (MHz)
Frequency_low	2402 (MHz)
Frequency_mid	2441 (MHz)

2.3 OUT Features

Features for OUT: FC6050B

<i>Designation</i>	<i>Description</i>	<i>Allowed Values</i>	<i>Supported Value(s)</i>
Features for scope: FCC_v2			
AC	The OUT is powered by or connected to AC Mains		
BT	EUT supports Bluetooth data rate of 1 Mbps with GFSK modulation in the band 2400 MHz - 2483.5 MHz		
Eant	removable antenna supplied and type tested with the radio equipment, designed as an indispensable part of the equipment		
EDR2	EUT supports Bluetooth using data rate of 2 Mbps with PI/4 DQPSK modulation in the band 2400 MHz - 2483.5 MHz		
EDR3	EUT supports Bluetooth using data rate of 3 Mbps with 8DPSK modulation in the band 2400 MHz - 2483.5 MHz		
Iant	Integral Antenna: permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment		

2.4 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

Setup No.	List of OUT samples		List of auxiliary equipment	
	Sample No.	Sample Description	AE No.	AE Description

A01 (Radiated Setup)

Sample: a01 Sample with external antenna

A01_15b (Computer peripheral setup)

Sample: a01	Sample with external antenna	AE AUX4	Keyboard
		AE AUX3	TFT Display
		AE AUX5	Mouse
		AE AUX1	Laptop Toshiba Tecra M9
		AE AUX2	AC/DC adapter for Laptop

B01 (Conducted Setup)

Sample: b01 condcted sample

C01_INT (Radiated Setup)

Sample: c01_int Sample with internal antenna

3 Results

3.1 General

Documentation of tested devices: Available at the test laboratory.

Interpretation of the test results: The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.

In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.

In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.

Note:

1) The laboratory environmental conditions are available and recorded in the Interlab System.

2) Special Software for testing:

The OUT was connected to a Laptop via Serial/USB connection to set the test modes.
The OUT automatically starts up in Bluetooth Test Mode.
The specific test modes could be set and controlled by the signalling unit "CBT" by Rohde&Schwarz over the air.



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

3.2 List of the Applicable Body

(Body for Scope: FCC_v2)

<i>Designation</i>	<i>Description</i>
FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES	Subpart C - Intentional Radiators; 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

3.3 List of Test Specification

<i>Test Specification:</i>	FCC part 2 and 15
<i>Version</i>	10-1-11 Edition
<i>Title:</i>	PART 2 - GENERAL RULES AND REGULATIONS PART 15 - RADIO FREQUENCY DEVICES

3.4 Summary

Test Case Identifier / Name	Result	Date of Test	Lab Ref.	Setup
15c.1 Conducted emissions (AC power line) §15.207				
15c.1; Mode = transmit	Passed	2012/07/10	Lab 1	A01_15b
15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209				
15c.2; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = low	Passed	2012/06/26	Lab 2	A01
15c.2; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/26	Lab 2	C01_INT
15c.2; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/22	Lab 2	C01_INT
15c.2; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = mid	Passed	2012/06/26	Lab 2	A01
15c.2; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/26	Lab 2	C01_INT
15c.2; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/22	Lab 2	C01_INT
15c.2; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = highest	Passed	2012/06/26	Lab 2	A01
15c.2; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/26	Lab 2	C01_INT
15c.2; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/22	Lab 2	C01_INT
15c.3 Occupied bandwidth §15.247 (a) (1)				
15c.3; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/16	Lab 3	B01
15c.3; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/16	Lab 3	B01
15c.3; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/16	Lab 3	B01
15c.3; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/16	Lab 3	B01
15c.3; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/16	Lab 3	B01
15c.3; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/16	Lab 3	B01
15c.3; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/16	Lab 3	B01
15c.3; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/16	Lab 3	B01
15c.3; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/16	Lab 3	B01

Test Case Identifier / Name	Result	Date of Test	Lab Ref.	Setup
acc. Title 47 CFR chapter I part 15 subpart C				
Test (condition)				
15c.4 Peak power output §15.247 (b) (1)				
15c.4; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/16	Lab 3	A01
15c.4; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/16	Lab 3	A01
15c.4; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/16	Lab 3	B01
15c.4; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/16	Lab 3	A01
15c.4; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/16	Lab 3	A01
15c.4; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/16	Lab 3	B01
15c.4; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/16	Lab 3	A01
15c.4; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/16	Lab 3	A01
15c.4; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/16	Lab 3	B01
15c.5 Spurious RF conducted emissions §15.247 (d)				
15c.5; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/16	Lab 3	A01
15c.5; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/16	Lab 3	A01
15c.5; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/16	Lab 3	B01
15c.5; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/16	Lab 3	A01
15c.5; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/16	Lab 3	A01
15c.5; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/16	Lab 3	B01
15c.5; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/16	Lab 3	A01
15c.5; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/16	Lab 3	A01
15c.5; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/16	Lab 3	B01

Test Case Identifier / Name	Result	Date of Test	Lab Ref.	Setup
15c.6 Band edge compliance §15.247 (d)				acc. Title 47 CFR chapter I part 15 subpart C
15c.6; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = conducted	Passed	2012/06/16	Lab 3	A01
15c.6; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = conducted	Passed	2012/06/16	Lab 3	A01
15c.6; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = conducted	Passed	2012/06/16	Lab 3	B01
15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = conducted	Passed	2012/06/16	Lab 3	A01
15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = radiated	Passed	2012/06/26	Lab 2	A01
15c.6; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = conducted	Passed	2012/06/22	Lab 2	C01_INT
15c.6; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = radiated	Passed	2012/06/16	Lab 3	A01
15c.6; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = conducted	Passed	2012/06/26	Lab 2	A01
15c.6; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = radiated	Passed	2012/06/22	Lab 2	C01_INT
15c.6; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = radiated	Passed	2012/06/16	Lab 3	B01
15c.6; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = radiated	Passed	2012/06/26	Lab 2	A01
15c.6; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = radiated	Passed	2012/06/22	Lab 2	C01_INT
15c.7 Dwell time §15.247 (a) (1) (iii)				
15c.7; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/16	Lab 3	A01
15c.7; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/16	Lab 3	A01
15c.7; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/16	Lab 3	B01
15c.8 Channel separation §15.247 (a) (1)				
15c.8; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/16	Lab 3	A01
15c.8; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/16	Lab 3	A01
15c.8; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/16	Lab 3	B01
15c.9 Number of hopping frequencies §15.247 (a) (1) (iii)				
15c.9; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/16	Lab 3	A01
15c.9; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/16	Lab 3	A01
15c.9; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/16	Lab 3	B01



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.1; Mode = transmit

Result: Passed

Setup No.: A01_15b

Date of Test: 2012/07/10 12:45

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES


Test Specification: FCC part 2 and 15

Detailed Results:
AC MAINS CONDUCTED

EUT: (CX390a01) / 25.06.2012
 Manufacturer:
 Operating Condition: BT TX on 2441MHz, loopback mode, Packettype: 1-DH1
 Test Site: 7 layers Ratingen
 Operator: Doe
 Test Specification: ANSI C63.4; FCC 15.107 / 15.207
 Comment:
 Start of Test: 25.06.2012 / 14:54:45

SCAN TABLE: "FCC Voltage"

Short Description:			FCC Voltage			
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time	Transducer
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	100.0 ms	9 kHz	ESH3-Z5
			Average			

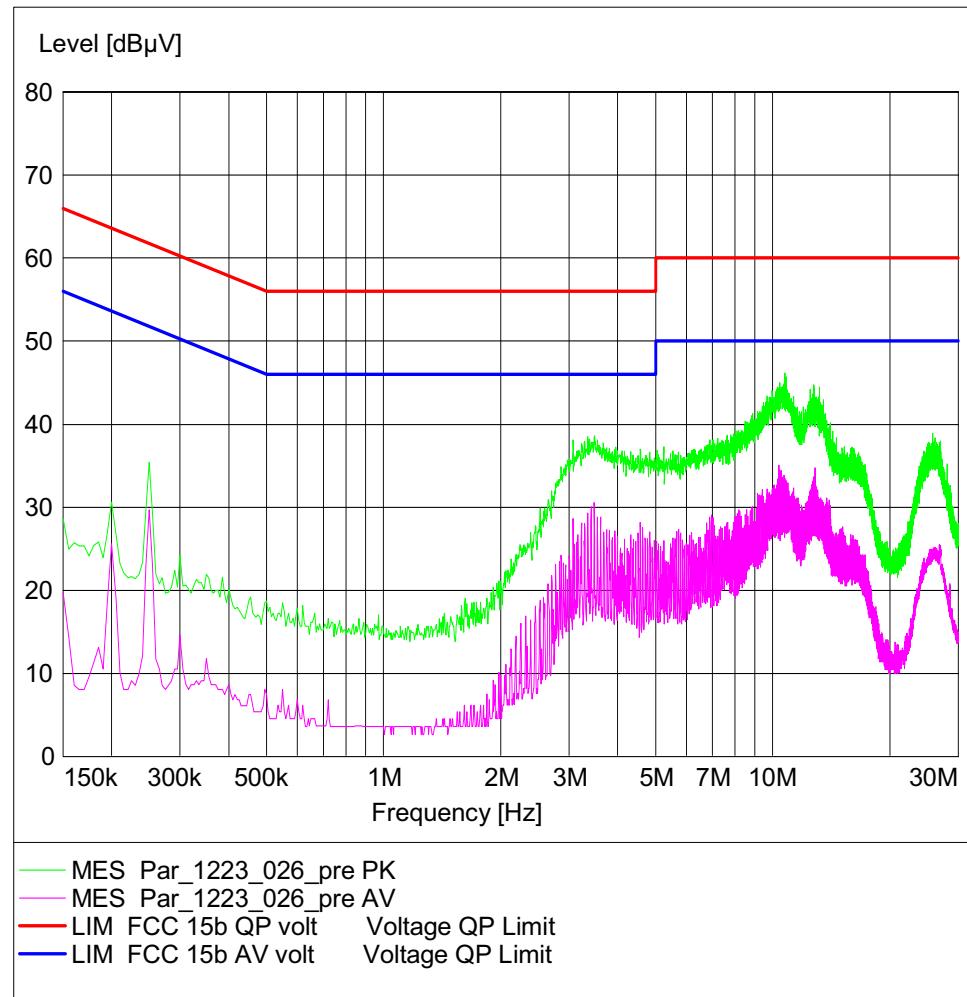



3.5.2 15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209

Test1: 15c.2; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = low

Result: Passed

Setup No.: A01

Date of Test: 2012/06/26 19:31

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2402 MHz					1-DH1			
Frequency range 30 MHz - 1 GHz								
Ant. Polar.	Limit QPK [dB μ V]	Frequency [MHz]	Corrected value QPK [dB μ V]	Result				
Ver + Hor				Passed				
Frequency range 1 GHz - 25 GHz								
Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	1387	48.71	37.99	25.29	16.01	Passed
	74	54	1664	46.66	36.02	27.34	17.98	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test2: 15c.2; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = low

Result: Passed

Setup No.: C01_INT

Date of Test: 2012/06/26 18:57

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:
Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2402 MHz 1-DH1
Frequency range 30 MHz - 1 GHz

Ant. Polar.	Limit QPK [dB μ V]	Frequency [MHz]	Corrected value QPK [dB μ V]	Margin QPK [dB]	Result
Ver + Hor	40	38	32.00	8.00	Passed
Ver + Hor	44	136	34.70	8.80	Passed
Ver + Hor	46	272	29.60	16.40	Passed
Ver + Hor	46	328	37.00	9.00	Passed
Ver + Hor	46	400	36.50	9.50	Passed

Frequency range 1 GHz - 25 GHz

Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54						Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
Test1: 15c.2; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: C01_INT

Date of Test: 2012/06/22 4:28

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:
Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2441 MHz 2-DH1
Frequency range 1 GHz - 8 GHz

Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	-	-	-	-	-	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
Test2: 15c.2; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2012/06/26 19:37

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:
Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2402 MHz 2-DH1
Frequency range 1 GHz - 8 GHz

Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	1110	45.62	34.70	28.38	19.30	Passed
	74	54	1664	46.53	36.20	27.47	17.80	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test1: 15c.2; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed
 Setup No.: C01_INT
 Date of Test: 2012/06/22 4:36
 Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
 Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2402 MHz 3-DH1

Frequency range 1 GHz - 8 GHz

Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	-	-	-	-	-	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test2: 15c.2; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed
 Setup No.: A01
 Date of Test: 2012/06/26 19:38
 Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
 Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2402 MHz 3-DH1

Frequency range 1 GHz - 8 GHz

Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	1387	49.78	39.29	24.22	14.71	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test1: 15c.2; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = mid

Result: Passed
 Setup No.: A01
 Date of Test: 2012/06/26 19:33
 Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
 Test Specification: FCC part 2 and 15

**Detailed Results:****Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2441 MHz 1-DH1****Frequency range 9 kHz - 1 GHz**

Ant. Polar.	Limit QPK [dB μ V]	Frequency y [MHz]	Corrected value QPK [dB μ V]	Result
Ver + Hor				Passed

Frequency range 1 GHz - 25 GHz

Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	1110	44.45	34.70	29.55	19.30	Passed
	74	54	1664	46.92	36.28	27.08	17.72	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.**Test2: 15c.2; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = mid***Result:* Passed*Setup No.:* C01_INT*Date of Test:* 2012/06/26 19:05*Body:* FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES*Test Specification:* FCC part 2 and 15**Detailed Results:****Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2441 MHz 1-DH1****Frequency range 9 kHz - 1 GHz**

Ant. Polar.	Limit QPK [dB μ V]	Frequency y [MHz]	Corrected value QPK [dB μ V]	Result
Ver + Hor				Passed

Frequency range 1 GHz - 25 GHz

Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54				74.00	54.00	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.**Test1: 15c.2; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation***Result:* Passed*Setup No.:* C01_INT*Date of Test:* 2012/06/22 4:30*Body:* FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES*Test Specification:* FCC part 2 and 15

Detailed Results:
Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2441 MHz 2-DH1
Frequency range 1 GHz - 8 GHz

Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	-	-	-	-	-	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
Test2: 15c.2; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation
Result: Passed

Setup No.: A01

Date of Test: 2012/06/26 19:39

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:
Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2441 MHz 2-DH1
Frequency range 1 GHz - 8 GHz

Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	1110	44.60	34.62	29.40	19.38	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
Test1: 15c.2; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation
Result: Passed

Setup No.: C01_INT

Date of Test: 2012/06/22 4:34

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:
Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2441 MHz 3-DH1
Frequency range 1 GHz - 8 GHz

Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	-	-	-	-	-	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
Test2: 15c.2; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation
Result: Passed

Setup No.: A01

Date of Test: 2012/06/26 19:39

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

**Detailed Results:**

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2441 MHz							3-DH1	
Frequency range 1 GHz - 8 GHz								
Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	1387	49.21	38.17	24.79	15.83	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test1: 15c.2; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = highest

Result: Passed

Setup No.: A01

Date of Test: 2012/06/26 19:35

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2480 MHz					1-DH1	
Frequency range 30 MHz - 1 GHz						
Ant. Polar.	Limit QPK [dB μ V]	Frequency [MHz]	Corrected value QPK [dB μ V]	Result		
Ver + Hor				Passed		

Frequency range 1 GHz - 25 GHz

Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	1110	44.44	34.62	29.56	19.38	Passed
	74	54	1664	47.45	36.37	26.55	17.63	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test2: 15c.2; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = highest

Result: Passed

Setup No.: C01_INT

Date of Test: 2012/06/26 19:12

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

**Detailed Results:****Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2480 MHz 1-DH1****Frequency range 30 MHz - 1 GHz**

Ant. Polar.	Limit QPK [dB μ V]	Frequency [MHz]	Corrected value QPK [dB μ V]	Margin QPK [dB]	Result
Ver + Hor	40	38	28.70	11.30	Passed
	44	120	37.40	6.10	Passed
	44	136	34.80	8.70	Passed
	46	264	36.30	9.70	Passed
	46	272	38.00	8.00	Passed
	46	400	36.40	9.60	Passed

Frequency range 1 GHz - 25 GHz

Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54				74.00	54.00	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.**Test1: 15c.2; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation***Result:* Passed*Setup No.:* C01_INT*Date of Test:* 2012/06/22 4:32*Body:* FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES*Test Specification:* FCC part 2 and 15**Detailed Results:****Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2480 MHz 2-DH1****Frequency range 1 GHz - 8 GHz**

Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	-	-	-	-	-	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.**Test2: 15c.2; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation***Result:* Passed*Setup No.:* A01*Date of Test:* 2012/06/26 19:40*Body:* FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES*Test Specification:* FCC part 2 and 15

**Detailed Results:**

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2480 MHz								2-DH1	
Frequency range 1 GHz - 8 GHz									
Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result	
Ver + Hor	74	54	1110	44.60	34.62	29.40	19.38	Passed	
			1664	46.79	36.20	27.21	17.80	Passed	

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test1: 15c.2; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: C01_INT

Date of Test: 2012/06/22 4:34

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2480 MHz								3-DH1	
Frequency range 1 GHz - 8 GHz									
Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result	
Ver + Hor	74	54	-	-	-	-	-	Passed	

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test2: 15c.2; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2012/06/26 19:41

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2480 MHz								3-DH1	
Frequency range 1 GHz - 8 GHz									
Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result	
Ver + Hor	74	54	1387	48.85	37.39	25.15	16.61	Passed	

Remark: No (further) spurious emissions in the range 20 dB below the limit found.



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.3; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation

Result: Passed

Setup No.: B01

Date of Test: 2012/06/16 18:33


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
0.968

added by operator

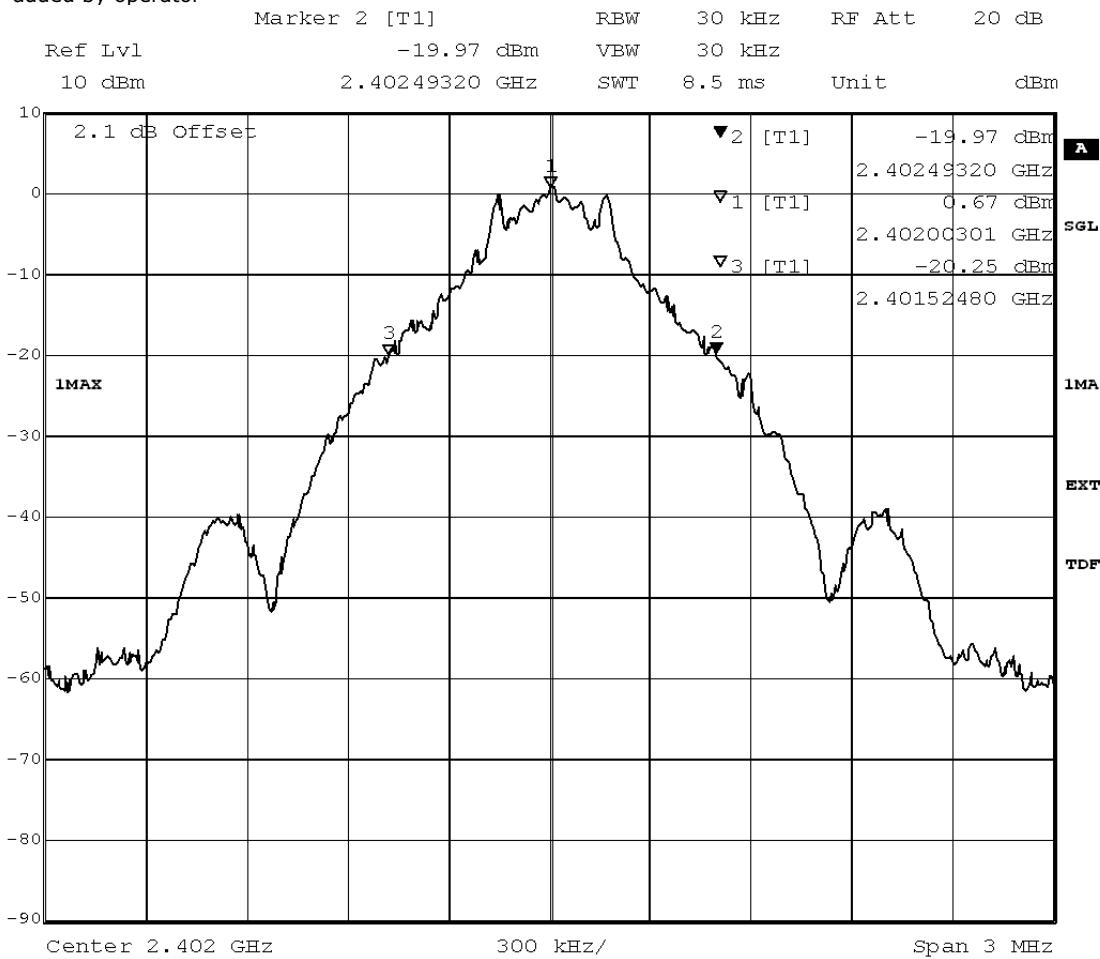

Title: 20dB Bandwidth
 Comment A: CH B: 2402 MHz; 20dB bandwidth (kHz):968.4
 Date: 16.JUN.2012 17:15:30

added by operator



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.3; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: B01

Date of Test: 2012/06/16 21:25


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
1.252

added by operator

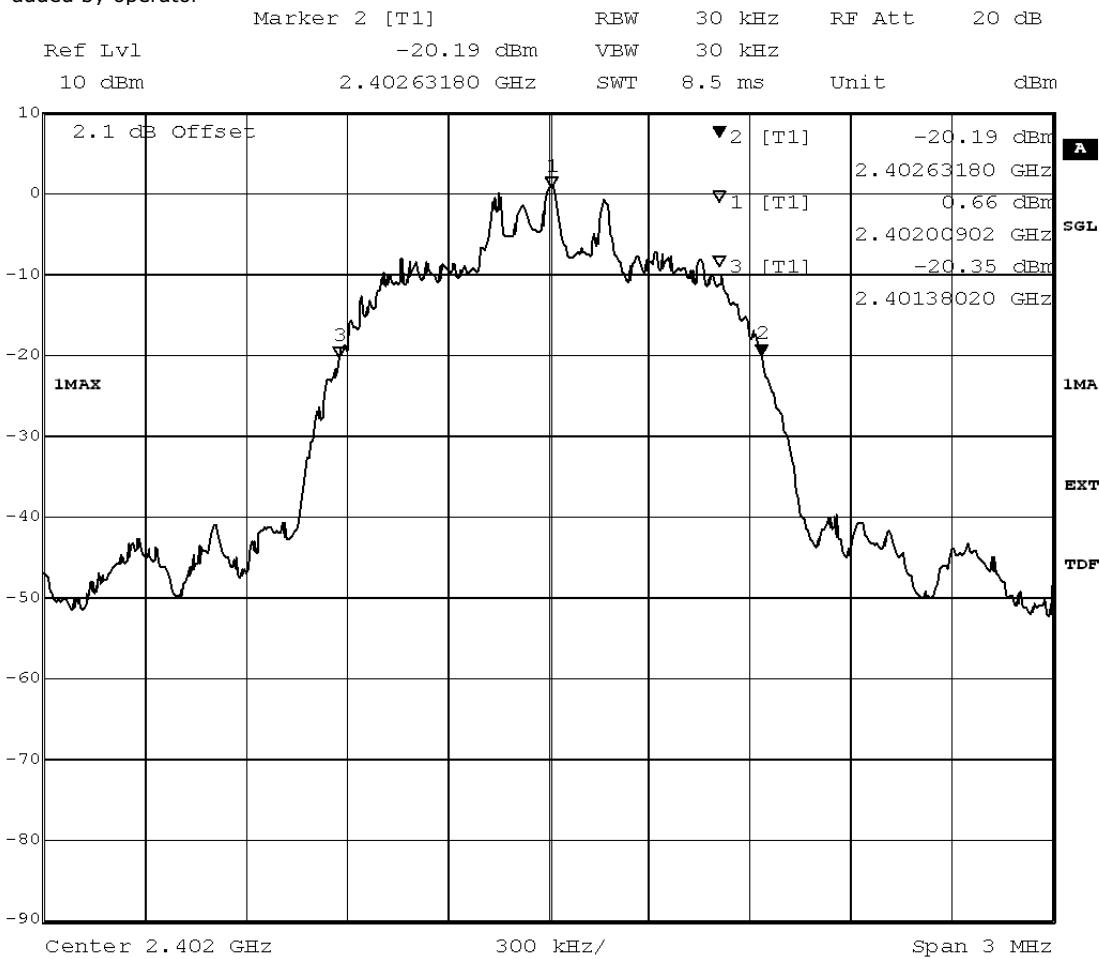

Title: 20dB Bandwidth
 Comment A: CH B: 2402 MHz; 20dB bandwidth (kHz):1251.6
 Date: 16.JUN.2012 19:48:50

added by operator



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.3; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: B01

Date of Test: 2012/06/16 22:07


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
1.312

added by operator

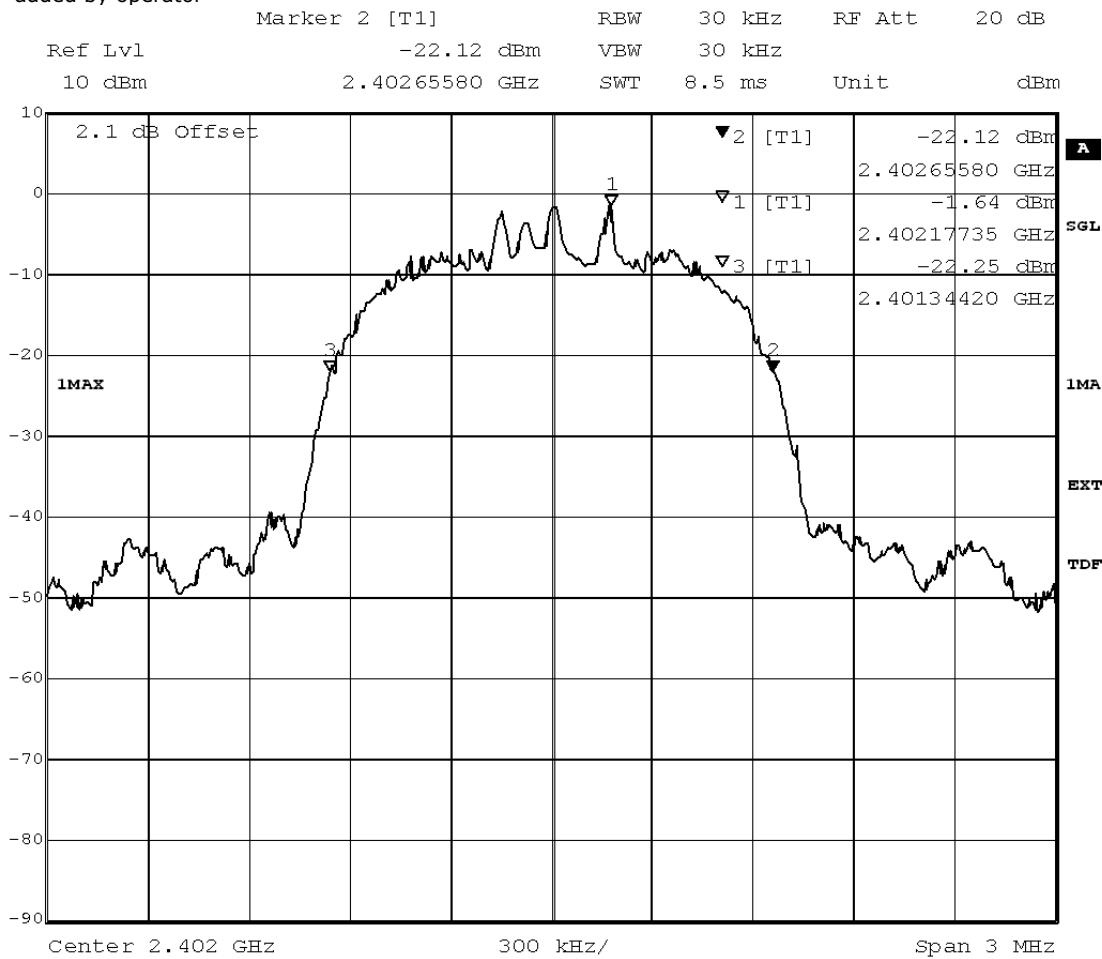

Title: 20dB Bandwidth
 Comment A: CH B: 2402 MHz; 20dB bandwidth (kHz):1311.6
 Date: 16.JUN.2012 21:10:56

added by operator



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.3; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation

Result: Passed

Setup No.: B01

Date of Test: 2012/06/16 18:36


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
0.968

added by operator

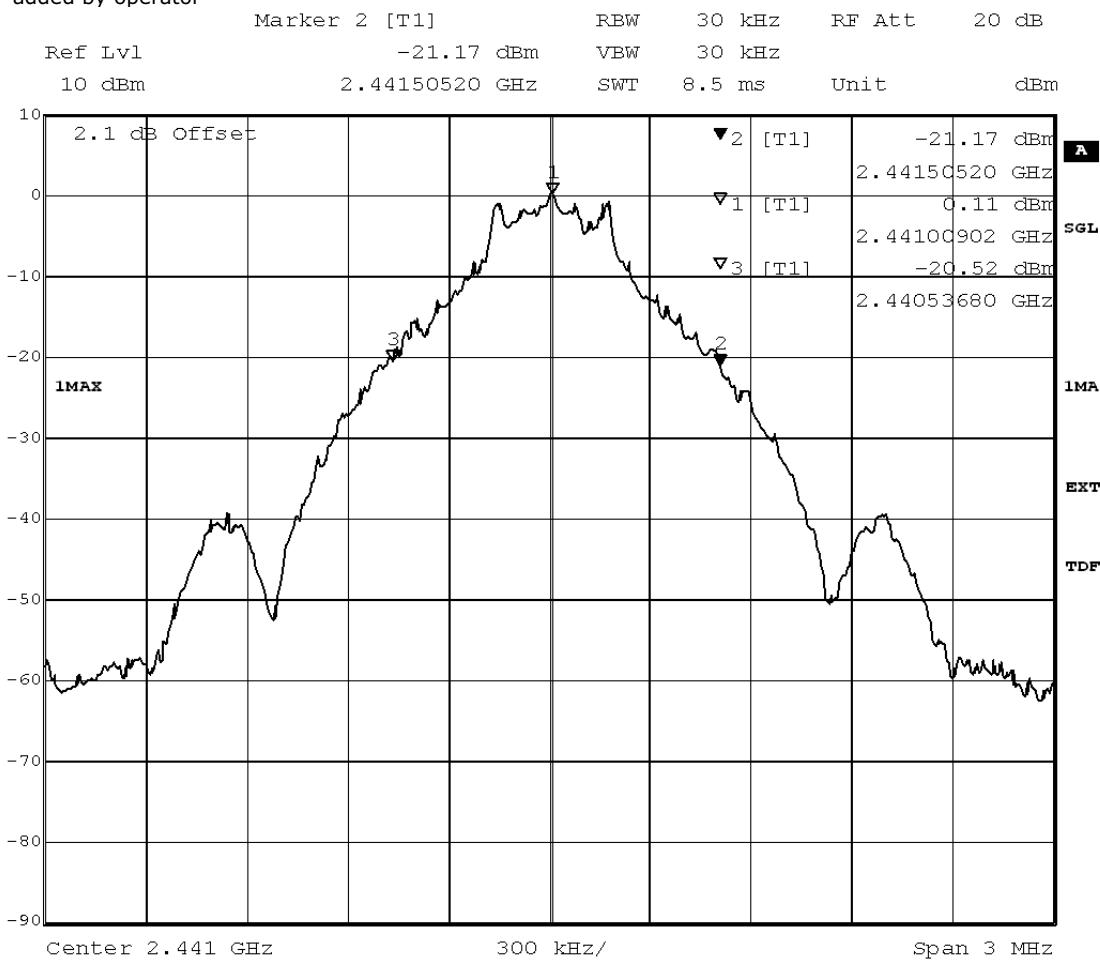

Title: 20dB Bandwidth
 Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz):968.4
 Date: 16.JUN.2012 17:51:51

added by operator



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.3; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: B01

Date of Test: 2012/06/16 21:28


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
1.312

added by operator

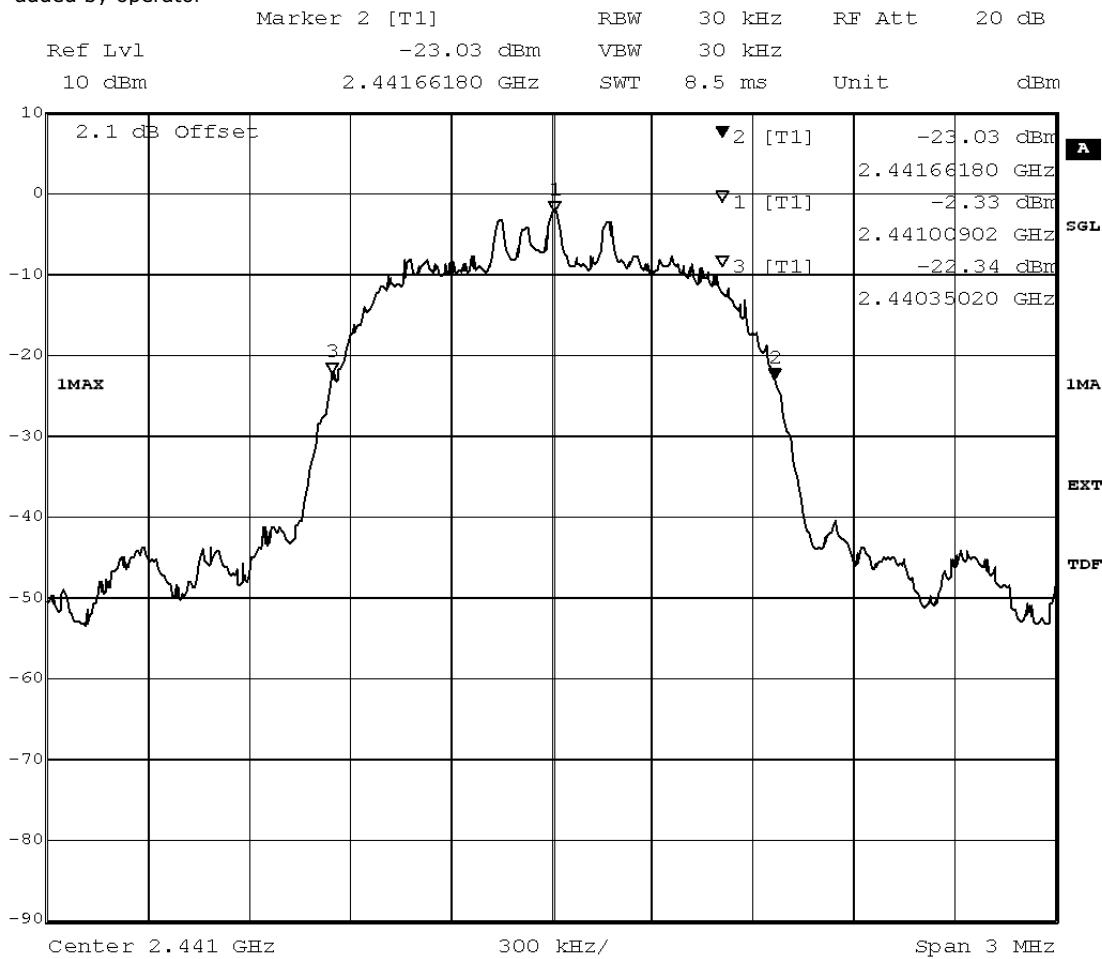

Title: 20dB Bandwidth
 Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz):1311.6
 Date: 16.JUN.2012 20:22:01

added by operator



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.3; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: B01

Date of Test: 2012/06/16 22:10


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
1.240

added by operator

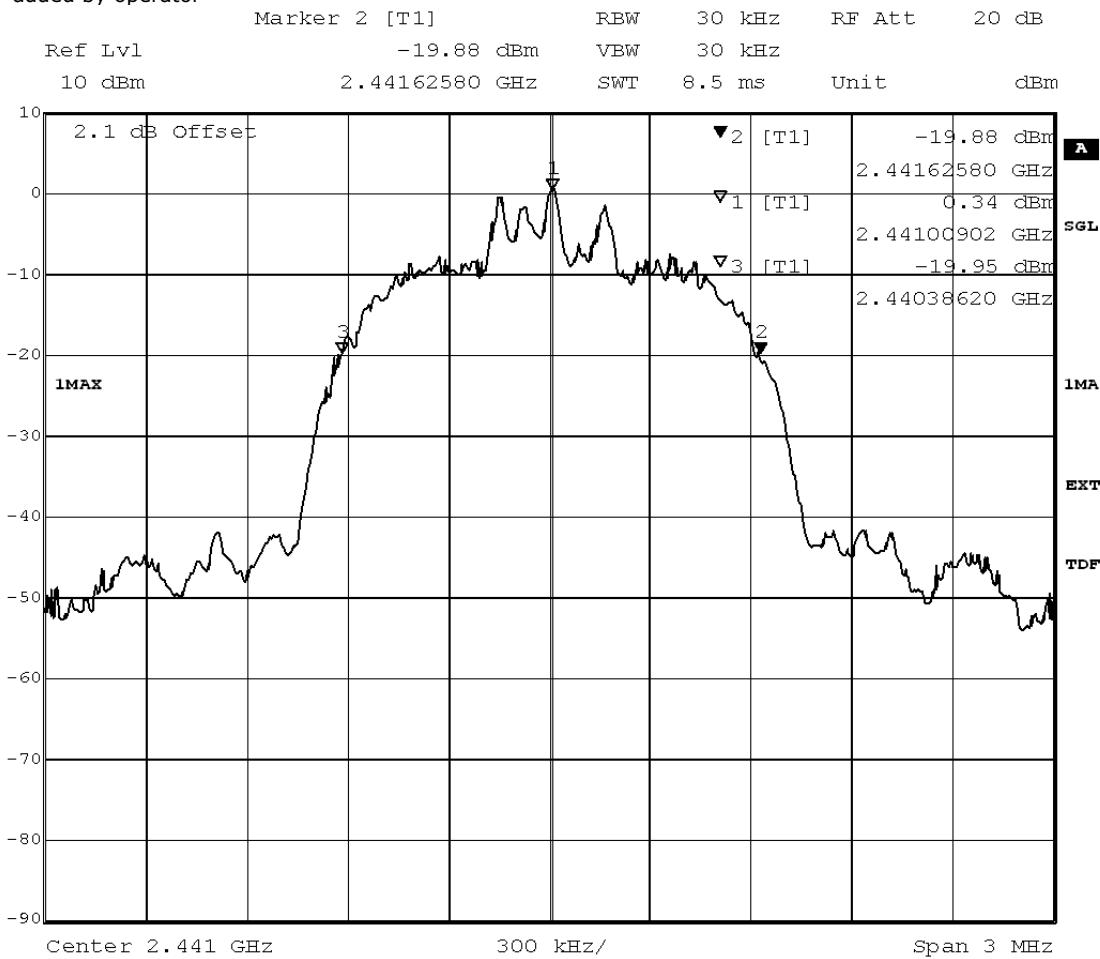

Title: 20dB Bandwidth
 Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz):1239.6
 Date: 16.JUN.2012 21:28:17

added by operator



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.3; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation

Result: Passed

Setup No.: B01

Date of Test: 2012/06/16 18:44


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
0.956

added by operator

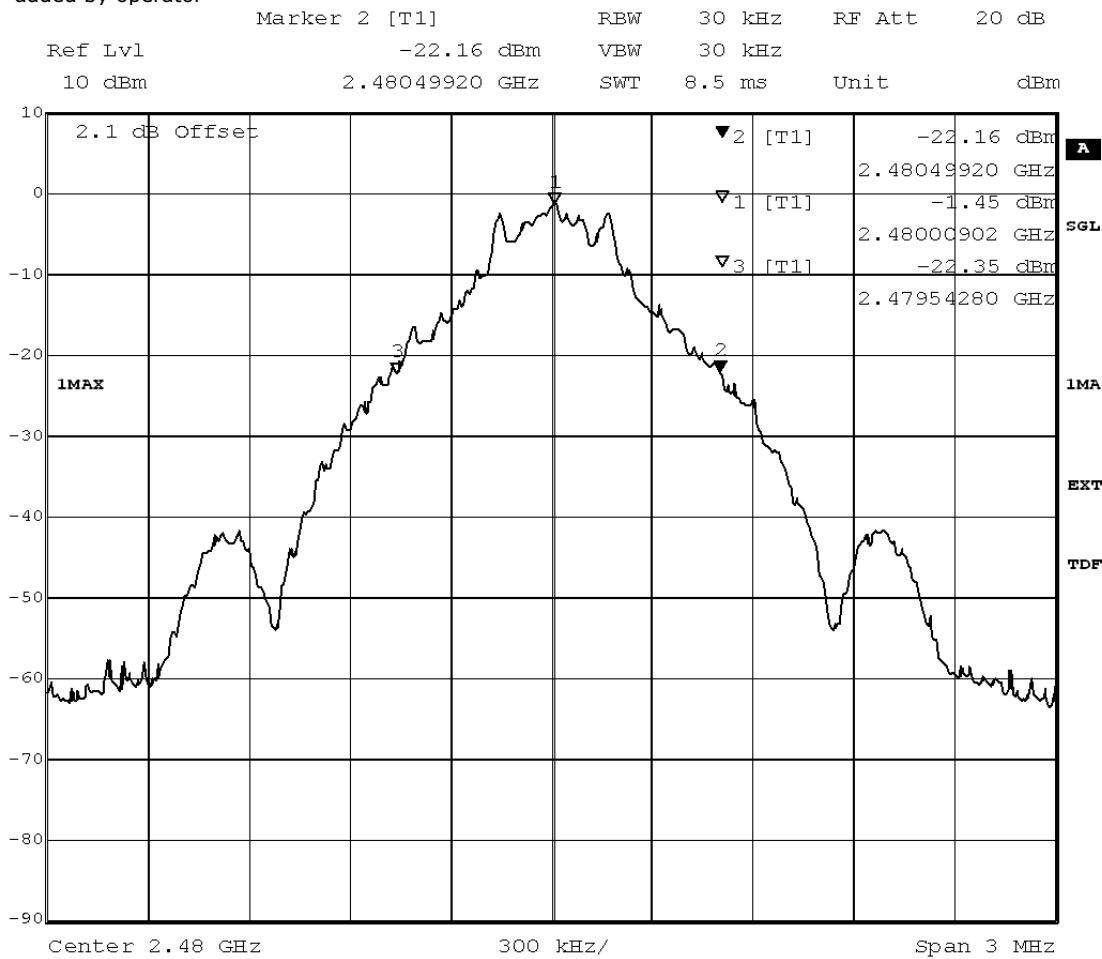

Title: 20dB Bandwidth
 Comment A: CH T: 2480 MHz; 20dB bandwidth (kHz):956.4
 Date: 16.JUN.2012 18:18:56

added by operator



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.3; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: B01

Date of Test: 2012/06/16 21:31


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
1.264

added by operator

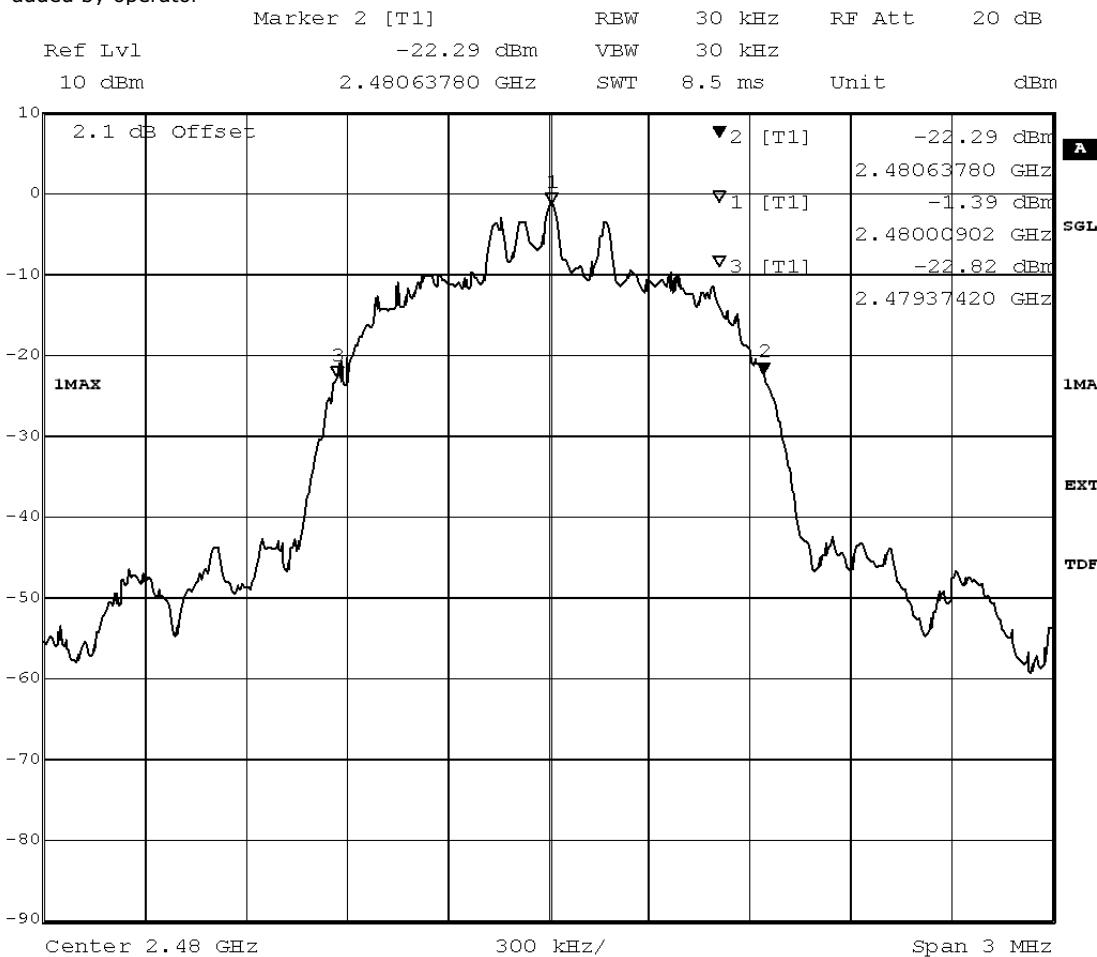

Title: 20dB Bandwidth
 Comment A: CH T: 2480 MHz; 20dB bandwidth (kHz):1263.6
 Date: 16.JUN.2012 20:48:56

added by operator



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.3; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: B01

Date of Test: 2012/06/16 22:14


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
1.312

added by operator

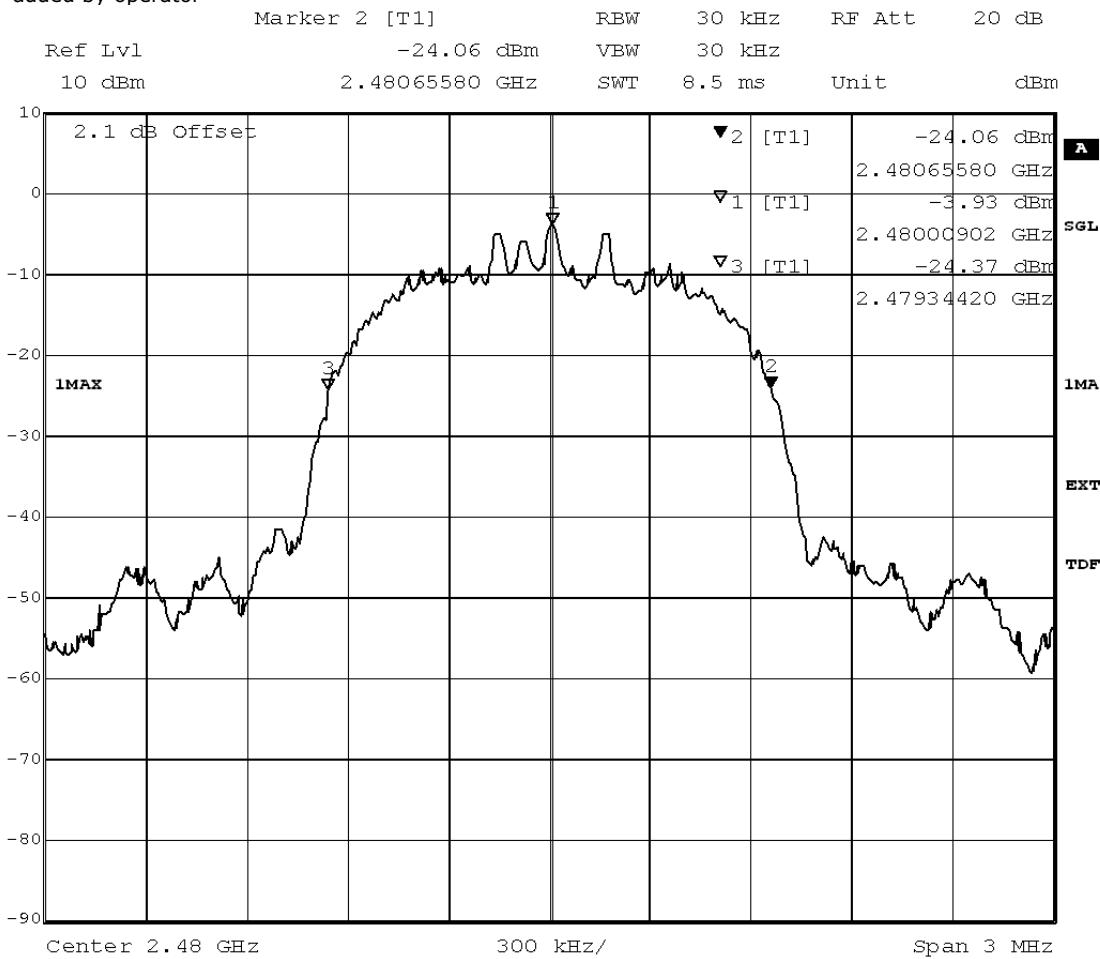

Title: 20dB Bandwidth
 Comment A: CH T: 2480 MHz; 20dB bandwidth (kHz):1311.6
 Date: 16.JUN.2012 21:53:22

added by operator



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2012/06/16 18:33


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
1.81	2.18	3.99

added by operator

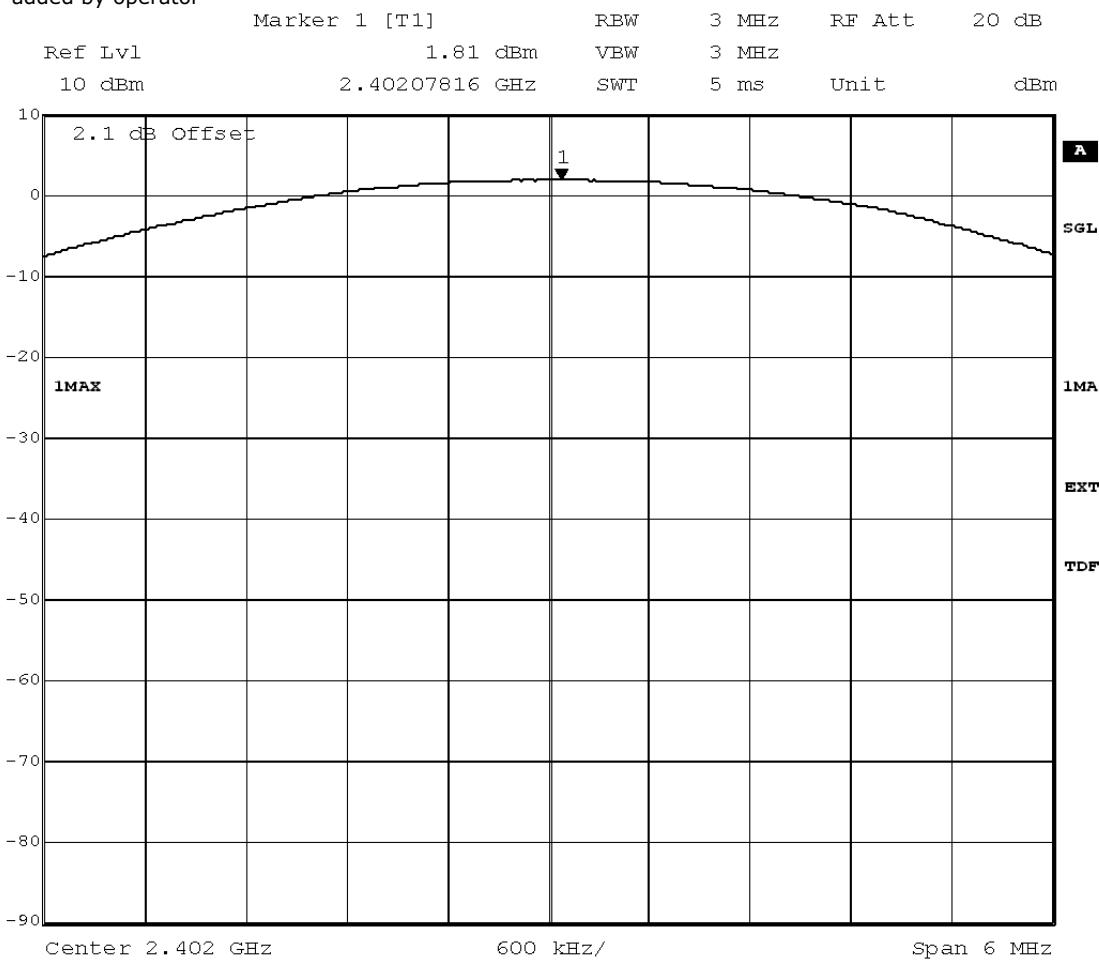

Title: Peak outputpower Power
 Comment A: CH B: 2402 MHz
 Date: 16.JUN.2012 17:16:03

added by operator



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2012/06/16 21:25


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
1.92	2.18	4.10

added by operator

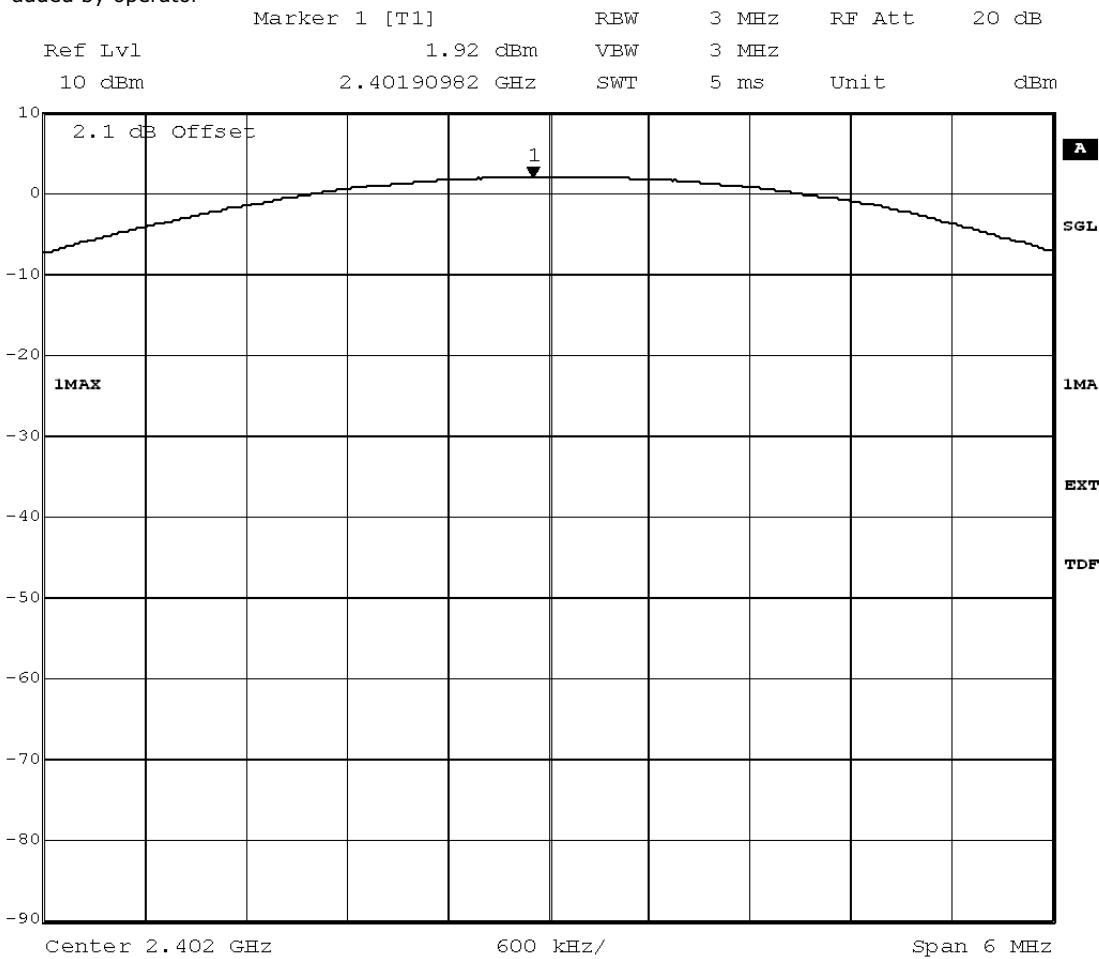

Title: Peak outputpower Power
 Comment A: CH B: 2402 MHz
 Date: 16.JUN.2012 19:49:23

added by operator



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: B01

Date of Test: 2012/06/16 22:07


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
1.79	2.18	3.97

added by operator

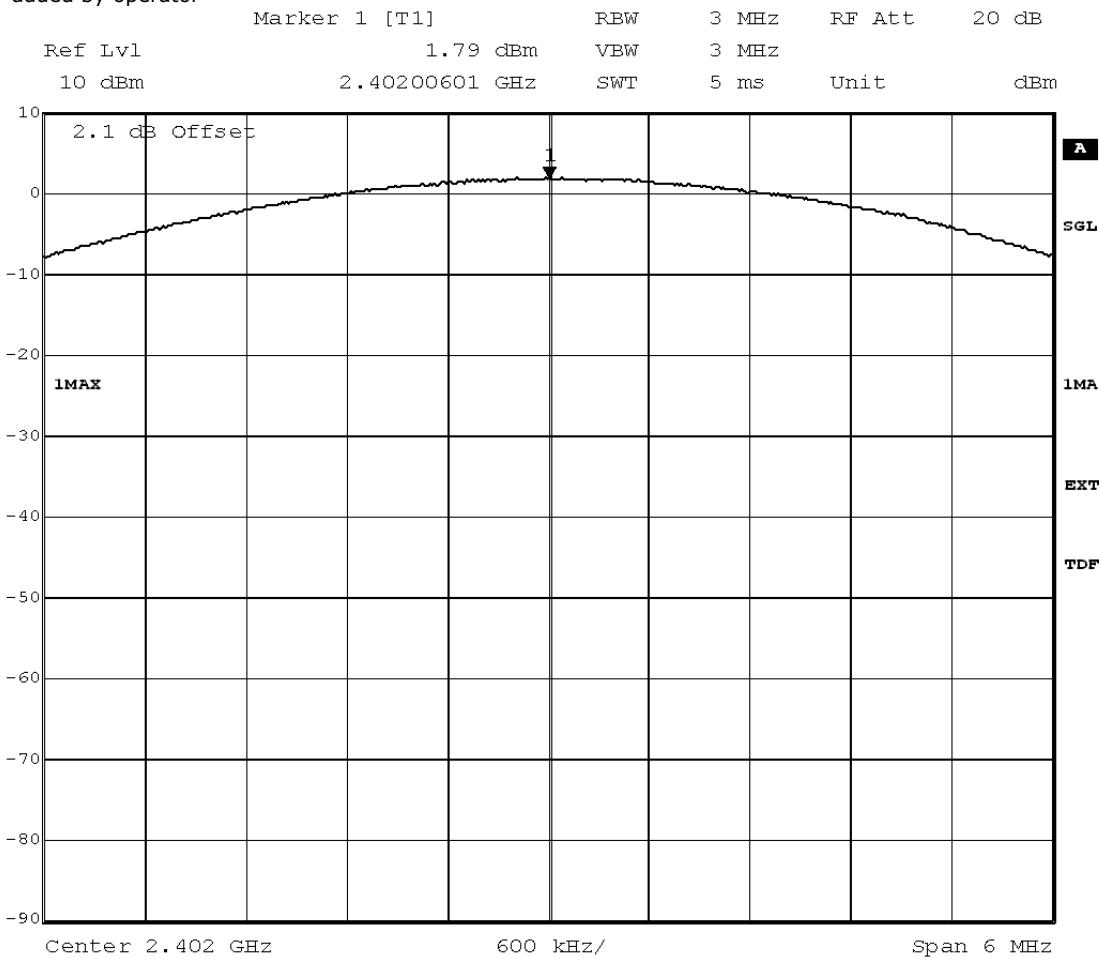

Title: Peak outputpower Power
 Comment A: CH B: 2402 MHz
 Date: 16.JUN.2012 21:11:29

added by operator



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2012/06/16 18:37


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
1.34	2.18	3.52

added by operator

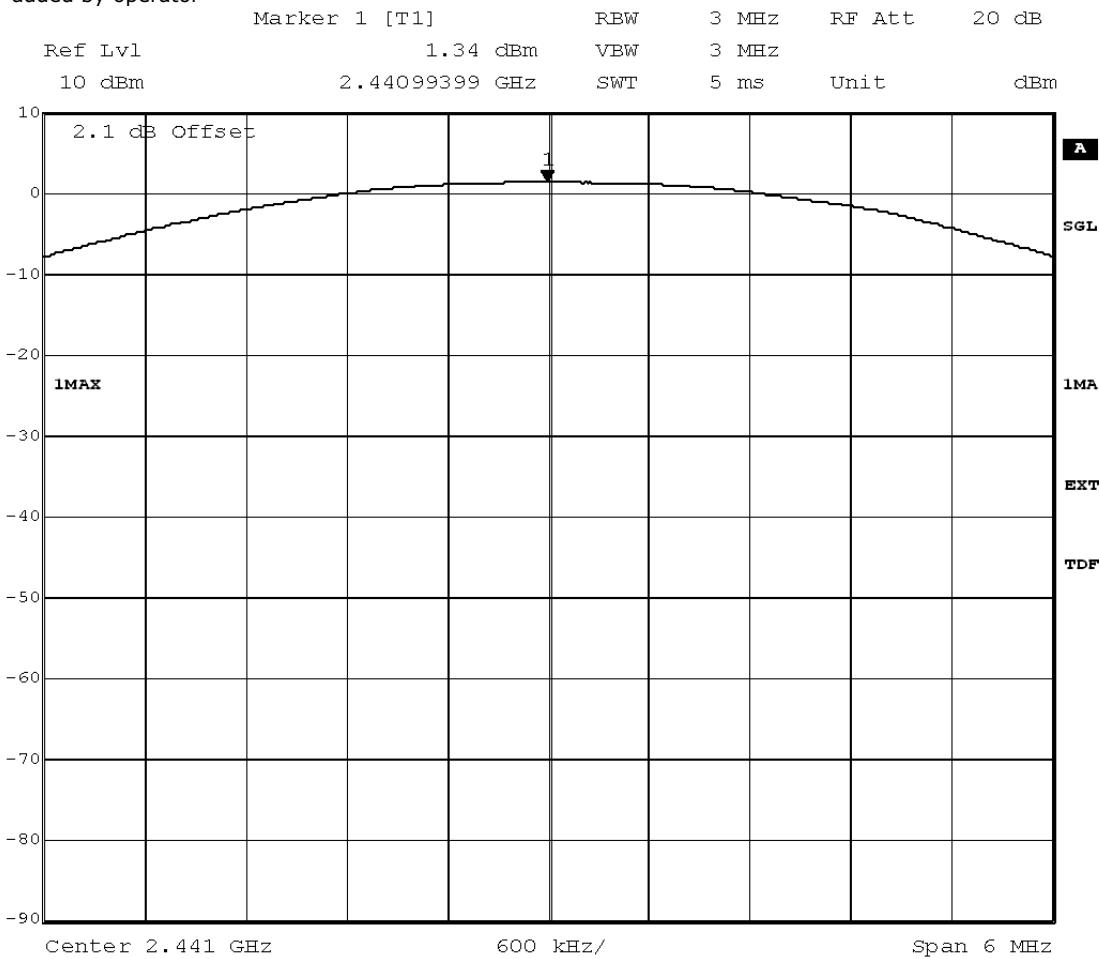

Title: Peak outputpower Power
 Comment A: CH M: 2441 MHz
 Date: 16.JUN.2012 17:52:23

added by operator



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2012/06/16 21:28


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
0.77	2.18	2.95

added by operator

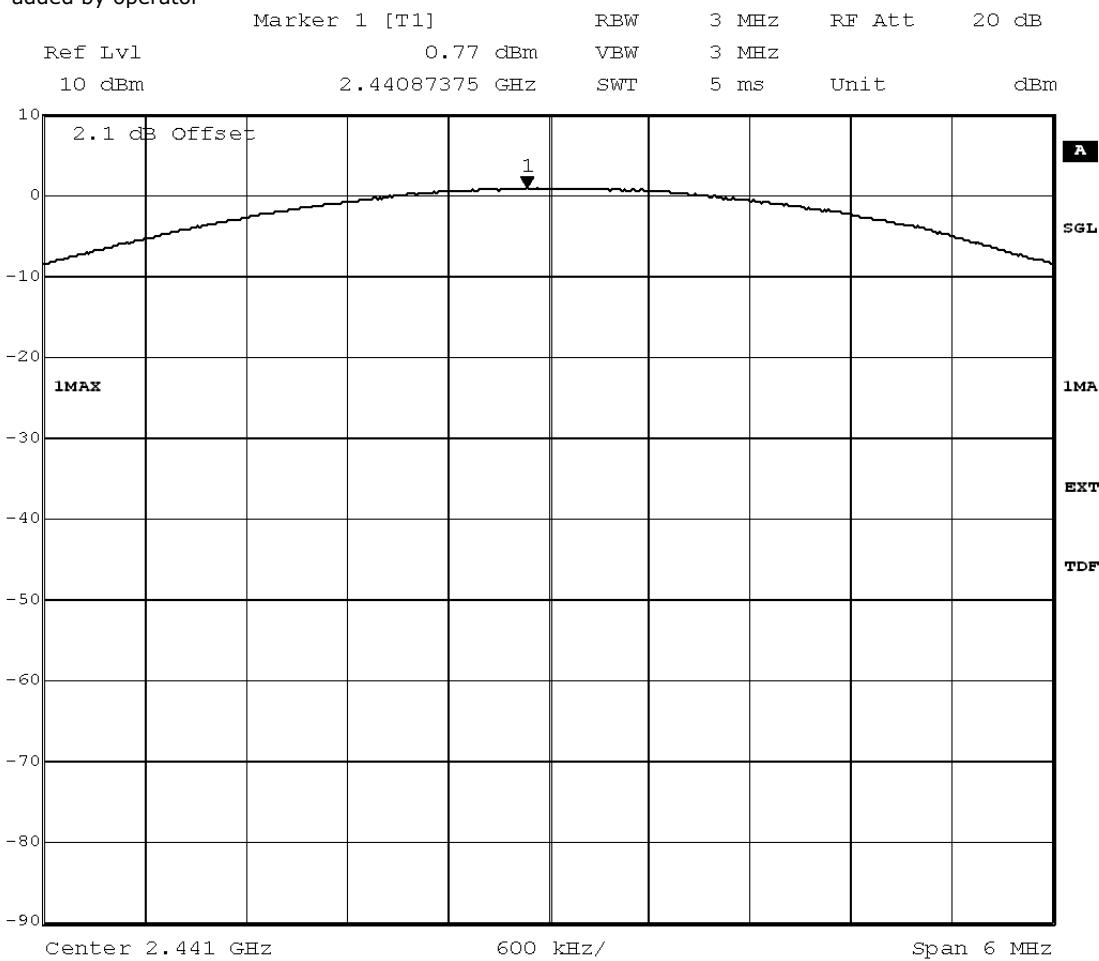

Title: Peak outputpower Power
 Comment A: CH M: 2441 MHz
 Date: 16.JUN.2012 20:22:34

added by operator



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: B01

Date of Test: 2012/06/16 22:10


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
1.36	2.18	3.54

added by operator

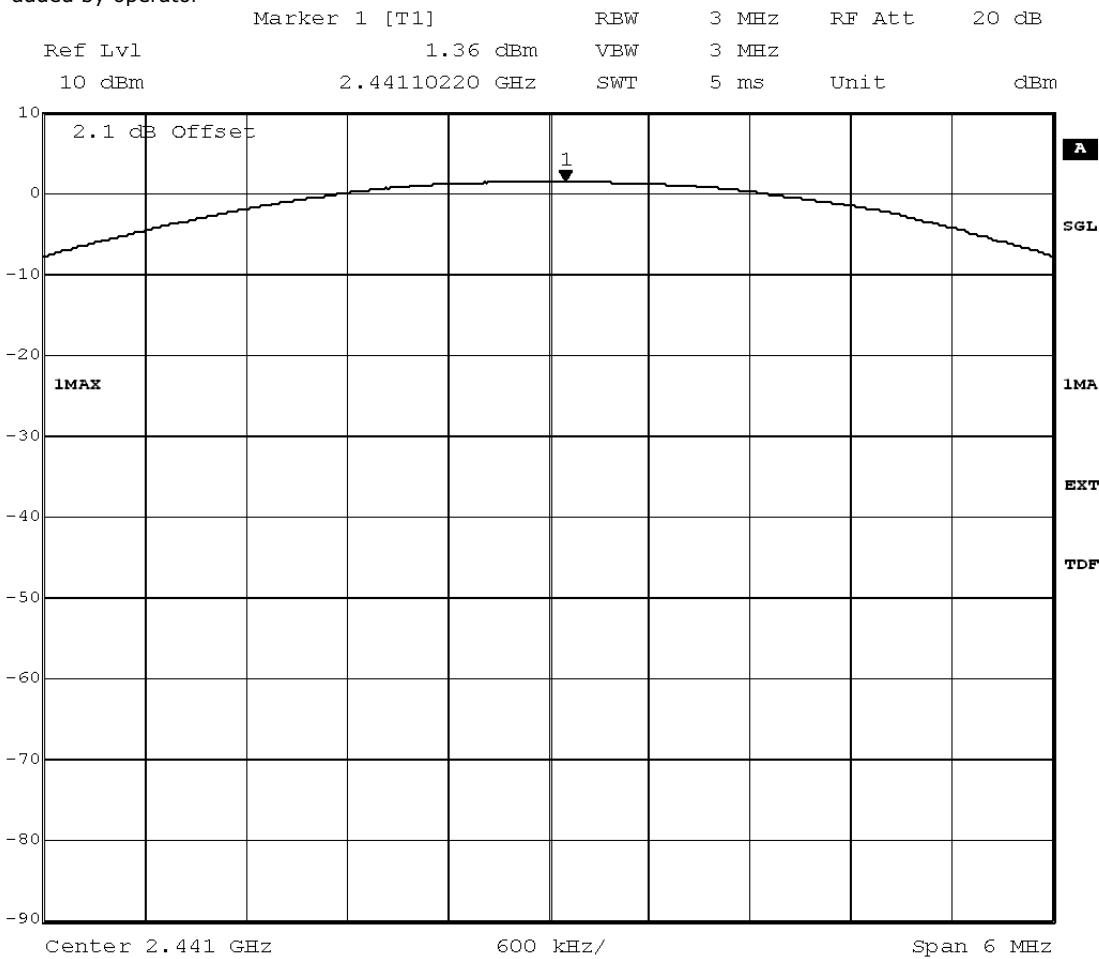

Title: Peak outputpower Power
 Comment A: CH M: 2441 MHz
 Date: 16.JUN.2012 21:28:52

added by operator



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2012/06/16 18:44


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
-0.28	2.18	1.90

added by operator

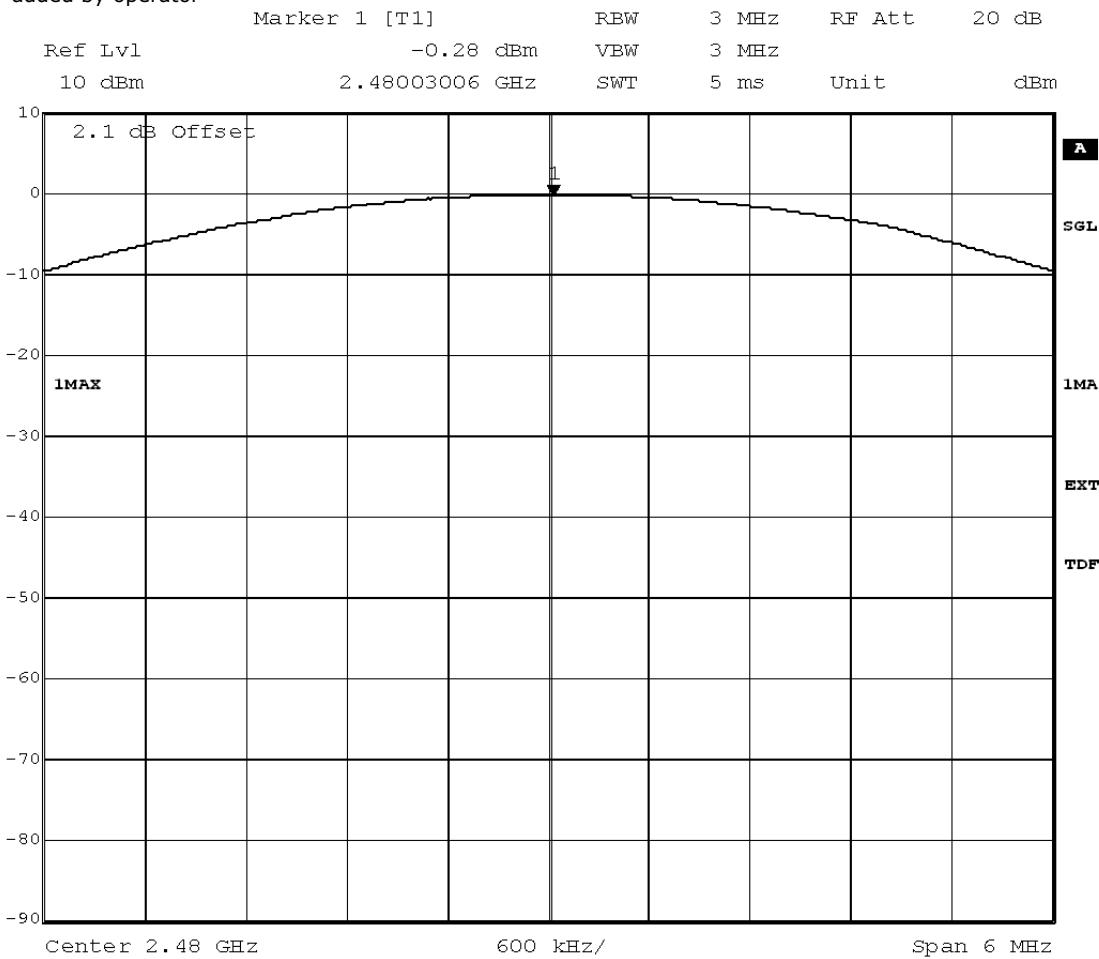

Title: Peak outputpower Power
 Comment A: CH T: 2480 MHz
 Date: 16.JUN.2012 18:19:29

added by operator



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2012/06/16 21:31


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
-0.26	2.18	1.92

added by operator

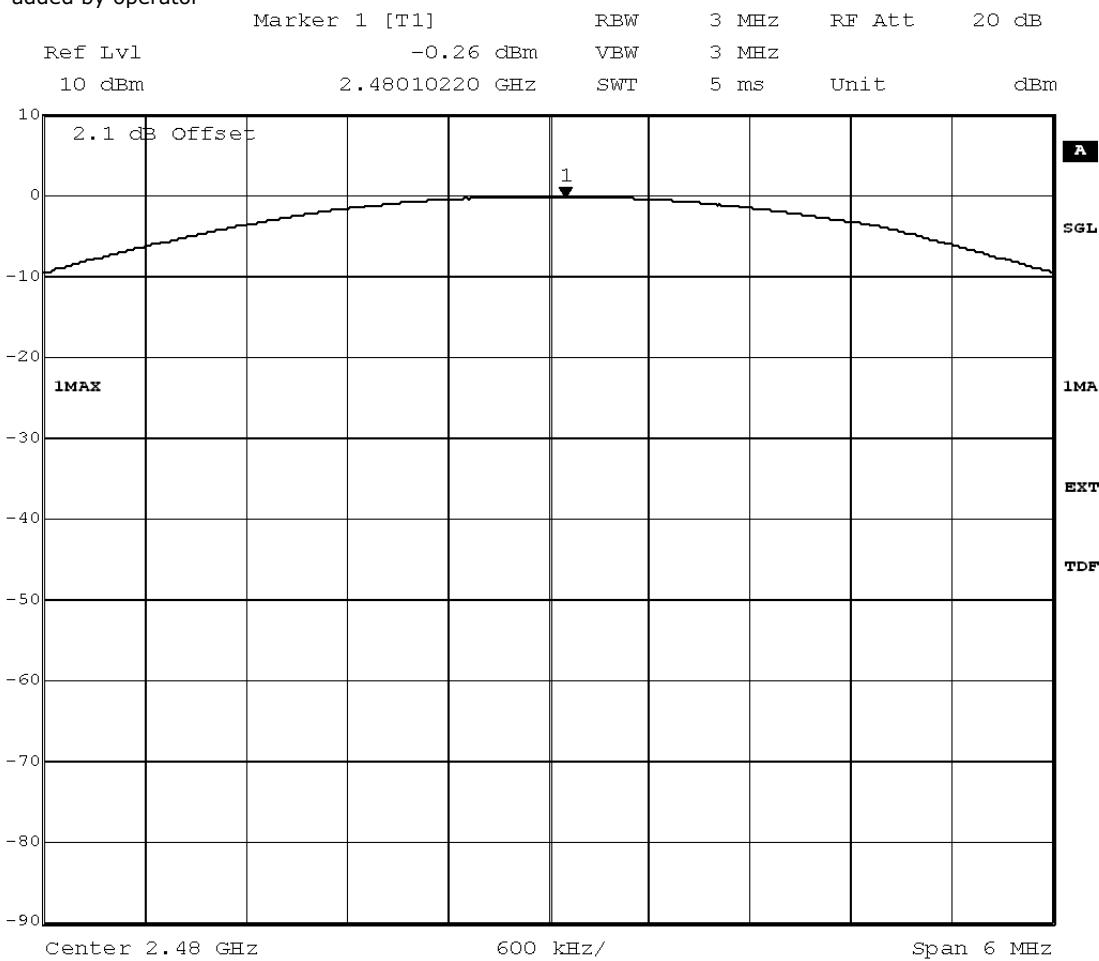

Title: Peak outputpower Power
 Comment A: CH T: 2480 MHz
 Date: 16.JUN.2012 20:49:31

added by operator



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: B01

Date of Test: 2012/06/16 22:14


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
-0.33	2.18	1.85

added by operator

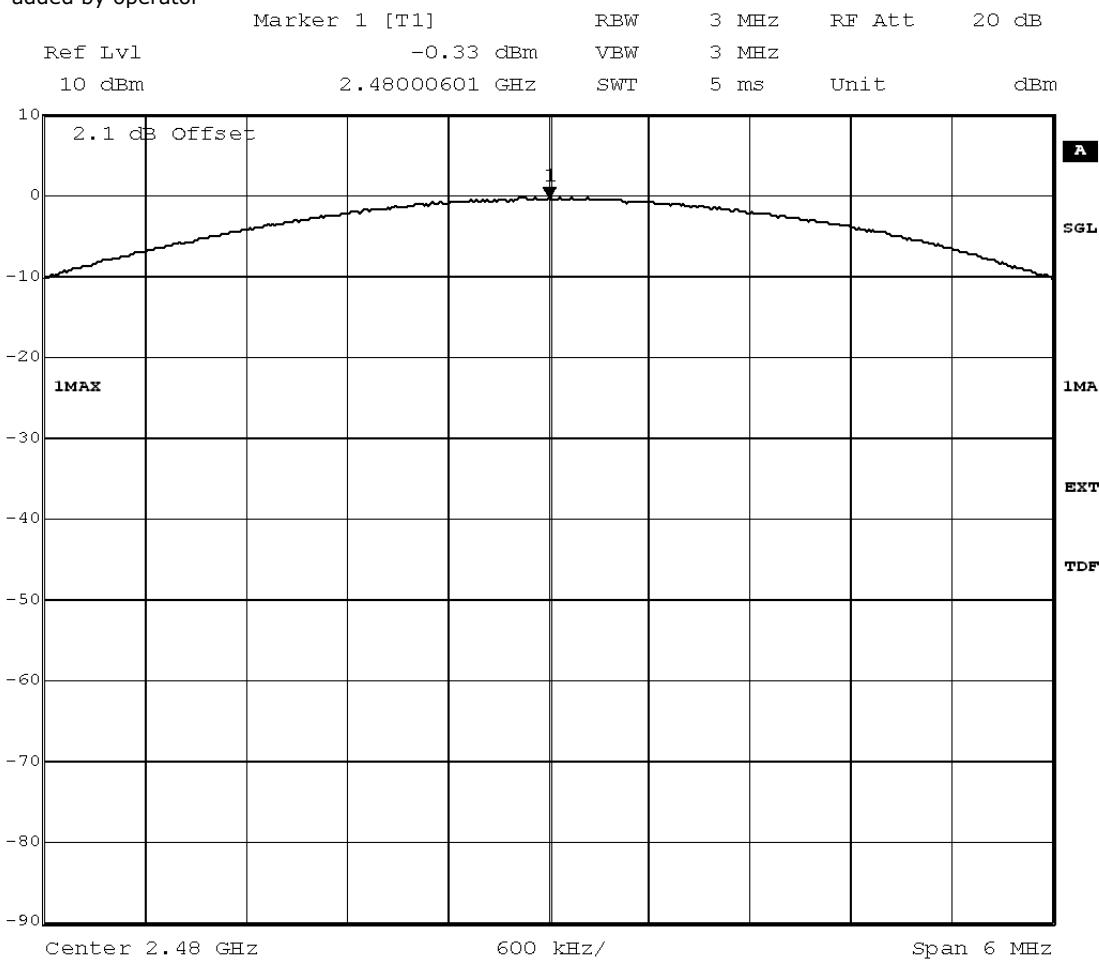

Title: Peak outputpower Power
 Comment A: CH T: 2480 MHz
 Date: 16.JUN.2012 21:53:55

added by operator

Test: 15c.5; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation


Result: Passed

Setup No.: A01

Date of Test: 2012/06/16 18:33

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

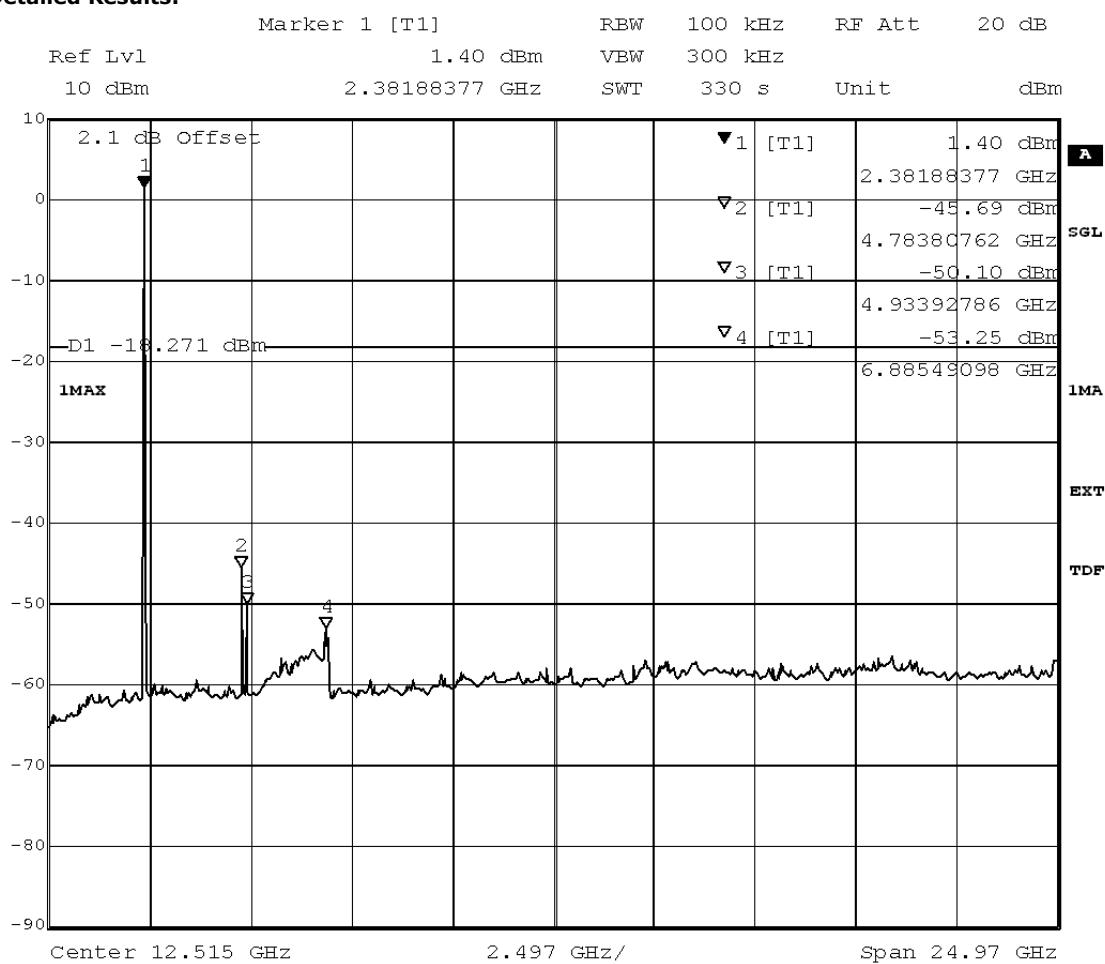Detailed Results:


Title: spurious emissions

Comment A: CH B: 2402 MHz

Date: 16.JUN.2012 17:12:05

added by operator

Test: 15c.5; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation


Result: Passed

Setup No.: A01

Date of Test: 2012/06/16 21:25

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

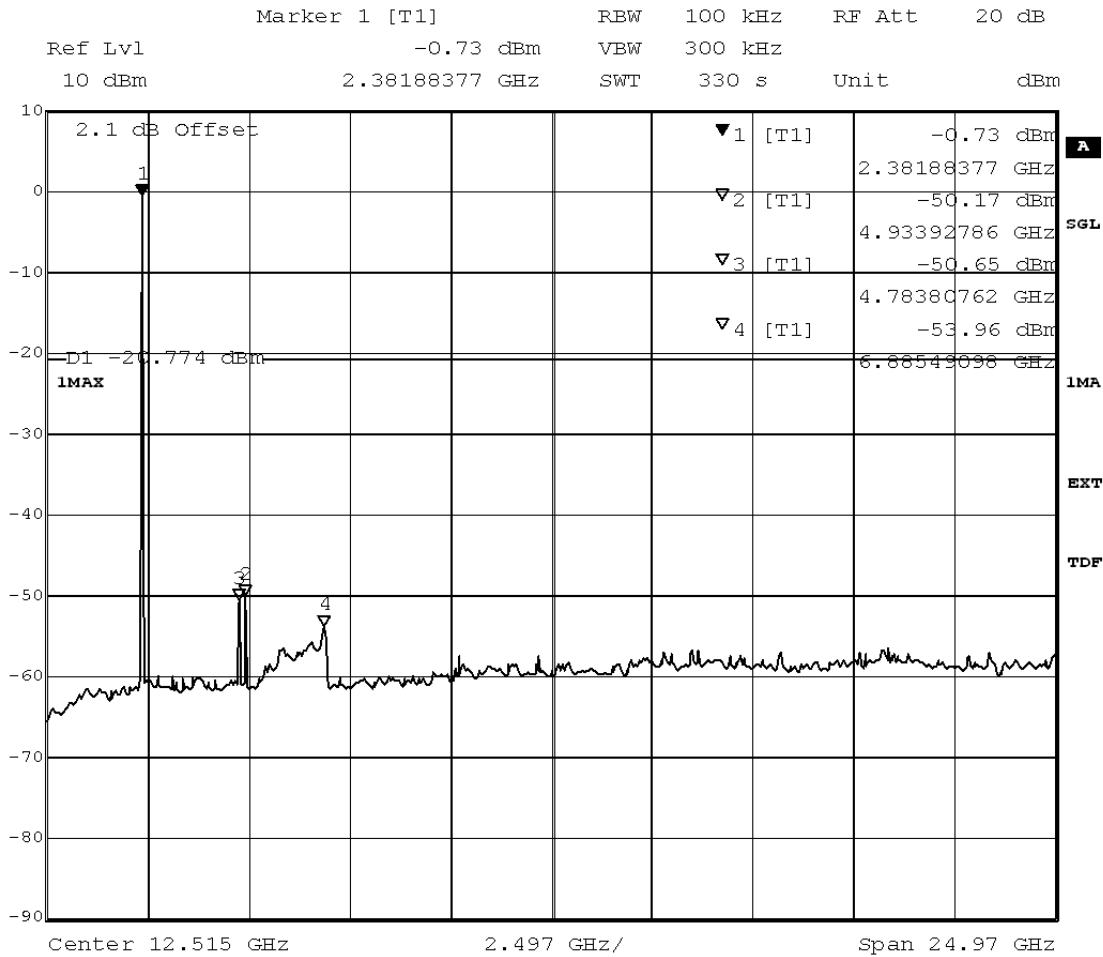Detailed Results:


Title: spurious emissions
 Comment A: CH B: 2402 MHz
 Date: 16.JUN.2012 19:45:40

added by operator

Test: 15c.5; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation


Result: Passed

Setup No.: B01

Date of Test: 2012/06/16 22:07

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

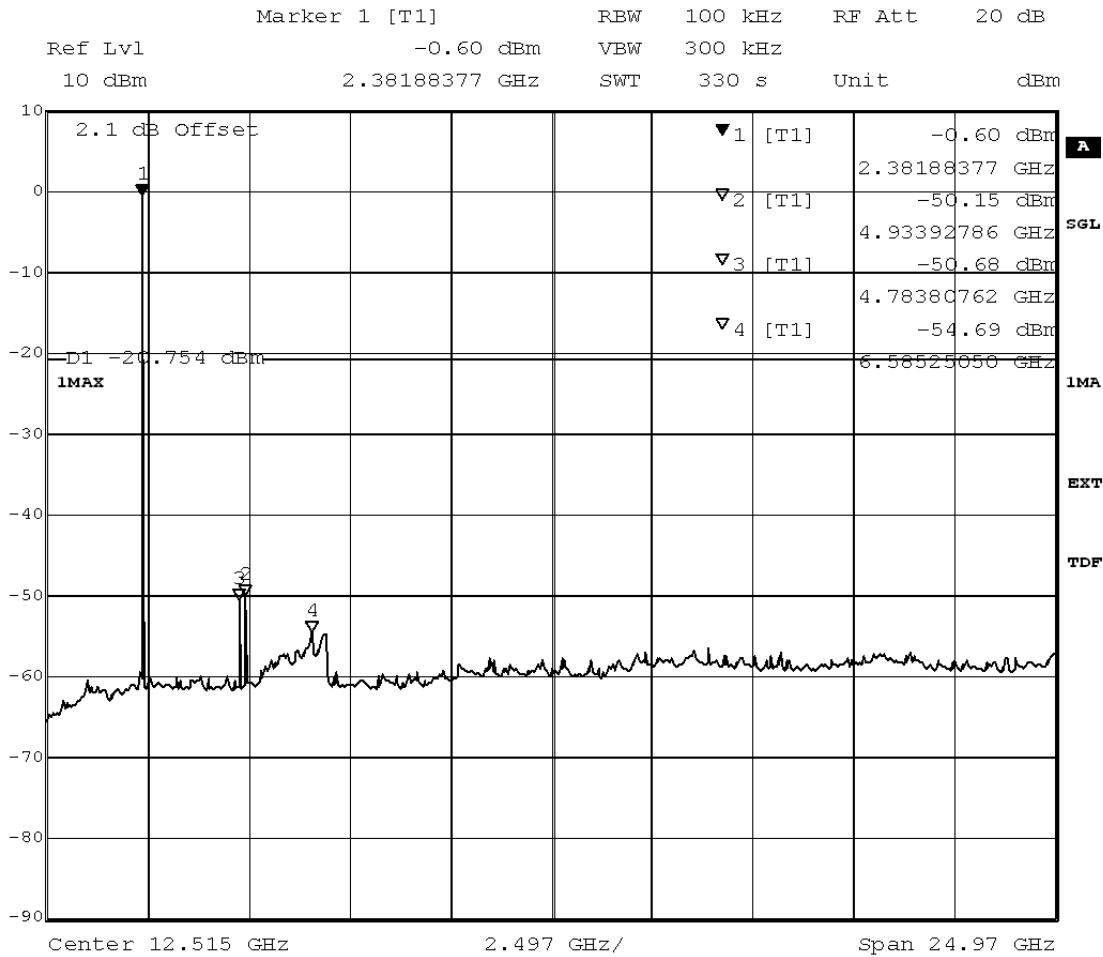Detailed Results:


Title: spurious emissions
 Comment A: CH B: 2402 MHz
 Date: 16.JUN.2012 21:07:49

added by operator

Test: 15c.5; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation


Result: Passed

Setup No.: A01

Date of Test: 2012/06/16 18:37

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

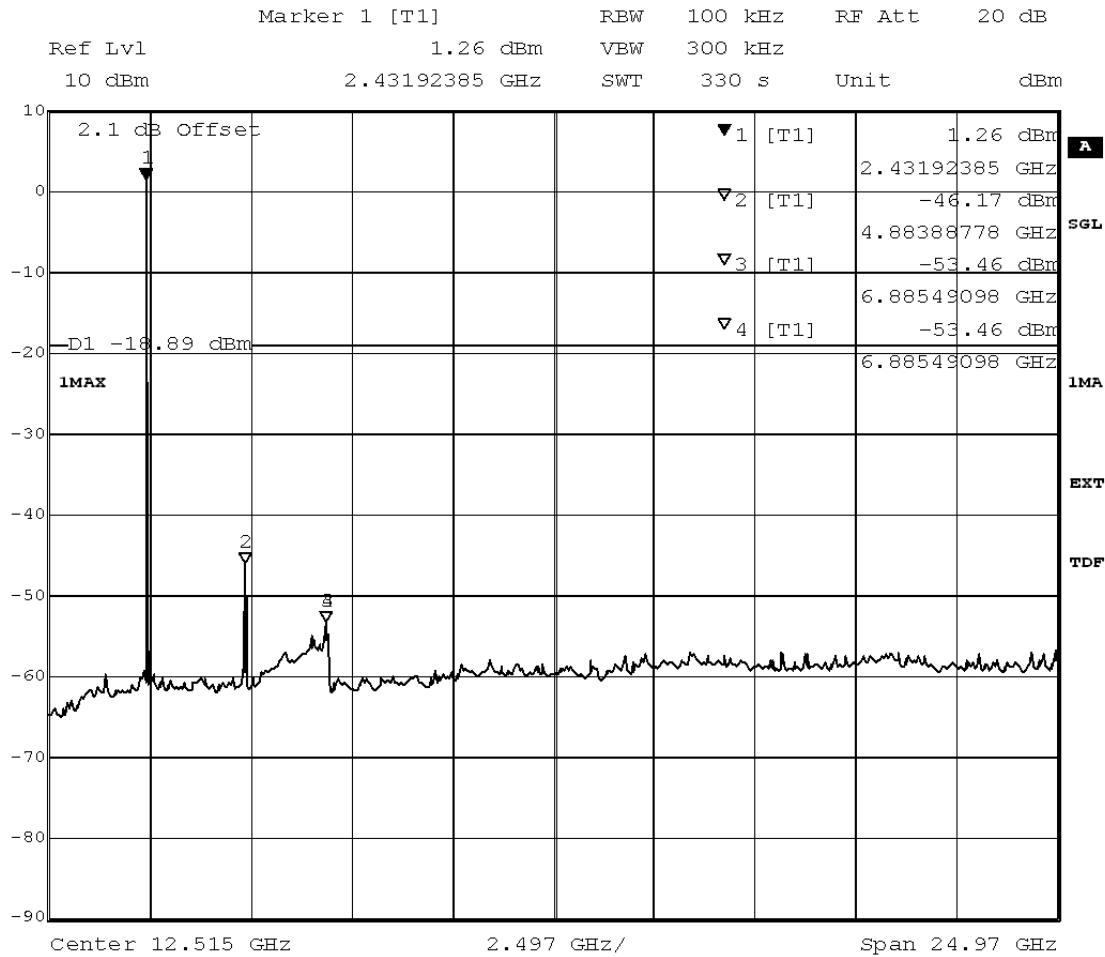Detailed Results:


Title: spurious emissions
 Comment A: CH M: 2441 MHz
 Date: 16.JUN.2012 17:48:34

added by operator

Test: 15c.5; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2012/06/16 21:28


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:


Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2441		-1.40		

added by operator

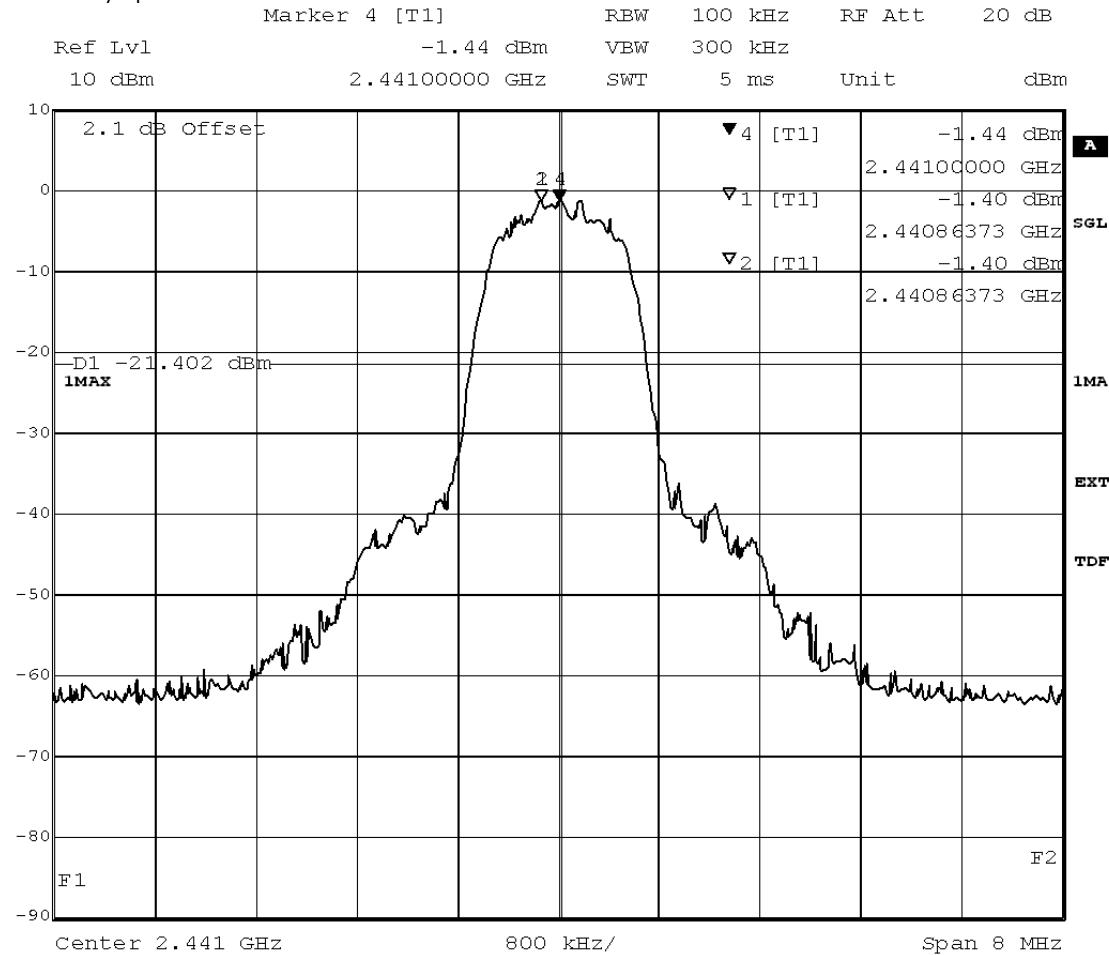

Title: Band Edge Compliance
Comment A: CH M: 2441 MHz
Date: 16.JUN.2012 20:07:05

added by operator

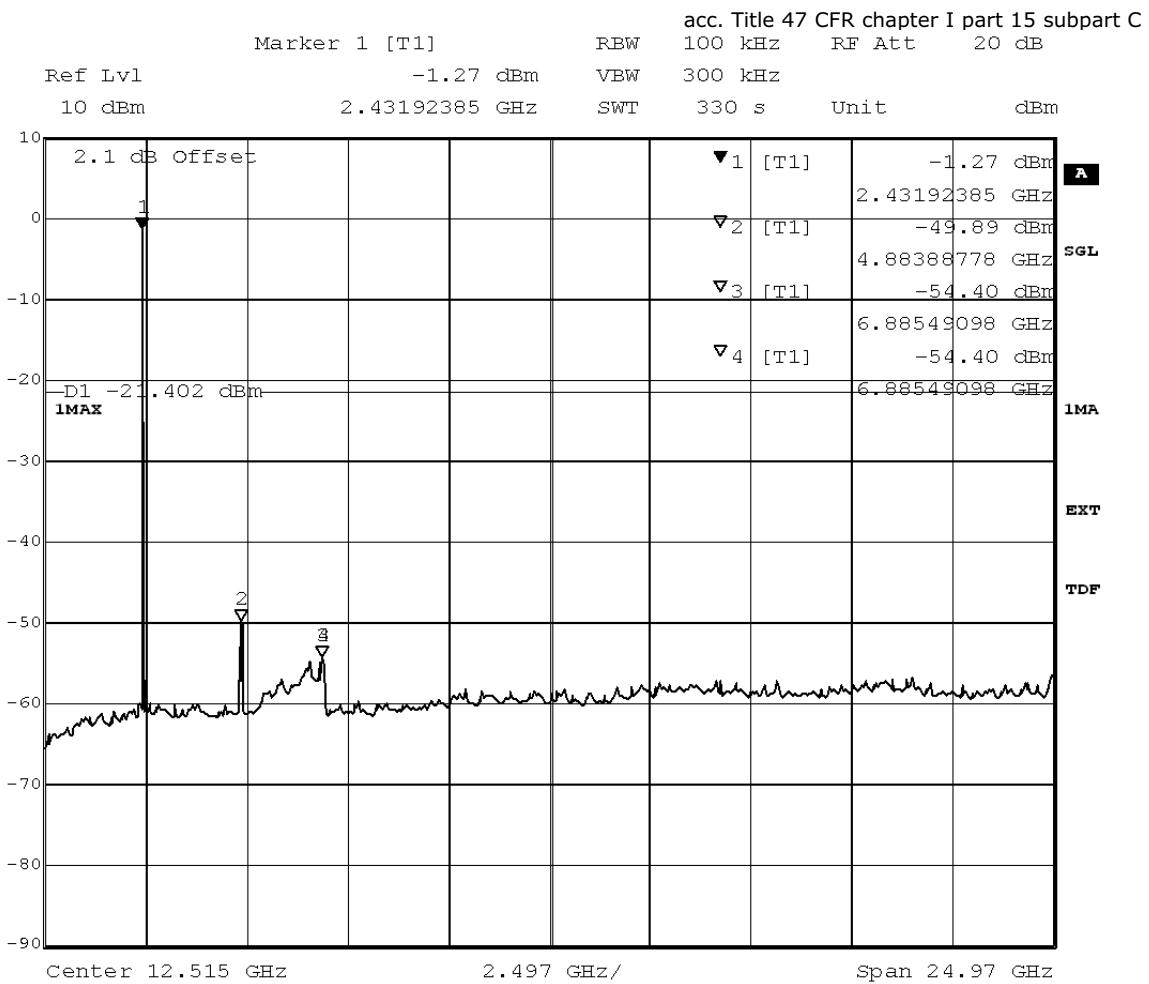

Title: spurious emissions
 Comment A: CH M: 2441 MHz
 Date: 16.JUN.2012 20:19:02

added by operator

Test: 15c.5; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: B01

Date of Test: 2012/06/16 22:10


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:


Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2441		-1.36		

added by operator

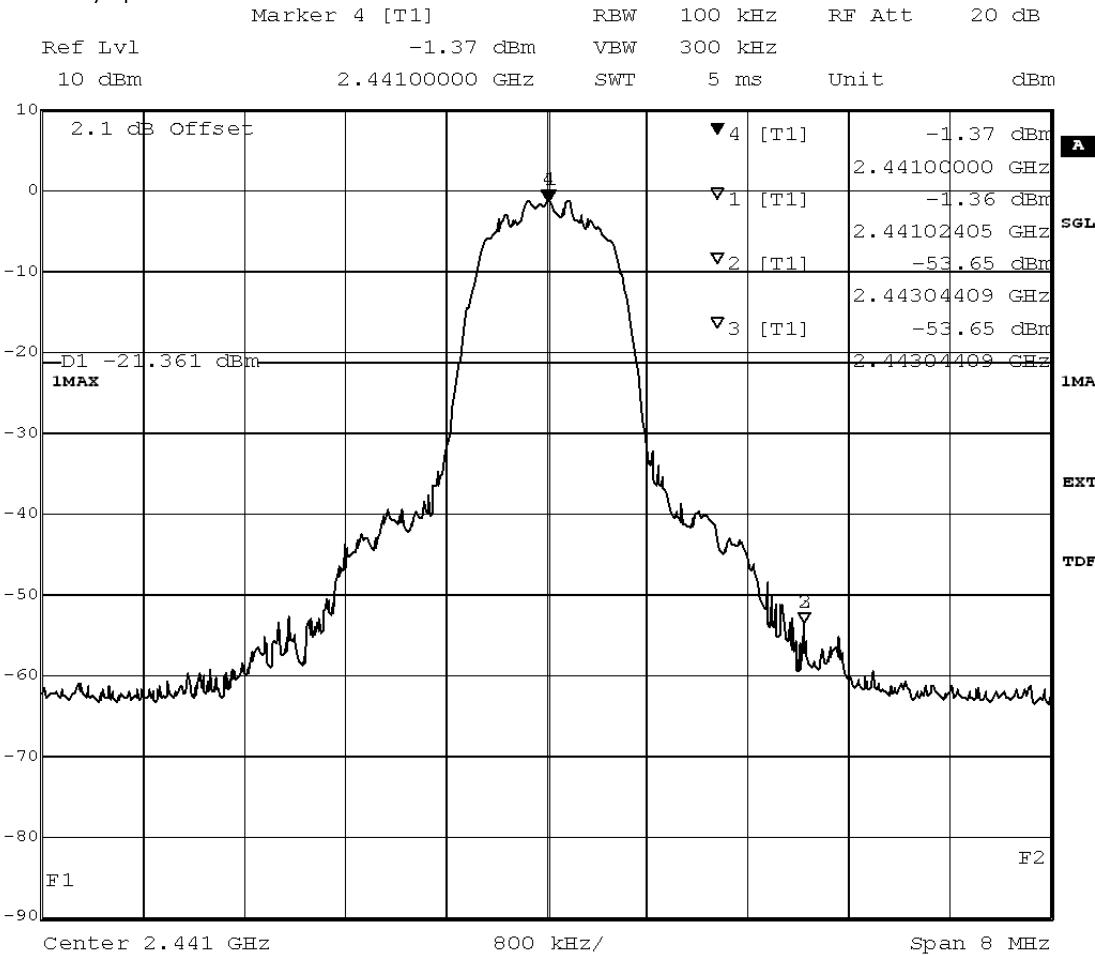

Title: Band Edge Compliance
 Comment A: CH M: 2441 MHz
 Date: 16.JUN.2012 21:14:16

added by operator

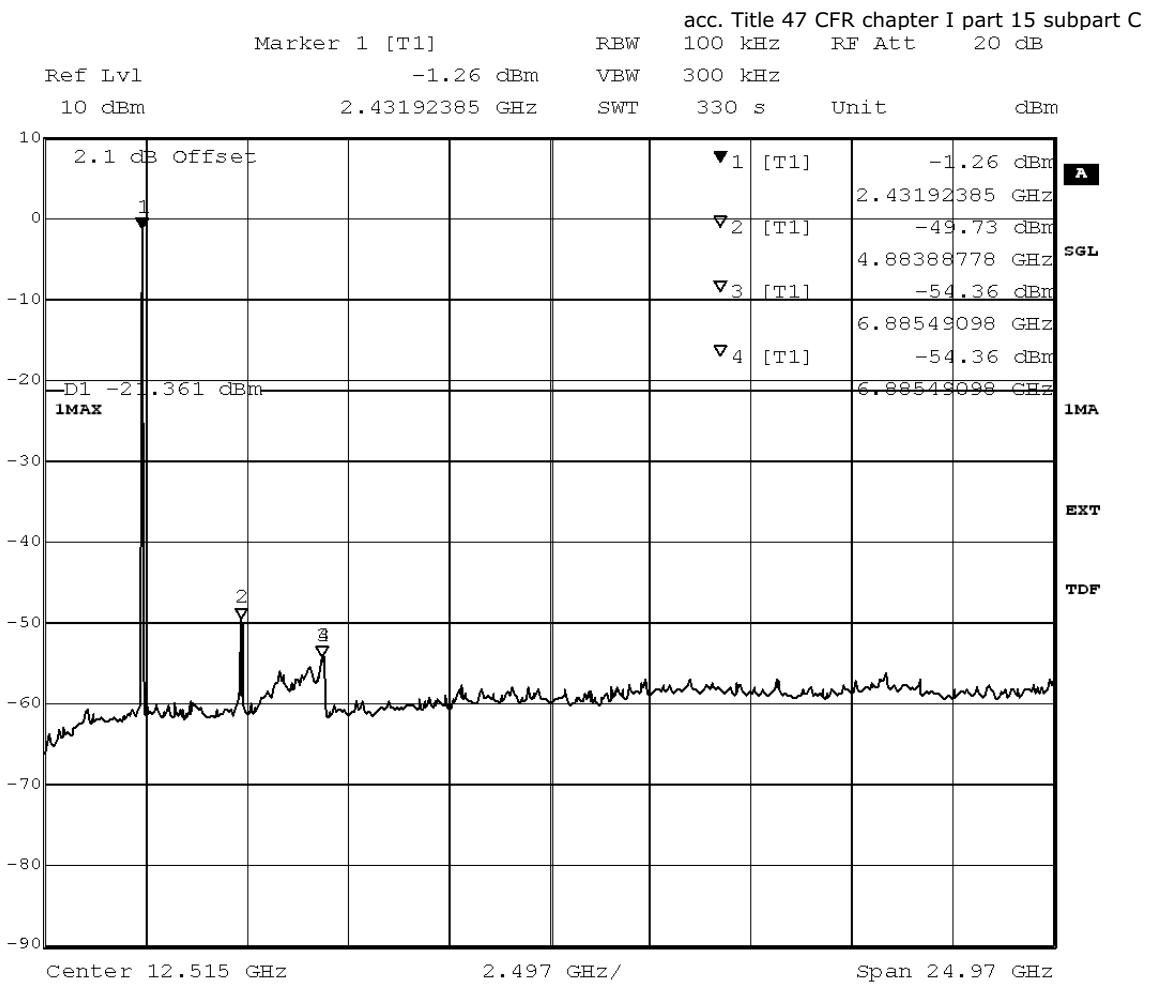

Title: spurious emissions
 Comment A: CH M: 2441 MHz
 Date: 16.JUN.2012 21:25:13

added by operator

Test: 15c.5; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation


Result: Passed

Setup No.: A01

Date of Test: 2012/06/16 18:44

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

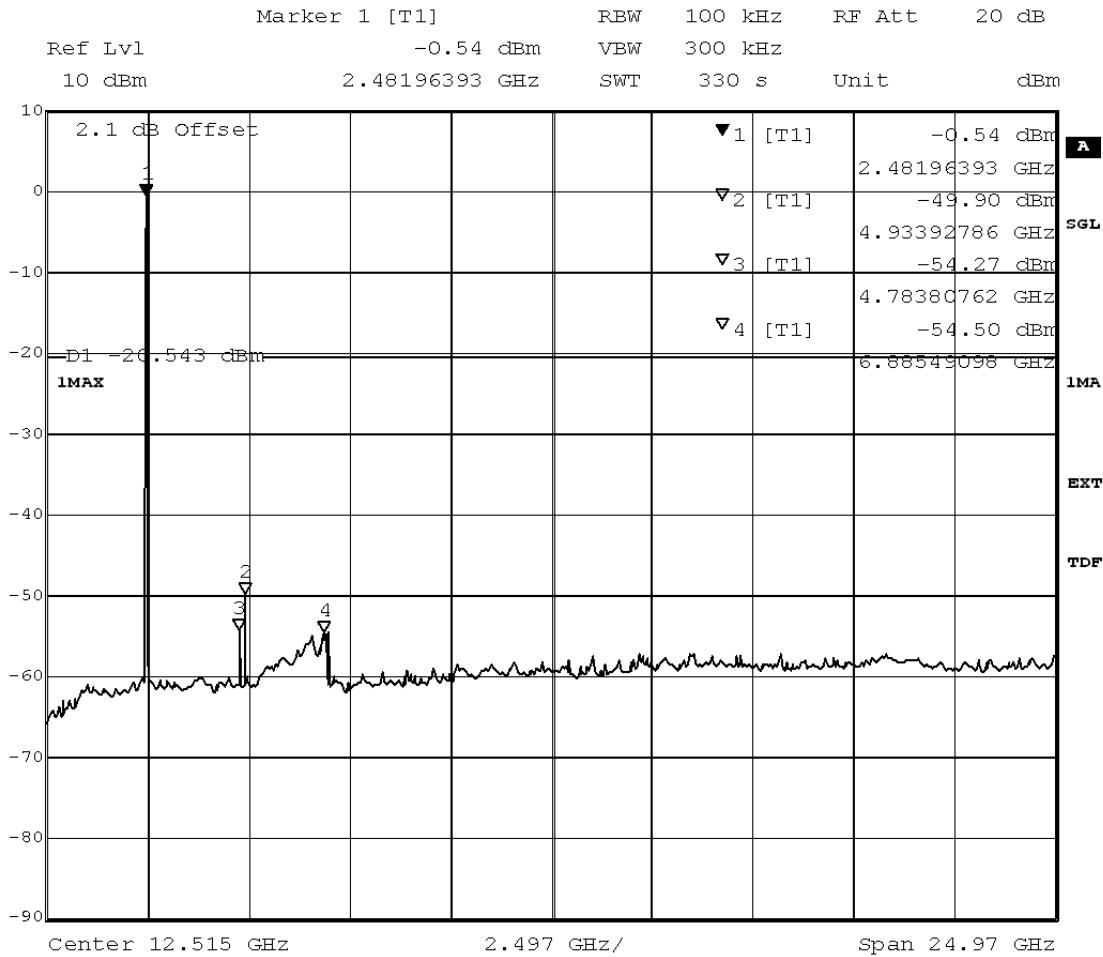Detailed Results:


Title: spurious emissions
 Comment A: CH T: 2480 MHz
 Date: 16.JUN.2012 18:15:33

added by operator

Test: 15c.5; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation


Result: Passed

Setup No.: A01

Date of Test: 2012/06/16 21:31

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

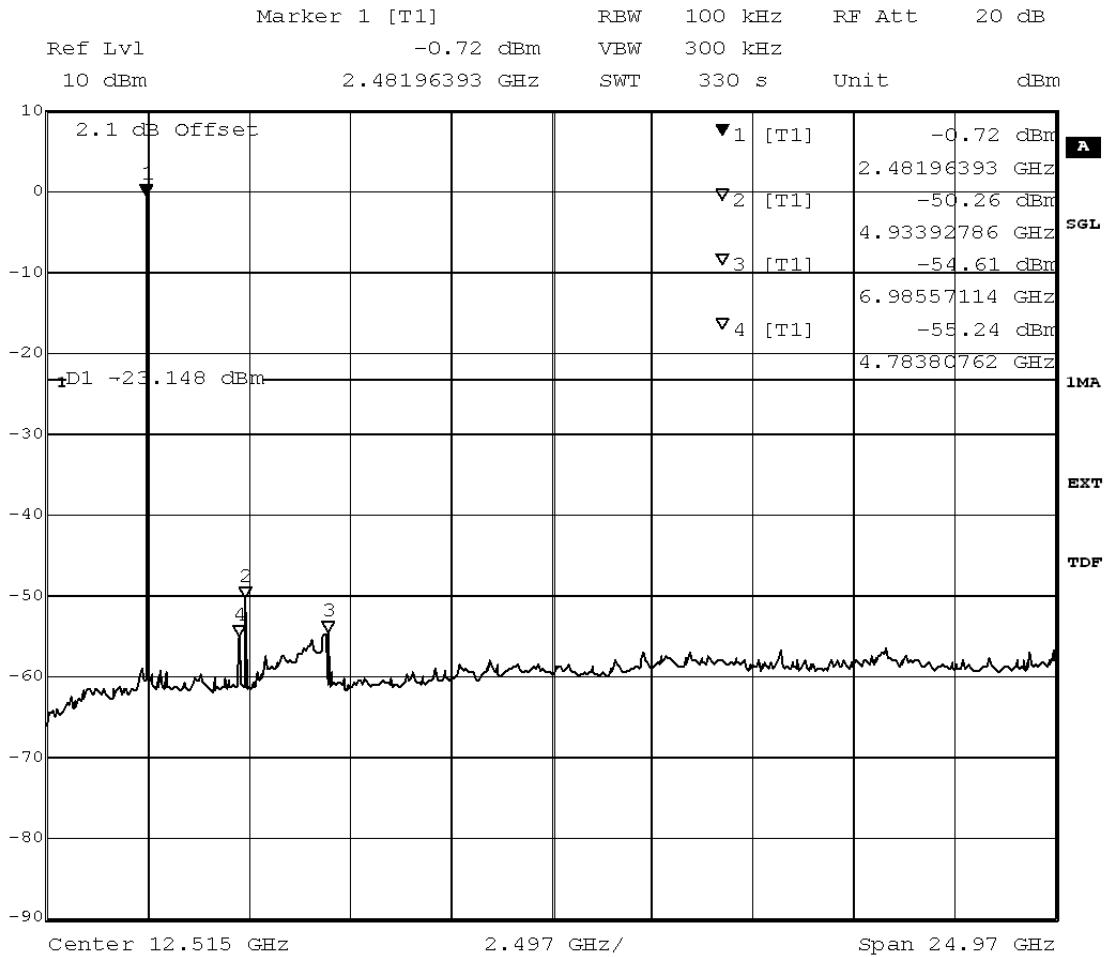Detailed Results:


Title: spurious emissions
 Comment A: CH T: 2480 MHz
 Date: 16.JUN.2012 20:45:47

added by operator

Test: 15c.5; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation


Result: Passed

Setup No.: B01

Date of Test: 2012/06/16 22:14

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

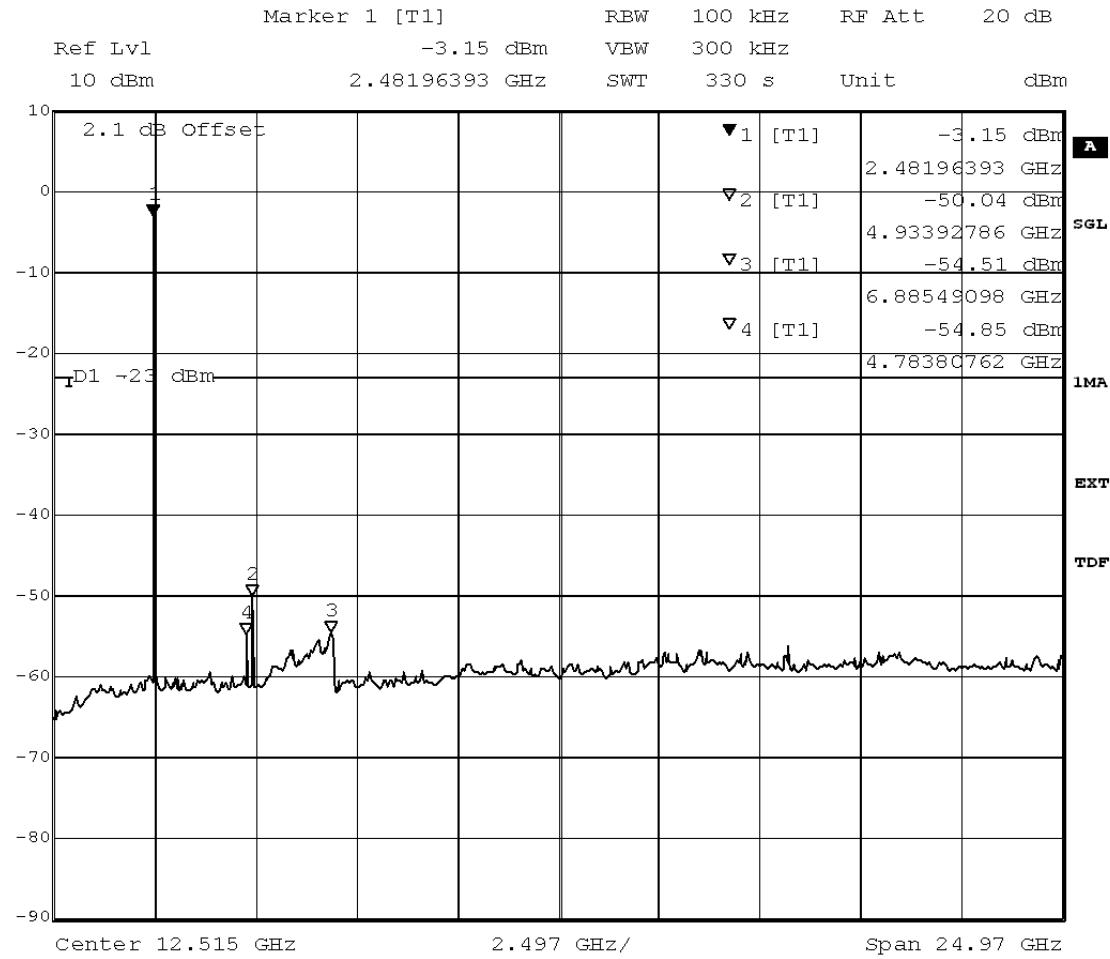Detailed Results:


Title: spurious emissions
 Comment A: CH T: 2480 MHz
 Date: 16.JUN.2012 21:50:19

added by operator

Test: 15c.6; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = conducted

Result: Passed

Setup No.: A01

Date of Test: 2012/06/16 18:34


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2400	-58.80	1.73	-18.27	40.53

added by operator

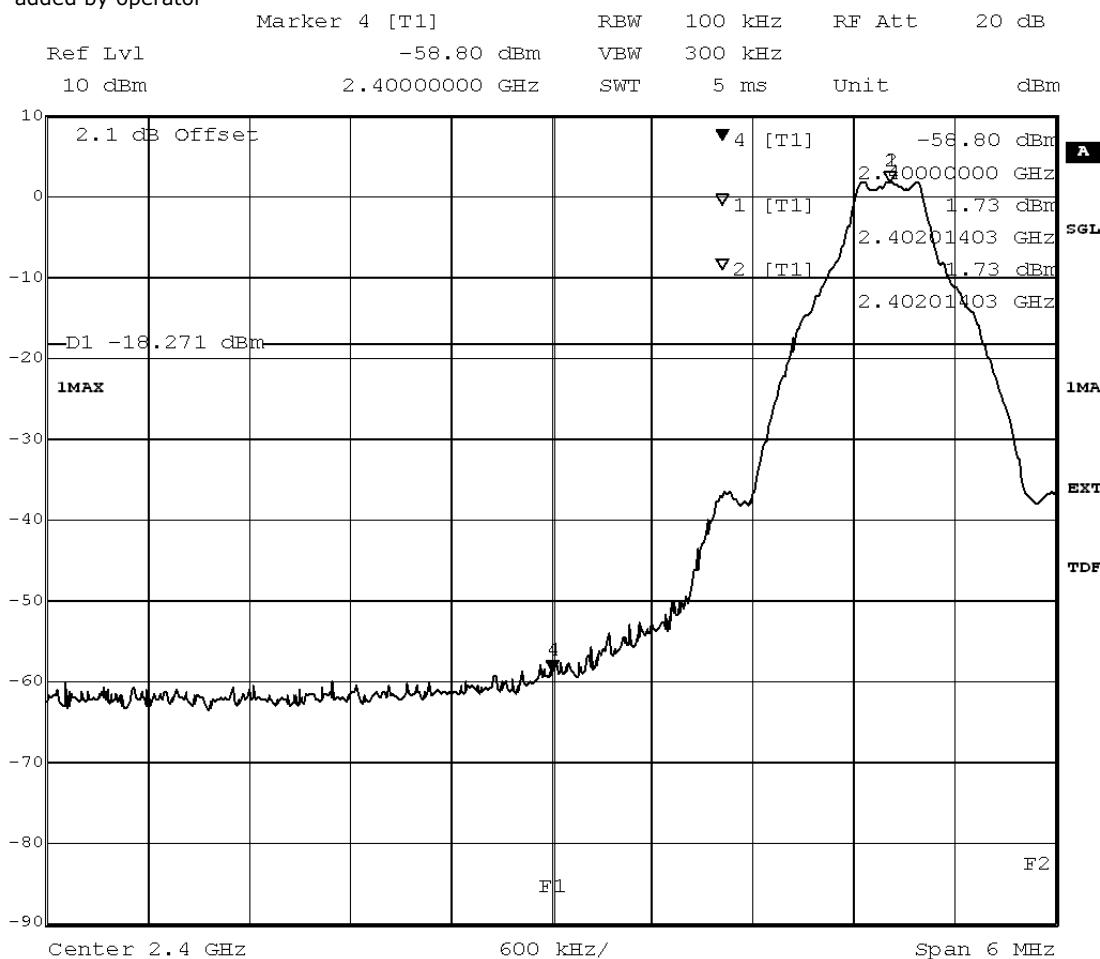

Title: Band Edge Compliance

Comment A: CH B: 2402 MHz

Date: 16.JUN.2012 17:00:08

added by operator

Test: 15c.6; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = conducted

Result: Passed

Setup No.: A01

Date of Test: 2012/06/16 21:25


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2400	-55.08	-0.77	-20.77	34.31

added by operator

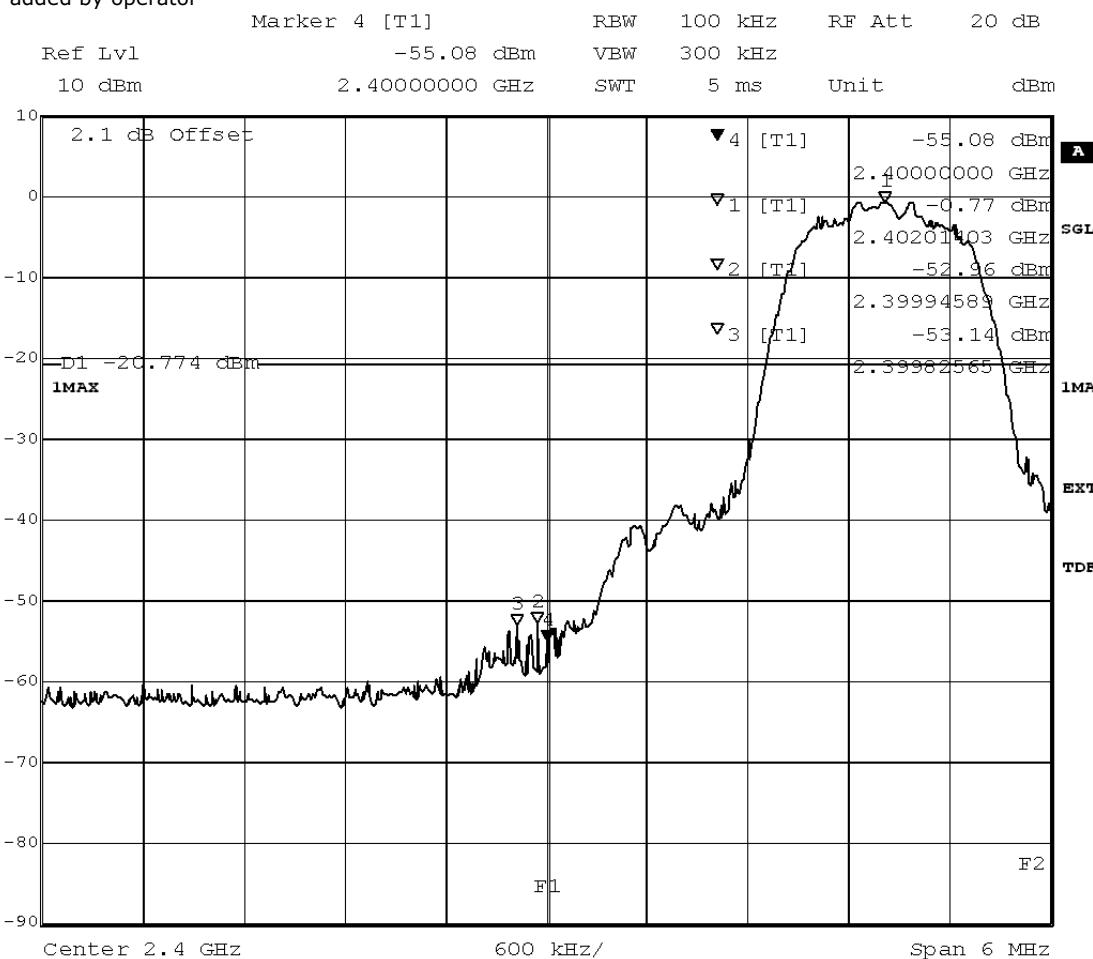

Title: Band Edge Compliance

Comment A: CH B: 2402 MHz

Date: 16.JUN.2012 19:33:43

added by operator

Test: 15c.6; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = conducted

Result: Passed

Setup No.: B01

Date of Test: 2012/06/16 22:07


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2400	-53.92	-0.75	-20.75	33.16

added by operator

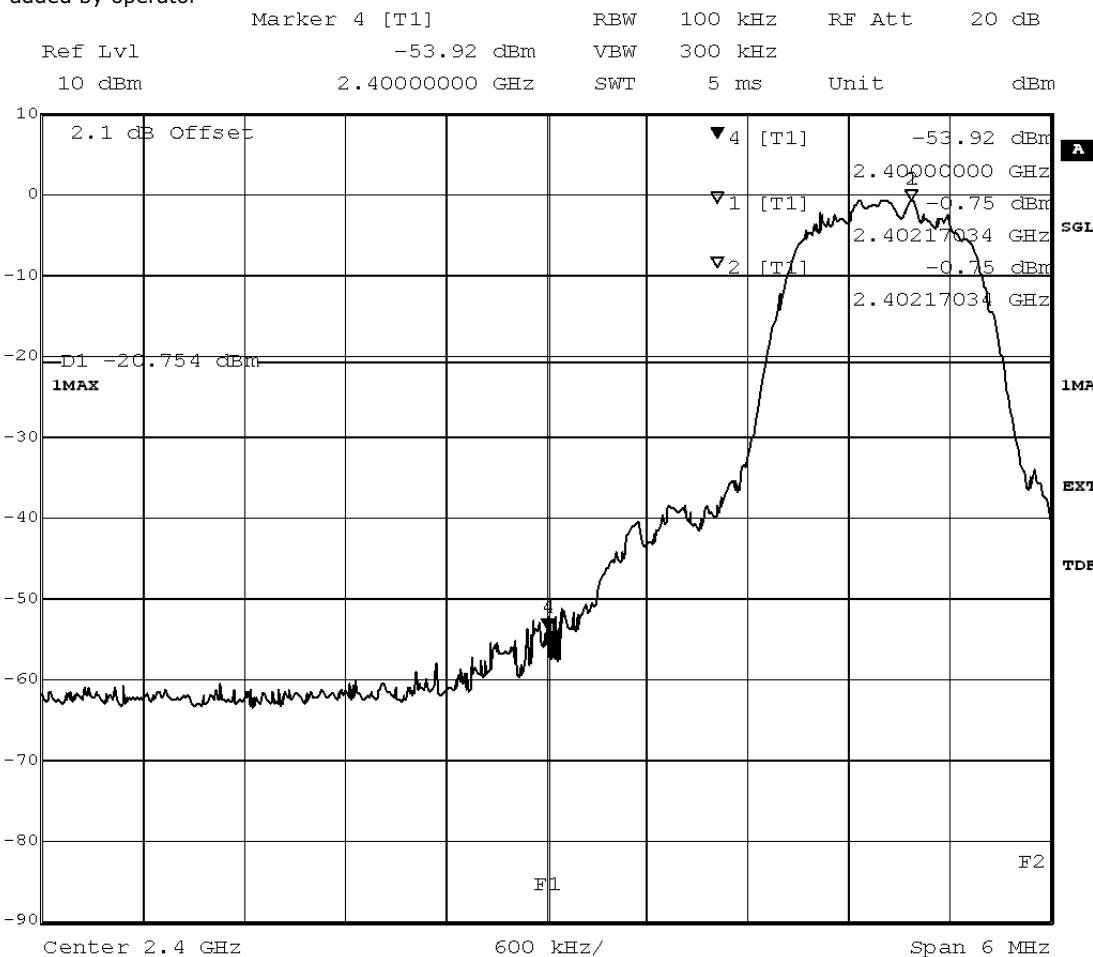

Title: Band Edge Compliance

Comment A: CH B: 2402 MHz

Date: 16.JUN.2012 20:55:50

added by operator

Test: 15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = conducted

Result: Passed

Setup No.: A01

Date of Test: 2012/06/16 18:44


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2484	-61.64	-0.54	-20.54	41.09

added by operator

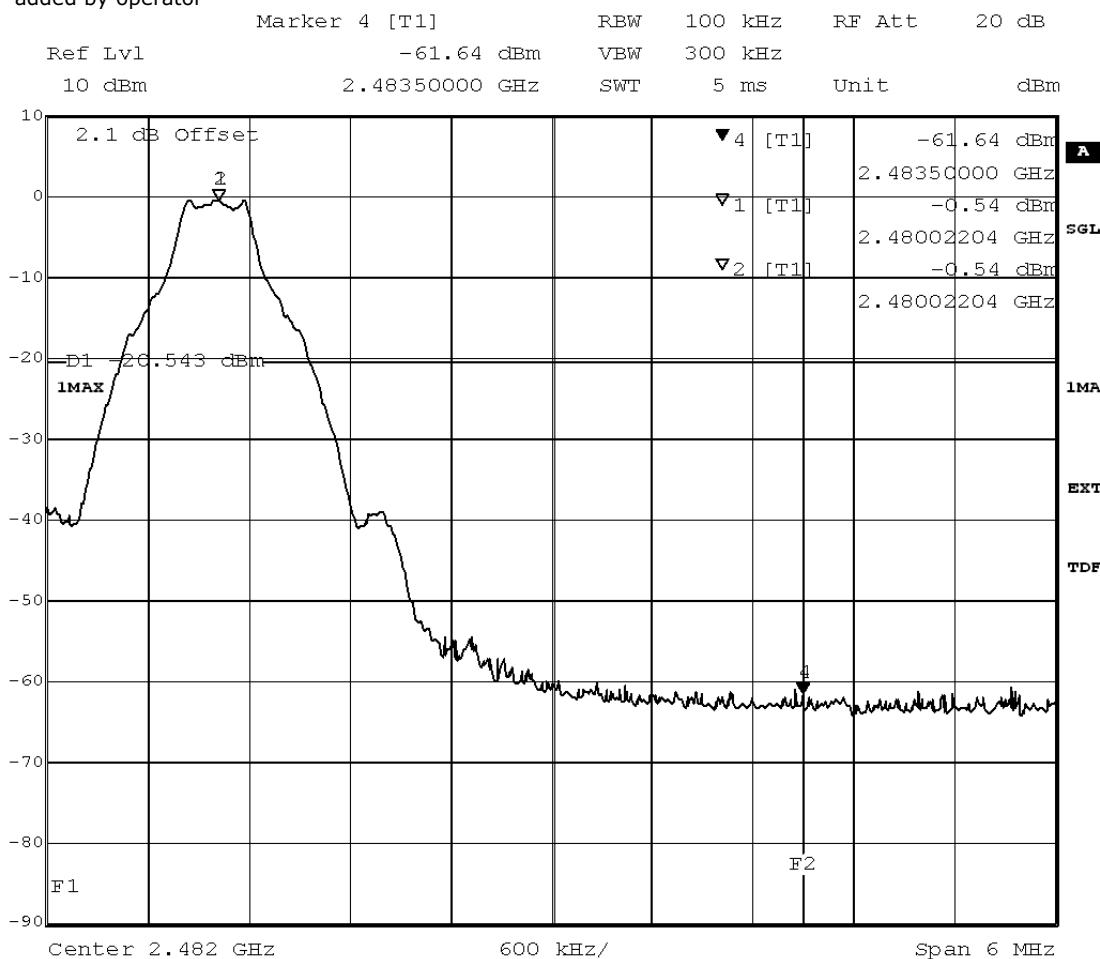

Title: Band Edge Compliance

Comment A: CH T: 2480 MHz

Date: 16.JUN.2012 18:03:36

added by operator



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test1: 15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = radiated


Result: Passed

Setup No.: C01_INT

Date of Test: 2012/06/22 5:29

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

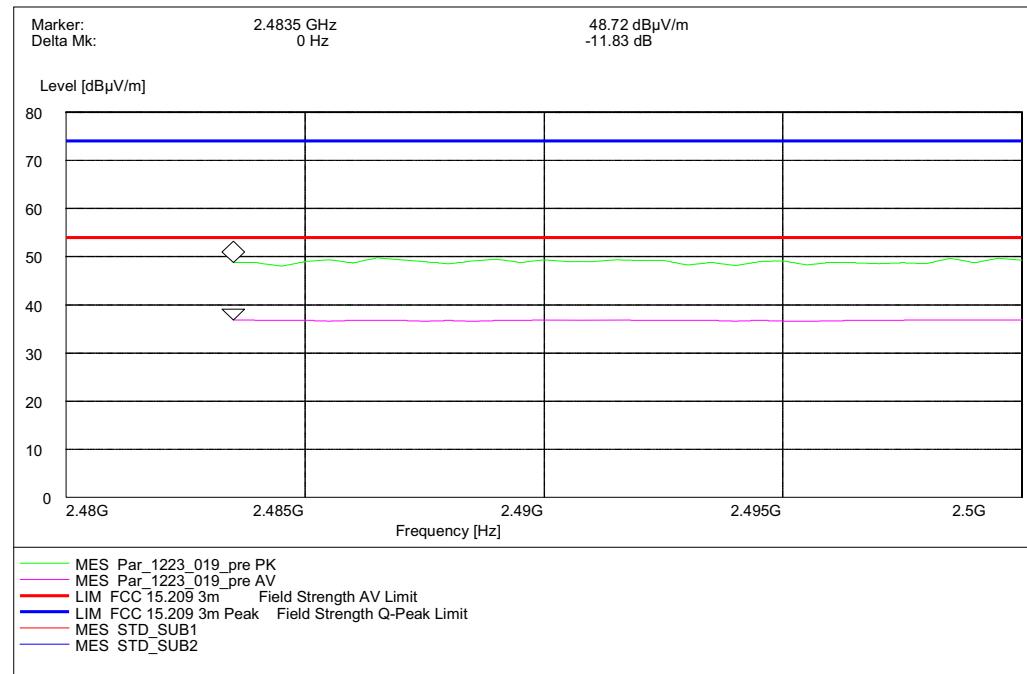Detailed Results:


TX on	Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
2480 MHz	Ver + Hor	74	54	2483.5	48.72	36.89	25.28	17.11	Passed

Test2: 15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = radiated

Result: Passed

Setup No.: A01

Date of Test: 2012/06/26 19:44


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Marker:	2.4835 GHz	48.72 dB μ V/m
Delta Mk:	0 Hz	-12.07 dB

Level [dB μ V/m]

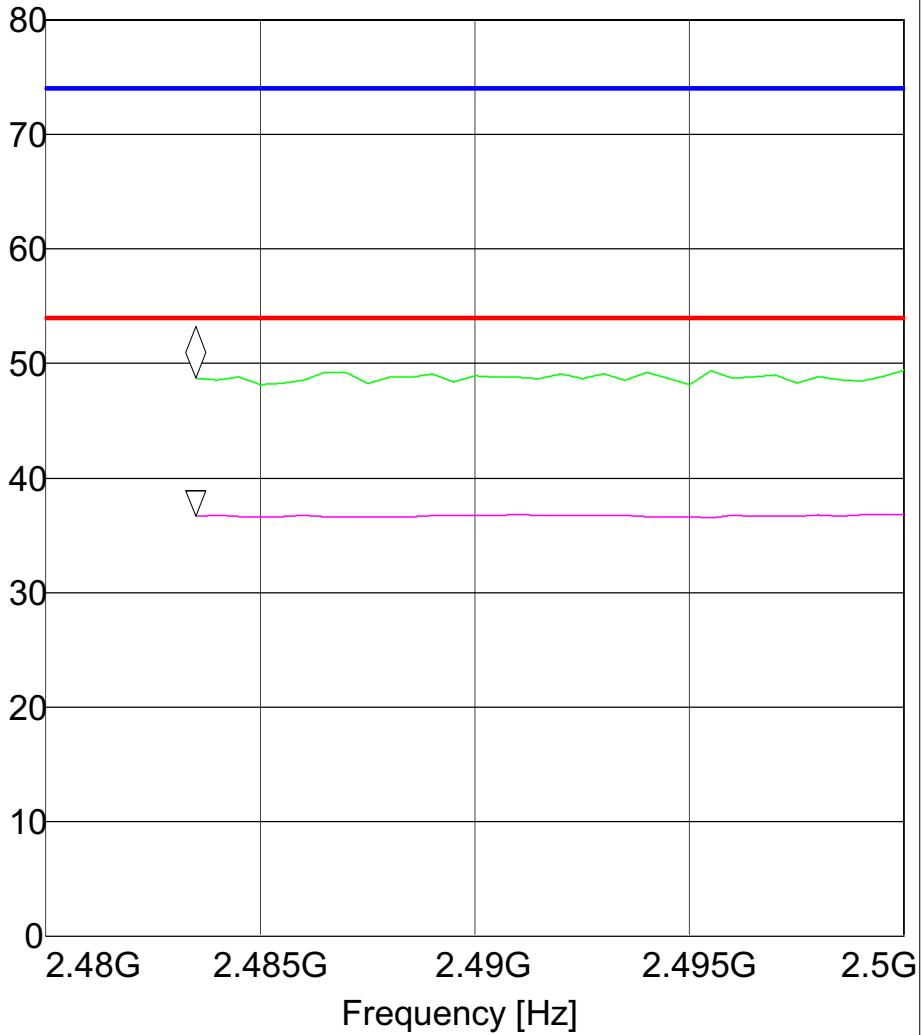

— MES Par_1223_003_pre PK
— MES Par_1223_003_pre AV
— LIM FCC 15.209 3m Field Strength AV Limit
— LIM FCC 15.209 3m Peak Field Strength Q-Peak Limit



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

TX on	Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
2480 MHz	Ver + Hor	74	54	2483.5	48.72	36.65	25.28	17.35	Passed

**Test: 15c.6; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation,
Method = conducted**

Result: Passed

Setup No.: A01

Date of Test: 2012/06/16 21:31


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2484	-63.77	-3.15	-23.15	40.62

added by operator

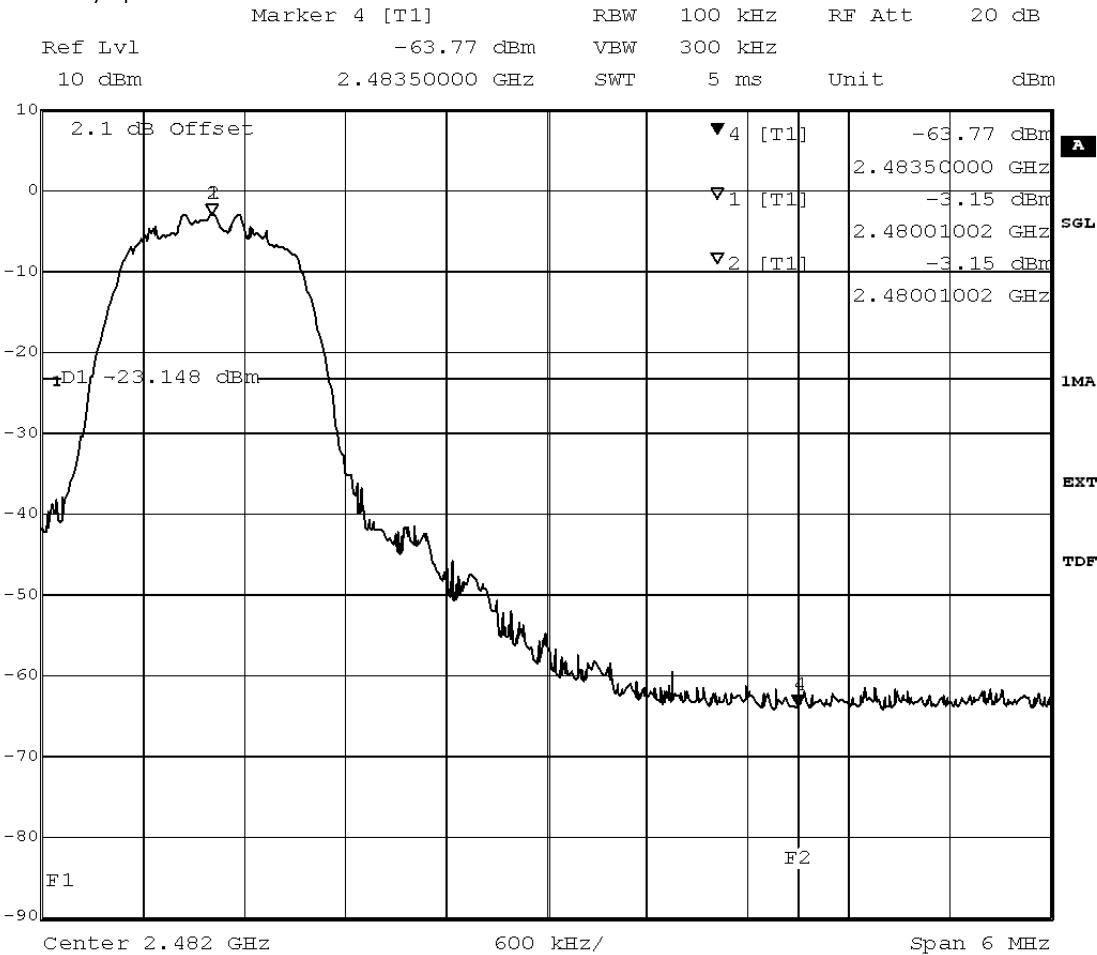

Title: Band Edge Compliance
 Comment A: CH T: 2480 MHz
 Date: 16.JUN.2012 20:33:47

added by operator

Test1: 15c.6; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = radiated


Result: Passed

Setup No.: C01_INT

Date of Test: 2012/06/22 4:39

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

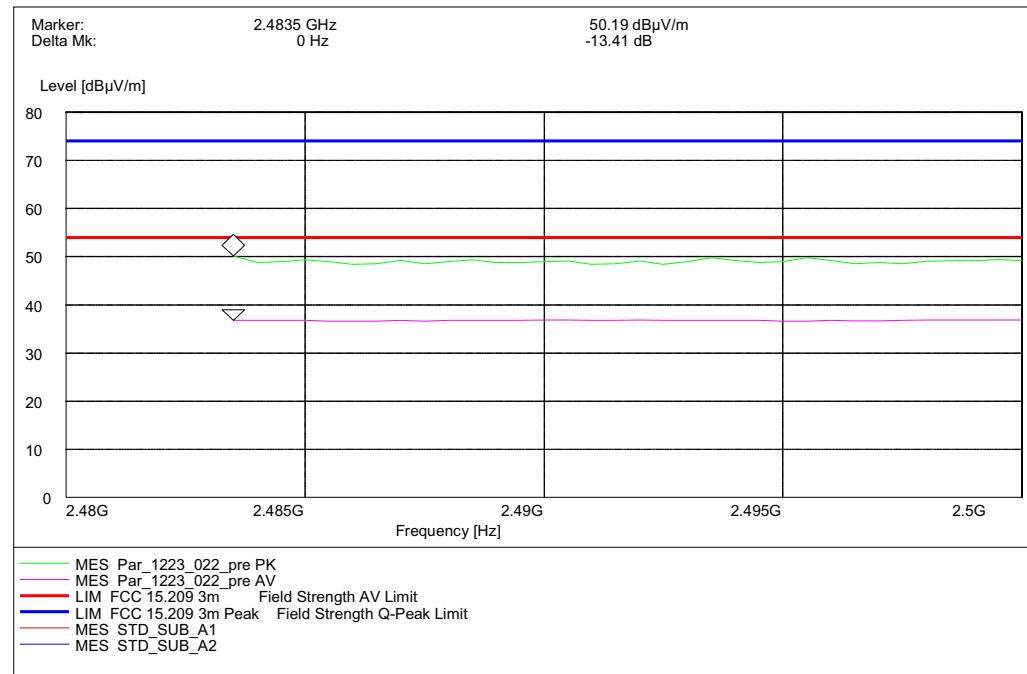Detailed Results:




Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

TX on	Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
2480 MHz	Ver + Hor	74	54	2483.5	50.19	36.78	23.81	17.22	Passed

Test2: 15c.6; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = radiated

Result: Passed

Setup No.: A01

Date of Test: 2012/06/26 19:47


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Marker:	2.4835 GHz	48.72 dB μ V/m
Delta Mk:	0 Hz	-11.95 dB

Level [dB μ V/m]

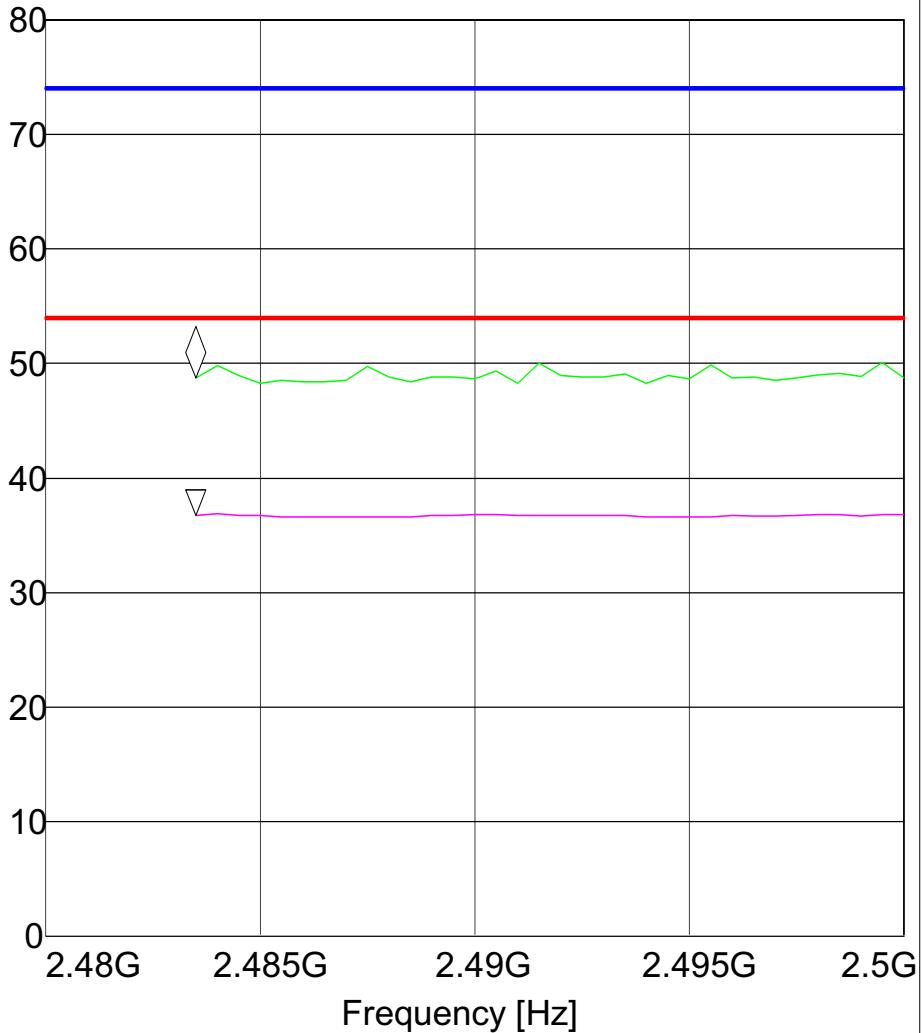

— MES Par_1223_006_pre PK
— MES Par_1223_006_pre AV
— LIM FCC 15.209 3m Field Strength AV Limit
— LIM FCC 15.209 3m Peak Field Strength Q-Peak Limit



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

TX on	Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
2480 MHz	Ver + Hor	74	54	2483.5	48.72	36.77	25.28	17.23	Passed

Test: 15c.6; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = conducted

Result: Passed

Setup No.: B01

Date of Test: 2012/06/16 22:14


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2484	-62.91	-3.00	-23.00	39.91

added by operator

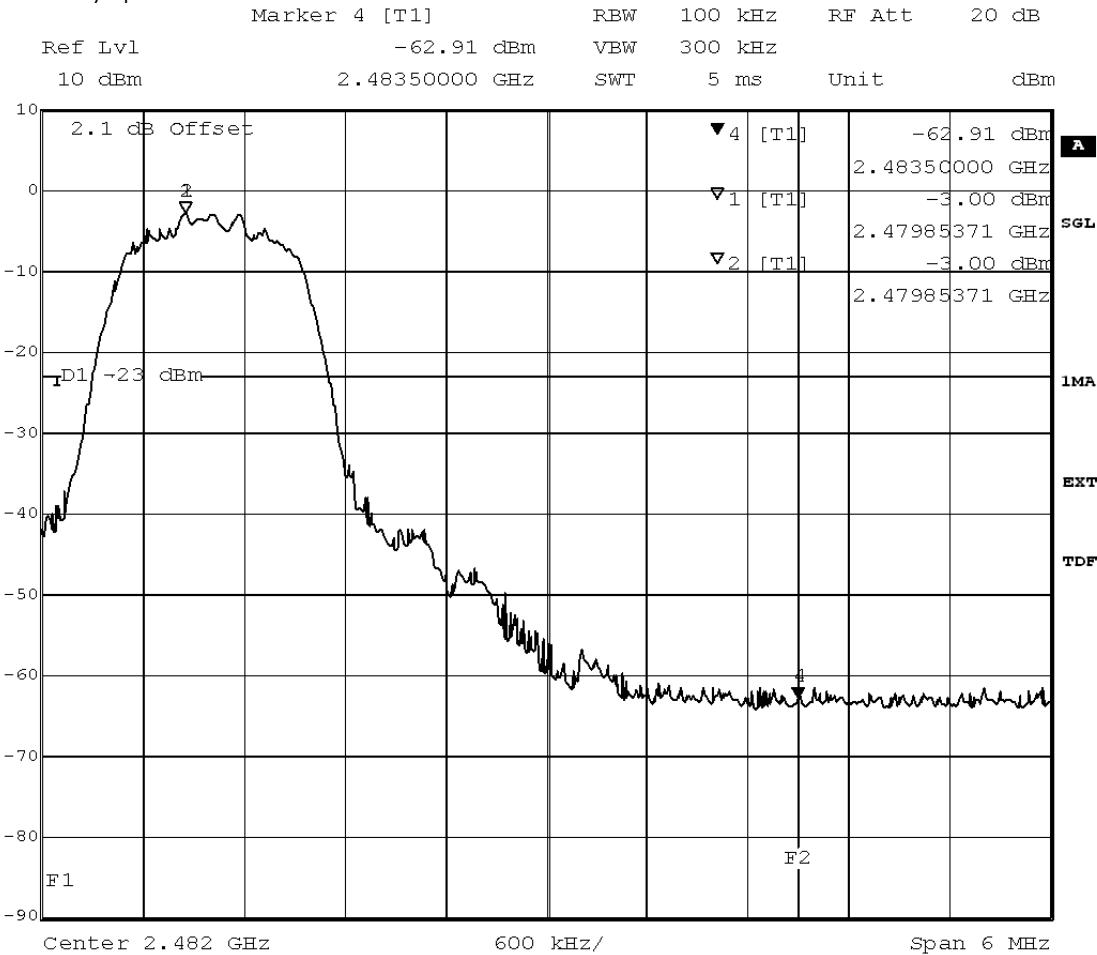

Title: Band Edge Compliance
Comment A: CH T: 2480 MHz
Date: 16.JUN.2012 21:38:20

added by operator

Test1: 15c.6; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = radiated


Result: Passed

Setup No.: C01_INT

Date of Test: 2012/06/22 4:38

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

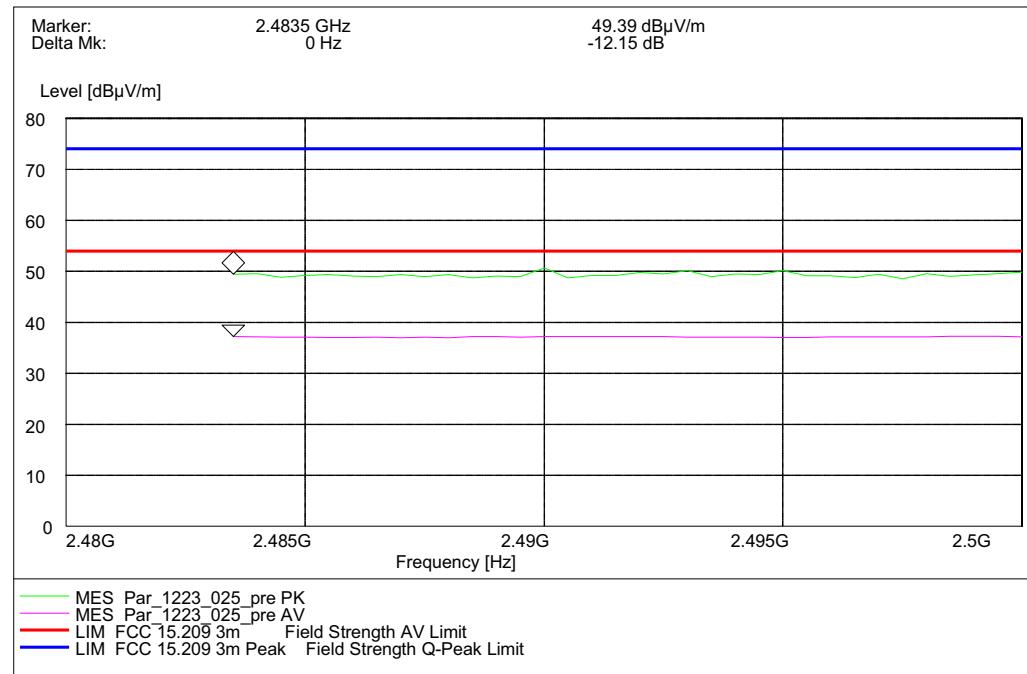Detailed Results:




Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

TX on	Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
2480 MHz	Ver + Hor	74	54	2483.5	49.39	37.24	24.61	16.76	Passed

Test2: 15c.6; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = radiated

Result: Passed

Setup No.: A01

Date of Test: 2012/06/26 19:49


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Marker:	2.4835 GHz	48.84 dB μ V/m
Delta Mk:	0 Hz	-11.72 dB

Level [dB μ V/m]

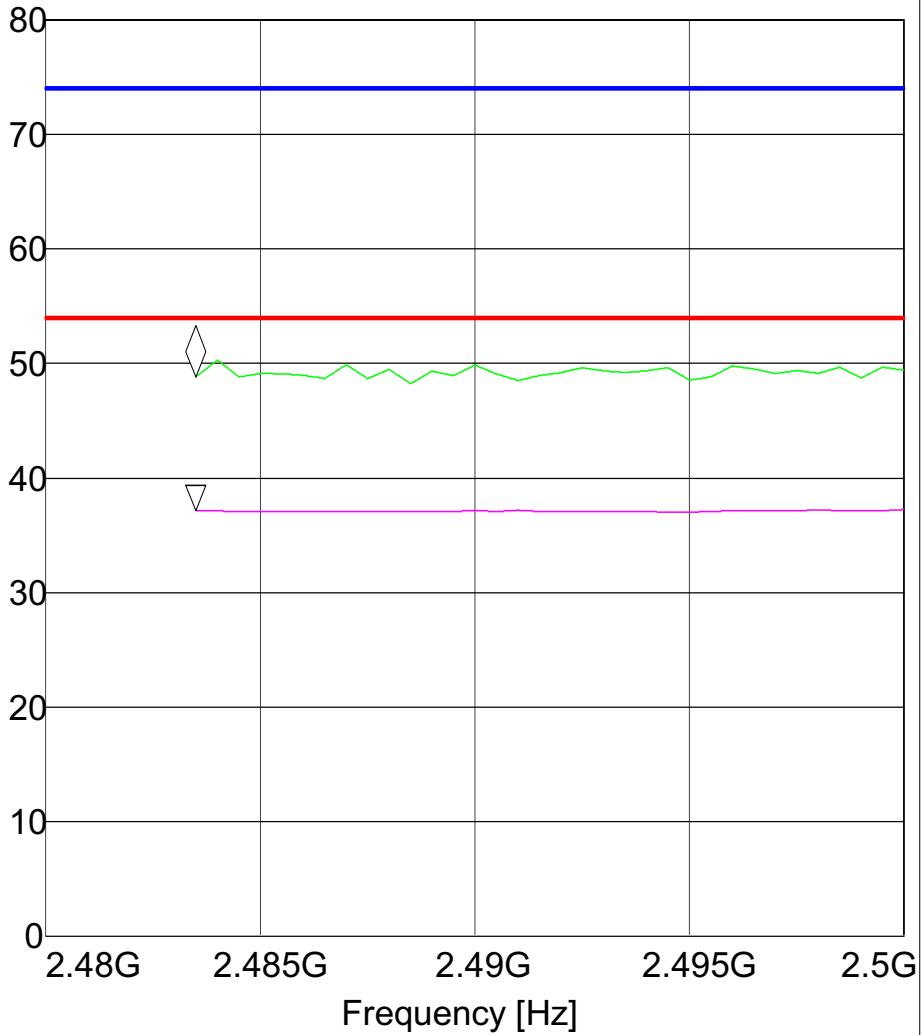

— MES Par_1223_016_pre PK

— MES Par_1223_016_pre AV

— LIM FCC 15.209 3m Field Strength AV Limit

— LIM FCC 15.209 3m Peak Field Strength Q-Peak Limit



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

TX on	Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
2480 MHz	Ver + Hor	74	54	2483.5	48.84	37.12	25.16	16.88	Passed



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.7; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2012/06/16 18:46


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Packet type	Time slot length	Dwell time	Dwell time ms
DH1	0.40	time slot length * 1600/5 /79 * 31.6	51.30

added by operator

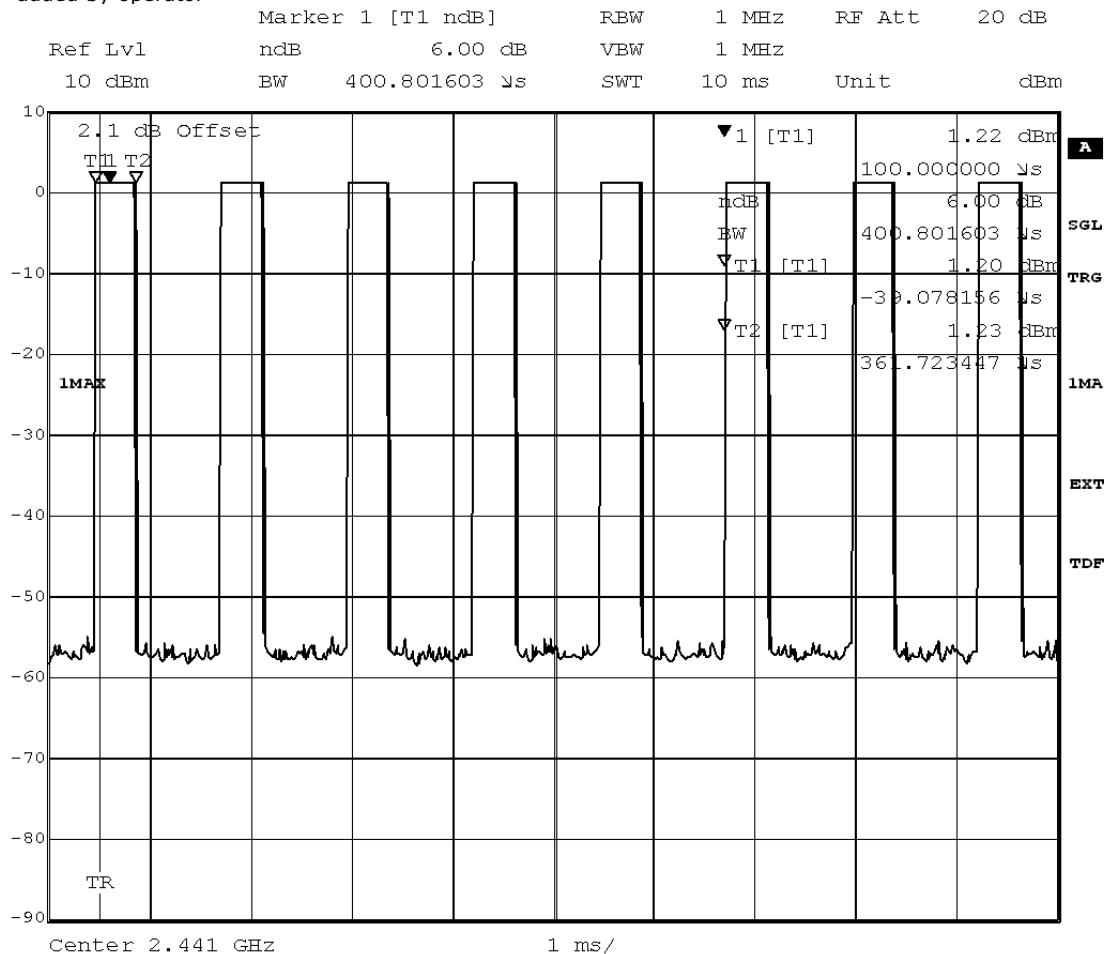


Title: Dwell time
 Comment A: CH M: 2441 MHz
 Date: 16.JUN.2012 18:23:52

added by operator

Packet type	Time slot length	Dwell time	Dwell time ms
DH3	1.66	time slot length * 1600/5 /79 * 31.6	212.91

added by operator

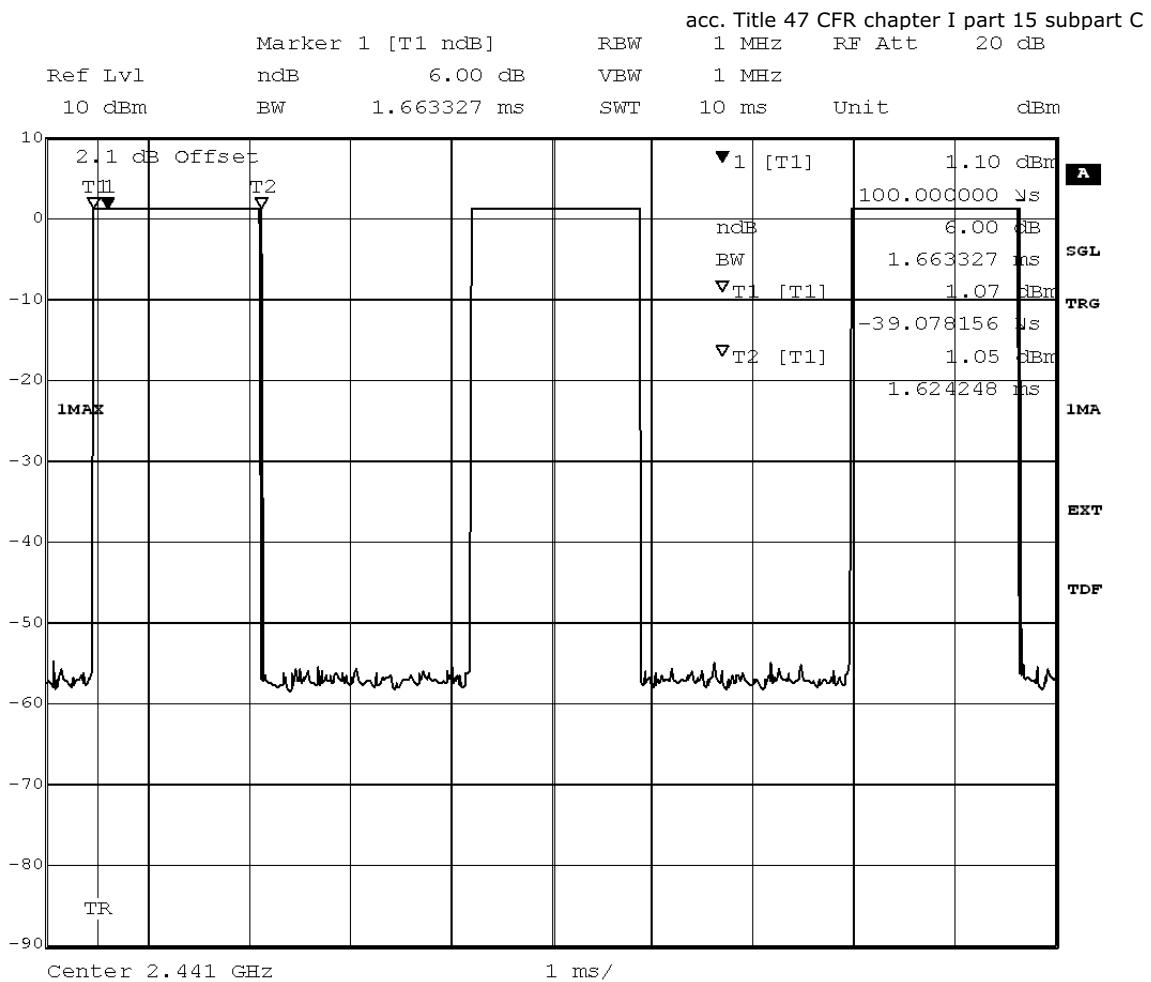


Title: Dwell time
 Comment A: CH M: 2441 MHz
 Date: 16.JUN.2012 18:24:20

added by operator

acc. Title 47 CFR chapter I part 15 subpart C

Packet type	Time slot length	Dwell time	Dwell time ms
DH5	2.93	time slot length * 1600/5 /79 * 31.6	374.51

added by operator

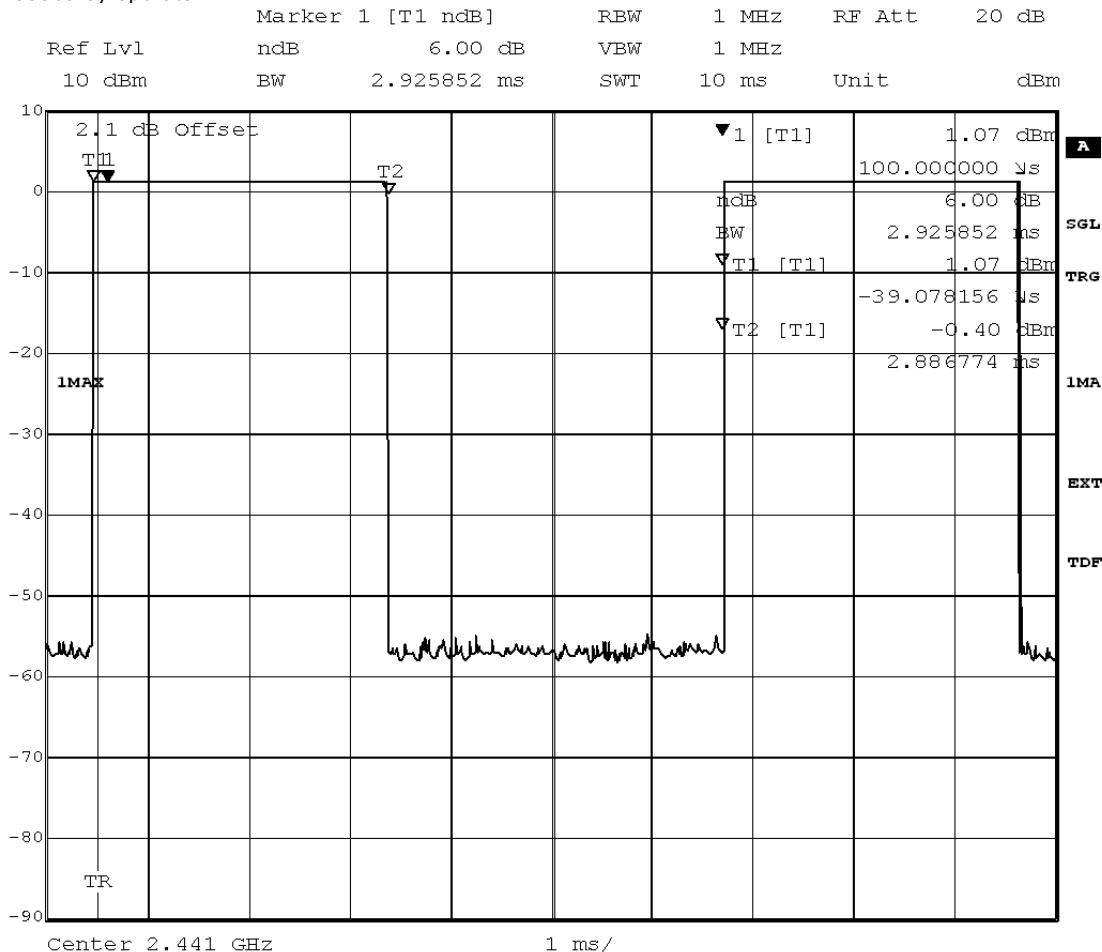

Title: Dwell time
 Comment A: CH M: 2441 MHz
 Date: 16.JUN.2012 18:24:51

added by operator

Test: 15c.7; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2012/06/16 21:33


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Packet type	Time slot length	Dwell time	Dwell time ms
DH1	0.42	time slot length * 1600/5 /79 * 31.6	53.87

added by operator

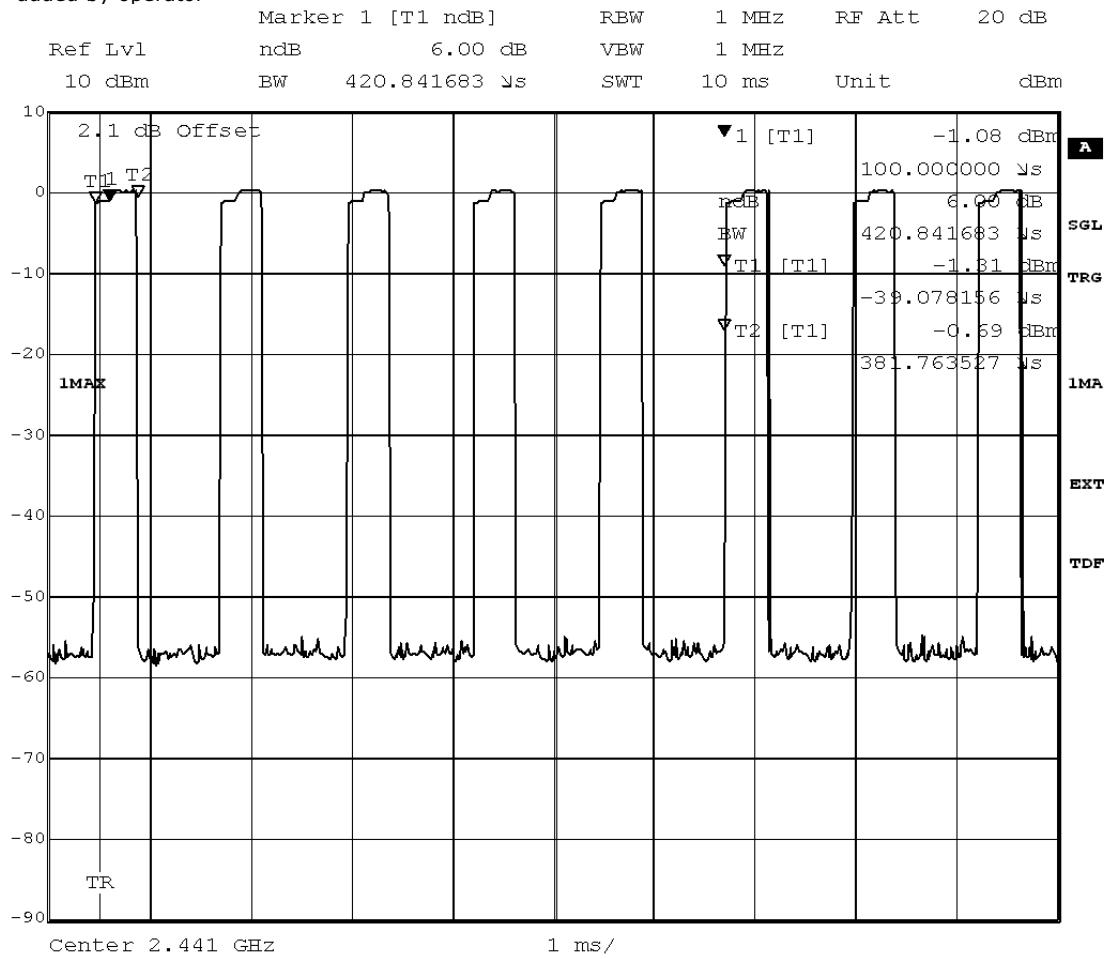


Title: Dwell time
 Comment A: CH M: 2441 MHz
 Date: 16.JUN.2012 20:52:49

added by operator

Packet type	Time slot length	Dwell time	Dwell time ms
DH3	1.66	time slot length * 1600/5 /79 * 31.6	212.91

added by operator

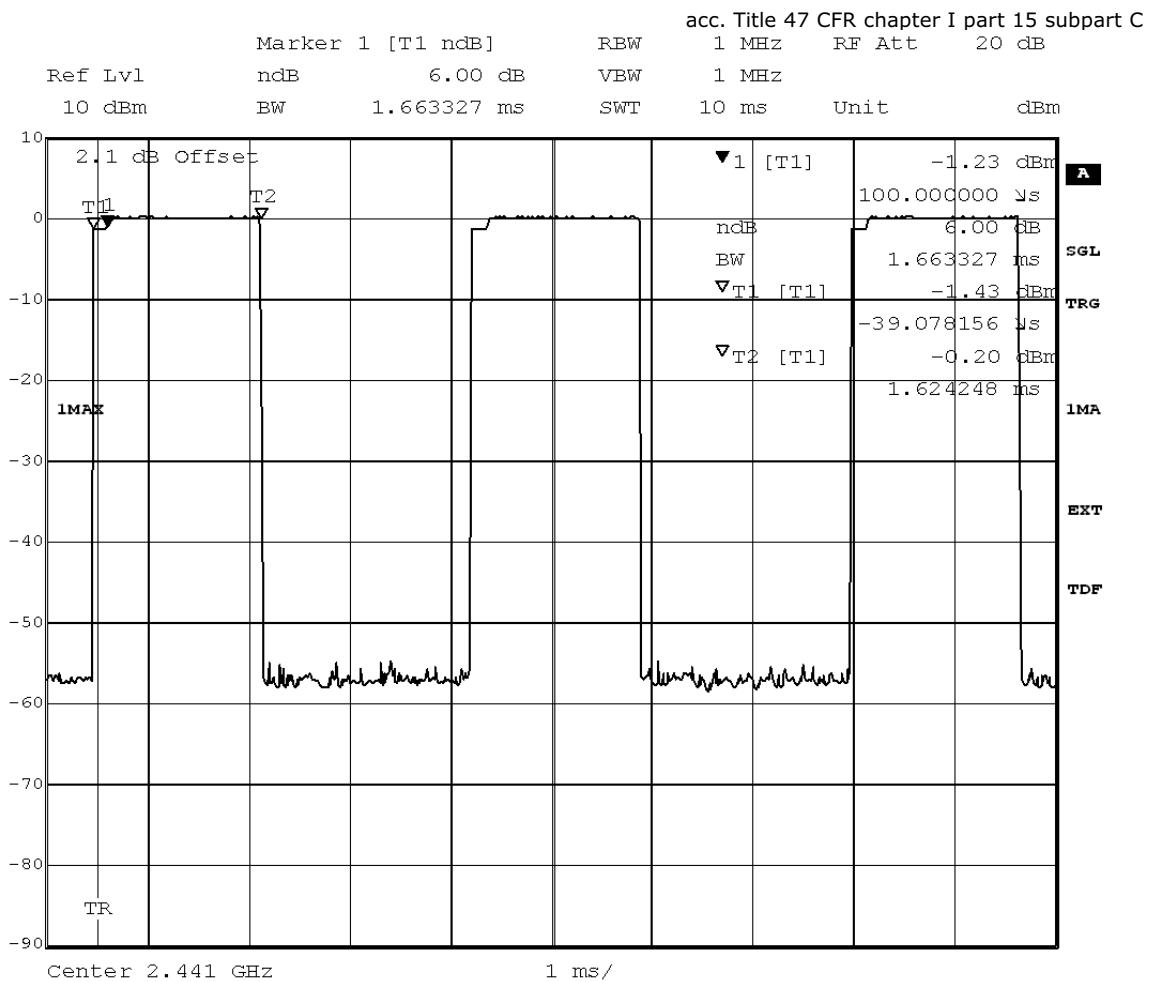


Title: Dwell time
 Comment A: CH M: 2441 MHz
 Date: 16.JUN.2012 20:53:29

added by operator

acc. Title 47 CFR chapter I part 15 subpart C

Packet type	Time slot length	Dwell time	Dwell time ms
DH5	2.93	time slot length * 1600/5 /79 * 31.6	374.51

added by operator

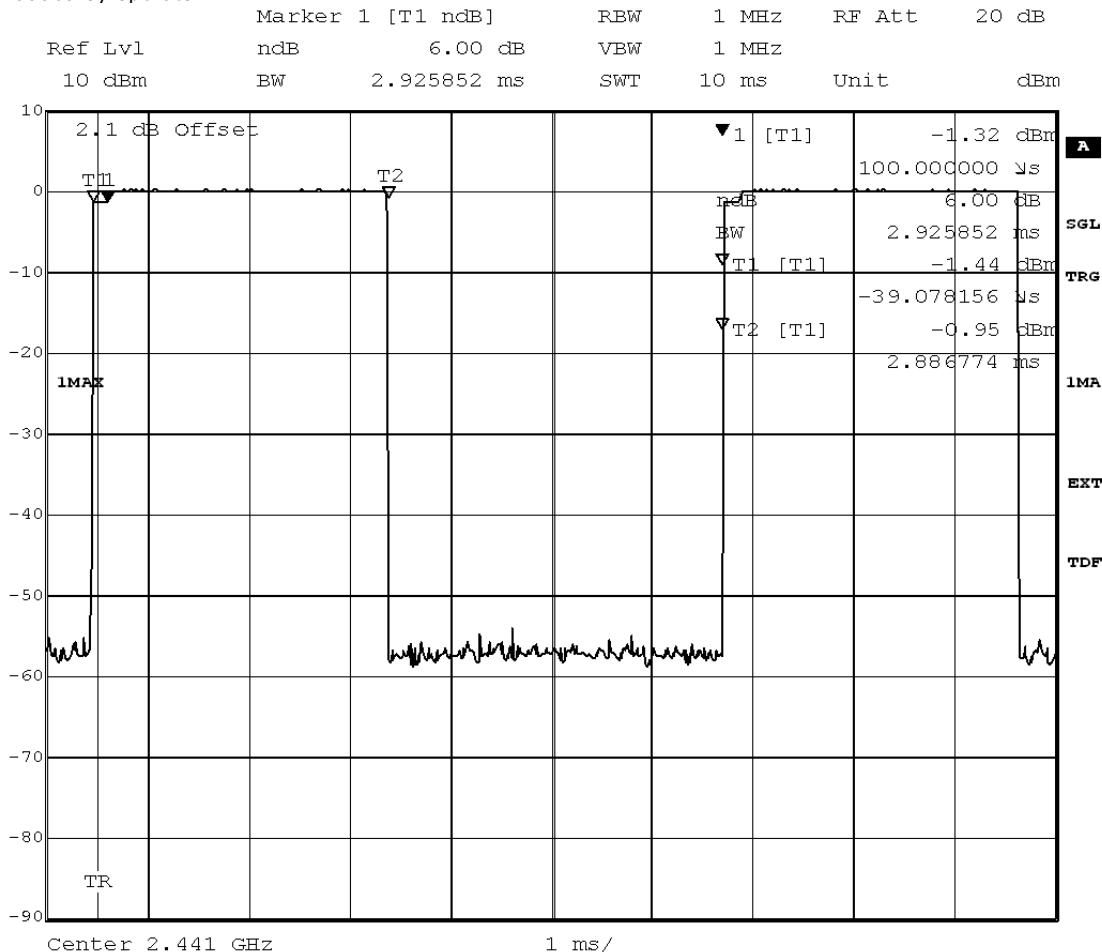

Title: Dwell time
 Comment A: CH M: 2441 MHz
 Date: 16.JUN.2012 20:53:58

added by operator

Test: 15c.7; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: B01

Date of Test: 2012/06/16 22:43


Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Packet type	Time slot length	Dwell time	Dwell time ms
DH1	0.42	time slot length * 1600/5 /79 * 31.6	53.87

added by operator

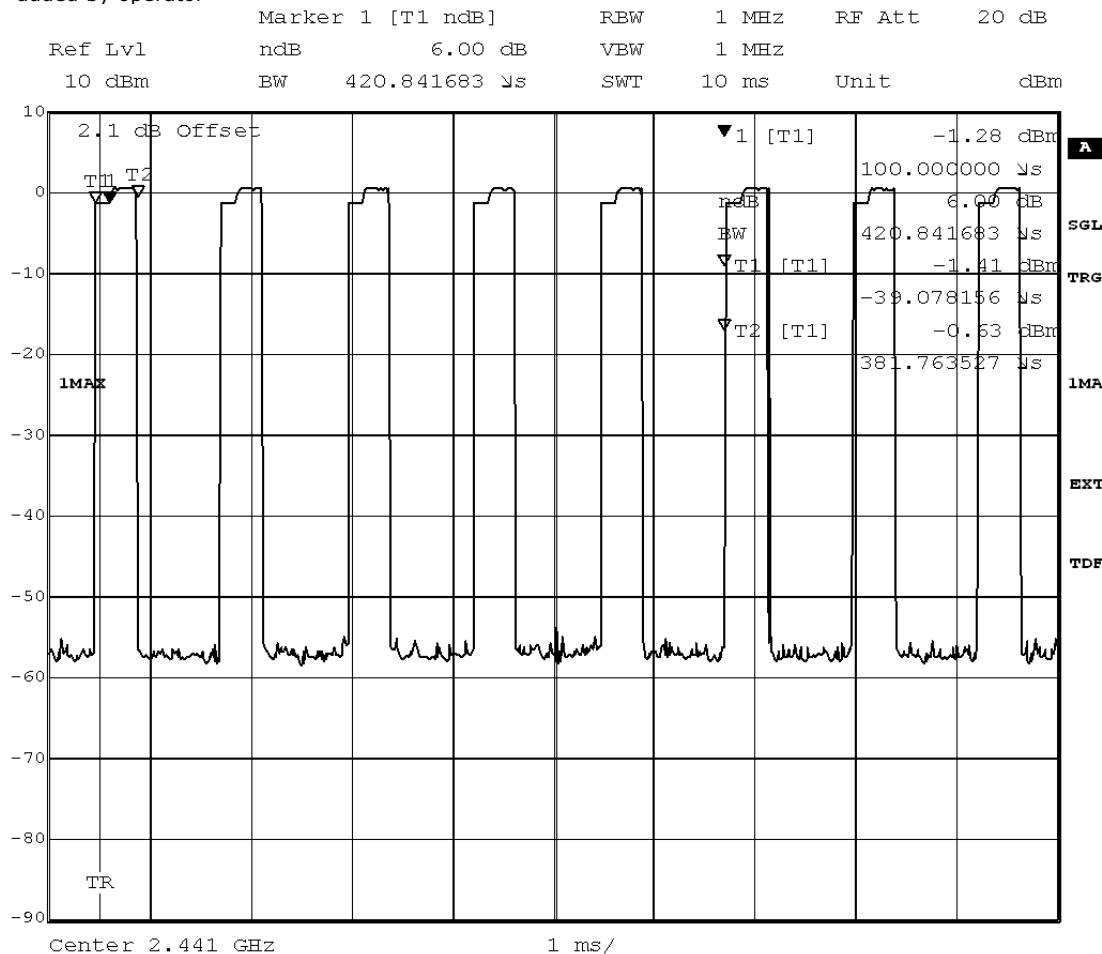


Title: Dwell time
 Comment A: CH M: 2441 MHz
 Date: 16.JUN.2012 22:13:19

added by operator

Packet type	Time slot length	Dwell time	Dwell time ms
DH3	1.66	time slot length * 1600/5 /79 * 31.6	212.91

added by operator

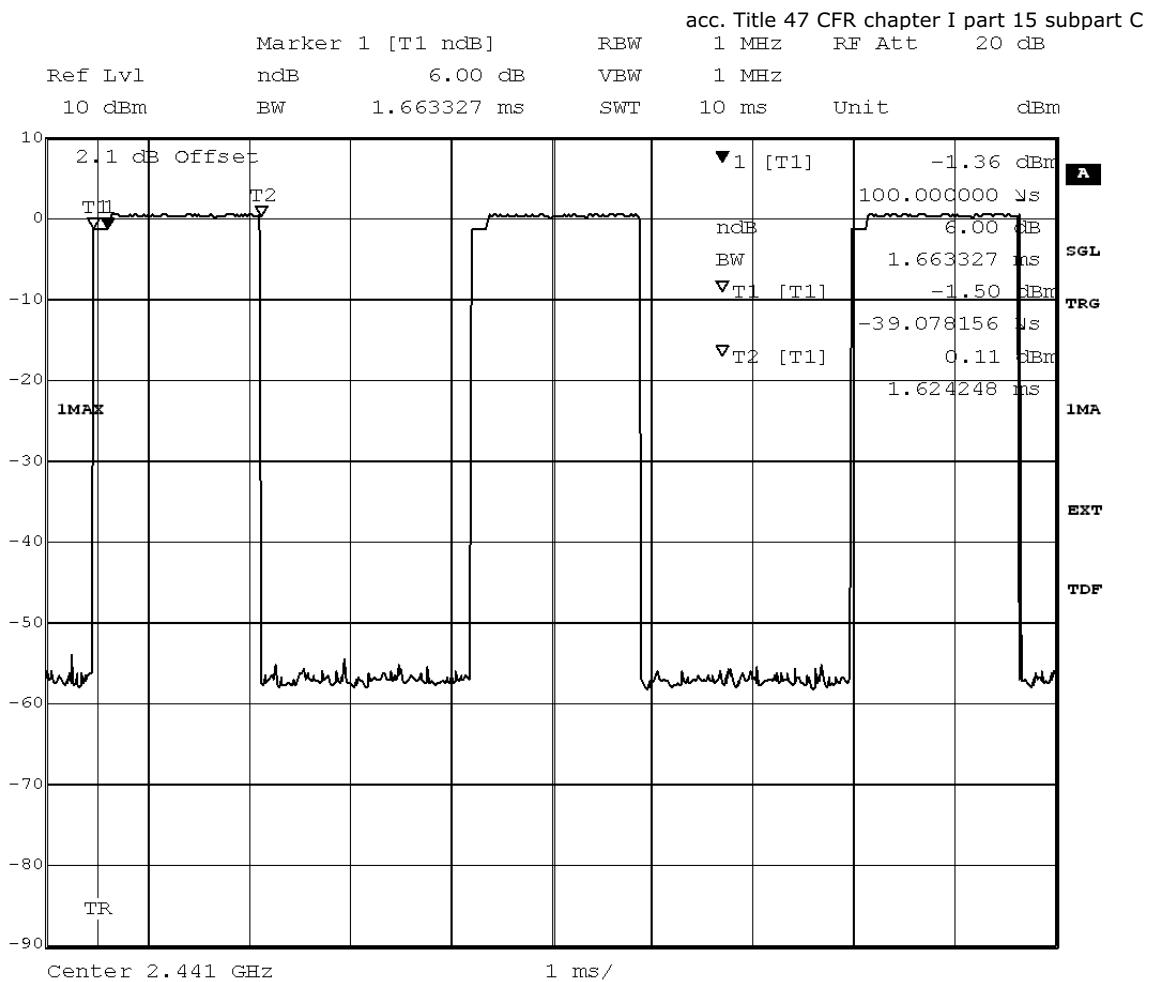


Title: Dwell time
 Comment A: CH M: 2441 MHz
 Date: 16.JUN.2012 22:13:59

added by operator

acc. Title 47 CFR chapter I part 15 subpart C

Packet type	Time slot length	Dwell time	Dwell time ms
DH5	2.93	time slot length * 1600/5 /79 * 31.6	374.51

added by operator

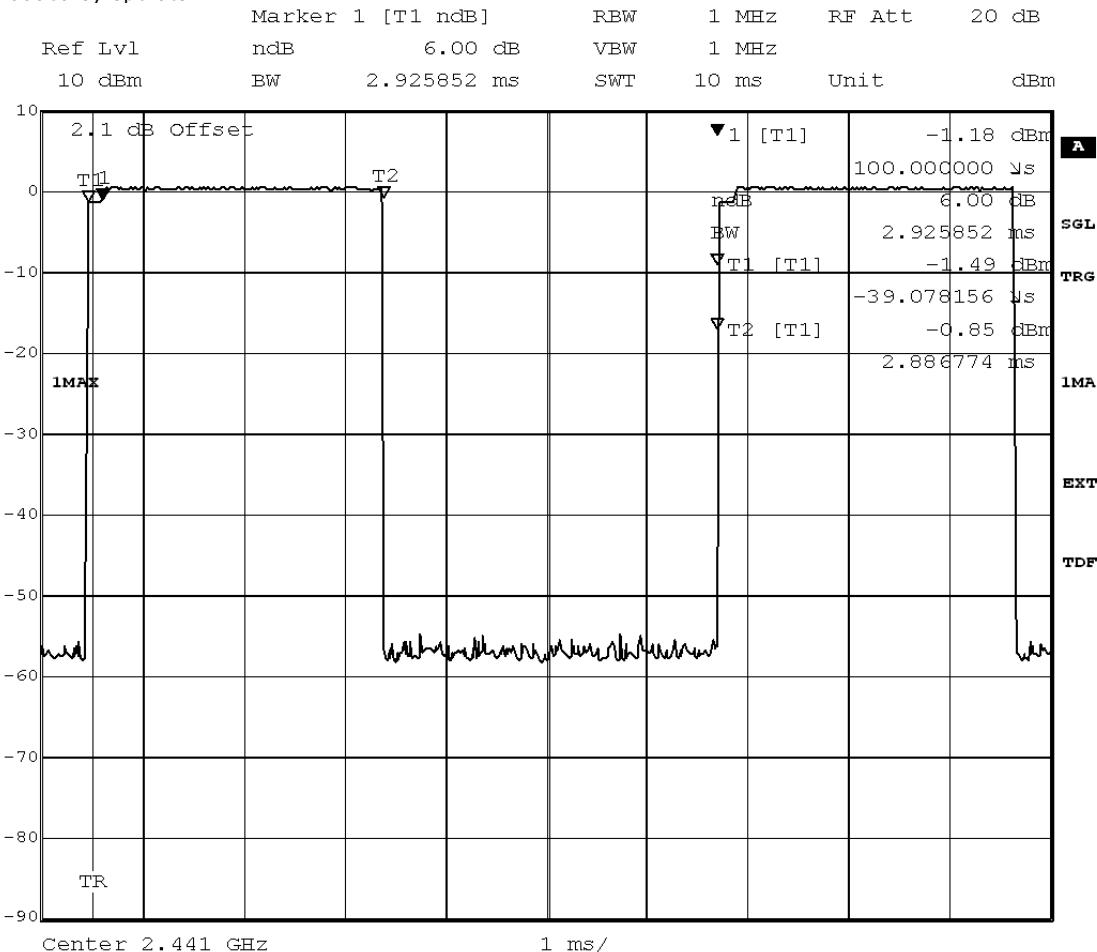

Title: Dwell time
 Comment A: CH M: 2441 MHz
 Date: 16.JUN.2012 22:14:27

added by operator

Test: 15c.8; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation

Result: Passed

Setup No.: A01


Date of Test: 2012/06/16 19:46

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Channel separation / MHz
1.000

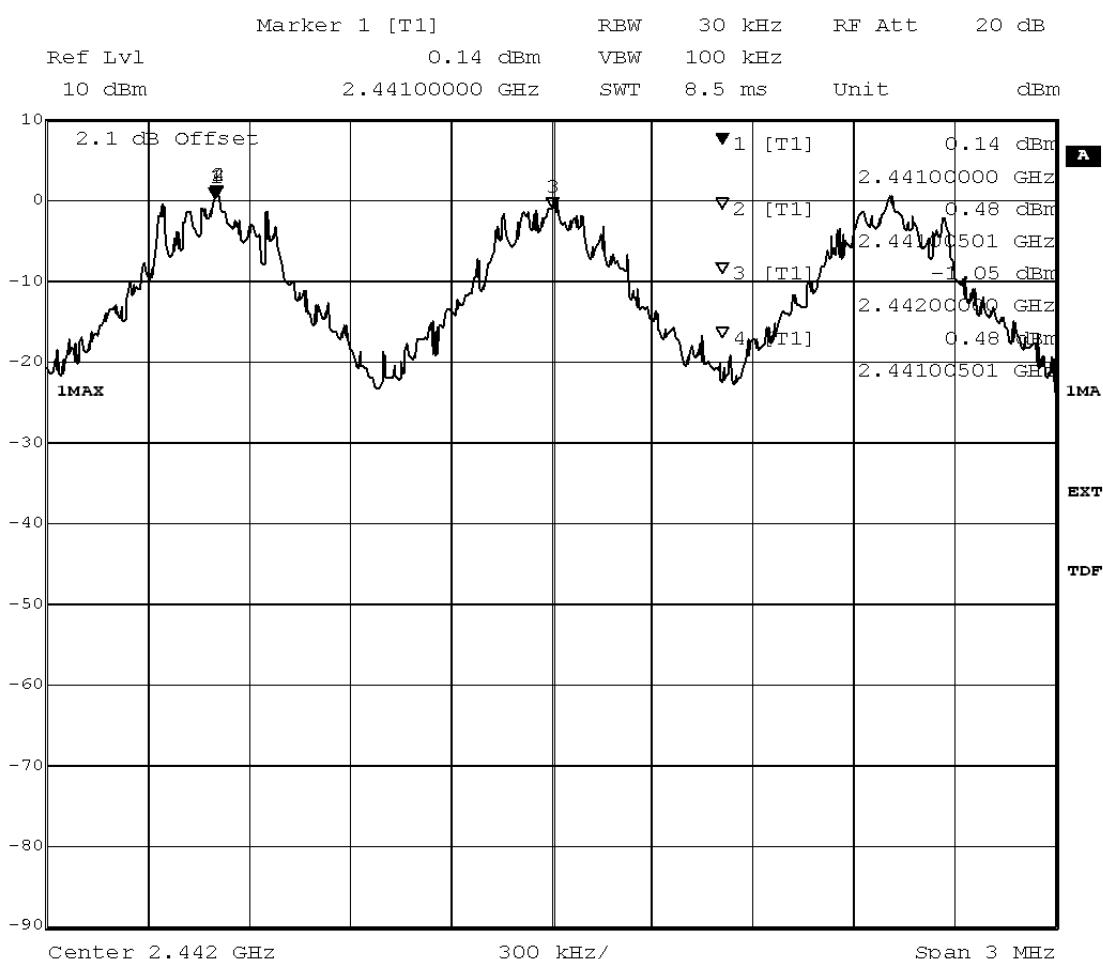

Title: Channel separation
 Comment A: CH H: Hopping
 Date: 16.JUN.2012 18:55:37

added by operator



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.8; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2012/06/16 19:48

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Channel separation / MHz
1.000

Test: 15c.8; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: B01

Date of Test: 2012/06/16 22:43

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Channel separation / MHz
1.000

Test: 15c.9; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation

Result: Passed

Setup No.: A01


Date of Test: 2012/06/16 19:46

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:
Number of Hopping Frequencies

79

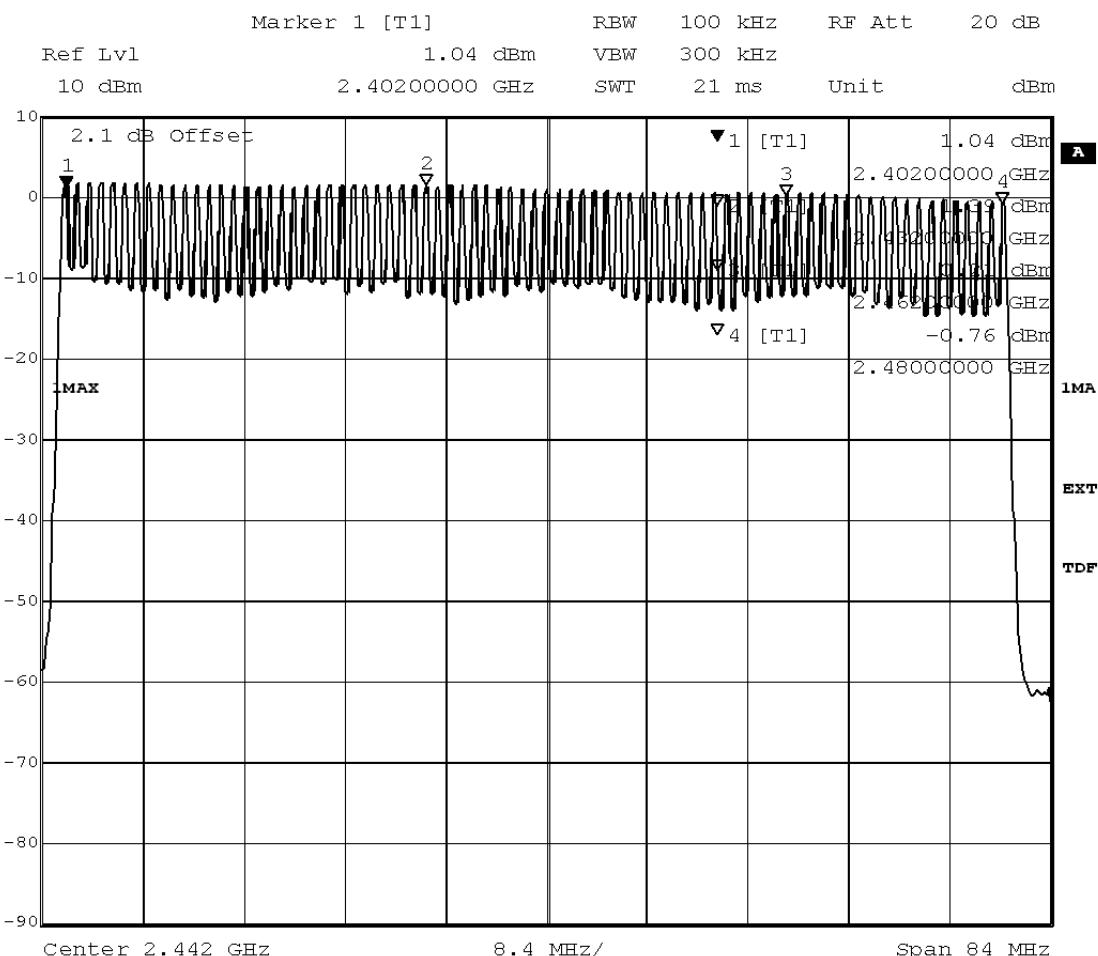

Title: Number of hopping frequencies

Comment A: CH H: Hopping

Date: 16.JUN.2012 19:06:26

added by operator



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.9; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2012/06/16 19:48

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Number of Hopping Frequencies
79

Test: 15c.9; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: B01

Date of Test: 2012/06/16 22:43

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Number of Hopping Frequencies
79

4 Test Equipment Details

4.1 List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:

Manufacturer:

Lab 2

Frankonia

Description:

Anechoic Chamber for radiated testing

Type:

10.58x6.38x6.00 m³

Single Devices for Anechoic Chamber

Single Device Name	Type	Serial Number	Manufacturer
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m ³ <i>Calibration Details</i>	none	Frankonia <i>Last Execution Next Exec.</i>
	FCC listing 96716 3m Part15/18	2011/01/11	2014/01/10
	IC listing 3699A-1 3m	2011/02/07	2014/02/06
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

Test Equipment Auxiliary Equipment for Conducted emissions

Lab ID:

Manufacturer:

Lab 1

Rohde & Schwarz GmbH & Co.KG

Description:

EMI Conducted Auxiliary Equipment

Single Devices for Auxiliary Equipment for Conducted emissions

Single Device Name	Type	Serial Number	Manufacturer
Cable "LISN to ESI"	RG214 <i>Calibration Details</i>	W18.03+W48.03	Huber&Suhner <i>Last Execution Next Exec.</i>
	Path Calibration		2011/11/11 2012/11/10
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG
Two-Line V-Network	ESH 3-Z5 <i>Calibration Details</i>	829996/002	Rohde & Schwarz GmbH & Co. KG <i>Last Execution Next Exec.</i>
	DKD calibration		2011/01/20 2013/01/19

Test Equipment Auxiliary Equipment for Radiated emissions
Lab ID:
Description:
Serial Number:
Lab 2

Equipment for emission measurements

see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer
Antenna mast	AS 620 P	620/37	HD GmbH
Biconical dipole	VUBA 9117	9117-108	Schwarzbeck
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2008/10/27 2013/10/26
	Standard Calibration		2012/01/18 2015/01/17
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01-2	Kabel Kusch
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02-2	Rosenberger Micro-Coax
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2012/05/18 2015/05/17
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2012/06/26 2015/06/25
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/10/27 2014/10/26
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5-10kg/024/379070	Maturo GmbH
		9	

**Test Equipment Auxiliary Test Equipment**

Lab ID:	Lab 2
Manufacturer:	see single devices
Description:	Single Devices for various Test Equipment
Type:	various
Serial Number:	none

Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	Calibration Details	Last Execution	Next Exec.
	Customized calibration	2011/10/19	2013/10/18
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG

Test Equipment Digital Signalling Devices
Lab ID:
Description:
Lab 1, Lab 2

Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
Bluetooth Signalling Unit CBT	CBT	100589	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration	2011/11/24	2014/11/23
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Initial factory calibration	2012/01/26	2014/01/25
	<i>HW/SW Status</i>	<i>Date of Start</i>	<i>Date of End</i>
	Firmware: V.2.01.25 3G : KC42x 11.48.02 LTE: KC501 1.6.5 up to 1.9.8 KC503 1.6.5 up to 1.9.8 KC506 1.9.8 KC507 1.7.0 KC508 1.8.5 up to 1.9.8 KC551 1.4.1 up to 1.9.8 KC553 1.5.5 up to 1.9.8 KC571 1.8.5 up to 1.9.8 KC572 1.8.5 up to 1.9.8 ---	2012/05/07	2012/07/03
	Firmware: V.2.01.25 3G : KC42x 11.48.02, 12.16.00 LTE: KC501 1.7.0 up to 2.0.0 KC503 1.7.2 up to 2.0.0 KC506 1.9.8 up to 2.0.0 KC507 1.7.0 KC508 1.8.5 up to 2.0.0 KC551 1.4.9 up to 2.0.0 KC553 1.7.0 up to 2.0.0 KC556 2.0.0 KC571 1.8.5 up to 2.0.0 KC572 1.8.5 up to 2.0.0 ---		2012/07/03
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration	2011/05/26	2013/05/25
	<i>HW/SW Status</i>	<i>Date of Start</i>	<i>Date of End</i>
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04 Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22 Firmware: μP1 8v50 02.05.06 ---	2007/07/16	
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration	2011/12/07	2014/12/06
	<i>HW/SW Status</i>	<i>Date of Start</i>	<i>Date of End</i>

Single Devices for Digital Signalling Devices (continued)

Single Device Name	Type	Serial Number	Manufacturer
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02		2007/01/02
	SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05		

	SW: K62, K69		2008/11/03

Test Equipment Emission measurement devices

Lab ID:	Lab 1, Lab 2
Description:	Equipment for emission measurements
Serial Number:	see single devices

Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer
Personal Computer	Dell	30304832059	Dell
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2012/05/22 2013/05/21
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2012/05/21 2013/05/20
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	standard calibration		2011/05/12 2014/05/11
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2011/12/05 2013/12/04
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Firmware-Update 4.34.4 from 3.45 during calibration		2009/12/03

Test Equipment Multimeter 12

Lab ID:	Lab 3
Description:	Ex-Tech 520
Serial Number:	05157876

Single Devices for Multimeter 12

Single Device Name	Type	Serial Number	Manufacturer
Digital Multimeter 12 (Multimeter)	EX520	05157876	Extech Instruments Corp.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2011/10/18 2013/10/17

Test Equipment Regulatory Bluetooth RF Test Solution

Lab ID: **Lab 3**
Description: Regulatory Bluetooth RF Tests
Type: Bluetooth RF
Serial Number: 001

Single Devices for Regulatory Bluetooth RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer
ADU 200 Relay Box 7	Relay Box	A04380	Ontrak Control Systems Inc.
Bluetooth Signalling Unit CBT	CBT	100302	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2011/08/17 2012/08/16
Power Meter NRV	NRVD	832025/059	
Power Sensor NRV Z1 A	PROBE	832279/013	
Power Supply	NGSM 32/10	2725	
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2011/06/15 2013/06/14
Rubidium Frequency Normal MFS	Datum MFS	002	Datum GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2011/08/17 2012/08/16
Signal Analyser FSIQ26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG
Vector Signal Generator SMIQ03B	SMIQ03B	832870/017	
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2010/06/23 2013/06/20

Test Equipment Shielded Room 02

Lab ID: **Lab 1**
Manufacturer: Frankonia
Description: Shielded Room for conducted testing
Type: 12 qm
Serial Number: none

Test Equipment Shielded Room 07

Lab ID: **Lab 3**
Description: Shielded Room 4m x 6m

Test Equipment T/H Logger 04

Lab ID: **Lab 3**
Description: Lufft Opus10
Serial Number: 7481

Single Devices for T/H Logger 04

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro Datalogger 04 (Environ)	Opus10 THI (8152.00)	7481	Lufft Mess- und Regeltechnik GmbH



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Test Equipment Temperature Chamber 01

Lab ID: **Lab 3**
Manufacturer: see single devices
Description: Temperature Chamber KWP 120/70
Type: Weiss
Serial Number: see single devices


Single Devices for Temperature Chamber 01

Single Device Name	Type	Serial Number	Manufacturer
Temperature Chamber Weiss 01	KWP 120/70	59226012190010	Weiss Umwelttechnik GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2012/03/12 2014/03/11

5 Annex

5.1 Additional Information for Report

Setup Drawings

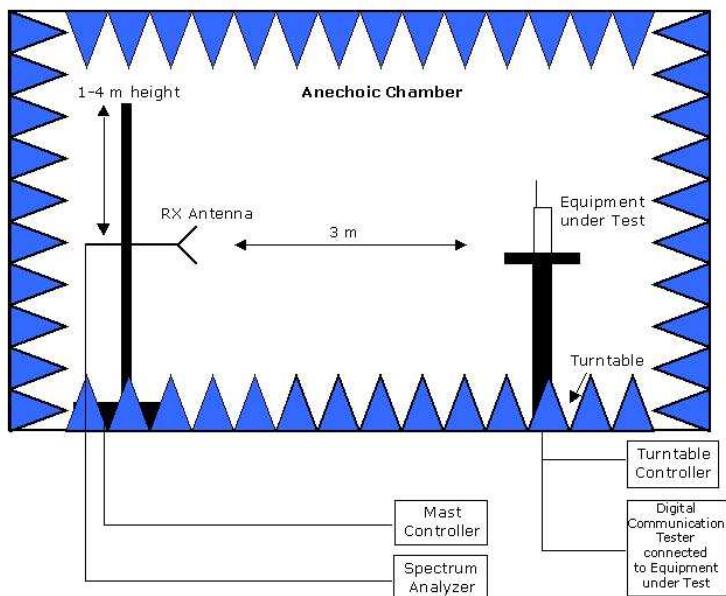

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Drawing 1: Setup in the Anechoic chamber:

Measurements below 1 GHz: Semi-anechoic, conducting ground plane.
 Measurements above 1 GHz: Fully-anechoic, absorbers on all surfaces



Reference: MDE_PARRO_1223_FCCa

acc. Title 47 CFR chapter I part 15 subpart C

Summary of Test Results

The EUT complied with all performed tests as listed in the summary section of this report.

Technical Report Summary

Type of Authorization :

Certification for an Intentional Radiator (Frequency Hopping Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15. The following subparts are applicable to the results in this test report

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

additional documents

The tests were selected and performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000. Instead of applying ANSI C63.4-1992 which is referenced in the FCC Public Note, the newer ANSI C63.4-2009 is applied.

Description of Methods of Measurements

Conducted emissions (AC power line)

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4,

Test Description

acc. Title 47 CFR chapter I part 15 subpart C

The test set-up was made in accordance to the general provisions of ANSI C 63.4.

The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 μ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads. The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.207

Frequency Range (MHz)	QP Limit (dB μ V)	AV Limit (dB μ V)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

Used conversion factor: Limit (dB μ V) = 20 log (Limit (μ V)/1 μ V).

Occupied bandwidth

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was setup to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produces the worst-case (widest) occupied bandwidth. The resolution bandwidth for measuring the reference level and the occupied bandwidth was 30 kHz.

The EUT was connected to the spectrum analyzer via a short coax cable.



Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Implication by the test laboratory:

Since the Bluetooth technology defines a fixed channel separation of 1 MHz this design parameter defines the maximum allowed occupied bandwidth depending on the EUT's output power:

1. Under the provision that the system operates with an output power not greater than 125 mW (21.0 dBm) : Implicit Limit: Max. 20 dB BW = 1.0 MHz / 2/3 = 1.5 MHz
2. If the system output power exceeds 125 mW (21.0 dBm): Implicit Limit: Max. 20 dB BW = 1.0 MHz

Used conversion factor: Output power (dBm) = 10 log (Output power (W) / 1mW)

The measured output power of the system is below 125 mW (21.0 dBm). For the results, please refer to the related chapter of this report. Therefore the limit is determined as 1.5 MHz.

Peak power output

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the output power measurements. The resolution bandwidth for measuring the output power was set to 3 MHz. The reference level of the spectrum analyzer was set higher than the output power of the EUT. The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (b) (1)

- (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:
- (1) For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)
==> Maximum Output Power: 30 dBm

Spurious RF conducted emissions

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements. The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: Peak-Maxhold
- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz

acc. Title 47 CFR chapter I part 15 subpart C

- Video Bandwidth (VBW): 300 kHz
- Sweep Time: 330 s

The reference value for the measurement of the spurious RF conducted emissions is determined during the test "band edge compliance" (cf. chapter 3.6). This value is used to calculate the 20 dBc limit.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

Spurious radiated emissions

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4,

Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4-2009.

The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The influence of the EUT support table that is used between 30-1000 MHz was evaluated.

The test was performed at the distance of 3 m between the EUT and the receiving antenna. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The radiated emissions measurements were made in a typical installation configuration. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is performed at 2 axes. A pre-check is also performed while the EUT is powered from both AC and DC (battery) power in order to find the worst-case operating condition.

1. Measurement up to 30 MHz

The test set-up was made in accordance to the general provisions of ANSI C63.4.

The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The radiated emissions measurements were made in a typical installation configuration.

The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

The Loop antenna HFH2-Z2 is used.

Step 1: pre-measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 – 0.15 and 0.15 – 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz – 10 kHz
- Measuring time / Frequency step: 100 ms

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 µs (BT Timing 1.25 ms)
- Turntable angle range: -180 to +180°

- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180 to +180°
- Turntable step size: 45°
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by +/-22.5° around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by +/-25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -22.5° to +22.5° around the determined value
- Height variation range: -0.25 m to +0.25 m around the determined value

Step 4: final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz: The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18–25 GHz) are used, the steps 2–4 are omitted. Step 1 was performed with one height of the receiving antenna only.

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

For the enhanced data rate packets the test is performed as worst-case-check in order to verify that emissions have a comparable level as found at basic data rate. Typically, the measurement for these packets is performed in the frequency range 1 to 8 GHz but it depends on the emissions found during the test for the basic data rate. Please refer to the results for the used frequency range.



Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (μ V/m)	Measurement distance (m)	Limit(dB μ V/m @10m)
0.009 – 0.49	2400/F(kHz)	300	Limit (dB μ V/m)+30dB
0.49 – 1.705	24000/F(kHz)	30	Limit (dB μ V/m)+10dB
1.705 - 30	30	30	Limit (dB μ V/m)+10dB

Frequency in MHz	Limit (μ V/m)	Measurement distance (m)	Limit (dB μ V/m)
30 - 88	100	3	40.0
88 - 216	150	3	43.5
216 - 960	200	3	46.0
above 960	500	3	54.0

§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dB μ V/m) = 20 log (Limit (μ V/m)/1 μ V/m)

Band edge compliance

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4, FCC §15.31

Test Description

The procedure to show compliance with the band edge requirement is divided into two measurements: 1. Show compliance of the lower band edge by a conducted measurement and 2. show compliance of the higher band edge by a radiated and conducted measurement.

For the first measurement the EUT is set to transmit on the lowest channel (2402 MHz). The lower band edge is 2400 MHz.

Analyzer settings:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

For the second measurement the EUT is set to transmit on the highest channel (2480 MHz). The higher band edge is 2483.5 MHz.

Analyzer settings for conducted measurement:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

Test Requirements / Limits

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the



acc. Title 47 CFR chapter I part 15 subpart C
desired power, based on either an RF conducted or a radiated measurement, provided the transmitter
demonstrates compliance with the peak conducted power limits.

...
Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated
emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the
radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the measurement of the lower band edge the RF power at the band edge shall be "at least 20 dB below
that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

For the measurement of the higher band edge the limit is "specified in Section 15.209(a)".

Dwell time

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the dwell time measurements. The EUT was
connected to the spectrum analyzer via a short coax cable. The dwell time is calculated by:

Dwell time = time slot length * hop rate / number of hopping channels * 31.6 s

with:

- hop rate = $1600 * 1/s$ for DH1 packets = 1600 s-1
- hop rate = $1600/3 * 1/s$ for DH3 packets = 533.33 s-1
- hop rate = $1600/5 * 1/s$ for DH5 packets = 320 s-1
- number of hopping channels = 79
- 31.6 s = 0.4 seconds multiplied by the number of hopping channels = $0.4 * 79$

The highest value of the dwell time is reported.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of
occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by
the number of hopping channels employed. Since the Bluetooth technology uses 79 channels this period is
calculated to be 31.6 seconds.

Channel separation

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the channel separation measurements. The channel
separation is independent from the modulation pattern.

The EUT was connected to spectrum analyzer via a short coax cable.

Analyzer settings:

- Detector: Peak-Maxhold
- Span: 3 MHz
- Centre Frequency: a mid frequency of the 2.4 GHz ISM band
- Resolution Bandwidth (RBW): 30 kHz
- Video Bandwidth (VBW): 100 kHz
- Sweep Time: Coupled

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

 Number of hopping frequencies

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the number of hopping frequencies measurement. The number of hopping frequencies is independent from the modulation pattern.

The EUT was connected to spectrum analyzer via a short coax cable.

Analyzer settings:

- Detector: Peak-Maxhold
- Centre frequency: 2442 MHz
- Frequency span: 84 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: Coupled

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (iii)

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

 FCC and IC Correlation of measurement requirements

The following tables show the correlation of measurement requirements for Bluetooth equipment and Digital Apparatus from FCC and IC standards.

Bluetooth® equipment:

Measurement	FCC reference	IC reference
Conducted emissions on AC mains	§ 15.207	RSS-Gen: 7.2.4
Occupied bandwidth	§ 15.247 (a) (1)	RSS-210: A8.1
Peak power output	§ 15.247 (b) (1)	RSS-210: A8.4
Spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen: 6;RSS-210: A8.5
Spurious radiated emissions	§ 15.247 (d)	RSS-Gen: 6;RSS-210: A8.5
Band edge compliance	§ 15.247 (d)	RSS-210: A8.5
Dwell time	§ 15.247 (a) (1) (iii)	RSS-210: A8.1
Channel separation	§ 15.247 (a) (1)	RSS-210: A8.1
No. of hopping frequencies	§ 15.247 (a) (1) (iii)	RSS-210: A8.1
Antenna requirement	§ 15.203 / 15.204	RSS-Gen: 7.1.2

Digital Apparatus:

Measurement	FCC reference	IC reference
Conducted Emissions(AC Power Line)	§15.107	ICES-003
Spurious Radiated Emissions	§15.109	ICES-003

6 Index

1	Administrative Data	2
1.1	Project Data	2
1.2	Applicant Data	2
1.3	Test Laboratory Data	2
1.4	Signature of the Testing Responsible	3
1.5	Signature of the Accreditation Responsible	3
2	Test Object Data	3
2.1	General OUT Description	3
2.2	Detailed Description of OUT Samples	4
2.3	OUT Features	5
2.4	Setups used for Testing	6
3	Results	6
3.1	General	6
3.2	List of the Applicable Body	7
3.3	List of Test Specification	7
3.4	Summary	8
3.5	Detailed Results	11
3.5.1	15c.1 Conducted emissions (AC power line) §15.207	11
3.5.2	15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209	13
3.5.3	15c.3 Occupied bandwidth §15.247 (a) (1)	21
3.5.4	15c.4 Peak power output §15.247 (b) (1)	39
3.5.5	15c.5 Spurious RF conducted emissions §15.247 (d)	57
3.5.6	15c.6 Band edge compliance §15.247 (d)	68
3.5.7	15c.7 Dwell time §15.247 (a) (1) (iii)	86
3.5.8	15c.8 Channel separation §15.247 (a) (1)	96
3.5.9	15c.9 Number of hopping frequencies §15.247 (a) (1) (iii)	98
4	Test Equipment Details	100
4.1	List of Used Test Equipment	100



Reference: MDE_PARRO_1223_FCCa

5 Annex	acc. Title 47 CFR chapter I part 15 subpart C
	107
5.1 Additional Information for Report	
	107
6 Index	
	116
