

EMITECH ATLANTIQUE

15, rue de la Cliae
Z.I. Angers-Beaucouzé
49070 BEAUCOUZÉ
Tél. 02 41 73 26 27
Fax 02 41 73 26 40
e-mail : atlantique@emitech.fr

R.C.S. ANGERS 95 B 543
SIRET 344 545 645 00055

RA-24-07101294-2/A Ed. 0

FCC CERTIFICATION RADIO Measurement Technical Report

**standard to apply:
FCC Part 15.247**

**Equipment under test:
BLUETOOTH HIFI SPEAKER
SIRIUS**

**FCC ID:
RKXSIRIUS**

**Company:
PARROT**

DISTRIBUTION: Mr PIDOU

Company: PARROT

Number of pages: 40 including 4 annexes

Ed.	Date	Modified pages	Written by	Technical Verification
			Name	Quality Approval
			Visa	Name
0	5-Jul-07	Creation	L. BERTHAUD <i>LB</i>	

Duplication of this document is only permitted for an integral photographic facsimile. It includes the number of pages referenced here above. This document is the result of testing a specimen or a sample of the product submitted. It does not imply an assessment of the conformity of the whole manufactured products of the tested sample.

SIEGE SOCIAL : EMITECH S.A.

3, rue des Coudriers – Z.A. de l'Observatoire – 78180 MONTIGNY-LE-BRETONNEUX – Tél. 01 30 57 55 55 – Fax 01 30 43 74 48
S.A. AU CAPITAL DE 480 000 € - R.C. VERSAILLES B 344 545 645 – SIRET 344 545 645 000 22 – CODE APE 742 C

PRODUCT: BLUETOOTH HIFI SPEAKER

Reference / model: SIRIUS

Serial number: not communicated

MANUFACTURER: not communicated

COMPANY SUBMITTING THE PRODUCT:

Company: PARROT

Address: 174, quai de Jemmapes
75010 PARIS
FRANCE

Responsible: Mr PIDOU

DATE(S) OF TEST: 23 and 31 May 2007
15 June 2007

TESTING LOCATION: EMITECH ATLANTIQUE laboratory at ANGERS (49) FRANCE
EMITECH ATLANTIQUE open area test site in LA POUEZE (49)
FRANCE

Registration Number by FCC: 101696/FRN: 0006 6490 08

TESTED BY: L. BERTHAUD

CONTENTS

TITLE	PAGE
1. INTRODUCTION.....	4
2. PRODUCT DESCRIPTION	4
3. NORMATIVE REFERENCE.....	4
4. TEST METHODOLOGY	5
5. ADD ATTACHMENTS FILES	5
6. TESTS AND CONCLUSIONS	6
7. MEASUREMENT OF THE CONDUCTED DISTURBANCES.....	7
CURVE N°: 1.....	9
CURVE N°: 2.....	10
8. PEAK OUTPUT POWER.....	11
9. RADIATED EMISSION OF TRANSMITTER	13
10. BAND EDGE COMPLIANCE	15
CURVE N°: 3.....	16
CURVE N°: 4.....	17
ANNEX 1: OCCUPIED BANDWIDTH AND CHANNEL SEPARATION	18
ANNEX 2: NUMBER OF CHANNELS AND AVERAGE TIME OF OCCUPANCY ON ANY FREQUENCY	24
ANNEX 3: PHOTOS OF THE EQUIPMENT UNDER TEST.....	34
ANNEX 4: TEST SET UP AND OPEN AREA TEST SITE	38

1. INTRODUCTION

This document presents the result of RADIO test carried out on the following equipment:
BLUETOOTH HIFI SPEAKER SIRIUS in accordance with normative reference.

2. PRODUCT DESCRIPTION

ITU Emission code: 1M00F7D

Class: B (residential environment)

Utilization: Bluetooth Hifi speaker

Antenna type: incorporated antenna

Operating frequency range: from 2402 MHz to 2480 MHz

Number of channels: 79

Channel spacing: 1 MHz

Frequency generation: SAW Resonator Crystal Synthesiser

Modulation: Frequency Hopping Spread Spectrum (FHSS)

Amplitude Digital Frequency Phase

Power source: Lithium battery (4.8 Vd.c.) + battery charger

Power level, frequency range and channels characteristics are not user adjustable.
The details pictures of the product and the circuit boards are joined with this file.

3. NORMATIVE REFERENCE

The standards and testing methods related throughout this report are those listed below.
They are applied on the whole test report even though the extensions (version, date and amendment) are not repeated.

FCC Part 15 (2006) Code of Federal Regulations
Title 47 - Telecommunication
Chapter 1 - Federal Communications Commission
Part 15 - Radio frequency devices
Subpart C - Intentional Radiators

ANSI C63.4 (2003) Methods of Measurement of Radio-Noise Emissions from Low-voltage Electrical and Electronics Equipment in the range of 9 kHz to 40 GHz.

Public Notice DA 00-705 Filing and Measurement Guideline for Frequency Hopping Spread Spectrum Systems.

4. TEST METHODOLOGY

Radio performance tests procedures given in part 15:

- Paragraph 33: frequency range of radiated measurements
- Paragraph 35: measurement detector functions and bandwidths
- Paragraph 203: antenna requirement
- Paragraph 205: restricted bands of operation
- Paragraph 207: conducted limits
- Paragraph 209: radiated emission limits; general requirements
- Paragraph 247: operation within the bands 2400-2483.5 MHz

5. ADD ATTACHMENTS FILES

- “*Synoptic*”
- “*Block diagram*”
- “*External photos and Product labeling*”
- “*Assembly of components*”
- “*Internal photos*”
- “*Layout pcb*”
- “*Bil of materials*”
- “*Schematics*”
- “*Product description*”
- “*User guide*”

EMITECH

EMITECH

EMITECH

EMITECH

6. TESTS AND CONCLUSIONS

Test procedure	Description of test	Criteria respected ?				Comment
		Yes	No	NAp	NAs	
FCC Part 15.203	ANTENNA REQUIREMENT	X				<i>Note 7</i>
FCC Part 15.205	RESTRICTED BANDS OF OPERATION	X				
FCC Part 15.207	CONDUCTED LIMITS	X				
FCC Part 15.209	RADIATED EMISSION LIMITS; general requirements	X				<i>Note 4</i>
FCC Part 15.247	OPERATION WITHIN THE BAND 2400-2483.5 MHz					
	(a) (1) <i>hopping systems</i>	X				<i>Note 1</i>
	(a) (1) (i) 902 – 928 MHz			X		
	(a) (1) (ii) 5725 – 5850 MHz			X		
	(a) (1) (iii) 2400 – 2483.5 MHz	X				<i>Note 2</i>
	(a) (2) <i>digital modulation techniques</i>			X		
	(b) <i>max output power</i>	X				<i>Note 5</i>
	(c) <i>operation with directional antenna gains > 6 dBi</i>			X		<i>Note 3</i>
	(d) <i>intentional radiator</i>	X				
	(e) <i>peak power spectral density</i>			X		
	(f) <i>hybrid system</i>			X		
	(g)	X				
	(h)	X				
	(i) <i>RF exposure compliance</i>	X				<i>Note 6</i>
DA 00-705	BAND EDGE COMPLIANCE	X				

NAp: Not Applicable

NAs: Not Asked

Note 1: the frequency hopping system has hopping channel carrier frequencies separated by 1 MHz. The system hops to channel frequencies from a pseudo randomly ordered list of hopping frequencies. Each frequency is used equally on the average by the transmitter, and separated by a minimum of 20 dB bandwidth of the hopping channel (see annex 1).

Note 2: the frequency hopping system use more than 15 channels.

The timing by channel is 142.8 μ s. During 79 channels \times 0.4 s (part 15) = 31.6 s, any channel is used 188 times, then $188 \times 142.8 \mu$ s = 26.85 ms, thus the average time of occupancy on any channel is less than 400 ms within a period of 0.4 s multiplied by the number of hopping channels employed, in normal operating mode (see annex 2).

Note 3: the antenna gain is less than 6 dBi.

Note 4: see FCC part 15.247 (d).

Note 5: conducted measurement is not possible (integral antenna), so we used the radiated method in open field.

Note 6: this type of equipment uses less than 0.5 W of output power with a high signal transmitting duty factor (section 3 from Oet 65c).

Note 7: pcb antenna (see photos in annex 3).

Conclusion:

The sample of **BLUETOOTH HIFI SPEAKER SIRIUS** submitted to the tests complies with the regulations of the standard FCC Part 15 in accordance with the limits or criteria defined in this report.

7. MEASUREMENT OF THE CONDUCTED DISTURBANCES**Standard:** FCC Part 15**Test procedure:** Paragraph 15.207**Limits:** Class B**Test equipment:**

TYPE	BRAND	EMITECH NUMBER
Test receiver ESH3	Rohde & Schwarz	1058
Pulse limiter ESH3-Z2	Rohde & Schwarz	976
Artificial main network L3-25	PMM	834
Spectrum analyzer FSBS	Rohde & Schwarz	3133
Power supply 115 V / 60 Hz PCR4000L	Kikusui	3132

Software used: BAT-EMC V3.1.7.1**Test set up:**

The test unit is placed on a wooden table, 0.8 m over an horizontal reference plane and 0.4 m from a vertical reference plane. It is powered by an artificial main network placed on the ground reference plane (see photos in annex 4).

Equipment under test operating condition:

The equipment is powered with the AC power operating voltage of 115 V / 60 Hz.

Frequency range: 150 kHz - 30 MHz**Detection mode:** Peak / Average**Bandwidth:** 9 kHz

EMITECH

EMITECH

EMITECH

EMITECH

Results:**Measurement on the mains power supply:**

The measurement is made with peak detector.

Curve N° 1: measurement on the Neutral with peak detector

Curve N° 2: measurement on the Line with peak detector

The spectrum line which are less than 6 dB of the limit are analyzed with Quasi-Peak detector and average detector.

Measurement with Average detector:


Frequencies (MHz)	Line (dB μ V)	Neutral (dB μ V)	Limits (dB μ V)
0.160	—	45.7	55.5
0.161	43.7		55.4

Test conclusion:

RESPECTED STANDARD

CURVE N°: 1.

Measurement on the neutral with peak detector

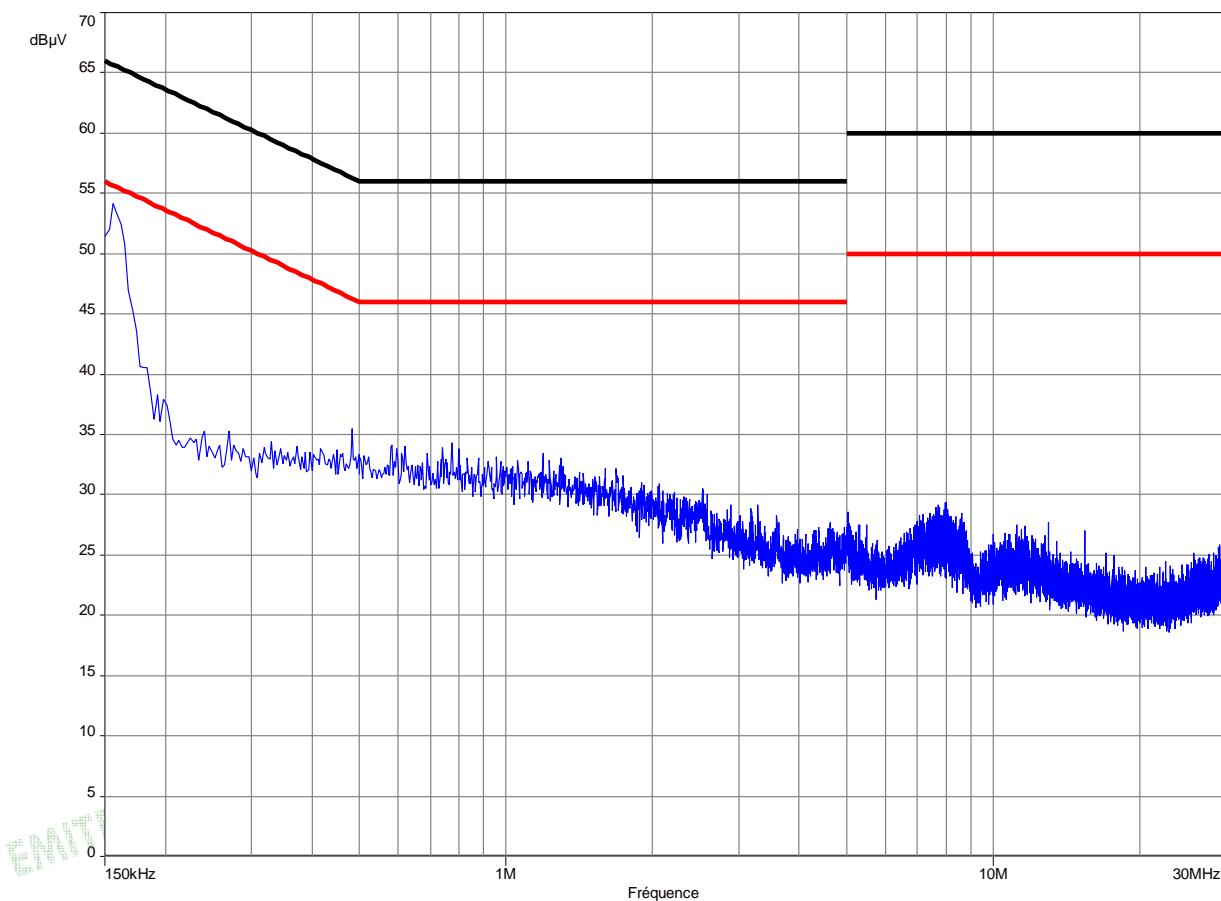

RBW filter: 10 kHz

VBW filter: 10 kHz

Sweep time: 500 ms/MHz

EMITECH


EMITECH

EMITECH

EMITECH

CURVE N°: 2.

Measurement on the line with peak detector

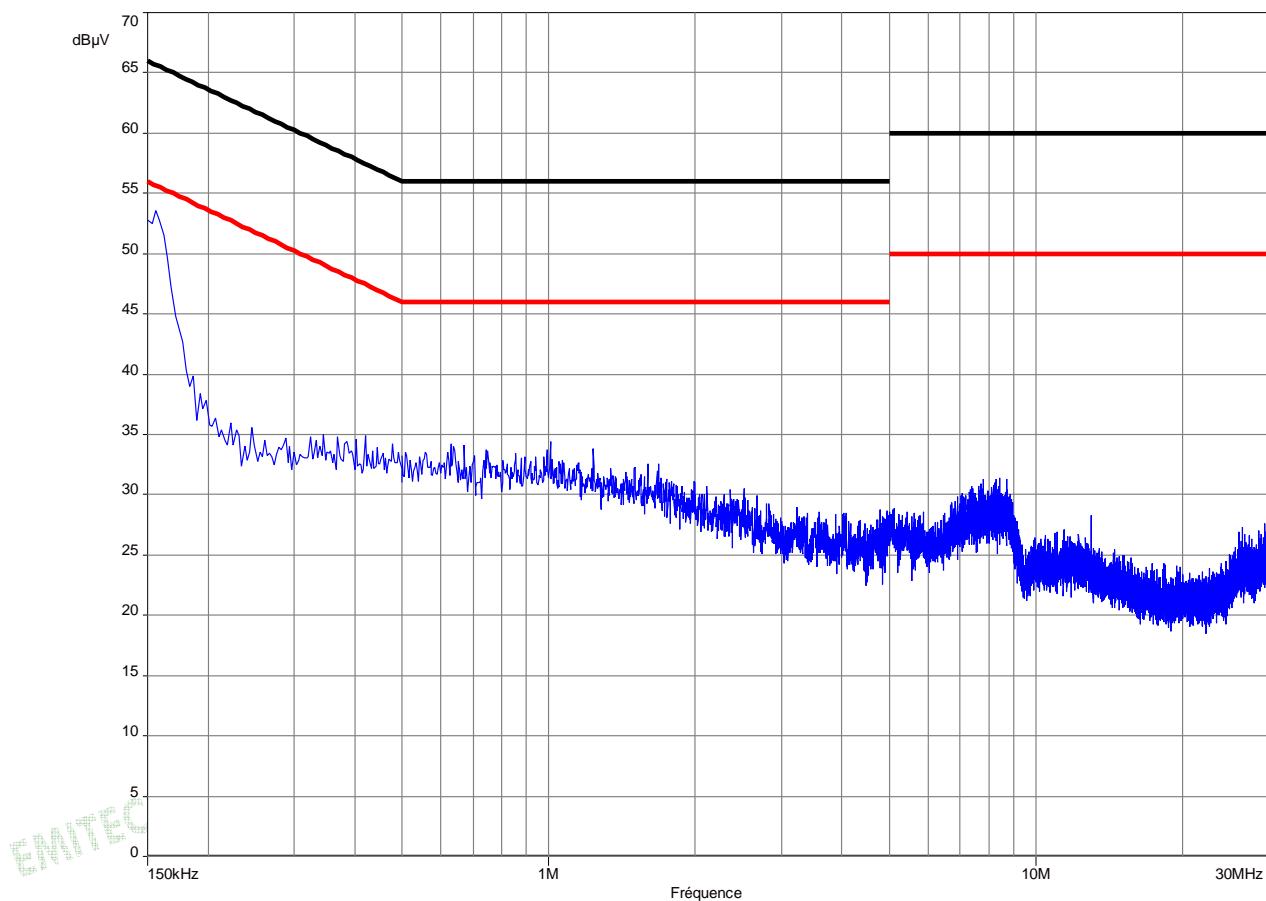

RBW filter: 10 kHz

VBW filter: 10 kHz

Sweep time: 500 ms/MHz

EMITECH

EMITECH

EMITECH

EMITECH

8. PEAK OUTPUT POWER

Standard: FCC Part 15

Test procedure: paragraph 15.247

Test equipment:

TYPE	BRAND	EMITECH NUMBER
Spectrum analyzer FSP 40	Rohde & Schwarz	4088
Diode detector ODZ0004A	Omniyig	2469
Oscilloscope THS 720	Tektronix	0940
Antenna RGA60	Electrometrics	1938
Antenna RGA60	Electrometrics	1204
Open site	EMITECH	1274
Radio frequency generator SME06	Rohde & Schwarz	1669
High pass filter HPM11630	Micro-tronics	1673
Low-noise amplifier 1 to 18 GHz	ALC	2648
Power meter 8541B	Gigatronics	3479
Power sensor 80401A	Gigatronics	3182
Multimeter 77-2	Fluke	812

Test set up:

The system is tested in an open area test site (OATS).

The test unit is placed on a rotating table, 0.8 m from a ground plane. Zero degree azimuth corresponds to the front of the equipment under test.

We use for this measure outdoor test site and substitution method. The measuring distance between the equipment and the test antenna is 3 m. The test antenna has been oriented in the two polarizations, we have recorded only the highest level.

The spectrum analyzer is first replaced by a diode detector which is connected to the vertical channel of an oscilloscope.

The equipment under test is then substituted by a signal generator with a calibrated double ridged guide antenna, and its level adjusted such that the deviation of the Y-trace of the oscilloscope reaches the level obtained with the E.U.T.

The output power level of the signal generator is finally measured with a calibrated RF power meter.

Then a measurement of the electro-magnetic field is realized, with a resolution bandwidth and video bandwidth adjusted at 1 MHz.

Distance of antenna: 3 meters

Antenna height: 1 to 4 meters

Antenna polarization: vertical and horizontal

Equipment under test operating condition:

The equipment is blocked in continuous modulated transmission mode.

Results:

Ambient temperature (°C): 22
 Relative humidity (%): 71

Polarization of test antenna: horizontal (height: 128 cm)
 Position of equipment: flat position (azimuth: 183 degrees)

Sample n° 1 Hopping mode

		Peak Output Power radiated at these frequencies (W): from 2402 MHz to 2480 MHz	Limits (W)
Normal test conditions	Nominal power source (V): 4.8	0.630×10^{-3}	1*

* the frequency hopping systems use at least 75 hopping channel.

Sample n° 1 Channel 1 (2402 MHz)

		Level dBμV	Cable loss dB	Antenna factor dB	Electro-magnetic field (dBμV/m):	P* (W)
Normal test conditions	Nominal power source (V): 4.8	63.01	4.75	29.16	96.92	1.476×10^{-3}

Sample n° 1 Channel 40 (2441 MHz)

		Level dBμV	Cable loss dB	Antenna factor dB	Electro-magnetic field (dBμV/m):	P* (W)
Normal test conditions	Nominal power source (V): 4.8	62.44	4.75	29.16	96.35	1.295×10^{-3}

Sample n° 1 Channel 79 (2480 MHz)

		Level dBμV	Cable loss dB	Antenna factor dB	Electro-magnetic field (dBμV/m):	P* (W)
Normal test conditions	Nominal power source (V): 4.8	64.18	4.75	29.16	98.09	1.933×10^{-3}

* $P = (E \times d)^2 / (30 \times G_p)$ with $d = 3$ m and $G_p = 1$

Test conclusion:

RESPECTED STANDARD

9. RADIATED EMISSION OF TRANSMITTER**Standard:** FCC Part 15

Test procedure: paragraph 15.205
 paragraph 15.209
 paragraph 15.247

Test equipment:

TYPE	BRAND	EMITECH NUMBER
Test receiver ESH3	Rohde & Schwarz	1058
Test receiver ESVS 10	Rohde & Schwarz	1219
Spectrum analyzer FSP 40	Rohde & Schwarz	4088
Loop antenna	EMCO	1406
Biconical antenna HP 11966C	Hewlett Packard	728
Log periodic antenna HL 223	Rohde & Schwarz	1999
Open site	Emitech	1274
Antenna RGA-60	Electrometrics	1204
Low-noise amplifier 2 to 18 GHz	Microwave DB	1922
High pass filter HP12/3200-5AA	Filtek	
Antenna WR42	IMC	1939
Low-noise amplifier 18 to 26 GHz	ALC	3036

Test set up:

The system is tested in an open area test site (OATS).

The test unit is placed on a rotating table, 0.8 m from a ground plane. Zero degree azimuth corresponds to the front of the equipment under test.

Frequency range: from 9 kHz to harmonic 10 ($F_{carrier} \leq 10$ GHz)

Bandwidth: 120 kHz ($F < 1$ GHz) or 100 kHz, following 15.205 or 15.247
 1 MHz ($F > 1$ GHz) or 100 kHz, following 15.205 or 15.247

Distance of antenna: between 30 m and 3 m according the frequencies and the limits.

Antenna height: 1 to 4 meters

Antenna polarization: vertical and horizontal, only the highest level is recorded.

Equipment under test operating condition:

The equipment is blocked in continuous modulated transmission mode.

Results:

Ambient temperature (°C): 19.5
 Relative humidity (%): 72

Power source: 115 V.a.c. + battery in charging mode

The polarity column refers to the antenna polarity at which the maximum emissions level is measured.

Channel 1

FREQUENCIES (MHz)	Detector	Antenna height (cm)	Azimuth (degree)	Polarization H: Horizontal V: Vertical	Field strength (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
520	Q-Peak	100	235	V	37	76.28	39.28
624	Q-Peak	100	221	V	36.6	76.28	39.68

Channel 40

FREQUENCIES (MHz)	Detector	Antenna height (cm)	Azimuth (degree)	Polarization H: Horizontal V: Vertical	Field strength (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
520	Q-Peak	100	235	V	37	76.28	39.28
624	Q-Peak	100	221	V	36.6	76.28	39.68

Channel 79

FREQUENCIES (MHz)	Detector	Antenna height (cm)	Azimuth (degree)	Polarization H: Horizontal V: Vertical	Field strength (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
520	Q-Peak	100	235	V	37	76.28	39.28
624	Q-Peak	100	221	V	36.6	76.28	39.68

Applicable limits: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

The highest level recorded in a 100 kHz bandwidth is 96.28 dB μ V/m on channel 1.

So the applicable limit is **76.28 dB μ V/m**.

In addition, radiated emissions which fall in the restricted band, as defined in section 15.205 (a), must also comply with the radiated emission limits specified in section 15.209 (a) (see section 15.205 (c)).

TEST CONCLUSION:

RESPECTED STANDARD

10. BAND EDGE COMPLIANCE

Standard: FCC Part 15.247

Test procedure: Public Notice DA 00-705, Delta Marker method

Test equipment used:

TYPE	MANUFACTURER	EMITECH NUMBER
Spectrum analyzer FSP 40	Rohde & Schwarz	4088
Antenna RGA-60	Electrometrics	1938
Power source E3610A	Hewlett Packard	4195

Measured condition:

Requirements: Emissions that fall in the restricted bands (part 15.205). These emissions must be less than or equal to 500 μ V/m (54 dB μ V/m)/ Part 15.35b applies in the restricted bands.

Test procedure: An in band field strength measurement of the fundamental Emission using the RBw and detector function required by C63.4-2003 and FCC Rules.

Test operating condition of the equipment:

The equipment is locked in frequency hopping mode (it's not possible to have a static mode operation).

Results:

Lower Band Edge: from 2310 MHz to 2390 MHz, CURVE n° 3

Upper Band Edge: from 2483.5 MHz to 2500 MHz, CURVE n° 4

Sample n°1:

Fundamental frequency (MHz)	Field Strength Level of fundamental (dB μ V/m)	Detector (Peak or Average)	Frequency of maximum Band-edges Emission (MHz)	Delta Marker (dB)*	Calculated Max Out of Band Emission Level (dB μ V/m)**	Limit (dB μ V/m)	Margin (dB)
2402	96.92	Peak	2342.4	-48.25	48.67 ⁽¹⁾	74	25.53
2480	98.09	Peak	2489.1	-50.03	48.06 ⁽¹⁾	74	25.94

* according to step 2 of Marker-Delta Method DA 00-705.

** according to step 3 of Marker-Delta Method:


Calculated Emission Level = Field Strength Level – Delta Marker Level

⁽¹⁾ the level is lower than the average limit (54 dB μ V/m).

Test conclusion:


RESPECTED PUBLIC NOTICE

CURVE N°: 3.

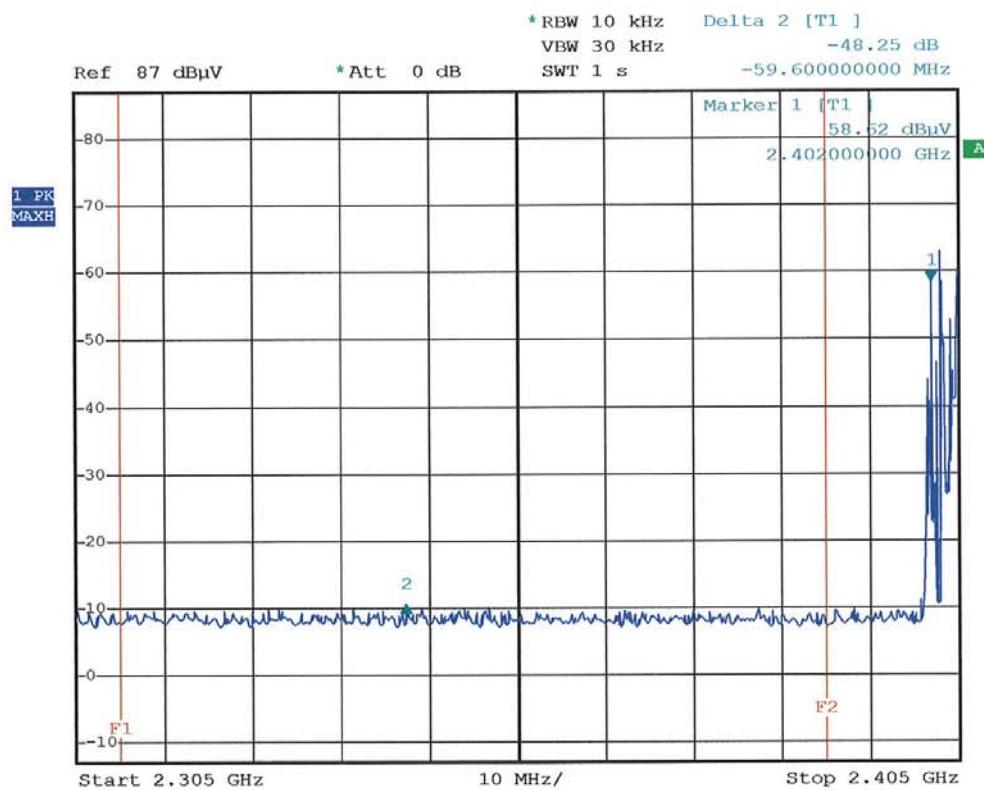

Date: 31.MAY.2007 15:31:50


CURVE N°: 4.

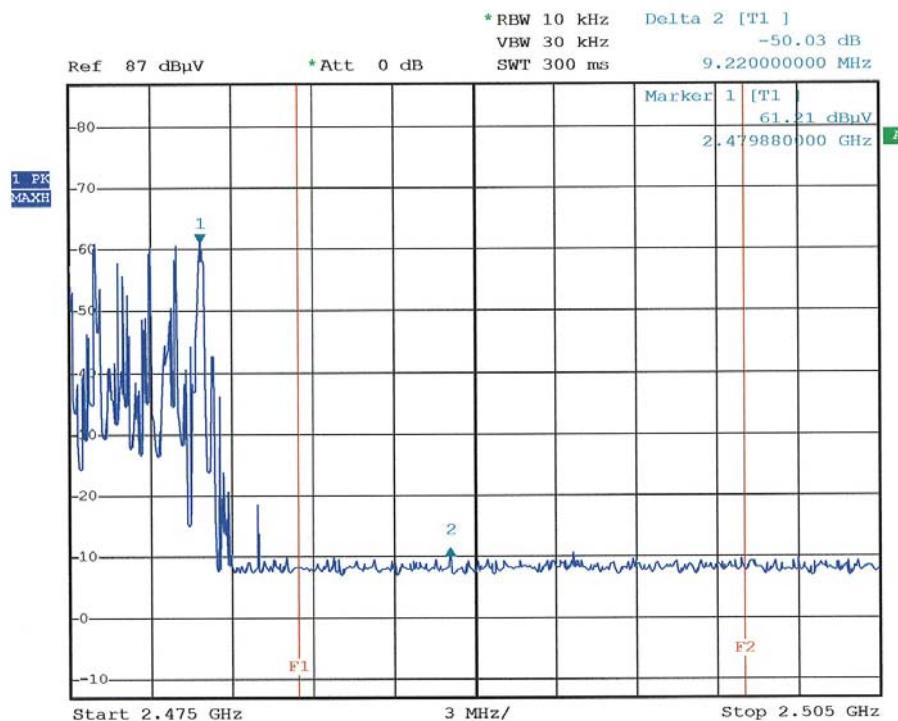


Date: 31.MAY.2007 15:35:05

□□□ End of report, 4 annexes to be forwarded □□□


ANNEX 1: OCCUPIED BANDWIDTH AND CHANNEL SEPARATION

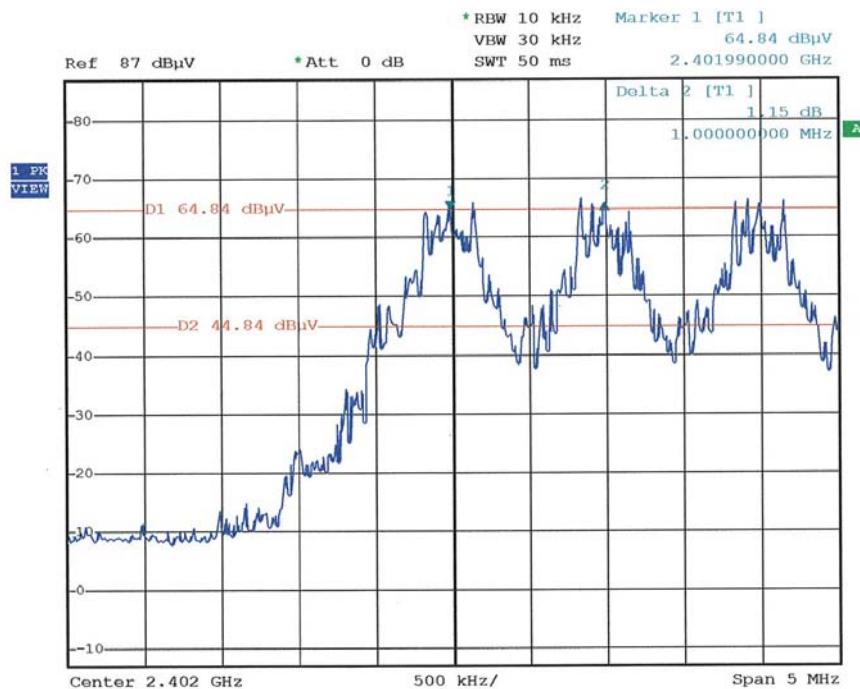


Date: 31.MAY.2007 15:43:46

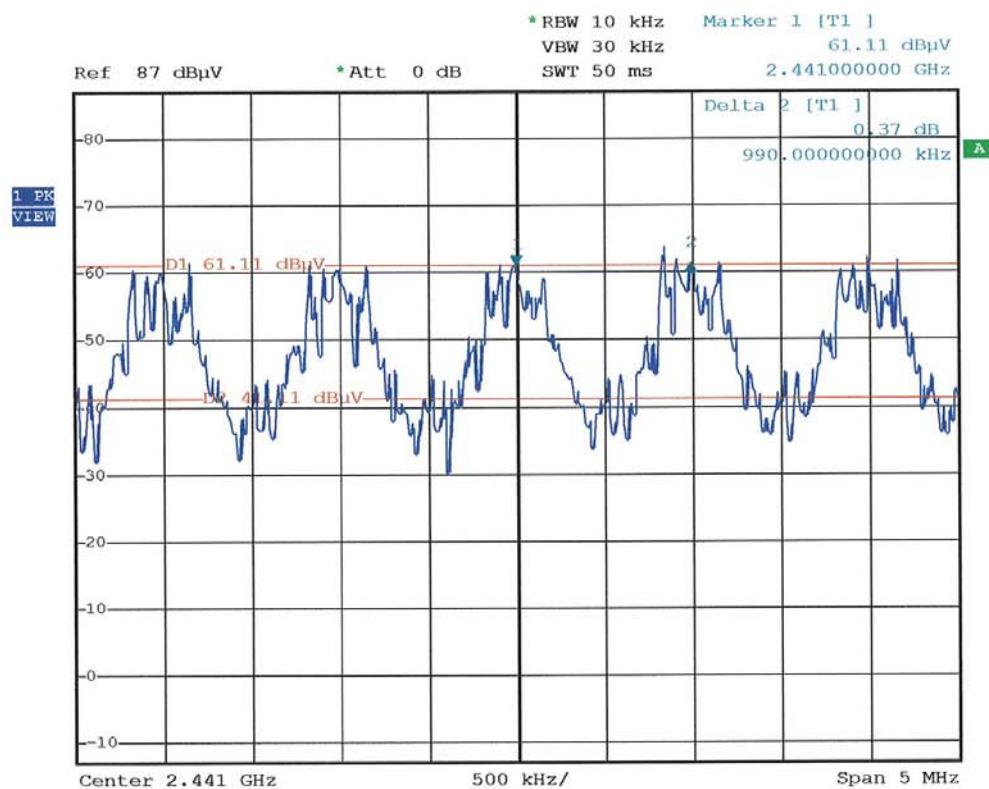


Date: 31.MAY.2007 15:51:57

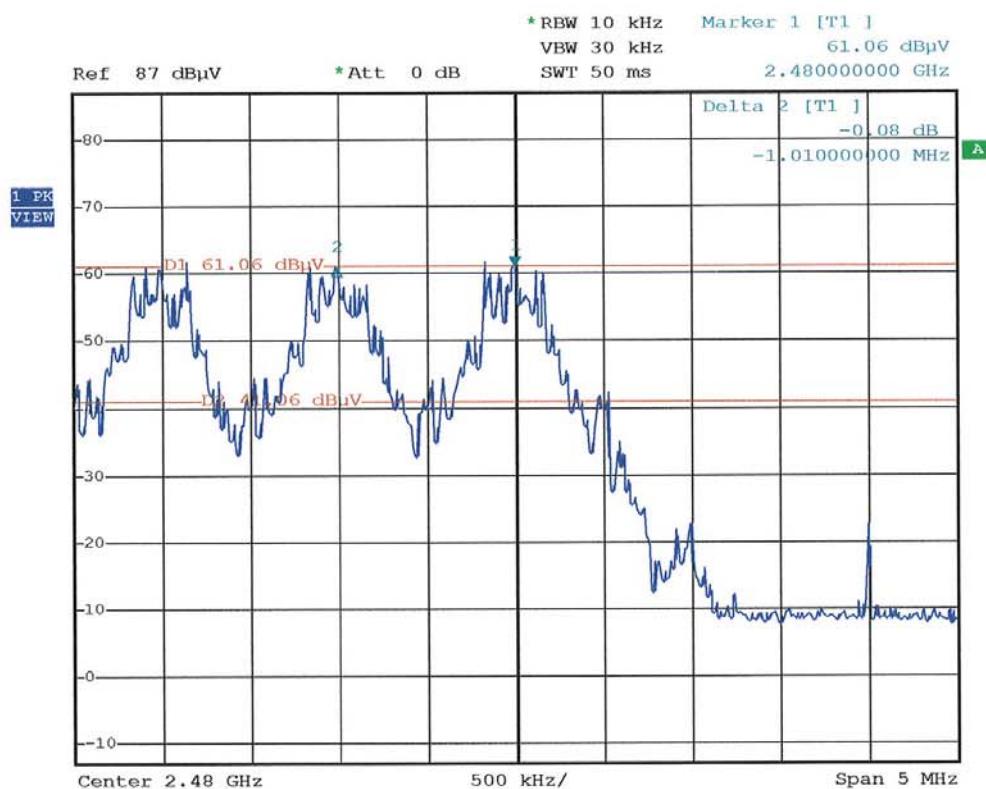


Date: 31.MAY.2007 16:00:14

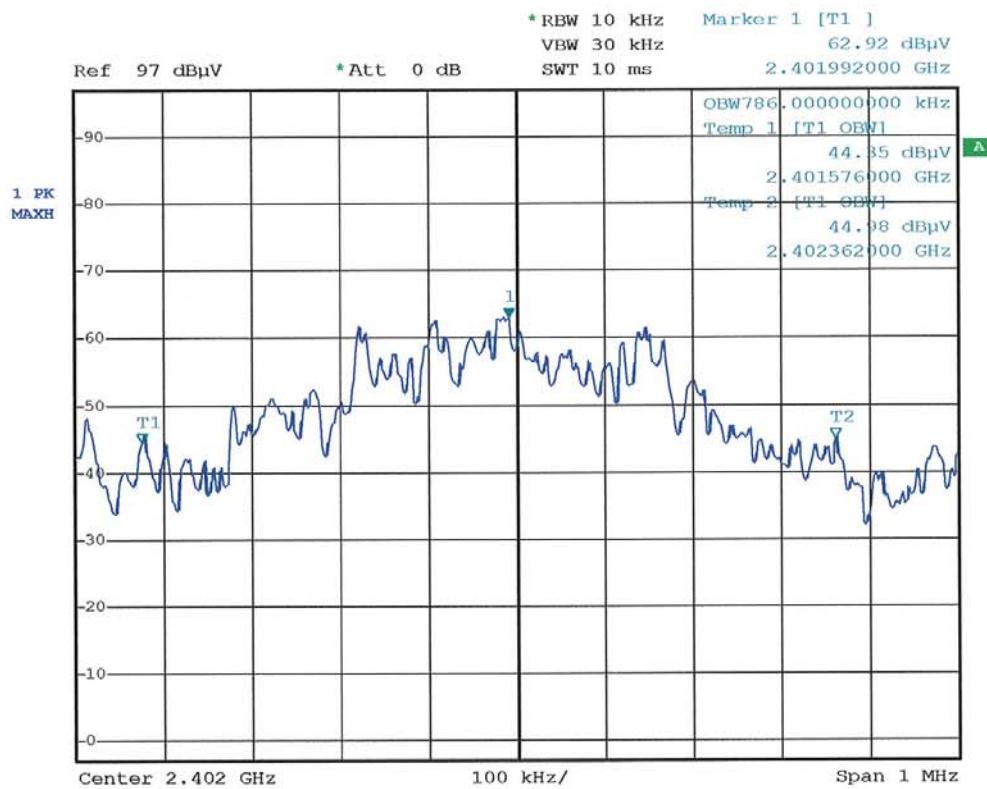

Date: 31.MAY.2007 14:53:39

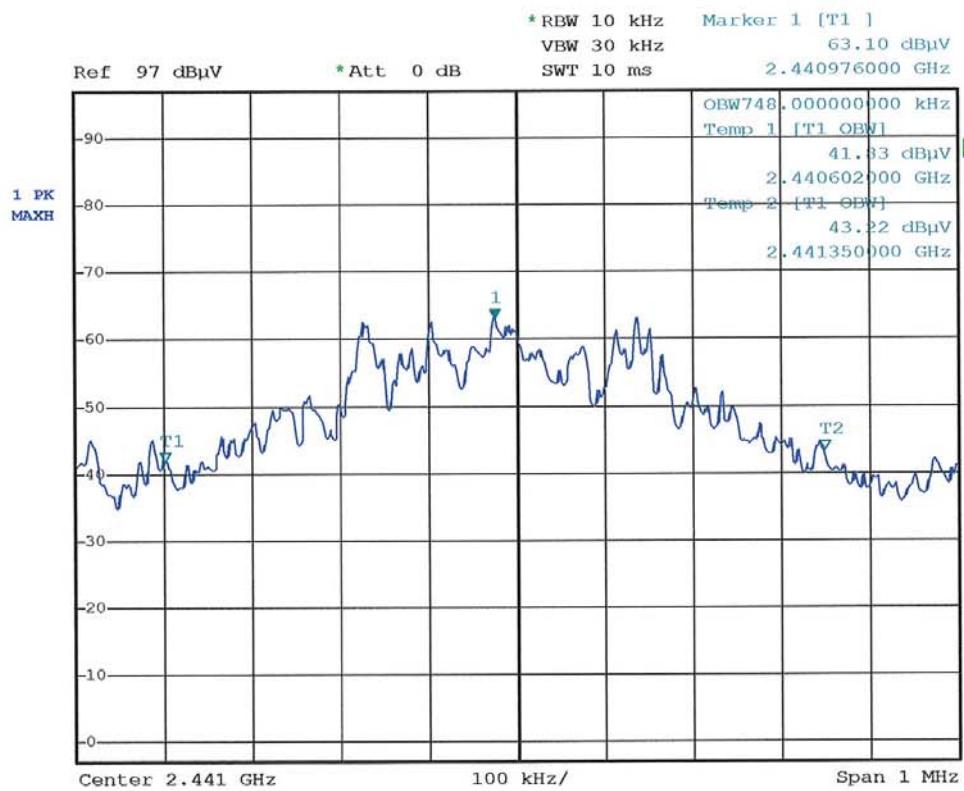


Date: 31.MAY.2007 14:43:37

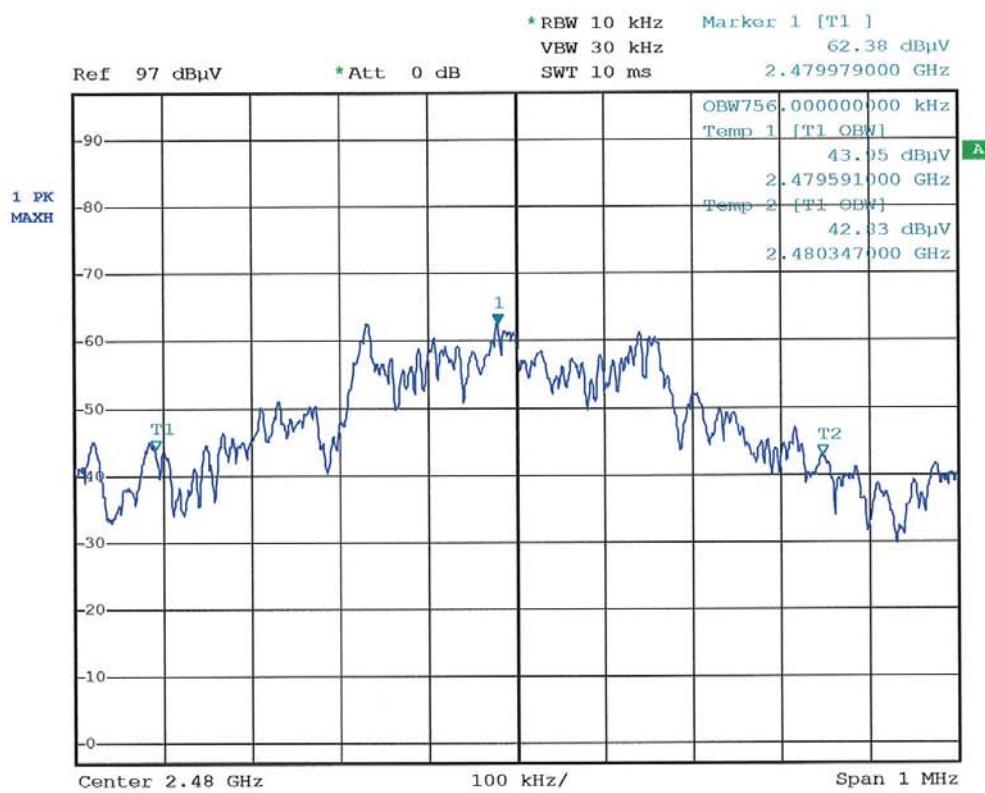


Date: 31.MAY.2007 15:06:52


ANNEX 2: NUMBER OF CHANNELS AND AVERAGE TIME OF OCCUPANCY ON ANY FREQUENCY

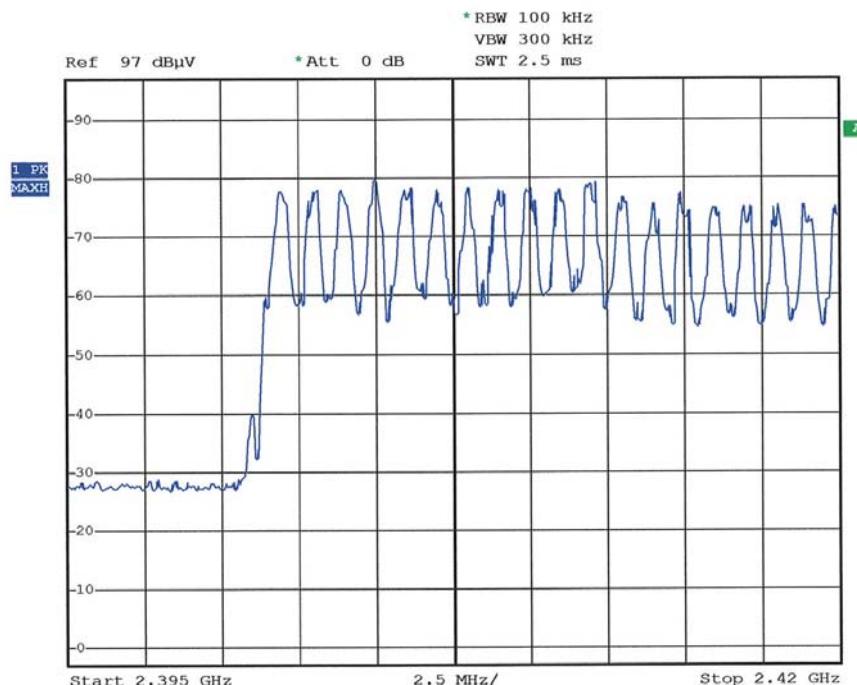


Date: 31.MAY.2007 16:07:26

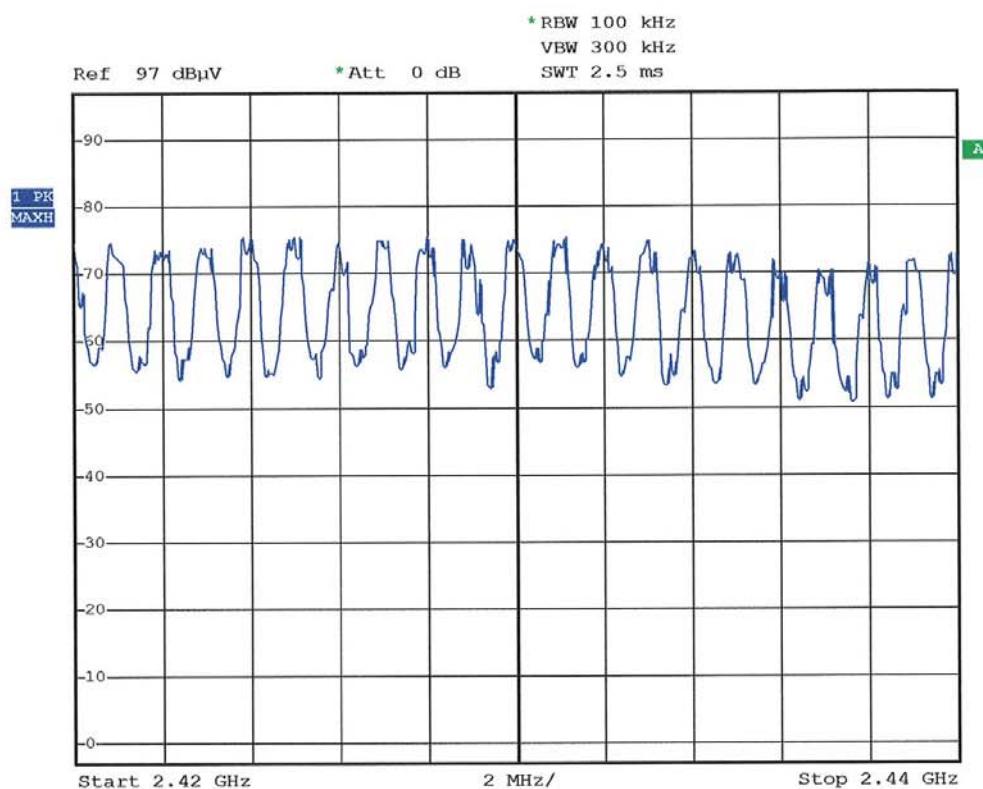


Date: 31.MAY.2007 16:11:50

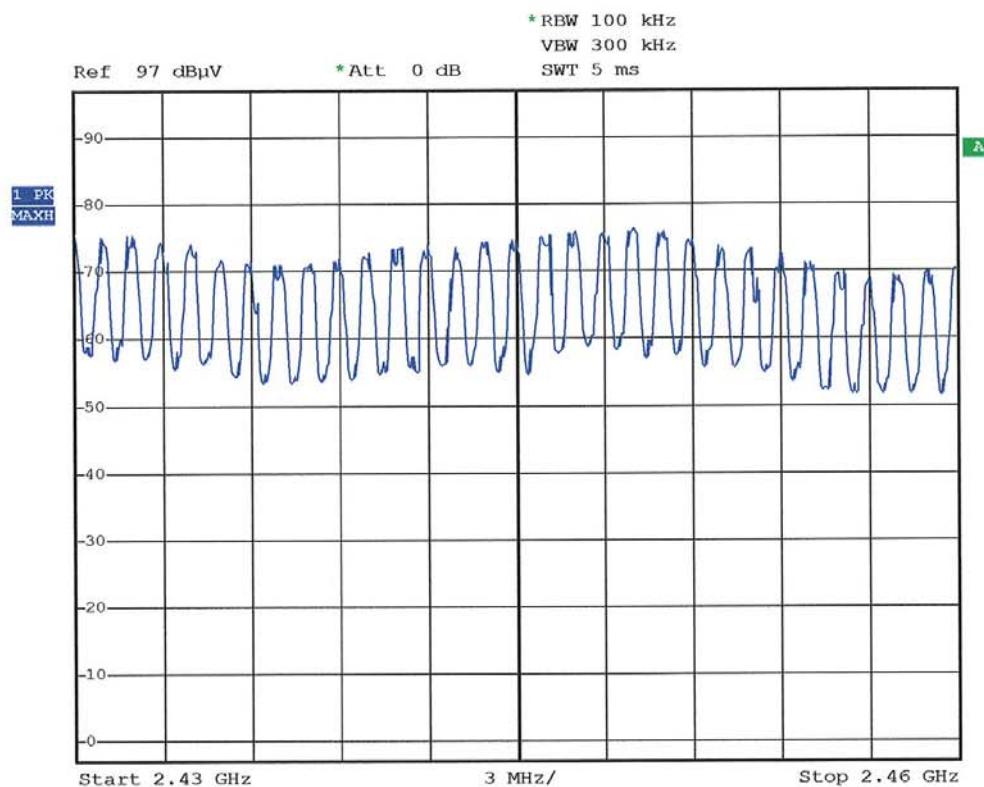


Date: 31.MAY.2007 16:17:23

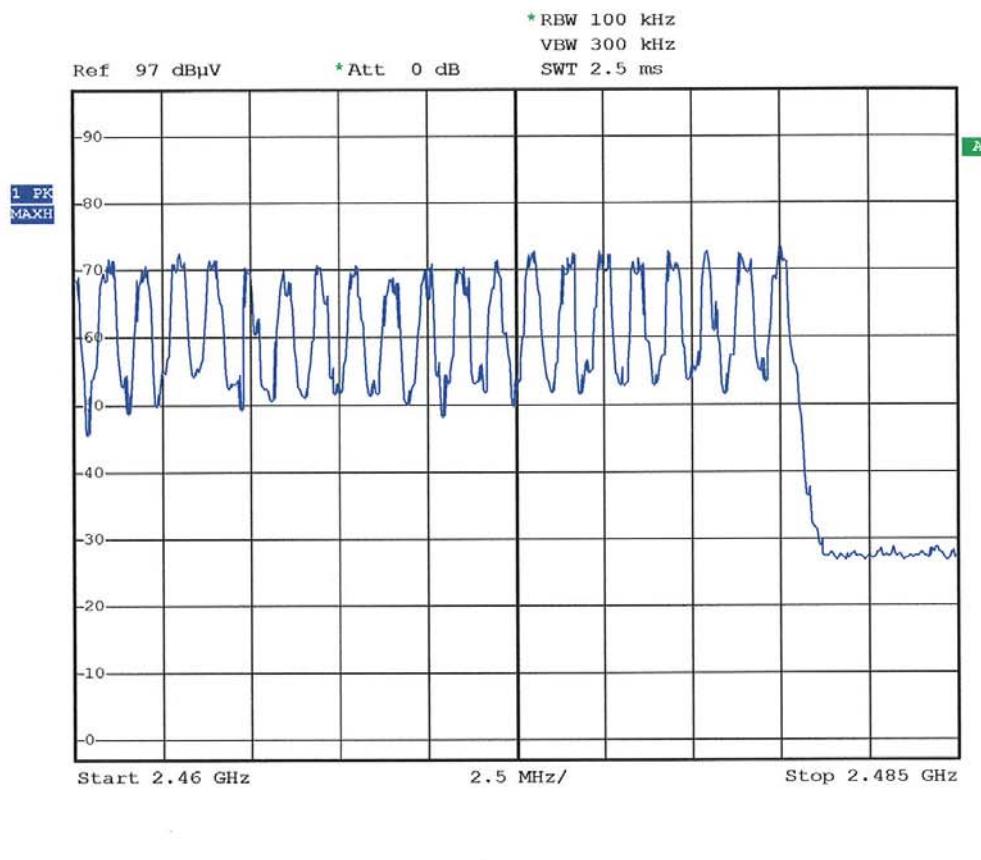


Date: 31.MAY.2007 16:32:20

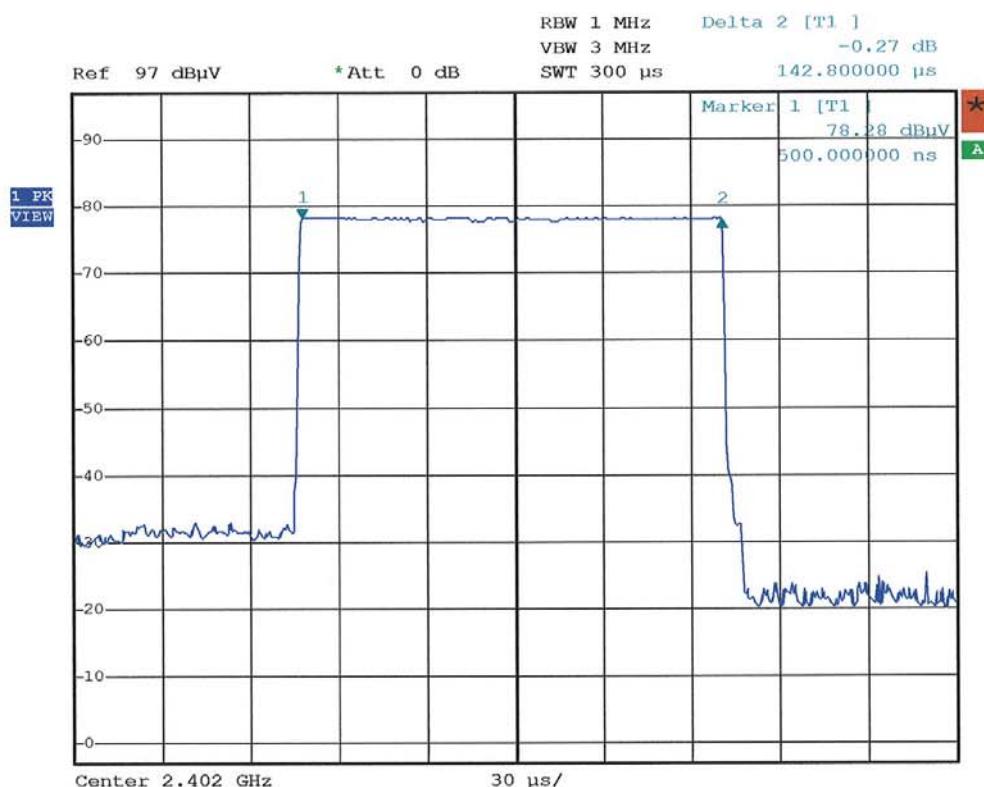


Date: 31.MAY.2007 16:39:34

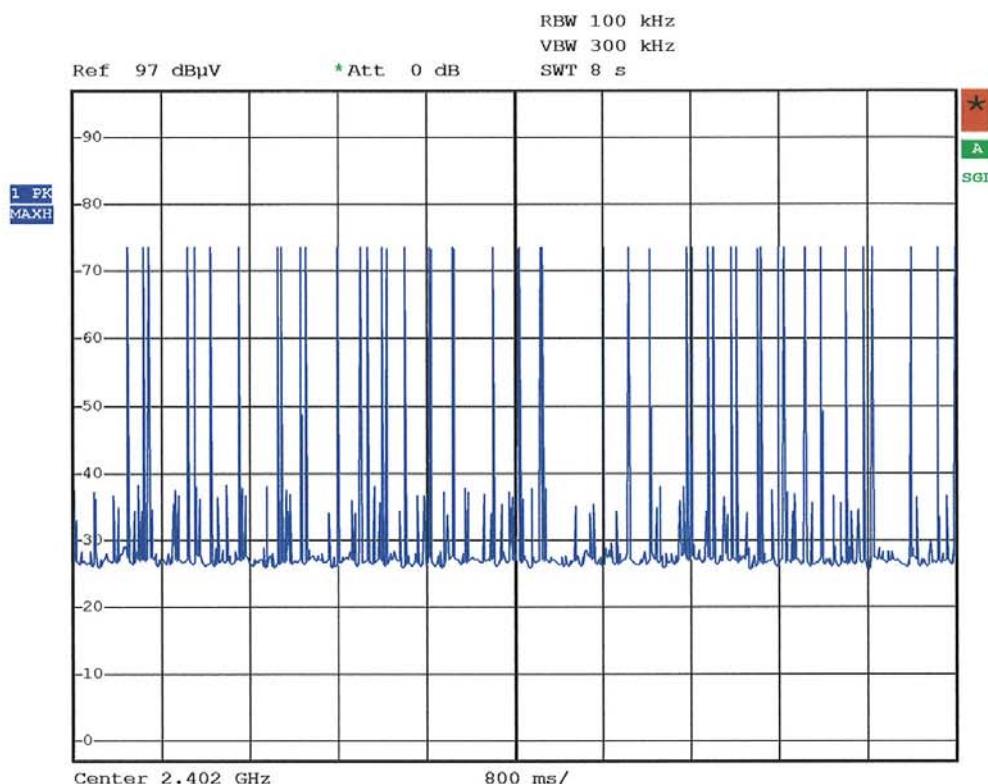


Date: 31.MAY.2007 16:51:05

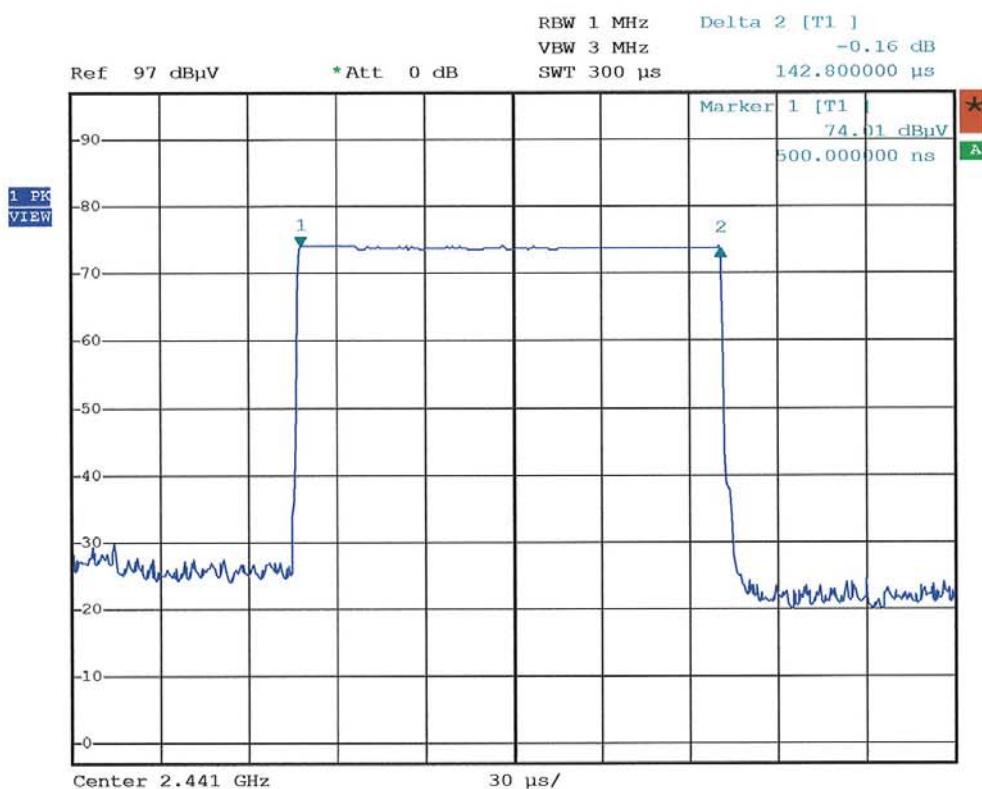


Date: 31.MAY.2007 16:37:27

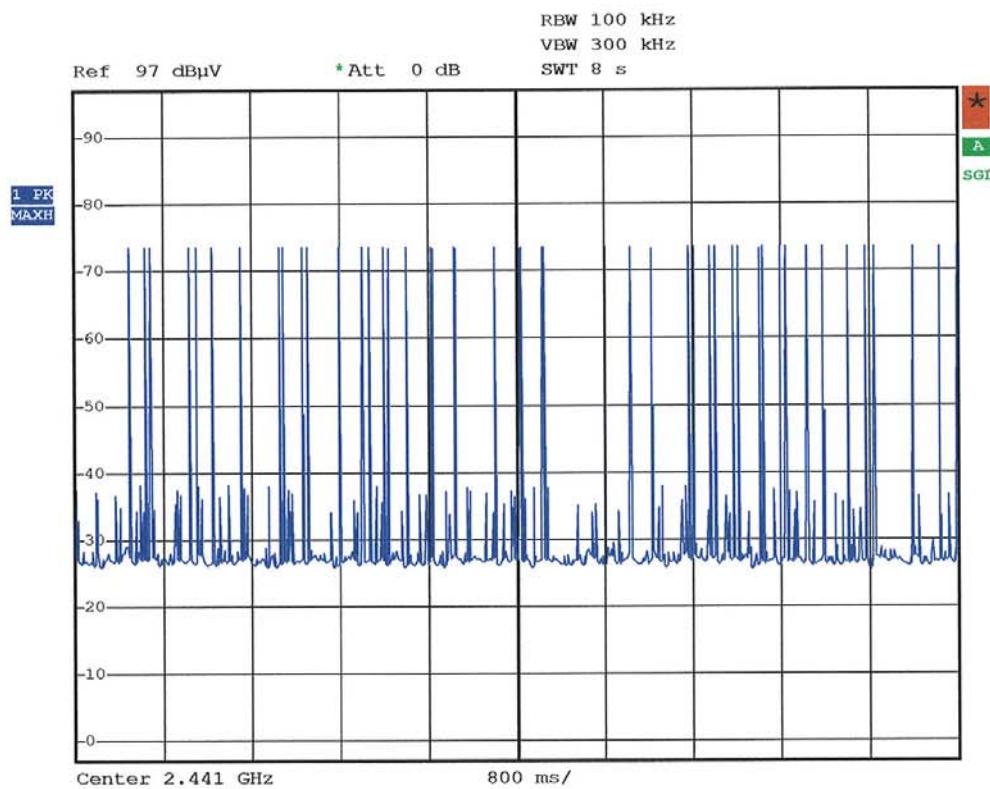

Date: 31.MAY.2007 16:48:39

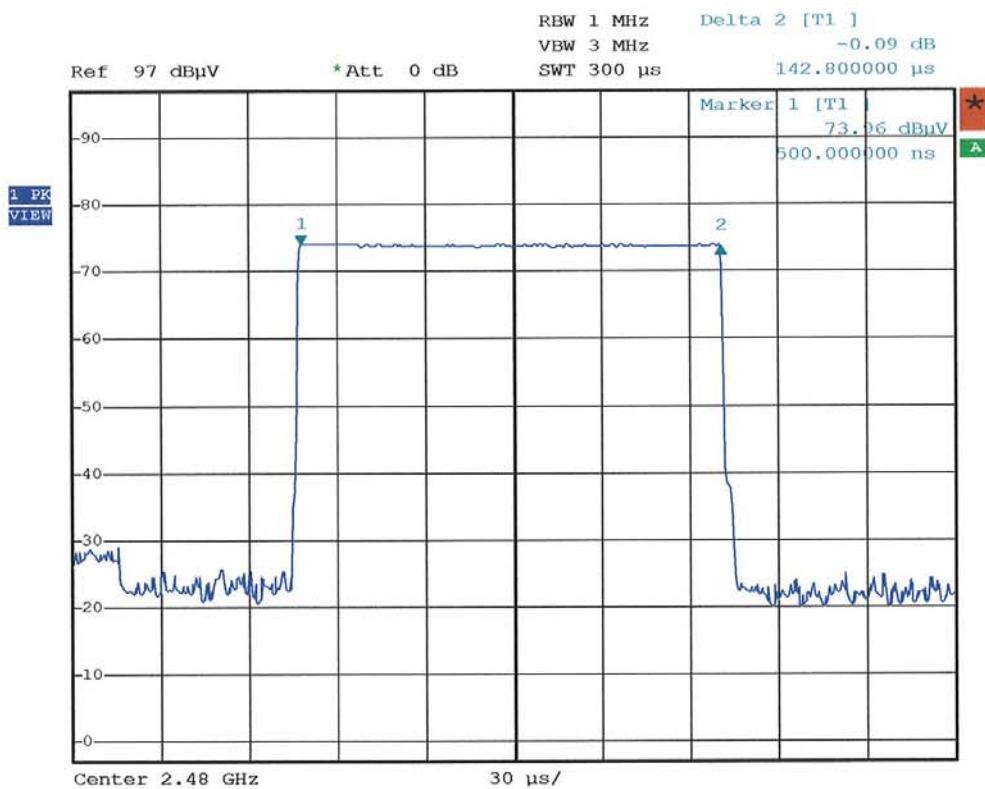

Date: 31.MAY.2007 16:35:15

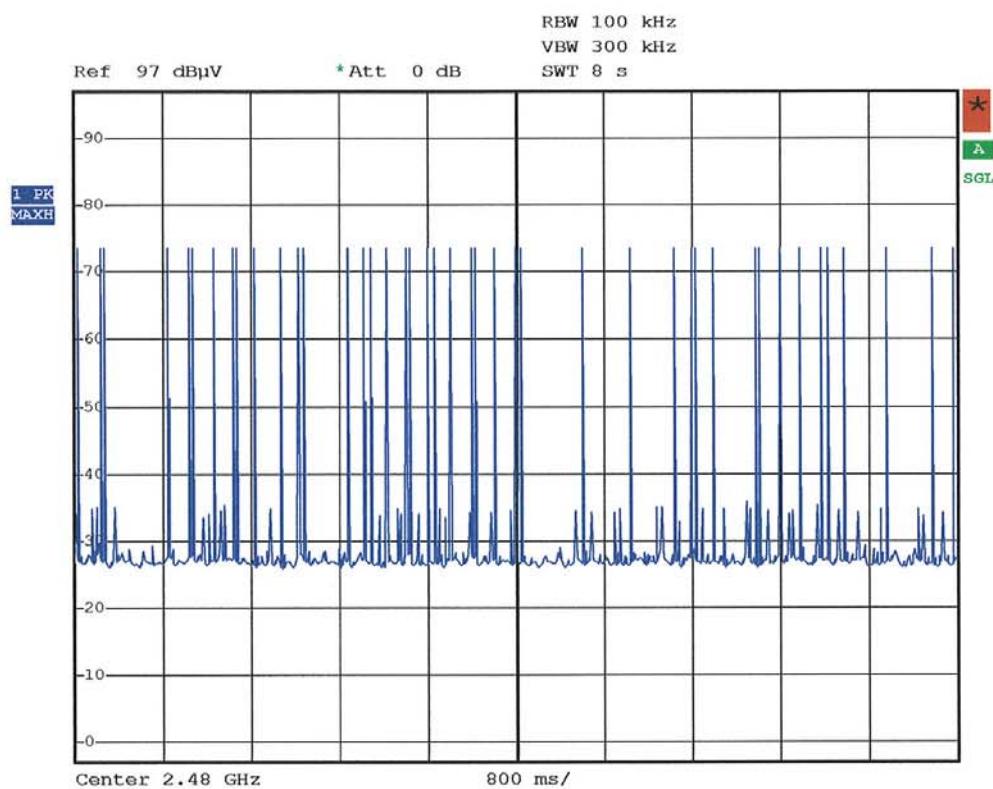

Date: 31.MAY.2007 17:19:59

ANNEX 3: PHOTOS OF THE EQUIPMENT UNDER TEST

GENERAL VIEW




EMITECH

EMITECH

EMITECH

EMITECH


Printed circuit board: face 1

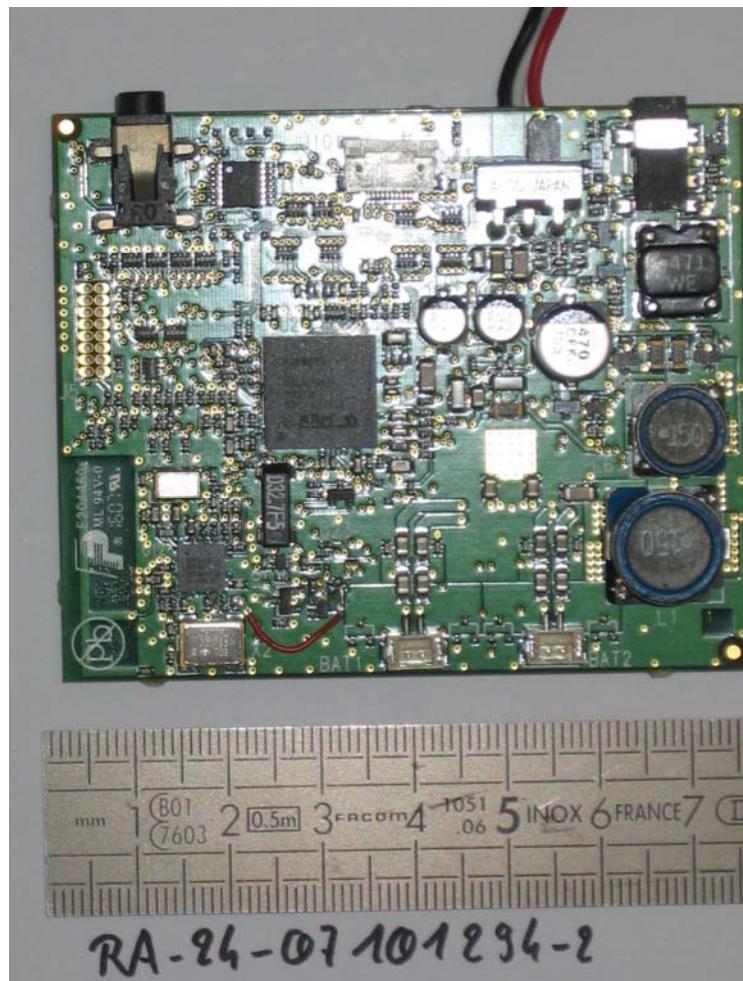

Printed circuit board: face 2



Antenna

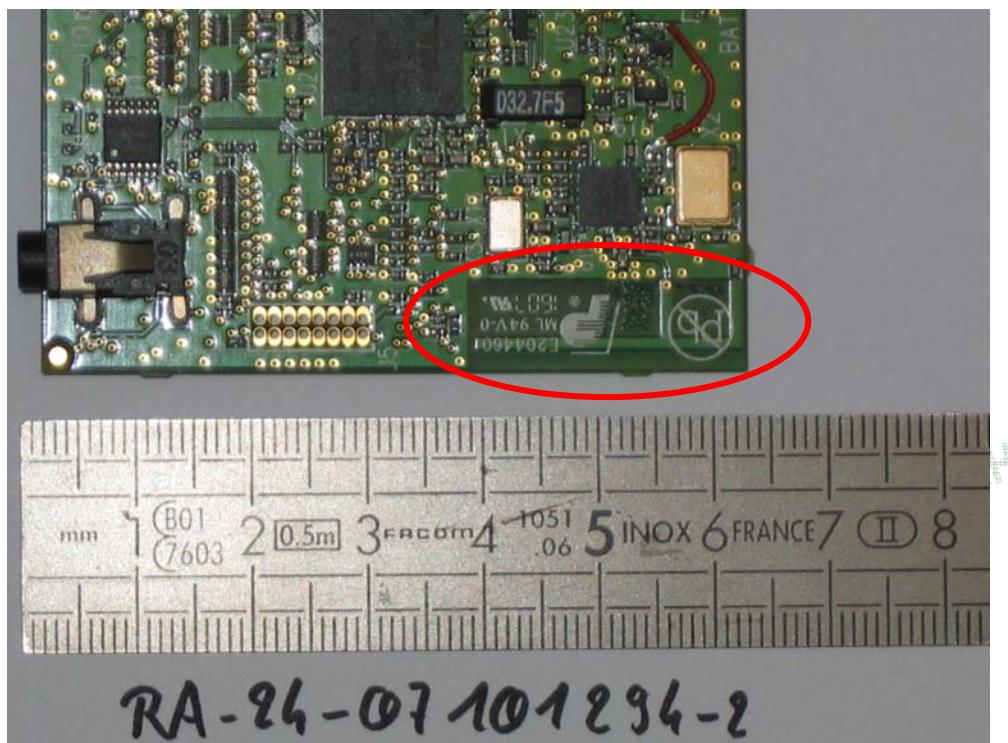

ANNEX 4: TEST SET UP AND OPEN AREA TEST SITE

CONDUCTED MEASUREMENT SET UP



EMITECH[®]

EMITECH

EMITECH

EMITECH

RADIATED MEASUREMENT SET UP

EMITECH

EMITECH

EMITECH

EMITECH

OPEN AREA TEST SITE*EMITECH**EMITECH**EMITECH**EMITECH*