



No.198 Kezhu Road, Science Town Economic& Technology
Development District Guangzhou, China 510663
Telephone: +86 (0) 20 82155555
Fax: +86 (0) 20 82075059
Email: sgs_internet_operations@sgs.com

FEDERAL COMMUNICATIONS COMMISSION
Registration number: 282399

Report No.: GLEMR060500091AVF

Page: 1 of 36
FCC ID: RLQBH-5300

TEST REPORT

Application No. : GLEMR060500091AV

Applicant: Zhongshan K-mate Electronics Co. Ltd.

FCC ID: RLQBH-5300

Fundamental Carrier

Frequency : 2.402GHz to 2.480GHz

Equipment Under Test (EUT):

Name: Bluetooth Car Kit & Headset

Model: BH-5300

Standards: FCC PART 15, SUBPART C : 2006 (Section 15.247)

Date of Receipt: 18 May 2006

Date of Test: 20 May to 14 June 2006

Date of Issue: 16 June 2006

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Jerry Chen
Manager

This report refers to the General Conditions for Inspection and Testing Services, printed overleaf
This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

2 Test Summary

Test	Test Requirement	Standard Paragraph	Result
Conducted Emission (150KHz to 30MHz)	FCC PART 15 :2006	Section 15.107	PASS
Maximum Peak Output Power	FCC PART 15 :2006	Section 15.247 (b1)	PASS
Conducted Spurious Emission (30MHz to 25GHz)	FCC PART 15 :2006	Section 15.247 (d)	PASS
Radiated Spurious Emission (30MHz to 25GHz)	FCC PART 15 :2006	Section 15.109 Section 15.209	PASS
Band Edges Measurement	FCC PART 15 :2006	Section 15.247 (c)	PASS
Hopping Channel Number	FCC PART 15 :2006	Section 15.247 (b1)	PASS
Occupied Bandwidth	FCC PART 15 :2006	Section 15.247 (a1)	PASS
Carrier Frequencies Separated	FCC PART 15 :2006	Section 15.247 (a1,iii)	PASS
Dell Time	FCC PART 15 :2006	Section 15.247 (a1)	PASS

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION.....	4
4.1 CLIENT INFORMATION.....	4
4.2 GENERAL DESCRIPTION OF E.U.T.....	4
4.3 DESCRIPTION OF SUPPORT UNITS	4
4.4 STANDARDS APPLICABLE FOR TESTING.....	4
4.5 TEST LOCATION.....	4
4.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER	4
4.7 TEST FACILITY	5
5 EQUIPMENTS USED DURING TEST.....	6
6 TEST RESULTS	7
6.1 E.U.T. OPERATION	7
6.2 CONDUCTED EMISSIONS MAINS TERMINALS, 150kHz TO 30MHz	8
6.3 MAXIMUM PEAK OUTPUT POWER	11
6.4 CONDUCTED SPURIOUS EMISSIONS.....	14
6.5 RADIATED SPURIOUS EMISSIONS.....	18
6.5.1 <i>Harmonics Emissions</i>	20
6.5.2 <i>Other Radiated Spurious Emissions</i>	24
6.6 BAND EDGES REQUIREMENT	25
6.6.1 <i>100 kHz Bandwidth Outside the Frequency Band</i>	25
6.6.2 <i>Radiated Emissions which fall in the restricted bands</i>	27
6.7 HOPPING CHANNEL NUMBER.....	30
6.8 OCCUPIED BANDWIDTH	31
6.9 CARRIER FREQUENCIES SEPARATED	32
6.10 DWELL TIME	32
6.11 ANTENNA REQUIREMENT.....	32
6.11.1 <i>Standard Applicable</i>	32
6.11.2 <i>Antenna Construction</i>	32

4 General Information

4.1 Client Information

Applicant Name: Zhongshan K-mate Electronics Co. Ltd.
Applicant Address: 3/F B1 Building Fuwan Industrial Zone Sunwen East Road,
Zhongshan, China.

4.2 General Description of E.U.T.

Product Name: Bluetooth Car Kit & Headset
Model: BH-5300
Bluetooth Specification: Bluetooth V1.1
Power Supply: Inside Rechargeable Battery
Charging Method: Supplied by USB line connected with PC or
Supplied by Car-kit.
USB Line: 1.0 Cable provided by applicant
Car-kit: Charging function and Hands-free function since there is speaker inside.

4.3 Description of Support Units

The EUT has been tested as an independent unit except the test in Charging mode connected PC by USB line or connected a car kit.

4.4 Standards Applicable for Testing

The customer requested FCC tests for a Bluetooth earphone.

The standard used was FCC PART 15, SUBPART C (2006) section 15.247.

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory, No.198 Kezhu Road, Science Town Economic& Technology Development District Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

4.6 Other Information Requested by the Customer

None.

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP – Lab Code: 200611-0**
SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.
Effective through December 31, 2006.
- **ACA**
SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.
- **VCCI**
The 3m Semi-anechoic chamber and Shielded Room (11.5m x 4m x 4m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-1599 and C-1706 respectively.
Date of Registration: June 01, 2005. Valid until February 22, 2008
- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FINKO**
Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.
- **CNAL – LAB Code: L0141**
SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of Testing Laboratories.
- **FCC – Registration No.: 282399**
SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002. With the above and NVLAP, SGS-CSTC is an authorized test laboratory for the DoC process.
- **Industry Canada (IC)**
The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5169.

5 Equipments Used during Test

Conducted Emission						
No:	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
EMC0306	Shielding Room	Zhong Yu	8 x 3 x 3.8 m ³	N/A	N/A	N/A
EMC0102	LISN	Schaffner Chase	MNZ050D/1	1421	05-12-2005	05-12-2006
EMC0506	EMI Test Receiver	Rohde & Schwarz	ESCS30	100085	05-12-2005	05-12-2006
EMC0107	Coaxial Cable	SGS	2m	N/A	25-11-2005	25-11-2006

RE in Chamber/OATS						
No:	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
EMC0525	Impact Semi-Anechoic Chamber	ChangZhou ZhongYu	N/A	N/A	06-03-2006	06-03-2007
EMC0522	EMI Test Receiver	Rohde & Schwarz	ESIB26	100249	05-12-2005	05-12-2006
N/A	EMI Test Software	Audix	E3	N/A	N/A	N/A
EMC0514	Coaxial cable	SGS	N/A	N/A	04-12-2005	04-12-2006
EMC0524	Bi-log Type Antenna	Schaffner -Chase	CBL6112B	2966	31-10-2005	31-10-2006
EMC0519	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	16-01-2006	16-01-2007
EMC0518	Horn Antenna	Rohde & Schwarz	HF906	100096	10-05-2005	09-05-2006
EMC0040	Spectrum Analyzer	Rohde & Schwarz	FSP30	100324	05-12-2005	05-12-2006
EMC0520	0.1-1300 MHz Pre-Amplifier	HP	8447D OPT 010	2944A0625 2	06-03-2006	06-03-2007
EMC0521	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A0164 9	06-03-2006	06-03-2007
EMC0523	Active Loop Antenna	EMCO	6502	00042963	14-01-2006	14-01-2007
EMC0529	10m Open Site	ZhongYu	N/A	N/A	26-12-2005	26-12-2006

General used equipment						
No:	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
EMC0050 to EMC0053	Temperature, & Humidity	ZHENGZHOU BO YANG	WSB	N/A	05-12-2005	05-12-2006
EMC0054	Temperature, & Humidity	Shenzhen Tai Kong	THG-1	N/A	04-01-2006	04-01-2007
EMC0006	DMM	Fluke	73	70681569	28-09-2005	28-09-2006
EMC0007	DMM	Fluke	73	70671122	12-09-2005	12-09-2006

6 Test Results

6.1 E.U.T. Operation

Input voltage:	Inside Rechargeable Battery
Operating Environment:	
Temperature:	24.0 -25.0 °C
Humidity:	50-56 % RH
Atmospheric Pressure:	1008 -1012 mbar
EUT Operation:	Test the EUT as a product which has frequency hopping system. The total hopping channels are 79 channels (0 to 78 channel), the fundamental frequencies are from 2.402GHz to 2.480GHz.

The test procedure provided by applicant enabled the EUT to transmit and receive data at lowest (**Channel 0: 2.402GHz**), medium (**Channel 39: 2.402GHz**), and highest channel (**Channel 78: 2.480GHz**), frequencies individually.

Pre-test all the frequencies mode and their power status, compliance test in the worse case: Channel 78, Channel 39, Channel 0.

6.2 Conducted Emissions Mains Terminals, 150kHz to 30MHz

Test Requirement: FCC Part15 B

Test Method: ANSI C63.4

Test Date: 15 June 2006

Frequency Range: 150KHz to 30MHz

Class / Severity: Class B

Detector: Peak for pre-scan (9kHz Resolution Bandwidth)

Quasi-Peak if maximised peak within 6dB of Quasi-Peak limit

EUT Operation: Test in charging mode connected with PC by USB line.


Test result:

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

The following Quasi-Peak and Average measurements were performed on the EUT on 15 June 2006:


Live Line:

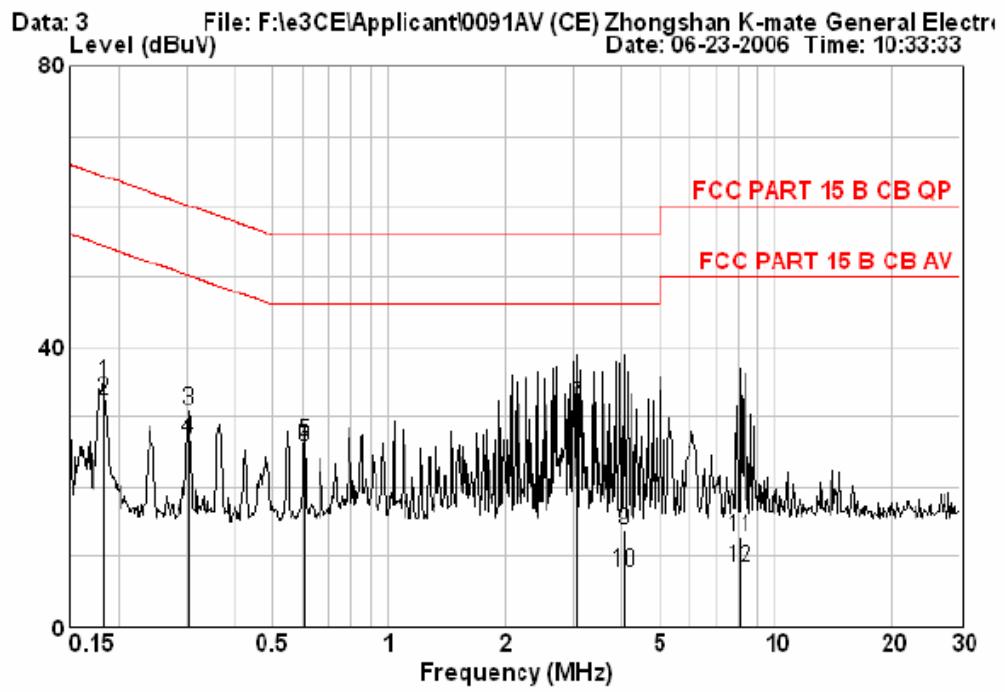

Site : sgs
Condition : FCC PART 15 B CB QP LISN LINE LINE
Job No. : 0091AV
Applicant: Zhongshan K-mate General Electronic Co.,
EUT: Bluetooth Car Kit & Headset
Model: EH-5300
Test mode: Test in PC connection mode
Remark: :

Freq	Read	Cable	LISN	Limit	Over	Remark	
	Level	Loss	Factor				
	MHz	dBuV	dB	dB	dBuV	dBuV	dB
1	0.182	34.82	-0.09	0.07	34.80	64.37	-29.57 QP
2	0.182	32.39	-0.09	0.07	32.37	54.37	-22.00 AVERAGE
3	0.303	30.98	-0.06	0.10	31.02	60.15	-29.13 QP
4	0.303	26.84	-0.06	0.10	26.88	50.15	-23.27 AVERAGE
5	0.604	26.34	-0.03	0.04	26.36	56.00	-29.64 QP
6	0.604	25.62	-0.03	0.04	25.64	46.00	-20.36 AVERAGE
7	3.090	31.62	0.05	0.05	31.72	56.00	-24.28 QP
8 !	3.090	29.52	0.05	0.05	29.62	46.00	-16.38 AVERAGE
9	4.049	13.66	0.06	0.08	13.80	56.00	-42.20 QP
10	4.049	7.67	0.06	0.08	7.81	46.00	-38.19 AVERAGE
11	8.105	12.66	0.09	0.17	12.92	60.00	-47.08 QP
12	8.105	8.12	0.09	0.17	8.38	50.00	-41.62 AVERAGE

Neutral Line

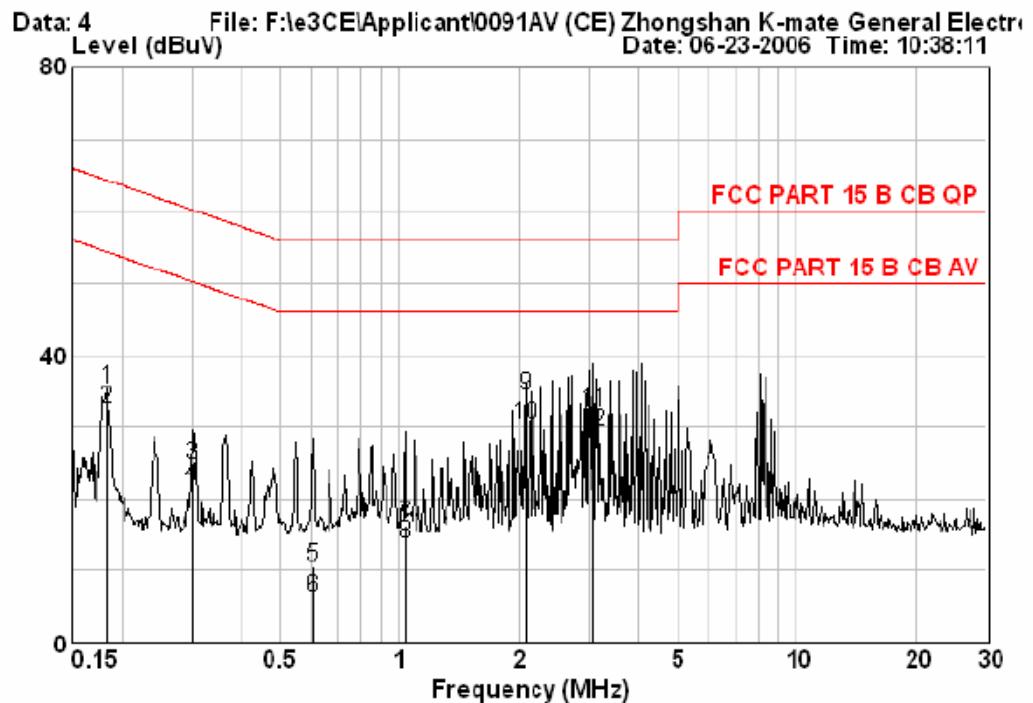


Site : sgs
Condition : FCC PART 15 B CB QP LISN NEUTRAL NEUTRAL
Job No.: 0091AV
Applicant: Zhongshan K-mate General Electronic Co.,
EUT: Bluetooth Car Kit&Headset
Model: EH-5300
Test mode: Test in PC connection mode
Remark: :

	Freq	Read Level	Cable Loss	LISN Factor	Limit Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.182	35.26	-0.09	0.10	35.27	64.37	-29.10	QP
2	0.182	32.58	-0.09	0.10	32.59	54.37	-21.78	AVERAGE
3	0.302	24.84	-0.06	0.10	24.88	60.19	-35.31	QP
4	0.302	21.73	-0.06	0.10	21.77	50.19	-28.42	AVERAGE
5	0.604	10.62	-0.03	0.04	10.64	56.00	-45.36	QP
6	0.604	6.08	-0.03	0.04	6.10	46.00	-39.90	AVERAGE
7	1.032	16.18	0.00	0.10	16.28	56.00	-39.72	QP
8	1.032	13.63	0.00	0.10	13.73	46.00	-32.27	AVERAGE
9	2.077	34.32	0.03	0.00	34.35	56.00	-21.65	QP
10 !	2.077	30.22	0.03	0.00	30.25	46.00	-15.75	AVERAGE
11	3.090	32.16	0.05	0.00	32.21	56.00	-23.79	QP
12	3.090	29.25	0.05	0.00	29.30	46.00	-16.70	AVERAGE

6.3 Maximum Peak Output Power

Test Requirement: FCC Part15 C
Test Method: Base on ANSI 63.4.
Test Date: 14 June 2006
Test Limit: Regulation 15.247 (b) The Limit of Maximum Peak Output Power For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
Test mode: Test in transmitting mode: Channel 0, Channel 39, Channel 78.

Test Configuration:

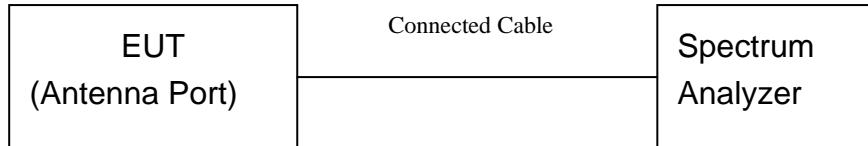


Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz, VBW = 1 MHz, Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max. reading.


Test Result:

Test Channel	Fundamental Frequency (GHz)	Reading Power (dBm)	Cable Loss (dB)	Output Power (dBm)	Limit (dBm)	PASS/FAIL
0	2.402	3.17	0.30	3.47	30.0	Pass
39	2.441	2.65	0.30	2.95	30.0	Pass
78	2.480	2.50	0.30	2.80	30.0	Pass


TEST RESULTS: The unit does meet the FCC requirements.

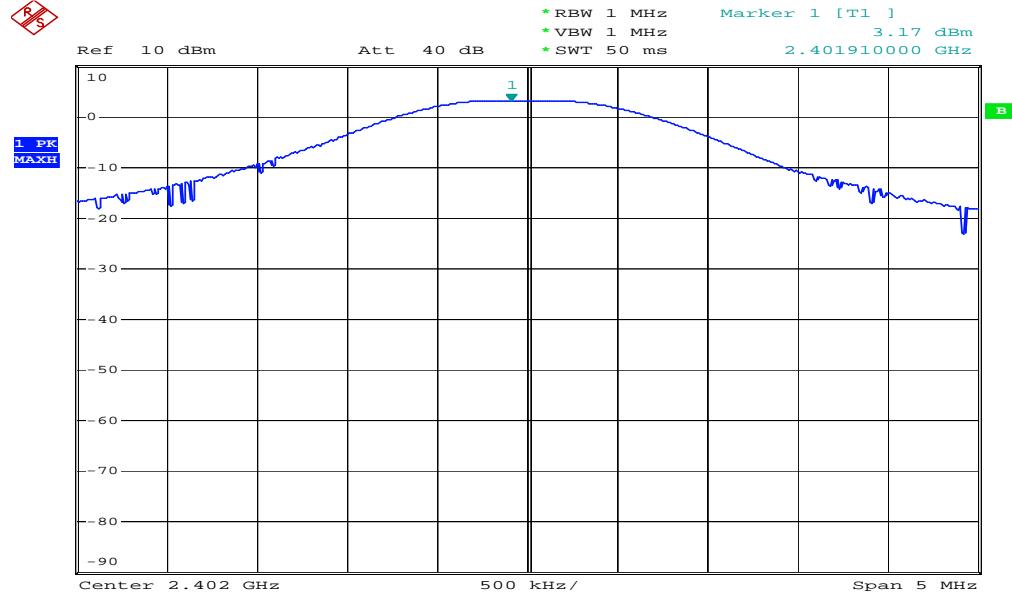Max. Power Output Data Plot:**1. Lowest Channel:**

Date: 14.JUN.2006 19:04:37

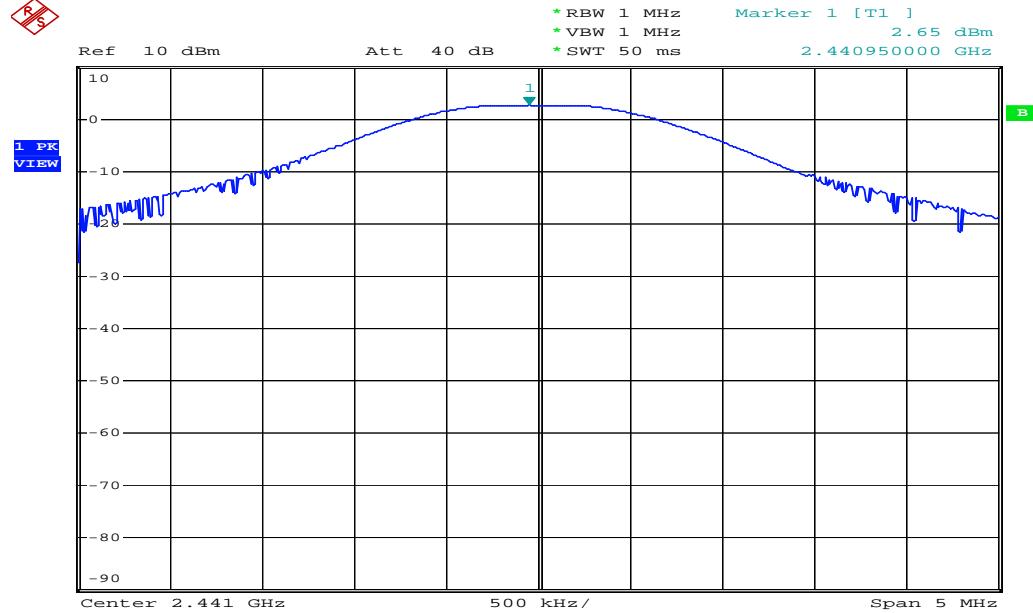2. Medium Channel:

Date: 14.JUN.2006 19:03:26

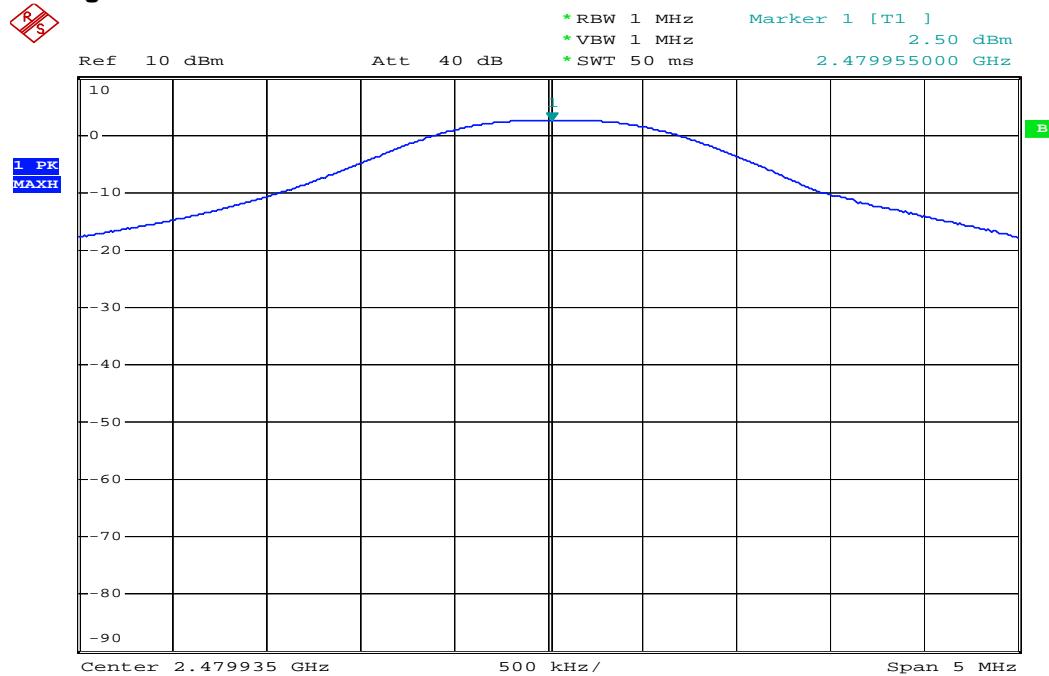3. Highest Channel:

Date: 14.JUN.2006 18:57:29

6.4 Conducted Spurious Emissions

Test Requirement: FCC Part 15 C

Test Method: Based on FCC Part15 C Section 15.247:

Test Date: 14 June 2006


Test requirements: (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100KHz, VBW >= RBW (set 100KHz), Sweep = auto; Detector Function = Peak (Max. hold).

Test result:

Lowest Channel (channel 0)

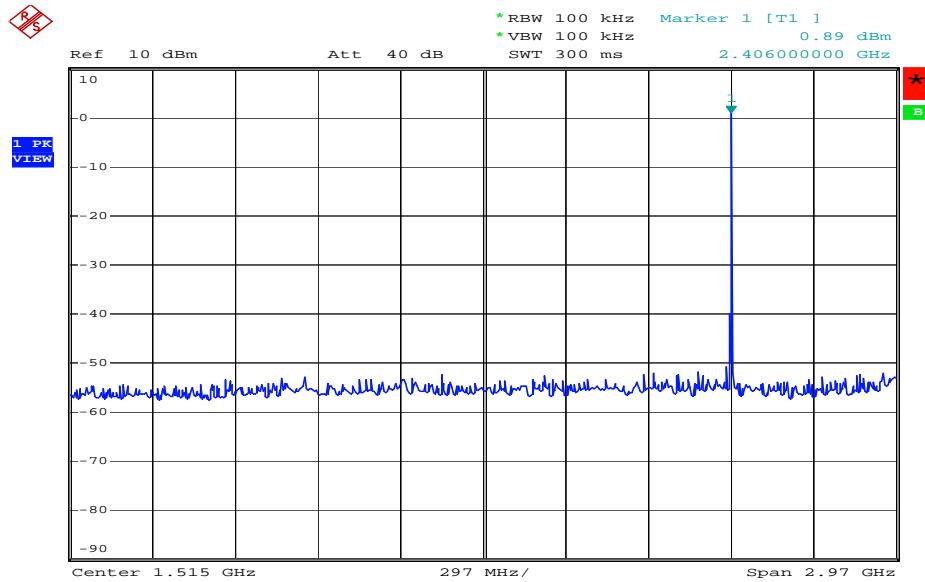


Date: 14.JUN.2006 19:24:53

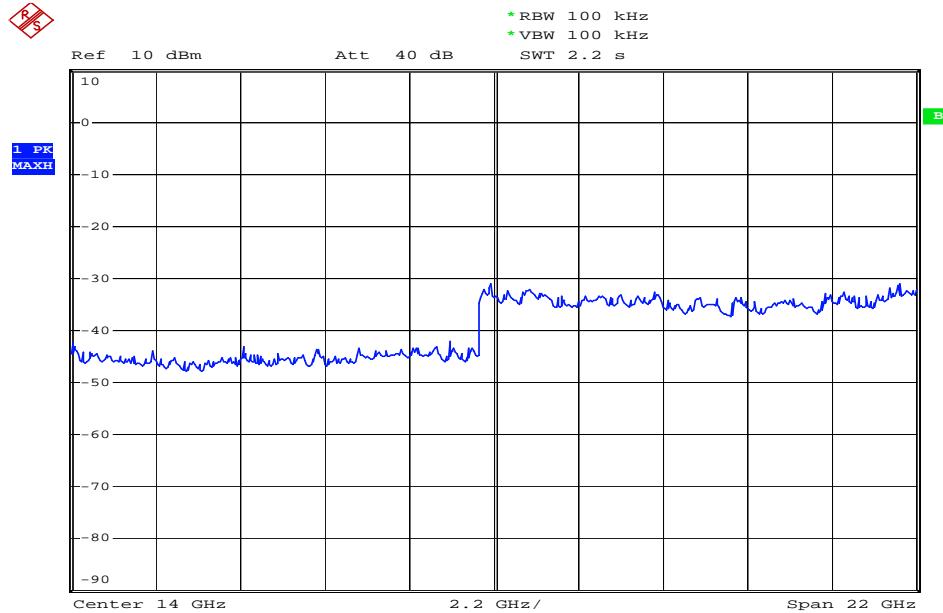


Date: 14.JUN.2006 19:17:55

Medium Channel (channel 39)

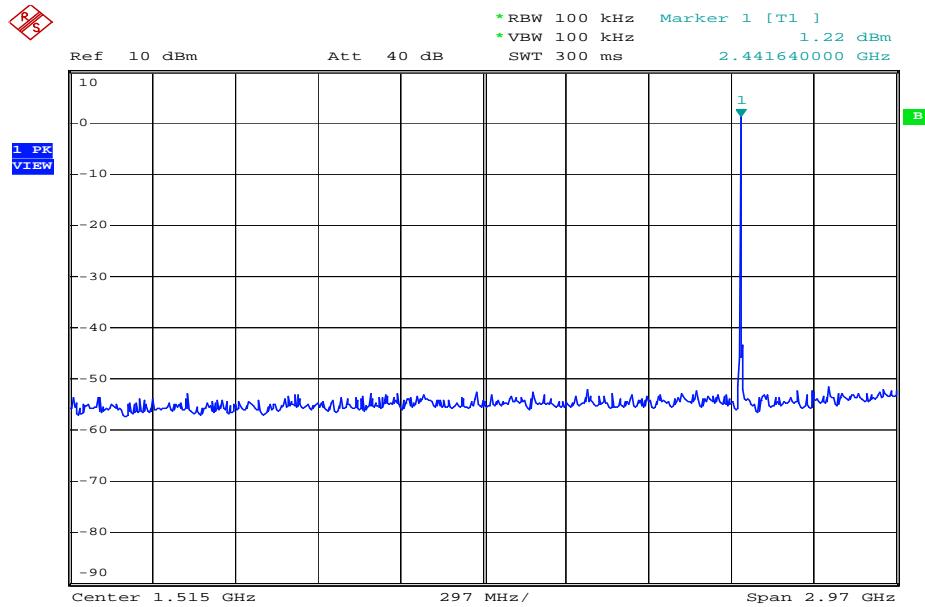


Date: 14.JUN.2006 19:21:18

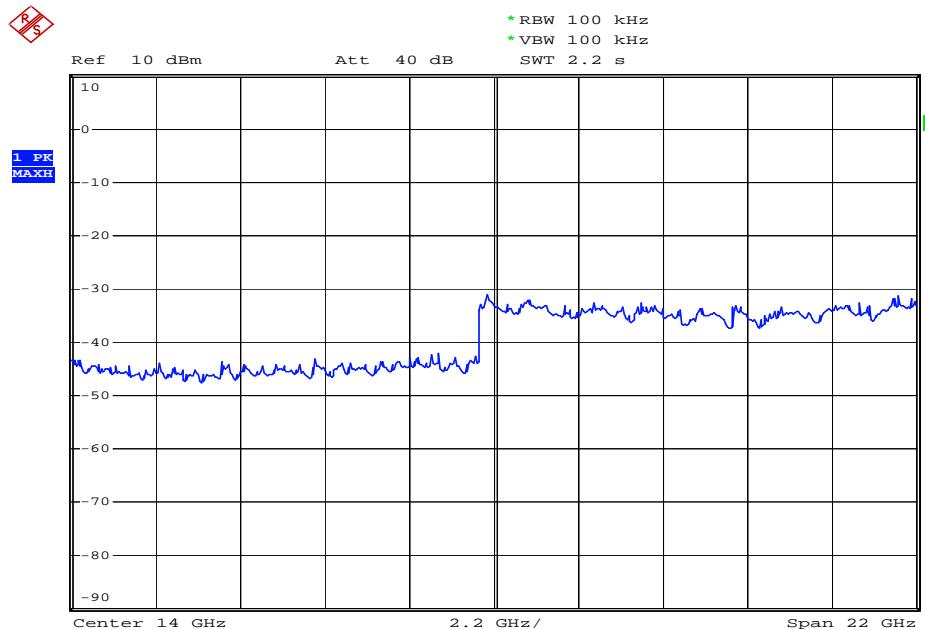


Date: 14.JUN.2006 19:17:29

Highest Channel (channel 78)

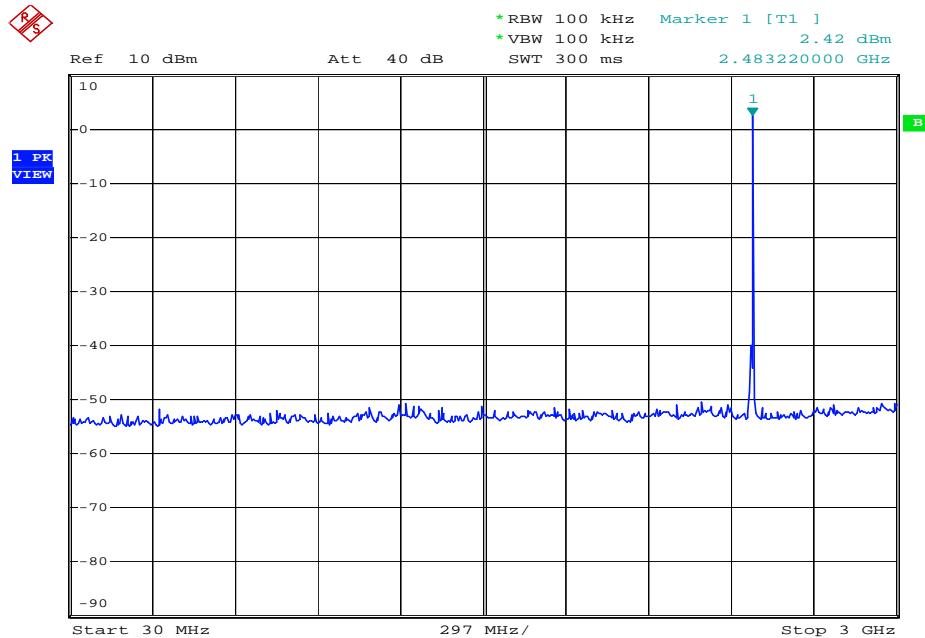

Date: 14.JUN.2006 19:15:04

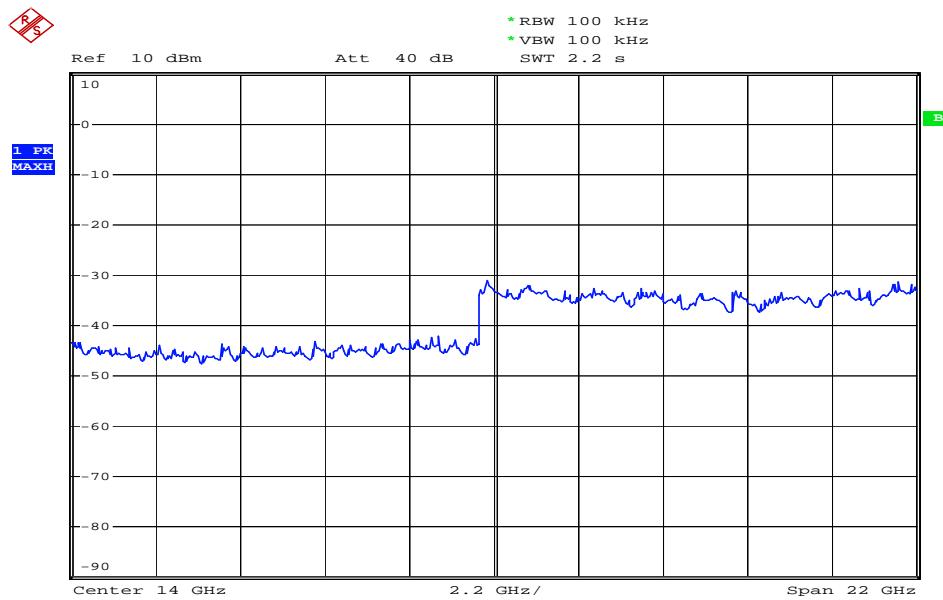


Date: 14.JUN.2006 19:17:29


6.5 Radiated Spurious Emissions

Test Requirement: FCC 15.209 & FCC 15.109
Test Method: ANSI C63.4 section 8 & 13
Test Date: 15 June 2006
Measurement Distance: 3m (Semi-Anechoic Chamber and OATS)
Frequency range 30 MHz – 25GHz for transmitting mode.
Test instrumentation resolution bandwidth 120 kHz (30 MHz - 1000 MHz)
1 MHz (1000 MHz – 25GHz)
Receive antenna scan height 1 m - 4 m, polarization Vertical / Horizontal

Limit: 40.0 dB μ V/m between 30MHz & 88MHz
43.5 dB μ V/m between 88MHz & 216MHz
46.0 dB μ V/m between 216MHz & 960MHz
54.0 dB μ V/m zbove 960MHz

Test Configuration:

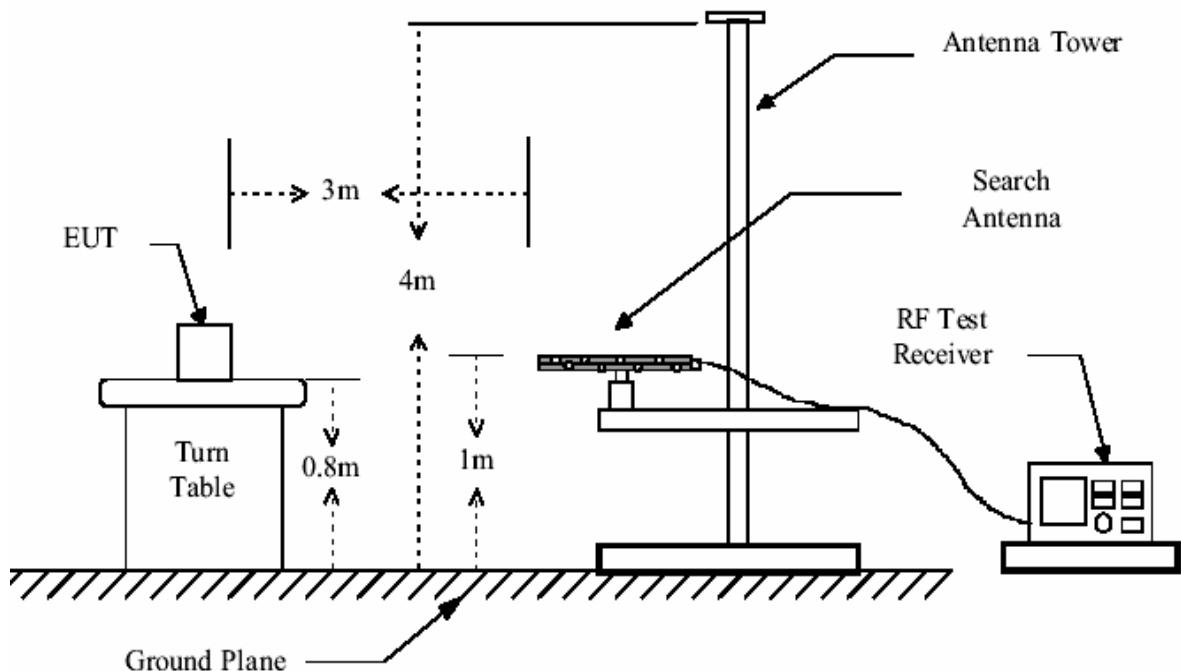

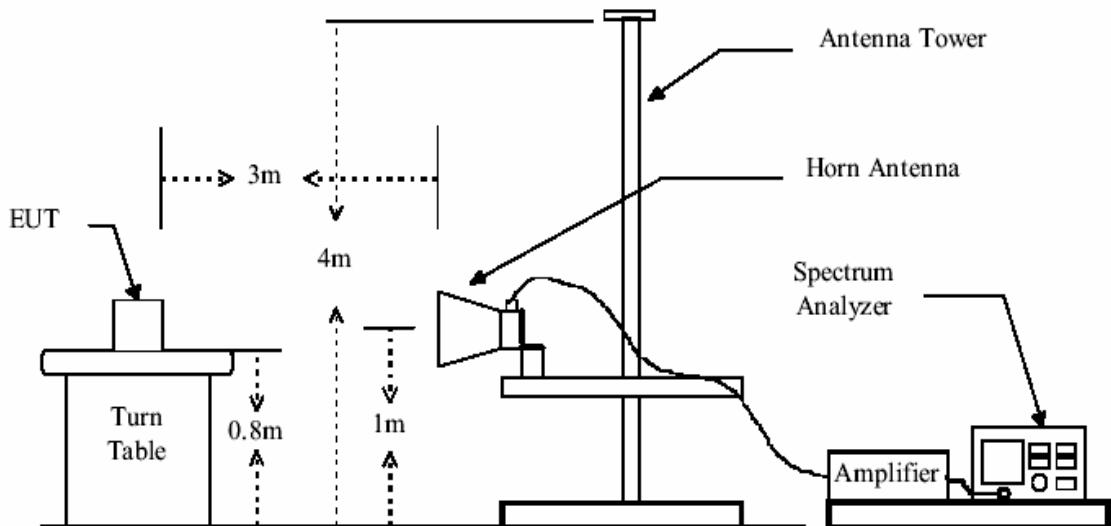

Test Procedure: The procedure used was ANSI Standard C63.4-2001. The receive was scanned from 30MHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

The field strength is calculated by adding the Antenna Factor, Cable Factor & Peramplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Peramplifier Factor

The following test results were performed on the EUT

6.5.1 Harmonics Emissions**Test in Channel 0 in transmitting status:**

Harmonics & Spurious Emissions

Peak Measurement

Test Frequency (GHz)	Measuring Level (dBuV/m)		Limits (dBuV/m)	Margin (dB)	
	Vertical	Horizontal		Vertical	Horizontal
2) 4.804	40.8	41.2	74.0	33.2	32.8
3) 7.206	42.6	40.7	74.0	31.4	33.3
4) 9.608	N/A	N/A	74.0	N/A	N/A
5) 12.010	N/A	N/A	74.0	N/A	N/A
6) 14.412	N/A	N/A	74.0	N/A	N/A
7) 16.814	N/A	N/A	74.0	N/A	N/A
8) 19.216	N/A	N/A	74.0	N/A	N/A
9) 21.618	N/A	N/A	74.0	N/A	N/A
10) 24.020	N/A	N/A	74.0	N/A	N/A

Average Measurement

2) 4.804	31.0	32.2	54.0	23.0	21.8
3) 7.206	30.2	33.7	54.0	23.8	20.3
4) 9.608	N/A	N/A	54.0	N/A	N/A
5) 12.010	N/A	N/A	54.0	N/A	N/A
6) 14.412	N/A	N/A	54.0	N/A	N/A
7) 16.814	N/A	N/A	54.0	N/A	N/A
8) 19.216	N/A	N/A	54.0	N/A	N/A
9) 21.618	N/A	N/A	54.0	N/A	N/A
10) 24.020	N/A	N/A	54.0	N/A	N/A

N/A: refer to remark 1).

Test in Channel 39 in transmitting status:

Harmonics & Spurious Emissions:

Test Frequency (GHz)	Measuring Level (dBuV/m)		Limits (dBuV/m)	Margin (dB)	
	Vertical	Horizontal		Vertical	Horizontal
11) 4.882	40.8	41.2	74.0	33.2	32.8
12) 7.323	42.6	40.7	74.0	31.4	33.3
13) 9.764	N/A	N/A	74.0	N/A	N/A
14) 12.205	N/A	N/A	74.0	N/A	N/A
15) 14.646	N/A	N/A	74.0	N/A	N/A
16) 17.087	N/A	N/A	74.0	N/A	N/A
17) 19.528	N/A	N/A	74.0	N/A	N/A
18) 21.969	N/A	N/A	74.0	N/A	N/A
19) 24.410	N/A	N/A	74.0	N/A	N/A
<u>Average Measurement</u>					
11) 4.882	31.5	32.5	54.0	22.5	21.5
12) 7.323	30.3	33.2	54.0	23.7	20.8
13) 9.764	N/A	N/A	54.0	N/A	N/A
14) 12.205	N/A	N/A	54.0	N/A	N/A
15) 14.646	N/A	N/A	54.0	N/A	N/A
16) 17.087	N/A	N/A	54.0	N/A	N/A
17) 19.528	N/A	N/A	54.0	N/A	N/A
18) 21.969	N/A	N/A	54.0	N/A	N/A
19) 24.410	N/A	N/A	54.0	N/A	N/A

N/A: refer to remark 1).

Test in Channel 78 in transmitting status:

Harmonics & Spurious Emissions:

Peak Measurement

Test Frequency (GHz)	Measuring Level (dBuV/m)		Limits (dBuV/m)	Margin (dB)	
	Vertical	Horizontal		Vertical	Horizontal
20) 4.960	39.2	41.5	74.0	34.8	32.3
21) 7.440	42.0	40.2	74.0	32.0	33.8
22) 9.920	N/A	N/A	74.0	N/A	N/A
23) 12.400	N/A	N/A	74.0	N/A	N/A
24) 14.880	N/A	N/A	74.0	N/A	N/A
25) 17.360	N/A	N/A	74.0	N/A	N/A
26) 19.840	N/A	N/A	74.0	N/A	N/A
27) 22.320	N/A	N/A	74.0	N/A	N/A
28) 24.800	N/A	N/A	74.0	N/A	N/A

Average Measurement

20) 4.960	31.0	32.2	54.0	23.0	21.8
21) 7.440	30.2	33.7	54.0	23.8	20.3
22) 9.920	N/A	N/A	54.0	N/A	N/A
23) 12.400	N/A	N/A	54.0	N/A	N/A
24) 14.880	N/A	N/A	54.0	N/A	N/A
25) 17.360	N/A	N/A	54.0	N/A	N/A
26) 19.840	N/A	N/A	54.0	N/A	N/A
27) 22.320	N/A	N/A	54.0	N/A	N/A
28) 24.800	N/A	N/A	54.0	N/A	N/A

N/A: refer to remark 1).

Remark:

- 1). N/A: For this intentional radiator operates below 25 GHz, the spectrum shall be investigated to the tenth harmonic of the highest fundamental frequency. And above the third harmonic of this intentional radiator, the disturbance is very low. So the test result only displays to 3rd harmonic.
- 2). According to 15.249 (d) As shown in Section 15.35(b), for frequencies above 1000 MHz, the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
- 3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

TEST RESULTS: The unit does meet the FCC requirements.

6.5.2 Other Radiated Spurious Emissions.

Test Requirement:	FCC Part15 Section 15.109
Test Method:	Based on FCC Part15 B
Measurement Distance:	3m
Limit:	40.0 dB μ V/m between 30MHz & 88MHz 43.5 dB μ V/m between 88MHz & 216MHz 46.0 dB μ V/m between 216MHz & 960MHz 54.0 dB μ V/m above 960MHz
Detector:	Peak for pre-scan, 120kHz resolution bandwidth within 1GHz, 1MHz resolution bandwidth above 1GHz Quasi-Peak if maximised peak within 6dB of limit

Pre-test in (1).Charging mode including with USB line charging and (2)Car kit Charging and hand free mode.

Completely test in the worse case: Charging by PC USB port.

The following measurement result were performed on the EUT:

Frequency (Hz)	Antenna Polarization	Emission Level (dB μ V/m)	Limit dB μ V/m)	Margin (dB)
141.550	Vertical	27.7	43.5	15.8
448.070	Vertical	35.0	46.0	11.0
564.470	Vertical	34.0	46.0	12.0
644.010	Vertical	34.8	46.0	11.2
731.112	Vertical	31.9	46.0	14.1
797.685	Vertical	30.2	46.0	15.8
44.550	Horizontal	24.8	40.0	15.2
141.550	Horizontal	23.0	43.5	20.5
330.700	Horizontal	24.9	46.0	21.1
622.670	Horizontal	33.8	46.0	12.2
730.340	Horizontal	31.5	46.0	14.5
815.700	Horizontal	33.2	46.0	12.8

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier.

The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

TEST RESULTS: The unit does meet the FCC requirements

6.6 Band Edges Requirement

Test Requirement: FCC Part 15 C

Test Method: Based on FCC Part15 C Section 15.247:
Operation within the band 2400 – 2483.5 MHz

Test Date: 14 June 2006

Requirements: Section 15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.6.1 100 kHz Bandwidth Outside the Frequency Band

Method of Measurement: Set RBW of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge.
The band edges was measured and recorded.


Test Result:

The Lower Edges: the value is -35.53dBm that is attenuated more than 20dB.


The Upper Edges: the value is -41.73dBm that is attenuated more than 20dB.

The unit does meet the FCC requirements

The graph as below, represents the emissions take for this device.

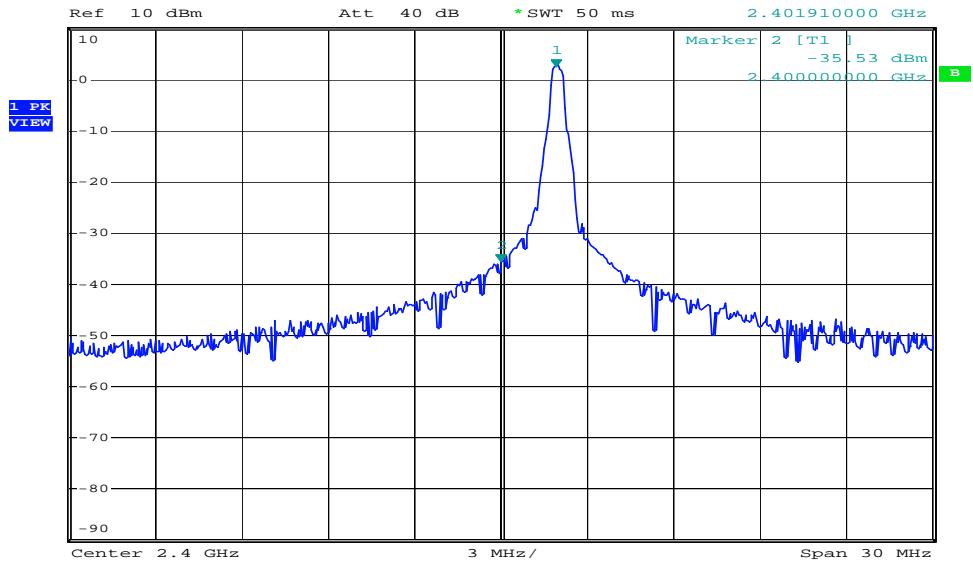1. For Lower Channel: the fundamental frequency is **2.402G Hz**.

Date : 14.JUN.2006 19:08:40

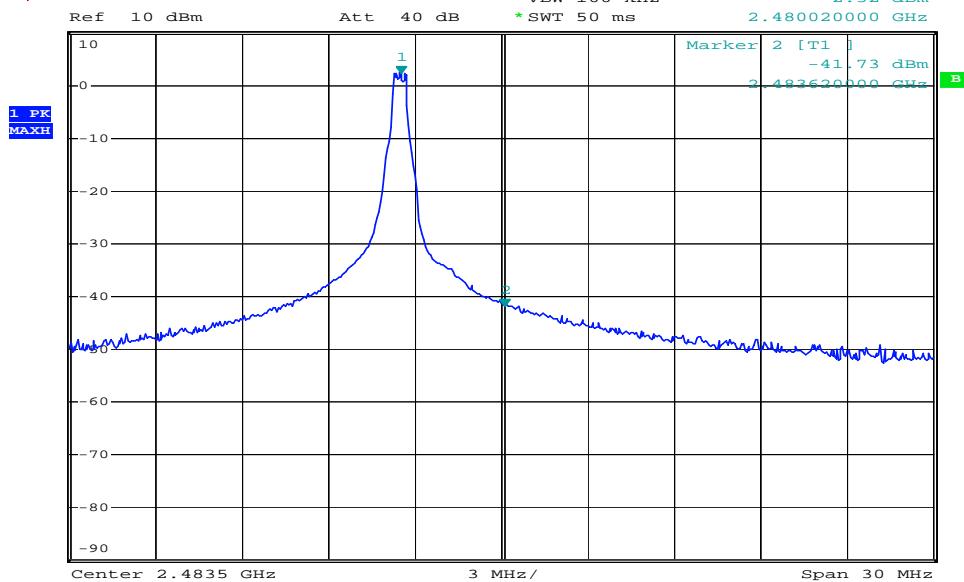2. For Upper Channel: the fundamental frequency is **2.481GHz**.

Date : 14.JUN.2006 19:10:01

6.6.2 Radiated Emissions which fall in the restricted bands

Test Requirement: Section 15.247 (c) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Method: Base on ANSI 63.4.

Test Date: 15 June 2006

Measurement Distance: 3m (Semi-Anechoic Chamber)

Limit: 40.0 dB μ V/m between 30MHz & 88MHz


43.5 dB μ V/m between 88MHz & 216MHz

46.0 dB μ V/m between 216MHz & 960MHz

54.0 dB μ V/m above 960MHz

Detector: Peak for pre-scan , 120kHz resolution bandwidth within 1GHz,
1MHz resolution bandwidth above 1GHz

Test Configuration:

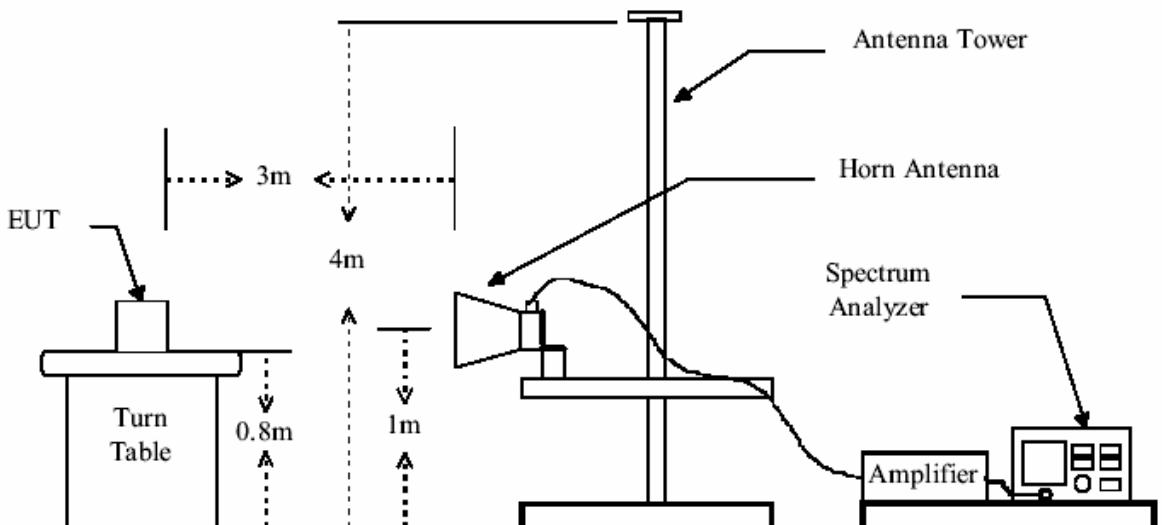

Test Procedure: The procedure used was ANSI Standard C63.4-2003. The receiver was scanned from 30MHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

Test Result:**1. Channel 0 (2.402GHz)**

Test Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	
					Peak	AV
2390.000	45.4	36.0	74.0	54.0	28.6	18.0
2483.500	46.2	38.0	74.0	54.0	27.8	16.0

2. Channel 39 (2.441GHz)

Test Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	
					Peak	AV
2390.000	44.8	36.0	74.0	54.0	29.2	18.0
2483.500	47.2	38.2	74.0	54.0	26.8	15.8

3. Channel 79 (2.480GHz)

Test Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	
					Peak	AV
2390.000	45.0	35.9	74.0	54.0	29.0	18.1
2483.500	46.8	38.5	74.0	54.0	27.2	15.5

The unit does meet the FCC requirements.

Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

6.7 Hopping Channel Number

Test Requirement:

FCC Part15 C

Test Method:

Based on FCC Part15 C Section 15.247

Test Date:

23 May 2006

Requirements:


Regulation 15.247 (b) (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels.

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100KHz, VBW = 100KHz, Sweep = auto; Detector Function = Peak.
3. Set the spectrum analyzer: start frequency = 2400MHz, stop frequency = 2483.5MHz. Record the max. hold reading graph.

Test result:

Total channels are 79 channels, channel 0 to channel 78.

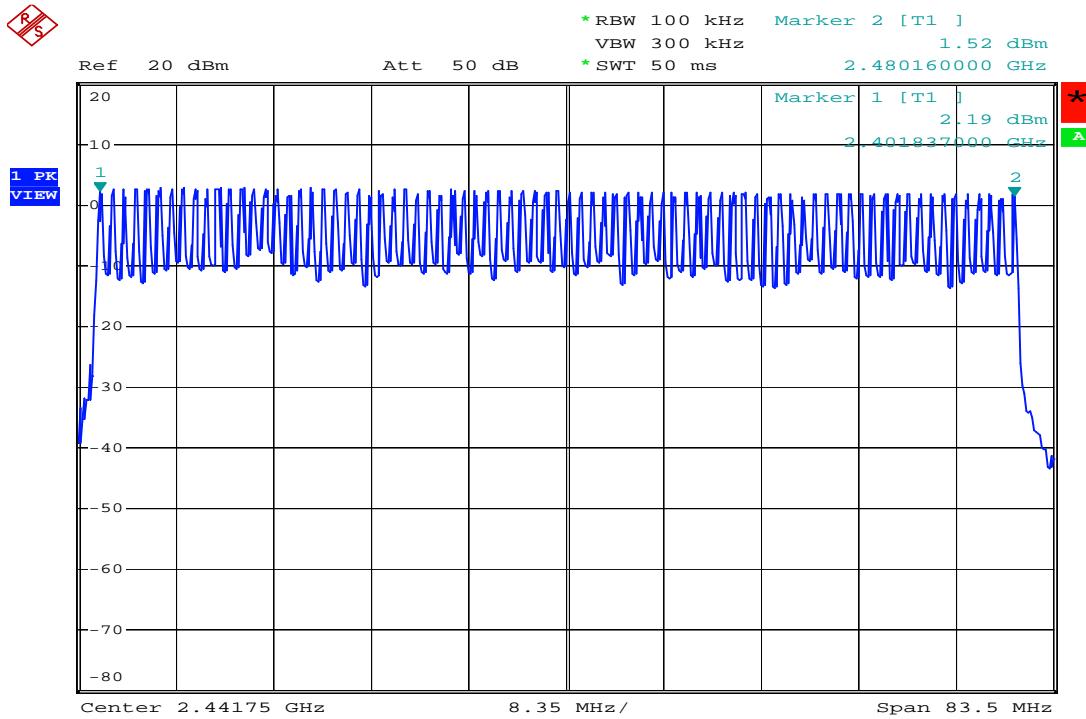

Date: 23.MAY.2006 17:56:55

6.8 Occupied Bandwidth

Test Requirement: FCC Part 15 C
Test Method: Based on FCC Part15 C Section 15.247:
Test Date: 14 June 2006
Test requirements: (a) Operation under the provisions of this Section is limited to frequency hopping and direct sequence spread spectrum intentional radiators that comply with the following provisions: (1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW \geq 1% of the 20dB bandwidth (set 10KHz), VBW \geq RBW (set 10KHz), Span = 3MHz, Sweep = auto; Detector Function = Peak (Max. hold).
3. Mark the peak frequency and -20dBm.

Test result:

Test Channel	20 dB bandwidth	PASS/FAIL
0	508KHz	Pass
39	516KHz	Pass
78	474KHz	Pass


The unit does meet the FCC requirements.

Please refer the graph as below: Lowest Channel (20 dB Bandwidth)

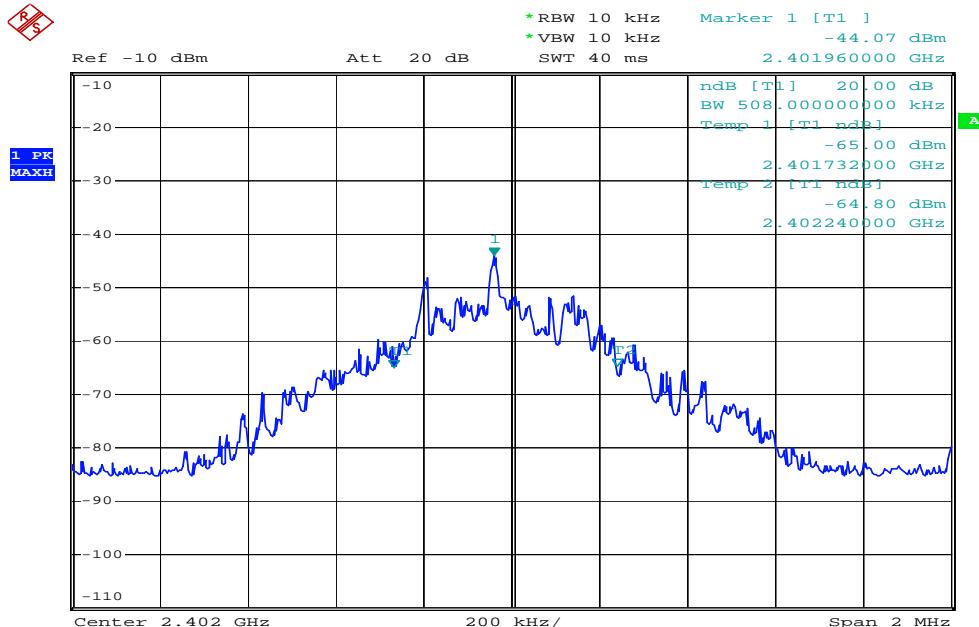


Date: 14.JUN.2006 18:02:09

Medium Channel (20 dB Bandwidth)

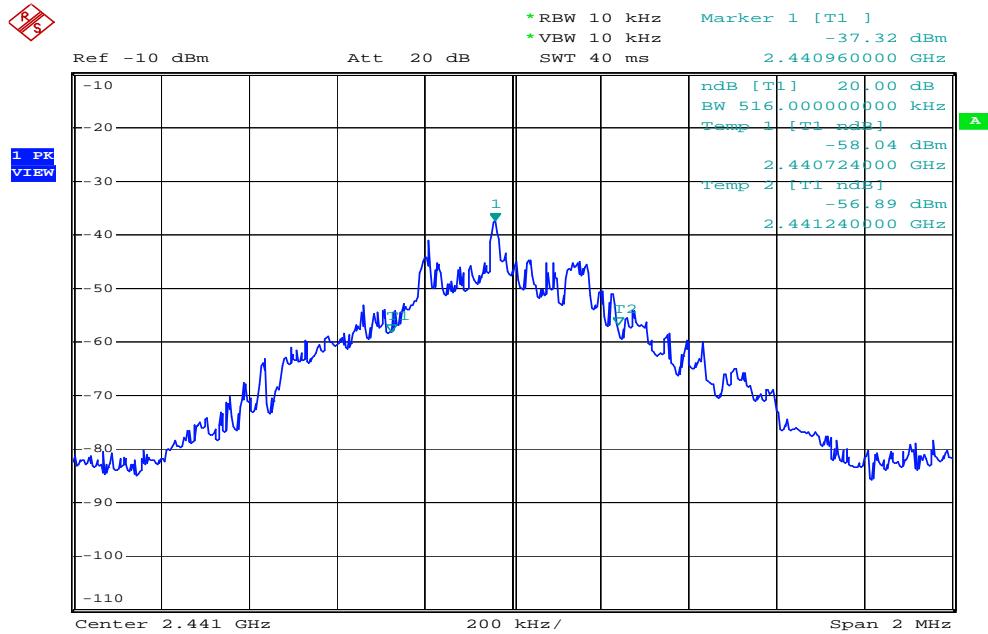

Date: 14.JUN.2006 17:59:41

Highest Channel (20 dB Bandwidth)

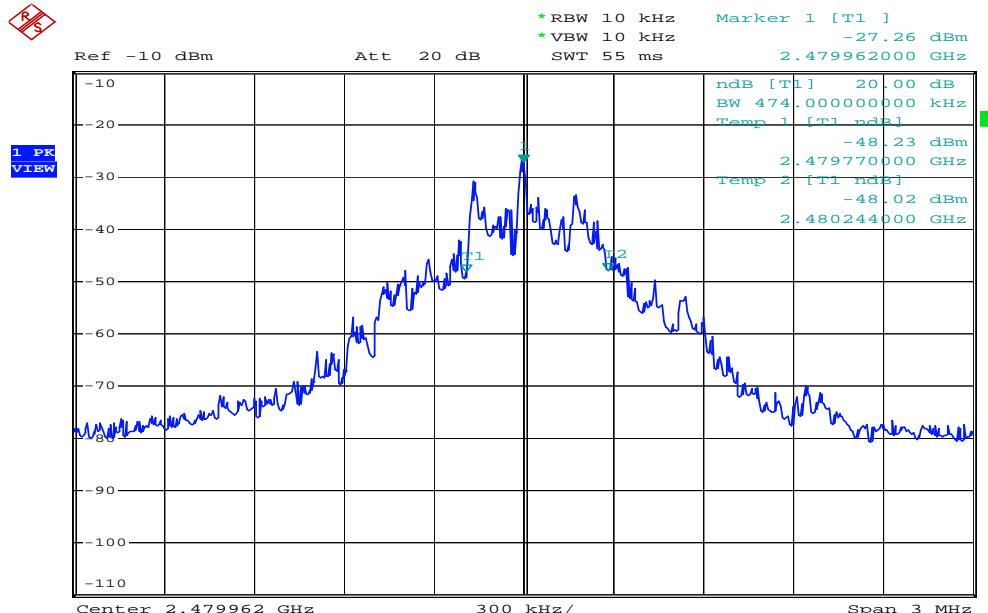

Date: 14.JUN.2006 17:38:51

6.9 Carrier Frequencies Separated

Test Requirement: FCC Part 15 C
Test Method: Based on FCC Part15 C Section 15.247:
Test Date: 23 and 29 May 2006
Test requirements: (a) Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW \geq 1% of the span (set 100KHz), VBW \geq RBW (set 300KHz), Span = 10MHz, Sweep = auto; Detector Function = Peak (Max. hold).
3. Mark the peak frequency and -20dBm.


Test result:

Test Channel	Carrier Frequencies Separated	PASS/FAIL
Lower Channels (channel 0 and channel 1)	1.0MHz	Pass
Middle Channels (channel 39 and channel 40)	1.0MHz	Pass
Upper Channels (channel 77 and channel 78)	1.0MHz	Pass


1. Lower Channels: Carrier Frequencies Separated

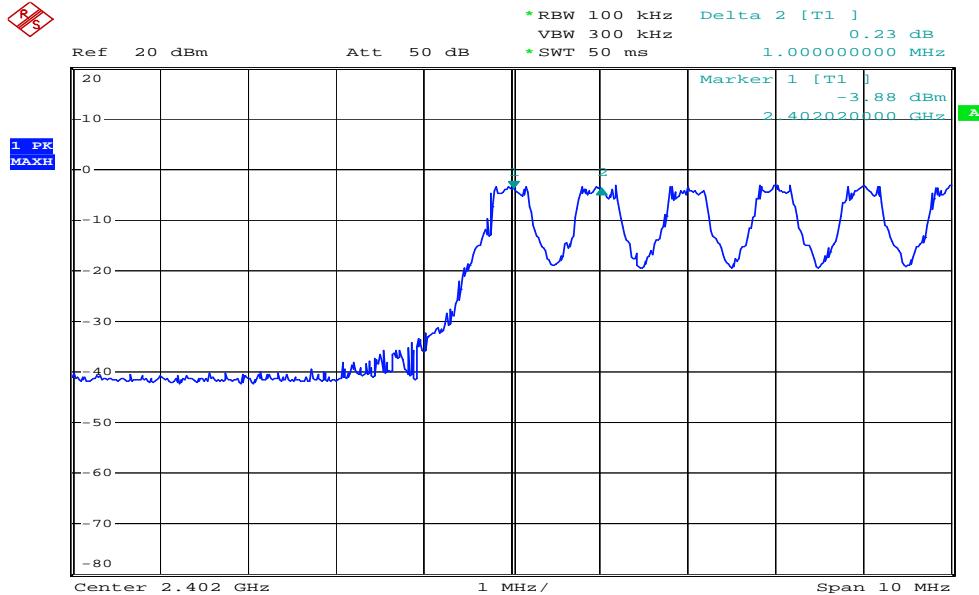

Date: 23.MAY.2006 18:09:12

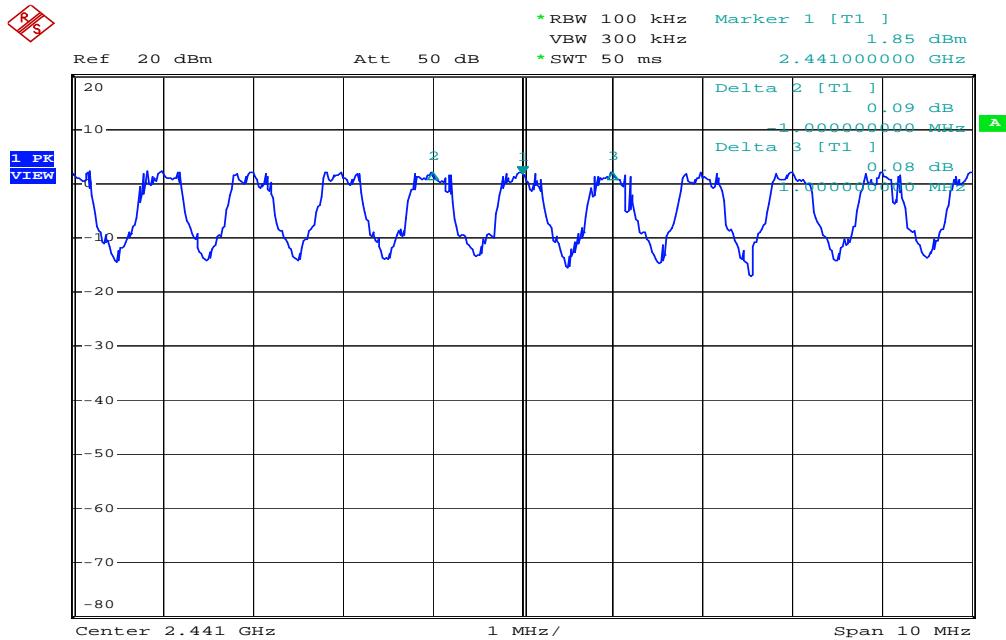2. Middle Channels: Carrier Frequencies Separated

Date: 29.MAY.2006 11:19:19

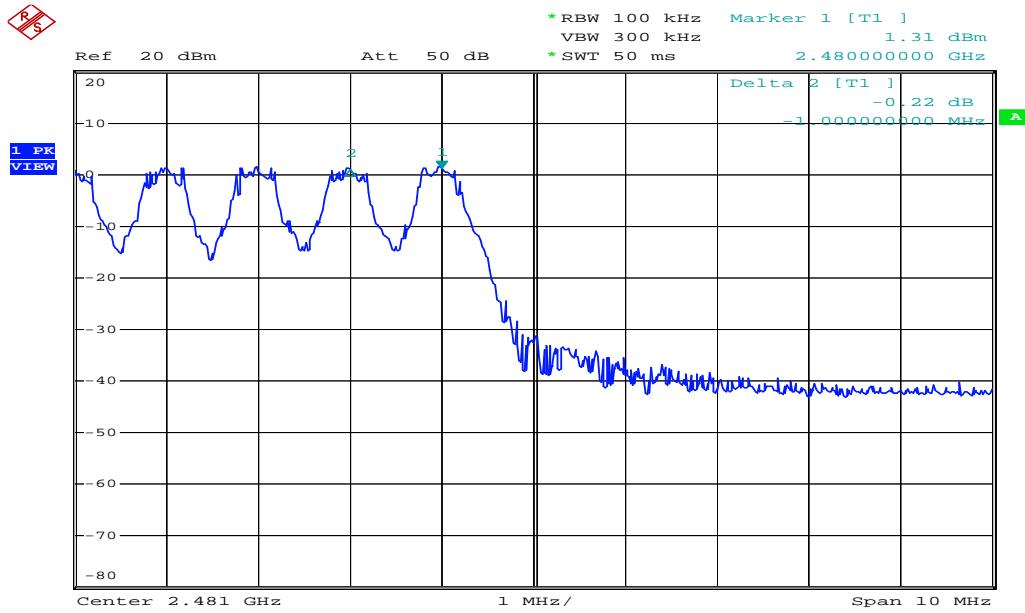3. Upper Channels: Carrier Frequencies Separated

Date: 29.MAY.2006 11:24:38

6.10 Dwell Time

Test Requirement: FCC Part 15 C

Test Method: Based on FCC Part15 C Section 15.247:

Test Date: 14 June 2006

Requirements: 15.247 a (1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set RBW of spectrum analyzer to 1MHz and VBW of spectrum analyzer to 1MHz, Set the test channel frequency span to 0.

Test Result:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

1. Channel 0: 2.402GHz

$\text{DH1 time slot} = 0.440 \text{ (ms)} * (1600/(2*79)) * 31.6 = 140.800 \text{ ms}$

$\text{DH3 time slot} = 1.690 \text{ (ms)} * (1600/(4*79)) * 31.6 = 270.400 \text{ ms}$

$\text{DH5 time slot} = 2.950 \text{ (ms)} * (1600/(6*79)) * 31.6 = 314.667 \text{ ms}$

2. Channel 39: 2.441GHz

$\text{DH1 time slot} = 0.440 \text{ (ms)} * (1600/(2*79)) * 31.6 = 140.800 \text{ ms}$

$\text{DH3 time slot} = 1.690 \text{ (ms)} * (1600/(4*79)) * 31.6 = 270.400 \text{ ms}$

$\text{DH5 time slot} = 2.930 \text{ (ms)} * (1600/(6*79)) * 31.6 = 312.533 \text{ ms}$

3. Channel 78: 2.4835GHz

$\text{DH1 time slot} = 0.448 \text{ (ms)} * (1600/(2*79)) * 31.6 = 143.360 \text{ ms}$

$\text{DH3 time slot} = 1.690 \text{ (ms)} * (1600/(4*79)) * 31.6 = 270.400 \text{ ms}$

$\text{DH5 time slot} = 2.938 \text{ (ms)} * (1600/(6*79)) * 31.6 = 313.387 \text{ ms}$

The results are not be greater than 0.4 seconds.

The unit does meet the FCC requirements.

6.11 Antenna Requirement

6.11.1 Standard Applicable

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3dB that the directional gain of the antenna exceeds 6 dBi.

6.11.2 Antenna Construction

The antenna is integrated on the main PCB and no consideration of replacement.