

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com



Test Report

Product Name: AMPLIFIER

FCC ID: RMCHL-350V DX

Applicant:

**Kimura Denyoki, Inc
570 Madrid Avenue
Torrance CA 90501**

Date Receipt: 10/17/2003

Date Tested: 10/17/2003

APPLICANT: Kimura Denyoki, Inc

FCC ID: RMCHL-350V DX

REPORT #: K/KIMURA\1447UT3\1447UT3TestReport.doc

PAGE: COVER SHEET

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

TABLE OF CONTENTS

APPLICANT: Kimura Denyoki, Inc

FCC ID: RMCHL-350V DX

REPORT CONTAINING:

PAGE 1-5.....	TEST EQUIPMENT LIST
PAGE 6.....	TEST PROCEDURE
PAGE 7.....	SPURIOUS EMISSIONS (RADIATED)
PAGE 8.....	IN BAND GAIN
PAGE 9.....	OUT OF BAND GAIN
PAGE 10.....	SPURIOUS EMISSION(CONDUCTED)
PAGE 11.....	METHOD OF MEASURING SPURIOUS EMISSIONS (CONDUCTED)
PAGE 12.....	PRODUCT DESCRIPTION

EXHIBITS CONTAINING:

PAGE 1.....	FCC ID LABEL SAMPLE
PAGE 2.....	SKETCH OF FCC ID LABEL LOCATION
PAGE 3.....	BLOCK DIAGRAM
PAGE 4.....	SCHEMATIC
PAGE 5.....	EXTERNAL PHOTOGRAPHS
PAGE 6.....	INTERNAL PHOTOGRAPHS
PAGE 7.....	TUNING PROCEDURE
PAGE 8.....	PARTS LIST
PAGE 9.....	CIRCUIT DESCRIPTION
PAGE 10.....	USERS MANUAL
PAGE 11.....	TEST SETUP PHOTOGRAPH

APPLICANT: Kimura Denyoki, Inc

FCC ID: RMCHL-350V DX

REPORT #: K/KIMURA\1447UT3\1447UT3TestReport.doc

PAGE: TABLE OF CONTENTS

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

EMC Equipment List

Last Update: 7/8/03

	DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
	3-Meter OATS	TEI	N/A	N/A	Listed 1/13/03	1/13/06
	3/10-Meter OATS	TEI	N/A	N/A	Listed 3/26/01	3/26/04
	Receiver, Beige Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 8/31/01	8/31/03
	RF Preselector	HP	85685A	3221A01400	CAL 8/31/01	8/31/03
	Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 8/31/01	8/31/03
	Preamplifier	HP	8449B-H02	3008A00372	CHAR 3/4/01	3/4/03
	Receiver, Blue Tower Spectrum Analyzer	HP	8568B	2928A04729 2848A18049	CAL 4/15/03	4/15/05
	RF Preselector	HP	85685A	2926A00983	CAL 4/15/03	4/15/05
	Quasi-Peak Adapter	HP	85650A	2811A01279	CAL 4/15/03	4/15/05
	Receiver, Silver/Grey Tower Spectrum Analyzer	HP	8566B Opt 462	3552A22064 3638A08608	CAL 10/14/02	10/14/04
	RF Preselector	HP	85685A	2620A00294	CAL 10/14/02	10/14/04
	Quasi-Peak Adapter	HP	85650A	3303A01844	CAL 10/14/02	10/14/04
	Preamplifier	HP	8449B	3008A01075	CHAR 1/28/02	1/28/04
	Biconnical Antenna	Electro-Metrics	BIA-25	1171	CAL 4/26/01	4/26/03

APPLICANT: Kimura Denyoki, Inc

FCC ID: RMCHL-350VDX

REPORT #: K/KIMURA\1447UT3\1447UT3TestReport.doc

PAGE: 1 of 12

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

	DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
	Biconnical Antenna	Eaton	94455-1	1096	CAL 10/1/01	10/1/03
	Biconnical Antenna	Eaton	94455-1	1057	CAL 3/18/03	3/18/05
	BiconiLog Antenna	EMCO	3143	9409-1043		
	Log-Periodic Antenna	Electro-Metrics	LPA-25	1122	CAL 10/2/01	10/2/03
	Log-Periodic Antenna	Electro-Metrics	EM-6950	632	CHAR 10/15/01	10/15/03
	Log-Periodic Antenna	Electro-Metrics	LPA-30	409	CAL 3/4/03	3/4/05
	Log-Periodic Antenna	Eaton	96005	1243	CAL 5/8/03	5/8/05
	Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	152	CAL 3/21/01	3/21/04
	Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	153	CAL 9/26/02	9/26/05
	Double-Ridged Horn Antenna	Electro-Metrics	RGA-180	2319	CAL 2/17/03	2/17/05
	Horn Antenna *(at 3 meters)	Electro-Metrics	EM-6961	6246	CAL 3/31/03	3/31/05
	Horn Antenna *(at 10 meters)	Electro-Metrics	EM-6961	6246	CAL 6/4/03	6/4/05
	Horn Antenna	ATM	19-443-6R	None	No Cal Required	
	Passive Loop Antenna	EMC Test Systems	EMCO 6512	9706-1211	CHAR 7/10/01	7/10/03
	Harmonic Mixer with Horn Antenna	Oleson Microwave Labs	M08HW/A	F30425-1	CHAR 4/25/03	4/25/05
	Harmonic Mixer with Horn Antenna	Oleson Microwave Labs	M12HW/A	E30425-1	CHAR 4/25/03	4/25/05
	Line Impedance Stabilization . . .	Electro-Metrics	ANS-25/2	2604	CAL 10/9/01	10/9/03

APPLICANT: Kimura Denyoki, Inc

FCC ID: RMCHL-350VDX

REPORT #: K/KIMURA\1447UT3\1447UT3TestReport.doc

PAGE: 2 of 12

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
Line Impedance Stabilization . . .	Electro-Metrics	EM-7820	2682	CAL 3/12/03	3/12/05
Termaline Wattmeter	Bird Electronic Corporation	611	16405	CAL 5/25/99	5/25/01
Termaline Wattmeter	Bird Electronic Corporation	6104	1926	CHAR 9/7/01	9/7/03
Oscilloscope	Tektronix	2230	300572	CAL 7/3/03	7/3/05
System One	Audio Precision	System One	SYS1-45868	CHAR 4/25/02	4/25/04
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 1/22/02	1/22/04
AC Voltmeter	HP	400FL	2213A14499	CAL 10/9/01	10/9/03
AC Voltmeter	HP	400FL	2213A14261	CHAR 10/15/01	10/15/03
AC Voltmeter	HP	400FL	2213A14728	CHAR 10/15/01	10/15/03
Digital Multimeter	Fluke	77	35053830	CHAR 1/8/02	1/8/04
Digital Multimeter	Fluke	77	43850817	CHAR 1/8/02	1/8/04
Digital Multimeter	HP	E2377A	2927J05849	CHAR 1/8/02	1/8/04
Multimeter	Fluke	FLUKE-77-3	79510405	CHAR 9/26/01	9/26/03
Peak Power Meter	HP	8900C	2131A00545	CAL 7/2/03	7/2/05
Power Sensor	Agilent Technologies	84811A	2551A02705	CAL 7/2/03	7/2/05
Power Meter	HP	432A	1141A07655	CAL 4/15/03	4/15/05
Power Sensor	HP	478A	72129	CAL 4/15/03	4/15/05
Power Meter And Sensor	Bird	4421-107 4022	0166 0218	CAL 4/16/03	4/16/05

APPLICANT: Kimura Denyoki, Inc

FCC ID: RMCHL-350VDX

REPORT #: K/KIMURA\1447UT3\1447UT3TestReport.doc

PAGE: 3 of 12

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
Digital Thermometer	Fluke	2166A	42032	CAL 1/16/02	1/16/04
Thermometer	Traulsen	SK-128		CHAR 1/22/02	1/22/04
Thermometer	Extech	4028	14871-2	CAL 3/7/03	3/7/05
Hygro-Thermometer	Extech	445703	0602	CAL 10/4/02	10/4/04
Frequency Counter	HP	5352B	2632A00165	CAL 11/28/01	11/28/03
Frequency Counter	HP	5385A	2730A03025	CAL 3/7/03	3/7/05
Service Monitor	IFR	FM/AM 500A	5182	CAL 11/22/00	11/22/02
Comm. Serv. Monitor	IFR	FM/AM 1200S	6593	CAL 5/12/02	5/12/04
Signal Generator	HP	8640B	2308A21464	CAL 2/15/02	2/15/04
Sweep Generator	Wiltron	6648	101009	CAL 4/15/03	4/15/05
Sweep Generator	Wiltron	6669M	007005	CAL 3/3/03	3/3/05
Modulation Analyzer	HP	8901A	3435A06868	CAL 9/5/01	9/5/03
Modulation Meter	Boonton	8220	10901AB	CAL 4/15/03	4/15/05
Near Field Probe	HP	HP11940A	2650A02748	CHAR 2/1/01	2/1/03
BandReject Filter	Lorch Microwave	5BR4-2400/ 60-N	Z1	CHAR 4/17/03	4/17/05
BandReject Filter	Lorch Microwave	6BR6-2442/ 300-N	Z1	CHAR 4/17/03	4/17/05
BandReject Filter	Lorch Microwave	5BR4-10525/ 900-S	Z1	CHAR 4/12/03	4/12/05
Notch Filter	Lorch Microwave	5BRX-850/ X100-N	AD-1	CHAR 4/17/03	4/17/05

APPLICANT: Kimura Denyoki, Inc

FCC ID: RMCHL-350VDX

REPORT #: K/KIMURA\1447UT3\1447UT3TestReport.doc

PAGE: 4 of 12

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

	DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
	High Pass Filter	Unk	3768(5)-400	041	CHAR 12/17/02	12/17/04
	High Pass Filter	Microlab	HA-10N		CHAR 11/17/02	11/17/04
	High Pass Filter	Microlab	HA-20N		CHAR 12/17/02	12/17/04
	Audio Oscillator	HP	653A	832-00260	CHAR 12/1/02	12/1/04
	Audio Generator	B&K Precision	3010	8739686	CHAR 12/1/02	12/1/04
	Frequency Counter	HP	5382A	1620A03535	CHAR 3/2/01	3/2/03
	Frequency Counter	HP	5385A	3242A07460	CAL 3/7/03	3/7/05
	Amplifier	HP	11975A	2738A01969	CHAR 3/1/01	3/1/03
	Egg Timer	Unk			CHAR 2/1/02	2/1/04
	Measuring Tape, 20M	Kraftixx	0631-20		CHAR 2/1/02	2/1/04
	Measuring Tape, 7.5M	Kraftixx	7.5M PROFI		2/1/02	2/1/04
	Coaxial Cable #51	Insulated Wire Inc.	NPS 2251- 2880	Timco #51	CHAR 1/23/02	1/23/04
	Coaxial Cable #64	Semflex Inc.	60637	Timco #64	CHAR 1/24/02	1/24/04
	Coaxial Cable #65	General Cable Co.	E9917 RG233/U	Timco #65	CHAR 1/23/02	1/23/04
	Coaxial Cable #106	Unknown	Unknown	Timco #106	CHAR 1/23/02	1/23/04

APPLICANT: Kimura Denyoki, Inc

FCC ID: RMCHL-350VDX

REPORT #: K/KIMURA\1447UT3\1447UT3TestReport.doc

PAGE: 5 of 12

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

TEST PROCEDURES

GENERAL: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a preselector. In the frequency range 10 kHz to 30 MHz the RBW was 10 kHz and from 30-1000 MHz the RBW of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was 300 kHz. The ambient temperature of the UUT was 80°F with a humidity of 50%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF = FS

33 20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

ANSI C63.4-1992 Section 8.2.1 MEASUREMENT PROCEDURES: The EUT was placed on a non-conducting table 80 cm above the ground plane with the EUT located in the center of the table. With the antenna vertical a preliminary scan was done at 1 meters distance, the EUT was moved to a 3.0-meter distance and the antenna height varied and also placed in a horizontal position. The frequency was scanned from 9.0 kHz to 1.0 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The EUT was measured in three (3) orthogonal planes. The unit was measured at TIMCO ENGINEERING, INC. located at 849 N.W. State Road 45 Newberry, Florida 32669.

APPLICANT: Kimura Denyoki, Inc

FCC ID: RMCHL-350VDX

REPORT #: K/KIMURA\1447UT3\1447UT3TestReport.doc

PAGE: 6 of 12

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: Kimura Denyoki, Inc

FCC ID: RMCHL-350V DX

NAME OF TEST: SPURIOUS EMISSIONS (RADIATED)

RULES PART NO. 97.317

REQUIREMENTS: Spurious emissions must be 60 dB down from the carrier.

TEST DATA:

Frequency	Coax Loss	ACF	Field Strength	dBc
146	0.89	16.66	152.2	0
292	1.4	14.72	84.32	67.88
292	1.4	15.21	91.81	60.39
438	1.6	16.51	78.61	73.59
438	1.6	16.91	82.11	70.09
584	1.6	19.14	69.84	82.36
584	1.6	18.54	73.54	78.66
730	1.9	20.64	76.64	75.56
730	1.9	21.57	79.27	72.93
876	1.7	21.8	67	85.2
876	1.7	22.89	70.59	81.61

TEST PROCEDURE: The procedure used was ANSI C63.4-1992 Section 8.2.

The frequency was scanned from 9.0 kHz to 1.0 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The unit was measured at TIMCO ENGINEERING, INC. located at 849 N.W. State Road 45 Newberry, Florida 32669.

APPLICANT: Kimura Denyoki, Inc

FCC ID: RMCHL-350V DX

REPORT #: K/KIMURA\1447UT3\1447UT3TestReport.doc

PAGE: 7 of 12

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: Kimura Denyoki, Inc


FCC ID: RMCHL-350V DX

NAME OF TEST: IN BAND GAIN

RULES PART NO. 97.315/97.317

REQUIREMENTS: To demonstrate that the amplifier has 15 dB of gain or less.
To demonstrate that the amplifier will not produce more than 1500 Watts output when driven by 50 Watts or less.

TEST RESULTS: It can be seen from the following plot that the gain is less than or equal to 15 dB.

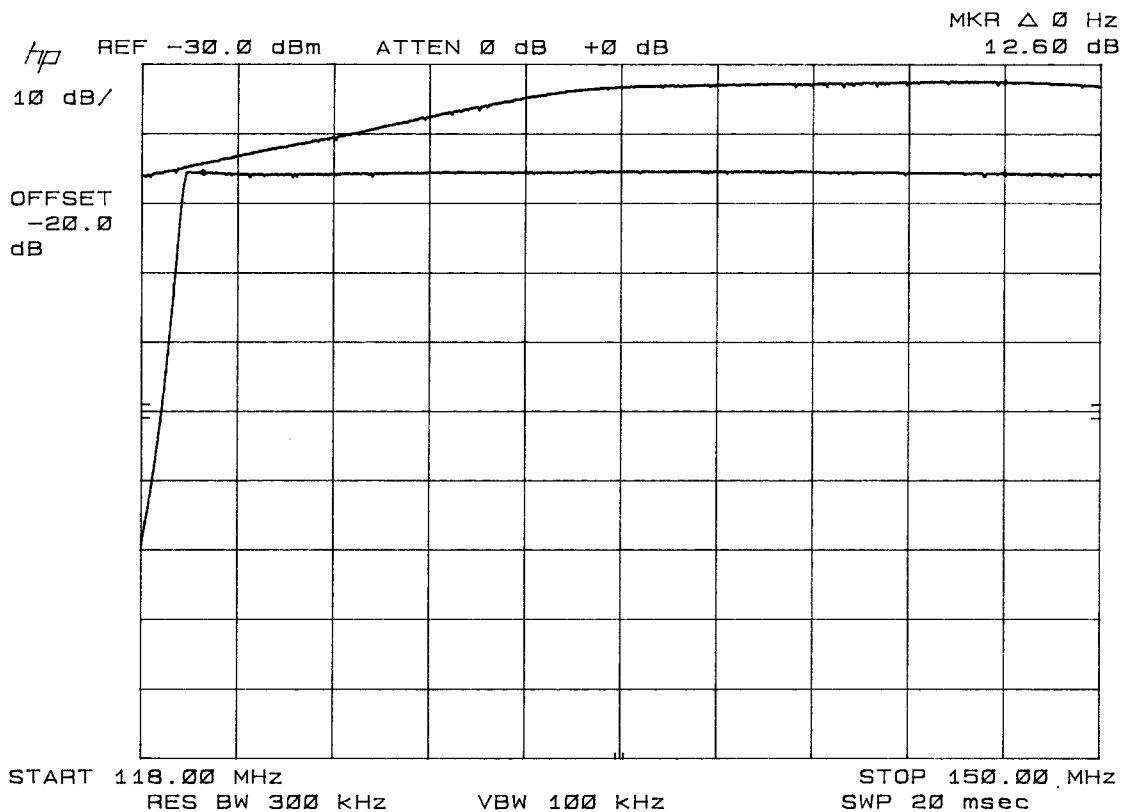

From the schematic it can be seen that this amplifier is incapable of more than 350 Watts and therefore, meets the requirements. The above plot shows gain output verses input.

APPLICANT: Kimura Denyoki, Inc

FCC ID: RMCHL-350V DX

REPORT #: K/KIMURA\1447UT3\1447UT3TestReport.doc

PAGE: 8 of 12

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: Kimura Denyoki, Inc


FCC ID: RMCHL-350V DX

NAME OF TEST: Out of Band Gain

RULES PART NO. 97.317

REQUIREMENTS: To demonstrate that the amplifier has 0 dB of gain at 120 MHz.

TEST RESULTS: It can be seen from the following plot that the gain **DOES** fall off to 0 dB at 120 MHz.

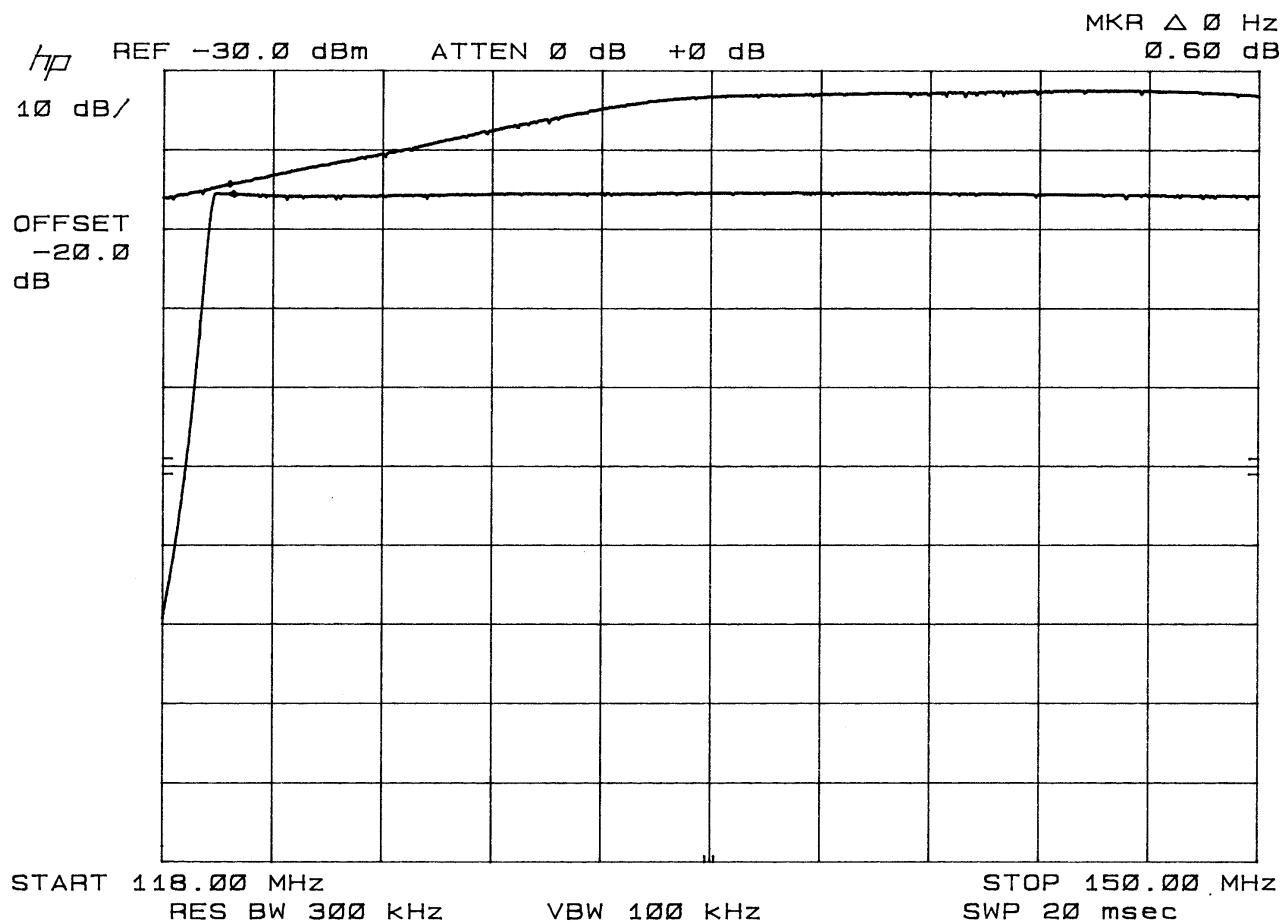

APPLICANT: Kimura Denyoki, Inc

FCC ID: RMCHL-350V DX

REPORT #: K/KIMURA\1448UT3\1448UT3TestReport.doc

PAGE: Page 9 of 12

TIMCO ENGINEERING INC.

849 NW State Road 45


Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1051 Spurious emissions at antenna terminals(conducted):
2.1052 Data on the following page shows the level of conducted spurious responses. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard TIA/EIA-603.

REQUIREMENTS: Emissions must be 60dB below the carrier.

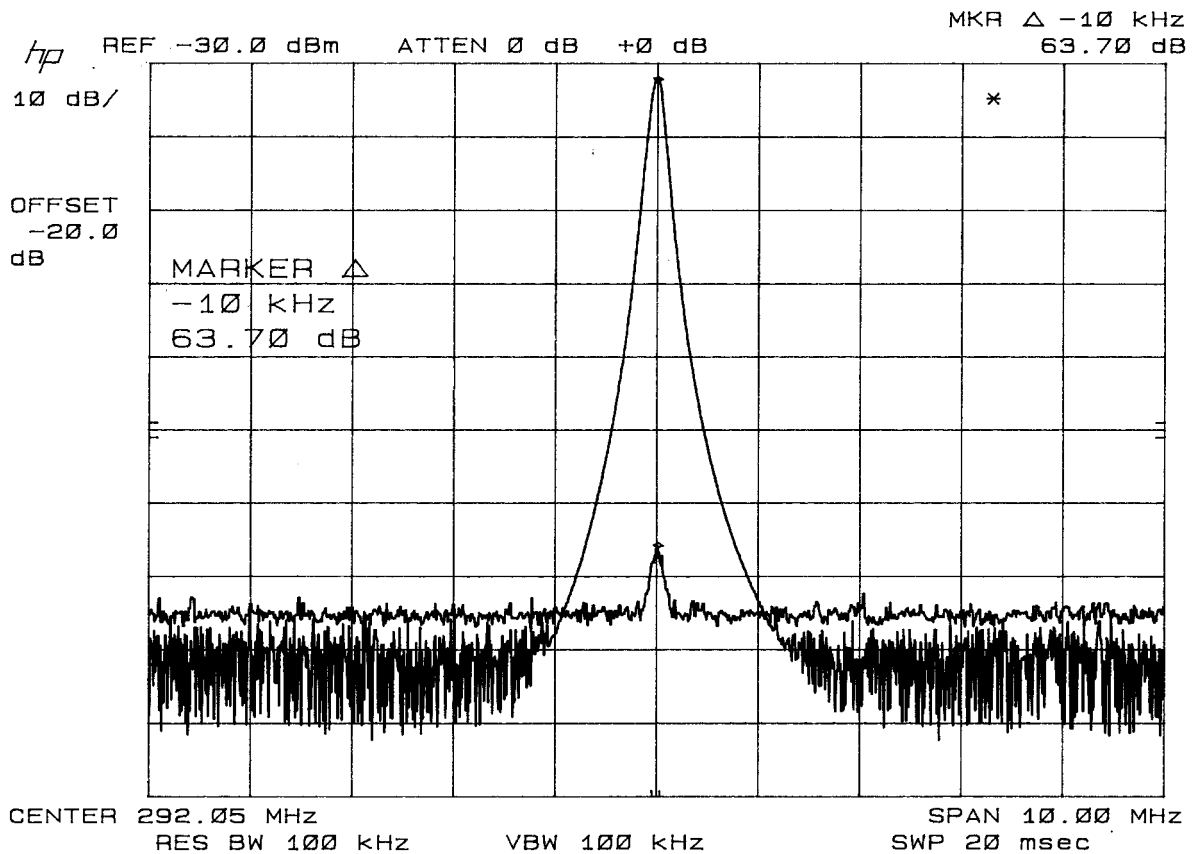

Emissions were scanned to the tenth harmonic and the worst case was found to be at the second harmonic represented in the plot above.

APPLICANT: Kimura Denyoki, Inc

FCC ID: RMCHL-350VDX

REPORT #: K/KIMURA\1448UT3\1448UT3TestReport.doc

PAGE: Page 10 of 12

TIMCO ENGINEERING INC.


849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Method of Measuring Conducted Spurious Emissions

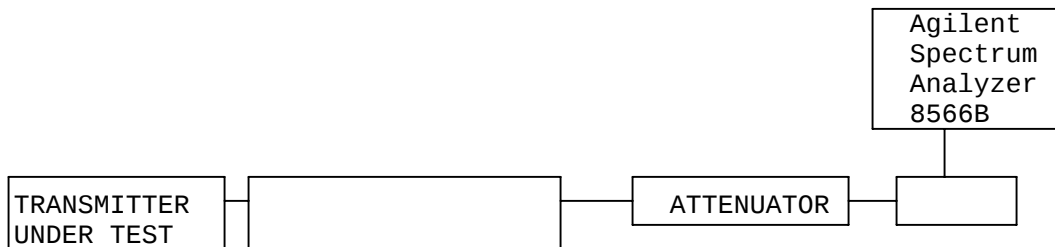

METHOD OF MEASUREMENT: The procedure used was TIA/EIA-603 STANDARD without any exceptions. An audio generator was connected to the UUT through a dummy microphone circuit and the output of the transmitter connected to a standard load and from the standard load through a pre-selector filter of the spectrum analyzer. The spectrum was scanned from 400 kHz to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer. The measurements were made using the shielded room located at TIMCO ENGINEERING INC. 849 N.W. State Road 45, Newberry, Florida 32669.

APPLICANT: Kimura Denyoki, Inc

FCC ID: RMCHL-350VDX

REPORT #: K/KIMURA\1448UT3\1448UT3TestReport.doc

PAGE: Page 11 of 12

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: Kimura Denyoki, Inc

FCC ID: RMCHL-350VDX

PRODUCT DESCRIPTION:

The amplifier has the following features:

- Covers only the 144-148 MHz band
- 350 watts output
- 10/25/50 watts input (switch selectable)
- RF sense switching (transmit to receive)
- No internal or external controls or adjustments
- No accessible wiring which would prevent operation of the amplifier in a manner contrary to the FCC Rules
- No additional components or circuits that would allow operation contrary to FCC Rules