

Test Report No.10054910 001

Appendix D: Radiated Spurious Emission Data

(File: 10054910AppendixD)

Contents

Spurious Emissions, TX Mode, 1-10G.....	2
Spurious Emissions, TX Mode, 30M-1G	14
Spurious Emissions, RX Mode, 1-10G	20
Spurious Emissions, RX Mode, 30M-1G.....	22


Spurious Emissions, TX Mode, 1-10G



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

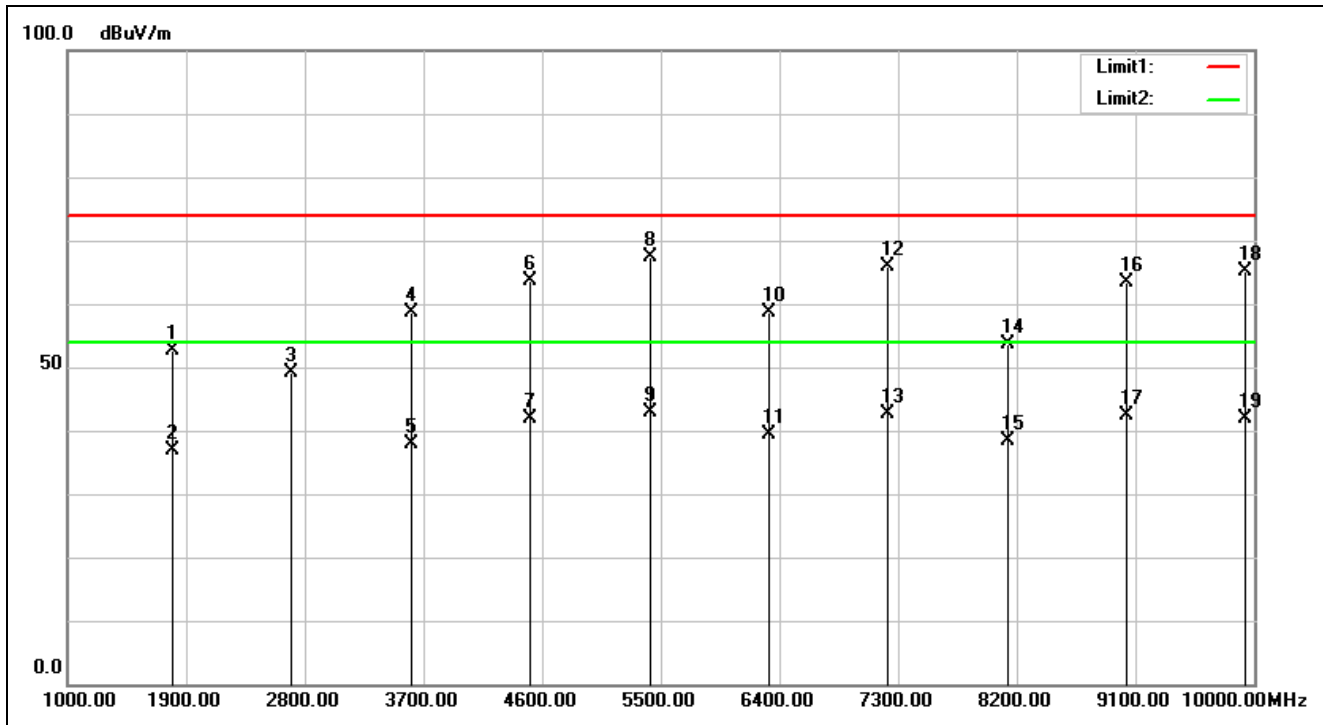


Service No.:	114039962_NCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2016/1/25 16:27:48
Applicant:	SHUN HU	Test Rating:	AC 120V/60Hz
Product:	Wireless module	Temp.(°C)/Hum.(%)	17.5(°C)/63%
Model No.:	RF-434LNA-S-915	Test Engineer:	Sam Su
Test Mode:	TX 902.5MHz		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1805.000	-9.30	61.88	52.58	74.00	-21.42	peak	100	312	
2	1805.000	-9.30	46.19	36.89	54.00	-17.11	AVG	100	312	
3	2707.500	-7.23	56.37	49.14	74.00	-24.86	peak	100	14	
4	3610.000	-6.06	64.71	58.65	74.00	-15.35	peak	100	208	
5	3610.000	-6.06	44.06	38.00	54.00	-16.00	AVG	100	208	
6	4512.500	-3.46	67.08	63.62	74.00	-10.38	peak	100	148	
7	4512.500	-3.46	45.46	42.00	54.00	-12.00	AVG	100	148	

Spurious Emissions, TX Mode, 1-18G


8	5415.000	-0.64	68.01	67.37	74.00	-6.63	peak	100	345	
9	5415.000	-0.64	43.61	42.97	54.00	-11.03	AVG	100	345	
10	6317.500	4.29	54.27	58.56	74.00	-15.44	peak	100	20	
11	6317.500	4.29	35.18	39.47	54.00	-14.53	AVG	100	20	
12	7220.000	4.78	61.22	66.00	74.00	-8.00	peak	100	142	
13	7220.000	4.78	37.87	42.65	54.00	-11.35	AVG	100	142	
14	8122.500	5.57	48.05	53.62	74.00	-20.38	peak	100	12	
15	8122.500	5.57	32.79	38.36	54.00	-15.64	AVG	100	12	
16	9025.000	6.29	57.07	63.36	74.00	-10.64	peak	100	357	
17	9025.000	6.29	36.10	42.39	54.00	-11.61	AVG	100	357	
18	9927.500	4.99	60.12	65.11	74.00	-8.89	peak	100	328	
19	9927.500	4.99	36.85	41.84	54.00	-12.16	AVG	100	328	

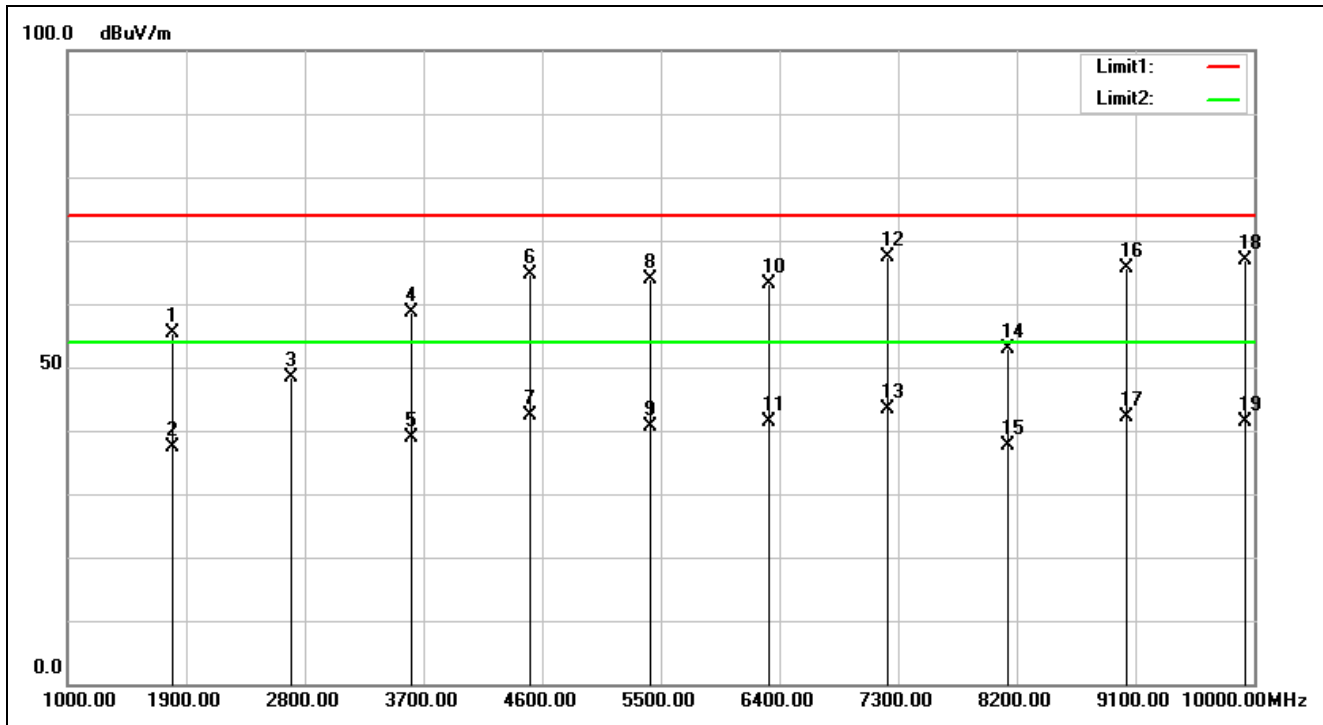

Service No.:	114039962_NCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2016/1/25 16:28:51
Applicant:	SHUN HU	Test Rating:	AC 120V/60Hz
Product:	Wireless module	Temp.(°C)/Hum.(%)	17.5(°C)/63%
Model No.:	RF-434LNA-S-915	Test Engineer:	Sam Su
Test Mode:	TX 902.5MHz		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1805.000	-9.30	64.69	55.39	74.00	-18.61	peak	100	107	
2	1805.000	-9.30	46.75	37.45	54.00	-16.55	AVG	100	107	
3	2707.000	-7.23	55.59	48.36	74.00	-25.64	peak	100	115	
4	3610.000	-6.06	64.73	58.67	74.00	-15.33	peak	100	132	
5	3610.000	-6.06	45.03	38.97	54.00	-15.03	AVG	100	132	
6	4512.500	-3.46	67.99	64.53	74.00	-9.47	peak	100	190	
7	4512.500	-3.46	45.91	42.45	54.00	-11.55	AVG	100	190	


8	5415.000	-0.64	64.50	63.86	74.00	-10.14	peak	100	281	
9	5415.000	-0.64	41.33	40.69	54.00	-13.31	AVG	100	281	
10	6317.500	4.29	58.92	63.21	74.00	-10.79	peak	100	259	
11	6317.500	4.29	37.07	41.36	54.00	-12.64	AVG	100	259	
12	7220.000	4.78	62.61	67.39	74.00	-6.61	peak	100	151	
13	7220.000	4.78	38.50	43.28	54.00	-10.72	AVG	100	151	
14	8122.500	5.57	47.36	52.93	74.00	-21.07	peak	100	348	
15	8122.500	5.57	32.16	37.73	54.00	-16.27	AVG	100	348	
16	9025.000	6.29	59.26	65.55	74.00	-8.45	peak	100	190	
17	9025.000	6.29	35.80	42.09	54.00	-11.91	AVG	100	190	
18	9927.500	4.99	61.82	66.81	74.00	-7.19	peak	100	157	
19	9927.500	4.99	36.40	41.39	54.00	-12.61	AVG	100	157	

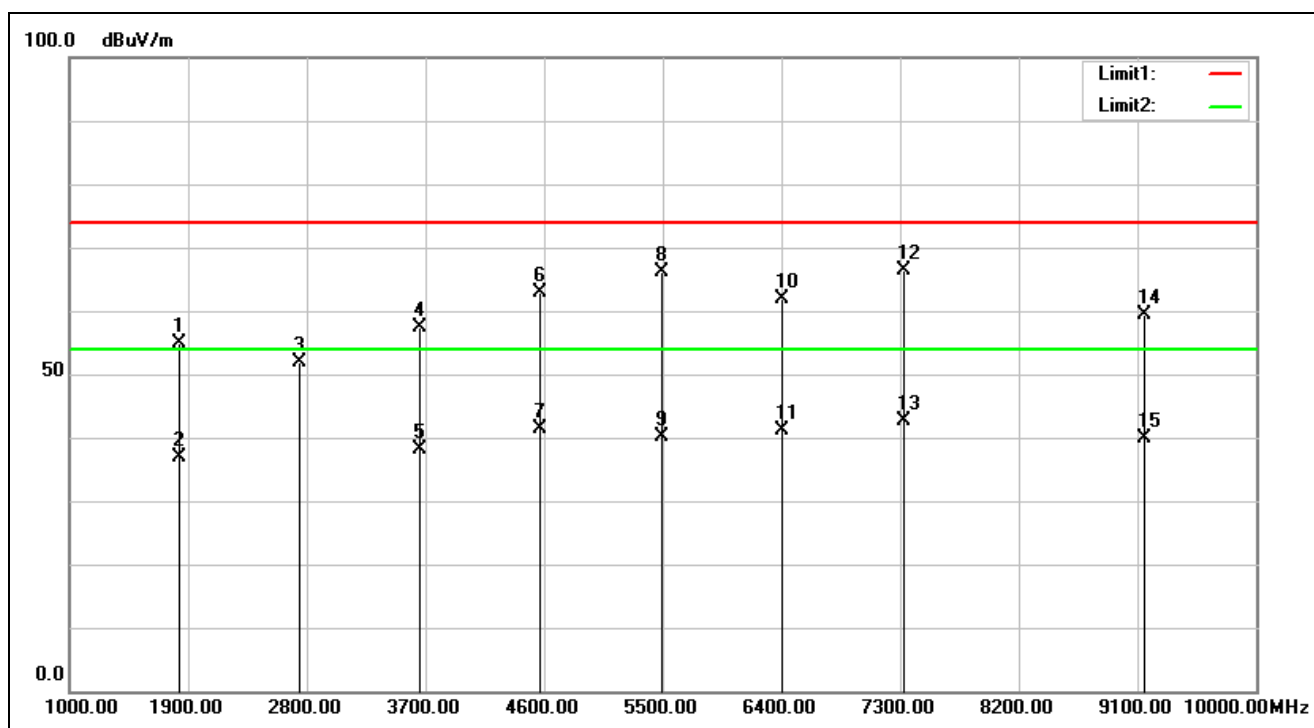

Service No.:	114039962_NCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2016/1/25 16:51:25
Applicant:	SHUN HU	Test Rating:	AC 120V/60Hz
Product:	Wireless module	Temp.(°C)/Hum.(%):	17.5(°C)/63%
Model No.:	RF-434LNA-S-915	Test Engineer:	Sam Su
Test Mode:	TX 915MHz		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1830.000	-9.15	63.99	54.84	74.00	-19.16	peak	100	321	
2	1830.000	-9.15	46.04	36.89	54.00	-17.11	AVG	100	321	
3	2745.000	-7.16	59.06	51.90	74.00	-22.10	peak	100	21	
4	3660.000	-5.97	63.41	57.44	74.00	-16.56	peak	100	312	
5	3660.000	-5.97	44.15	38.18	54.00	-15.82	AVG	100	312	
6	4575.000	-3.38	66.35	62.97	74.00	-11.03	peak	100	51	
7	4575.000	-3.38	44.69	41.31	54.00	-12.69	AVG	100	51	


8	5490.000	-0.25	66.36	66.11	74.00	-7.89	peak	100	343	
9	5490.000	-0.25	40.29	40.04	54.00	-13.96	AVG	100	343	
10	6405.000	4.62	57.16	61.78	74.00	-12.22	peak	100	107	
11	6405.000	4.62	36.63	41.25	54.00	-12.75	AVG	100	107	
12	7320.000	5.06	61.35	66.41	74.00	-7.59	peak	100	137	
13	7320.000	5.06	37.52	42.58	54.00	-11.42	AVG	100	137	
14	9150.000	6.20	53.26	59.46	74.00	-14.54	peak	100	143	
15	9150.000	6.20	33.62	39.82	54.00	-14.18	AVG	100	143	

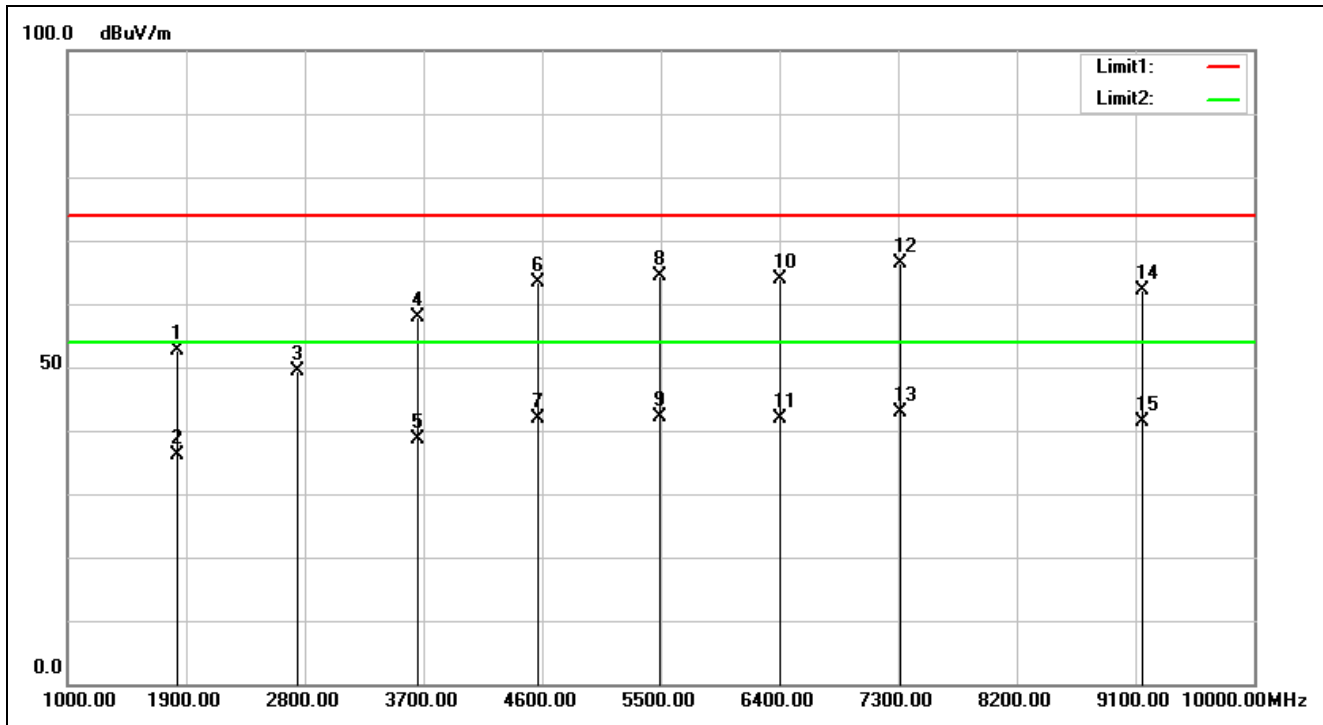

Service No.:	114039962_NCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2016/1/25 16:52:28
Applicant:	SHUN HU	Test Rating:	AC 120V/60Hz
Product:	Wireless module	Temp.(°C)/Hum.(%)	17.5(°C)/63%
Model No.:	RF-434LNA-S-915	Test Engineer:	Sam Su
Test Mode:	TX 915MHz		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1830.000	-9.15	61.82	52.67	74.00	-21.33	peak	100	145	
2	1830.000	-9.15	45.19	36.04	54.00	-17.96	AVG	100	145	
3	2745.000	-7.16	56.58	49.42	74.00	-24.58	peak	100	220	
4	3660.000	-5.97	63.95	57.98	74.00	-16.02	peak	100	131	
5	3660.000	-5.97	44.64	38.67	54.00	-15.33	AVG	100	131	
6	4575.000	-3.38	66.80	63.42	74.00	-10.58	peak	100	357	
7	4575.000	-3.38	45.17	41.79	54.00	-12.21	AVG	100	357	


8	5490.000	-0.25	64.71	64.46	74.00	-9.54	peak	100	279	
9	5490.000	-0.25	42.49	42.24	54.00	-11.76	AVG	100	279	
10	6405.000	4.62	59.16	63.78	74.00	-10.22	peak	100	261	
11	6405.000	4.62	37.34	41.96	54.00	-12.04	AVG	100	261	
12	7320.000	5.06	61.22	66.28	74.00	-7.72	peak	100	148	
13	7320.000	5.06	37.78	42.84	54.00	-11.16	AVG	100	148	
14	9150.000	6.20	56.01	62.21	74.00	-11.79	peak	100	220	
15	9150.000	6.20	35.13	41.33	54.00	-12.67	AVG	100	220	

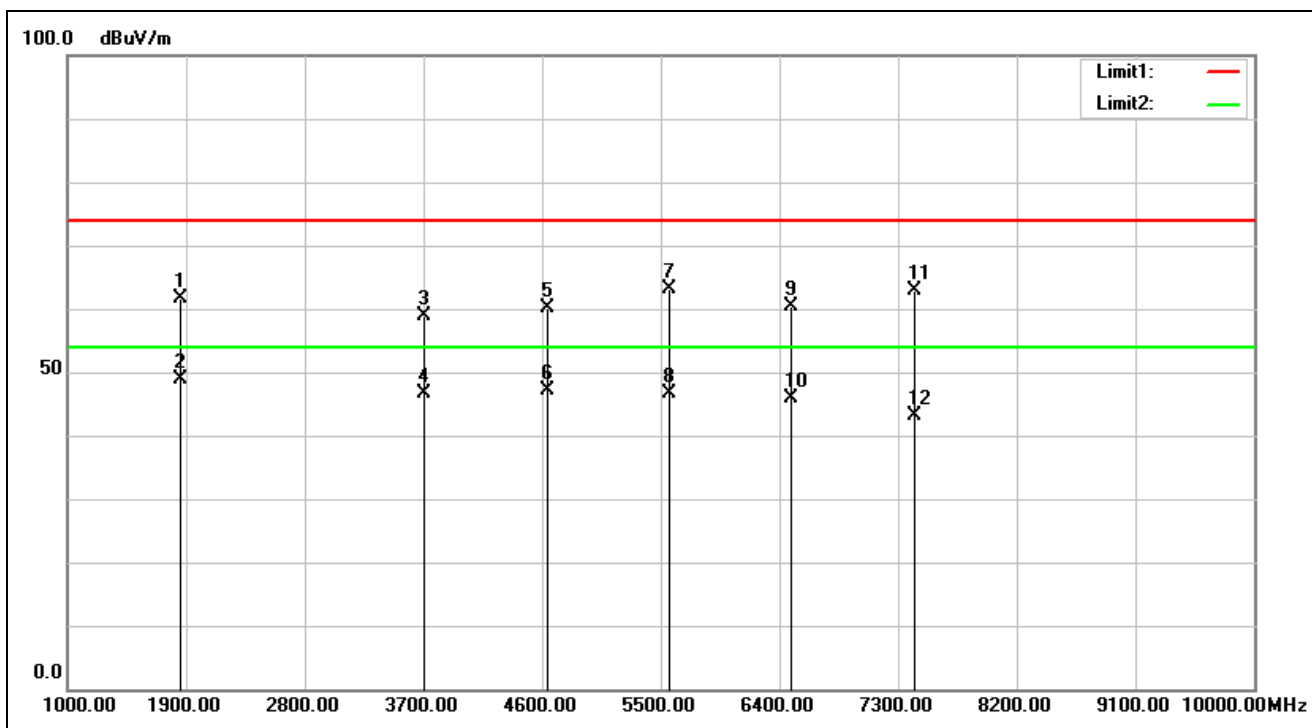

Service No.:	114039962_FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2016/5/10 20:12:58
Applicant:	SHUN HU	Test Rating:	AC 120V/60Hz
Product:	Wireless module	Temp.(°C)/Hum.(%)	23.8(°C)/51%
Model No.:	RF-434LNA-S-915	Test Engineer:	Sam Su
Test Mode:	TX 927.5MHz		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1855.000	-9.03	70.61	61.58	74.00	-12.42	peak	100	161	
2	1855.000	-9.03	58.03	49.00	54.00	-5.00	AVG	100	161	
3	3710.000	-6.18	64.97	58.79	74.00	-15.21	peak	100	320	
4	3710.000	-6.18	52.78	46.60	54.00	-7.40	AVG	100	320	
5	4637.500	-3.63	63.77	60.14	74.00	-13.86	peak	100	263	
6	4637.500	-3.63	50.83	47.20	54.00	-6.80	AVG	100	263	
7	5565.000	-0.15	63.28	63.13	74.00	-10.87	peak	100	345	

8	5565.000	-0.15	46.85	46.70	54.00	-7.30	AVG	100	345	
9	6492.500	4.46	56.04	60.50	74.00	-13.50	peak	100	304	
10	6492.500	4.46	41.44	45.90	54.00	-8.10	AVG	100	304	
11	7420.000	5.15	57.66	62.81	74.00	-11.19	peak	100	332	
12	7420.000	5.15	37.95	43.10	54.00	-10.90	AVG	100	332	

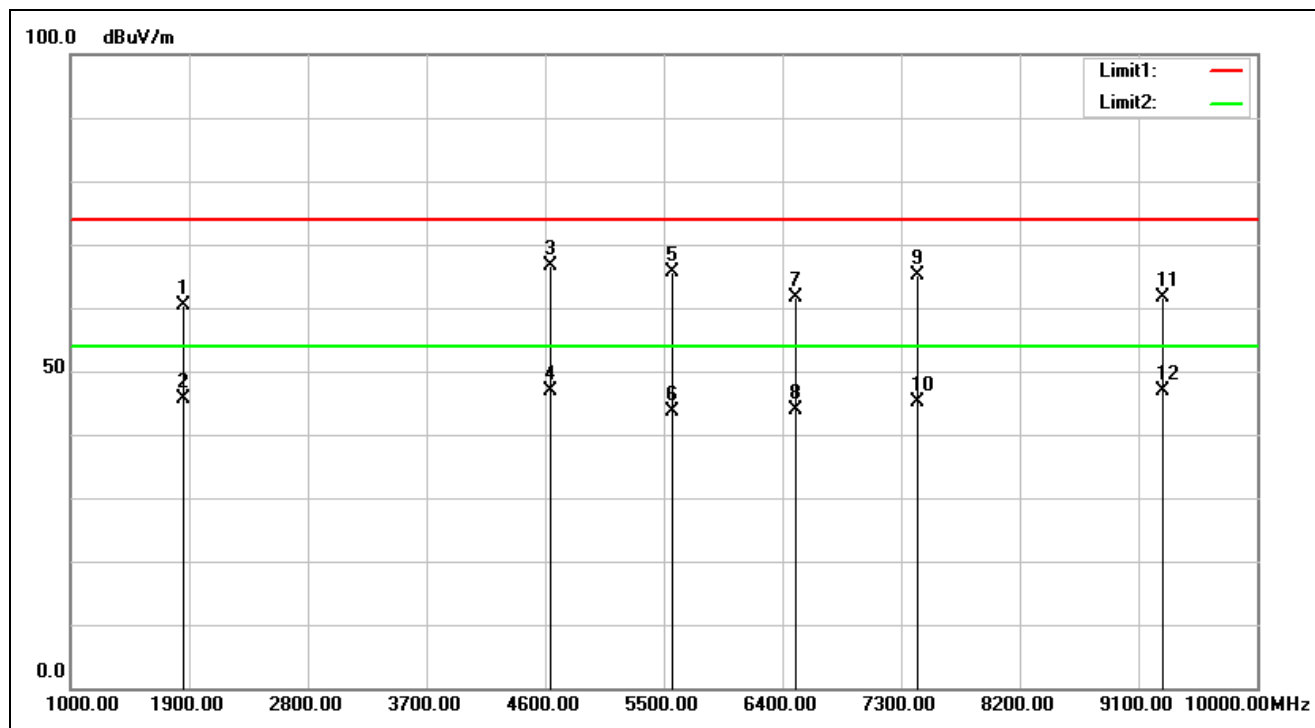

Service No.:	114039962_FCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2016/5/10 20:14:00
Applicant:	SHUN HU	Test Rating:	AC 120V/60Hz
Product:	Wireless module	Temp.(°C)/Hum.(%):	23.8(°C)/51%
Model No.:	RF-434LNA-S-915	Test Engineer:	Sam Su
Test Mode:	TX 927.5MHz		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1885.000	-9.03	69.52	60.49	74.00	-13.51	peak	100	304	
2	1885.000	-9.03	54.73	45.70	54.00	-8.30	AVG	100	304	
3	4637.500	-3.63	70.22	66.59	74.00	-7.41	peak	100	233	
4	4637.500	-3.63	50.53	46.90	54.00	-7.10	AVG	100	233	
5	5565.000	-0.15	65.81	65.66	74.00	-8.34	peak	100	120	
6	5565.000	-0.15	43.85	43.70	54.00	-10.30	AVG	100	120	
7	6492.500	4.46	57.24	61.70	74.00	-12.30	peak	100	239	
8	6492.500	4.46	39.54	44.00	54.00	-10.00	AVG	100	239	

9	7420.000	5.15	60.10	65.25	74.00	-8.75	peak	100	120	
10	7420.000	5.15	39.95	45.10	54.00	-8.90	AVG	100	120	
11	9275.000	5.66	56.05	61.71	74.00	-12.29	peak	100	230	
12	9275.000	5.66	41.34	47.00	54.00	-7.00	AVG	100	230	


Spurious Emissions, TX Mode, 30M-1G



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

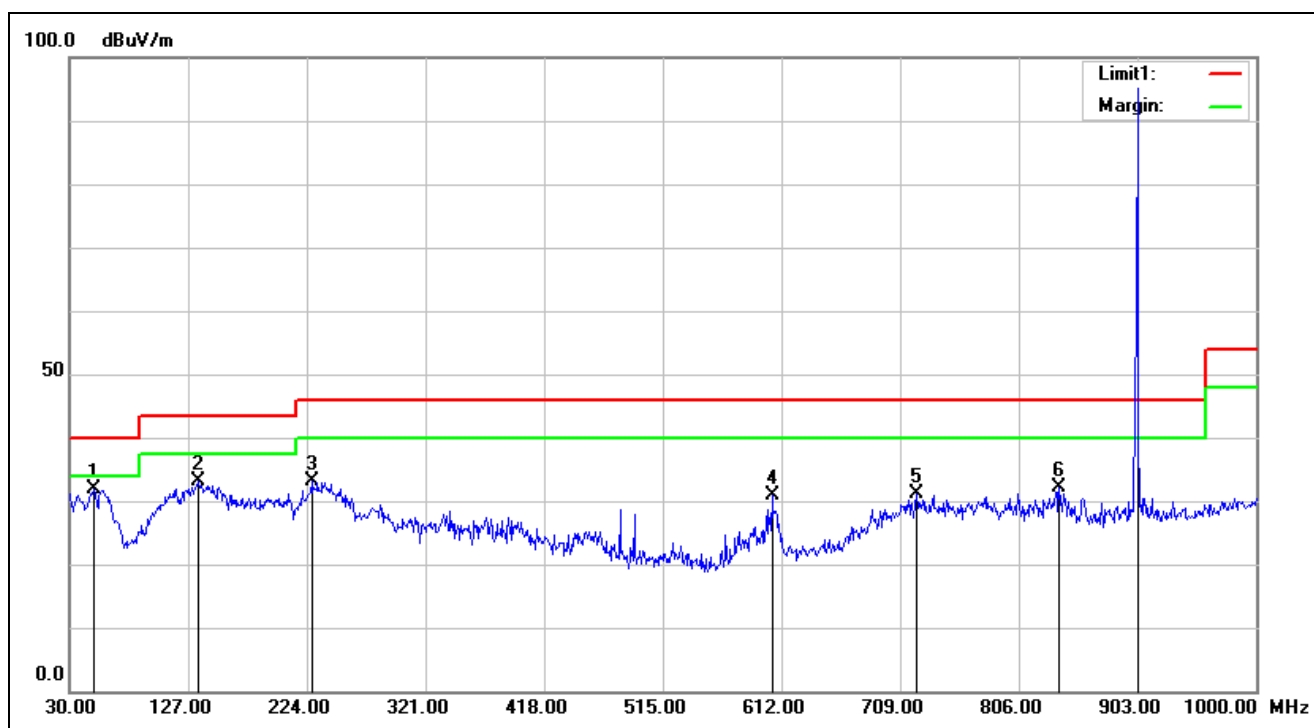

Service No.:	114039962_NCC	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2016/1/25 15:00:52
Applicant:	SHUN HU	Test Rating:	AC 120V/60Hz
Product:	Wireless module	Temp.(°C)/Hum.(%)	17.5(°C)/63%
Model No.:	RF-434LNA-S-915	Test Engineer:	Sam Su
Test Mode:	TX 902.5MHz		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	49.3998	-16.77	48.69	31.92	40.00	-8.08	QP	100	190	
2	135.7298	-12.69	45.82	33.13	43.50	-10.37	QP	100	147	
3	227.8799	-13.72	46.96	33.24	46.00	-12.76	QP	100	169	
4	604.2400	-5.94	36.71	30.77	46.00	-15.23	QP	100	230	
5	722.5800	-4.62	35.66	31.04	46.00	-14.96	QP	100	254	
6	838.9800	-2.70	34.79	32.09	46.00	-13.91	QP	100	142	
7	903.0000	-1.95	97.12	95.17	46.00	49.17	peak	100	51	TX

Spurious Emissions, RX Mode, 1-18G

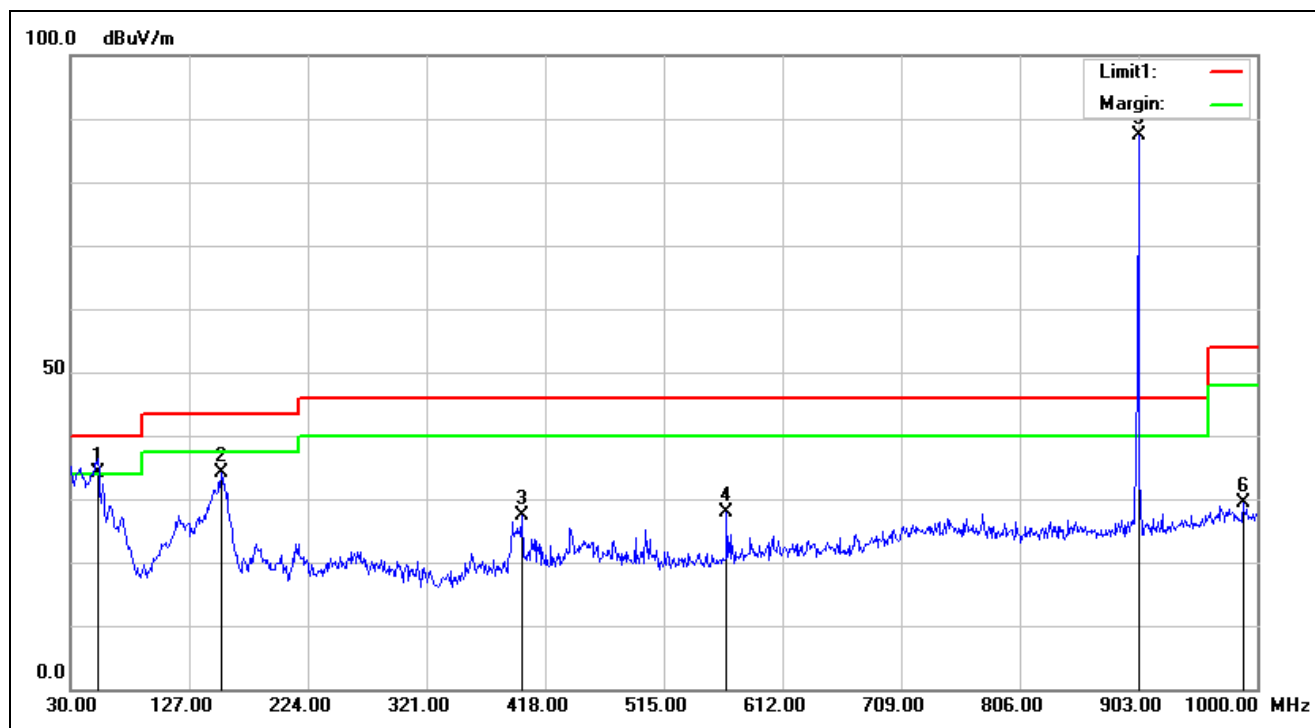


Service No.:	114039962_NCC	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2016/1/25 15:01:56
Applicant:	SHUN HU	Test Rating:	AC 120V/60Hz
Product:	Wireless module	Temp.(°C)/Hum.(%)	17.5(°C)/63%
Model No.:	RF-434LNA-S-915	Test Engineer:	Sam Su
Test Mode:	TX 902.5MHz		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	52.3100	-17.71	51.81	34.10	40.00	-5.90	QP	100	261	
2	153.1900	-13.44	47.58	34.14	43.50	-9.36	QP	100	235	
3	399.5700	-8.69	36.13	27.44	46.00	-18.56	QP	100	344	
4	566.4099	-6.66	34.62	27.96	46.00	-18.04	QP	100	186	
5	903.0000	-1.95	89.44	87.49	46.00	41.49	peak	100	221	TX
6	988.3600	-0.11	29.55	29.44	54.00	-24.56	QP	100	240	

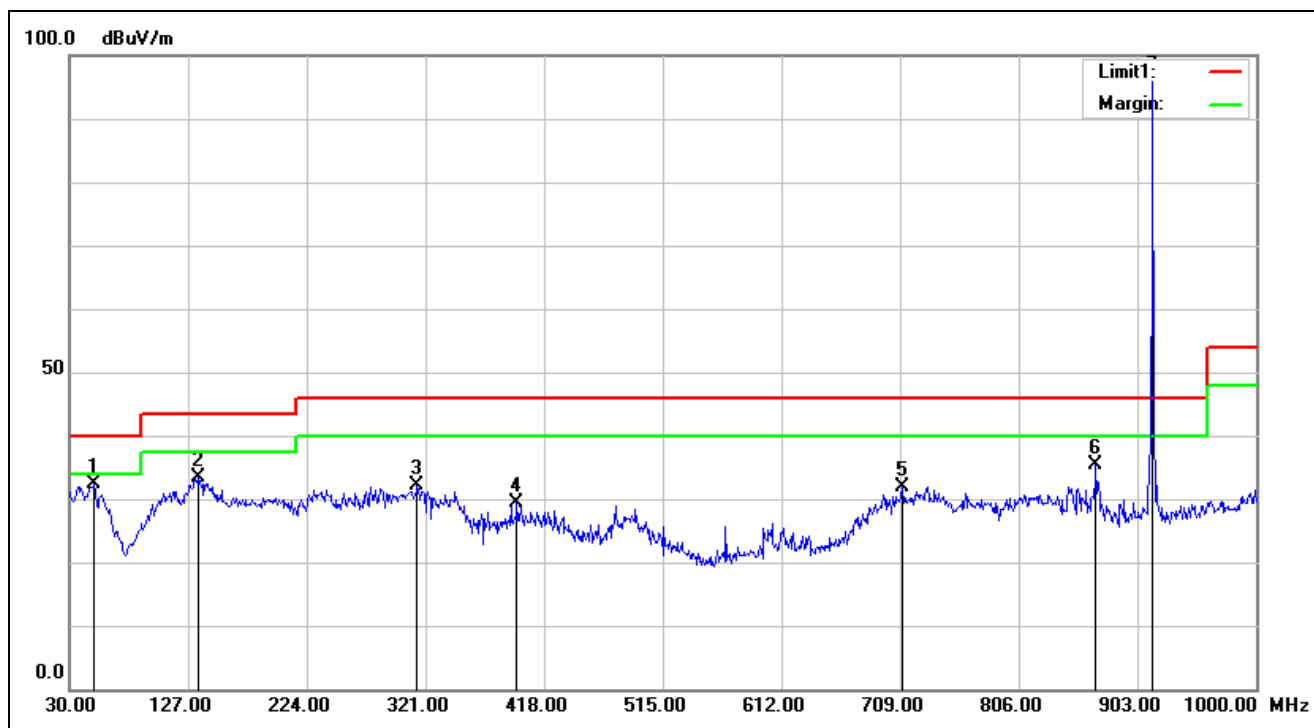


Service No.:	114039962_NCC	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2016/1/25 15:10:48
Applicant:	SHUN HU	Test Rating:	AC 120V/60Hz
Product:	Wireless module	Temp.(°C)/Hum.(%)	17.5(°C)/63%
Model No.:	RF-434LNA-S-915	Test Engineer:	Sam Su
Test Mode:	TX 915MHz		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	50.3699	-17.22	49.71	32.49	40.00	-7.51	QP	100	164	
2	135.7298	-12.69	45.99	33.30	43.50	-10.20	QP	100	172	
3	314.2099	-10.17	42.37	32.20	46.00	-13.80	QP	100	115	
4	395.6899	-8.73	38.04	29.31	46.00	-16.69	QP	100	331	
5	710.9400	-4.85	36.83	31.98	46.00	-14.02	QP	100	262	
6	869.0499	-2.27	37.60	35.33	46.00	-10.67	QP	100	262	
7	915.6100	-1.57	97.54	95.97	46.00	49.97	peak	100	51	TX

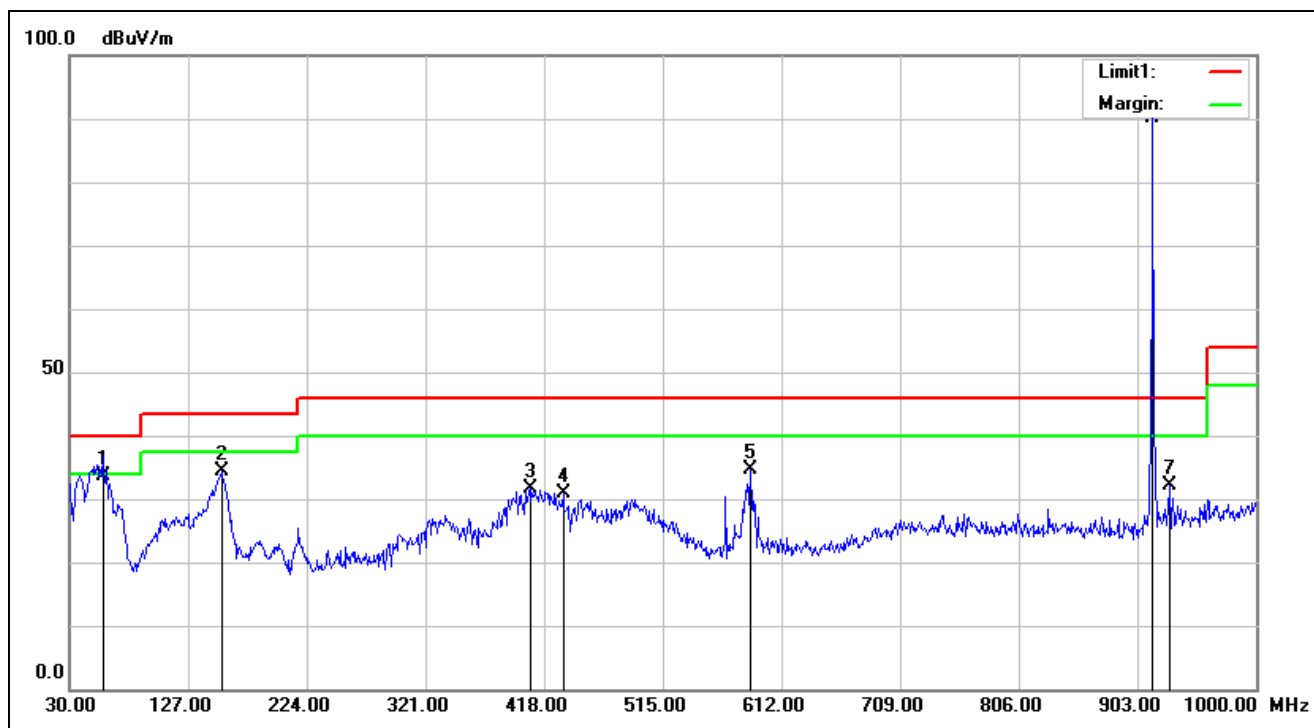


Service No.:	114039962_NCC	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2016/1/25 15:11:52
Applicant:	SHUN HU	Test Rating:	AC 120V/60Hz
Product:	Wireless module	Temp.(°C)/Hum.(%)	17.5(°C)/63%
Model No.:	RF-434LNA-S-915	Test Engineer:	Sam Su
Test Mode:	TX 915MHz		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	57.1599	-18.98	52.58	33.60	40.00	-6.40	QP	100	192	
2	154.1599	-13.51	47.93	34.42	43.50	-9.08	QP	100	269	
3	407.3299	-8.58	40.12	31.54	46.00	-14.46	QP	100	200	
4	433.5199	-8.26	39.16	30.90	46.00	-15.10	QP	100	192	
5	586.7799	-6.25	40.94	34.69	46.00	-11.31	QP	100	162	
6	915.6100	-1.57	91.77	90.20	46.00	44.20	peak	100	275	TX
7	929.1900	-1.16	33.40	32.24	46.00	-13.76	QP	100	261	

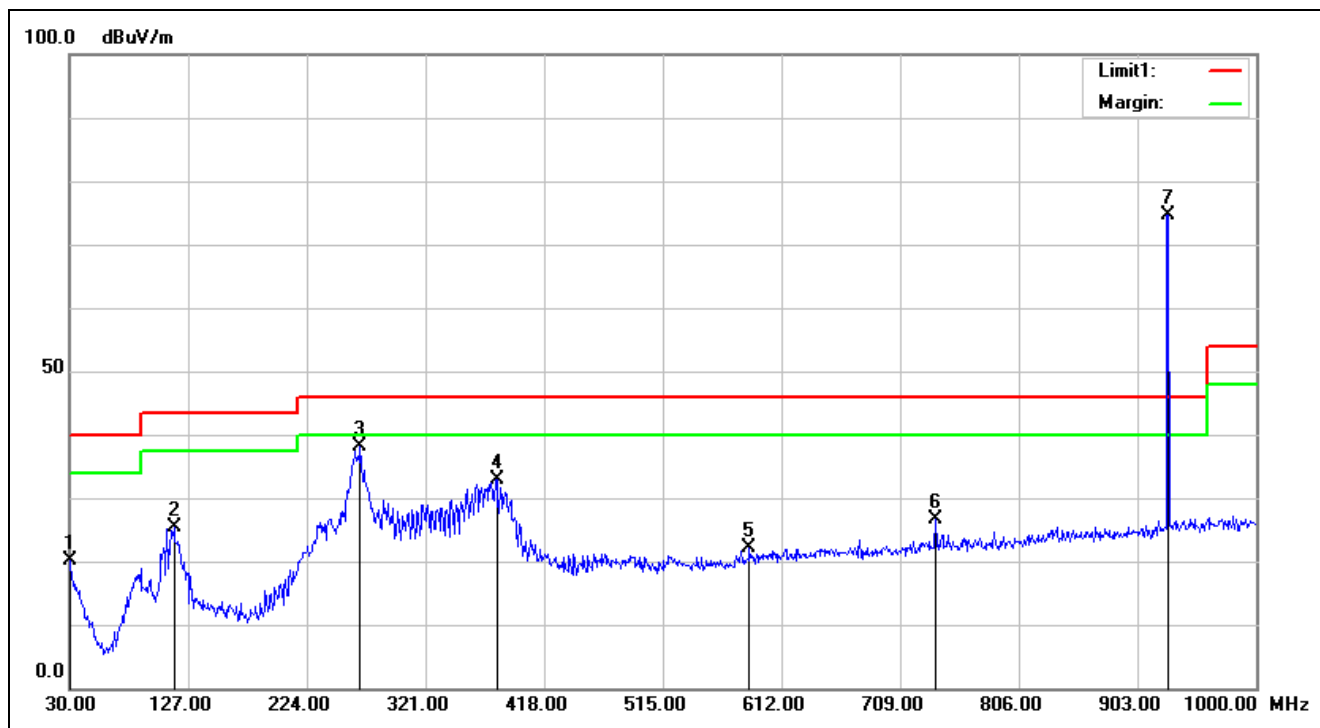

Service No.:	114039962_FCC	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2016/5/10 20:36:14
Applicant:	SHUN HU	Test Rating:	AC 120V/60Hz
Product:	Wireless module	Temp.(°C)/Hum.(%)	23.8(°C)/51%
Model No.:	RF-434LNA-S-915	Test Engineer:	Sam Su
Test Mode:	TX 927.5MHz		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-5.85	25.97	20.12	40.00	-19.88	QP	100	193	
2	115.3600	-13.27	38.63	25.36	43.50	-18.14	QP	100	112	
3	267.6500	-11.22	49.39	38.17	46.00	-7.83	QP	100	209	
4	379.2000	-8.97	41.92	32.95	46.00	-13.05	QP	100	350	
5	585.8099	-6.27	28.44	22.17	46.00	-23.83	QP	100	86	
6	738.1000	-4.31	30.94	26.63	46.00	-19.37	QP	100	139	
7	928.2200	-1.19	75.87	74.68	46.00	28.68	peak	100	326	TX

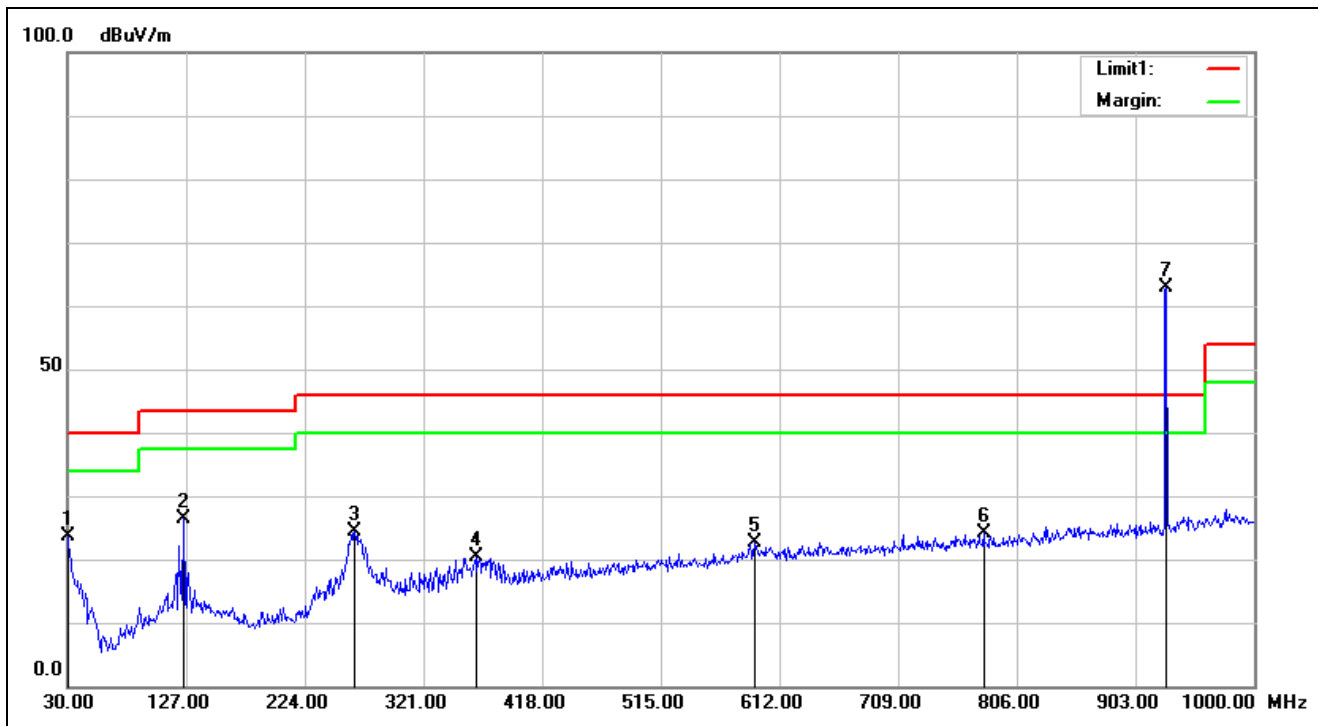

Service No.:	114039962_FCC	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2016/5/10 20:37:17
Applicant:	SHUN HU	Test Rating:	AC 120V/60Hz
Product:	Wireless module	Temp.(°C)/Hum.(%)	23.8(°C)/51%
Model No.:	RF-434LNA-S-915	Test Engineer:	Sam Su
Test Mode:	TX 927.5MHz		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-5.85	29.37	23.52	40.00	-16.48	QP	100	165	
2	125.0600	-12.84	39.24	26.40	43.50	-17.10	QP	100	277	
3	264.7400	-11.06	35.42	24.36	46.00	-21.64	QP	100	117	
4	363.6800	-9.19	29.50	20.31	46.00	-25.69	QP	100	99	
5	591.6300	-6.16	28.90	22.74	46.00	-23.26	QP	100	349	
6	778.8400	-3.86	28.03	24.17	46.00	-21.83	QP	100	283	
7	928.2200	-1.19	64.12	62.93	46.00	16.93	peak	100	251	TX


Spurious Emissions, RX Mode, 1-10G



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

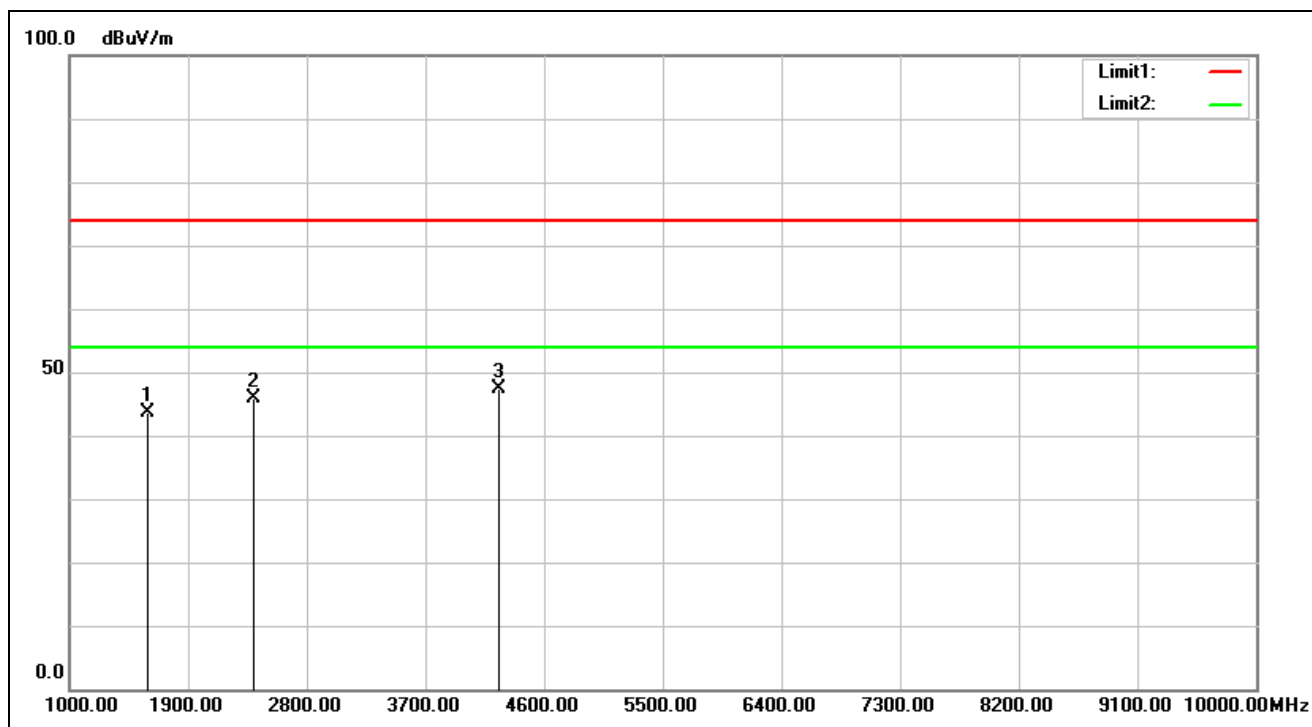

Service No.:	114039962_NCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2016/1/25 16:17:14
Applicant:	SHUN HU	Test Rating:	AC 120V/60Hz
Product:	Wireless module	Temp.(°C)/Hum.(%)	17.5(°C)/63%
Model No.:	RF-434LNA-S-915	Test Engineer:	Sam Su
Test Mode:	RX 915MHz		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1594.000	-10.59	54.17	43.58	74.00	-30.42	peak	100	107	
2	2395.000	-7.72	53.63	45.91	74.00	-28.09	peak	100	45	
3	4258.000	-4.40	51.83	47.43	74.00	-26.57	peak	100	32	

Spurious Emissions, RX Mode, 1-18G

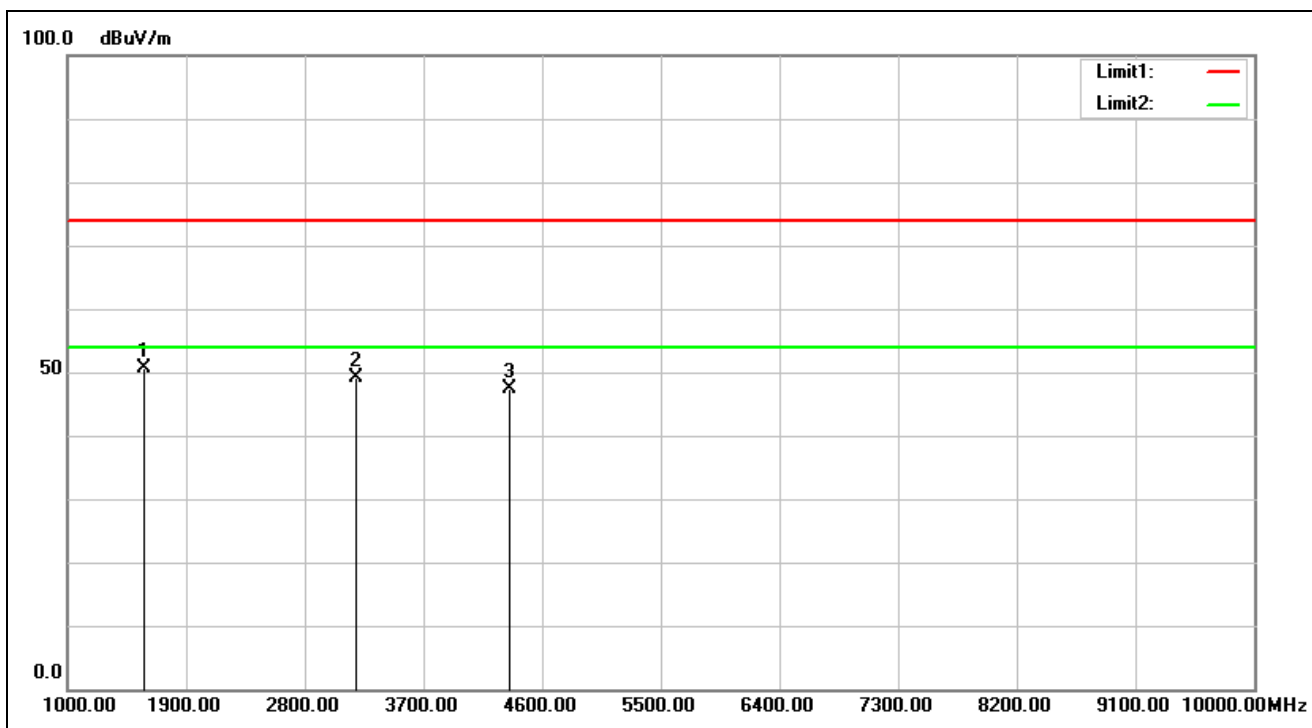

Service No.:	114039962_NCC	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2016/1/25 16:18:17
Applicant:	SHUN HU	Test Rating:	AC 120V/60Hz
Product:	Wireless module	Temp.(°C)/Hum.(%)	17.5(°C)/63%
Model No.:	RF-434LNA-S-915	Test Engineer:	Sam Su
Test Mode:	RX 915MHz		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1585.000	-10.65	61.26	50.61	74.00	-23.39	peak	100	226	
2	3187.000	-6.51	55.63	49.12	74.00	-24.88	peak	100	195	
3	4348.000	-4.05	51.33	47.28	74.00	-26.72	peak	100	187	


Spurious Emissions, RX Mode, 30M-1G



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

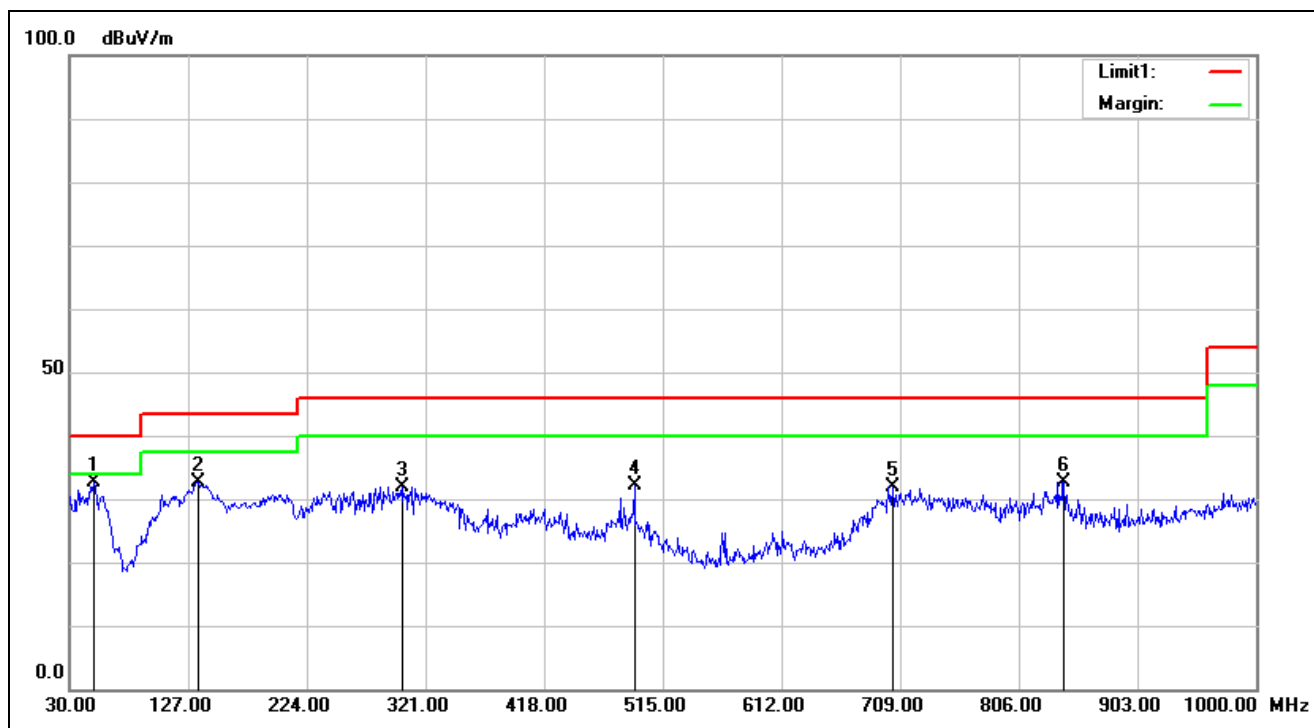

Service No.:	114039962_NCC	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2016/1/25 15:48:03
Applicant:	SHUN HU	Test Rating:	AC 120V/60Hz
Product:	Wireless module	Temp.(°C)/Hum.(%)	17.5(°C)/63%
Model No.:	RF-434LNA-S-915	Test Engineer:	Sam Su
Test Mode:	RX 915MHz		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	49.3998	-16.77	49.45	32.68	40.00	-7.32	QP	100	182	
2	134.7599	-12.68	45.42	32.74	43.50	-10.76	QP	100	155	
3	302.5699	-10.42	42.34	31.92	46.00	-14.08	QP	100	270	
4	491.7200	-7.43	39.56	32.13	46.00	-13.87	QP	100	65	
5	703.1799	-5.01	36.98	31.97	46.00	-14.03	QP	100	254	
6	842.8600	-2.60	35.15	32.55	46.00	-13.45	QP	100	171	

Spurious Emissions, RX Mode, 30M-1G

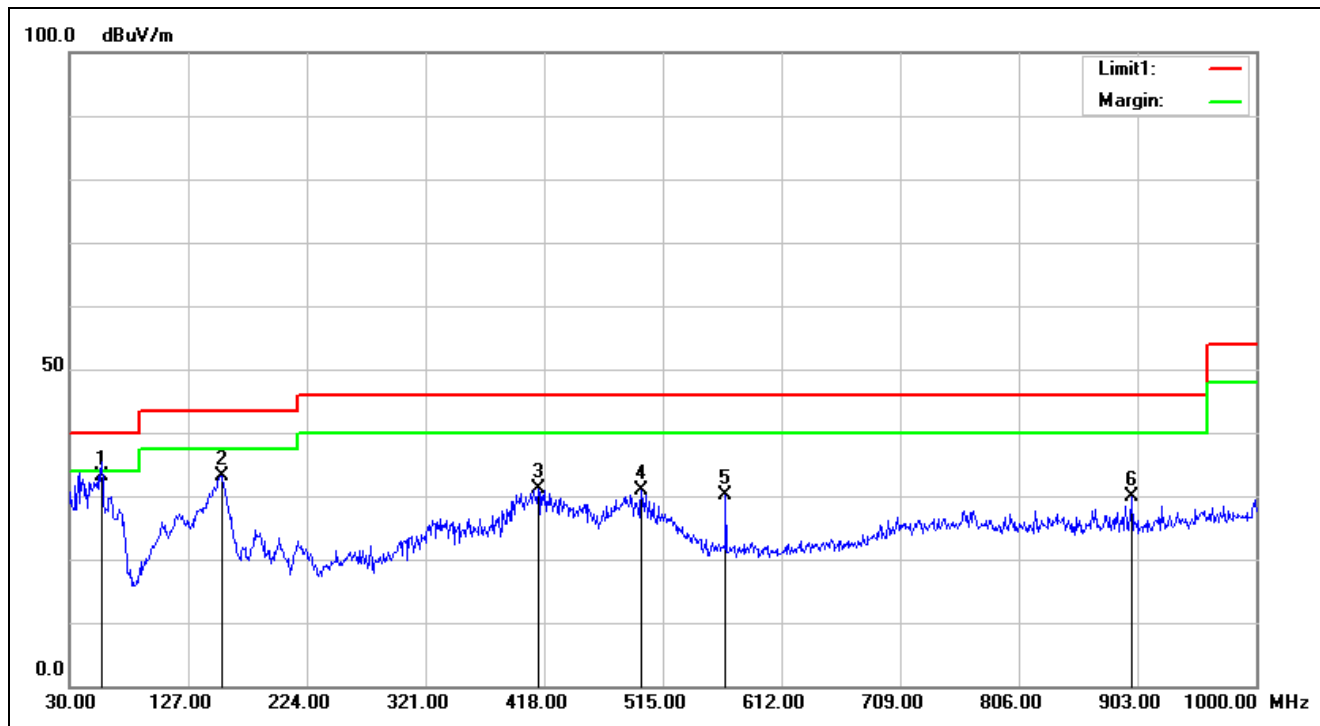

Service No.:	114039962_NCC	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2016/1/25 15:49:06
Applicant:	SHUN HU	Test Rating:	AC 120V/60Hz
Product:	Wireless module	Temp.(°C)/Hum.(%)	17.5(°C)/63%
Model No.:	RF-434LNA-S-915	Test Engineer:	Sam Su
Test Mode:	RX 915MHz		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	56.1899	-18.73	51.93	33.20	40.00	-6.80	QP	100	197	
2	154.1600	-13.51	46.60	33.09	43.50	-10.41	QP	100	253	
3	413.1500	-8.51	39.70	31.19	46.00	-14.81	QP	100	218	
4	497.5400	-7.34	38.29	30.95	46.00	-15.05	QP	100	197	
5	566.4099	-6.66	36.86	30.20	46.00	-15.80	QP	100	141	
6	898.1500	-2.06	31.83	29.77	46.00	-16.23	QP	100	109	