

# FCC Part 15

# EMI TEST REPORT

## of

E.U.T. : XBOX Wireless Controller Host

MODEL : LM576

FCC ID. : RNIX825576-H

for

APPLICANT : Esel International Co., Ltd.

ADDRESS : Rm 15-17, 5/F, Cardinal Ind, Bldg. No. 17 On Lok Mun St., Fanling, N.T., Hong Kong

Test Performed by

**ELECTRONICS TESTING CENTER, TAIWAN**  
NO. 8 LANE 29, WENMIMG ROAD,  
LOSHAN TSUN, KWEISHAN HSIANG,  
TAOYUAN, TAIWAN, R.O.C.

Tel:(03)3280026#570~576

Fax:(03)3276188

Report Number : ET92S-12-004

# TEST REPORT CERTIFICATION

Applicant : Esel International Co., Ltd.  
Rm 15-17, 5/F, Cardinal Ind, Bldg. No. 17 On Lok Mun St., Fanling, N.T., Hong Kong

Manufacturer : Eastern Sources Electronics Manufacturer  
Daji Industrial Zone, Hengshan District, Shipai Town, Dongguan City, Guangdong, China.

Description of EUT :  
a) Type of EUT : XBOX Wireless Controller Host  
b) Trade Name : Hip Interactive  
c) Model No. : LM576  
d) Power Supply : 6VDC (for XBOX Station), AC 100-127V, 50-60Hz

Regulation Applied : FCC Rules and Regulations Part 15 Subpart B & C (2003)

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.4, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.  
2. The testing report shall not be reproduced expect in full, without the written approval of ETC.

Issued Date : Dec. 5, 2003

Test Engineer : Anderson

Approve & Authorized Signer : Win-Po Tsai  
Signature  
Win-Po Tsai  
Manager of EMC Testing Department  
Electronics Testing Center, Taiwan

Table of Contents	Page
<b>1 GENERAL INFORMATION .....</b>	<b>1</b>
1.1 Product Description .....	1
1.2 Characteristics of Device .....	1
1.3 Test Methodology .....	1
1.4 Modification List of EUT .....	1
1.5 Test Facility .....	1
<b>2 PROVISIONS APPLICABLE.....</b>	<b>2</b>
2.1 Definition .....	2
2.2 Requirement for Compliance .....	3
2.3 Restricted Bands of Operation .....	5
2.4 Labeling Requirement.....	5
2.5 User Information .....	6
<b>3. SYSTEM TEST CONFIGURATION .....</b>	<b>7</b>
3.1 Justification .....	7
3.2 Devices for Tested System.....	7
<b>4 RADIATED EMISSION MEASUREMENT .....</b>	<b>8</b>
4.1 Applicable Standard.....	8
4.2 Measurement Procedure .....	8
4.3 Measuring Instrument .....	10
4.4 Radiated Emission Data.....	11
4.4.1 RF Portion.....	11
4.4.2 Other Emission .....	14
4.5 Field Strength Calculation .....	14
4.6 Photos of Radiation Measuring Setup .....	18
<b>5 CONDUCTED EMISSION MEASUREMENT .....</b>	<b>19</b>
5.1 Applicable Standard.....	19
5.2 Measurement Procedure .....	19
5.3 Conducted Emission Data.....	20
5.4 Result Data Calculation .....	29
5.5 Conducted Measurement Equipment.....	29
5.6 Photos of Conduction Measuring Setup .....	30
<b>6 ANTENNA REQUIREMENT .....</b>	<b>31</b>
6.1 Standard Applicable.....	31
6.2 Antenna Construction and Directional Gain.....	31
<b>7 20dB EMISSION BANDWIDTH MEASUREMENT .....</b>	<b>32</b>

7.1 Standard Applicable.....	32
7.2 Measurement Procedure .....	32
7.3 Measurement Equipment .....	32
7.4 Measurement Data .....	33
<b>8 OUTPUT POWER MEASUREMENT.....</b>	<b>37</b>
8.1 Standard Applicable.....	37
8.2 Measurement Procedure .....	37
8.3 Measurement Equipment .....	37
8.4 Measurement Data .....	38
<b>9 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT .....</b>	<b>42</b>
9.1 Standard Applicable.....	42
9.2 Measurement Procedure .....	42
9.3 Measurement Equipment .....	42
9.4 Measurement Data .....	43
<b>10 RADIATED MEASUREMENT AT BANDEDGE WITH FUNDAMENTAL FREQUENCIES .....</b>	<b>49</b>
10.1 Standard Applicable.....	49
10.2 Measurement Procedure .....	49
10.3 Measuring Instrument .....	50
10.4 Radiated Emission Data.....	51
<b>11 NUMBER OF HOPPING CHANNELS.....</b>	<b>52</b>
11.1 Standard Applicable.....	52
11.2 Measurement Procedure .....	52
11.3 Measurement Equipment .....	52
11.4 Measurement Data .....	52
<b>12 CHANNEL CARRIER FREQUENCIES SEPERATION .....</b>	<b>54</b>
12.1 Standard Applicable.....	54
12.2 Measurement Procedure .....	54
12.3 Measurement Equipment .....	54
12.4 Measurement Data .....	55
<b>13 POWER SPECTRAL DENSITY .....</b>	<b>59</b>
13.1 Standard Applicable.....	59
13.2 Measurement Procedure .....	59
13.3 Measurement Equipment .....	59
13.4 Measurement Data .....	60
<b>14 DWELL TIME .....</b>	<b>64</b>

14.1 Standard Applicable.....	64
14.2 Measurement Procedure .....	64
14.3 Measurement Equipment .....	64
14.4 Measurement Data .....	64

## 1 GENERAL INFORMATION

### 1.1 Product Description

- a) Type of EUT : XBOX Wireless Controller Host
- b) Trade Name : Hip Interactive
- c) Model No. : LM576
- d) Power Supply : 6VDC (for XBOX Station), AC 100-127V, 50-60Hz

### 1.2 Characteristics of Device

- Fully compatible with XBOX TM consoles
- Dual vibration motors
- Power on/off selection
- Twin analog sticks
- Rubber grips
- Auto Player matching
- 10 Meter(30ft) 2.4G RF wireless transmitting & receiving distance
- Turbo fire setting
- Macro programmable setting
- Low power Indicator

### 1.3 Test Methodology

The XBOX Wireless Controller Host designed with a transmitting method of Frequency Hopping spread spectrum, which operates at 2.4 GHz ISM band. The rated output power is  $-7.83$  dBm (0.165 mW).

### 1.4 Modification List of EUT

No modifications were required. (That is the EUT complied with the requirements as tested.)

### 1.5 Test Facility

The semi-anechoic chamber and conducted measurement facility used to collect the radiated and conducted data are located inside the Building at No.8, Lane 29, Wen-ming Road, Lo-shan Tsun, Kweishan Hsiang, Taoyuan, Taiwan, R.O.C.

This site has been accreditation as a FCC filing site.

## 2 PROVISIONS APPLICABLE

### 2.1 Definition

**Unintentional radiator:**

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

**Class A Digital Device:**

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

**Class B Digital Device :**

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business or industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

**Intentional radiator:**

A device that intentionally generates and emits radio frequency energy by radiation or induction.

## 2.2 Requirement for Compliance

### (1) Conducted Emission Requirement

For unintentional device, according to §15.107(a) Line Conducted Emission Limits is as following:

Frequency MHz	Quasi Peak dB $\mu$ V	Average dB $\mu$ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

\*Decreases with the logarithm of the frequency.

For intentional device, according to §15.207(a) Line Conducted Emission Limits is same as above table.

### (2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB $\mu$ V/m	Radiated $\mu$ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
above 960	3	54.0	500

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

### (3) Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

**(4) 20dB Bandwidth Requirement**

For frequency hopping systems, according to 15.247(a)(1), hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of hopping channel, whichever is greater.

**(5) Output Power Requirement**

For frequency hopping systems, according to 15.247(1), operating in the 2400-2483.5MHz band employing at least 75 hopping channels. The maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**(6) 100 kHz Bandwidth of Frequency Band Edges Requirement**

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a), whichever results in the lesser attenuation.

**(7) Number of Hopping Channels**

According to 15.247(b)(1), for frequency hopping systems, operating in the 2400-2483.5MHz band employing at least 75 hopping channels.

**(8) Channel Carrier Frequencies Separation**

According to 15.247(a)(1)(iii), the frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25kHz or the 20dB bandwidth of hopping channel, whichever is greater.

**(9) Dwell Time**

According to 15.247(a)(1)(iii), frequency hopping system in the 2400-2483.5MHz band employing at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 second multiplied by the number of hopping channels employed.

**(10) RF Exposure Evaluation**

According to 15.247(b)(5), system operating under the provisions of this section(15.247) shall operate in a manner that ensures that the public is not exposed to radio frequency levels in excess of the commission guidelines, 1.1307(b)(1)

## 2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.25
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

## 2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## 2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

### 3. SYSTEM TEST CONFIGURATION


#### 3.1 Justification

For the purposes of this test report ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT during the test. Notebook PC was used to control the RF channel under the highest, middle and lowest frequency and transmit the maximum RF power. Customer would not use it. But nevertheless Ancillary Equipment can influence the test results..

#### 3.2 Devices for Tested System

Device	Manufacturer	Model	Cable Description
*XBOX Wireless Controller Host	Eastern Sources Electronics Manufacturer	LM576	----
XBOX Station	MICROSOFT	S/N: 2112611 14702	Power cable 1.8m

Remark “\*” means equipment under test.

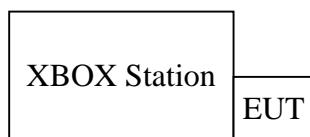

## 4 RADIATED EMISSION MEASUREMENT

### 4.1 Applicable Standard

For unintentional radiator, the radiated emission shall comply with §15.109(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and frequency hopping spread spectrum, and the out band emission shall be comply with §15.247 (c)

### 4.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, it is performed in a semi-anechoic chamber to determine the accurate frequencies of higher emissions. For emission frequencies measured above 1 GHz, a pre-scan be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.

Note : A band pass filter was used to avoid pre-amplifier saturated when measure TX operation mode in frequency band above 1 GHz.

5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the datarate, placement of ANT. cables associated with EUT to obtain the worse case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


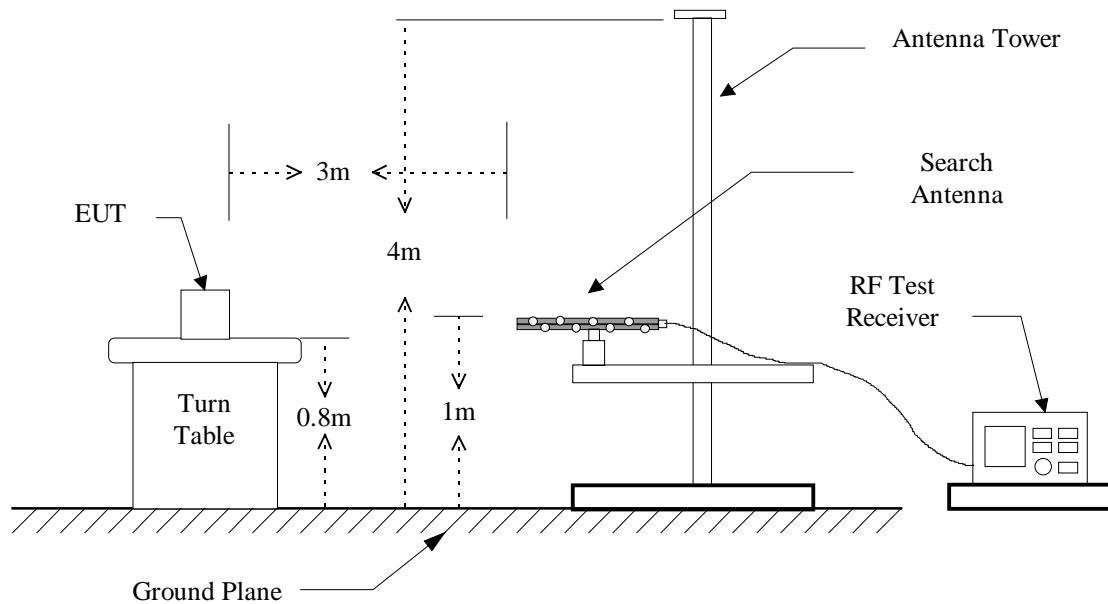


Figure 2 : Frequencies measured above 1 GHz configuration

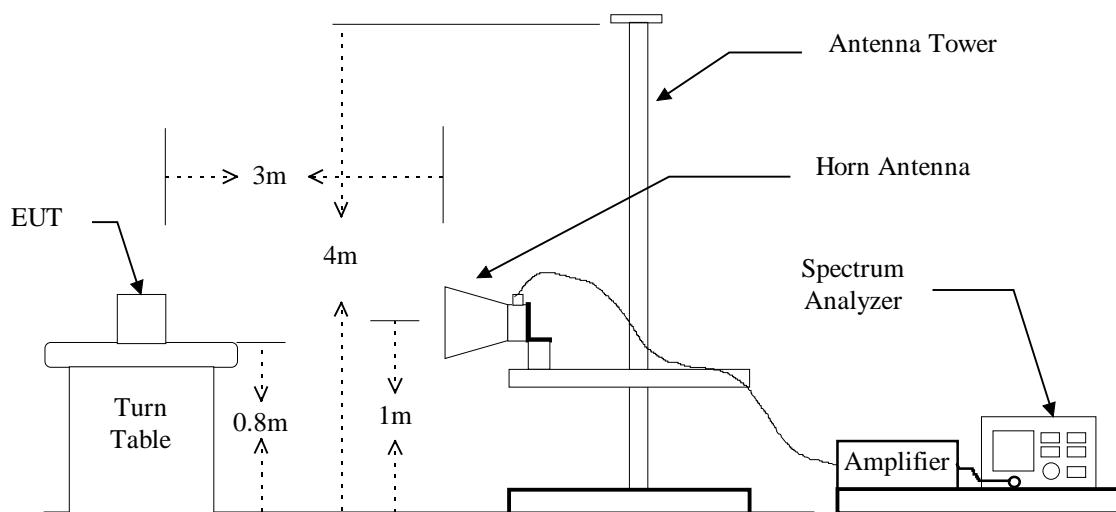

### 4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement :

Equipment	Manufacturer	Model No.	Next Cal. Due
EMI Test Receiver	Hewlett-Packard	8546A	08/27/2004
Horn Antenna	EMCO	3115	06/05/2004
LogBicone Antenna	Schwarzbeck	9160	10/28/2004
Horn Antenna	EMCO	3116	06/28/2004
Preamplifier	Hewlett-Packard	8449B	09/04/2004
Spectrum Analyzer	Hewlett-Packard	8564EC	09/10/2004

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	N/A
	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz

## 4.4 Radiated Emission Data

### 4.4.1 RF Portion

#### a) Channel 0

Operation Mode : Transmitting/ Receiving

Fundamental Frequency : 2402 MHz

Test Date : Nov. 29, 2003

Temperature : 24

Humidity : 60 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave	Peak	Ave.	
4804.000	46.0	---	---	---	2.5	48.5	---	74.0	54.0	-25.5	118	1.0
12010.000	---	---	---	---	9.2	---	---	74.0	54.0	---	---	---
16216.000	---	---	---	---	8.9	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. Remark “---” means that the emissions level is too low to be measured.
3. Item “Margin” referred to Average limit while there is only peak result.
4. The radiation emissions have been measured to beyond the tenth harmonic of the fundamental frequency and show the significant frequencies, other means the value is too low to be detected.

## b) Channel 39

Operation Mode : Transmitting/ Receiving

Fundamental Frequency : 2441 MHz

Test Date : Nov. 29, 2003      Temperature : 24      Humidity : 60 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m) Peak      Ave (H/V Max.)		Limit @3m (dBuV/m) Peak      Ave.		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V									
	Peak	Ave	Peak	Ave								
4882.000	44.5	---	---	---	2.7	47.2	---	74.0	54.0	-26.8	122	1.0
7323.000	---	---	---	---	5.9	---	---	74.0	54.0	---	---	---
12205.000	---	---	---	---	9.3	---	---	74.0	54.0	---	---	---
19528.000	---	---	---	---	8.5	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. Remark “---” means that the emissions level is too low to be measured.
3. Item “Margin” referred to Average limit while there is only peak result.
4. The radiation emissions have been measured to beyond the tenth harmonic of the fundamental frequency and show the significant frequencies, other means the value is too low to be detected.

## c) Channel 78

Operation Mode : Transmitting/ Receiving

Fundamental Frequency : 2480 MHz

Test Date : Nov. 29, 2003

Temperature : 24

Humidity : 60 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m) Peak Ave (H/V Max.)		Limit @3m (dBuV/m) Peak Ave.		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave			
4960.000	43.7	---	---	---	2.8	46.5	---	74.0	54.0	-27.5	120	1.0
7440.000	---	---	---	---	6.1	---	---	74.0	54.0	---	---	---
12400.000	---	---	---	---	9.4	---	---	74.0	54.0	---	---	---
19840.000	---	---	---	---	8.6	---	---	74.0	54.0	---	---	---
22320.000	---	---	---	---	10.1	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. Remark “---” means that the emissions level is too low to be measured.
3. Item “Margin” referred to Average limit while there is only peak result.
4. The radiation emissions have been measured to beyond the tenth harmonic of the fundamental frequency and show the significant frequencies, other means the value is too low to be detected.

#### 4.4.2 Other Emission

Operation Mode: Transmitting/ Receiving Mode

Test Date : Nov. 29, 2003

Temperature : 24

Humidity : 60 %

Emission Frequency ( MHz )	Meter Reading ( dBuV )		CORR'd Factor ( dB )	Results ( dBuV/m )		Limit (3m) (dBuV/m)	Margins ( dB )	Table Degree (deg)		Ant. High (m)	
	HOR.	VERT.		HOR.	VERT.			HOR.	VERT.	HOR.	VERT.
148.340	26.0	***	12.7	38.7	***	43.5	-4.8	120	***	1.0	***
148.340	***	16.8	12.7	***	29.5	43.5	-14.0	***	35	***	1.0
164.830	20.7	***	11.6	32.3	***	43.5	-11.2	120	***	1.1	***
164.830	***	15.9	11.6	***	27.5	43.5	-16.0	***	220	***	1.1
179.380	***	13.3	11.8	***	25.1	43.5	-18.4	***	350	***	1.0
213.330	20.8	***	12.7	33.5	***	43.5	-10.0	122	***	1.0	***
259.890	20.1	***	15.6	35.7	***	46.0	-10.3	125	***	1.5	***
293.840	***	10.4	17.5	***	27.9	46.0	-18.1	***	350	***	1.0
295.780	19.7	***	17.5	37.2	***	46.0	-8.8	305	***	1.0	***
310.330	19.7	***	17.5	37.2	***	46.0	-8.8	128	***	1.5	***
342.340	19.4	***	19.0	38.4	***	46.0	-7.6	130	***	1.0	***
421.880	***	10.0	20.6	***	30.6	46.0	-15.4	***	215	***	1.0
436.430	***	16.2	20.6	***	36.8	46.0	-9.2	***	220	***	1.0
470.380	***	10.2	21.3	***	31.5	46.0	-14.5	***	215	***	1.0

Note :

1. Item of margin shown in above table refer to average limit.
2. Remark “---” means that the emissions level is too low to be measured.
3. Item “Margin” referred to Q.P. limit while there is only peak result.
4. *The EUT is a body worn device. In order to get the worse data, EUT direction (X, Y, Z axes) were adjusted during the prescan measurement. For final measurement, EUT was setup under the maximum emission direction.*

#### 4.5 Field Strength Calculation


The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss(if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$


where


$$\text{Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

\*ATTEN 0dB MIKA 29.00dB V  
0L 90.0dB 2.267GHZ

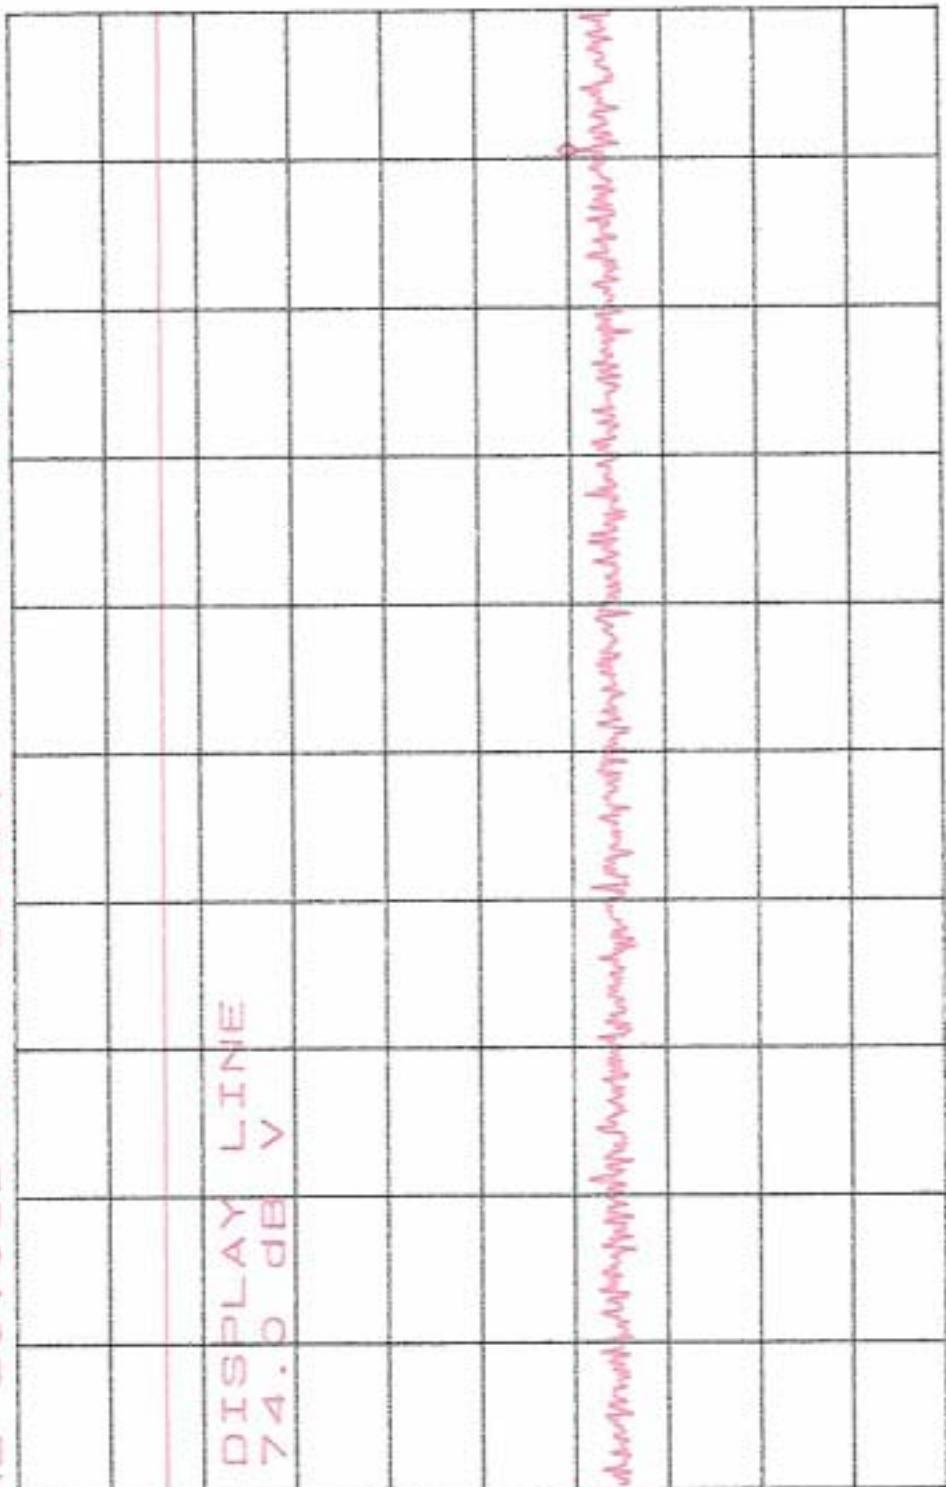


START 1.000GHz STOP 2.400GHz  
RBW 1.0MHz VBW 1.0MHz SWP 50.0ms

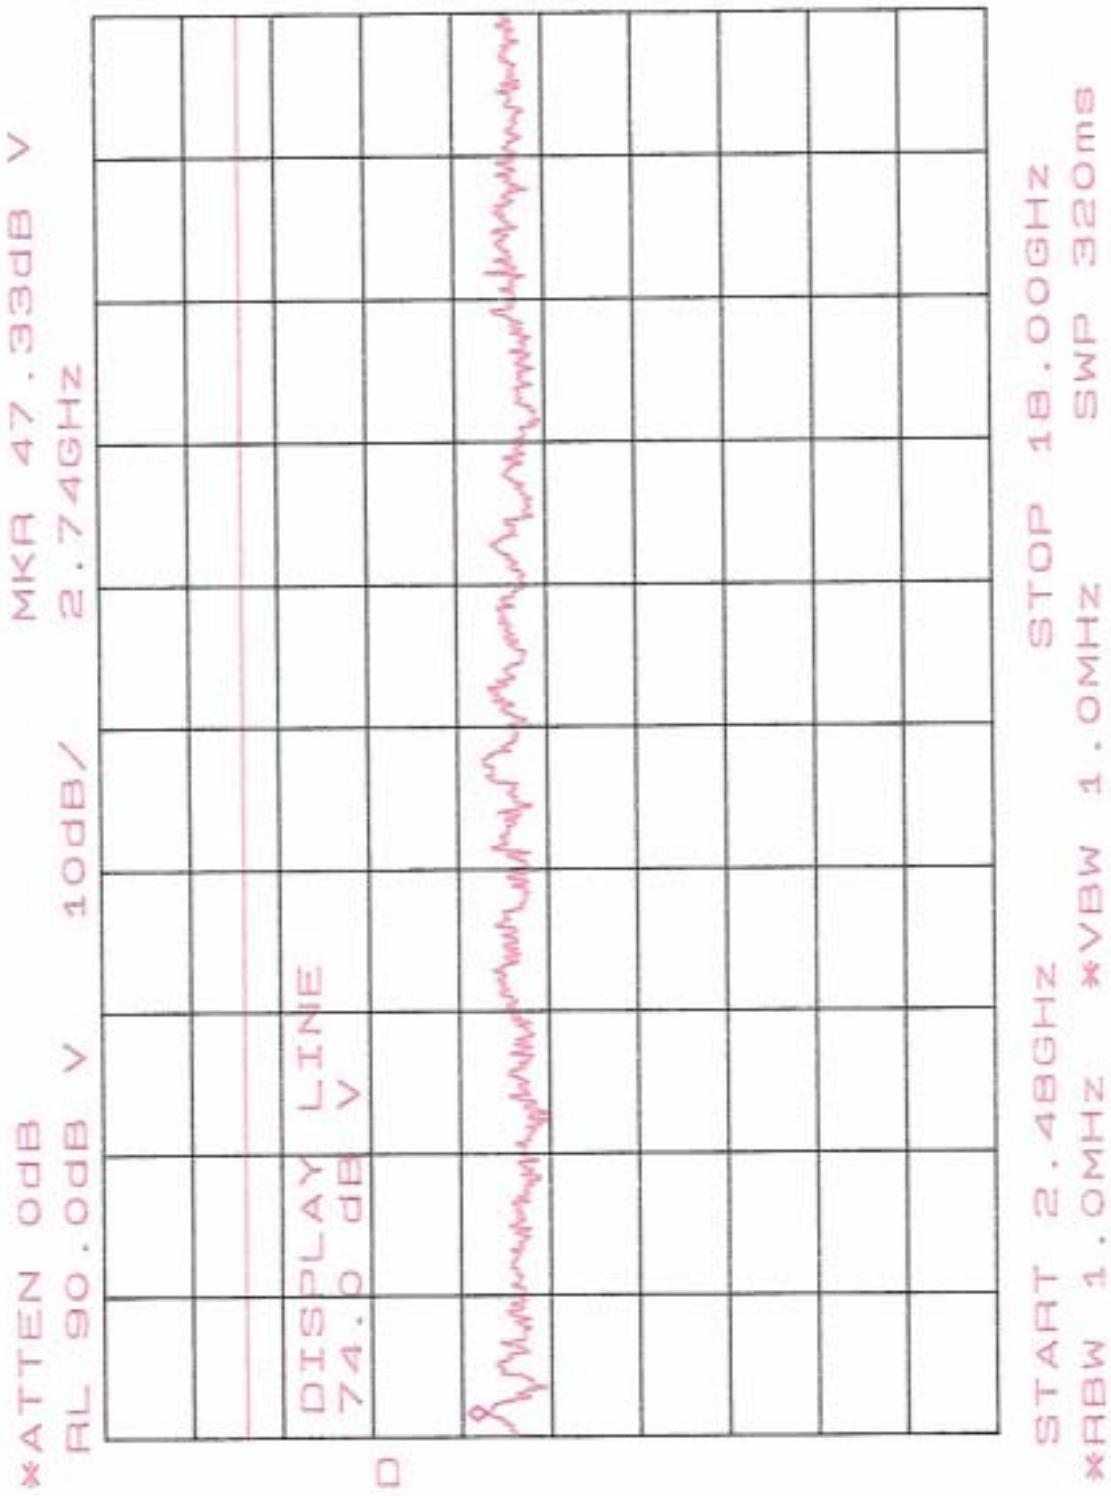

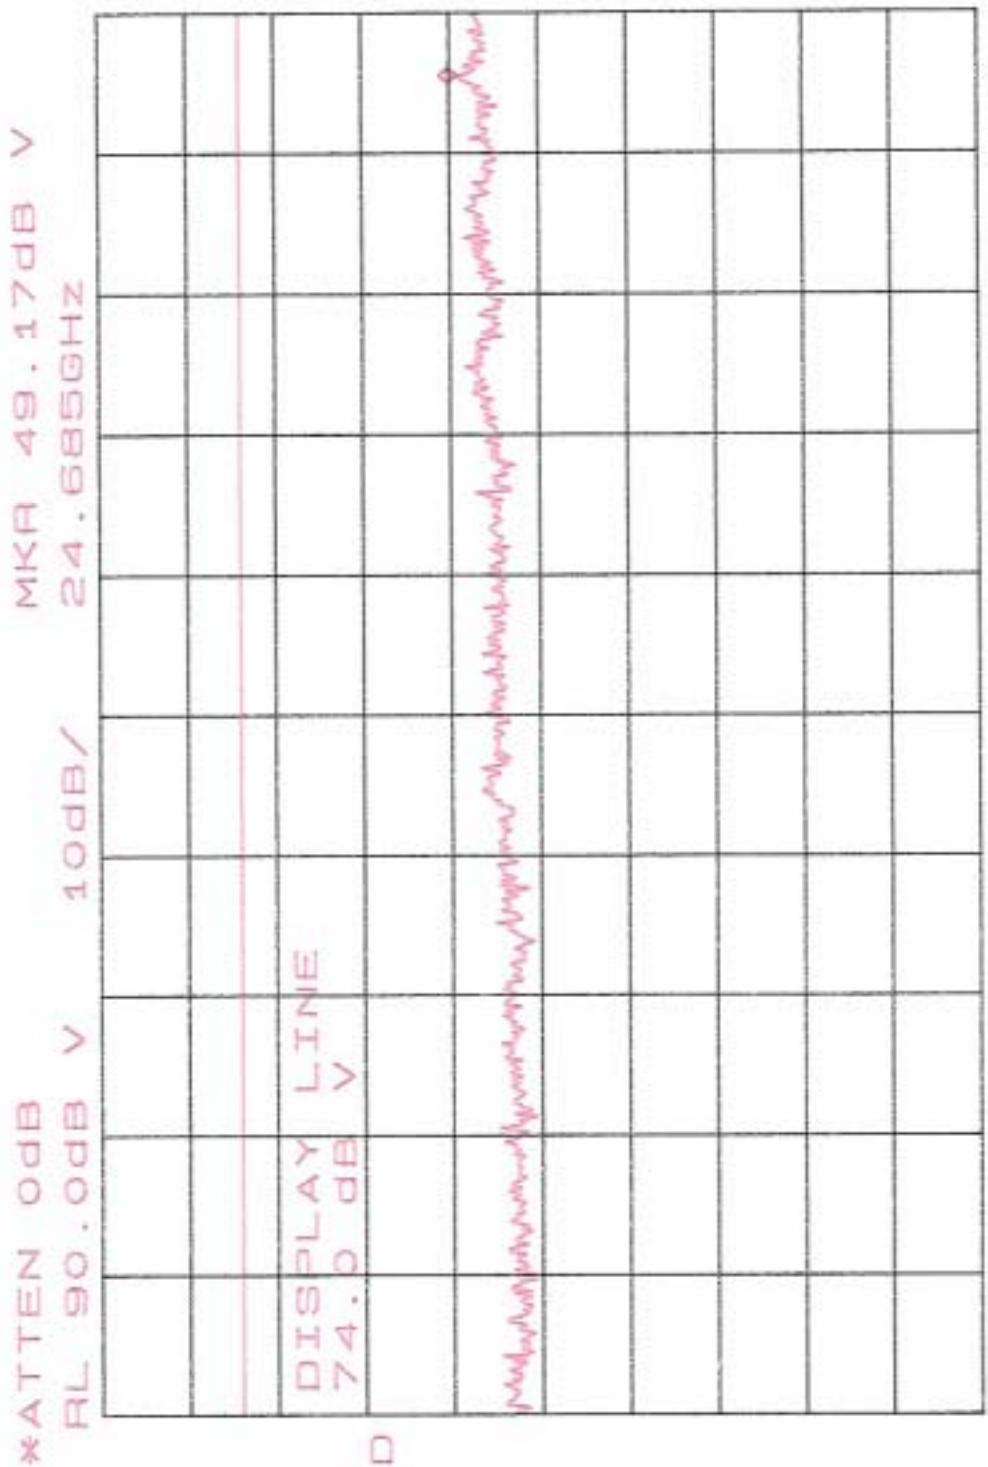

START 18.000GHz  
\*RBW 1.0MHz \*VBW 1.0MHz SWP 140ms  
STOP 25.000GHz

#### 4.6 Photos of Radiation Measuring Setup

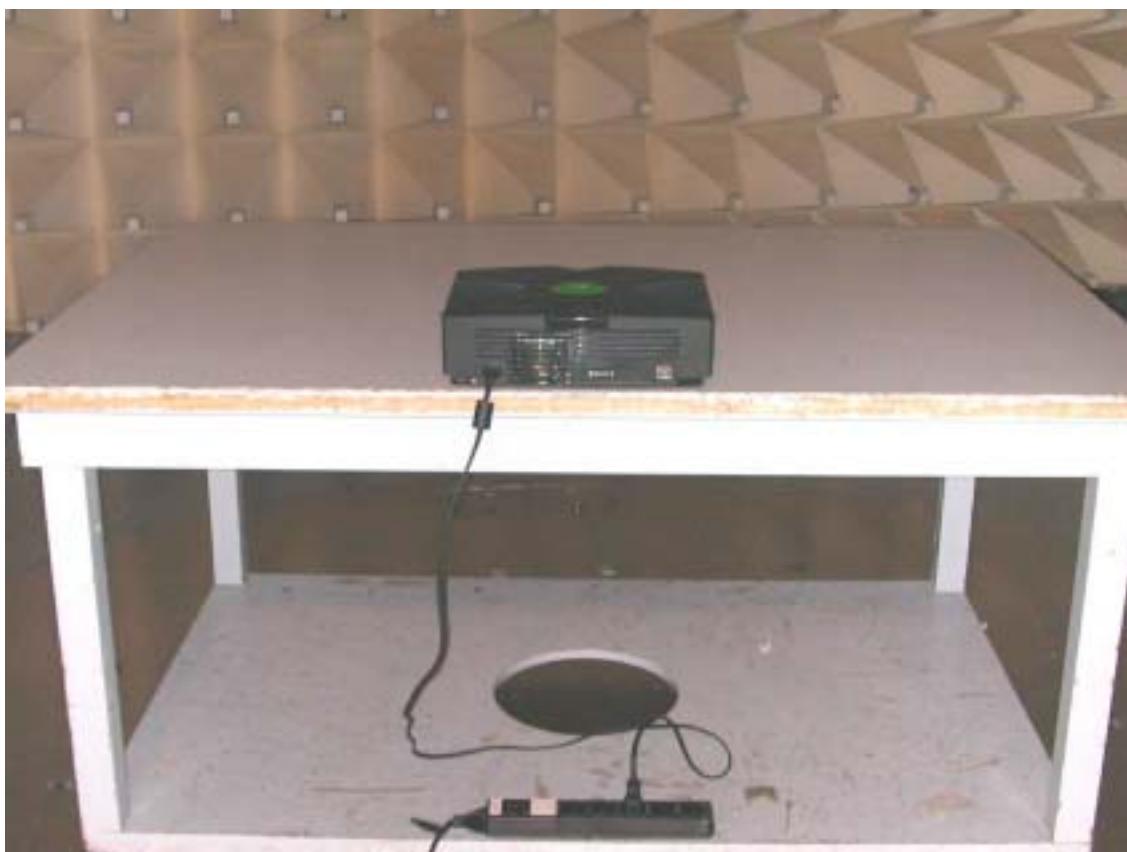

## 5 CONDUCTED EMISSION MEASUREMENT


### 5.1 Applicable Standard

For unintentional digital devices, Line Conducted Emission Limits are in accordance to §15.107(a) . And according to §15.107(e), an alternative to the conducted limits is CISPR 22.

### 5.2 Measurement Procedure

1. Setup the configuration per figure 3.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 4 to 8 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then record the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 3 : Conducted emissions measurement configuration

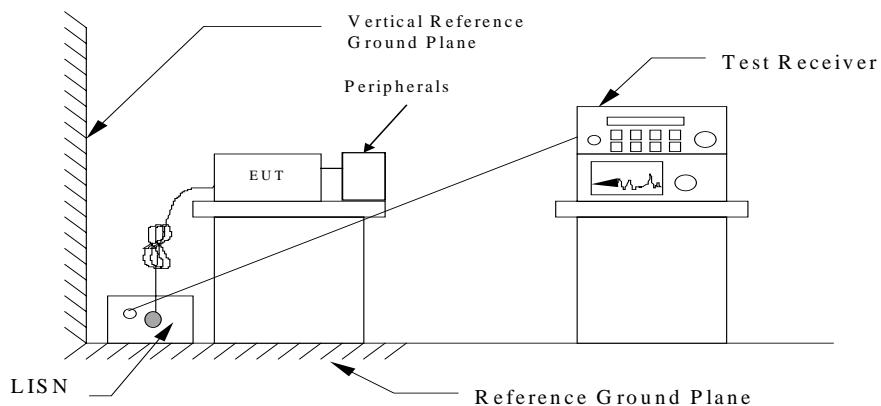

## 5.3 Conducted Emission Data

### 5.3.1

Temperature : 24  
 Humidity : 60 %  
 Test Date : Nov. 29, 2003  
 Operation Mode : Transmitting/ Receiving Mode(CH0)

Freq. (MHz)	Meter Reading (dBuV)				Factor (dB)	Result (dBuV)				Limit (dBuV)		Margins (dB) Q.P. or AVG.		
	Q.P Value		AVG. Value			Q.P Value		AVG. Value		Q.P Value	AVG. Value			
	L1	L2	L1	L2		L1	L2	L1	L2					
0.150	***	39.3#	----	----	0.1	***	39.4#	----	----	66.0	56.0	-26.6		
0.162	36.5#	***	----	----	0.1	36.6#	***	----	----	65.4	55.4	-28.8		
0.189	35.2#	***	----	----	0.1	35.3#	***	----	----	64.1	54.1	-28.8		
0.209	***	31.3#	----	----	0.1	***	31.4#	----	----	63.2	53.2	-31.8		
0.259	26.4#	***	----	----	0.1	26.5#	***	----	----	61.5	51.5	-35.0		
0.505	22.6#	***	----	----	0.1	22.7#	***	----	----	56.0	46.0	-33.3		
0.931	***	24.5#	----	----	0.1	***	24.6#	----	----	56.0	46.0	-31.4		
1.345	***	24.2#	----	----	0.2	***	24.4#	----	----	56.0	46.0	-31.6		
2.337	21.1#	***	----	----	0.2	21.3#	***	----	----	56.0	46.0	-34.7		
2.380	***	24.3#	----	----	0.2	***	24.5#	----	----	56.0	46.0	-31.5		
8.130	27.3#	***	----	----	0.3	27.6#	***	----	----	60.0	50.0	-32.4		
8.759	***	26.4#	----	----	0.3	***	26.7#	----	----	60.0	50.0	-33.3		

Note:


1. The full frequency range scanning test data is shown in next two pages.
2. “\*\*\*” means the value was too low to be measured.
3. “#” means the noise was low, so record the peak value.
4. If the data table appeared symbol of “----” means the Q.P. value is under the limit for AVG. so, the AVG. value doesn't need to be measured.
5. The estimated measurement uncertainty of the result measurement is ±3dB.

## Conducted Emission Test

## Peak Value

EUT: HOST(X BOX)  
Manuf:  
Op Cond:  
Operator: Anderson  
Test Spec: FCC CLASS B  
Comment: L1  
TX/RX,CHO  
Result File: a&d.dat : New Measurement

Final Measurement: Detector: X AV  
Meas Time: 1sec  
Peaks: 8  
Acc Margin: 30 dB

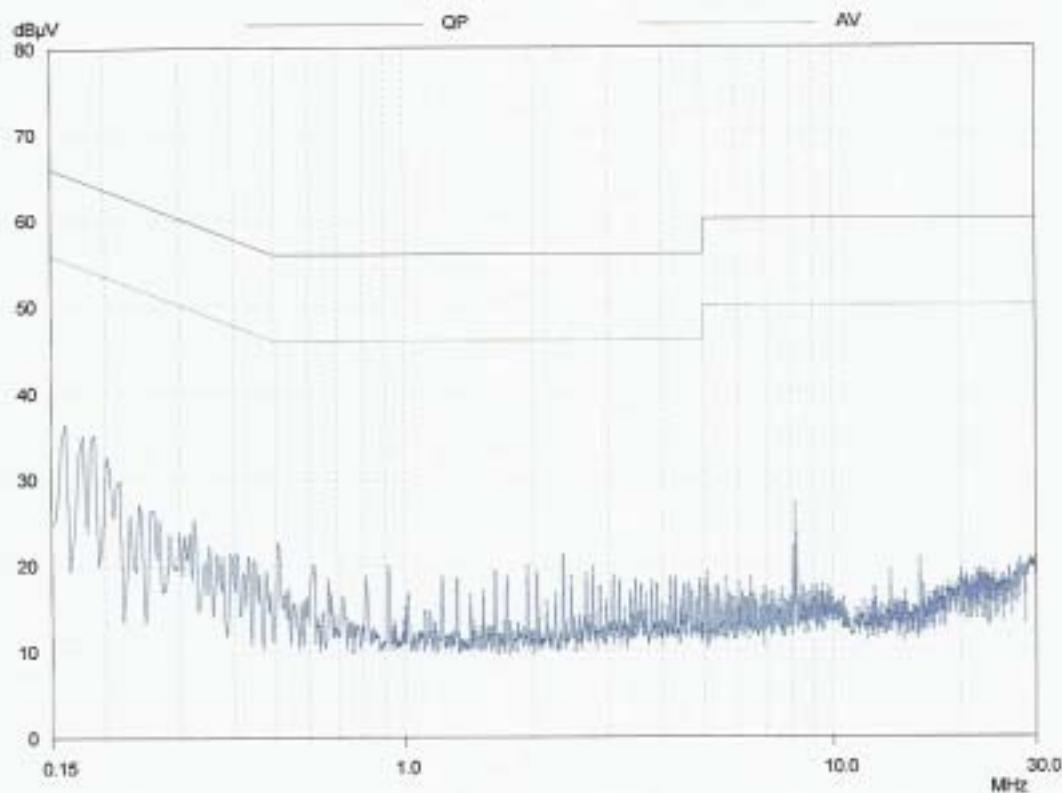


## Conducted Emission Test

## Peak Value

EUT: HOST(X BOX)  
Manuf:  
Op Cond:  
Operator: Anderson  
Test Spec: FCC CLASS B  
Comment: L2  
Result File: a&d.dat : New Measurement

Final Measurement: Detector: X AV  
Meas. Time: 1sec  
Peaks: 8  
Acc Margin: 30 dB

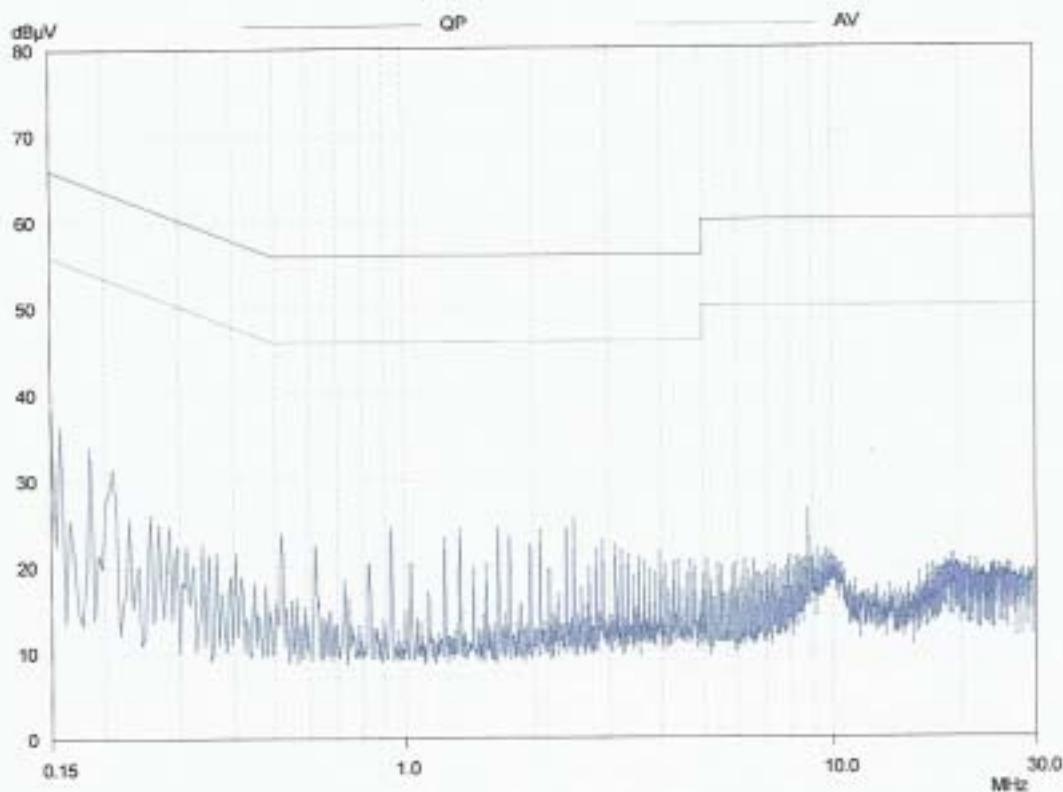

## 5.3.2

Temperature : 24  
 Humidity : 60 %  
 Test Date : Nov. 29, 2003  
 Operation Mode : Transmitting/ Receiving Mode(CH39)

Freq. (MHz)	Meter Reading (dBuV)				Factor (dB)	Result (dBuV)				Limit (dBuV)		Margins (dB) Q.P. or AVG.		
	Q.P Value		AVG. Value			Q.P Value		AVG. Value		Q.P Value	AVG. Value			
	L1	L2	L1	L2		L1	L2	L1	L2					
0.162	***	33.4#	----	----	0.1	***	33.5#	----	----	65.4	55.4	-31.9		
0.173	35.8#	***	----	----	0.1	35.9#	***	----	----	64.8	54.8	-28.9		
0.189	***	33.9#	----	----	0.1	***	34.0#	----	----	64.1	54.1	-30.1		
0.216	32.4#	***	----	----	0.1	32.5#	***	----	----	63.0	53.0	-30.5		
0.509	24.2#	***	----	----	0.1	24.3#	***	----	----	56.0	46.0	-31.7		
0.923	21.0#	***	----	----	0.1	21.1#	***	----	----	56.0	46.0	-34.9		
0.931	***	25.1#	----	----	0.1	***	25.2#	----	----	56.0	46.0	-30.8		
1.345	***	25.0#	----	----	0.2	***	25.2#	----	----	56.0	46.0	-30.8		
5.001	***	26.4#	----	----	0.2	***	26.6#	----	----	60.0	50.0	-33.4		
6.251	26.3#	***	----	----	0.2	26.5#	***	----	----	60.0	50.0	-33.5		
7.954	28.8#	***	----	----	0.3	29.1#	***	----	----	60.0	50.0	-30.9		
8.204	***	25.7#	----	----	0.3	***	26.0#	----	----	60.0	50.0	-34.0		

## Note:


1. The full frequency range scanning test data is shown in next two pages.
2. “\*\*\*” means the value was too low to be measured.
3. “#” means the noise was low, so record the peak value.
4. If the data table appeared symbol of “----” means the Q.P. value is under the limit for AVG. so, the AVG. value doesn't need to be measured.
5. The estimated measurement uncertainty of the result measurement is  $\pm 3$ dB.

## Conducted Emission Test

## Peak Value

EUT: HOST(X.BOX)  
Manuf:  
Op Cond:  
Operator: Anderson  
Test Spec: FCC CLASS B  
Comment: L1  
Result File: a&d.dat : New Measurement

Final Measurement: Detector: XAV  
Meas Time: 1sec  
Peaks: 8  
Acc Margin: 30 dB

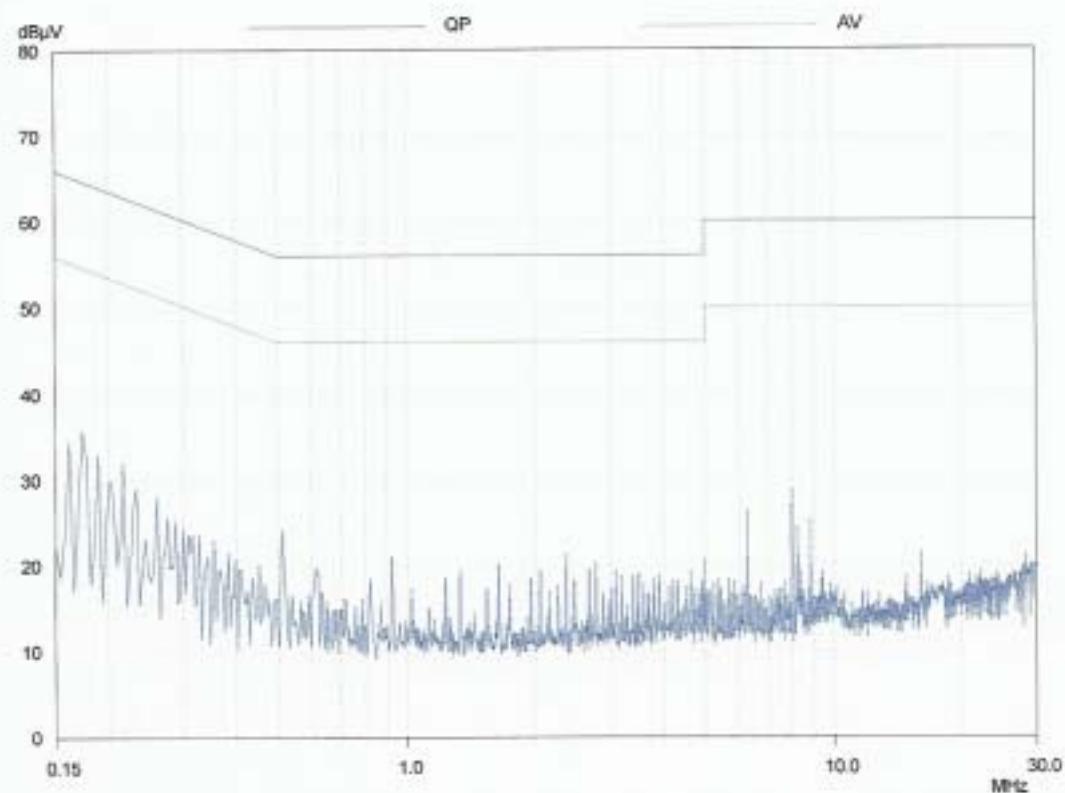


## Conducted Emission Test

## Peak Value

EUT: HOST(X BOX)  
Manuf:  
Op Cond:  
Operator: Anderson  
Test Spec: FCC CLASS B  
Comment: L2  
Result File: a&d.dat : New Measurement

Final Measurement: Detector: X AV  
Meas Time: 1sec  
Peaks: 8  
Acc Margin: 30 dB

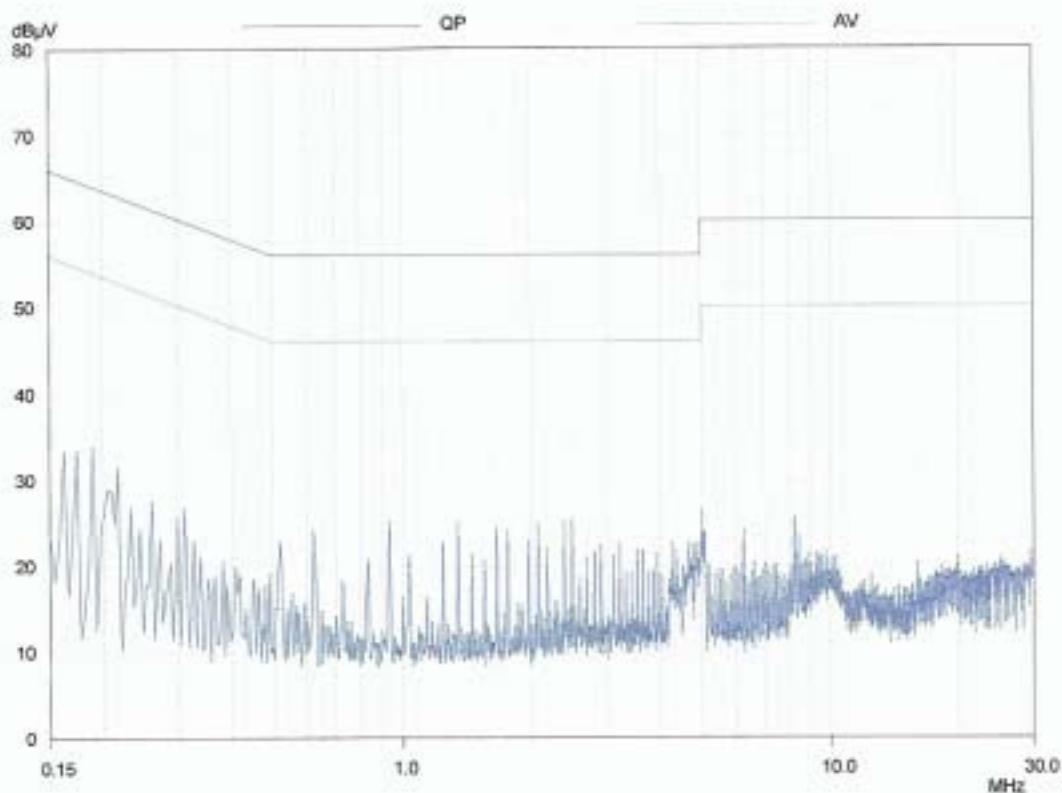

## 5.3.3

Temperature : 24  
 Humidity : 60 %  
 Test Date : Nov. 29, 2003  
 Operation Mode : Transmitting/ Receiving Mode(CH78)

Freq. (MHz)	Meter Reading (dBuV)				Factor (dB)	Result (dBuV)				Limit (dBuV)		Margins (dB) Q.P. or AVG.		
	Q.P Value		AVG. Value			Q.P Value		AVG. Value		Q.P Value	AVG. Value			
	L1	L2	L1	L2		L1	L2	L1	L2					
0.150	***	40.0	----	----	0.1	***	40.1	----	----	66.0	56.0	-25.9		
0.177	34.0	***	----	----	0.1	34.1	***	----	----	64.6	54.6	-30.5		
0.181	***	34.6	----	----	0.1	***	34.7	----	----	64.4	54.4	-29.7		
0.205	31.1	***	----	----	0.1	31.2	***	----	----	63.4	53.4	-32.2		
0.267	19.9	***	----	----	0.1	20.0	***	----	----	61.2	51.2	-41.2		
0.513	21.5	***	----	----	0.1	21.6	***	----	----	56.0	46.0	-34.4		
0.517	***	24.7	----	----	0.1	***	24.8	----	----	56.0	46.0	-31.2		
0.931	***	24.7	----	----	0.1	***	24.8	----	----	56.0	46.0	-31.2		
2.072	***	25.9	----	----	0.2	***	26.1	----	----	56.0	46.0	-29.9		
8.154	***	23.0	----	----	0.3	***	23.3	----	----	60.0	50.0	-36.7		
8.236	25.6	***	----	----	0.3	25.9	***	----	----	60.0	50.0	-34.1		
10.087	22.3	***	----	----	0.4	22.7	***	----	----	60.0	50.0	-37.3		

## Note:


1. The full frequency range scanning test data is shown in next two pages.
2. “\*\*\*” means the value was too low to be measured.
3. “#” means the noise was low, so record the peak value.
4. If the data table appeared symbol of “---” means the Q.P. value is under the limit for AVG. so, the AVG. value doesn't need to be measured.
5. The estimated measurement uncertainty of the result measurement is  $\pm 3$ dB.

## Conducted Emission Test

## Peak Value

EUT: HOST(X BOX)  
Manuf:  
Op Cond:  
Operator: Anderson  
Test Spec: FCC CLASS B  
Comment: L1  
Result File: a&d.dat : New Measurement

Final Measurement: Detector: X.AV  
Meas Time: 1sec  
Peaks: 8  
Acc Margin: 30 dB

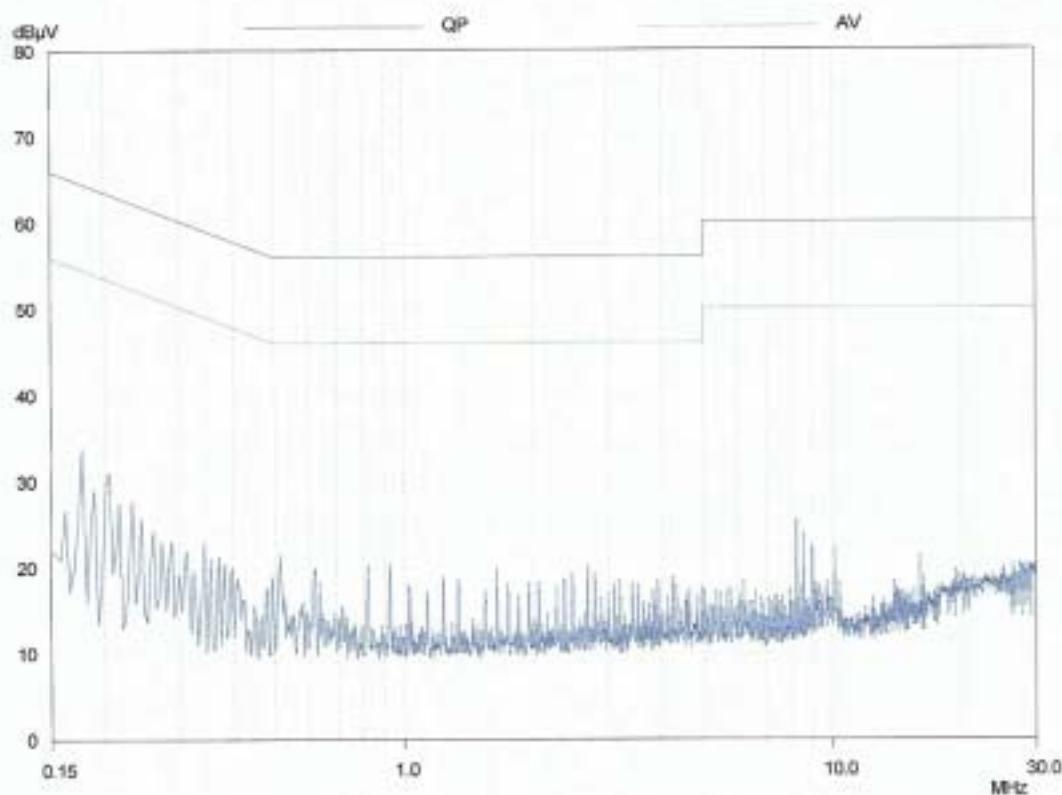


## Conducted Emission Test

## Peak Value

EUT: HOST(X BOX)  
Manuf:  
Op Cond:  
Operator: Anderson  
Test Spec: FCC CLASS B  
Comment: L2  
Result File: a&d.dat: New Measurement

Final Measurement: Detector: X AV  
Meas Time: 1sec  
Peaks: 8  
Acc Margin: 30 dB

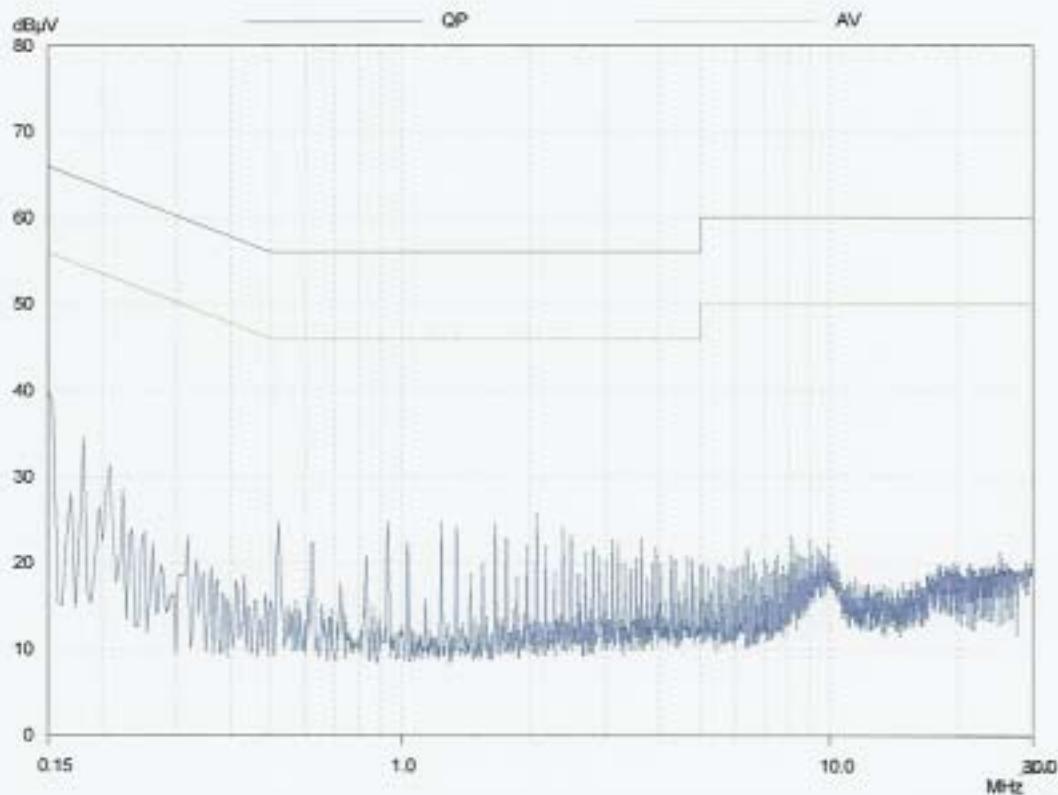

## 5.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\text{RESULT} = \text{READING} + \text{LISN FACTOR}$$

Assume a receiver reading of 22.5 dB  $\mu$  V is obtained, and LISN Factor is 0.1 dB, then the total of field strength is 22.6 dB  $\mu$  V.

$$\text{RESULT} = 22.5 + 0.1 = 22.6 \text{ dB } \mu \text{V}$$

$$\begin{aligned} \text{Level in } \mu \text{V} &= \text{Common Antilogarithm}[(22.6 \text{ dB } \mu \text{V})/20] \\ &= 13.48 \text{ } \mu \text{V} \end{aligned}$$

## 5.5 Conducted Measurement Equipment

The following test equipment are used during the conducted test .

Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
EMI Test Receiver	R&S	ESCS30	13054409-001	Sep. 23, 2004
LISN	EMCO	3825	13057704-001	Nov. 02, 2004

Note: The standards used to perform this calibration are traceable to NML/ROC and NIST/USA.

## 5.6 Photos of Conduction Measuring Setup



## 6 ANTENNA REQUIREMENT

### 6.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to §15.247 (b), if Receiving antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 6.2 Antenna Construction and Directional Gain

Highly efficient dipole antenna(invert F) fix on the PCB. The directional gain of antenna is -3~-6dBi.

## 7 20dB EMISSION BANDWIDTH MEASUREMENT


### 7.1 Standard Applicable

According to 15.247(a)(1), for frequency hopping systems, hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of hopping channel, whichever is greater.

### 7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Figure 4: Emission bandwidth measurement configuration.

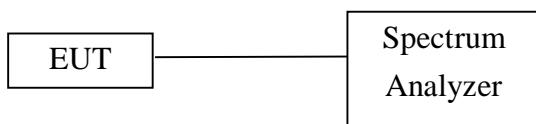

### 7.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Plotter	Hewlett-Packard	7550A	N/A
Spectrum Analyzer	Hewlett-Packard	8564EC	09/10/2004

## 7.4 Measurement Data


Test Date : Nov. 29, 2003


Temperature : 24


Humidity : 60 %

- a) Channel 0 : 20 dB Emission Bandwidth is 757 KHz
- b) Channel 39 : 20 dB Emission Bandwidth is 763 KHz
- c) Channel 78 : 20 dB Emission Bandwidth is 757 KHz

*Note: Please see Next pages for plotted data*

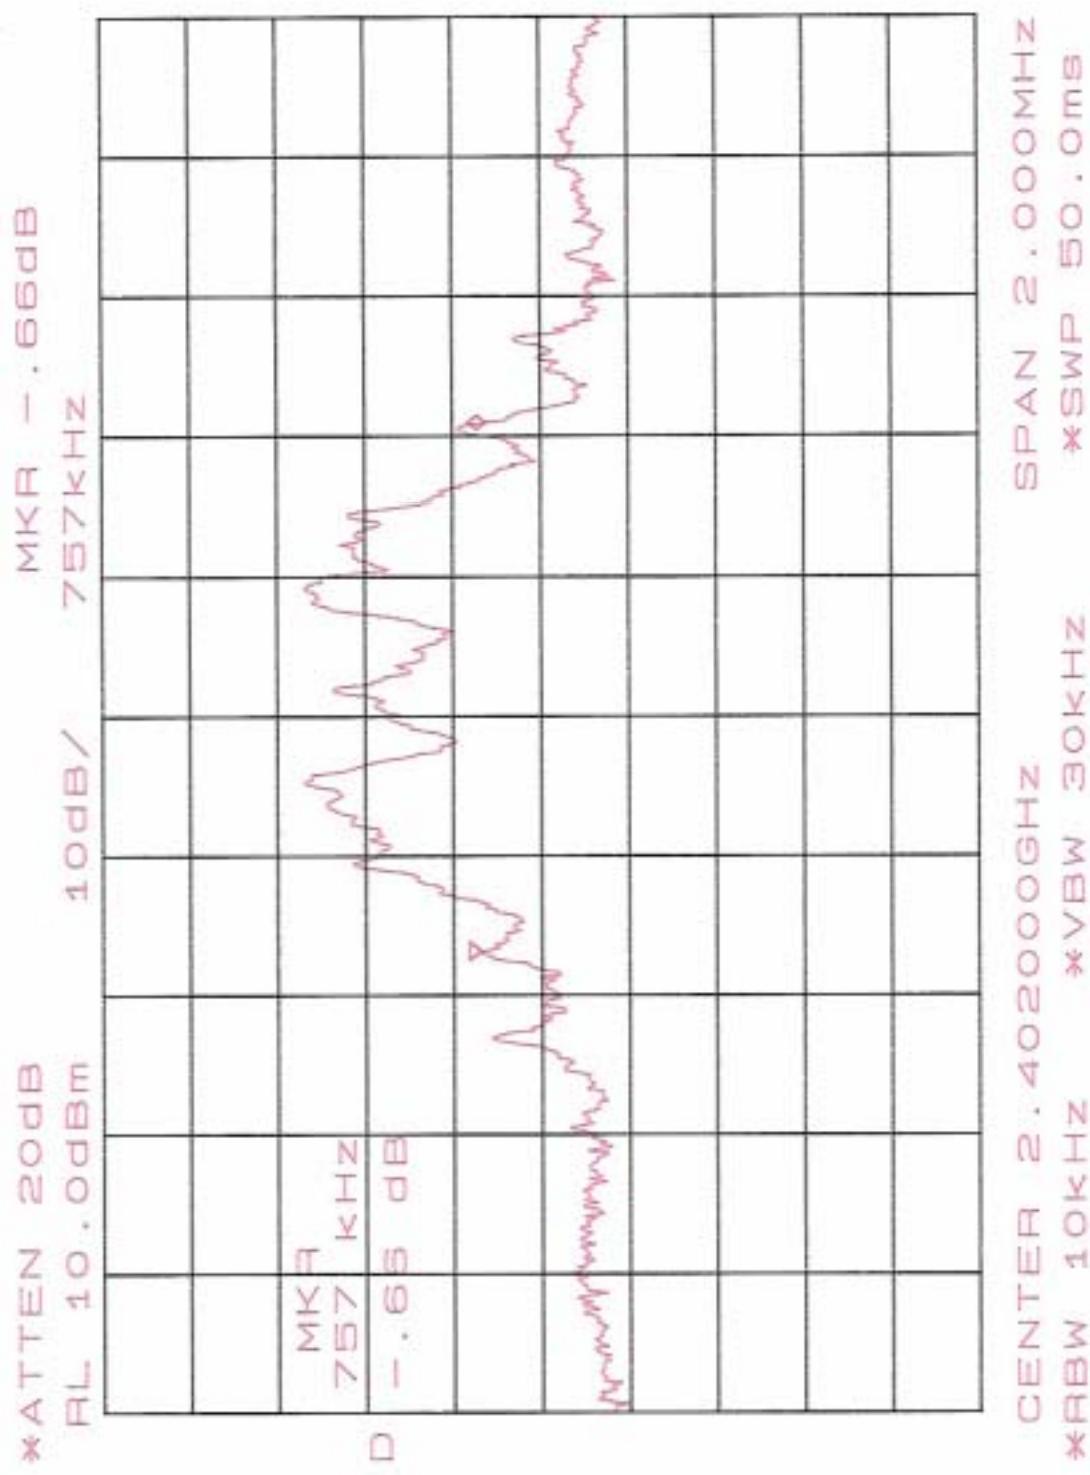

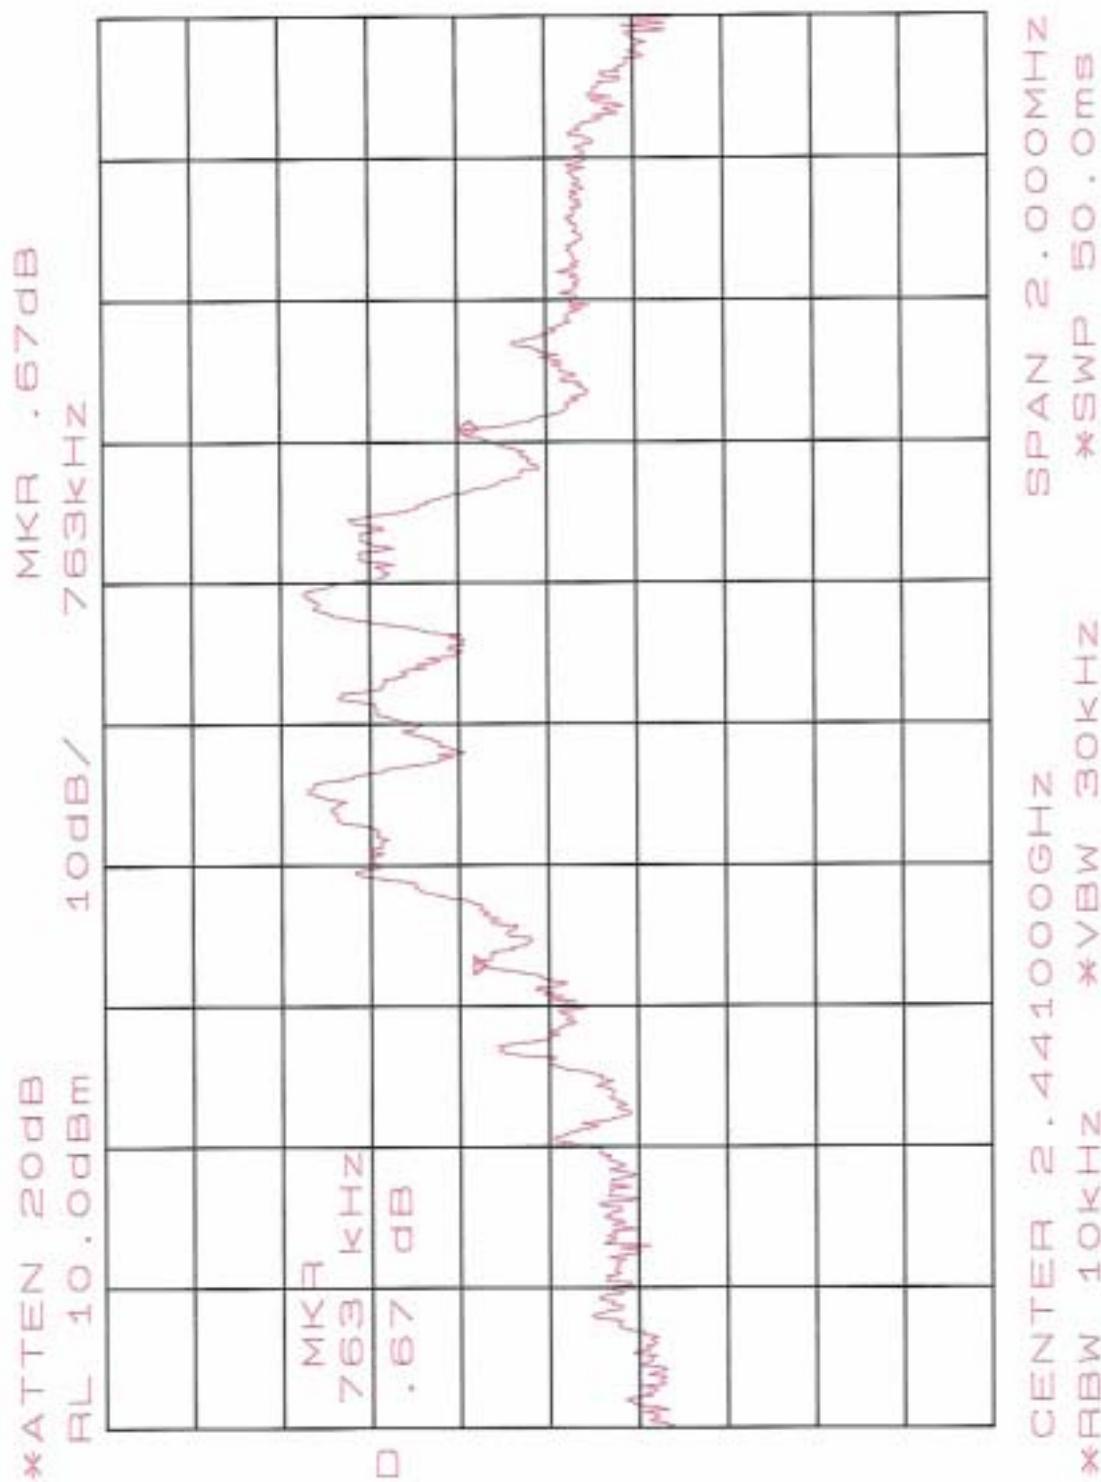

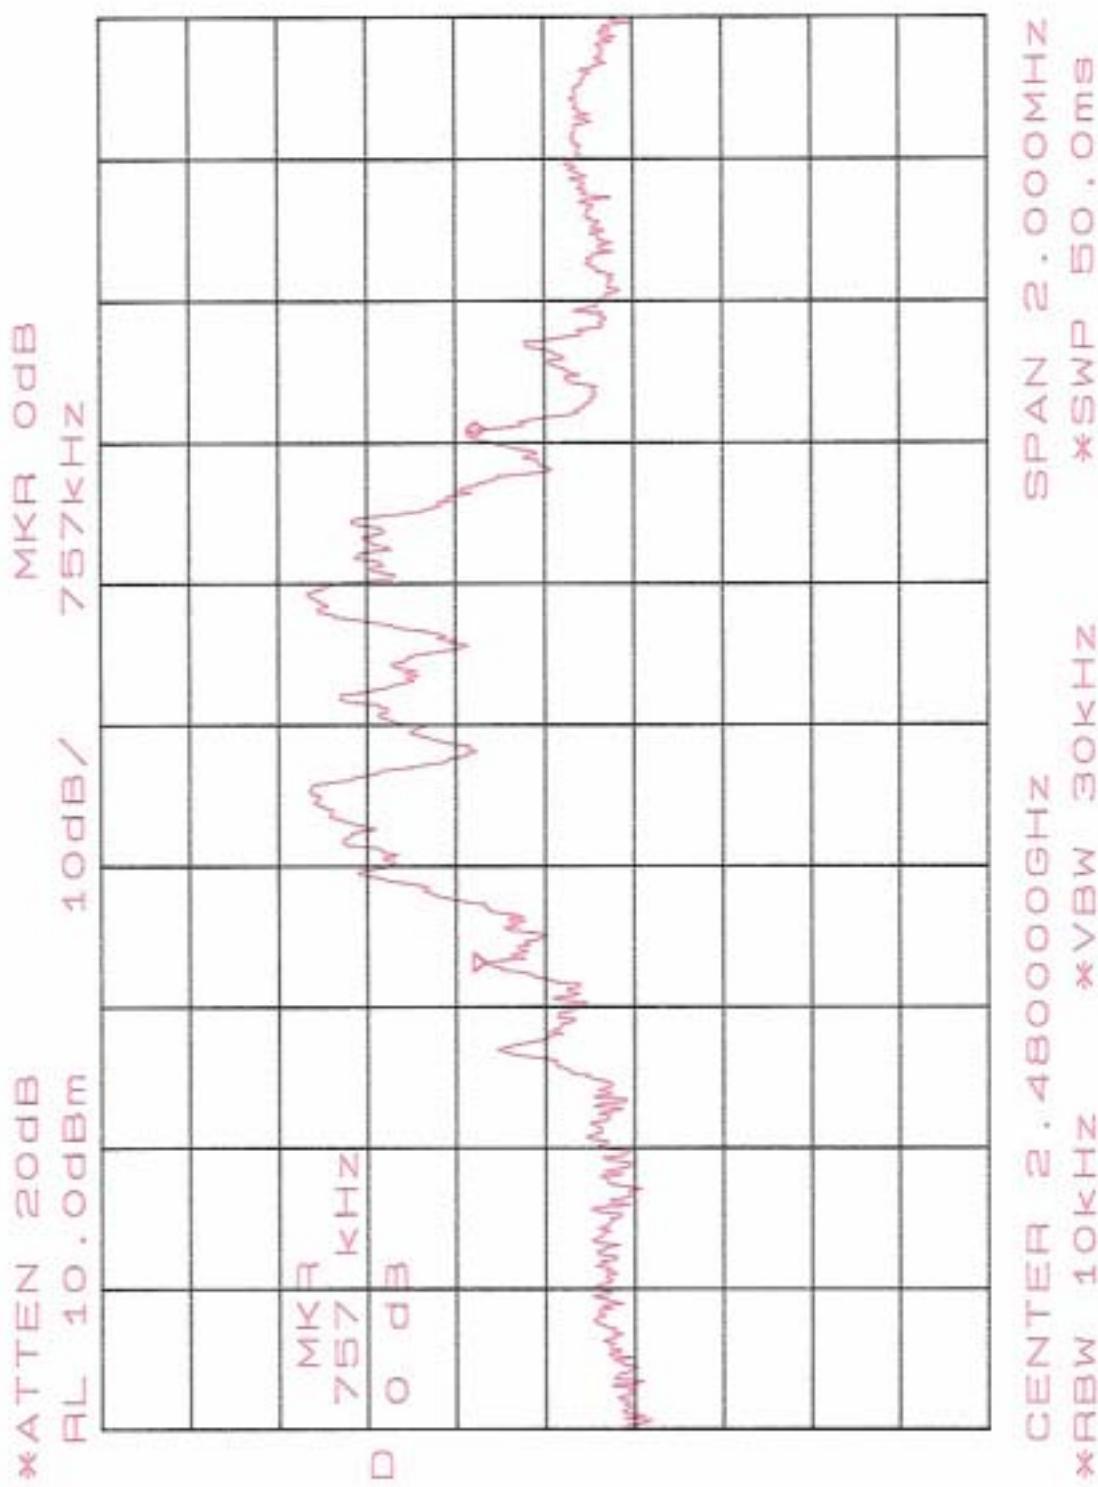

## 8 OUTPUT POWER MEASUREMENT


### 8.1 Standard Applicable

For frequency hopping system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If Receiving antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz and VBW to 3 MHz.
4. Measure the highest amplitude appearing on spectral display and record the level to calculate result data.
5. Repeat above procedures until all frequencies measured were complete.

Figure 5: Output power and measurement configuration.

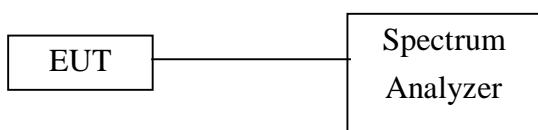

### 8.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Plotter	Hewlett-Packard	7550A	N/A
Spectrum Analyzer	Hewlett-Packard	8564EC	09/10/2004

## 8.4 Measurement Data


Test Date : Nov. 29, 2003


Temperature : 24


Humidity : 60 %

- a) Channel 0 : Output Peak Power is  $-7.83$  dBm or  $0.165$  mW
- b) Channel 39 : Output Peak Power is  $-7.83$  dBm or  $0.165$  mW
- c) Channel 78 : Output Peak Power is  $-8.17$  dBm or  $0.152$  mW

*Note: Please see Next pages for plotted datas*

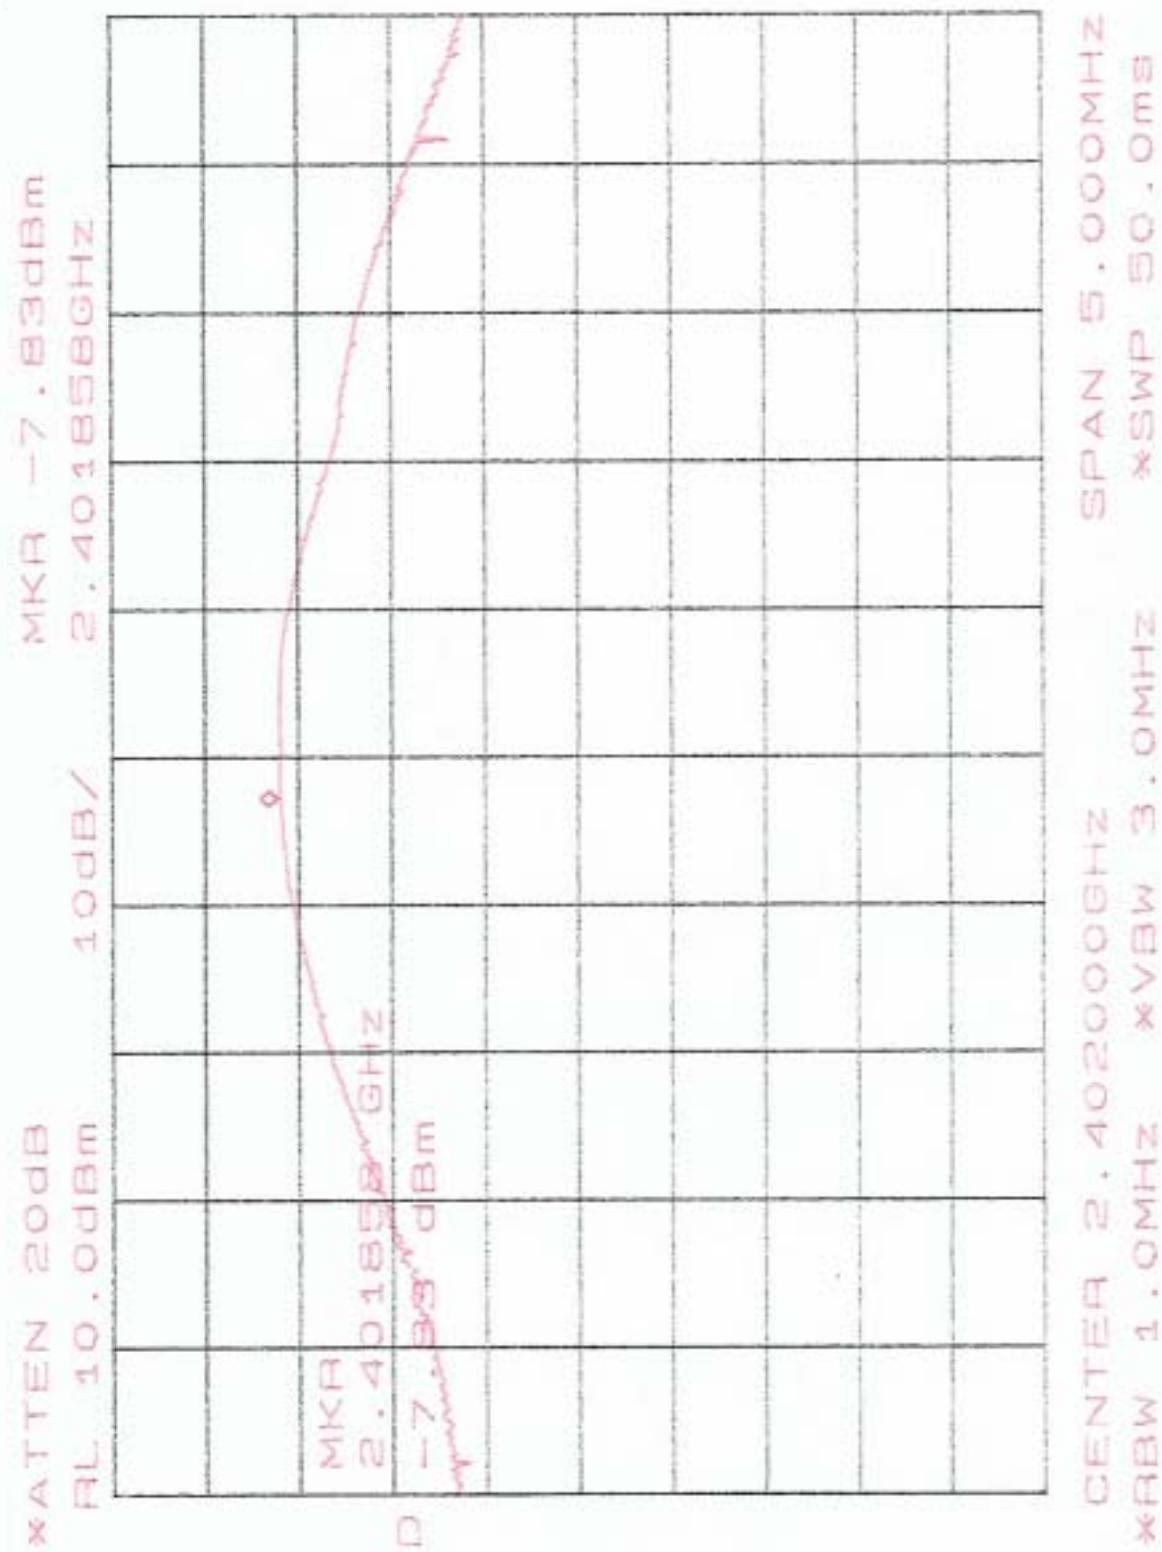

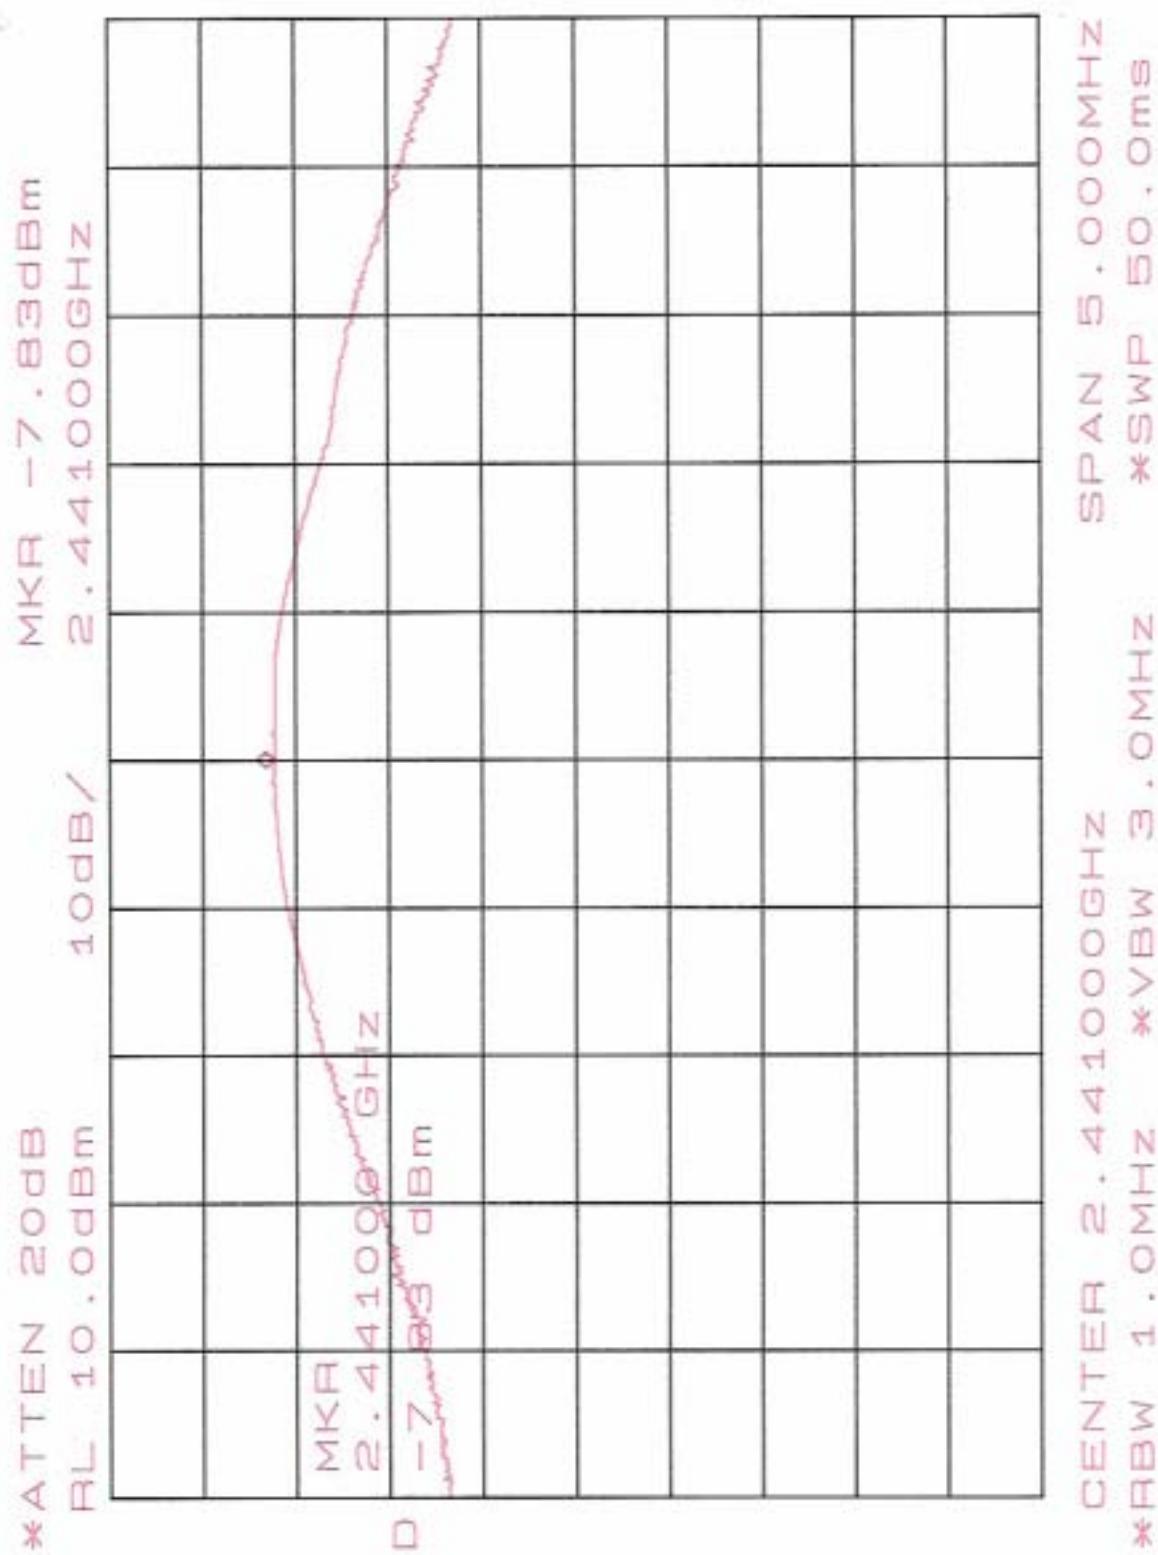

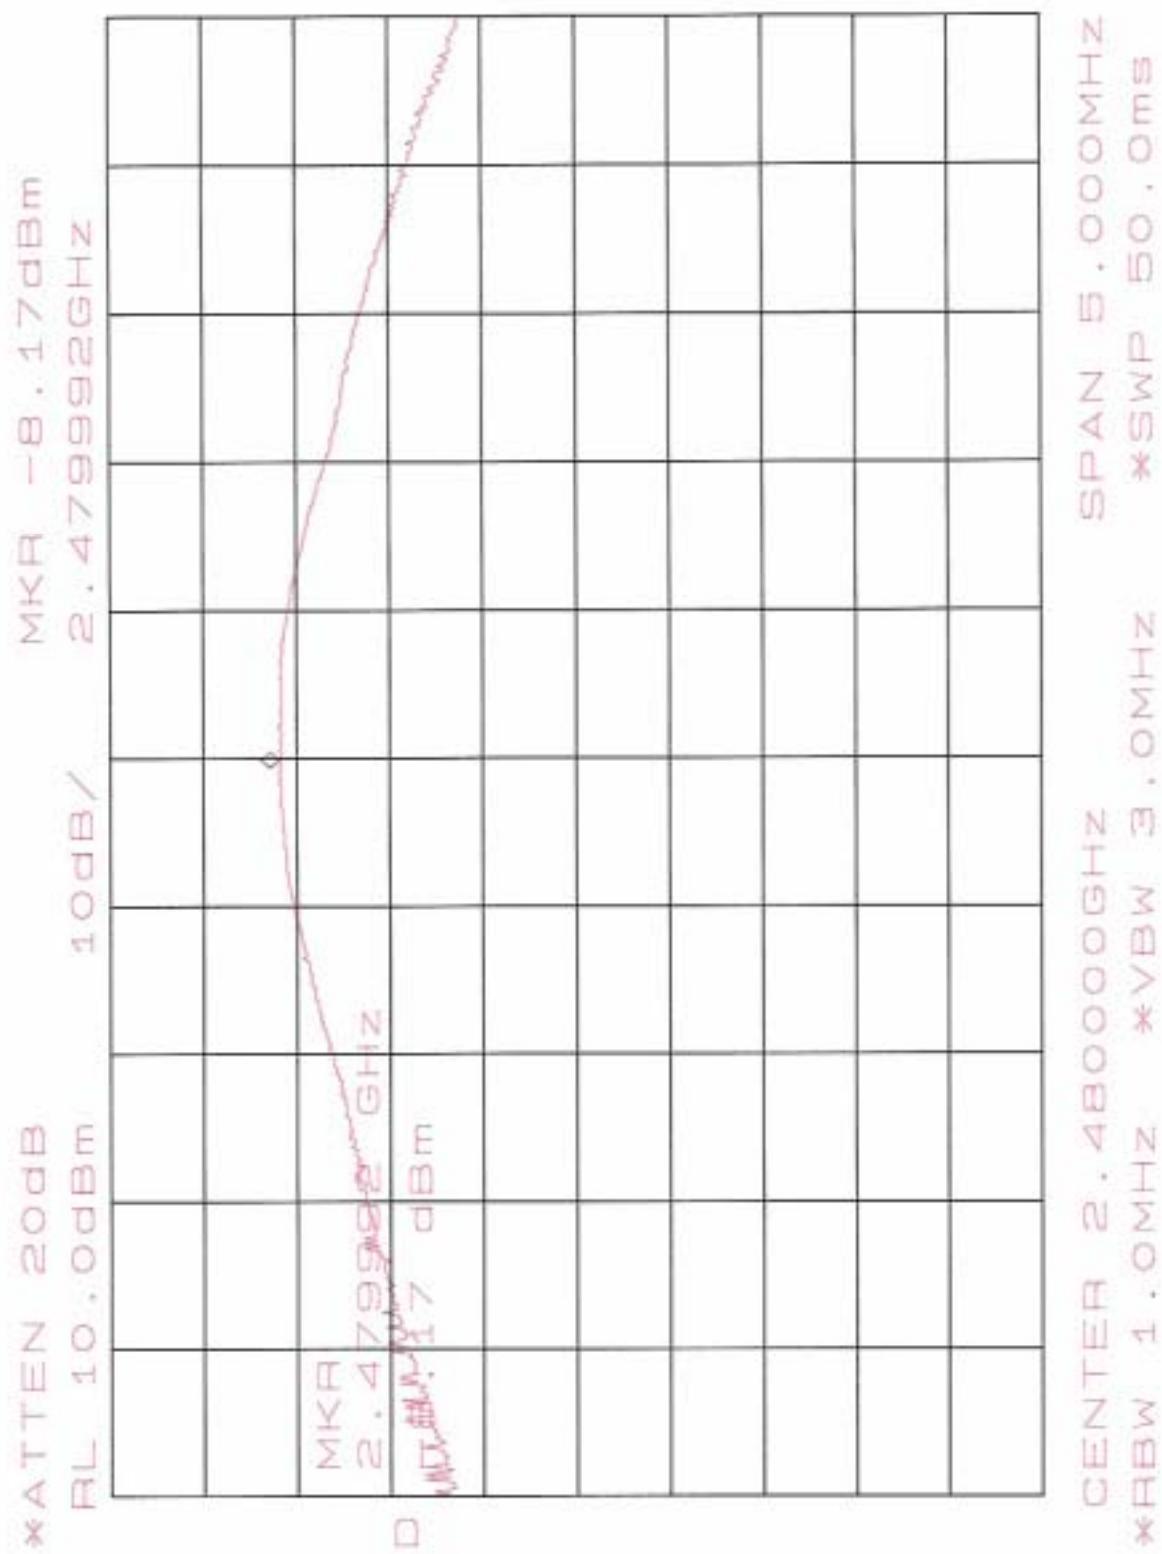

## 9 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

### 9.1 Standard Applicable

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a), whichever results in the lesser attenuation.

### 9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 9.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Plotter	Hewlett-Packard	7550A	N/A
Spectrum Analyzer	Hewlett-Packard	8564EC	09/10/2004

## 9.4 Measurement Data


Test Date : Nov. 29, 2003


Temperature : 24


Humidity : 60 %


- a) Lower Band Edge : maximum value is -41.33 dBm that is attenuated more than 20dB
- b) Upper Band Edge : maximum value is -51.00 dBm that is attenuated more than 20dB

*Note: Please see Next pages for plotted data*

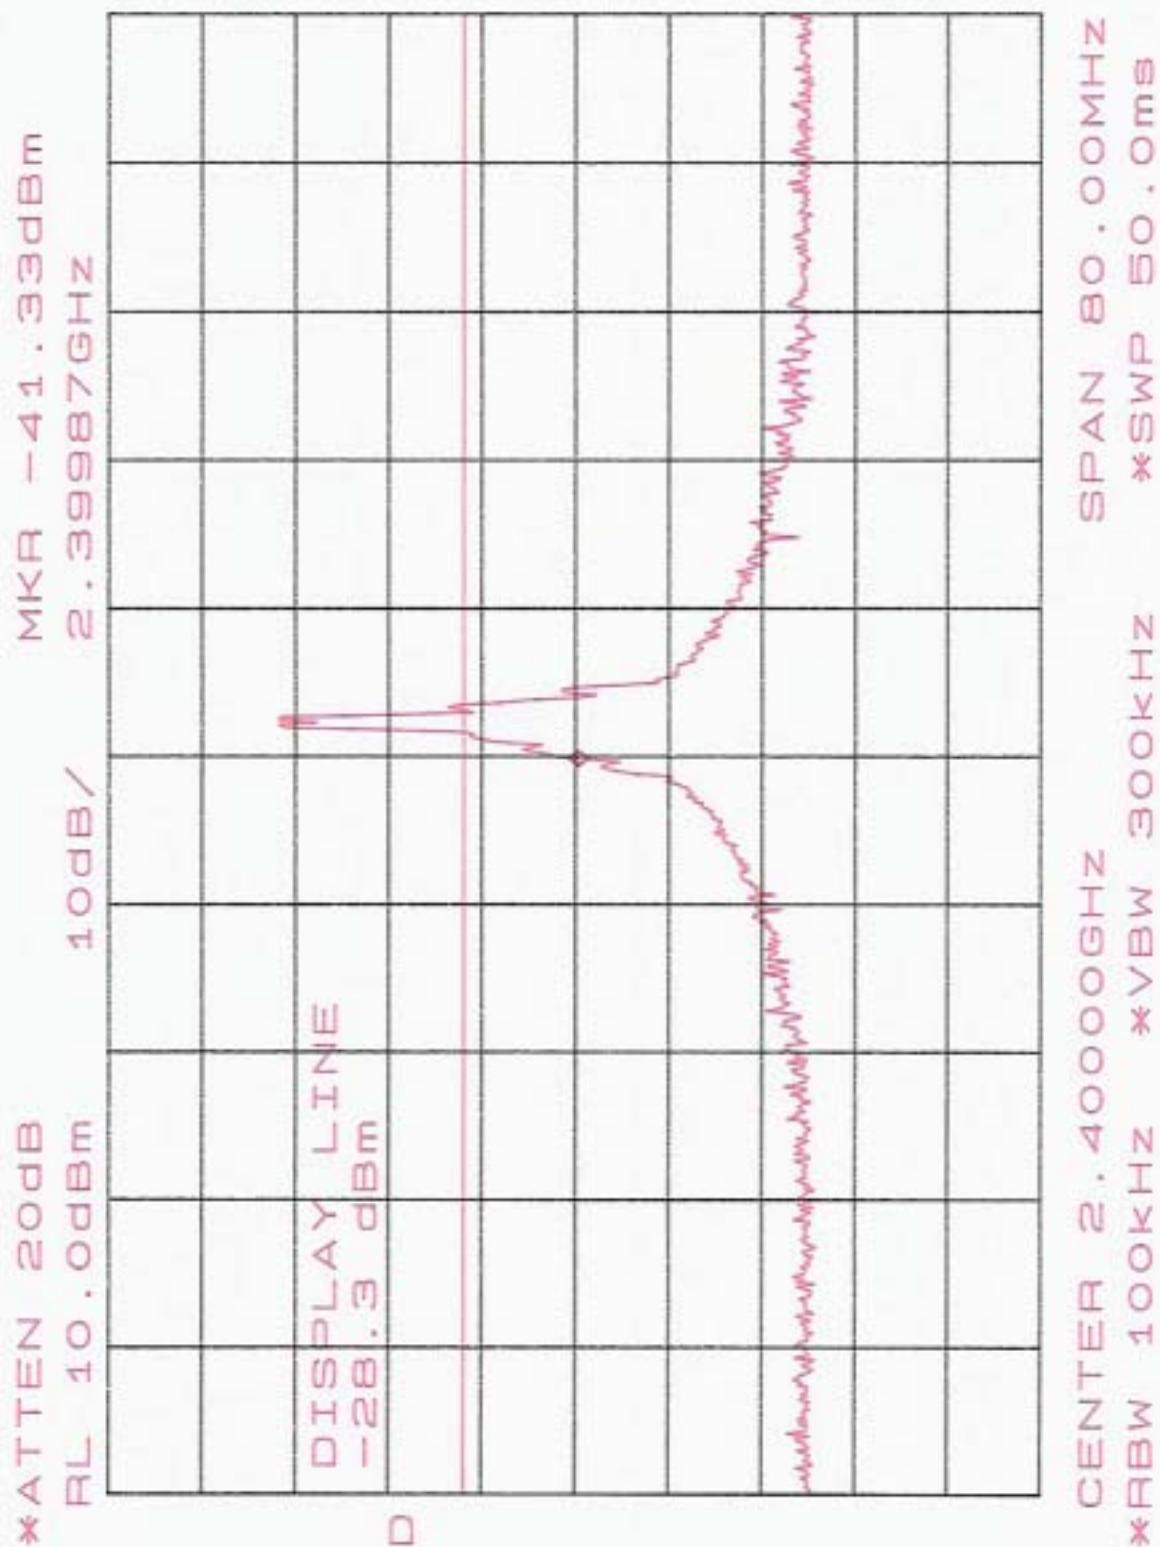


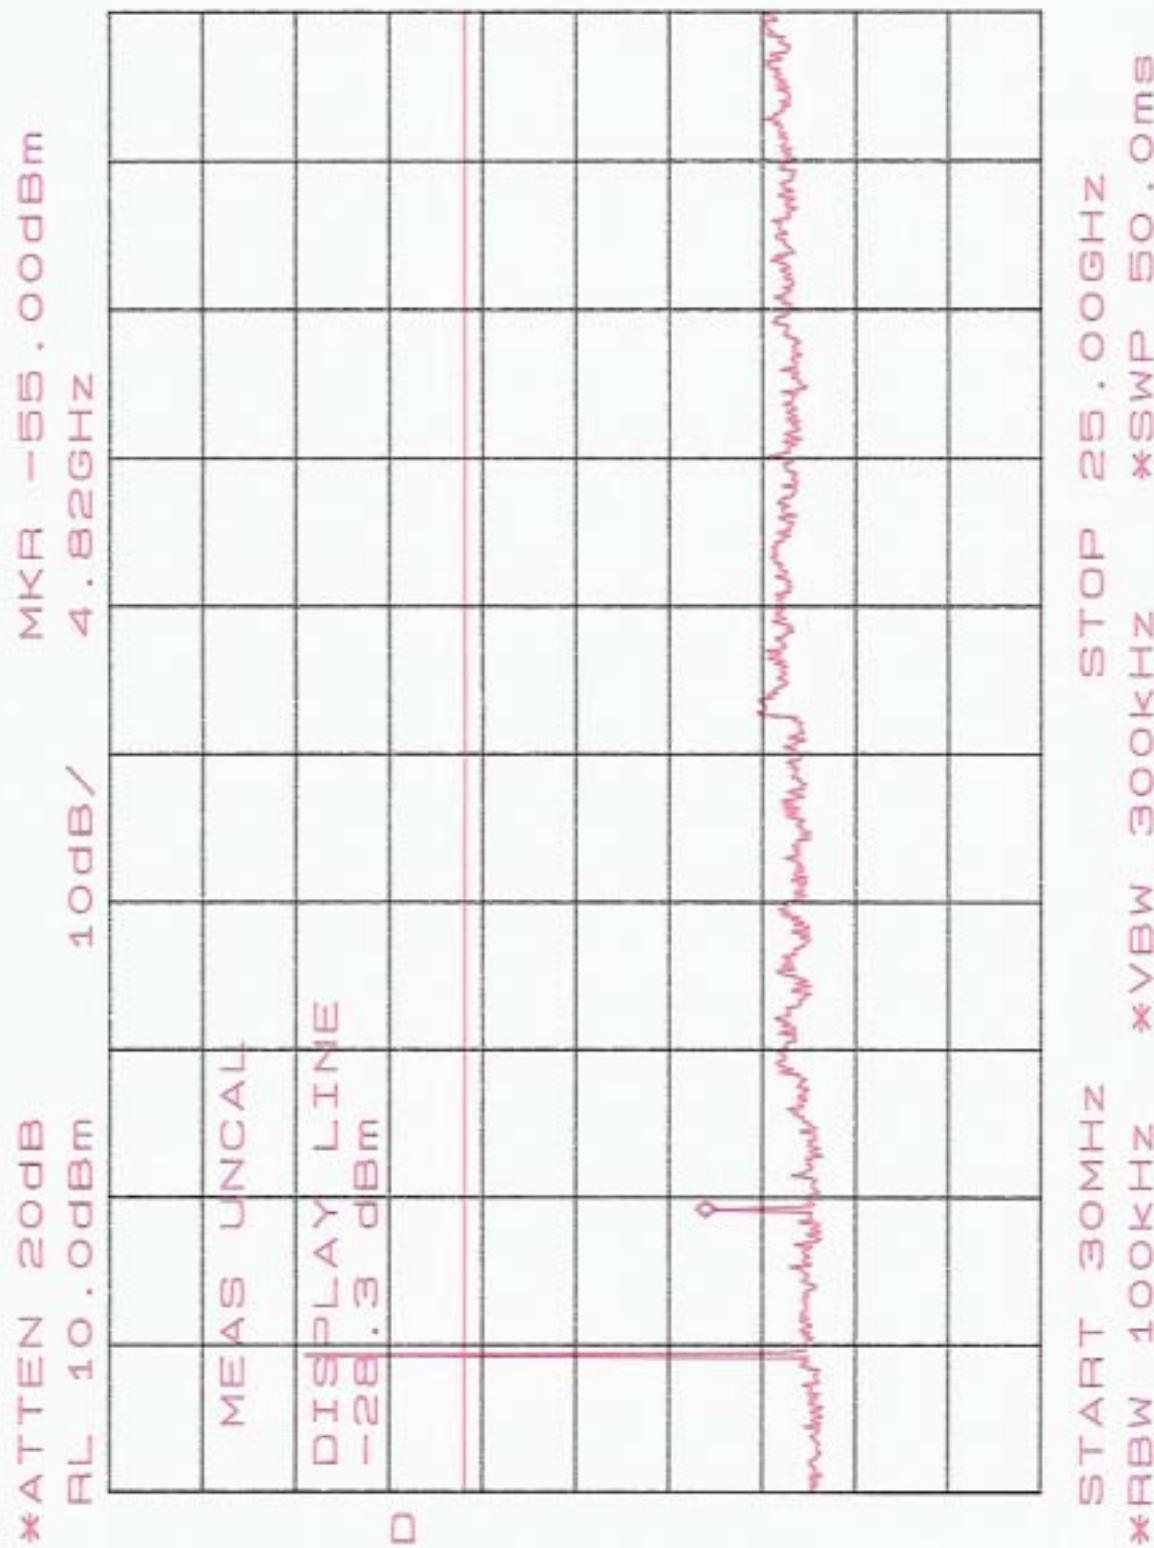

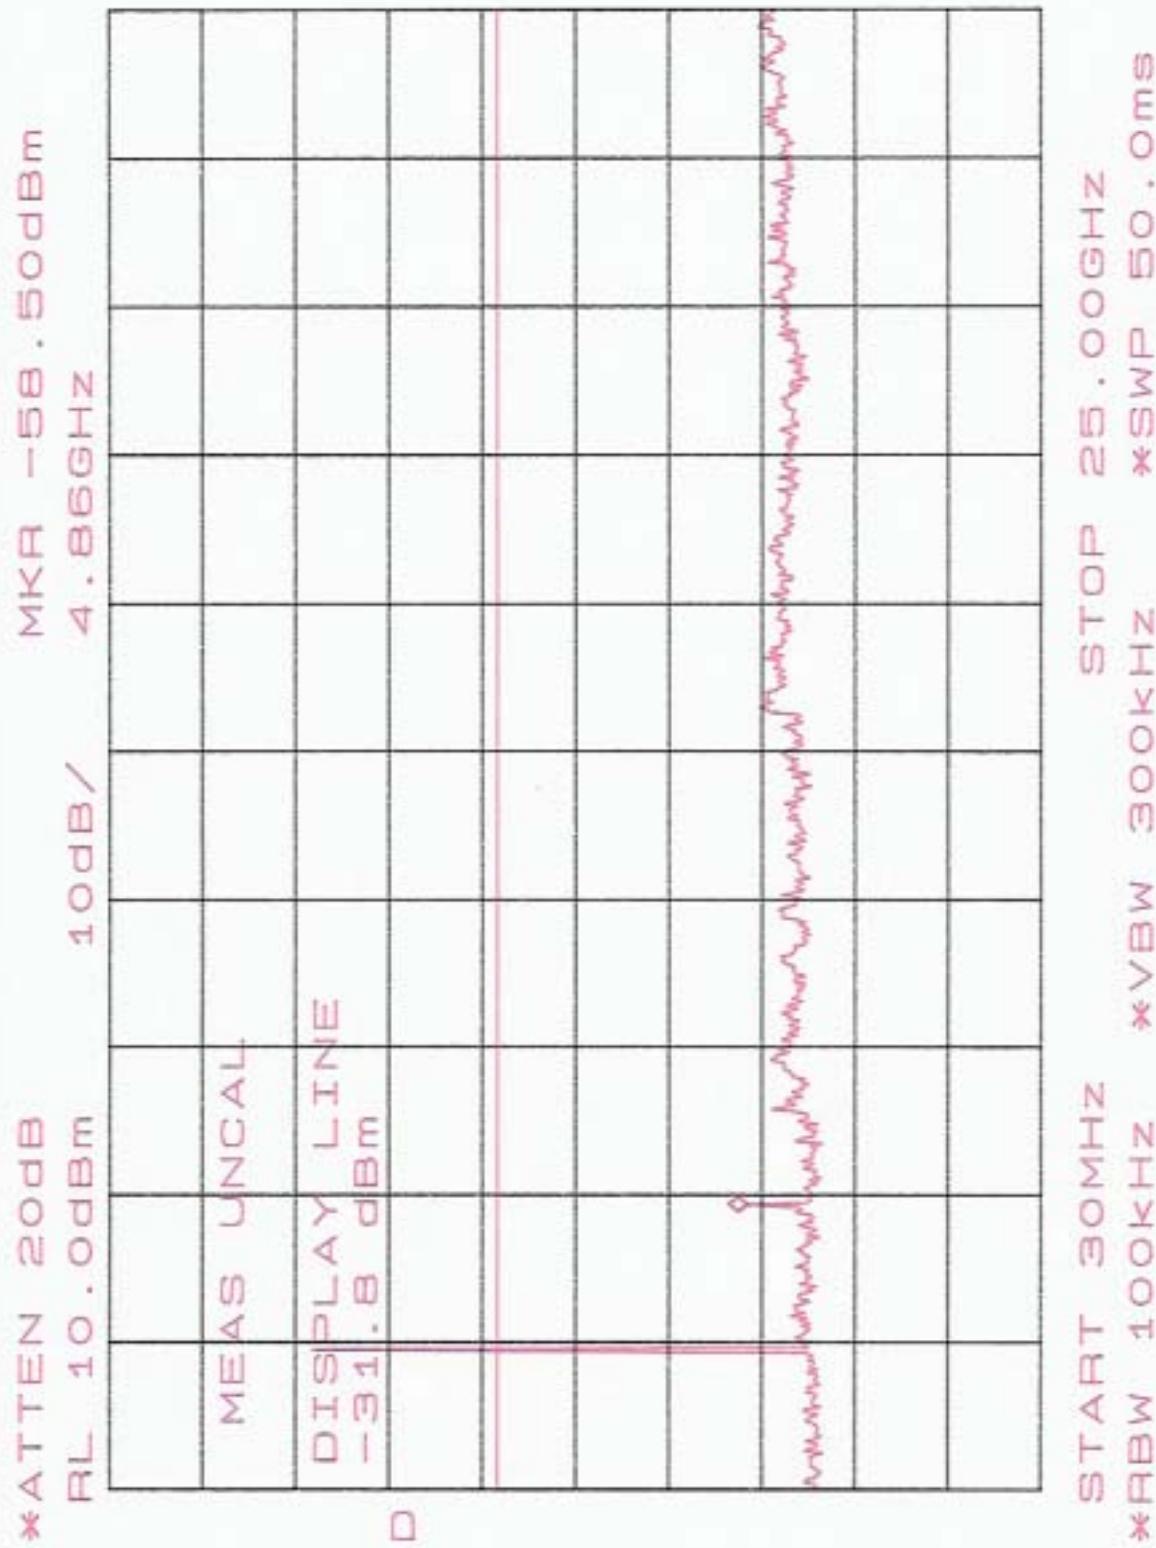

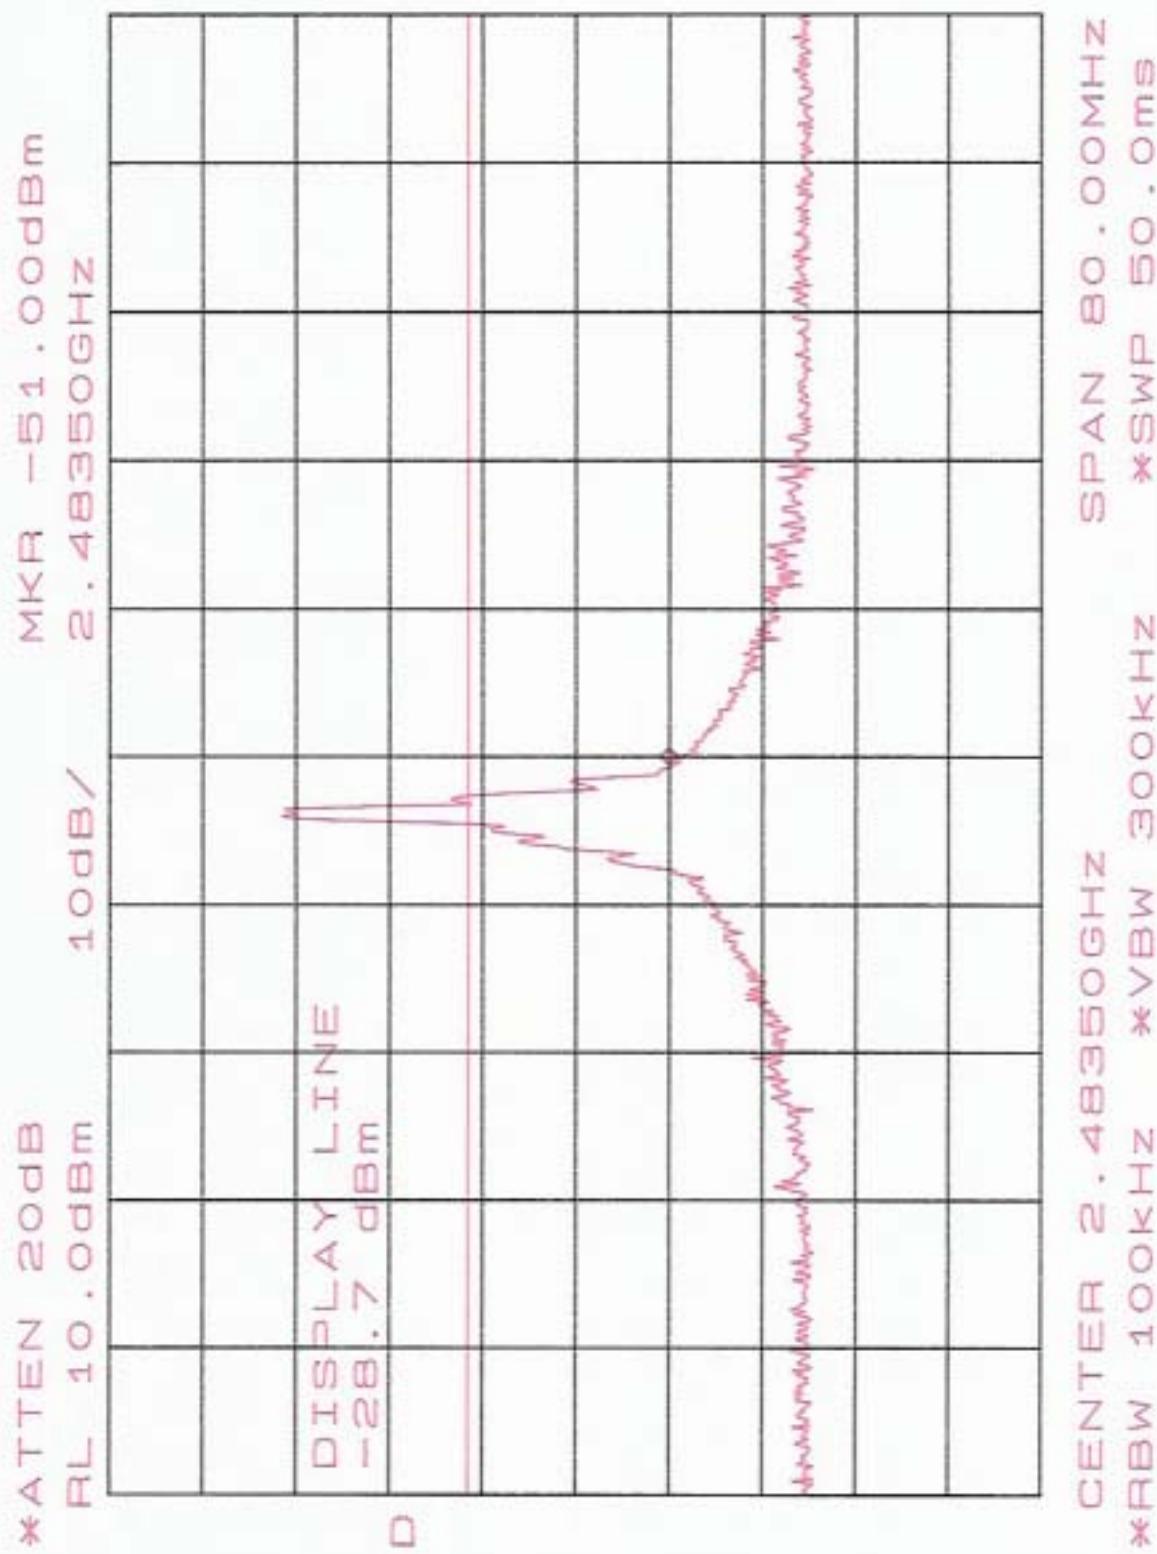

\*ATTEN 20dB RL 10.0dB 10dB/ MKR -5dB 17dB  
4.94GHz

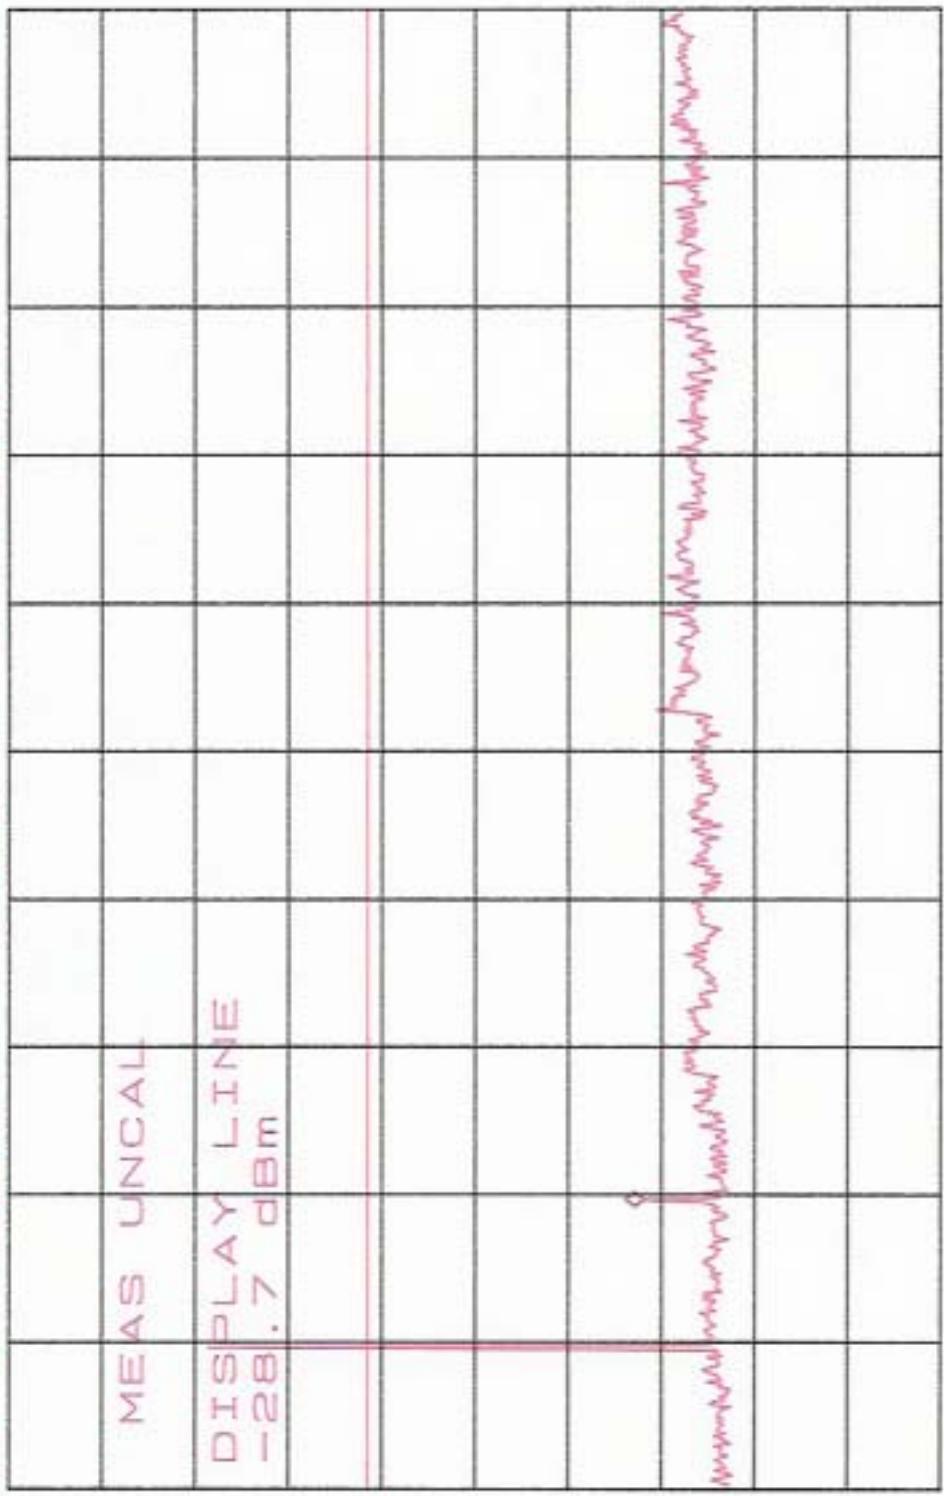

START 30MHz \*RBW 100kHz STOP 25.00GHz \*VBW 300kHz \*SWP 50.0ms

## 10 RADIATED MEASUREMENT AT BANDEDGE WITH FUNDAMENTAL FREQUENCIES

### 10.1 Standard Applicable

According to 15.247(c), radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 10.2 Measurement Procedure

1. Setup the configuration per figure 2 for 2.39GHz and 2.4835GHz measured.
2. Set the spectrum analyzer on 1MHz resolution bandwidth for each frequency measured.
3. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.
4. Repeat step 3 until all frequencies need to be measured were complete.
5. Repeat step 4 with search antenna in vertical polarized orientations.
6. Measurement applied to channel 0, 39, 78, recorded the result.

### 10.3 Measuring Instrument

The following instrument are used for radiated emissions measurement :

Equipment	Manufacturer	Model No.	Next Cal. Due
EMI Test Receiver	Hewlett-Packard	8546A	08/27/2004
Horn Antenna	EMCO	3115	06/05/2004
LogBicone Antenna	Schwarzbeck	9160	10/28/2004
Horn Antenna	EMCO	3116	06/28/2004
Preamplifier	Hewlett-Packard	8449B	09/04/2004
Spectrum Analyzer	Hewlett-Packard	8564EC	09/10/2004

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
2390 & 2483.5	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz

## 10.4 Radiated Emission Data

### a) Channel 0

Operation Mode : Transmitting /Receiving

Fundamental Frequency : 2402 MHz

Test Date : Nov. 29, 2003      Temperature : 24      Humidity : 60 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave	(H/V Max.)		
2390.000	27.1	---	27.0	---	29.0	56.4	---	74.0	54.0	-17.6	222	1.0
2483.500	28.3	---	28.6	---	29.6	58.2	---	74.0	54.0	-15.8	218	1.0

### b) Channel 39

Operation Mode : Transmitting / Receiving

Fundamental Frequency : 2441MHz

Test Date : Nov. 29, 2003      Temperature : 24      Humidity : 60 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave	(H/V Max.)		
2390.000	27.2	---	27.3	---	29.0	56.3	---	74.0	54.0	-17.7	222	1.0
2483.500	28.1	---	28.4	---	29.6	58.0	---	74.0	54.0	-16.0	218	1.0

### c) Channel 78

Operation Mode : Transmitting / Receiving

Fundamental Frequency : 2480 MHz

Test Date : Nov. 29, 2003      Temperature : 24      Humidity : 60 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave	(H/V Max.)		
2390.500	27.2	---	27.1	---	29.0	56.2	---	74.0	54.0	-17.8	218	1.0
2483.500	28.6	---	28.8	---	29.6	58.4	---	74.0	54.0	-15.6	218	1.0

## 11 Number of Hopping Channels

### 11.1 Standard Applicable

According to 15.247(b)(1), for frequency hopping systems, operating in the 2400-2483.5MHz band employing at least 75 hopping channels

### 11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set EUT to hopping operating mode and set spectrum analyzer maximum to measure the number of hopping channels.

### 11.3 Measurement Equipment


Equipment	Manufacturer	Model No.	Next Cal. Due
Plotter	Hewlett-Packard	7440A	N/A
Spectrum Analyzer	Hewlett-Packard	8564EC	09/10/2004

### 11.4 Measurement Data

Test Date : Nov. 29, 2003 Temperature : 24 Humidity : 60 %

Number of hopping channels = 79 channels

*Note: Please see Next pages for plotted datas*

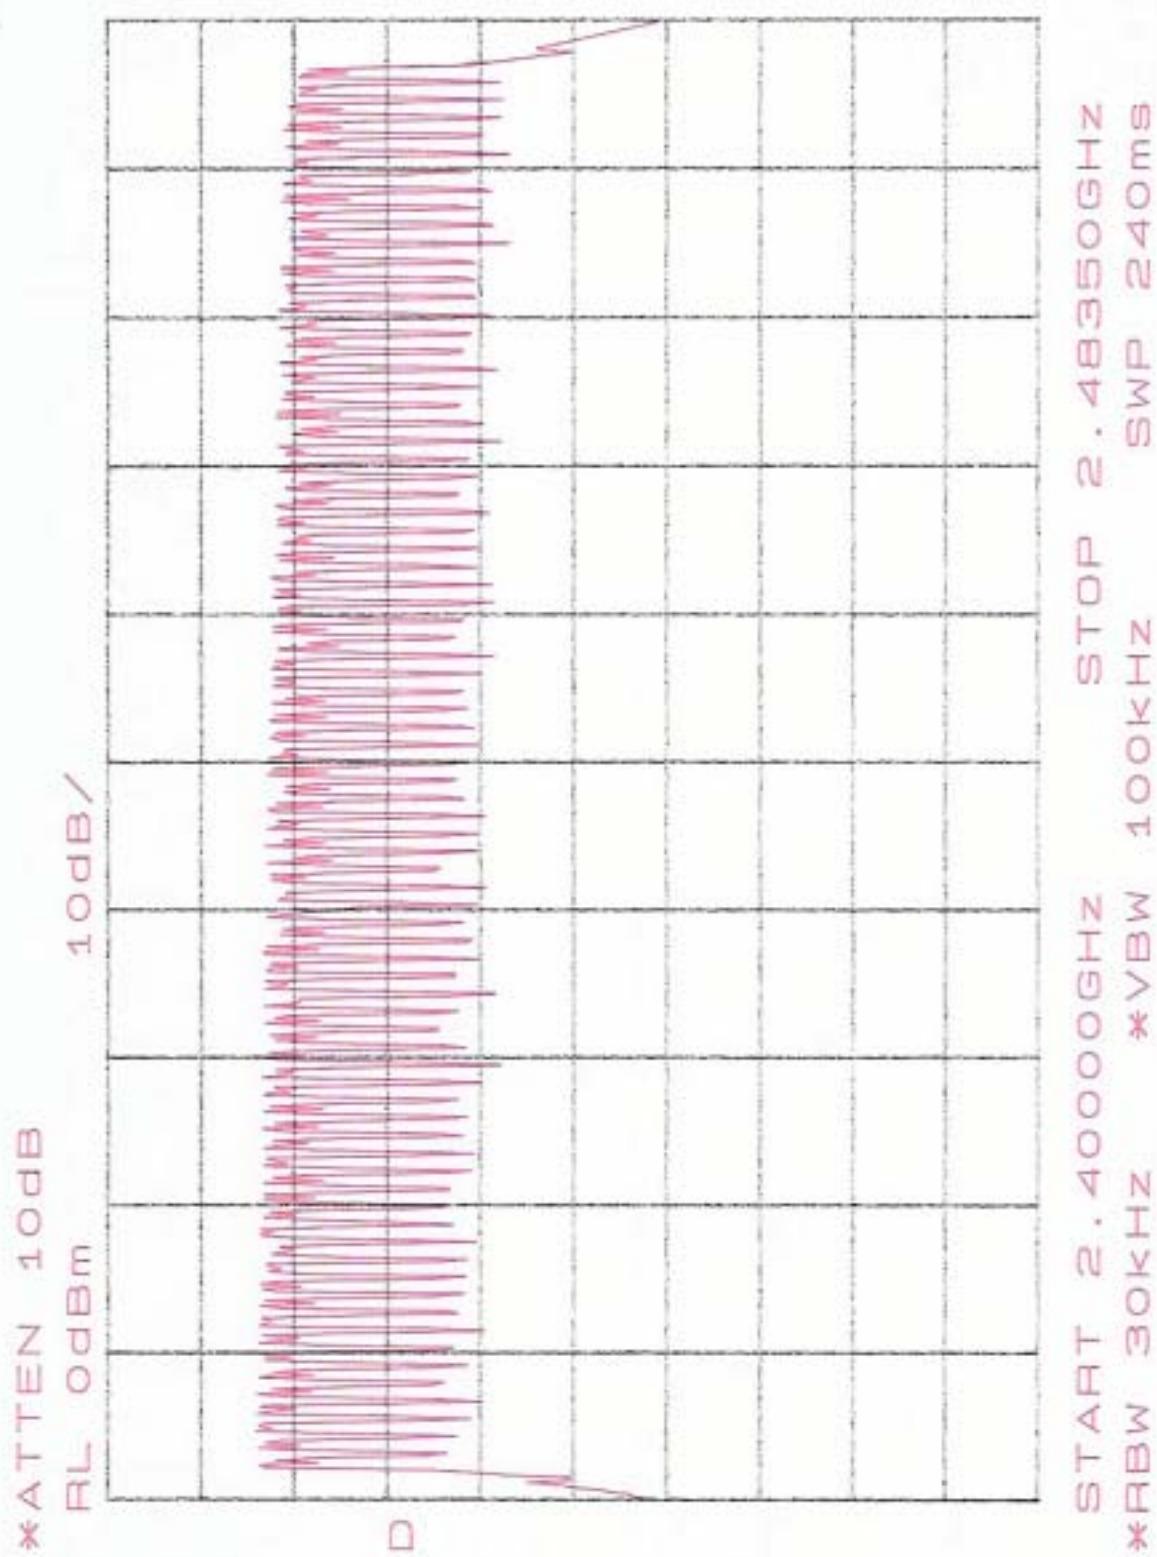

## 12 Channel Carrier Frequencies Separation

### 12.1 Standard Applicable

According to 15.247(a)(1), the frequency hopping system shall have hopping channel carrier frequencies separated by minimum of 25kHz or the 20dB bandwidth of hopping channel, whichever is greater.

### 12.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measurement frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set spectrum analyzer maximum hold to measure channel carrier frequency , then adjust channel carrier frequency to adjacent channel.
4. Repeat above procedure until all measured frequencies were complete.

### 12.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Plotter	Hewlett-Packard	7550A	N/A
Spectrum Analyzer	Hewlett-Packard	8564EC	09/10/2004

## 12.4 Measurement Data


Test Date : Nov. 29, 2003


Temperature : 24


Humidity : 60 %

- a) 2402MHz channel separation is 1.0MHz
- b) 2441MHz channel separation is 1.0MHz
- c) 2480MHz channel separation is 1.0MHz

*Note: Please see Next pages for plotted datas*

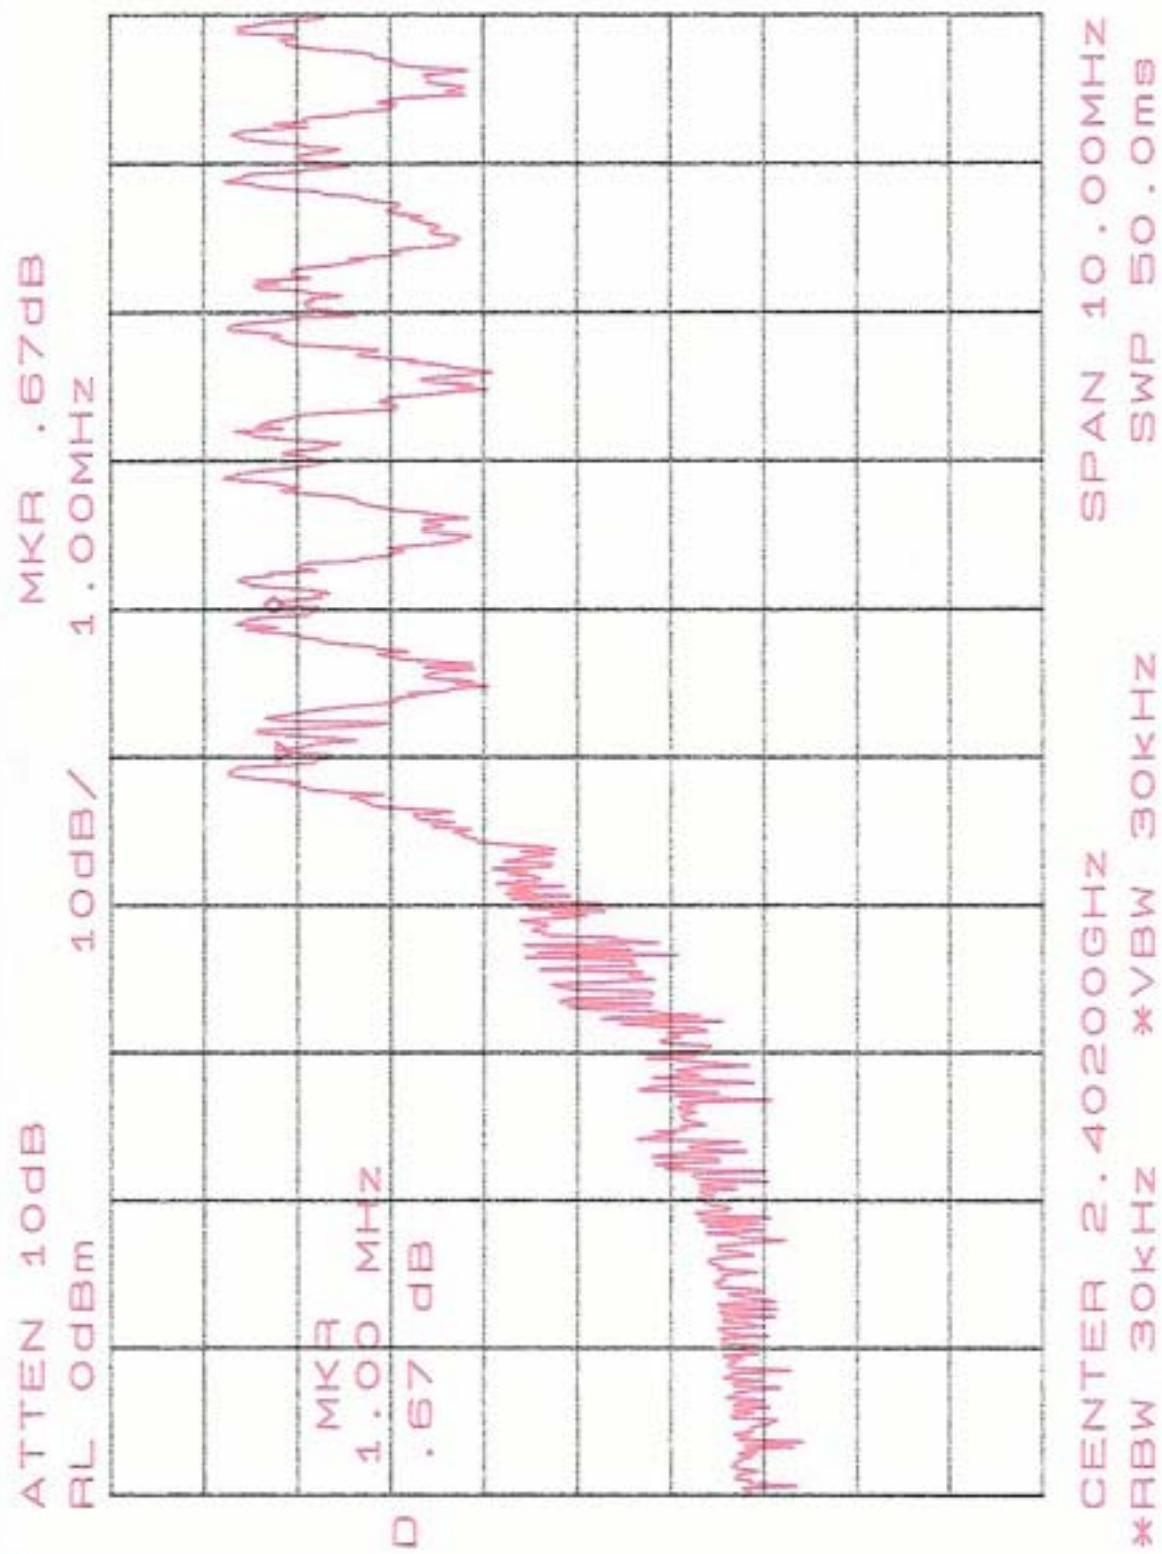

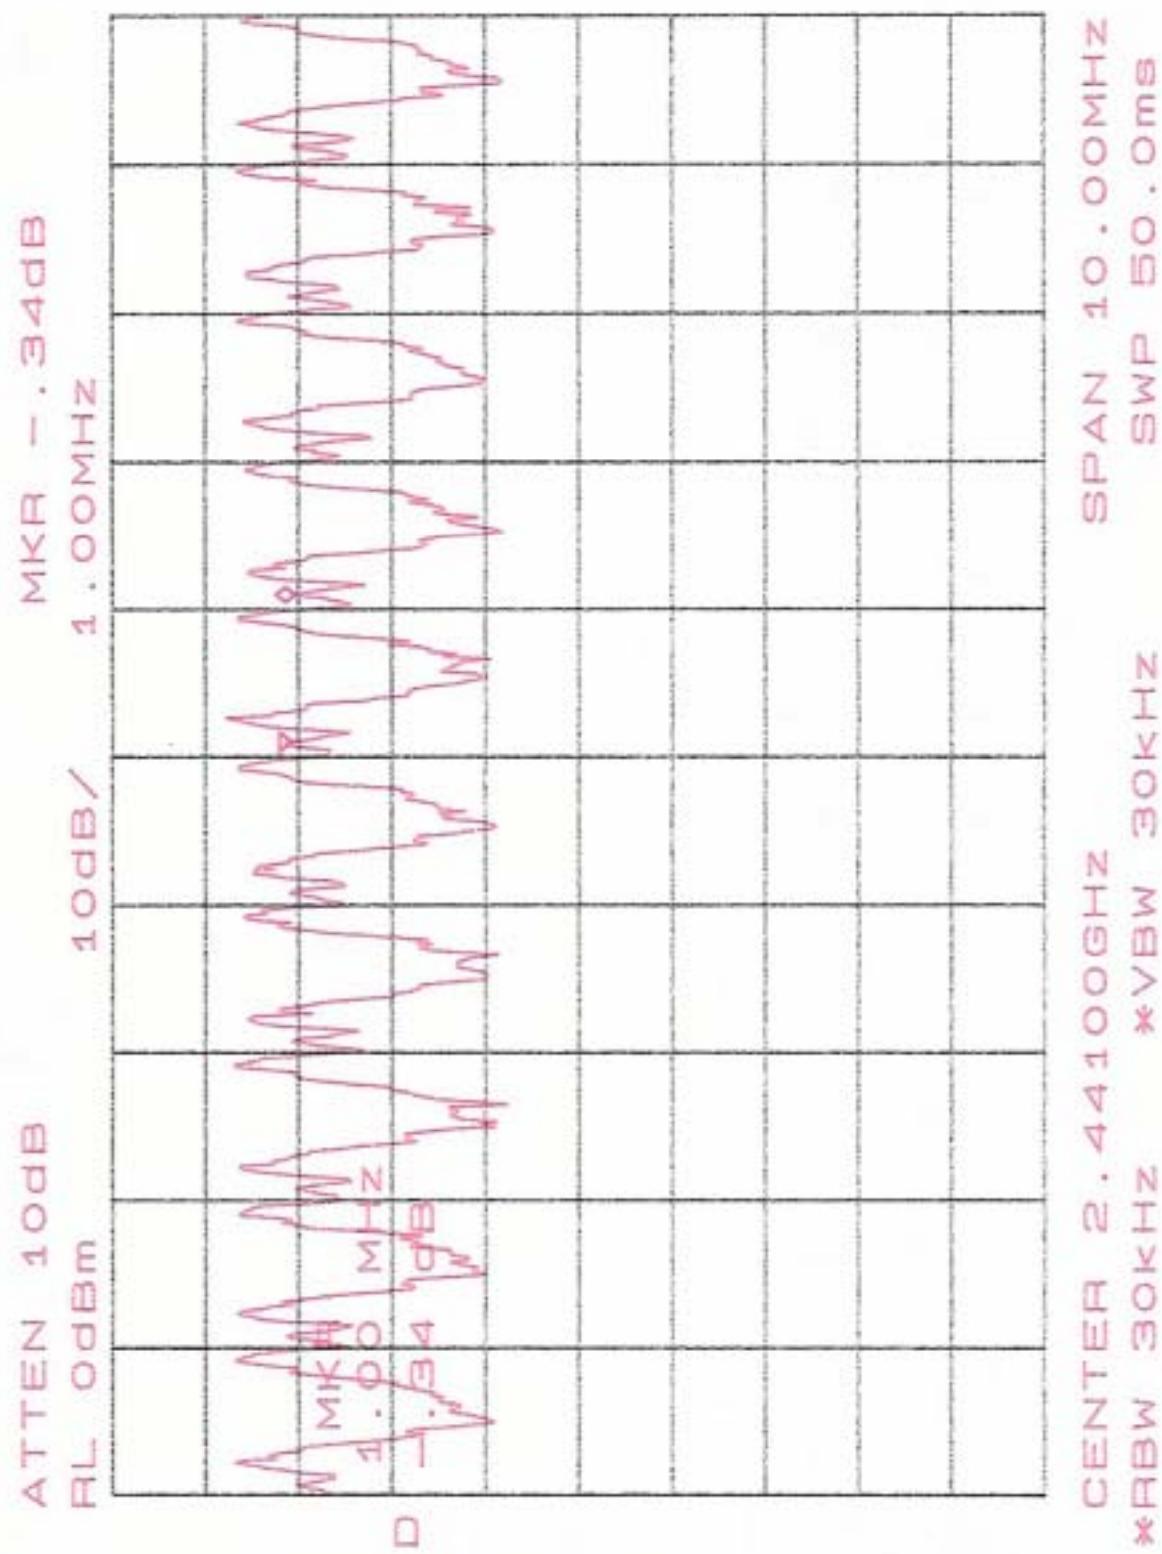

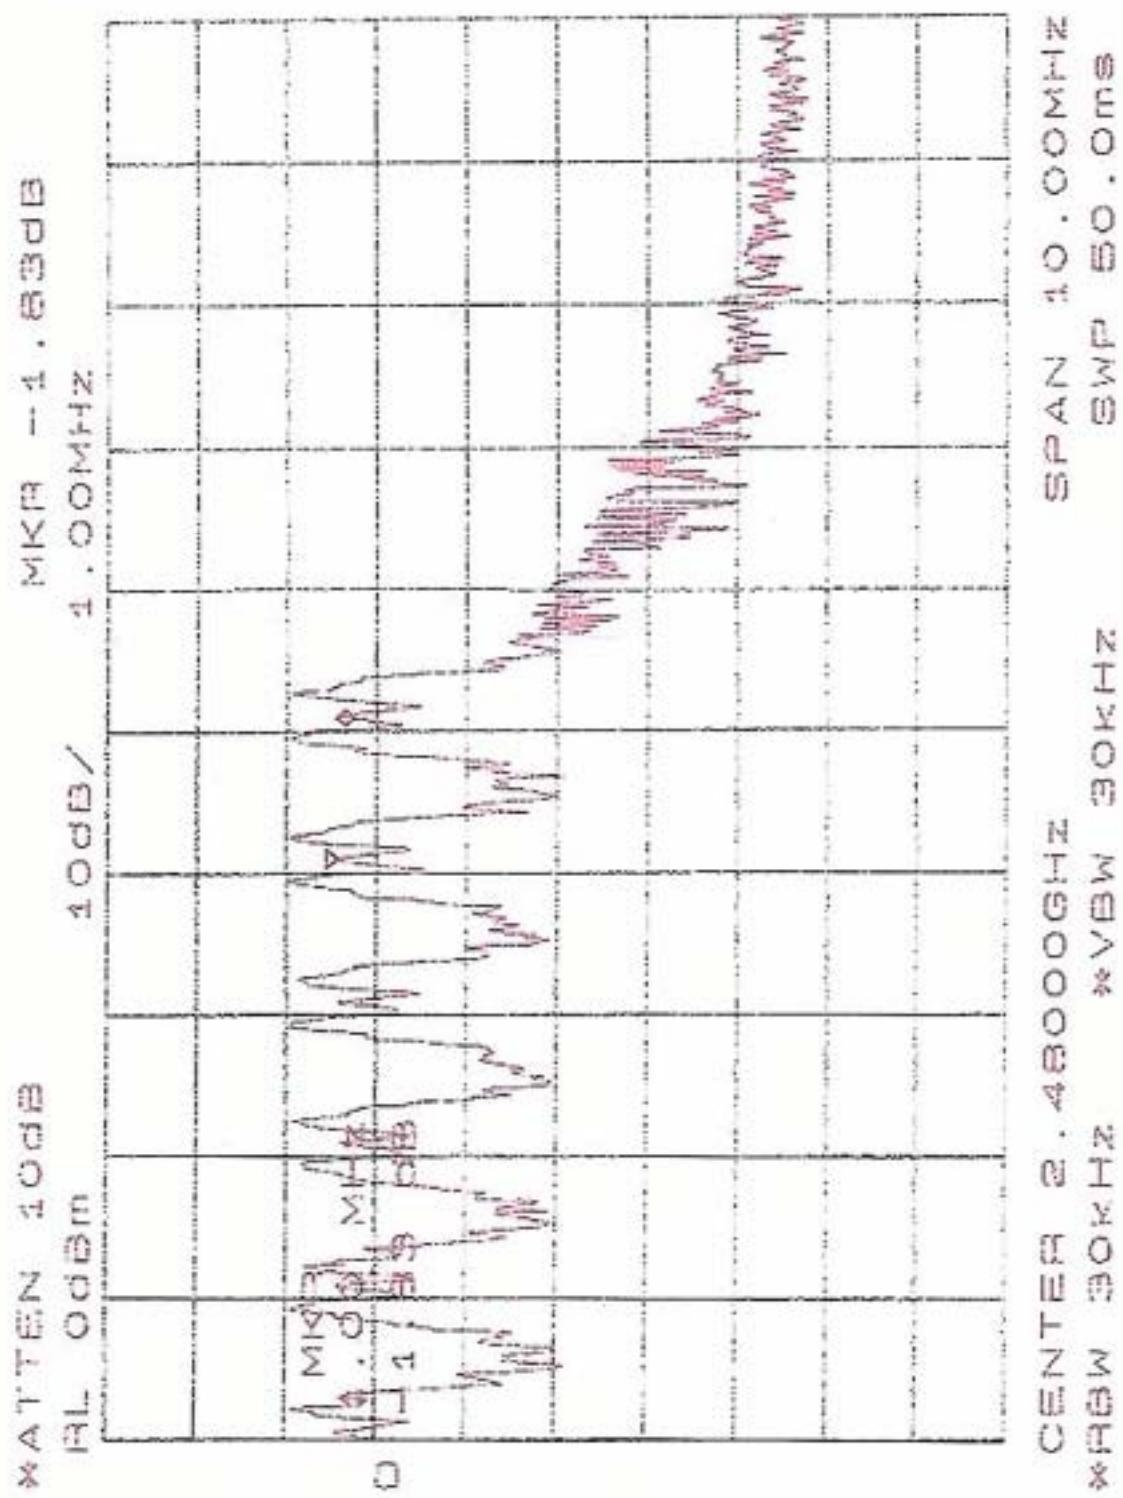

## 13 POWER SPECTRAL DENSITY


### 13.1 Standard Applicable

For frequency hopping system, according to 15.247(d), for digitally modulated, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

### 13.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 3kHz, VBW to 30 kHz, sweep 300kHz and sweep time 100 sec.
4. Measure the highest amplitude appearing on spectral display and record the level to calculate result data.
5. Repeat above procedures until all frequencies measured were complete.

Figure 5: Output power and measurement configuration.

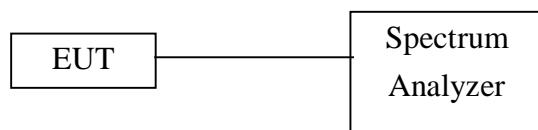

### 13.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Plotter	Hewlett-Packard	7550A	N/A
Spectrum Analyzer	Hewlett-Packard	8564EC	09/10/2004

### 13.4 Measurement Data


Test Date : Nov. 29, 2003


Temperature : 24


Humidity : 60 %

- a) Channel 0 : Power Spectral Density is -16.17 dBm
- b) Channel 39 : Power Spectral Density is -16.83 dBm
- c) Channel 78 : Power Spectral Density is -18.00 dBm

*Note: Please see next pages for plotted datas*

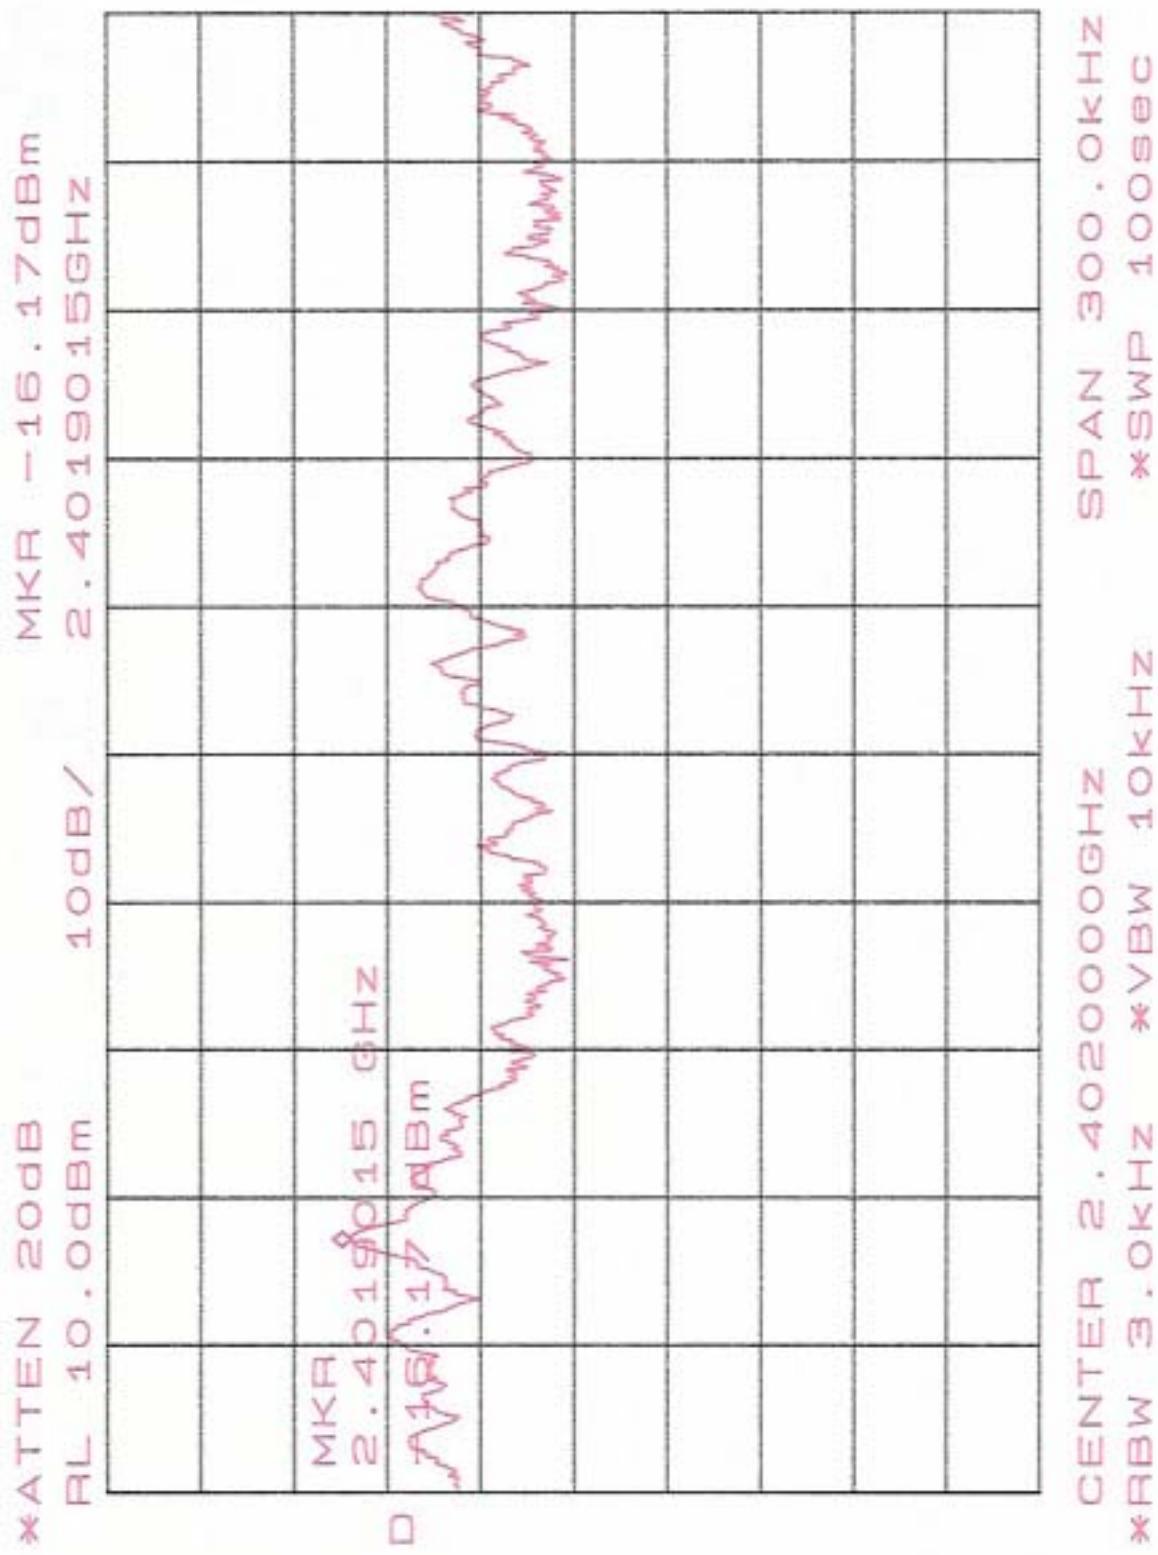

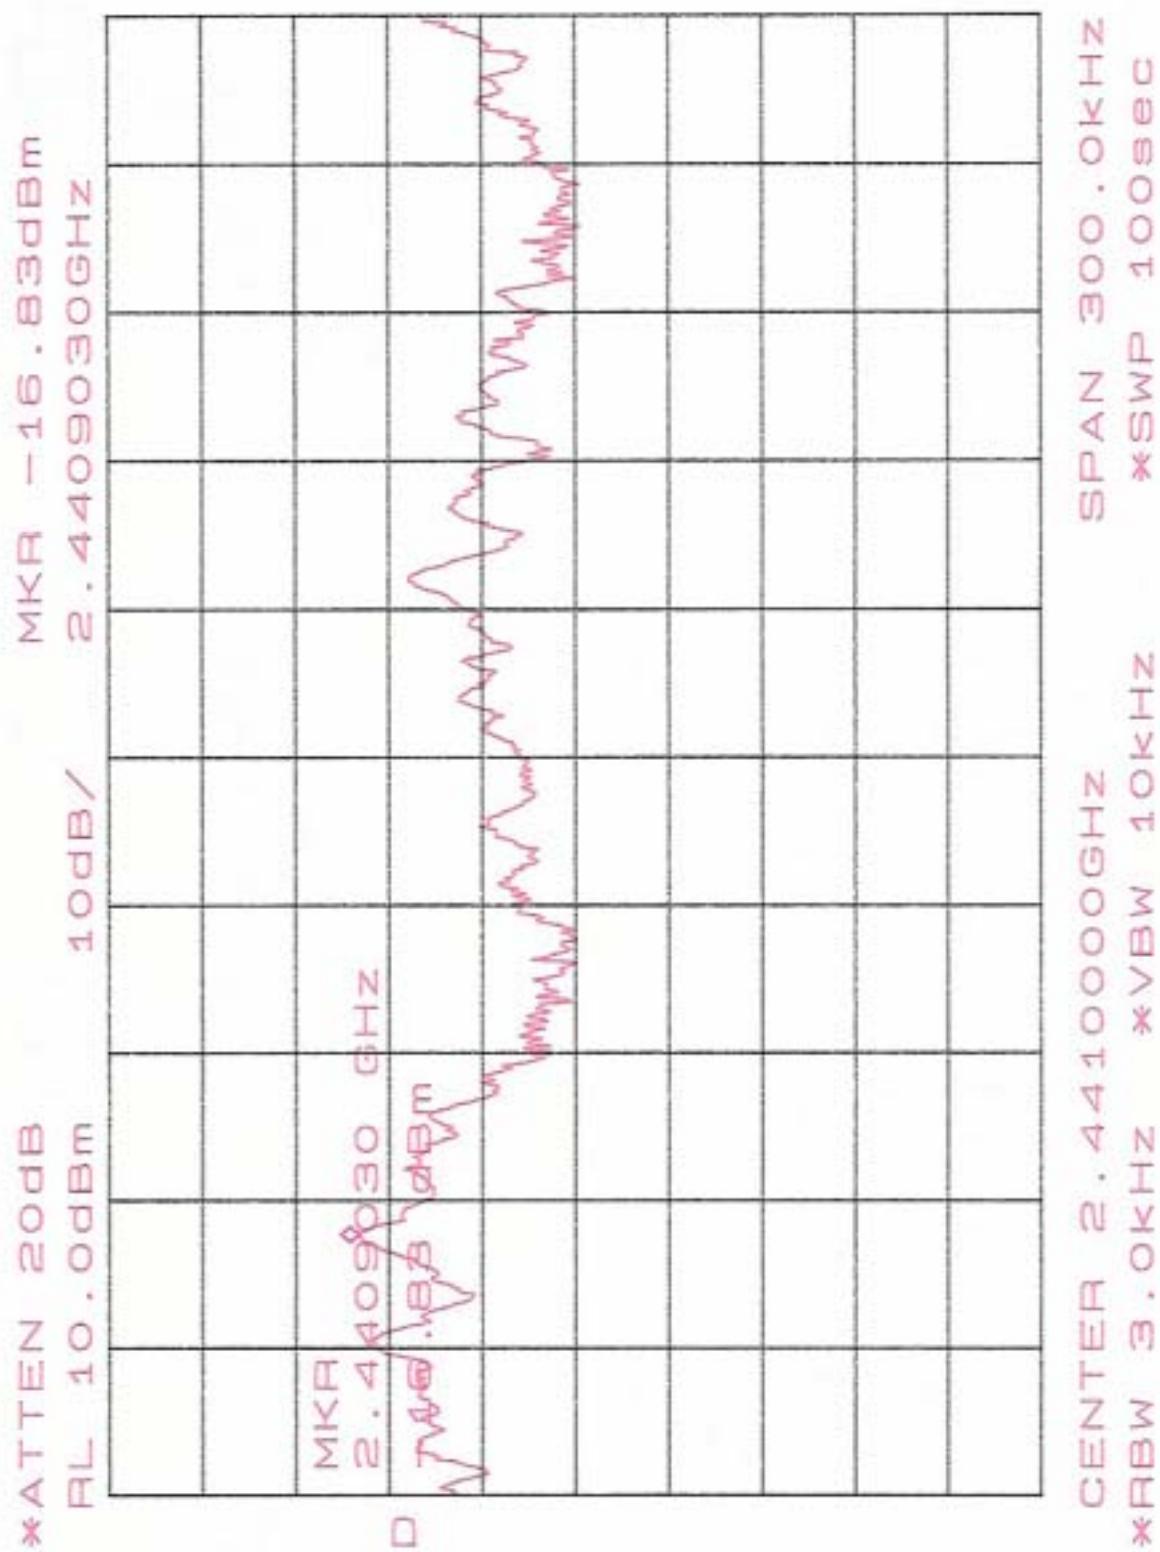

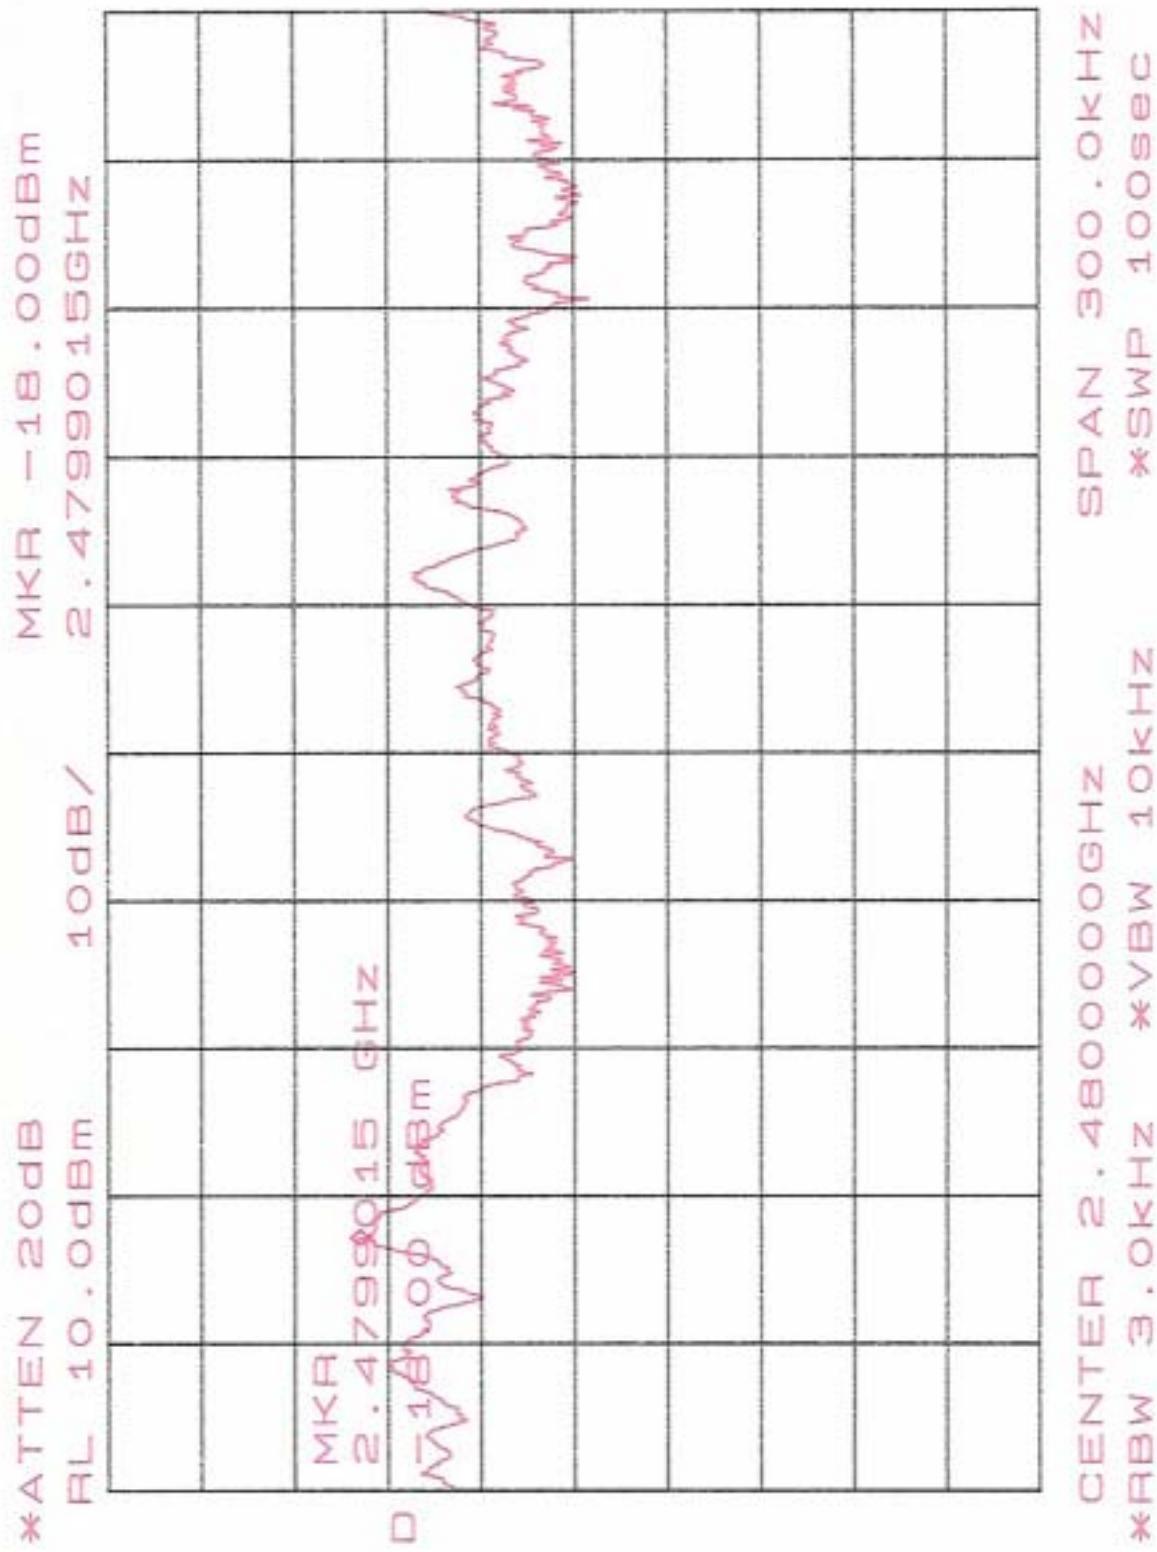

## 14 Dwell Time

## 14.1 Standard Applicable

According to 15.247(a)(1)(iii), frequency hopping system in the 2400-2483.5MHz band employing at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 second multiplied by the number of hopping channels employed.

## 14.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5.

### 14.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Plotter	Hewlett-Packard	7550A	N/A
Spectrum Analyzer	Hewlett-Packard	8564EC	09/10/2004

## 14.4 Measurement Data

Test Date : Nov. 29, 2003      Temperature : 24      Humidity : 60 %

Test period=0.4(second/channel)×79 channel=31.6sec

$$a) \quad 2402\text{MHz dwell time} = 0.6033\text{ms} \times \frac{42}{500\text{ms}} \times \frac{31.6}{79} = 20.271\text{ms}$$

b) 2441MHz dwell time=  $0.6017\text{ms} \times \frac{42}{500\text{ms}} \times \frac{31.6}{79} = 20.217\text{ms}$

c) 2480MHz dwell time=  $0.6033\text{ms} \times \frac{42}{500\text{ms}} \times \frac{31.6}{79} = 20.271\text{ms}$

*Note: Please see Next pages for plotted data*

