



FCC ID: RNIX83381435-D

Issued on Nov. 12, 2004

Report No.: FR4O0803

FCC TEST REPORT

CATEGORY : Portable

PRODUCT NAME : Air Flo Wireless Controller for Xbox (2.4G)

FCC ID. : RNIX83381435-D

FILING TYPE : Certification

BRAND NAME : NYKO

MODEL NAME : 81435

APPLICANT : Esel International Co., Ltd.

Rm 15-17, 5/F, Cardinal Ind, Bldg, No.17 On Lok Mun St.,
Faniling, N.T. Hong Kong

MANUFACTURER : Eastem Sources Electronics Manufacturer

Daji Industrial Zone, Hengshan District, Shipai Town,
Dongguan City, Guangdong China

ISSUED BY : SPORTON INTERNATIONAL INC.

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., His Chih, Taipei Hsien,
Taiwan, R.O.C.

Statements:

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

Certificate or Test Report could not be used by the applicant to claim the product endorsement by CNLA, NVLAP or any agency of U.S. government.

The test equipment used to perform the test are calibrated and traceable to NML/ROC or NIST/USA.

NVLAP[®]

Lab Code: 200079-0



Table of Contents

History of this test report.....	ii
CERTIFICATE OF COMPLIANCE.....	iii
1. General Description of Equipment under Test.....	1
1.1. Applicant	1
1.2. Manufacturer.....	1
1.3. Basic Description of Equipment under Test.....	1
1.4. Features of Equipment under Test	1
1.5. Table for Carrier Frequencies	1
2. Test Configuration of the Equipment under Test.....	2
2.1. Connection Diagram of Test System	2
2.2. The Test Mode Description.....	2
2.3. Description of Test Supporting Units	2
3. General Information of Test.....	3
3.1. Test Facility	3
3.2. Test Conditions	3
3.3. Standards for Methods of Measurement.....	3
3.4. DoC Statement	3
3.5. Frequency Range Investigated	3
3.6. Test Distance	3
3.7. Test Software	3
4. List of Measurements.....	4
4.1. Summary of the Test Results.....	4
5. Test Result	5
5.1. Carrier Field Strength.....	5
5.2. Test of AC Power Line Conducted Emission.....	7
5.3. Test of Spurious Radiated Emission.....	8
5.4. Antenna Requirements	20
6. List of Measuring Equipments Used	21
Appendix A. Photographs of EUT.....	A1 ~ A17



FCC ID: RNIX83381435-D
Issued on Nov. 12, 2004

Report No.: FR400803

History of this test report

Original Report Issue Date: Nov. 12, 2004

Report No.: FR400803

- No additional attachment.
- Additional attachment were issued as following record:



FCC ID: RNIX83381435-D

Issued on Nov. 12, 2004

Report No.: FR4O0803

CERTIFICATE OF COMPLIANCE

with

47 CFR FCC Part 15 Subpart C (Section 15.249)

PRODUCT NAME : Air Flo Wireless Controller for Xbox (2.4G)

BRAND NAME : NYKO

MODEL NAME : 81435

APPLICANT : **Esel International Co., Ltd.**

Rm 15-17, 5/F, Cardinal Ind, Bldg, No.17 On Lok Mun St.,
Faniling, N.T. Hong Kong

MANUFACTURER : **Eastem Sources Electronics Manufacturer**

Daji Industrial Zone, Hengshan District, Shipai Town,
Dongguan City, Guangdong China

I **HEREBY** CERTIFY THAT:

The measurements shown in this test report were made in accordance with the procedures given in ANSI C63.4 - 2003 and all test are performed according to 47 CFR FCC Part 15. Testing was carried out on Nov. 10, 2004 at SPORTON International Inc. LAB.


Dr. Alan Lane
Vice General Manager
SPORTON International Inc.



1. General Description of Equipment under Test

1.1. Applicant

Esel International Co., Ltd.

Rm 15-17, 5/F, Cardinal Ind, Bldg, No.17 On Lok Mun St., Fanling, N.T. Hong Kong

1.2. Manufacturer

Eastem Sources Electronics Manufacturer

Daji Industrial Zone, Hengshan District, Shipai Town, Dongguan City, Guangdong China

1.3. Basic Description of Equipment under Test

This product is a wireless XBOX Controller and its receiver with FSK modulation RF solution. The technical data has been listed on section " Features of Equipment under Test ". This report is for the controller part only.

1.4. Features of Equipment under Test

Items	Description
Type of Modulation	FSK
Number of Channels	80
Operating Frequency Band	2402MHz ~ 2481MHz
Carrier Frequency	Please reference table below.
Antenna Type	Printed Antenna
Mode of operation	Half-Duplex
Testing Duty Cycle	50%
Power Rating (DC/AC, Voltage)	6 VDC
Temperature Range (Operating)	0~ 40 °C

1.5. Table for Carrier Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	39	2441 MHz	79	2481MHz	-	-




FCC ID: RNIX83381435-D

Issued on Nov. 12, 2004

Report No.: FR4O0803

2. Test Configuration of the Equipment under Test

2.1. Connection Diagram of Test System

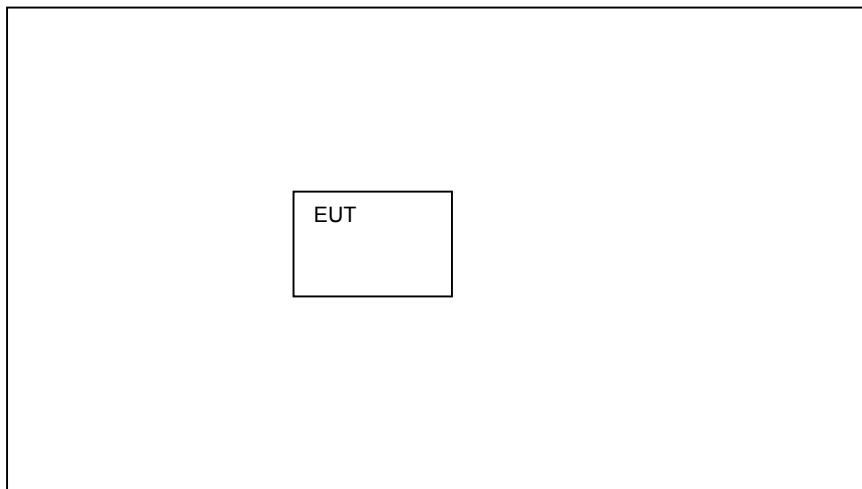

2.2. The Test Mode Description

Spurious emission below 1GHz is independent of channel selection, so only channel 79 was worst case tested.

AC conduction emission is independent of channel selection, so only channel 79 was worst case tested.

2.3. Description of Test Supporting Units

The EUT was tested alone. No supporting device is needed for testing.



3. General Information of Test

3.1. Test Facility

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiag, Tao Yuan Hsien, Taiwan, R.O.C.
: TEL 886-3-327-3456
: FAX 886-3-318-0055

Test Site No : 03CH03-HY

3.2. Test Conditions

Normal Voltage : 6 VDC
Extreme Voltages : NA
Normal Temperature : 20°C
Extreme Temperature : 0°C and 40°C

3.3. Standards for Methods of Measurement

Here is the list of the standards followed in this test report.

ANSI C63.4-2003

47 CFR Part 15 Subpart C (Section 15.249)

3.4. DoC Statement

This EUT is also classified as a device of computer peripheral Class B which DoC has to be followed. It has been verified according to the rule of 47 CFR part 15 Subpart B, and found that all the requirements has been fulfilled.

3.5. Frequency Range Investigated

Radiated emission test: from 30 MHz to 10th carrier harmonic

3.6. Test Distance

The test distance of radiated emission (30MHz~1GHz) test from antenna to EUT is 3 M.

The test distance of radiated emission (1GHz~10th carrier harmonic) test from antenna to EUT is 1 M.

3.7. Test Software

There is no special test software, the channel can be switched by the hardware key.



FCC ID: RNIX83381435-D

Issued on Nov. 12, 2004

Report No.: FR4O0803

4. List of Measurements

4.1. Summary of the Test Results

Applied Standard: 47 CFR Part 15 and Part 2

Paragraph	FCC Rule	Description of Test	Result
5.1	15.249	Maximum Carrier Field Strength	Pass
5.2	15.207	AC Power Line Conducted Emission	NA
5.3	15.209/15.249	Spurious Radiated Emission	Pass
5.4	15.203	Antenna Requirement	Pass

5. Test Result

5.1. Carrier Field Strength


5.1.1 Measuring Instruments

Item 1~9 of the table on section 7.

5.1.2 Test Procedures

1. Configure the EUT according to ANSI C63.4.
2. The EUT was placed on the top of the turn table 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turn table.
4. Power on the EUT and all the supporting units.
5. The turn table was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
9. For emission above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.

5.1.3 Test Setup Layout

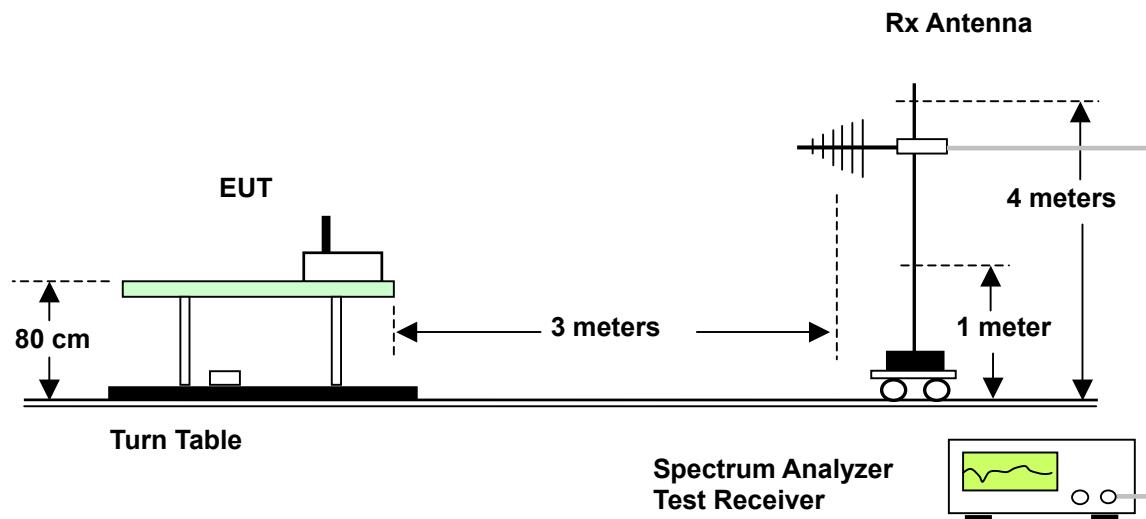



FCC ID: RNIX83381435-D

Issued on Nov. 12, 2004

Report No.: FR4O0803

5.1.4 Test Result

Test Channel	CH 00	Temperature	25 deg. C	Tested By	Ted Chiu
Frequency	2402MHz	Humidity	53%		

Frequency	Level	Over	Read	Probe	Cable	Preamp	Limit	Detect
(MHz)	(dBuV/m)	Lmimt	Level	Factor	Loss	Factor	Line	Mode
2389.230	54.94	-19.06	24.94	28.28	1.72	0.00	114	Peak
2389.230	42.78	-11.22	12.78	28.28	1.72	0.00	94	AV
2402.340	68.67	14.67	38.63	28.31	1.73	0.00	114	Peak
2402.340	73.57	-0.43	43.53	28.31	1.73	0.00	94	AV

Test Channel	CH 39	Temperature	25 deg. C	Tested By	Ted Chiu
Frequency	2441MHz	Humidity	53%		

Frequency	Level	Over	Read	Probe	Cable	Preamp	Limit	Detect
(MHz)	(dBuV/m)	Lmimt	Level	Factor	Loss	Factor	Line	Mode
2441.860	72.89	-1.11	42.72	28.40	1.77	0.00	114	Peak
2441.860	68.61	14.61	38.44	28.40	1.77	0.00	94	AV

Test Channel	CH 79	Temperature	25 deg. C	Tested By	Ted Chiu
Frequency	2481MHz	Humidity	63%		

Frequency	Level	Over	Read	Probe	Cable	Preamp	Limit	Detect
(MHz)	(dBuV/m)	Lmimt	Level	Factor	Loss	Factor	Line	Mode
2480.810	75.37	1.37	45.10	28.48	1.79	0.00	114	Peak
2480.810	70.89	16.89	40.62	28.48	1.79	0.00	94	AV
2484.000	63.50	-10.50	33.22	28.49	1.79	0.00	114	Peak
2484.000	45.27	-8.73	14.99	28.49	1.79	0.00	94	AV



FCC ID: RNIX83381435-D
Issued on Nov. 12, 2004

Report No.: FR4O0803

5.2. Test of AC Power Line Conducted Emission

This EUT is battery powered, so there is no need to test this item.

5.3. Test of Spurious Radiated Emission


5.3.1. Measuring Instruments

Please reference item 6~17 in chapter 6 for the instruments used for testing.

5.3.2. Test Procedures

1. Configure the EUT according to ANSI C63.4.
2. The EUT was placed on the top of the turn table 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turn table.
4. Power on the EUT and all the supporting units.
5. The turn table was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
9. For emission above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
10. If the emission level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz and average method for above the 1GHz. the reported.
11. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB higher than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.3.3. Test Setup Layout

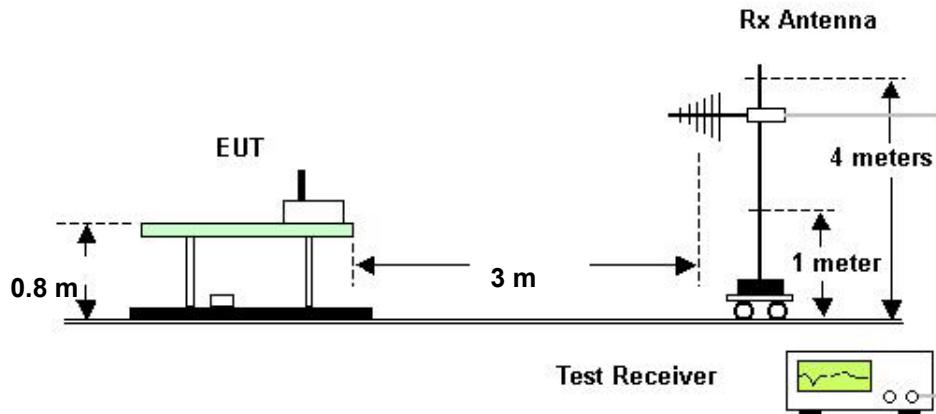



FCC ID: RNIX83381435-D


Issued on Nov. 12, 2004

Report No.: FR4O0803

5.3.4. Test Results for CH 79 / 2481MHz (for emission below 1GHz)

- Temperature: 25°C
- Relative Humidity: 53%
- Duty Cycle of the Equipment During the Test: 50%
- Test Engineer: Ted Chiu

(A) **Polarization: Horizontal**

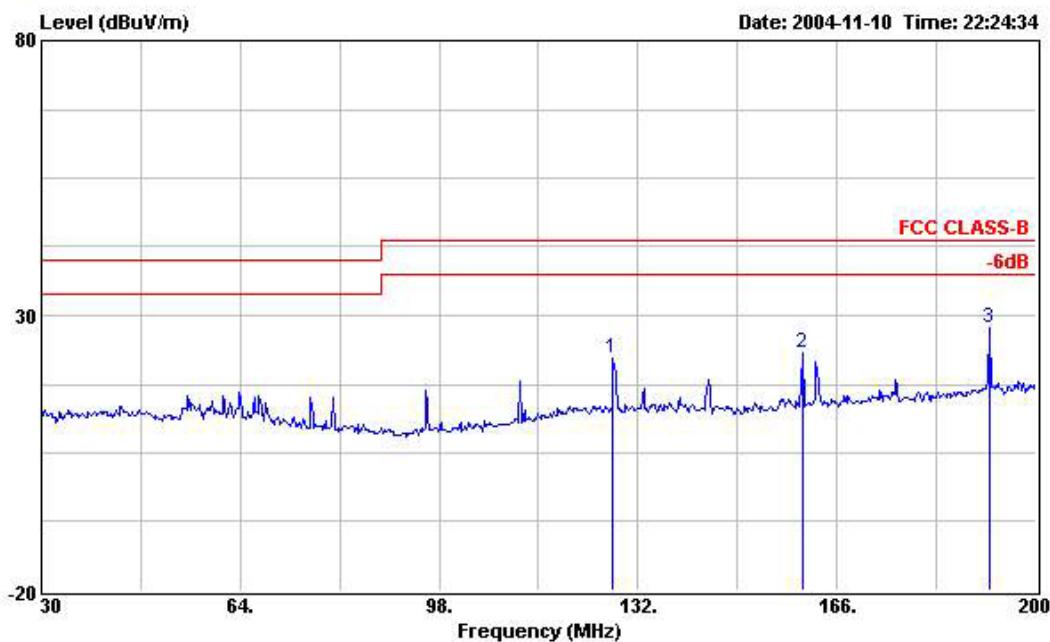


Freq	Level	Over Limit	Limit Line	Read	Probe	Cable	Preampl	Ant Pos	Table Pos
				Level	Factor	Loss	Factor		
1	127.750	22.11	-21.39	43.50	34.92	12.27	2.06	27.14	Peak
2	160.220	23.12	-20.38	43.50	35.25	12.64	2.31	27.08	Peak
3	192.180	27.69	-15.81	43.50	37.04	15.17	2.49	27.01	Peak



FCC ID: RNIX83381435-D

Issued on Nov. 12, 2004

Report No.: FR4O0803

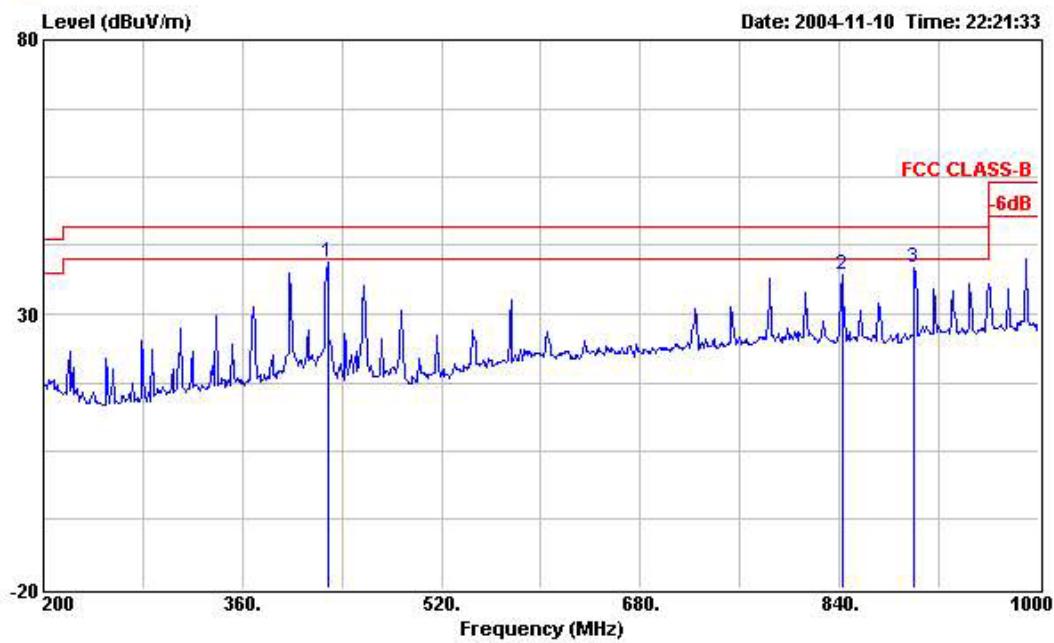

Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Ant Pos	Table Pos
		Limit	Line	Level	Factor	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg
1	428.800	39.27	-6.73	46.00	46.90	16.57	3.61	27.81	Peak
2	842.400	37.07	-8.93	46.00	37.47	21.81	5.28	27.49	Peak
3	900.000	38.56	-7.44	46.00	38.72	21.70	5.34	27.20	Peak




FCC ID: RNIX83381435-D

Issued on Nov. 12, 2004

Report No.: FR4O0803

(B) Polarization: Vertical

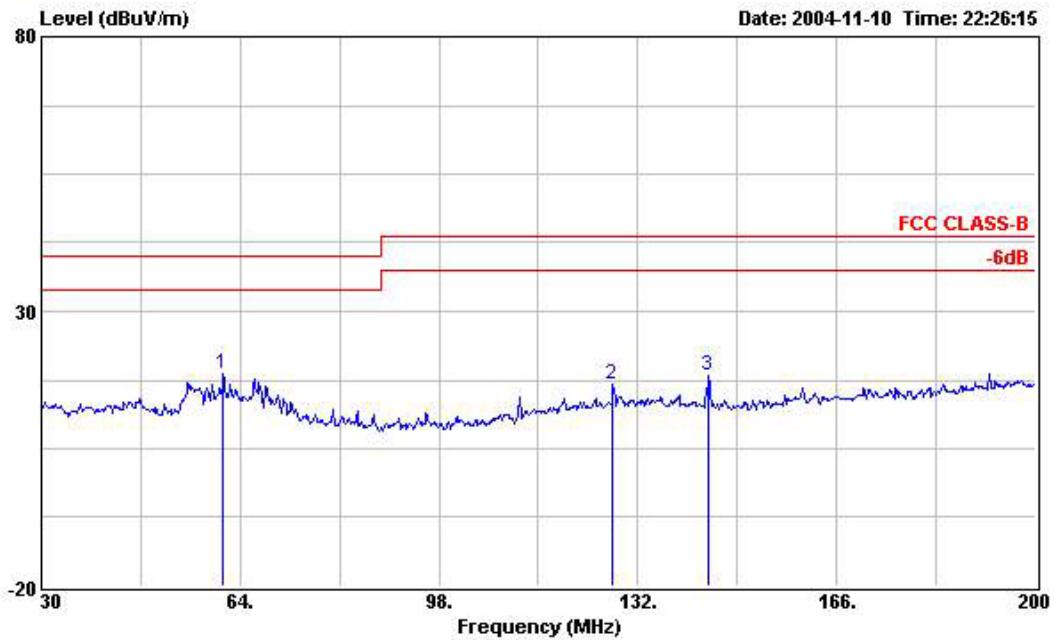


Freq	Level	Over Limit		Read Line		Probe Level	Cable Factor	Preamp Factor	Remark	Ant Pos	Table Pos
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg
1	61.110	18.67	-21.33	40.00	34.44	10.43	1.31	27.51	Peak	---	---
2	127.750	16.83	-26.67	43.50	29.64	12.27	2.06	27.14	Peak	---	---
3	144.070	18.23	-25.27	43.50	30.91	12.31	2.12	27.11	Peak	---	---



FCC ID: RNIX83381435-D

Issued on Nov. 12, 2004

Report No.: FR4O0803

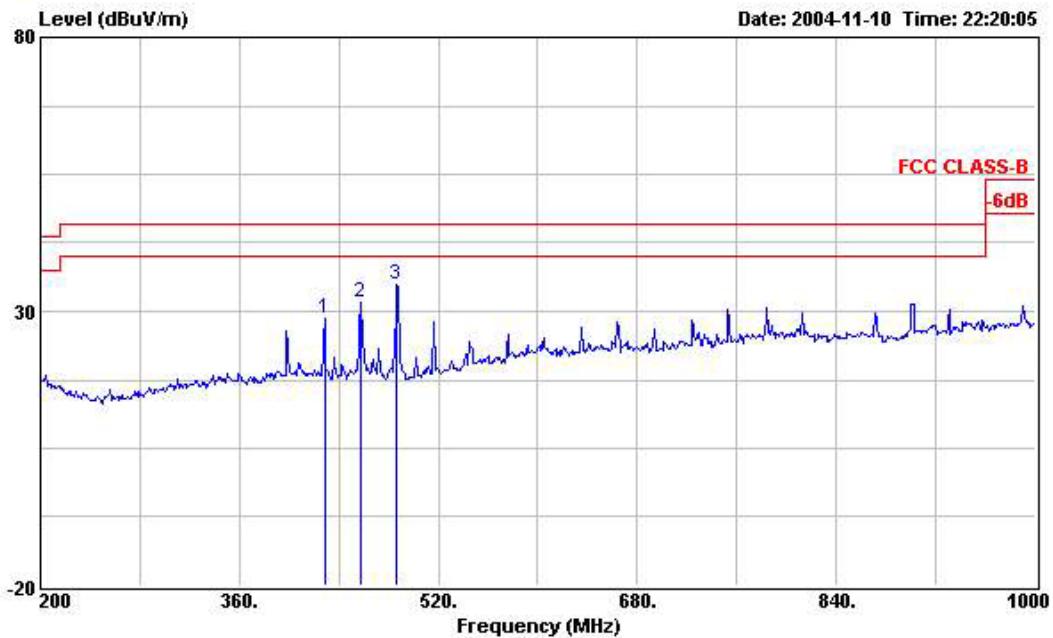

Freq	Level	over limit		read	probe	cable		Preamp	Ant	Table	
		Limit	Line			Level	Factor				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	dB	cm	deg	
1	428.800	28.58	-17.42	46.00	36.21	16.57	3.61	27.81	Peak	---	---
2	457.600	31.67	-14.33	46.00	39.51	16.33	3.76	27.93	Peak	---	---
3	486.400	34.91	-11.09	46.00	43.02	16.10	3.84	28.05	Peak	---	---

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level



FCC ID: RNIX83381435-D


Issued on Nov. 12, 2004

Report No.: FR4O0803

5.3.5. Test Results for CH 00 / 2402 MHz (for emission above 1GHz)

- Temperature: 25°C
- Relative Humidity: 53%
- Duty Cycle of the Equipment During the Test: 50%
- Test Engineer: Ted Chiu

(A) Polarization: Horizontal

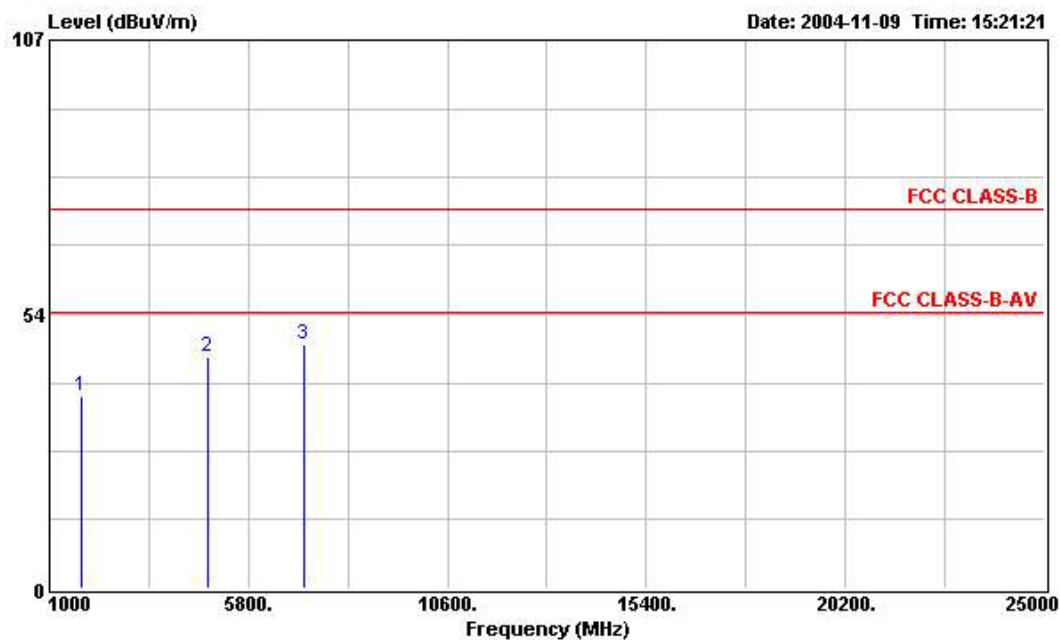

Freq	Level	Over Limit	Limit	Read Line	Probe Level	Cable Factor	Preamplifier Factor	Remark	Ant	Table
									Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg
1	1788.000	37.64	-36.36	74.00	49.06	26.48	1.55	39.45	Peak	---
2	4804.000	45.08	-28.92	74.00	49.87	32.93	2.42	40.14	Peak	---
3	7140.000	47.49	-26.51	74.00	48.66	35.51	2.82	39.50	Peak	---




FCC ID: RNIX83381435-D

Issued on Nov. 12, 2004

Report No.: FR4O0803

(B) Polarization: Vertical

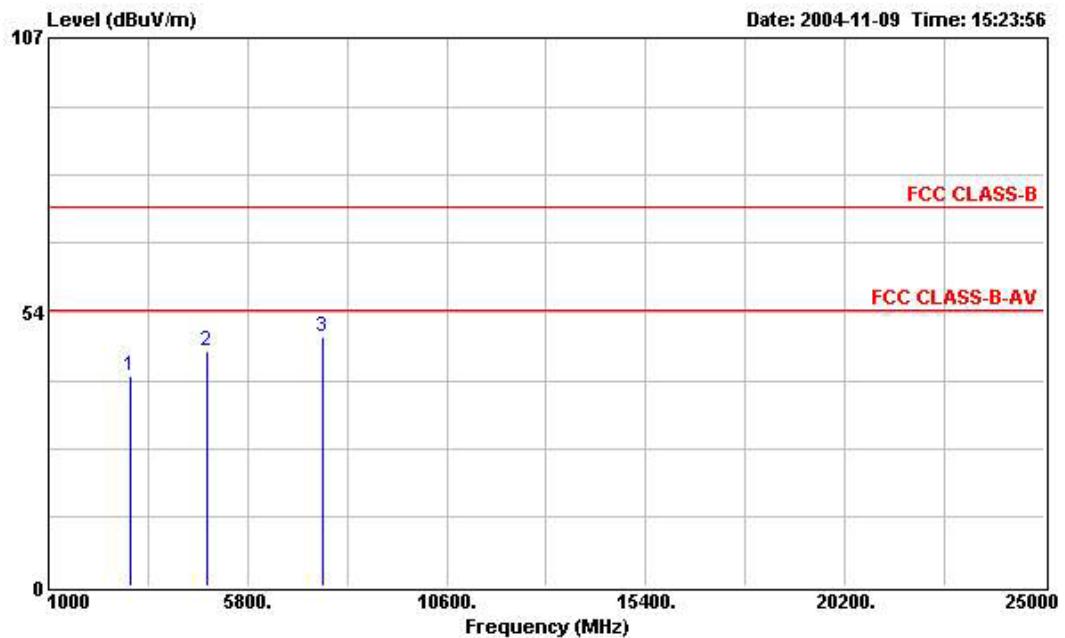

Freq	Level	Over Limit		Read Line	Probe Factor	Cable Preamp		Remark	Ant Pos	Table Pos
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		
1	2960.000	40.95	-33.05	74.00	48.26	29.99	2.11	39.41	Peak	---
2	4804.000	45.78	-28.22	74.00	50.57	32.93	2.42	40.14	Peak	---
3	7604.000	48.76	-25.24	74.00	48.47	36.70	2.96	39.37	Peak	---

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level



FCC ID: RNIX83381435-D


Issued on Nov. 12, 2004

Report No.: FR4O0803

5.3.6. Test Results for CH 39 / 2441 MHz (for emission above 1GHz)

- Temperature: 25°C
- Relative Humidity: 53%
- Duty Cycle of the Equipment During the Test: 50%
- Test Engineer: Ted Chiu

(A) Polarization: Horizontal

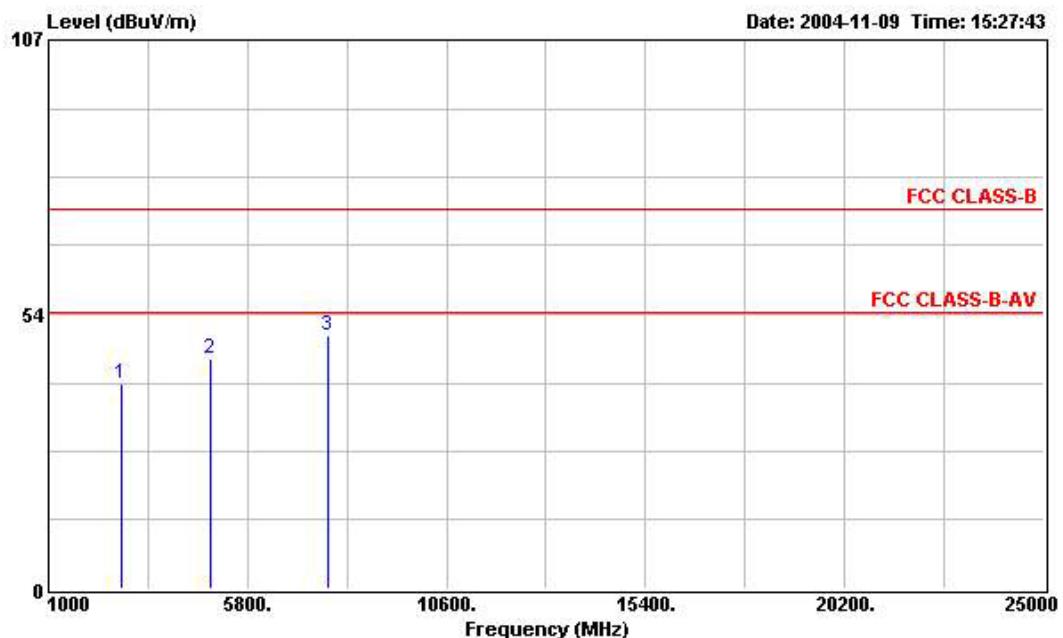

Freq	Level	Over Limit	Limit Line	Read		Cable	Preamp	Ant	Table
				Level	Factor				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg
1	2776.000	39.95	-34.05	74.00	48.14	29.35	1.94	39.48	Peak
2	4916.000	44.74	-29.26	74.00	49.25	33.14	2.49	40.14	Peak
3	7740.000	49.29	-24.71	74.00	48.95	36.85	2.81	39.32	Peak




FCC ID: RNIX83381435-D

Issued on Nov. 12, 2004

Report No.: FR4O0803

(B) Polarization: Vertical

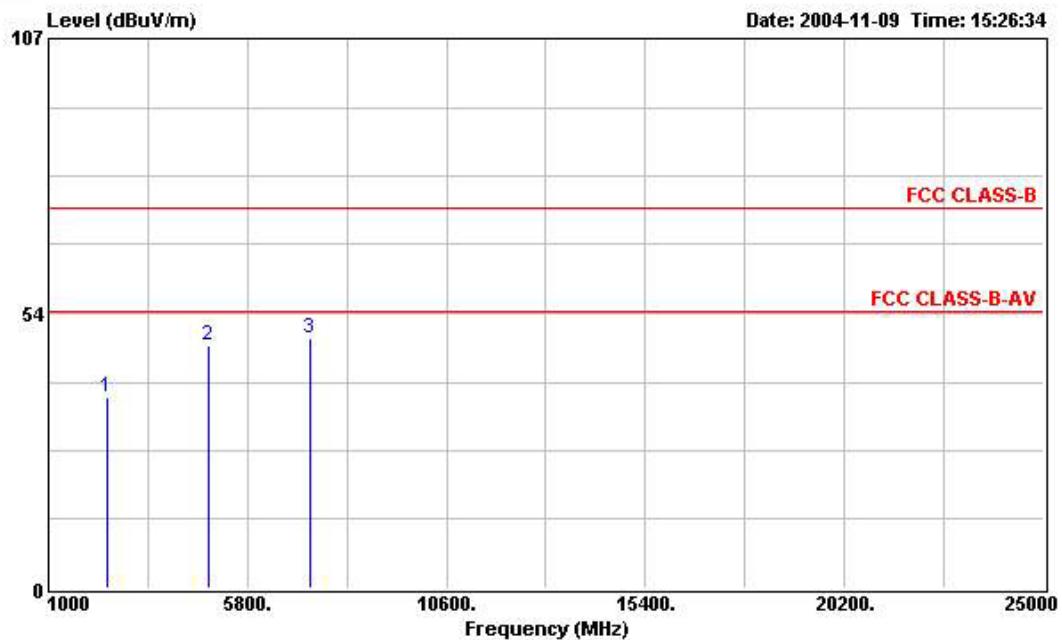

Freq	Level	Over Limit		Read Line	Probe Factor	Cable Preamp		Remark	Ant Pos	Table Pos
		Limit	dB			dBuV/m	dB			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	dB	cm	deg
1	2396.000	37.08	-36.92	74.00	46.69	28.27	1.72	39.60	Peak	---
2	4884.000	47.28	-26.72	74.00	51.80	33.11	2.51	40.14	Peak	---
3	7292.000	48.49	-25.51	74.00	48.79	35.98	3.18	39.46	Peak	---

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level



FCC ID: RNIX83381435-D


Issued on Nov. 12, 2004

Report No.: FR4O0803

5.3.7. Test Results for CH 79 / 2481MHz (for emission above 1GHz)

- Temperature: 25°C
- Relative Humidity: 53%
- Duty Cycle of the Equipment During the Test: 50%
- Test Engineer: Ted Chiu

(A) Polarization: Horizontal

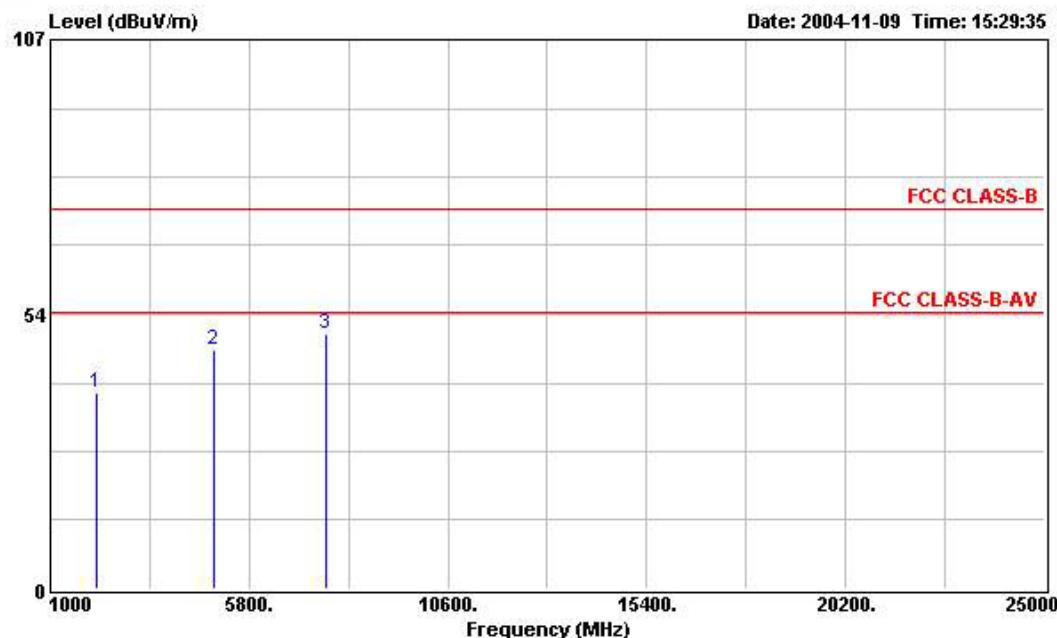

Freq	Level	Over Limit	Limit Line	Read			Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
				dB	dBuV/m	dBuV					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	dB	cm	deg	
1	2116.000	38.05	-35.95	74.00	48.39	27.63	1.67	39.64	Peak	---	---
2	4964.000	46.47	-27.53	74.00	50.94	33.24	2.44	40.15	Peak	---	---
3	7640.000	49.72	-24.28	74.00	49.19	36.75	3.13	39.35	Peak	---	---




FCC ID: RNIX83381435-D

Issued on Nov. 12, 2004

Report No.: FR4O0803

(B) Polarization: Vertical

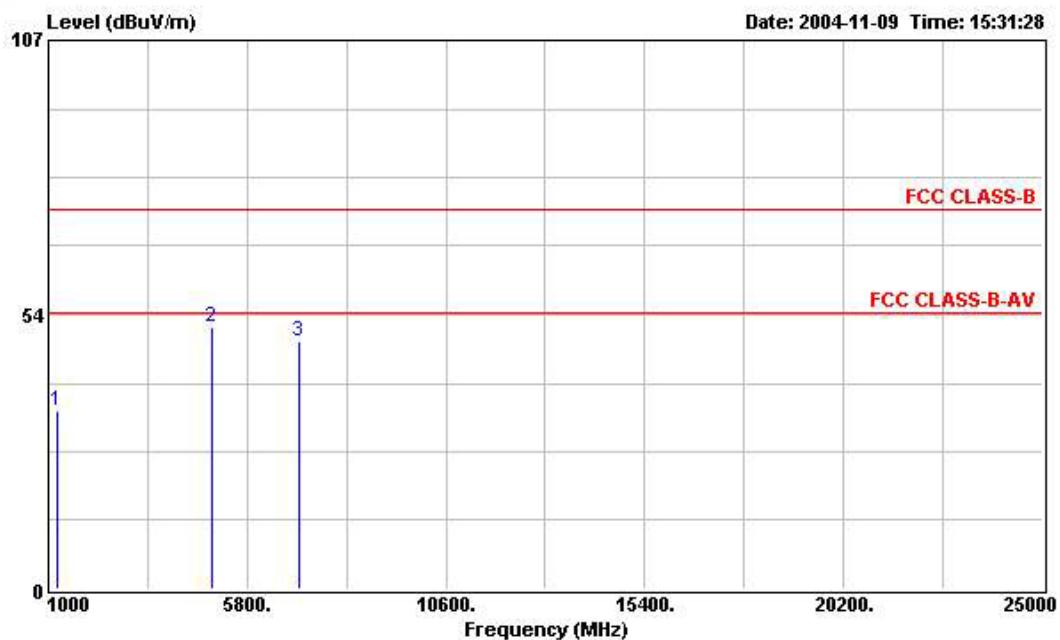

Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Ant Pos	Table Pos
		Limit	Line	Level	Factor	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg
1	1200.000	34.71	-39.29	74.00	48.17	24.54	1.22	39.22	Peak
2	4964.000	51.20	-22.80	74.00	55.67	33.24	2.44	40.15	Peak
3	7036.000	48.34	-25.66	74.00	49.23	35.26	3.38	39.53	Peak

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level




FCC ID: RNIX83381435-D

Issued on Nov. 12, 2004


Report No.: FR4O0803

5.3.8. Photographs of Radiated Emission Test Configuration

FRONT VIEW

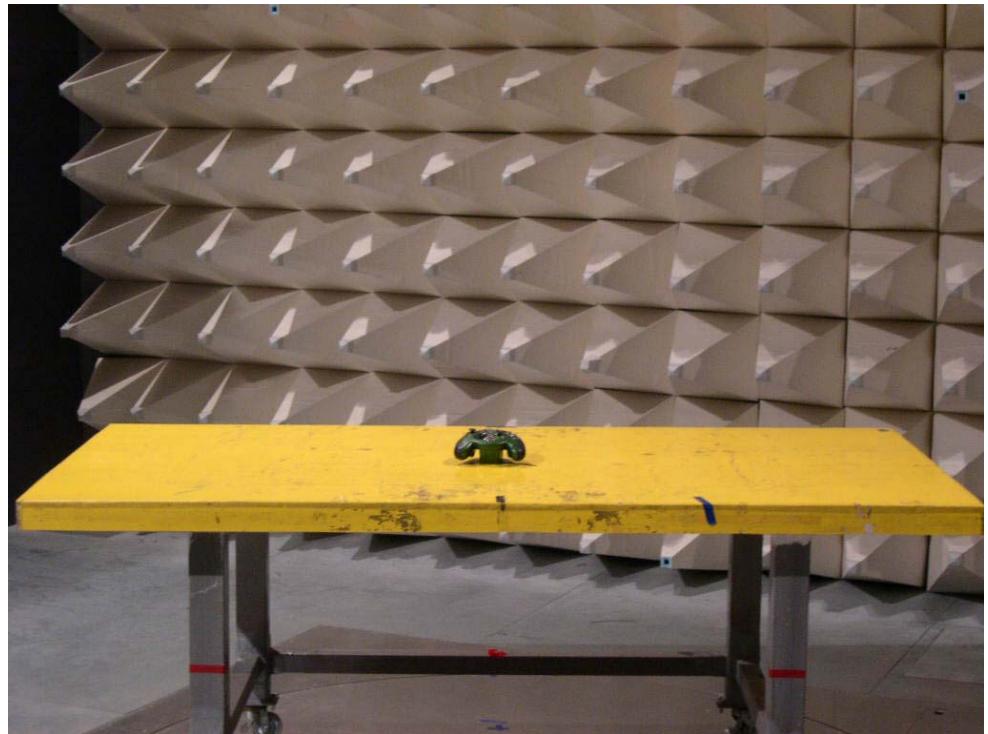

REAR VIEW

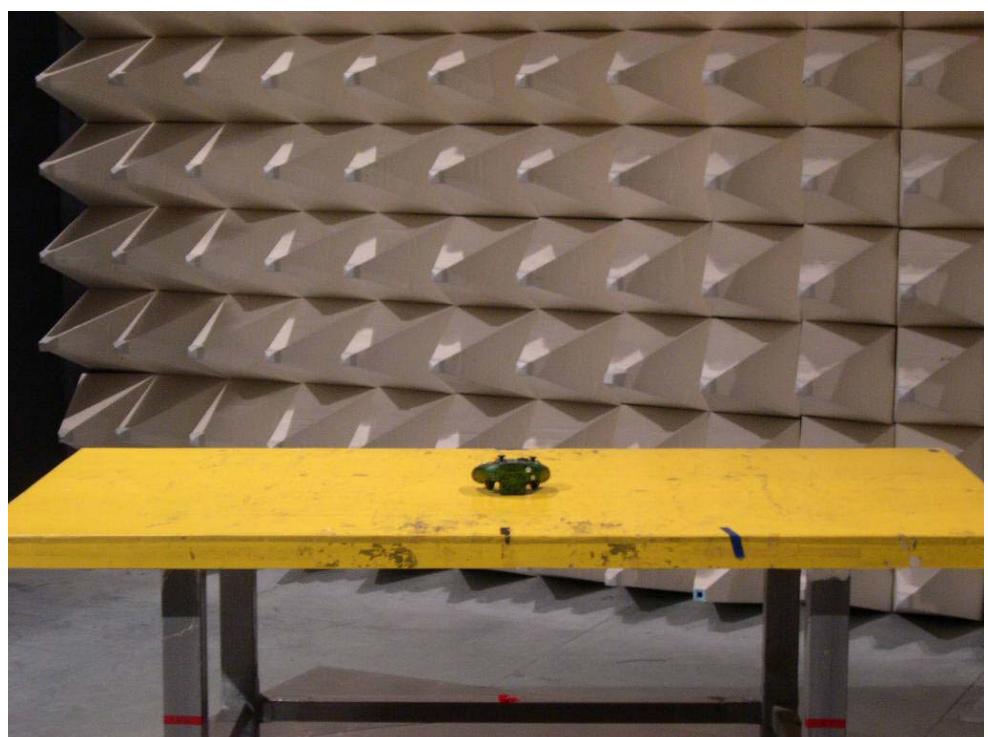



FCC ID: RNIX83381435-D

Issued on Nov. 12, 2004

Report No.: FR4O0803

5.4. Antenna Requirements

5.4.1. Standard Applicable

47 CFR Part15 Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.4.2. Antenna Connected Construction

The antenna used in this device is printed antenna, there is no antenna connector.



FCC ID: RNIX83381435-D

Issued on Nov. 12, 2004

Report No.: FR4O0803

6. List of Measuring Equipments Used

Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
1	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	Jun. 21, 2004	Radiation (03CH03-HY)
2	Spectrum analyzer	R&S	FSP40	100004	9KHZ~40GHz	Aug. 31, 2004	Radiation (03CH03-HY)
3	Amplifier	HP	8447D	2944A09072	100KHz – 1.3GHz	Nov. 10, 2004	Radiation (03CH03-HY)
4	Biconical Antenna	SCHWARZBECK	VHBB 9124	301	30MHz –200MHz	Jul. 28, 2004	Radiation (03CH03-HY)
5	Log Antenna	SCHWARZBECK	VUSLP 9111	221	200MHz -1GHz	Jul. 28, 2004	Radiation (03CH03-HY)
6	RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Dec. 03, 2003	Radiation (03CH03-HY)
7	Amplifier	MITEQ	AFS44	849984	100MHz~26.5GHz	Mar. 26, 2004	Radiation (03CH03-HY)
8	Horn Antenna	EMCO	3115	6741	1GHz – 18GHz	Apr. 07, 2004	Radiation (03CH03-HY)
9	Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
10	Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
11	Horn Antenna	Schwarzbeck	BBHA9170	154	18GHz~40GHz	Jun. 09, 2004	Radiation (03CH03-HY)
12	RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Dec. 05, 2003	Radiation (03CH03-HY)

※ Calibration Interval of instruments listed above is one year.