



ONETECH

Testing & Evaluation Lab.

Page 1 of 11

FCC ID. : RNNFMD-

Report No. : E046R-059

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CLASS B CERTIFICATION

Test Report No. : E046R-059

Applicant : INNATOR CO., LTD.

Address : 5FL, Kwang Myoung B/D, 1029-21, Hoge-a-Dong, Dongan-Gu, Ahnyang-Shi, Gyeonggi-Do, Korea

Manufacturer : INNATOR CO., LTD.

Address : 5FL, Kwang Myoung B/D, 1029-21, Hoge-a-Dong, Dongan-Gu, Ahnyang-Shi, Gyeonggi-Do, Korea

Type of Equipment : XDRIVE PLUS (Peripheral Device for Class B Computing Device)

FCC ID : RNNFMD-WP

Model Name : FMD-WP

Serial Number : N/A

Total page of Report : 11 pages (including this page)

Date of Incoming : May 31, 2004

Date of Issuing : June 23, 2004

SUMMARY

The equipment complies with the requirements of **FCC CFR 47 PART 15 SUBPART B, Class B**.

This test report contains only the results of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production.

Prepared by:

G. W. Lee/ Chief Engineer
EMC Div.

Reviewed by:

Y. K. Kwon/ Director
EMC Div.

It should not be reproduced except in full, without the written approval of ONETECH.

FCC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do 464-860 Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)



ONETECH

Testing & Evaluation Lab.

ONETECH Corp.

Page 2 of 11
FCC ID. : RNNFMD-

Report No. : E046R-059
ONETECH Corp.

It should not be reproduced except in full, without the written approval of ONETECH.

FCC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do 464-860 Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)



CONTENTS

	Page
1. VERIFICATION OF COMPLIANCE	4
2. GENERAL INFORMATION.....	5
2.1 PRODUCT DESCRIPTION.....	5
2.2 MODEL DIFFERENCES:	5
2.3 RELATED SUBMITTAL(S) / GRANT(S)	5
2.4 TEST SYSTEM DETAILS	5
2.5 TEST METHODOLOGY	5
2.6 TEST FACILITY	6
3. SYSTEM TEST CONFIGURATION.....	6
3.1 JUSTIFICATION	6
3.2 EUT EXERCISE SOFTWARE.....	6
3.3 CABLE DESCRIPTION	6
3.4 NOISE SUPPRESSION PARTS ON CABLE	6
3.5 EQUIPMENT MODIFICATIONS	7
3.6 CONFIGURATION OF TEST SYSTEM	7
4. PRELIMINARY TEST	7
4.1 AC POWER LINE CONDUCTED EMISSION TEST	7
4.2 RADIATED EMISSION TEST	7
5. FINAL RESULT OF MEASURMENT	8
5.1 CONDUCTED EMISSION TEST	8
5.2 RADIATED EMISSION TEST	11
6. FIELD STRENGTH CALCULATION	12
7. LIST OF TEST EQUIPMENT	13



1. VERIFICATION OF COMPLIANCE

- . APPLICANT : INNATOR CO., LTD.
- . ADDRESS : 5FL, Kwang Myoung B/D, 1029-21, Hoge-Dong, Dongan-Gu, Ahnyang-Shi, Gyeonggi-Do, Korea
- . CONTACT PERSON : Mr. Sung-Ho, Hong / R&D Manager
- . TELEPHONE NO : +82-31-477-1405
- . FCC ID : RNNFMD-WP
- . MODEL NAME : FMD-WP
- . SERIAL NUMBER : N/A
- . DATE : June 23, 2004

DEVICE TYPE	Peripheral Device for Class B Computing Device - Unintentional Radiator
E.U.T. DESCRIPTION	XDRIVE PLUS
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4: 2001
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15, SECTION 15.101
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

- . This device has shown compliance with the conducted emissions limits in 15.107 adopted under FCC 02-107 (ET Docket 98-80). The device may be marketed after July 11, 2005 affected by the 15.37(j) transition provisions.
- . The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



2. GENERAL INFORMATION

2.1 Product Description

The INNATOR CO., LTD., Model FMD-WP (referred to as the EUT in this report) is a XDRIVE PLUS that is USB portable storage device connected to personal computer via USB port. Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic
LIST OF EACH OSC. or CRY. FREQ.(FREQ.>=1MHz)	12 MHz
NUMBER OF LAYERS	2 Layers
EXTERNAL CONNECTOR	USB External Cable, and I/O Connector for Mobile charging and communication

2.2 Model Differences:

The difference(s) compared to the EUT is as follows:

Model Name	Model Grouping	Model Differences	Memory Size
FMD-WP	XDrive Plus Mobile	-	1 GB/512MB/256MB/ 128MB/64MB/32MB/16MB
	XDrive Plus	Deleted the port for Mobile Charging and Communication Port on the XDrive Plus Mobile	1 GB/512MB/256MB/ 128MB/64MB/32MB/16MB

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Test System Details

The model numbers for all the equipments that were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
FMD-WP	INNATOR CO., LTD.	RNNFMD-WP	XDRIVE PLUS (EUT)	PC
PP05LC	DELL COMPUTER CORP.	DoC	NOTEBOOK PC	-
2225C	HP	DSI6XU2225	PRINTER	PC
020-0470	CARDINAL	GDE0196	MODEM	PC
SCH-X600	SAMSUNG ELEC.	N/A	MOBILE PHONE	EUT

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4: 2001. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

It should not be reproduced except in full, without the written approval of ONETECH.

FCC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do 464-860 Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)



2.6 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on January 18, 2002. (Registration Number: 92819)

3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
MAIN BOARD	INNATOR CO., LTD.	N/A	N/A

3.2 EUT exercise Software

After connecting the EUT to notebook PC and mobile phone, data were continuously read and written from the HDD of the notebook PC to the EUT.

3.3 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
XDRIVE PLUS (EUT)	N/A	N/A	-
NOTEBOOK PC	N	-	1.8(P)
PRINTER	N	Y	1.8(P), 1.2(D)
MODEM	N	Y	1.8(P), 1.2(D)
MOBILE PHONE	N/A	Y	1.2(D)

* The marked "(P)" means the Power Cable and "D" means the I/O Cable.

3.4 Noise Suppression Parts on Cable

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
XDRIVE PLUS (EUT)	N	N/A	Y	PC END
NOTEBOOK PC	N/A	N/A	N/A	-
PRINTER	N	N/A	Y	BOTH END
MODEM	N	N/A	Y	BOTH END
MOBILE PHONE	N	N/A	Y	PC END

It should not be reproduced except in full, without the written approval of ONETECH.

FCC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do 464-860 Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)



3.5 Equipment Modifications

To achieve compliance to CLASS B levels, the following change(s) was made by ONETECH Corp. during compliance testing:

“There were no Modified items during EMI test”

3.6 Configuration of Test System

Line Conducted Test : The EUT was inserted to USB port of PC and the power line of PC was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4: 2001 7.2.3 to determine the worse operating conditions.

Radiated Emission Test : Preliminary radiated emission test was conducted using the procedure in ANSI C63.4: 2001 8.3.1.1 to determine the worse operating conditions. Final radiated emission test was conducted at 3 meters open area test site.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Data were continuously read and write via USB and charging mode for mobile phone	X

4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Data were continuously read and write via USB and charging mode for mobile phone	X



5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

5.1 Conducted Emission Test

Humidity Level : 42 % Temperature: 23 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.107 (a)
 Type of Test : CLASS B
 Result : PASSED BY -14.19 dB at 0.26 MHz under average detector mode

EUT : XDRIVE PLUS Date: June 07, 2004
 Operating Condition : Data were continuously read and written and charging mode for mobile phone.
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

Frequency (MHz)	Line	Peak (dBuV)		Margin (dB)
		Emission level	Q.P Limits	
0.15	N	48.50	66.00	-17.50
0.19	H	46.16	64.26	-18.10
0.26	H	44.08	61.43	-17.35
0.32	H	39.17	59.71	-20.54
9.57	N	40.44	60.00	-19.56
10.20	H	40.17	60.00	-19.83
Frequency (MHz)	Line	Average (dBuV)		Margin (dB)
		Emission level	Limits	
0.26	H	37.24	51.43	-14.19
0.32	H	34.46	49.71	-15.25
9.57	N	31.88	50.00	-18.12
10.20	H	31.15	50.00	-18.85

Line Conducted Emission Tabulated Data

Remark : "H": Hot Line, "N": Neutral line

See next page for an overview sweep performed with peak detector.

✓ 7/26



ONETECH

Testing & Evaluation Lab.

Page 9 of 11
FCC ID. : RNNFMD-

Report No. : E046R-059

Tested by: Gi-Hong, Nam / Test Engineer




ONETECH

Testing & Evaluation Lab.

Page 10 of 11

FCC ID. : RNNFMD-

Report No. : E046R-059

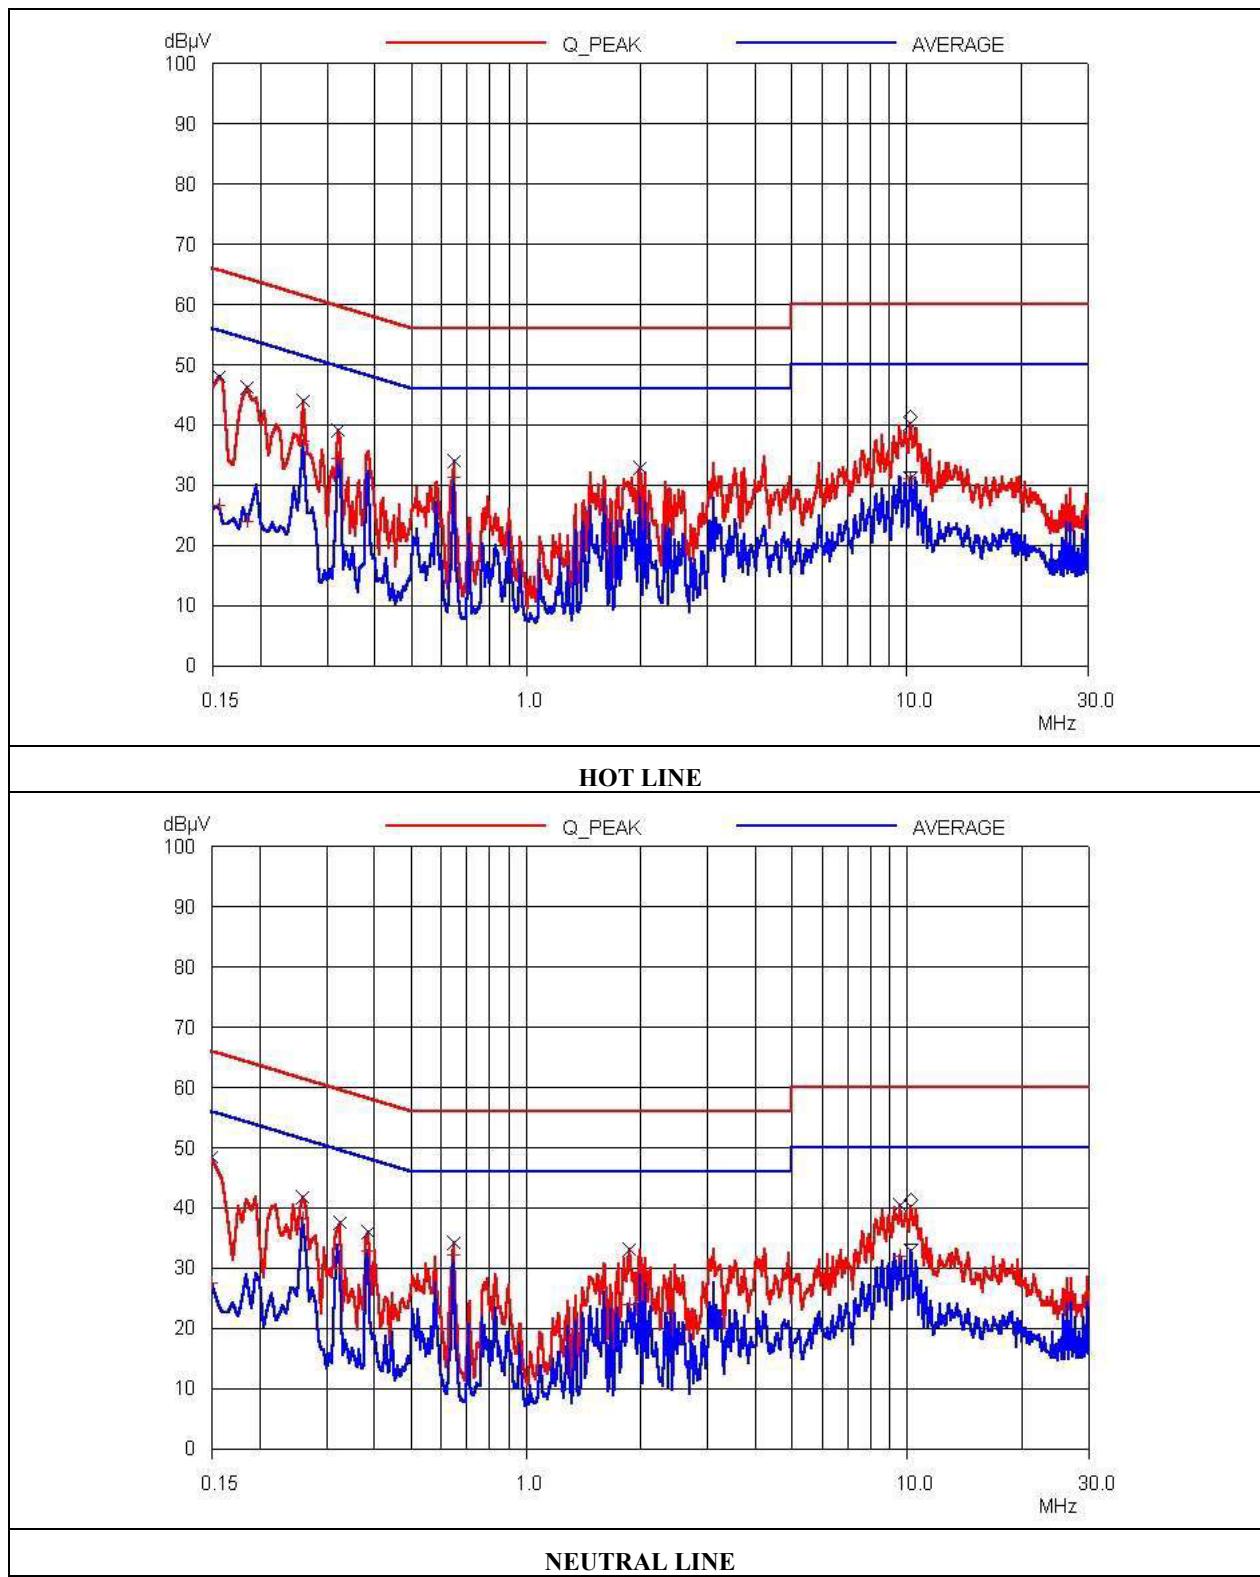

It should not be reproduced except in full, without the written approval of ONETECH.

FCC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do 464-860 Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

**5.2 Radiated Emission Test**

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level	: <u>42 %</u>	Temperature: <u>26 °C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART B, SECTION 15.109 (a)</u>	
Type of Test	: <u>CLASS B</u>	
Result	: <u>PASSED BY -3.91 dB at 479.60 MHz</u>	

EUT	: XDRIVE PLUS	Date: July 14, 2003
Operating Condition	: Data were continuously read and written and charging mode for mobile phone.	
Detector	: CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)	
Distance	: 3 Meter	

Radiated Emissions		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)		Ant.	Cable (dB)		Amp. (dBuV/m)	Limit (dBuV/m)
59.67	26.30	V	7.97	1.16	35.43	40.00	-4.57
111.22	18.40	H	12.04	1.52	31.96	43.52	-11.56
119.87	18.10	V	13.29	1.67	33.06	43.52	-10.46
231.80	16.10	H	12.06	2.22	30.38	46.02	-15.64
239.60	18.40	H	12.68	2.27	33.35	46.02	-12.67
359.60	21.30	V	14.05	2.70	38.05	46.02	-7.97
479.60	22.10	H	16.75	3.26	42.11	46.02	-3.91
602.40	18.80	V	18.21	3.68	40.69	46.02	-5.33
960.00	13.10	H	23.96	4.60	41.66	46.02	-4.36

Radiated Emissions Tabulated Data

Tested by: Young-Min Choi / Project Engineer



ONETECH

Testing & Evaluation Lab.

Page 12 of 11

FCC ID. : RNNFMD-

Report No. : E046R-059

6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)



7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	NOV/03	12MONTH	■
2.	Test receiver	R/S	ESHS 10	834467/007	APR/04	12MONTH	■
3.	Spectrum analyzer	HP	8566B	3407A08547	MAY/04	12MONTH	
4.	Spectrum analyzer	HP	8568B	3109A05456	MAY/04	12MONTH	■
5.	RF preselector	HP	85685A	3107A01264	MAY/04	12MONTH	■
6.	Quasi-Peak Adapter	HP	85650A	3107A01542	MAY/04	12MONTH	■
7.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	VULB9163 166	FEB/04	12MONTH	
8.	Biconical antenna	EMCO	3104C	9109-4443	MAY/04	12MONTH	■
				9109-4444	JUL/03		
		Schwarzbeck	VHA9103	91031852	JAN/04		
9.	Log Periodic antenna	EMCO	3146	9109-3213	FEB/04	12MONTH	
				9109-3214	JUL/03		■
				9109-3217	MAY/04		
		Schwarzbeck	9108-A(494)	62281001	JAN/04		
10.	LISN	EMCO	3825/2	9109-1867	AUG/03	12MONTH	■
				9109-1869	OCT/03		■
11.	Position Controller	EMCO	1090	9107-1038	N/A	N/A	■
12.	Turn Table	EMCO	1080-1.21	9109-1576	N/A	N/A	■
13.	Antenna Master	EMCO	1070-1	9109-1624	N/A	N/A	■