



Test Report for Hayward Industries, Inc.  
Report No. EX0020-2 Issue 3



## TEST REPORT

Applicant	Hayward Industries, Inc.
Address	One Hayward Industrial Drive, Clemmons NC 27012

FCC ID	RNW-BT923
ISED Canada IC	5110A-BT923
Product Description	BT and 900 Wireless Module 2023
PMN Model/HVIN FVIN HMN	BT923 G066000227A N/A N/A
Additional Models	None
Date of tests	Jun 13, 2023 - Jul 25, 2024
FCC Test Firm DN Canada CABID	US1028 US0106

The tests have been carried out according to the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247  
 ISED Canada RSS-247 Issue 3

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Prepared by Yunus Faziloglu Sr. Wireless Engineer	Approved by Ahmed Ait Ahmed EMC Supervisor
Issue Date: Dec 10, 2024	Issue Number: 3

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <https://www.cps.bureauveritas.com/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute you unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



## TABLE OF CONTENTS

RELEASE CONTROL RECORD .....	4
1 SUMMARY OF TEST RESULTS.....	5
2 MEASUREMENT UNCERTAINTY .....	6
3 GENERAL INFORMATION.....	7
3.1 GENERAL DESCRIPTION OF EUT .....	7
3.2 DESCRIPTION OF TEST MODES.....	8
3.3 GENERAL DESCRIPTION OF APPLIED TEST PROCEDURES .....	12
3.4 DESCRIPTION OF SUPPORT EQUIPMENT .....	12
4 TEST TYPES AND RESULTS.....	13
4.1 CONDUCTED EMISSION MEASUREMENT.....	13
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	13
4.1.2 TEST INSTRUMENTS .....	13
4.1.3 TEST PROCEDURES.....	14
4.1.4 DEVIATION FROM TEST STANDARD.....	14
4.1.5 TEST SETUP .....	15
4.1.6 EUT OPERATING CONDITIONS.....	15
4.1.7 TEST RESULTS .....	16
4.2 RADIATED EMISSIONS.....	24
4.2.1 LIMITS .....	24
4.2.2 TEST EQUIPMENT USED .....	25
4.2.3 TEST PROCEDURES.....	26
4.2.4 DEVIATION FROM TEST STANDARD.....	26
4.2.5 TEST SETUP .....	27
4.2.6 EUT OPERATING CONDITIONS.....	28
4.2.7 TEST RESULTS .....	29
4.3 NUMBER OF HOPPING FREQUENCIES.....	60
4.3.1 LIMIT OF HOPPING FREQUENCY USED.....	60
4.3.2 TEST SETUP .....	60
4.3.3 TEST INSTRUMENTS .....	60
4.3.4 TEST PROCEDURES.....	60
4.3.5 DEVIATION FROM TEST STANDARD.....	60
4.3.6 TEST RESULTS .....	60
4.4 DWELL TIME ON EACH CHANNEL.....	63
4.4.1 LIMIT OF DWELL TIME USED.....	63
4.4.2 TEST SETUP .....	63



**Test Report for Hayward Industries, Inc.**  
**Report No. EX0020-2 Issue 3**



4.4.3	<i>TEST INSTRUMENTS</i> .....	63
4.4.4	<i>TEST PROCEDURES</i> .....	63
4.4.5	<i>DEVIATION FROM TEST STANDARD</i> .....	63
4.4.6	<i>TEST RESULTS</i> .....	63
4.5	CHANNEL BANDWIDTH (20dB) AND OCCUPIED BANDWIDTH (99%) .....	66
4.5.1	<i>LIMITS OF CHANNEL BANDWIDTH</i> .....	66
4.5.2	<i>TEST SETUP</i> .....	66
4.5.3	<i>TEST INSTRUMENTS</i> .....	66
4.5.4	<i>TEST PROCEDURE</i> .....	66
4.5.5	<i>DEVIATION FROM TEST STANDARD</i> .....	66
4.5.6	<i>TEST RESULTS</i> .....	66
4.6	HOPPING CHANNEL SEPARATION .....	71
4.6.1	<i>LIMIT OF HOPPING CHANNEL SEPARATION</i> .....	71
4.6.2	<i>TEST SETUP</i> .....	71
4.6.3	<i>TEST INSTRUMENTS</i> .....	71
4.6.4	<i>TEST PROCEDURES</i> .....	71
4.6.5	<i>DEVIATION FROM TEST STANDARD</i> .....	71
4.6.6	<i>TEST RESULTS</i> .....	71
4.7	CONDUCTED PEAK OUTPUT POWER .....	75
4.7.1	<i>LIMITS OF CONDUCTED PEAK OUTPUT POWER MEASUREMENT</i> .....	75
4.7.2	<i>TEST SETUP</i> .....	75
4.7.3	<i>TEST INSTRUMENTS</i> .....	75
4.7.4	<i>TEST PROCEDURES</i> .....	75
4.7.5	<i>DEVIATION FROM TEST STANDARD</i> .....	75
4.7.6	<i>TEST RESULTS</i> .....	76
4.8	OUT OF BAND EMISSION MEASUREMENT .....	79
4.8.1	<i>LIMITS OF out of band eMISSION MEASUREMENT</i> .....	79
4.8.2	<i>TEST SETUP</i> .....	79
4.8.3	<i>test Instrument</i> .....	79
4.8.4	<i>TEST PROCEDURE</i> .....	79
4.8.5	<i>DEVIATION FROM TEST STANDARD</i> .....	79
4.8.6	<i>TEST RESULTS</i> .....	79
5	PHOTOGRAPHS OF THE TEST CONFIGURATIONS .....	87
6	MODIFICATIONS TO THE EUT DURING TESTING .....	88



**Test Report for Hayward Industries, Inc.  
Report No. EX0020-2 Issue 3**



## **RELEASE CONTROL RECORD**

<b>ISSUE NO.</b>	<b>REASON FOR CHANGE</b>	<b>DATE ISSUED</b>
1	Original release	Feb 7, 2024
2	Revision to address TCB review comments: Corrected input voltage Revised Block Diagram Support equipment list updates Repeated AC Line Conducted test and updated test equipment used Mentioned Adjusted reading formula	Jul 31, 2024
3	Revision to address TCB review comments: HVIN Corrected Power setting used during testing specified in Section 3.1	Dec 10, 2024



## 1 SUMMARY OF TEST RESULTS

EUT was tested against the following requirements:

APPLIED STANDARD: FCC PART 15, SUBPART C (Section 15.247), RSS-247				
STANDARD SECTION		TEST TYPE AND LIMIT	APPLICABLE	RESULT
47CFR15	RSS			
15.207	Gen 8.8	AC Power Line Conducted Emission	Y	PASS
15.247(a)(1)(i)	247 5.1(c)	Number of Hopping Frequencies Used	Y	PASS
15.247(a)(1)(i)	247 5.1(c)	Dwell Time	Y	PASS
15.247(a)(1)(i)	247 5.1(c)	20dB Bandwidth	Y	PASS
--	Gen 6.7	99% Occupied Bandwidth	Y	PASS
15.247(a)(1)	247 5.1(b)	Hopping Channel Separation	Y	PASS
15.247(b)(2)	247 5.4(a)	Conducted Output Power	Y	PASS
15.205 15.247(d) 15.209	247 3.3 247 5.5 Gen 8.9 Gen 8.10	Radiated Spurious Emissions	Y	PASS
15.247(d)	247 5.5	Conducted Spurious Emissions	Y	PASS
15.203	Gen 6.8	Antenna Requirement	Y	PASS

This report addresses 900MHz (DSS) operation of the module. 2.4GHz (DTS) operation of the module is addressed in EX0020-1 Test Report.



**Test Report for Hayward Industries, Inc.  
Report No. EX0020-2 Issue 3**



## 2 MEASUREMENT UNCERTAINTY

The listed uncertainties are the worst-case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results. Values for measurement uncertainty are calculated per ETSI TR 100 028 (2001).

Measurement	Expanded Uncertainty k=2	Maximum allowable uncertainty
Radio frequency (@ 2.4GHz)	$3.23 \times 10^{-8}$	$1 \times 10^{-7}$
RF power, conducted	0.40dB	0.75dB
Maximum frequency deviation: Within 300Hz and 6kHz of audio frequency / Within 6kHz and 25kHz of audio frequency	3.4% 0.3dB	5% 3dB
Adjacent channel power	1.9dB	3dB
Conducted spurious emission of transmitter, valid up to 12.75GHz	2.39dB	3dB
Conducted emission of receivers	1.3dB	3dB
Radiated emission of transmitter, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of transmitter, valid up to 80GHz	3.3dB	6dB
Radiated emission of receiver, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of receiver, valid up to 80GHz	3.3dB	6dB
Humidity	2.37%	5%
Temperature	0.7°C	1.0°C
Time	4.1%	10%
RF Power Density, Conducted	0.4dB	3dB
DC and low frequency voltages	1.3%	3%
Voltage (AC, <10kHz)	1.3%	2%
Voltage (DC)	0.62%	1%
The above reflects a 95% confidence level		

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

NOMINAL VOLTAGE	3.3VDC
MODULATION TECHNOLOGY	FHSS
MODULATION TYPE(S)	2-GFSK
DATA RATE(S)	50kbps
OPERATING FREQUENCY	902.2MHz - 927.7MHz
NUMBER OF CHANNELS	50
EUT Power Setting During Testing	13dBm
OUTPUT POWER	7.1mW (Peak Conducted) External Antenna 10.0mW (Peak Conducted) Internal Antenna

#### Customer Supplied Antenna Information

Type	Manufacturer	Model	Peak Gain
External Hinged	Kyocera	X9000984-4GDSMB	3.4dBi
PCB Trace	N/A	N/A	5dBi

EUT Ports:							
Port Label	Port Type	No. of ports	No. Populated	Cable Type	Shielded	Ferrites	Length
DC Power	Power	1	1	DC	No	No	1m

Highest clock frequency in the device (used/generated): 2480MHz

#### NOTES:

1. For a more detailed description of the EUT, please refer to the manufacturer's specifications or the user's manual.
2. Please disregard 5VDC references in the rest of the report data tables and plots.
3. For photos of the EUT, please refer to External and Internal Photos exhibits.



**Test Report for Hayward Industries, Inc.  
Report No. EX0020-2 Issue 3**



### 3.2 DESCRIPTION OF TEST MODES

EUT supports 129 channels but uses a group of 50 pseudo randomly selected channels during its normal operation. Please refer to Operational Description exhibit for more details

Channel	Freq. MHz	Channel	Freq. MHz	Channel	Freq. MHz	Channel	Freq. MHz	Channel	Freq. MHz
1	<b>902.2</b>	27	907.4	53	912.6	79	917.8	105	923.0
2	902.4	28	907.6	54	912.8	80	918.0	106	923.2
3	902.6	29	907.8	55	913.0	81	918.2	107	923.4
4	902.8	30	908.0	56	913.2	82	918.4	108	923.6
5	903.0	31	908.2	57	913.4	83	918.6	109	923.8
6	903.2	32	908.4	58	913.6	84	918.8	110	924.0
7	903.4	33	908.6	59	913.8	85	919.0	111	924.2
8	903.6	34	908.8	60	914.0	86	919.2	112	924.4
9	903.8	35	909.0	61	914.2	87	919.4	113	924.6
10	904.0	36	909.2	62	914.4	88	919.6	114	924.8
11	904.2	37	909.4	63	914.6	89	919.8	115	925.0
12	904.4	38	909.6	64	914.8	90	920.0	116	925.2
13	904.6	39	909.8	<b>65</b>	<b>915.0</b>	91	920.2	117	925.4
14	904.8	40	910.0	66	915.2	92	920.4	118	925.6
15	905.0	41	910.2	67	915.4	93	920.6	119	925.8
16	905.2	42	910.4	68	915.6	94	920.8	120	926.0
17	905.4	43	910.6	69	915.8	95	921.0	121	926.2
18	905.6	44	910.8	70	916.0	96	921.2	122	926.4
19	905.8	45	911.0	71	916.2	97	921.4	123	926.6
20	906.0	46	911.2	72	916.4	98	921.6	124	926.8
21	906.2	47	911.4	73	916.6	99	921.8	125	927.0
22	906.4	48	911.6	74	916.8	100	922.0	126	927.2
23	906.6	49	911.8	75	917.0	101	922.2	127	927.4
24	906.8	50	912.0	76	917.2	102	922.4	128	927.6
25	907.0	51	912.2	77	917.4	103	922.6	<b>129</b>	<b>927.7</b>
26	907.2	52	912.4	78	917.6	104	922.8		

Four configurations were provided for testing:

Sample	Description	EUT Antenna	Purpose
1	External Antenna	External Dipole attached	Radiated Sample
2	External Antenna	External Dipole detached	Conducted Sample
3	Internal Antenna	Trace antenna in place	Radiated Sample
4	Internal Antenna	Trace antenna replaced with an SMA connector	Conducted Sample

## Notes:

- All samples were powered with an external 3.3VDC power supply.
- Please disregard 5VDC references in the rest of the report data tables and plots.
- The customer provided a laptop to set up test modes with a programming tool from the radio chipset manufacturer.


## EUT Test Modes:

TEST MODE	DESCRIPTION
A	Hopping (Normal Operation)
B	Single Channel (Non-Hopping): Continuous Transmit at 50kbps (Duty-cycle: 100%)


## EUT Setup Block Diagram:

## Radiated Emissions EUT Setup

## With External Antenna

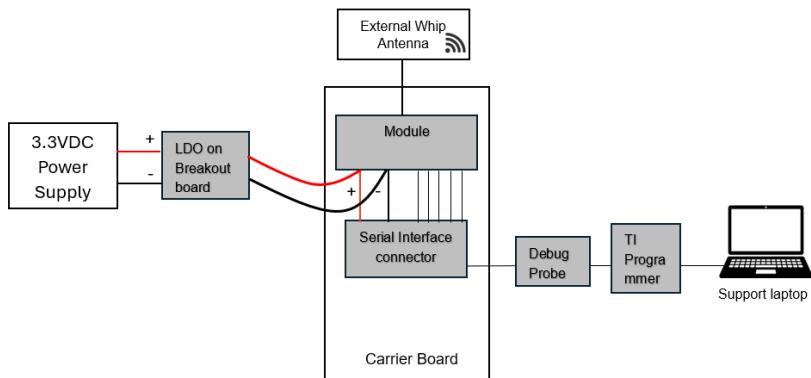

## With Internal Antenna

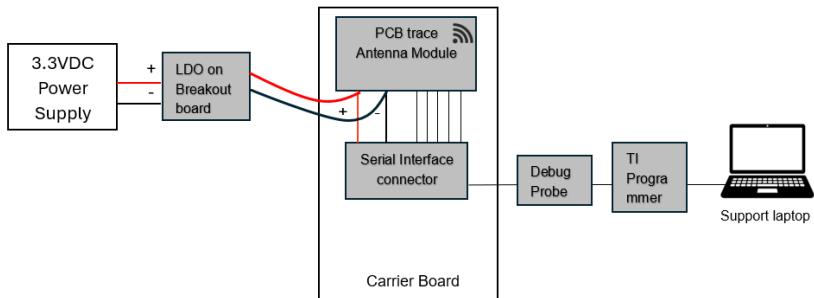


**Note:** Debug Probe, TI Programmer and support Laptop are disconnected after the test mode is set.




## AC line Conducted Emissions EUT Setup

### With External Antenna

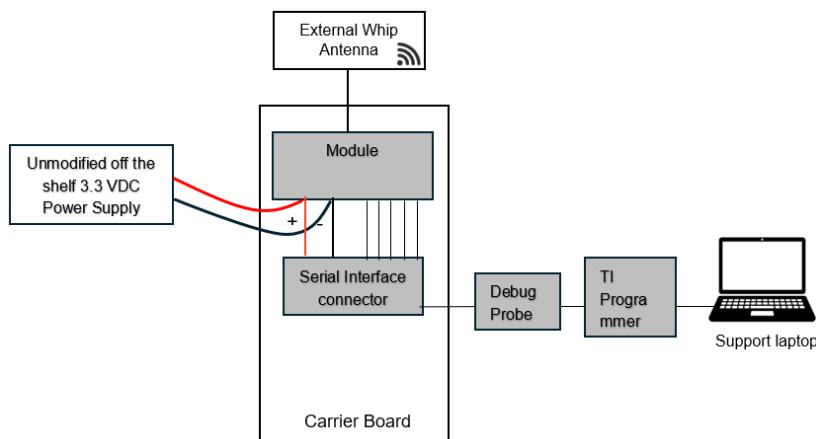

### With Internal Antenna

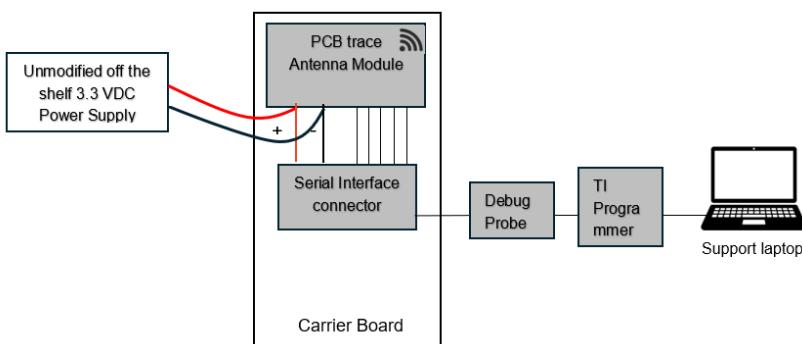

### Note:

- Debug Probe, TI Programmer and support Laptop are disconnected after the test mode is set.
- During AC line conducted emission testing LDO breakout board is removed to supply 3.3VDC power directly to the module for worst-case testing.

For antenna port test setup block diagrams, please see the corresponding sections of this report.



**Test Report for Hayward Industries, Inc.**  
**Report No. EX0020-2 Issue 3**



Following channels/modes were selected for the applicable tests below:

TEST	TEST MODE	AVAILABLE CHANNELS	TESTED CHANNEL	MODULATION TYPE	DATA RATE (kbps)	Notes
NHF	A	1 to 129	All	2-GFSK	50	--
DT	A	1 to 129	1, 65, 129	2-GFSK	50	--
HCS	A	1 to 129	1, 65, 129	2-GFSK	50	--
20DB	B	1 to 129	1, 65, 129	2-GFSK	50	--
OBW	B	1 to 129	1, 65, 129	2-GFSK	50	--
COP	B	1 to 129	1, 65, 129	2-GFSK	50	--
CBE	A, B	1 to 129	1, 129	2-GFSK	50	--
CSE	B	1 to 129	1, 65, 129	2-GFSK	50	--
RSE<1G	B	1 to 129	1, 65, 129	2-GFSK	50	1, 2
RSE≥1G	B	1 to 129	1, 65, 129	2-GFSK	50	1
PLCE	B	1 to 129	1, 129	2-GFSK	50	3

Note 1: For internal antenna configuration, module was maximized on X, Y and Z. Worst case orientation was Y. For external antenna configuration, module was maximized on X, Y, Z and external antenna was maximized in horizontal and vertical orientations for each. Worst case was when module was in Z axis and external antenna in horizontal orientation as shown in the test setup photos exhibit.

Note 2: Testing below 30MHz was limited to 1 channel only since no significant emissions were detected.

Note 3: Testing was limited to 1 channel only since no significant emissions were detected.

**NHF:** Number of Hopping Frequencies

**DT:** Dwell Time

**HCS:** Hopping Channel Separation

**20DB:** 20dB Bandwidth

**OBW:** 99% Occupied Bandwidth

**COP:** Conducted Output Power

**CBE:** Conducted Band-edge

**CSE:** Conducted Spurious Emissions

**RSE<1G:** Radiated Spurious Emissions Below 1GHz

**RSE≥1G:** Radiated Spurious Emissions Above 1GHz

**PLCE:** Power Line Conducted Emissions

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TESTED BY
<b>RE&lt;1G</b>	As listed on corresponding data tables	Ryan M. Brown
<b>RE≥1G</b>	As listed on corresponding data tables	Ryan M. Brown
<b>PLC</b>	As listed on corresponding data tables	Ryan M. Brown
<b>Antenna Port</b>	12/04/2023: 18.1°C, 42% RH, 1016 mbar 12/07/2023: 18.7°C, 44% RH, 1013 mbar	Yunus Faziloglu



**Test Report for Hayward Industries, Inc.  
Report No. EX0020-2 Issue 3**



### **3.3 GENERAL DESCRIPTION OF APPLIED TEST PROCEDURES**

All testing was performed in accordance with the procedures described in the following standards and procedures:

**KDB 558074 D01 15.247 Meas Guidance v05r02**

**ANSI C63.10-2013**

**RSS-Gen Issue 5**

### **3.4 DESCRIPTION OF SUPPORT EQUIPMENT**

<b>Support Equipment</b>	<b>Model #</b>	<b>Serial #</b>	<b>Comments</b>
Laptop	Acer PEW51	LXTZ9030250353FFEB1601	Customer supplied for test mode set up
Debug Probe	XDS200	TC54683	Customer supplied for test mode set up
Debug Board	HRI-ENG-0003-01	N/A	Customer supplied for test mode set up
AC Adaptor CUI INC	SW16-3.3-N	SW16-3.3-N-P5	Supplied by the customer for testing. Used during REMI and antenna port tests
Lab DC power Supply	HP E3612A	KR61304227	Used during REMI tests
144W Universal Power Adapter	LGY-363000	NA	Off-the-shelf unmodified supply used during AC line conducted testing



**Test Report for Hayward Industries, Inc.  
Report No. EX0020-2 Issue 3**



## 4 TEST TYPES AND RESULTS

### 4.1. CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

**NOTE:** 1. The lower limit shall apply to the transition frequencies.  
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.  
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

Rev. 7/11/2024

Conducted Test Sites (Mains / Telco)	FCC Code	VCCI Code	Cat	Calibration Due	Calibrated on			
			III	NA	N/A			
Spectrum Analyzers / Receivers /Preselectors Rental MXE EMI Receiver (1274541)	Range 20Hz-26.5GHz	MN N9038A	Mfr Keysight	SN MY53220101	Asset 1274541	Cat 1	Calibration Due 6/11/2025	Calibrated on 6/11/2024
Cables CEMI-02	Range 9kHz - 2GHz	Mfr C-S				Cat II	Calibration Due 1/26/2025	Calibrated on 1/26/2024
Attenuators 20dB20W Attenuator(A#2499)	Range 9KHz-4GHz	MN 766-20	Mfr Narda	SN 8710	Asset 2499	Cat II	Calibration Due 12/5/2024	Calibrated on 12/5/2023
LISNs/Measurement Probes LISN Asset 1726 LISN Asset 1727	Range 150kHz-30MHz 150kHz-30MHz	MN LI-150A LI-150A	Mfr Com-Power Com-Power	SN 201092 201093	Asset 1726 1727	Cat I I	Calibration Due 1/17/2025 1/17/2025	Calibrated on 1/17/2024 1/17/2024
Meteorological Meters/Chambers Weather Clock (Pressure Only) Asset #2654	MN BA928 1235C97	Mfr Oregon Scientific Control Company	SN C3166-1 200477432	Asset 831 2654	Cat I I	Calibration Due 12/15/2025 8/18/2025	Calibrated on 12/15/2022 8/18/2022	

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



**Test Report for Hayward Industries, Inc.  
Report No. EX0020-2 Issue 3**



#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

#### 4.1.4 DEVIATION FROM TEST STANDARD


No deviation.



**Test Report for Hayward Industries, Inc.  
Report No. EX0020-2 Issue 3**



#### 4.1.5 TEST SETUP

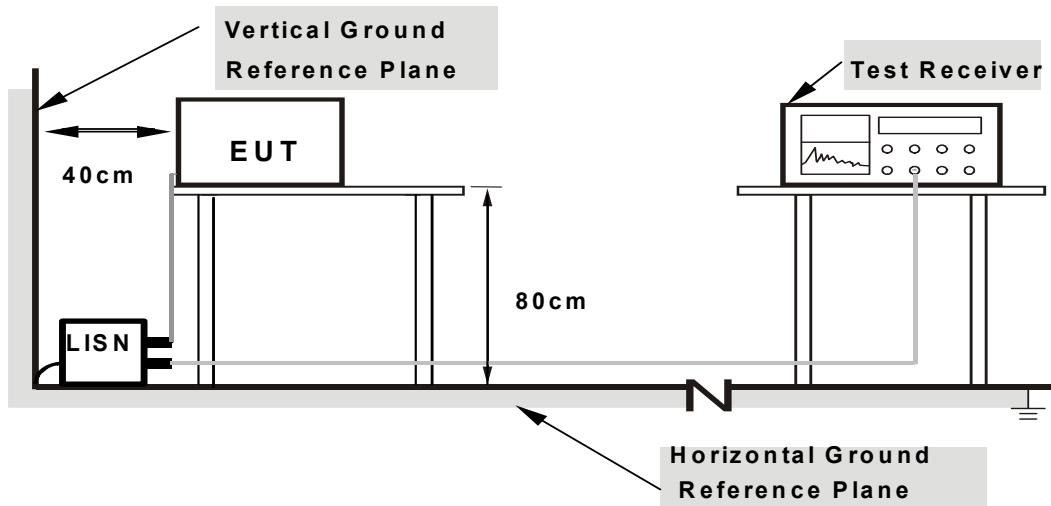

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

As noted on the data tables.




**Test Report for Hayward Industries, Inc.  
Report No. EX0020-2 Issue 3**



#### 4.1.7 TEST RESULTS

## Internal Antenna

Bureau Veritas Consumer Product Services Inc. Conducted Emissions per CISPR 16-2-1 Peak Detector Data Notes: EUT Line tested: Line EUT Mode of Operation: 915MHz Internal Antenna				Work Order # - X0020 EUT Power Input - 120VAC/ 60Hz Test Site - CEMI-5 Conditions: - 23.0°C; 54.6%RH; 1006mBar Test Engineer - Yunus Faziloglu Date of Test - 7-25-2024			

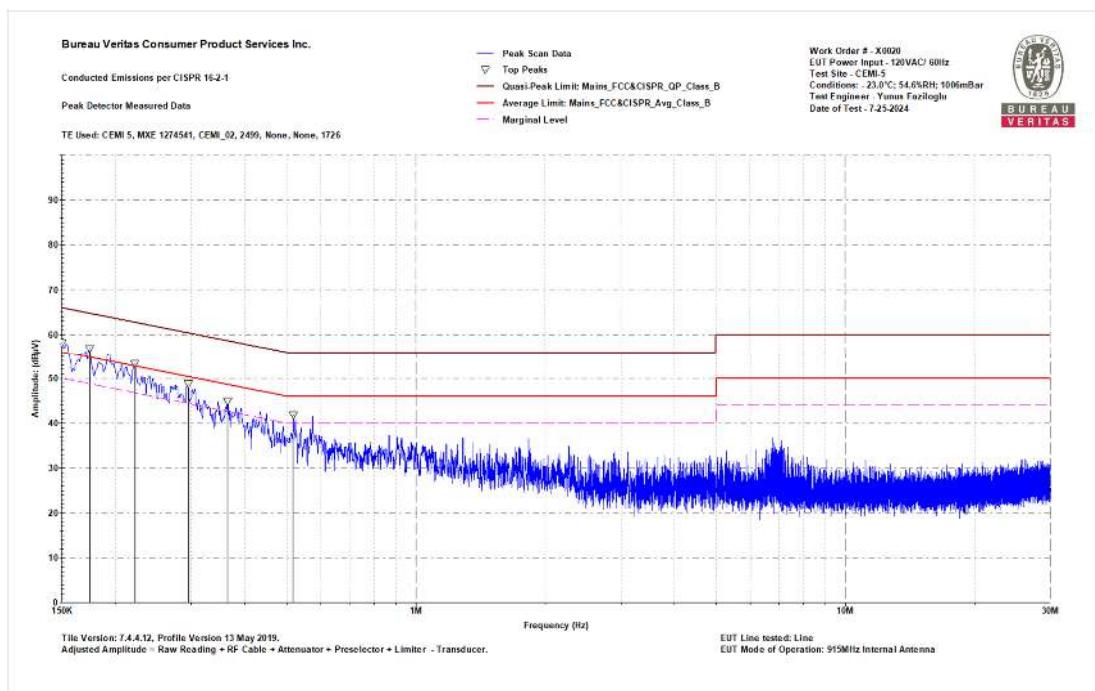

## 0.15-30MHz Line Peak Data table and Plot




**Test Report for Hayward Industries, Inc.**  
**Report No. EX0020-2 Issue 3**



Bureau Veritas Consumer Product Services Inc.	Work Order # - X0020
Conducted Emissions per CISPR 16-2-1, CISPR Average Detector	EUT Power Input - 120VAC/ 60Hz
Quick Average Detector Data	Test Site - CEMI-5
Notes:	Conditions: - 23.0°C; 54.6%RH; 1006mBar
EUT Line tested: Line	Test Engineer - Yunus Faziloglu
EUT Mode of Operation: 915MHz Internal Antenna	Date of Test - 7-25-2024

Frequency (MHz)	Raw Avg Reading (dB $\mu$ V)	Correction Factor (dB)	Adjusted Avg Amplitude (dB $\mu$ V)	Av Lim: Mains_FCC&CISP R_Avg_Class_B (dB $\mu$ V)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Avg Margin (dB)
0.152	32.1	20	52.1	55.9	-3.8	PASS	-3.8
0.204	27.1	19.9	47	53.4	-6.4	PASS	
0.238	24	19.9	43.9	52.2	-8.3	PASS	
0.268	21.6	19.9	41.4	51.2	-9.7	PASS	
0.293	21.5	19.9	41.3	50.4	-9.1	PASS	
0.325	19.1	19.9	39	49.6	-10.6	PASS	

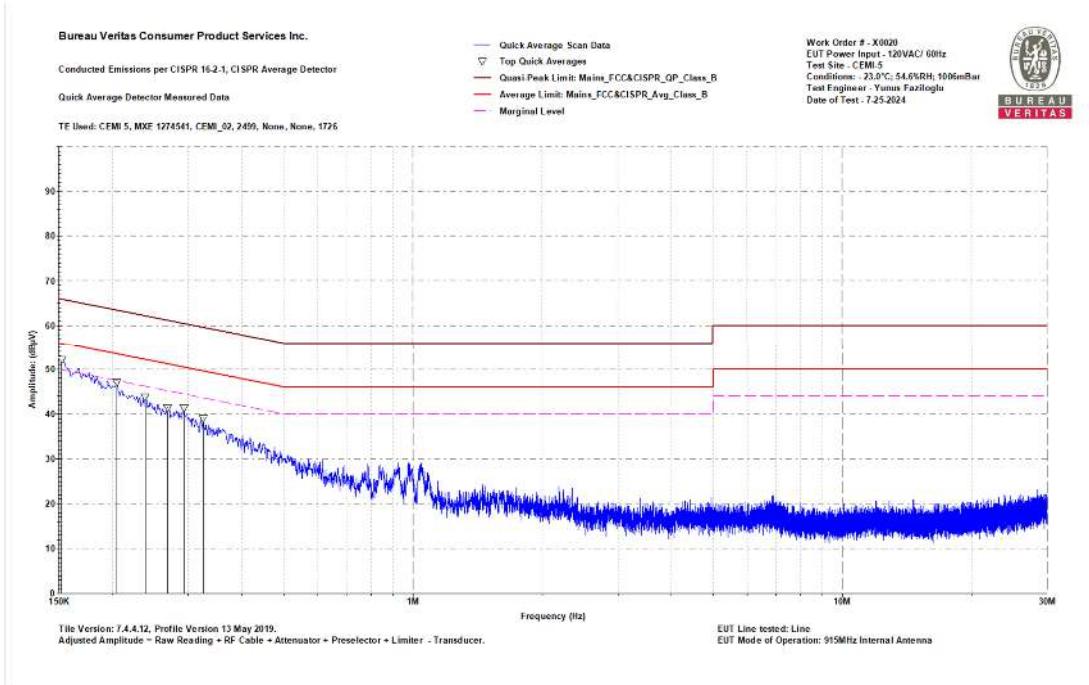

0.15-30MHz Line Quick Average Data table and Plot



**Test Report for Hayward Industries, Inc.**  
**Report No. EX0020-2 Issue 3**



Bureau Veritas Consumer Product Services Inc.

Conducted Emissions per CISPR 16-2-1

Peak Detector Data

Notes:

EUT Line tested: Neutral

EUT Mode of Operation: 915MHz Internal Antenna

Work Order # - X0020

EUT Power Input - 120VAC/ 60Hz


Test Site - CEMI-5

Conditions: - 23.0°C; 54.6%RH; 1006mBar

Test Engineer - Yunus Faziloglu

Date of Test - 7-25-2024

Frequency (MHz)	Raw Pk Reading (dB $\mu$ V)	Correction Factor (dB)	Adjusted Pk Amplitude (dB $\mu$ V)	QP Lim: Mains_FCC&CISP R_QP_Class_B (dB $\mu$ V)	Margin to the QP Limit (dB)	Pk to QP Limit Results (Pass/Fail)	Worst Margin (QP Limit) (dB)
0.151	38.8	19.9	58.8	65.9	-7.2	PASS	-7.2
0.241	34.1	19.9	54	62.1	-8.1	PASS	
0.273	28.2	19.8	48	61	-13	PASS	
0.3	28.3	19.8	48.1	60.2	-12.2	PASS	
0.351	26.6	19.8	46.5	58.9	-12.5	PASS	
0.543	21.3	19.8	41.1	56	-14.9	PASS	

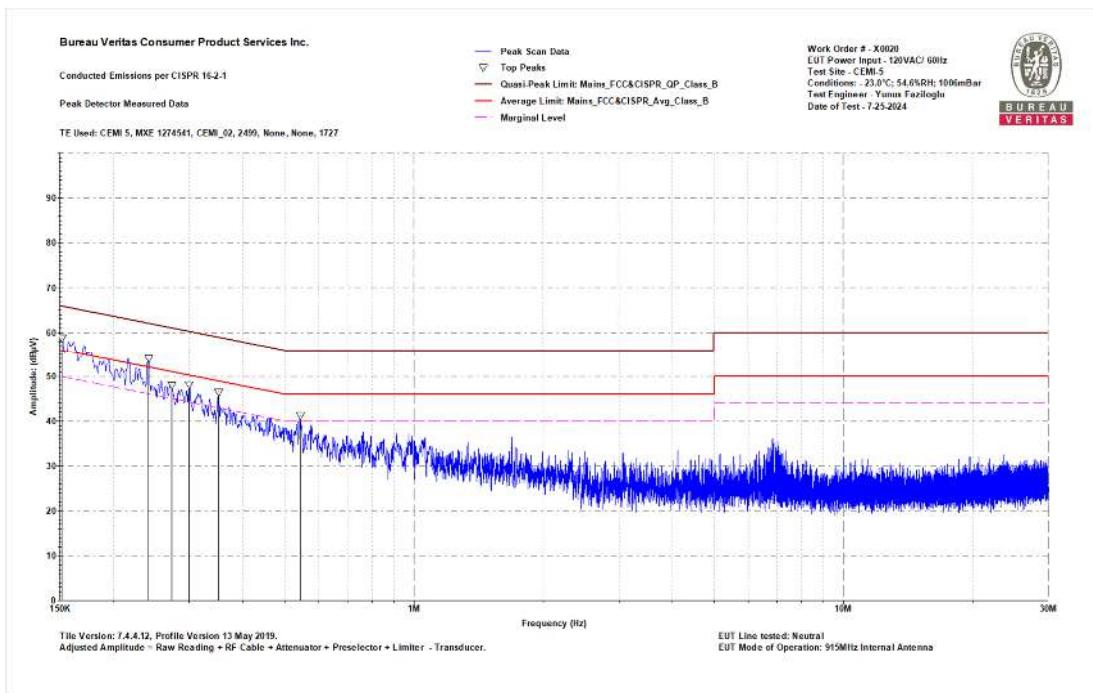

0.15-30MHz Neutral Peak Data table and Plot

Bureau Veritas Consumer Product Services Inc.

One Distribution Center Circle, #1 Littleton, MA

Tel.: (978) 486-8880  
 Fax: (978) 486-8828




**Test Report for Hayward Industries, Inc.**  
**Report No. EX0020-2 Issue 3**



Bureau Veritas Consumer Product Services Inc.	Work Order # - X0020
Conducted Emissions per CISPR 16-2-1, CISPR Average Detector	EUT Power Input - 120VAC/ 60Hz
Quick Average Detector Data	Test Site - CEMI-5
Notes:	Conditions: - 23.0°C; 54.6%RH; 1006mBar
EUT Line tested: Neutral	Test Engineer - Yunus Faziloglu
EUT Mode of Operation: 915MHz Internal Antenna	Date of Test - 7-25-2024

Frequency (MHz)	Raw Avg Reading (dB $\mu$ V)	Correction Factor (dB)	Adjusted Avg Amplitude (dB $\mu$ V)	Av Lim: Mains_FCC&CISP R_Avg_Class_B (dB $\mu$ V)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Avg Margin (dB)
0.153	31.6	19.9	51.6	55.8	-4.3	PASS	-4.3
0.195	27.8	19.9	47.7	53.8	-6.1	PASS	
0.224	24.6	19.9	44.5	52.7	-8.2	PASS	
0.257	23.3	19.9	43.2	51.5	-8.4	PASS	
0.286	21.4	19.8	41.2	50.6	-9.4	PASS	
0.319	19.2	19.8	39.1	49.7	-10.6	PASS	

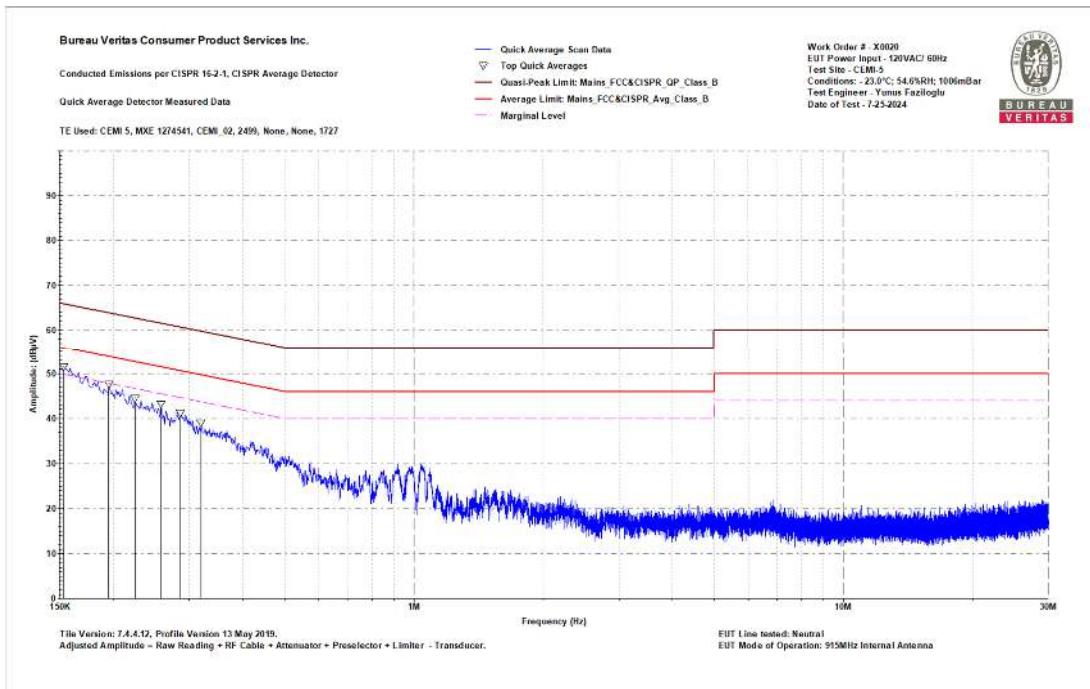

0.15-30MHz Neutral Quick Average Data table and Plot




**Test Report for Hayward Industries, Inc.**  
**Report No. EX0020-2 Issue 3**



**External Antenna**

Bureau Veritas Consumer Product Services Inc. Conducted Emissions per CISPR 16-2-1 Peak Detector Data Notes: EUT Line tested: Line EUT Mode of Operation: 915MHz External Antenna				Work Order # - X0020 EUT Power Input - 120VAC/ 60Hz Test Site - CEMI-5 Conditions: -23.0°C; 54.6%RH; 1006mBar Test Engineer - Yunus Faziloglu Date of Test - 7-25-2024			
Frequency (MHz)	Raw Pk Reading (dB $\mu$ V)	Correction Factor (dB)	Adjusted Pk Amplitude (dB $\mu$ V)	QP Lim: Mains_FCC&CISP_R_QP_Class_B (dB $\mu$ V)	Margin to the QP Limit (dB)	Pk to QP Limit Results (Pass/Fail)	Worst Margin (QP Limit) (dB)
0.162	37.9	19.9	57.8	65.4	-7.6	PASS	-7.6
0.189	34.2	19.9	54.1	64.1	-10	PASS	
0.22	32.5	19.9	52.4	62.8	-10.4	PASS	
0.25	30.8	19.9	50.7	61.8	-11	PASS	
0.292	28.1	19.9	47.9	60.5	-12.5	PASS	
0.331	25.9	19.9	45.8	59.4	-13.6	PASS	

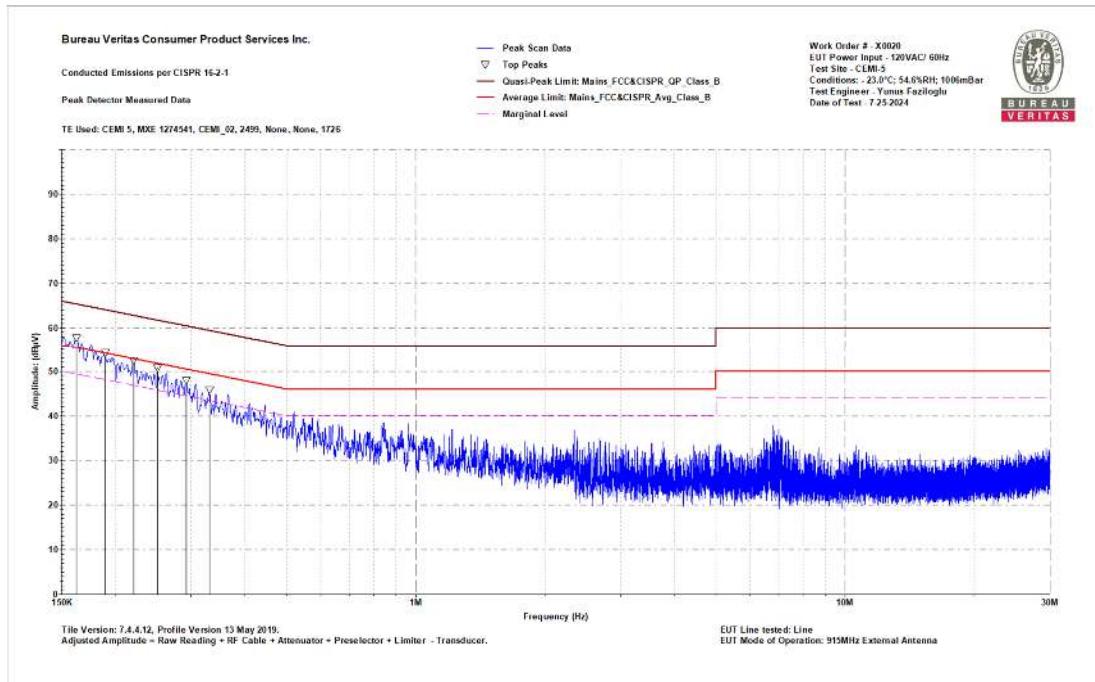

0.15-30MHz Line Peak Data table and Plot




**Test Report for Hayward Industries, Inc.**  
**Report No. EX0020-2 Issue 3**



Bureau Veritas Consumer Product Services Inc.	Work Order # - X0020
Conducted Emissions per CISPR 16-2-1, CISPR Average Detector	EUT Power Input - 120VAC/ 60Hz
Quick Average Detector Data	Test Site - CEMI-5
Notes:	Conditions: - 23.0°C; 54.6%RH; 1006mBar
EUT Line tested: Line	Test Engineer - Yunus Faziloglu
EUT Mode of Operation: 915MHz External Antenna	Date of Test - 7-25-2024

Frequency (MHz)	Raw Avg Reading (dB $\mu$ V)	Correction Factor (dB)	Adjusted Avg Amplitude (dB $\mu$ V)	Av Lim: Mains_FCC&CISP R_Avg_Class_B (dB $\mu$ V)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Avg Margin (dB)
0.154	32.1	20	52.1	55.8	-3.7	PASS	-3.7
0.201	27	19.9	46.9	53.6	-6.7	PASS	
0.257	22.2	19.9	42.1	51.5	-9.4	PASS	
0.294	21.1	19.9	40.9	50.4	-9.5	PASS	
0.371	16.9	19.9	36.8	48.5	-11.7	PASS	
0.397	15.8	19.9	35.7	47.9	-12.2	PASS	

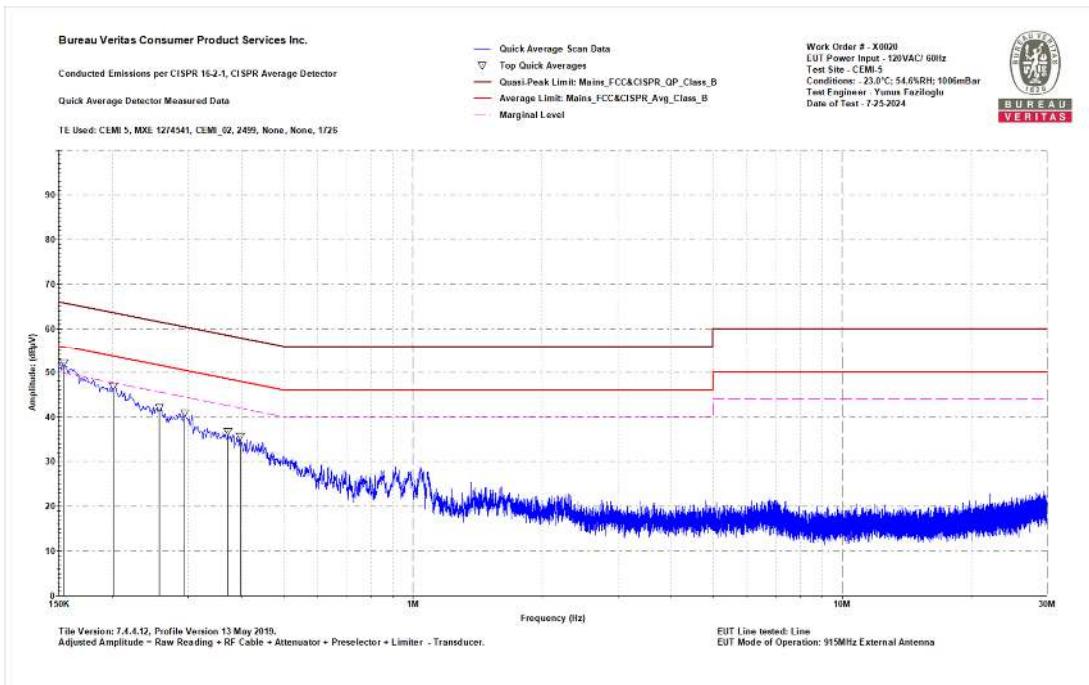

0.15-30MHz Line Quick Average Data table and Plot



**Test Report for Hayward Industries, Inc.**  
**Report No. EX0020-2 Issue 3**



Bureau Veritas Consumer Product Services Inc.

Conducted Emissions per CISPR 16-2-1

Peak Detector Data

Notes:

EUT Line tested: Neutral

EUT Mode of Operation: 915MHz External Antenna

Work Order # - X0020

EUT Power Input - 120VAC/ 60Hz


Test Site - CEMI-5

Conditions: - 23.0°C; 54.6%RH; 1006mBar

Test Engineer - Yunus Faziloglu

Date of Test - 7-25-2024

Frequency (MHz)	Raw Pk Reading (dB $\mu$ V)	Correction Factor (dB)	Adjusted Pk Amplitude (dB $\mu$ V)	QP Lim: Mains_FCC&CISP R_QP_Class_B (dB $\mu$ V)	Margin to the QP Limit (dB)	Pk to QP Limit Results (Pass/Fail)	Worst Margin (QP Limit) (dB)
0.155	38.4	19.9	58.3	65.7	-7.4	PASS	-7.4
0.182	36.9	19.9	56.8	64.4	-7.6	PASS	
0.233	32.1	19.9	51.9	62.3	-10.4	PASS	
0.295	29	19.8	48.8	60.4	-11.6	PASS	
0.337	25.3	19.8	45.1	59.3	-14.1	PASS	
0.437	21.9	19.8	41.8	57.1	-15.4	PASS	

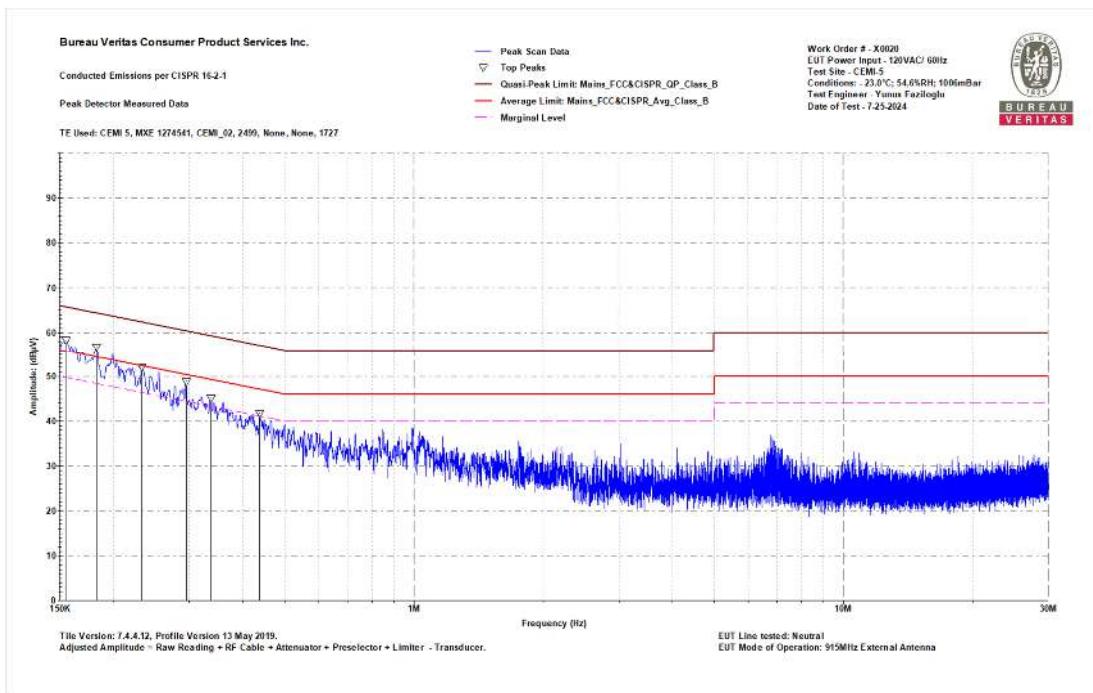

0.15-30MHz Neutral Peak Data table and Plot




**Test Report for Hayward Industries, Inc.**  
**Report No. EX0020-2 Issue 3**



Bureau Veritas Consumer Product Services Inc.	Work Order # - X0020
Conducted Emissions per CISPR 16-2-1, CISPR Average Detector	EUT Power Input - 120VAC/ 60Hz
Quick Average Detector Data	Test Site - CEMI-5
Notes:	Conditions: - 23.0°C; 54.6%RH; 1006mBar
EUT Line tested: Neutral	Test Engineer - Yunus Faziloglu
EUT Mode of Operation: 915MHz External Antenna	Date of Test - 7-25-2024

Frequency (MHz)	Raw Avg Reading (dB $\mu$ V)	Correction Factor (dB)	Adjusted Avg Amplitude (dB $\mu$ V)	Av Lim: Mains_FCC&CISP R_Avg_Class_B (dB $\mu$ V)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Avg Margin (dB)
0.154	32.3	19.9	52.2	55.8	-3.5	PASS	-3.5
0.227	24.6	19.9	44.5	52.6	-8	PASS	
0.252	23.3	19.9	43.2	51.7	-8.5	PASS	
0.293	20.9	19.8	40.7	50.4	-9.7	PASS	
0.348	18.5	19.8	38.3	49	-10.7	PASS	
0.414	15.1	19.8	35	47.6	-12.6	PASS	

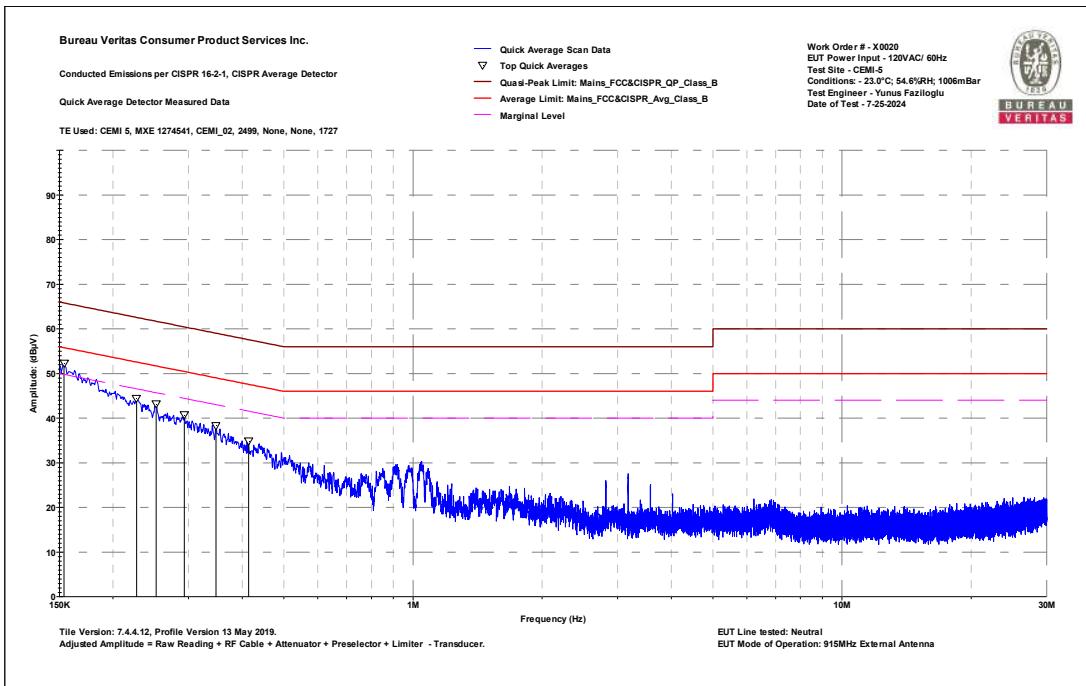

0.15-30MHz Neutral Quick Average Data table and Plot



**Test Report for Hayward Industries, Inc.  
Report No. EX0020-2 Issue 3**



## **4.2. RADIATED EMISSIONS**

### **4.2.1 LIMITS**

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

<b>FREQUENCIES (MHz)</b>	<b>FIELD STRENGTH (microvolts/meter)</b>	<b>MEASUREMENT DISTANCE (meters)</b>
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. Lower limit applies at the transition frequencies.
2. As specified in 15.35(b), for frequencies above 1000MHz, field strength limits are based on the use of measurement instrumentation employing an average detector function. However, there is also a limit on the peak level of the emissions that is 20 dB above the maximum permitted average emission limit.
3. Measurements above 6GHz or 18GHz can be performed at distances less than 3m from the EUT due to increased noise floor of the measurement system. Since such measurements produce higher amplitudes than what they would be if they were measured at 3 meters, this would be considered worst-case and no compensation back to 3 meters is needed. Limit conversion above 30MHz is done by using inverse linear distance extrapolation factor (20dB/decade) as allowed in FCC 15.31(f)(1).  
$$\text{Limit}(1\text{m}) = \text{Limit}(3\text{m}) + 20 \cdot \log(3/1) = \text{Limit}(3\text{m}) + 9.5$$
$$\text{Limit}(0.1\text{m}) = \text{Limit}(3\text{m}) + 20 \cdot \log(3/0.1) = \text{Limit}(3\text{m}) + 29.5$$
4. Limit conversion below 30MHz is done by using the square of an inverse linear distance extrapolation factor (40 dB/decade) as allowed in FCC 15.31(f)(2).  
$$\text{Limit}(3\text{m}) = \text{Limit}(30\text{m}) + 40 \cdot \log(30/3) = \text{Limit}(30\text{m}) + 40$$
$$\text{Limit}(3\text{m}) = \text{Limit}(300\text{m}) + 40 \cdot \log(300/3) = \text{Limit}(300\text{m}) + 80$$
5. Adjusted Reading (dBuV/m) = Raw Reading (dBuV) + Transducer(Correction) Factor (dB/m)  
Transducer Factor (dB/m) = Antenna Factor (dB/m) – PreAmp Gain (dB) + Cable Loss (dB) + Filter Loss (dB)  
Note: Filter loss only applies if a notch filter is used during testing.
6. RSS-GEN Table 6 H-field limits are 51.5dB lower than FCC 15.209(a) E-field limits. Measurements are performed in terms of magnetic field and converted to electric field using the free space impedance of  $377\Omega$  ( $E\text{-field} = H\text{-field} + 51.5$ ). Therefore resulting pass/fail margin would be the same if an E-field reading is compared to an H-field limit or an H-field reading is compared to an E-field limit.



**Test Report for Hayward Industries, Inc.**  
**Report No. EX0020-2 Issue 3**



#### 4.2.2 TEST EQUIPMENT USED

Rev. 4/28/2023

Spectrum Analyzers / Receivers /Preselectors		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Rental MXE EMI Receiver(1170725)		20Hz-26.5GHz	N9038A	Agilent	MY51210151	1170725	I	2/21/2024	2/21/2023
<b>Radiated Emissions Sites</b>									
EMI Chamber 1		719150	2762A-6	A-0015	30-1000MHz	1685	I	11/29/2024	11/29/2022
EMI Chamber 1		719150	2762A-6	A-0015	1-18GHz	1685	I	12/29/2024	12/29/2022
<b>Preamps /Couplers Attenuators / Filters</b>									
8447F Rental PA		9KHz-1.3GHz	84477F	HP	3113A05395	Asset	II	10/17/2023	Calibrated on 10/17/2022
<b>Antennas</b>									
Red-Black Biolog		30-2000MHz	JB1	Sunol	A091604-2	1106	I	9/14/2023	6/14/2021
3117 Horn / PA		1-18GHz	3117	ETS	259199	2710	I	3/15/2024	3/15/2023
Small Loop		10kHz-30MHz	PLA-130/A	ARA	1024	755	I	9/12/2024	9/12/2022
Large Loop		20Hz-5MHz	6511	EMCO	9704-1154	67	I	8/22/2024	8/22/2022
<b>Meteorological Meters/Chambers</b>									
Asset 2707			SD700	EXTECH	A.115171	2707	I	1/13/2025	Calibrated on 1/13/2023
<b>Cables</b>									
Asset #2474		9KHz-18GHz		MegaPhase			II	11/1/2023	11/1/2022
Asset #2610		9KHz-18GHz		Pasternack			II	3/3/2024	3/3/2023
Asset #2681		9KHz-18GHz		Pasternack			II	12/13/2023	12/13/2022

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



**Test Report for Hayward Industries, Inc.  
Report No. EX0020-2 Issue 3**



#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber.
- b. For below 30MHz, a loop antenna with its lowest point 1m above the ground was placed 3m away from the EUT and it was rotated 0 and 90 degrees around its vertical axis.
- c. In 30MHz-1GHz range, a biconilog antenna was mounted on a variable-height antenna tower and placed 3m away from the EUT. Antenna height was varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna were investigated. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. In 1GHz-10GHz range, a horn antenna was mounted on a variable-height antenna tower and placed 3m away from the EUT. Antenna height was varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna were investigated. The table was rotated 360 degrees to determine the position of the highest radiation.
- e. For battery operated equipment, tests were performed using fresh batteries.
- f. Following bandwidths were used during emissions testing:

<b>Freq. (MHz)</b>	<b>RBW</b>	<b>VBW</b>	<b>Pre-scan</b>	<b>Final</b>
0.009-0.15	200Hz	1kHz	Peak	Quasi Peak and RMS Power Avg (Trace Avg)
0.15-30	9kHz	30kHz	Peak	Quasi Peak and RMS Power Avg (Trace Avg)
30-1000	120kHz	300kHz	Peak	Quasi Peak
>1000	1MHz	3MHz	Peak	Peak Max Hold and RMS Power Avg (Trace Avg)


Per FCC §15.209(d), limits §15.209(a) are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. If peak measurements in these frequency bands were below the applicable limits, QPk and RMS measurements were not performed.

#### 4.2.4 DEVIATION FROM TEST STANDARD


No deviation.

#### 4.2.5 TEST SETUP

##### Below 30MHz Test Setup

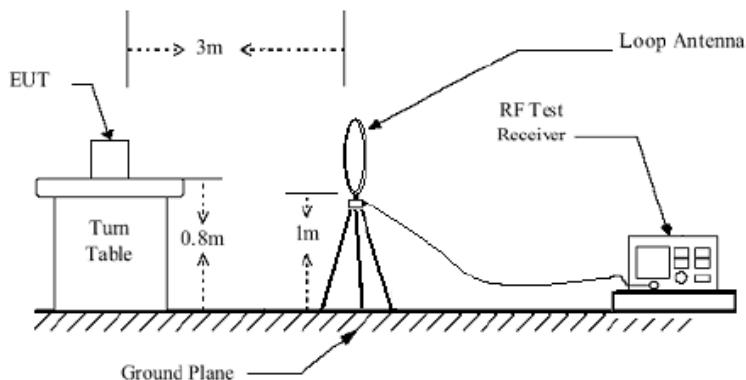

##### 30MHz - 1GHz Test Setup

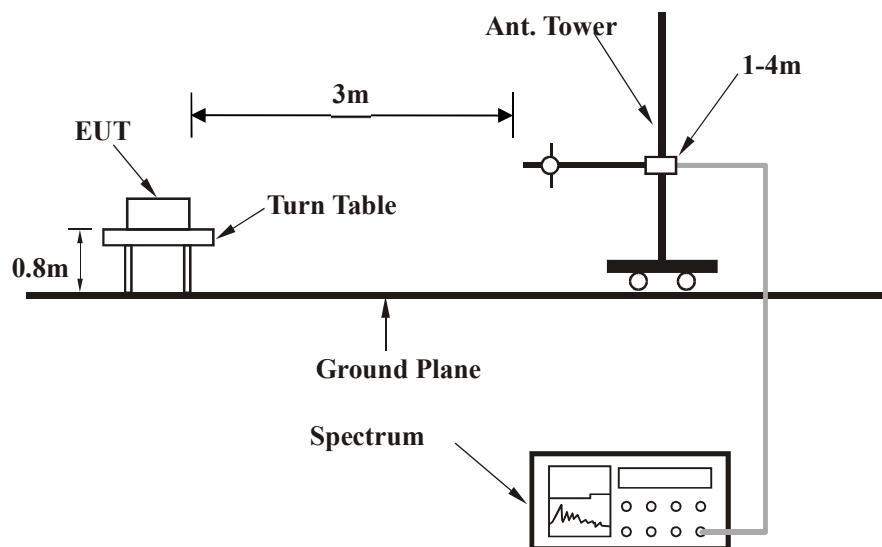




**Test Report for Hayward Industries, Inc.**  
**Report No. EX0020-2 Issue 3**



### 1GHz – 10GHz Test Setup

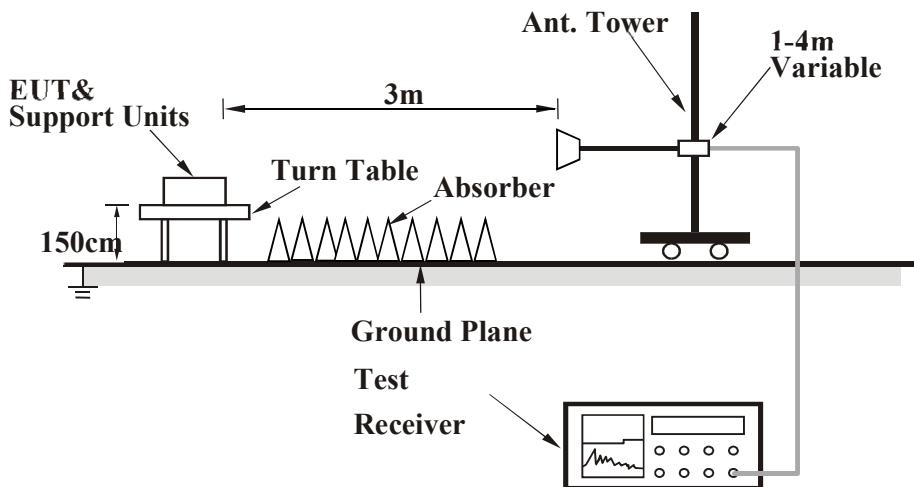

**Note:** For the actual test configuration, please refer to the Test Setup Photos exhibit.

#### 4.2.6 EUT OPERATING CONDITIONS

EUT was operated according to the manufacturer's specifications.



**Test Report for Hayward Industries, Inc.**  
**Report No. EX0020-2 Issue 3**




## 4.2.7 TEST RESULTS

### Emissions below 1GHz

#### Internal Antenna

##### Results for low channel

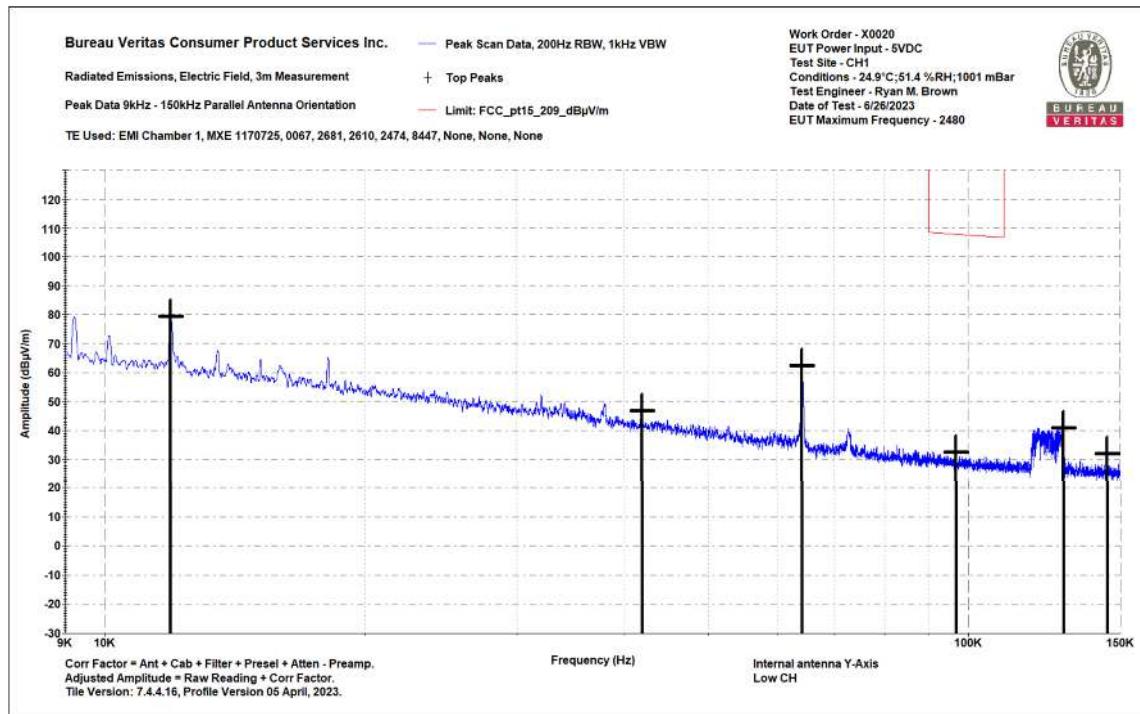

**0.009-0.15MHz Parallel**




## Test Report for Hayward Industries, Inc. Report No. EX0020-2 Issue 3



Bureau Veritas Consumer Product Services Inc. — Peak Scan Data, 200Hz RBW, 1kHz VBW  
Radiated Emissions, Electric Field, 3m Measurement + Top Peaks  
Peak Data 9kHz - 150kHz Perpendicular Antenna Orientation — Limit: FCC\_pt15\_209\_dBpV/m  
TE Used: EMI Chamber 1, MXE 1170725, 0067, 2681, 2610, 2474, 8447, None, None, None


Work Order - X0020  
EUT Power Input - 5VDC  
Test Site - CH1  
Conditions - 24.9°C; 51.4 %RH; 1001 mBar  
Test Engineer - Ryan M. Brown  
Date of Test - 6/26/2023  
EUT Maximum Frequency - 2480

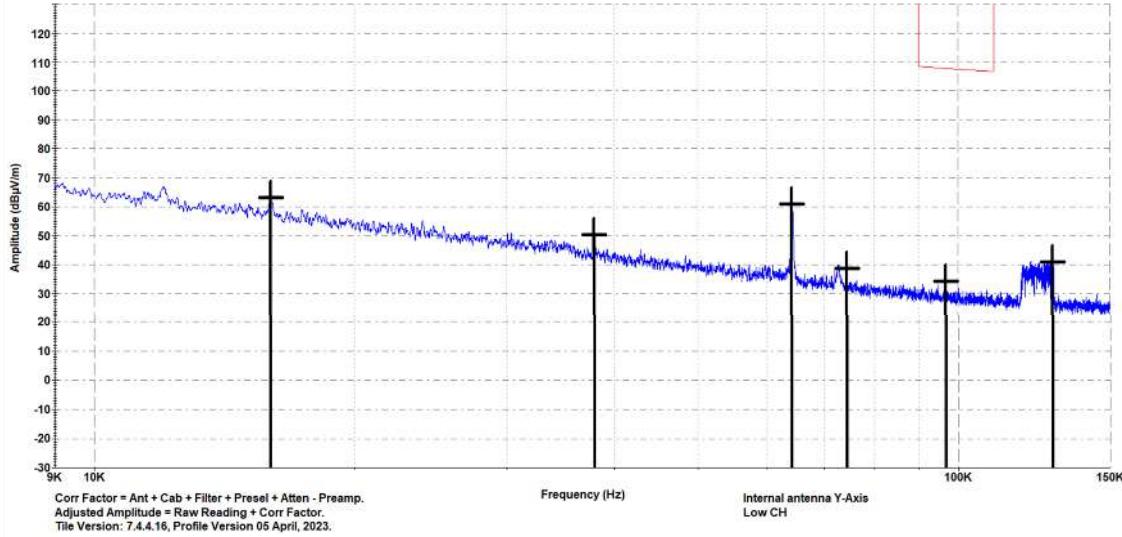

### 0.009-0.15MHz Perpendicular

Bureau Veritas Consumer Product Services Inc. — Peak Scan Data, 9kHz RBW, 30kHz VBW  
Radiated Emissions, Magnetic Field, 3m Measurement + Top Peaks  
Peak Data 150kHz - 1MHz Parallel Antenna Orientation — Limit: FCC\_pt15\_209\_dBpV/m  
TE Used: EMI Chamber 1, MXE 1170725, 0067, 2681, 2610, 2474, 8447, None, None, None

Work Order - X0020  
EUT Power Input - 5VDC  
Test Site - CH1  
Conditions - 24.9°C; 51.4 %RH; 1001 mBar  
Test Engineer - Ryan M. Brown  
Date of Test - 6/26/2023  
EUT Maximum Frequency - 2480

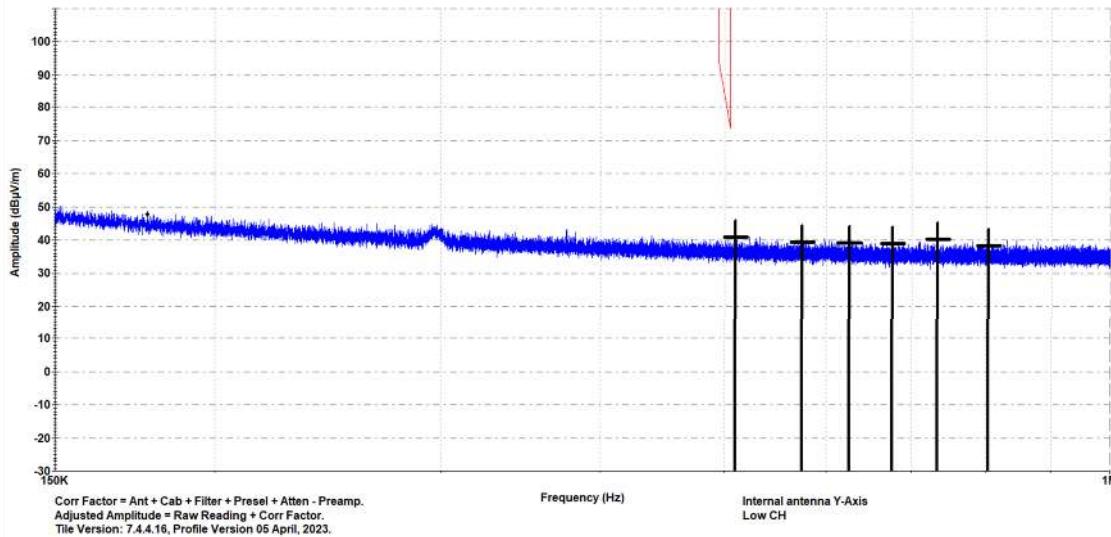

### 0.15-1MHz Parallel

Bureau Veritas Consumer Product Services Inc.

One Distribution Center Circle, #1  
Littleton, MA

Tel.: (978) 486-8880  
Fax: (978) 486-8828




## Test Report for Hayward Industries, Inc. Report No. EX0020-2 Issue 3



Bureau Veritas Consumer Product Services Inc. — Peak Scan Data, 9kHz RBW, 30kHz VBW  
Radiated Emissions, Magnetic Field, 3m Measurement + Top Peaks  
Peak Data 150kHz - 1MHz Perpendicular Antenna Orientation — Limit: FCC\_pt15\_209\_dBpV/m  
TE Used: EMI Chamber 1, MXE 1170725, 0067, 2681, 2610, 2474, 8447, None, None, None


Work Order - X0020  
EUT Power Input - 5VDC  
Test Site - CH1  
Conditions - 24.9°C; 51.4 %RH; 1001 mBar  
Test Engineer - Ryan M. Brown  
Date of Test - 6/26/2023  
EUT Maximum Frequency - 2480

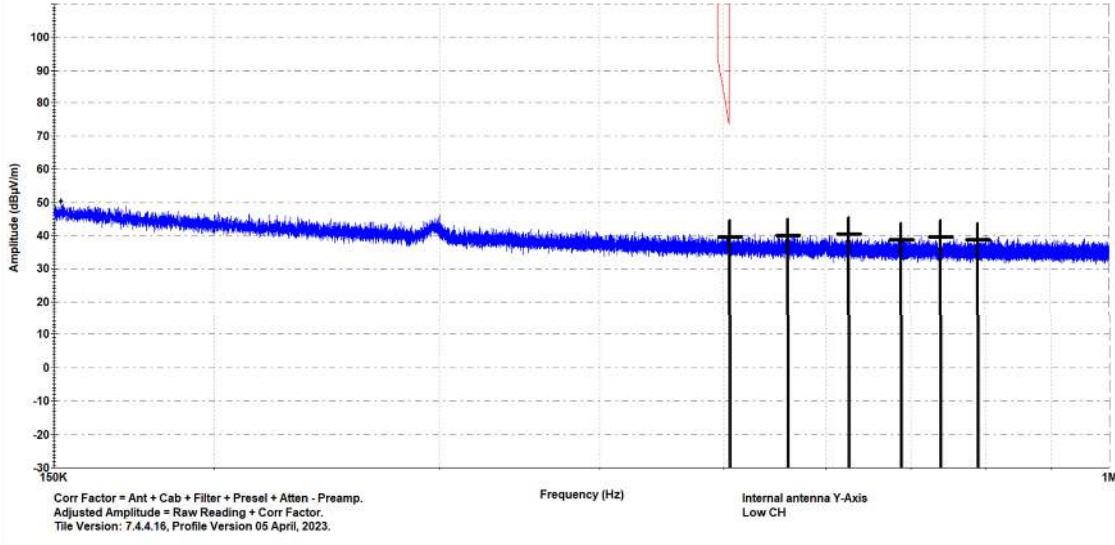

### 0.15-1MHz Perpendicular

Bureau Veritas Consumer Product Services Inc. — Peak Scan Data, 9kHz RBW, 30kHz VBW  
Radiated Emissions, Magnetic Field, 3m Measurement + Top Peaks  
Peak Data 1-30MHz Parallel Antenna Orientation — Limit: FCC\_pt15\_209\_dBpV/m  
TE Used: EMI Chamber 1, MXE 1170725, 0755, 2681, 2610, 2466, 8447, None, None, None

Work Order - X0020  
EUT Power Input - 5VDC  
Test Site - CH1  
Conditions - 24.9°C; 51.4 %RH; 1001 mBar  
Test Engineer - Ryan M. Brown  
Date of Test - 6/26/2023  
EUT Maximum Frequency - 2480

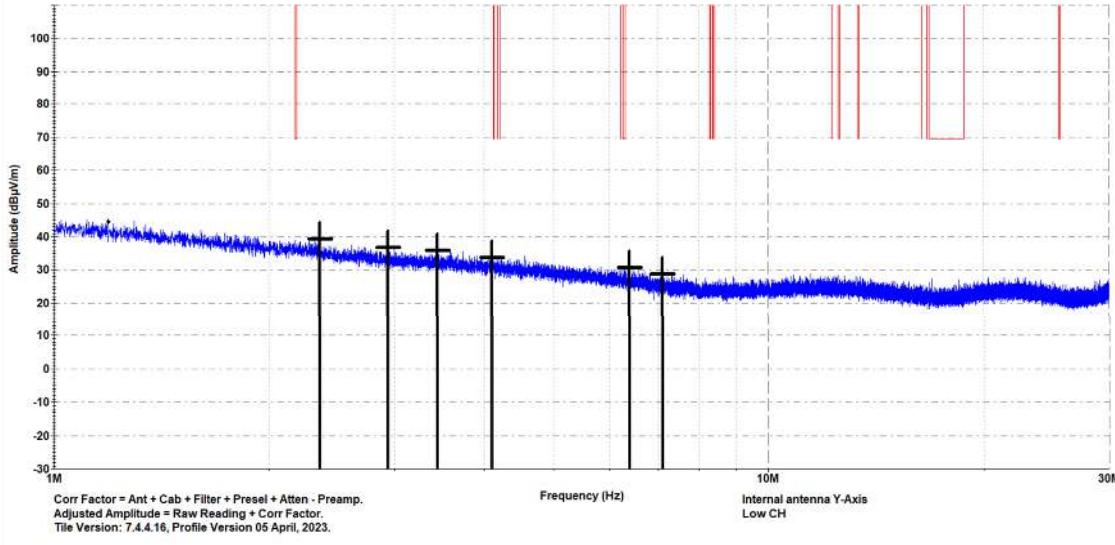

### 1-30MHz Parallel


Bureau Veritas Consumer Product Services Inc.

One Distribution Center Circle, #1 Littleton, MA

Tel.: (978) 486-8880  
Fax: (978) 486-8828



**Test Report for Hayward Industries, Inc.**  
**Report No. EX0020-2 Issue 3**

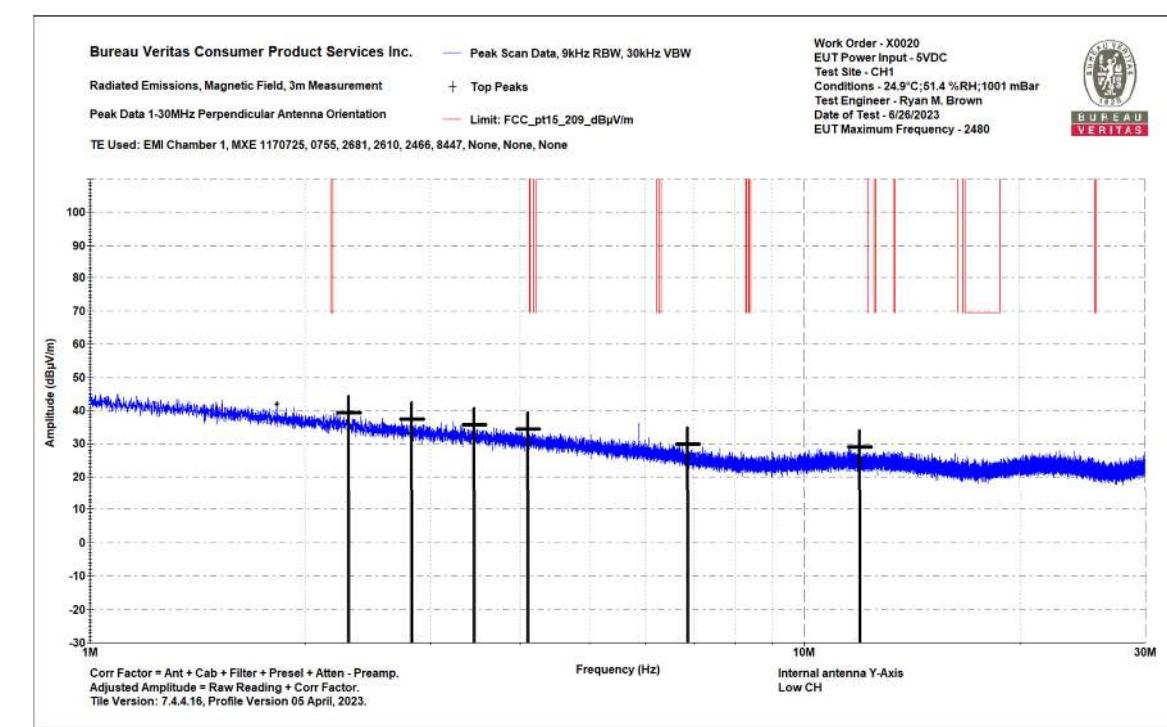

**1-30MHz Perpendicular**

Bureau Veritas Consumer Product Services Inc.	Work Order - X0020
Radiated Emissions Electric Field 3m Distance	EUT Power Input - 5VDC
Top Peaks Vertical 30-1000MHz	Test Site - CH1
Notes:	Conditions - 23.2°C;47.0 %RH;1016 mBar
Internal antenna Y-Axis	Test Engineer - Ryan M. Brown
Low CH	Date of Test - 6/22/2023
0	


Frequency (MHz)	Peak Reading (dBpV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBpV/m)	Lim1: FCC_pt15_209 (dBpV/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Antenna Height (cm)	Turntable Azimuth (degrees)
37.614	38.7	-3.6	35.1	40	-4.9	PASS	-4.9	100	180
993.259	28.9	6.9	35.8	54	-18.2	PASS		150	315

**30-1000MHz Vertical Data Table**




# Test Report for Hayward Industries, Inc.

## Report No. EX0020-2 Issue 3

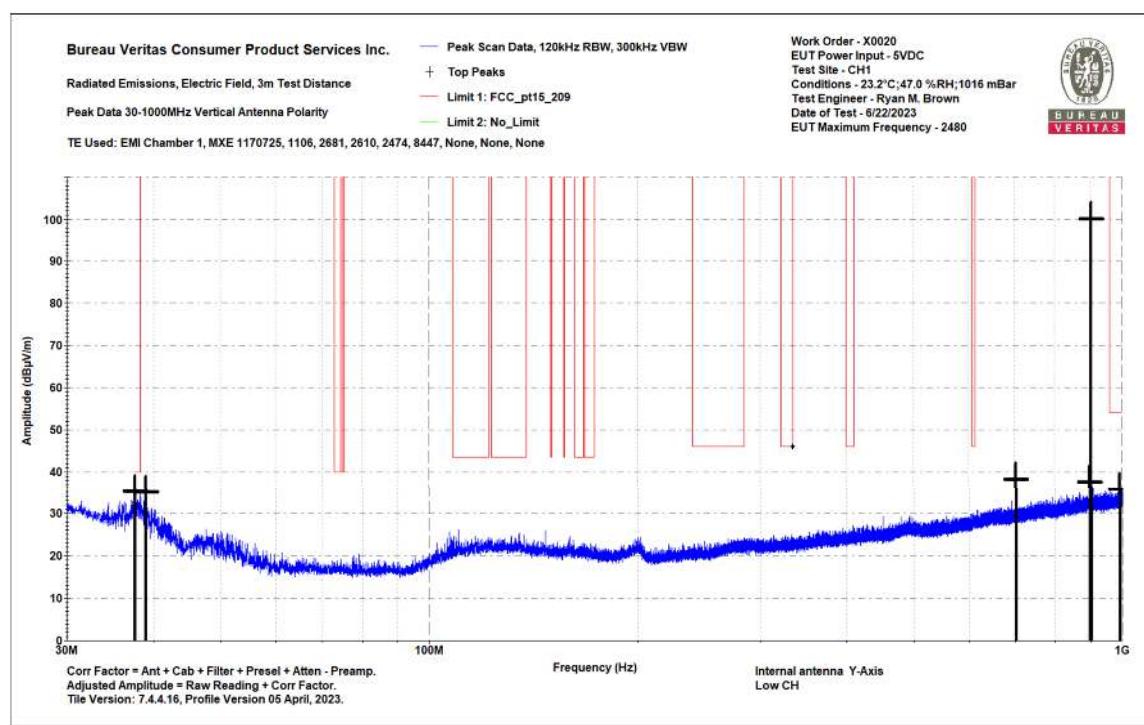



## Test Report for Hayward Industries, Inc. Report No. EX0020-2 Issue 3

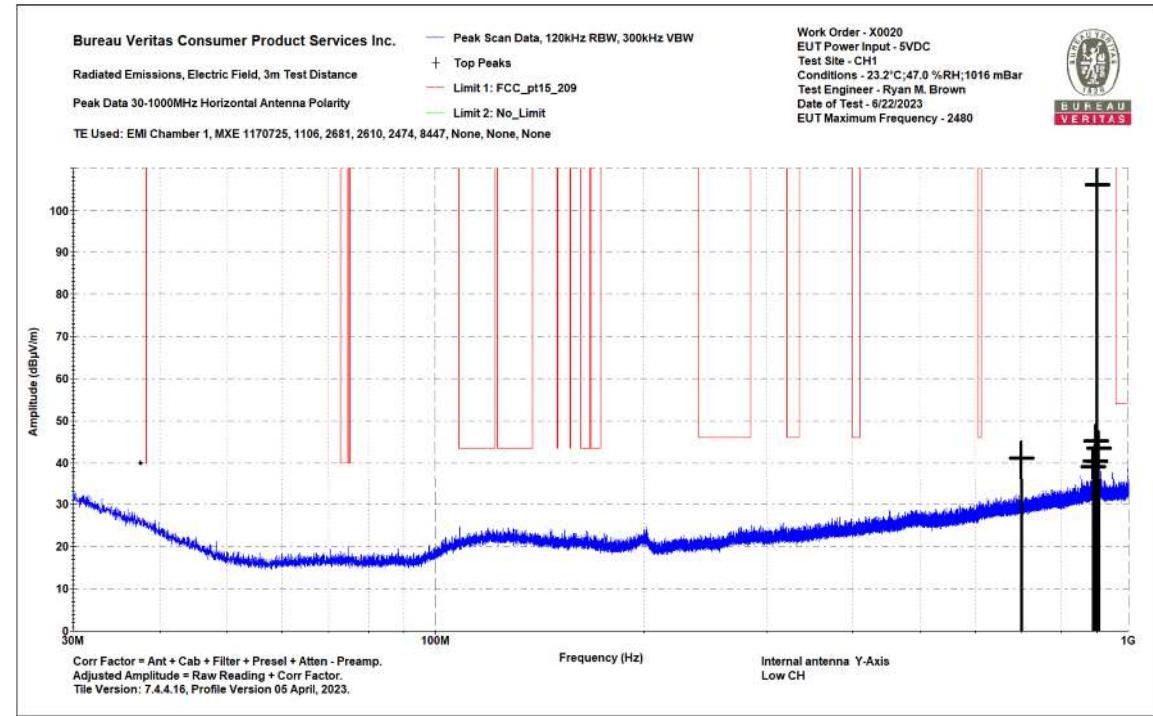

**30-1000MHz Horizontal Plot**  
**No Emissions Detected in the Restricted Bands**



**Test Report for Hayward Industries, Inc.**  
**Report No. EX0020-2 Issue 3**




**Results for Mid Channel**

Bureau Veritas Consumer Product Services Inc.	Work Order - X0020
Radiated Emissions Electric Field 3m Distance	EUT Power Input - 5VDC
Top Peaks Vertical 30-1000MHz	Test Site - CH1
Notes:	Conditions - 23.2°C;47.0 %RH;1016 mBar
Internal antenna Y-Axis	Test Engineer - Ryan M. Brown
Mid CH	Date of Test - 6/22/2023
0	

Frequency (MHz)	Peak Reading (dB $\mu$ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB $\mu$ V/m)	Lim1: FCC_pt15_209 (dB $\mu$ V/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Antenna Height (cm)	Turntable Azimuth (degrees)
37.76	37.8	-3.7	34.1	40	-5.9	PASS	-5.9	100	45
995.562	28.7	6.9	35.7	54	-18.3	PASS		250	315

**30-1000MHz Vertical Data Table**

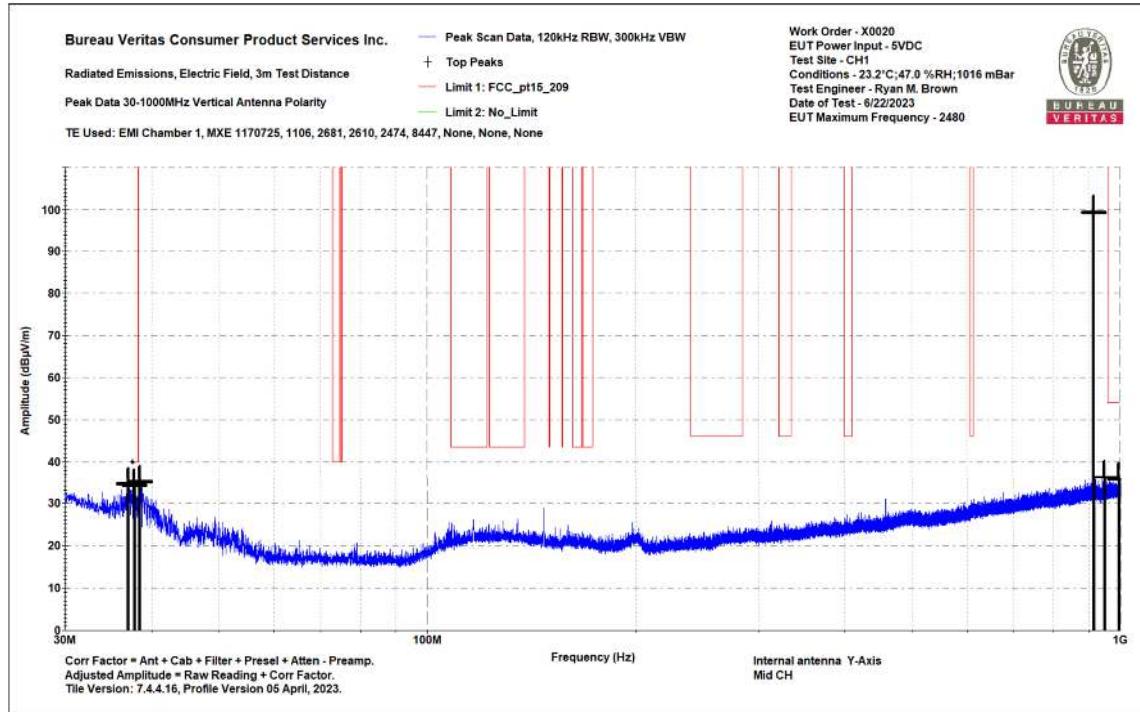

**30-1000MHz Vertical Plot**



**Test Report for Hayward Industries, Inc.**  
**Report No. EX0020-2 Issue 3**



Bureau Veritas Consumer Product Services Inc.

Radiated Emissions Electric Field 3m Distance

Top Peaks Horizontal 30-1000MHz

Notes:

Internal antenna Y-Axis

Mid CH

0

Work Order - X0020

EUT Power Input - 5VDC

Test Site - CH1


Conditions - 23.2°C; 47.0 %RH; 1016 mBar

Test Engineer - Ryan M. Brown

Date of Test - 6/22/2023

Frequency (MHz)	Peak Reading (dB $\mu$ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB $\mu$ V/m)	Lim1: FCC_pt15_209 (dB $\mu$ V/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
962.995	30	6.3	36.3	54	-17.7	PASS	-17.7	150	45

**30-1000MHz Horizontal Data Table**

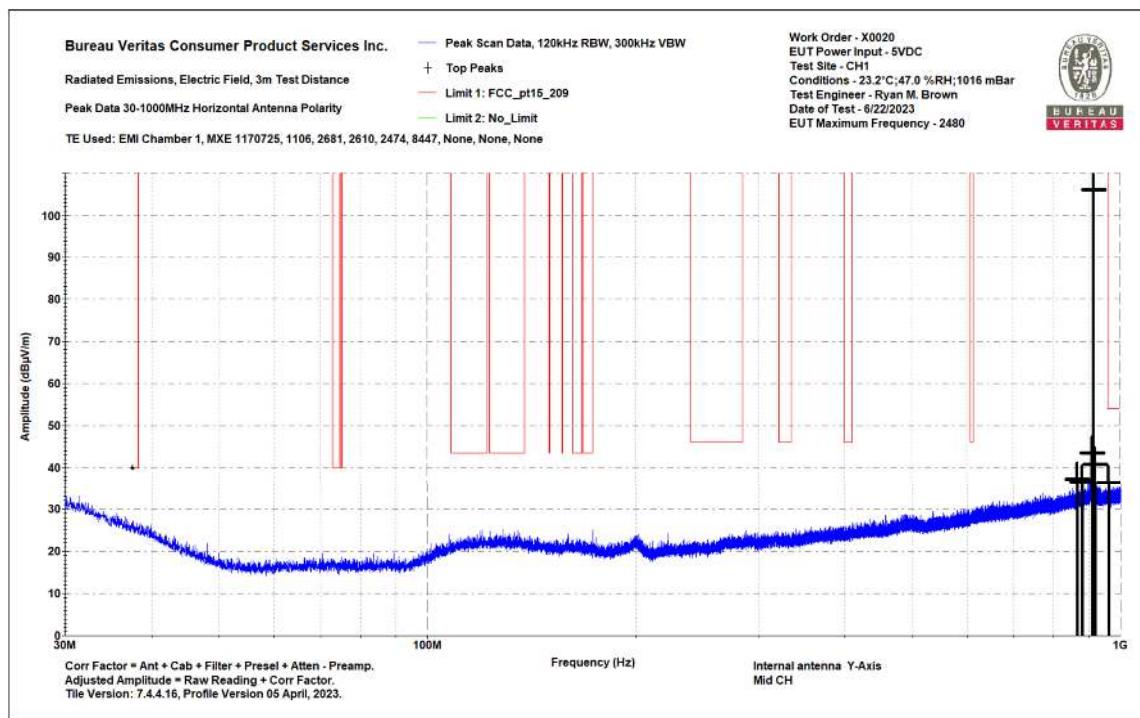

**30-1000MHz Horizontal Plot**

Bureau Veritas Consumer Product Services Inc.

One Distribution Center Circle, #1 Littleton, MA

Tel.: (978) 486-8880  
Fax: (978) 486-8828



## Test Report for Hayward Industries, Inc. Report No. EX0020-2 Issue 3




### Results for High Channel

Bureau Veritas Consumer Product Services Inc.  
Radiated Emissions Electric Field 3m Distance  
Top Peaks Vertical 30-1000MHz  
Notes:  
Internal antenna Y-Axis  
High CH 927.7GHz  
0

Work Order - X0020  
EUT Power Input - 5VDC  
Test Site - CH1  
Conditions - 23.2°C;47.0 %RH;1016 mBar  
Test Engineer - Ryan M. Brown  
Date of Test - 8/23/2023

Frequency (MHz)	Peak Reading (dB $\mu$ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB $\mu$ V/m)	Lim1: FCC_pt15_209 (dB $\mu$ V/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Antenna Height (cm)	Turntable Azimuth (degrees)
975.726	29.2	6.6	35.8	54	-18.2	PASS	-18.2	150	270


### 30-1000MHz Vertical Data Table

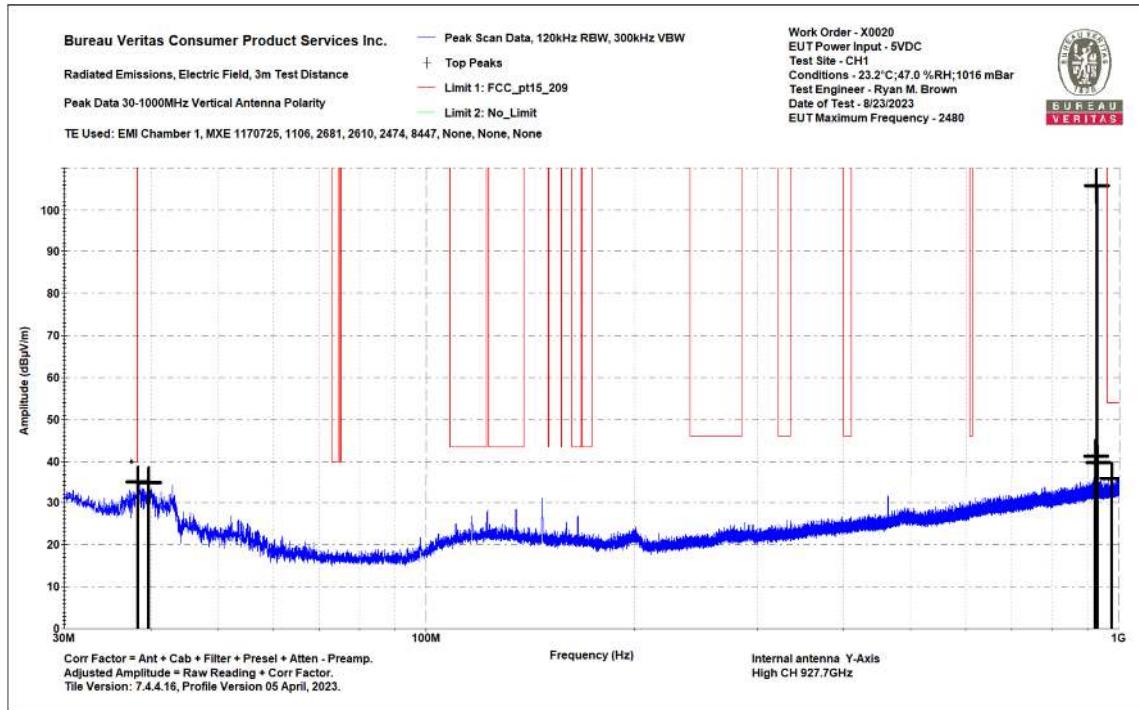

### 30-1000MHz Vertical Plot



## Test Report for Hayward Industries, Inc. Report No. EX0020-2 Issue 3

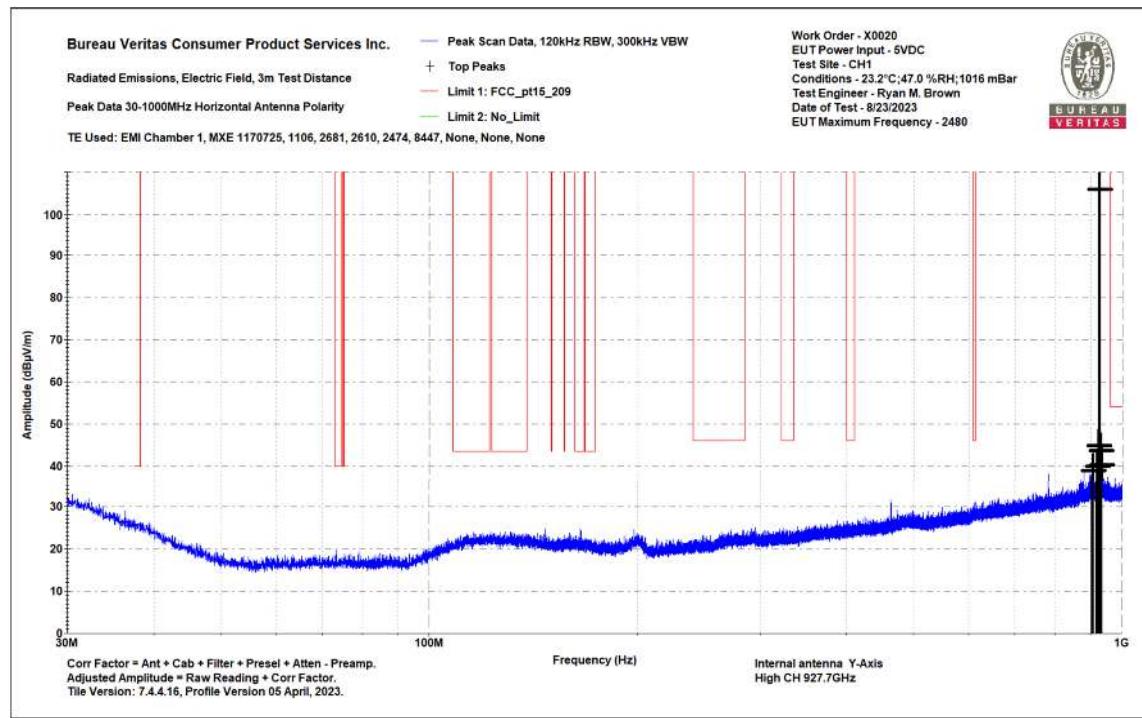

**30-1000MHz Horizontal Plot**  
**No Emissions Detected in the Restricted Bands**



**Test Report for Hayward Industries, Inc.**  
**Report No. EX0020-2 Issue 3**




**External Antenna**

**Results for Low Channel**

Bureau Veritas Consumer Product Services Inc. Radiated Emissions Electric Field 3m Distance Top Peaks Vertical 30-1000MHz Notes: External antenna Z-Axis External Antenna Horizontal Low CH				Work Order - X0020 EUT Power Input - 5VDC Test Site - CH1 Conditions - 23.2°C;47.0 %RH;1016 mBar Test Engineer - Ryan M. Brown Date of Test - 6/22/2023										
Frequency (MHz)	Peak Reading (dB $\mu$ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB $\mu$ V/m)	Lim1: FCC_pt15_209	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: No_Limit (dB $\mu$ V/m)	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	Turntable Azimuth (degrees)	
38.172	38.7	-4	34.7	40	-5.3	PASS	-5.3	200	-165.3	PASS		100	225	
998.181	30.4	6.9	37.3	54	-16.7	PASS		200	-162.7	PASS		150	270	

**30-1000MHz Vertical Data Table**

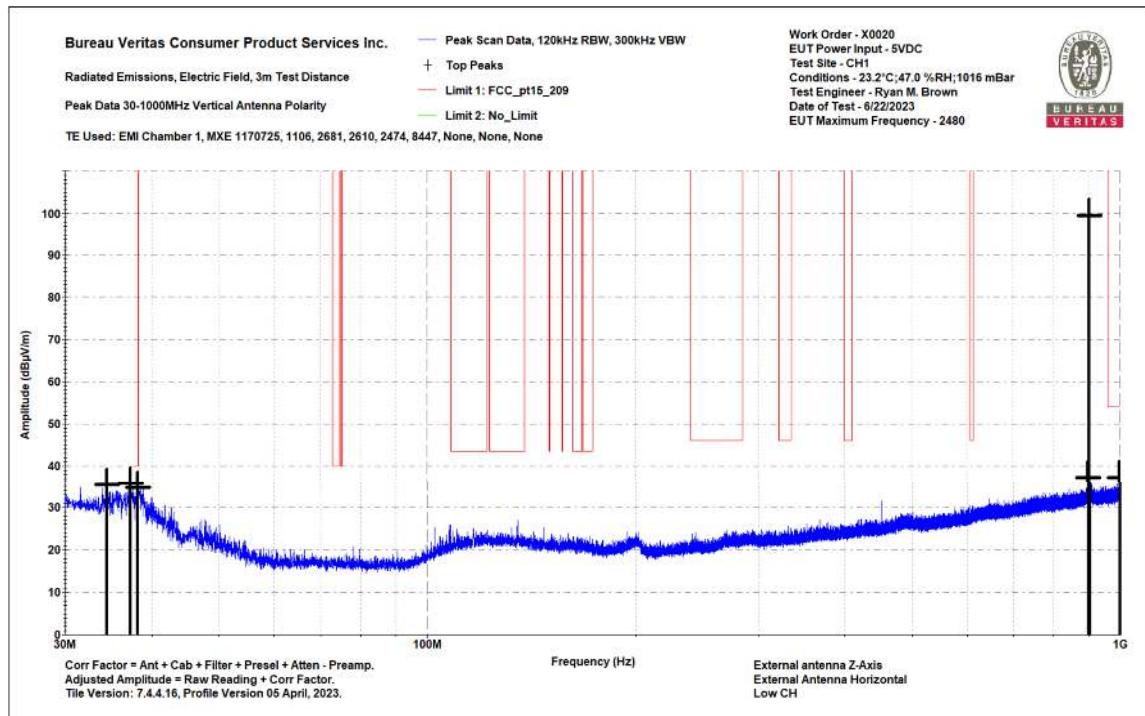

**30-1000MHz Vertical Plot**



**Test Report for Hayward Industries, Inc.**  
**Report No. EX0020-2 Issue 3**




Bureau Veritas Consumer Product Services Inc.  
Radiated Emissions Electric Field 3m Distance  
Top Peaks Horizontal 30-1000MHz  
Notes:  
External antenna Z-Axis  
External Antenna Horizontal  
Low CH

Work Order - X0020  
EUT Power Input - 5VDC  
Test Site - CH1  
Conditions - 23.2°C; 47.0 %RH; 1016 mBar  
Test Engineer - Ryan M. Brown  
Date of Test - 6/22/2023

Frequency (MHz)	Peak Reading (dB $\mu$ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB $\mu$ V/m)	Lim1: FCC_pt15_209 (dB $\mu$ V/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
998.181	32.5	6.9	39.4	54	-14.6	PASS	-14.6	150	270

**30-1000MHz Horizontal Data Table**

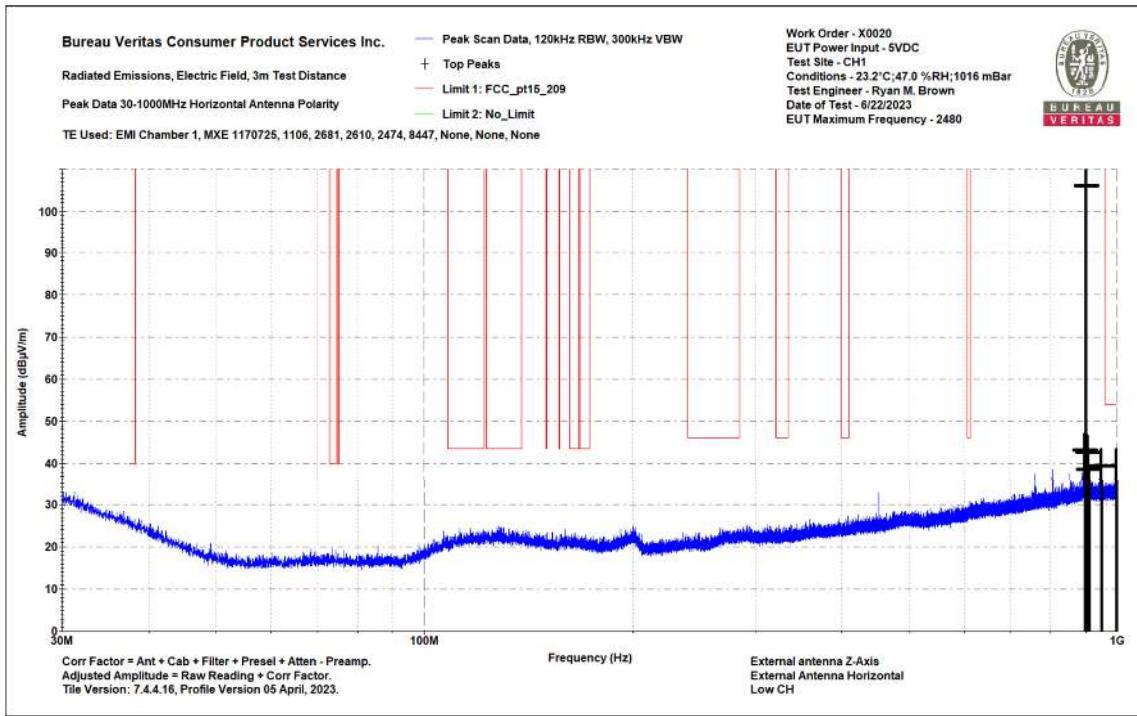


**30-1000MHz Horizontal Plot**




## Test Report for Hayward Industries, Inc. Report No. EX0020-2 Issue 3



### Results for Mid Channel

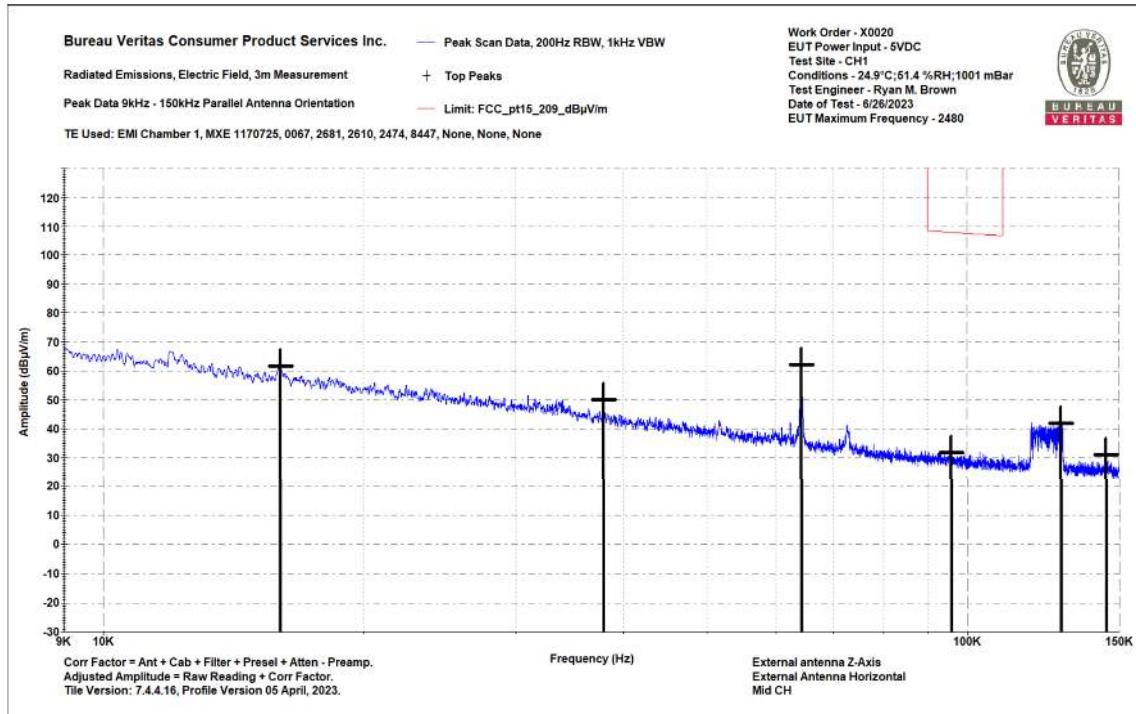

### 0.009-0.15MHz Parallel

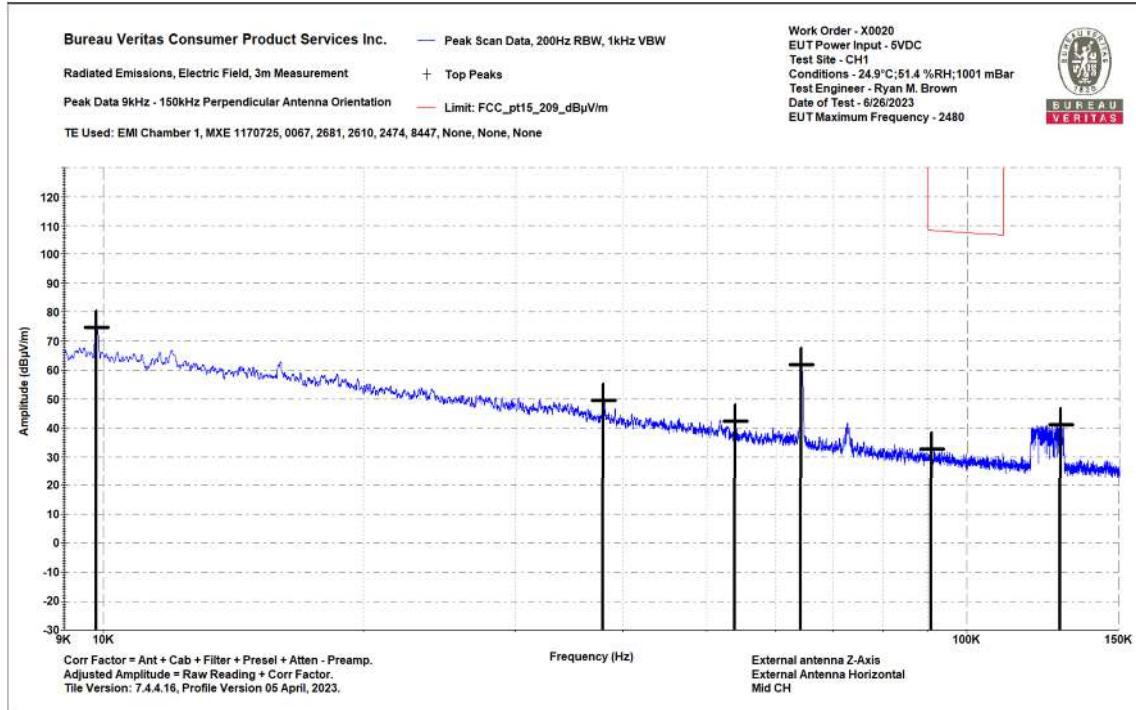

### 0.009-0.15MHz Perpendicular


Bureau Veritas Consumer Product Services Inc.

One Distribution Center Circle, #1  
Littleton, MA


Tel.: (978) 486-8880  
Fax: (978) 486-8828



## Test Report for Hayward Industries, Inc. Report No. EX0020-2 Issue 3

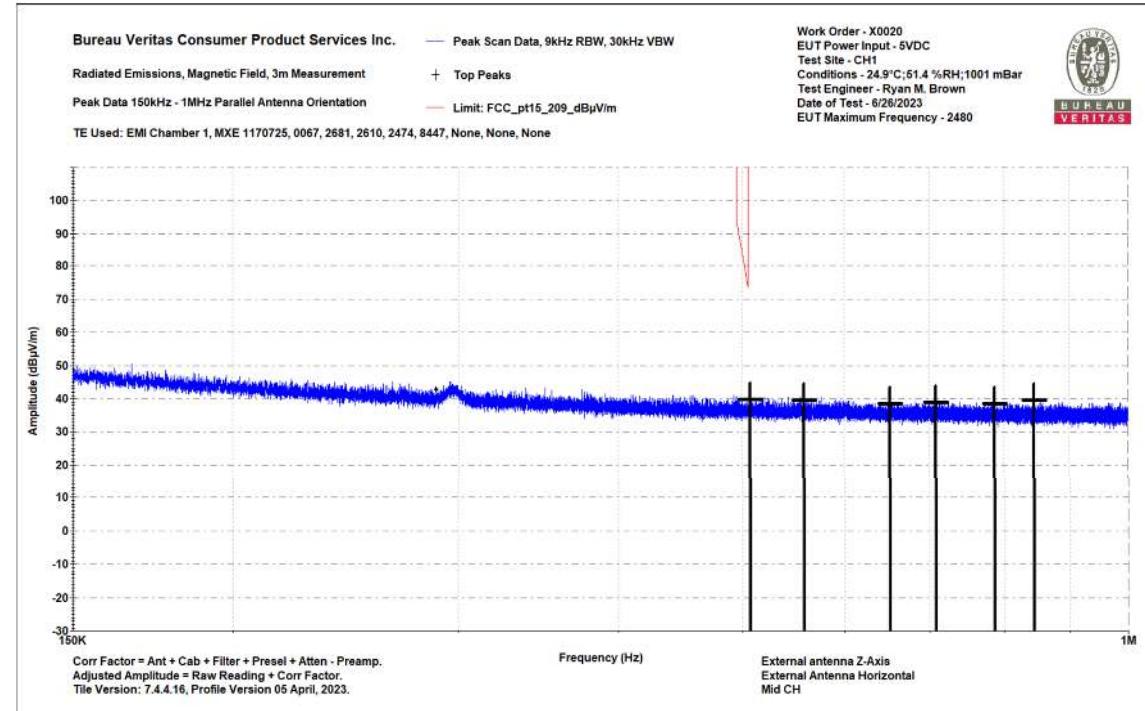

### 0.15-1MHz Parallel

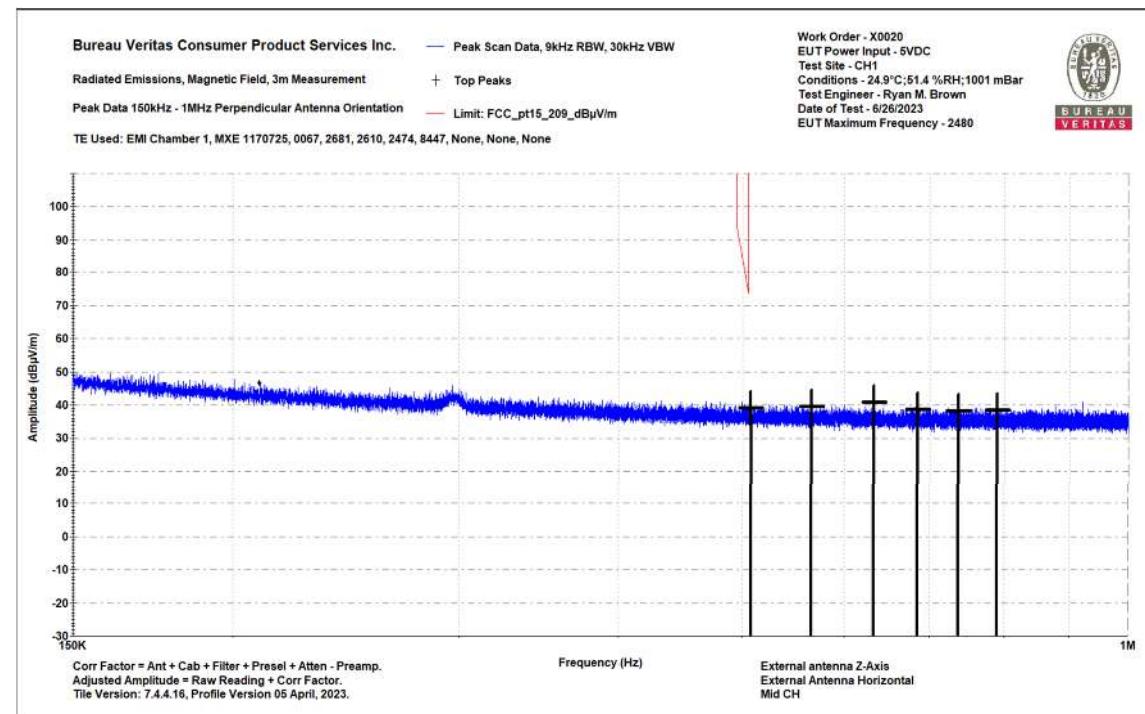

### 0.15-1MHz Perpendicular

Bureau Veritas Consumer Product  
Services Inc.

One Distribution Center Circle, #1  
Littleton, MA

Tel.: (978) 486-8880  
Fax: (978) 486-8828




## Test Report for Hayward Industries, Inc. Report No. EX0020-2 Issue 3



Bureau Veritas Consumer Product Services Inc. — Peak Scan Data, 9kHz RBW, 30kHz VBW  
Radiated Emissions, Magnetic Field, 3m Measurement + Top Peaks  
Peak Data 1-30MHz Parallel Antenna Orientation — Limit: FCC\_pt15\_209\_dBpV/m  
TE Used: EMI Chamber 1, MXE 1170725, 0755, 2681, 2610, 2466, 8447, None, None, None


Work Order - X0020  
EUT Power Input - 5VDC  
Test Site - CH1  
Conditions - 24.9°C; 51.4 %RH; 1001 mBar  
Test Engineer - Ryan M. Brown  
Date of Test - 8/26/2023  
EUT Maximum Frequency - 2480

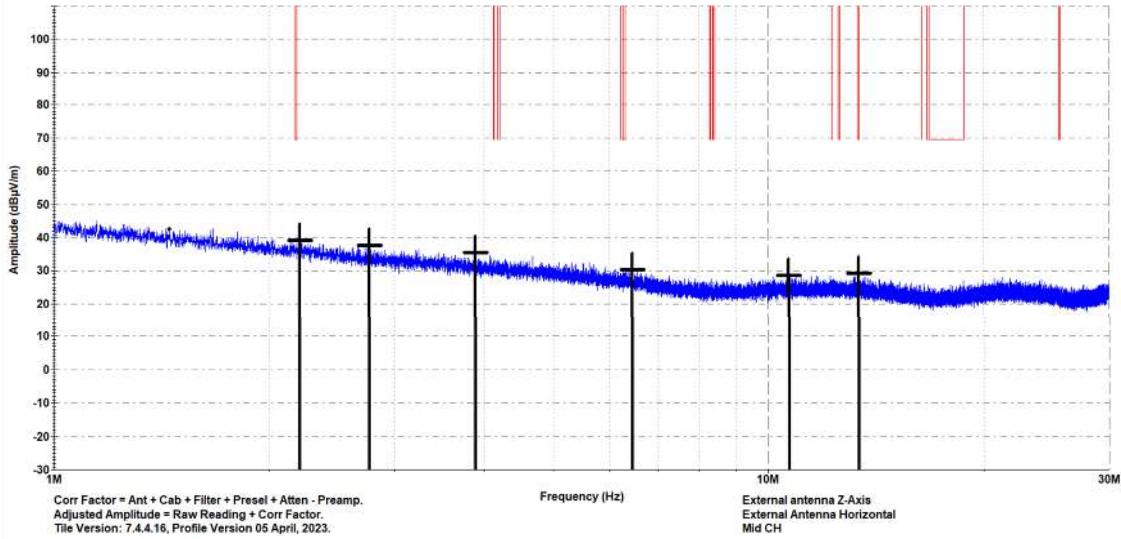

### 1-30MHz Parallel

Bureau Veritas Consumer Product Services Inc. — Peak Scan Data, 9kHz RBW, 30kHz VBW  
Radiated Emissions, Magnetic Field, 3m Measurement + Top Peaks  
Peak Data 1-30MHz Perpendicular Antenna Orientation — Limit: FCC\_pt15\_209\_dBpV/m  
TE Used: EMI Chamber 1, MXE 1170725, 0755, 2681, 2610, 2466, 8447, None, None, None

Work Order - X0020  
EUT Power Input - 5VDC  
Test Site - CH1  
Conditions - 24.9°C; 51.4 %RH; 1001 mBar  
Test Engineer - Ryan M. Brown  
Date of Test - 8/26/2023  
EUT Maximum Frequency - 2480

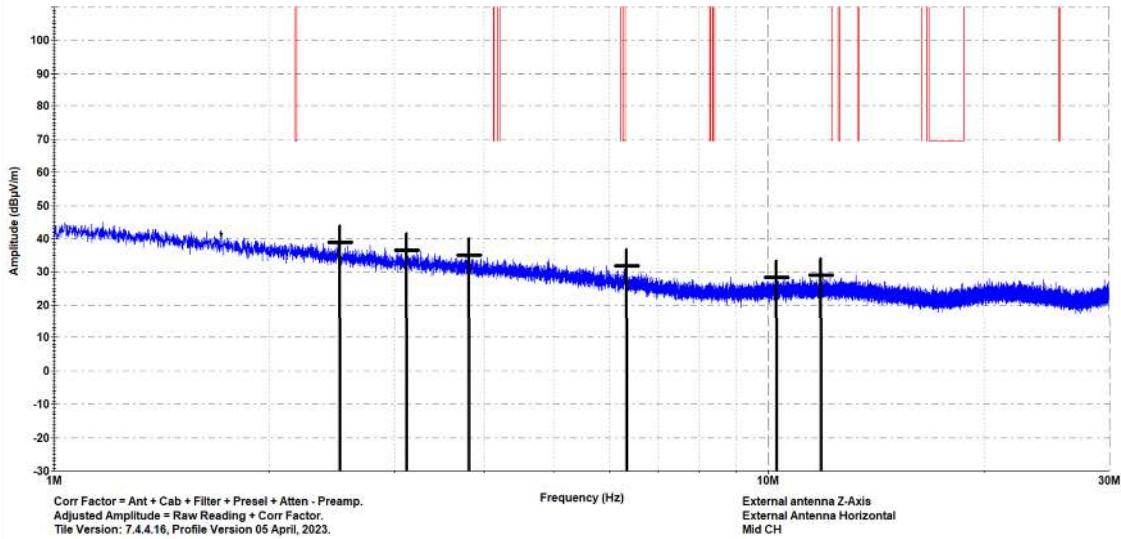

### 1-30MHz Perpendicular

Bureau Veritas Consumer Product Services Inc.

One Distribution Center Circle, #1  
Littleton, MA

Tel.: (978) 486-8880  
Fax: (978) 486-8828



**Test Report for Hayward Industries, Inc.**  
**Report No. EX0020-2 Issue 3**




Bureau Veritas Consumer Product Services Inc.  
Radiated Emissions Electric Field 3m Distance  
Top Peaks Vertical 30-1000MHz  
Notes:  
External antenna Z-Axis  
External Antenna Horizontal  
Mid CH

Work Order - X0020  
EUT Power Input - 5VDC  
Test Site - CH1  
Conditions - 23.2°C; 47.0 %RH; 1016 mBar  
Test Engineer - Ryan M. Brown  
Date of Test - 6/22/2023

Frequency (MHz)	Peak Reading (dB $\mu$ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB $\mu$ V/m)	Lim1: FCC_pt15_209 (dB $\mu$ V/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Antenna Height (cm)	Turntable Azimuth (degrees)
37.784	40.2	-3.7	36.5	40	-3.5	PASS	-3.5	100	45
610.618	29.6	0.4	30.1	46	-15.9	PASS		250	270
963.043	29.8	6.3	36.1	54	-17.9	PASS		100	45


**30-1000MHz Vertical Data Table**

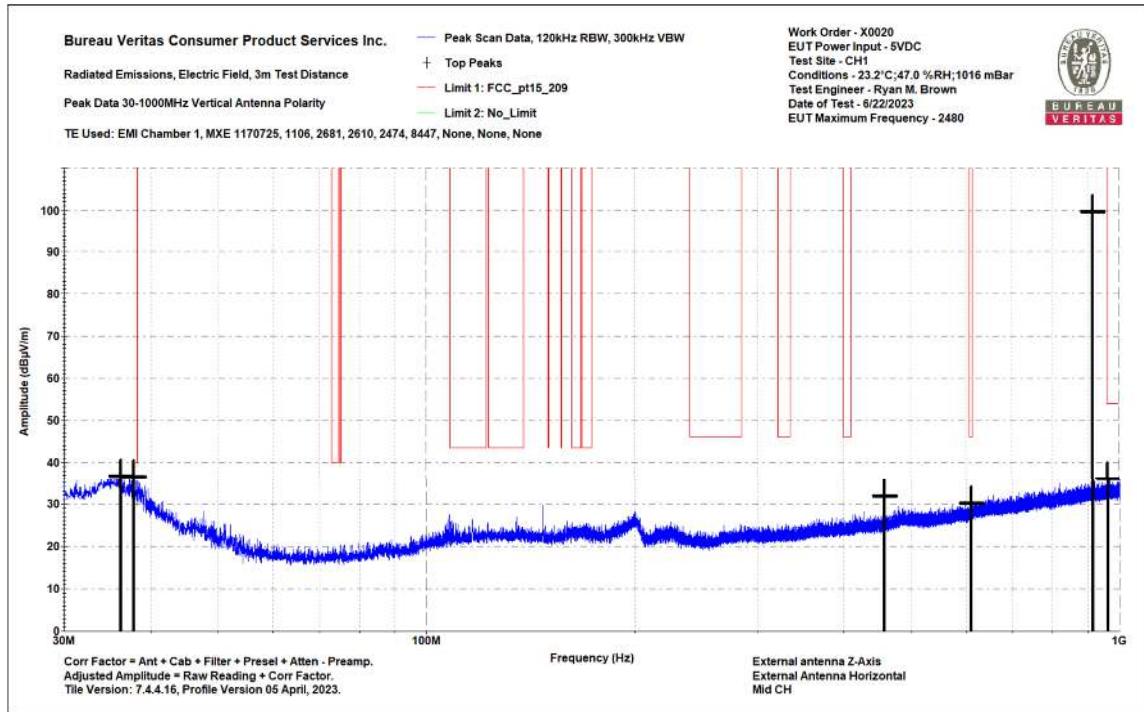

**30-1000MHz Vertical Plot**



## Test Report for Hayward Industries, Inc. Report No. EX0020-2 Issue 3

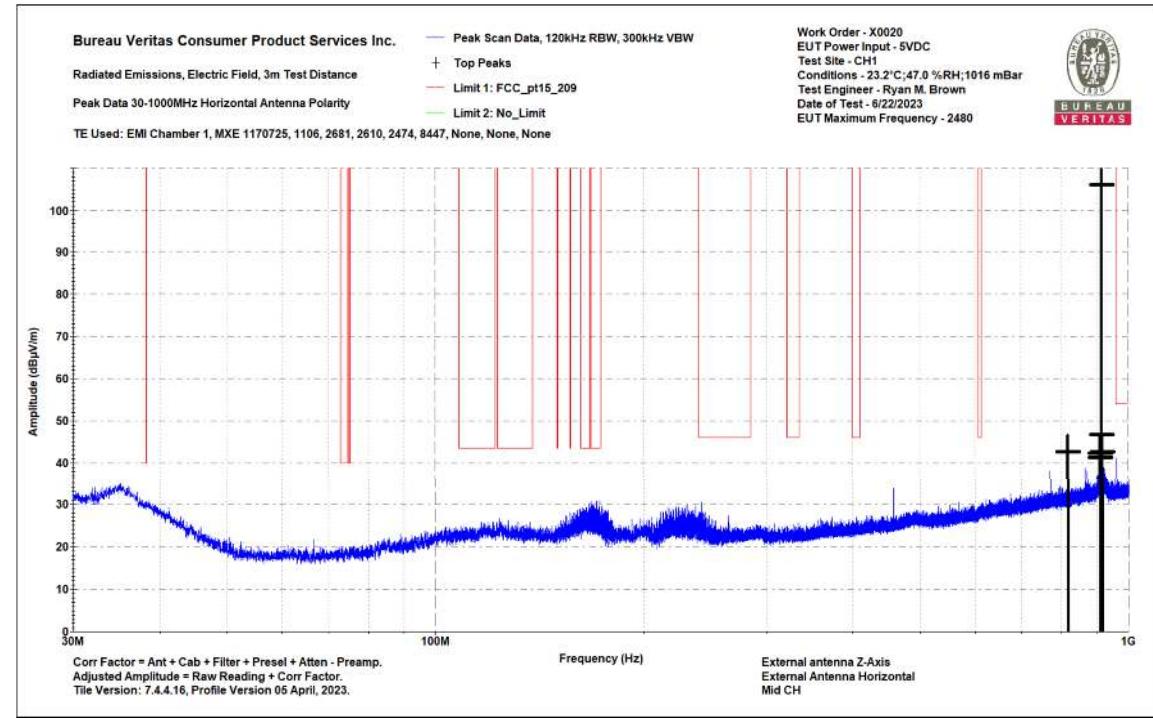

**30-1000MHz Horizontal Plot**  
**No Emissions Detected in the Restricted Bands**



**Test Report for Hayward Industries, Inc.**  
**Report No. EX0020-2 Issue 3**




**Results for High Channel**

Bureau Veritas Consumer Product Services Inc.	Work Order - X0020											
Radiated Emissions Electric Field 3m Distance	EUT Power Input - 5VDC											
30-1000MHz Vertical Data	Test Site - CH1											
Notes:	Conditions - 23.2°C; 47.0 %RH; 1016 mBar											
External antenna Z-Axis	Test Engineer - Ryan M. Brown											
External Antenna Horizontal	Date of Test - 8/23/2023											
High CH 927.7MHz												

Frequency (MHz)	Raw QP Reading (dB $\mu$ V)	Correction Factor (dB/m)	Adjusted QP Amplitude (dB $\mu$ V/m)	Lim1: 99 (dB $\mu$ V/m)	Margin to Lim1 (dB)	Test Results Lim1 (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: No_Limit (dB $\mu$ V/m)	Margin to Lim2 (dB)	Test Results Lim2 (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
37.753	26.9	-3.7	23.2	40	-16.8	PASS	-16.8	200	-176.8	PASS		125	331


**30-1000MHz Vertical Data Table**

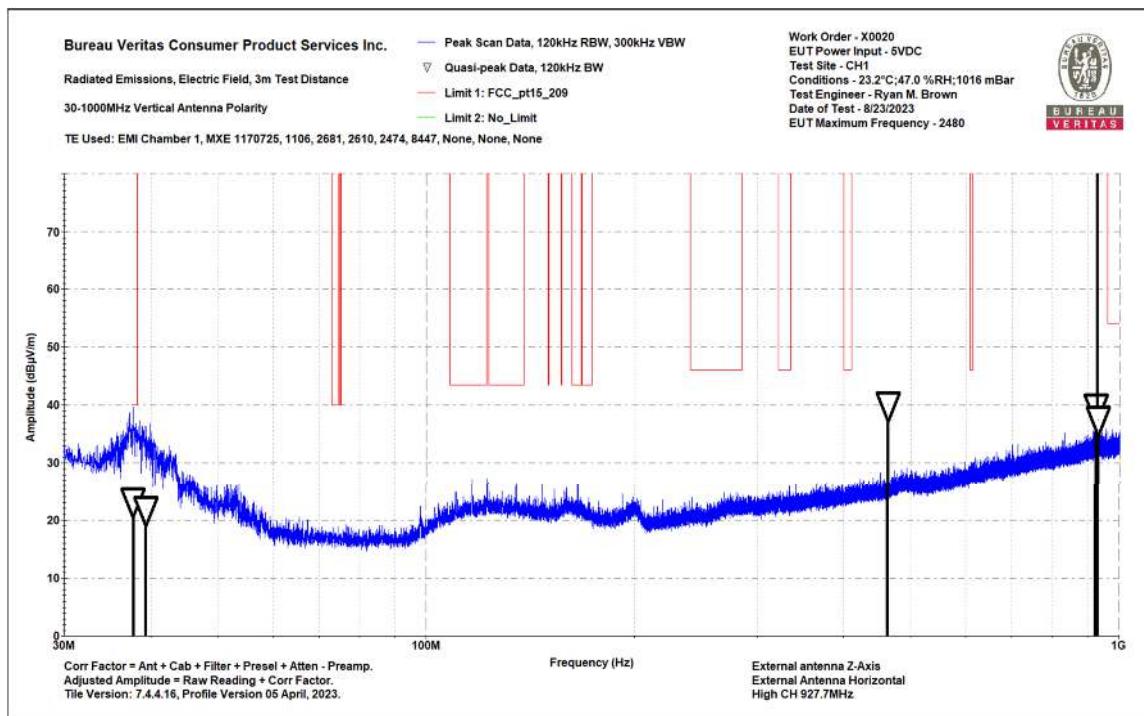

**30-1000MHz Vertical Plot**



## Test Report for Hayward Industries, Inc. Report No. EX0020-2 Issue 3

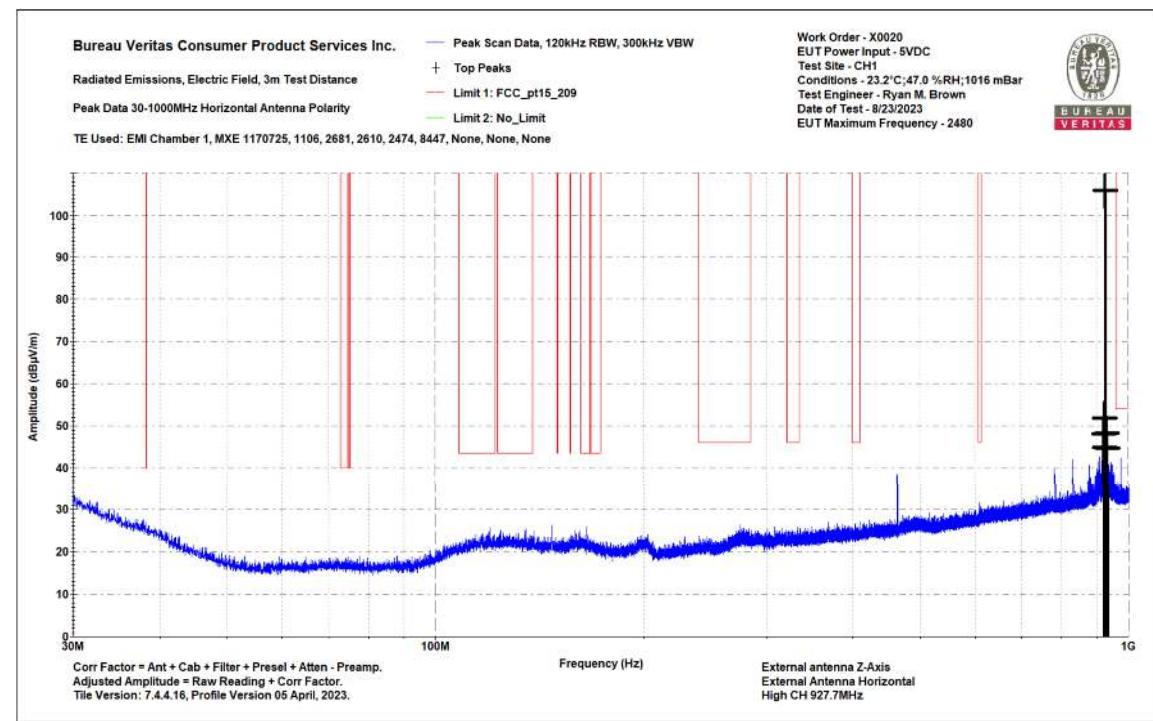

**30-1000MHz Horizontal Plot**  
**No Emissions Detected in the Restricted Bands**



**Test Report for Hayward Industries, Inc.**  
**Report No. EX0020-2 Issue 3**




**Emissions above 1GHz**

**Internal Antenna**

**Results for Low Channel**

Bureau Veritas Consumer Product Services Inc.				Work Order - X0020											
Radiated Emissions Electric Field 3m Distance				EUT Power Input - 5VDC											
1-10GHz Vertical Data				Test Site - CH1											
Notes:				Conditions - 23.0°C; 54.3 %RH; 993 mBar											
Internal Antenna				Test Engineer - Ryan M. Brown											
Y-Axis				Date of Test - 6/14/2023											
Low Ch															
Frequency (MHz)	Raw Peak (dB $\mu$ V)	Raw RMS Average (dB $\mu$ V)	Correction Factor (dB/m)	Adjusted Peak (dB $\mu$ V/m)	Adjusted RMS Average (dB $\mu$ V/m)	Peak Limit FCC 15.209 (dB $\mu$ V/m)	Peak Margin (dB)	Peak Result (Pass/Fail)	Peak Worst Margin (dB)	Average Limit FCC 15.209 (dB $\mu$ V/m)	Average Margin (dB)	Average Result (Pass/Fail)	Average Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
2706.7	45.7	41.09	7.8	53.5	48.89	74	-20.5	PASS	-20.5	54	-5.11	PASS	-5.11	100	69
3336.6	29.87	29.87	8	37.87	37.87	74	-36.13	PASS	--	54	-16.13	PASS	--	100	81
4046.6	28.81	28.81	9	37.81	37.81	74	-36.19	PASS	--	54	-16.19	PASS	--	100	84
5460	28.69	28.69	11.5	40.19	40.19	74	-33.81	PASS	--	54	-13.81	PASS	--	100	46
9101.1	28.85	28.9	13.2	42.05	42.1	74	-31.95	PASS	--	54	-11.9	PASS	--	200	265

**1-10GHz Vertical Data Table**

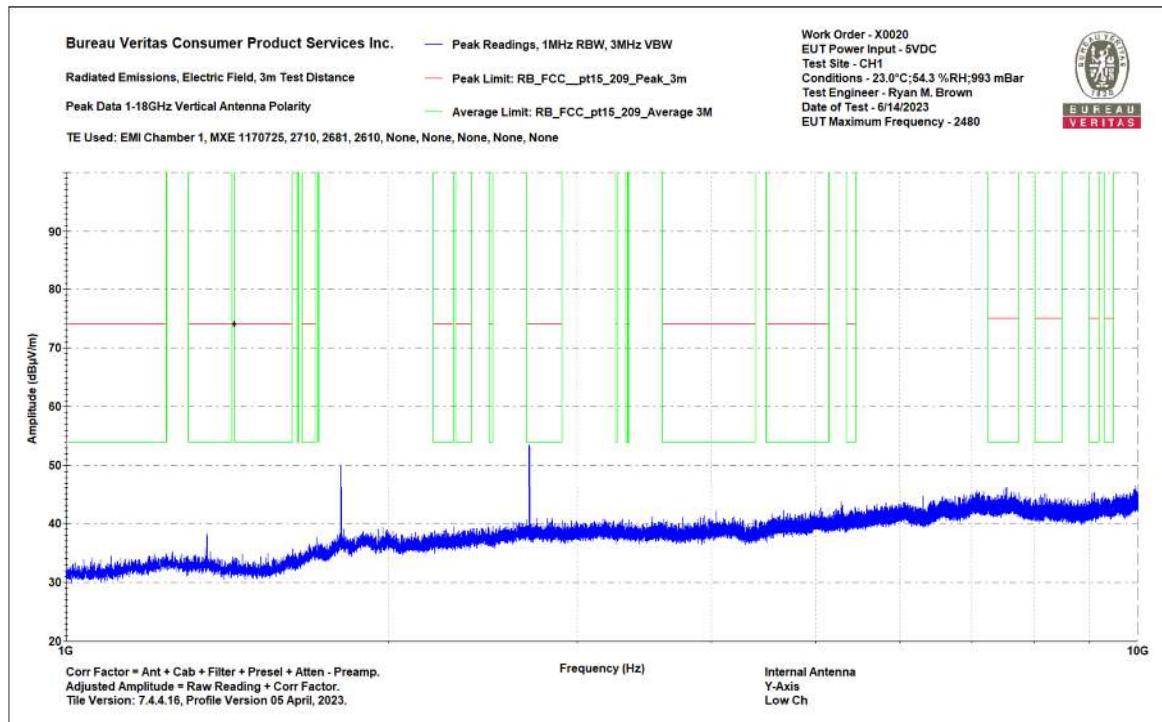

**1-10GHz Vertical Plot**

Bureau Veritas Consumer Product Services Inc.

One Distribution Center Circle, #1 Littleton, MA

Tel.: (978) 486-8880  
Fax: (978) 486-8828



**Test Report for Hayward Industries, Inc.**  
**Report No. EX0020-2 Issue 3**




Bureau Veritas Consumer Product Services Inc.	Work Order - X0020
Radiated Emissions Electric Field 3m Distance	EUT Power Input - 5VDC
1-10GHz Horizontal Data	Test Site - CH1
Notes:	Conditions - 23.0°C; 54.3 %RH; 993 mBar
Internal Antenna	Test Engineer - Ryan M. Brown
Y-Axis	Date of Test - 6/14/2023
Low Ch	

Frequency (MHz)	Raw Peak (dB $\mu$ V)	Raw RMS Average (dB $\mu$ V)	Correction Factor (dB/m)	Adjusted Peak (dB $\mu$ V/m)	Adjusted RMS Average (dB $\mu$ V/m)	Peak Limit FCC 15.209 (dB $\mu$ V/m)	Peak Margin (dB)	Peak Result (Pass/Fail)	Peak Worst Margin (dB)	Average Limit FCC 15.209 (dB $\mu$ V/m)	Average Margin (dB)	Average Result (Pass/Fail)	Average Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
2706.5	47.02	40.22	7.8	54.82	48.02	74	-19.18	PASS	-19.18	54	-5.98	PASS	-5.98	155	192
4036.4	30.36	30.36	9	39.36	39.36	74	-34.64	PASS	--	54	-14.64	PASS	--	159	296

**1-10GHz Horizontal Data Table**

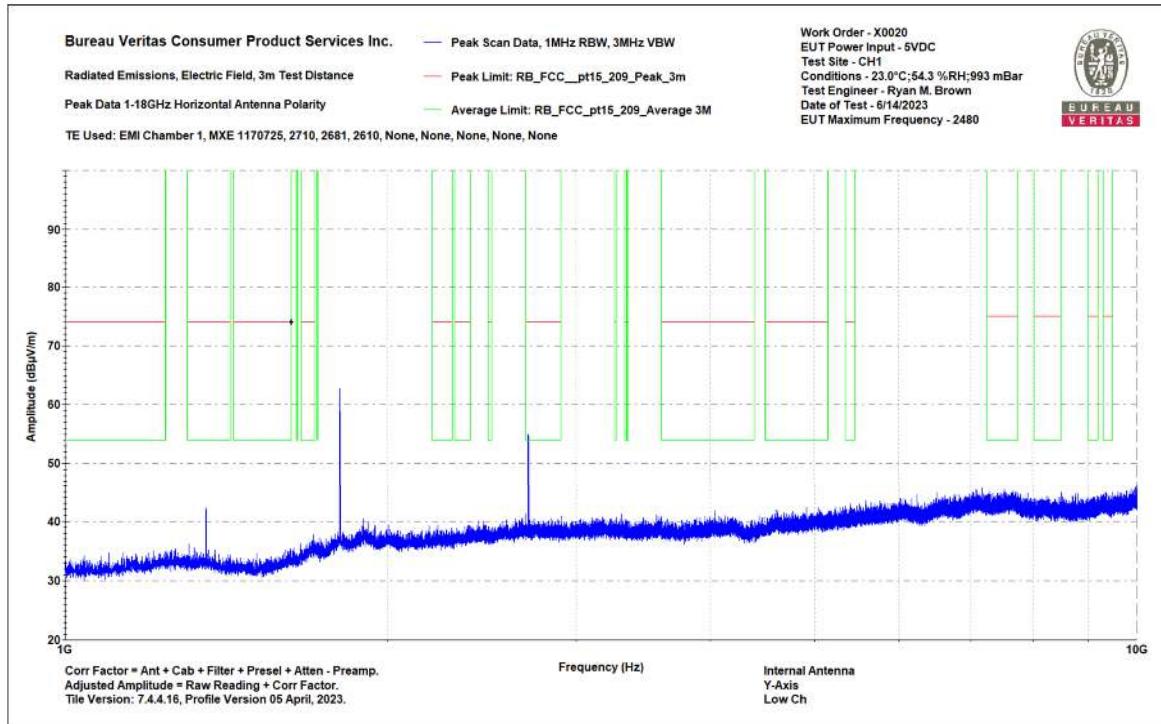

**1-10GHz Horizontal Plot**



**Test Report for Hayward Industries, Inc.**  
**Report No. EX0020-2 Issue 3**




**Results for Mid Channel**

Bureau Veritas Consumer Product Services Inc.		Work Order - X0020												
Radiated Emissions Electric Field 3m Distance		EUT Power Input - 5VDC												
1-10GHz Vertical Data		Test Site - CH1												
Notes:		Conditions - 23.0°C; 54.3 %RH; 993 mBar												
Internal Antenna		Test Engineer - Ryan M. Brown												
Y-Axis		Date of Test - 6/14/2023												
Mid Ch														

Frequency (MHz)	Raw Peak (dB $\mu$ V)	Raw RMS Average (dB $\mu$ V)	Correction Factor (dB/m)	Adjusted Peak (dB $\mu$ V/m)	Adjusted RMS Average (dB $\mu$ V/m)	Peak Limit FCC 15.209 (dB $\mu$ V/m)	Peak Margin (dB)	Peak Result (Pass/Fail)	Peak Worst Margin (dB)	Average Limit FCC 15.209 (dB $\mu$ V/m)	Average Margin (dB)	Average Result (Pass/Fail)	Average Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
2744.9	43.1	40.46	8.2	51.3	48.66	74	-22.7	PASS	-22.7	54	-5.34	PASS	-5.34	100	78
4113.4	33.1	33.15	9	42.15	42.15	74	-31.85	PASS	--	54	-11.85	PASS	--	200	234
5459.5	29.6	26.2	11.5	41.1	37.7	74	-32.9	PASS	--	54	-16.3	PASS	--	158	158

**1-10GHz Vertical Data Table**

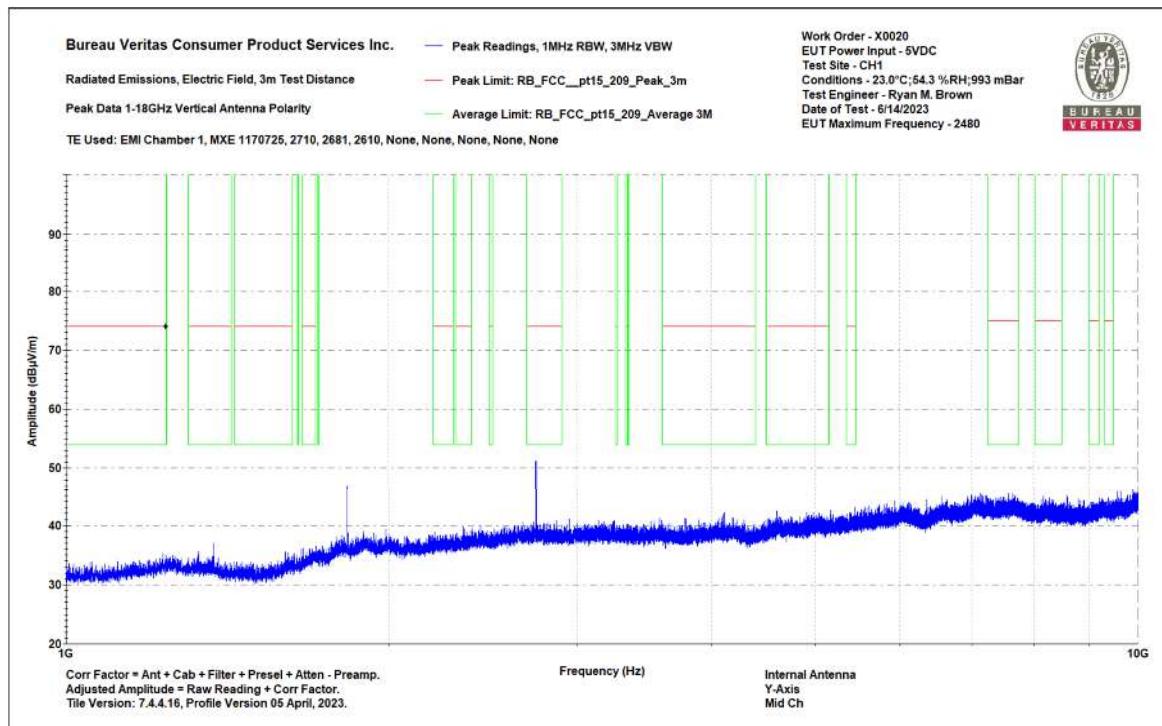

**1-10GHz Vertical Plot**