



Engineering and Testing for EMC and Safety Compliance

## APPLICATION FOR FCC CERTIFICATION DIRECT SEQUENCE SPREAD SPECTRUM TRANSMITTER

**Part 15 Unlicensed Modular Transmitter Approval (DA00-1407 June 26, 2000)**

**CISCO Systems, Inc.  
3875 Embassy Parkway  
Suite 350  
Akron, OH 44333  
330-664-7362 (Jim Nicholson)**

**Model: AIR-MPI352  
FCC ID:LDK102042**

*February 28, 2001*

| STANDARDS REFERENCED FOR THIS REPORT |                                                                                |
|--------------------------------------|--------------------------------------------------------------------------------|
| <b>PART 2: 1999</b>                  | FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS  |
| <b>PART 15: 1999</b>                 | RADIO FREQUENCY DEVICES                                                        |
| <b>FCC 97-114</b>                    | GUIDANCE ON MEASUREMENTS FOR DIRECT SEQUENCE SPREAD SPECTRUM SYSTEMS           |
| <b>ANSI C63.4-1992</b>               | STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS |
| <b>RSS-210, Issue 3: 2000</b>        | LOW POWER LICENCE-EXEMPT RADIOCOMMUNICATION DEVICES (ALL FREQUENCY BANDS)      |
| <b>RSS-102, Issue 1: 1999</b>        | EVALUATION PROCEDURE FOR MOBILE AND PORTABLE RADIO TRANSMITTERS                |

| FCC Rules Parts   | Frequency Range  | Output Power (W) | Freq. Tolerance | Emission Designator |
|-------------------|------------------|------------------|-----------------|---------------------|
| Part 15.247       | 2412 to 2462 MHz | 0.109            |                 |                     |
| Canadian Sections | Frequency Range  | Output Power (W) | Freq. Tolerance | Emission Designator |
| 6.2.2 (o)         | 2412 to 2462 MHz | 0.109            |                 |                     |

|                                                                                                                                                                 |  |                                                     |                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------------------------------------|-----------------------------------------|
| This report concerns (check one):                                                                                                                               |  | Original Grant: <input checked="" type="checkbox"/> | Class II Change:                        |
| Equipment Type: PCI Board                                                                                                                                       |  |                                                     |                                         |
| Deferred grant requested per 47 CFR 0.457 (d) (1) (ii)                                                                                                          |  | Yes:                                                | No: <input checked="" type="checkbox"/> |
| If yes, defer until:                                                                                                                                            |  |                                                     |                                         |
| Company name agrees to notify the Commission by: _____ (date) of the intended date of announcement of the product so that the grant can be issued on that date. |  |                                                     |                                         |
| Transition Rules Request per 15.37?                                                                                                                             |  | Yes:                                                | No: <input checked="" type="checkbox"/> |
| If no, assumed Part 15, subpart B for unintentional radiators - the new 47 CFR. [10-1-90 Edition] provision.                                                    |  |                                                     |                                         |

REPORT PREPARED BY:

EMC Engineer: Rachid Sehb

Signature:

Supervising Engineer: Desmond A. Fraser

Signature:

Document Number: 2001041

*No part of this report may be reproduced without the full written approval of Rhein Tech Laboratories, Inc.*

360 Herndon Parkway, Suite 1400  
Herndon, VA 20170  
Phone: 703-689-0368; Fax: 703-689-2056; Metro: 703-471-6441



## TABLE OF CONTENTS

|           |                                                                |           |
|-----------|----------------------------------------------------------------|-----------|
| <b>1</b>  | <b>INTRODUCTION.....</b>                                       | <b>5</b>  |
| 1.1       | RELATED SUBMITTAL (S)/GRANT (S).....                           | 5         |
| 1.2       | TEST METHODOLOGY.....                                          | 5         |
| 1.3       | TEST FACILITY .....                                            | 5         |
| 1.4       | EMISSIONS EQUIPMENT LIST.....                                  | 6         |
| <b>2</b>  | <b>SYSTEM TEST CONFIGURATION.....</b>                          | <b>9</b>  |
| 2.1       | JUSTIFICATION .....                                            | 9         |
| 2.2       | EUT EXERCISE SOFTWARE .....                                    | 9         |
| 2.3       | SPECIAL ACCESSORIES .....                                      | 9         |
| 2.4       | TEST SYSTEM DETAILS .....                                      | 10        |
| 2.5       | CONFIGURATION OF TESTED SYSTEM.....                            | 11        |
| <b>3</b>  | <b>CONFORMANCE STATEMENT .....</b>                             | <b>12</b> |
| <b>4</b>  | <b>FIELD STRENGTH CALCULATION.....</b>                         | <b>13</b> |
| <b>5</b>  | <b>CONDUCTED EMISSIONS MEASUREMENTS .....</b>                  | <b>14</b> |
| 5.1       | CONDUCTED EMISSIONS TEST .....                                 | 15        |
| 5.1.1     | CONDUCTED EMISSIONS (CHANNEL 1 CISCO DIPOLE Antenna).....      | 16        |
| <b>6</b>  | <b>RADIATED EMISSIONS MEASUREMENTS.....</b>                    | <b>17</b> |
| 6.1       | RADIATED EMISSIONS TEST .....                                  | 18        |
| <b>7</b>  | <b>MODULATED BANDWIDTH .....</b>                               | <b>19</b> |
| <b>8</b>  | <b>CONDUCTED POWER OUTPUT .....</b>                            | <b>19</b> |
| <b>9</b>  | <b>ANTENNA CONDUCTED SPURIOUS EMISSIONS .....</b>              | <b>20</b> |
| <b>10</b> | <b>RADIATED EMISSIONS HARMONICS/SPURIOUS.....</b>              | <b>22</b> |
| 10.1      | CISCO DIPOLE ANTENNA.....                                      | 23        |
| 10.2      | DELL DIPOLE ANTENNA.....                                       | 24        |
| 10.3      | DELL INVERTED F ANTENNA.....                                   | 27        |
| 10.4      | TOSHIBA CHIP ANTENNA.....                                      | 30        |
| 10.5      | TOSHIBA INVERTED F ANTENNA.....                                | 33        |
| <b>11</b> | <b>POWER SPECTRAL DENSITY TEST DATA .....</b>                  | <b>36</b> |
| <b>12</b> | <b>COMPLIANCE WITH THE RESTRICTED BAND EDGE TEST DATA.....</b> | <b>37</b> |
| <b>13</b> | <b>RECEIVER TEST DATA.....</b>                                 | <b>38</b> |
| <b>14</b> | <b>ANTENNA SPECIFICATIONS.....</b>                             | <b>39</b> |
| 14.1      | CISCO DIPOLE ANTENNA .....                                     | 39        |
| <b>15</b> | <b>BANDEDGE PLOTS.....</b>                                     | <b>45</b> |
| <b>16</b> | <b>SPECTRAL DENSITY PLOTS .....</b>                            | <b>65</b> |
| <b>17</b> | <b>6dB PLOTS .....</b>                                         | <b>68</b> |



## TABLE OF APPENDIXES

|             |                                                       |    |
|-------------|-------------------------------------------------------|----|
| APPENDIX A: | RF EXPOSURE CALCULATIONS FOR HIGH GAIN ANTENNAS ..... | 71 |
| APPENDIX B: | PROCESSING GAIN REPORT .....                          | 73 |
| APPENDIX C: | PRODUCT DESCRIPTION .....                             | 74 |
| APPENDIX D: | LABEL INFORMATION .....                               | 75 |
| APPENDIX E: | SCHEMATICS.....                                       | 76 |
| APPENDIX F: | MANUAL.....                                           | 77 |
| APPENDIX G: | TEST PHOTOGRAPHS.....                                 | 78 |
| APPENDIX H: | INTERNAL PHOTOGRAPHS.....                             | 80 |
| APPENDIX I: | EXTERNAL PHOTOGRAPHS.....                             | 83 |
| APPENDIX J: | ANTENNA PHOTOGRAPHS.....                              | 84 |
| APPENDIX K: | SAR REPORT.....                                       | 89 |

## TABLE OF TABLES

|           |                                                   |    |
|-----------|---------------------------------------------------|----|
| TABLE 1:  | EQUIPMENT UNDER TEST .....                        | 10 |
| TABLE 2:  | EXTERNAL COMPONENTS OF TESTED CONFIGURATION.....  | 10 |
| TABLE 3:  | INTERNAL COMPONENTS OF TESTED CONFIGURATION ..... | 10 |
| TABLE 4:  | NEUTRAL SIDE (LINE 1).....                        | 16 |
| TABLE 5:  | HOT SIDE (LINE 2).....                            | 16 |
| TABLE 6:  | DIGITAL NOISE (CHANNEL 1 CISCO DIPOLE).....       | 18 |
| TABLE 7:  | MODULATED BANDWIDTH.....                          | 19 |
| TABLE 8:  | CONDUCTED POWER OUTPUT .....                      | 19 |
| TABLE 9:  | CHANNEL 1.....                                    | 20 |
| TABLE 10: | CHANNEL 6.....                                    | 20 |
| TABLE 11: | CHANNEL 11.....                                   | 21 |
| TABLE 12: | CHANNEL 1 (CISCO DIPOLE ANTENNA) .....            | 23 |
| TABLE 13: | CHANNEL 6 (CISCO DIPOLE ANTENNA) .....            | 23 |
| TABLE 14: | CHANNEL 11(CISCO DIPOLE ANTENNA).....             | 23 |
| TABLE 15: | CHANNEL 1 (DELL DIPOLE ANTENNA) .....             | 24 |
| TABLE 16: | CHANNEL 6 (DELL DIPOLE ANTENNA) .....             | 25 |
| TABLE 17: | CHANNEL 11 (DELL DIPOLE ANTENNA) .....            | 26 |
| TABLE 18: | CHANNEL 1 ( DELL INVERTED F ANTENNA).....         | 27 |
| TABLE 19: | CHANNEL 6 ( DELL INVERTED F ANTENNA).....         | 28 |
| TABLE 20: | CHANNEL 11 ( DELL INVERTED F ANTENNA) .....       | 29 |
| TABLE 21: | CHANNEL 1 (TOSHIBA CHIP ANTENNA) .....            | 30 |
| TABLE 22: | CHANNEL 6 (TOSHIBA CHIP ANTENNA) .....            | 31 |
| TABLE 23: | CHANNEL 11 (TOSHIBA CHIP ANTENNA) .....           | 32 |
| TABLE 24: | POWER SPECTRAL DENSITY.....                       | 36 |
| TABLE 25: | RESTRICTED BAND EDGE .....                        | 37 |
| TABLE 26: | RADIATED EMISSION (RECEIVER MODE).....            | 38 |
| TABLE 27: | MONOPOLE ANTENNA .....                            | 72 |
| TABLE 28: | DIPOLE DIVERSITY .....                            | 72 |
| TABLE 29: | INVERTED F .....                                  | 72 |
| TABLE 30: | CHIP .....                                        | 72 |



## TABLE OF PHOTOGRAPHS

|                |                                              |    |
|----------------|----------------------------------------------|----|
| PHOTOGRAPH 1:  | CONDUCTED FRONT VIEW .....                   | 78 |
| PHOTOGRAPH 2:  | CONDUCTED REAR VIEW .....                    | 78 |
| PHOTOGRAPH 3:  | RADIATED FRONT VIEW .....                    | 79 |
| PHOTOGRAPH 4:  | REAR VIEW .....                              | 79 |
| PHOTOGRAPH 5:  | TOP VIEW .....                               | 80 |
| PHOTOGRAPH 6:  | BOTTOM VIEW .....                            | 80 |
| PHOTOGRAPH 7:  | TOP VIEW OF THE BOARD WITHOUT COVER .....    | 81 |
| PHOTOGRAPH 8:  | BOTTOM VIEW OF THE BOARD WITHOUT COVER ..... | 81 |
| PHOTOGRAPH 9:  | ANTENNA PORT ON THE BOARD .....              | 82 |
| PHOTOGRAPH 10: | DIPOLE CISCO ANTENNA .....                   | 84 |
| PHOTOGRAPH 11: | : DIPOLE CISCO ANTENNA PORT .....            | 84 |
| PHOTOGRAPH 12: | DELL INVERTED F ANTENNA .....                | 85 |
| PHOTOGRAPH 13: | DELL DIPOLE ANTENNA .....                    | 86 |
| PHOTOGRAPH 14: | TOSHIBA CHIP ANTENNA .....                   | 87 |

## TABLE OF FIGURES

|           |                            |    |
|-----------|----------------------------|----|
| FIGURE 1: | TESTED CONFIGURATION ..... | 11 |
|-----------|----------------------------|----|

## TABLE OF PLOTS

|          |                                               |    |
|----------|-----------------------------------------------|----|
| PLOT 1:  | CHANNEL 1 MONOPOLE ANTENNA .....              | 45 |
| PLOT 2:  | CHANNEL 1 MONOPOLE ANTENNA .....              | 46 |
| PLOT 3:  | CHANNEL 11 MONOPOLE ANTENNA .....             | 47 |
| PLOT 4:  | CHANNEL 11 MONOPOLE ANTENNA .....             | 48 |
| PLOT 5:  | CHANNEL 1 DELL DIPOLE ANTENNA 1MHZ/10HZ ..... | 49 |
| PLOT 17: | CHANNEL 1 .....                               | 65 |
| PLOT 18: | CHANNEL 6 .....                               | 66 |
| PLOT 19: | CHANNEL 11 .....                              | 67 |
| PLOT 20: | CHANNEL 1 .....                               | 68 |
| PLOT 21: | CHANNEL 6 .....                               | 69 |
| PLOT 22: | CHANNEL 11 .....                              | 70 |



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

## 1 INTRODUCTION

The following Application for FCC Certification for a Direct Sequence Spread Spectrum transmitter is prepared on behalf of Cisco System in accordance with Part 15.247 of the Federal Communications Commissions. The Equipment Under Test (EUT) was the **AIR-MPI352, FCC ID: LDK102042**. The test results reported in this document relate only to the item that was tested. The afore mentioned device fulfills the requirement for a Part 15 Unlicensed Modular Transmitter per FCC public notice DA 00-1407 released in June 26, 2000.

All measurements contained in this Application were conducted in accordance with ANSI C63.4 Methods of Measurement of Radio Noise Emissions, 1992. The instrumentation utilized for the measurements conforms to the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Some accessories are used to increase sensitivity and prevent overloading of the measuring instrument. These are explained in the appendix of this report. Calibration checks are performed regularly on the instruments, and all accessories including the high pass filter, preamplifier and cables.

### 1.1 RELATED SUBMITTAL (S)/GRANT (S)

This is an original application for certification.

### 1.2 TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 1992. Radiated testing was performed at an antenna to EUT distance of 3 meters. Emissions above 1 GHz were video averaged.

### 1.3 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report dated March 3, 1994, submitted to and approved by the Federal Communication Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 1992).



## 1.4 EMISSIONS EQUIPMENT LIST

| RTL Asset Number | Manufacturer              | Model                               | Part Type                                       | Serial Number      | Calibration due date |
|------------------|---------------------------|-------------------------------------|-------------------------------------------------|--------------------|----------------------|
| 900969           | Hewlett Packard           | 85650A                              | Quasi-Peak Adapter (30 Hz – 40 GHz)             | 2412A00414         | 03/23/01             |
| 900929           | Hewlett Packard           | 85650A                              | Quasi-Peak Adapter (30 Hz – 40 GHz)             | 2811A01276         | 03/28/01             |
| 900901           | Hewlett Packard           | 85650A                              | Quasi-Peak Adapter (30 Hz – 40 GHz)             | 3145A01599         | 11/02/01             |
| 900339           | Hewlett Packard           | 85650A                              | Quasi-Peak Adapter (30 Hz – 40 GHz)             | 2521A00743         | 03/27/01             |
| 900042           | Hewlett Packard           | 85650A                              | Quasi-Peak Adapter (30 Hz – 40 GHz)             | 2521A01032         | 11/05/01             |
| 900924           | Amplifier Research        | 75A220                              | Amplifier (10 kHz – 220 MHz)                    |                    | N/A                  |
| 900933           | Hewlett Packard           | 11975A                              | Power Amplifier (2 - 8 GHz)                     | 2304A00348         | 11/15/01             |
| 901067           | Hewlett Packard           | 8903B                               | Audio Analyzer                                  | 2303A00307         | 06/28/01             |
| 901055           | Hewlett Packard           | 8901A Opt. 002-003                  | Modulation Analyzer                             | 2545A04102         | 06/08/01             |
| 900718           | Voltech                   | PM3000A                             | Power Analyzer                                  | 6836-002-10        | 11/08/01             |
| 900397           | Associated Research, Inc. | 6554SA                              | Electrical Safety Compliance Analyzer           | 940281             | 11/08/01             |
| 900926           | Hewlett Packard           | 8753D                               | RF Vector Network Analyzer                      | 3410A09659         | 03/28/01             |
| 901089           | Hewlett Packard           | HP875ET                             | Transmission/Reflection Network Analyzer        | US39170052         | N/A                  |
| 900968           | Hewlett Packard           | 8567A                               | Spectrum Analyzer (10 kHz – 1.5 GHz)            | 2602A00160         | 03/23/01             |
| 900903           | Hewlett Packard           | 8567A                               | Spectrum Analyzer (10 kHz – 1.5 GHz)            | 2841A00614         | 11/02/01             |
| 900897           | Hewlett Packard           | 8567A                               | Spectrum Analyzer (10 kHz – 1.5 GHz)            | 2727A00535         | 11/08/01             |
| 900931           | Hewlett Packard           | 8566B                               | Spectrum Analyzer (100 Hz – 22 GHz)             | 3138A07771         | 03/27/01             |
| 900912           | Hewlett Packard           | 8568A                               | RF Spectrum Analyzer (100 Hz – 1.5 GHz)         | 2634A02704         | 08/02/01             |
| 900824           | Hewlett Packard           | 8591E                               | RF Spectrum Analyzer (9 KHz – 1.8 GHz)          | 3710A06135         | 11/14/01             |
| 900724           | ARA                       | LPB-2520                            | Log Periodic / Biconical Antenna (25-1000 MHz)  | 1037               | 2/1/01               |
| 900725           | ARA                       | LPB-2520                            | Log Periodic / Biconical Antenna (25-1000 MHz)  | 1036               | 07/12/01             |
| 900967           | A.H. Systems              | TDS-206/535-1 through TDS-206/535-4 | Tuned Dipole set (30 – 1000 MHz)                | 126, 128, 129, 132 | 12/15/00             |
| 900154           | Compliance Design         | Roberts Dipole                      | Adjustable Elements Dipole antenna (30-1000MHz) | N/A                | 7/26/01              |
| 900814           | Electro-Metrics           | RGA-60                              | Double Ridges Guide Antenna (1-18 GHz)          | 2310               | 2/26/01              |
| 900081           | EMCO                      | 3146                                | Log-Periodic Antenna (200-1000 MHz)             | 1850               |                      |
| 900800           | EMCO                      | 3301B                               | Active Monopole (Rod antenna) (30 Hz – 50 MHz)  | 9809-4071          | 05/02/01             |
| 900151           | Rohde@Schwarz             | HFH@-Z2                             | Loop Antenna (9kHz-30 MHz)                      | 82825/019          | 05/26/01             |
| 900791           | Schaffner –Chase          | CSL6112                             | Bilog antenna (30 MHz – 2GHz)                   | 2099               | 2/22/01              |
| 901053           | Schaffner –Chase          | CBL6112B                            | Bilog Chase antenna (200 MHz – 2 GHz)           | 2648               | 05/24/01             |
| 900060           | Hewlett Packard           | 86634B                              | Auxiliary Section for External Pulse Modulator  | 1314A02913         | 11/08/01             |
| 901041           | ACO Pacific               | 511E                                | Sound Level Calibrator                          | 028751             | In calibration       |
| 900970           | Hewlett Packard           | 85662A                              | Spectrum Analyzer Display                       | 254211239          | 03/23/01             |
| 900930           | Hewlett Packard           | 85662A                              | Spectrum Analyzer Display                       | 3144A20839         | 03/28/01             |
| 900911           | Hewlett Packard           | 85662A                              | Spectrum Analyzer Display                       | 2542A12739         | 08/02/01             |
| 900902           | Hewlett Packard           | 85662A                              | Spectrum Analyzer Display                       | 2848A17585         | 11/02/01             |
| 900896           | Hewlett Packard           | 85662A                              | Spectrum Analyzer Display                       | 2816A16471         | 11/02/01             |



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

| RTL Asset Number | Manufacturer       | Model            | Part Type                                        | Serial Number | Calibration due date |
|------------------|--------------------|------------------|--------------------------------------------------|---------------|----------------------|
| 900914           | Hewlett Packard    | 8546OA           | RF Filter Section, (100 KHz to 6.5 GHz)          | 3330A00107    | 11/07/01             |
| 901057           | Hewlett Packard    | 3336B            | Synthesizer/Level Generator                      | 2514A02585    | 06/21/01             |
| 900059           | Hewlett Packard    | 8660C            | Signal Generator (9 KHz – 3200 MHz)              | 1947A02956    | 11/08/01             |
| 900960           | Hewlett Packard    | 8444A            | Tracking Generator (0.5 –1500MHz)                | 2325A07827    | 03/08/01             |
| 900917           | Hewlett Packard    | 8648C            | Synthesized. Signal Generator (9 KHz – 3200 MHz) | 3537A01741    | 03/28/01             |
| 900821           | Hewlett Packard    | 33120A           | 15 MHz Function / Arbitrary Waveform Generator   | US36029992    | 11/14/01             |
| 900059           | Hewlett Packard    | 8660C            | Synthesized. Signal Generator (9 kHz –3200 MHz)  | 1947A02956    | 11/08/01             |
| 900560           | Haefely            | PESD 1600        | ESD Generator                                    | H 703146      | 10/05/01             |
| 900099           | Marconi            | 52022-910E       | Signal Generator (10 kHz – 1 GHz)                | 119044-189    | 11/14/01             |
| 900195           | Tektronix          | CFG280           | Function Generator (0.1 Hz – 11 MHz)             | TW12167       | N/A                  |
| 900927           | Tektronix          | ASG 100          | Audio Signal Generator                           | B03274 V2.3   | N/A                  |
| 900935           | Wavetek            | 3510B            | Signal Generator                                 | 5372160       | 03/28/00             |
| 900660           | Philips            | PM5418TDS        | TV Generator                                     | LO 604891     | 11/21/01             |
| 900369           | Philips            | PM5418TDS        | TV Generator                                     | LR81436C      | N/A                  |
| 900268           | Taylor             | 5565             | Hygrometer / Thermometer                         | N/A           | 09/05/01             |
| 901056           | Hewlett Packard    | 8954A, Opt.H03   | Transceiver Interface                            | 2924A00830    | 06/02/01             |
| 901088           | Hewlett Packard    | 8954A            | Transceiver Interface                            | 2146A00139    | 07/28/01             |
| 901082           | AFJ International  | AFJ LS16         | LISN (9 kHz – 30 MHz)                            | 16010020081   | 06/16/01             |
| 901083           | AFJ International  | AFJ LS16         | LISN (9 kHz – 30 MHz)                            | 16010020082   | 06/16/01             |
| 901084           | AFJ International  | AFJ LS16         | LISN (9 kHz – 30 MHz)                            | 16010020080   | 06/16/01             |
| 901090           | Bajog electronic   | 4V-100/200       | LISN (150 kHz – 30 MHz)                          | 00-44-007     | 08/03/01             |
| 900726           | Solar              | 7225-1           | LISN                                             | N/A           | 03/29/01             |
| 900727           | Solar              | 7225-1           | LISN                                             | N/A           | 03/29/01             |
| 900078           | Solar              | 7225-1           | LISN                                             | N/A           | 03/29/01             |
| 900077           | Solar              | 7225-1           | LISN                                             | N/A           | 03/29/01             |
| 901054           | Hewlett Packard    | HP 3586B         | Selective Level Meter                            | 1928A01892    | 06/08/01             |
| 900770           | Hewlett Packard    | 437B             | Power Meter                                      | 2949A02966    | In cal.              |
| 900793           | Hewlett Packard    | 432A             | Thermistor Power Meter                           | 1848a22632    | N/A                  |
| 900126           | Hewlett Packard    | 11970A           | Harmonic Mixer (26-40 GHz)                       | 2332A01199    | 11/10/02             |
| 900396           | Hewlett Packard    | 11970K           | Harmonic Mixer (18-26 GHz)                       | 2332A00563    | 11/00/02             |
| 900921           | Haefely            | IP 6.2           | Coupling Network                                 | 083-334-13    | 11/10/01             |
| 900918           | Voltech            | IEC Standard 555 | Reference Impedance Network (rented)             | 7701          | 11/08/01             |
| 900061           | Hewlett Packard    | 86603A           | RF Plug-in (1 to 2600 MHz)                       | 2221A02967    | 11/08/01             |
| 900160           | Pacific            | 112-AMX          | AC Power Source (rented)                         | 0187          | 11/15/01             |
| 900932           | Hewlett Packard    | 8449B OPT H02    | Preamplifier (1-26.5 GHz)                        | 3008A00505    | 09/15/01             |
| 900045           | Hewlett Packard    | 8447F            | Preamplifier                                     | 2944A03783    | N/A                  |
| 901040           | Industrial         | SMX100           | Wide Band Preamplifier (0.01-1000 MHz)           | 1736-0696     | 11/17/01             |
| 900721           | Hewlett Packard    | 8447D            | Preamplifier (0.1-1300 MHz)                      | 2727A05397    | N/A                  |
| 900889           | Hewlett Packard    | 85685A           | RF Preselector for HP 8566B or 8568B (20Hz-2GHz) | 3146A01309    | 11/14/01             |
| 900566           | Amplifier Research | FP 2000          | Isotropic Field Probe                            | 20760         | 08/29/01             |
| 900174           | FCC                | F-120-9A         | RF Injection Probe (10 kHz – 300 MHz)            | N/A           | 05/31/01             |
| 901044           | FCC                | F-120-5          | Bulk Current Injection Probe (10 kHz – 150 MHz)  | 17            | 05/12/01             |
| 901042           | FCC                | F-72-1           | RF Current Probe (10 Hz – 100 MHz)               | 44            | 05/11/01             |
| 900704           | FCC                | F-14-1           | Current Probe (10 Hz – 500 kHz)                  | 33            | 05/12/01             |



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

| RTL Asset Number | Manufacturer             | Model       | Part Type                                 | Serial Number | Calibration due date |
|------------------|--------------------------|-------------|-------------------------------------------|---------------|----------------------|
| 900894           | FCC                      | F-33-1      | RF Current Probe (10 kHz – 250 MHz)       | 303           | 05/30/01             |
| 900854           | Solar Electronics Co     | 9119-IN     | RF Current Probe                          | 972501        |                      |
| 900849           | Solar Electronics Co     | 9121-IN     | Injection Probe (10 MHz – 1 GHz)          | 953501        |                      |
| 900848           | Solar Electronics Co     | 9320-IN     | RF Current Probe                          | 990521        |                      |
| 900913           | Hewlett Packard          | 85462A      | EMI Receiver RF Section (9 KHz – 6.5 GHz) | 3325A00159    | 03/29/01             |
| 900769           | Hewlett Packard          | 8481B       | Power Sensor                              | 2702A05059    | In cal.              |
| 900937           | Hewlett Packard          | 8482H       | 3-watt Power Sensor (100 KHz to 4.2 GHz)  | 3318A08961    | 12/02/01             |
| 900928           | Hewlett Packard          | 83752A      | Synthesized Sweeper, 0.01 to 20 GHz       | 3610A00866    | 03/28/01             |
| 900946           | Tenney Engineering, Inc. | TH65        | Temperature Chamber with Humidity         | 11380         | 11/07/01             |
| 900111           | Omega Engineering        | DP41-TC-DSS | Temperature Monitor                       | 2060123       | In cal.              |
| 901043           | FCC                      |             | Terminator for RF Current Probe F-72-1    |               | 05/12/01             |
| 900731           | Haefely                  | PEFT.1      | Burst Tester with Coupling Network        | 082 106-29    | 11/10/01             |
| 900402           | BAPCO Electro-Com        | IEC 601 L   | Safety Tester                             | 000028        | 11/10/01             |
| 900720           | Haefely                  | Psurge 4.1  | Surge Tester                              | 083-342-02    | 11/10/01             |
| 900839           | Bird                     | 43P         | Peak Reading Wattmeter                    | 3110          | 11/10/01             |
| 901137           | Par Electronics          | Notch       | Notch Filter (2.3 GHz to 2.5 GHz)         | N/A           | N/A                  |



## **2 SYSTEM TEST CONFIGURATION**

### **2.1 JUSTIFICATION**

The EUT was tested in all three orthogonal planes in order to determine worst-case emission. Channel 1 at 2.412 GHz, Channel 6 at 2.442 GHz and Channel 11 at 2.462 GHz were tested and investigated from 9kHz to 24GHz. All three channels were investigated and tested. Data for all three channels are presented in this report.

To complete the configuration required by the FCC, the transmitter was tested in a full computer with an external antenna connected to the antenna port similar to its intended use.

The EUT was investigated with the external antenna. The worst-case data taken in this report represents the highest data rate at 11 MBPS. Data rates of 5.5MBPS, 2 MBPS and 1 MBPS were investigated and found to be in compliance.

### **2.2 EUT EXERCISE SOFTWARE**

The EUT was provided with the software to continuously transmit during testing. The carrier was also checked to verify that the information was being transmitted.

### **2.3 SPECIAL ACCESSORIES**

N/A.



## 2.4 TEST SYSTEM DETAILS

The FCC Identifiers for all equipment, plus descriptions of all cables used in the tested system (including inserted cards, which have grants) are:

TABLE 1: EQUIPMENT UNDER TEST

| PART                    | MANUFACTURER     | MODEL              | SERIAL NUMBER   | FCC ID | CABLE DESCRIPTION | RTL BAR CODE |
|-------------------------|------------------|--------------------|-----------------|--------|-------------------|--------------|
| WIRELESS LAN CARD (EUT) | CISCO SYSTEM, VA | AIR-MP1350 (100mW) | LDK102042 (001) | DOC    | N/A               | 013054       |

TABLE 2: EXTERNAL COMPONENTS OF TESTED CONFIGURATION

| PART     | MANUFACTURER     | MODEL             | SERIAL NUMBER | FCC ID  | CABLE DESCRIPTION                                   | RTL BAR CODE |
|----------|------------------|-------------------|---------------|---------|-----------------------------------------------------|--------------|
| MOUSE    | MICROSOFT        | INTELLIMOUSE 1.1A | 00332324      | C3KKMP5 | SHIELDED I/O                                        | 900589       |
| KEYBOARD | NMB TECHNOLOGIES | PCB:44J           | PS2           | SAMPLE  | SHIELDED I/O                                        | 012728       |
| MONITOR  | LG ELECTRONICS   | EVF700 17"        | N/A           | SAMPLE  | SHIELDED, FERRITE BOTH ENDS I/O<br>UNSHIELDED POWER | 011929       |
| SYSTEM   | CISCO SYSTEM, VA | N/A               | 253886        | N/A     | UNSHIELDED POWER                                    | 012956       |

TABLE 3: INTERNAL COMPONENTS OF TESTED CONFIGURATION

| PART              | MANUFACTURER                               | MODEL              | SERIAL NUMBER        | FCC ID | CABLE DESCRIPTION                                    | RTL BAR CODE |
|-------------------|--------------------------------------------|--------------------|----------------------|--------|------------------------------------------------------|--------------|
| Cisco AIR-ANT1499 | Centurion                                  | Cisco Dipole       | LDK 102042           | N/A    | NONE                                                 | 013055       |
| LDA8220D          | MURATA                                     | Toshiba Chip       | N/A                  | N/A    | 0.4 m cable                                          |              |
| Dell 360YM        | Centurion                                  | Dell Inverted-F    | N/A                  | N/A    | 0.4 m cable<br>pcb<br>0.07m cable                    |              |
| FX01L03-P1        | FOXCONN                                    | Dell Dipole        | N/A                  | N/A    | 2 cables 0.26 m<br>pcb for diversity<br>0.07 m cable |              |
| HTL004            | Hitachi Cable                              | Toshiba Inverted-F | B36087211            |        | 0.6 m cable                                          |              |
| CONTROLLER CARD   | CATALYST COMMUNICATIONS TECHNOLOGIES, INC. | PCIA564            | 384-0030-002 REV B   | N/A    | N/A                                                  | 013047       |
| MINI PCI CARD     | CATALYST COMMUNICATIONS TECHNOLOGIES, INC. | TYPE III           | WIRELESS LAN SUPPORT | N/A    | N/A                                                  | 013053       |
| MODEM             | CISCO SYSTEM, VA                           | V1456VQH-R7        | 00V237C00135480      | DOC    | N/A                                                  | 013048       |
| MOTHERBOARD       | CISCO SYSTEM, VA                           | EP-693A            | N/A                  | N/A    | INTERNAL I/O<br>INTERNAL POWER                       | 013049       |
| CD-ROM DRIVE      | DELTA PRODUCTS CORPORATION, CA             | CD5200A            | 011039052161         | DOC    | INTERNAL I/O<br>INTERNAL POWER                       | 013058       |
| POWER SUPPLY      | ASTEC CUSTOM POWER                         | SA320-3505-1412    | 99-3578              | N/A    | UNSHIELDED POWER                                     | 011211       |
| FLOPPY DRIVE      | MITSUMI                                    | D359M3D            | 0J15AX0837           | N/A    | INTERNAL I/O<br>INTERNAL POWER                       | 013057       |



## 2.5 CONFIGURATION OF TESTED SYSTEM

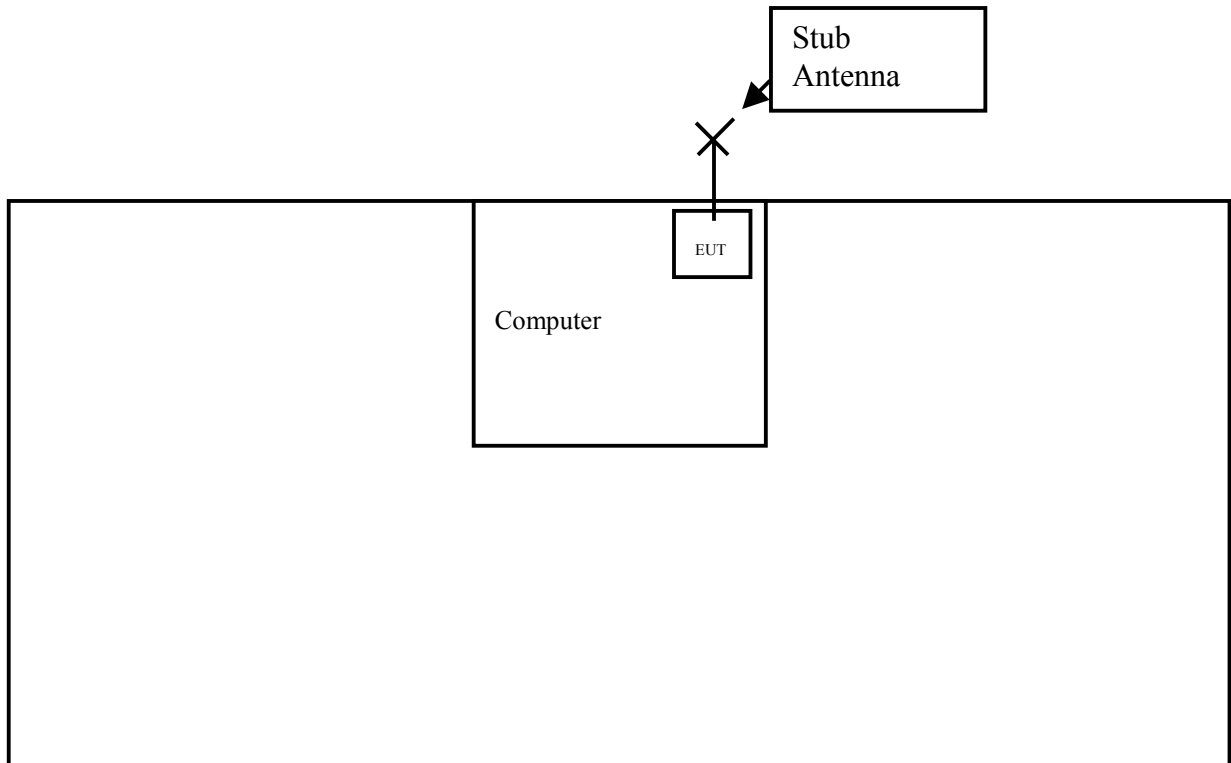


FIGURE 1: TESTED CONFIGURATION



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

### 3 CONFORMANCE STATEMENT

| STANDARDS REFERENCED FOR THIS REPORT |                                                                                |
|--------------------------------------|--------------------------------------------------------------------------------|
| <b>PART 2: 1999</b>                  | FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS  |
| <b>PART 15: 1999</b>                 | RADIO FREQUENCY DEVICES                                                        |
| <b>FCC 97-114</b>                    | GUIDANCE ON MEASUREMENTS FOR DIRECT SEQUENCE SPREAD SPECTRUM SYSTEMS           |
| <b>ANSI C63.4-1992</b>               | STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS |
| <b>RSS-210, Issue 3: 2000</b>        | LOW POWER LICENSE-EXEMPT RADIOCOMMUNICATION DEVICES (ALL FREQUENCY BANDS)      |
| <b>RSS-102, Issue 1: 1999</b>        | EVALUATION PROCEDURE FOR MOBILE AND PORTABLE RADIO TRANSMITTERS                |

| FCC Rules Parts   | Frequency Range  | Output Power (W) | Freq. Tolerance | Emission Designator |
|-------------------|------------------|------------------|-----------------|---------------------|
| Part 15.247       | 2412 to 2462 MHz | 0.109            |                 |                     |
| Canadian Sections | Frequency Range  | Output Power (W) | Freq. Tolerance | Emission Designator |
| 6.2.2 (o)         | 2412 to 2462 MHz | 0.109            |                 |                     |

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described above. Modifications were not made during testing to the equipment in order to achieve compliance with these standards.

Furthermore, there was no deviation from, additions to or exclusions from the ANSI C63.4 test methodology.

Signature: Desmond A. Fraser

Date: February 28, 2001

Typed/Printed Name: Desmond A. Fraser

Position: President  
(NVLAP Signatory)

**NVLAP** Accredited by the National Voluntary Accreditation Program for the specific scope of accreditation under Lab Code 20061-0.

**Note: This report may not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.**



## 4 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FI(\text{dBuV/m}) = SAR(\text{dBuV}) + SCF(\text{dB/m})$$

FI = Field Intensity

SAR = Spectrum Analyzer Reading

SCF = Site Correction Factor

The Site Correction Factor (SCF) used in the above equation is determined empirically, and is expressed in the following equation:

$$SCF(\text{dB/m}) = -PG(\text{dB}) + AF(\text{dB/m}) + CL(\text{dB})$$

SCF = Site Correction Factor

PG = Pre-amplifier Gain

AF = Antenna Factor

CL = Cable Loss

The field intensity in microvolts per meter can then be determined according to the following equation:

$$FI(\text{uV/m}) = 10^{FI(\text{dBuV/m})/20}$$

For example, assume a signal at a frequency of 125 MHz has a received level measured as 49.3 dBuV. The total Site Correction Factor (antenna factor plus cable loss minus preamplifier gain) for 125 MHz is -11.5 dB/m. The actual radiated field strength is calculated as follows:

$$49.3 \text{ dBuV} - 11.5 \text{ dB/m} = 37.8 \text{ dBuV/m}$$

$$10^{37.8/20} = 10^{1.89} = 77.6 \text{ uV/m}$$

**EIRP calculation:** Power from power meter in (dBm) + antenna gain in (dBi)



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

## 5 CONDUCTED EMISSIONS MEASUREMENTS

The power line conducted emission measurements were performed in a Series 81 type shielded enclosure manufactured by Rayproof. The EUT was assembled on a wooden table 80 centimeters high. Power was fed to the EUT through a 50 ohm / 50 microhenry Line Impedance Stabilization Network (EUT LISN). The EUT LISN was fed power through an A.C. filter box on the outside of the shielded enclosure. The filter box and EUT LISN housing are bonded to the ground plane of the shielded enclosure. A second LISN, the peripheral LISN, provides isolation for the EUT test peripherals. This peripheral LISN was also fed A.C. power. A metal power outlet box, which is bonded to the ground plane and electrically connected to the peripheral LISN, powers the EUT host peripherals.

The spectrum analyzer was connected to the A.C. line through an isolation transformer. The 50-ohm output of the EUT LISN was connected to the spectrum analyzer input through a Solar 7 kHz high-pass filter. The filter is used to prevent overload of the spectrum analyzer from noise below 7 kHz. Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or average mode if applicable). The analyzer's 6 dB bandwidth was set to 9 kHz. No video filter less than 10 times the resolution bandwidth was used. Average measurements are performed in linear mode using a 10 kHz resolution bandwidth, a 1 Hz video bandwidth, and by increasing the sweep time in order to obtain a calibrated measurement. The range of the frequency spectrum to be investigated is specified in FCC Part 15. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in this report.



## 5.1 CONDUCTED EMISSIONS TEST

The following table lists worst-case conducted emission data. Specifically: Emission Frequency, Test Detector, Analyzer Reading, Site Correction Factor, corrected Emission Level, Quasi Peak Limit and Margin, and the Average Limit and Margin.

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. If the conducted emissions exceed the limit with the instrument set to the quasi-peak mode, then measurements are made in the average mode.

The conducted test was performed with the EUT exercise program loaded, and the emissions were scanned between 150 kHz to 30 MHz on the NEUTRAL SIDE and HOT SIDE, herein referred to as L1 and L2, respectively.



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

#### 5.1.1 CONDUCTED EMISSIONS (CHANNEL 1 CISCO DIPOLE ANTENNA)

TABLE 4: NEUTRAL SIDE (LINE 1)

| Emission Frequency (MHz) | Test Detector | Analyzer Reading (dBμV) | Site Correction Factor (dB) | Emission Level (dBμV) | FCC B Limit (dBμV) | FCC B Margin (dB) |
|--------------------------|---------------|-------------------------|-----------------------------|-----------------------|--------------------|-------------------|
| 11.781                   | Pk            | 47.6                    | -3.0                        | 44.6                  | 48.0               | -3.4              |
| 14.727                   | Pk            | 47.4                    | -3.3                        | 44.1                  | 48.0               | -3.9              |
| 20.617                   | Pk            | 48.1                    | -3.9                        | 44.2                  | 48.0               | -3.8              |
| 29.454                   | Pk            | 45.4                    | -4.5                        | 40.9                  | 48.0               | -7.1              |

TABLE 5: HOT SIDE (LINE 2)

| Emission Frequency (MHz) | Test Detector | Analyzer Reading (dBμV) | Site Correction Factor (dB) | Emission Level (dBμV) | FCC B Limit (dBμV) | FCC B Margin (dB) |
|--------------------------|---------------|-------------------------|-----------------------------|-----------------------|--------------------|-------------------|
| 11.781                   | Pk            | 47.8                    | -3.0                        | 44.8                  | 48.0               | -3.2              |
| 20.617                   | Pk            | 48.8                    | -3.9                        | 44.9                  | 48.0               | -3.1              |
| 26.507                   | Pk            | 43.3                    | -4.3                        | 39.0                  | 48.0               | -9.0              |
| 29.453                   | Pk            | 45.3                    | -4.5                        | 40.8                  | 48.0               | -7.2              |

<sup>(1)</sup>Pk = Peak; QP = Quasi-Peak; Av = Average

**TEST PERSONNEL: ELIZABETH BAUMAN**

Typed/Printed Name:

Date: February 28, 2001



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

## 6 RADIATED EMISSIONS MEASUREMENTS

Before final measurements of radiated emissions were made on the open-field three/ten meter range; the EUT was scanned indoor at one and three meter distances. This was done in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to insure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three/ten-meter, open-field test site. The EUT was placed on a nonconductive turntable 0.8 meters above the ground plane.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters in order to determine the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarizations. The spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. No video filter less than 10 times the resolution bandwidth was used. The range of the frequency spectrum to be investigated is specified in FCC Part 15. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report. . **For radiated measurements above 1 GHz, a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz are used.**

*Note: Rhein Tech Laboratories, Inc. has implemented procedures to minimize errors that occur from test instruments, calibration, procedures, and test setups. Test instrument and calibration errors are documented from the manufacturer or calibration lab. Other errors have been defined and calculated within the Rhein Tech quality manual, section 6.1. Rhein Tech implements the following procedures to minimize errors that may occur: yearly as well as daily calibration methods, technician training, and emphasis to employees on avoiding error.*



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

## 6.1 RADIATED EMISSIONS TEST

The following data lists the significant emission frequencies, measured levels, correction factor (includes cable and antenna corrections), the corrected reading, plus the limit.

TABLE 6: DIGITAL NOISE (CHANNEL 1 CISCO DIPOLE)

| Emission Frequency (MHz) | Test Detector | Antenna Polarity (H/V) | Turntable Azimuth (deg) | Antenna Height (m) | Analyzer Reading (dBμV) | Site Correction Factor (dB/m) | Emission Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|--------------------------|---------------|------------------------|-------------------------|--------------------|-------------------------|-------------------------------|-------------------------|----------------|-------------|
| 263.998                  | Qp            | H                      | 190                     | 1.0                | 38.2                    | -13.5                         | 24.7                    | 46.0           | -21.3       |
| 352.006                  | Qp            | H                      | 160                     | 1.0                | 44.3                    | -11.4                         | 32.9                    | 46.0           | -13.1       |
| 483.998                  | Qp            | H                      | 25                      | 1.3                | 27.4                    | -8.3                          | 19.1                    | 46.0           | -26.9       |
| 747.998                  | Qp            | H                      | 150                     | 1.0                | 29.1                    | -4.5                          | 24.6                    | 46.0           | -21.4       |
| 835.998                  | Qp            | H                      | 145                     | 1.0                | 25.8                    | -3.4                          | 22.4                    | 46.0           | -23.6       |
| 923.998                  | Qp            | H                      | 140                     | 1.0                | 25.2                    | -2.4                          | 22.8                    | 46.0           | -23.2       |

**QUASI PEAK =120 KHZ**

**TEST PERSONNEL: ELIZABETH BAUMAN**

**Typed/Printed Name:**

**Date:** February 28, 2001



## 7 MODULATED BANDWIDTH

The minimum 6 dB bandwidth per FCC 15.247(a)(2) was measured using a 50 ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 300 kHz. The Minimum 6 dB modulated bandwidths are the following:

TABLE 7: MODULATED BANDWIDTH

| Channel | 6(dB) Bandwidth (MHz) |
|---------|-----------------------|
| 1       | 11.0                  |
| 6       | 11.5                  |
| 11      | 11.4                  |

The 6dB bandwidth is listed in figures Section 26 of this report.

## 8 CONDUCTED POWER OUTPUT

The conducted and radiated output power per FCC 15.247(b) was measured on the EUT using a power meter. The radiated EIRP measurement data are results from our outdoor 3-meter range.

TABLE 8: CONDUCTED POWER OUTPUT

| Channel | Radiated EIRP (dBm)* | Power conducted output (dBm) |
|---------|----------------------|------------------------------|
| 1       | 22.5                 | 19.4                         |
| 6       | 22.5                 | 20.4                         |
| 11      | 20.4                 | 18.4                         |

\*Measurement accuracy is +/- 1.5 dB



## 9 ANTENNA CONDUCTED SPURIOUS EMISSIONS

Antenna spurious emission per FCC 15.247(c) was measured from the EUT antenna port using a 50 ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 300 kHz. The modulated carrier was identified at 2.413GHz for Channel 1, 2.443GHz for Channel 6 and 2.462GHz for Channel 11. No other harmonics or spurs were found within 20 dB of the carrier level, and from 9kHz to the carriers 10<sup>th</sup> harmonic. See antenna conducted spurious noise table.

FCC 97 114 appendix C specifies 100KHz/300KHz resolution and video bandwidth for the authorized band up to the 10<sup>th</sup> harmonic. All spurs and harmonic must be 20 dB down from the carrier within the authorized band. A 2.4 GHz notch filter was used to attenuate the carrier so that the spectrum analyzer would not be overloaded. The insertion loss of the notch filter was added to the spurious level on the table below.

TABLE 9: CHANNEL 1

| Frequency (MHz) | Spurious level (dBm) | FCC Margin (dB) |
|-----------------|----------------------|-----------------|
| 18.990          | -45.0                | -30.0           |
| 602.300         | -28.0                | -13.0           |
| 801.760         | -33.0                | -18.0           |
| 951.954         | -46.0                | -31.0           |
| 1808.600        | -35.0                | -20.0           |
| 2445.510        | -49.0                | -34.0           |
| 2548.070        | -55.0                | -40.0           |
| 2785.510        | -51.0                | -36.0           |
| 4824.060        | -41.7                | -26.7           |

TABLE 10: CHANNEL 6

| Frequency (MHz) | Spurious level (dBm) | FCC Margin (dB) |
|-----------------|----------------------|-----------------|
| 8.000           | -28.8                | -14.8           |
| 10.990          | -28.5                | -14.5           |
| 27.440          | -37.0                | -23.0           |
| 82.300          | -37.6                | -23.6           |
| 631.320         | -19.6                | -5.6            |
| 841.735         | -31.7                | -17.7           |
| 946.950         | -52.0                | -38.0           |
| 2815.510        | -54.0                | -40.0           |
| 4884.030        | -36.1                | -22.1           |



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

TABLE 11: CHANNEL 11

| Frequency (MHz) | Spurious level (dBm) | FCC Margin (dB) |
|-----------------|----------------------|-----------------|
| 8.020           | -41.0                | -24.4           |
| 144.500         | -48.0                | -31.4           |
| 650.800         | -28.5                | -11.9           |
| 850.100         | -38.7                | -22.1           |
| 1880.000        | -42.7                | -26.1           |
| 2407.489        | -57.0                | -40.4           |
| 2440.940        | -50.0                | -33.4           |
| 2835.000        | -59.0                | -42.4           |
| 4922.000        | -43.0                | -26.4           |
| 4927.000        | -57.0                | -40.4           |



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

## **10 RADIATED EMISSIONS HARMONICS/SPURIOUS**

Radiated Spurious Emissions applies to harmonics and spurious emissions that fall in the restricted and non-restricted bands. The restricted bands are listed in Section 15.205. The maximum permitted average field strength for the restricted band is listed in Section 15.209. A 2.4 GHz notch filter was used to attenuate the carrier so that the spectrum analyzer would not be overloaded. The insertion loss of the notch filter was added to the spurious level on the table below.



## 10.1 CISCO DIPOLE ANTENNA

TABLE 12: CHANNEL 1 (CISCO DIPOLE ANTENNA)

| Frequency (MHz) | Test Detector | Antenna Polarity (H/V) | Turntable Azimuth (deg) | Antenna Height (m) | Analyzer Reading (dBμV) | Site Correction Factor (dB/m) | Level in (dBμV/m) | Limit in (dBμV/m) | Margin (dB) |
|-----------------|---------------|------------------------|-------------------------|--------------------|-------------------------|-------------------------------|-------------------|-------------------|-------------|
| 2413.07         | AV            | V                      | 90                      | 1.5                | 98.5                    | 8.9                           | 107.4             | Fundamental       |             |
| 2413.07         | PK            | V                      | 90                      | 1.5                | 108.4                   | 8.9                           | 117.3             | Fundamental       |             |
| 2785.51         | AV            | V                      | 95                      | 1.5                | 37.0                    | 9.0                           | 46.0              | 54.0              | -8          |
| 4824.33         | AV            | V                      | 90                      | 1.5                | 33.5                    |                               | NF                | 54.0              |             |

Average Measurement (AV: resolution bandwidth. =1 MHz, video bandwidth = 10 Hz; NF = noise floor

Peak Measurement (PK) = resolution bandwidth = 1 MHz, video bandwidth = 1 MHz

NF = Noise Floor

TABLE 13: CHANNEL 6 (CISCO DIPOLE ANTENNA)

| Frequency (MHz) | Test Detector | Antenna Polarity (H/V) | Turntable Azimuth (deg) | Antenna Height (m) | Analyzer Reading (dBμV) | Site Correction Factor (dB/m) | Level in (dBμV/m) | Limit in (dBμV/m) | Margin (dB) |
|-----------------|---------------|------------------------|-------------------------|--------------------|-------------------------|-------------------------------|-------------------|-------------------|-------------|
| 2442.97         | AV            | V                      | 95                      | 1.                 | 98.7                    | 8.9                           | 107.6             | Fundamental       |             |
| 2442.97         | PK            | V                      | 95                      | 1.                 | 108.8                   | 8.9                           | 117.7             | Fundamental       |             |
| 4884.13         | AV            | V                      | 95                      | 1.                 | 34.7                    |                               | NF                | 54.0              |             |

Average Measurement (AV: resolution bandwidth. =1 MHz, video bandwidth = 10 Hz; NF = noise floor

Peak Measurement (PK) = resolution bandwidth = 1 MHz, video bandwidth = 1 MHz

NF = Noise Floor

TABLE 14: CHANNEL 11(CISCO DIPOLE ANTENNA)

| Frequency (MHz) | Test Detector | Antenna Polarity (H/V) | Turntable Azimuth (deg) | Antenna Height (m) | Analyzer Reading (dBμV) | Site Correction Factor (dB/m) | Level in (dBμV/m) | Limit in (dBμV/m) | Margin (dB) |
|-----------------|---------------|------------------------|-------------------------|--------------------|-------------------------|-------------------------------|-------------------|-------------------|-------------|
| 2462.9          | AV            | V                      | 95                      | 1.                 | 98.5                    | 7.5                           | 106.0             | Fundamental       |             |
| 2462.9          | PK            | V                      | 95                      | 1.                 | 108.3                   | 7.5                           | 115.8             | Fundamental       |             |
| 4925.8          | AV            | V                      | 95                      | 1.                 | 33.4                    |                               | NF                | 54.0              |             |

Average Measurement (AV: resolution bandwidth. =1 MHz, video bandwidth = 10 Hz; NF = noise floor

Peak Measurement (PK) = resolution bandwidth = 1 MHz, video bandwidth = 1 MHz

NF = Noise Floor

### TEST PERSONNEL:

Typed/Printed Name: Rachid SEHB

Date: February 28, 2001



## 10.2 DELL DIPOLE ANTENNA

TABLE 15: CHANNEL 1 (DELL DIPOLE ANTENNA)

| Frequency (MHz) | Test Detector | Antenna Polarity (H/V) | Turntable Azimuth (deg) | Antenna Height (m) | Analyzer Reading (dBμV) | Site Correction Factor (dB/m) | Level in (dBμV/m) | Limit in (dBμV/m) | Margin (dB) |
|-----------------|---------------|------------------------|-------------------------|--------------------|-------------------------|-------------------------------|-------------------|-------------------|-------------|
| 2372.13         | AV            | H                      | 95                      | 1.5                | 41.1                    | -2.2                          | 38.9              | 54.0              | -15.1       |
| 2372.13         | PK            | H                      | 95                      | 1.5                | 53.9                    | -2.2                          | 51.7              |                   |             |
| 2375.13         | AV            | H                      | 95                      | 1.5                | 42.4                    | -2.2                          | 40.2              | 54.0              | -13.8       |
| 2375.13         | PK            | H                      | 95                      | 1.5                | 53.0                    | -2.2                          | 50.8              |                   |             |
| 2383.63         | AV            | H                      | 95                      | 1.5                | 42.3                    | -2.2                          | 40.1              | 54.0              | -13.9       |
| 2383.63         | PK            | H                      | 95                      | 1.5                | 56.9                    | -2.2                          | 54.7              |                   |             |
| 2413.07         | AV            | H                      | 90                      | 1.5                | 94.7                    | -2.2                          | 92.5              | Fundamental       |             |
| 2413.07         | PK            | H                      | 90                      | 1.5                | 99.5                    | -2.2                          | 97.3              | Fundamental       |             |
| 2439.00         | AV            | H                      | 95                      | 1.5                | 48.5                    | -2.2                          | 46.3              | 72.5              | -26.2       |
| 2439.00         | PK            | H                      | 95                      | 1.5                | 59.7                    | -2.2                          | 57.5              |                   |             |
| 2448.88         | AV            | H                      | 95                      | 1.5                | 44.8                    | -2.2                          | 42.6              | 72.5              | -29.9       |
| 2448.88         | PK            | H                      | 95                      | 1.5                | 56.2                    | -2.2                          | 54.0              |                   |             |
| 2452.00         | AV            | H                      | 95                      | 1.5                | 44.2                    | -2.2                          | 42.0              | 72.5              | -30.5       |
| 2452.00         | PK            | H                      | 95                      | 1.5                | 57.5                    | -2.2                          | 55.3              |                   |             |
| 4826.17         | AV            | H                      | 100                     | 1.5                | 34.5                    | 8.5                           | 43.0              | 54.0              | -11.0       |
| 4826.17         | PK            | H                      | 100                     | 1.5                | 44.0                    | 8.5                           | 52.5              |                   |             |

Average Measurement (AV: resolution bandwidth. =1 MHz, video bandwidth = 10 Hz; NF = noise floor

Peak Measurement (PK) : resolution bandwidth = 1 MHz, video bandwidth = 1 MHz

NF = Noise Floor

### TEST PERSONNEL:

Typed/Printed Name: Rachid SEHB

Date: April 3, 2001



TABLE 16: CHANNEL 6 (DELL DIPOLE ANTENNA)

| Frequency (MHz) | Test Detector | Antenna Polarity (H/V) | Turntable Azimuth (deg) | Antenna Height (m) | Analyzer Reading (dBμV) | Site Correction Factor (dB/m) | Level in (dBμV/m) | Limit in (dBμV/m) | Margin (dB) |
|-----------------|---------------|------------------------|-------------------------|--------------------|-------------------------|-------------------------------|-------------------|-------------------|-------------|
| 2406.28         | AV            | H                      | 100                     | 1.5                | 47.7                    | -2.2                          | 45.5              | 73.3              | -27.8       |
| 2406.28         | PK            | H                      | 100                     | 1.5                | 59.6                    | -2.2                          | 57.4              |                   |             |
| 2410.00         | AV            | H                      | 100                     | 1.5                | 43.1                    | -2.2                          | 40.9              | 73.3              | -32.4       |
| 2410.00         | PK            | H                      | 100                     | 1.5                | 55.2                    | -2.2                          | 50.0              |                   |             |
| 2416.50         | AV            | H                      | 100                     | 1.5                | 52.3                    | -2.2                          | 50.1              | 73.3              | -23.2       |
| 2416.50         | PK            | H                      | 100                     | 1.5                | 60.9                    | -2.2                          | 58.7              |                   |             |
| 2443.25         | AV            | H                      | 90                      | 1.5                | 95.5                    | -2.2                          | 93.3              | Fundamental       |             |
| 2443.25         | PK            |                        | 90                      |                    | 98.9                    | -2.2                          | 96.7              | Fundamental       |             |
| 2467.75         | AV            | H                      | 90                      | 1.5                | 56.9                    | -2.2                          | 54.7              | 73.3              | -18.6       |
| 2467.75         | PK            | H                      | 90                      | 1.5                | 65.8                    | -2.2                          | 63.6              |                   |             |
| 2470.63         | AV            | H                      | 100                     | 1.5                | 53.0                    | -2.2                          | 50.8              | 73.3              | -22.5       |
| 2470.63         | PK            | H                      | 100                     | 1.5                | 57.3                    | -2.2                          | 55.1              |                   |             |
| 2479.88         | AV            | H                      | 100                     | 1.5                | 53.1                    | -2.2                          | 50.9              | 73.3              | -22.4       |
| 2479.88         | PK            | H                      | 100                     | 1.5                | 58.9                    | -2.2                          | 56.7              |                   |             |
| 2489.88         | AV            | H                      | 100                     | 1.5                | 48.7                    | -2.2                          | 46.5              | 54.0              | -7.5        |
| 2489.88         | PK            | H                      | 100                     | 1.5                | 57.1                    | -2.2                          | 54.9              |                   |             |
| 2511.75         | AV            | H                      | 100                     | 1.5                | 43.2                    | -2.2                          | 41.0              | 73.3              | -32.3       |
| 2511.75         | PK            | H                      | 100                     | 1.5                | 53.1                    | -2.2                          | 51.9              |                   |             |
| 4886.50         | AV            | H                      | 100                     | 1.5                | 35.0                    | 8.5                           | 43.5              | 54.0              | -10.5       |
| 4886.50         | PK            | H                      | 100                     | 1.5                | 54.0                    | 8.5                           | 62.5              |                   |             |

Average Measurement (AV: resolution bandwidth = 1 MHz, video bandwidth = 10 Hz; NF = noise floor

Peak Measurement (PK) = resolution bandwidth = 1 MHz, video bandwidth = 1 MHz

NF = Noise Floor

### **TEST PERSONNEL:**

Typed/Printed Name: Rachid SEHB

Date: April 3, 2001



TABLE 17: CHANNEL 11 (DELL DIPOLE ANTENNA)

| Frequency (MHz) | Test Detector | Antenna Polarity (H/V) | Turntable Azimuth (deg) | Antenna Height (m) | Analyzer Reading (dBμV) | Site Correction Factor (dB/m) | Level in (dBμV/m) | Limit in (dBμV/m) | Margin (dB) |
|-----------------|---------------|------------------------|-------------------------|--------------------|-------------------------|-------------------------------|-------------------|-------------------|-------------|
| 2433.00         | AV            | H                      | 100                     | 1.5                | 42.4                    | -2.2                          | 40.2              | 74.2              | -34.0       |
| 2433.00         | PK            | H                      | 100                     | 1.5                | 57.2                    | -2.2                          | 55.2              |                   |             |
| 2436.00         | AV            | H                      | 100                     | 1.5                | 43.4                    | -2.2                          | 41.2              | 74.2              | -33.0       |
| 2436.00         | PK            | H                      | 100                     | 1.5                | 54.5                    | -2.2                          | 52.3              |                   |             |
| 2440.75         | AV            | H                      | 100                     | 1.5                | 47.8                    | -2.2                          | 45.6              | 74.2              | -28.6       |
| 2440.75         | PK            | H                      | 100                     | 1.5                | 56.2                    | -2.2                          | 54.0              |                   |             |
| 2463.75         | AV            | H                      | 95                      | 1.5                | 96.4                    | -2.2                          | 94.2              | Fundamental       |             |
| 2463.75         | PK            |                        | 95                      |                    | 99.2                    |                               | 97.0              | Fundamental       |             |
| 2487.88         | AV            | H                      | 90                      | 1.5                | 50.9                    | -2.2                          | 48.7              | 54.               | -5.3        |
| 2487.88         | PK            | H                      | 90                      | 1.5                | 61.3                    | -2.2                          | 59.1              |                   |             |
| 2490.88         | AV            | H                      | 100                     | 1.5                | 48.8                    | -2.2                          | 46.6              | 54.0              | -7.4        |
| 2490.88         | PK            | H                      | 100                     | 1.5                | 60.7                    | -2.2                          | 58.5              |                   |             |
| 2540.00         | AV            | H                      | 100                     | 1.5                | 44.8                    | -2.2                          | 42.6              | 74.2              | -31.6       |
| 2540.00         | PK            | H                      | 100                     | 1.5                | 58.4                    | -2.2                          | 56.2              |                   |             |
| 2540.00         | AV            | H                      | 100                     | 1.5                | 33.4                    | 8.5                           | 41.9              | 54.0              | -12.1       |
| 2540.00         | PK            | H                      | 100                     | 1.5                | 50.1                    | 8.5                           | 58.6              |                   |             |

Average Measurement (AV: resolution bandwidth = 1 MHz, video bandwidth = 10 Hz; NF = noise floor  
Peak Measurement (PK) = resolution bandwidth = 1 MHz, video bandwidth = 1 MHz  
NF = Noise Floor

**TEST PERSONNEL:**

**Typed/Printed Name:** Rachid SEHB

**Date:** April 3, 2001



### 10.3 DELL INVERTED F ANTENNA

TABLE 18: CHANNEL 1 ( DELL INVERTED F ANTENNA)

| Frequency (MHz) | Test Detector | Antenna Polarity (H/V) | Turntable Azimuth (deg) | Antenna Height (m) | Analyzer Reading (dBμV) | Site Correction Factor (dB/m) | Level in (dBμV/m) | Limit in (dBμV/m) | Margin (dB) |
|-----------------|---------------|------------------------|-------------------------|--------------------|-------------------------|-------------------------------|-------------------|-------------------|-------------|
| 2375.25         | AV            | H                      | 95                      | 1.5                | 41.1                    | -2.2                          | 38.9              | 54.0              | -15.1       |
| 2375.25         | PK            | H                      | 95                      | 1.5                | 50.2                    | -2.2                          | 48.0              |                   |             |
| 2380.00         | AV            | H                      | 95                      | 1.5                | 40.0                    | -2.2                          | 37.8              | 54.0              | -16.2       |
| 2380.00         | PK            | H                      | 95                      | 1.5                | 51.4                    | -2.2                          | 49.2              |                   |             |
| 2383.50         | AV            | H                      | 95                      | 1.5                | 41.7                    | -2.2                          | 39.5              | 54.0              | -14.5       |
| 2383.50         | PK            | H                      | 95                      | 1.5                | 52.1                    | -2.2                          | 49.9              |                   |             |
| 2386.50         | AV            | H                      | 95                      | 1.5                | 39.9                    | -2.2                          | 37.7              | 54.0              | -16.3       |
| 2386.50         | PK            | H                      | 95                      | 1.5                | 53.2                    | -2.2                          | 51.0              |                   |             |
| 2413.07         | AV            | H                      | 90                      | 1.5                | 97.1                    | -2.2                          | 94.9              | Fundamental       |             |
| 2413.07         | PK            | H                      | 90                      | 1.5                | 100.0                   | -2.2                          | 97.8              | Fundamental       |             |
| 2449.00         | AV            | H                      | 95                      | 1.5                | 47.5                    | -2.2                          | 45.3              | 74.9              | -29.6       |
| 2449.00         | PK            | H                      | 95                      | 1.5                | 58.5                    | -2.2                          | 56.3              |                   |             |
| 2451.88         | AV            | H                      | 95                      | 1.5                | 46.6                    | -2.2                          | 44.4              | 74.9              | -30.5       |
| 2451.88         | PK            | H                      | 95                      | 1.5                | 58.7                    | -2.2                          | 56.5              |                   |             |
| 4826.14         | AV            | H                      | 95                      | 1.5                | 36.2                    | 8.5                           | 44.7              | 54.0              | -9.3        |
| 4826.14         | PK            | H                      | 95                      | 1.5                | 50.0                    | 8.5                           | 58.5              |                   |             |

Average Measurement (AV: resolution bandwidth = 1 MHz, video bandwidth = 10 Hz; NF = noise floor

Peak Measurement (PK) = resolution bandwidth = 1 MHz, video bandwidth = 1 MHz

NF = Noise Floor

#### TEST PERSONNEL:

Typed/Printed Name: Rachid SEHB

Date: April 3, 2001



TABLE 19: CHANNEL 6 ( DELL INVERTED F ANTENNA)

| Frequency (MHz) | Test Detector | Antenna Polarity (H/V) | Turntable Azimuth (deg) | Antenna Height (m) | Analyzer Reading (dBμV) | Site Correction Factor (dB/m) | Level in (dBμV/m) | Limit in (dBμV/m) | Margin (dB) |
|-----------------|---------------|------------------------|-------------------------|--------------------|-------------------------|-------------------------------|-------------------|-------------------|-------------|
| 2394.25         | AV            | H                      | 90                      | 1.5                | 41.6                    | -2.2                          | 39.4              | 74.0              | -34.6       |
| 2394.25         | PK            | H                      | 90                      | 1.5                | 52.3                    | -2.2                          | 50.1              |                   |             |
| 2402.80         | AV            | H                      | 90                      | 1.5                | 43.5                    | -2.2                          | 41.3              | 74.0              | -32.7       |
| 2402.80         | PK            | H                      | 90                      | 1.5                | 54.4                    | -2.2                          | 52.2              |                   |             |
| 2407.06         | AV            | H                      | 90                      | 1.5                | 47.2                    | -2.2                          | 45.0              | 74.0              | -29.0       |
| 2407.06         | PK            | H                      | 90                      | 1.5                | 56.5                    | -2.2                          | 54.3              |                   |             |
| 2412.88         | AV            | H                      | 90                      | 1.5                | 47.6                    | -2.2                          | 45.4              | 74.0              | -28.6       |
| 2412.88         | PK            | H                      | 90                      | 1.5                | 56.7                    | -2.2                          | 54.5              |                   |             |
| 2416.50         | AV            | H                      | 90                      | 1.5                | 54.9                    | -2.2                          | 52.7              | 74.0              | 21.3        |
| 2416.50         | PK            | H                      | 90                      | 1.5                | 67.7                    | -2.2                          | 65.5              |                   |             |
| 2443.00         | AV            | H                      | 100                     | 1.5                | 96.2                    | -2.2                          | 94.0              | Fundamental       |             |
| 2443.00         | PK            | H                      | 100                     | 1.5                | 99.7                    | -2.2                          | 97.5              | Fundamental       |             |
| 2467.75         | AV            | H                      | 90                      | 1.5                | 56.4                    | -2.2                          | 54.2              | 74.0              | -19.8       |
| 2467.75         | PK            | H                      | 90                      | 1.5                | 62.5                    | -2.2                          | 60.3              |                   |             |
| 2479.63         | AV            | H                      | 90                      | 1.5                | 48.7                    | -2.2                          | 46.5              | 74.0              | -27.5       |
| 2479.63         | PK            | H                      | 90                      | 1.5                | 51.4                    | -2.2                          | 49.2              |                   |             |
| 2489.88         | AV            | H                      | 90                      | 1.5                | 44.8                    | -2.2                          | 42.6              | 54.0              | -11.4       |
| 2489.88         | PK            | H                      | 90                      | 1.5                | 51.8                    | -2.2                          | 49.6              |                   |             |
| 4486.00         | AV            | AV                     | 90                      | 1.5                | 40.2                    | 8.5                           | 48.7              | 54.0              | -5.3        |
| 4486.00         | PK            | PK                     | 90                      | 1.5                | 49.1                    | 8.5                           | 57.6              |                   |             |

Average Measurement (AV: resolution bandwidth. =1 MHz, video bandwidth = 10 Hz; NF = noise floor  
Peak Measurement (PK) = resolution bandwidth = 1 MHz, video bandwidth = 1 MHz  
NF = Noise Floor

### TEST PERSONNEL:

Typed/Printed Name: Rachid SEHB

Date: April 3, 2001



TABLE 20: CHANNEL 11 ( DELL INVERTED F ANTENNA)

| Frequency (MHz) | Test Detector | Antenna Polarity (H/V) | Turntable Azimuth (deg) | Antenna Height (m) | Analyzer Reading (dBμV) | Site Correction Factor (dB/m) | Level in (dBμV/m) | Limit in (dBμV/m) | Margin (dB) |
|-----------------|---------------|------------------------|-------------------------|--------------------|-------------------------|-------------------------------|-------------------|-------------------|-------------|
| 2433.58         | AV            | H                      | 100                     | 1.5                | 43.0                    | -2.2                          | 40.8              | 71.5              | -30.7       |
| 2433.58         | PK            | H                      | 100                     | 1.5                | 49.5                    | -2.2                          | 47.3              |                   |             |
| 2440.88         | AV            | H                      | 100                     | 1.5                | 48.9                    | -2.2                          | 46.7              | 71.5              | -24.8       |
| 2440.88         | PK            | H                      | 100                     | 1.5                | 56.2                    | -2.2                          | 54.0              |                   |             |
| 2463.75         | AV            | H                      | 95                      | 1.5                | 93.7                    | -2.2                          | 91.5              | Fundamental       |             |
| 2463.75         | PK            | H                      | 95                      | 1.5                | 97.8                    | -2.2                          | 95.6              | Fundamental       |             |
| 2487.75         | AV            | H                      | 90                      | 1.5                | 44.8                    | -2.2                          | 42.6              | 54.0              | -11.6       |
| 2487.75         | PK            | H                      | 90                      | 1.5                | 53.9                    | -2.2                          | 51.7              |                   |             |
| 2490.50         | AV            | H                      | 100                     | 1.5                | 43.7                    | -2.2                          | 41.5              | 54.0              | -12.5       |
| 2490.50         | PK            | H                      | 100                     | 1.5                | 53.1                    | -2.2                          | 50.9              |                   |             |
| 4927.50         | AV            | H                      | 110                     | 1.5                | 36.9                    | 8.5                           | 45.4              | 54.0              | -8.5        |
| 4927.50         | PK            | H                      | 110                     | 1.5                | 45.0                    | 8.5                           | 53.5              |                   |             |

Average Measurement (AV: resolution bandwidth. =1 MHz, video bandwidth = 10 Hz; NF = noise floor

Peak Measurement (PK) = resolution bandwidth = 1 MHz, video bandwidth = 1 MHz

NF = Noise Floor

**TEST PERSONNEL:**

**Typed/Printed Name:** Rachid SEHB

**Date:** April 3, 2001



## 10.4 TOSHIBA CHIP ANTENNA

TABLE 21: CHANNEL 1 (TOSHIBA CHIP ANTENNA)

| Frequency (MHz) | Test Detector | Antenna Polarity (H/V) | Turntable Azimuth (deg) | Antenna Height (m) | Analyzer Reading (dBμV) | Site Correction Factor (dB/m) | Level in (dBμV/m) | Limit in (dBμV/m) | Margin (dB) |
|-----------------|---------------|------------------------|-------------------------|--------------------|-------------------------|-------------------------------|-------------------|-------------------|-------------|
| 2372.13         | AV            | H                      | 90                      | 1.5                | 38.6                    | -2.2                          | 36.4              | 54.0              | -17.6       |
| 2372.13         | PK            | H                      | 90                      | 1.5                | 45.0                    | -2.2                          | 42.8              |                   |             |
| 2375.25         | AV            | H                      | 90                      | 1.5                | 39.6                    | -2.2                          | 37.4              | 54.0              | -16.6       |
| 2375.25         | PK            | H                      | 90                      | 1.5                | 44.2                    | -2.2                          | 42.0              |                   |             |
| 2383.50         | AV            | H                      | 90                      | 1.5                | 41.0                    | -2.2                          | 39.0              | 54.0              | -15.0       |
| 2383.50         | PK            | H                      | 90                      | 1.5                | 51.4                    | -2.2                          | 49.2              |                   |             |
| 2385.00         | AV            | H                      | 95                      | 1.5                | 40.0                    | -2.2                          | 37.8              | 54.0              | -16.2       |
| 2385.00         | PK            | H                      | 95                      | 1.5                | 51.0                    | -2.2                          | 48.8              |                   |             |
| 2413.07         | AV            | H                      | 90                      | 1.5                | 96.7                    | -2.2                          | 94.5              | Fundamental       |             |
| 2413.07         | PK            | H                      | 90                      | 1.5                | 98.7                    | -2.2                          | 96.5              | Fundamental       |             |
| 2449.00         | AV            | H                      | 90                      | 1.5                | 40.5                    | -2.2                          | 38.3              | 74.5              | -36.2       |
| 2449.00         | PK            | H                      | 90                      | 1.5                | 50.9                    | -2.2                          | 48.7              |                   |             |
| 2452.25         | AV            | H                      | 90                      | 1.5                | 40.2                    | -2.2                          | 38.0              | 74.5              | -36.5       |
| 2452.25         | PK            | H                      | 90                      | 1.5                | 45.7                    | -2.2                          | 43.5              |                   |             |
| 2452.25         | AV            | H                      | 90                      | 1.5                | 33.3                    | 8.5                           | 41.8              | 54.0              | -12.2       |
| 2452.25         | PK            | H                      | 90                      | 1.5                | 39.6                    | 8.5                           | 48.3              |                   |             |

Average Measurement (AV: resolution bandwidth = 1 MHz, video bandwidth = 10 Hz; NF = noise floor

Peak Measurement (PK) = resolution bandwidth = 1 MHz, video bandwidth = 1 MHz

NF = Noise Floor

### TEST PERSONNEL:

Typed/Printed Name: Rachid SEHB

Date: April 3, 2001



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

TABLE 22: CHANNEL 6 (TOSHIBA CHIP ANTENNA)

| Frequency (MHz) | Test Detector | Antenna Polarity (H/V) | Turntable Azimuth (deg) | Antenna Height (m) | Analyzer Reading (dBμV) | Site Correction Factor (dB/m) | Level in (dBμV/m) | Limit in (dBμV/m) | Margin (dB) |
|-----------------|---------------|------------------------|-------------------------|--------------------|-------------------------|-------------------------------|-------------------|-------------------|-------------|
| 2406.00         | AV            | H                      | 100                     | 1.5                | 47.7                    | -2.2                          | 45.5              | 73.3              | -27.8       |
| 2406.00         | PK            | H                      | 100                     | 1.5                | 57.7                    | -2.2                          | 55.5              |                   |             |
| 2410.00         | AV            | H                      | 100                     | 1.5                | 43.1                    | -2.2                          | 40.9              | 73.3              | -32.9       |
| 2410.00         | PK            | H                      | 100                     | 1.5                | 52.5                    | -2.2                          | 50.3              |                   |             |
| 2416.50         | AV            | H                      | 100                     | 1.5                | 52.3                    | -2.2                          | 50.1              | 73.3              | -23.2       |
| 2416.50         | PK            | H                      | 100                     | 1.5                | 54.8                    | -2.2                          | 52.6              |                   |             |
| 2443.88         | AV            | H                      | 90                      | 1.5                | 95.5                    | -2.2                          | 93.3              | Fundamental       |             |
| 2443.88         | PK            | H                      | 90                      | 1.5                | 99.7                    | -2.2                          | 97.5              | Fundamental       |             |
| 2470.88         | AV            | H                      | 90                      | 1.5                | 56.9                    | -2.2                          | 54.7              | 73.3              | -18.6       |
| 2470.88         | PK            | H                      | 90                      | 1.5                | 57.2                    | -2.2                          | 55.0              |                   |             |
| 2479.00         | AV            | H                      | 100                     | 1.5                | 62.0                    | -2.2                          | 50.8              | 73.3              | -22.5       |
| 2479.00         | PK            | H                      | 100                     | 1.5                | 57.5                    | -2.2                          | 55.3              |                   |             |
| 2482.00         | AV            | H                      | 100                     | 1.5                | 52.0                    | -2.2                          | 49.8              | 73.3              | -23.5       |
| 2482.00         | PK            | H                      | 100                     | 1.5                | 56.2                    | -2.2                          | 54.0              |                   |             |
| 2489.80         | AV            | H                      | 100                     | 1.5                | 52.1                    | -2.2                          | 50.9              | 54                | -3.1        |
| 2489.80         | PK            | H                      | 100                     | 1.5                | 52.2                    | -2.2                          | 50.0              |                   |             |
| 4887.76         | AV            | H                      | 100                     | 1.5                | 38.6                    | 8.5                           | 47.1              | 54                | -6.9        |
| 4887.76         | PK            | H                      | 100                     | 1.5                | 44.0                    | 8.5                           | 52.5              |                   |             |

Average Measurement (AV: resolution bandwidth = 1 MHz, video bandwidth = 10 Hz; NF = noise floor

Peak Measurement (PK) = resolution bandwidth = 1 MHz, video bandwidth = 1 MHz

NF = Noise Floor

### **TEST PERSONNEL:**

**Typed/Printed Name:** Rachid SEHB

**Date:** April 3, 2001



TABLE 23: CHANNEL 11 (TOSHIBA CHIP ANTENNA)

| Frequency (MHz) | Test Detector | Antenna Polarity (H/V) | Turntable Azimuth (deg) | Antenna Height (m) | Analyzer Reading (dBμV) | Site Correction Factor (dB/m) | Level in (dBμV/m) | Limit in (dBμV/m) | Margin (dB) |
|-----------------|---------------|------------------------|-------------------------|--------------------|-------------------------|-------------------------------|-------------------|-------------------|-------------|
| 2433.25         | AV            | H                      | 100                     | 1.5                | 42.4                    | -2.2                          | 40.2              | 73.7              | -33.5       |
| 2433.25         | PK            | H                      | 100                     | 1.5                | 50.4                    | -2.2                          | 48.2              |                   |             |
| 2436.13         | AV            | H                      | 100                     | 1.5                | 43.4                    | -2.2                          | 41.2              | 73.7              | -32.5       |
| 2436.13         | PK            | H                      | 100                     | 1.5                | 49.6                    | -2.2                          | 51.8              |                   |             |
| 2440.88         | AV            | H                      | 100                     | 1.5                | 48.6                    | -2.2                          | 46.4              | 73.7              | -27.3       |
| 2440.88         | PK            | H                      | 100                     | 1.5                | 54.2                    | -2.2                          | 52.0              |                   |             |
| 2462.76         | AV            | H                      | 90                      | 1.5                | 95.9                    | -2.2                          | 93.7              | Fundamental       |             |
| 2462.76         | PK            | H                      | 100                     | 1.5                | 99.5                    | -2.2                          | 97.3              | Fundamental       |             |
| 2483.38         | AV            | H                      | 95                      | 1.5                | 50.3                    | -2.2                          | 48.1              | 73.7              | -25.6       |
| 2483.38         | PK            | H                      | 95                      | 1.5                | 56.9                    | -2.2                          | 54.7              |                   |             |
| 2487.88         | AV            | H                      | 95                      | 1.5                | 46.1                    | -2.2                          | 43.9              | 54.0              | -10.1       |
| 2487.88         | PK            | H                      | 95                      | 1.5                | 57.2                    | -2.2                          | 55.0              |                   |             |
| 2490.63         | AV            | H                      | 100                     | 1.5                | 43.2                    | -2.2                          | 41.0              | 54.0              | -13.0       |
| 2490.63         | PK            | H                      | 100                     | 1.5                | 53.6                    | -2.2                          | 51.4              |                   |             |
| 4925.52         | AV            | H                      | 90                      | 1.5                | 39.0                    | 8.5                           | 47.5              | 54.0              | -6.5        |
| 4925.52         | PK            | H                      | 90                      | 1.5                | 50.5                    | 8.5                           | 59.0              |                   |             |

Average Measurement (AV: resolution bandwidth = 1 MHz, video bandwidth = 10 Hz; NF = noise floor  
Peak Measurement (PK) = resolution bandwidth = 1 MHz, video bandwidth = 1 MHz  
NF = Noise Floor

**TEST PERSONNEL:**

Typed/Printed Name: Rachid SEHB

Date: April 3, 2001



## 10.5 TOSHIBA INVERTED F ANTENNA

: TABLE 24 CHANNEL 1 (TOSHIBA INVERTED F ANTENNA)

| Frequency (MHz) | Test Detector | Antenna Polarity (H/V) | Turntable Azimuth (deg) | Antenna Height (m) | Analyzer Reading (dBμV) | Site Correction Factor (dB/m) | Level in (dBμV/m) | Limit in (dBμV/m) | Margin (dB) |
|-----------------|---------------|------------------------|-------------------------|--------------------|-------------------------|-------------------------------|-------------------|-------------------|-------------|
| 2272.25         | AV            | H                      | 90                      | 1.5                | 49.8                    | -2.2                          | 47.6              | 54.0              | -6.4        |
|                 | PK            | H                      | 90                      | 1.5                | 55.7                    | -2.2                          | 53.5              |                   |             |
| 2372.38         | AV            | H                      | 90                      | 1.5                | 41.8                    | -2.2                          | 39.6              | 54.0              | -14.4       |
|                 | PK            | H                      | 90                      | 1.5                | 52.2                    | -2.2                          | 50.0              |                   |             |
| 2375.38         | AV            | H                      | 90                      | 1.5                | 43.5                    | -2.2                          | 41.3              | 54.0              | -12.7       |
|                 | PK            | H                      | 90                      | 1.5                | 51.8                    | -2.2                          | 49.6              |                   |             |
| 2380.00         | AV            | H                      | 95                      | 1.5                | 42.2                    | -2.2                          | 40.0              | 54.0              | -14.0       |
|                 | PK            | H                      | 95                      | 1.5                | 50.9                    | -2.2                          | 48.7              |                   |             |
| 2386.38         | AV            | H                      | 90                      | 1.5                | 42.3                    | -2.2                          | 40.1              | 54.0              | 13.9        |
|                 | PK            | H                      | 90                      | 1.5                | 51.2                    | -2.2                          | 49.0              |                   |             |
| 2414.00         | AV            | H                      | 90                      | 1.5                | 96.9                    | -2.2                          | 94.7              | Fundamental       |             |
|                 | PK            | H                      | 90                      | 1.5                | 100.4                   | -2.2                          | 98.2              | Fundamental       |             |
| 2462.73         | AV            | H                      | 90                      | 1.5                | 42.5                    | -2.2                          | 40.3              | 74.7              | -34.4       |
|                 | PK            | H                      | 90                      | 1.5                | 51.2                    | -2.2                          | 49.0              |                   |             |
| 2540.40         | AV            | H                      | 90                      | 1.5                | 41.7                    | -2.2                          | 39.5              | 74.7              | -35.2       |
|                 | PK            | H                      | 90                      | 1.5                | 51.0                    | -2.2                          | 48.8              |                   |             |
| 2673.60         | AV            | H                      | 90                      | 1.5                | 43.1                    | -2.2                          | 40.9              | 54.0              | -13.1       |
|                 | PK            | H                      | 90                      | 1.5                | 51.2                    | -2.2                          | 49.0              |                   |             |
| 4828.00         | AV            | H                      | 90                      | 1.5                | 33.5                    | 8.5                           | 42.0              | 54.0              | -12.0       |
|                 | PK            | H                      | 90                      | 1.5                | 39.7                    | 8.5                           | 48.2              |                   |             |

Average Measurement (AV: resolution bandwidth. =1 MHz, video bandwidth = 10 Hz; NF = noise floor

Peak Measurement (PK) = resolution bandwidth = 1 MHz, video bandwidth = 1 MHz

NF = Noise Floor

### TEST PERSONNEL:

**Typed/Printed Name:** Rachid SEHB

**Date:** April 3, 2001



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

: TABLE 25 CHANNEL 6 (TOSHIBA INVERTED F ANTENNA)

| Frequency (MHz) | Test Detector | Antenna Polarity (H/V) | Turntable Azimuth (deg) | Antenna Height (m) | Analyzer Reading (dBμV) | Site Correction Factor (dB/m) | Level in (dBμV/m) | Limit in (dBμV/m) | Margin (dB) |
|-----------------|---------------|------------------------|-------------------------|--------------------|-------------------------|-------------------------------|-------------------|-------------------|-------------|
| 2272.18         | AV            | H                      | 100                     | 1.5                | 52.4                    | -2.2                          | 50.2              | 54.0              | -3.8        |
|                 | PK            | H                      | 100                     | 1.5                | 61.2                    | -2.2                          | 59.0              |                   |             |
| 2406.13         | AV            | H                      | 100                     | 1.5                | 52.7                    | -2.2                          | 50.5              | 76.6              | -26.1       |
|                 | PK            | H                      | 100                     | 1.5                | 62.2                    | -2.2                          | 60.0              |                   |             |
| 2443.35         | AV            | H                      | 100                     | 1.5                | 98.8                    | -2.2                          | 96.6              | Fundamental       |             |
|                 | PK            | H                      | 100                     | 1.5                | 102.2                   | -2.2                          | 100.0             | Fundamental       |             |
| 2483.70         | AV            | H                      | 90                      | 1.5                | 53.9                    | -2.2                          | 51.7              | 54.0              | -2.3        |
|                 | PK            | H                      | 90                      | 1.5                | 62.2                    | -2.2                          | 60.0              |                   |             |
| 4886.70         | AV            | H                      | 90                      | 1.5                | 40.0                    | 8.5                           | 48.5              | 54                | -18.6       |
|                 | PK            | H                      | 90                      | 1.5                | 51.2                    | 8.5                           | 59.7              |                   |             |

Average Measurement (AV: resolution bandwidth = 1 MHz, video bandwidth = 10 Hz; NF = noise floor

Peak Measurement (PK) = resolution bandwidth = 1 MHz, video bandwidth = 1 MHz

NF = Noise Floor

**TEST PERSONNEL:**

**Typed/Printed Name:** Rachid SEHB

**Date:** April 3, 2001



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

: TABLE 26 CHANNEL 11 (TOSHIBA INVERTED F ANTENNA)

| Frequency (MHz) | Test Detector | Antenna Polarity (H/V) | Turntable Azimuth (deg) | Antenna Height (m) | Analyzer Reading (dBμV) | Site Correction Factor (dB/m) | Level in (dBμV/m) | Limit in (dBμV/m) | Margin (dB) |
|-----------------|---------------|------------------------|-------------------------|--------------------|-------------------------|-------------------------------|-------------------|-------------------|-------------|
| 2272.50         | AV            | H                      | 100                     | 1.5                | 52.8                    | -2.2                          | 50.6              | 54.0              | -3.4        |
|                 | PK            | H                      | 100                     | 1.5                | 61.2                    | -2.2                          | 59.0              |                   |             |
| 2406.35         | AV            | H                      | 100                     | 1.5                | 52.0                    | -2.2                          | 49.8              | 75.5              | -25.7       |
|                 | PK            | H                      | 100                     | 1.5                | 62.2                    | -2.2                          | 60.0              |                   |             |
| 2433.04         | AV            | H                      | 100                     | 1.5                | 42.8                    | -2.2                          | 40.6              | 75.5              | -34.9       |
|                 | PK            | H                      | 100                     | 1.5                | 58.8                    | -2.2                          | 56.6              |                   |             |
| 2436.48         | AV            | H                      | 90                      | 1.5                | 44.6                    | -2.2                          | 42.4              | 75.5              | -33.1       |
|                 | PK            | H                      | 100                     | 1.5                | 60.2                    | -2.2                          | 58.0              |                   |             |
| 2440.74         | AV            | H                      | 95                      | 1.5                | 49.1                    | -2.2                          | 46.9              | 75.5              | -28.6       |
|                 | PK            | H                      | 95                      | 1.5                | 60.2                    | -2.2                          | 58.0              |                   |             |
| 2463.98         | AV            | H                      | 95                      | 1.5                | 97.7                    | -2.2                          | 95.5              | Fundamental       |             |
|                 | PK            | H                      | 100                     | 1.5                | 100.8                   | -2.2                          | 98.6              | Fundamental       |             |
| 4927.96         | AV            | H                      | 90                      | 1.5                | 39.5                    | 8.5                           | 48.5              | 54.0              | -5.5        |
|                 | PK            | H                      | 90                      | 1.5                | 50.5                    | 8.5                           | 59.0              |                   |             |

Average Measurement (AV: resolution bandwidth. =1 MHz, video bandwidth = 10 Hz; NF = noise floor

Peak Measurement (PK) = resolution bandwidth = 1 MHz, video bandwidth = 1 MHz

NF = Noise Floor

### **TEST PERSONNEL:**

**Typed/Printed Name:** Rachid SEHB

**Date:** April 3, 2001



## 11 POWER SPECTRAL DENSITY TEST DATA

The Power spectral density per FCC 15.247(d) was measured from the antenna port of the EUT using a 50 ohm spectrum analyzer with the resolution bandwidth set at 3kHz, the video bandwidth set at 3kHz, and the sweep time set at 17 second. The spectral lines were resolved for the modulated carriers at 2.412GHz, 2.442GHz and 2.462GHz respectively. These levels are well below the +8 dBm limit. See power spectral density table below and the plots in Section 16 of this report.

TABLE 27: POWER SPECTRAL DENSITY

| Channel | Power Spectral Density limit = +8dBm |
|---------|--------------------------------------|
| 1       | -12.3                                |
| 6       | -11.6                                |
| 11      | -13.9                                |



## 12 COMPLIANCE WITH THE RESTRICTED BAND EDGE TEST DATA

Compliance with the band edges was performed using the FCC's "Radiated Measurement at a Band Edge" guidance document. The final data derived below were from radiated measurements only. The data taken in this report represents the worst case at 11 MBPS. Data rates of 5.5MBPS, 2 MBPS and 1 MBPS were investigated and found to be in compliance. Both absolute and delta method were performed with the same results.

TABLE 28: RESTRICTED BAND EDGE

| Band edge Measurement |                |                      |                                     |                          |                 |
|-----------------------|----------------|----------------------|-------------------------------------|--------------------------|-----------------|
| Antenna               | Channel Set to | Frequency tested MHz | Field Strength Level (dB $\mu$ V/m) | FCC Limit (dB $\mu$ V/m) | FCC Margin (dB) |
| Cisco Dipole          | 1              | 2390.0               | 53.1                                | 54.0                     | -0.9            |
|                       | 11             | 2483.5               | 53.9                                | 54.0                     | -0.1            |
| Dell Dipole           | 1              | 2390.0               | 41.4                                | 54.0                     | -12.6           |
|                       | 11             | 2483.5               | 52.4                                | 54.0                     | -1.6            |
| Dell Inverted F       | 1              | 2390.0               | 40.4                                | 54.0                     | -13.6           |
|                       | 11             | 2483.5               | 46.9                                | 54.0                     | -7.1            |
| Toshiba Chip          | 1              | 2390.0               | 37.9                                | 54.0                     | -16.1           |
|                       | 11             | 2483.5               | 47.2                                | 54.0                     | -6.8            |
| Toshiba Inverted F    | 1              | 2390.0               | 39.8                                | 54.0                     | -14.2           |
|                       | 11             | 2483.5               | 50.2                                | 54.0                     | -3.8            |



## 13 RECEIVER TEST DATA

TABLE 29: RADIATED EMISSION (RECEIVER MODE)

| Temperature: 47°F        |               |                        |                         |                    | Humidity: 41%           |                               |                         |                |             |
|--------------------------|---------------|------------------------|-------------------------|--------------------|-------------------------|-------------------------------|-------------------------|----------------|-------------|
| Emission Frequency (MHz) | Test Detector | Antenna Polarity (H/V) | Turntable Azimuth (deg) | Antenna Height (m) | Analyzer Reading (dBuV) | Site Correction Factor (dB/m) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| 263.998                  | Qp            | H                      | 185                     | 1.2                | 42.5                    | -13.5                         | 29.0                    | 46.0           | -17.0       |
| 351.998                  | Qp            | H                      | 180                     | 1.0                | 43.5                    | -11.4                         | 32.1                    | 46.0           | -13.9       |
| 747.998                  | Qp            | H                      | 150                     | 1.0                | 29.8                    | -4.5                          | 25.3                    | 46.0           | -20.7       |
| 791.998                  | Qp            | H                      | 160                     | 1.0                | 27.8                    | -3.7                          | 24.1                    | 46.0           | -21.9       |
| 835.998                  | Qp            | H                      | 145                     | 1.0                | 30.4                    | -3.4                          | 27.0                    | 46.0           | -19.0       |
| 923.998                  | Qp            | H                      | 165                     | 1.0                | 26.1                    | -2.4                          | 23.7                    | 46.0           | -22.3       |



## 14 ANTENNA SPECIFICATIONS

### 14.1 CISCO DIPOLE ANTENNA

#### Electrical Specifications:

|                              |                        |
|------------------------------|------------------------|
| <b>Model No.</b>             | LDK 102042             |
| <b>Frequency Range</b>       | 2.4-2.5GHz             |
| <b>Bandwidth</b>             | 100MHz                 |
| <b>Gain</b>                  | 2.2dBi                 |
| <b>V.S.W.R</b>               | <1.9                   |
| <b>Radiation Pattern</b>     | Omni-Directional       |
| <b>Polarization</b>          | Vertical or Horizontal |
| <b>Impedance</b>             | 50ohms                 |
| <b>Operating Temperature</b> |                        |

#### Electrical Specifications:

|                         |     |
|-------------------------|-----|
| <b>Dimension</b>        | N/A |
| <b>Pulling Strength</b> | N/A |
| <b>Swivel Torque</b>    | N/A |
| <b>Input Connector</b>  |     |




360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

#### Setup: Anechoic Chamber Measurements


The anechoic chamber is a 3m absorber cone range with a fully automated turntable measurement system and software. Prior to conducting the DUT measurements, the range was calibrated with known gain horn antennas at the frequencies of 2.4GHz, 2.45GHz, and 2.5GHz to verify that the S21 gain settings were correct. This was done to make sure the gain measurements would give the correct absolute gain measurements of the antennas under test.

Four measurements were taken on each laptop for each of the antennas present in the laptop for the same three frequencies. The measurement planes are defined as the XY and YZ planes (the ZX plane was skipped due to time constraints), doing both a horizontal and vertical polarization measurements for each antenna. The antennas were placed on the turntable to match the level of the main beam from the measurement horn. Pictures of the setups are shown below:

XY plane, Horizontal Polarization

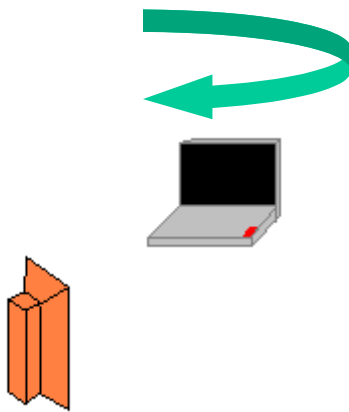

XY plane, Vertical Polarization

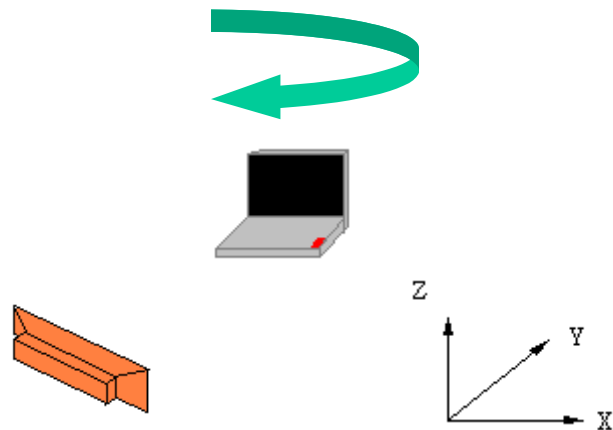




YZ plane, Horizontal Polarization

YZ plane, Vertical Polarization

0 degrees is with the LCD directly facing the horn for both measurements.

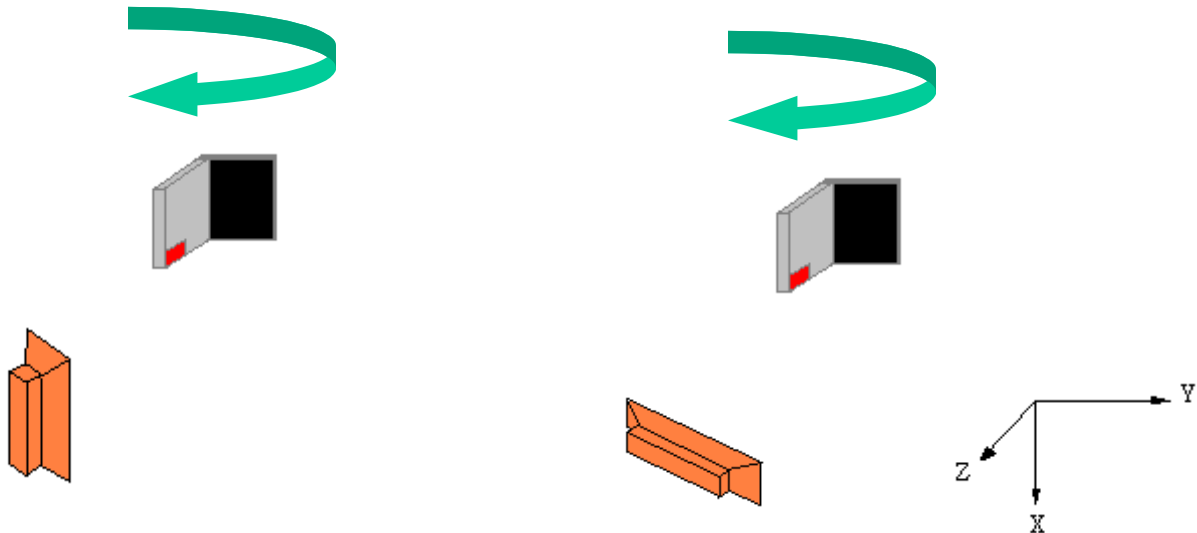

Note that the full XY measurement is indicative of the antenna performance around the LCD as would be seen as the user rotates the laptop in an open position. For the YZ and ZX planes, only the  $-90$  to  $+90$  measurements are useful as the bottom of the laptop would be resting on a surface in actual use. Also, the YZ and ZX performance may vary depending on whether the desk surface is RF reflective (metal) or absorptive, so actual gain may vary somewhat depending on the user environment.

The following antenna characteristics were examined:

#### The quality of the antenna match in the system

The antenna system must be tuned to the correct band to get the optimum gain performance at the operating frequencies. The reflection coefficient S11 is used as a measure of the antennas ability to radiate at specific frequencies. It is desired to have a wide enough band antenna so it will be tuned over the entire operating band with some margin for slight tuning shifts. The figure of measure here is a S11 VSWR of less than 2:1 over the operating band, and a bandwidth of at least 100MHz for tuning shifts due to manufacturing tolerances.

#### The gain of the antenna embedded in the system.

The average gain of the antenna was compared with the average gain of the PCMCIA extended card antenna. The F-antenna performance in the card is a basic antenna performance benchmark for the required gain needed to get adequate RF coverage in the Orinoco system.

The average gain performance of the F-antennas is between  $-10\text{dBi}$  and  $-4\text{dBi}$  in each of the measurement planes, with an overall average gain around  $-1\text{dBi}$  to  $-6\text{dBi}$  when the card is in a laptop unit. Antennas with overall average gains in this range, give or take a dB or two, are deemed to have acceptable gain for the Orinoco system.

The peak gain is no greater than  $+1\text{dBi}$  for the F antennas based on previous Lucent documented test results. The upper gain limit on the embedded antennas is  $+2.5\text{dBi}$  to be able to use the certification work done on the mini-PCI card, as anything higher than this may require a full recertification effort.

#### The omnidirectionality of the pattern.

This is a measure of how constant the gain is as the antennas are rotated.



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

While statistical methods can be used to evaluate this, a cursory look at the pattern plot can determine if the performance is acceptable. Omnidirectionality is difficult to control with electrically small antenna design, so the requirement of a less than 10dB difference between the average gain in the measurement plane and the maximum gain in the same plane is an acceptable goal. Omnidirectionality is important so that the user does not see large differences in SNR performance as the laptop is rotated around, which may lead them to believe there is a problem with the system.

#### The polarization differences between the antennas.

Some diversity scheme between the two antennas in a system is desired in order for the system to show 2-3dB performance improvements in fading at the cell fringes. One scheme is to use polarization diversity, where the antennas are designed to have a 90 degree polarization difference.

Polarization differences between the antennas are checked by orienting the transmitting horn in both HP and VP positions. Polarization diversity between two embedded antennas is most important in systems where the antennas are located closely together at fractions of an operating wavelength. Polarization can be rigorously computed through the use of formulas, but here, a simple inspection of the HP and VP measurements will show which polarization the design is leaning to. The higher the gain in a particular polarization, the more the antenna is polarized in that direction. For the small antennas, polarization will, in general, be somewhat chaotic and will be a combination of both HP and VP.

#### The spacing of the antennas.

In the case of laptop antennas, there is typically already the advantage of space diversity, another diversity scheme that can give comparable performance to polarization diversity. Space diversity simply means the antennas are spaced several wavelengths apart and are well isolated from each other. If this spacing condition is met, fulfilling the polarization diversity requirement is not as critical.

#### The isolation between antennas.


This can be a problem when the antennas are constrained to be close together. The desired isolation spec is  $S_{21} > 20\text{dB}$ . Since the two antennas are typically spaced far apart in these applications, the spec should not have a problem being met.

#### Office Environment Measurements


##### Test Results:

##### H2 Laptop

This laptop had both the main and auxiliary antenna connected to a diversity switch. A bias T was used to operate the switch externally with a DC bias. Network analyzer measurements were done to check the tuning of the antennas and to make sure there was enough isolation to provide the space diversity requirements.

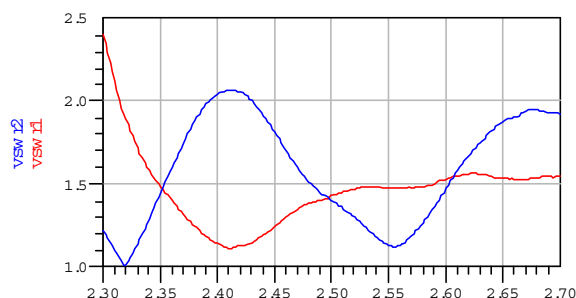


Certification Report For Cisco System  
Document Number: 2001041 Revision 4



freq (2.300GHz to 2.700GHz)

m1  
freq=2.442GHz  
Del2\_MahS=0.091 / 60.638  
impedance = Z0 \* (1.079 + j1.173)

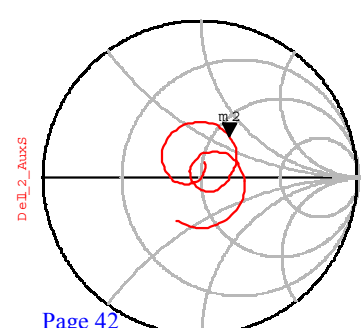

freq (2.300GHz to 2.700GHz)

m2  
freq=2.440GHz  
Del2\_AuxS=0.314 / 54.836  
impedance = Z0 \* (1.223 + j0.697)

Page 42



The aux antenna looked like it might be tuned slightly high, but it was close enough to be acceptable. The isolation between the antennas was greater than 20dB which is acceptable. The antennas were located on opposite sides of the unit, so space diversity between the antennas was adequately present.

Gain measurements on a similar laptop with the same antenna designs were previously taken by Foxconn on 7/00-8/00. A summary of the results they received as documented in their IEEE802.11 Test Report –2 document is shown below:

### MAIN ANTENNA – Average Gain

| (dBi)           | 2400 MHz | 2450 MHz | 2500 MHz |
|-----------------|----------|----------|----------|
| XY-OPEN-H       | -11.71   | -11.72   | -12.40   |
| XY-OPEN-V       | -7.75    | -9.10    | -10.11   |
| XY-OPEN-AVG.    | -6.29    | -7.21    | -8.10    |
| YZ-OPEN-H       | -8.73    | -8.31    | -8.35    |
| YZ-OPEN-V       | -12.58   | -14.11   | -12.59   |
| YZ-OPEN-AVG.    | -7.23    | -7.29    | -6.96    |
| XZ-OPEN-H       | -11.67   | -10.66   | -11.66   |
| XZ-OPEN-V       | -6.94    | -6.82    | -7.52    |
| XZ-OPEN-AVG.    | -5.68    | -5.32    | -6.10    |
| TOTAL AVG. GAIN | -6.35    | -6.51    | -6.98    |

### AUX ANTENNA – Average Gain



| (dBi)           | 2400 MHz | 2450 MHz | 2500 MHz |
|-----------------|----------|----------|----------|
| XY-OPEN-H       | -12.31   | -14.63   | -17.08   |
| XY-OPEN-V       | -8.70    | -9.82    | -8.86    |
| XY-OPEN-AVG.    | -7.13    | -8.58    | -8.25    |
| YZ-OPEN-H       | -6.91    | -8.17    | -8.27    |
| YZ-OPEN-V       | -11.67   | -11.85   | -13.57   |
| YZ-OPEN-AVG.    | -5.66    | -6.62    | -7.14    |
| XZ-OPEN-H       | -9.35    | -10.94   | -10.11   |
| XZ-OPEN-V       | -8.28    | -11.03   | -8.62    |
| XZ-OPEN-AVG.    | -5.77    | -7.97    | -6.29    |
| TOTAL AVG. GAIN | -6.14    | -7.65    | -7.15    |

The average gain numbers are calculated by summing all the linear gain measurements and dividing by 360, then converting back to dBi units.



### Dell L2 Laptop (Inspiron)

This laptop contained only one antenna due to space constraints, so there is no need to check the polarization or isolation of the system. The diversity scheme is therefore not used in this system. Network analyzer measurement data is shown below. This antenna also seemed to be tuned to 2.55 GHz, and needs some VSWR improvement in the 2.4-2.483GHz band.

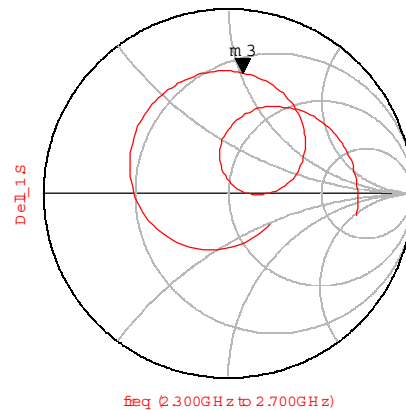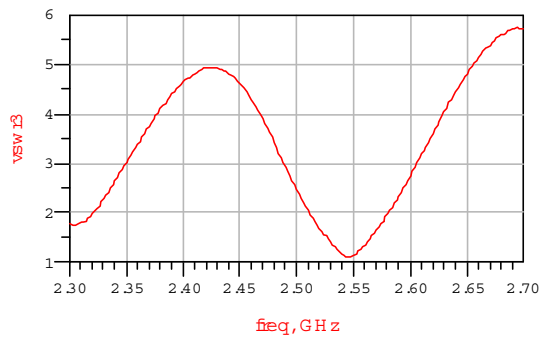


m 3  
freq=2.440GHz  
DeL1S=0.656 /83.258  
impedance = Z0 \* (0.446 + j1.021)




## 15 BANDEDGE PLOTS

PLOT 1: CHANNEL 1 CISCO DIPOLE ANTENNA 1MHZ/10HZ

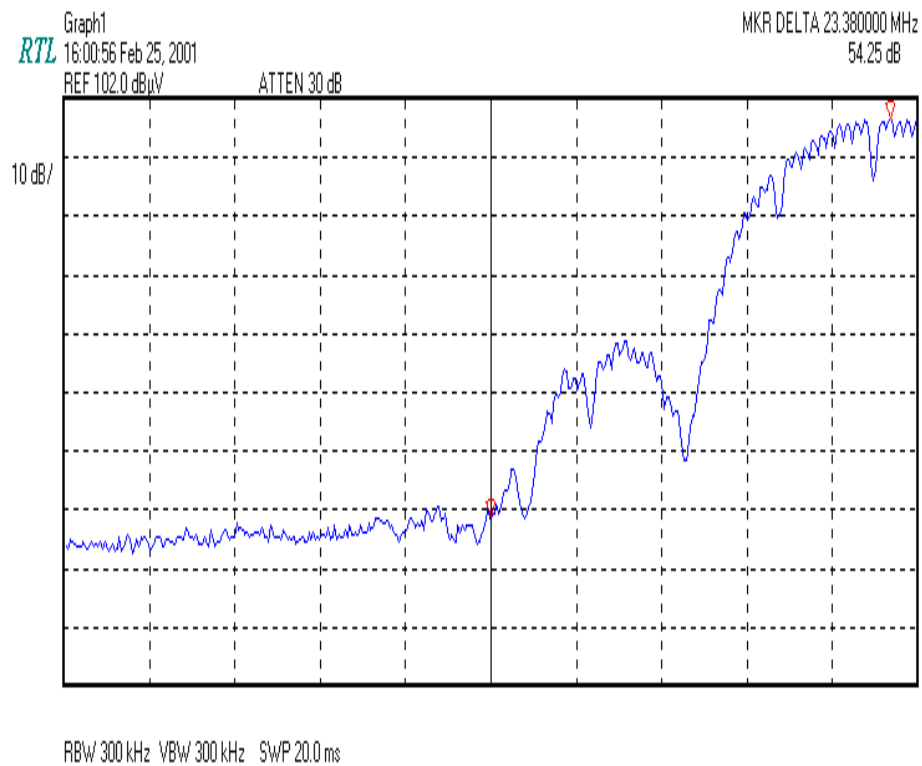



PLOT 2: CHANNEL 1 CISCO DIPOLE ANTENNA

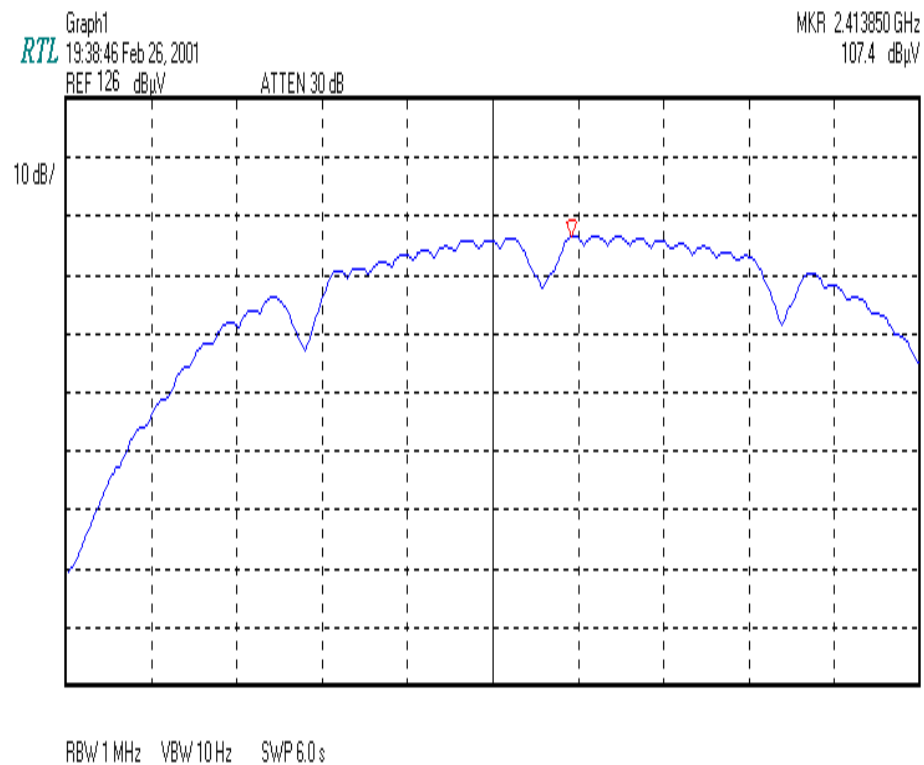


**Note site factor entered into analyzer register for corrected final result.**




360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

PLOT 3: CHANNEL 11 CISCO DIPOLEANTENNA

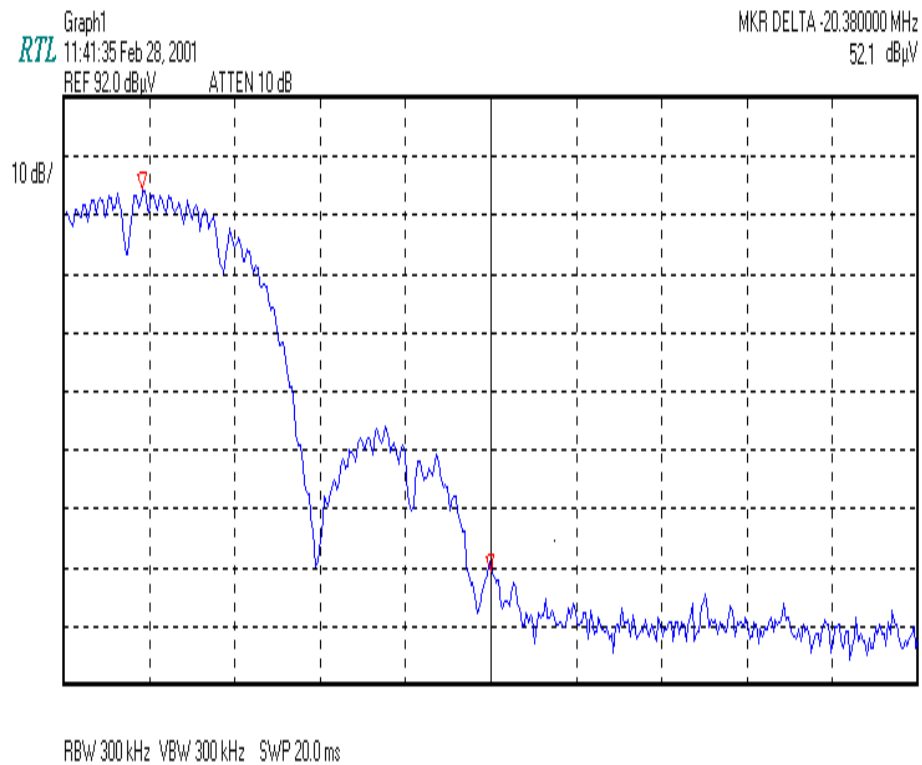



PLOT 4: CHANNEL 11 CISCO DIPOLE ANTENNA

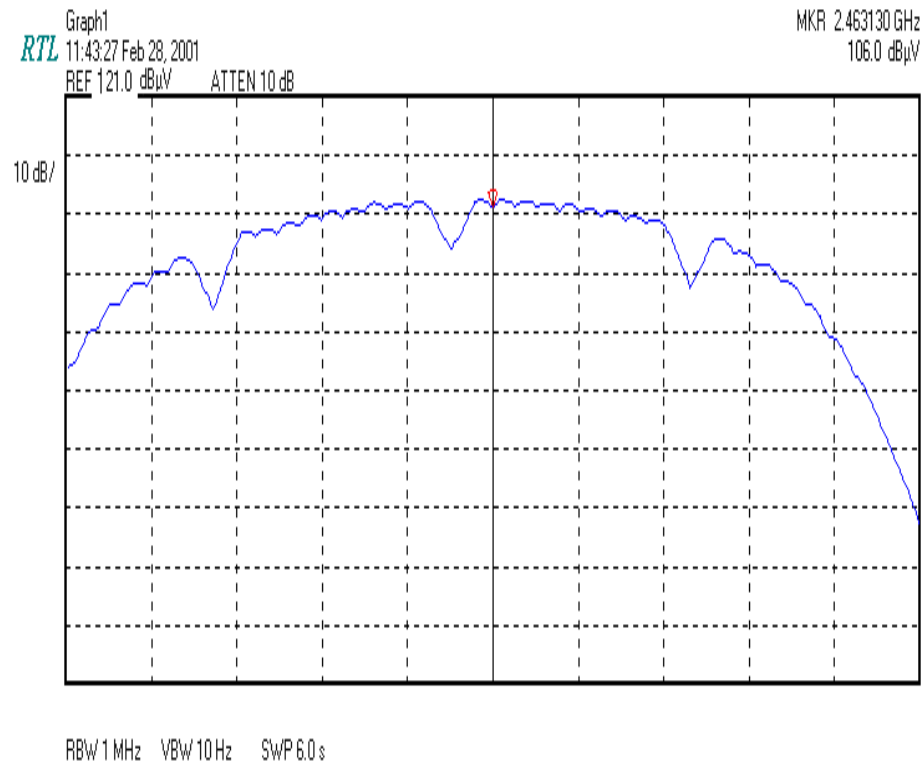


**Note site factor entered into analyzer register for corrected final result.**



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

PLOT 5: CHANNEL 1 DELL DIPOLE ANTENNA 1MHZ/10HZ

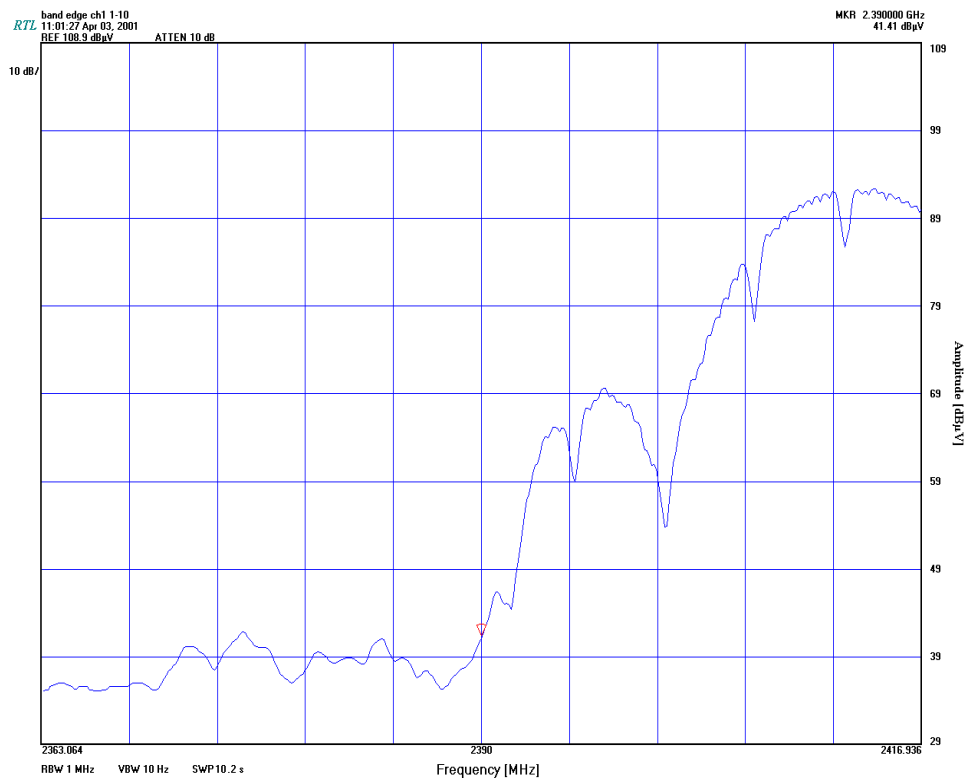




360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

PLOT 6


CHANNEL 1 DELL DIPOLE ANTENNA 1MHZ/1MHZ

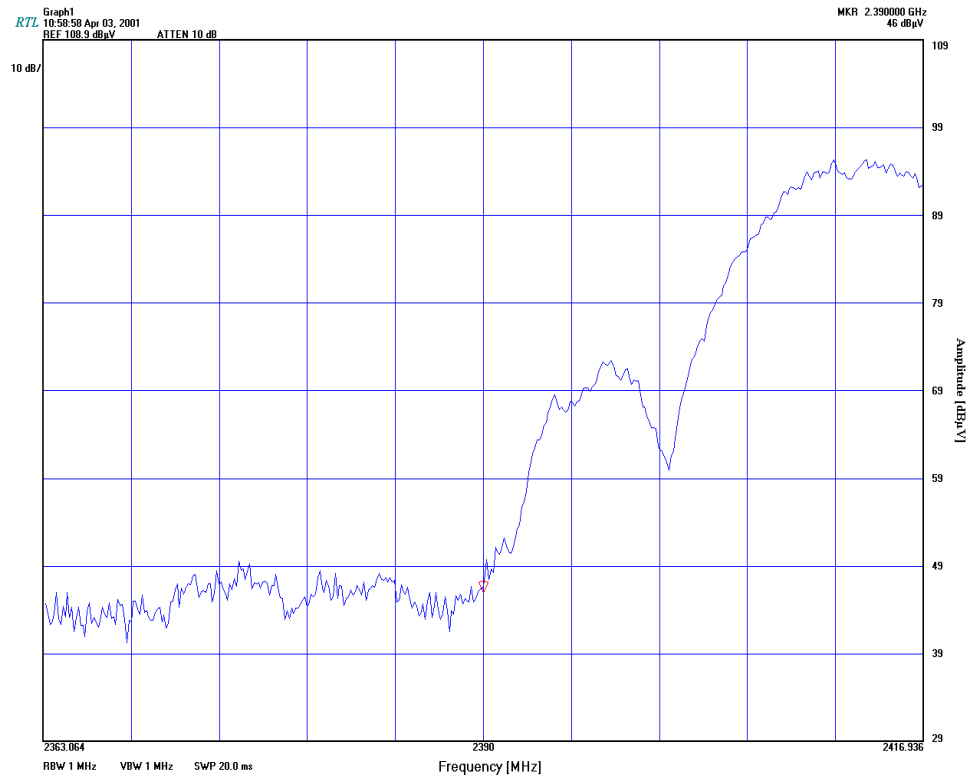



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

PLOT 7 CHANNEL 11 DELL DIPOLE ANTENNA 1MHZ/10HZ

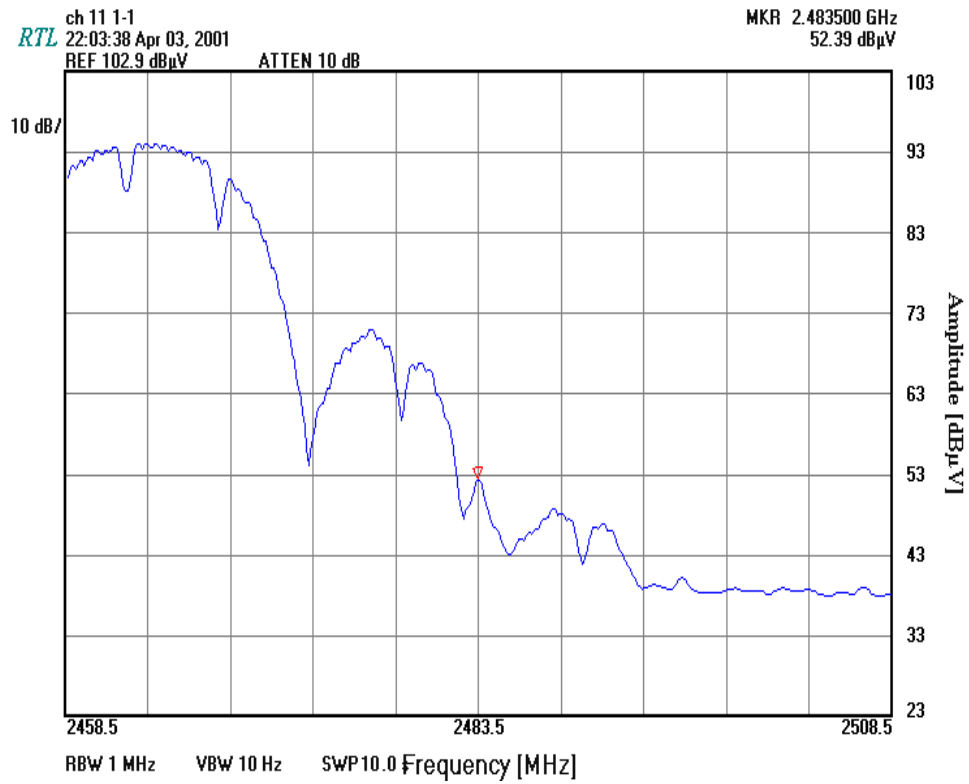




360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

PLOT 8

CHANNEL 11 DELL DIPOLE ANTENNA 1MHZ/1MHZ

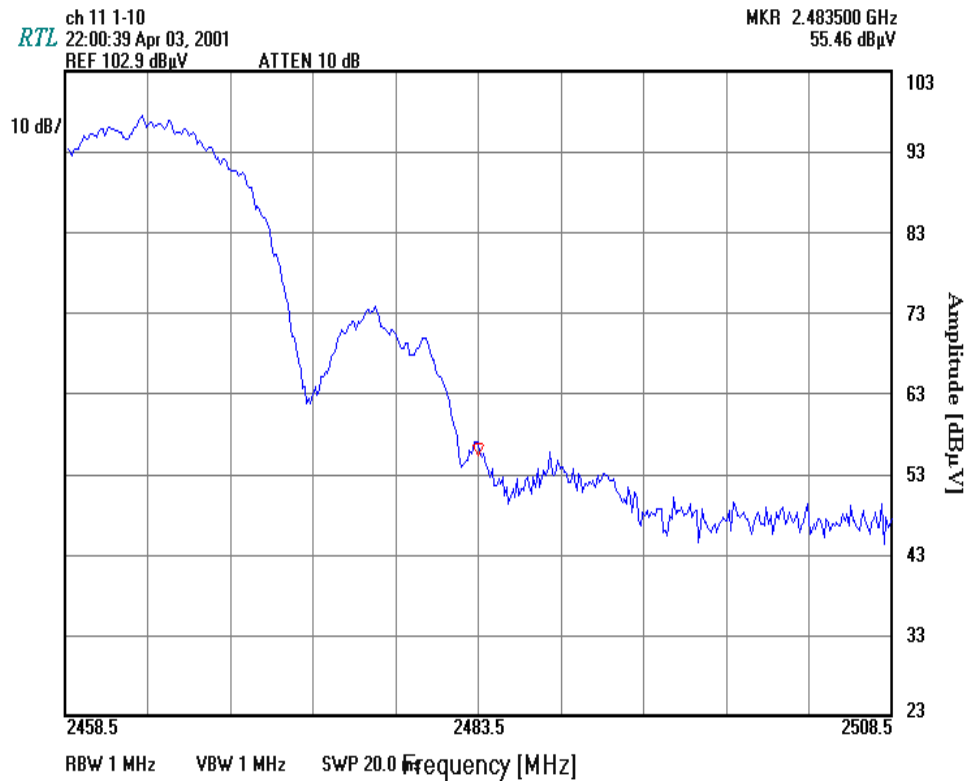




360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

PLOT 9


CHANNEL 1 DELL INVERTED F ANTENNA 1MHZ/10HZ

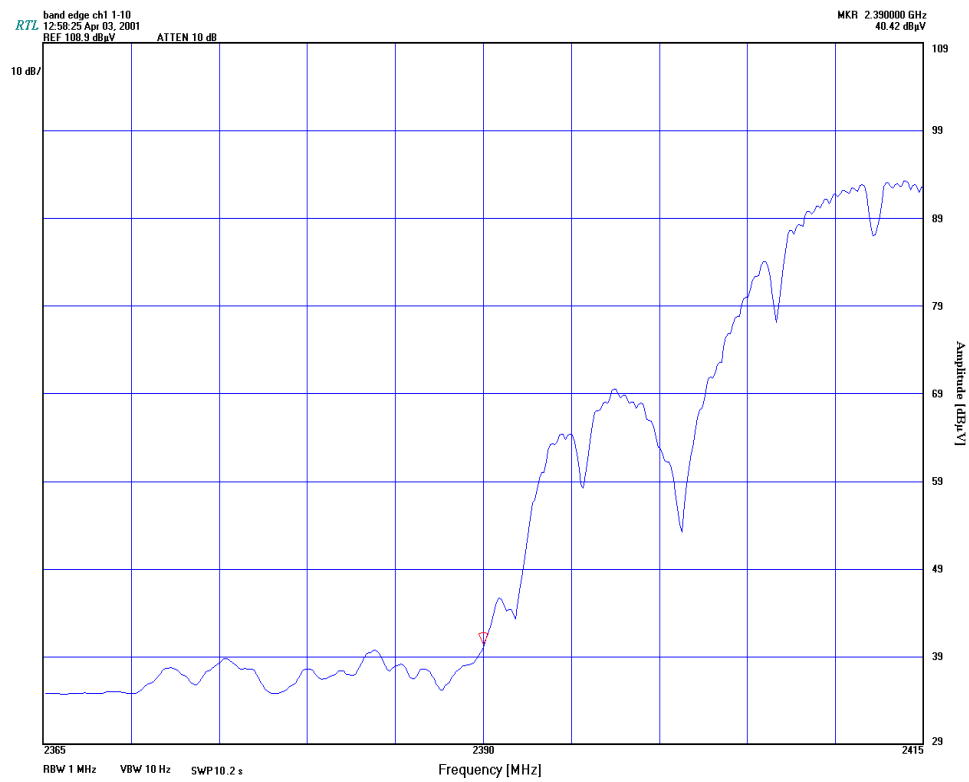



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>


# PLOT 10 CHANNEL 1 DELL INVERTED F ANTENNA 1MHZ/1MHZ

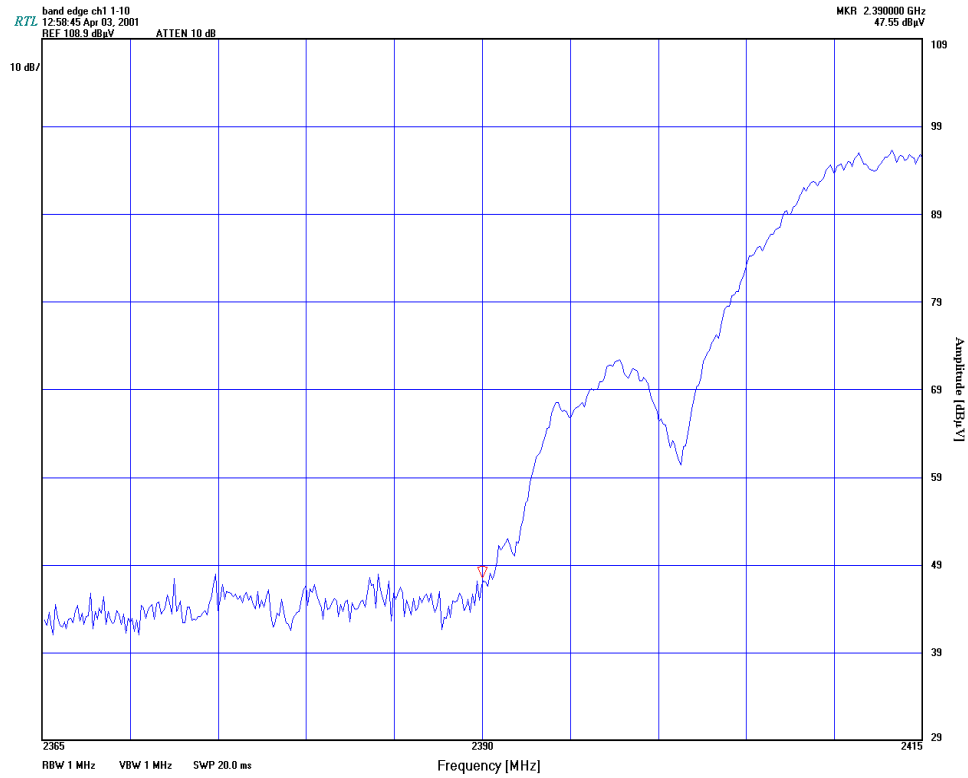



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>


PLOT 11 CHANNEL 11 DELL INVERTED F ANTENNA 1MHZ/10HZ

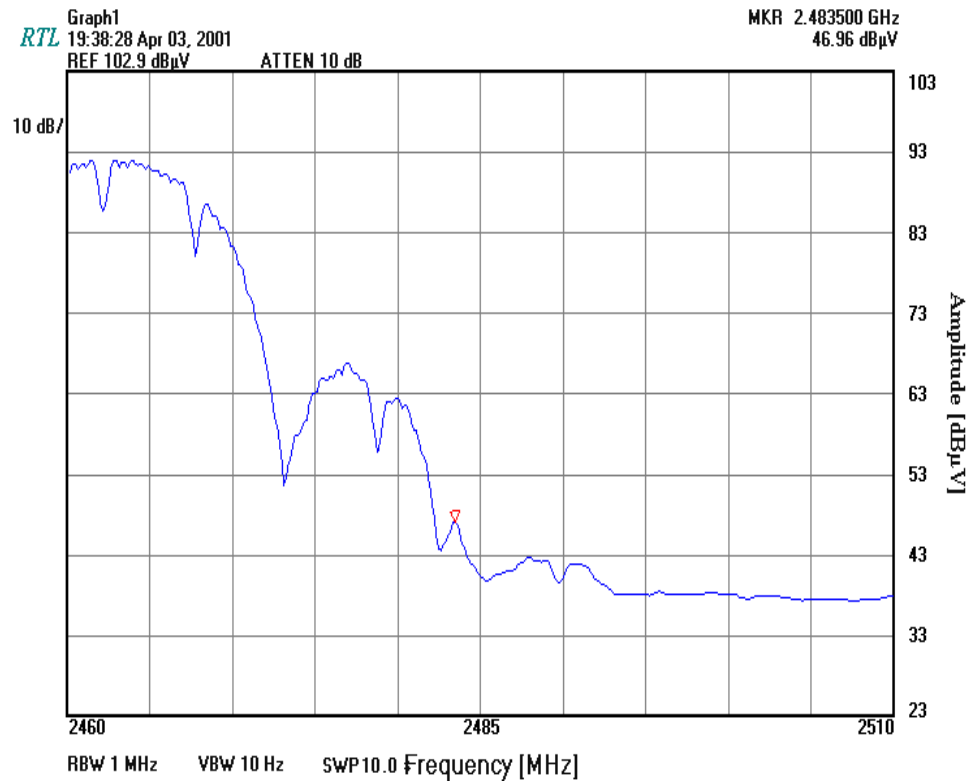



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>


PLOT 12 CHANNEL 11 DELL INVERTED F ANTENNA 1MHZ/1MHZ

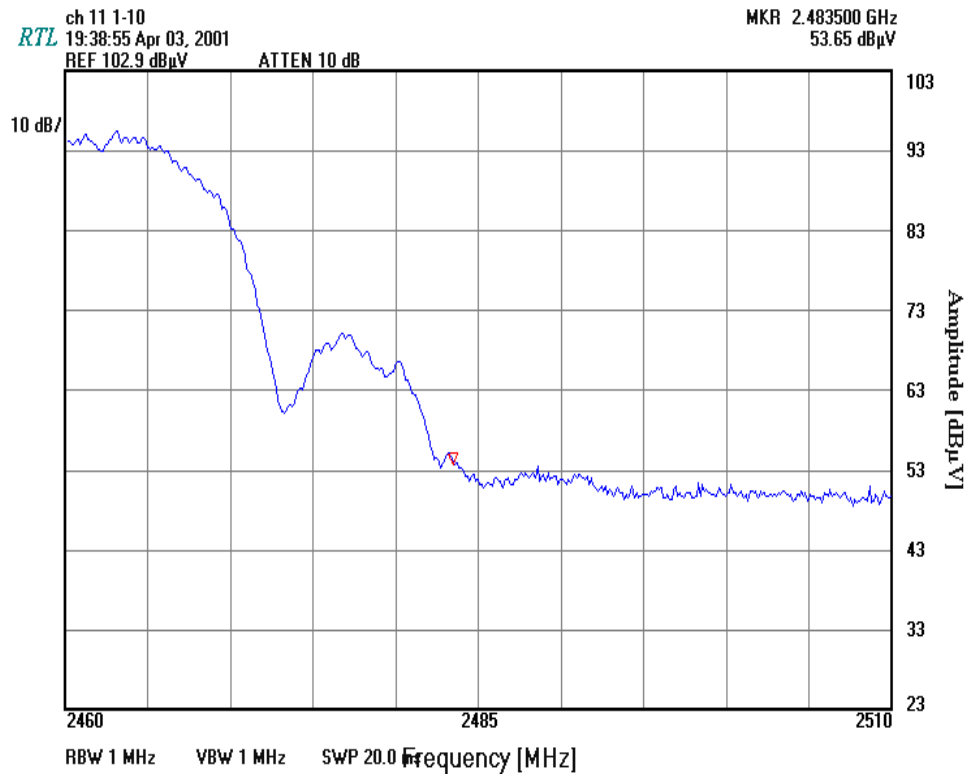



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>


# PLOT 13 CHANNEL 1 TOSHIBA CHIP ANTENNA 1MHZ/10HZ

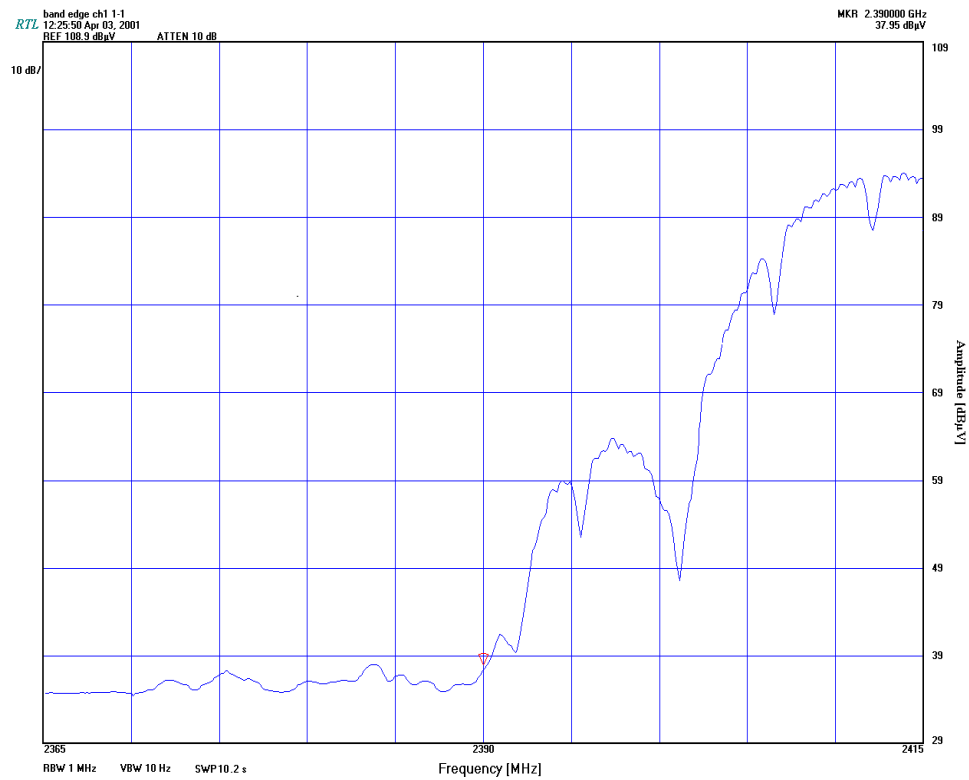



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>


PLOT 14 CHANNEL 1 TOSHIBA CHIP ANTENNA 1MHZ/1MHZ

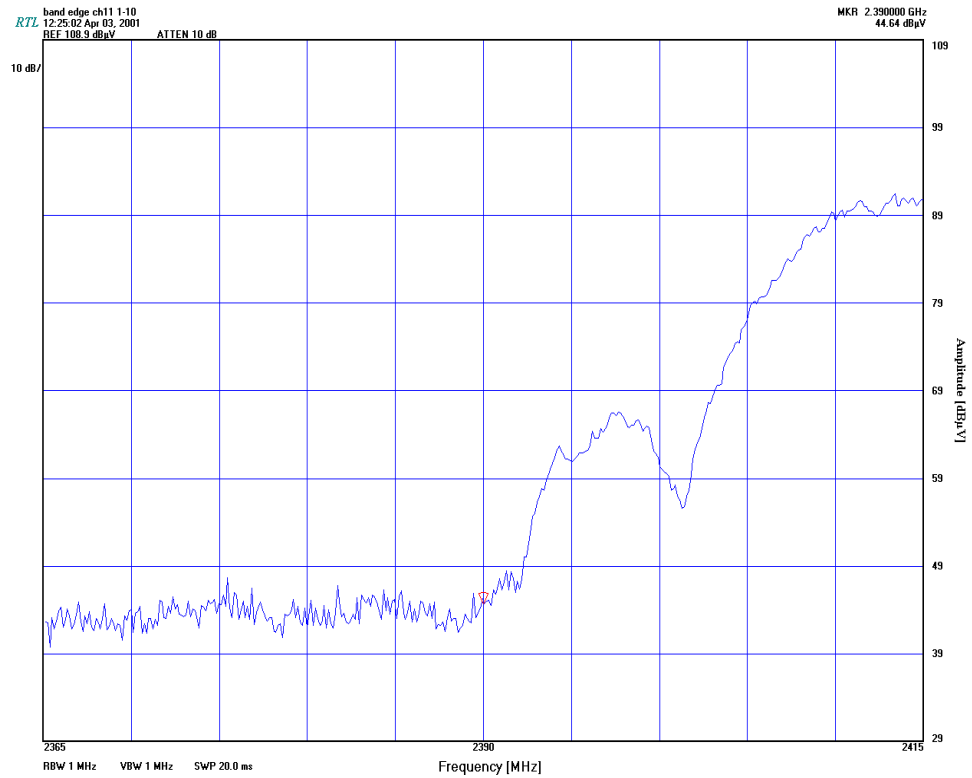



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>


PLOT 15 CHANNEL 11 TOSHIBA CHIP ANTENNA 1MHZ/10HZ

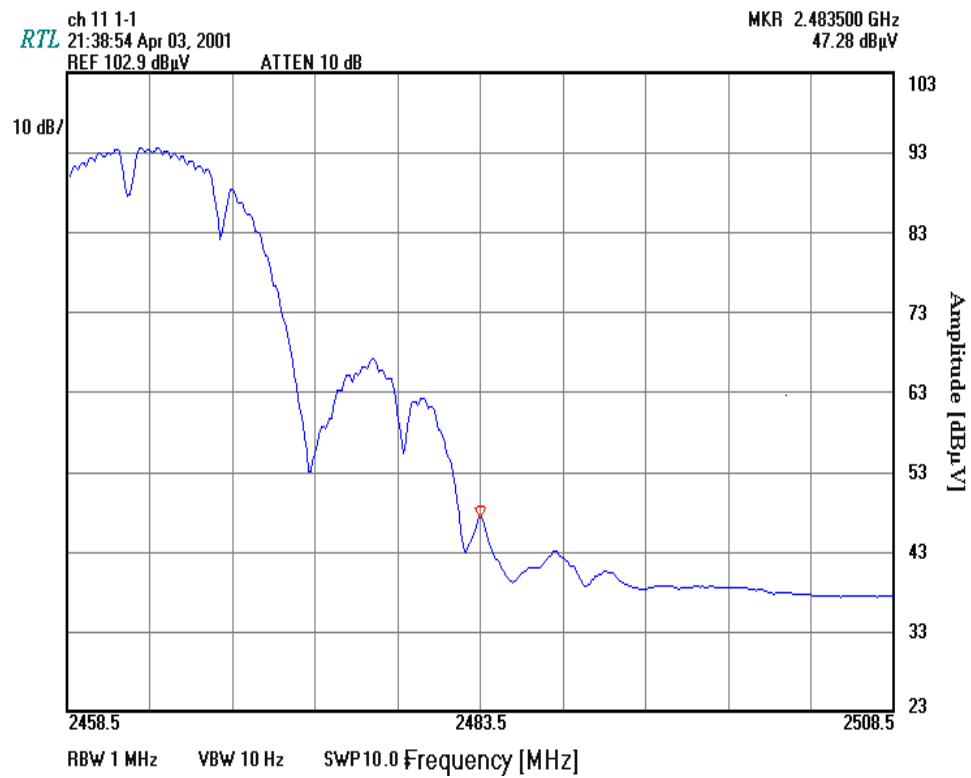



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>


PLOT 16 CHANNEL 11 TOSHIBA CHIP ANTENNA 1MHZ/1MHZ

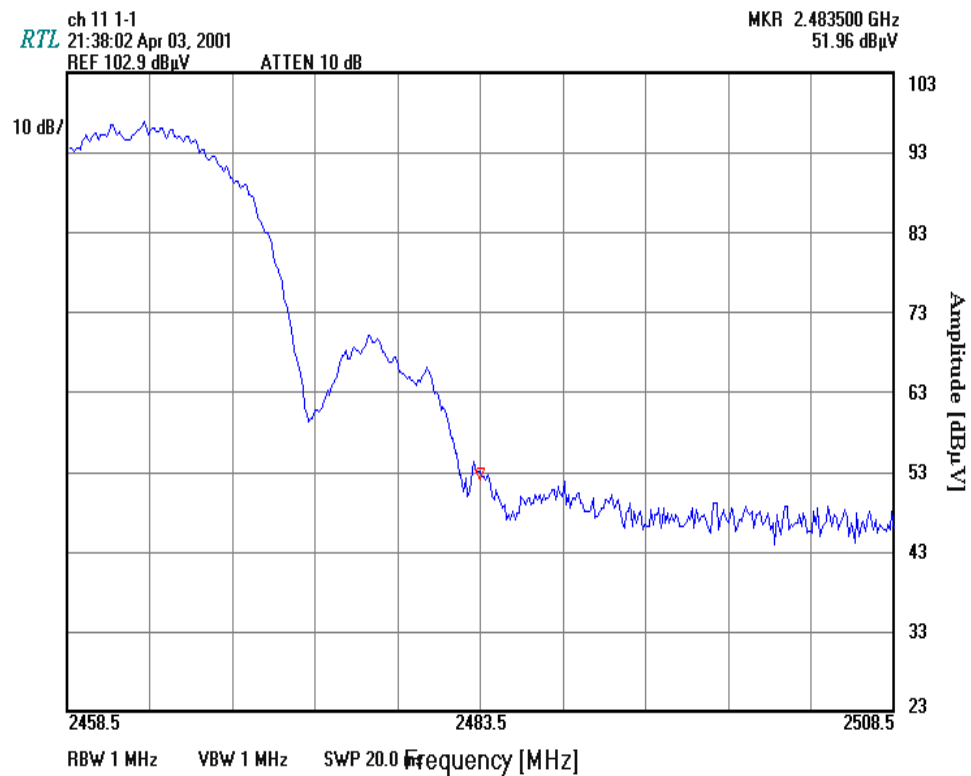



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>


PLOT 17 CHANNEL 1 INVERTED F TOSHIBA ANTENNA 1MHZ/10HZ

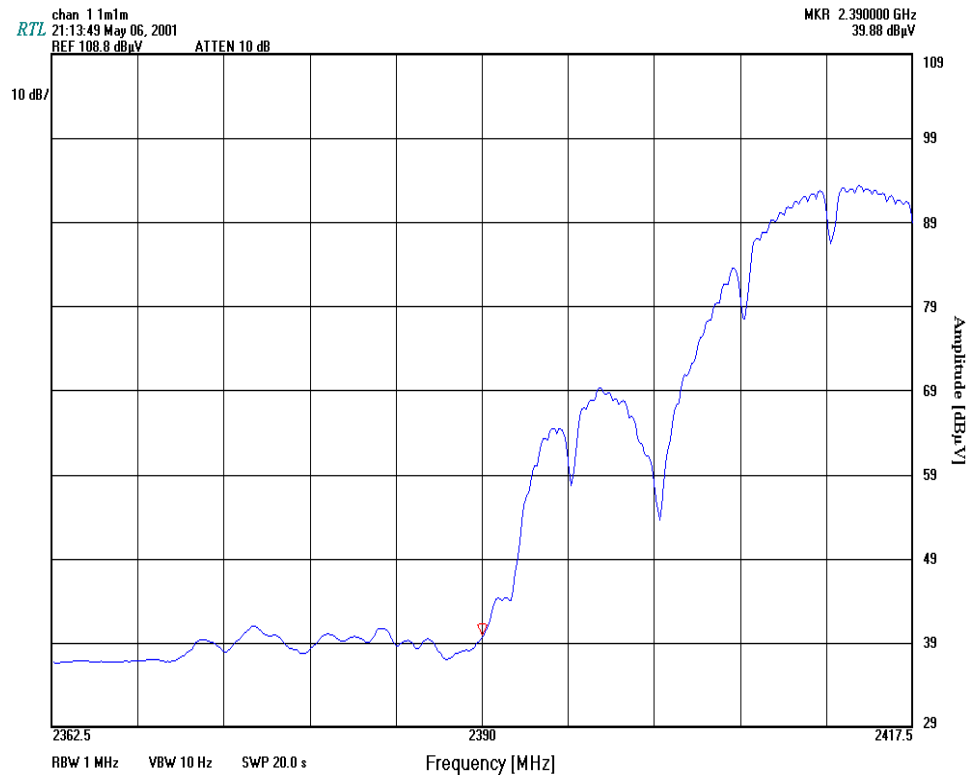



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>


PLOT 18 CHANNEL 1 INVERTED F TOSHIBA ANTENNA 1MHZ/1MHZ

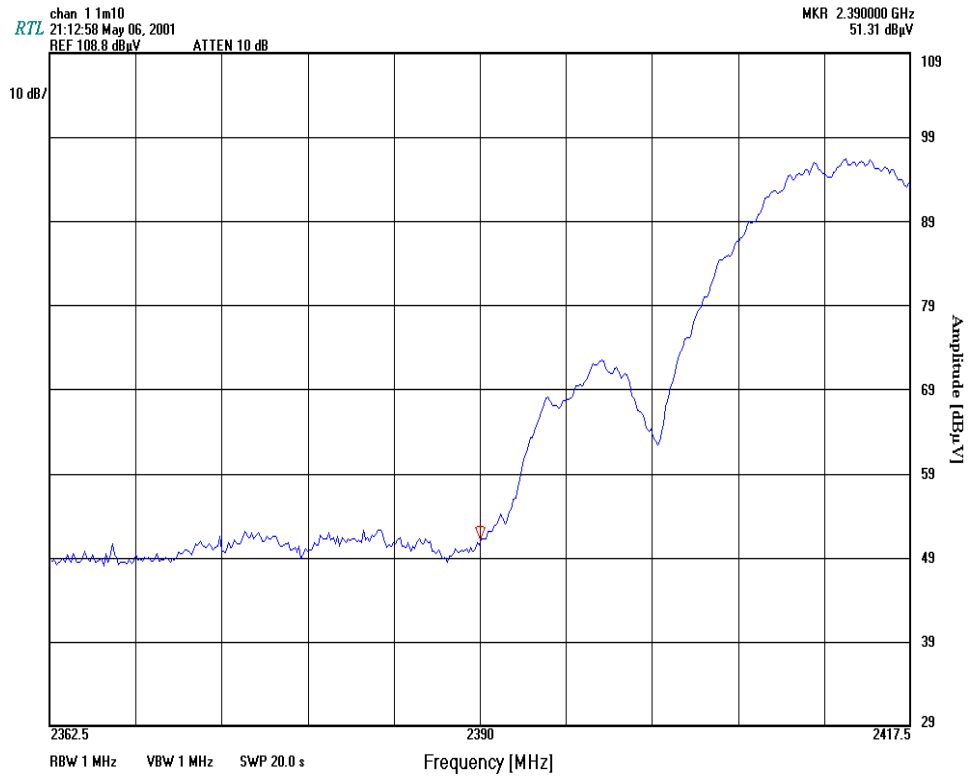



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>


PLOT 19 CHANNEL 11 INVERTED F TOSHIBA ANTENNA 1MHZ/10HZ

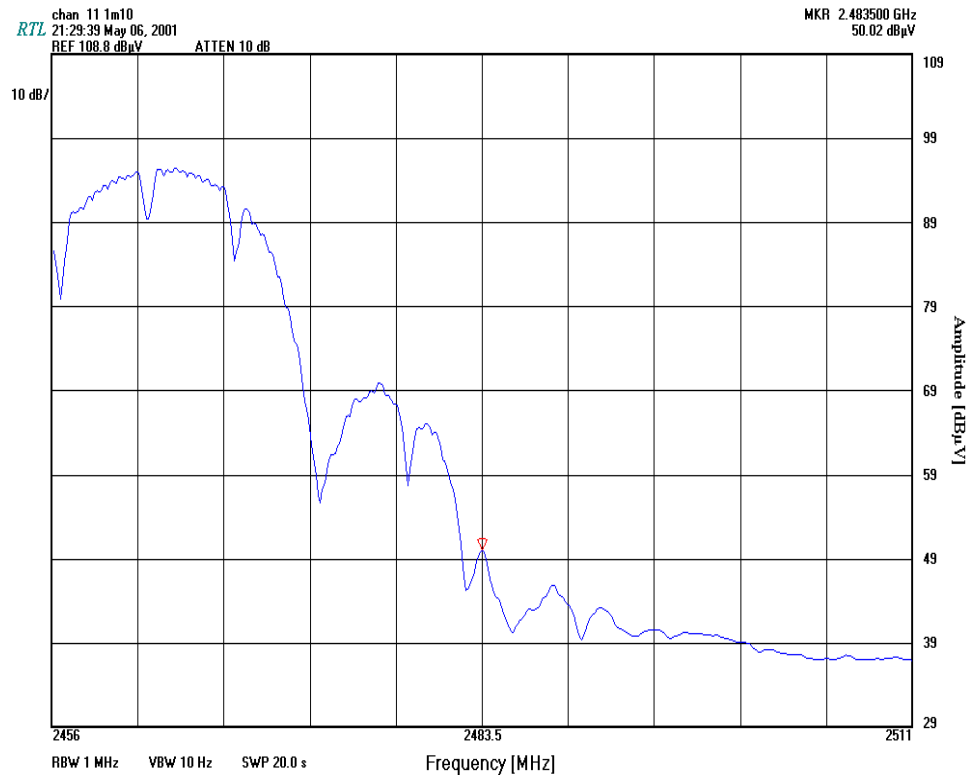



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>


PLOT 20 CHANNEL 11 INVERTED F TOSHIBA ANTENNA 1MHZ/1MHZ

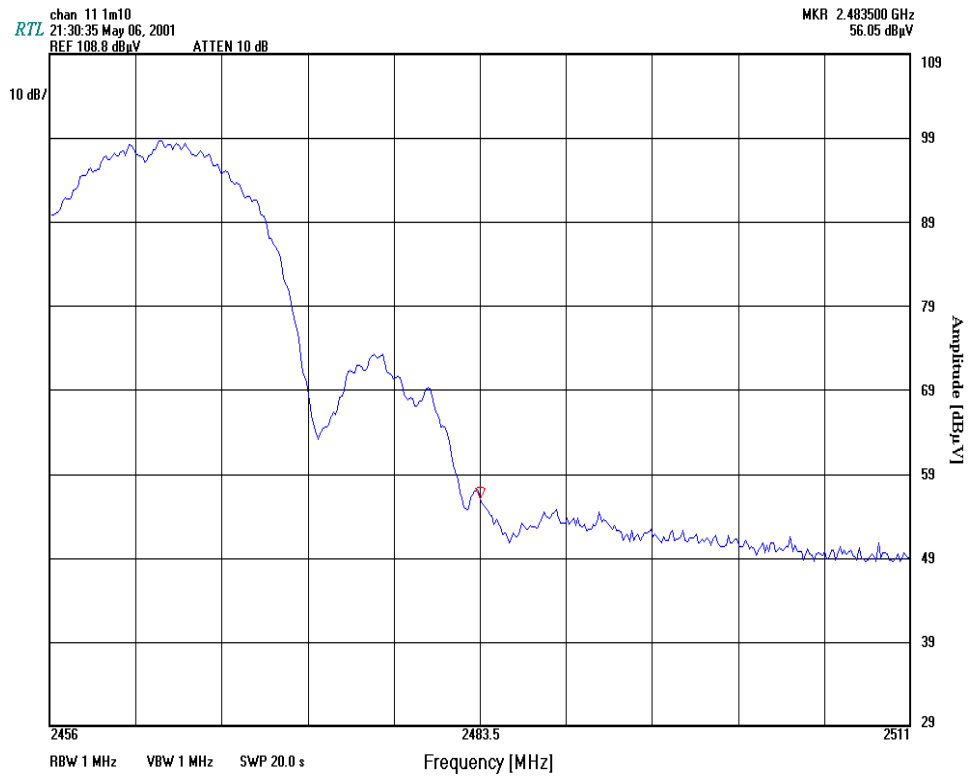



## 16 SPECTRAL DENSITY PLOTS


PLOT 21: CHANNEL 1

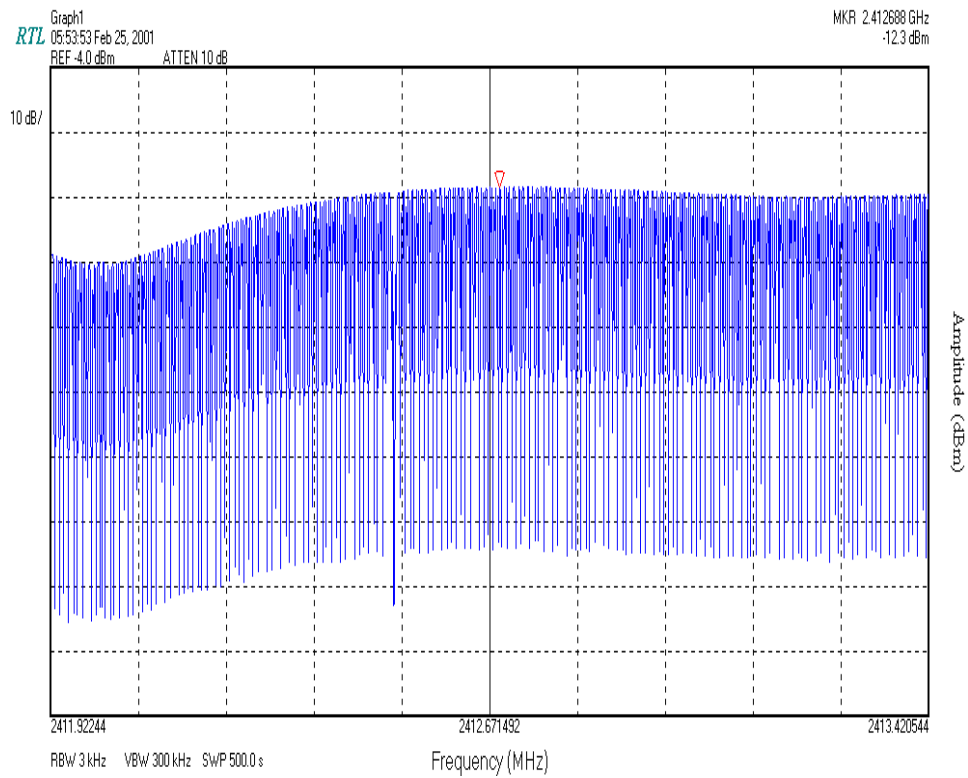



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>


PLOT 22: CHANNEL 6

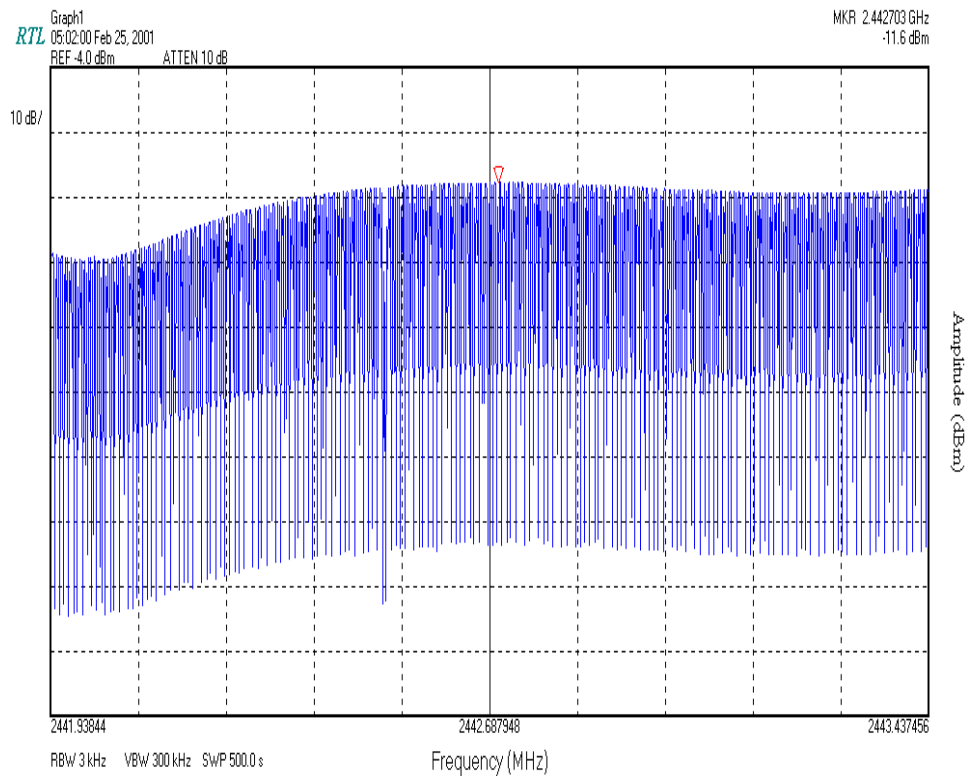



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>


PLOT 23: CHANNEL 11

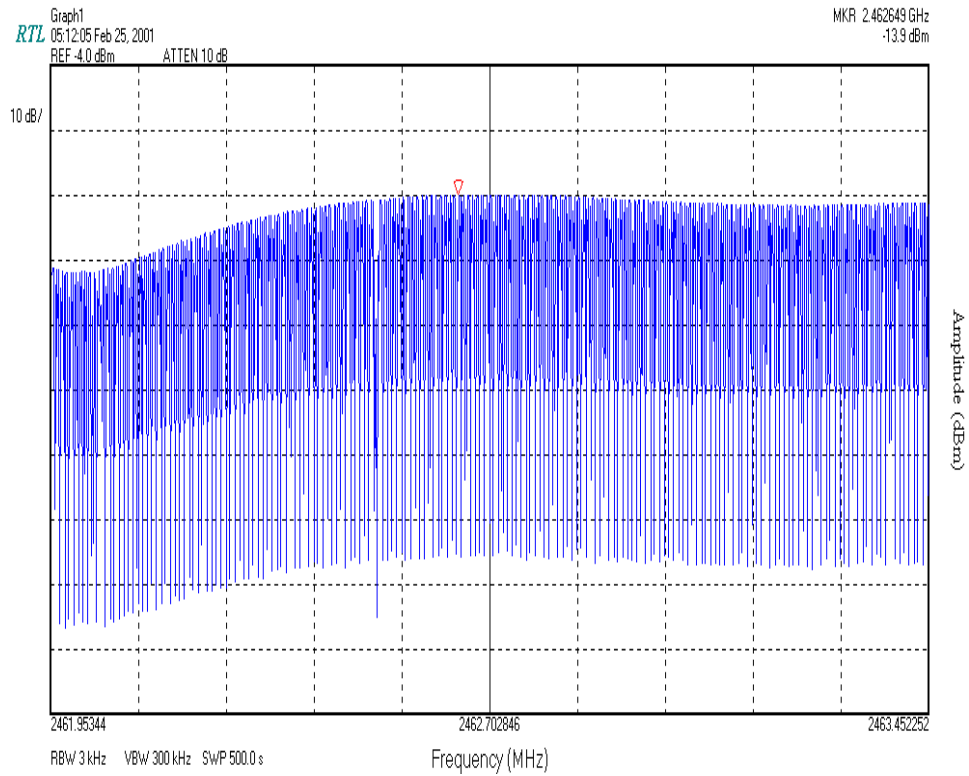



## 17 6dB PLOTS


PLOT 24: CHANNEL 1

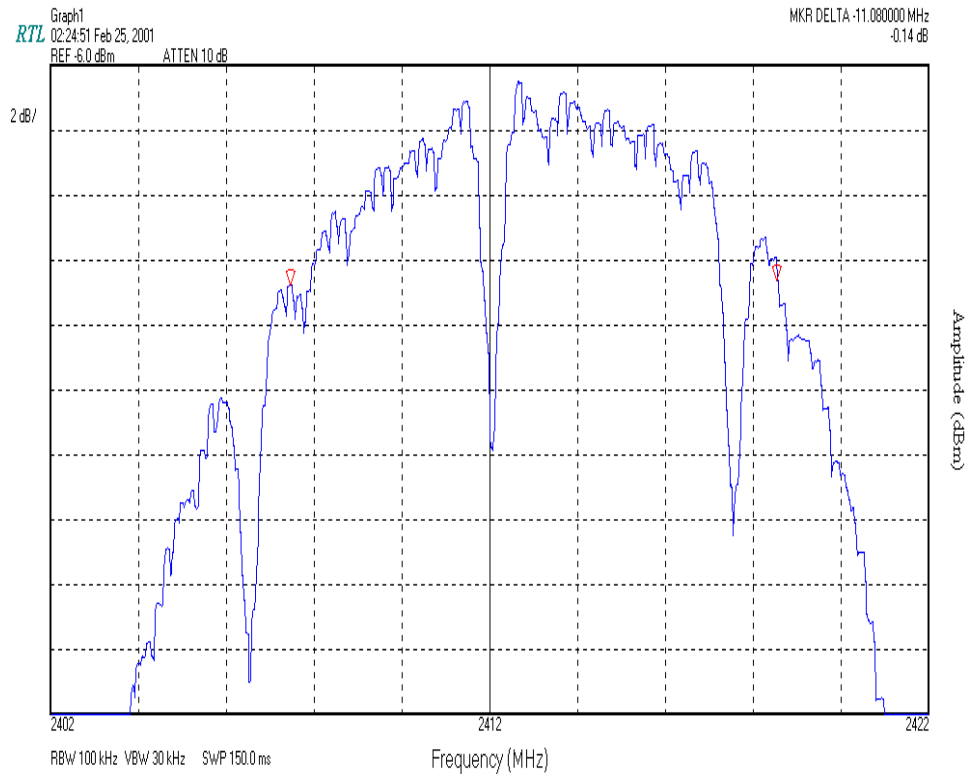



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

PLOT 25: CHANNEL 6

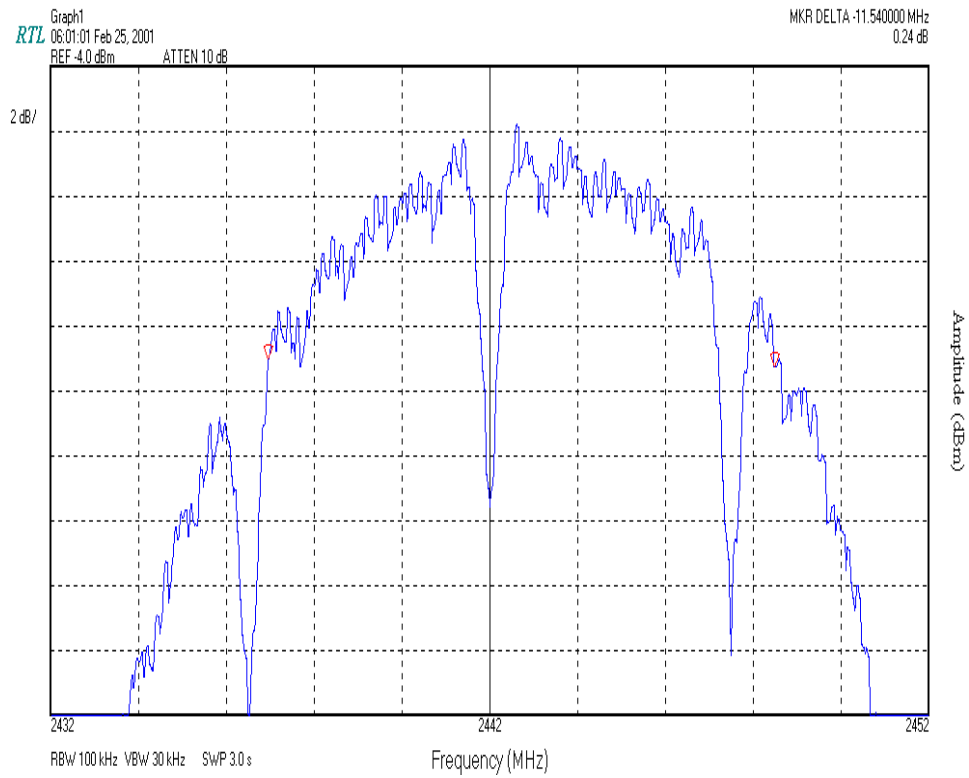



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

PLOT 26: CHANNEL 11

