

Nemko Test Report: 3L0515RUS2

Applicant: Innerwireless
1155 Kas Drive #200
Richardson, TX 75081

**Equipment Under Test:
(E.U.T.)** Access Point Interface Model Number: 11001Q002
with Innerwireless Discone, PCB LPA, and LPA
antennas

FCC ID: RO5IWAPINTERFACE

In Accordance With: FCC Part 15, Subpart C, 15.247
Direct Sequence Spread Spectrum Transmitters

Tested By: Nemko Dallas Inc.
802 N. Kealy
Lewisville, Texas 75057-3136

Authorized By: 
Tom Tidwell, Frontline Manager

Date: 3/3/04

EQUIPMENT: Model Number: 11001Q002 **TEST REPORT NO.: 3L0515RUS2**

Table of Contents

Section 1. Summary of Test Results	3
Section 2. Equipment Under Test (E.U.T.).....	5
Section 3. Spurious Emissions (radiated).....	7
Section 4. Test Equipment List	14
ANNEX A - TEST DETAILS.....	15
ANNEX B - TEST DIAGRAMS.....	17

EQUIPMENT: Model Number: 11001Q002 **TEST REPORT NO.:** [3L0515RUS2](#)**Section 1. Summary of Test Results**

Manufacturer: Innerwireless

Model No.: Discone: P/N. 00702A001 Rev. C, S/N. AWO 2003-0486
PCB LPA: P/N. 00701L001, S/N. 0101
LPA: 00701C001, S/N. 0216General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Paragraph 15.247 for Direct Sequence Spread Spectrum devices. Radiated tests were conducted in accordance with ANSI C63.4-1992. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

<input checked="" type="checkbox"/> New Submission	<input checked="" type="checkbox"/> Production Unit
<input type="checkbox"/> Class II Permissive Change	<input type="checkbox"/> Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.**THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.**

See "Summary of Test Data".

**NVLAP LAB CODE: 100426-0**

Nemko Dallas Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Dallas Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

EQUIPMENT: Model Number: 11001Q002TEST REPORT NO.: 3L0515RUS2**Summary Of Test Data**

NAME OF TEST	PARA. NO.	SPEC.	RESULT
Powerline Conducted Emissions	15.207(a)	48 dB μ V	NA*
Minimum 6 dB Bandwidth	15.247(a)(2)	>500 kHz	NA*
Maximum Peak Power Output	15.247(b)(1)	<1 Watt	NA*
Spurious Emissions (Antenna Conducted)	15.247(c)	-20 dBc/100kHz	NA*
Spurious Emissions (Restricted Bands)	15.247(c)	< 74 dB μ V/m Peak < 54 dB μ V/m Avg	Complies
Peak Power Spectral Density	15.247(d)	+8 dBm/3kHz	NA*

Footnotes:

*These tests were not performed. The Cisco Access Point is already approved under FCC ID: LDK102049

When the Access Point was previously tested it was determined that worst-case emission levels are found with the access point operating at a data rate of 11 Mbps. Therefore spurious emissions were tested in this configuration only. All emissions were measured including emission levels on the upper band edge.

Please refer to supporting documentation.

EQUIPMENT: Model Number: 11001Q002**TEST REPORT NO.:** [3L0515RUS2](#)**Section 2. Equipment Under Test (E.U.T.)****General Equipment Information****Frequency Band:**

902 – 928 MHz
 2400 – 2483.5 MHz
 5725 – 5850 MHz

Operating Range:


2412 – 2462 MHz (channels 1 – 11)

User Frequency Adjustment:

Software controlled

Theory of Operation

This is an access point system that provides WLAN access for an area

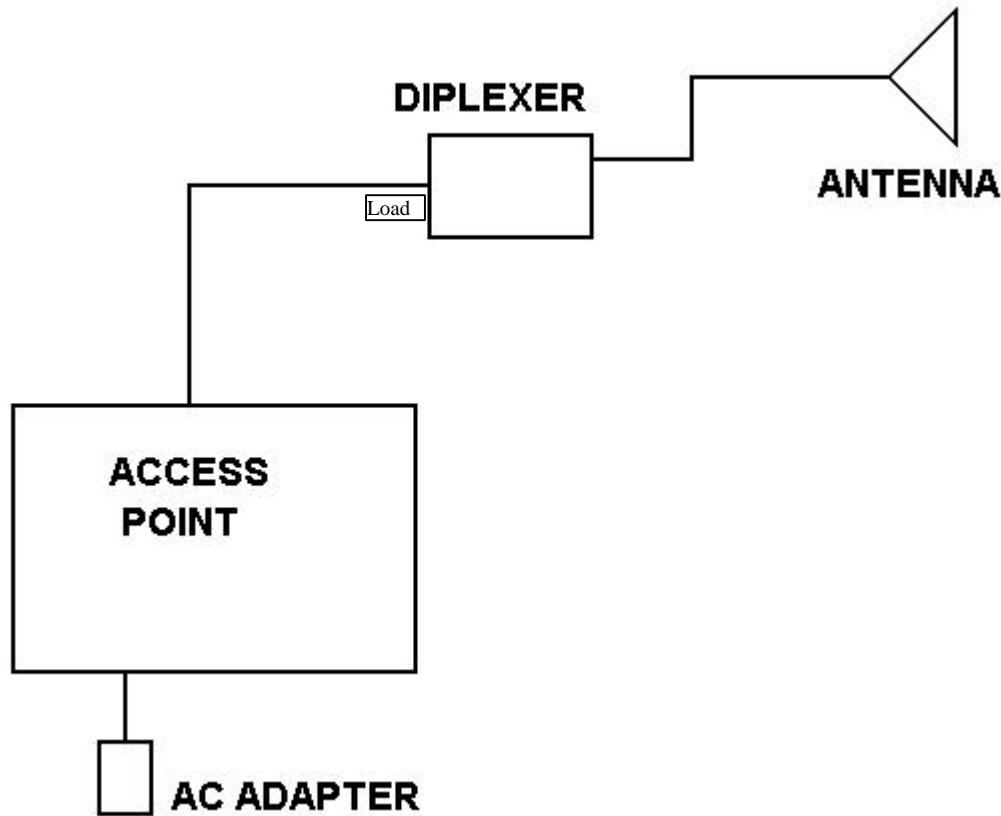System Diagram

Nemko Dallas

FCC PART 15, SUBPART C
DIRECT SEQUENCE SPREAD SPECTRUM TRANSMITTER

EQUIPMENT: Model Number: 11001Q002 TEST REPORT NO.: [3L0515RUS2](#)

Section 3. Spurious Emissions (radiated)

NAME OF TEST: Spurious Emissions	PARA. NO.: 15.247 (c)
TESTED BY: David Light	DATE: 1/14/04

Test Results: Complies.

Measurement Data: See attached table.

Measurement Uncertainty: +/-3.6dB

EQUIPMENT: Model Number: 11001Q002 TEST REPORT NO.: 3L0515RUS2

Test Data – Radiated Emissions (Restricted Bands)

<u>Restricted Band Emissions</u>								
Page <u>1</u> of 1								
Job No.:	3L0515R				Date: 1/14/04			
Specification:	15.247/15.205				Temperature(°C): 20			
Tested By:	David Light				Relative Humidity(%) 45			
E.U.T.:	Cisco AP (802.11g) with Discone antenna							
Configuration:	Tx 11 Mb/s							
Sample Number	1							
Location:	AC 3				RBW: 1 MHz			
Detector Type:	Peak				VBW: 1 MHz			
<u>Test Equipment Used</u>								
Antenna:	1304				Directional Coupler: #N/A			
Pre-Amp:	1016				Cable #1: 1484			
Filter:	1482				Cable #2: 1485			
Receiver:	1464				Cable #3: #N/A			
Attenuator #1	#N/A				Cable #4: #N/A			
Attenuator #2:	#N/A				Mixer: #N/A			
Measurement Uncertainty: +/-3.6 dB								
Frequency (MHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Comment
								Channel 11 Horizontal
2483.5	33	28.2	3.1	0.0	64.3	74	-9.7	Peak - Bandedge
2483.5	22	28.2	3.1	0.0	53.3	54	-0.7	Average - Bandedge
4924.0	40	33.9	4.6	32.7	45.8	54	-8.2	Peak - NF
7386.0	42	36.5	6.3	32.9	51.9	54	-2.1	Peak - NF
								Channel 11 Vertical
2483.5	33	28.2	3.1	0.0	64.3	74	-9.7	Peak - Bandedge
2483.5	22	28.2	3.1	0.0	53.3	54	-0.7	Average - Bandedge
4924.0	40	33.9	4.6	32.7	45.8	54	-8.2	Peak - NF
7386.0	42	36.5	6.3	32.9	51.9	54	-2.1	Peak - NF
								Channel 6 Vertical
4874.0	41.8	33.9	4.6	32.7	47.6	54	-6.4	Peak - NF
7311.0	39.3	36.3	6.3	32.8	49.1	54	-4.9	Peak - NF
								Channel 6 Horizontal
4874.0	41.8	33.9	4.6	32.7	47.6	54	-6.4	Peak - NF
7311.0	39.3	36.3	6.3	32.8	49.1	54	-4.9	Peak - NF
								Channel 1 - Horizontal
4824	42.8	33.9	4.6	32.7	48.6	54	-5.4	Peak
12060	41.7	36.3	6.3	34.7	49.6	54	-4.4	Peak - NF
								Channel 1 - vertical
4824	43	33.9	4.6	32.7	48.8	54	-5.2	Peak
12060	41.7	36.3	6.3	34.7	49.6	54	-4.4	Peak - NF
Notes: Scanned spectrum to 25 Ghz - If PEAK readings met AVG limit, then an AVG reading was not taken.								
AVG readings using 1MHz RBW/1 kHz VBW								
No emissions were detected except those indicated in RED								

EQUIPMENT: Model Number: 11001Q002 TEST REPORT NO.: 3L0515RUS2

Test Data – Radiated Emissions (Restricted Bands)

Restricted Band								
Page <u>1</u> of <u>1</u>								
Job No.:	3L0515R				Date: 1/14/04			
Specification	15.247/15.205			Temperature(°C)	20			
Tested By:	David Light	Relative			45			
E.U.T.	Cisco AP (802.11g) with PCB LNA Antenna							
Configuration	Tx 11 Mb/s							
Sample	1							
Location	AC 3				RBW: 1 MHz			
Detector	Peak				VBW: 1 MHz			
Test Equipment								
Antenna:	1304			Directional	#N/A			
Pre-Amp:	1016				Cable #1: 1484			
Filter	1482				Cable #2: 1485			
Receiver:	1464				Cable #3: #N/A			
Attenuator #1	#N/A				Cable #4: #N/A			
Attenuator #2:	#N/A				Mixer: #N/A			
Measurement	+/- 3.6 dB							
Frequency (MHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Comment
								Channel 11 Horizontal
2483.5	33	28.2	3.1	0.0	64.3	74	-9.7	Peak - Bandedge
2483.5	22	28.2	3.1	0.0	53.3	54	-0.7	Average - Bandedge
4924.0	40	33.9	4.6	32.7	45.8	54	-8.2	Peak - NF
7386.0	42	36.5	6.3	32.9	51.9	54	-2.1	Peak - NF
								Channel 11 Vertical
2483.5	33	28.2	3.1	0.0	64.3	74	-9.7	Peak - Bandedge
2483.5	22	28.2	3.1	0.0	53.3	54	-0.7	Average - Bandedge
4924.0	40	33.9	4.6	32.7	45.8	54	-8.2	Peak - NF
7386.0	42	36.5	6.3	32.9	51.9	54	-2.1	Peak - NF
								Channel 6 Vertical
4874.0	41.8	33.9	4.6	32.7	47.6	54	-6.4	Peak - NF
7311.0	39.3	36.3	6.3	32.8	49.1	54	-4.9	Peak - NF
								Channel 6 Horizontal
4874.0	41.8	33.9	4.6	32.7	47.6	54	-6.4	Peak - NF
7311.0	39.3	36.3	6.3	32.8	49.1	54	-4.9	Peak - NF
								Channel 1 - Horizontal
4824	41	33.9	4.6	32.7	46.8	54	-7.2	Peak - NF
12060	41.7	36.3	6.3	34.7	49.6	54	-4.4	Peak - NF
								Channel 1 - Vertical
4824	41	33.9	4.6	32.7	46.8	54	-7.2	Peak - NF
12060	41.7	36.3	6.3	34.7	49.6	54	-4.4	Peak - NF
Notes: Scanned spectrum to 25 Ghz - If PEAK readings met AVG limit, then an AVG reading was not taken.								
AVG readings using 1MHz RBW/1 kHz VBW								
No emissions were detected except for those marked in red.								

EQUIPMENT: Model Number: 11001Q002

TEST REPORT NO.: 3L0515RUS2


Test Data – Radiated Emissions (Restricted Bands)

Restricted Band								
Page 1 of 1								
Job No.:	3L0515R			Date:	1/14/04			
Specification	15.247/15.205			Temperature(°C)	20			
Tested By:	David Light	Relative			45			
E.U.T.	Cisco AP (802.11g) with LPA							
Configuration	Tx 11 Mb/s							
Sample	1							
Location	AC 3			RBW:	1 MHz			
Detector	Peak			VBW:	1 MHz			
Test Equipment								
Antenna:	1304			Directional		#N/A		
Pre-Amp:	1016				Cable #1:	1484		
Filter	1482				Cable #2:	1485		
Receiver:	1464				Cable #3:	#N/A		
Attenuator #1	#N/A				Cable #4:	#N/A		
Attenuator #2:	#N/A				Mixer:	#N/A		
Measurement Uncertainty: +/-3.6								
Frequency (MHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Comment
								Channel 11 Horizontal
2483.5	33	28.2	3.1	0.0	64.3	74	-9.7	Peak - Bandedge
2483.5	22	28.2	3.1	0.0	53.3	54	-0.7	Average - Bandedge
4924.0	40	33.9	4.6	32.7	45.8	54	-8.2	Peak - NF
7386.0	42	36.5	6.3	32.9	51.9	54	-2.1	Peak - NF
								Channel 11 Vertical
2483.5	38.8	28.2	3.1	0.0	70.1	74	-3.9	Peak - Bandedge
2483.5	22	28.2	3.1	0.0	53.3	54	-0.7	Average - Bandedge
4924.0	40	33.9	4.6	32.7	45.8	54	-8.2	Peak - NF
7386.0	42	36.5	6.3	32.9	51.9	54	-2.1	Peak - NF
								Channel 6 Vertical
4874.0	41.8	33.9	4.6	32.7	47.6	54	-6.4	Peak - NF
7311.0	39.3	36.3	6.3	32.8	49.1	54	-4.9	Peak - NF
								Channel 6 Horizontal
4874.0	41.8	33.9	4.6	32.7	47.6	54	-6.4	Peak - NF
7311.0	39.3	36.3	6.3	32.8	49.1	54	-4.9	Peak - NF
								Channel 1 - Horizontal
4824	41	33.9	4.6	32.7	46.8	54	-7.2	Peak - NF
12060	41.7	36.3	6.3	34.7	49.6	54	-4.4	Peak - NF
								Channel 1 - vertical
4824	41	33.9	4.6	32.7	46.8	54	-7.2	Peak - NF
12060	41.7	36.3	6.3	34.7	49.6	54	-4.4	Peak - NF
Notes:	Scanned spectrum to 25 Ghz - If PEAK readings met AVG limit, then an AVG reading was not taken.							
	AVG readings using 1MHz RBW/1 kHz VBW							
	No emissions were detected other than those indicated in RED							

EQUIPMENT: Model Number: 11001Q002

TEST REPORT NO.: [3L0515RUS2](#)

Test Setup Photos (Discone Antenna)

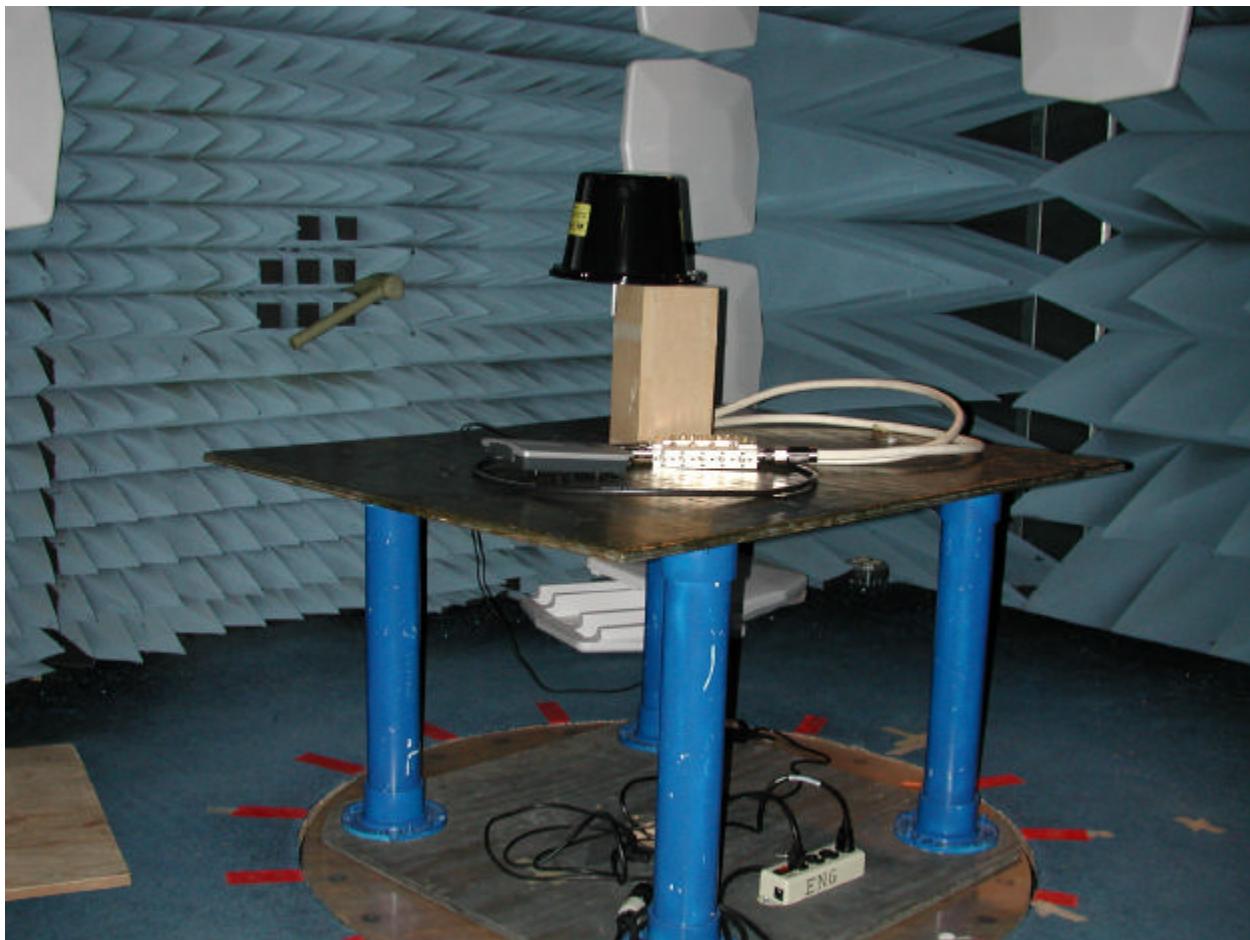

EQUIPMENT: Model Number: 11001Q002

TEST REPORT NO.: [3L0515RUS2](#)


Test Setup Photos (PCB LPA Antenna)



EQUIPMENT: Model Number: 11001Q002

TEST REPORT NO.: [3L0515RUS2](#)

Test Setup Photos (LPA Antenna)

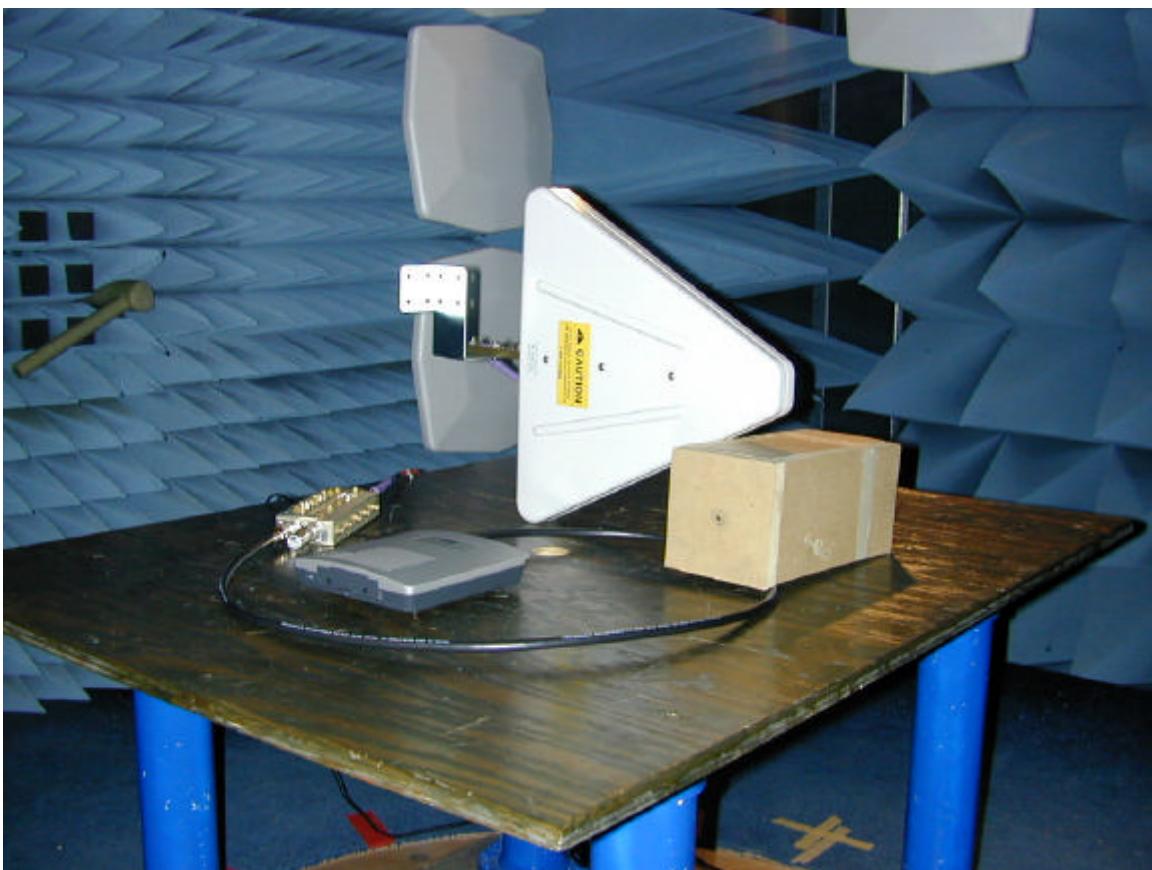

EQUIPMENT: Model Number: 11001Q002**TEST REPORT NO.:** [3L0515RUS2](#)**Section 4. Test Equipment List**

Nemko ID	Description	Manufacturer Model Number	Serial Number	Calibration Date	Calibration Due
1464	Spectrum analyzer	Hewlett Packard 8563E	3551A04428	02/11/03	02/11/05
1484	Cable 2.0-18.0 Ghz	Storm PR90-010-072	N/A	07/24/03	07/23/04
1485	Cable 2.0-18.0 Ghz	Storm PR90-010-216	N/A	07/24/03	07/23/04
1482	Band Pass Filter	K & L 11SH10-4000/T12000-0/0	2	Cal B4 Use	N/A
1304	HORN ANTENNA	ELECTRO METRICS RGA-60	6151	09/22/03	09/22/05
1016	Pre-Amp	HEWLETT PACKARD 8449A	2749A00159	10/27/03	10/26/04

Nemko Dallas

FCC PART 15, SUBPART C
DIRECT SEQUENCE SPREAD SPECTRUM TRANSMITTER

EQUIPMENT: Model Number: 11001Q002

TEST REPORT NO.: [3L0515RUS2](#)

ANNEX A - TEST DETAILS

EQUIPMENT: Model Number: 11001Q002TEST REPORT NO.: 3L0515RUS2

NAME OF TEST: Radiated Spurious Emissions

PARA. NO.: 15.247(c)

Minimum Standard: In any 100kHz bandwidth outside the frequency band in which the transmitter is operating, emissions shall be at least 20 dB below the fundamental emission or shall not exceed the following field strength limits:

Emissions falling in the restricted bands of 15.205 shall not exceed the following field strength limits:

Frequency (MHz)	Field Strength (mV/m @ 3m)	Field Strength (dB @ 3m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

THE SPECTRUM WAS SEARCHED TO THE 10th HARMONIC

15.205 Restricted Bands

MHz	MHz	MHz	GHz
0.09-0.11	16.42-16.423	399.9-410	4.5-5.25
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.125-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41	1718		

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

Nemko Dallas

FCC PART 15, SUBPART C
DIRECT SEQUENCE SPREAD SPECTRUM TRANSMITTER

EQUIPMENT: Model Number: 11001Q002

TEST REPORT NO.: [3L0515RUS2](#)

ANNEX B - TEST DIAGRAMS

EQUIPMENT: Model Number: 11001Q002**TEST REPORT NO.:** [3L0515RUS2](#)**Test Site For Radiated Emissions**