

Conducted test results

No.1-7444-24-01-03_TR1-A201-R1

June 27, 2024

Test Standard(s)	FCC 15.407, ISED RSS247 - NI FCC 15.407 - NI
------------------	---

This document is electronically signed and valid without handwritten signature.
Public keys for verification of the electronic signatures can be requested at the testing laboratory.

Authorized

Michael Dorongovski
Lab Manager
Radio Labs

Table of Content

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1	7
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1	11
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1	15
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1	19
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1	23
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1	27
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-1	31
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-1	35
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-1	39
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-1	43
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-1	47
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-1	51
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-1	55
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-1	59
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-1	63
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-1	67
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-1	71
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1	75
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1	80
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1	85
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1	89
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1	94
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1	99
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-1	103
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-1	108
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-1	113
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-1	117
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-1	122
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-1	127
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-1	131
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-1	136
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-1	141
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-1	146
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-1	151
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-1	156
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2A	161
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2A	166
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2A	171
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2A	176
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2A	181
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2A	186

FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2A	191
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2A	196
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2A	201
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2A	206
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2A	211
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2A	216
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-2A	221
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-2A	226
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-2A	231
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-2A	236
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-2A	241
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-2A	246
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A	251
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A	256
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A	261
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A	266
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A	271
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A	276
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-2A	281
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-2A	286
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-2A	291
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-2A	296
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-2A	301
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-2A	306
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-2A	311
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-2A	316
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-2A	321
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-2A	326
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-2A	331
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-2A	336
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2C	341
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2C	346
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2C	351
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2C	356
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2C	361
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2C	366
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2C	371
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2C	376
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2C	381
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2C	386
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2C	391
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2C	396
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-2C	401
FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-2C	406

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-2C	411
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-2C	416
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-2C	421
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-2C	426
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-2C	431
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-2C	436
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-2C	441
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-2C	446
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-2C	451
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-2C	456
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2C	461
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2C	466
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2C	471
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2C	476
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2C	481
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2C	486
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-2C	491
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-2C	496
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-2C	501
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-2C	506
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-2C	511
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-2C	516
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-2C	521
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-2C	526
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-2C	531
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-2C	536
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-2C	541
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-2C	546
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-2C	551
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-2C	556
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-2C	561
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-2C	566
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-2C	571
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-2C	576
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-3	581
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-3	585
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-3	589
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-3	593
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-3	597
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-3	601
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-3	605
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-3	609
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-3	613
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-3	617

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-3	621
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-3	625
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-3	629
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-3	633
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-3	637
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-3	641
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-3	645
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-3	649
FCC 15.407, ISED RSS247 # Emission mask (eirp) ~ WLAN5Gx a mode U-NII-3	653
FCC 15.407, ISED RSS247 # Emission mask (eirp) ~ WLAN5Gx a mode U-NII-3	656
FCC 15.407, ISED RSS247 # Emission mask (eirp) ~ WLAN5Gx a mode U-NII-3	659
FCC 15.407, ISED RSS247 # Emission mask (eirp) ~ WLAN5Gx a mode U-NII-3	662
FCC 15.407, ISED RSS247 # Emission mask (eirp) ~ WLAN5Gx a mode U-NII-3	665
FCC 15.407, ISED RSS247 # Emission mask (eirp) ~ WLAN5Gx a mode U-NII-3	668
FCC 15.407, ISED RSS247 # Emission mask (eirp) ~ WLAN5Gx ac-VHT20 mode U-NII-3	671
FCC 15.407, ISED RSS247 # Emission mask (eirp) ~ WLAN5Gx ac-VHT20 mode U-NII-3	674
FCC 15.407, ISED RSS247 # Emission mask (eirp) ~ WLAN5Gx ac-VHT20 mode U-NII-3	677
FCC 15.407, ISED RSS247 # Emission mask (eirp) ~ WLAN5Gx ac-VHT20 mode U-NII-3	680
FCC 15.407, ISED RSS247 # Emission mask (eirp) ~ WLAN5Gx ac-VHT20 mode U-NII-3	683
FCC 15.407, ISED RSS247 # Emission mask (eirp) ~ WLAN5Gx ac-VHT20 mode U-NII-3	686
FCC 15.407, ISED RSS247 # Emission mask (eirp) ~ WLAN5Gx ac-VHT40 mode U-NII-3	689
FCC 15.407, ISED RSS247 # Emission mask (eirp) ~ WLAN5Gx ac-VHT40 mode U-NII-3	692
FCC 15.407, ISED RSS247 # Emission mask (eirp) ~ WLAN5Gx ac-VHT40 mode U-NII-3	695
FCC 15.407, ISED RSS247 # Emission mask (eirp) ~ WLAN5Gx ac-VHT40 mode U-NII-3	698
FCC 15.407, ISED RSS247 # Emission mask (eirp) ~ WLAN5Gx ac-VHT80 mode U-NII-3	701
FCC 15.407, ISED RSS247 # Emission mask (eirp) ~ WLAN5Gx ac-VHT80 mode U-NII-3	704
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	707
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	712
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	717
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	722
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	727
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	732
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-3	737
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-3	742
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-3	747
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-3	752
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-3	757
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-3	762
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-3	767
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-3	772
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-3	777
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-3	782
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-3	787
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-3	791

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx a mode U-NII-3	795
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx a mode U-NII-3	797
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx a mode U-NII-3	799
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx a mode U-NII-3	801
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx a mode U-NII-3	803
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx a mode U-NII-3	805
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT20 mode U-NII-3	807
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT20 mode U-NII-3	809
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT20 mode U-NII-3	811
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT20 mode U-NII-3	813
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT20 mode U-NII-3	815
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT20 mode U-NII-3	817
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT40 mode U-NII-3	819
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT40 mode U-NII-3	821
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT40 mode U-NII-3	823
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT40 mode U-NII-3	825
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT80 mode U-NII-3	827
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT80 mode U-NII-3	829

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1

References

TC start	11.06.2024 13:37:12
Ambit temp [°C] humidity [rel%]	24.8 31
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5180 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	0.96	dBm	INFO
Ref. frequency	---	---	5183.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.96 12.69 15
Start [MHz] Stop [MHz]	5155.000 5205.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

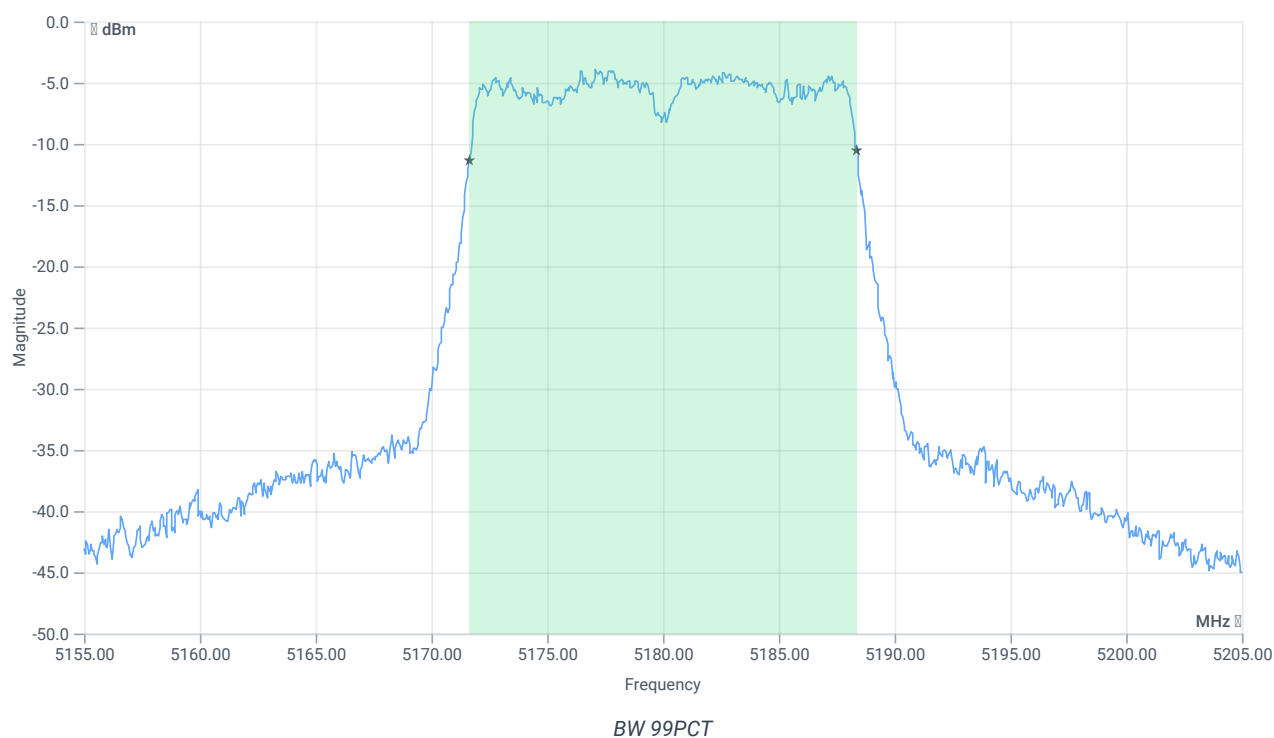


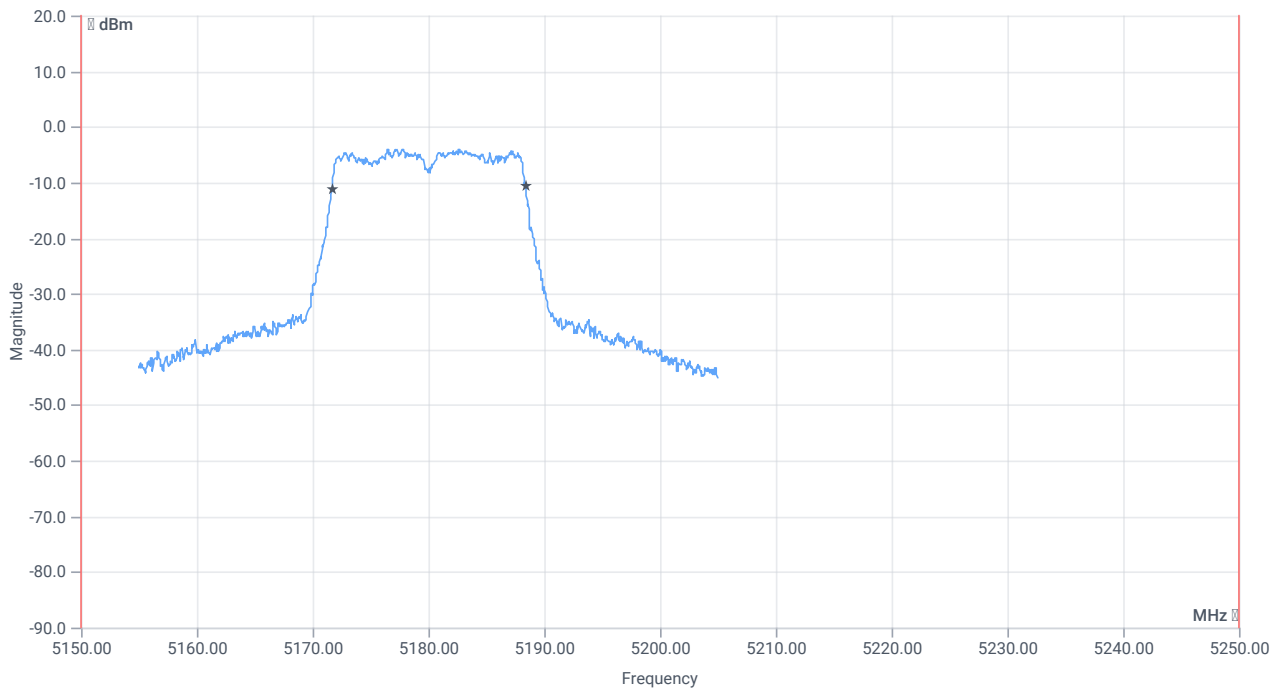


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.733	MHz	INFO
T1 99%	5150.000000	---	5171.6583	MHz	PASS
T2 99%	---	5250.000000	5188.3916	MHz	PASS

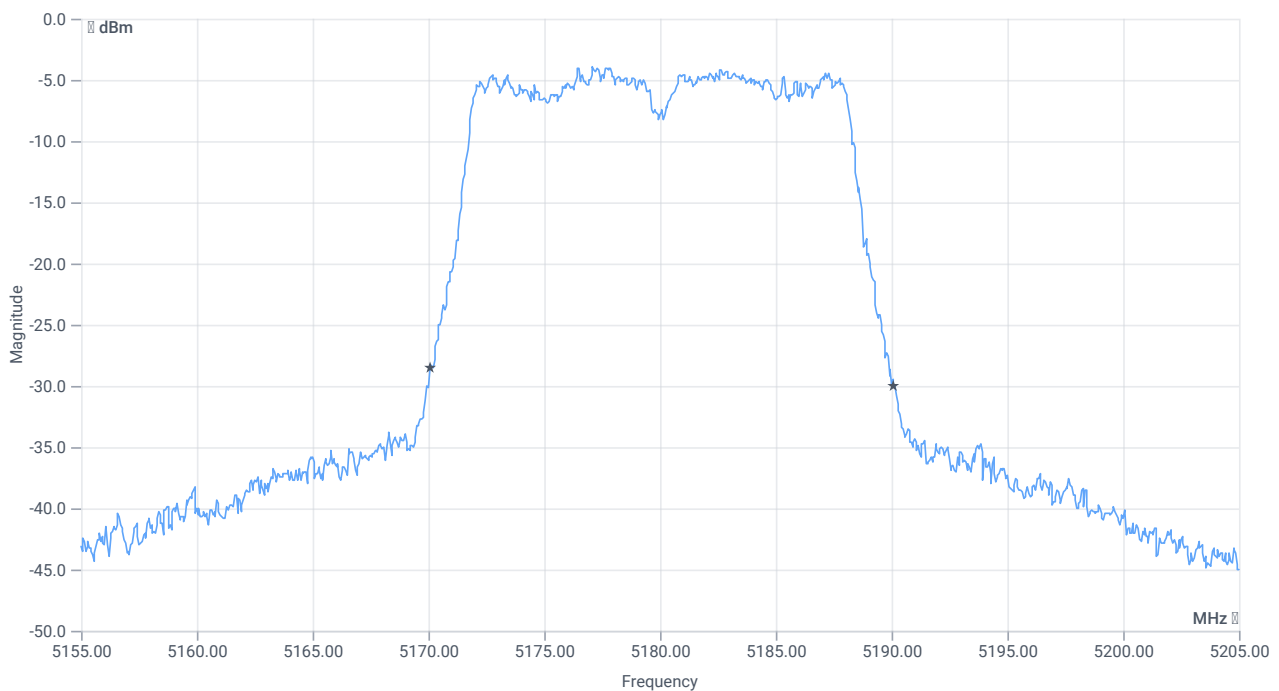

BW 26dB

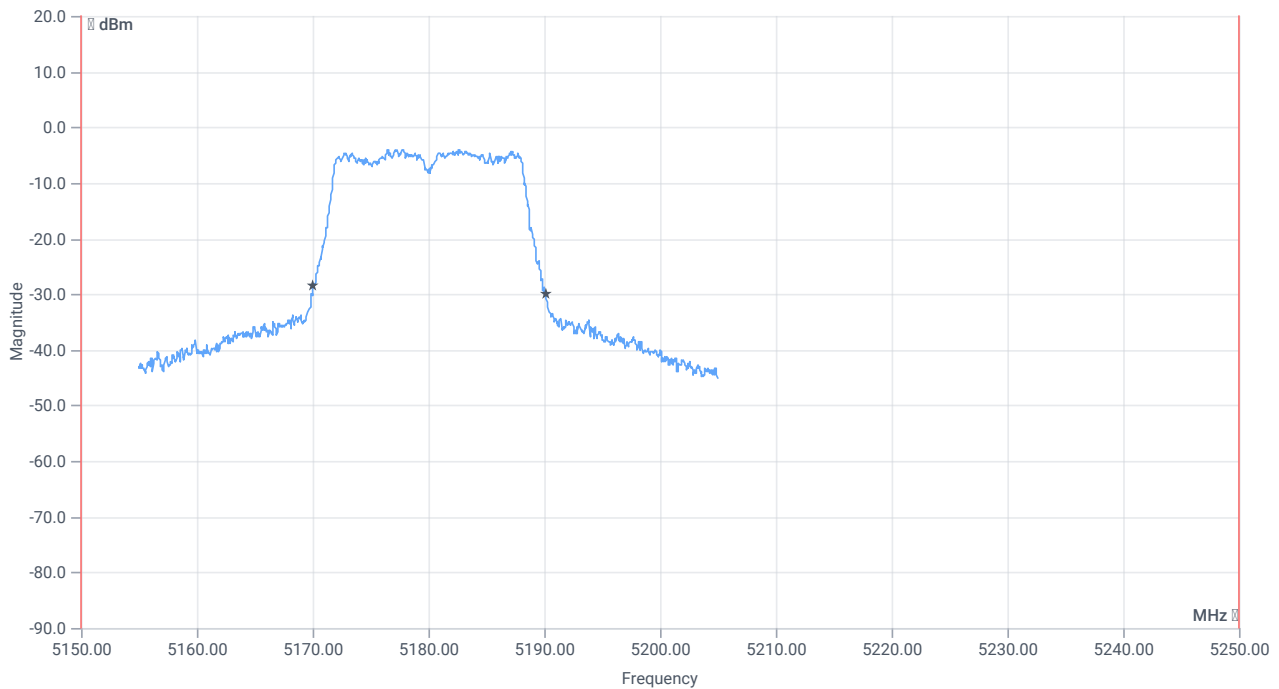

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.05	MHz	INFO
T1 26dB	5150.000000	---	5170.0500	MHz	PASS
T2 26dB	---	5250.000000	5190.1000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1

References

TC start	11.06.2024 13:54:11
Ambit temp [°C] humidity [rel%]	24.9 31
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5200 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.07	dBm	INFO
Ref. frequency	---	---	5192.610	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.07 12.67 15
Start [MHz] Stop [MHz]	5175.000 5225.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

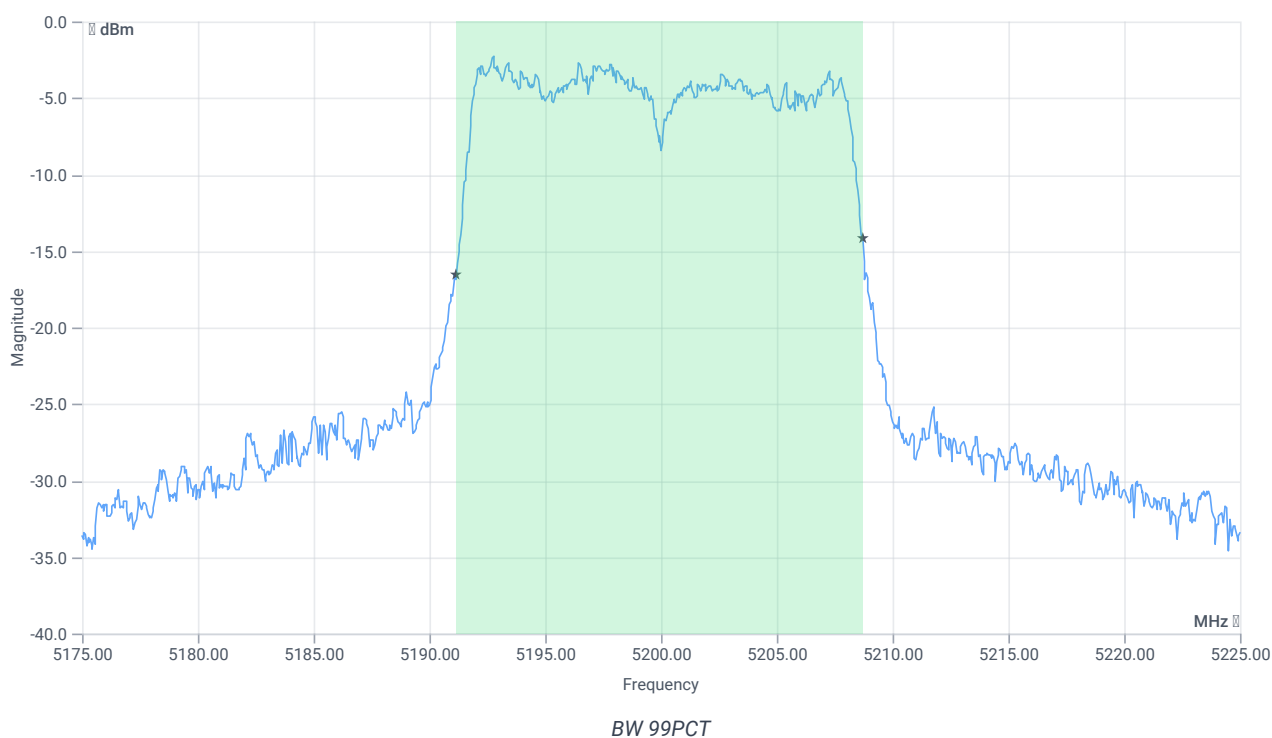


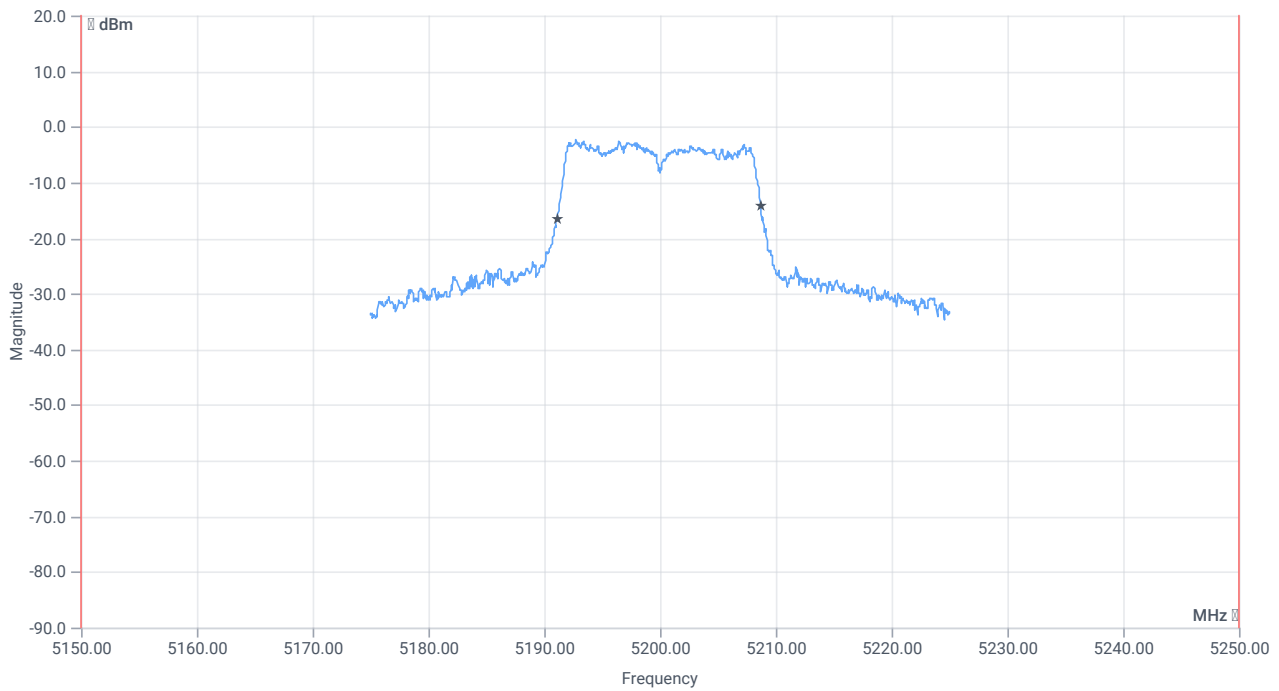

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17.582	MHz	INFO
T1 99%	5150.000000	---	5191.1089	MHz	PASS
T2 99%	---	5250.000000	5208.6913	MHz	PASS

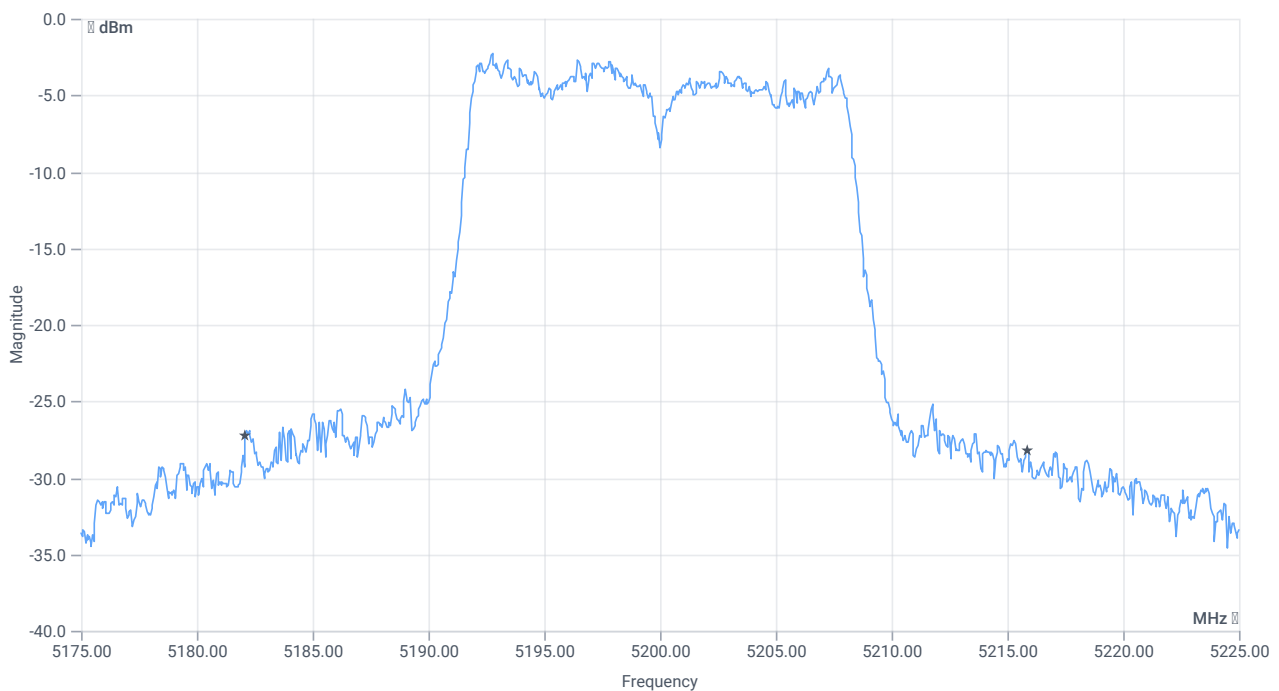

BW 26dB



BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	33.75	MHz	INFO
T1 26dB	5150.000000	---	5182.1000	MHz	PASS
T2 26dB	---	5250.000000	5215.8500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1

References

TC start	25.06.2024 11:52:19
Ambit temp [°C] humidity [rel%]	22.6 57
System version	5.0.7.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5240 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.70	dBm	INFO
Ref. frequency	---	---	5242.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.70 12.51 20
Start [MHz] Stop [MHz]	5215.000 5265.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

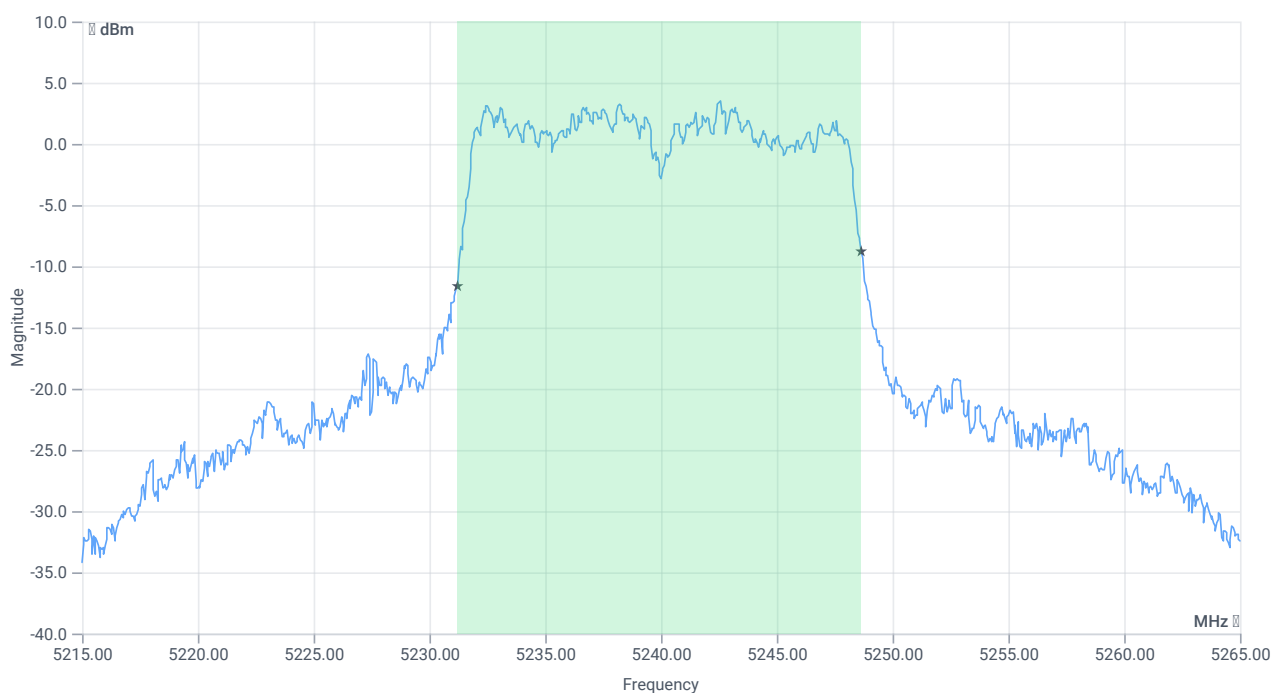


BW 99PCT




BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17.433	MHz	INFO
T1 99%	5150.000000	---	5231.2088	MHz	PASS
T2 99%	---	5250.000000	5248.6414	MHz	PASS

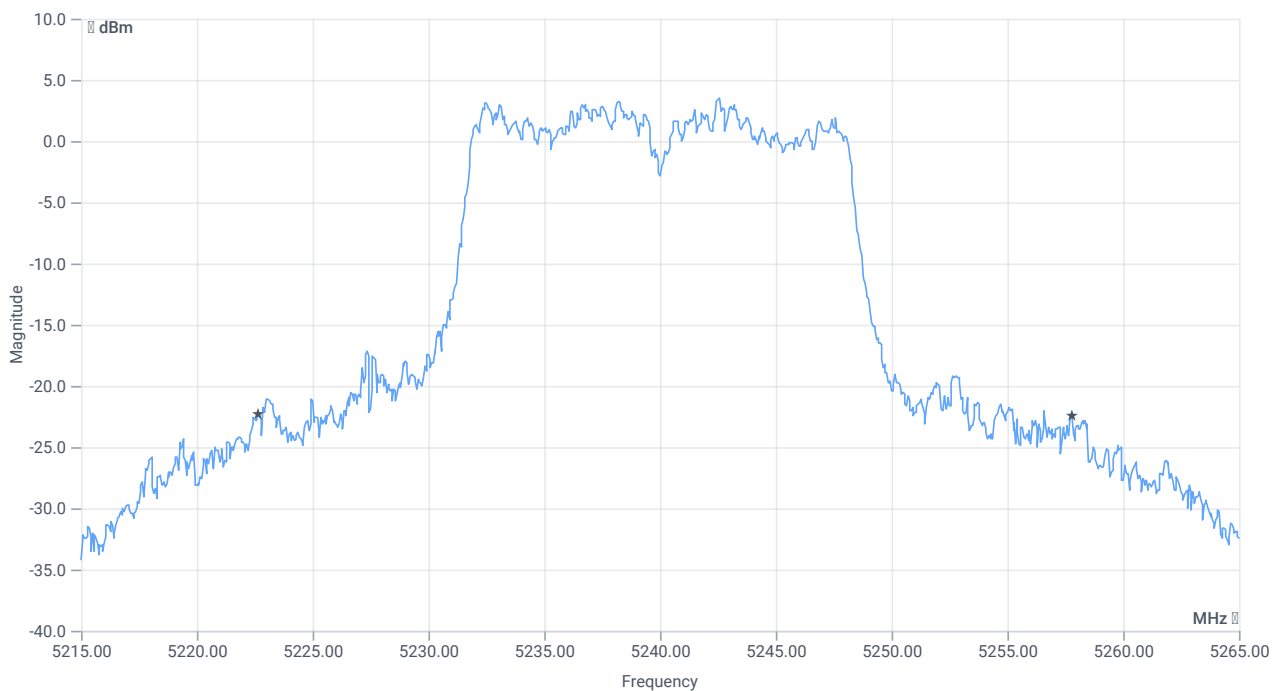

BW 26dB

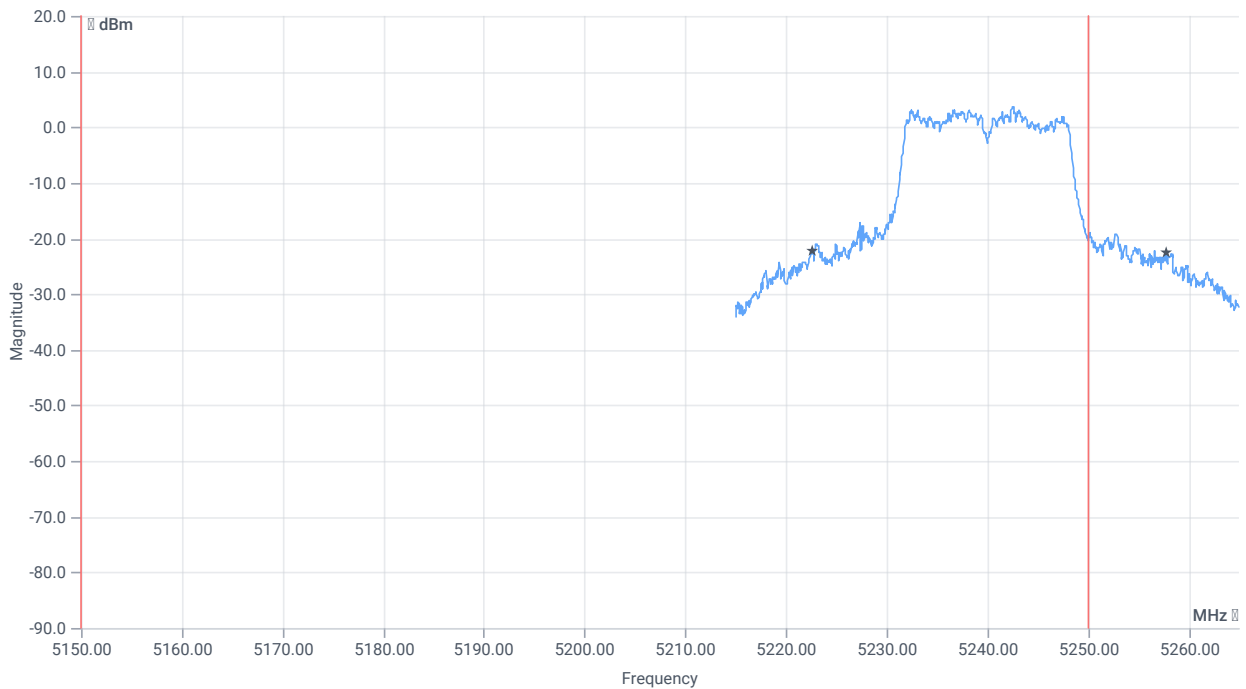

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	35.15	MHz	INFO
T1 26dB	5150.000000	---	5222.6500	MHz	PASS
T2 26dB	---	5250.000000	5257.8000	MHz	DFS required

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1

References

TC start	12.06.2024 09:55:58
Ambit temp [°C] humidity [rel%]	24.1 34
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5180 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.43	dBm	INFO
Ref. frequency	---	---	5177.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.43 12.55 15
Start [MHz] Stop [MHz]	5155.000 5205.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

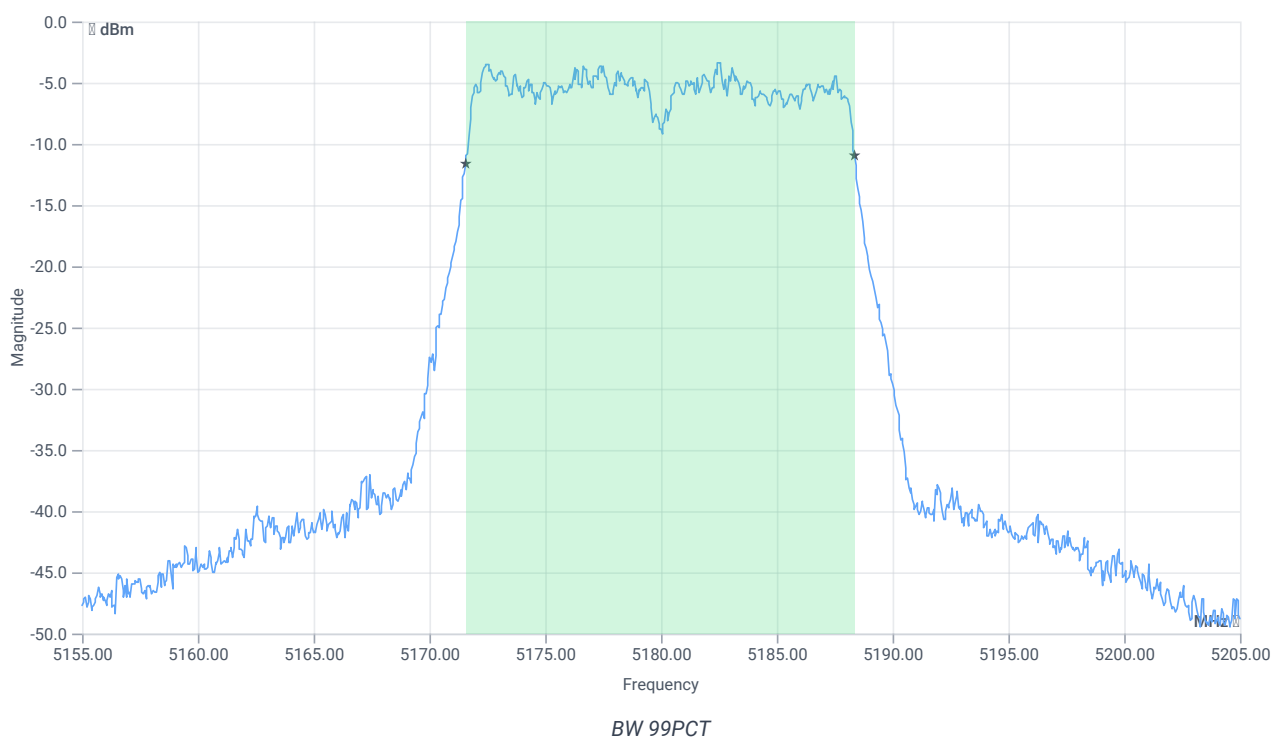


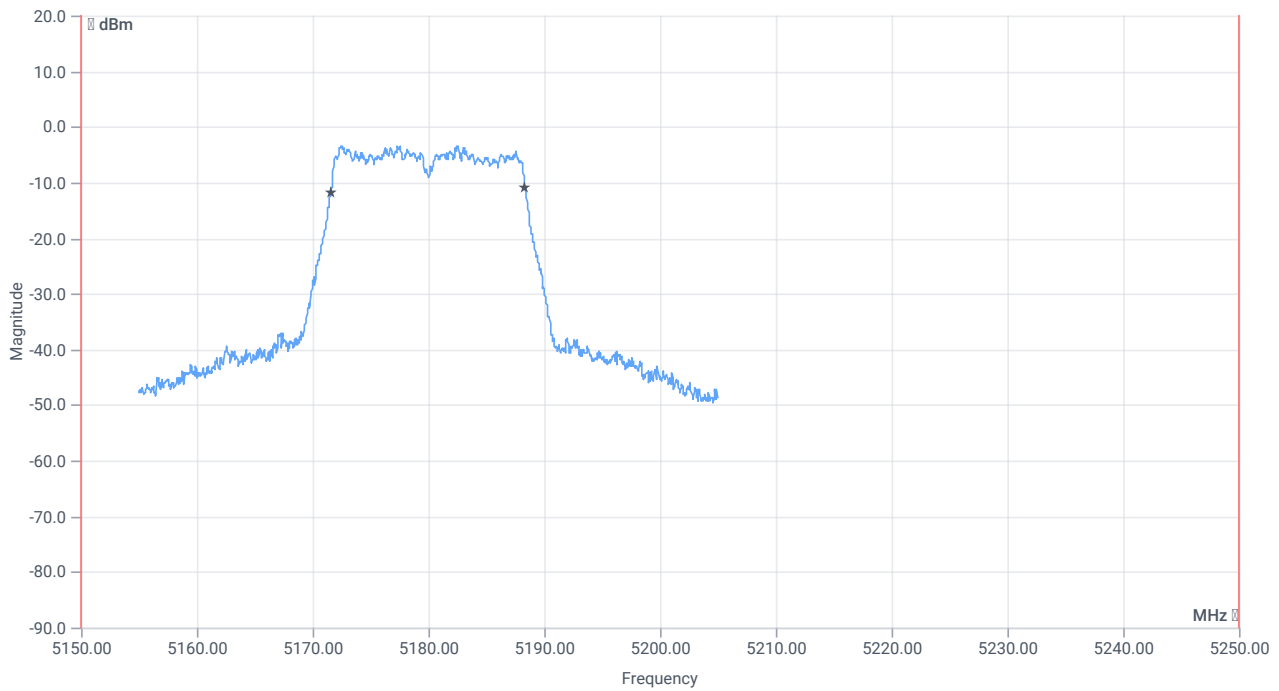


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.783	MHz	INFO
T1 99%	5150.000000	---	5171.5584	MHz	PASS
T2 99%	---	5250.000000	5188.3417	MHz	PASS

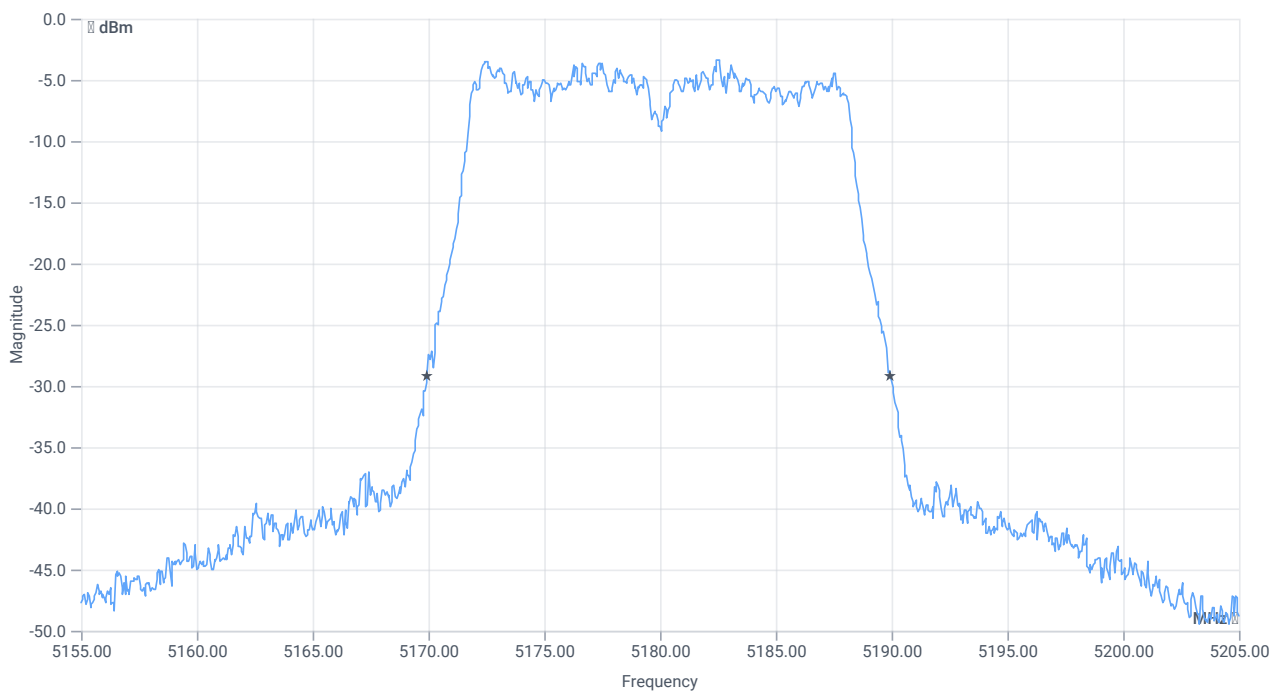

BW 26dB

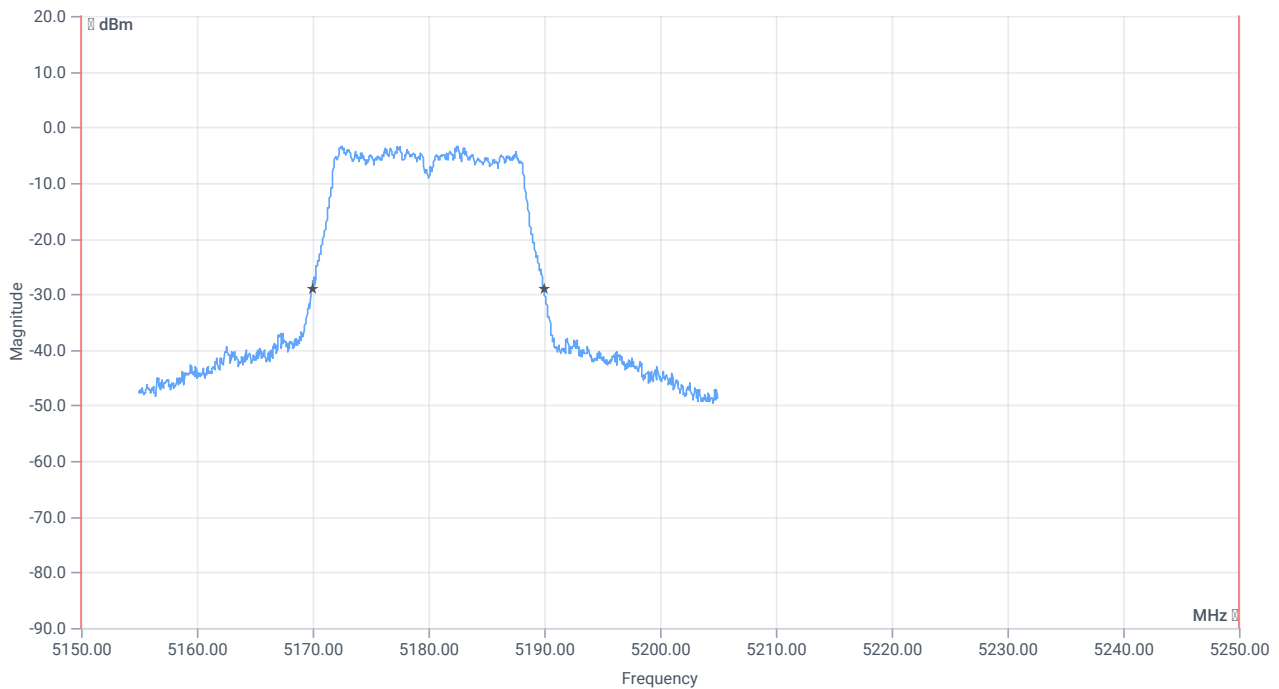

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20	MHz	INFO
T1 26dB	5150.000000	---	5169.9500	MHz	PASS
T2 26dB	---	5250.000000	5189.9500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1

References

TC start	12.06.2024 10:21:18
Ambit temp [°C] humidity [rel%]	24.2 34
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5200 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.26	dBm	INFO
Ref. frequency	---	---	5207.390	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.26 12.47 15
Start [MHz] Stop [MHz]	5175.000 5225.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

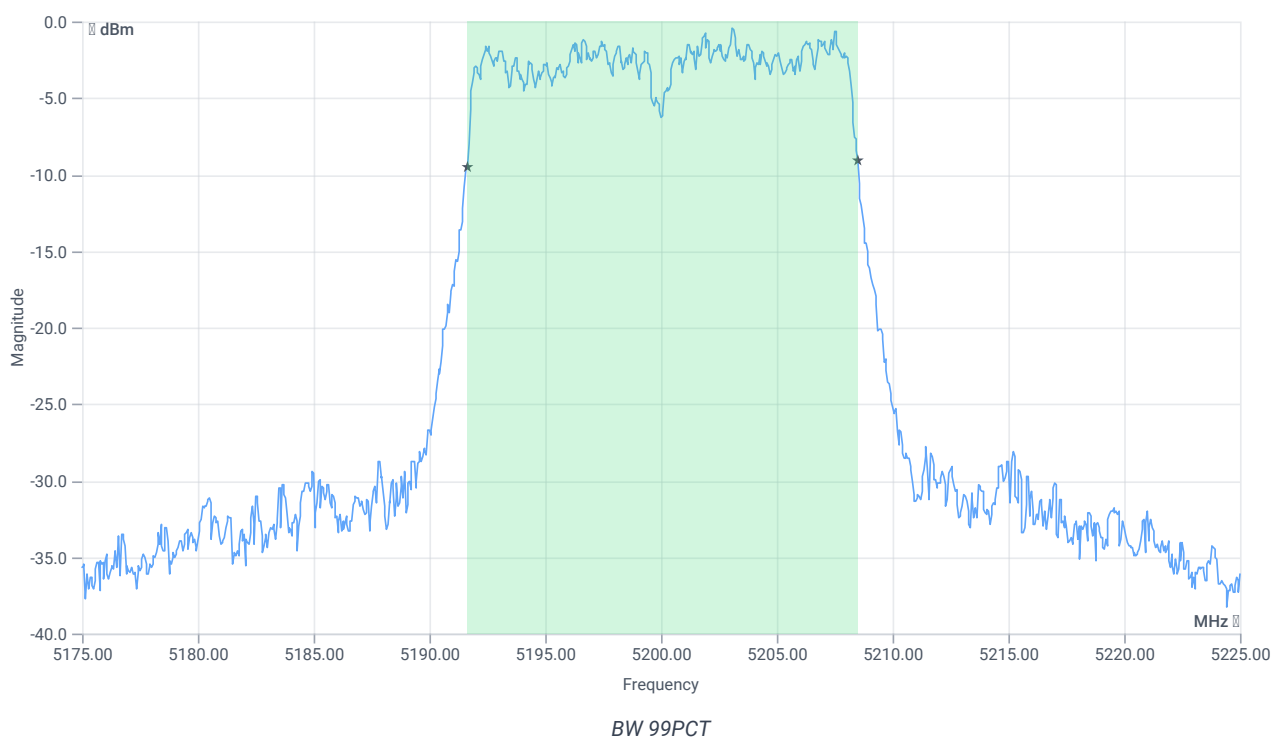


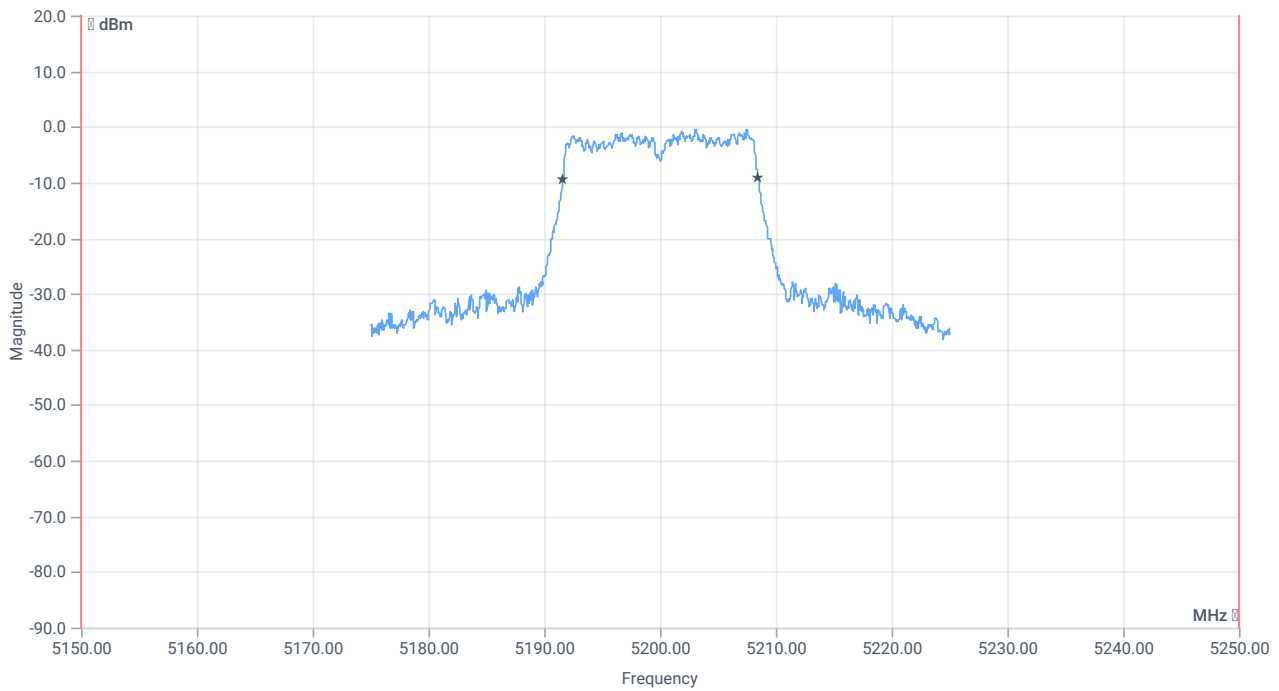


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.883	MHz	INFO
T1 99%	5150.000000	---	5191.6084	MHz	PASS
T2 99%	---	5250.000000	5208.4915	MHz	PASS

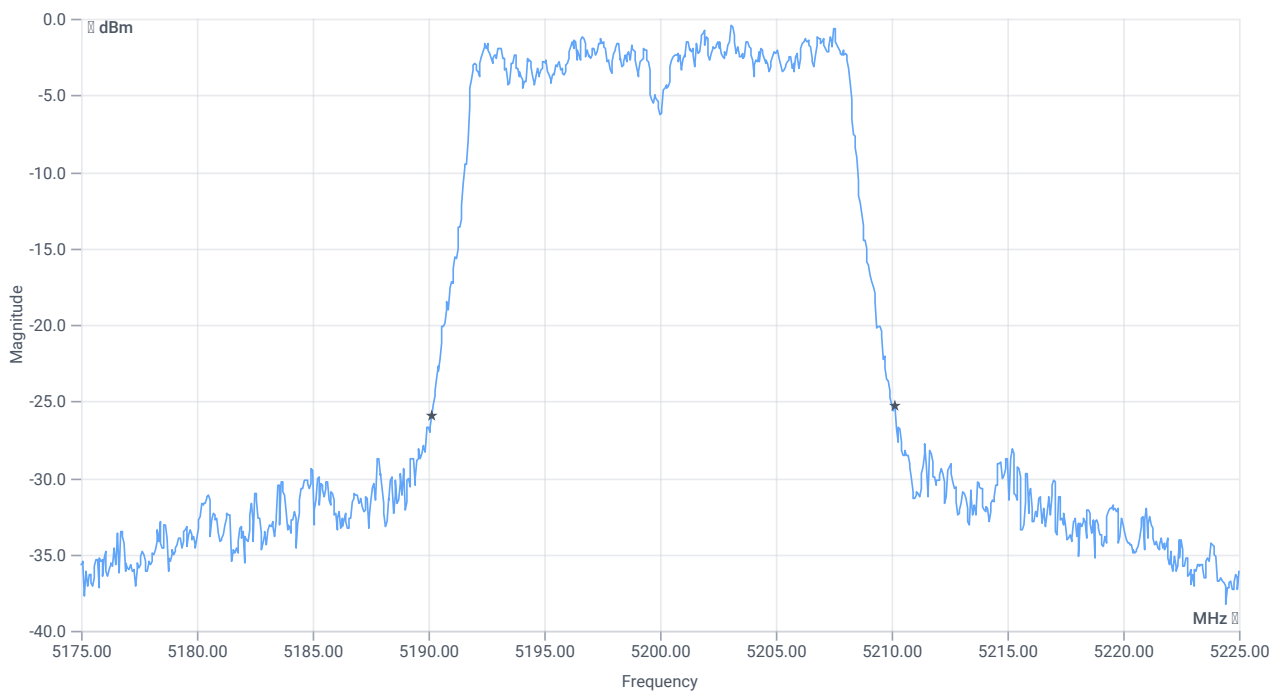

BW 26dB

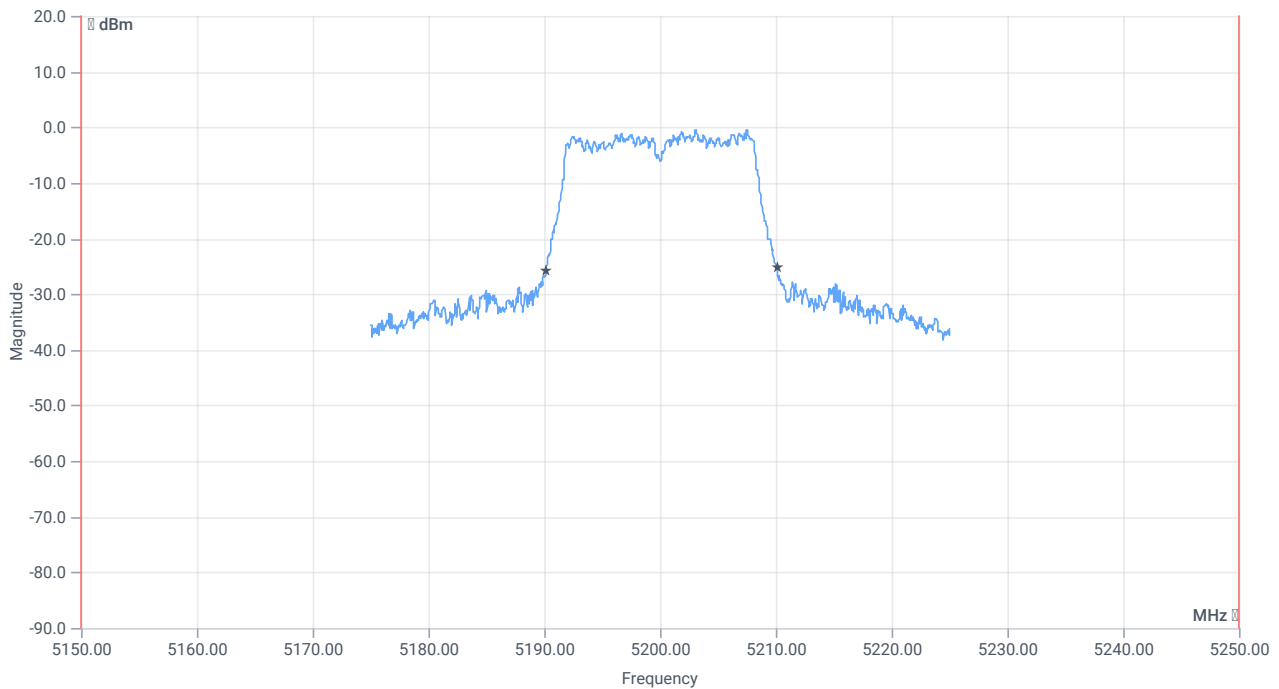

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20	MHz	INFO
T1 26dB	5150.000000	---	5190.1500	MHz	PASS
T2 26dB	---	5250.000000	5210.1500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1

References

TC start	25.06.2024 11:56:35
Ambit temp [°C] humidity [rel%]	22.9 56
System version	5.0.7.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5240 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.73	dBm	INFO
Ref. frequency	---	---	5247.390	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.73 12.29 20
Start [MHz] Stop [MHz]	5215.000 5265.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

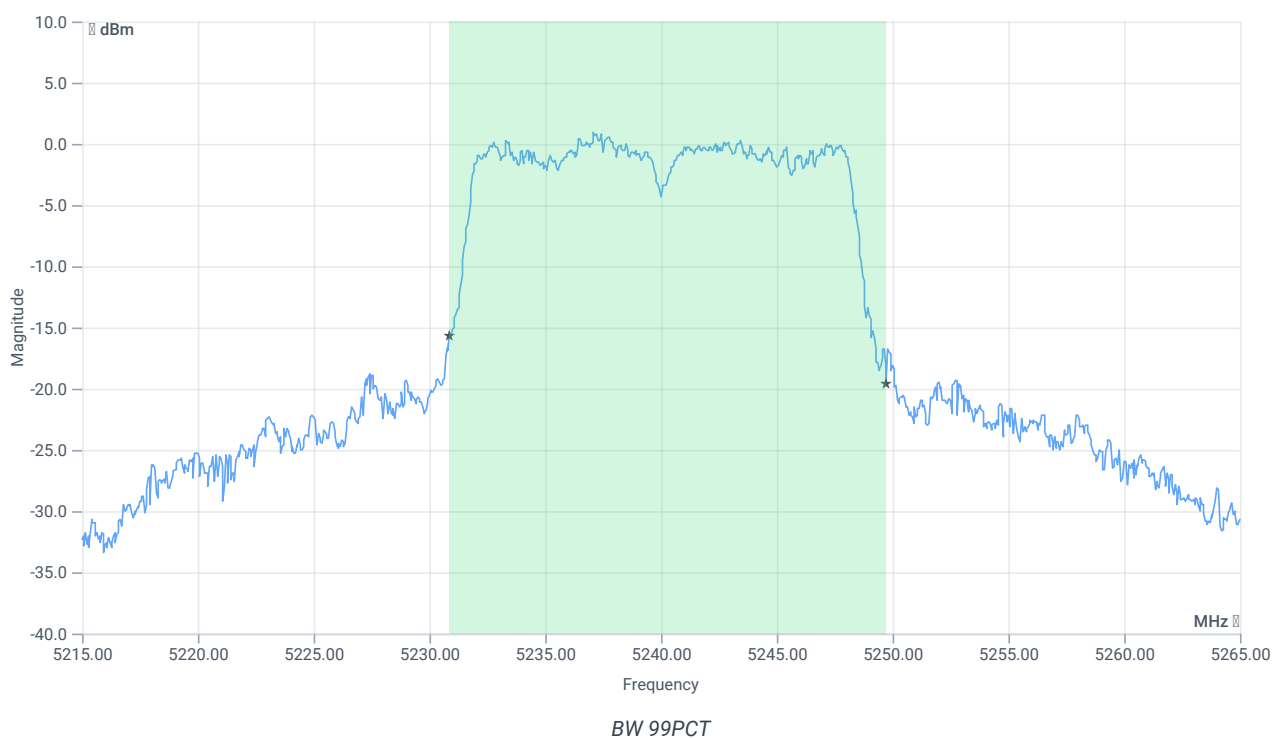





BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	18.881	MHz	INFO
T1 99%	5150.000000	---	5230.8591	MHz	PASS
T2 99%	---	5250.000000	5249.7403	MHz	PASS

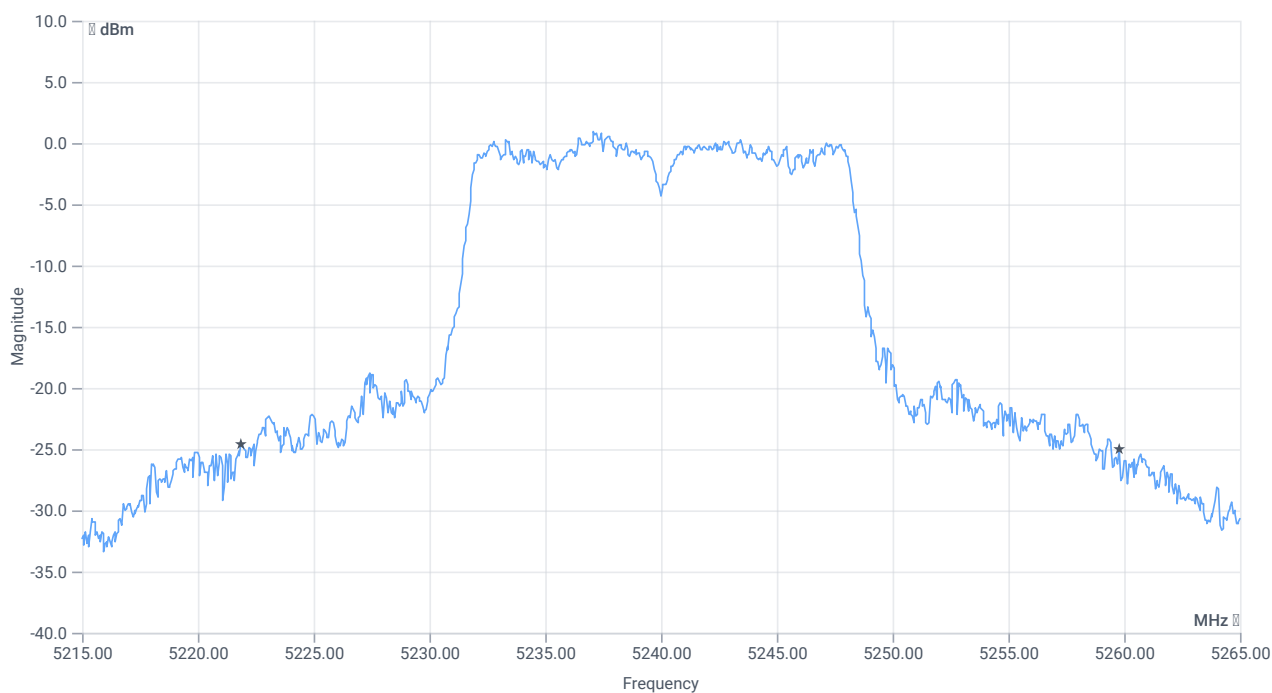

BW 26dB

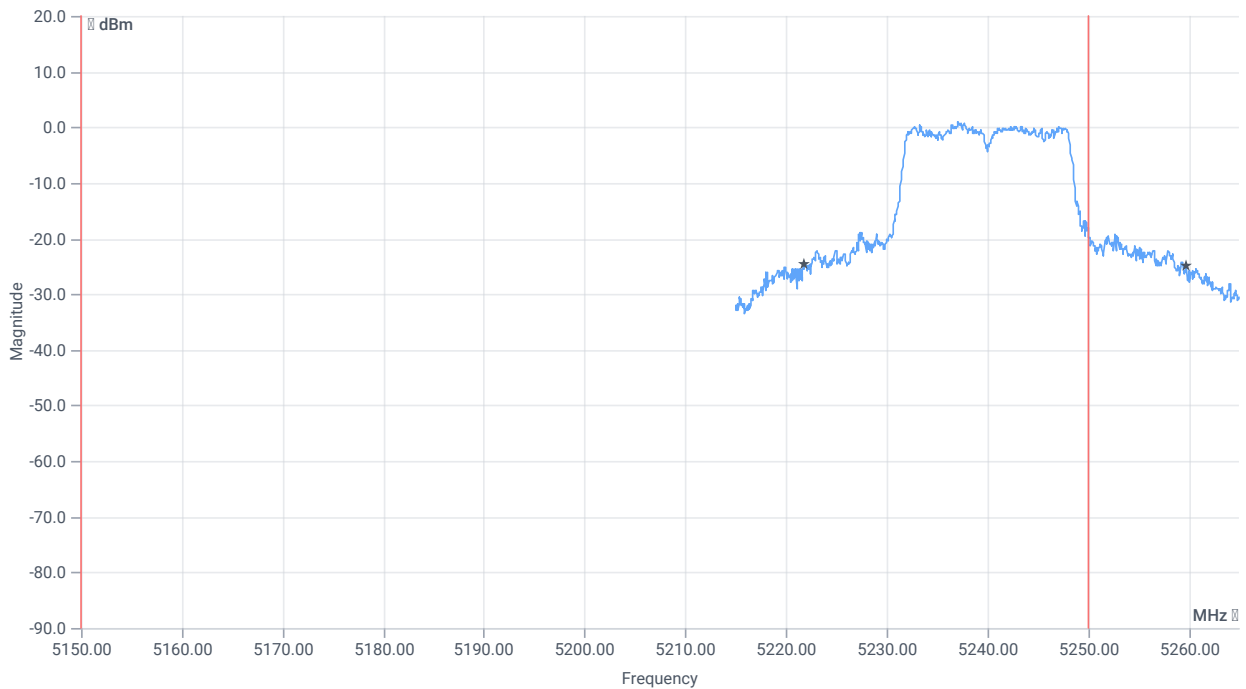

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	37.95	MHz	INFO
T1 26dB	5150.000000	---	5221.8500	MHz	PASS
T2 26dB	---	5250.000000	5259.8000	MHz	DFS required

Verdict

PASS

FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-1

References

TC start	12.06.2024 07:43:57
Ambit temp [°C] humidity [rel%]	22.8 36
System version	5.0.5.0
Standard Version	FCC 15.407, ISSED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISSED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5180 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.24	dBm	INFO
Ref. frequency	---	---	5178.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.24 12.69 15
Start [MHz] Stop [MHz]	5155.000 5205.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

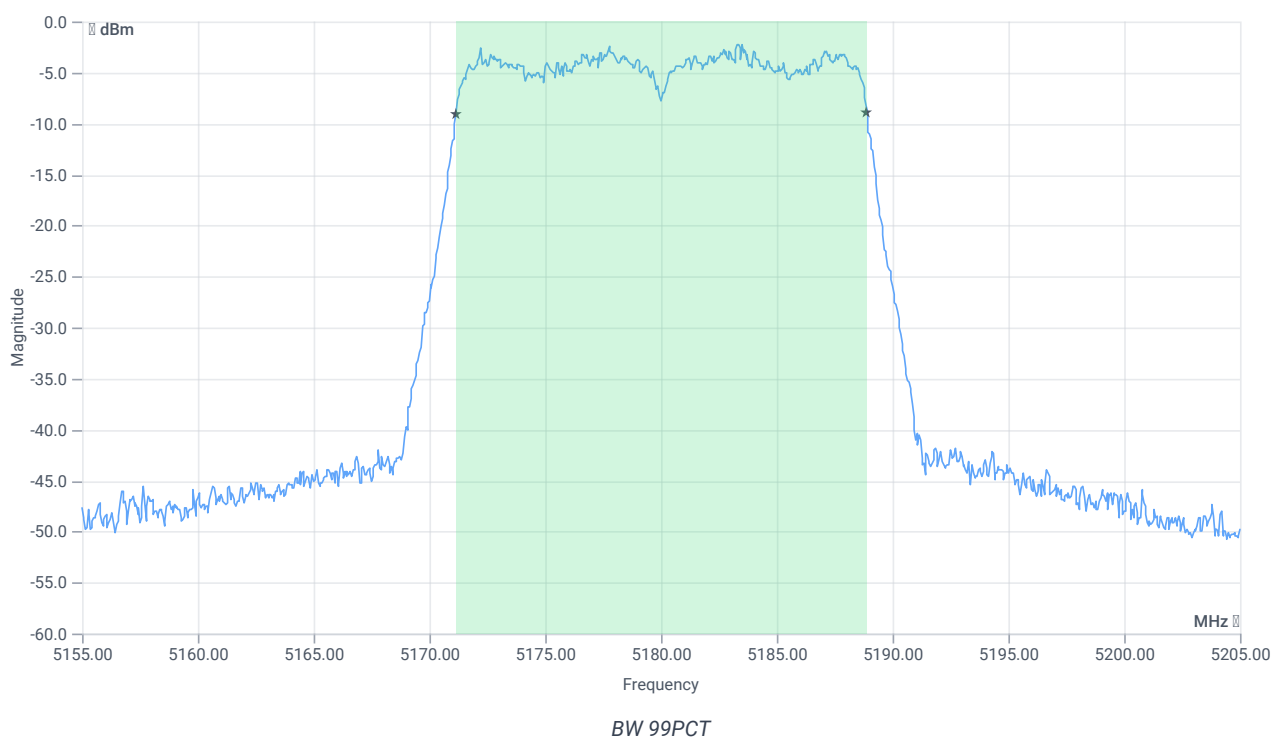


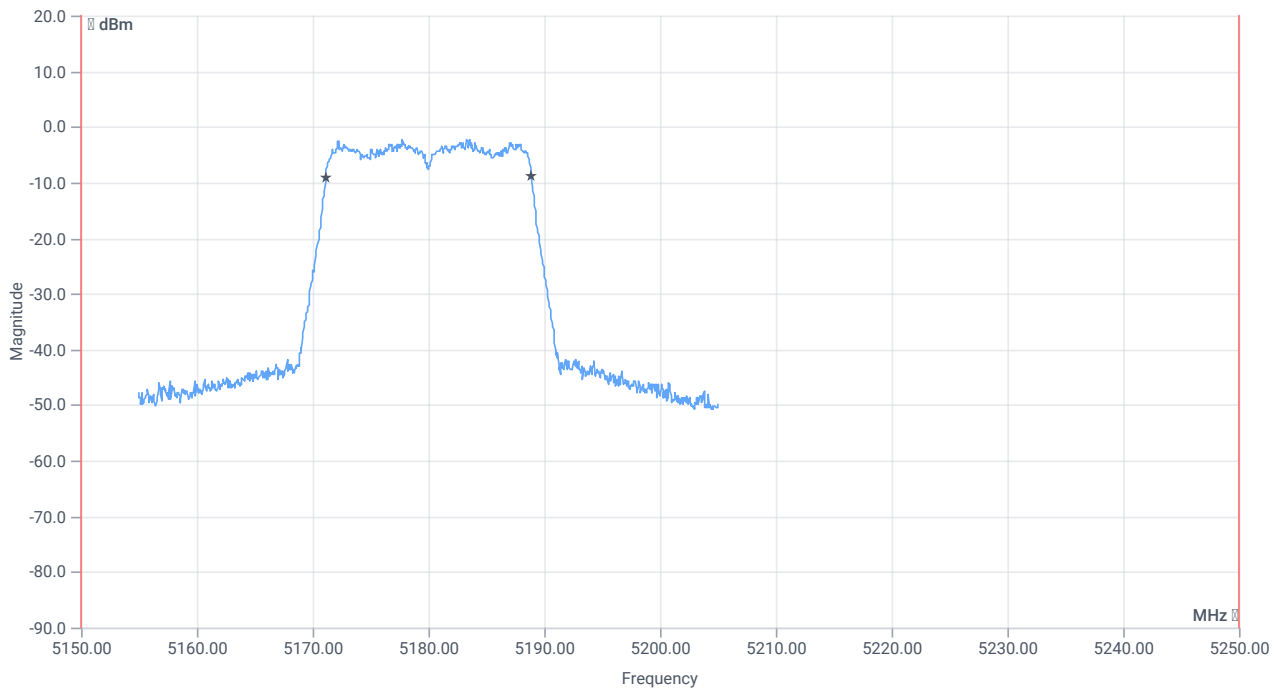


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17.732	MHz	INFO
T1 99%	5150.000000	---	5171.1588	MHz	PASS
T2 99%	---	5250.000000	5188.8911	MHz	PASS

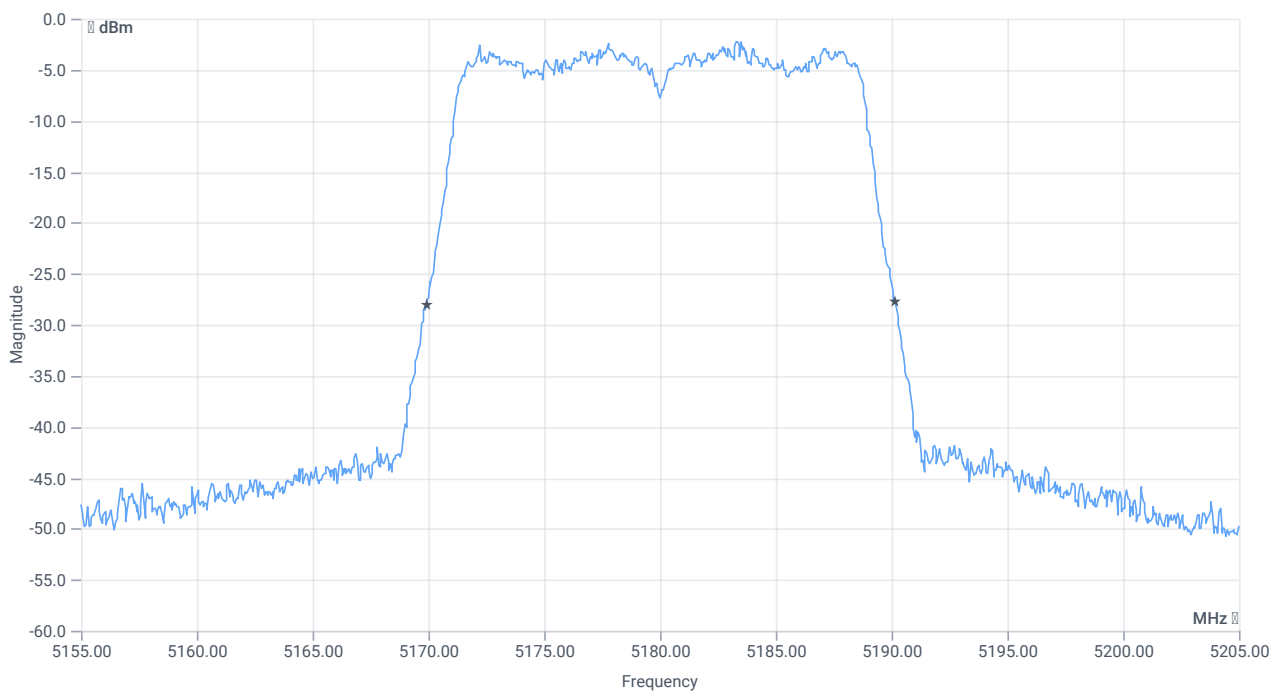

BW 26dB

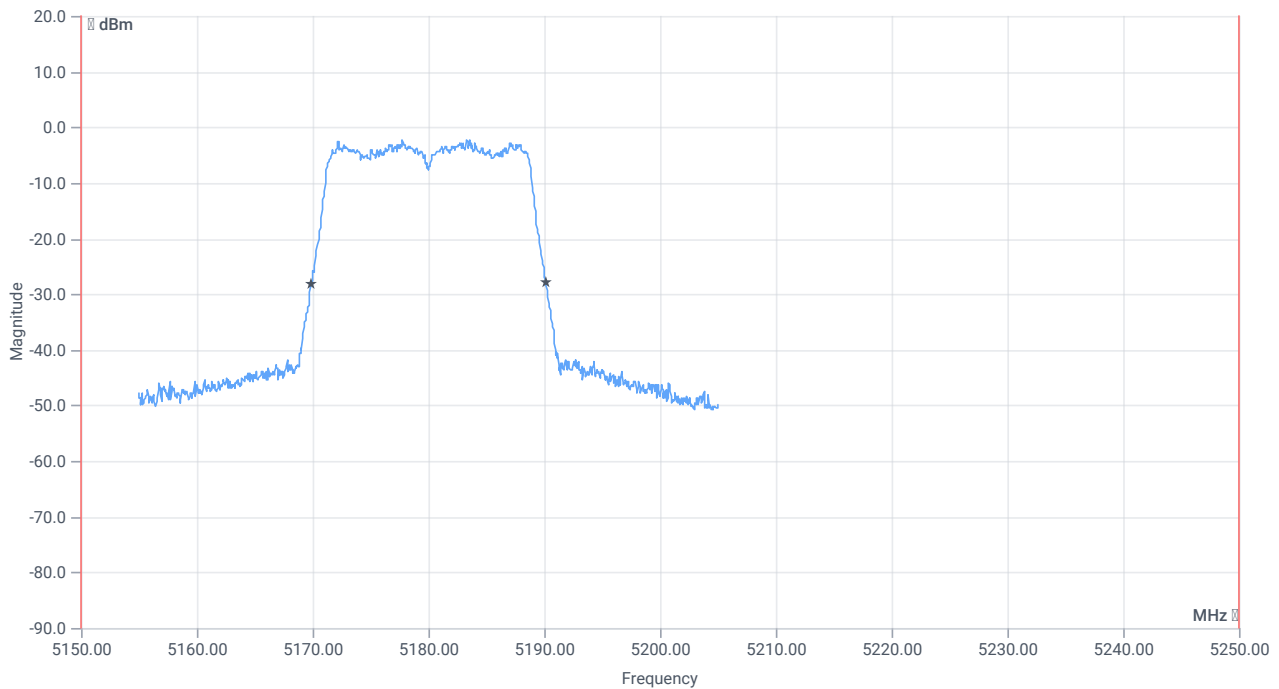

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.25	MHz	INFO
T1 26dB	5150.000000	---	5169.9000	MHz	PASS
T2 26dB	---	5250.000000	5190.1500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-1

References

TC start	12.06.2024 08:01:54
Ambit temp [°C] humidity [rel%]	23.0 36
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5200 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.34	dBm	INFO
Ref. frequency	---	---	5192.210	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.34 12.67 15
Start [MHz] Stop [MHz]	5175.000 5225.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

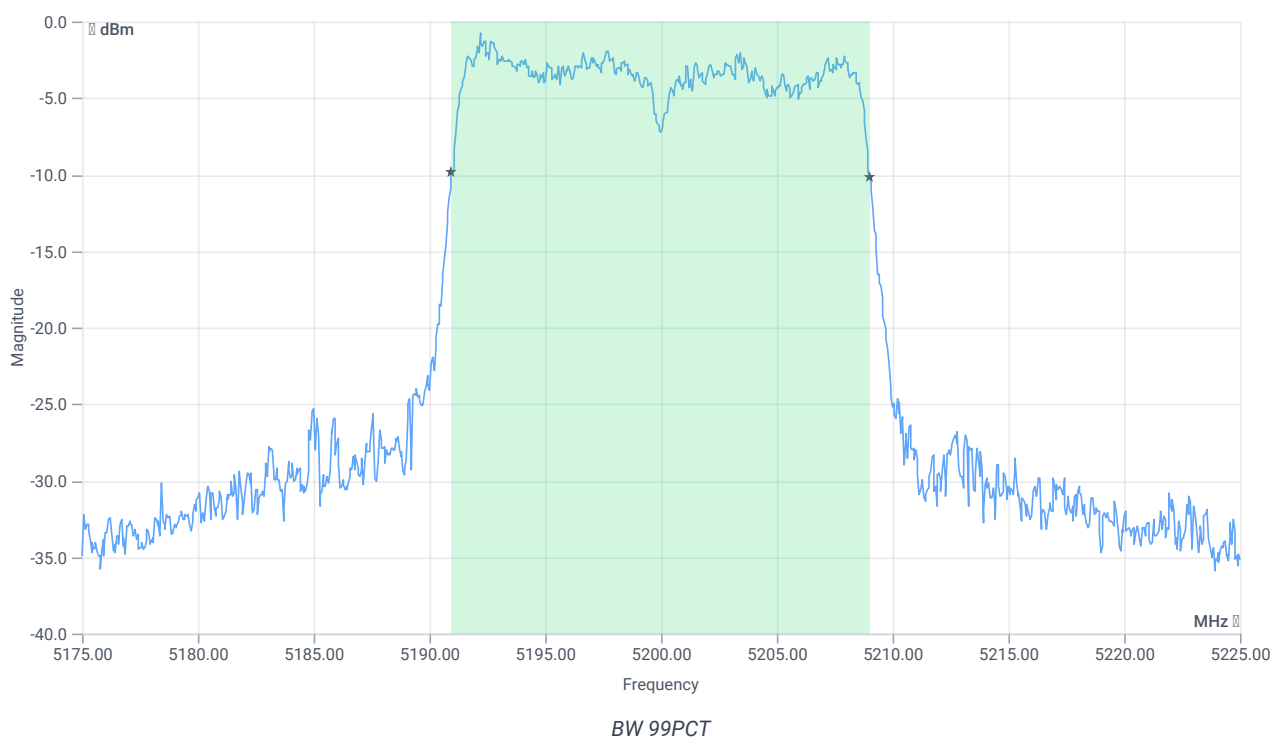


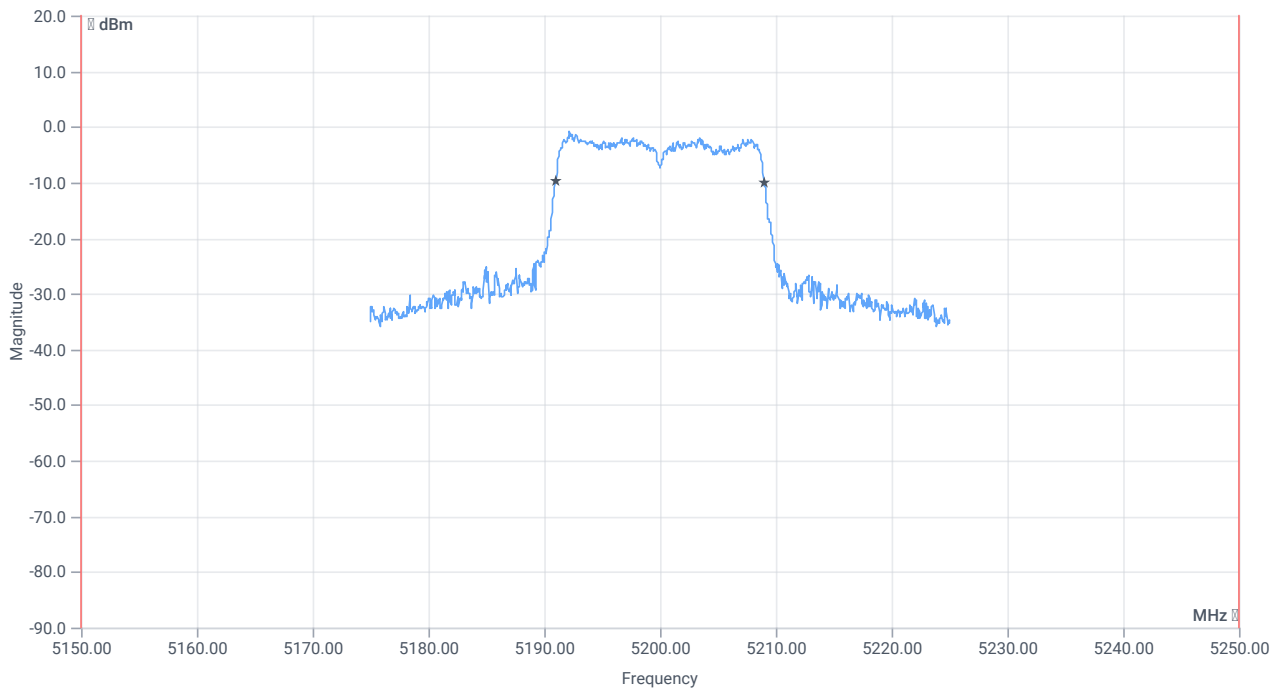


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	18.032	MHz	INFO
T1 99%	5150.000000	---	5190.9590	MHz	PASS
T2 99%	---	5250.000000	5208.9910	MHz	PASS

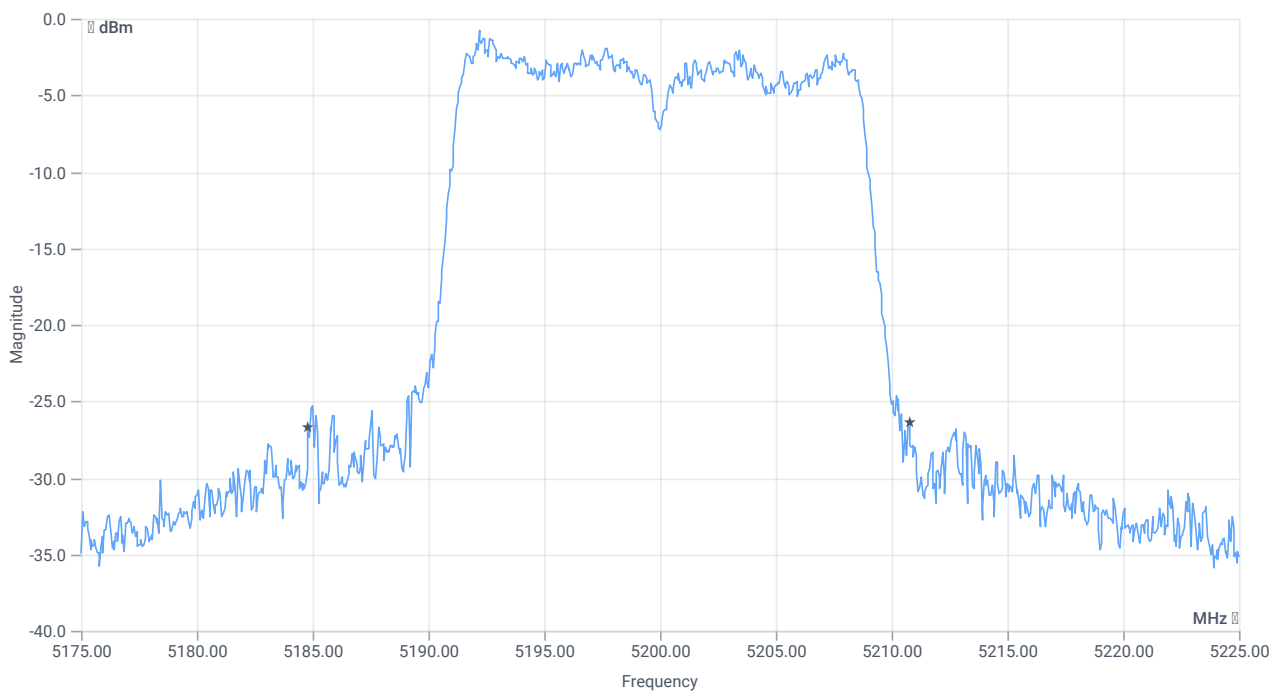

BW 26dB

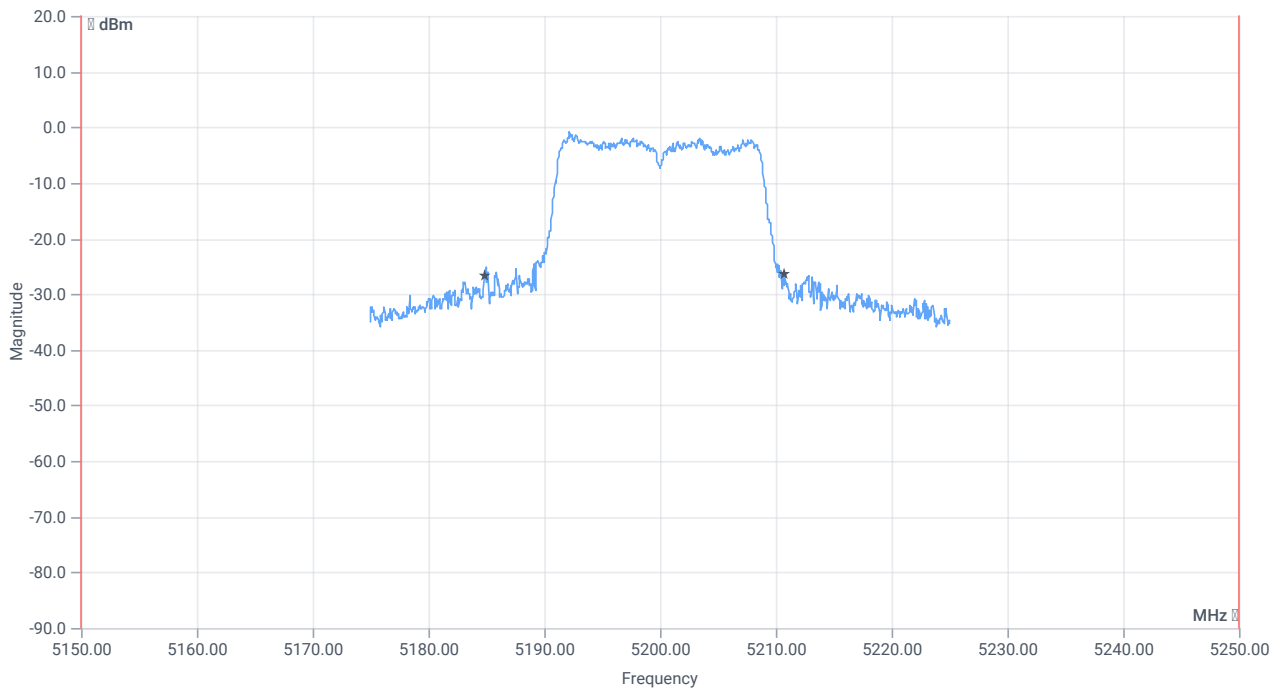

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	25.95	MHz	INFO
T1 26dB	5150.000000	---	5184.8000	MHz	PASS
T2 26dB	---	5250.000000	5210.7500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-1

References

TC start	25.06.2024 12:12:46
Ambit temp [°C] humidity [rel%]	23.8 54
System version	5.0.7.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5240 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	6.04	dBm	INFO
Ref. frequency	---	---	5242.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.04 12.51 20
Start [MHz] Stop [MHz]	5215.000 5265.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

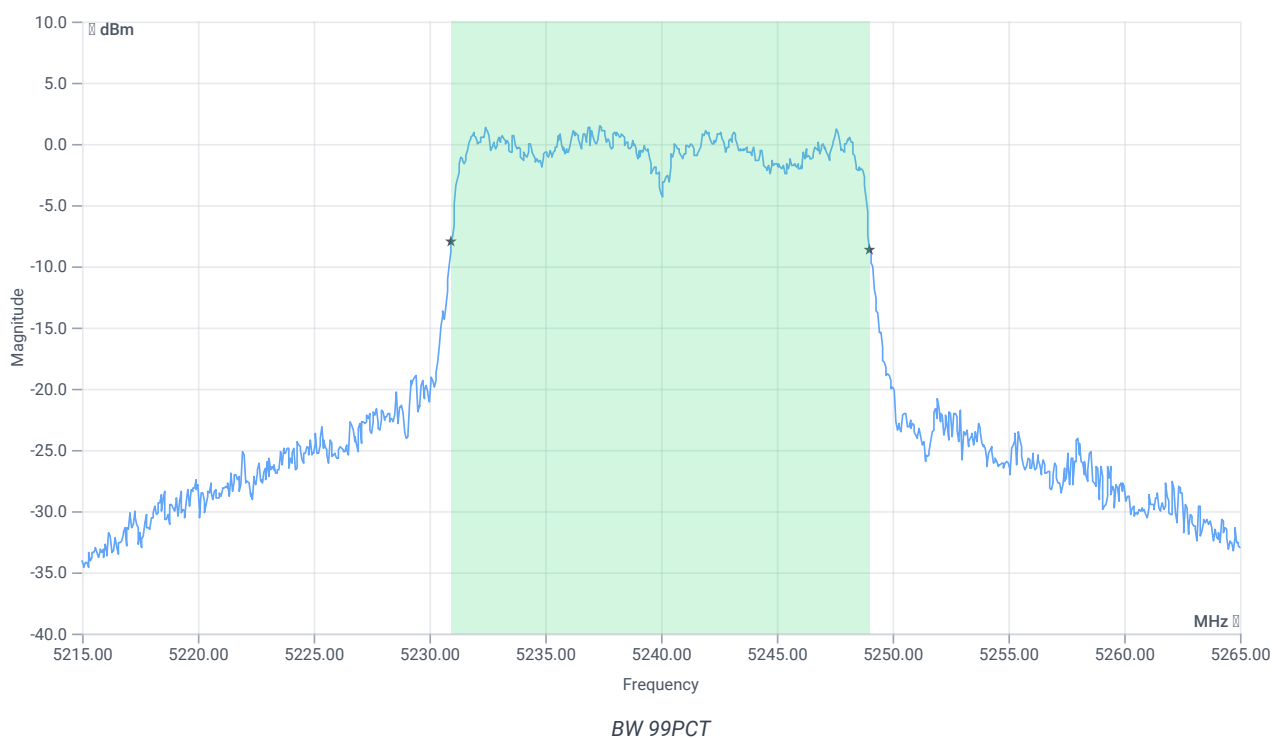


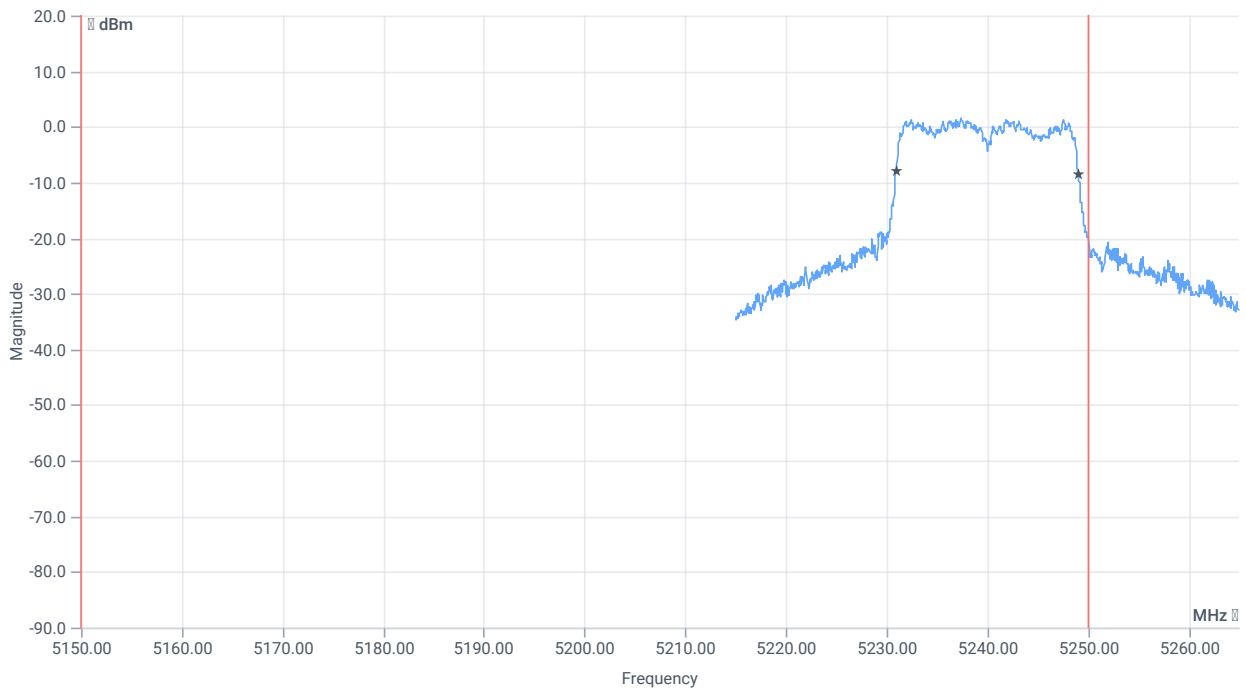


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	18.032	MHz	INFO
T1 99%	5150.000000	---	5230.9590	MHz	PASS
T2 99%	---	5250.000000	5248.9910	MHz	PASS

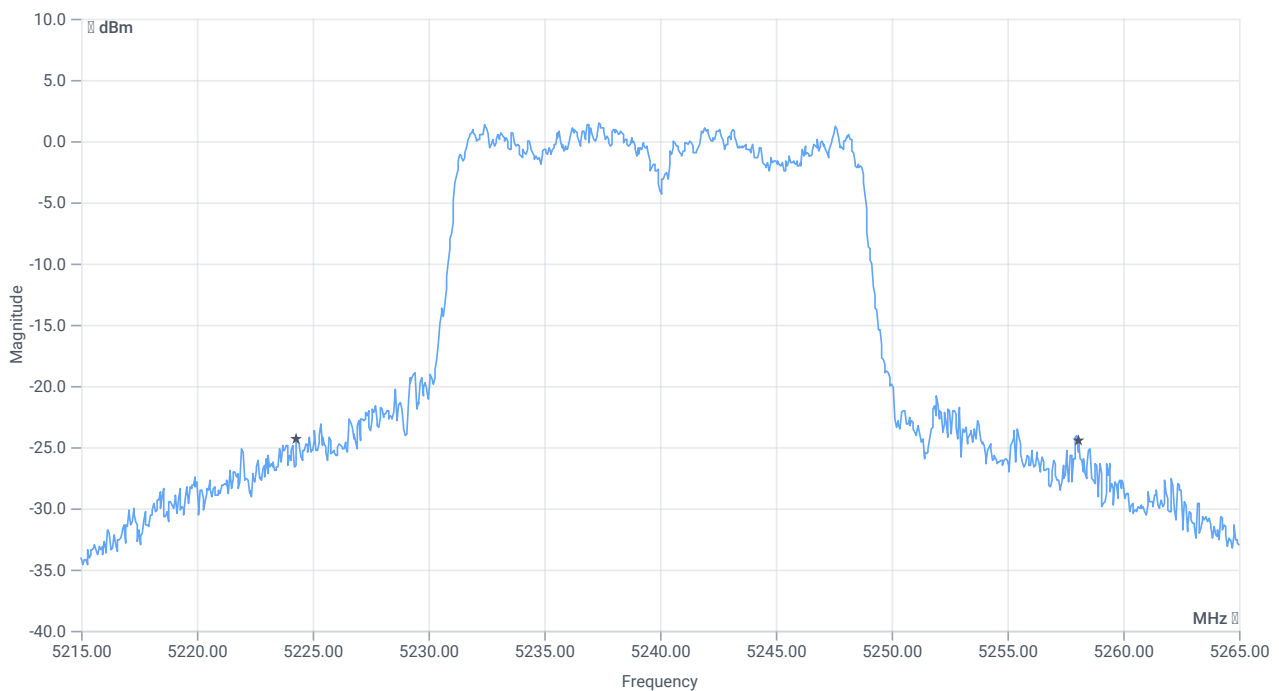

BW 26dB

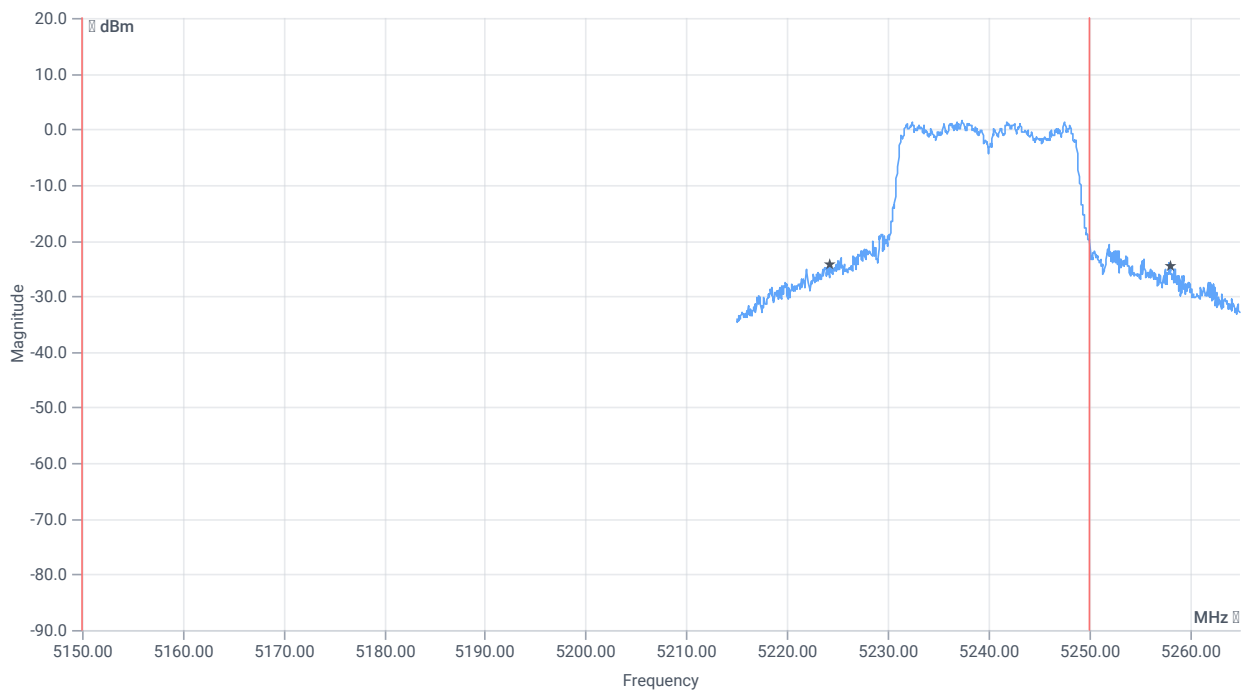

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	33.8	MHz	INFO
T1 26dB	5150.000000	---	5224.3000	MHz	PASS
T2 26dB	---	5250.000000	5258.1000	MHz	DFS required

Verdict
PASS

FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-1

References

TC start	12.06.2024 13:52:11
Ambit temp [°C] humidity [rel%]	25.4 29
System version	5.0.5.0
Standard Version	FCC 15.407, ISSED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISSED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5200 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.07	dBm	INFO
Ref. frequency	---	---	5207.390	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.07 12.47 15
Start [MHz] Stop [MHz]	5175.000 5225.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

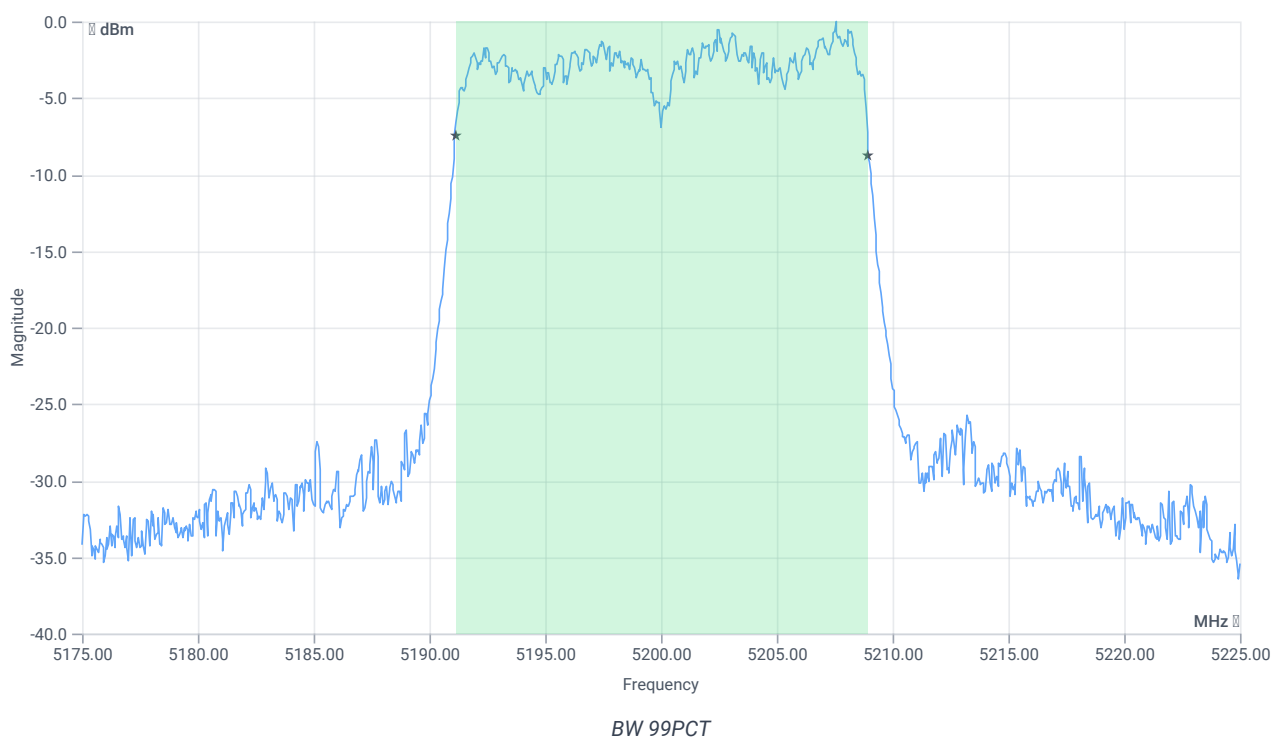


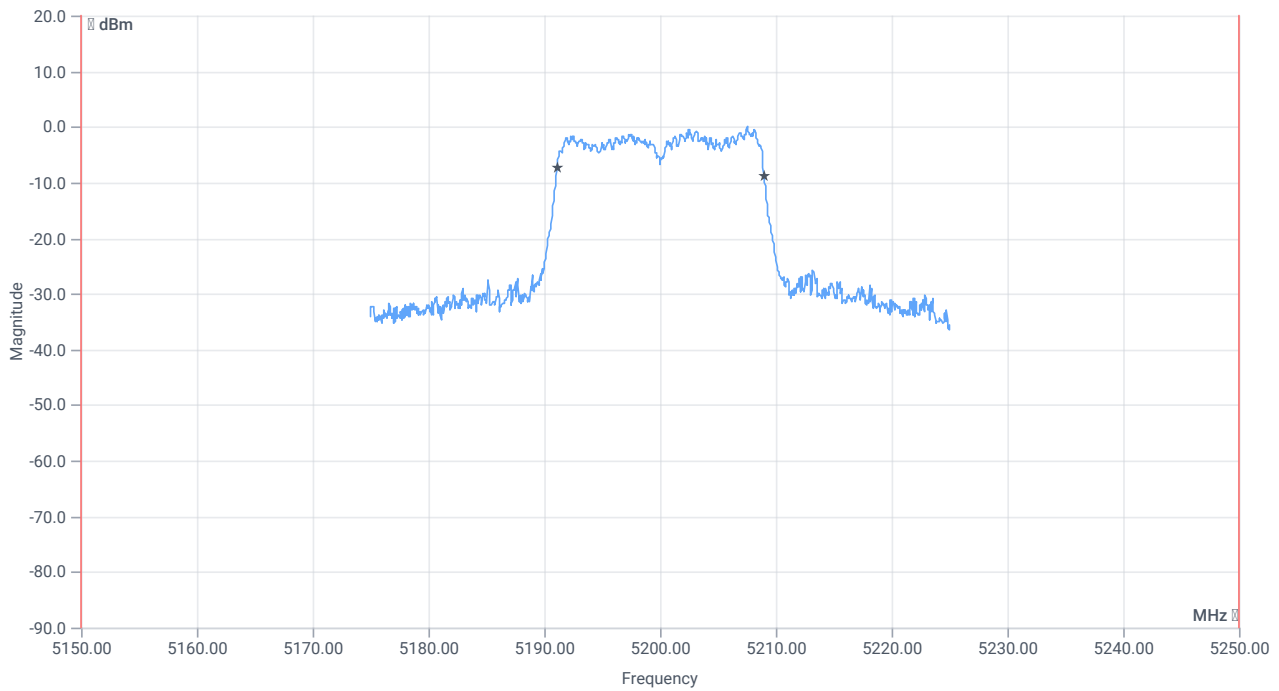


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17.832	MHz	INFO
T1 99%	5150.000000	---	5191.1089	MHz	PASS
T2 99%	---	5250.000000	5208.9411	MHz	PASS

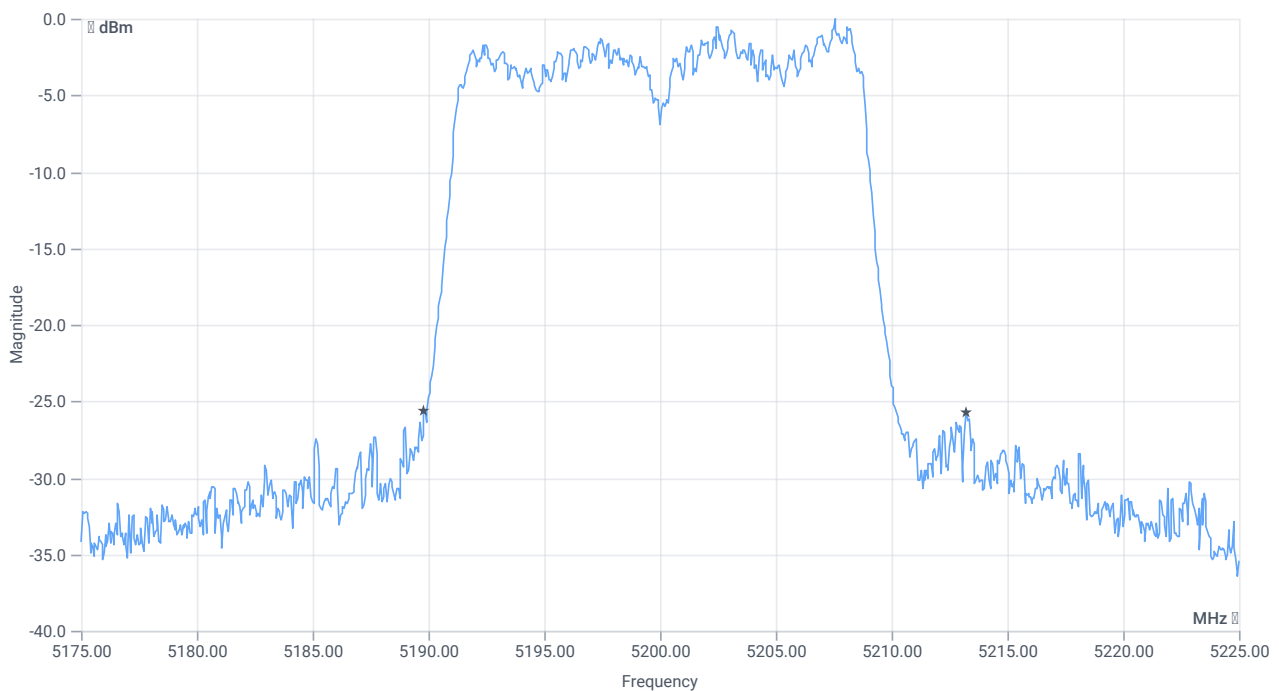

BW 26dB

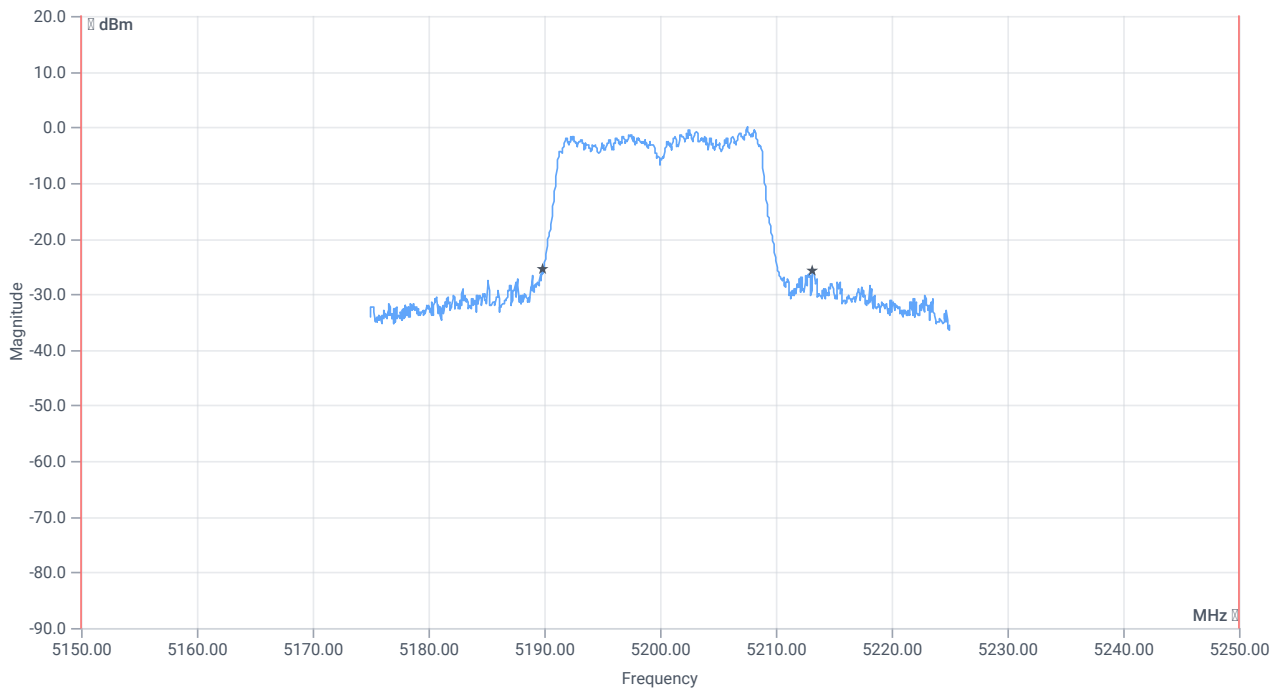

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	23.4	MHz	INFO
T1 26dB	5150.000000	---	5189.8000	MHz	PASS
T2 26dB	---	5250.000000	5213.2000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-1

References

TC start	25.06.2024 12:17:13
Ambit temp [°C] humidity [rel%]	24.1 54
System version	5.0.7.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5240 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.42	dBm	INFO
Ref. frequency	---	---	5242.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.42 12.29 20
Start [MHz] Stop [MHz]	5215.000 5265.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

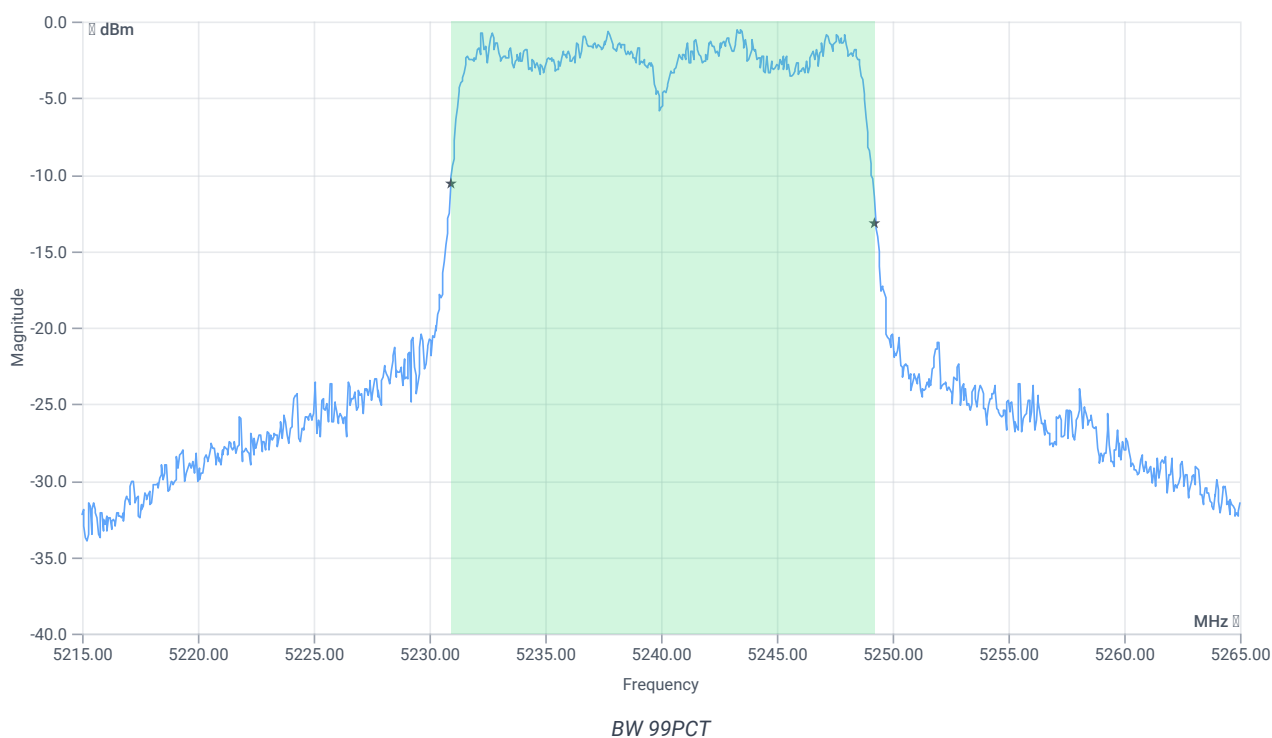


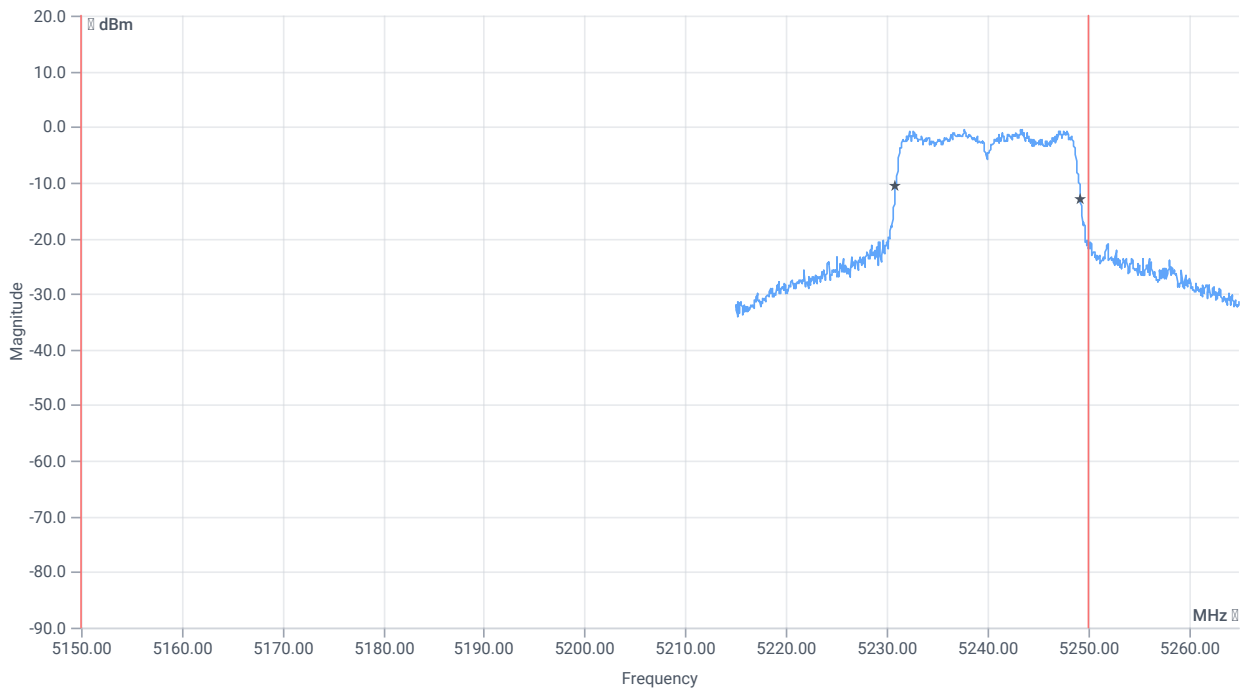


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	18.332	MHz	INFO
T1 99%	5150.000000	---	5230.9091	MHz	PASS
T2 99%	---	5250.000000	5249.2408	MHz	PASS

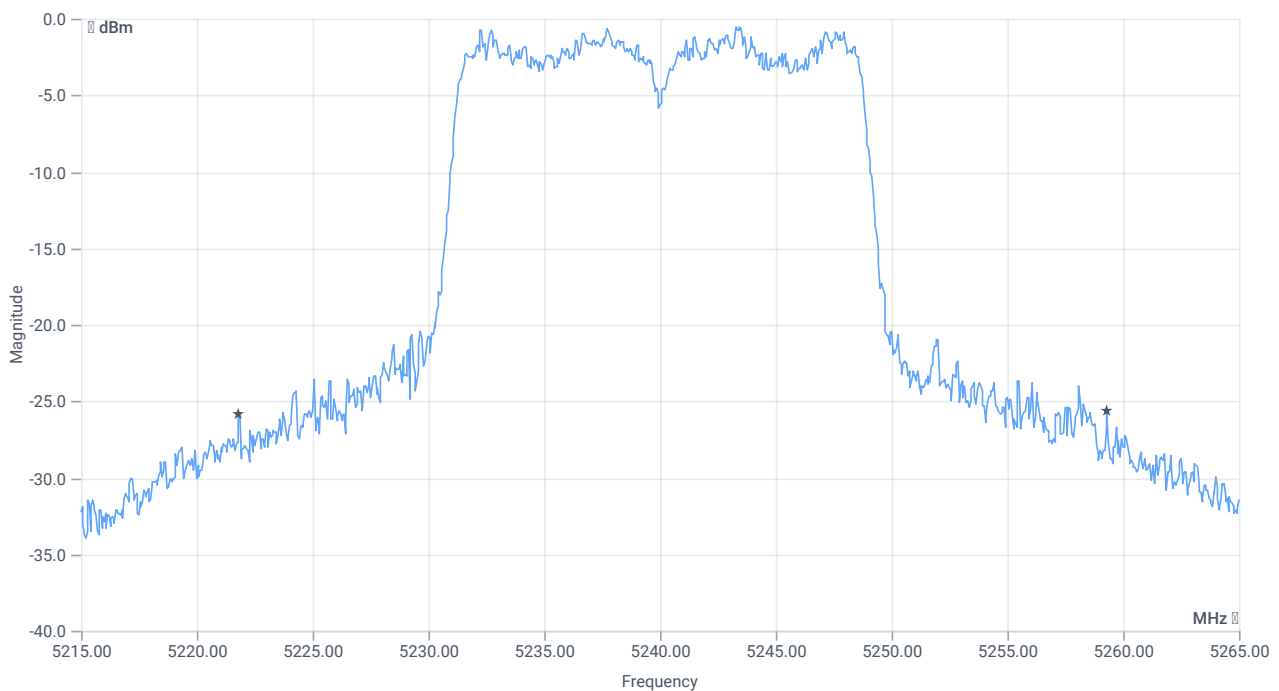

BW 26dB

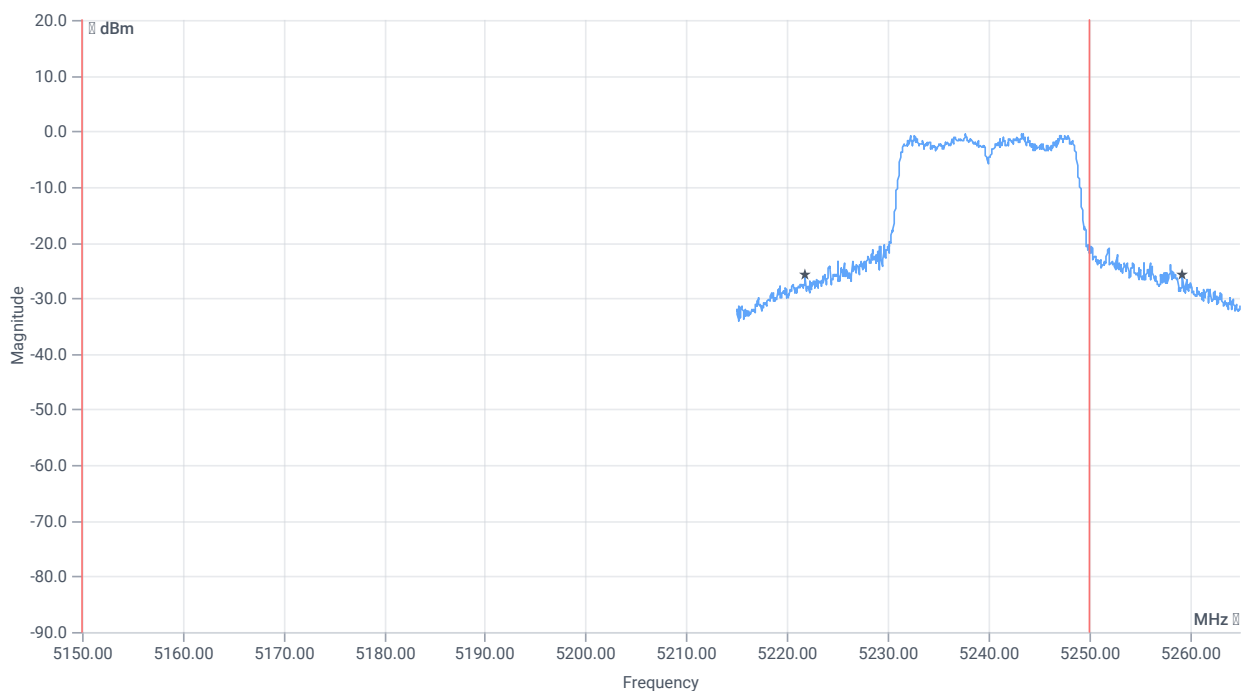

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	37.5	MHz	INFO
T1 26dB	5150.000000	---	5221.8000	MHz	PASS
T2 26dB	---	5250.000000	5259.3000	MHz	DFS required

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-1

References

TC start	12.06.2024 08:34:04
Ambit temp [°C] humidity [rel%]	23.3 35
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT40 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5230
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5190 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-1.00	dBm	INFO
Ref. frequency	---	---	5184.010	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.00 12.68 10
Start [MHz] Stop [MHz]	5140.000 5240.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

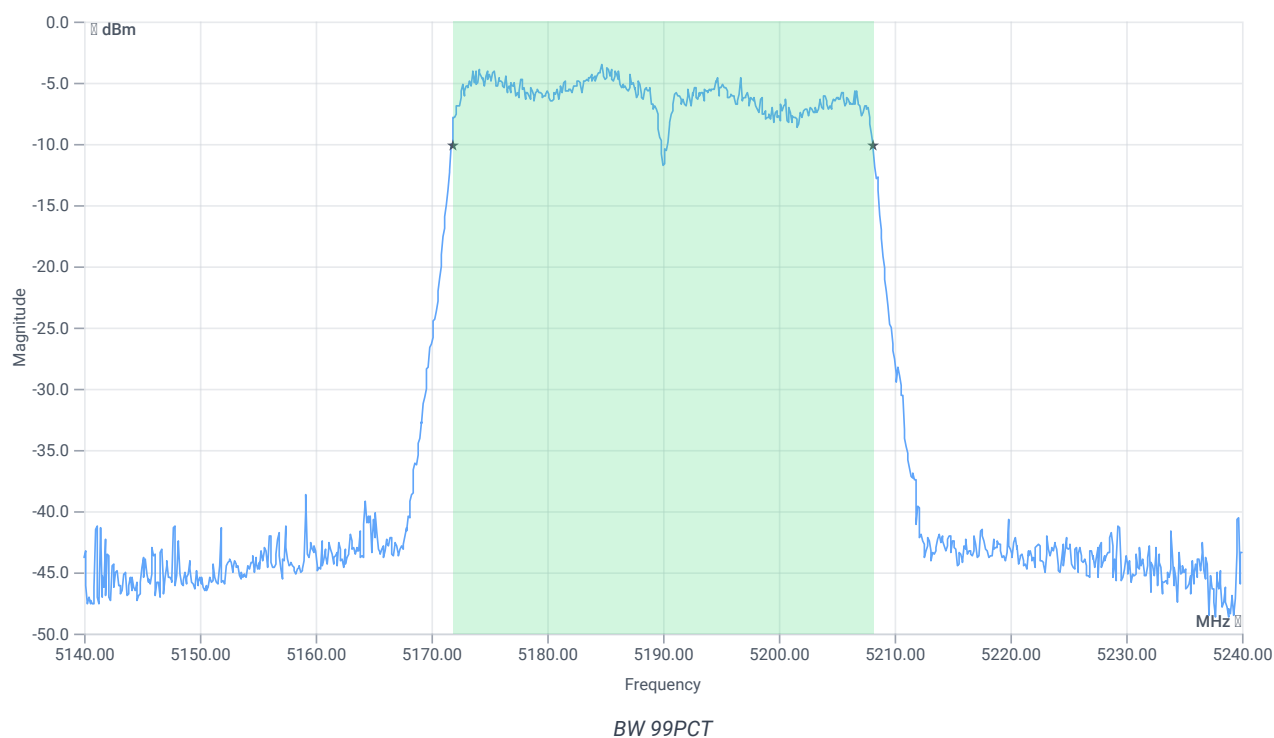





BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36.264	MHz	INFO
T1 99%	5150.000000	---	5171.8182	MHz	PASS
T2 99%	---	5250.000000	5208.0819	MHz	PASS

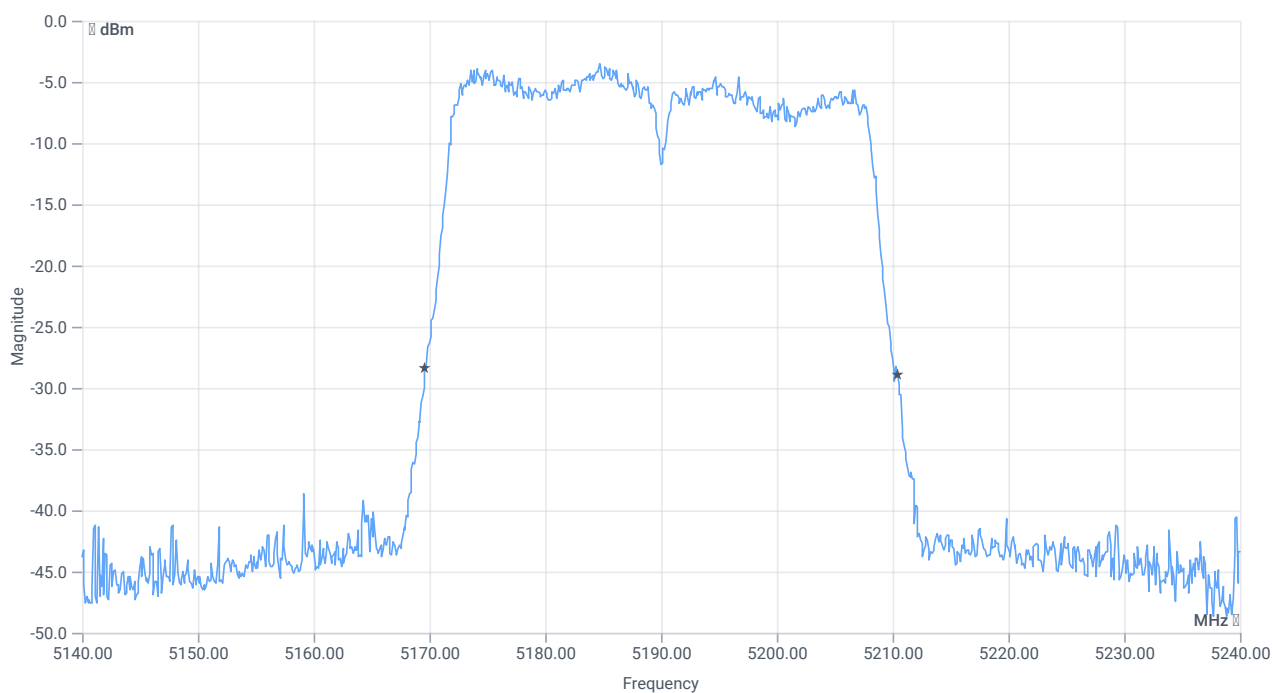

BW 26dB

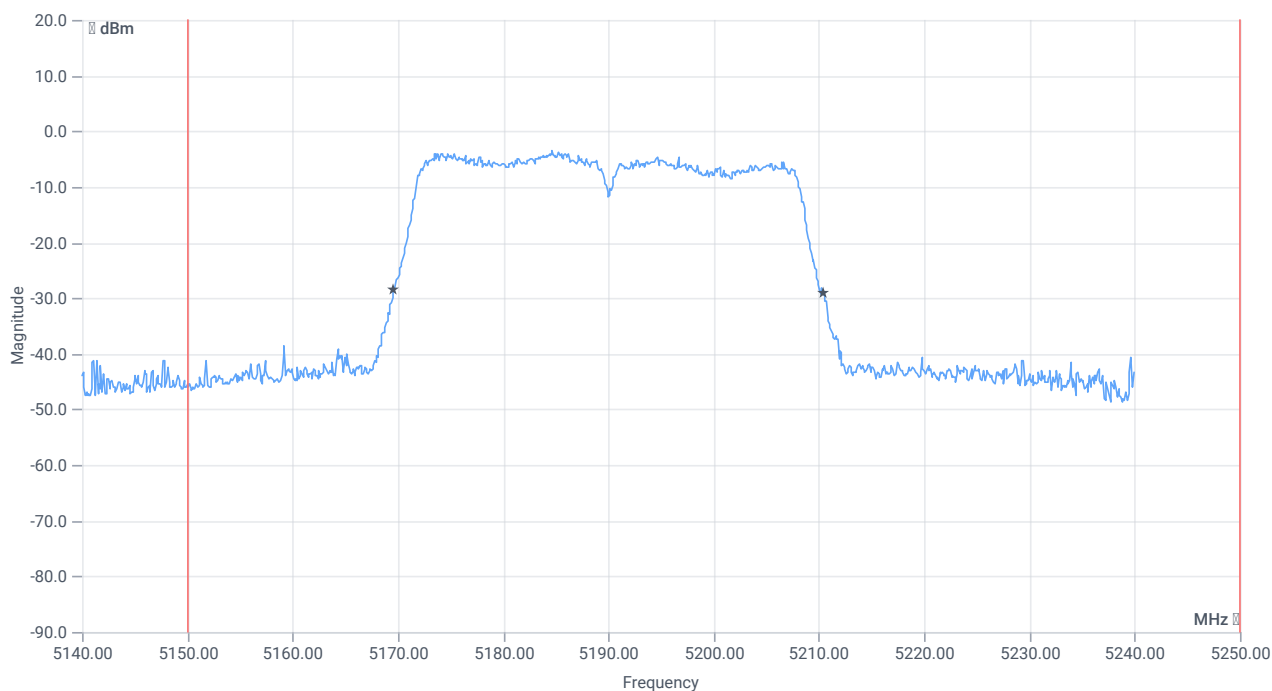

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	40.8	MHz	INFO
T1 26dB	5150.000000	---	5169.6000	MHz	PASS
T2 26dB	---	5250.000000	5210.4000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-1

References

TC start	12.06.2024 08:53:58
Ambit temp [°C] humidity [rel%]	23.5 35
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT40 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5230
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5230 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	0.10	dBm	INFO
Ref. frequency	---	---	5243.990	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.10 12.55 15
Start [MHz] Stop [MHz]	5180.000 5280.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

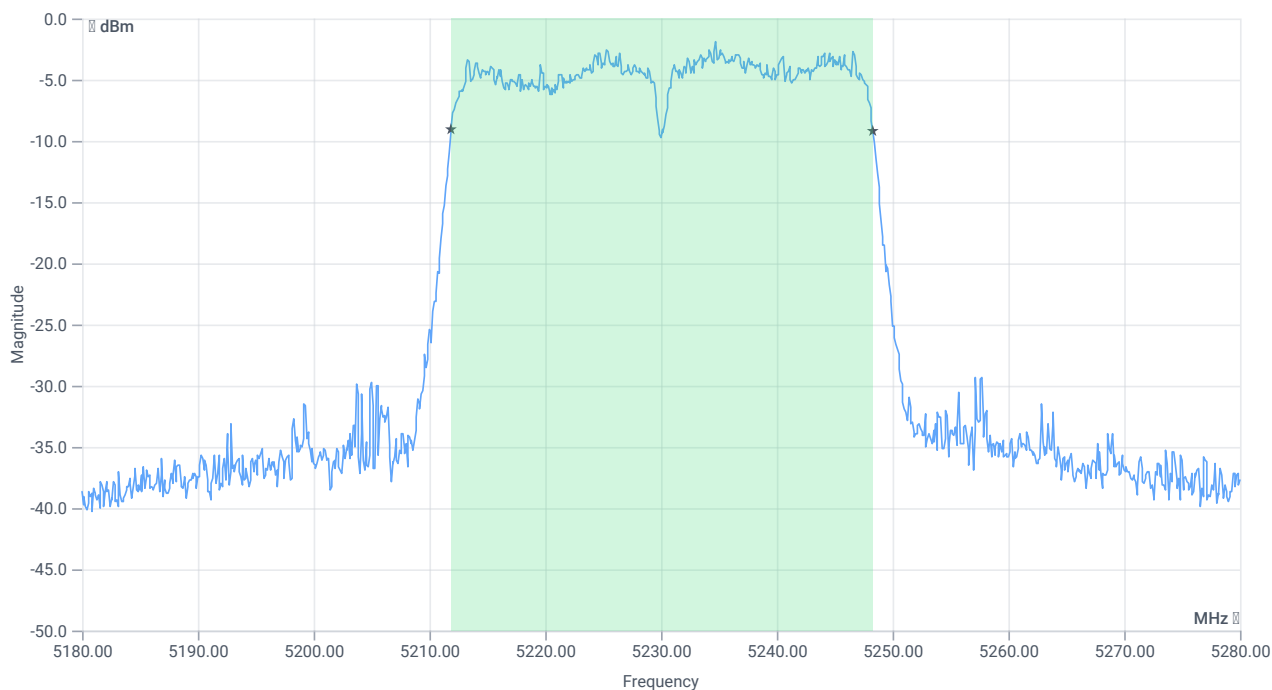


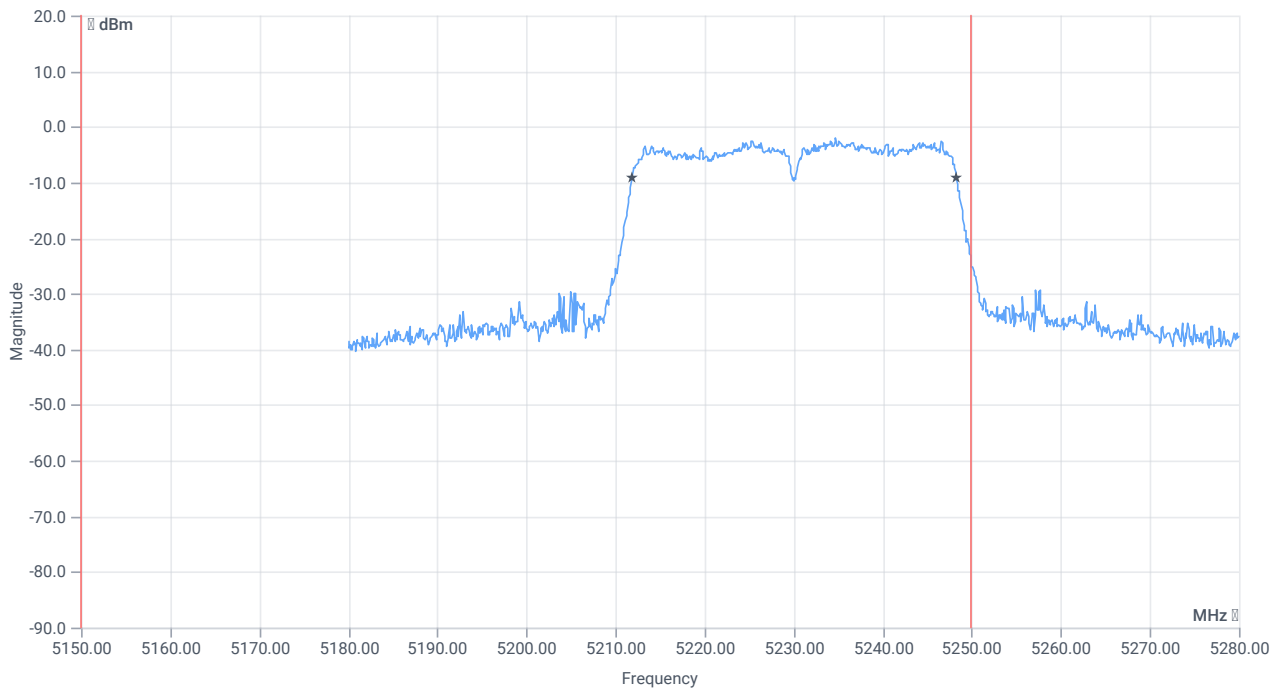


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36.364	MHz	INFO
T1 99%	5150.000000	---	5211.9181	MHz	PASS
T2 99%	---	5250.000000	5248.2817	MHz	PASS

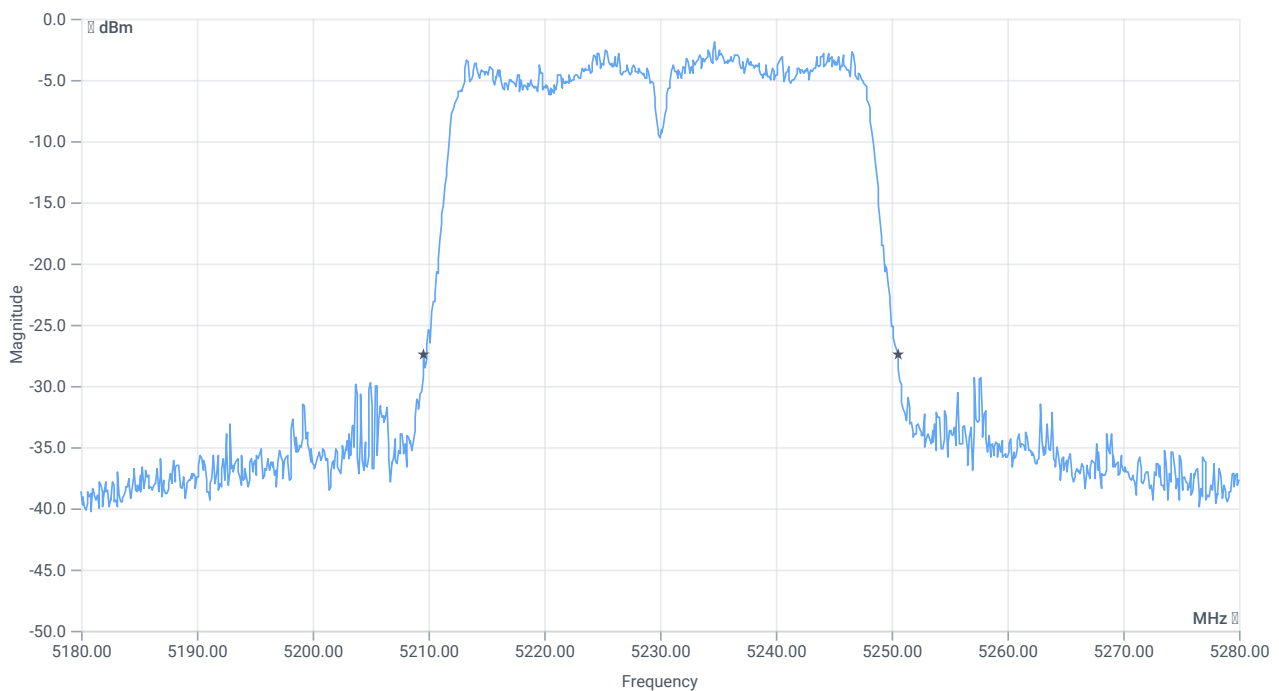

BW 26dB

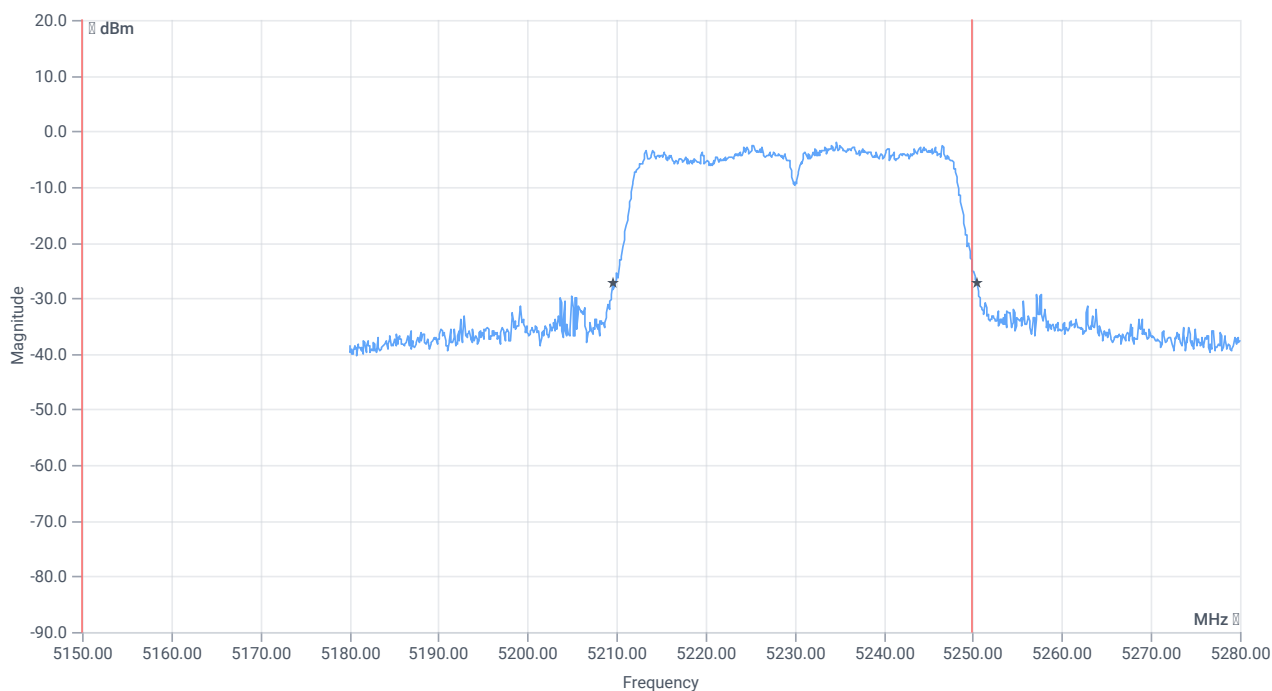

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	40.9	MHz	INFO
T1 26dB	5150.000000	---	5209.6000	MHz	PASS
T2 26dB	---	5250.000000	5250.5000	MHz	DFS required

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-1

References

TC start	12.06.2024 12:13:15
Ambit temp [°C] humidity [rel%]	24.9 30
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT40 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5230
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5190 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-0.68	dBm	INFO
Ref. frequency	---	---	5205.980	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.32 12.51 10
Start [MHz] Stop [MHz]	5140.000 5240.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

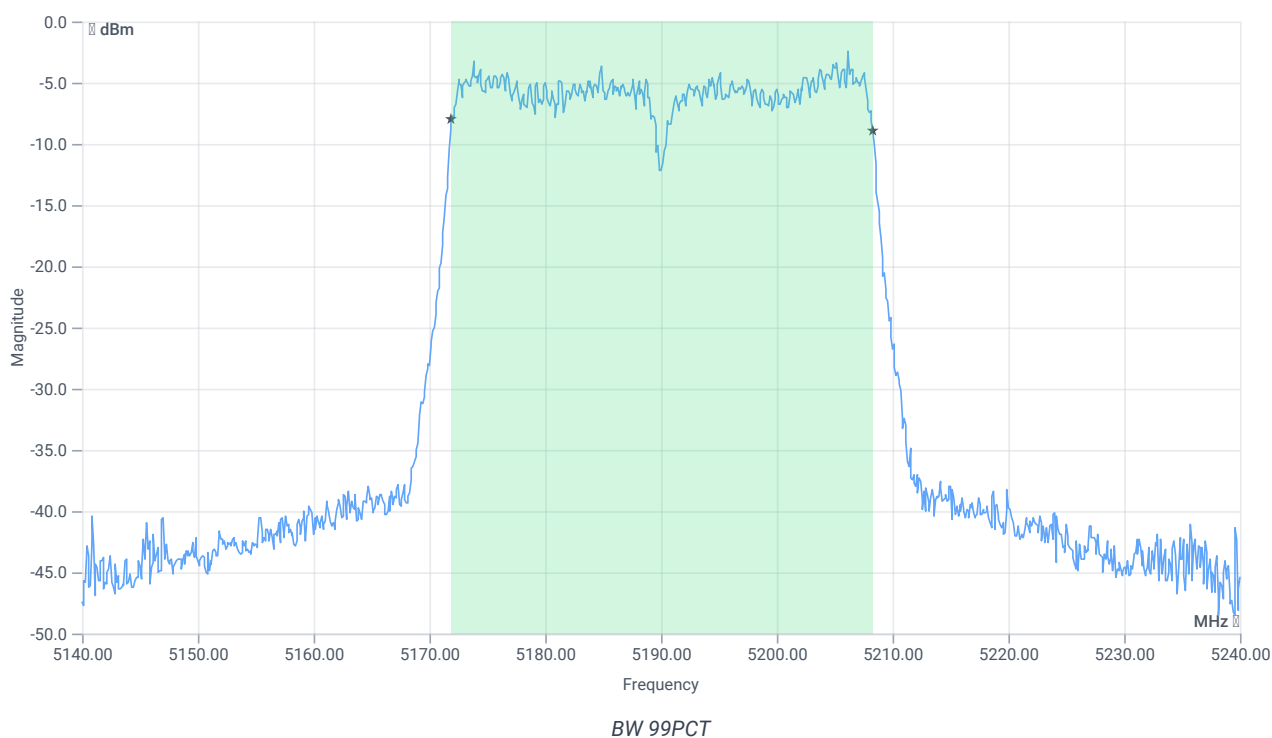


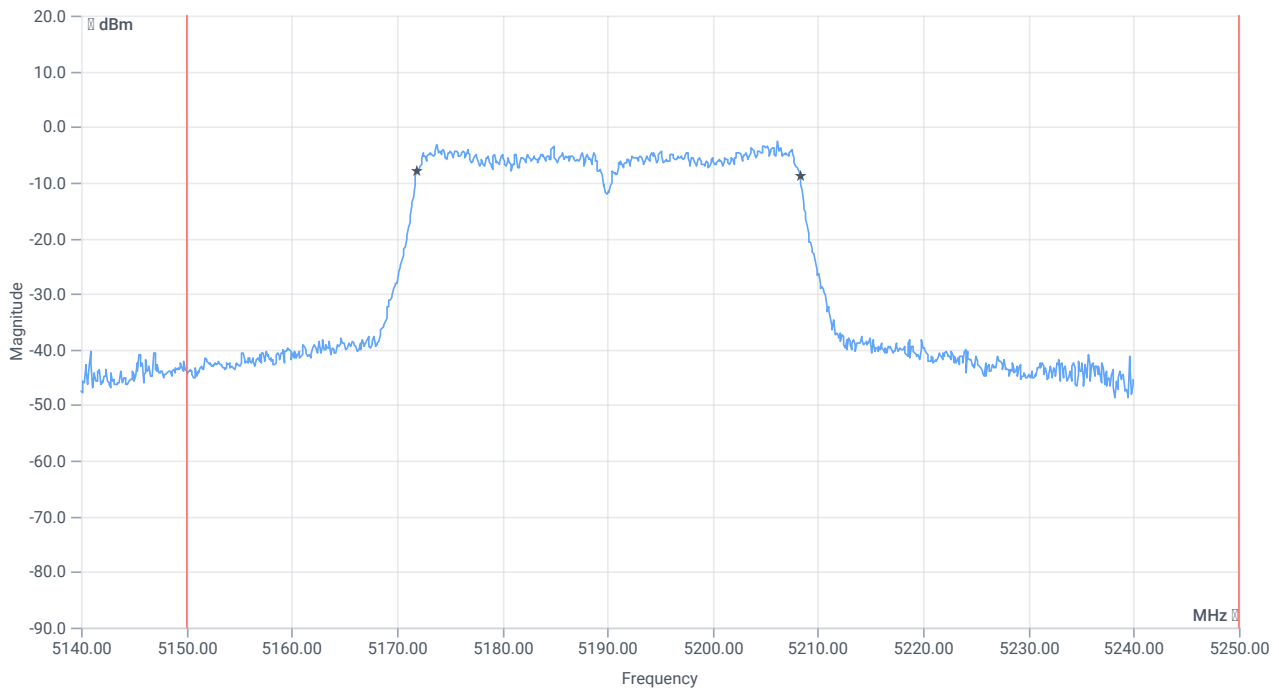


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36.364	MHz	INFO
T1 99%	5150.000000	---	5171.9181	MHz	PASS
T2 99%	---	5250.000000	5208.2817	MHz	PASS

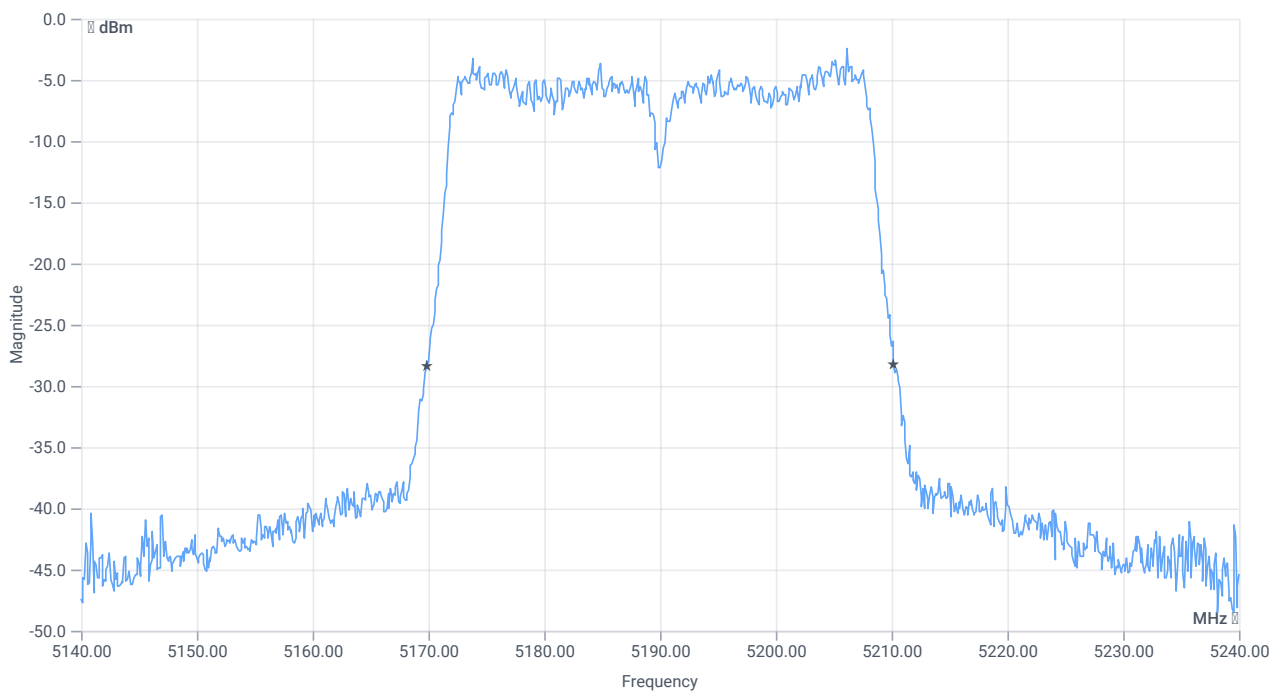

BW 26dB

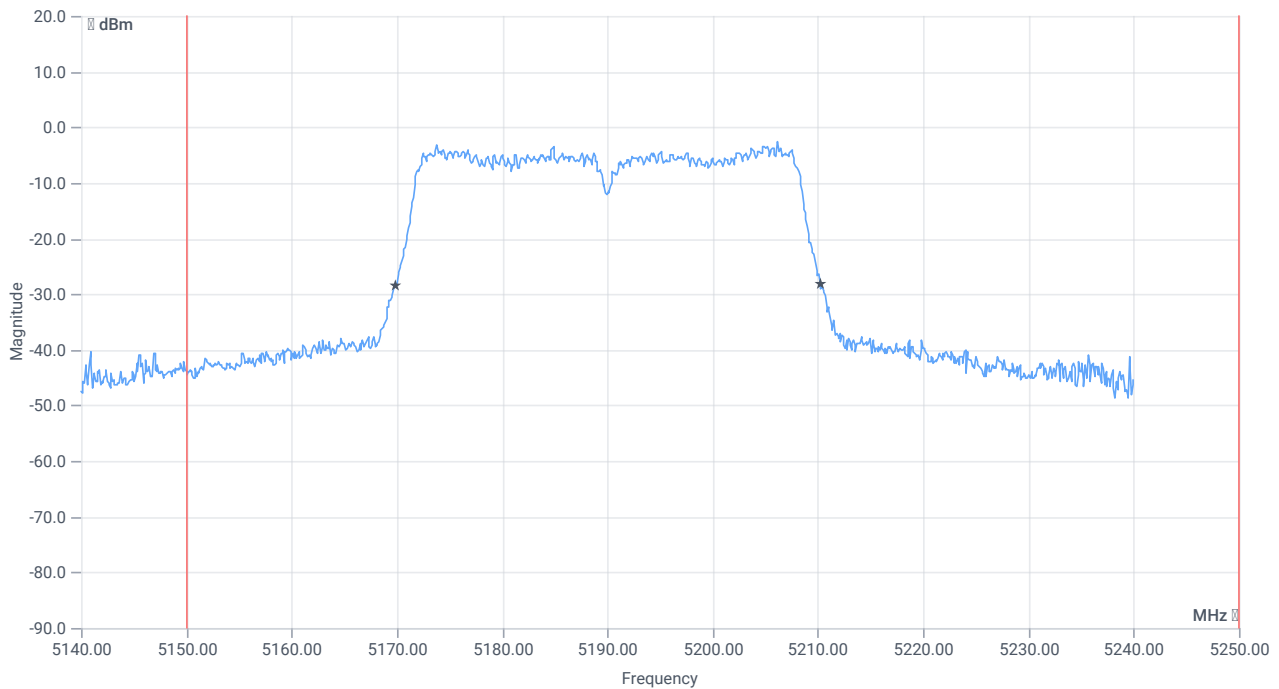

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	40.4	MHz	INFO
T1 26dB	5150.000000	---	5169.8000	MHz	PASS
T2 26dB	---	5250.000000	5210.2000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-1

References

TC start	12.06.2024 12:33:48
Ambit temp [°C] humidity [rel%]	25.0 30
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT40 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5230
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5230 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	0.28	dBm	INFO
Ref. frequency	---	---	5235.990	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.28 12.33 15
Start [MHz] Stop [MHz]	5180.000 5280.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

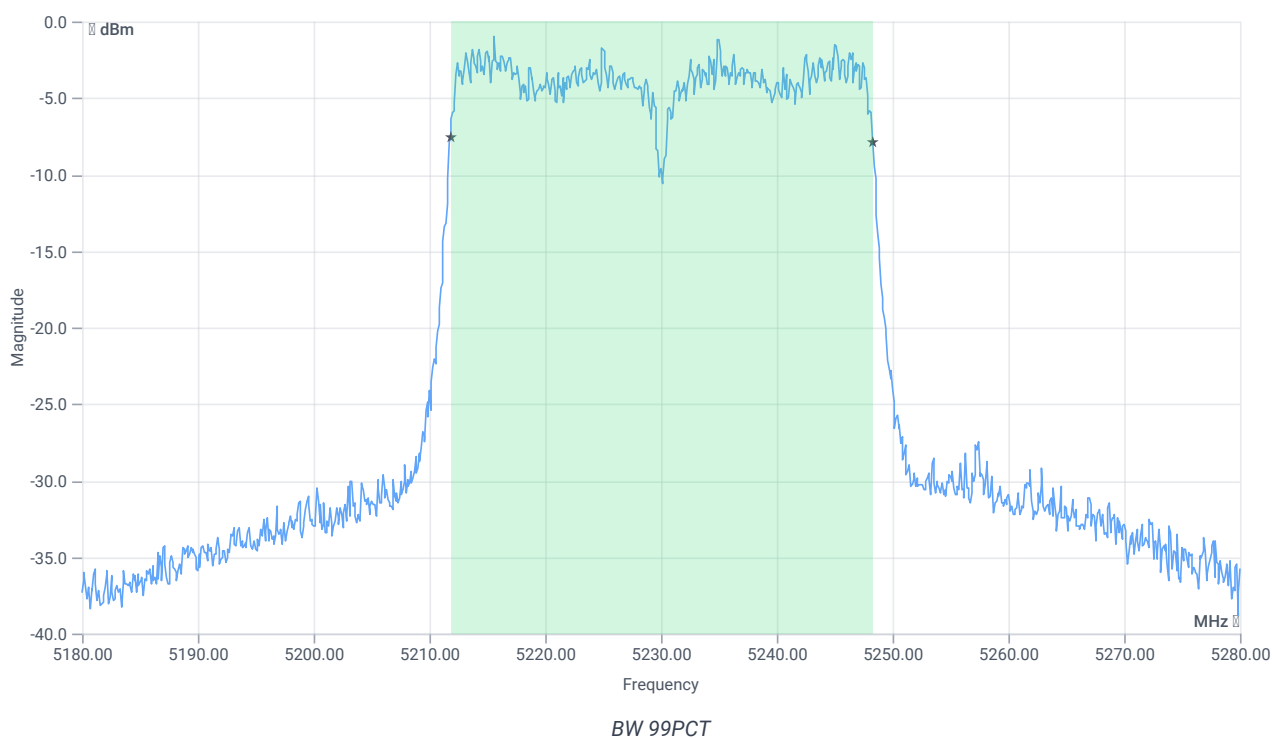


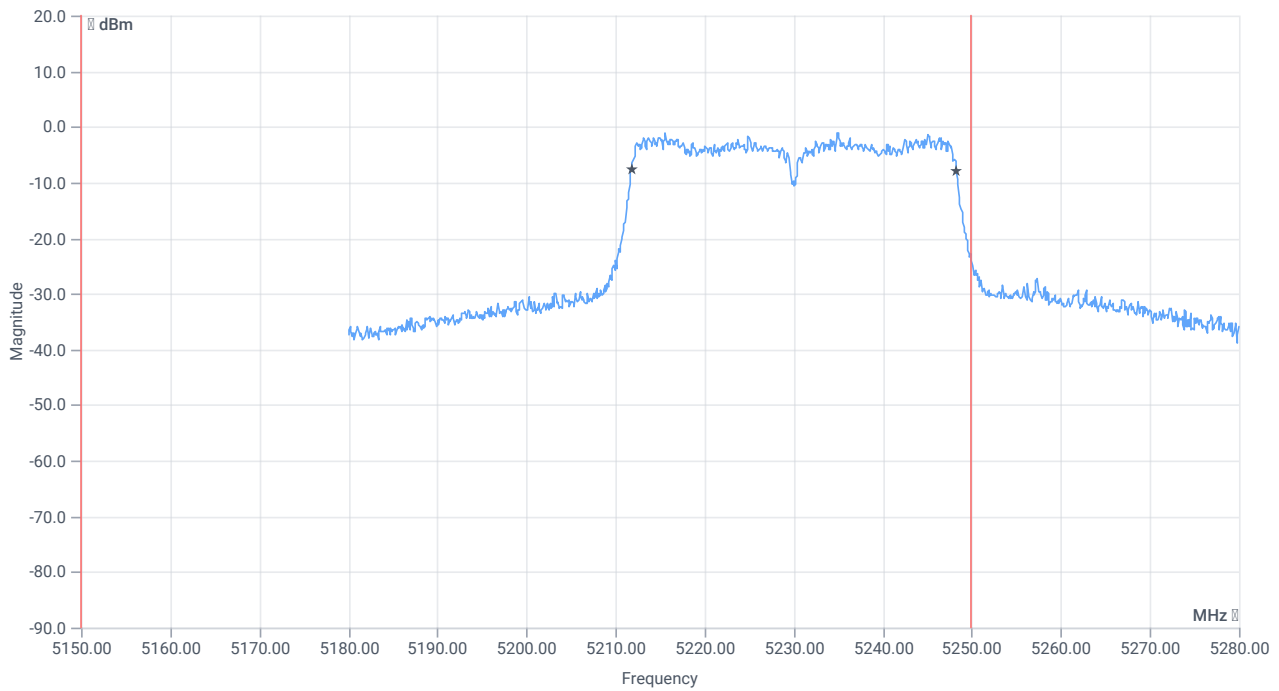


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36.464	MHz	INFO
T1 99%	5150.000000	---	5211.8182	MHz	PASS
T2 99%	---	5250.000000	5248.2817	MHz	PASS

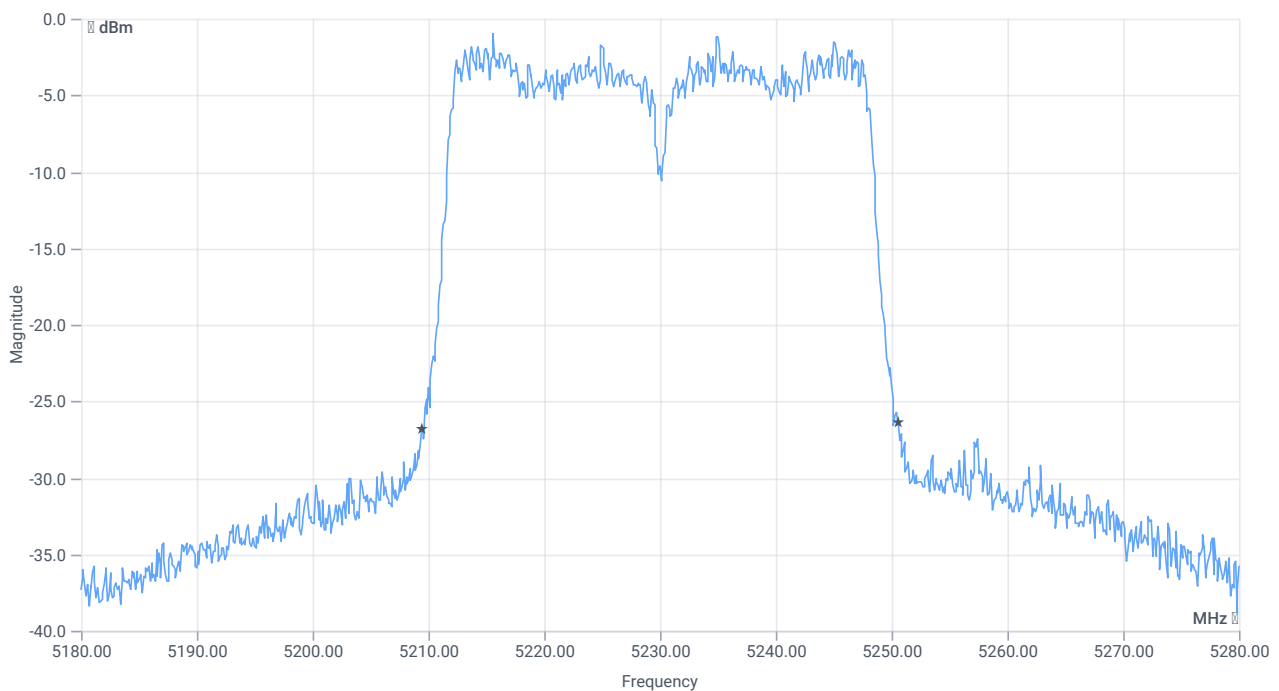

BW 26dB

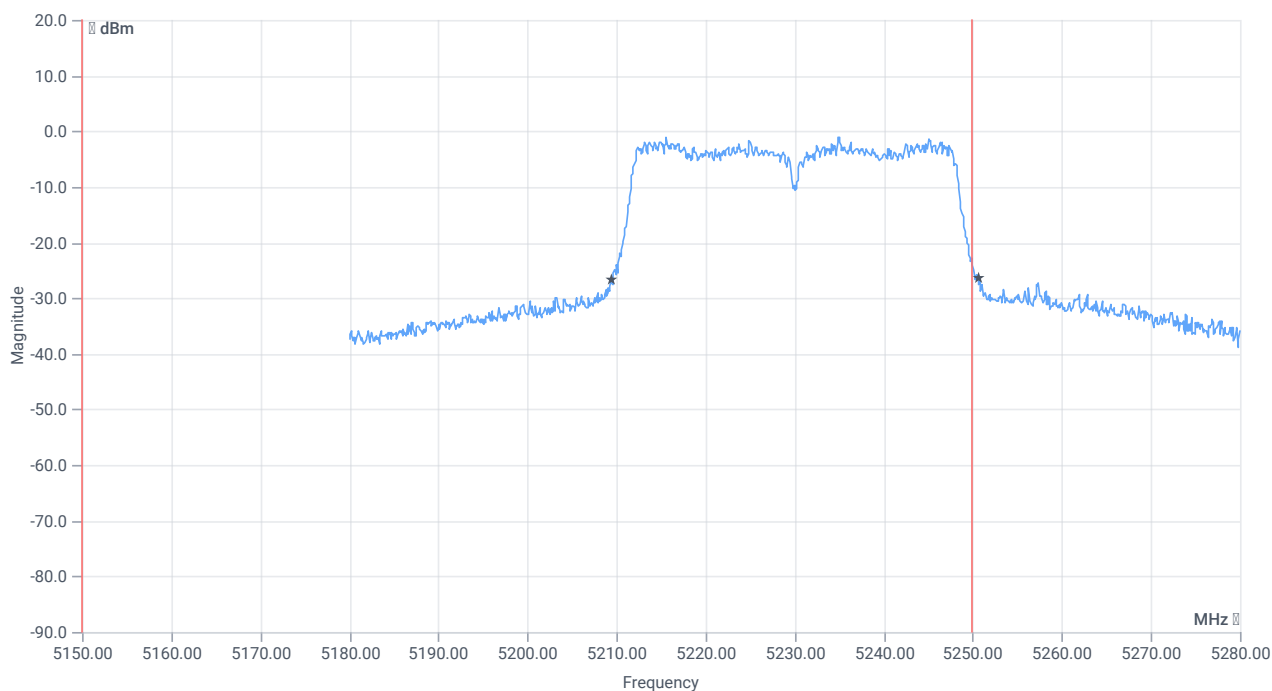

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	41.2	MHz	INFO
T1 26dB	5150.000000	---	5209.4000	MHz	PASS
T2 26dB	---	5250.000000	5250.6000	MHz	DFS required

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-1

References

TC start	12.06.2024 09:16:31
Ambit temp [°C] humidity [rel%]	23.7 35
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT80 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5210
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5210 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-5.92	dBm	INFO
Ref. frequency	---	---	5238.970	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.08 12.63 5
Start [MHz] Stop [MHz]	5110.000 5310.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

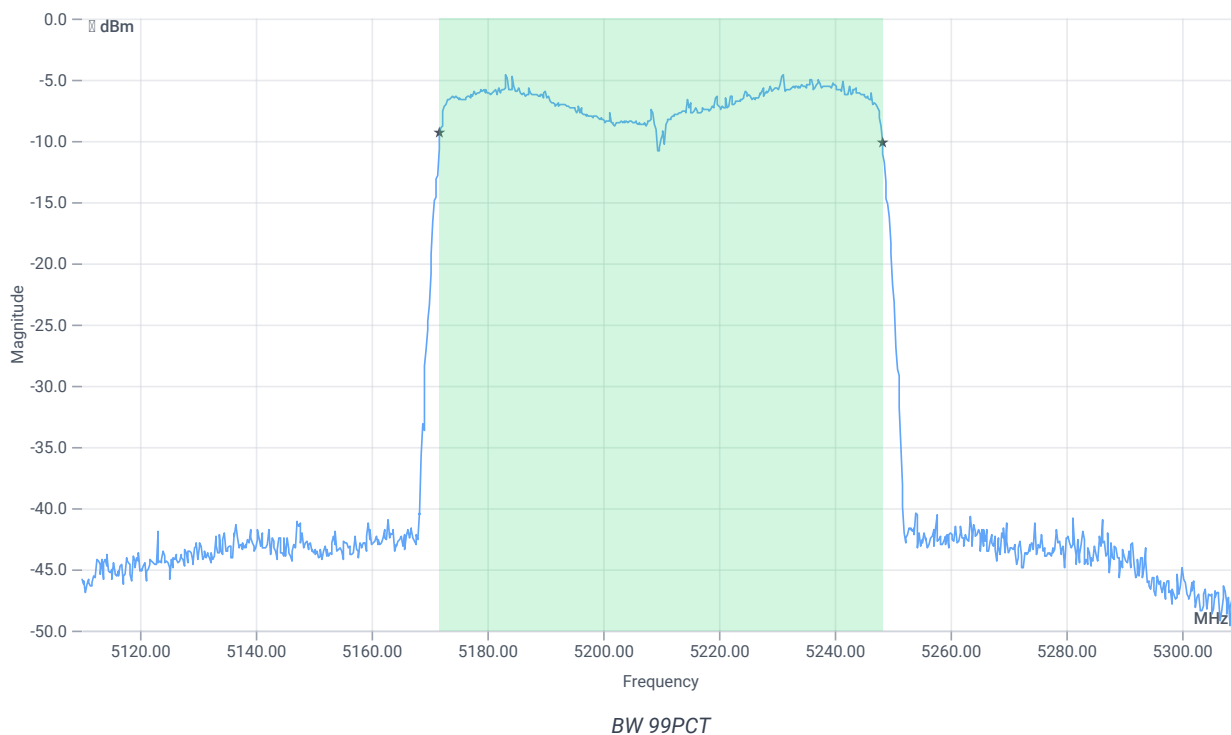


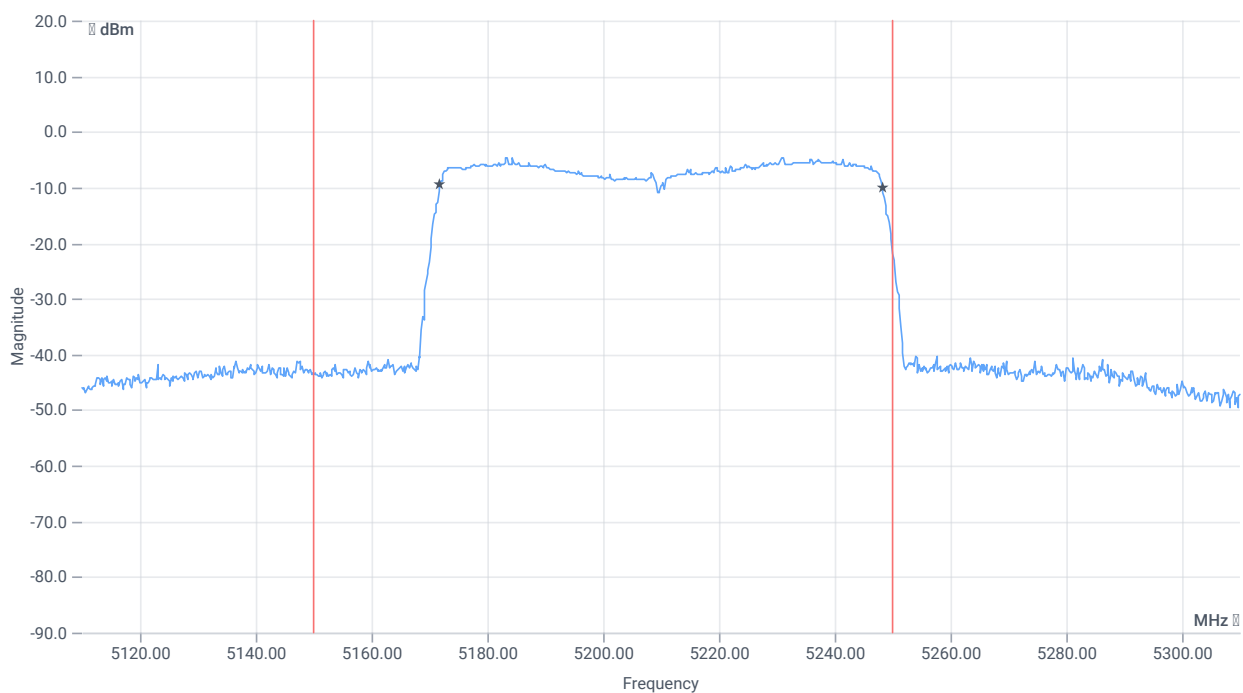


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	76.324	MHz	INFO
T1 99%	5150.000000	---	5171.8382	MHz	PASS
T2 99%	---	5250.000000	5248.1618	MHz	PASS

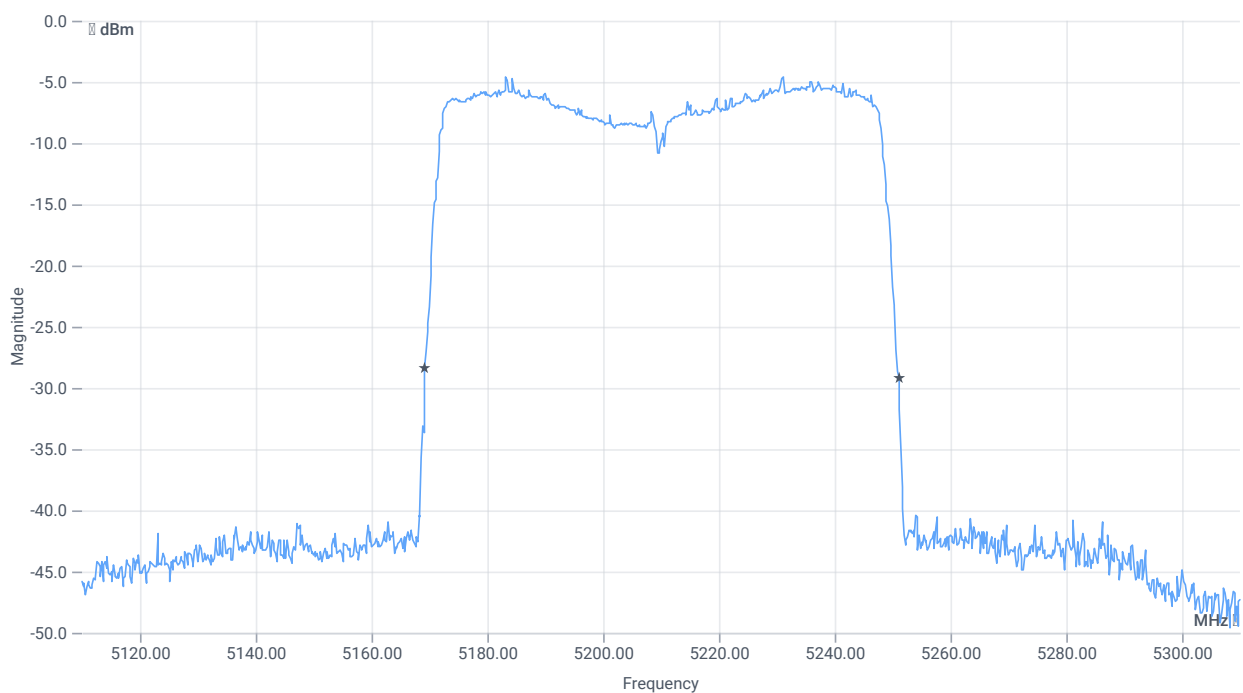

BW 26dB

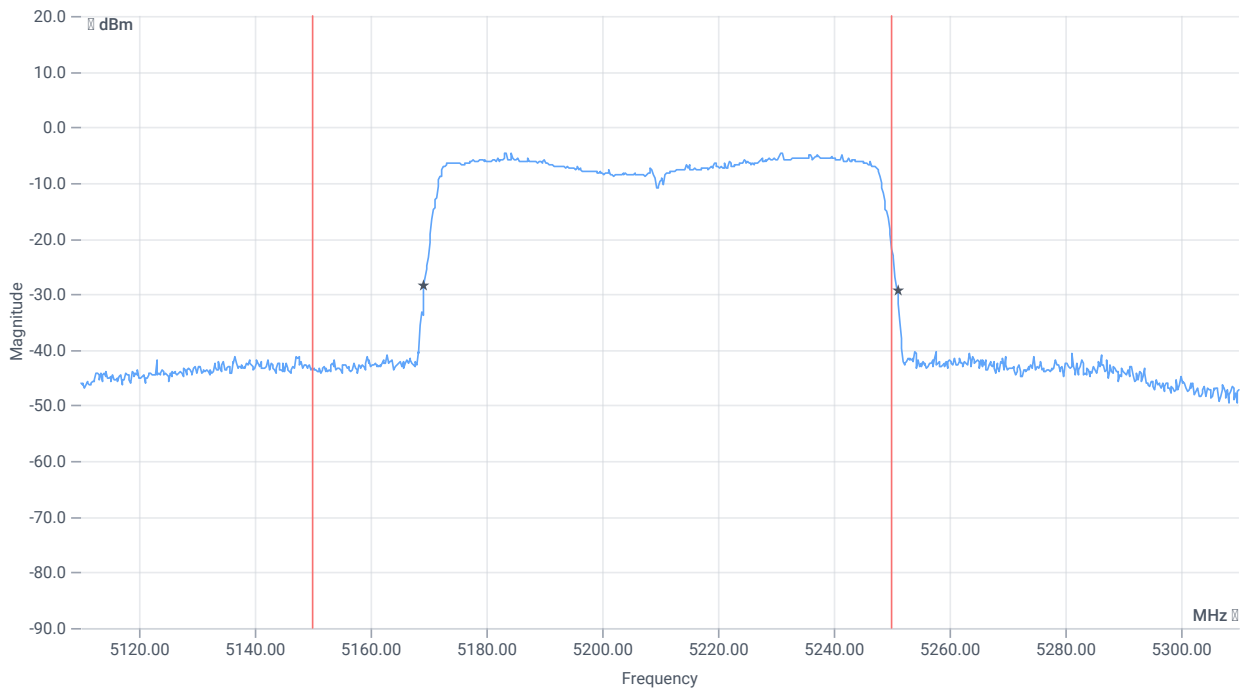

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	81.8	MHz	INFO
T1 26dB	5150.000000	---	5169.2000	MHz	PASS
T2 26dB	---	5250.000000	5251.0000	MHz	DFS required

Verdict

PASS

FCC 15.407, ISSED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-1

References

TC start	12.06.2024 13:06:32
Ambit temp [°C] humidity [rel%]	25.2 29
System version	5.0.5.0
Standard Version	FCC 15.407, ISSED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISSED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT80 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5210
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5210 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-6.33	dBm	INFO
Ref. frequency	---	---	5241.770	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.67 12.42 5
Start [MHz] Stop [MHz]	5110.000 5310.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

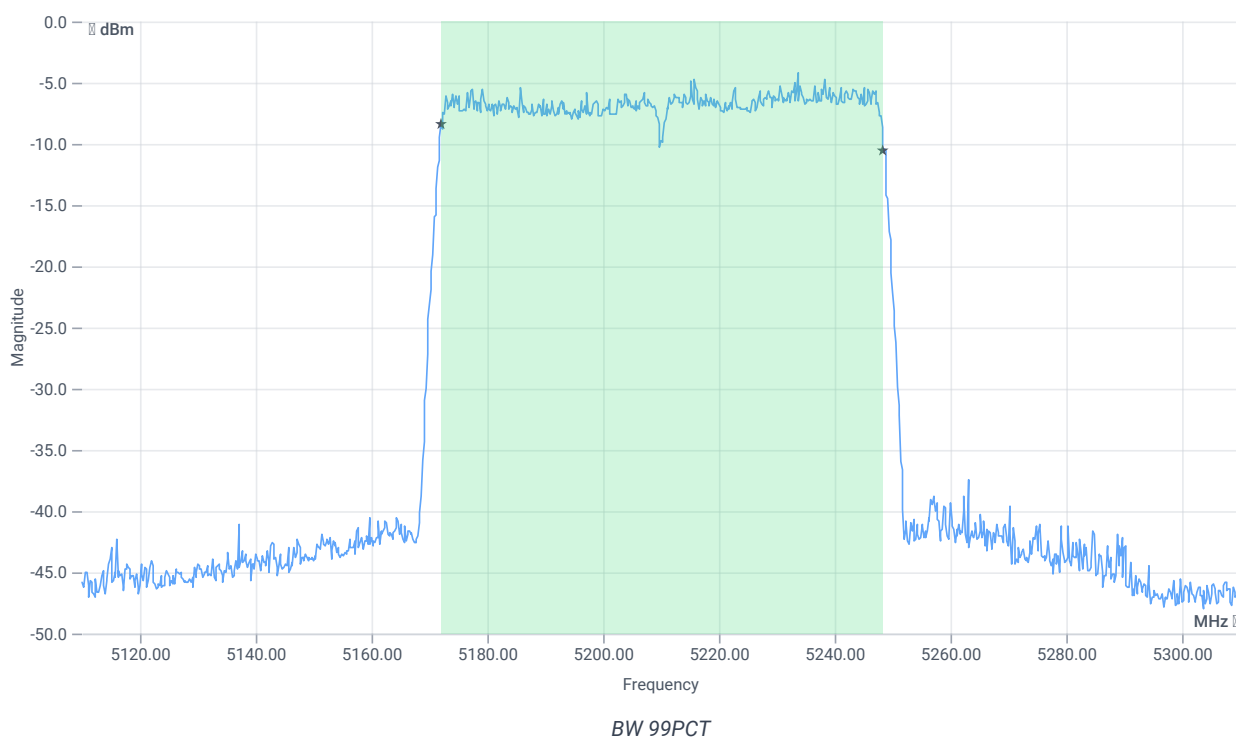


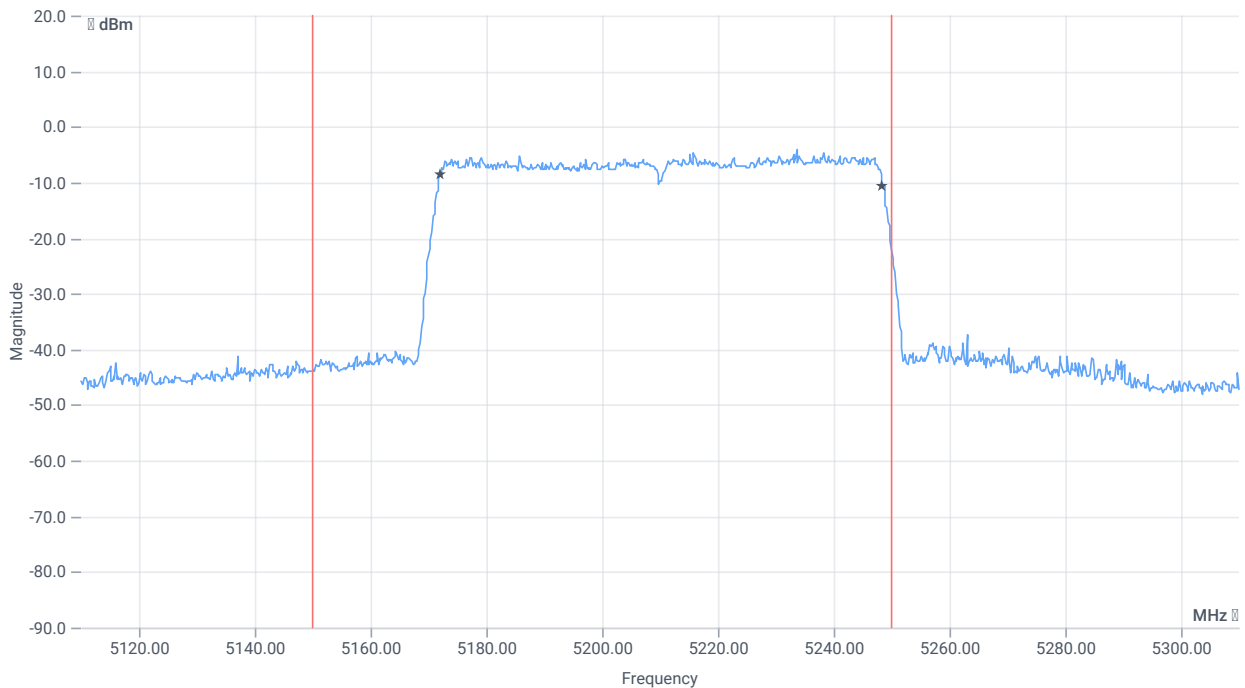

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	76.324	MHz	INFO
T1 99%	5150.000000	---	5172.0380	MHz	PASS
T2 99%	---	5250.000000	5248.3616	MHz	PASS

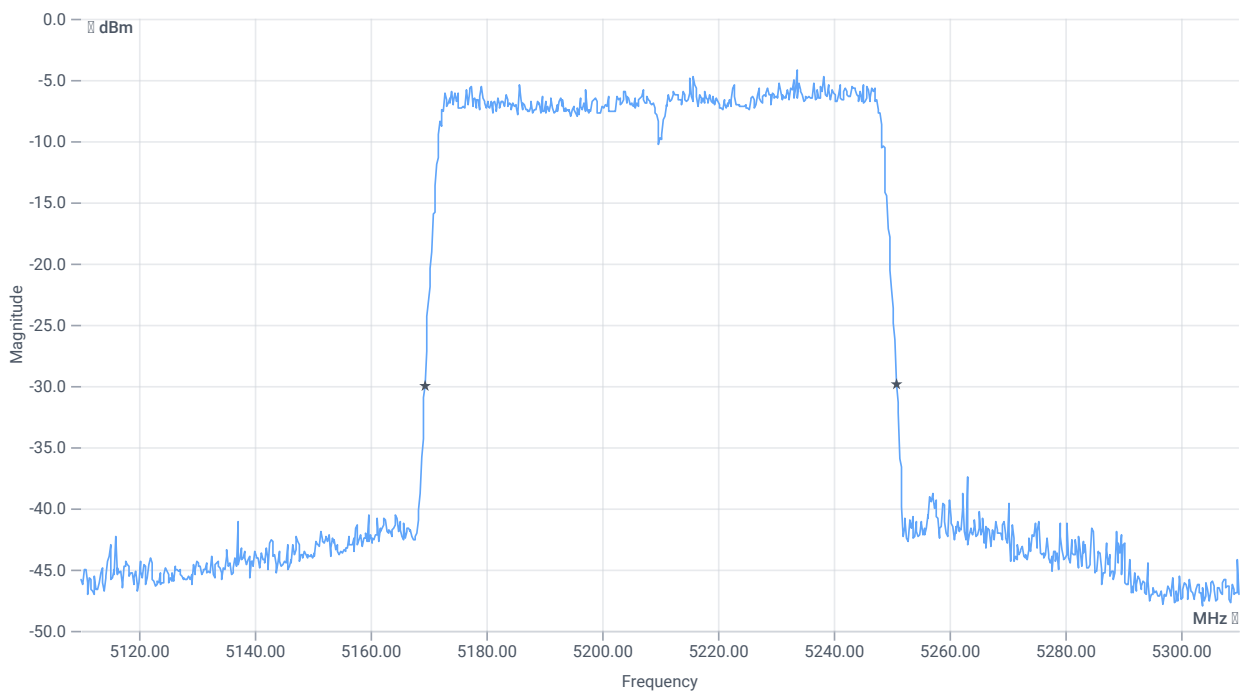

BW 26dB



BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	81.4	MHz	INFO
T1 26dB	5150.000000	---	5169.4000	MHz	PASS
T2 26dB	---	5250.000000	5250.8000	MHz	DFS required

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

References

TC start	11.06.2024 13:35:49
Ambit temp [°C] humidity [rel%]	24.8 31
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5180 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	1.08	dBm	INFO
Ref. frequency	---	---	5184.000	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

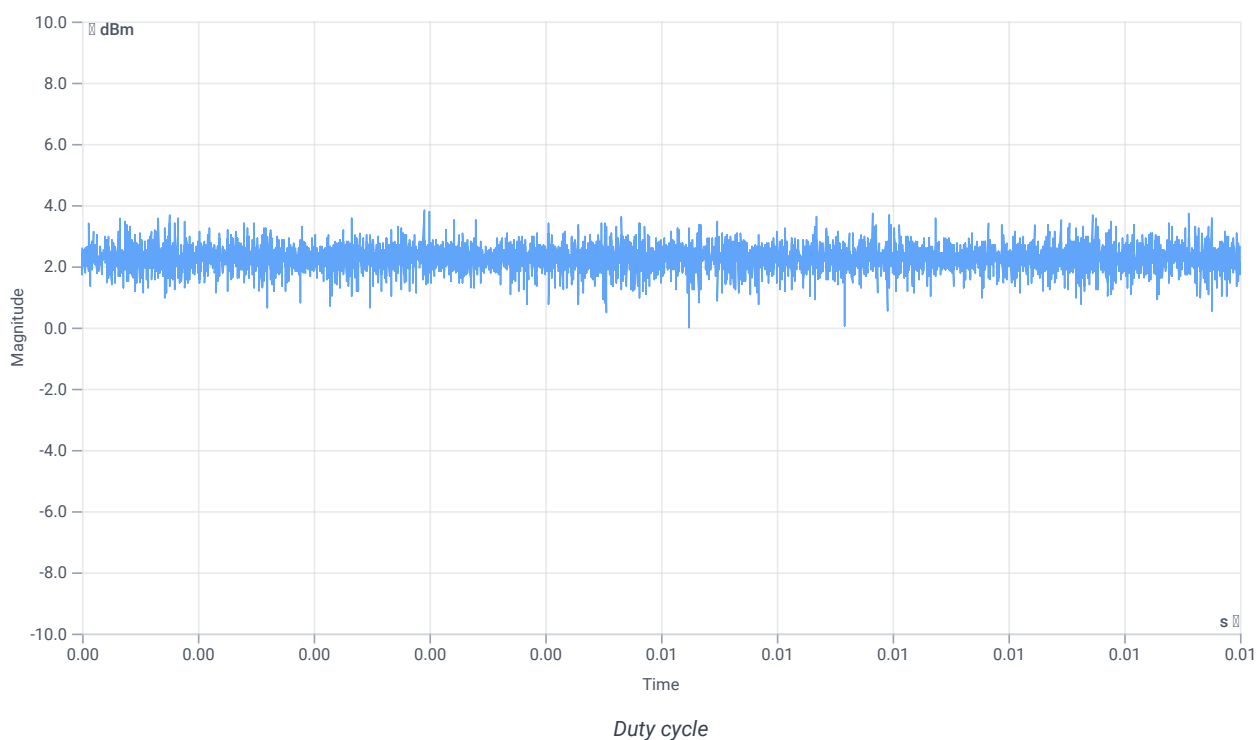

Evaluation bandwidth

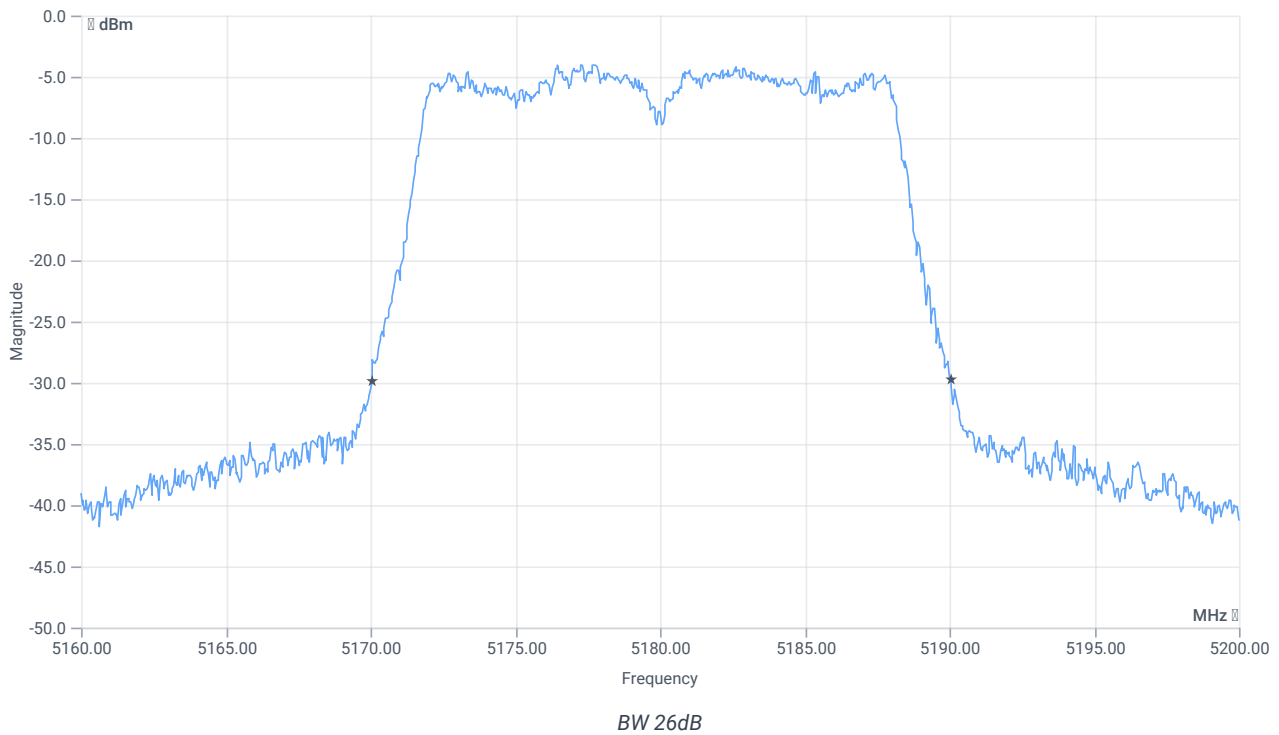


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20	MHz	INFO
T1 26dB	---	---	5170.0400	MHz	INFO
T2 26dB	---	---	5190.0400	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.08 12.69 15
Start [MHz] Stop [MHz]	5160.000 5200.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

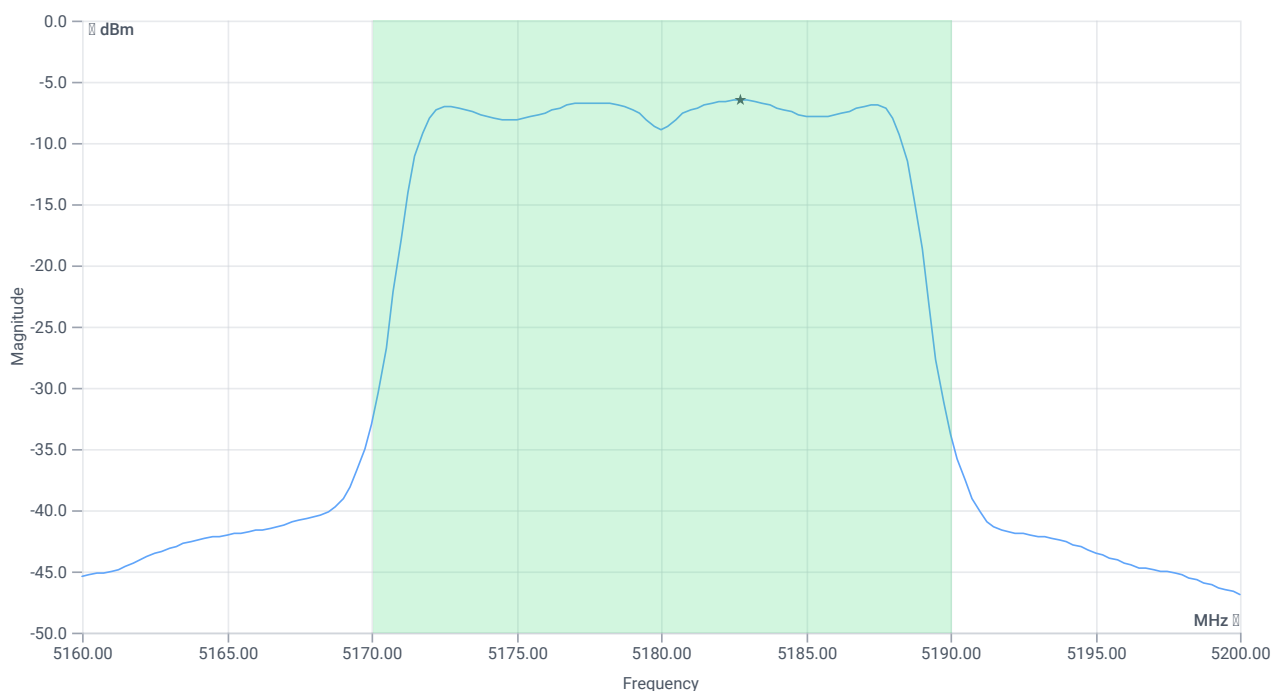

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	4.66	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	30	4.66	dBm	PASS
LIMIT: 11 dBm + 10 log 20					
Max output power DC corrected cond	---	24.01	4.66	dBm	na

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-6.47	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO
Power spectral density DC corrected cond	---	17	-6.47	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

References

TC start	11.06.2024 13:52:58
Ambit temp [°C] humidity [rel%]	24.9 31
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5200 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.39	dBm	INFO
Ref. frequency	---	---	5198.000	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

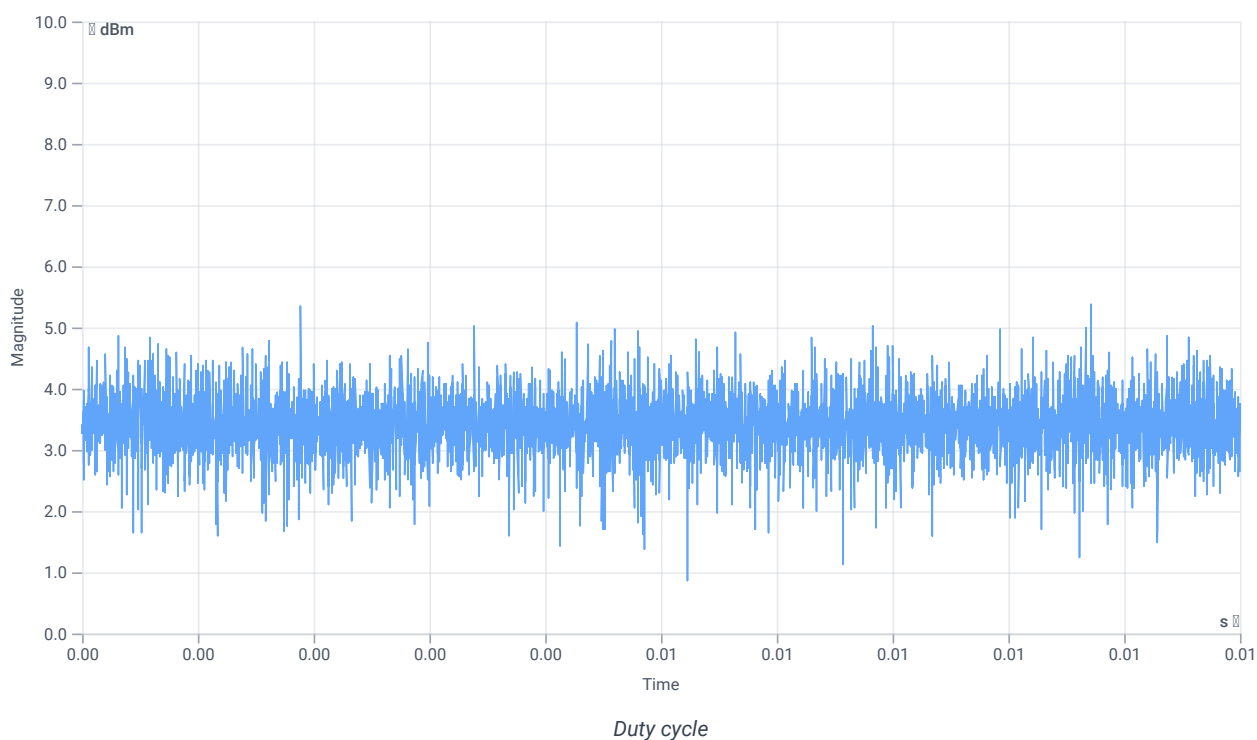

Evaluation bandwidth

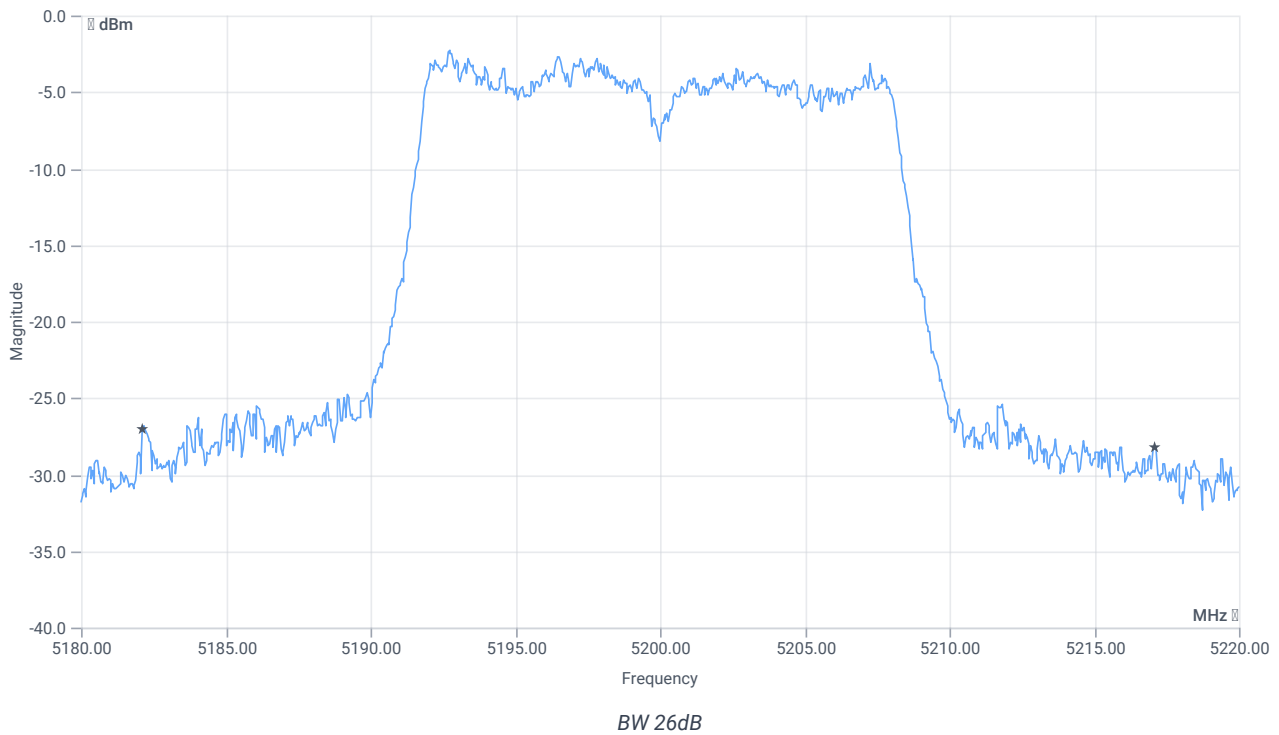


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	34.96	MHz	INFO
T1 26dB	---	---	5182.1200	MHz	INFO
T2 26dB	---	---	5217.0800	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.39 12.67 20
Start [MHz] Stop [MHz]	5180.000 5220.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

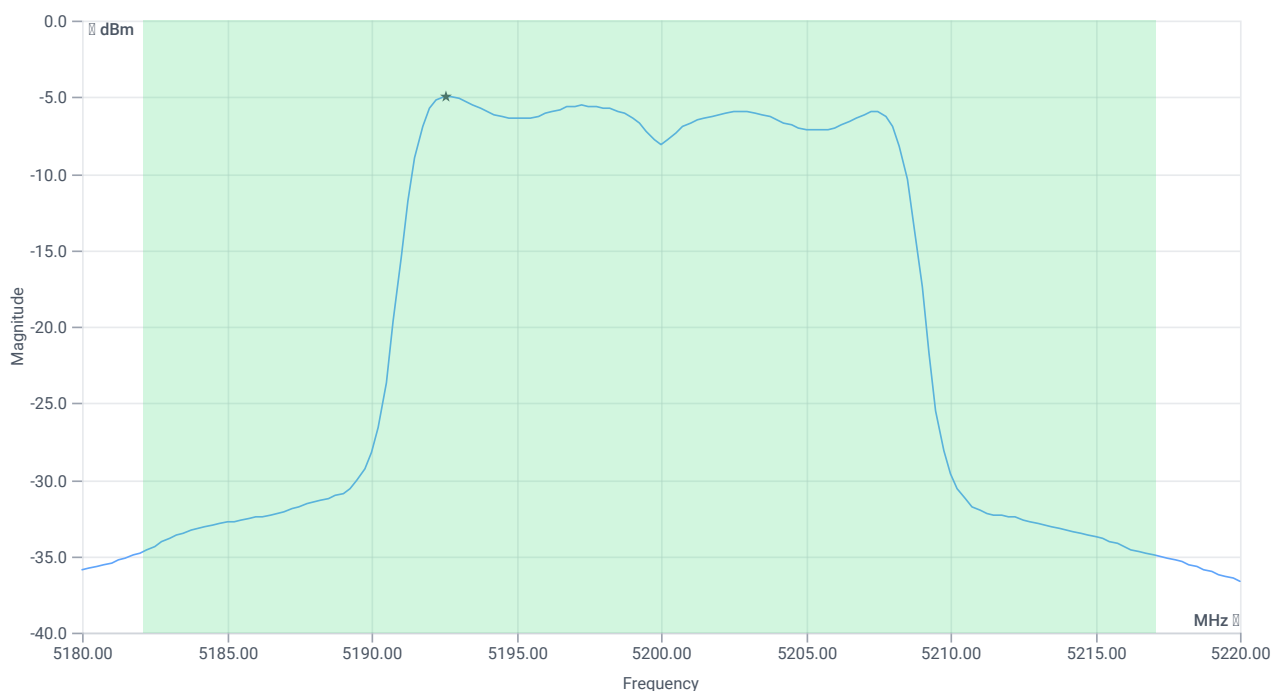

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	5.8	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	30	5.8	dBm	PASS
LIMIT: 11 dBm + 10 log 34.96					
Max output power DC corrected cond	---	26.44	5.8	dBm	na

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-4.95	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO
Power spectral density DC corrected cond	---	17	-4.95	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

References

TC start	25.06.2024 11:51:01
Ambit temp [°C] humidity [rel%]	22.4 57
System version	5.0.7.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5240 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.81	dBm	INFO
Ref. frequency	---	---	5237.400	MHz	INFO

Evaluation max. duty cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation bandwidth

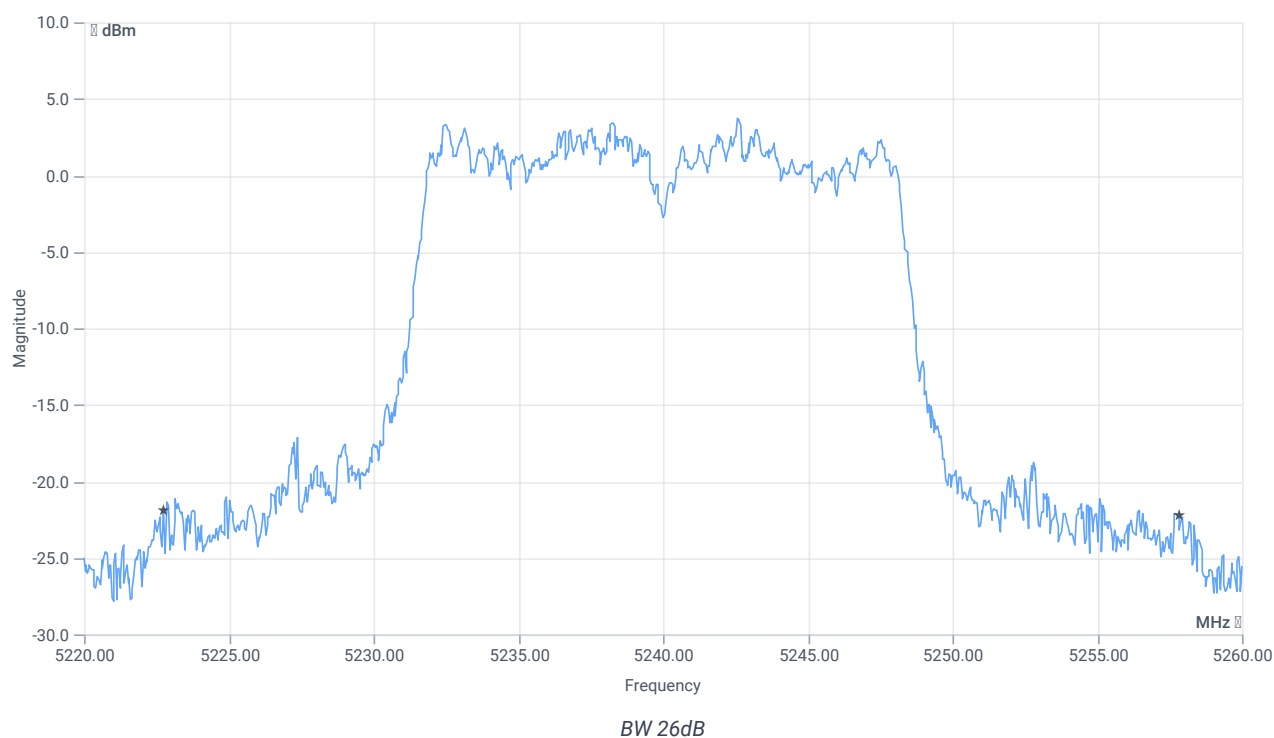


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	35.08	MHz	INFO
T1 26dB	---	---	5222.7200	MHz	INFO
T2 26dB	---	---	5257.8000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.81 12.51 25
Start [MHz] Stop [MHz]	5220.000 5260.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

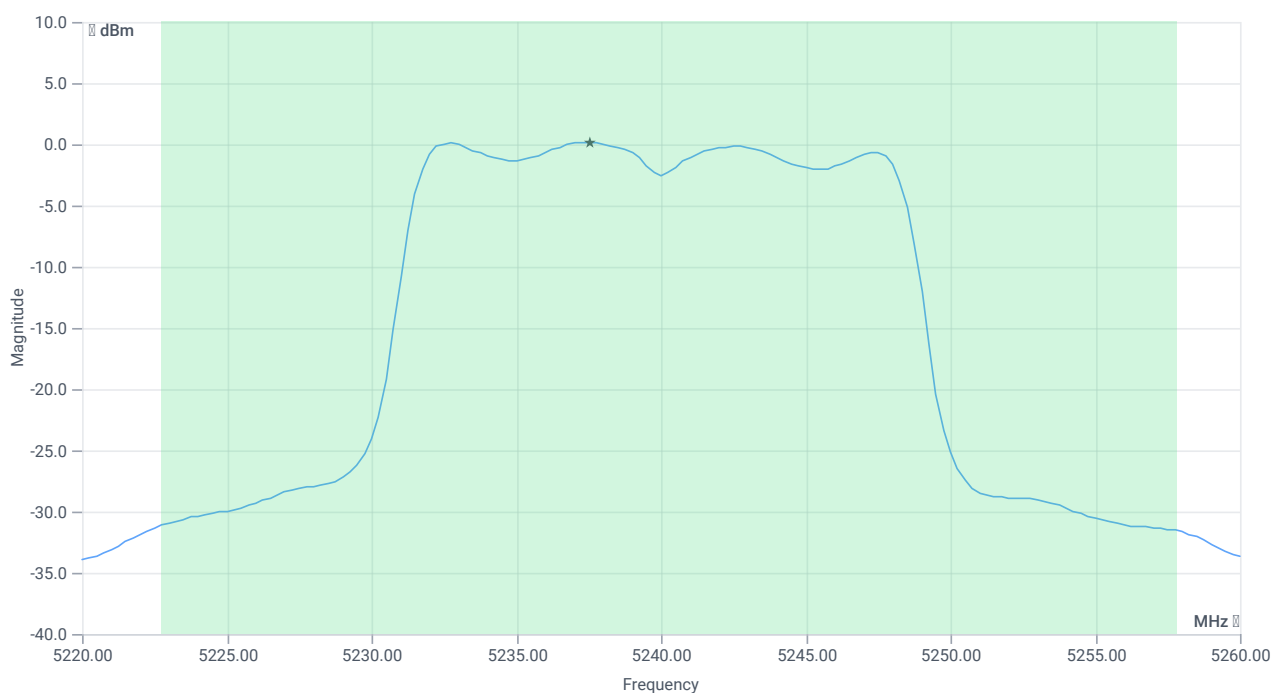

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	11.18	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	30	11.18	dBm	PASS
LIMIT: 11 dBm + 10 log 35.08					
Max output power DC corrected cond	---	26.45	11.18	dBm	na

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	0.16	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO
Power spectral density DC corrected cond	---	17	0.16	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

References

TC start	12.06.2024 09:54:38
Ambit temp [°C] humidity [rel%]	24.1 34
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5180 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	0.71	dBm	INFO
Ref. frequency	---	---	5173.410	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

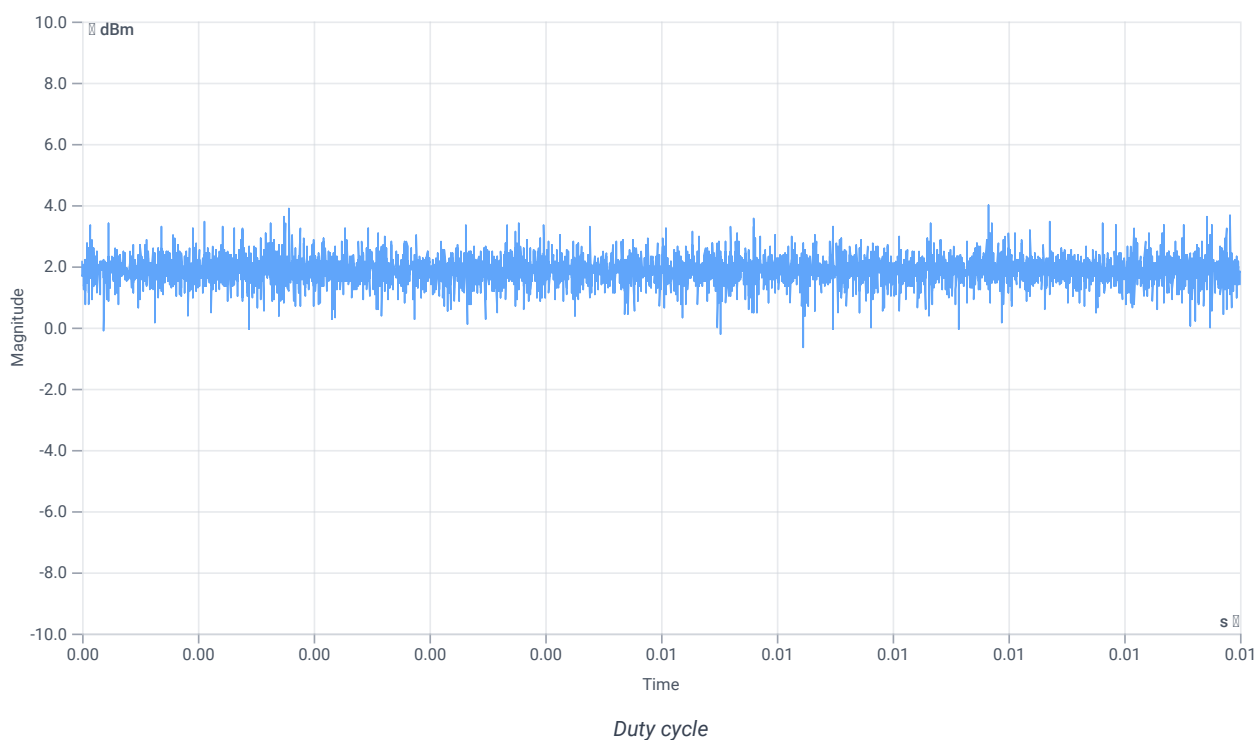

Evaluation bandwidth

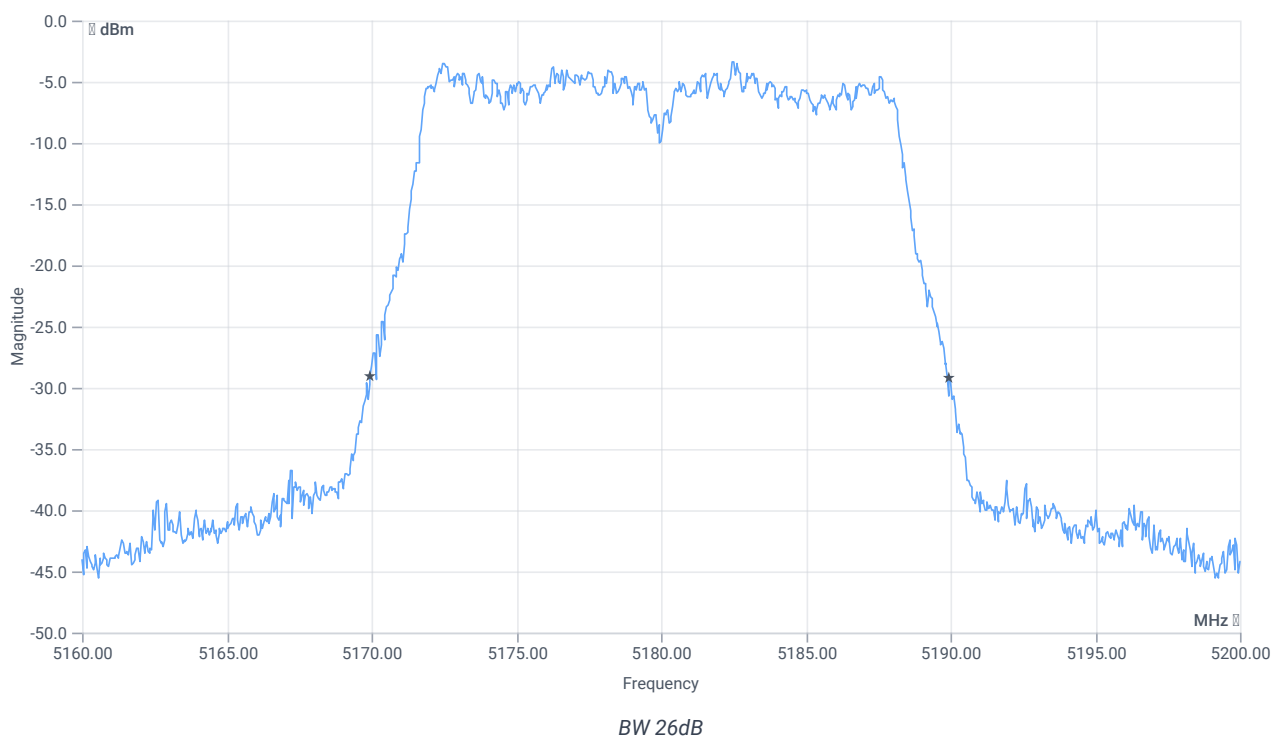


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20	MHz	INFO
T1 26dB	---	---	5169.9600	MHz	INFO
T2 26dB	---	---	5189.9600	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.71 12.55 15
Start [MHz] Stop [MHz]	5160.000 5200.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

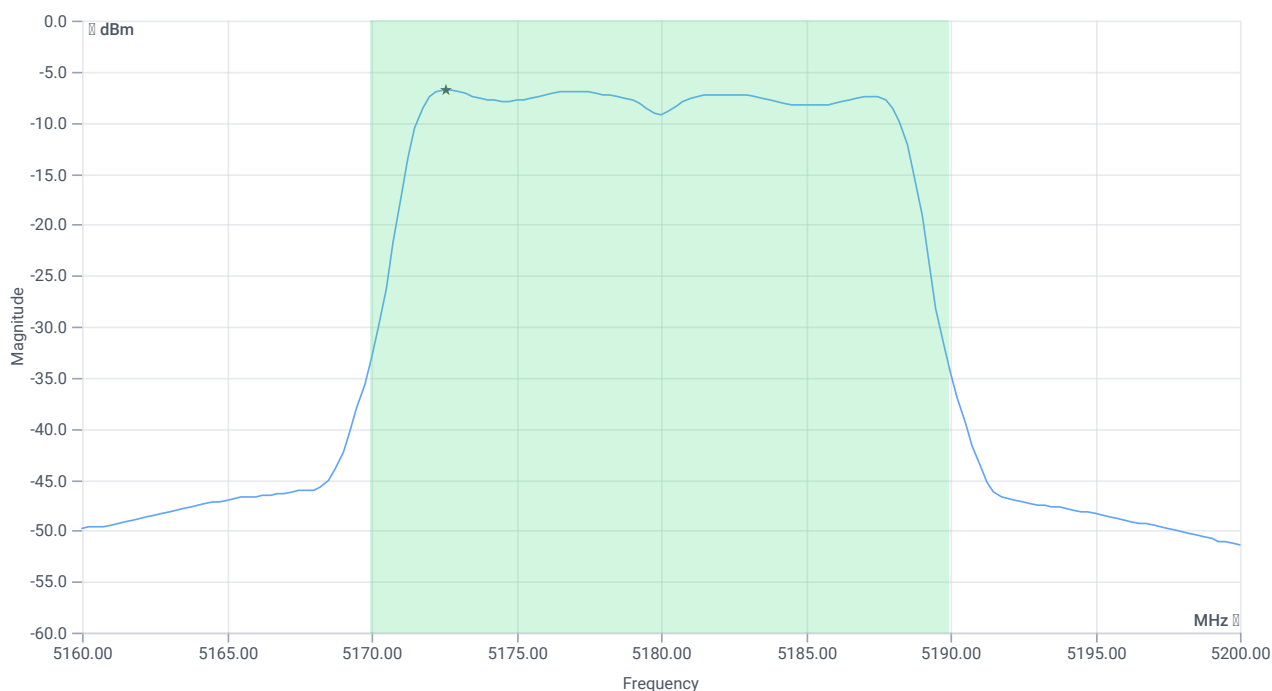

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	4.37	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	30	4.37	dBm	PASS
LIMIT: 11 dBm + 10 log 20					
Max output power DC corrected cond	---	24.01	4.37	dBm	na

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-6.74	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO
Power spectral density DC corrected cond	---	17	-6.74	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

References

TC start	12.06.2024 10:20:06
Ambit temp [°C] humidity [rel%]	24.2 34
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5200 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.96	dBm	INFO
Ref. frequency	---	---	5207.390	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

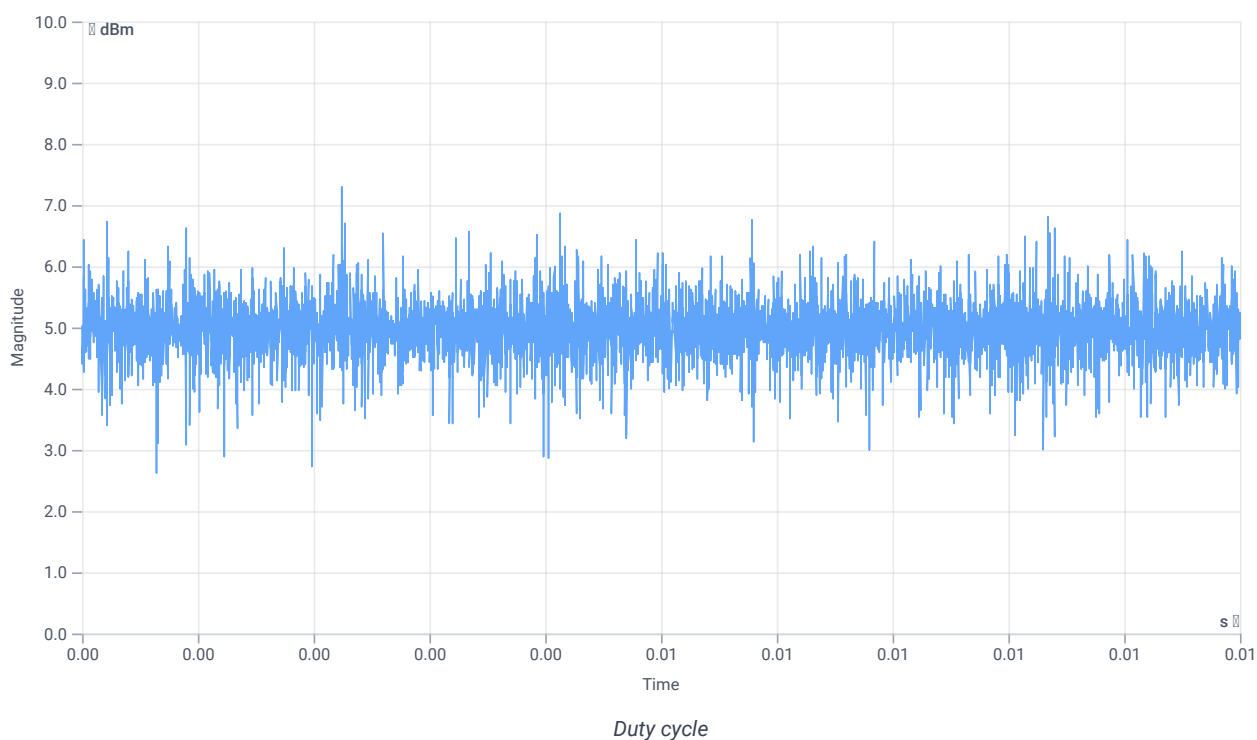

Evaluation bandwidth

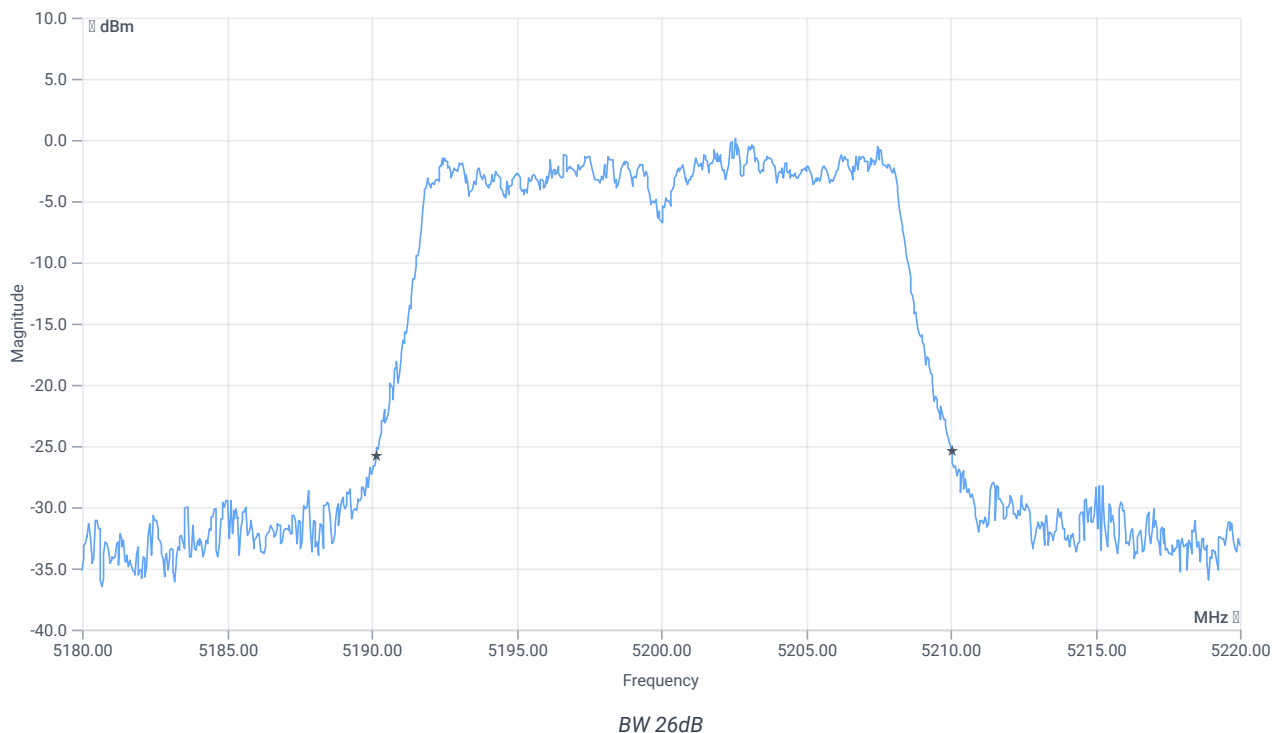


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	19.88	MHz	INFO
T1 26dB	---	---	5190.1600	MHz	INFO
T2 26dB	---	---	5210.0400	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.96 12.47 20
Start [MHz] Stop [MHz]	5180.000 5220.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

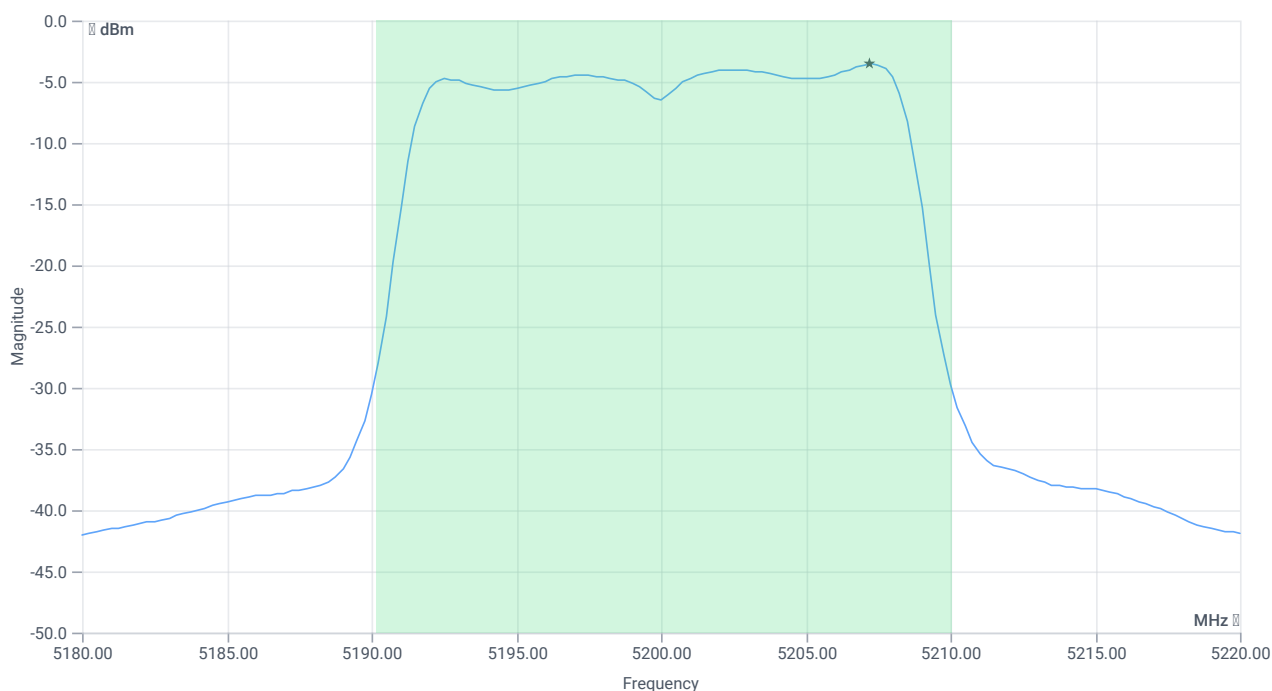

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	7.27	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	30	7.27	dBm	PASS
LIMIT: 11 dBm + 10 log 19.88					
Max output power DC corrected cond	---	23.98	7.27	dBm	na

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-3.58	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO
Power spectral density DC corrected cond	---	17	-3.58	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

References

TC start	25.06.2024 11:55:20
Ambit temp [°C] humidity [rel%]	22.8 56
System version	5.0.7.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5240 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.24	dBm	INFO
Ref. frequency	---	---	5243.800	MHz	INFO

Evaluation max. duty cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation bandwidth

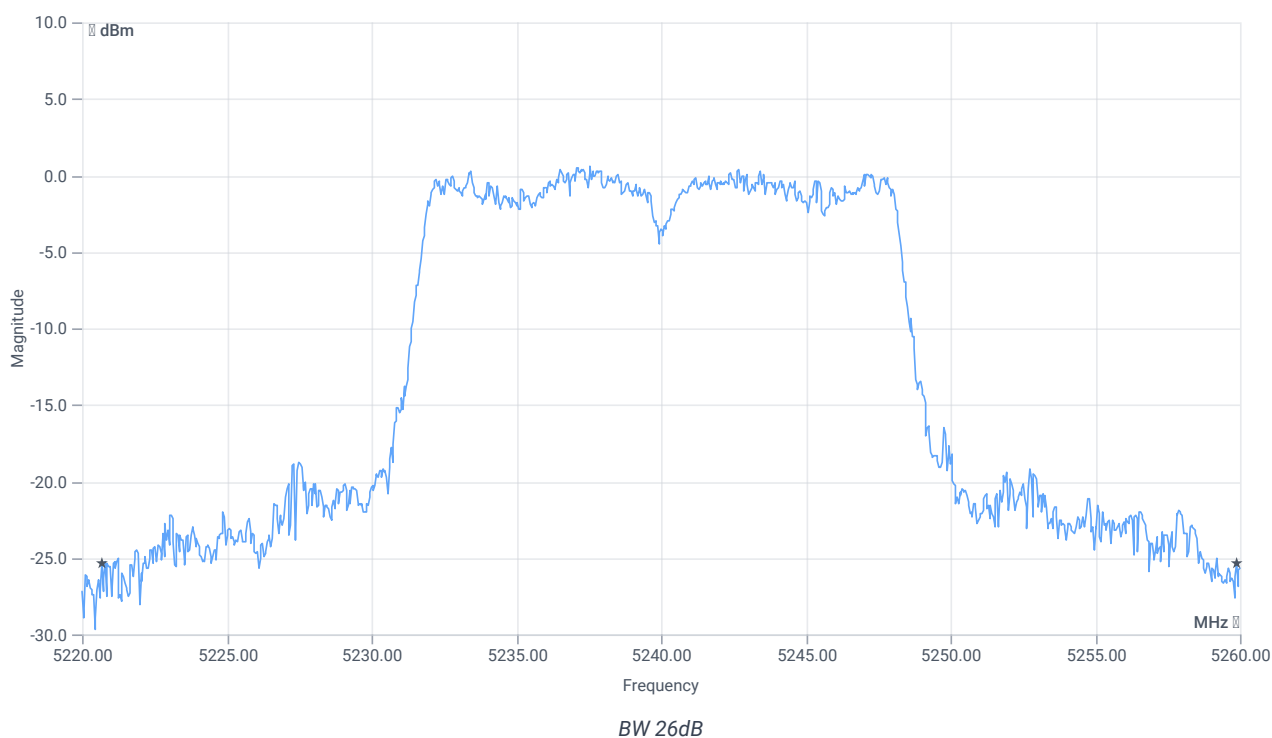


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	39.2	MHz	INFO
T1 26dB	---	---	5220.6800	MHz	INFO
T2 26dB	---	---	5259.8800	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.24 12.29 20
Start [MHz] Stop [MHz]	5220.000 5260.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

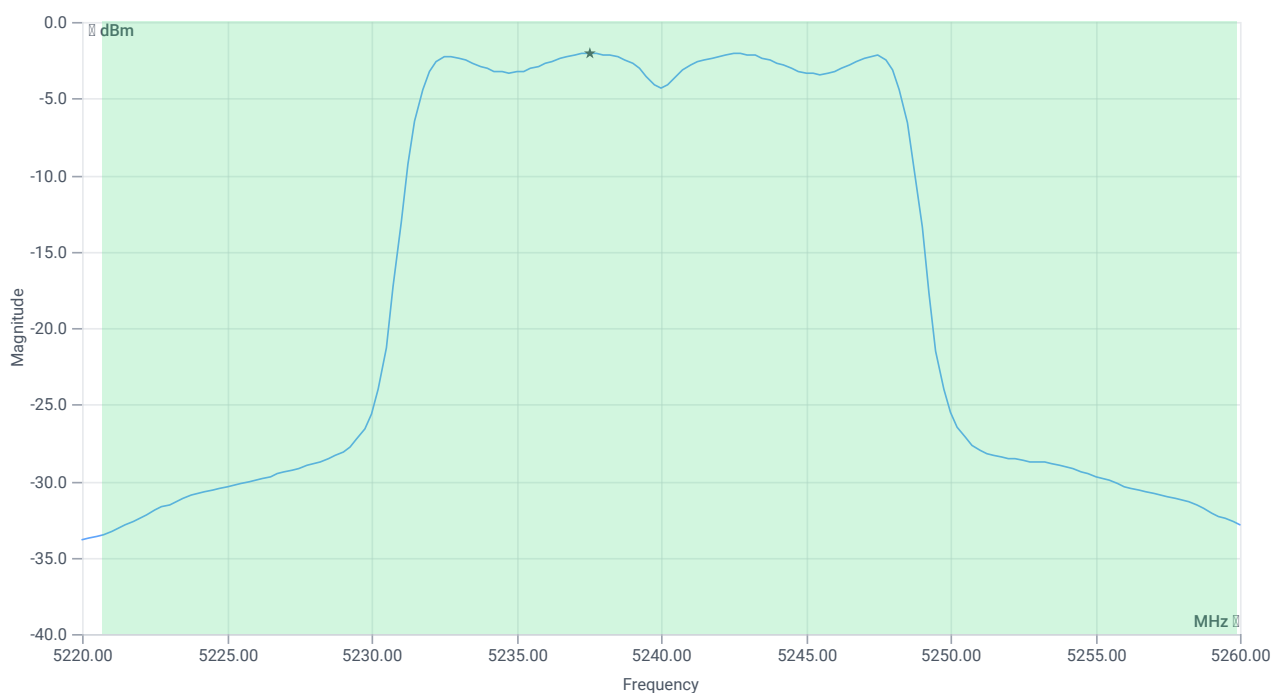

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	9.29	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	30	9.29	dBm	PASS
LIMIT: 11 dBm + 10 log 39.2					
Max output power DC corrected cond	---	26.93	9.29	dBm	na

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-2.06	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO
Power spectral density DC corrected cond	---	17	-2.06	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-1

References

TC start	12.06.2024 07:42:25
Ambit temp [°C] humidity [rel%]	22.7 36
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MPSIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5180 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	1.99	dBm	INFO
Ref. frequency	---	---	5182.800	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

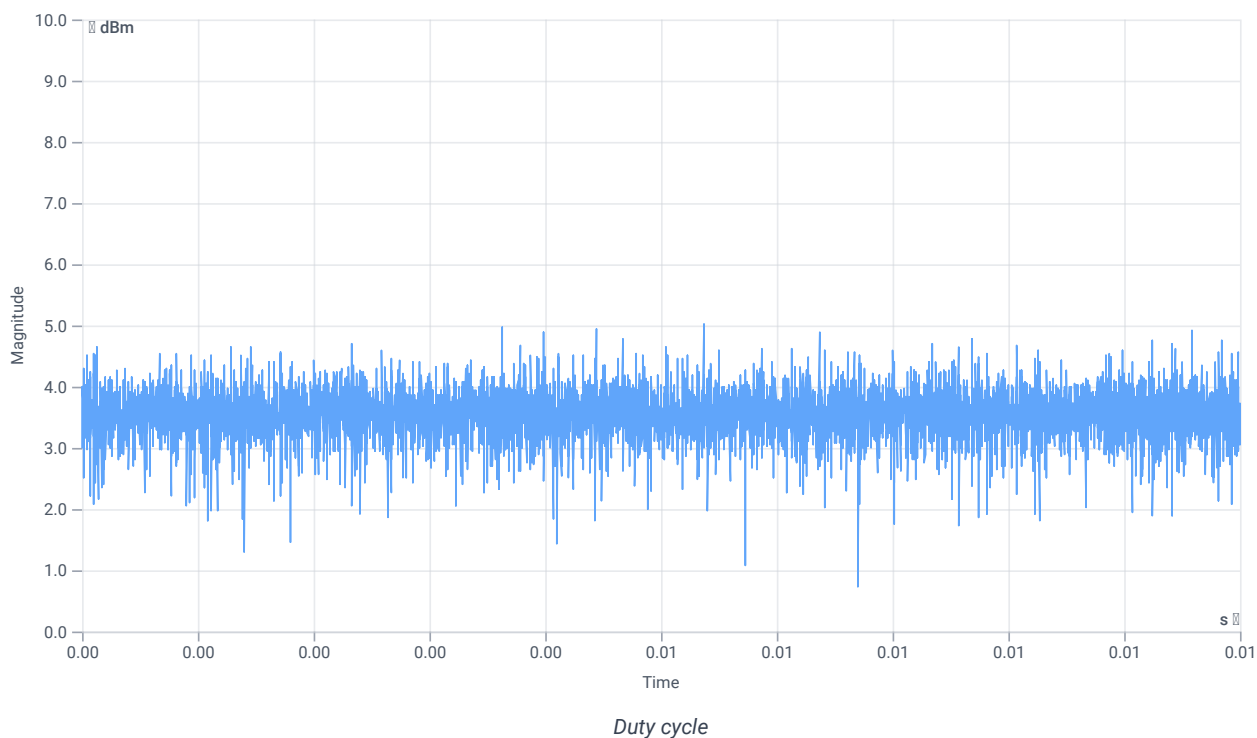

Evaluation bandwidth

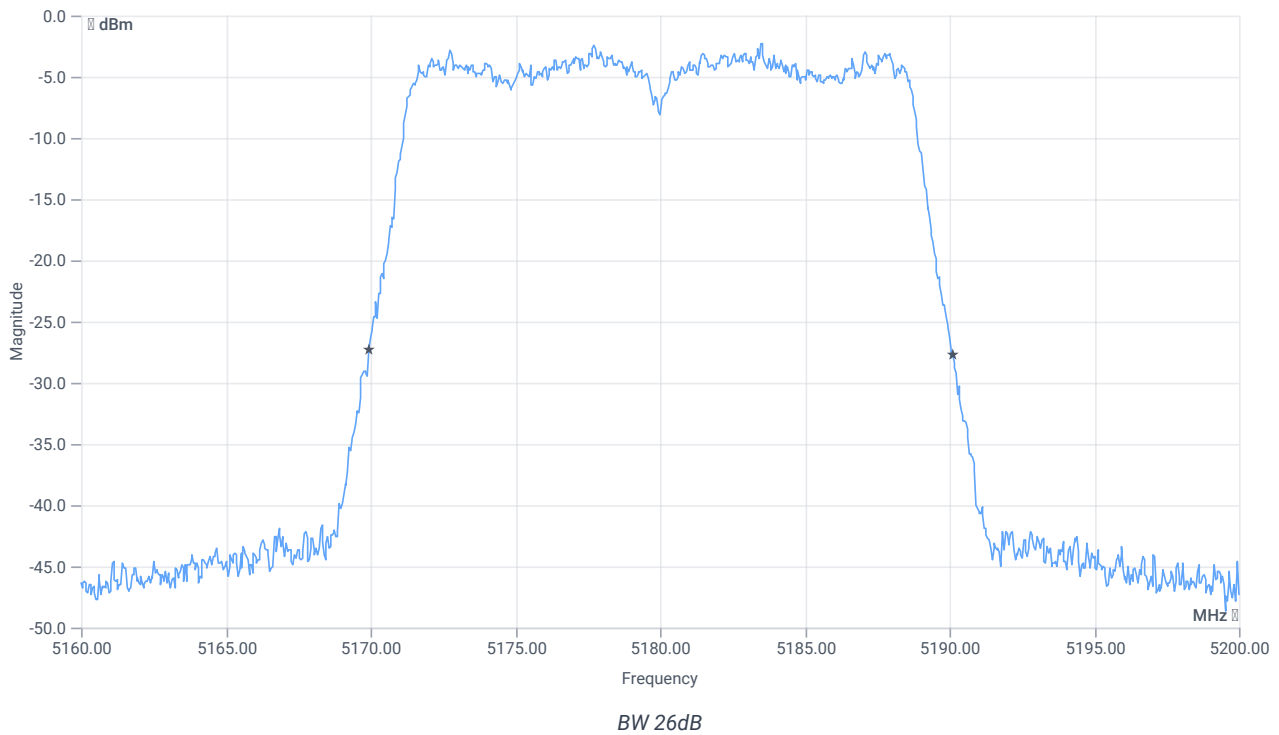


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.2	MHz	INFO
T1 26dB	---	---	5169.9200	MHz	INFO
T2 26dB	---	---	5190.1200	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.99 12.69 20
Start [MHz] Stop [MHz]	5160.000 5200.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

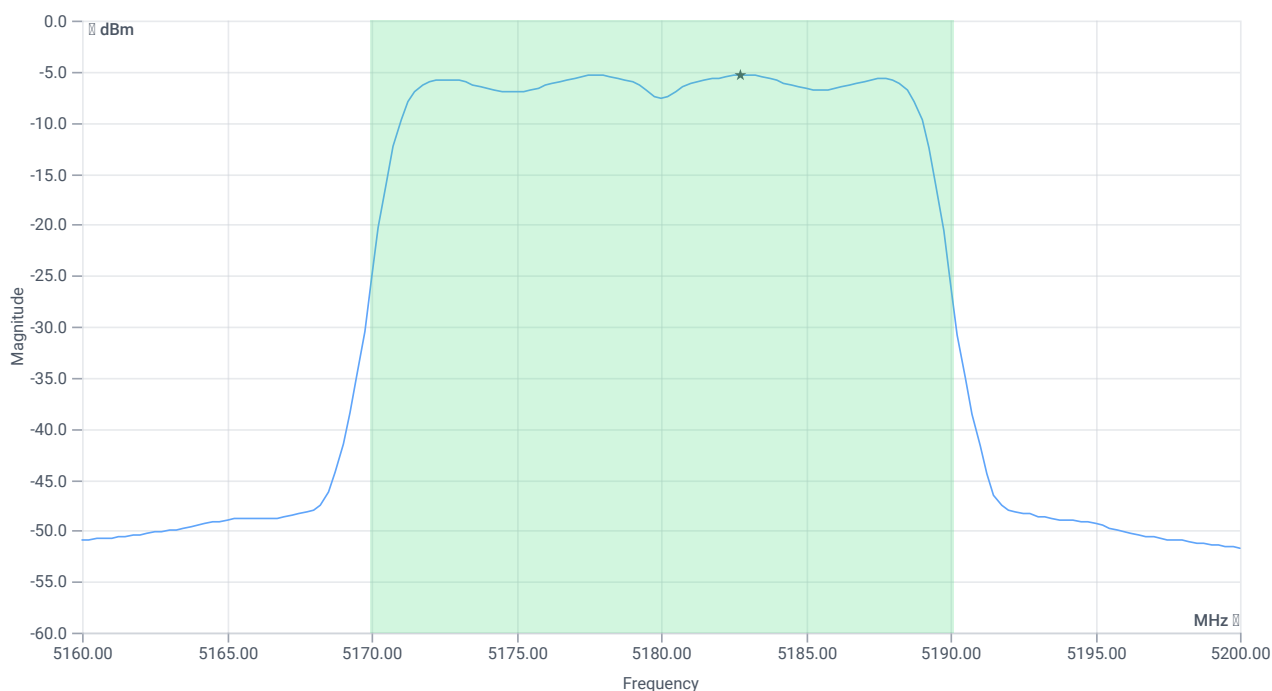

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	6.1	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	30	6.1	dBm	PASS
LIMIT: 11 dBm + 10 log 20.2					
Max output power DC corrected cond	---	24.05	6.1	dBm	na

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-5.34	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO
Power spectral density DC corrected cond	---	17	-5.34	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-1

References

TC start	12.06.2024 08:00:37
Ambit temp [°C] humidity [rel%]	23.0 36
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5200 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.26	dBm	INFO
Ref. frequency	---	---	5202.400	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

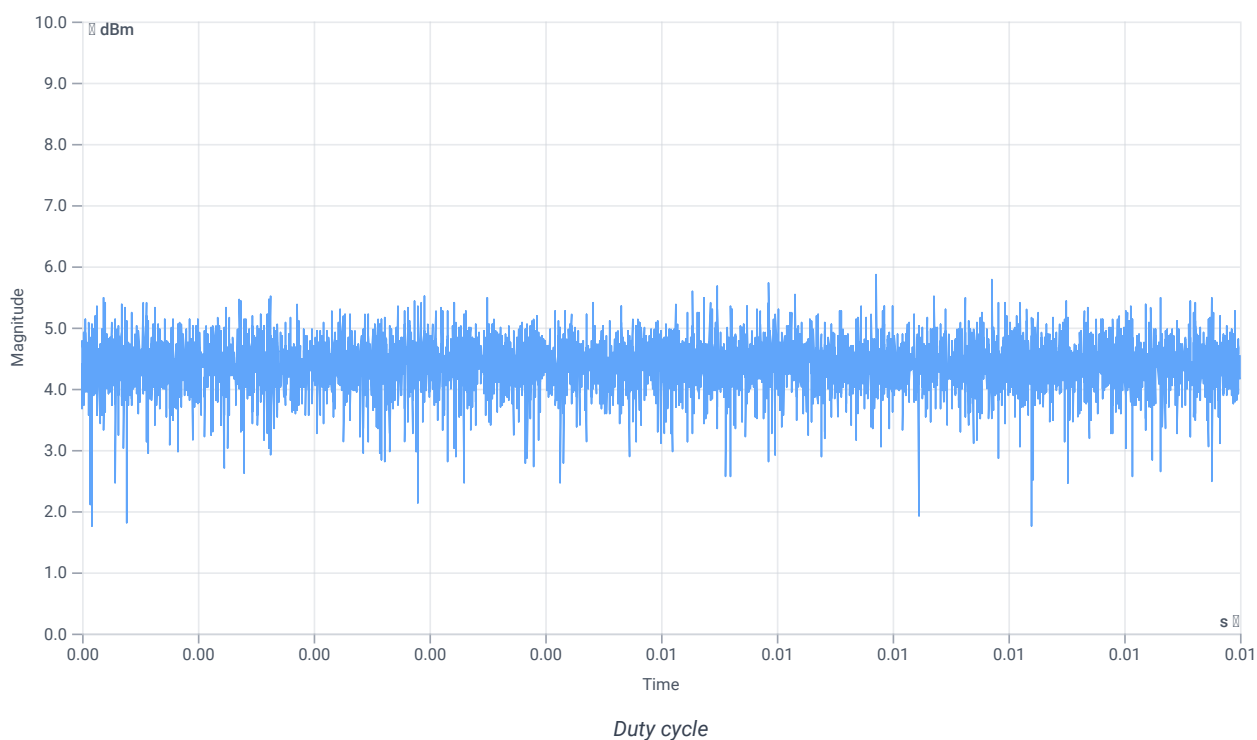

Evaluation bandwidth

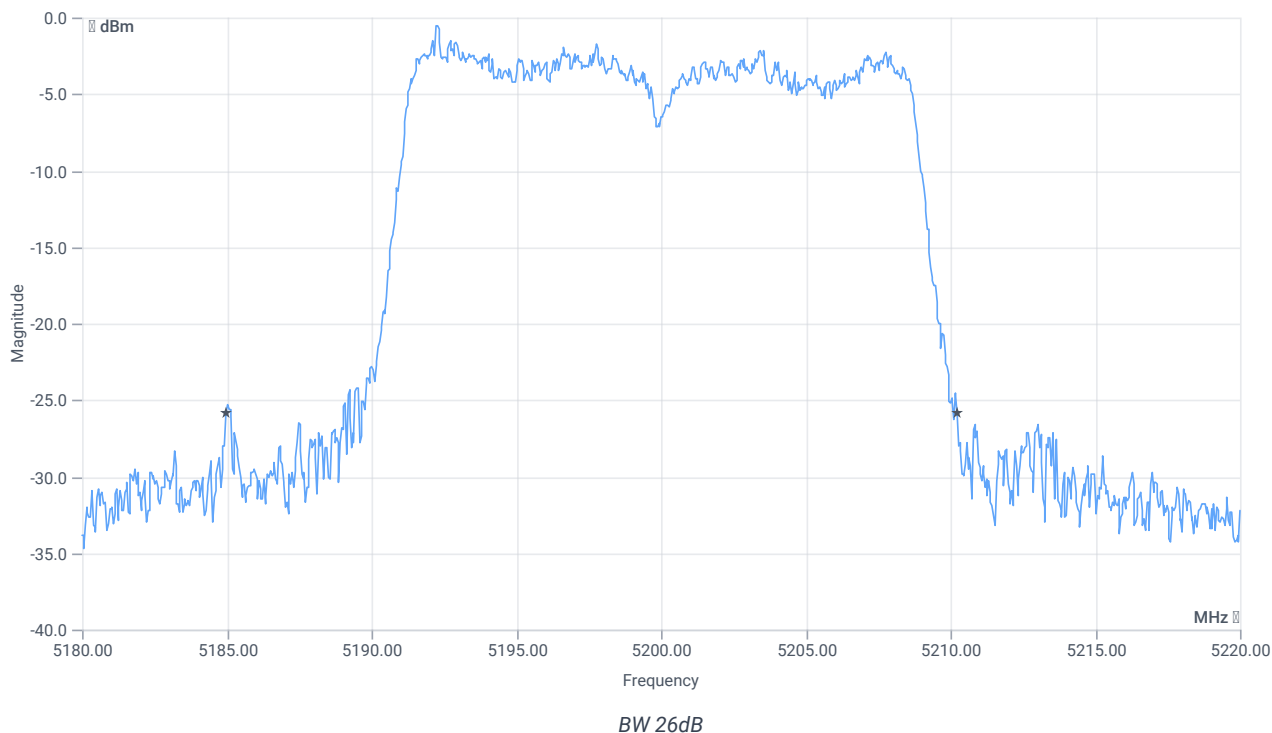


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	25.28	MHz	INFO
T1 26dB	---	---	5184.9600	MHz	INFO
T2 26dB	---	---	5210.2400	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.26 12.67 20
Start [MHz] Stop [MHz]	5180.000 5220.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

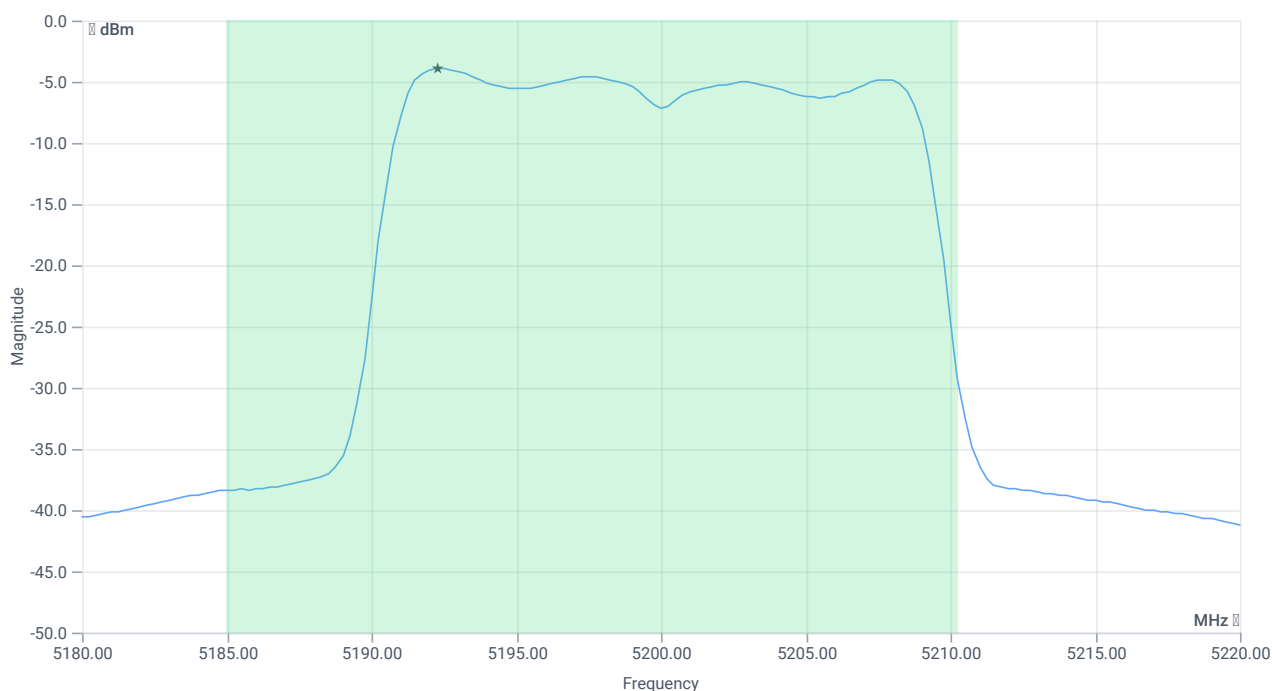

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	7.01	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	30	7.01	dBm	PASS
LIMIT: 11 dBm + 10 log 25.28					
Max output power DC corrected cond	---	25.03	7.01	dBm	na

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-3.94	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO
Power spectral density DC corrected cond	---	17	-3.94	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-1

References

TC start	25.06.2024 12:11:34
Ambit temp [°C] humidity [rel%]	23.8 55
System version	5.0.7.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5240 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	6.24	dBm	INFO
Ref. frequency	---	---	5237.600	MHz	INFO

Evaluation max. duty cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation bandwidth

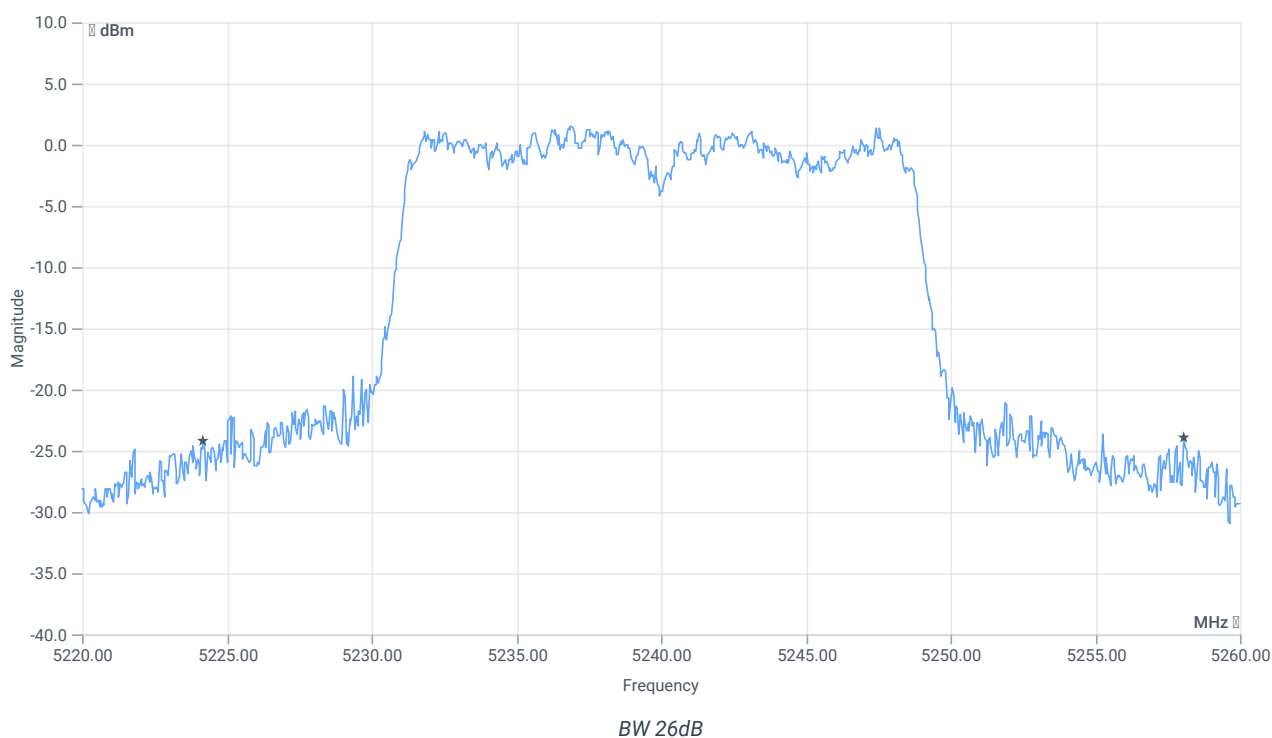


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	33.88	MHz	INFO
T1 26dB	---	---	5224.2000	MHz	INFO
T2 26dB	---	---	5258.0800	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.24 12.51 20
Start [MHz] Stop [MHz]	5220.000 5260.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

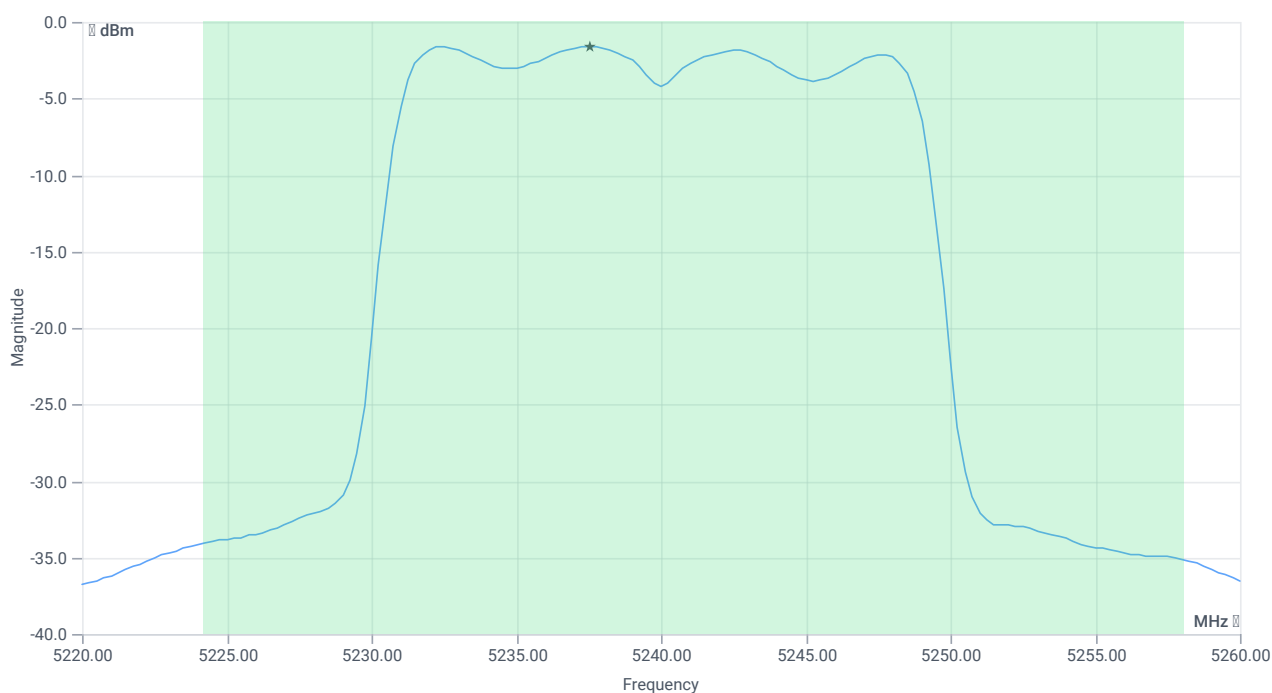

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	9.74	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	30	9.74	dBm	PASS
LIMIT: 11 dBm + 10 log 33.88					
Max output power DC corrected cond	---	26.3	9.74	dBm	na

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-1.59	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO
Power spectral density DC corrected cond	---	17	-1.59	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-1

References

TC start	12.06.2024 13:37:05
Ambit temp [°C] humidity [rel%]	25.3 29
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5180 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.64	dBm	INFO
Ref. frequency	---	---	5176.200	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

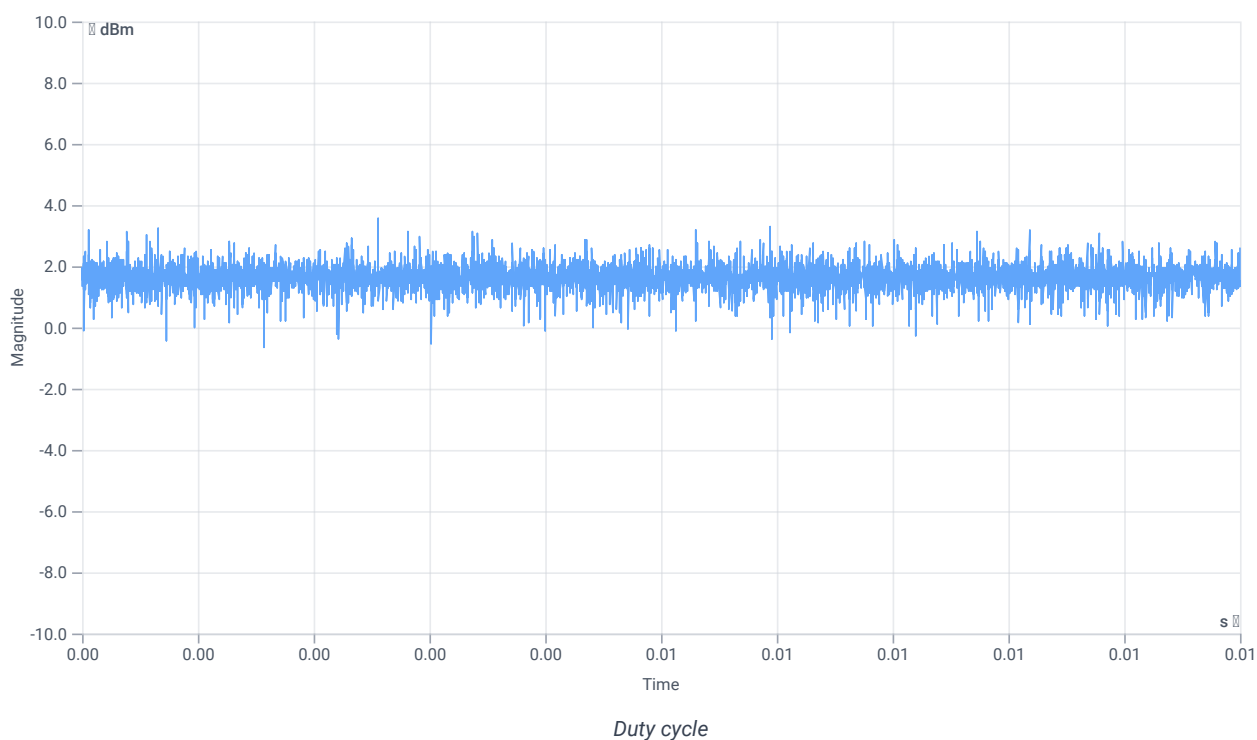

Evaluation bandwidth

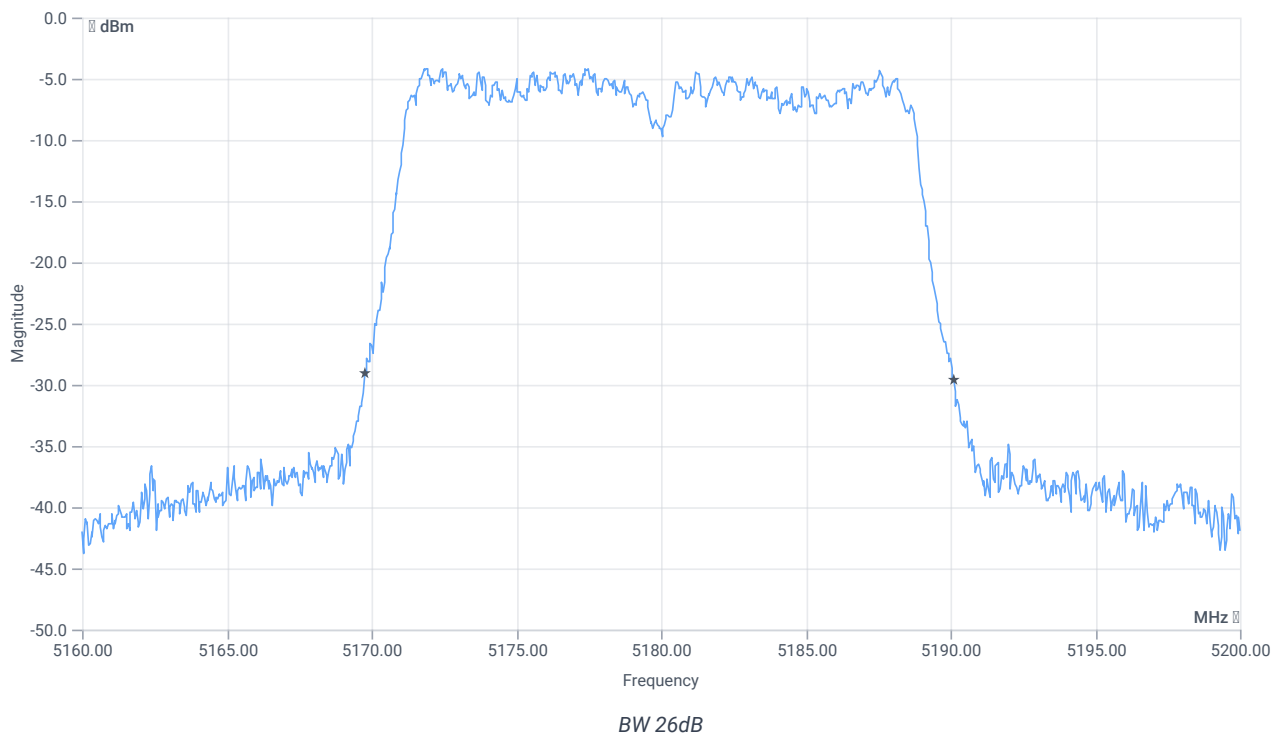


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.36	MHz	INFO
T1 26dB	---	---	5169.7600	MHz	INFO
T2 26dB	---	---	5190.1200	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.64 12.55 20
Start [MHz] Stop [MHz]	5160.000 5200.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

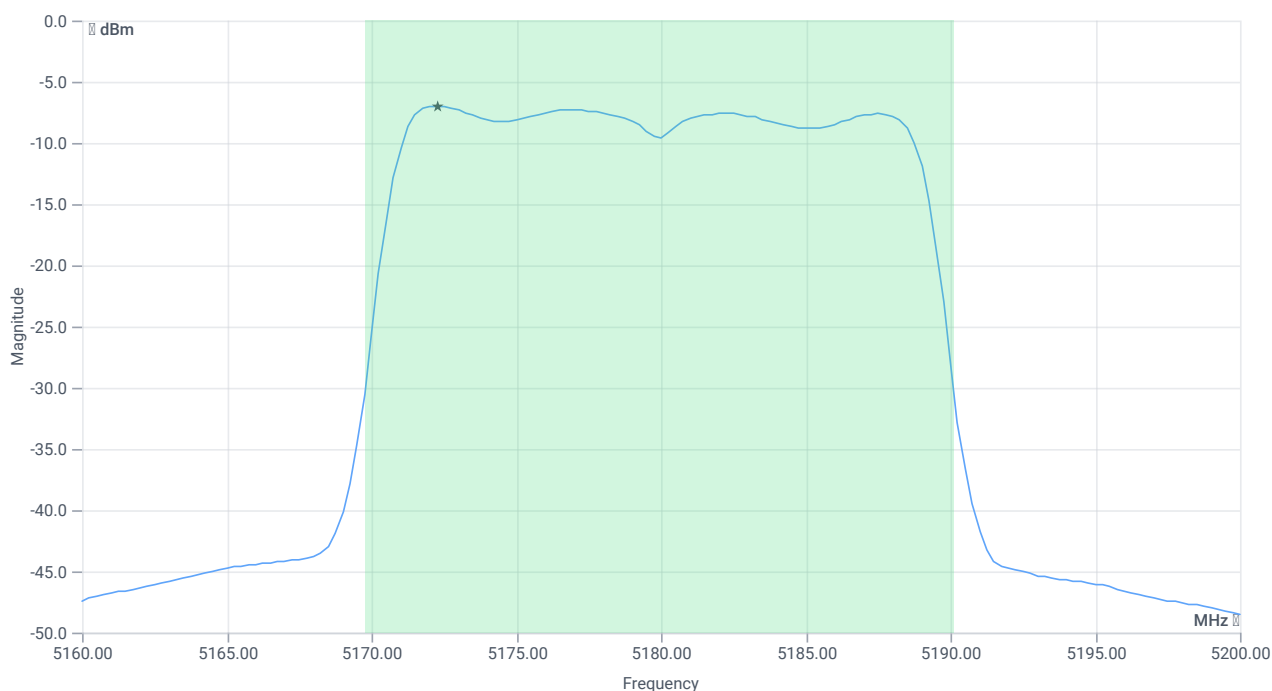

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	4.32	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	30	4.32	dBm	PASS
LIMIT: 11 dBm + 10 log 20.36					
Max output power DC corrected cond	---	24.09	4.32	dBm	na

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-6.96	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO
Power spectral density DC corrected cond	---	17	-6.96	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-1

References

TC start	12.06.2024 13:50:58
Ambit temp [°C] humidity [rel%]	25.4 29
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5200 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.64	dBm	INFO
Ref. frequency	---	---	5207.790	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

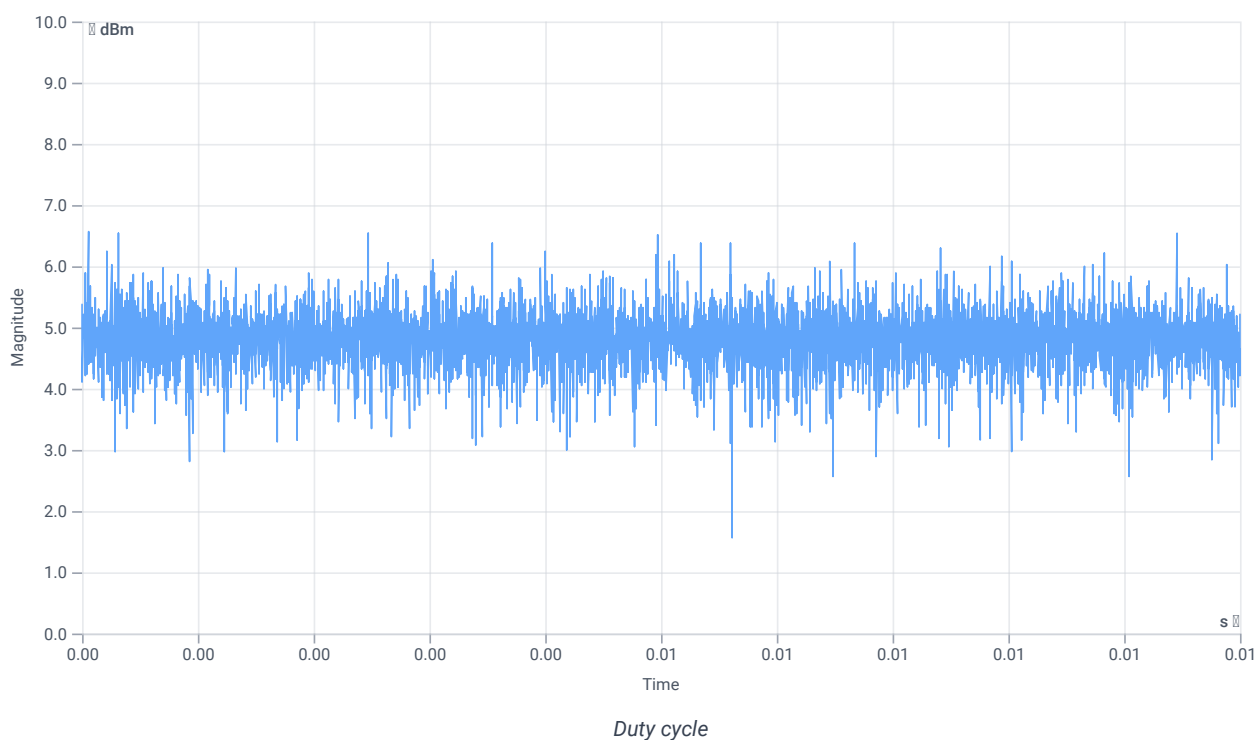

Evaluation bandwidth

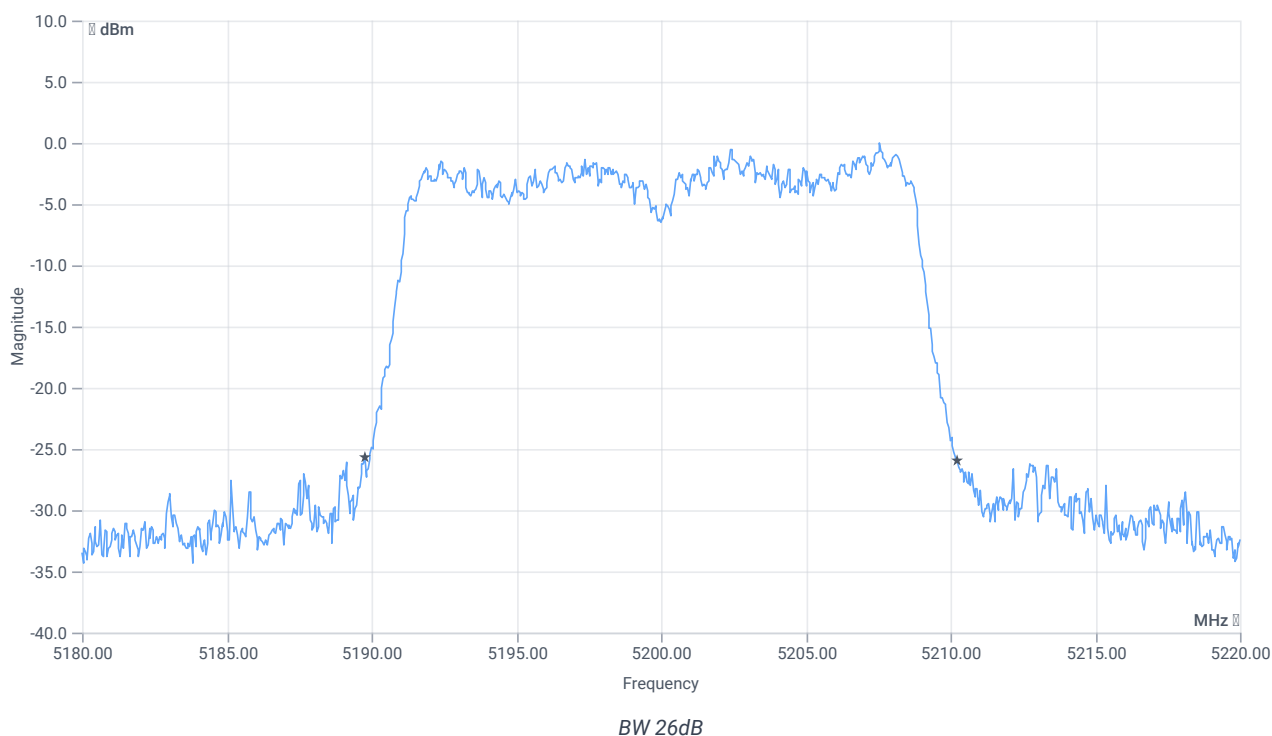


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.48	MHz	INFO
T1 26dB	---	---	5189.7600	MHz	INFO
T2 26dB	---	---	5210.2400	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.64 12.47 20
Start [MHz] Stop [MHz]	5180.000 5220.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

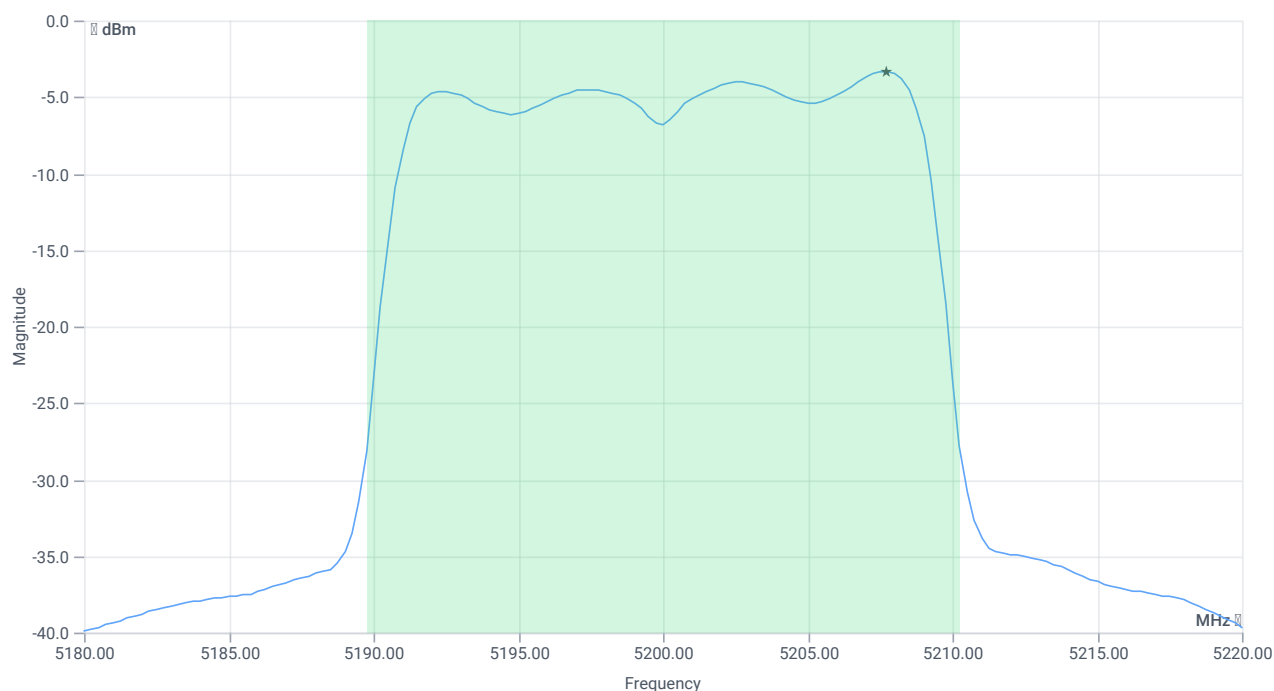

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	7.4	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	30	7.4	dBm	PASS
LIMIT: 11 dBm + 10 log 20.48					
Max output power DC corrected cond	---	24.11	7.4	dBm	na

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-3.34	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO
Power spectral density DC corrected cond	---	17	-3.34	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-1

References

TC start	25.06.2024 12:16:02
Ambit temp [°C] humidity [rel%]	24.0 54
System version	5.0.7.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5240 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.00	dBm	INFO
Ref. frequency	---	---	5242.400	MHz	INFO

Evaluation max. duty cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation bandwidth

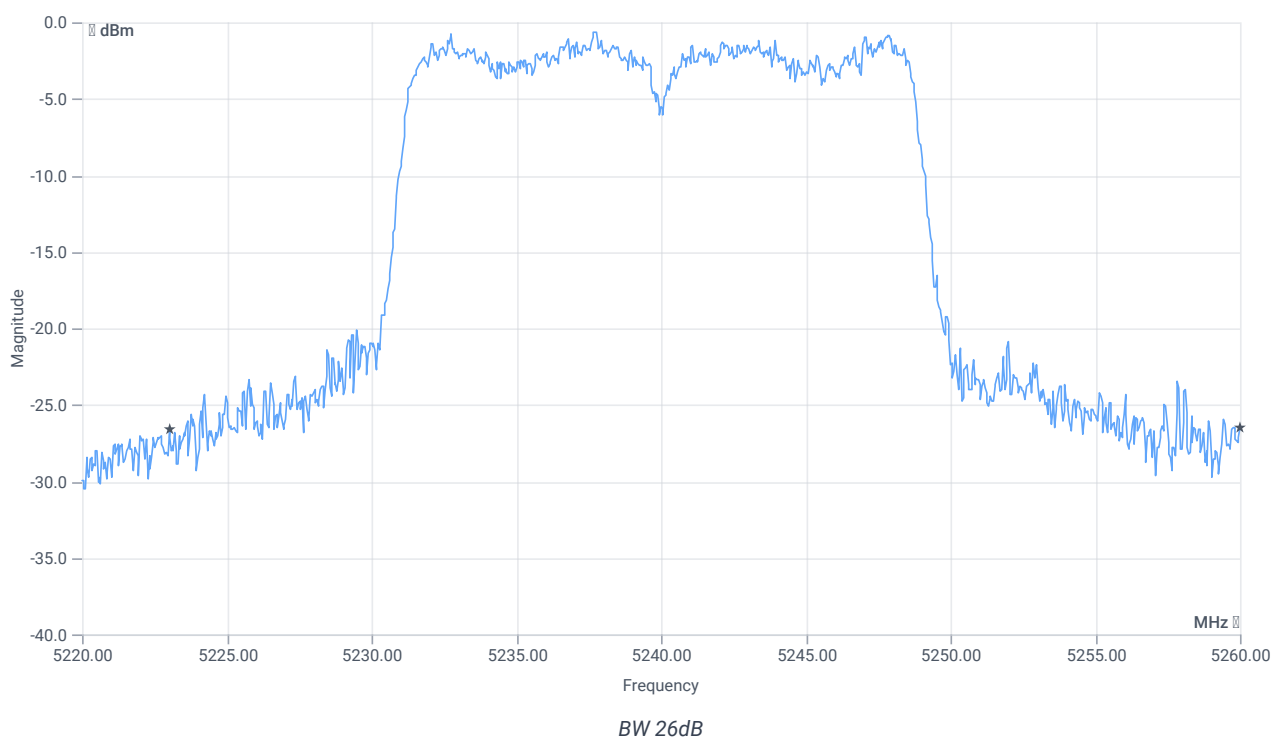


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	37	MHz	INFO
T1 26dB	---	---	5223.0000	MHz	INFO
T2 26dB	---	---	5260.0000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.00 12.29 20
Start [MHz] Stop [MHz]	5220.000 5260.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

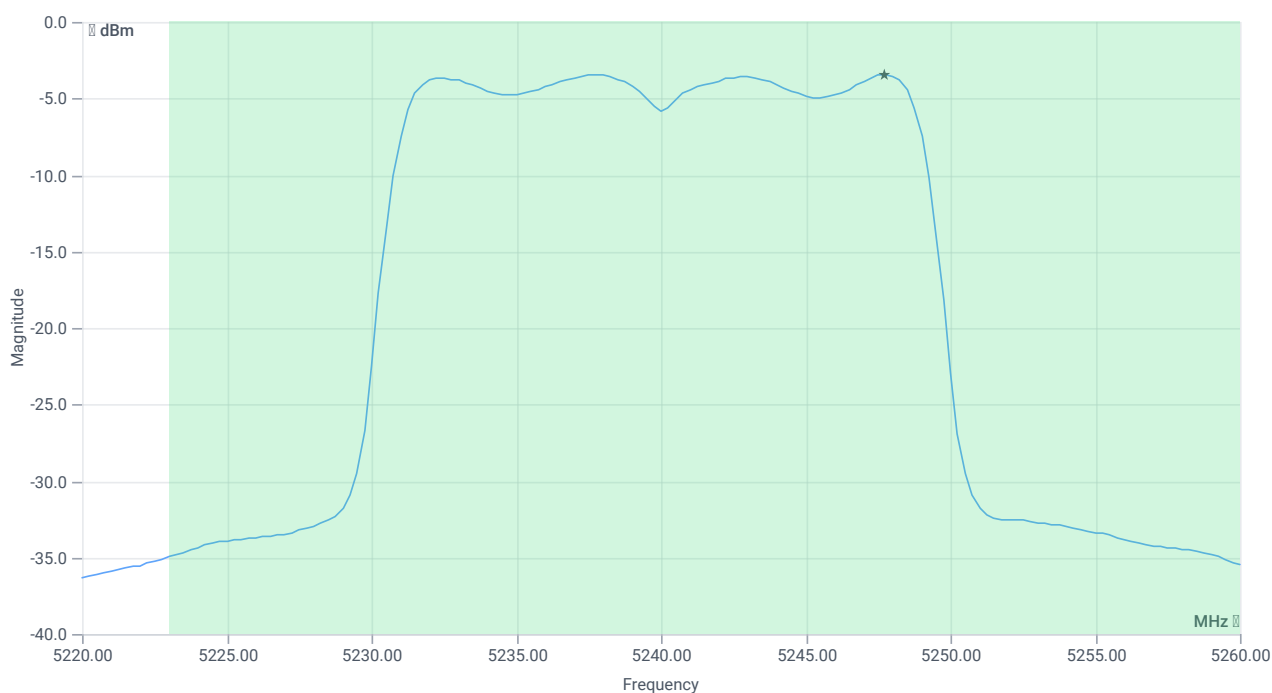

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	8.1	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	30	8.1	dBm	PASS
LIMIT: 11 dBm + 10 log 37					
Max output power DC corrected cond	---	26.68	8.1	dBm	na

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-3.44	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO
Power spectral density DC corrected cond	---	17	-3.44	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-1

References

TC start	12.06.2024 08:32:41
Ambit temp [°C] humidity [rel%]	23.3 35
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT40 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5230
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5190 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-1.06	dBm	INFO
Ref. frequency	---	---	5174.420	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

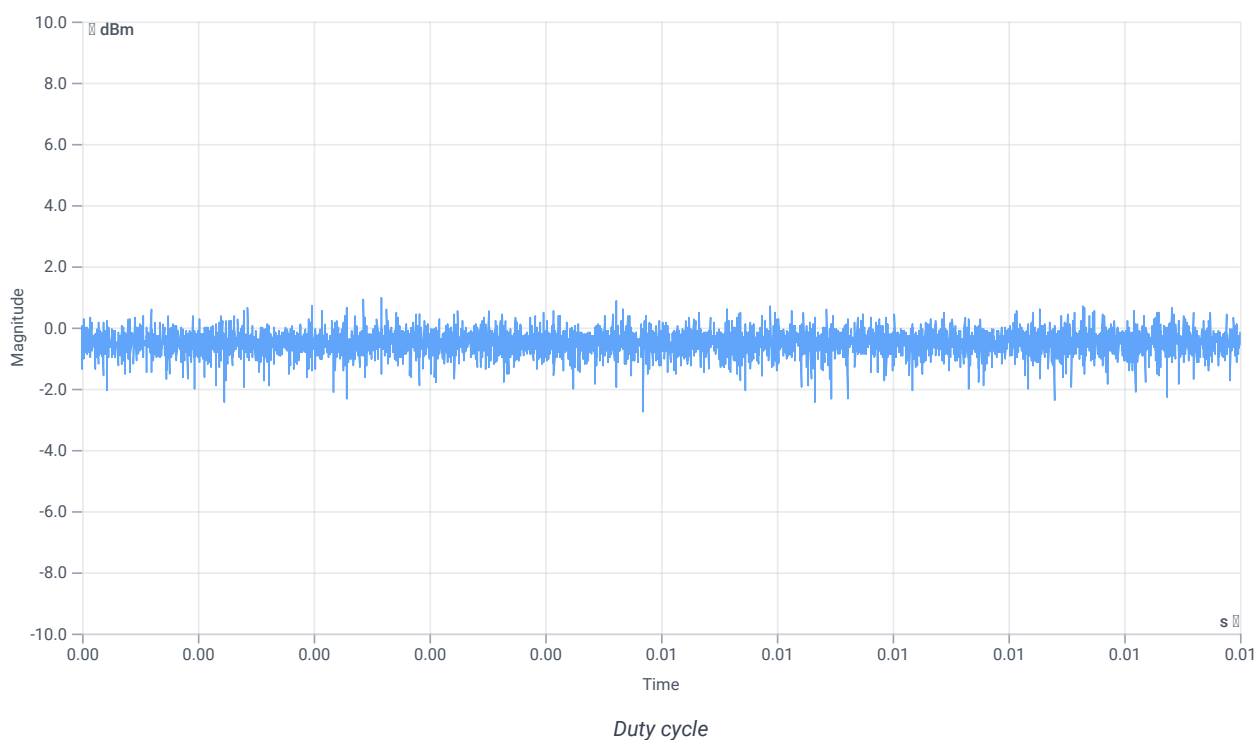

Evaluation bandwidth

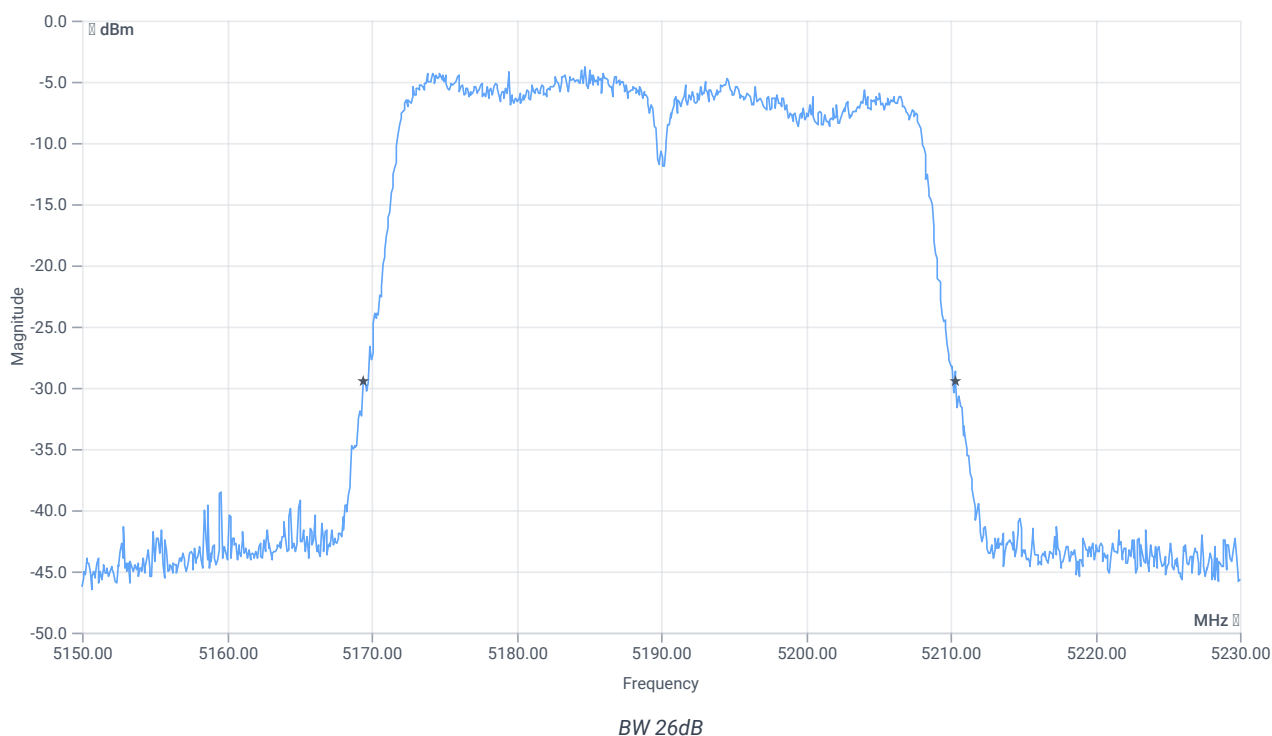


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	40.96	MHz	INFO
T1 26dB	---	---	5169.4400	MHz	INFO
T2 26dB	---	---	5210.4000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.94 12.68 15
Start [MHz] Stop [MHz]	5150.000 5230.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

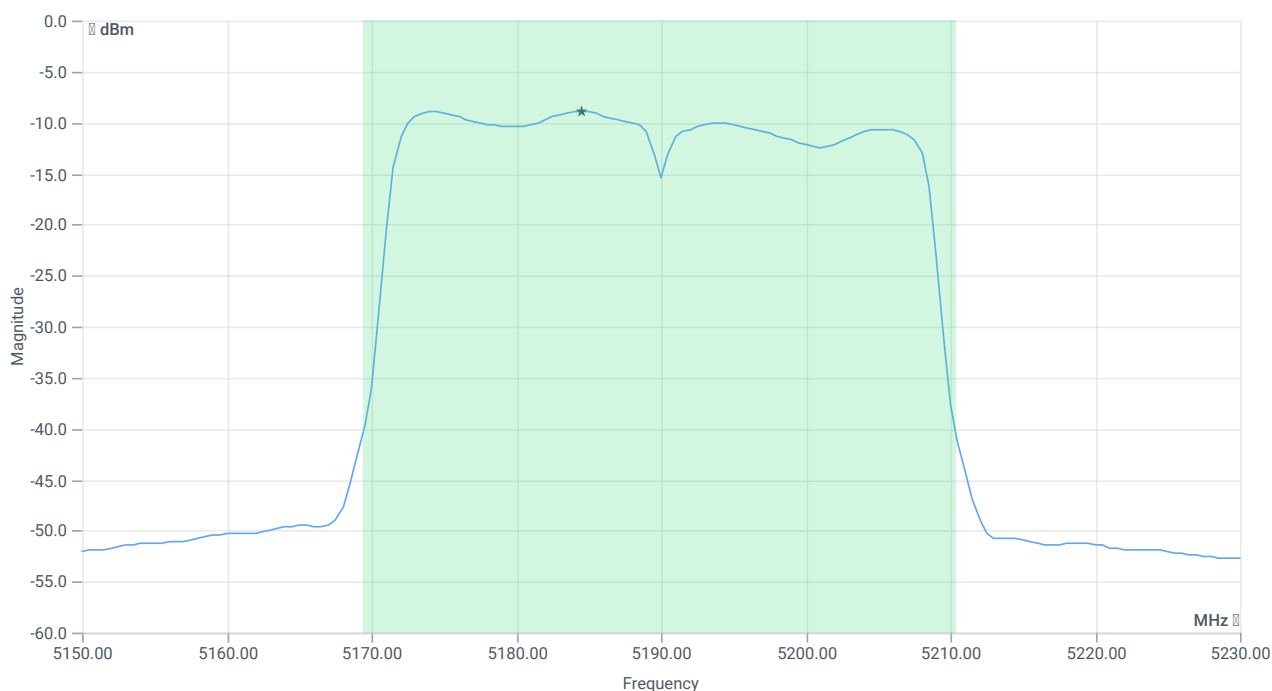

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	4.94	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	30	4.94	dBm	PASS
LIMIT: 11 dBm + 10 log 40.96					
Max output power DC corrected cond	---	27.12	4.94	dBm	na

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-8.9	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO
Power spectral density DC corrected cond	---	17	-8.9	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-1

References

TC start	12.06.2024 08:52:38
Ambit temp [°C] humidity [rel%]	23.5 35
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT40 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5230
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5230 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	0.22	dBm	INFO
Ref. frequency	---	---	5234.600	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

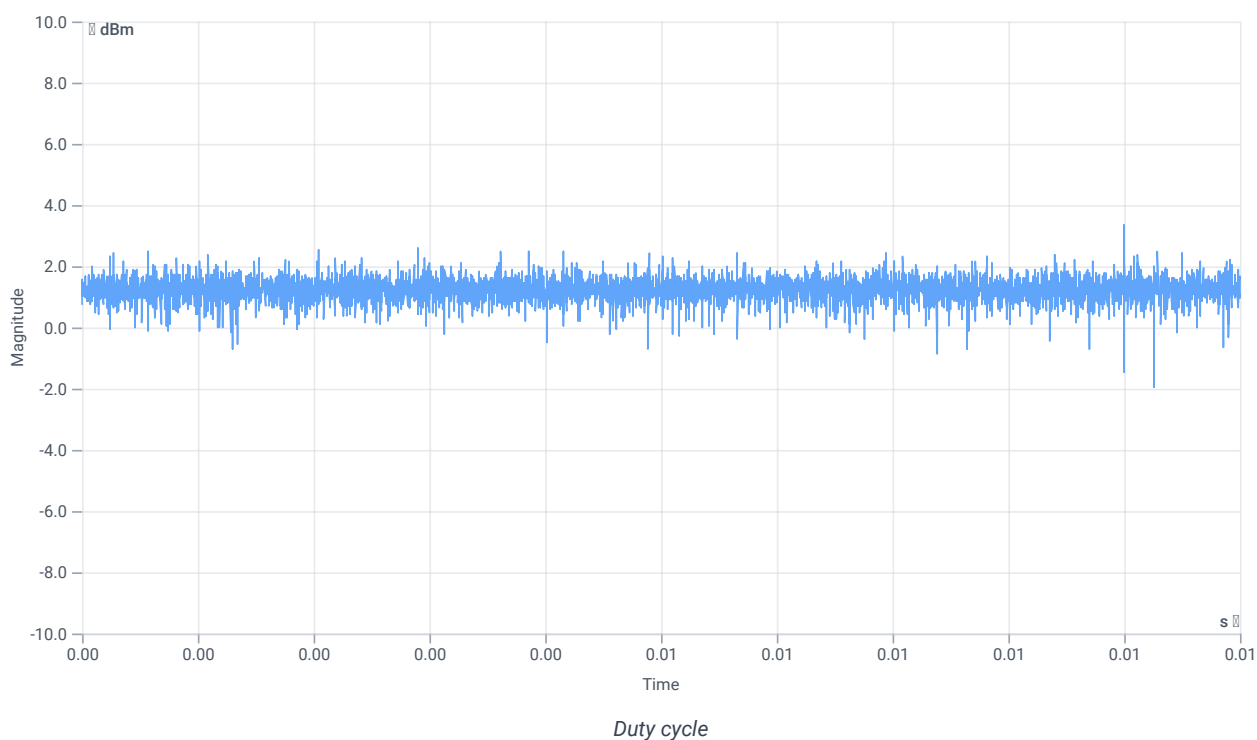

Evaluation bandwidth

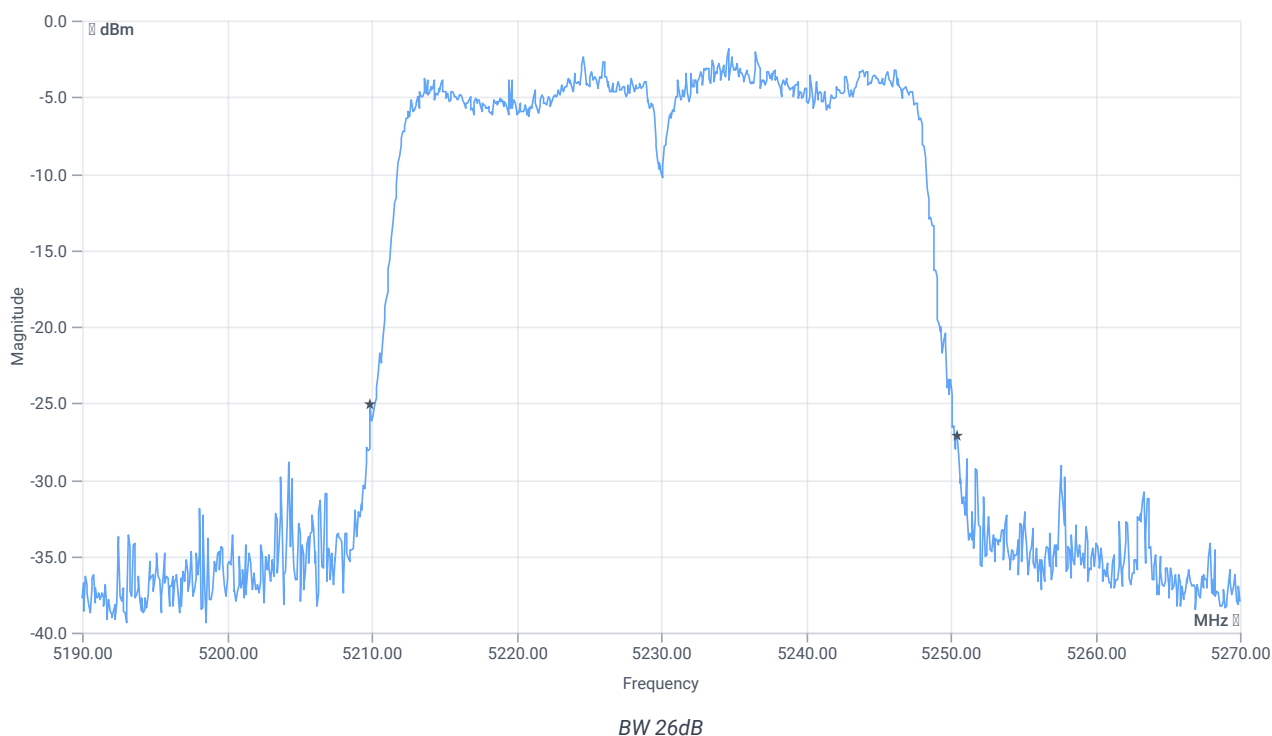


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	40.56	MHz	INFO
T1 26dB	---	---	5209.9200	MHz	INFO
T2 26dB	---	---	5250.4800	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.22 12.55 15
Start [MHz] Stop [MHz]	5190.000 5270.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

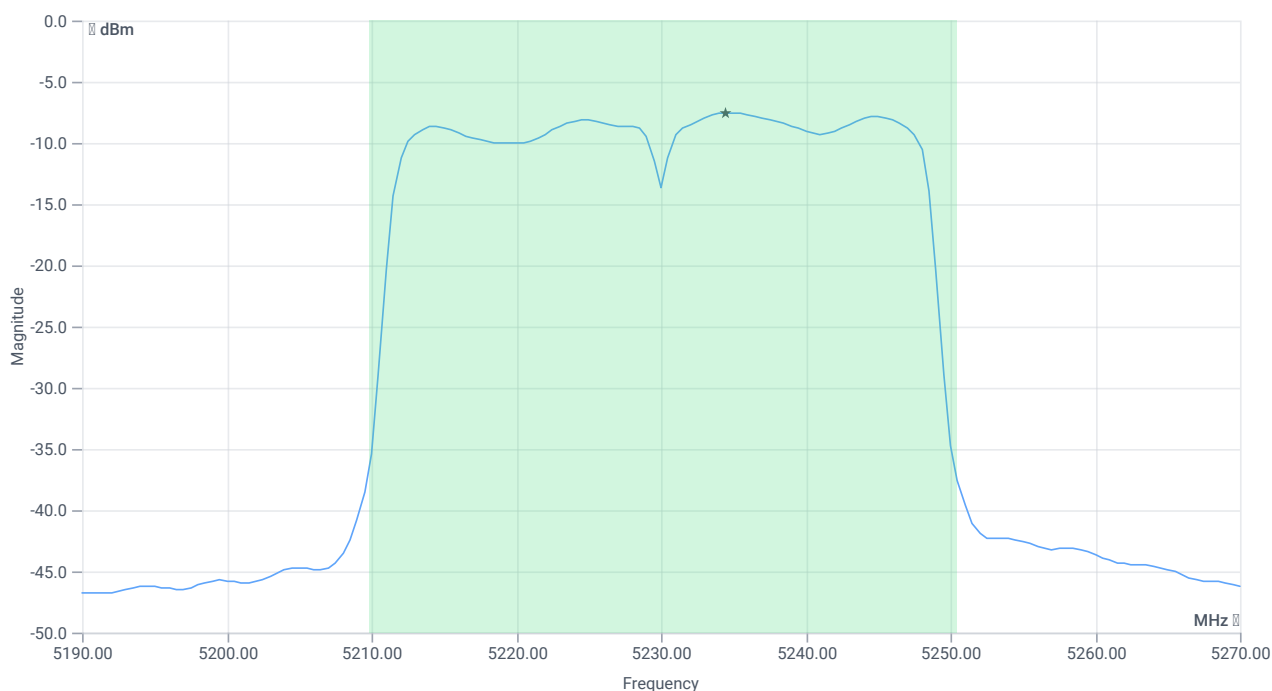

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	6.55	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	30	6.55	dBm	PASS
LIMIT: 11 dBm + 10 log 40.56					
Max output power DC corrected cond	---	27.08	6.55	dBm	na

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-7.51	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO
Power spectral density DC corrected cond	---	17	-7.51	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-1

References

TC start	12.06.2024 12:11:55
Ambit temp [°C] humidity [rel%]	24.9 30
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT40 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5230
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5190 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-2.06	dBm	INFO
Ref. frequency	---	---	5186.800	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

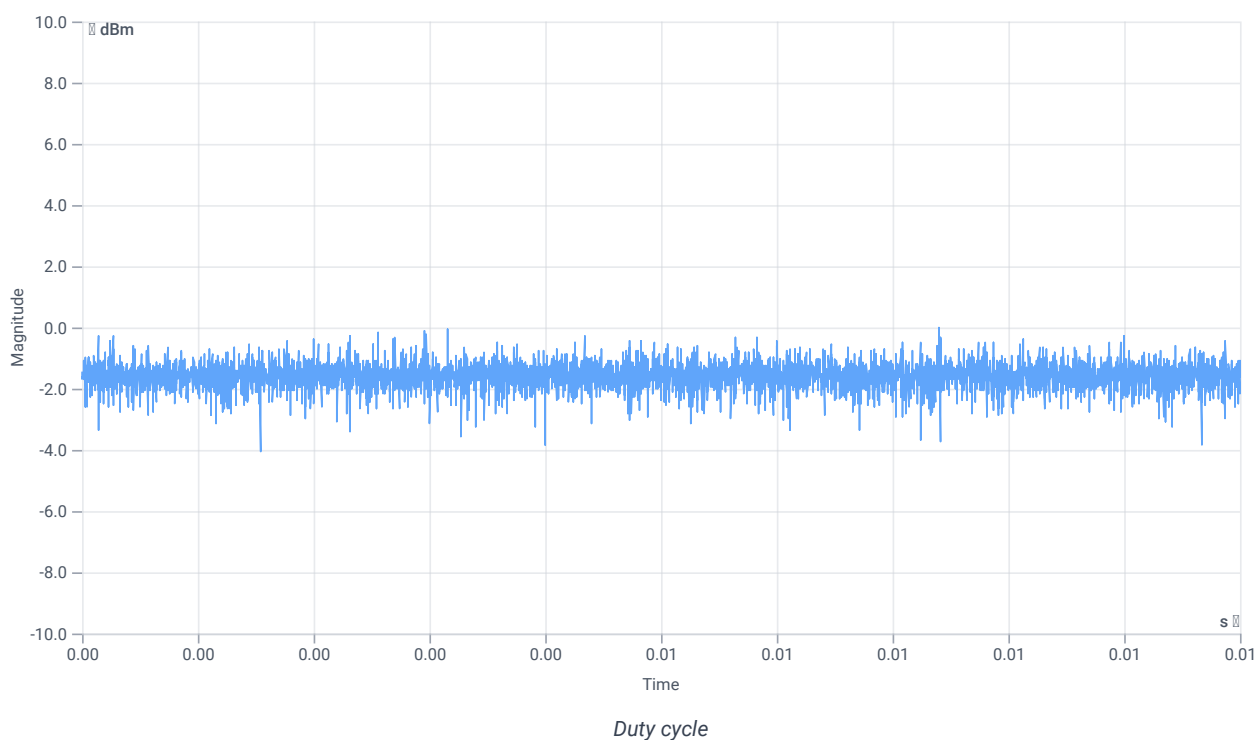

Evaluation bandwidth

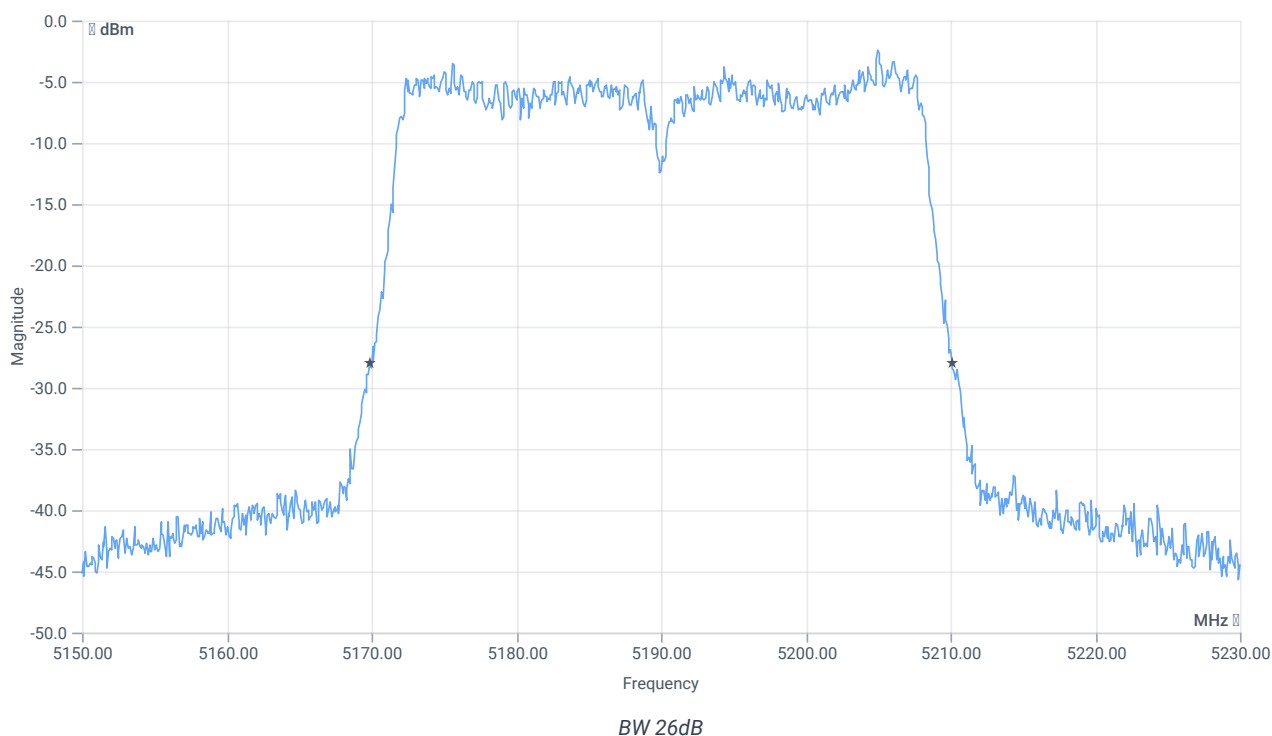


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	40.24	MHz	INFO
T1 26dB	---	---	5169.8400	MHz	INFO
T2 26dB	---	---	5210.0800	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.94 12.51 15
Start [MHz] Stop [MHz]	5150.000 5230.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

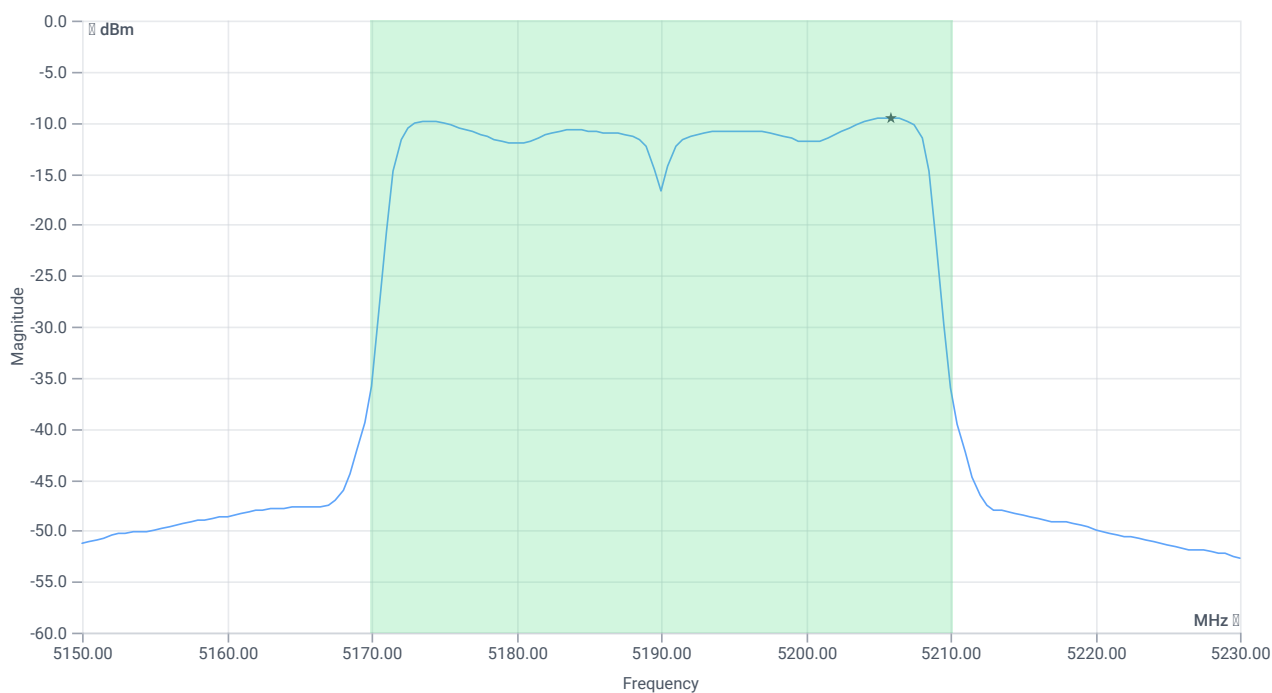

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	4.37	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	30	4.37	dBm	PASS
LIMIT: 11 dBm + 10 log 40.24					
Max output power DC corrected cond	---	27.05	4.37	dBm	na

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-9.58	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO
Power spectral density DC corrected cond	---	17	-9.58	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-1

References

TC start	12.06.2024 12:32:27
Ambit temp [°C] humidity [rel%]	25.0 30
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT40 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5230
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5230 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	0.32	dBm	INFO
Ref. frequency	---	---	5214.020	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

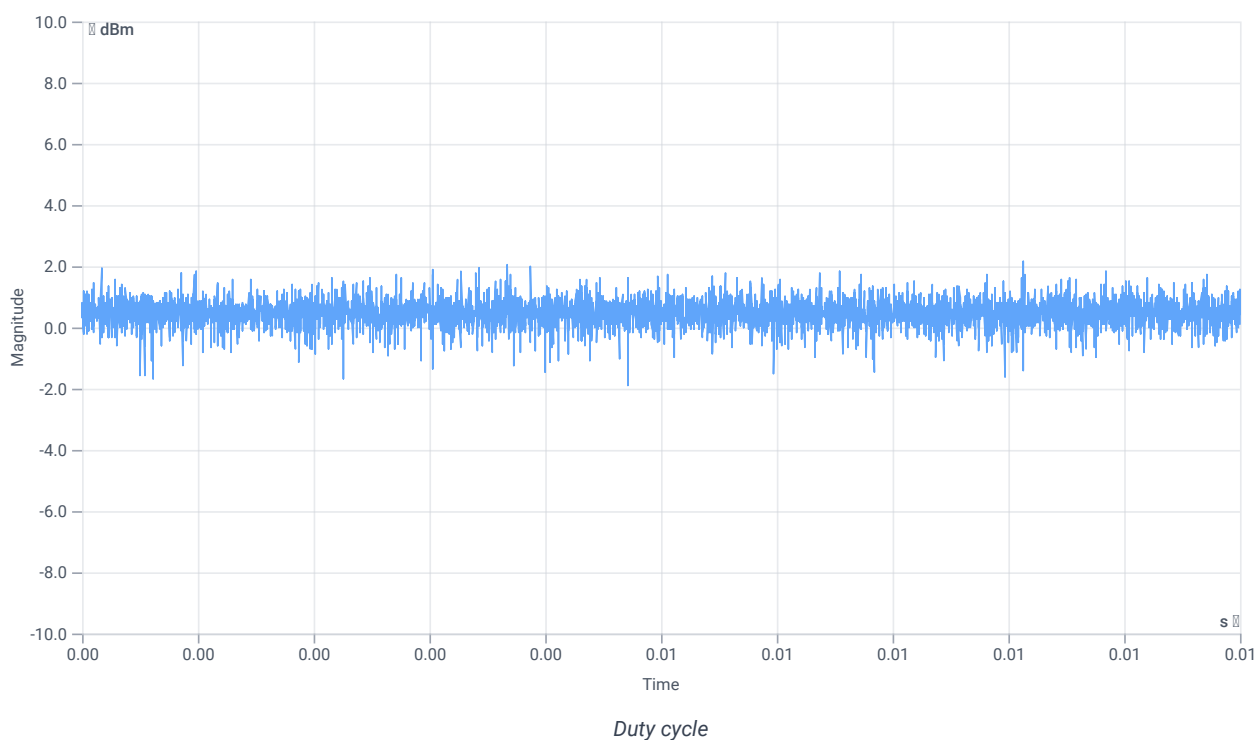

Evaluation bandwidth

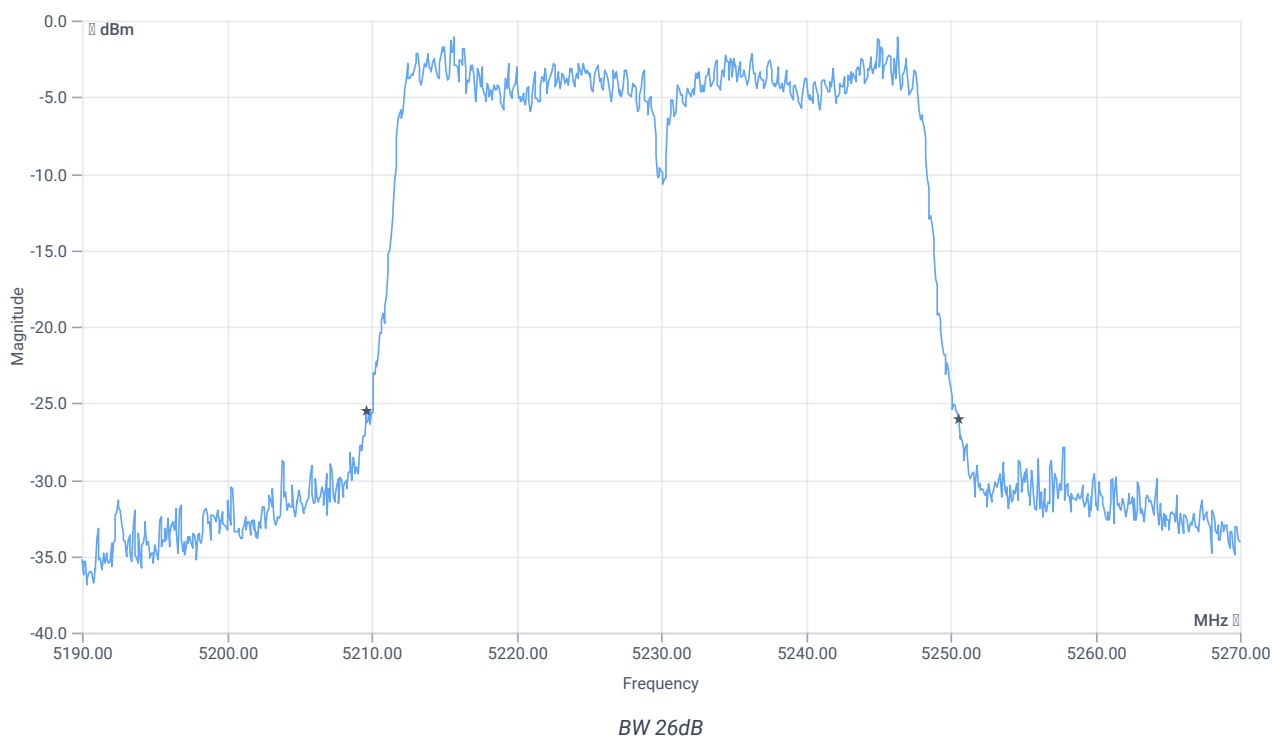


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	40.96	MHz	INFO
T1 26dB	---	---	5209.6000	MHz	INFO
T2 26dB	---	---	5250.5600	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.32 12.33 15
Start [MHz] Stop [MHz]	5190.000 5270.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

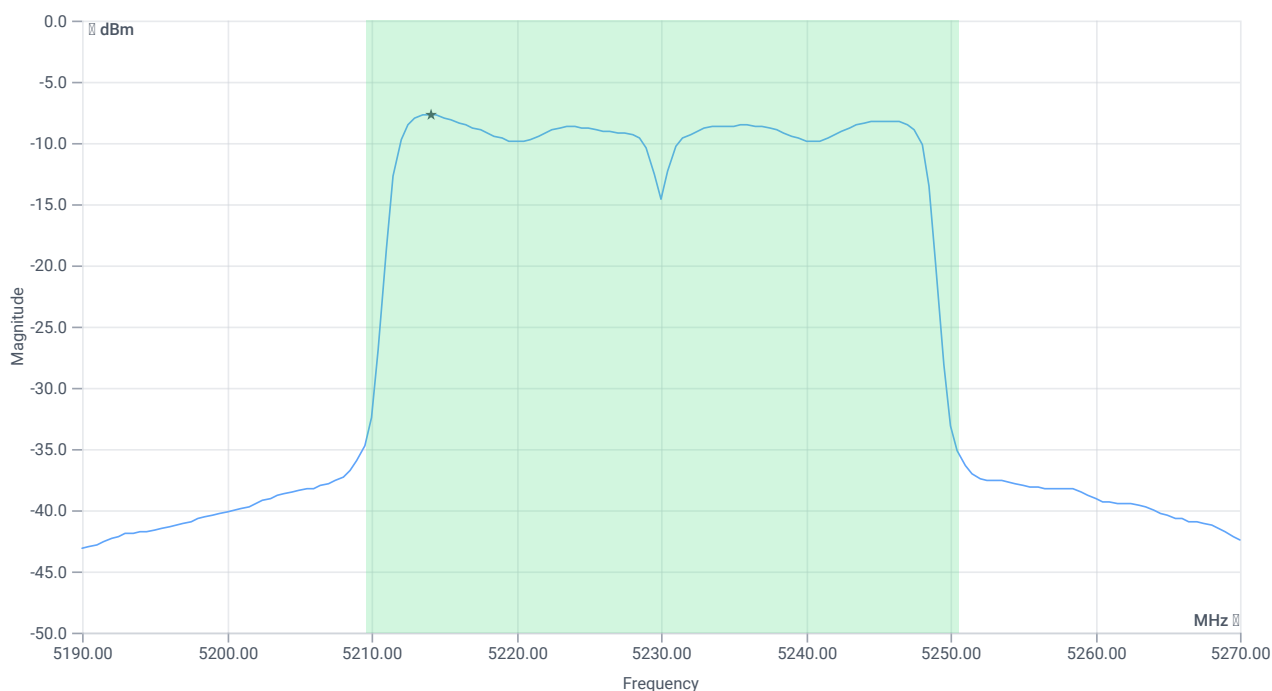

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	6.35	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	30	6.35	dBm	PASS
LIMIT: 11 dBm + 10 log 40.96					
Max output power DC corrected cond	---	27.12	6.35	dBm	na

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-7.66	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO
Power spectral density DC corrected cond	---	17	-7.66	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-1

References

TC start	12.06.2024 09:14:54
Ambit temp [°C] humidity [rel%]	23.7 35
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT80 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5210
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5210 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-5.65	dBm	INFO
Ref. frequency	---	---	5183.230	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

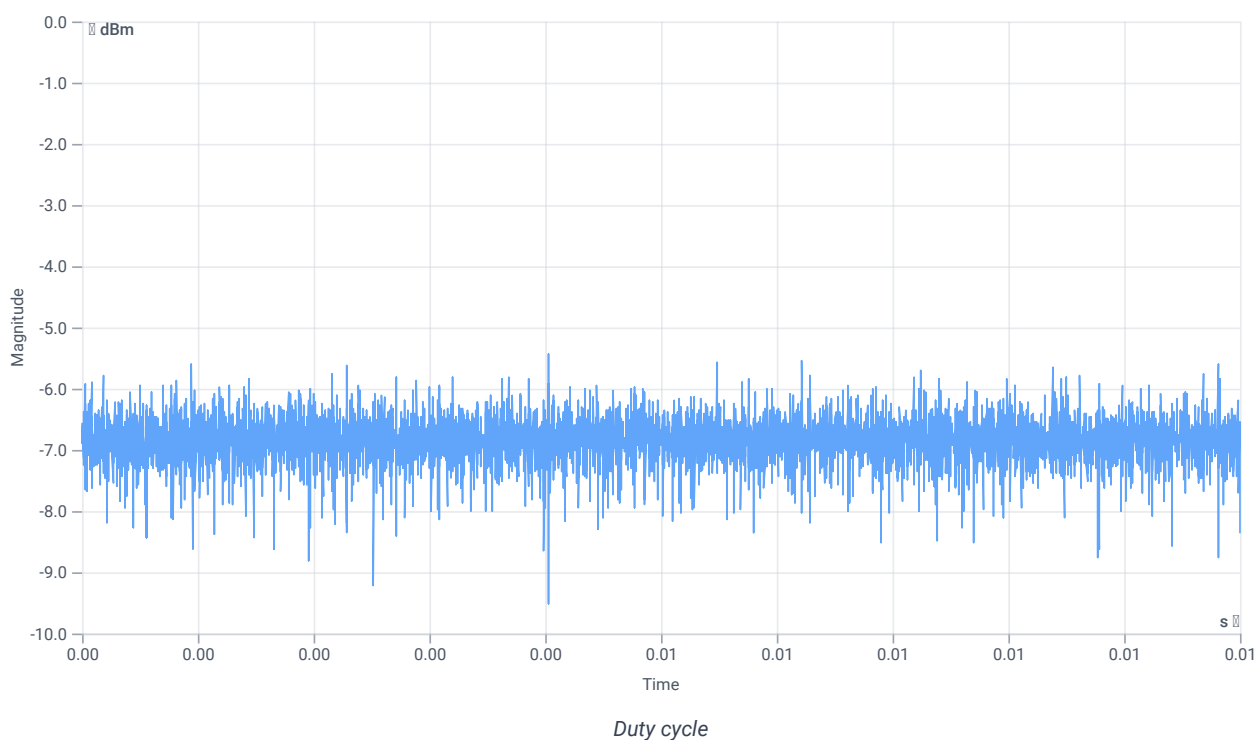

Evaluation bandwidth

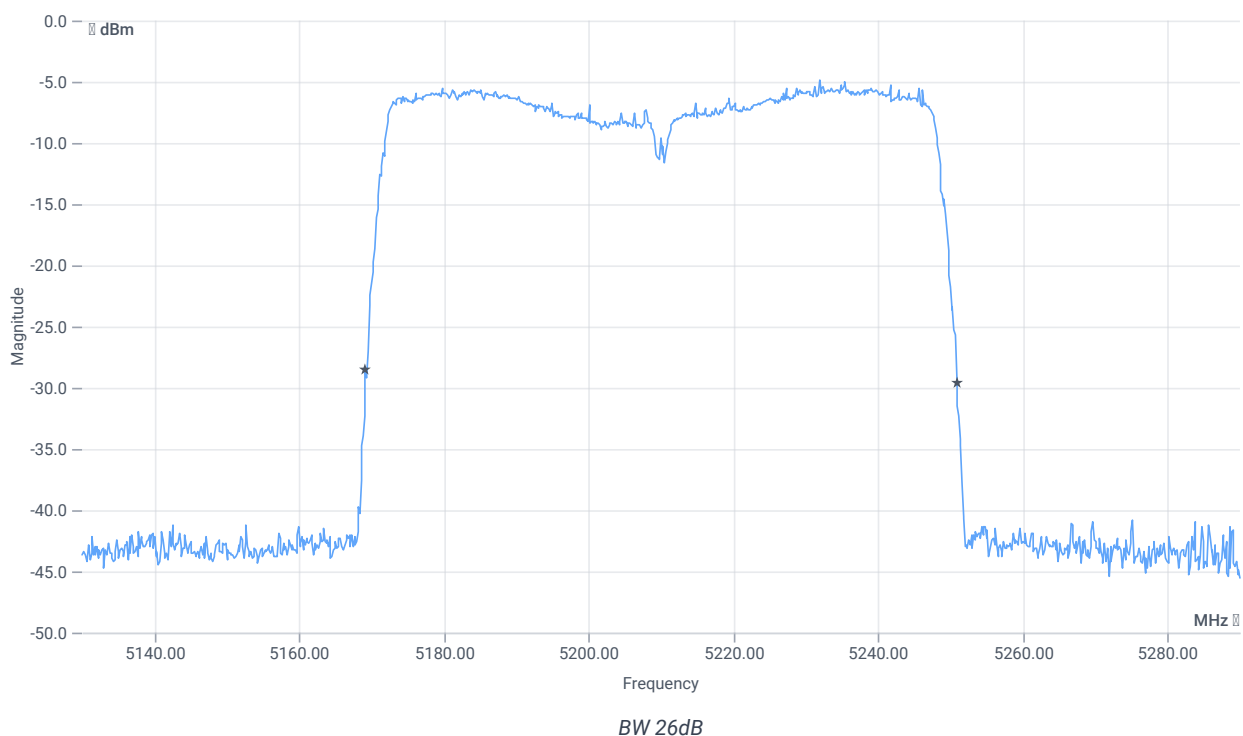


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	81.6	MHz	INFO
T1 26dB	---	---	5169.2000	MHz	INFO
T2 26dB	---	---	5250.8000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.35 12.63 10
Start [MHz] Stop [MHz]	5130.000 5290.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	10700 1 320 SWE

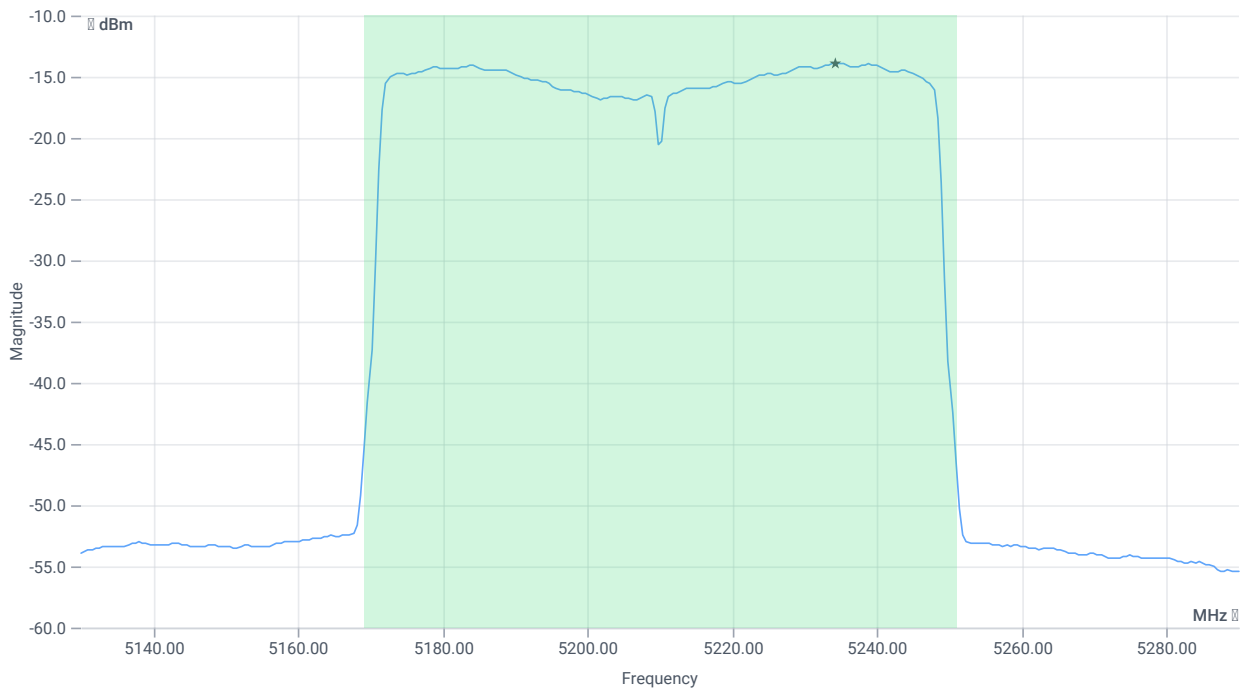

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	3.46	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	30	3.46	dBm	PASS
LIMIT: 11 dBm + 10 log 81.6					
Max output power DC corrected cond	---	30.12	3.46	dBm	na

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-13.93	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO
Power spectral density DC corrected cond	---	17	-13.93	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-1

References

TC start	12.06.2024 13:04:54
Ambit temp [°C] humidity [rel%]	25.2 30
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT80 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5210
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5210 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-6.02	dBm	INFO
Ref. frequency	---	---	5204.010	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

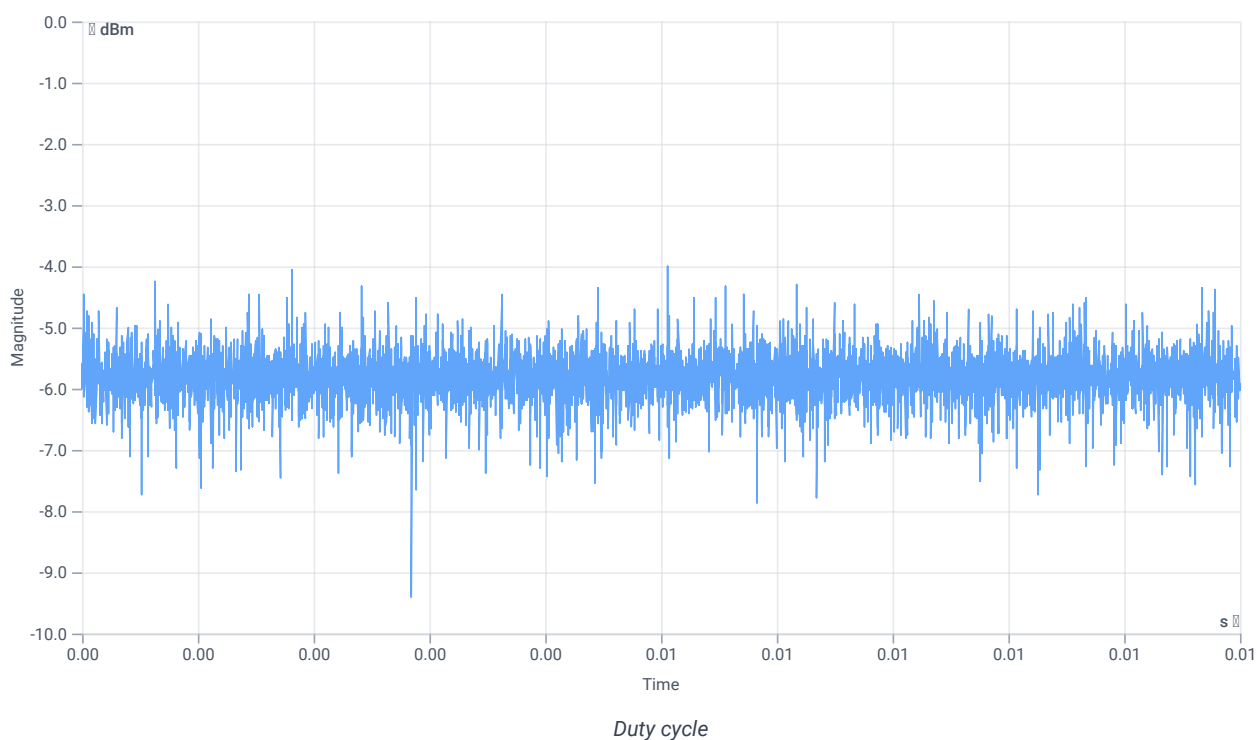

Evaluation bandwidth

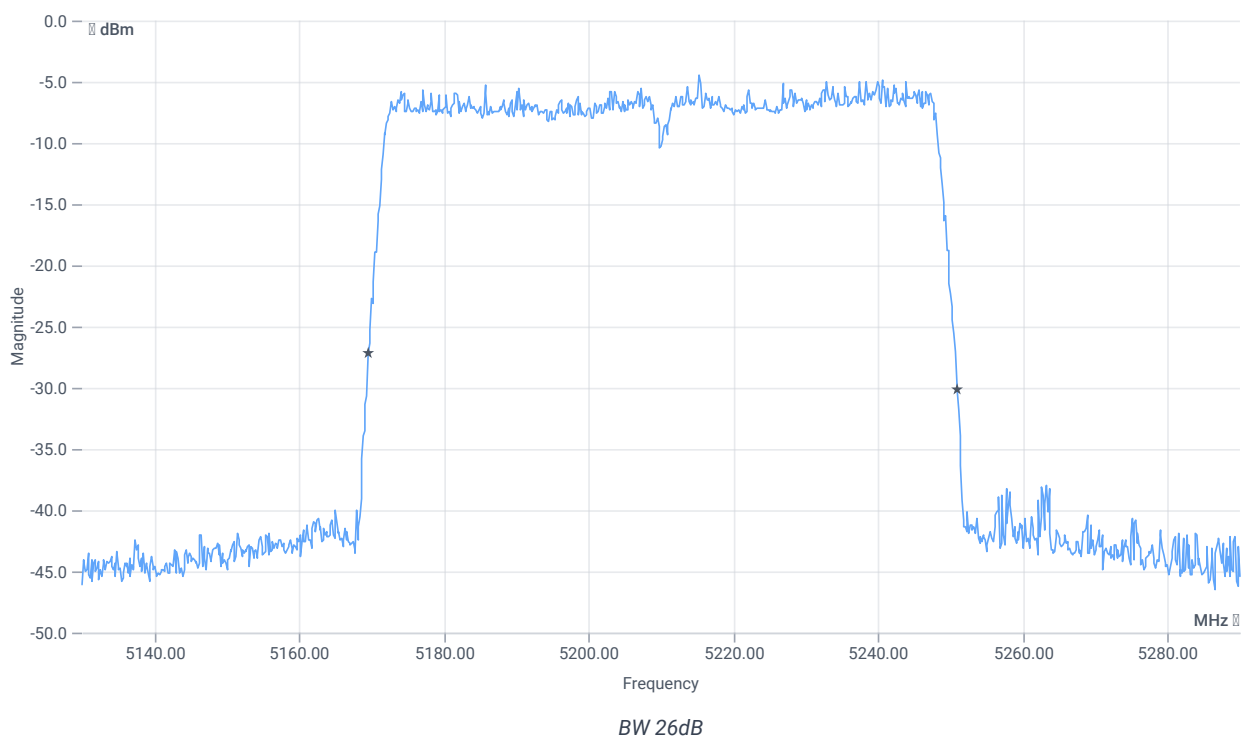


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	81.44	MHz	INFO
T1 26dB	---	---	5169.5200	MHz	INFO
T2 26dB	---	---	5250.9600	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.98 12.42 10
Start [MHz] Stop [MHz]	5130.000 5290.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	10700 1 320 SWE

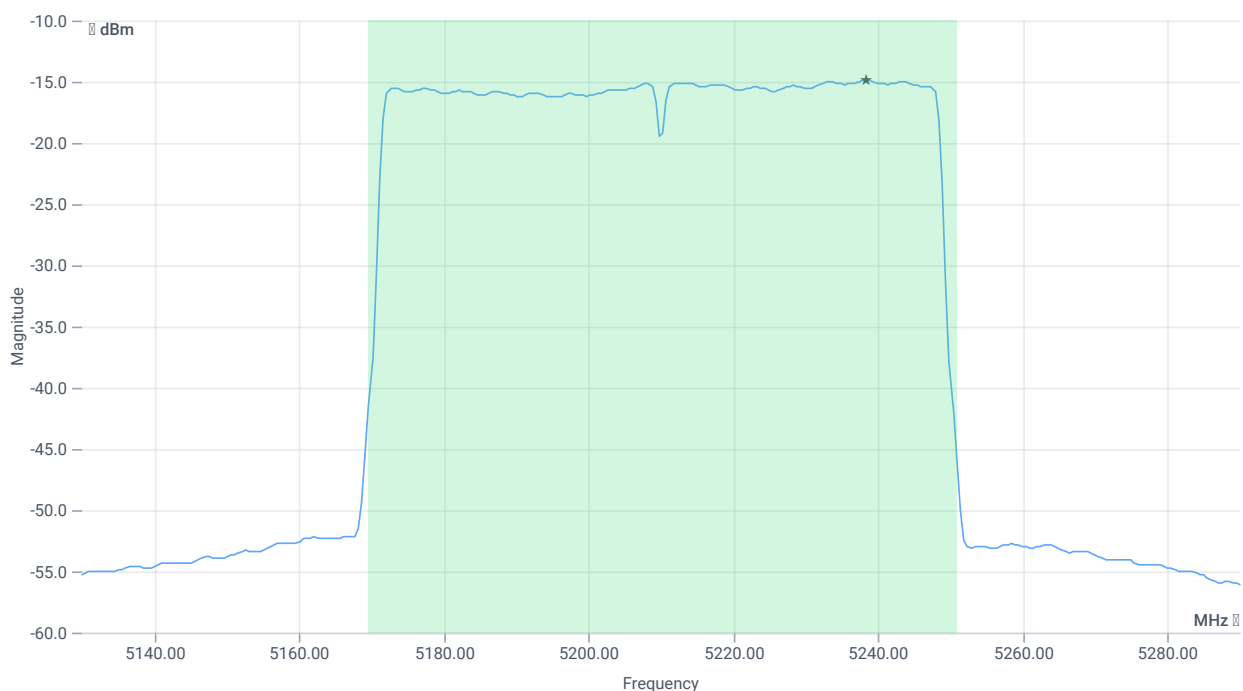

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	2.97	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	30	2.97	dBm	PASS
LIMIT: 11 dBm + 10 log 81.44					
Max output power DC corrected cond	---	30.11	2.97	dBm	na

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-14.86	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO
Power spectral density DC corrected cond	---	17	-14.86	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2A

References

TC start	11.06.2024 13:40:35
Ambit temp [°C] humidity [rel%]	24.8 31
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5260 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.55	dBm	INFO
Ref. frequency	---	---	5263.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.55 12.55 20
Start [MHz] Stop [MHz]	5235.000 5285.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


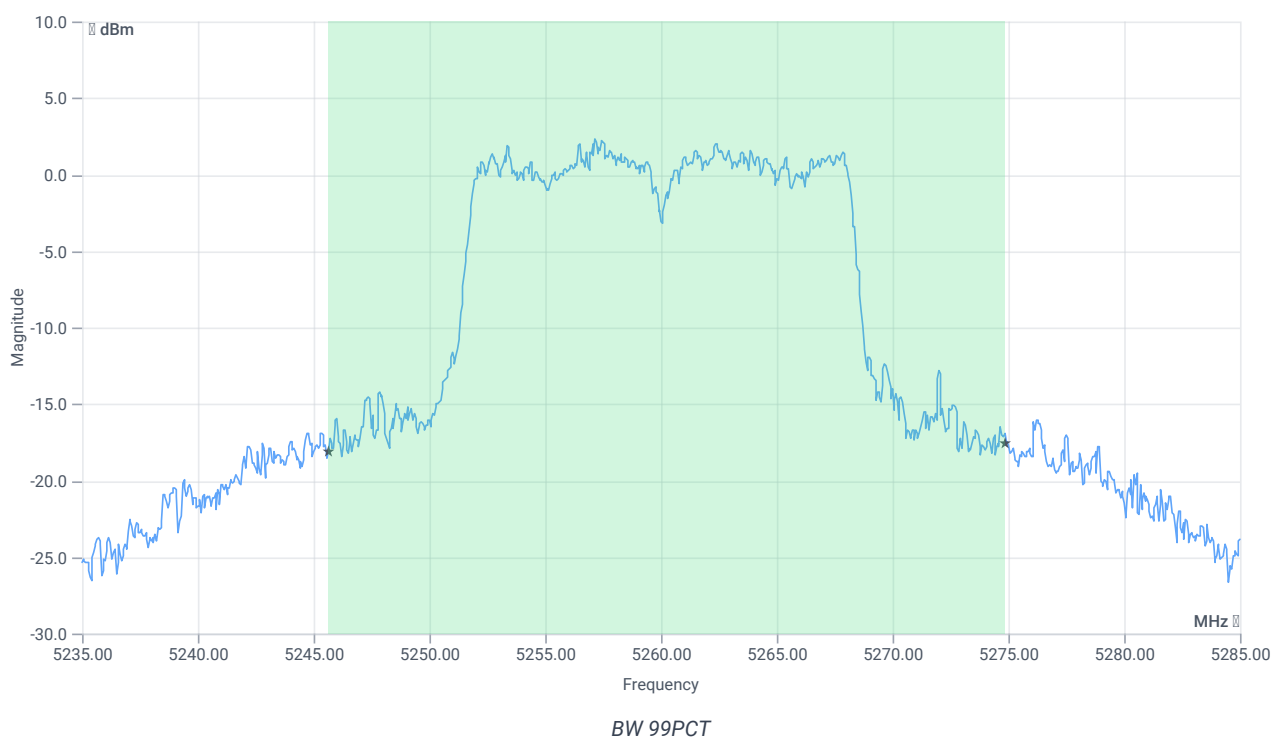




BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	29.221	MHz	INFO
T1 99%	5250.000000	---	5245.6643	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5274.8851	MHz	PASS

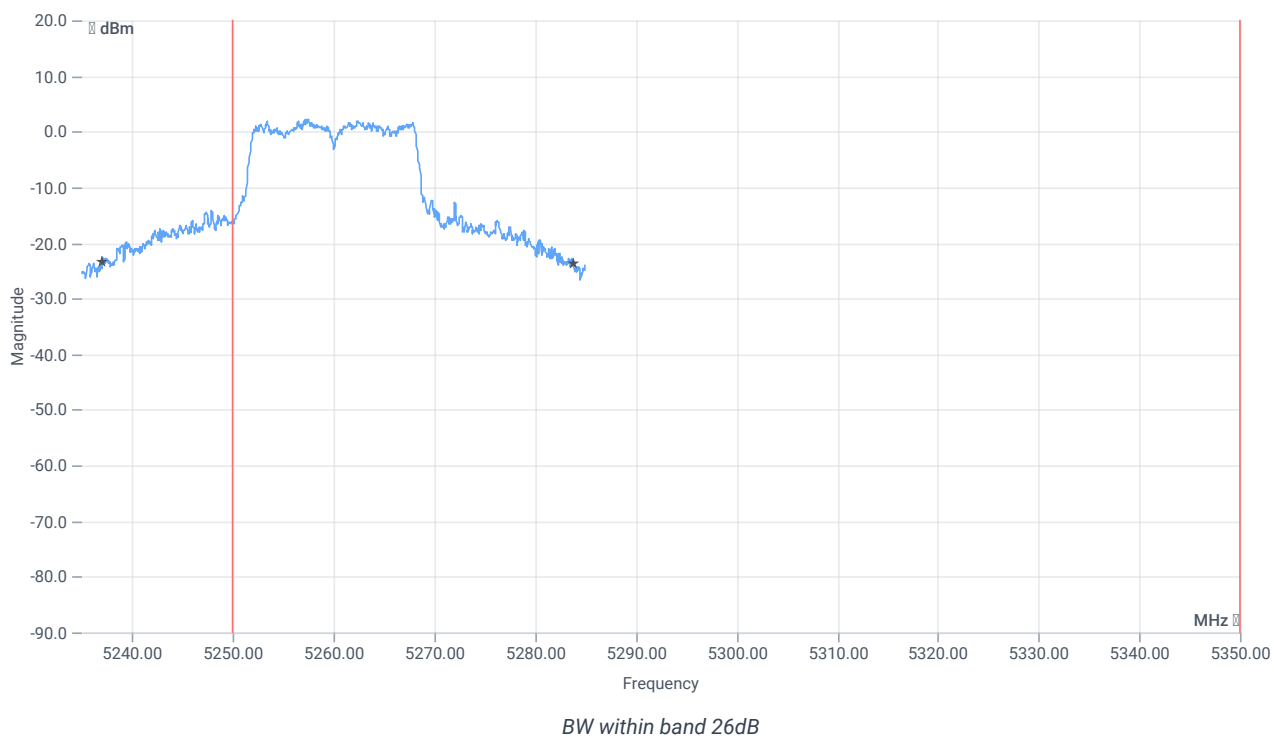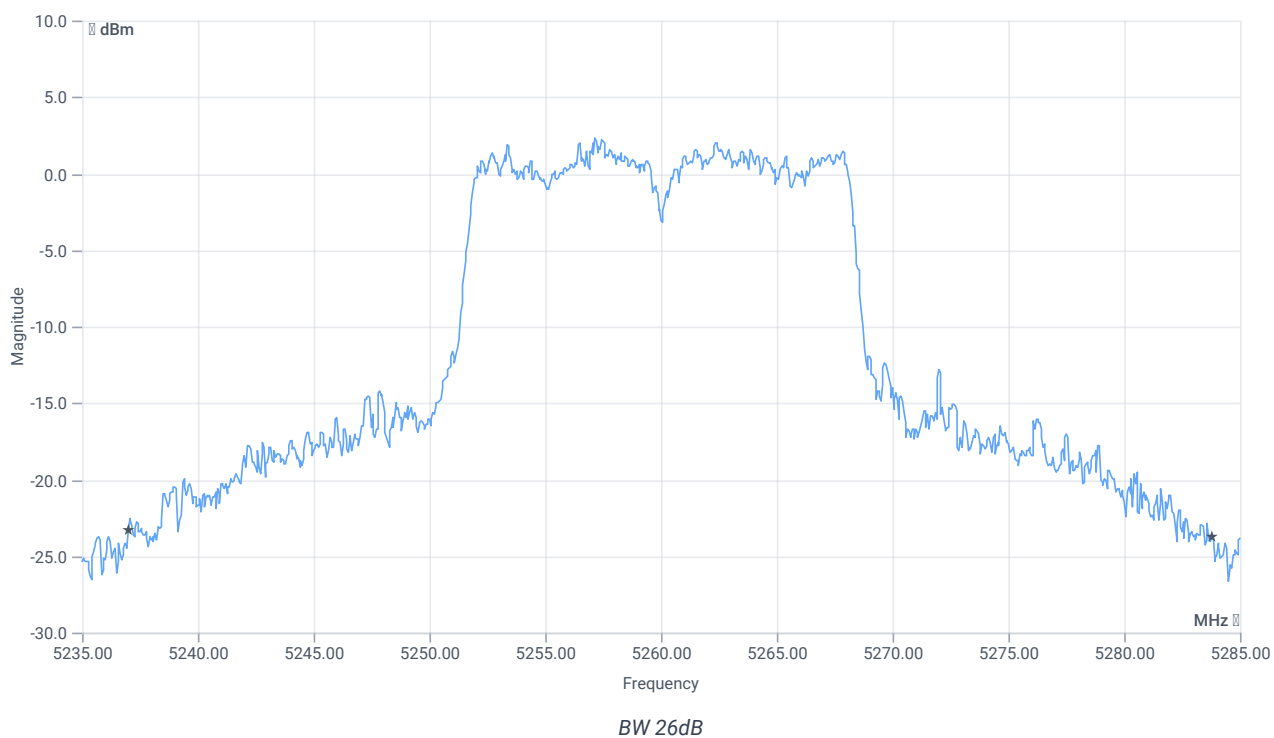

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	46.8	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5237.0000	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5283.8000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2A

References

TC start	11.06.2024 13:58:09
Ambit temp [°C] humidity [rel%]	24.9 31
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	True Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5280 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.80	dBm	INFO
Ref. frequency	---	---	5282.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.80 12.59 20
Start [MHz] Stop [MHz]	5255.000 5305.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


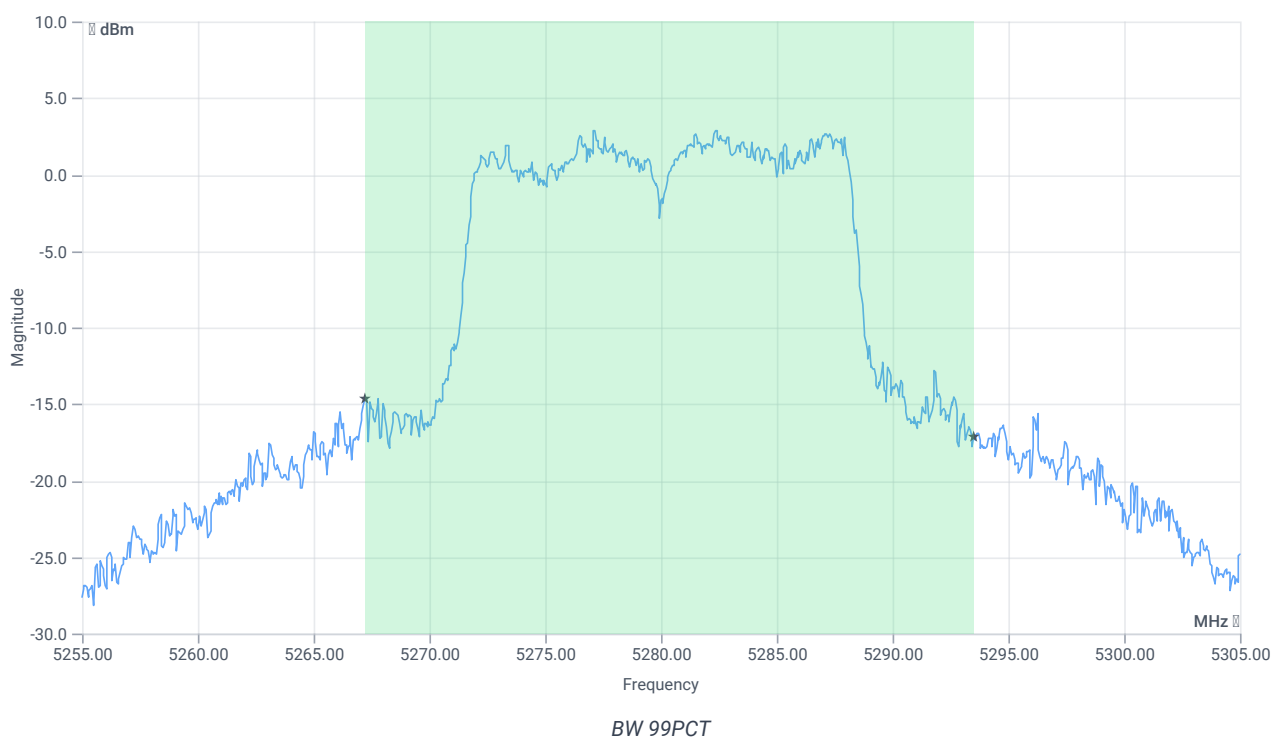


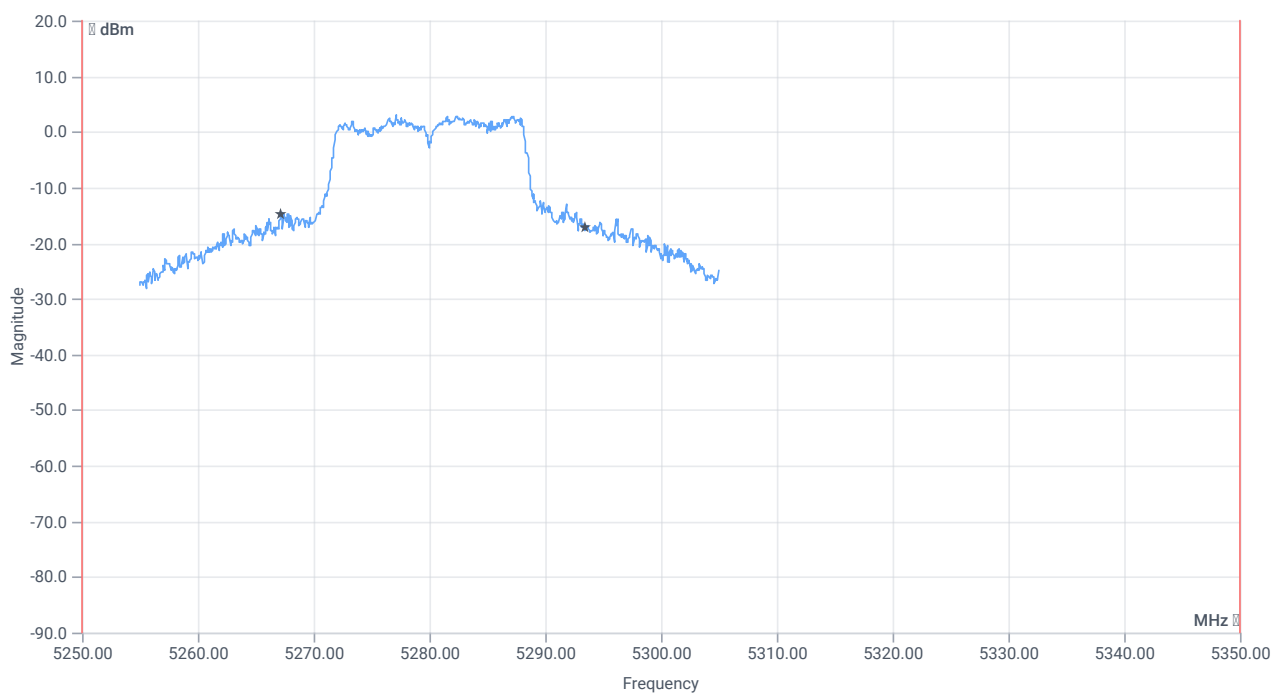

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	26.274	MHz	INFO
T1 99%	5250.000000	---	5267.2128	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5293.4865	MHz	PASS

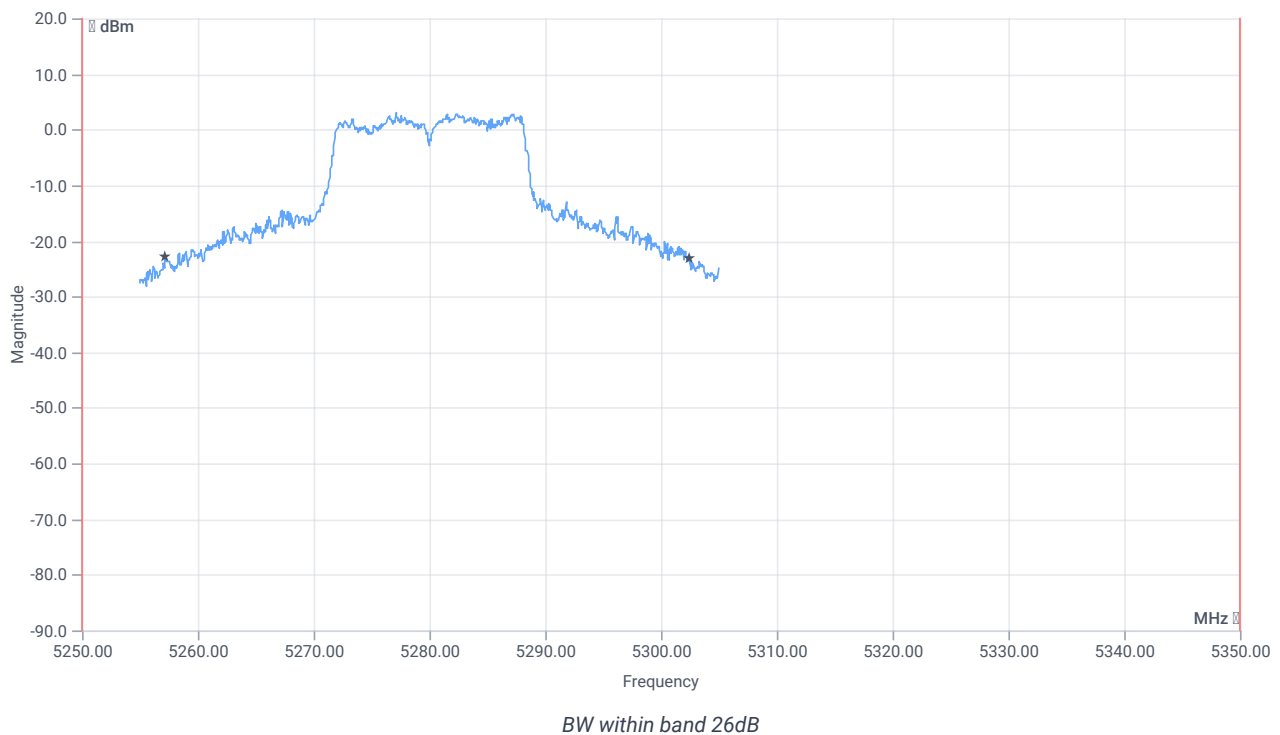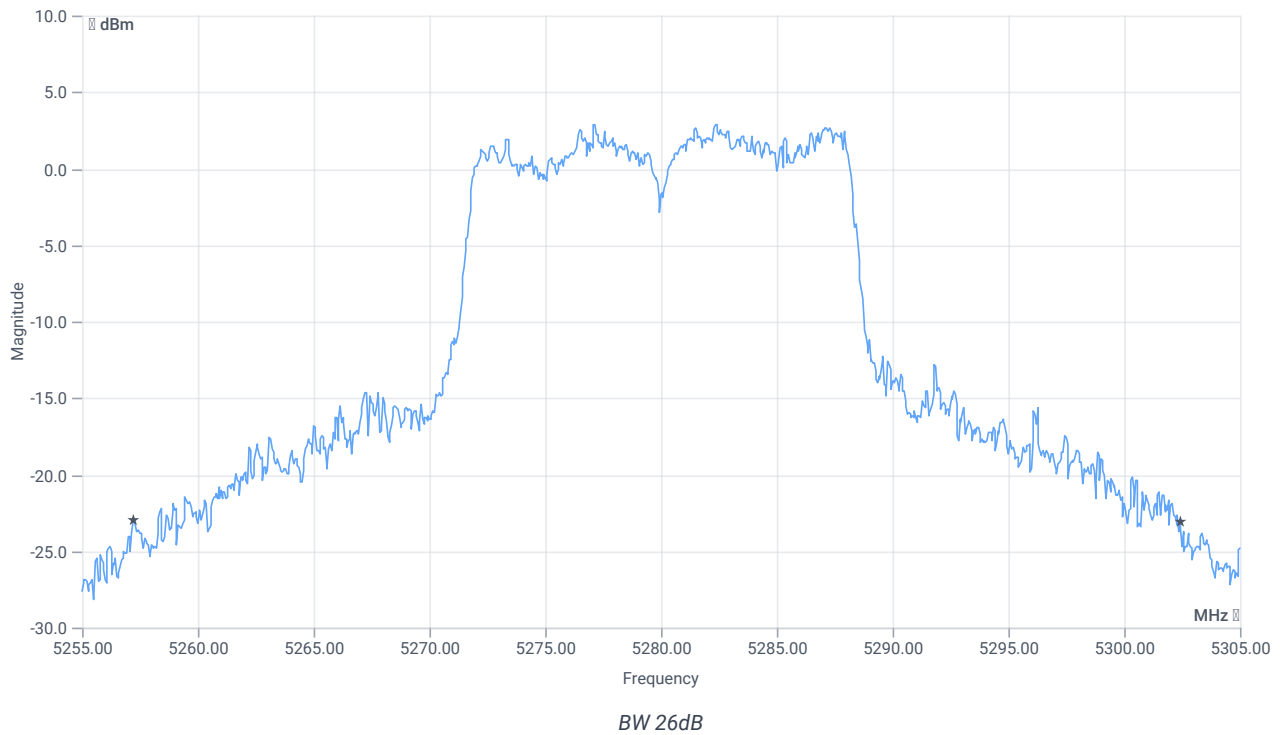

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	45.2	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5257.2000	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5302.4000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2A

References

TC start	11.06.2024 14:14:52
Ambit temp [°C] humidity [rel%]	24.9 31
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	True Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5320 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.71	dBm	INFO
Ref. frequency	---	---	5327.390	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.71 13.26 15
Start [MHz] Stop [MHz]	5295.000 5345.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


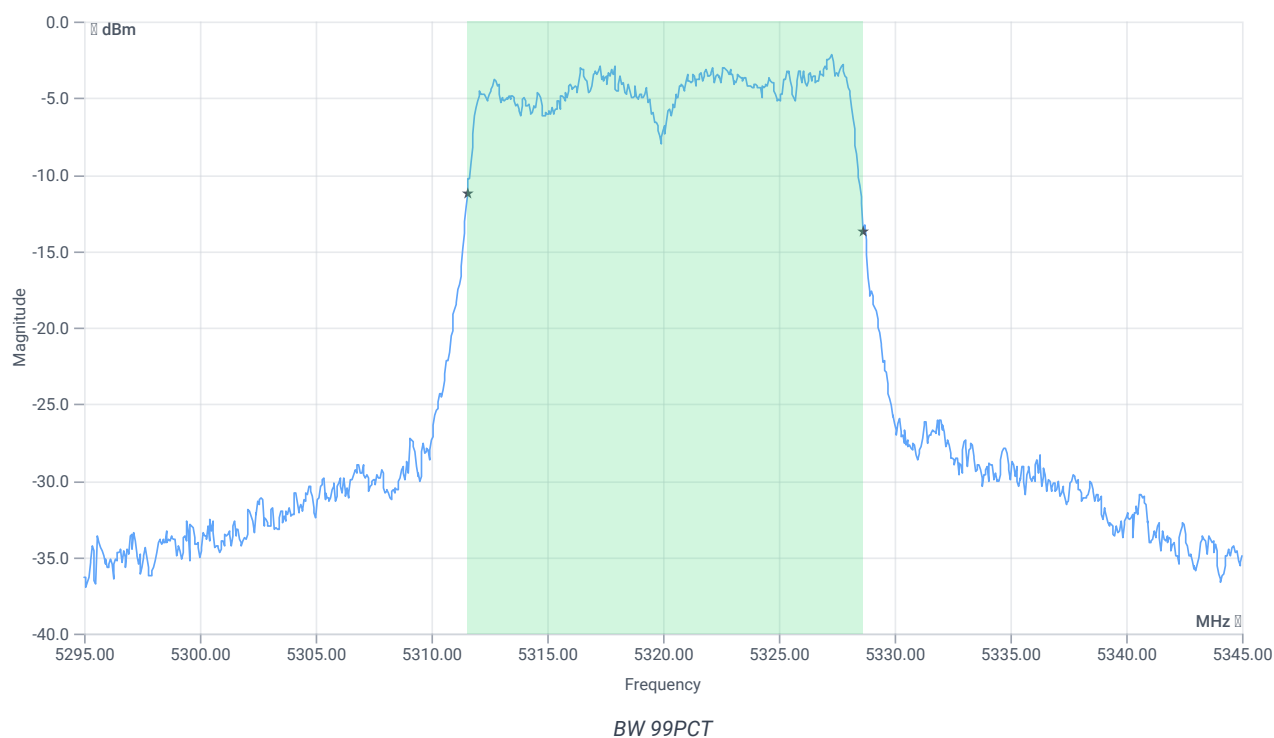


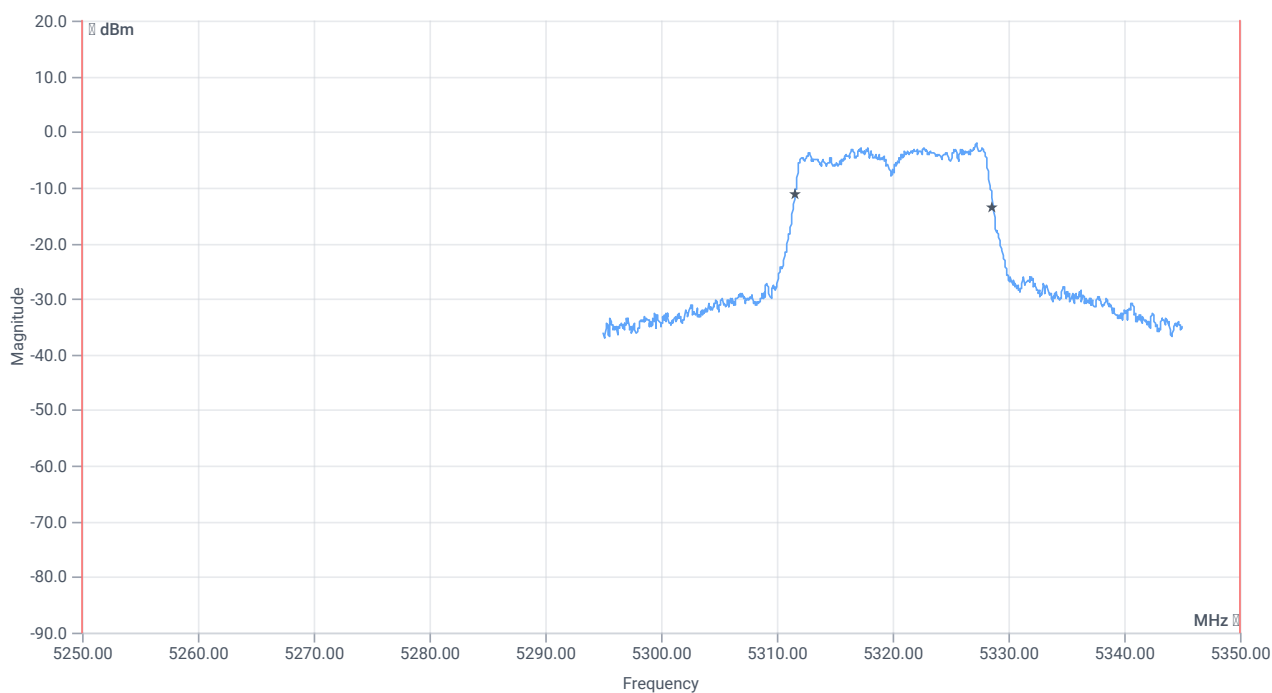

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17.083	MHz	INFO
T1 99%	5250.000000	---	5311.5584	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5328.6414	MHz	PASS

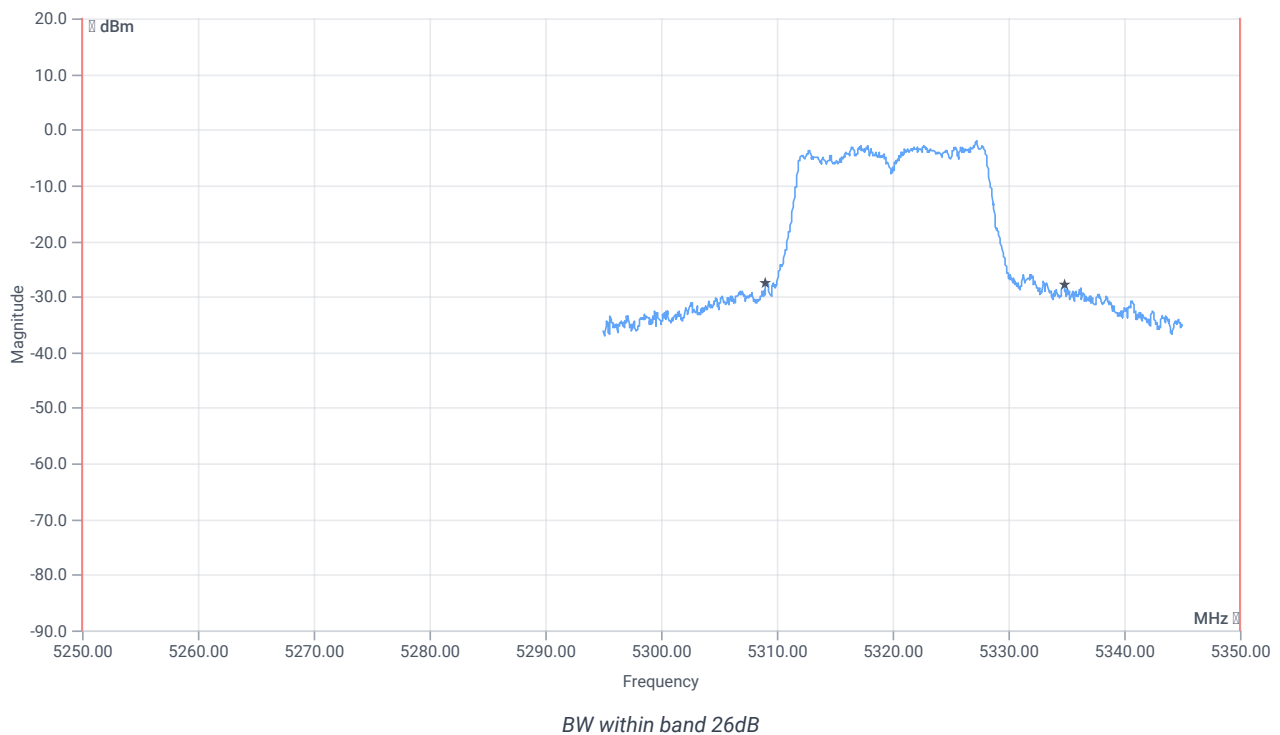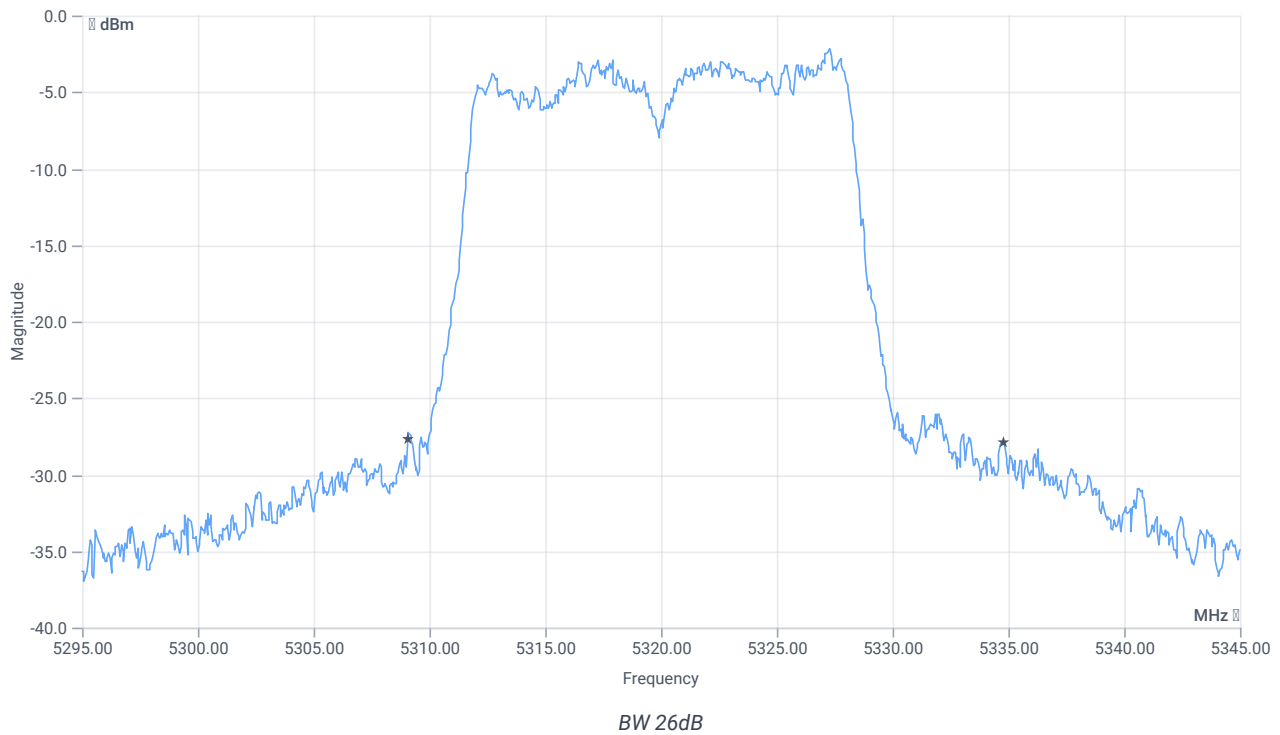

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	25.75	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5309.0500	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5334.8000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2A

References

TC start	12.06.2024 10:10:03
Ambit temp [°C] humidity [rel%]	24.2 34
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5260 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.95	dBm	INFO
Ref. frequency	---	---	5257.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.95 12.34 25
Start [MHz] Stop [MHz]	5235.000 5285.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


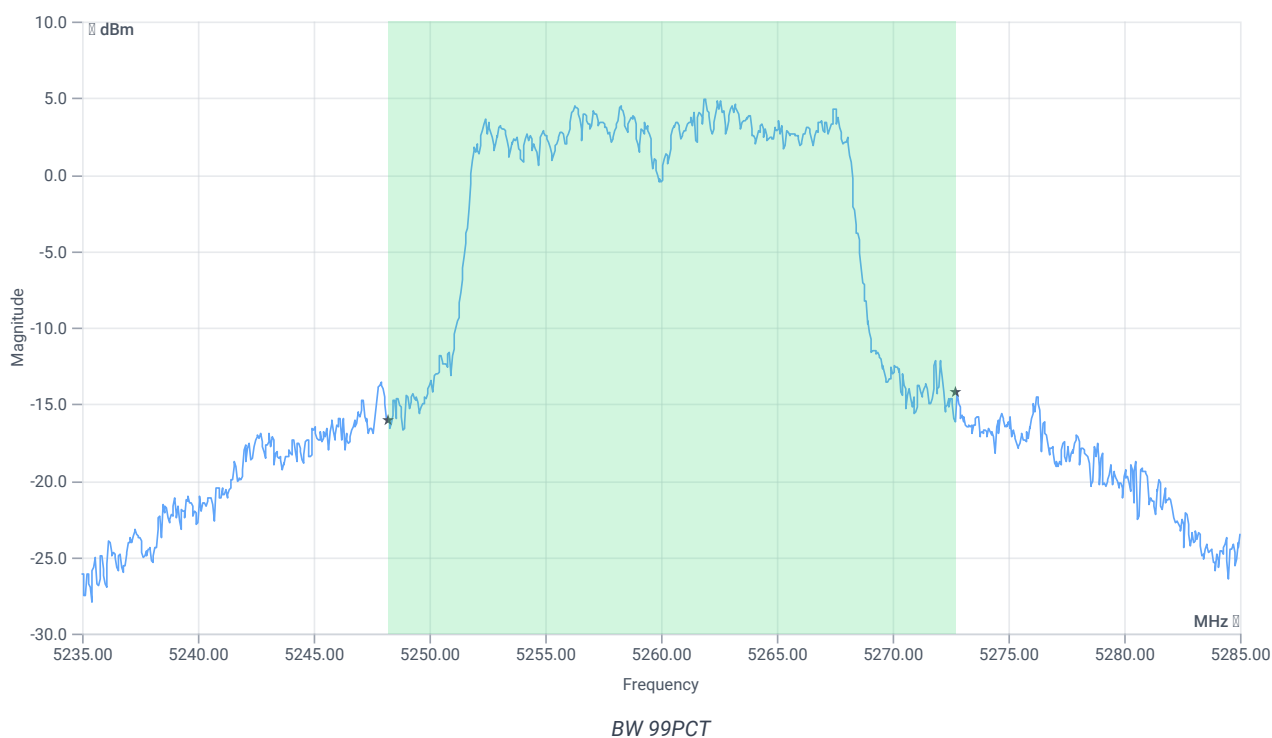




BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	24.525	MHz	INFO
T1 99%	5250.000000	---	5248.2118	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5272.7373	MHz	PASS

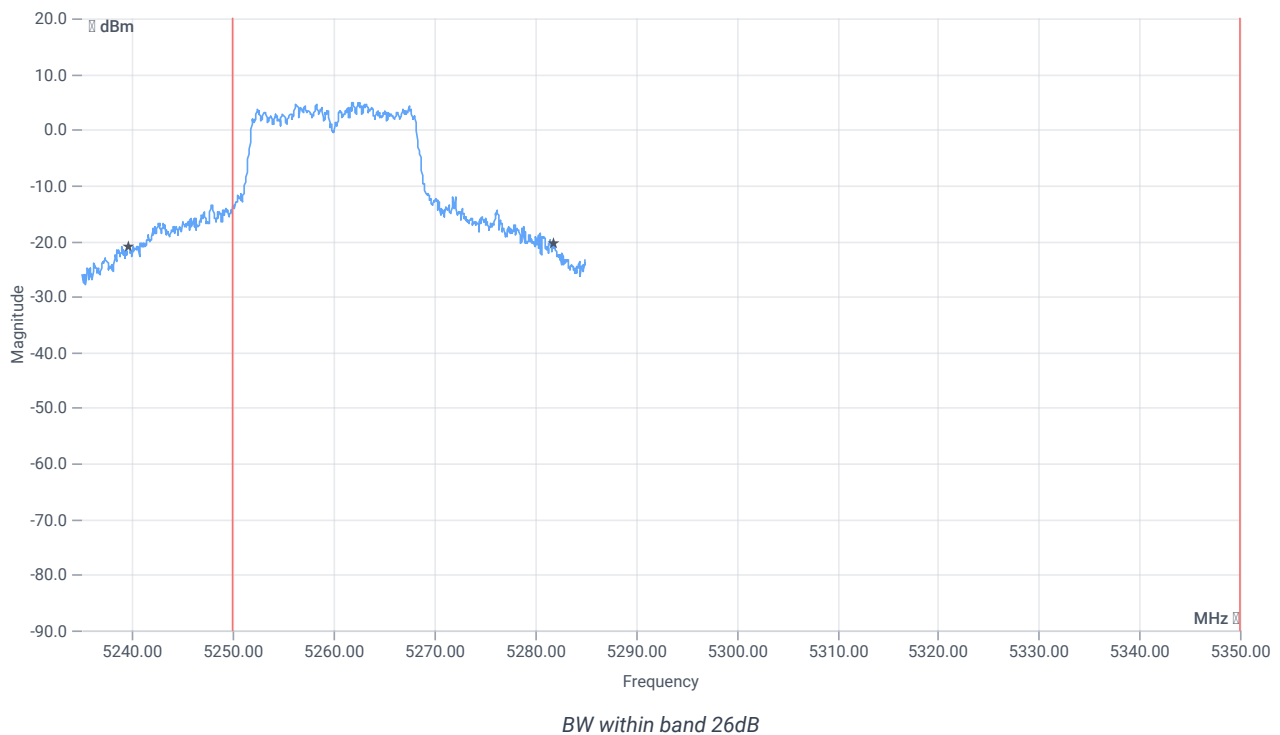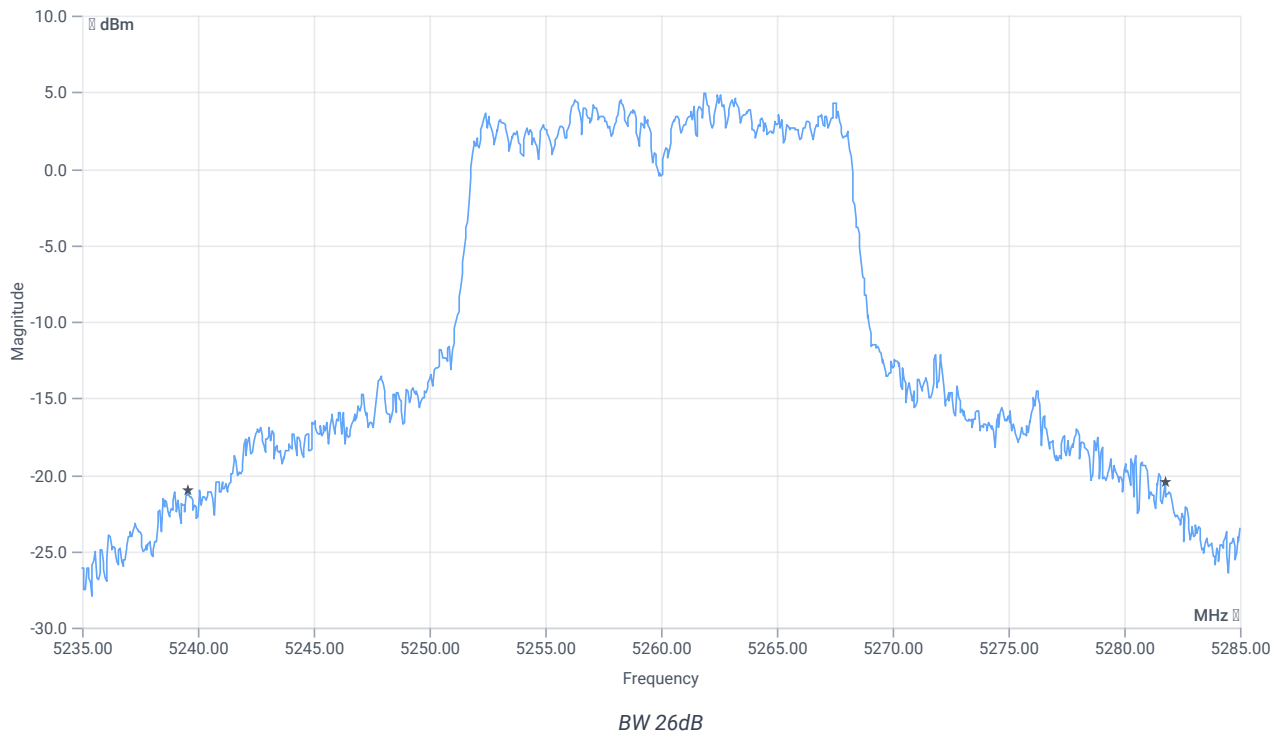

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	42.15	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5239.6000	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5281.7500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2A

References

TC start	12.06.2024 10:25:00
Ambit temp [°C] humidity [rel%]	24.3 34
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	True Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5280 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.86	dBm	INFO
Ref. frequency	---	---	5281.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.86 12.57 20
Start [MHz] Stop [MHz]	5255.000 5305.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

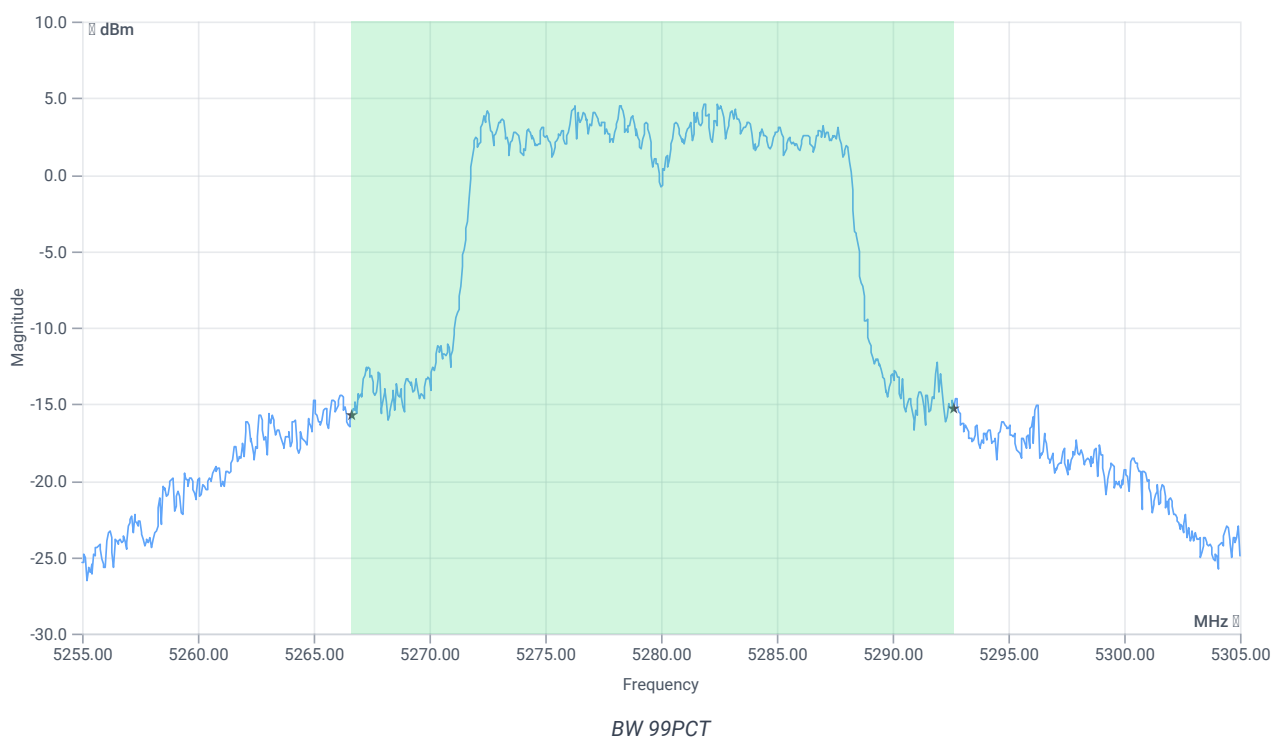


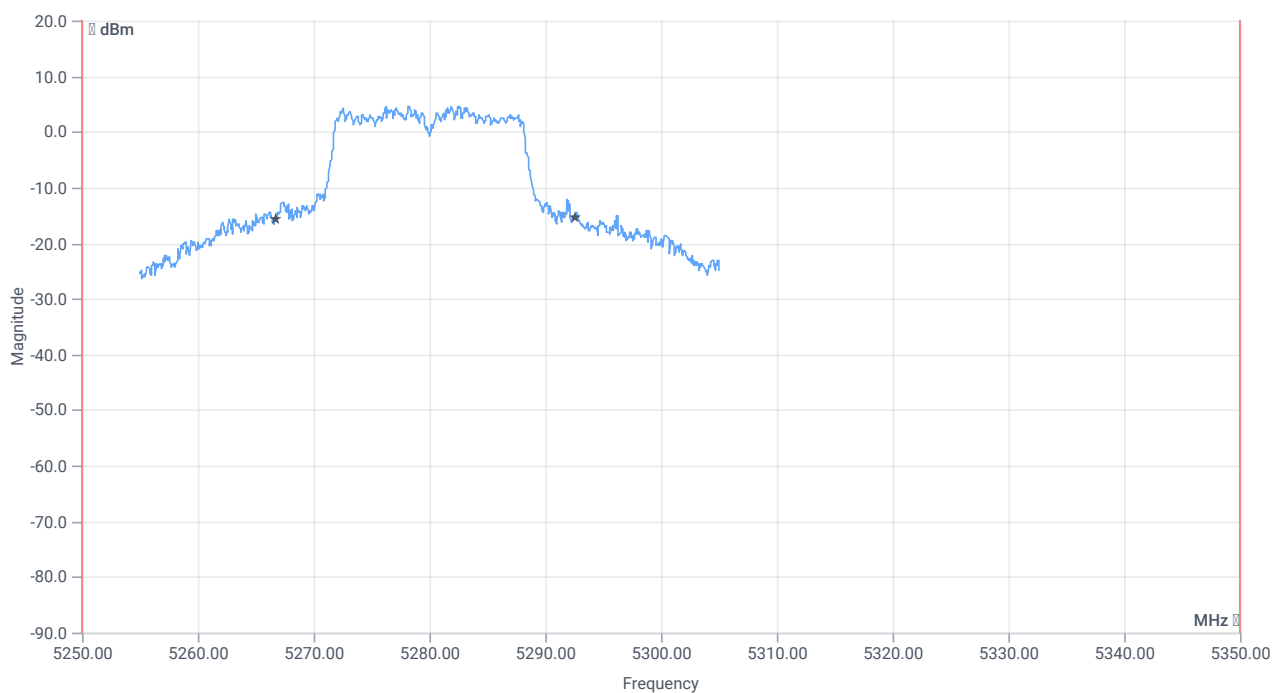

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	25.974	MHz	INFO
T1 99%	5250.000000	---	5266.6633	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5292.6374	MHz	PASS

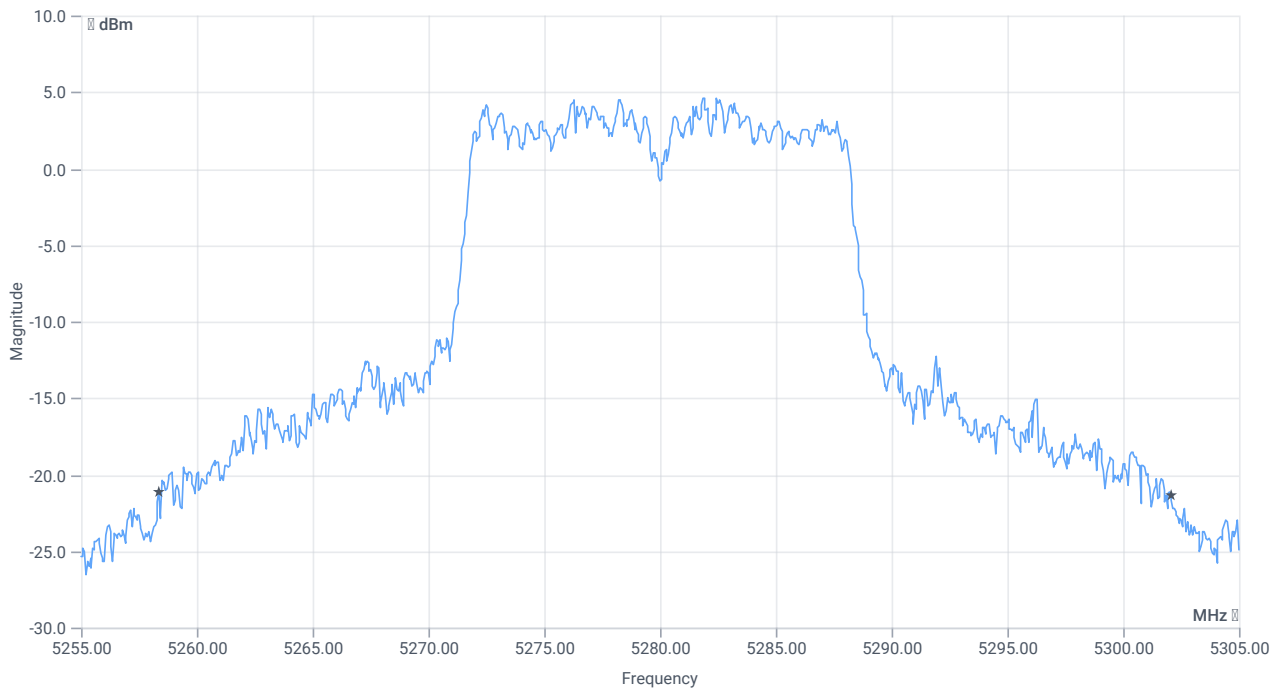

BW 26dB



BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	43.7	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5258.3500	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5302.0500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2A

References

TC start	12.06.2024 10:38:50
Ambit temp [°C] humidity [rel%]	24.4 33
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	True Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5320 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.95	dBm	INFO
Ref. frequency	---	---	5317.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.95 13.02 15
Start [MHz] Stop [MHz]	5295.000 5345.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

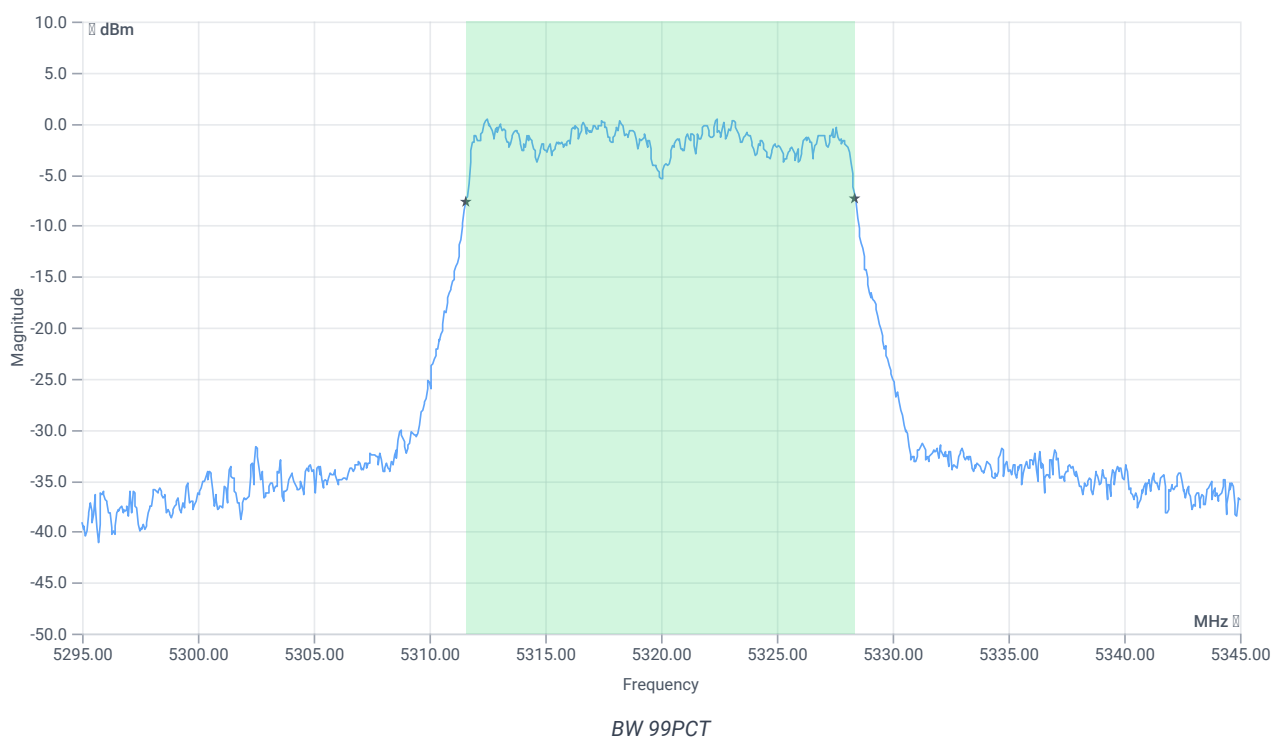


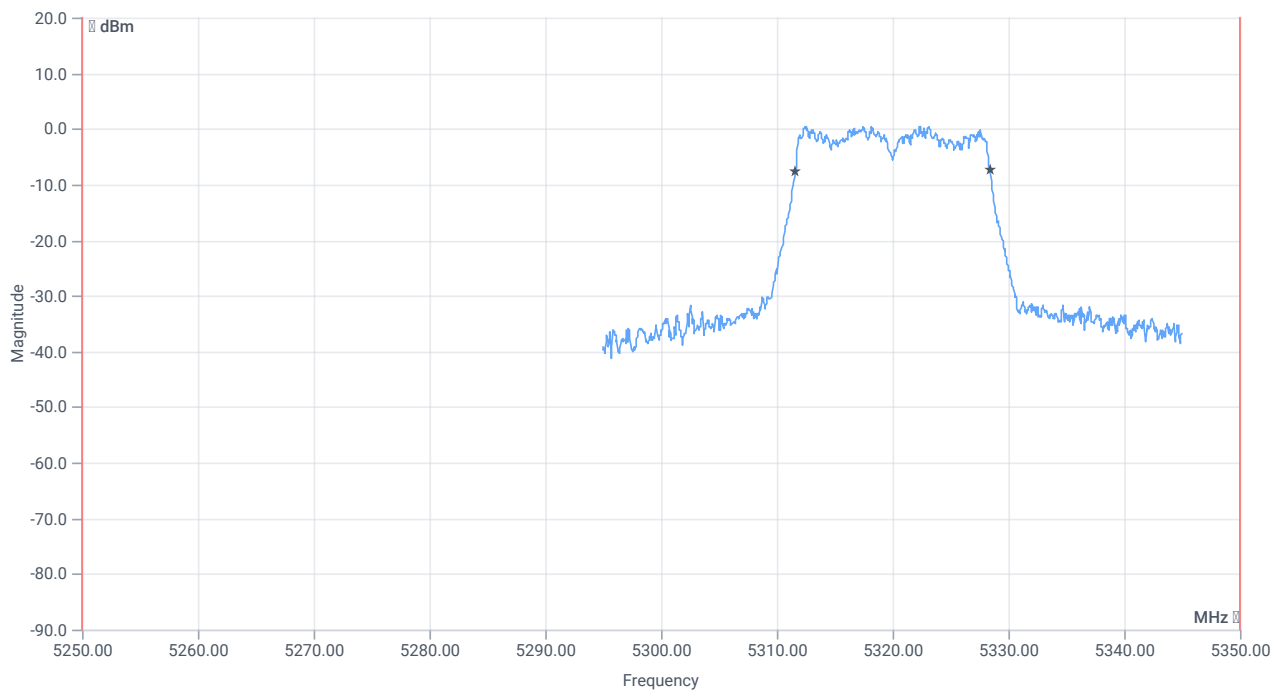


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.833	MHz	INFO
T1 99%	5250.000000	---	5311.5584	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5328.3916	MHz	PASS

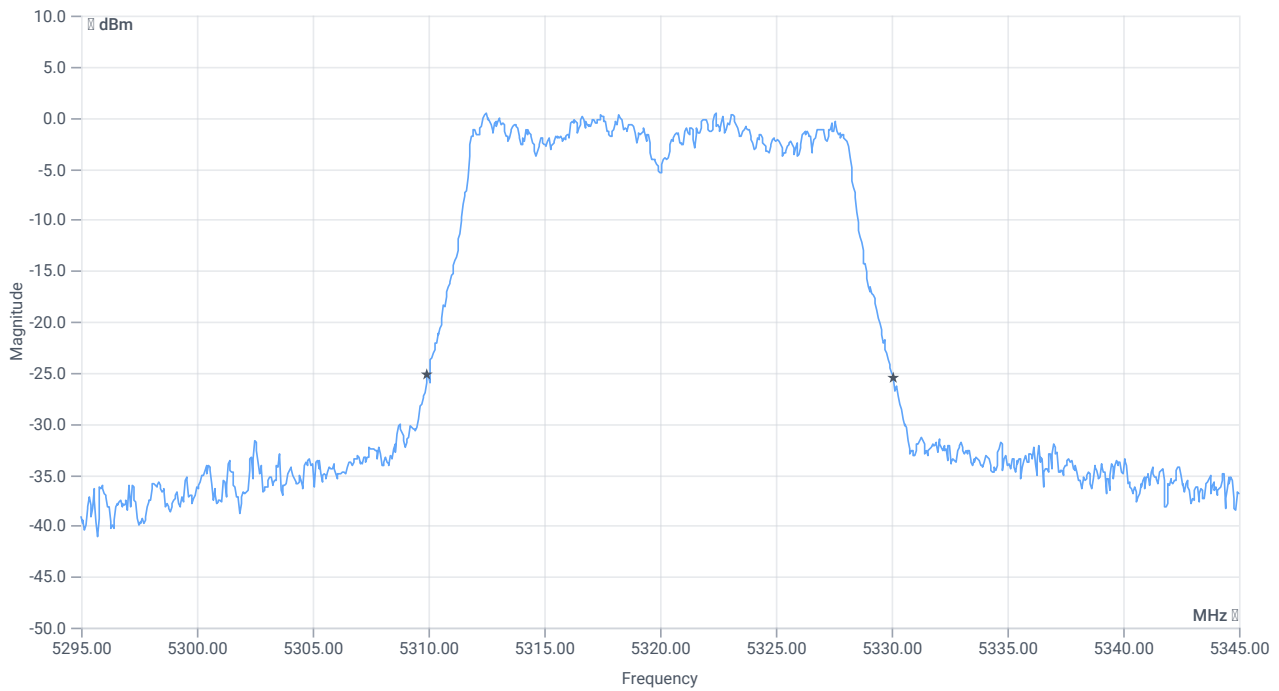

BW 26dB

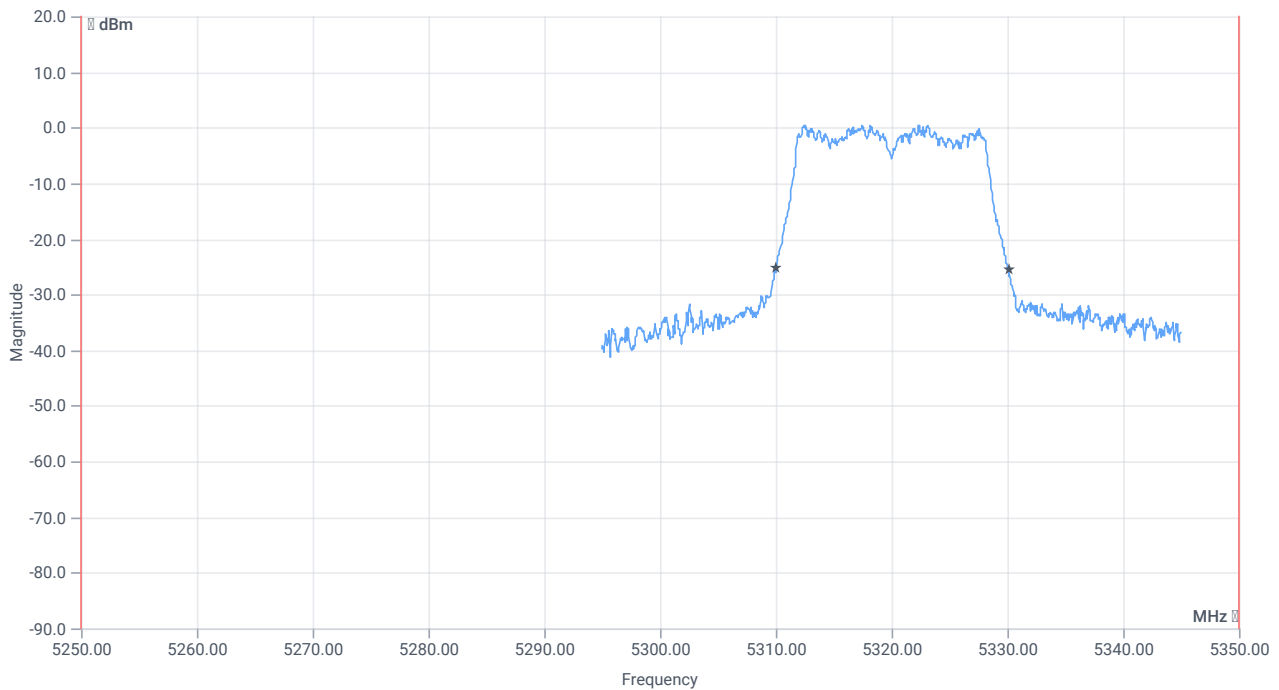

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.15	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5309.9500	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5330.1000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2A

References

TC start	12.06.2024 07:50:19
Ambit temp [°C] humidity [rel%]	22.9 36
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT20 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5260 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.12	dBm	INFO
Ref. frequency	---	---	5262.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.12 12.55 20
Start [MHz] Stop [MHz]	5235.000 5285.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


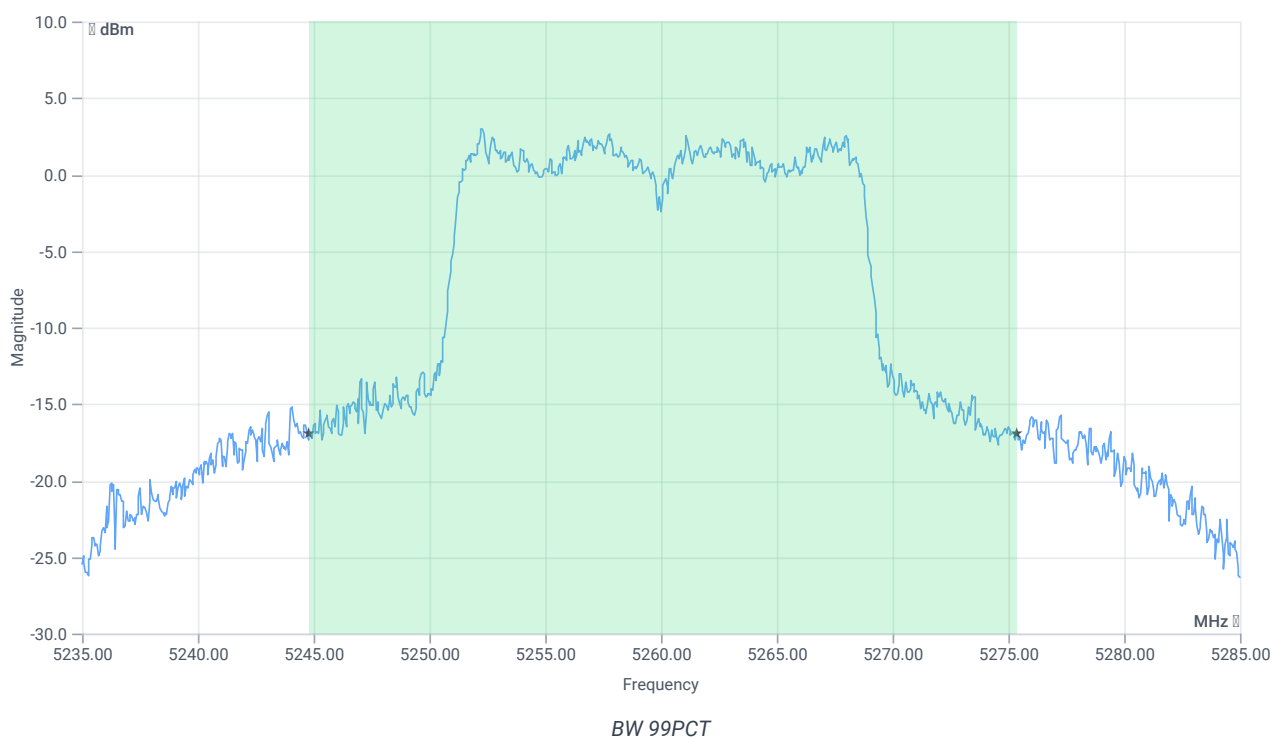


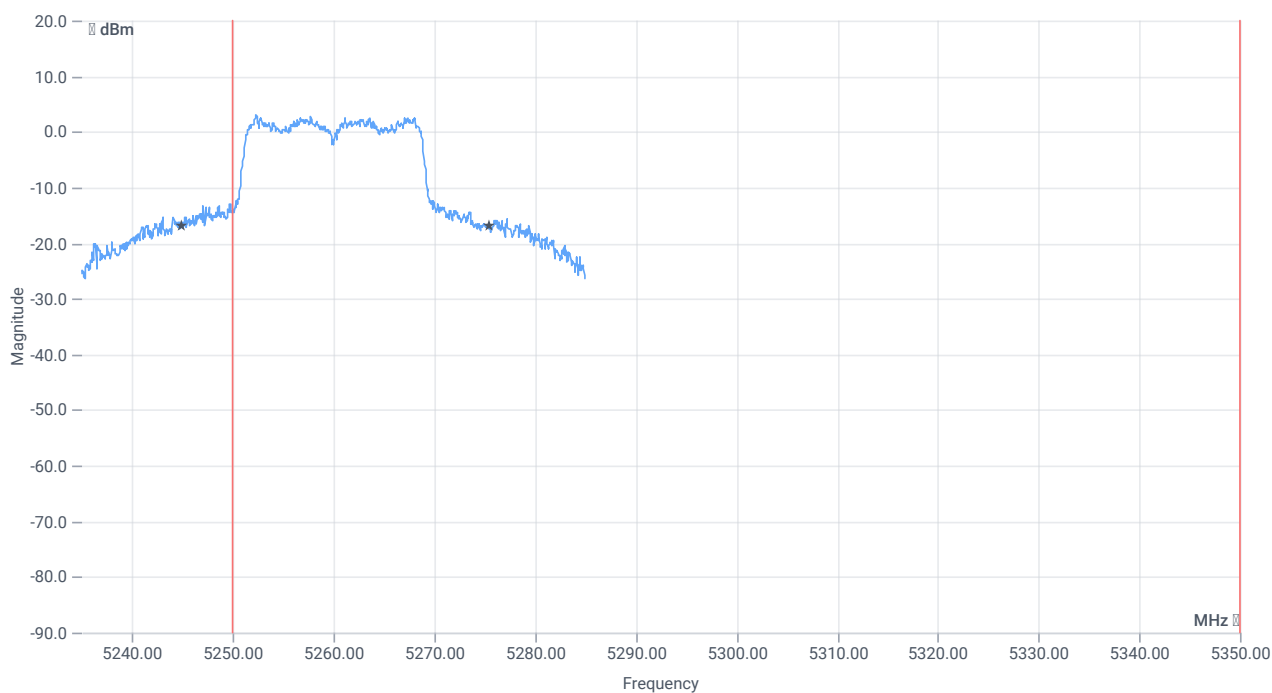

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	30.569	MHz	INFO
T1 99%	5250.000000	---	5244.8152	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5275.3846	MHz	PASS

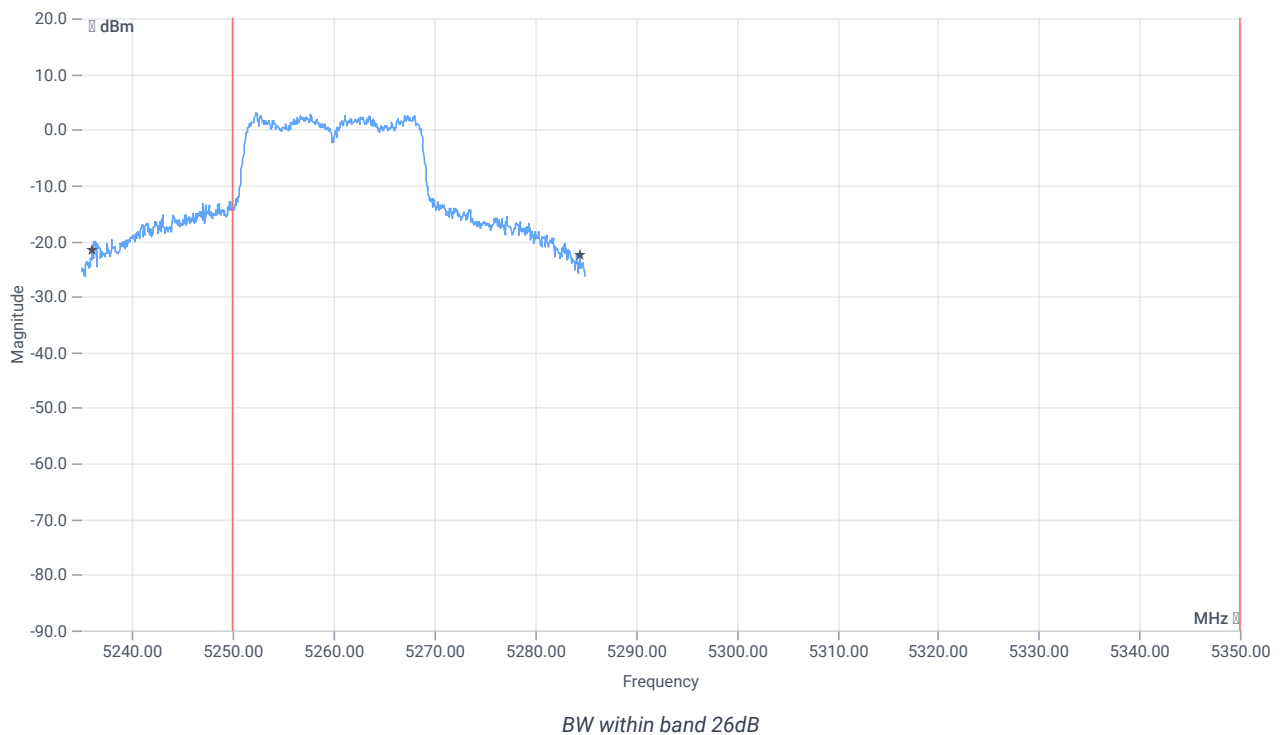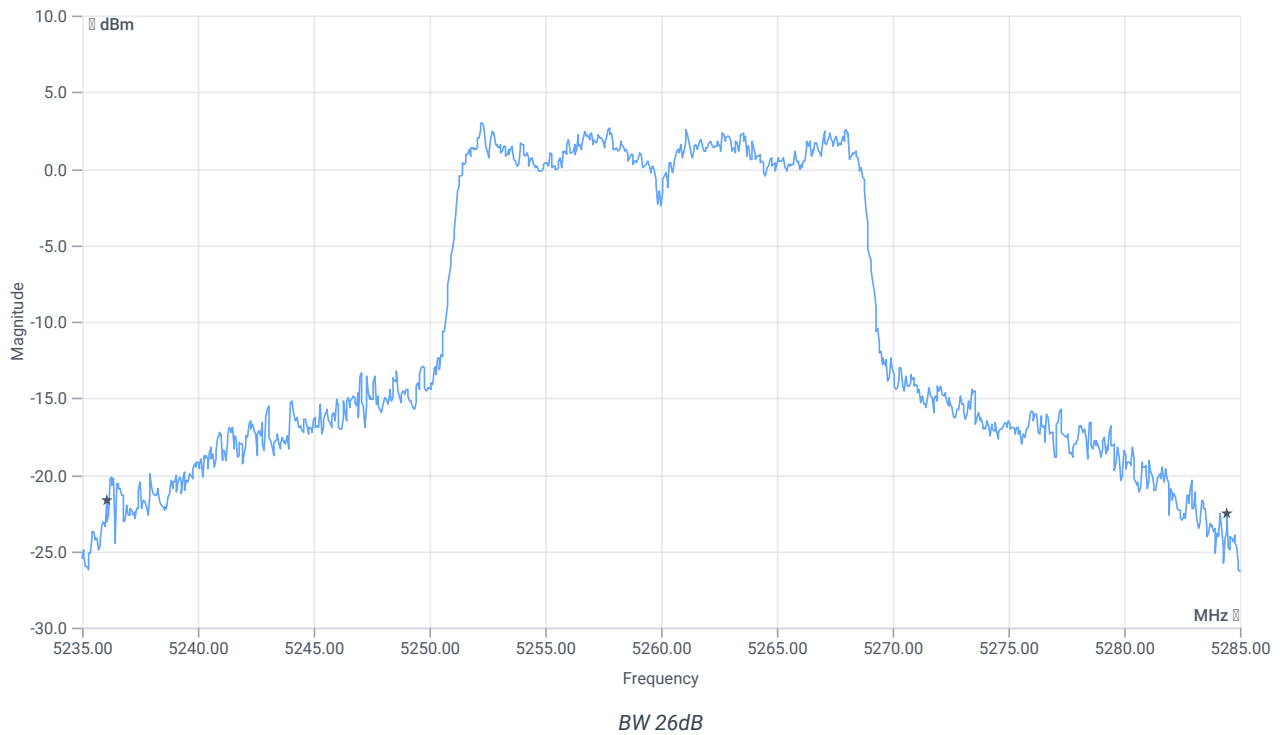

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	48.4	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5236.0500	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5284.4500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2A

References

TC start	12.06.2024 08:05:14
Ambit temp [°C] humidity [rel%]	23.1 36
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT20 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	True Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5280 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.61	dBm	INFO
Ref. frequency	---	---	5287.390	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.61 12.59 20
Start [MHz] Stop [MHz]	5255.000 5305.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

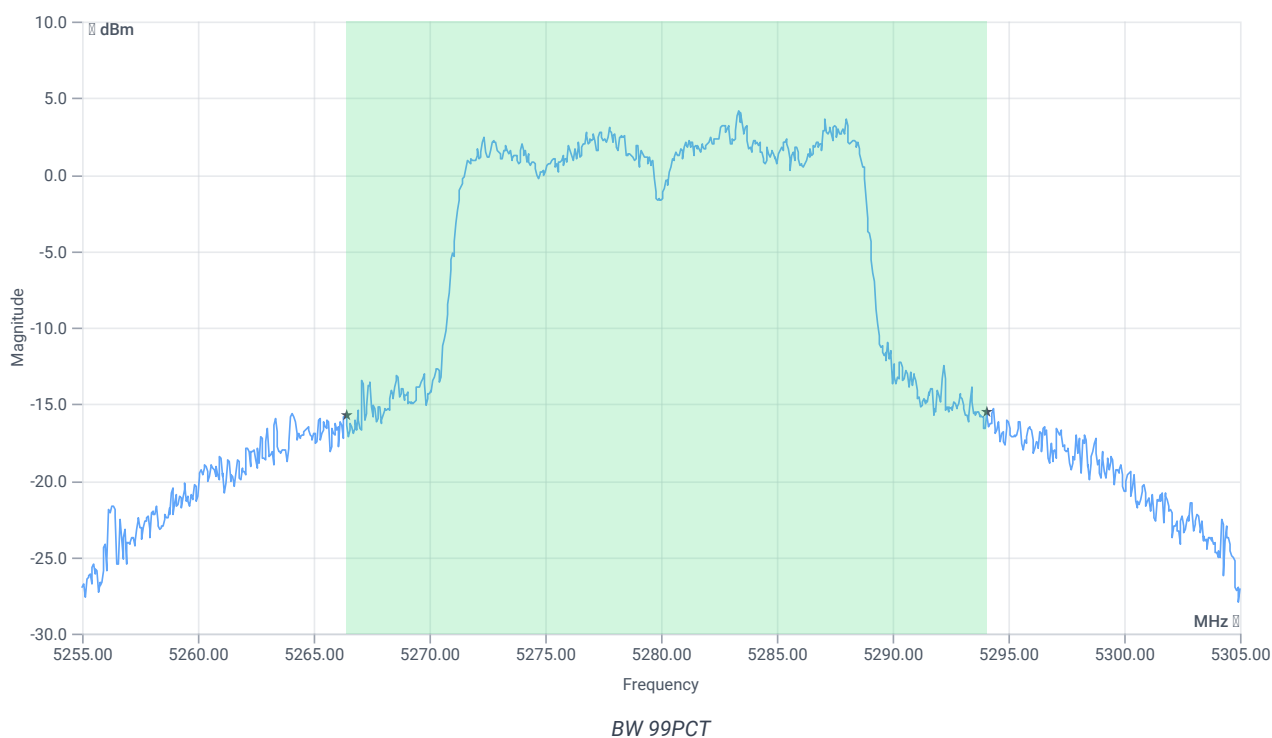


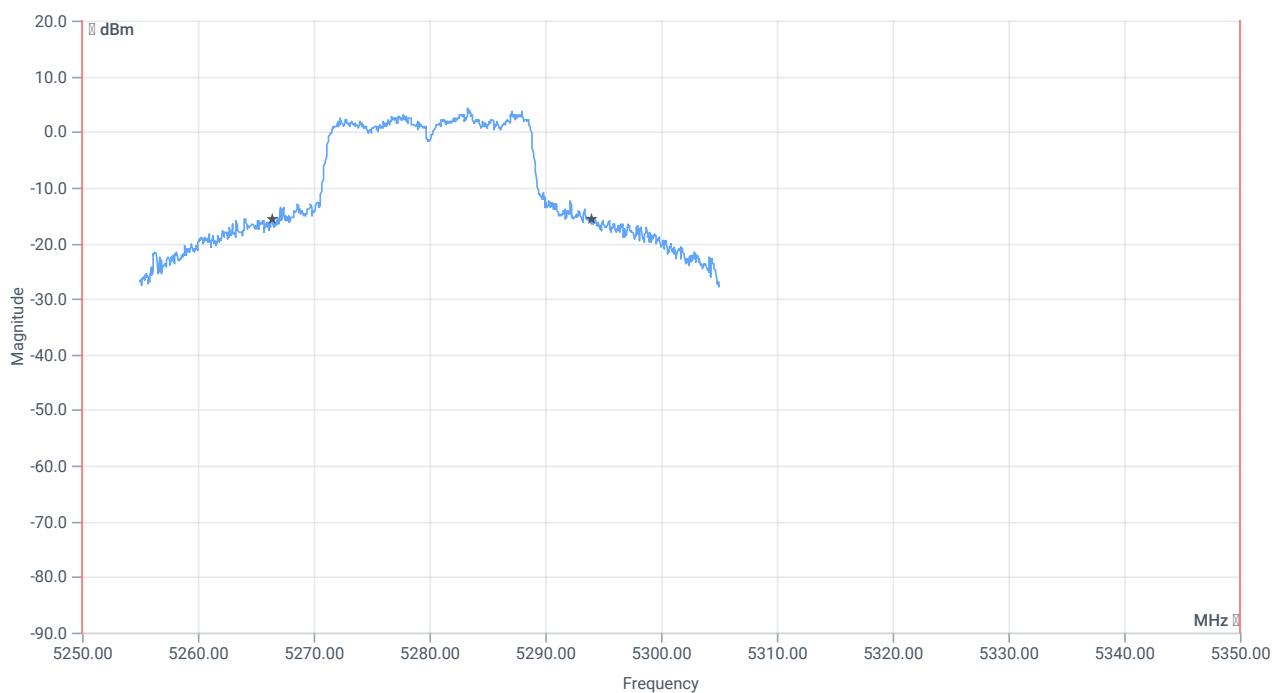


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	27.622	MHz	INFO
T1 99%	5250.000000	---	5266.4136	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5294.0360	MHz	PASS

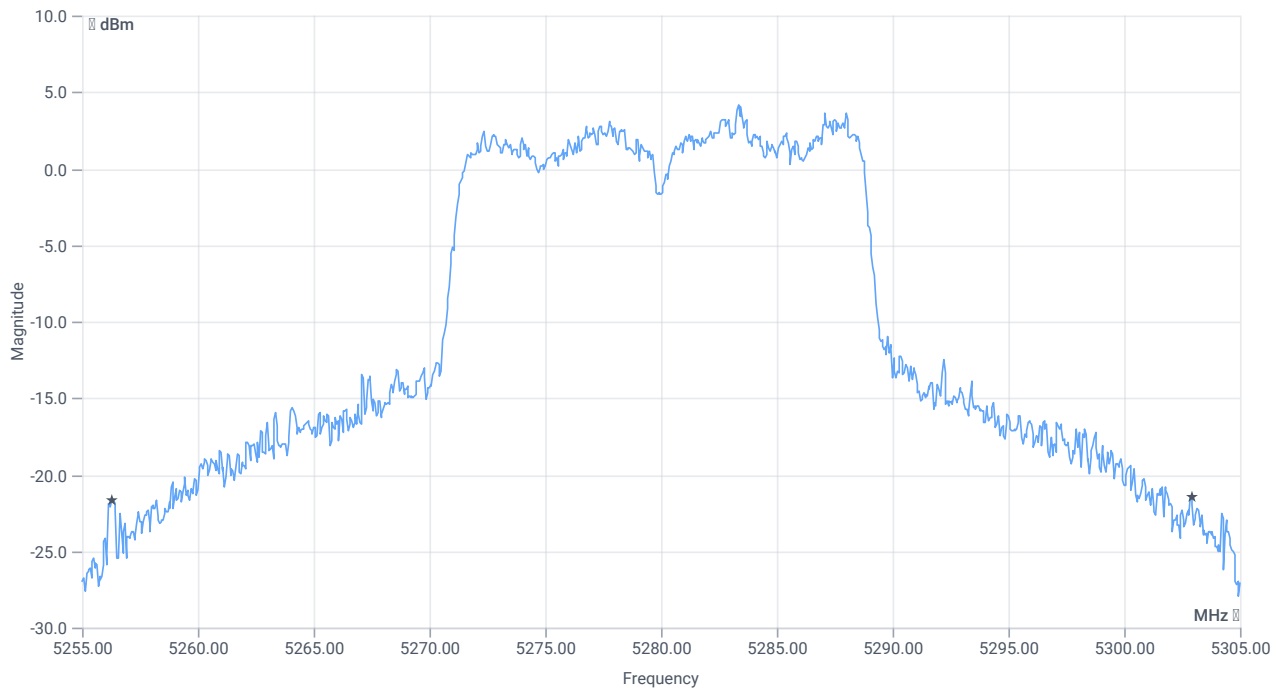

BW 26dB

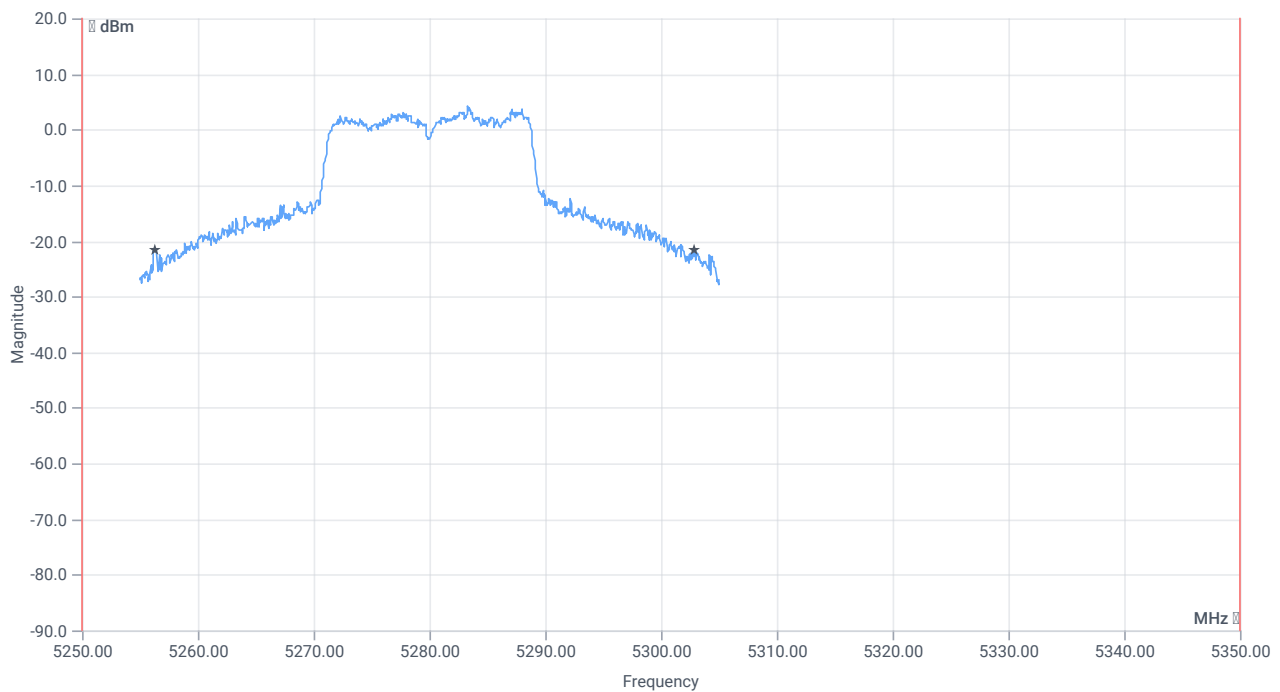

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	46.65	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5256.2500	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5302.9000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2A

References

TC start	12.06.2024 08:20:03
Ambit temp [°C] humidity [rel%]	23.2 36
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT20 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	True Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5320 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.06	dBm	INFO
Ref. frequency	---	---	5327.390	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.06 13.26 15
Start [MHz] Stop [MHz]	5295.000 5345.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


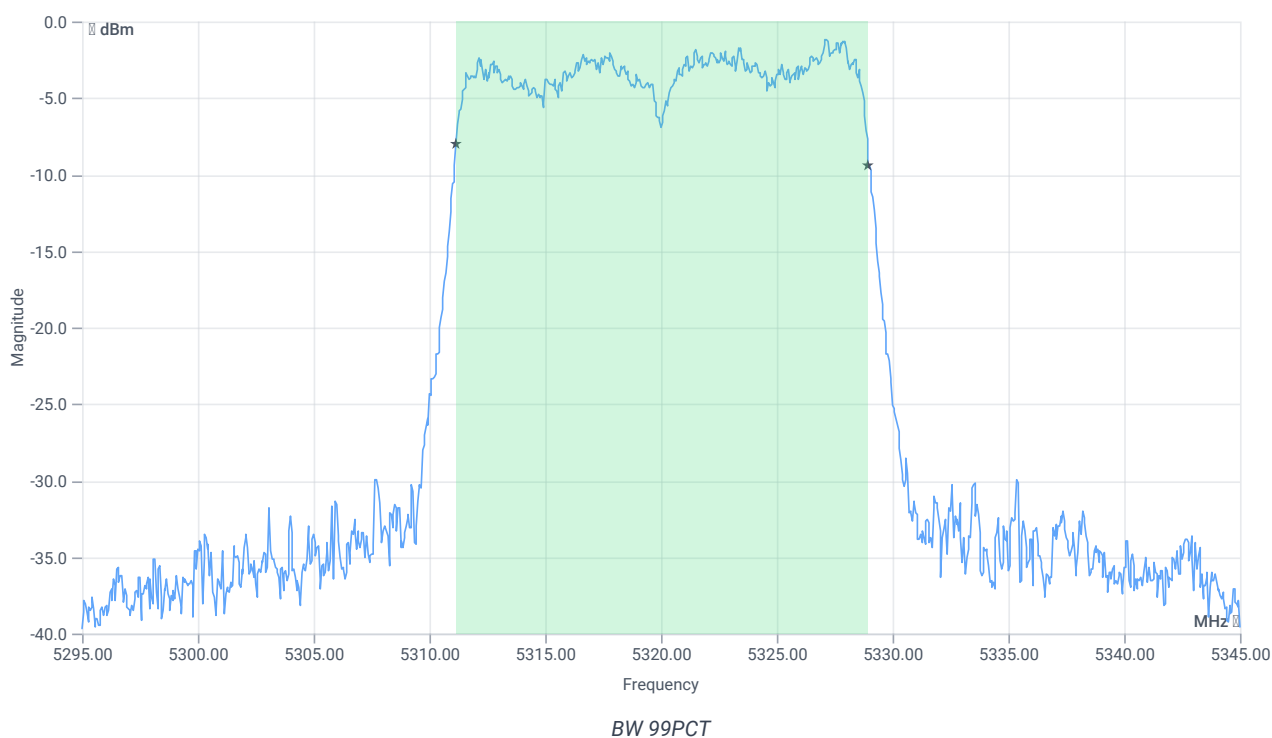


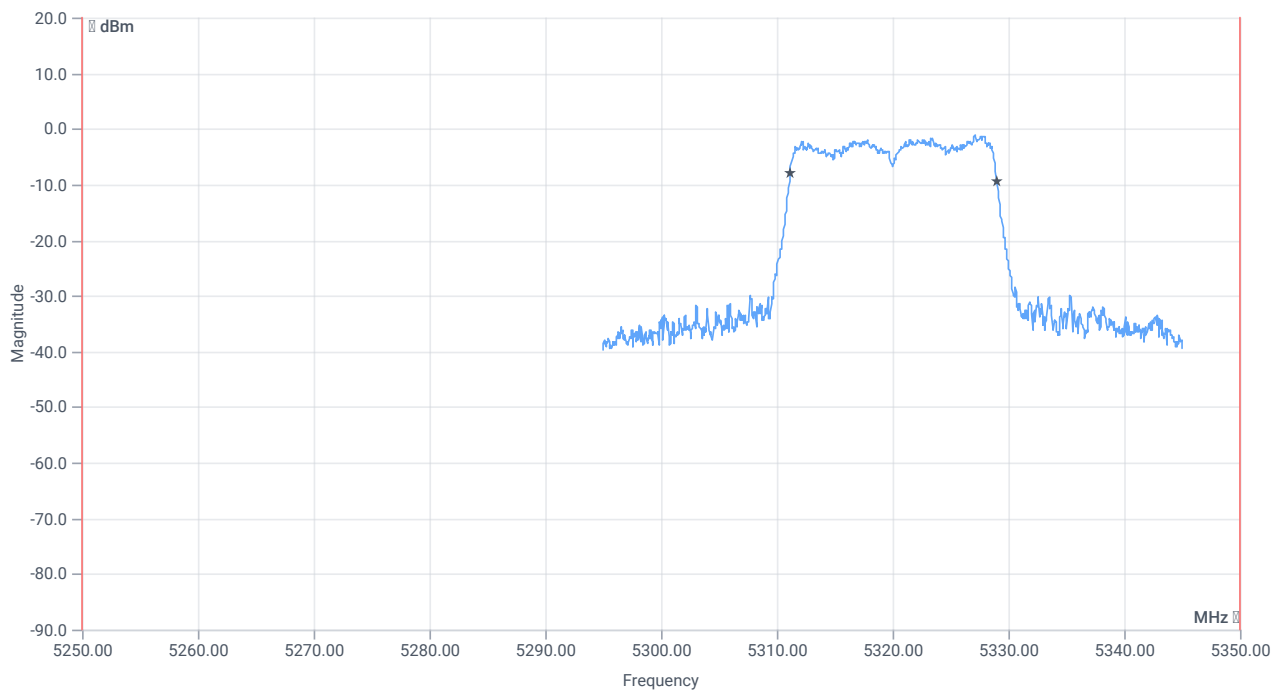

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17.782	MHz	INFO
T1 99%	5250.000000	---	5311.1588	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5328.9411	MHz	PASS

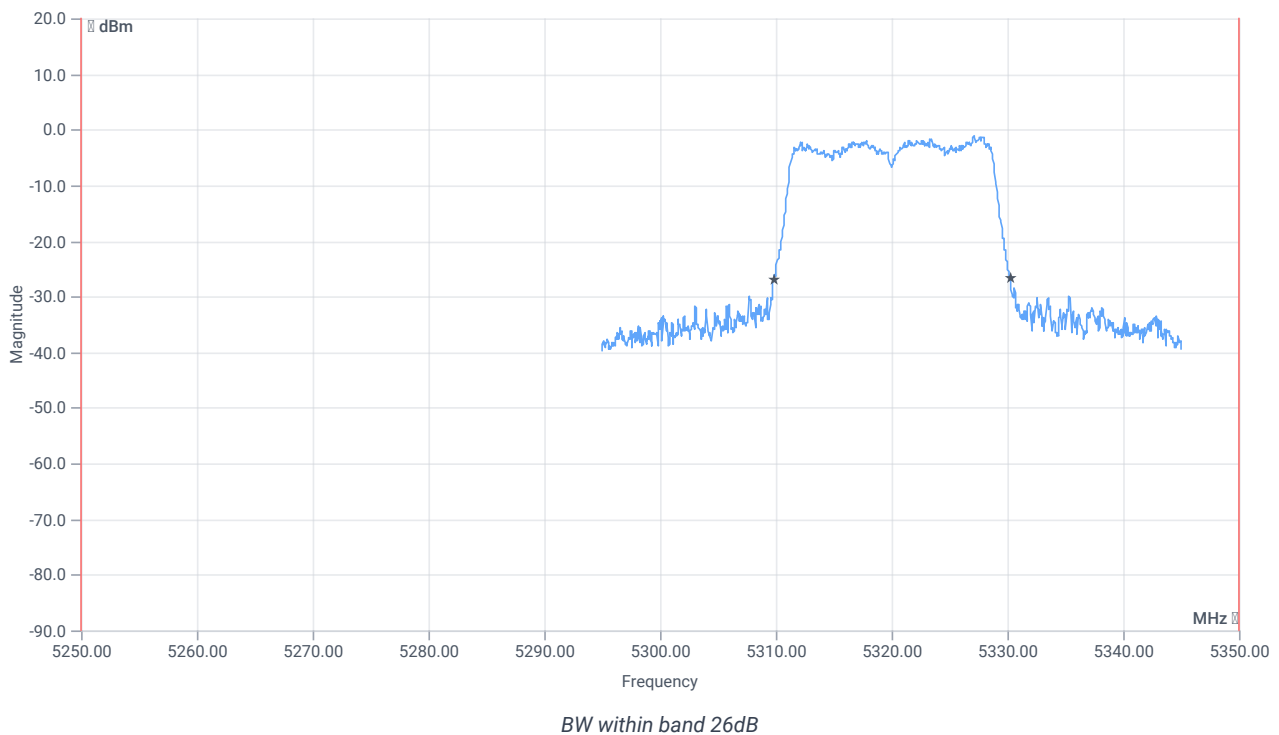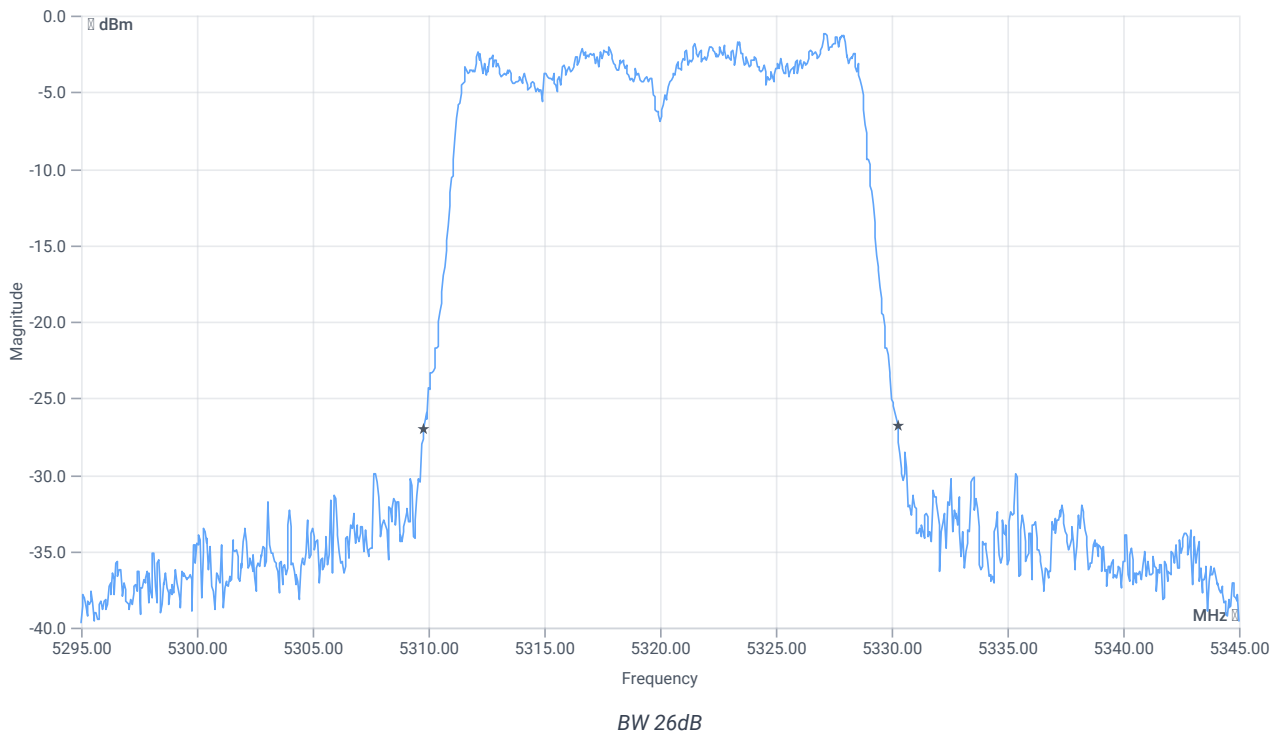

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.45	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5309.8000	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5330.2500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2A

References

TC start	12.06.2024 13:41:34
Ambit temp [°C] humidity [rel%]	25.3 29
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT20 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5260 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.48	dBm	INFO
Ref. frequency	---	---	5263.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.48 12.34 25
Start [MHz] Stop [MHz]	5235.000 5285.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


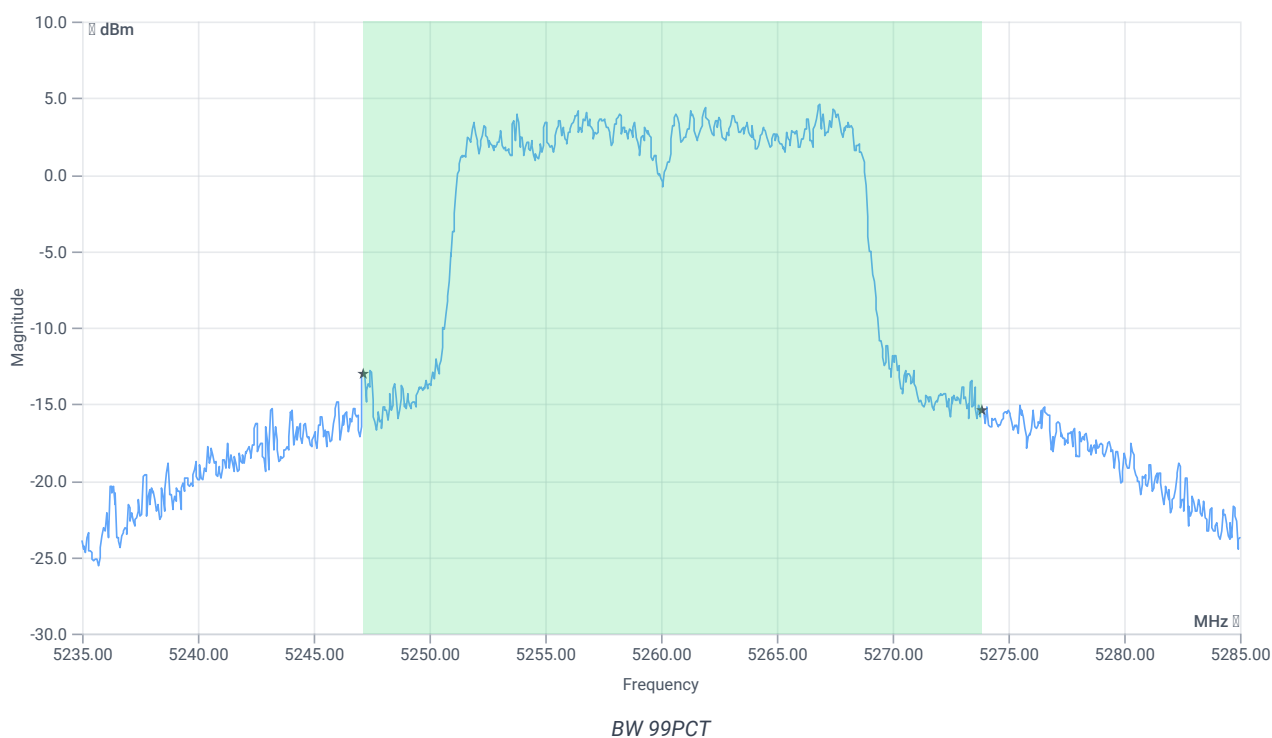


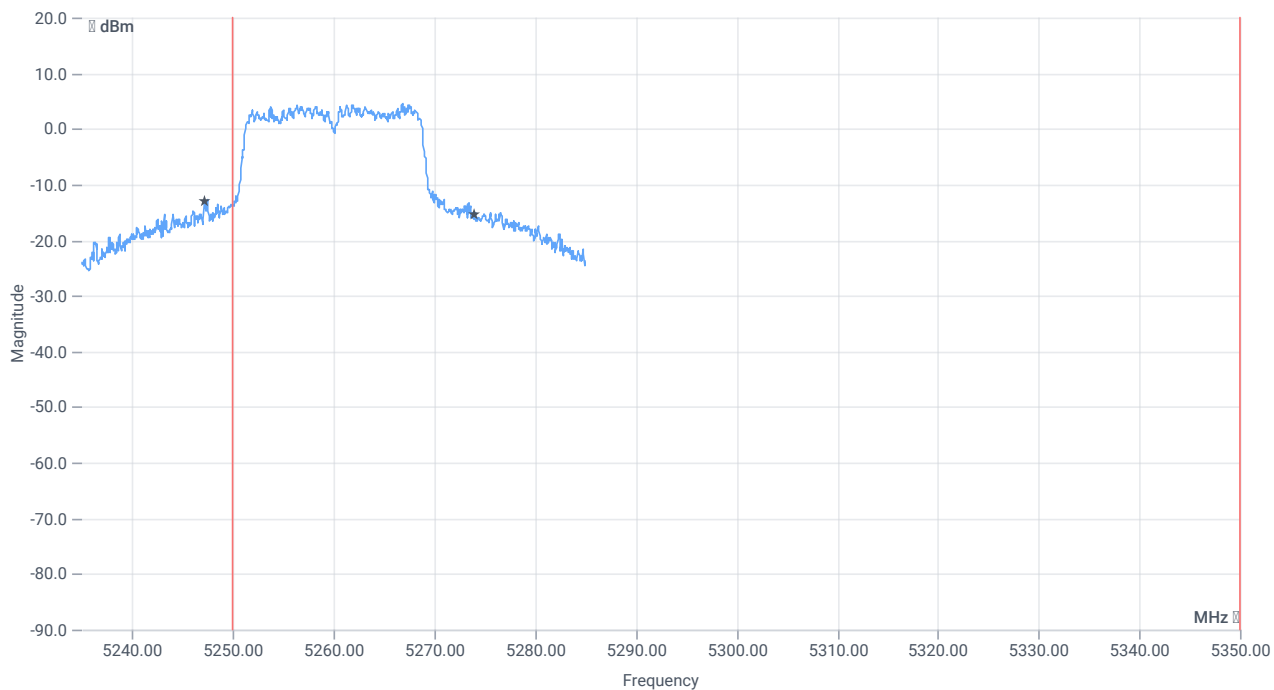

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	26.723	MHz	INFO
T1 99%	5250.000000	---	5247.1628	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5273.8861	MHz	PASS

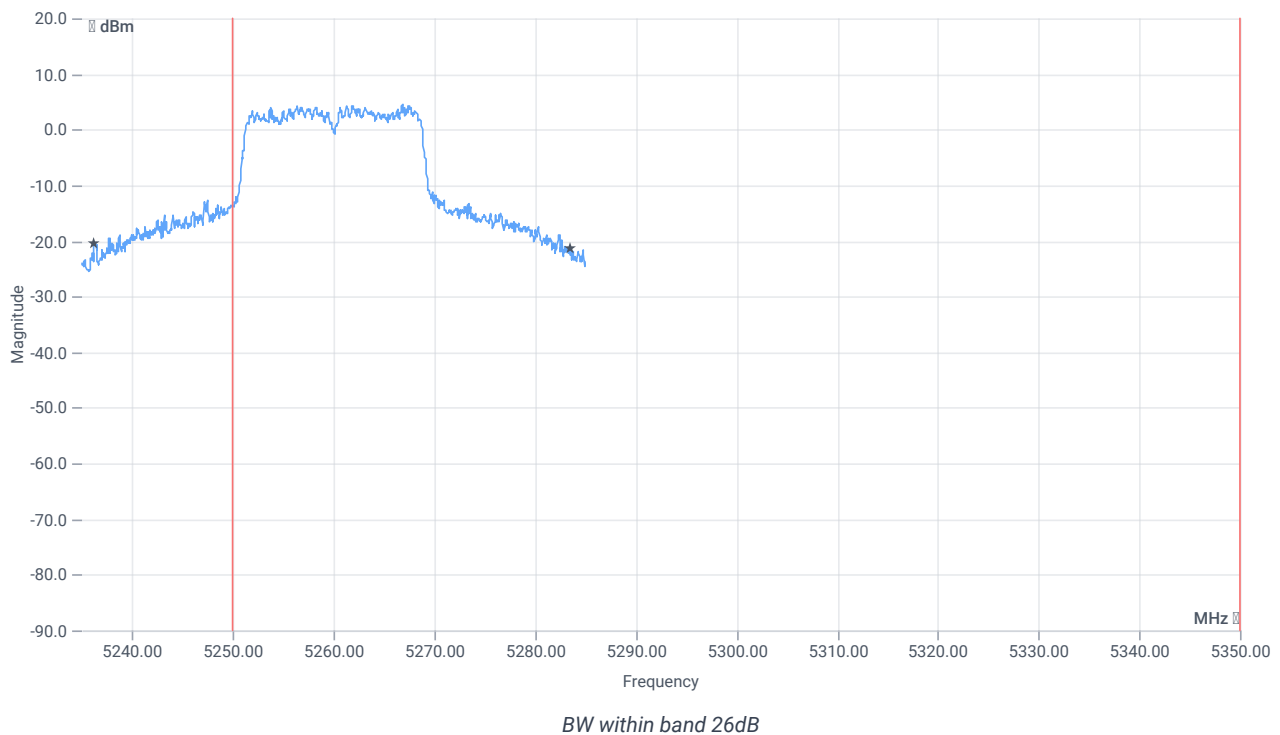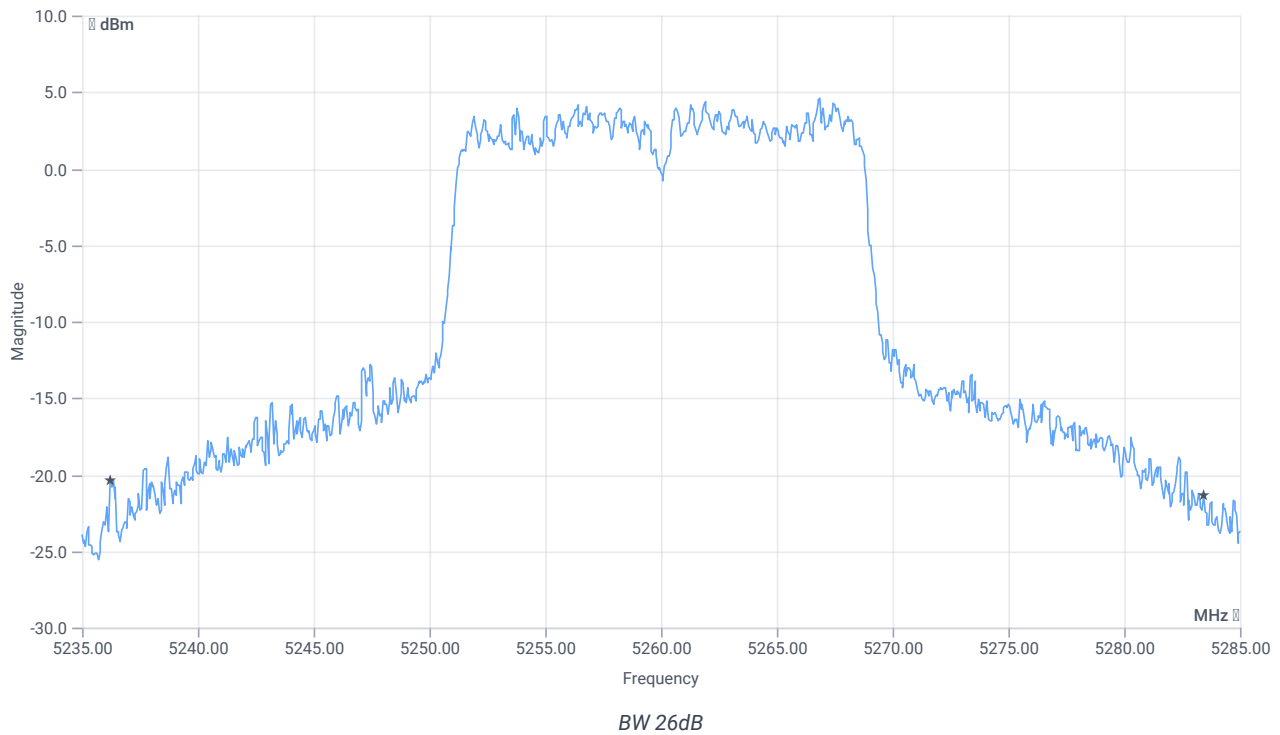

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	47.25	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5236.2000	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5283.4500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2A

References

TC start	12.06.2024 13:55:26
Ambit temp [°C] humidity [rel%]	25.4 28
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT20 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	True Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5280 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.57	dBm	INFO
Ref. frequency	---	---	5281.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.57 12.57 20
Start [MHz] Stop [MHz]	5255.000 5305.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

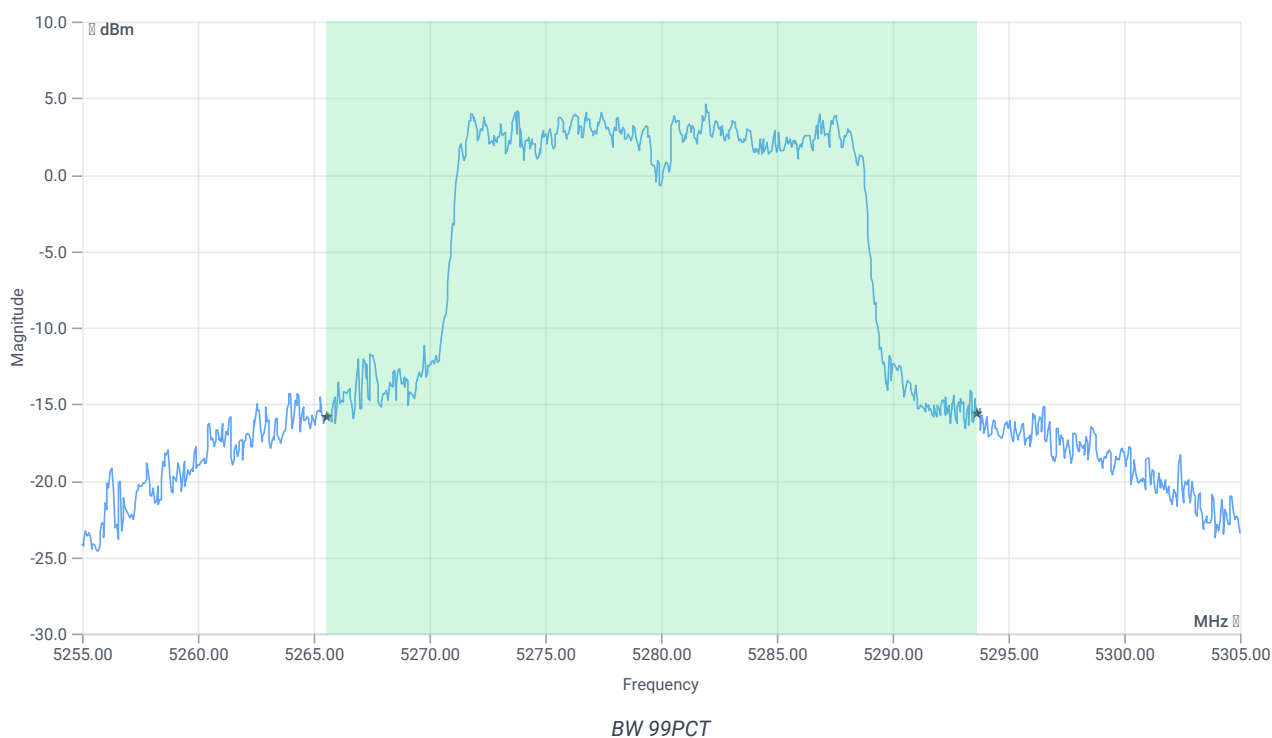





BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	28.072	MHz	INFO
T1 99%	5250.000000	---	5265.5644	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5293.6364	MHz	PASS

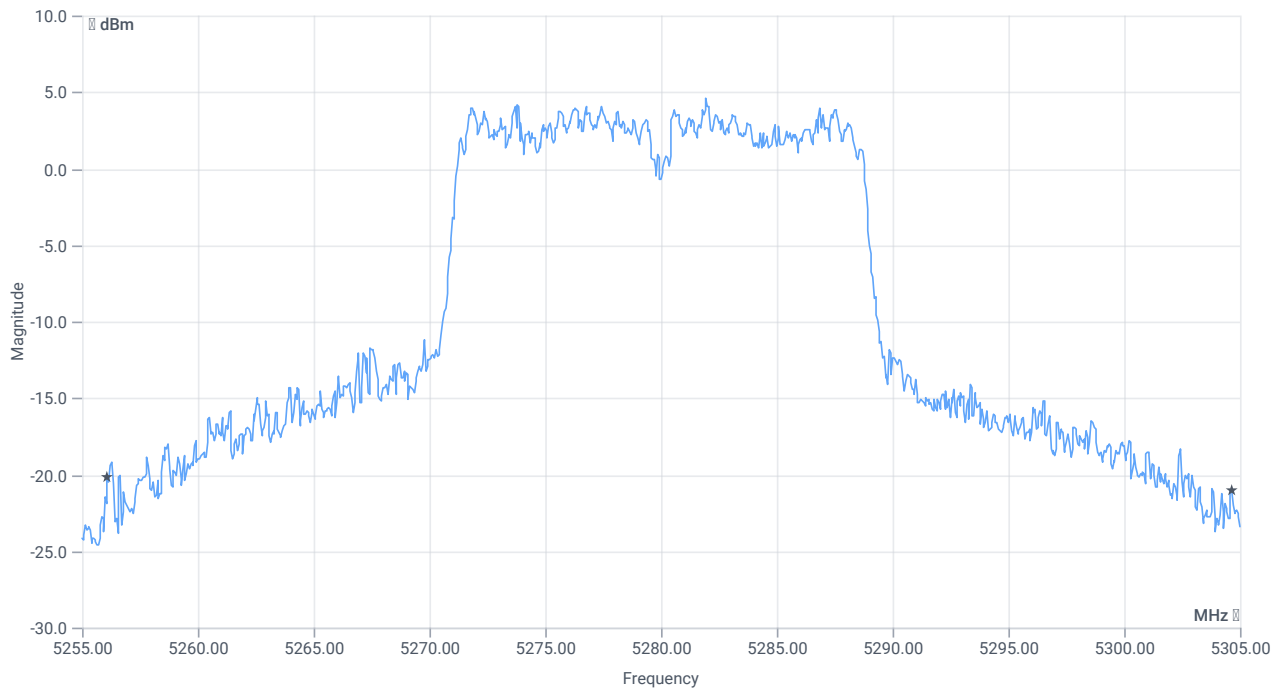

BW 26dB

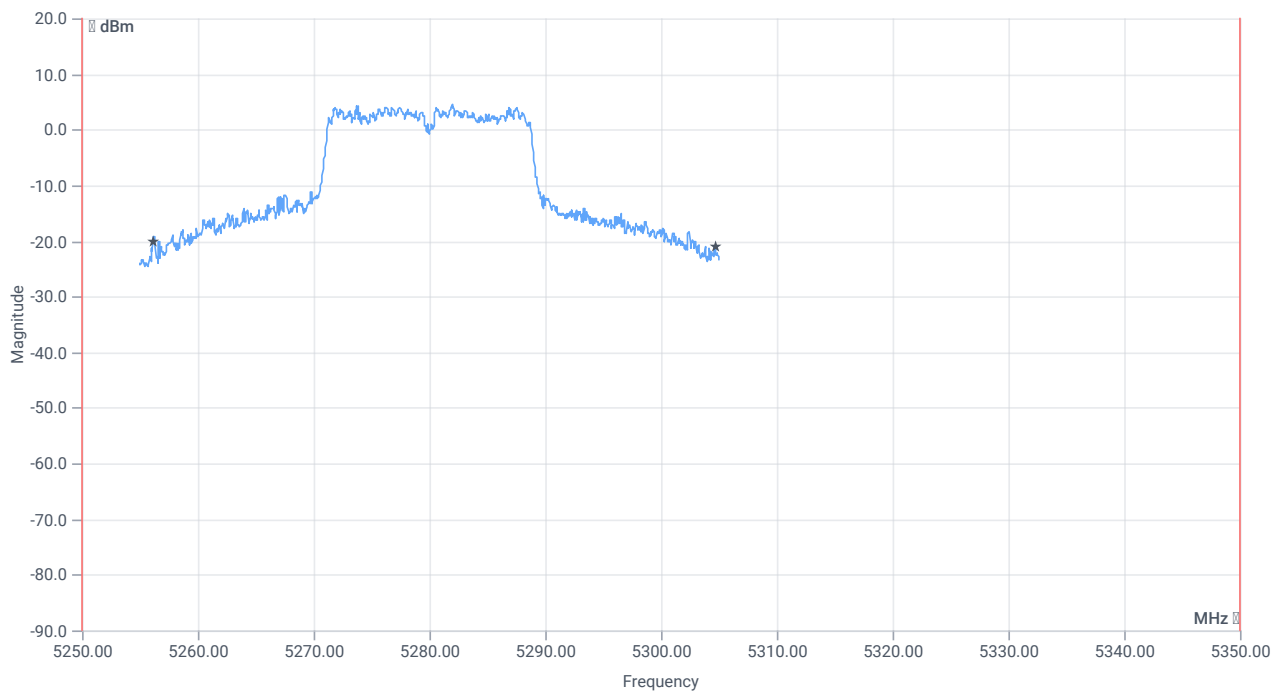

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	48.55	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5256.1000	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5304.6500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2A

References

TC start	12.06.2024 14:28:18
Ambit temp [°C] humidity [rel%]	25.6 28
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT20 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	True Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5320 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.40	dBm	INFO
Ref. frequency	---	---	5327.790	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.40 13.02 15
Start [MHz] Stop [MHz]	5295.000 5345.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


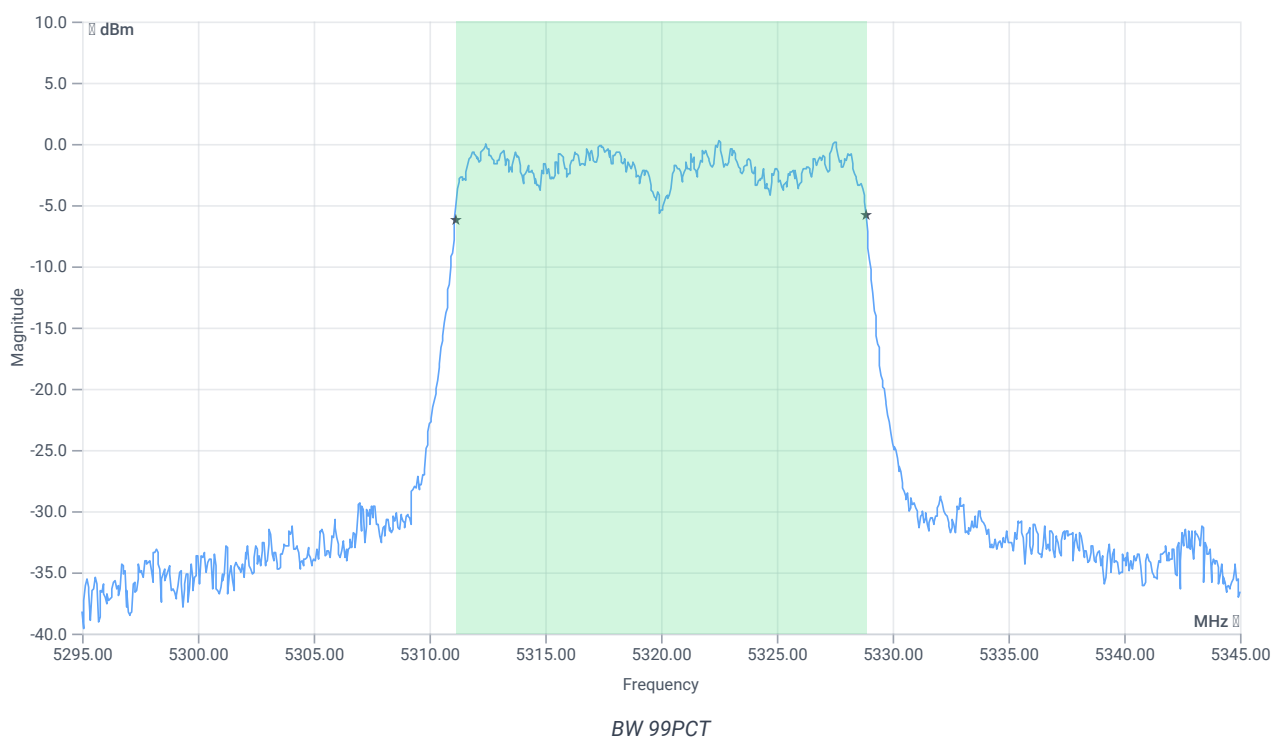


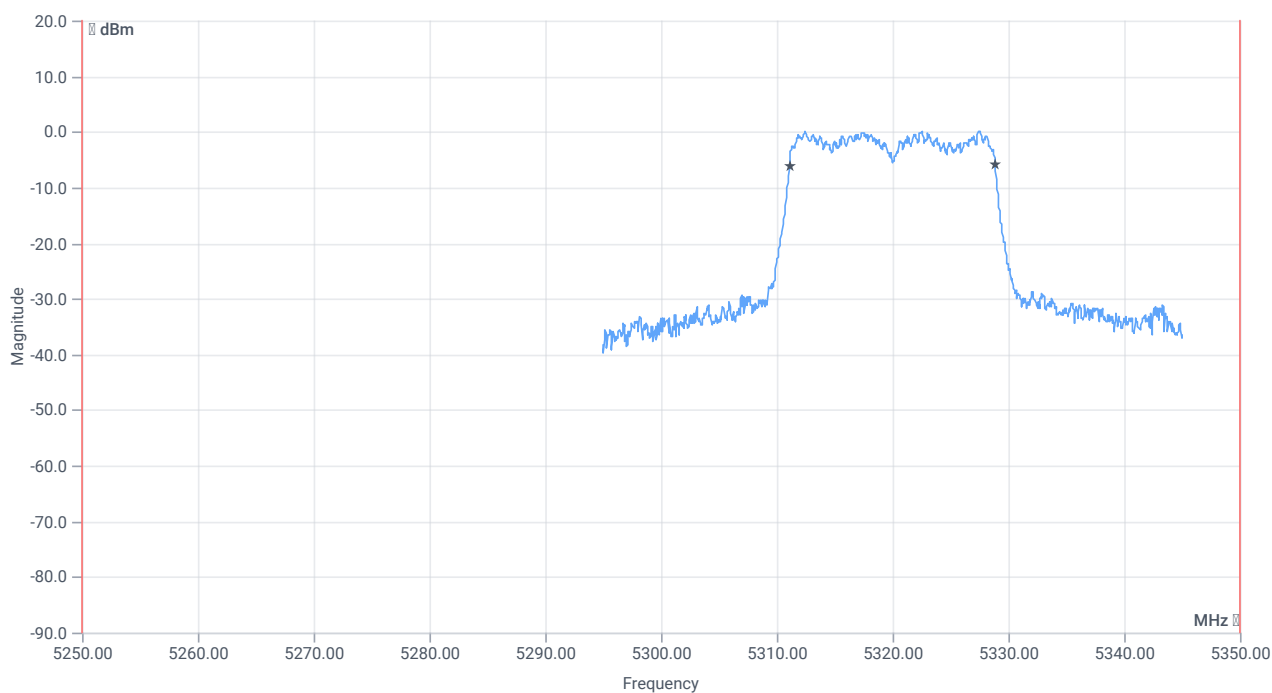

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17.732	MHz	INFO
T1 99%	5250.000000	---	5311.1089	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5328.8412	MHz	PASS

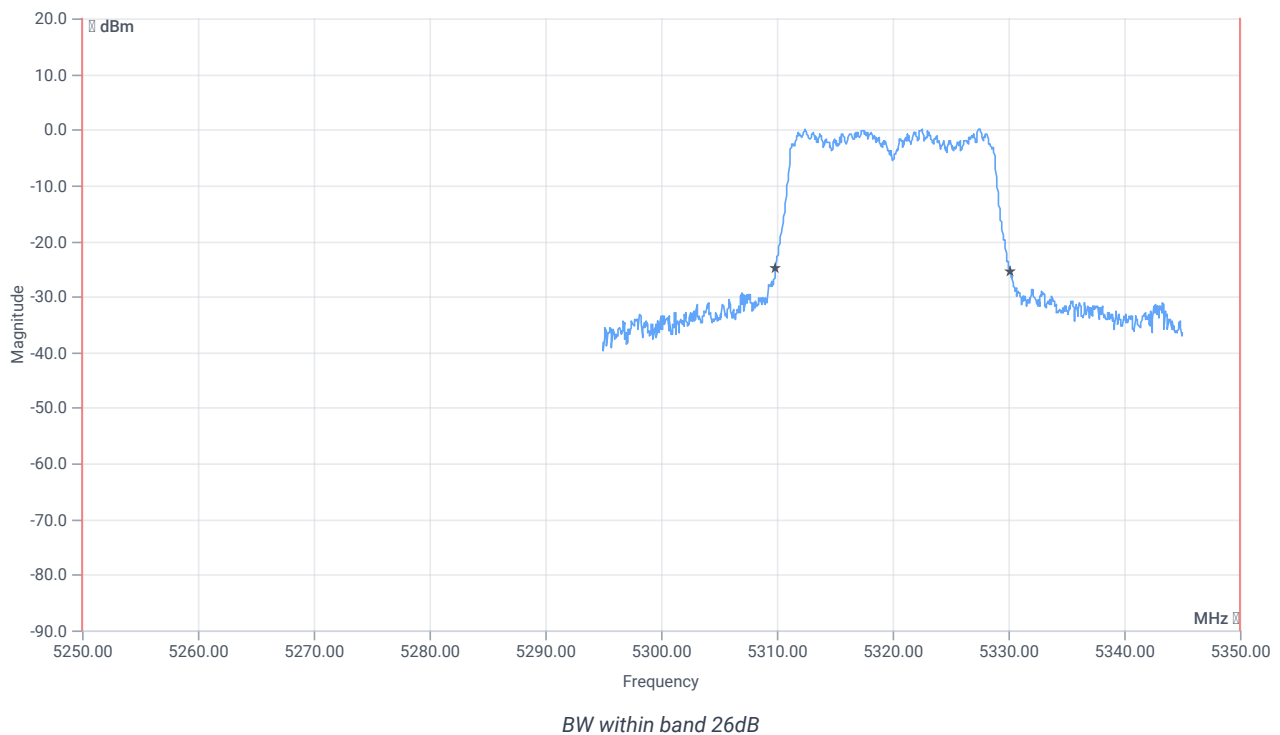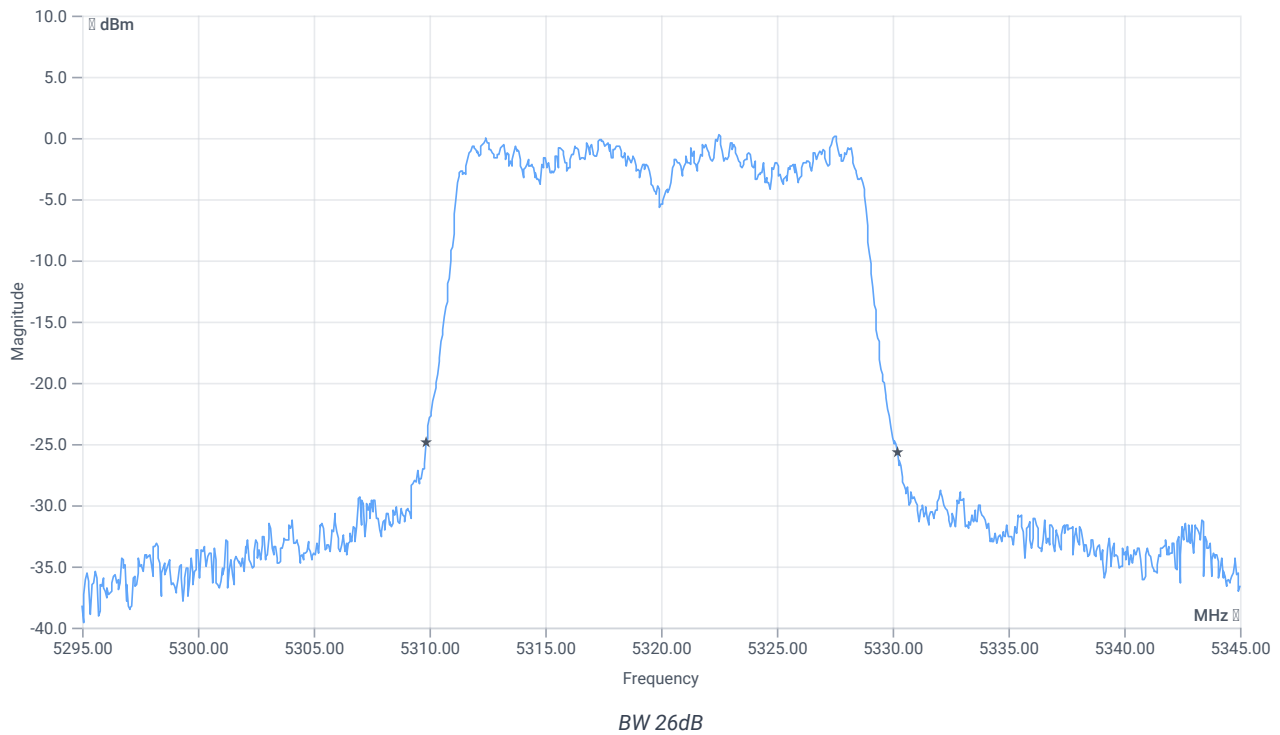

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.35	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5309.8500	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5330.2000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-2A

References

TC start	12.06.2024 08:37:32
Ambit temp [°C] humidity [rel%]	23.3 35
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT40 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5270
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5310
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5270 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.39	dBm	INFO
Ref. frequency	---	---	5284.990	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.39 12.57 20
Start [MHz] Stop [MHz]	5220.000 5320.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


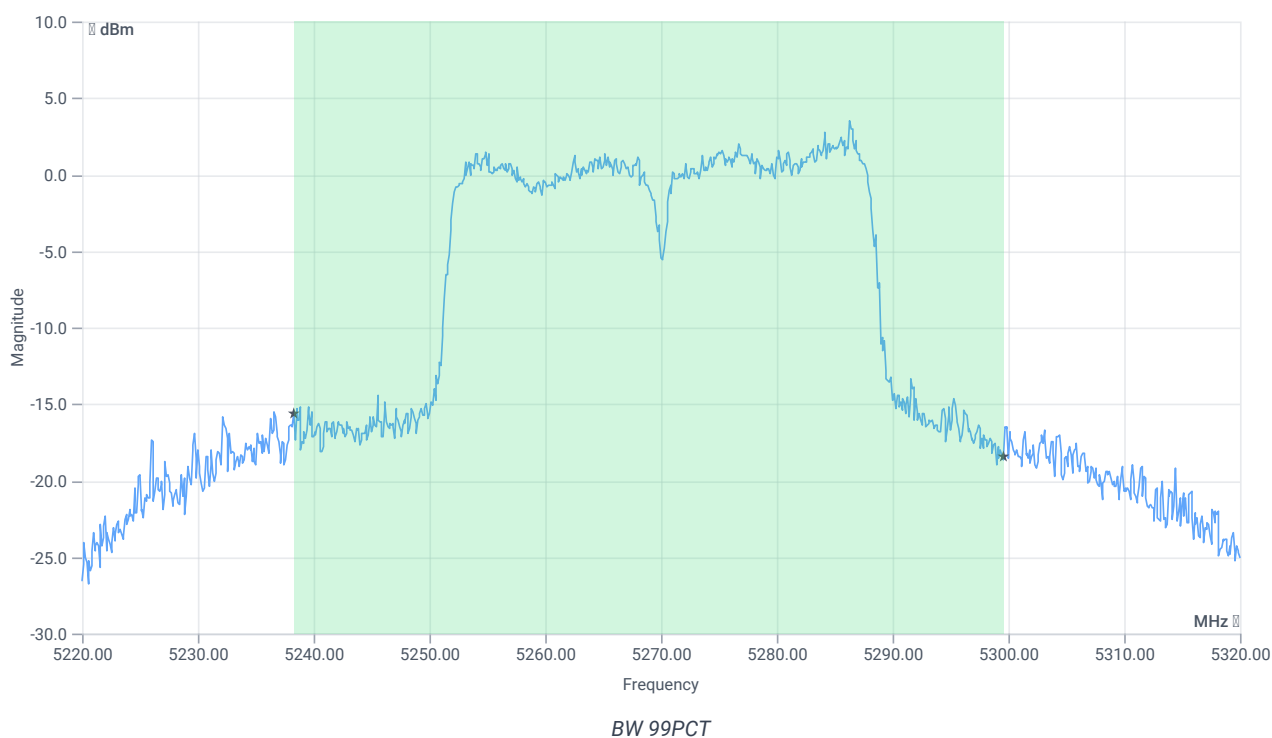


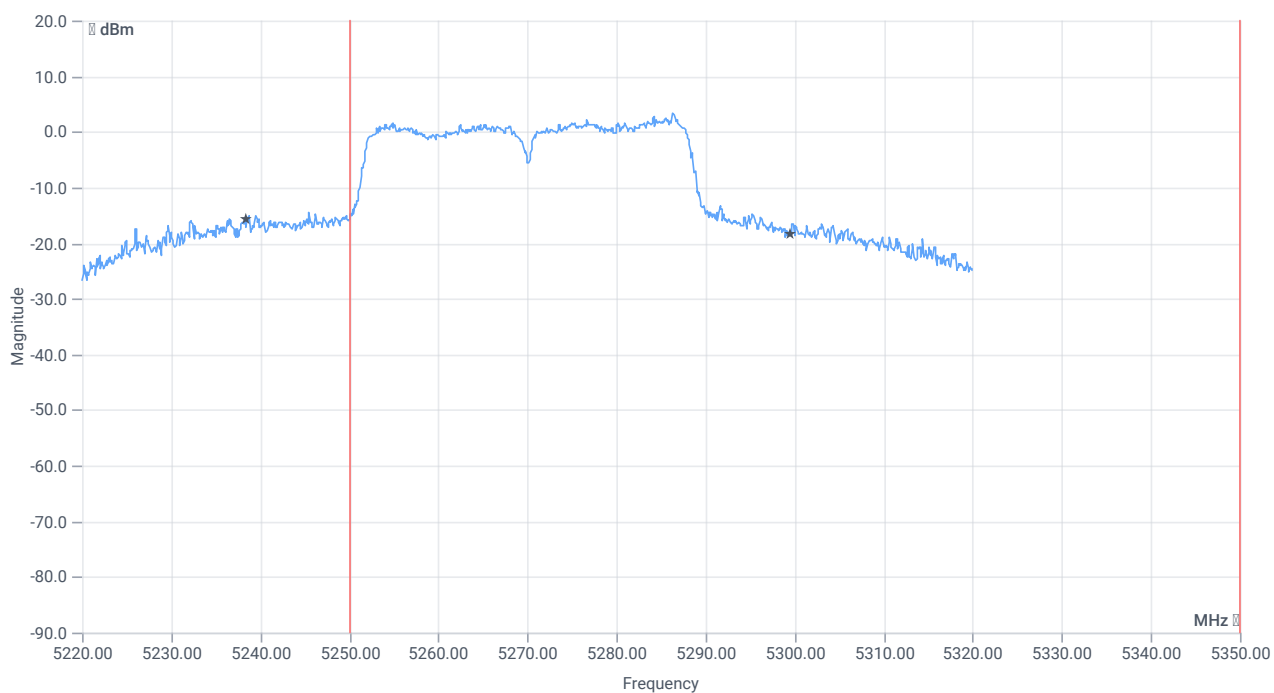

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	61.239	MHz	INFO
T1 99%	5250.000000	---	5238.3317	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5299.5704	MHz	PASS

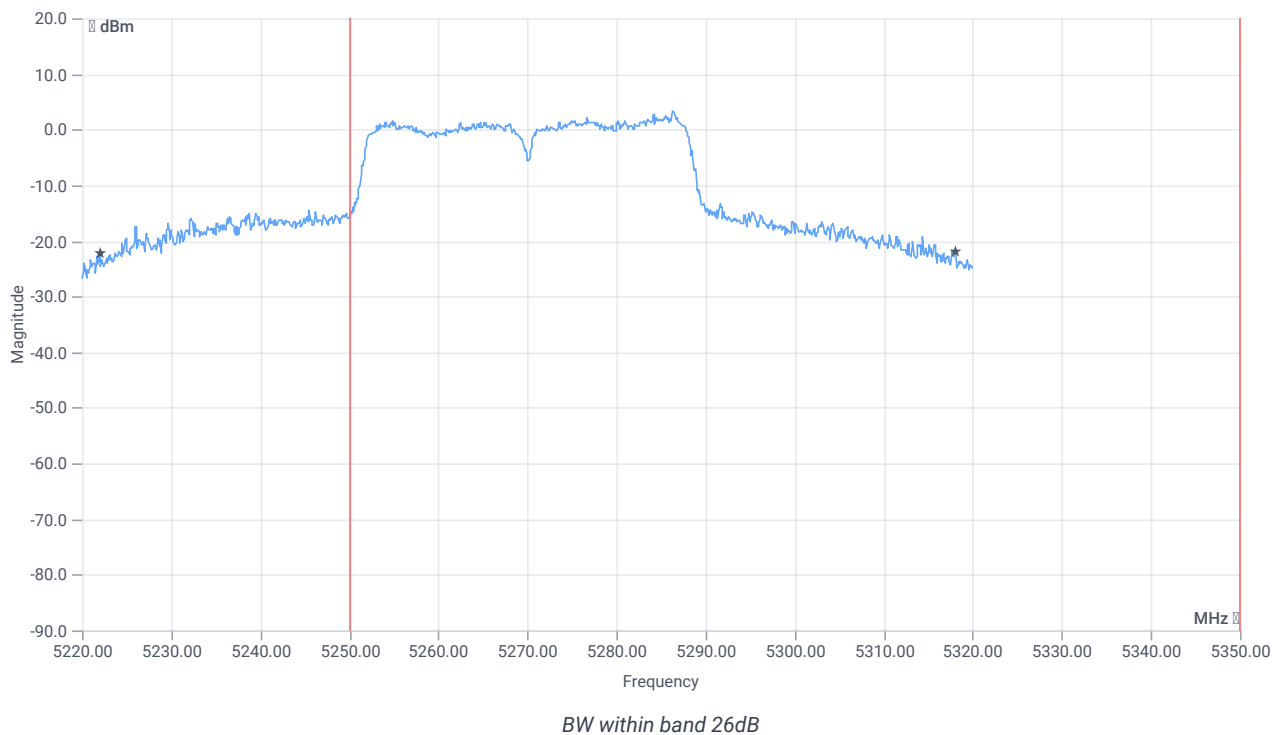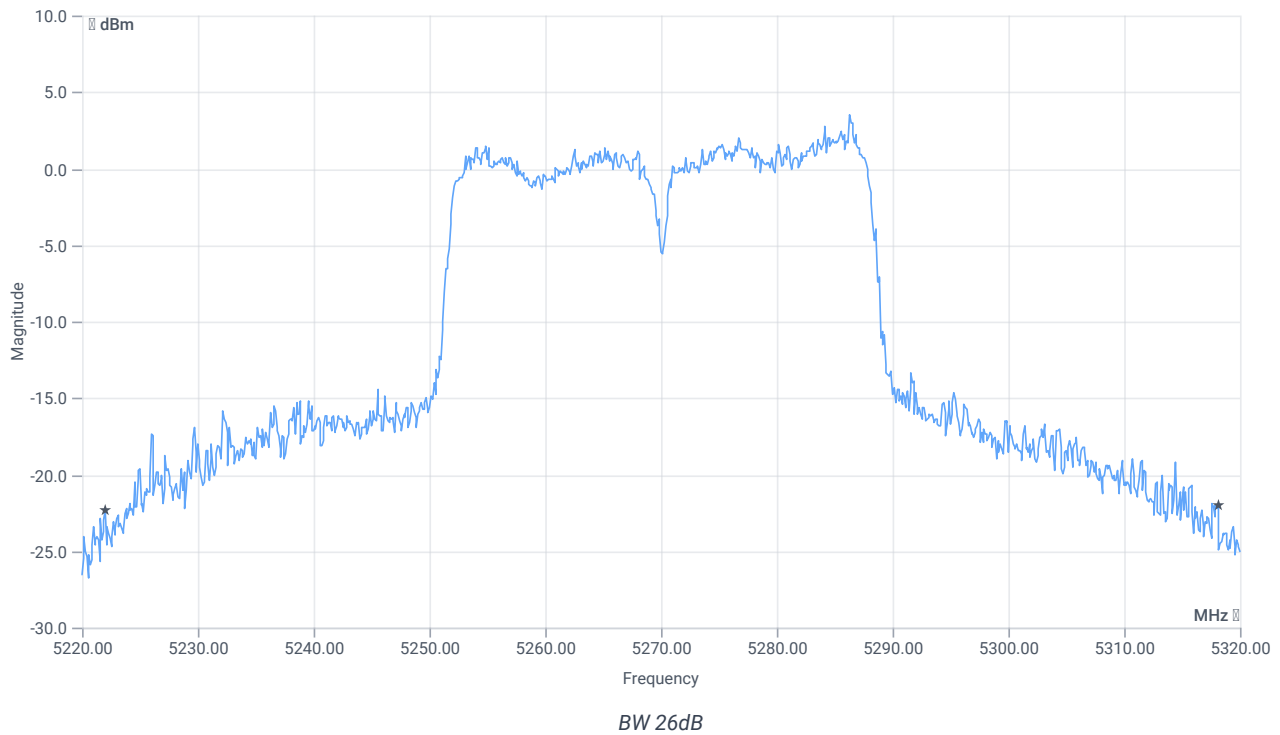

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	96.1	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5222.0000	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5318.1000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-2A

References

TC start	12.06.2024 08:57:25
Ambit temp [°C] humidity [rel%]	23.5 35
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT40 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5270
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5310
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5310 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-0.98	dBm	INFO
Ref. frequency	---	---	5326.180	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.02 13.09 10
Start [MHz] Stop [MHz]	5260.000 5360.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


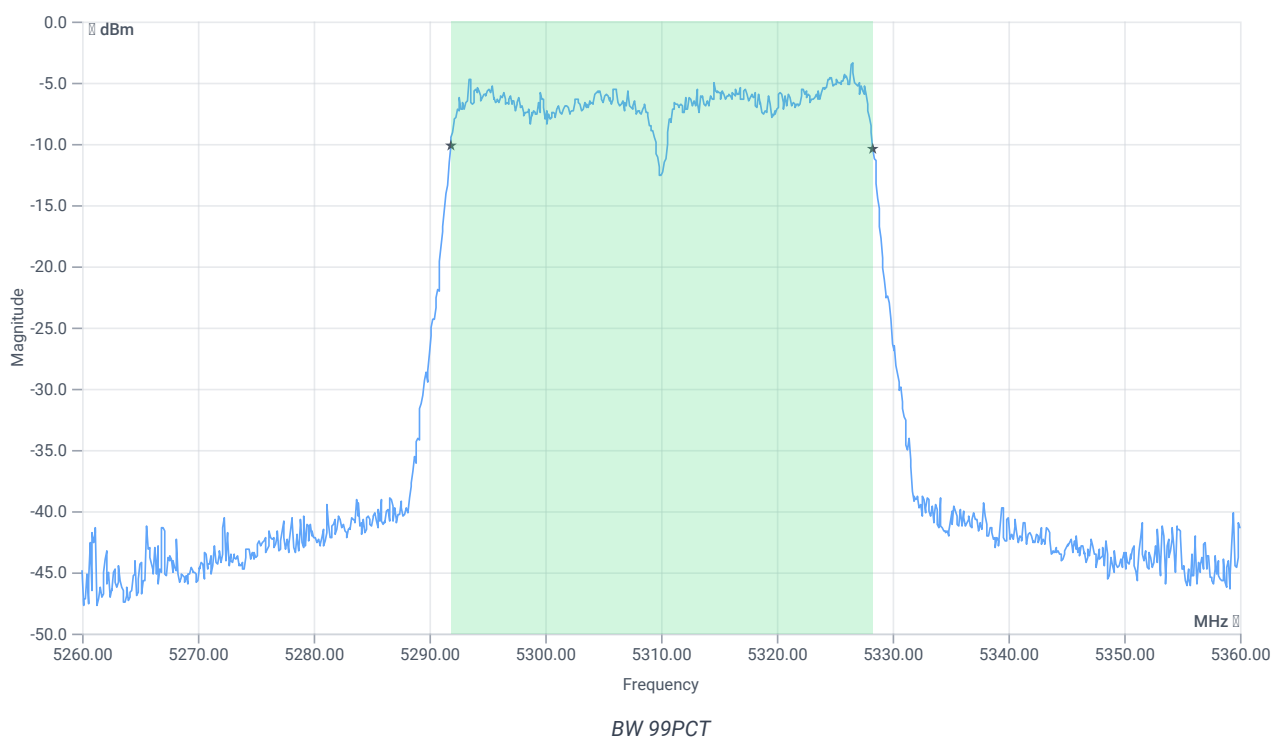




BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36.464	MHz	INFO
T1 99%	5250.000000	---	5291.8182	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5328.2817	MHz	PASS

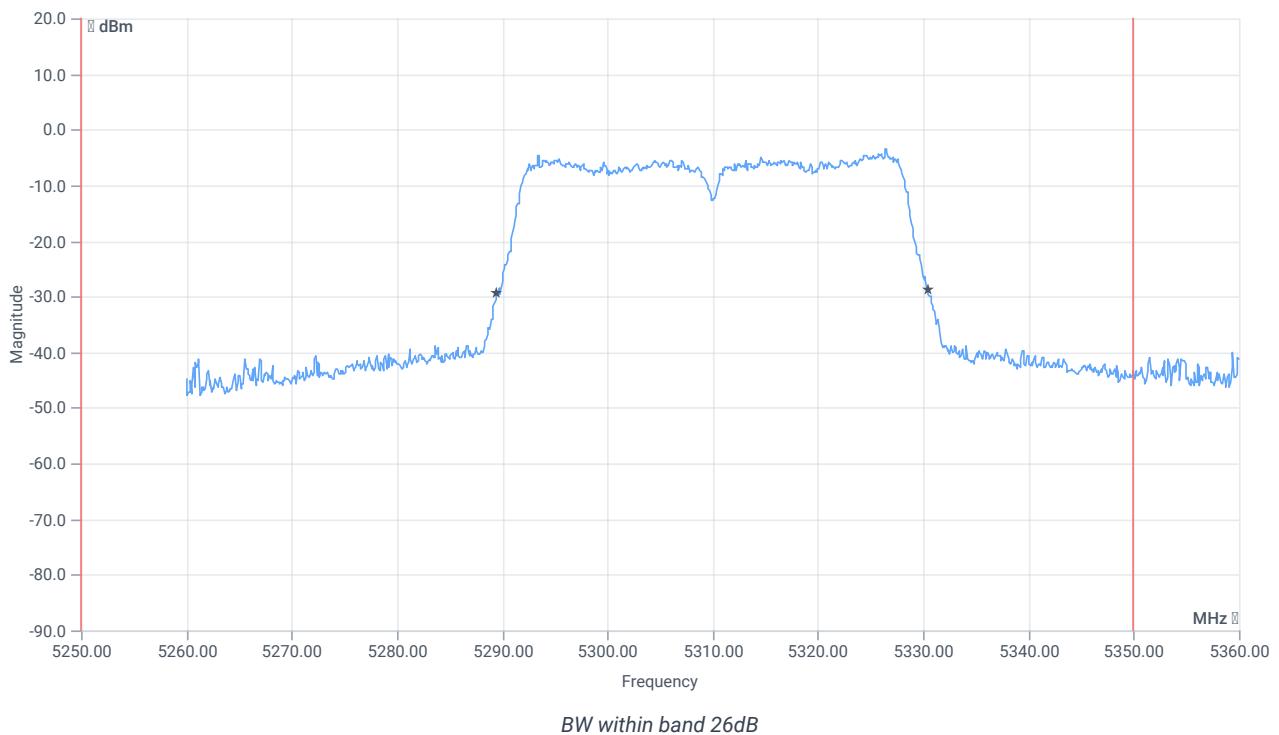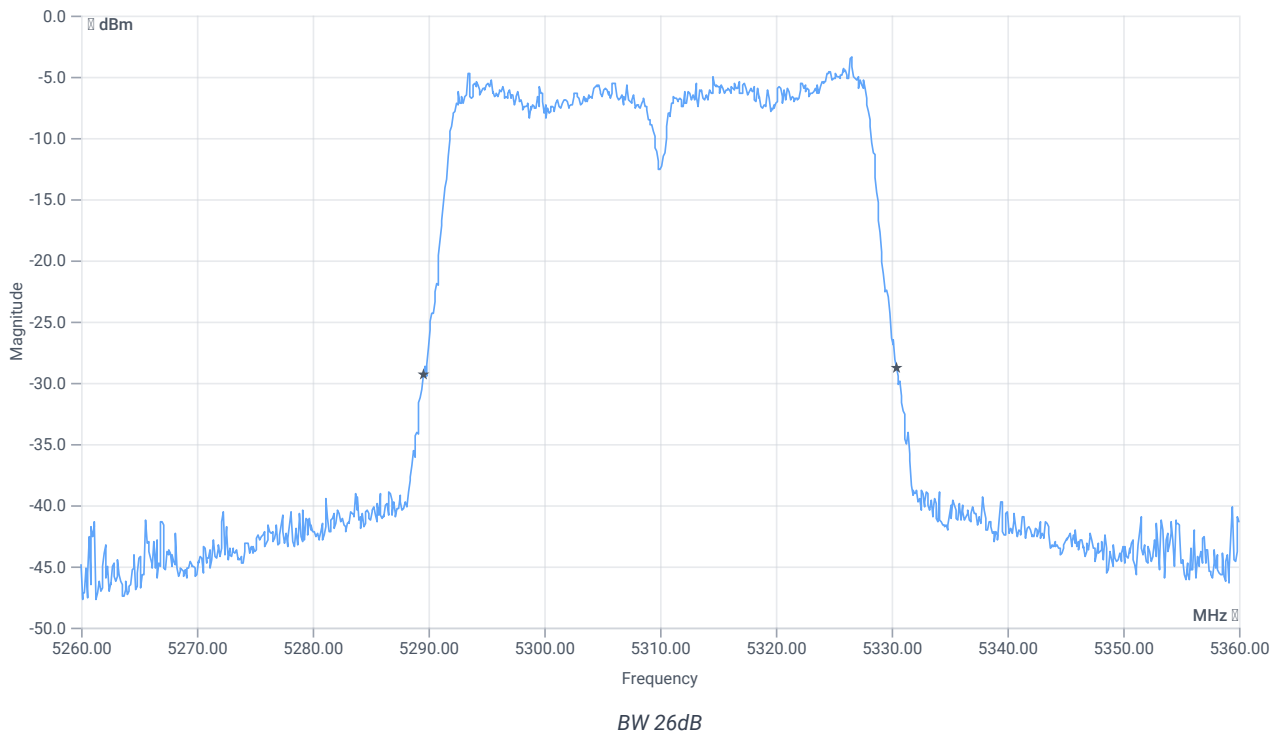

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	40.9	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5289.5000	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5330.4000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-2A

References

TC start	12.06.2024 12:17:55
Ambit temp [°C] humidity [rel%]	24.9 30
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT40 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5270
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5310
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5270 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	6.40	dBm	INFO
Ref. frequency	---	---	5254.620	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.40 12.45 20
Start [MHz] Stop [MHz]	5220.000 5320.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

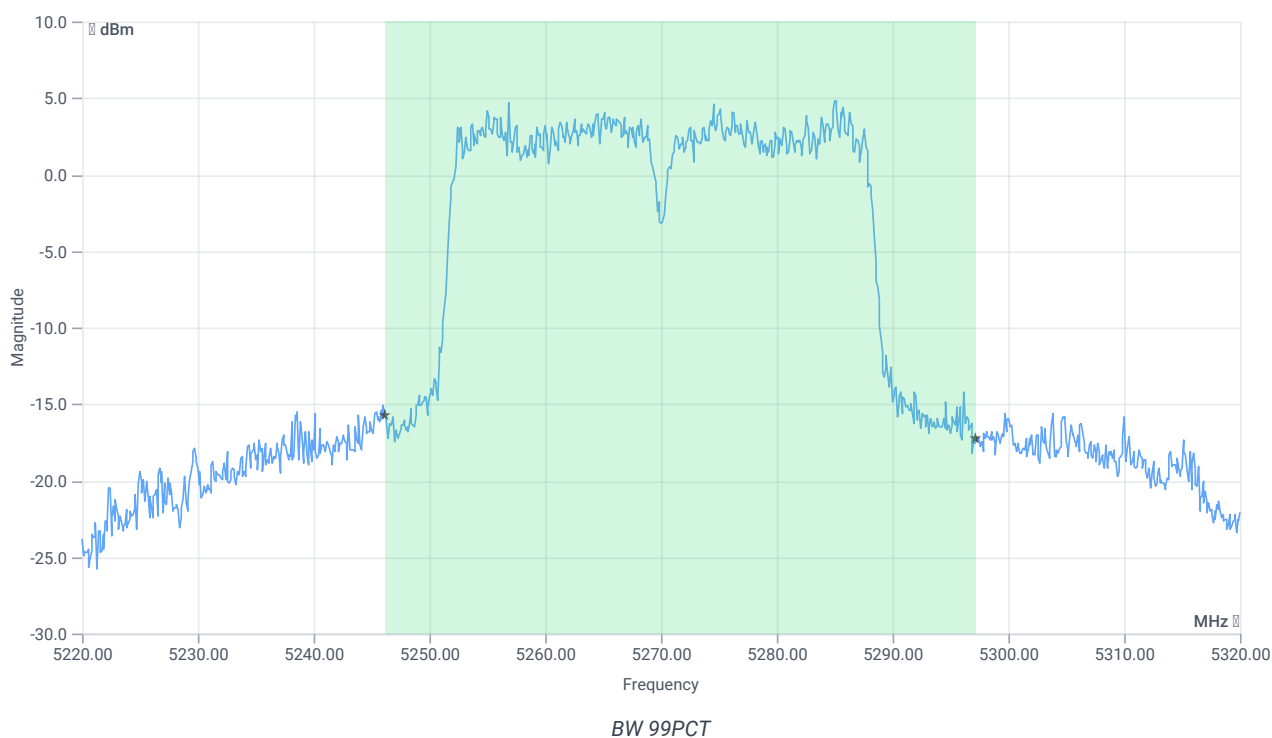




BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	51.049	MHz	INFO
T1 99%	5250.000000	---	5246.1239	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5297.1728	MHz	PASS

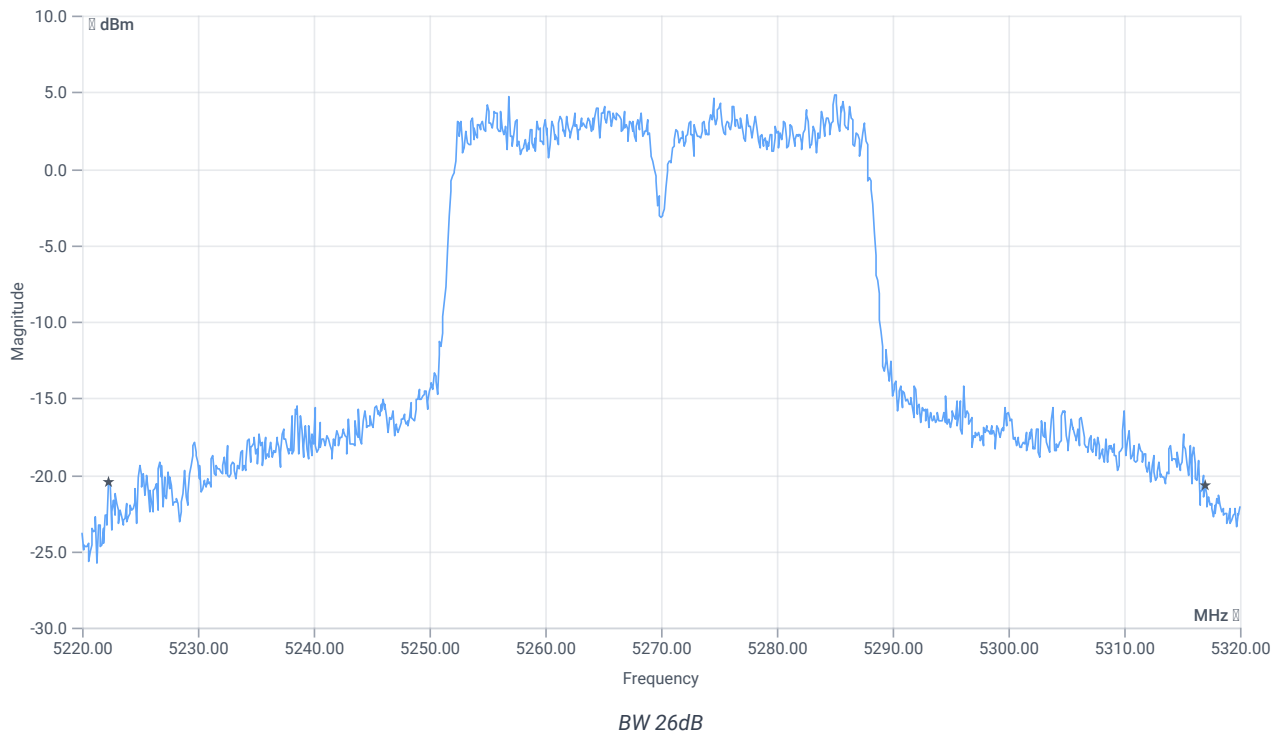

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	94.7	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5222.3000	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5317.0000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-2A

References

TC start	12.06.2024 12:37:09
Ambit temp [°C] humidity [rel%]	25.0 30
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT40 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5270
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5310
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5310 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	0.36	dBm	INFO
Ref. frequency	---	---	5314.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.36 12.91 15
Start [MHz] Stop [MHz]	5260.000 5360.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


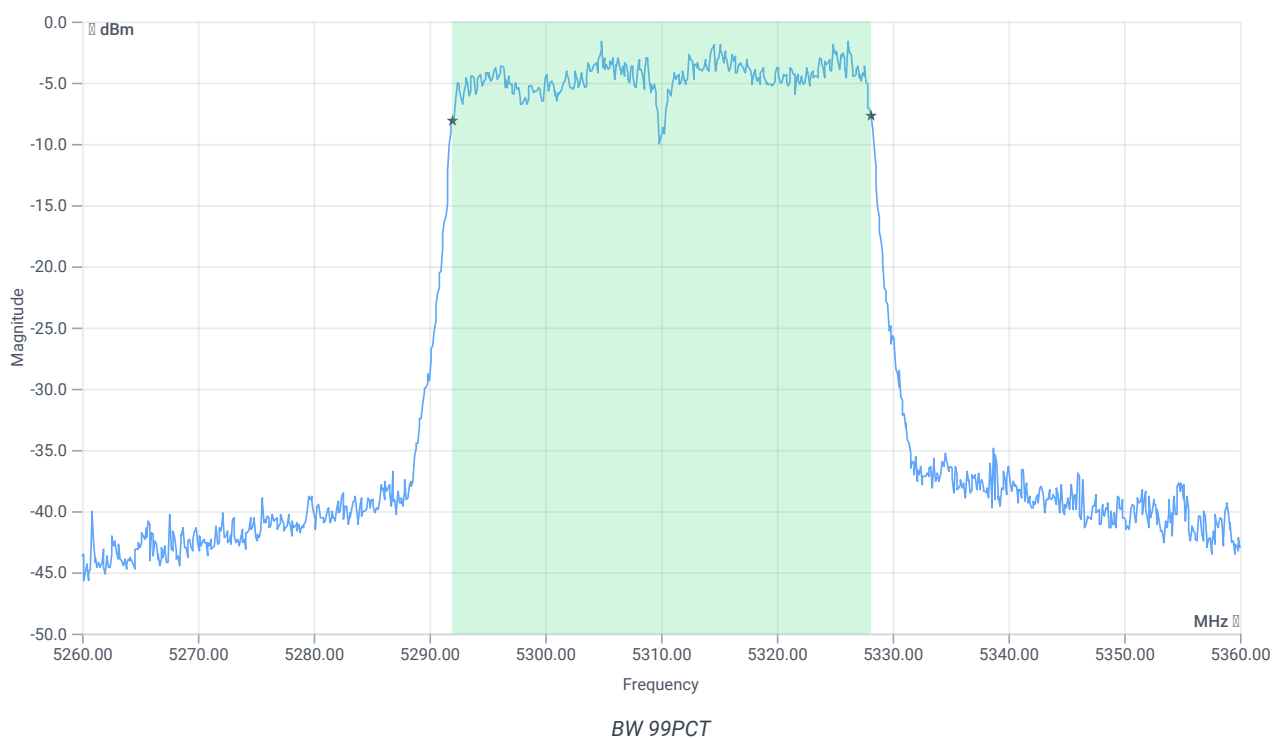


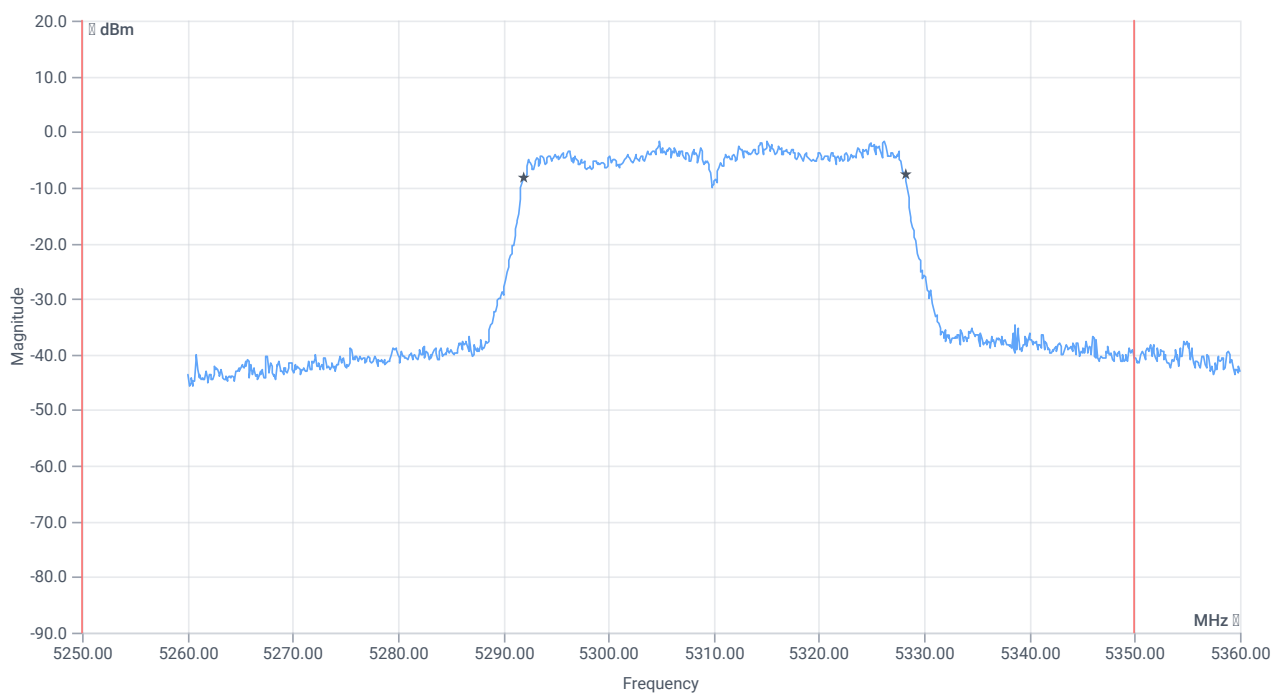

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36.164	MHz	INFO
T1 99%	5250.000000	---	5292.0180	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5328.1818	MHz	PASS

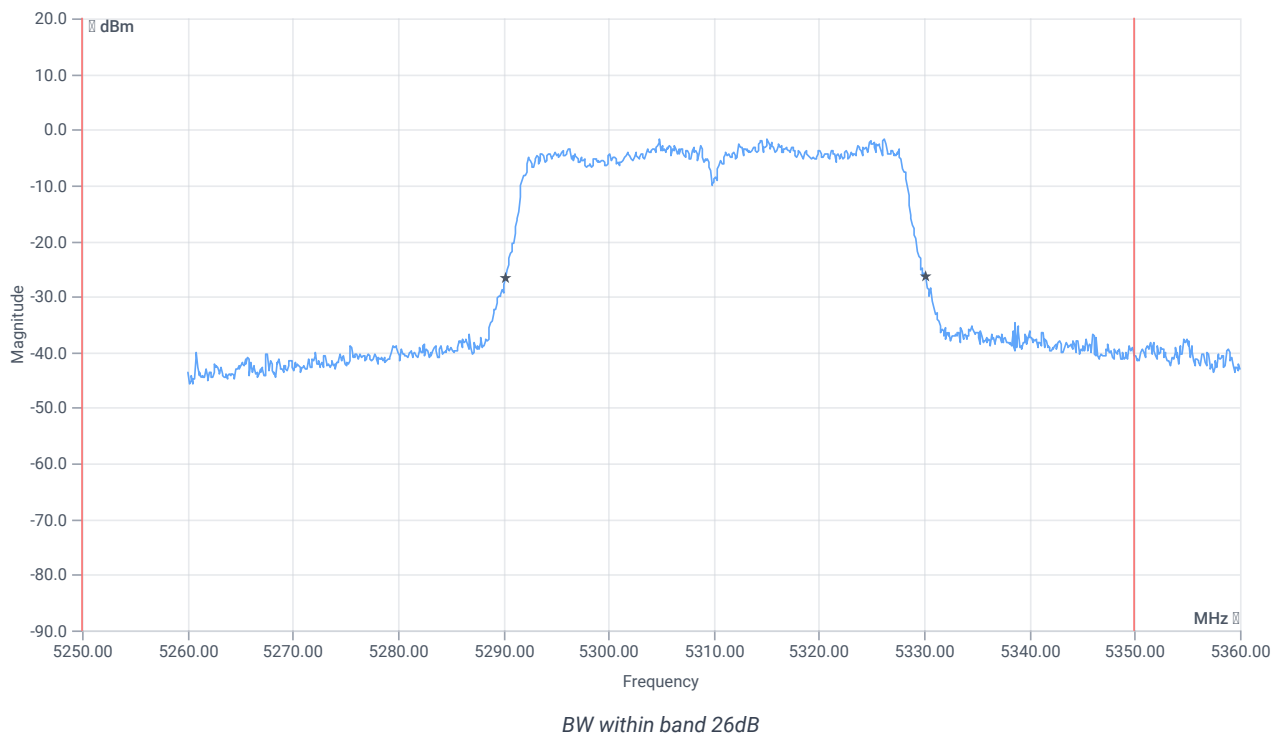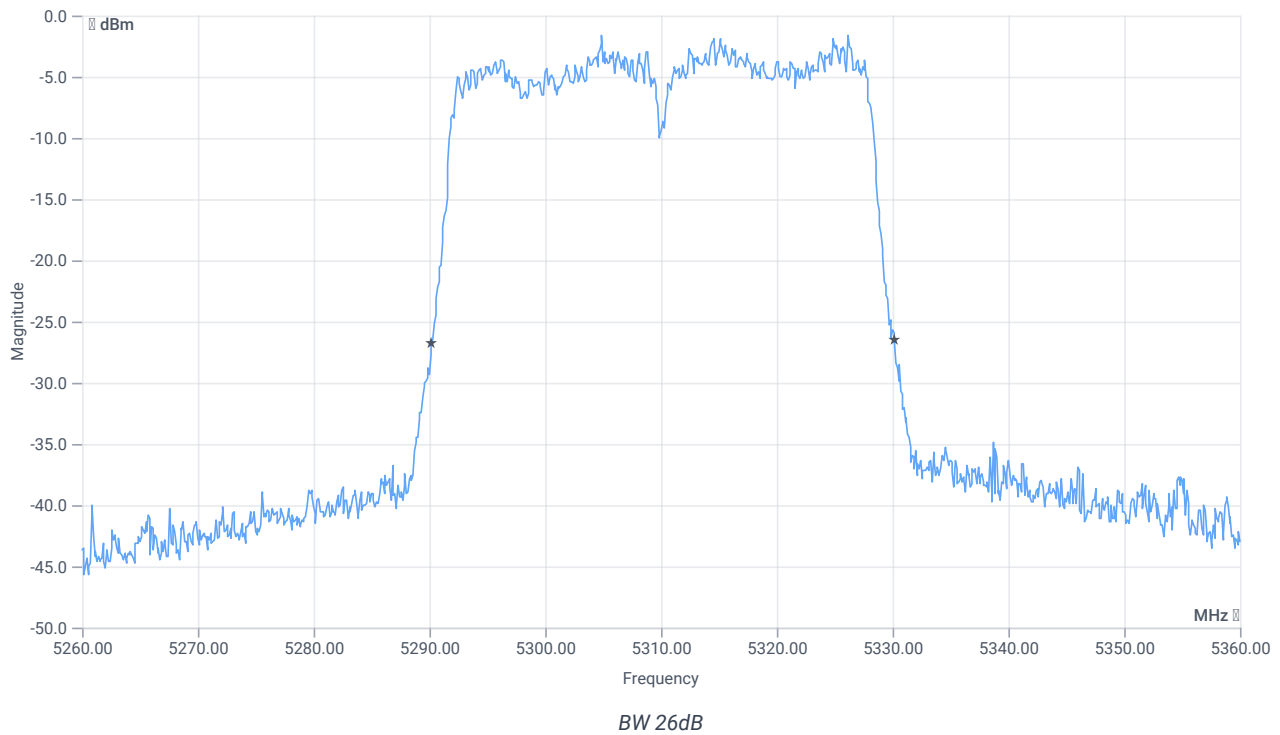

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	40	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5290.2000	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5330.2000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-2A

References

TC start	12.06.2024 09:22:15
Ambit temp [°C] humidity [rel%]	23.8 35
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT80 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5290
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5290 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-5.32	dBm	INFO
Ref. frequency	---	---	5325.960	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.68 12.75 5
Start [MHz] Stop [MHz]	5190.000 5390.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


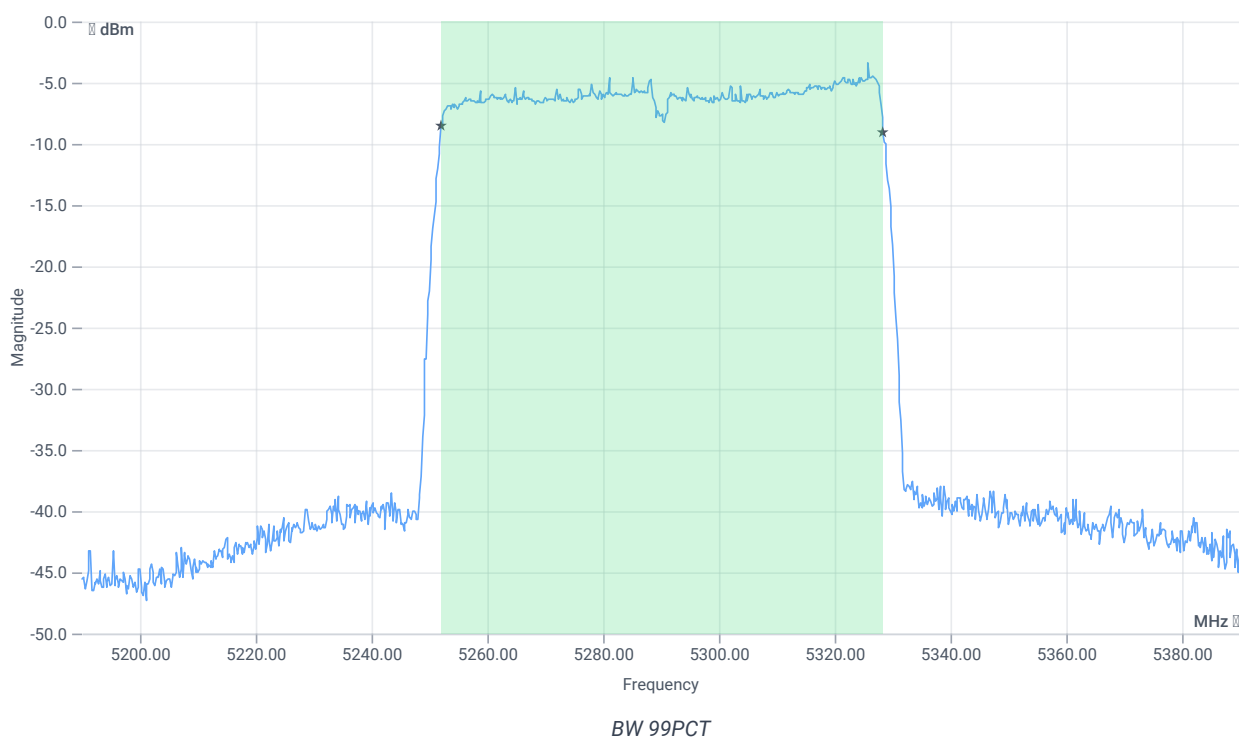


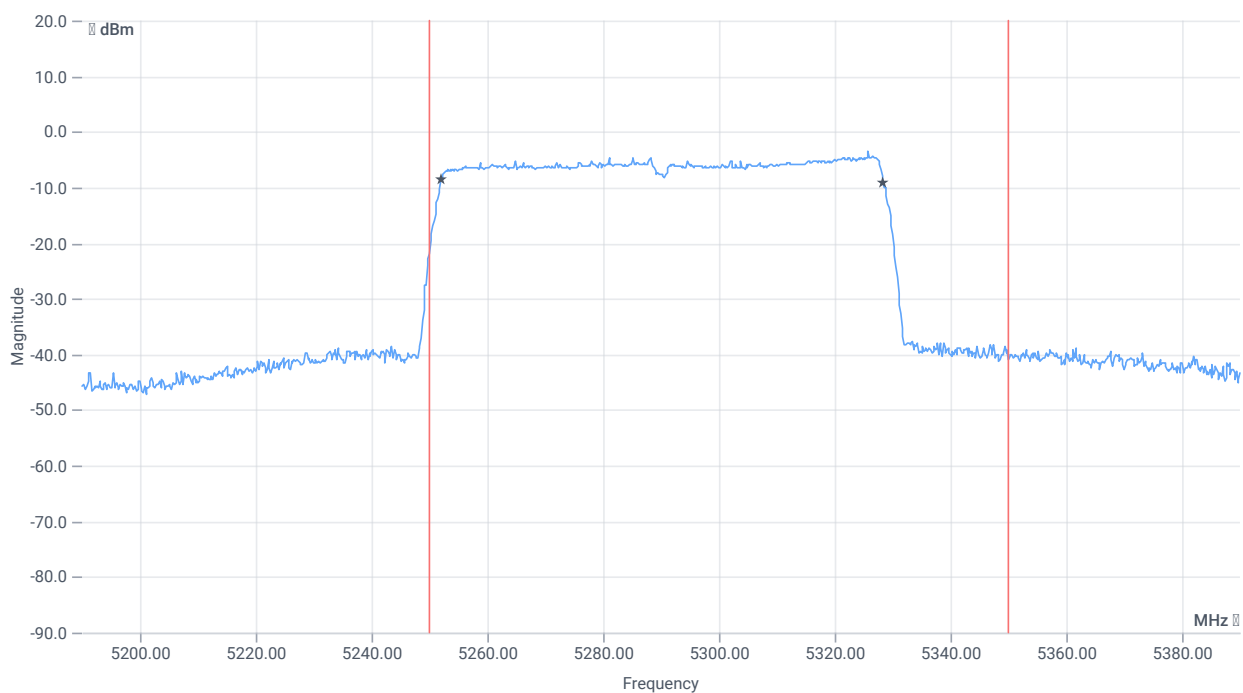

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	76.324	MHz	INFO
T1 99%	5250.000000	---	5252.0380	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5328.3616	MHz	PASS

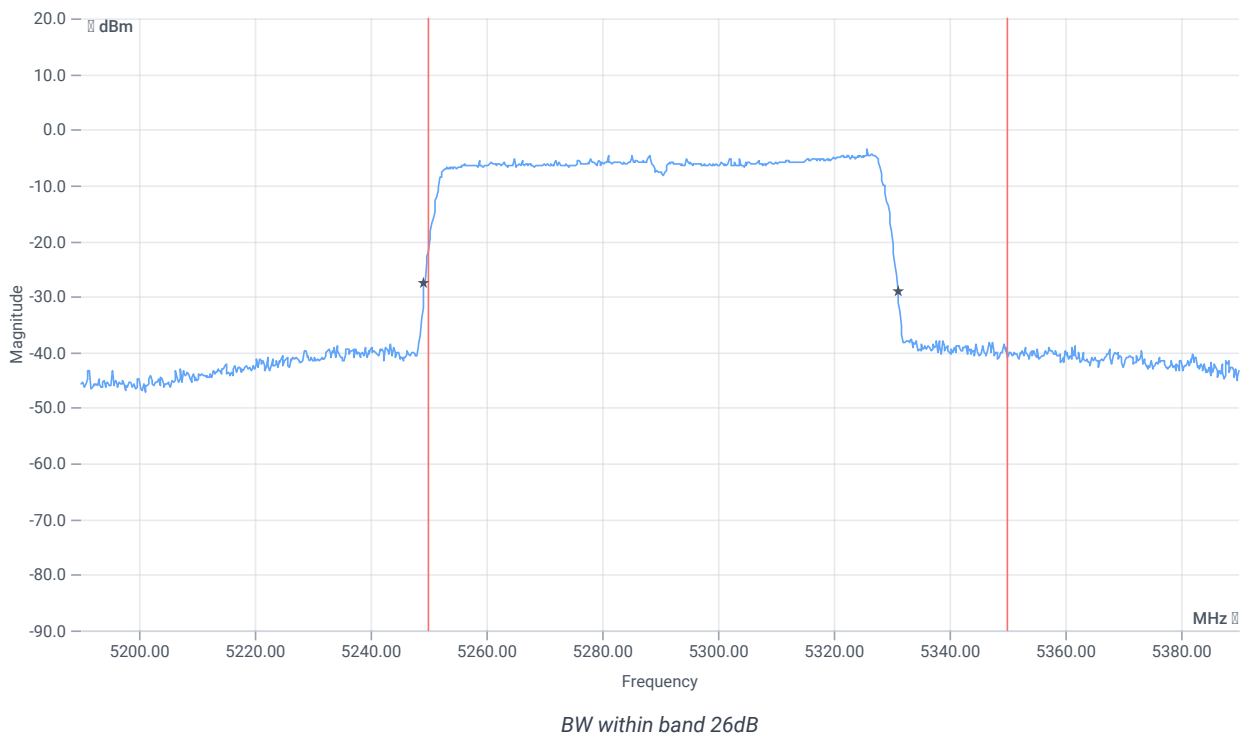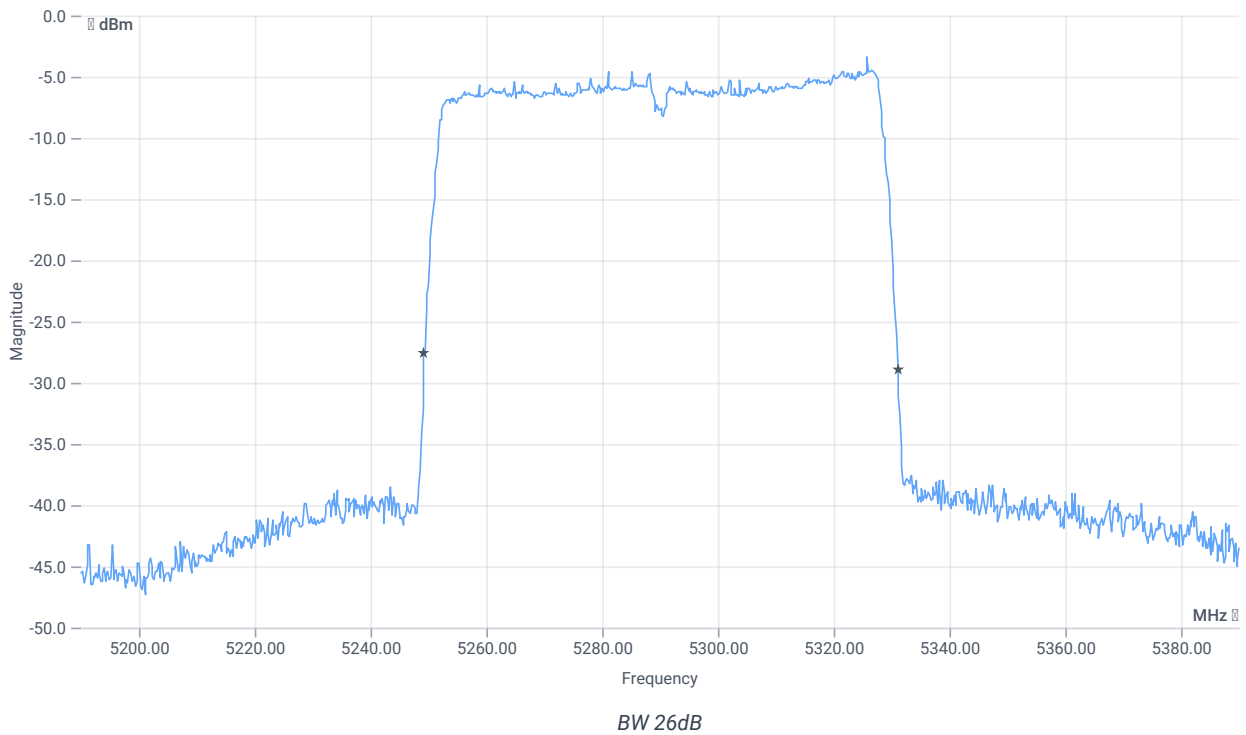

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	81.8	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5249.2000	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5331.0000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-2A

References

TC start	12.06.2024 13:11:30
Ambit temp [°C] humidity [rel%]	25.2 29
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT80 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5290
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5290 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-4.61	dBm	INFO
Ref. frequency	---	---	5315.770	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.39 12.68 10
Start [MHz] Stop [MHz]	5190.000 5390.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


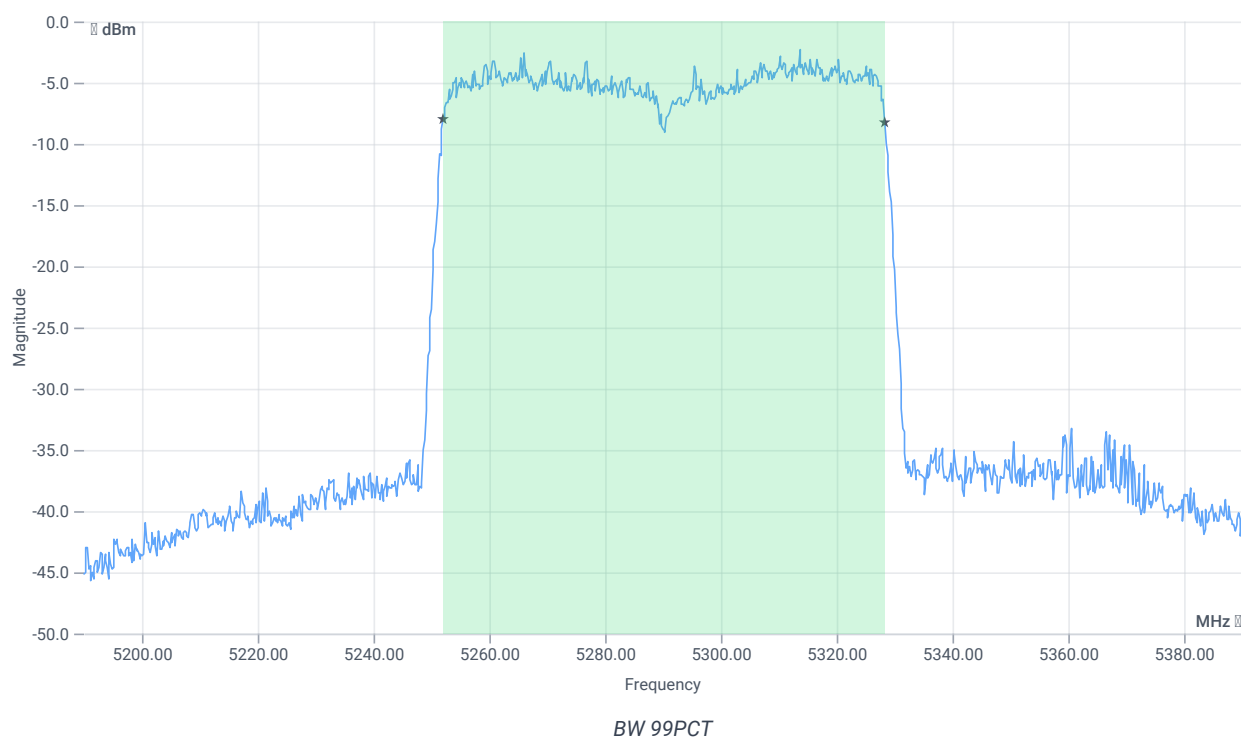




BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	76.124	MHz	INFO
T1 99%	5250.000000	---	5252.0380	MHz	PASS since U-NII-1 is supported
T2 99%	---	5350.000000	5328.1618	MHz	PASS

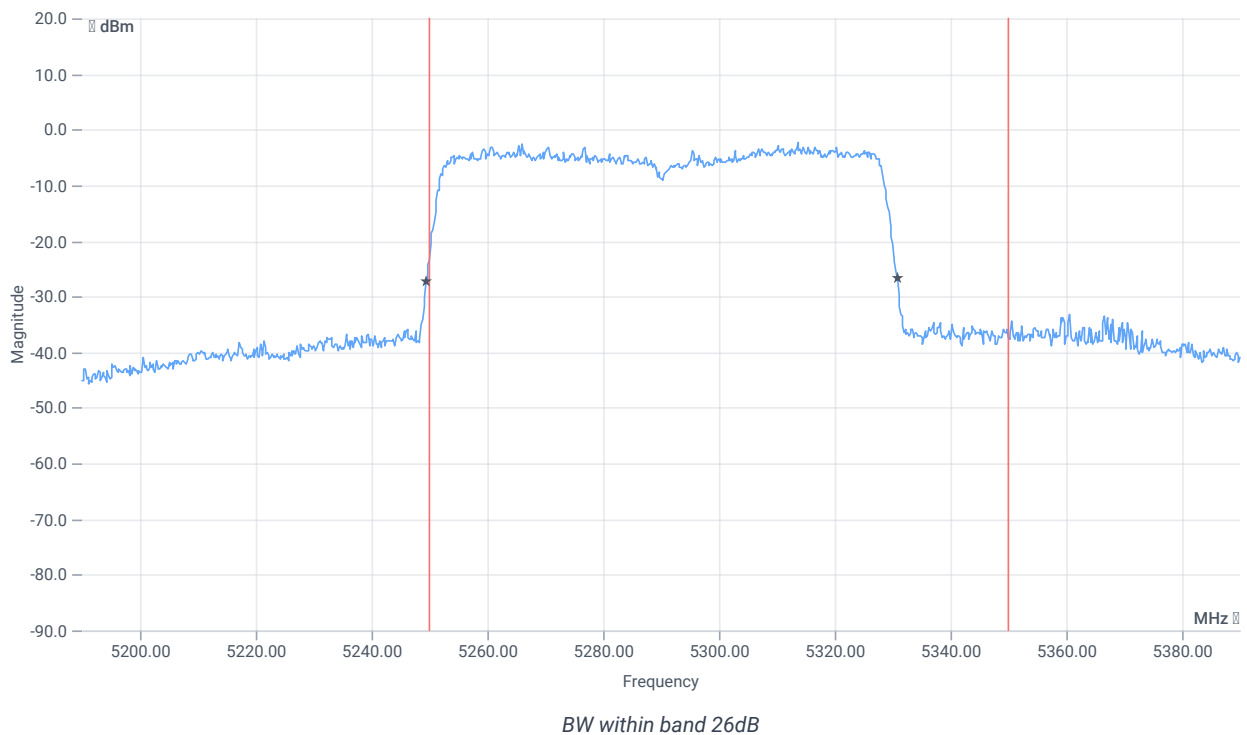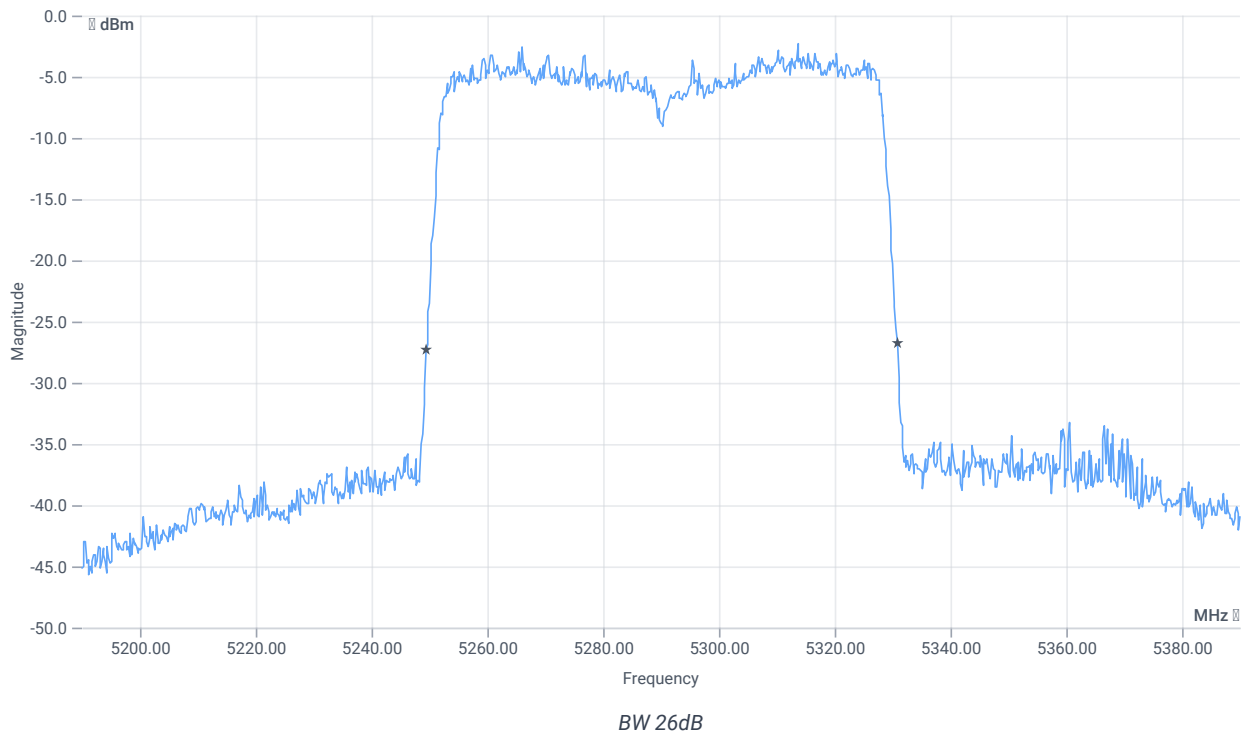

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	81.4	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5250.000000	---	5249.4000	MHz	PASS since U-NII-1 is supported
T2 26dB	---	5350.000000	5330.8000	MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A

References

TC start	11.06.2024 13:39:21
Ambit temp [°C] humidity [rel%]	24.8 32
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5260 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	6.93	dBm	INFO
Ref. frequency	---	---	5252.610	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

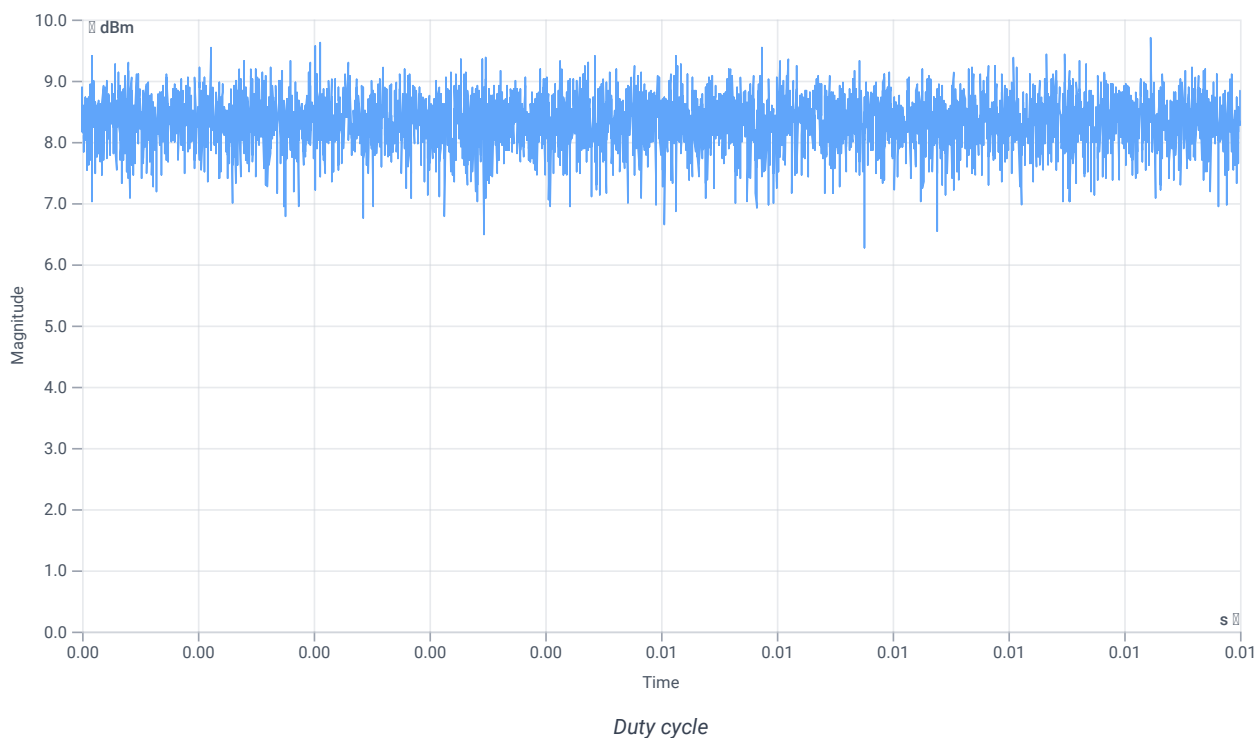

Evaluation bandwidth

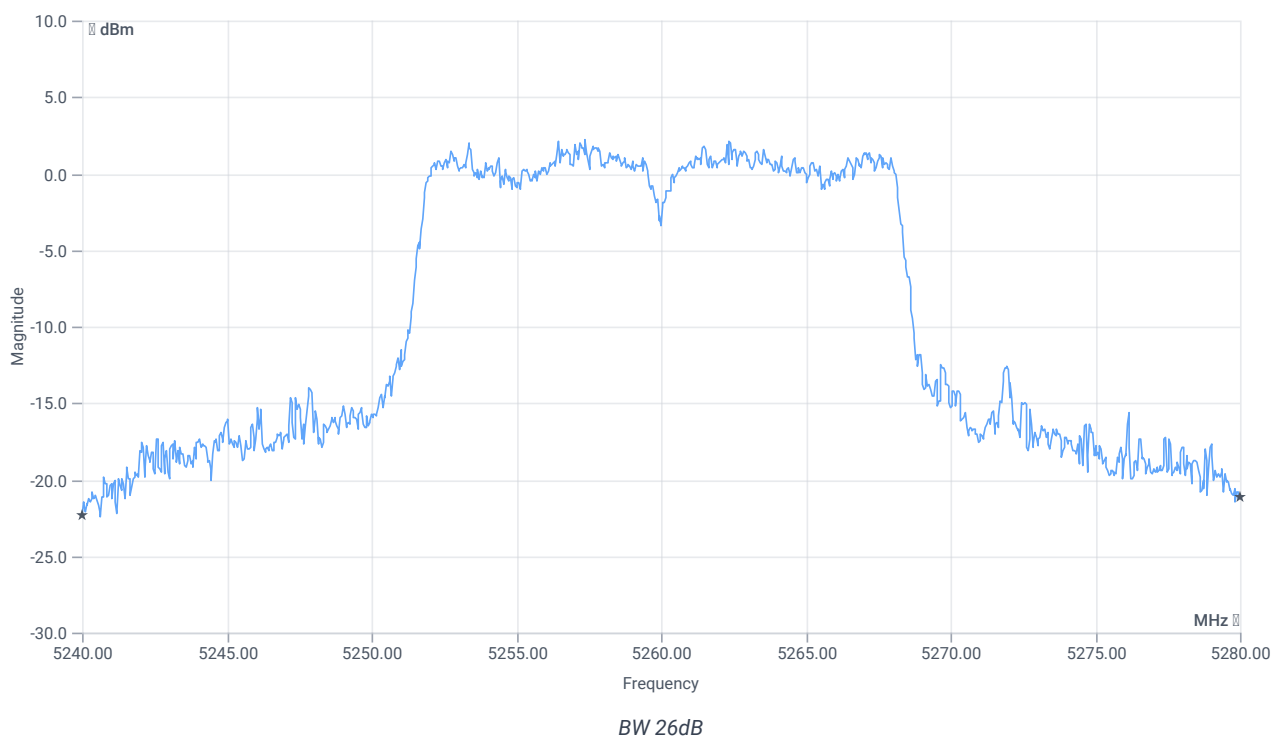

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	40	MHz	INFO
T1 26dB	---	---	5240.0000	MHz	INFO
T2 26dB	---	---	5280.0000	MHz	INFO


Maximum Output Power

Antenna gain

Considered antenna gain [dBi]: 0 @ 5260 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.93 12.55 25
Start [MHz] Stop [MHz]	5240.000 5280.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

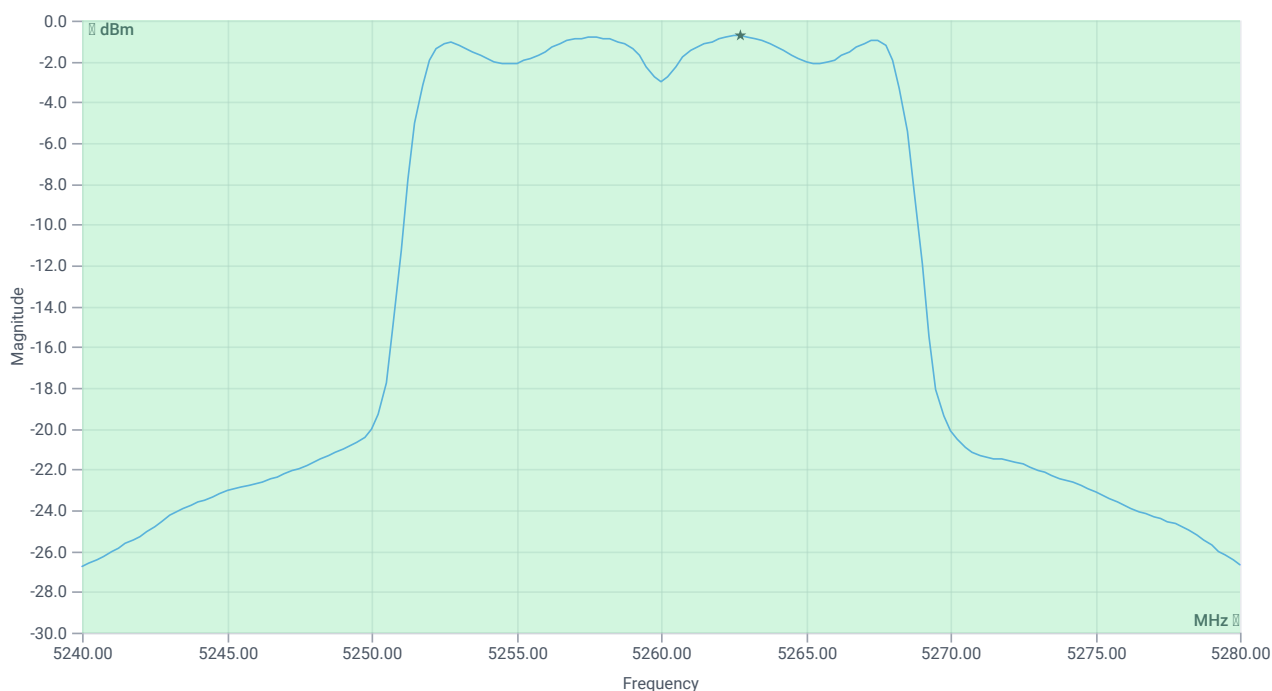

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	10.6	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	10.6	dBm	PASS
LIMIT: 11 dBm + 10 log 40					
Max output power DC corrected cond	---	27.02	10.6	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	10.6	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-0.75	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Power spectral density DC corrected cond	--	11	-0.75	dBm/1MHz	PASS
--	----	----	-------	----------	------

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A

References

TC start	11.06.2024 13:56:55
Ambit temp [°C] humidity [rel%]	24.9 31
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	True Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5280 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.64	dBm	INFO
Ref. frequency	---	---	5287.390	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

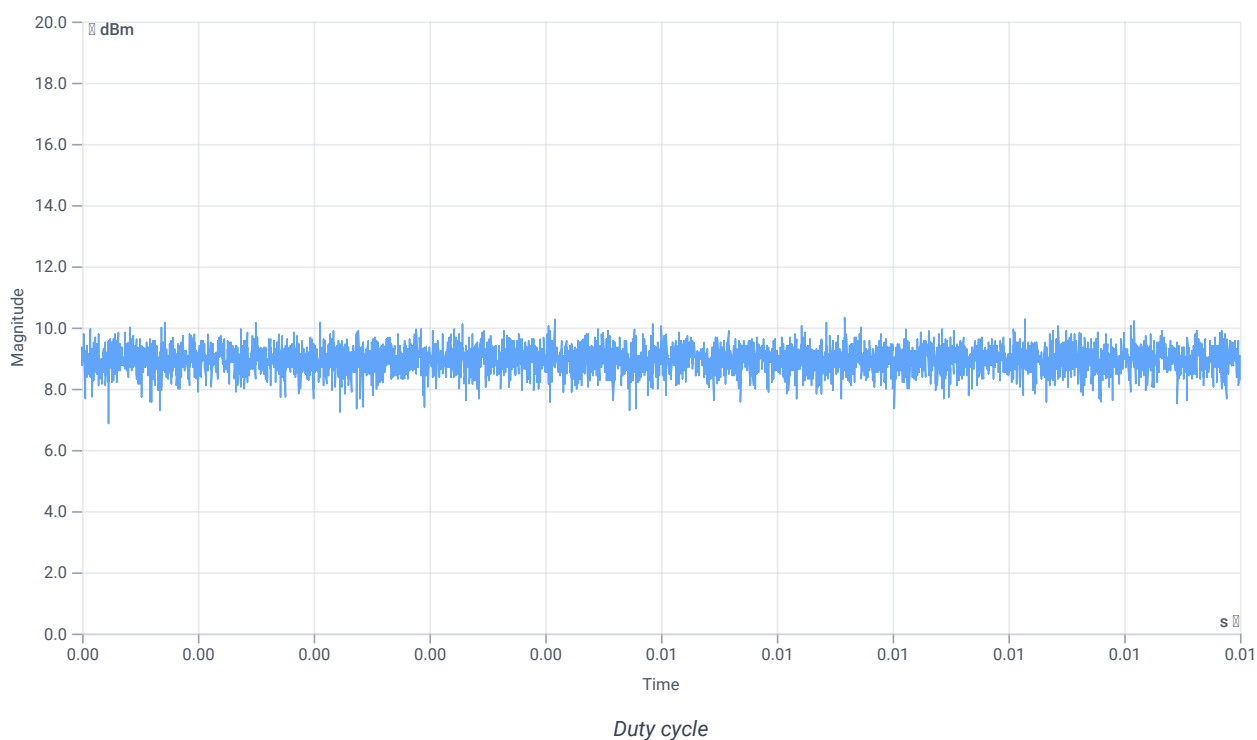

Evaluation bandwidth

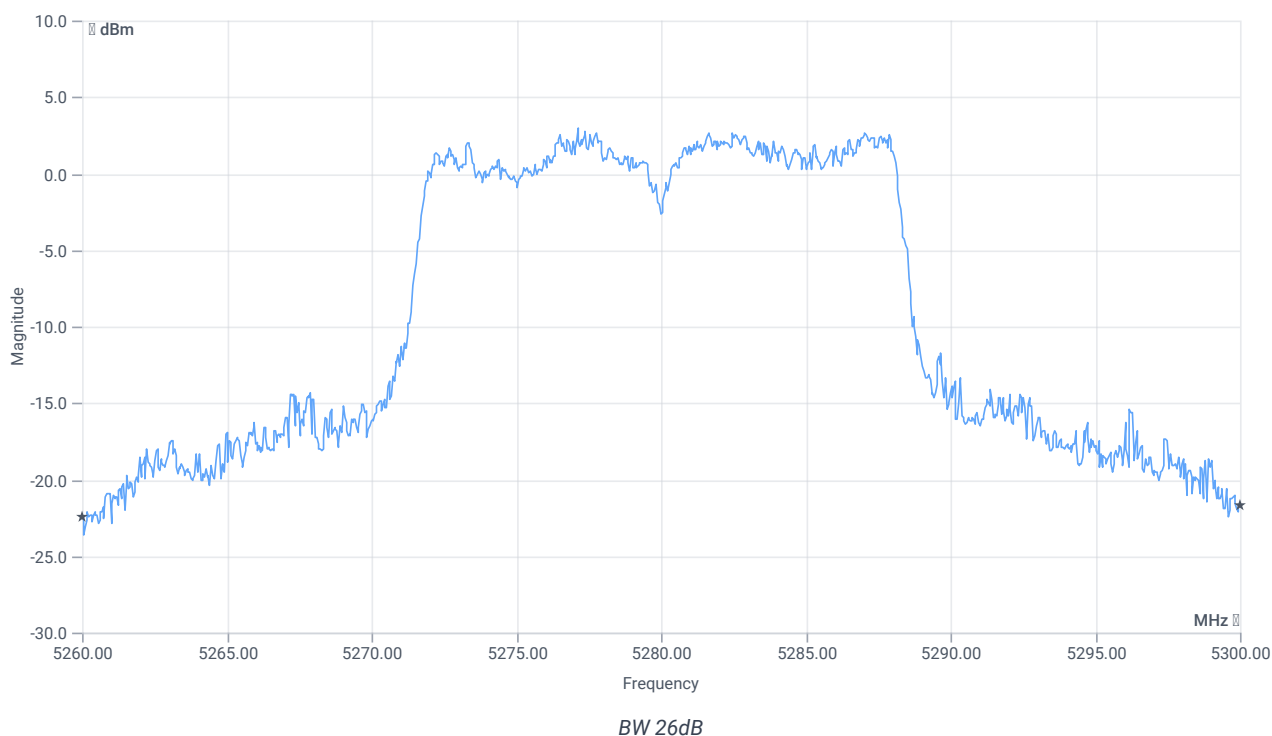

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	40	MHz	INFO
T1 26dB	---	---	5260.0000	MHz	INFO
T2 26dB	---	---	5300.0000	MHz	INFO


Maximum Output Power

Antenna gain

Considered antenna gain [dBi]: 0 @ 5280 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.64 12.59 25
Start [MHz] Stop [MHz]	5260.000 5300.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

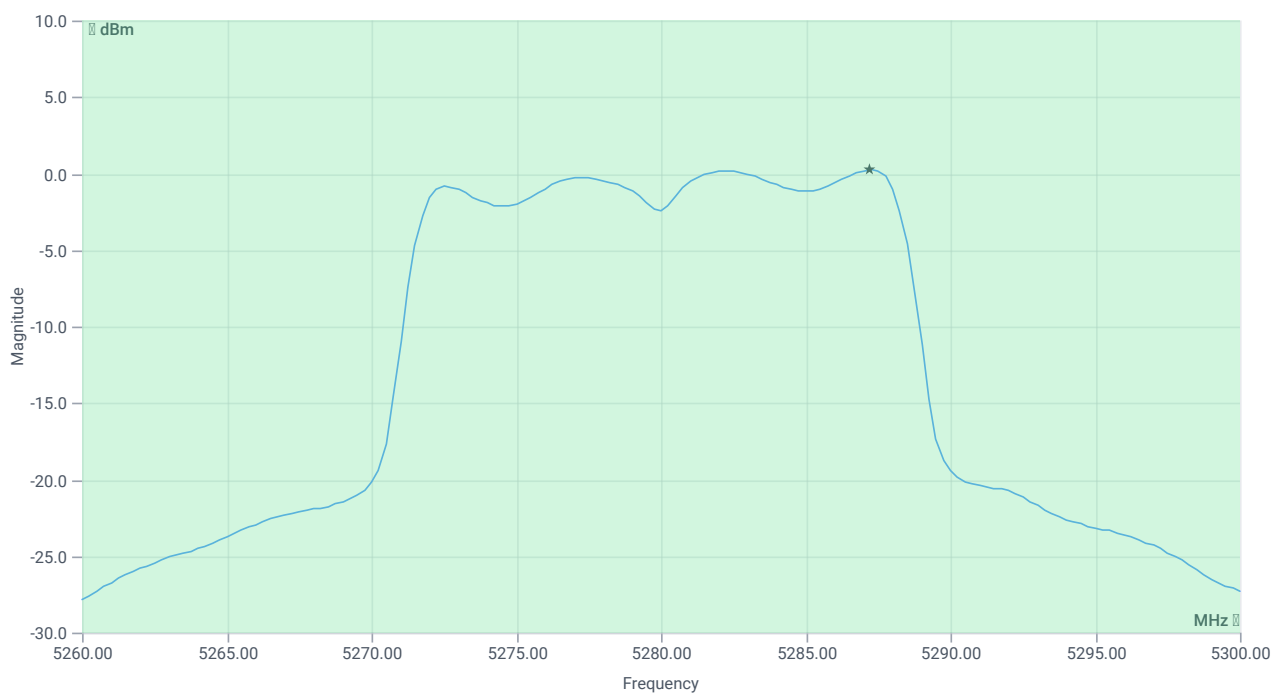

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	11.24	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	11.24	dBm	PASS
LIMIT: 11 dBm + 10 log 40					
Max output power DC corrected cond	---	27.02	11.24	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	11.24	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	0.23	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Power spectral density DC corrected cond	--	11	0.23	dBm/1MHz	PASS
--	----	----	------	----------	------

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A

References

TC start	11.06.2024 14:13:38
Ambit temp [°C] humidity [rel%]	24.9 31
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	True Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5320 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.87	dBm	INFO
Ref. frequency	---	---	5322.800	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

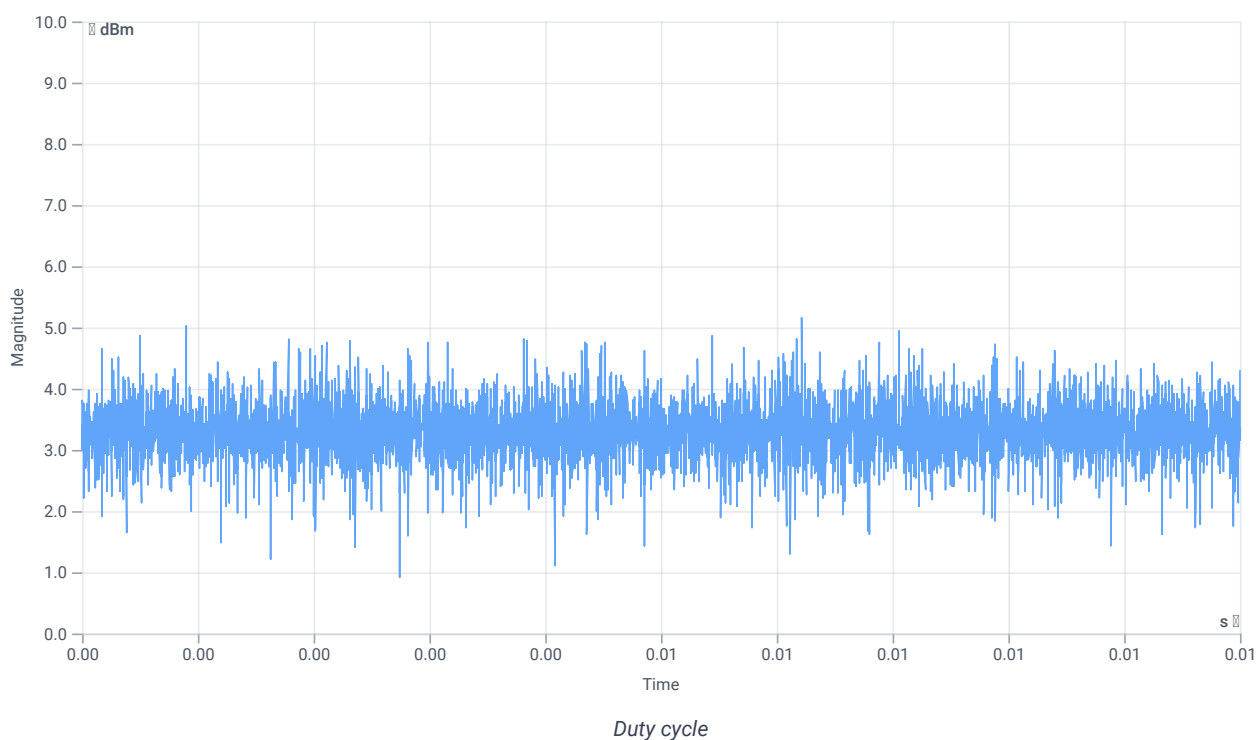

Evaluation bandwidth

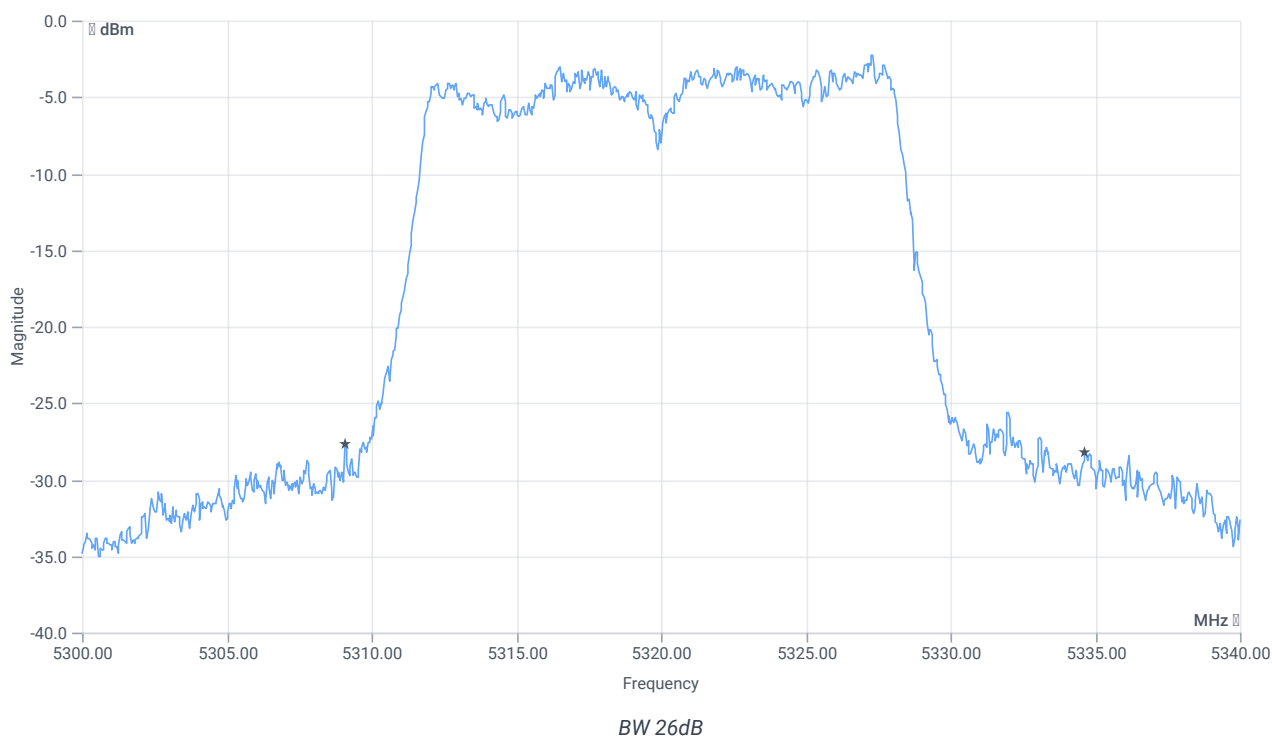

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	25.56	MHz	INFO
T1 26dB	---	---	5309.0800	MHz	INFO
T2 26dB	---	---	5334.6400	MHz	INFO


Maximum Output Power

Antenna gain

Considered antenna gain [dBi]: 0 @ 5320 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.87 13.26 20
Start [MHz] Stop [MHz]	5300.000 5340.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

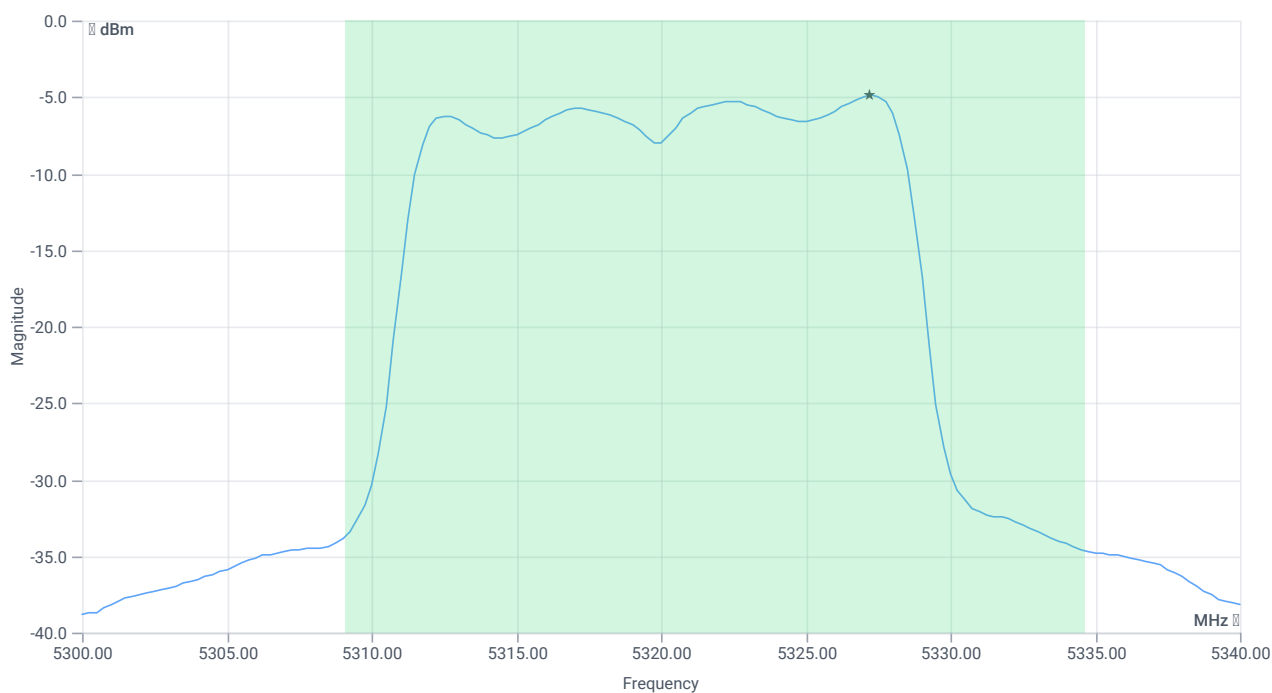

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	5.76	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	5.76	dBm	PASS
LIMIT: 11 dBm + 10 log 25.56					
Max output power DC corrected cond	---	25.08	5.76	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	5.76	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-4.89	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Power spectral density DC corrected cond	--	11	-4.89	dBm/1MHz	PASS
--	----	----	-------	----------	------

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A

References

TC start	12.06.2024 10:08:48
Ambit temp [°C] humidity [rel%]	24.2 34
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5260 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.41	dBm	INFO
Ref. frequency	---	---	5257.200	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

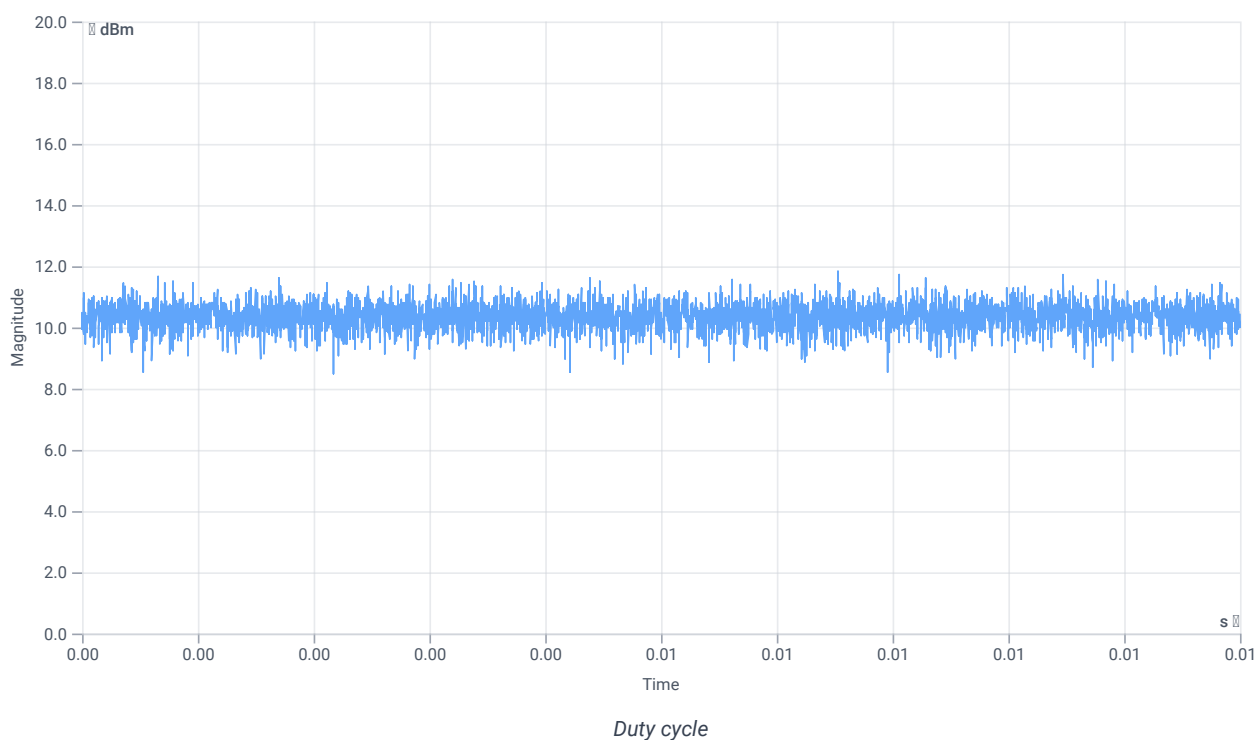

Evaluation bandwidth

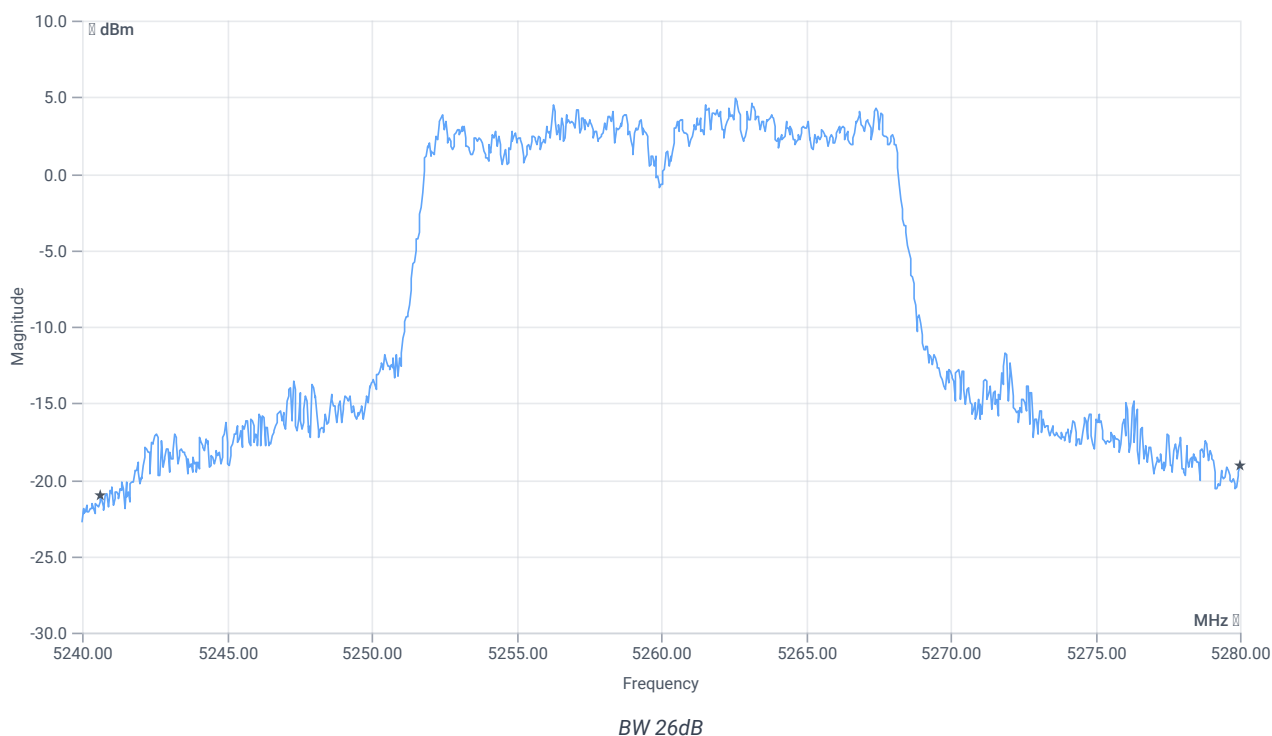

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	39.36	MHz	INFO
T1 26dB	---	---	5240.6400	MHz	INFO
T2 26dB	---	---	5280.0000	MHz	INFO


Maximum Output Power

Antenna gain

Considered antenna gain [dBi]: 0 @ 5260 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	21.41 12.34 25
Start [MHz] Stop [MHz]	5240.000 5280.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

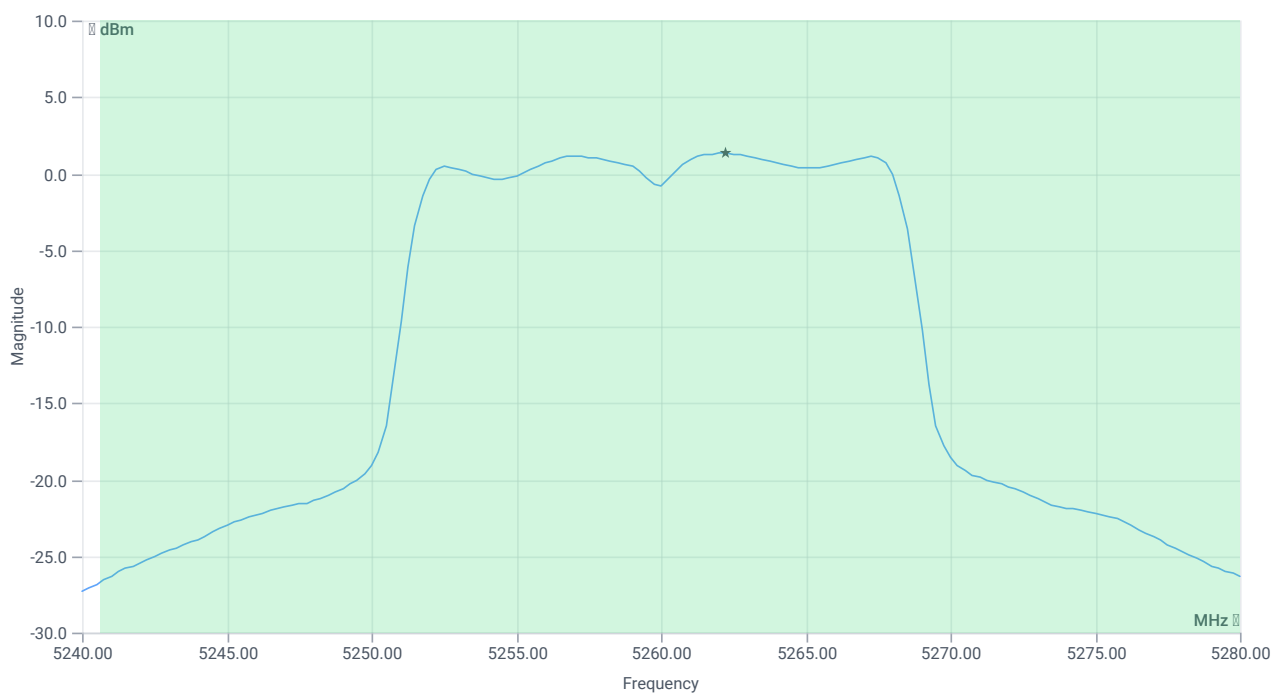

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	12.58	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	12.58	dBm	PASS
LIMIT: 11 dBm + 10 log 39.36					
Max output power DC corrected cond	---	26.95	12.58	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	12.58	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	1.33	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Power spectral density DC corrected cond	--	11	1.33	dBm/1MHz	PASS
--	----	----	------	----------	------

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A

References

TC start	12.06.2024 10:23:44
Ambit temp [°C] humidity [rel%]	24.2 34
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	True Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5280 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.51	dBm	INFO
Ref. frequency	---	---	5282.400	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

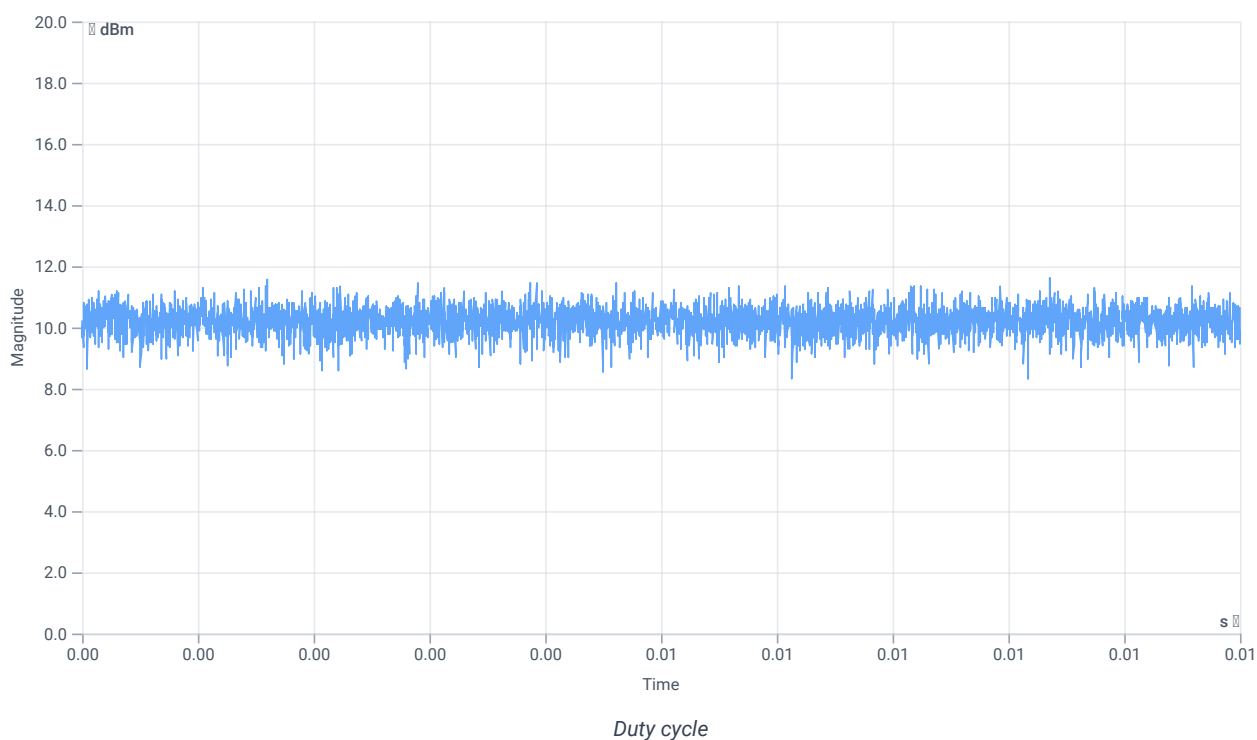

Evaluation bandwidth

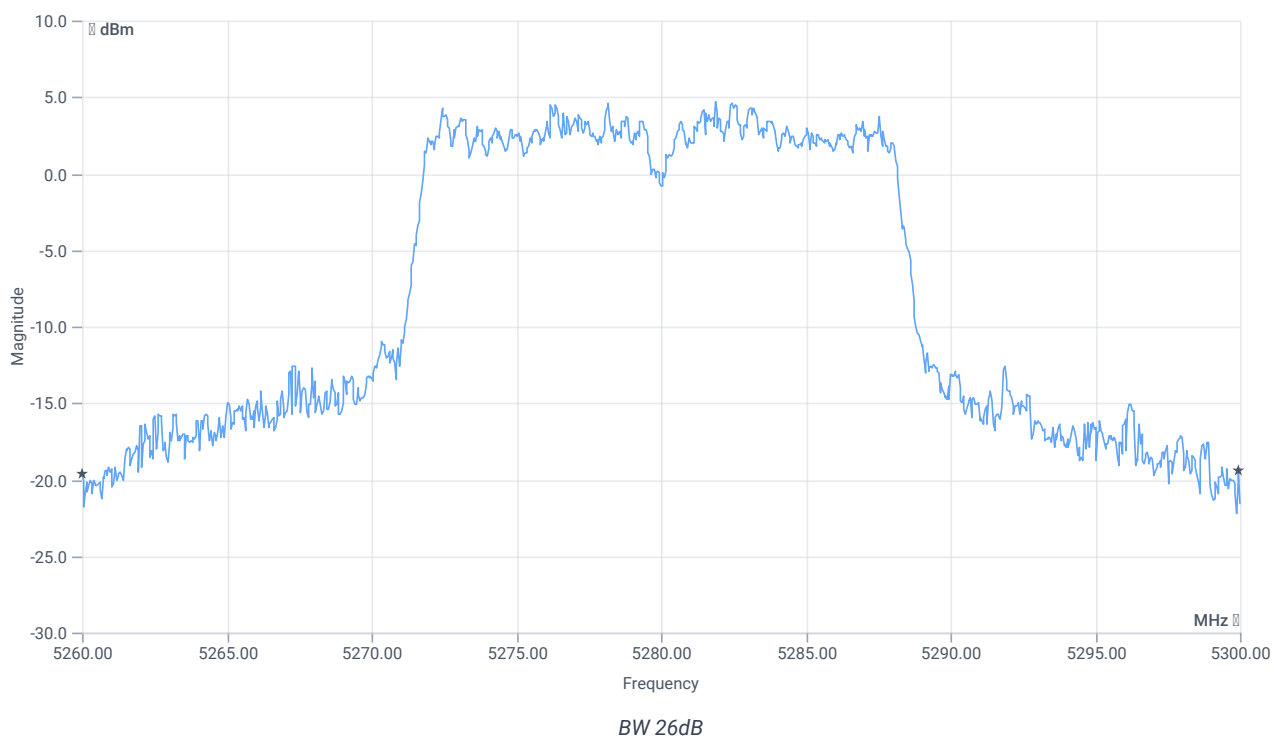

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	39.96	MHz	INFO
T1 26dB	---	---	5260.0000	MHz	INFO
T2 26dB	---	---	5299.9600	MHz	INFO


Maximum Output Power

Antenna gain

Considered antenna gain [dBi]: 0 @ 5280 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	23.51 12.57 25
Start [MHz] Stop [MHz]	5260.000 5300.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

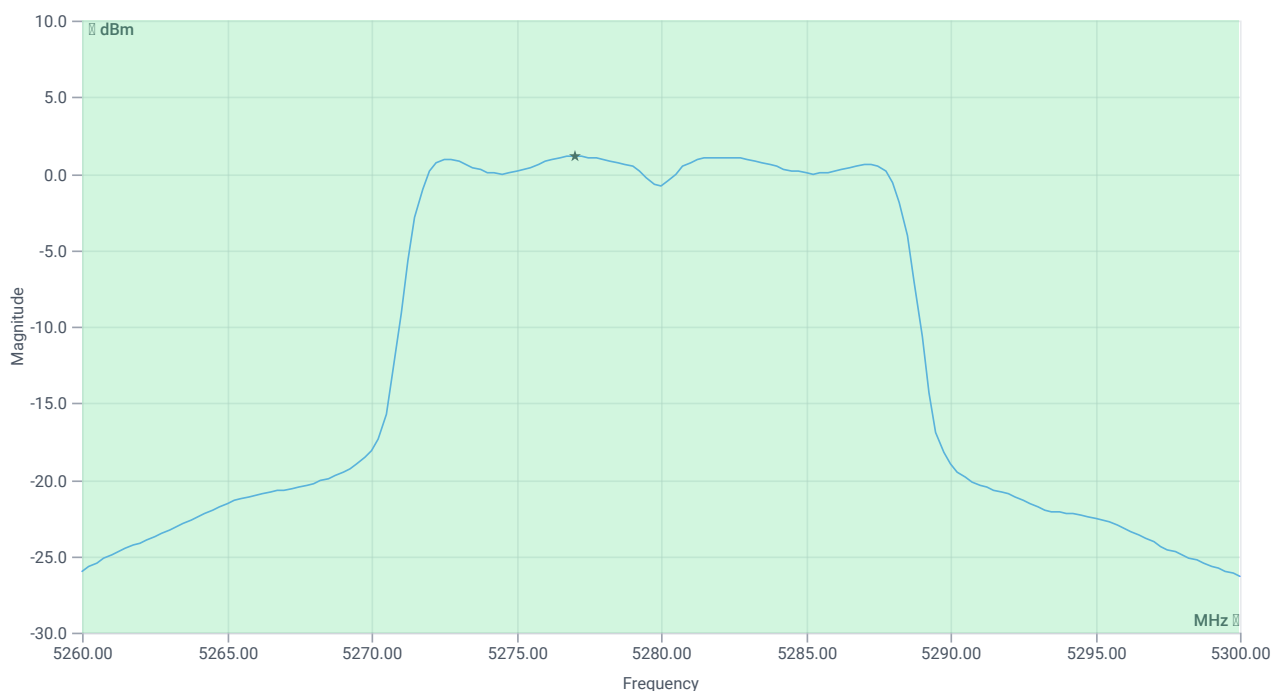

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	12.54	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	12.54	dBm	PASS
LIMIT: 11 dBm + 10 log 39.96					
Max output power DC corrected cond	---	27.02	12.54	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	12.54	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	1.15	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Power spectral density DC corrected cond	--	11	1.15	dBm/1MHz	PASS
--	----	----	------	----------	------

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A

References

TC start	12.06.2024 10:37:36
Ambit temp [°C] humidity [rel%]	24.4 34
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	True Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5320 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	6.11	dBm	INFO
Ref. frequency	---	---	5317.600	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

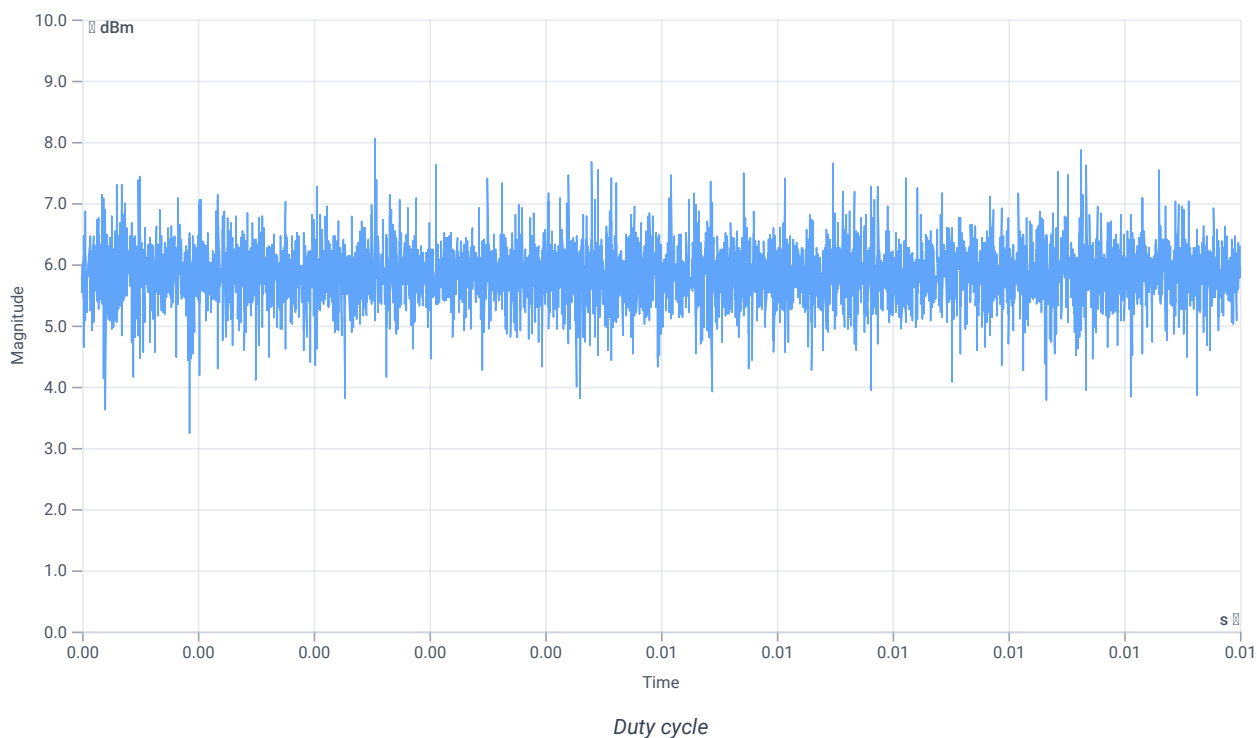

Evaluation bandwidth

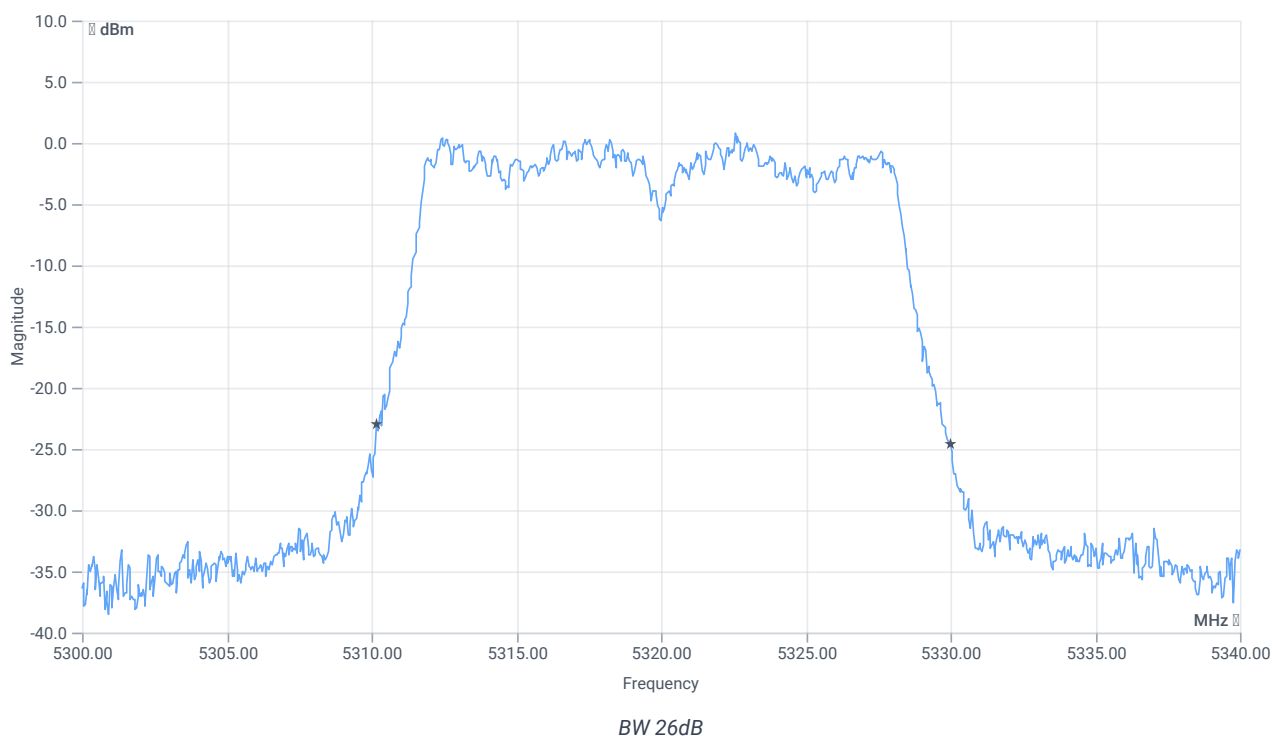

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	19.84	MHz	INFO
T1 26dB	---	---	5310.1600	MHz	INFO
T2 26dB	---	---	5330.0000	MHz	INFO


Maximum Output Power

Antenna gain

Considered antenna gain [dBi]: 0 @ 5320 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.11 13.02 20
Start [MHz] Stop [MHz]	5300.000 5340.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

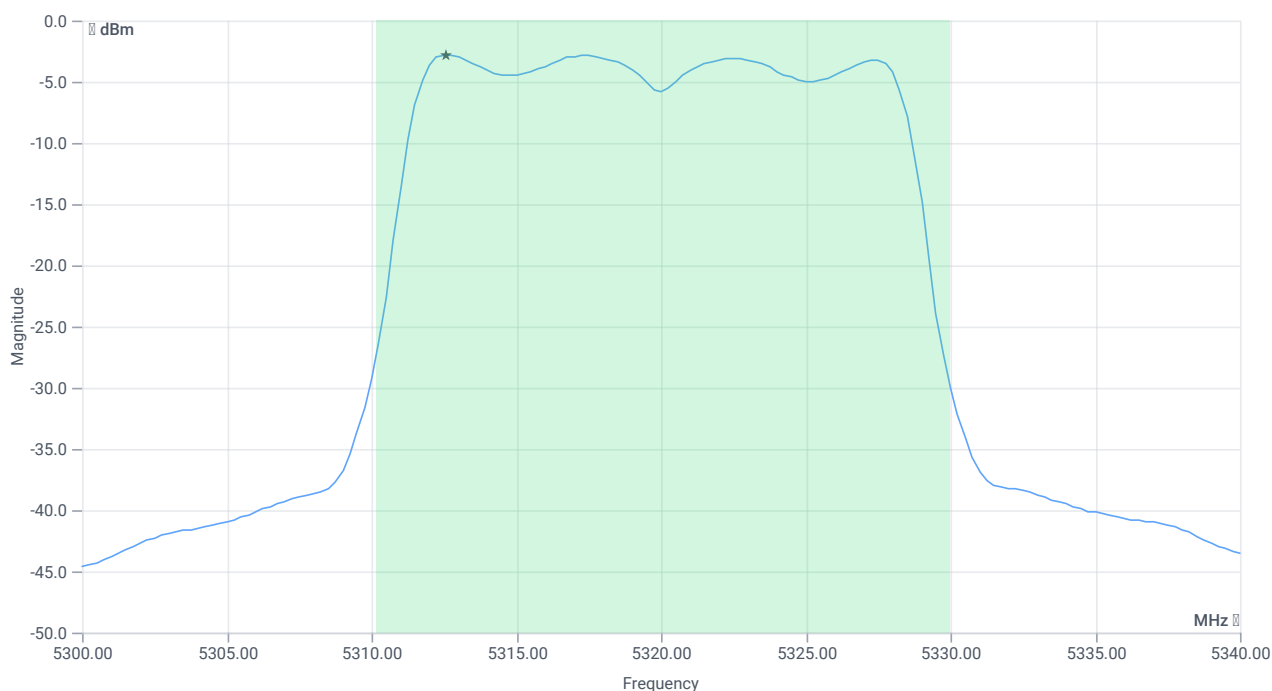

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	8.2	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	8.2	dBm	PASS
LIMIT: 11 dBm + 10 log 19.84					
Max output power DC corrected cond	---	23.98	8.2	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	8.2	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-2.82	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Power spectral density DC corrected cond	--	11	-2.82	dBm/1MHz	PASS
--	----	----	-------	----------	------

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-2A

References

TC start	12.06.2024 07:48:58
Ambit temp [°C] humidity [rel%]	22.9 36
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT20 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5260 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.60	dBm	INFO
Ref. frequency	---	---	5262.400	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

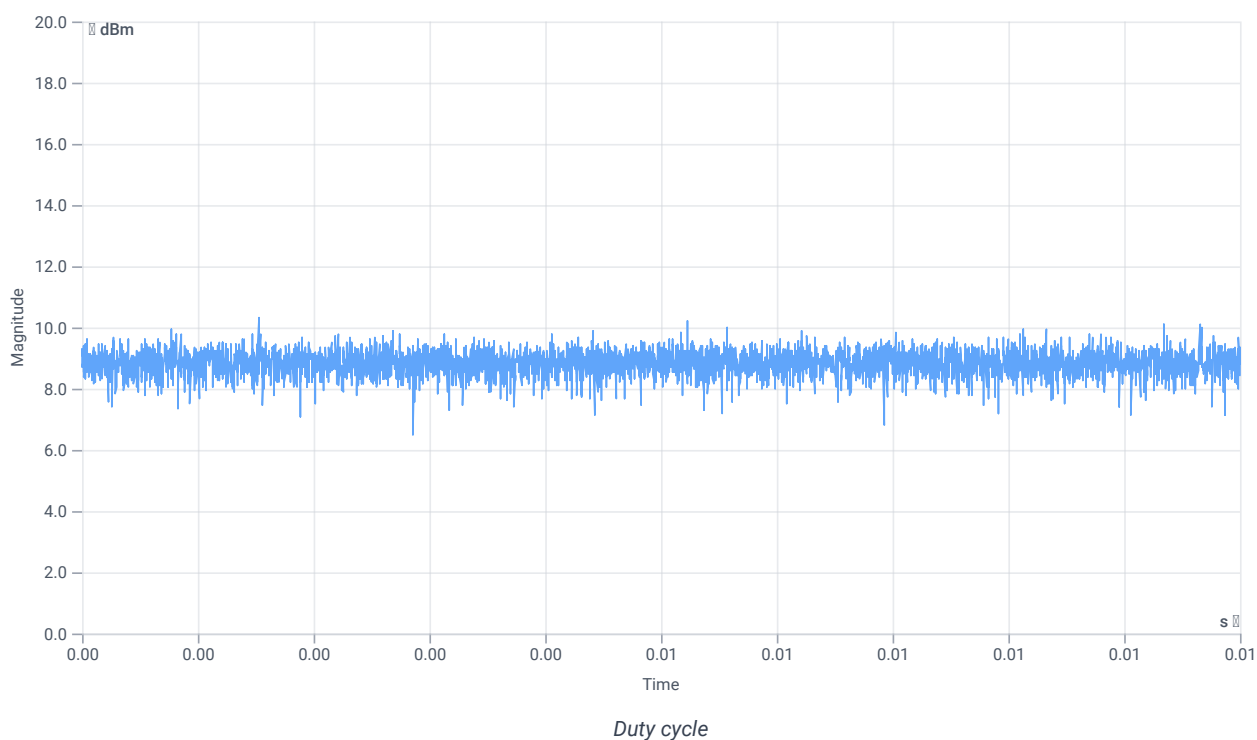

Evaluation bandwidth

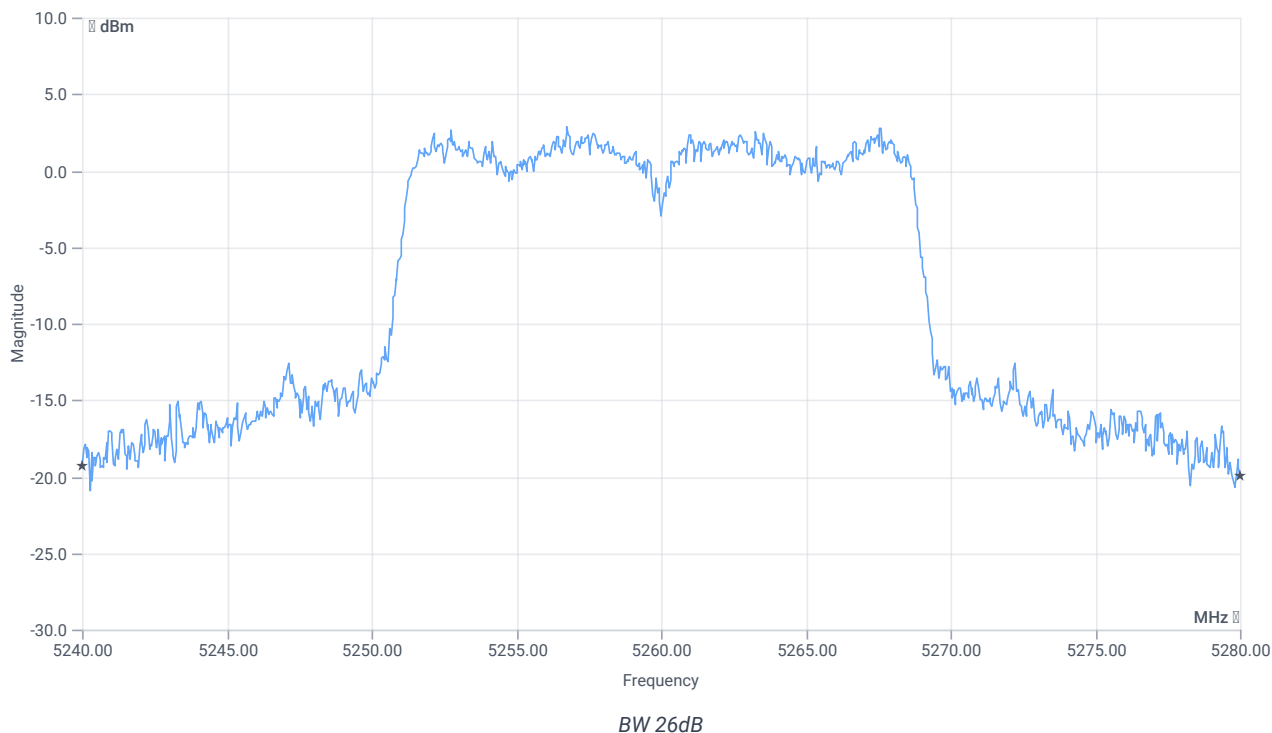

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	40	MHz	INFO
T1 26dB	---	---	5240.0000	MHz	INFO
T2 26dB	---	---	5280.0000	MHz	INFO


Maximum Output Power

Antenna gain

Considered antenna gain [dBi]: 0 @ 5260 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.60 12.55 25
Start [MHz] Stop [MHz]	5240.000 5280.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

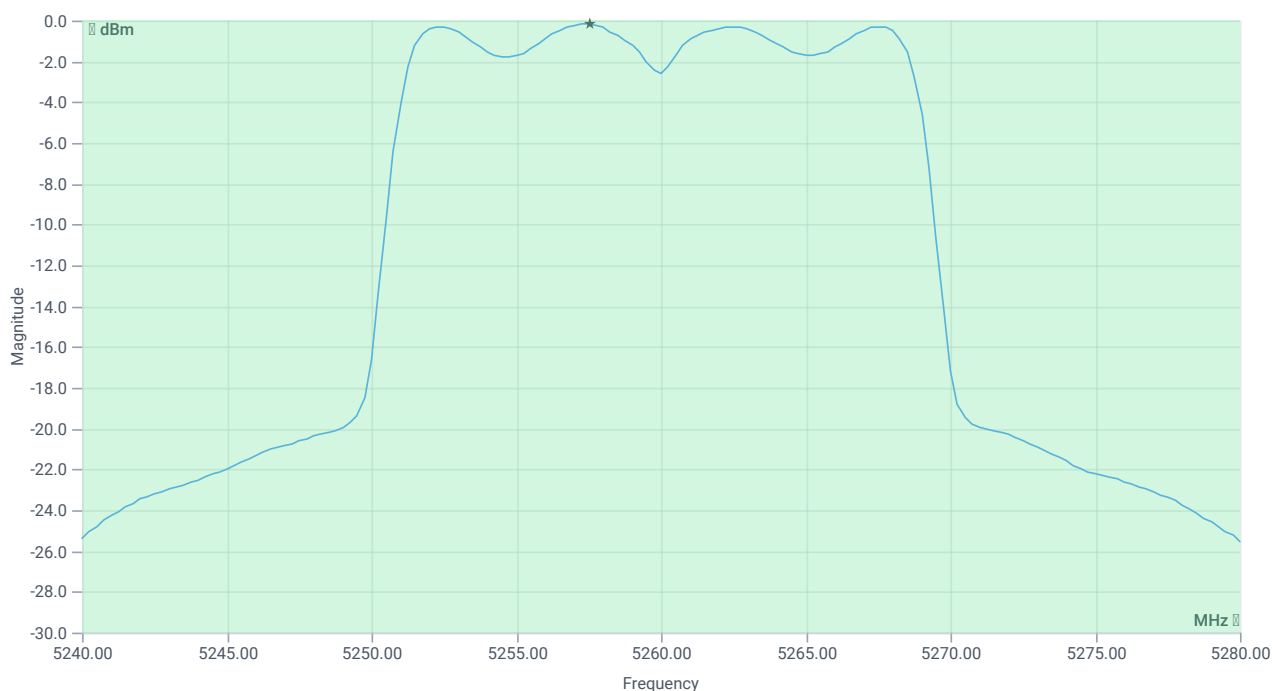

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	11.38	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	11.38	dBm	PASS
LIMIT: 11 dBm + 10 log 40					
Max output power DC corrected cond	---	27.02	11.38	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	11.38	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-0.18	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Power spectral density DC corrected cond	--	11	-0.18	dBm/1MHz	PASS
--	----	----	-------	----------	------

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-2A

References

TC start	12.06.2024 08:03:57
Ambit temp [°C] humidity [rel%]	23.0 36
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT20 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	True Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5280 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.26	dBm	INFO
Ref. frequency	---	---	5287.790	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

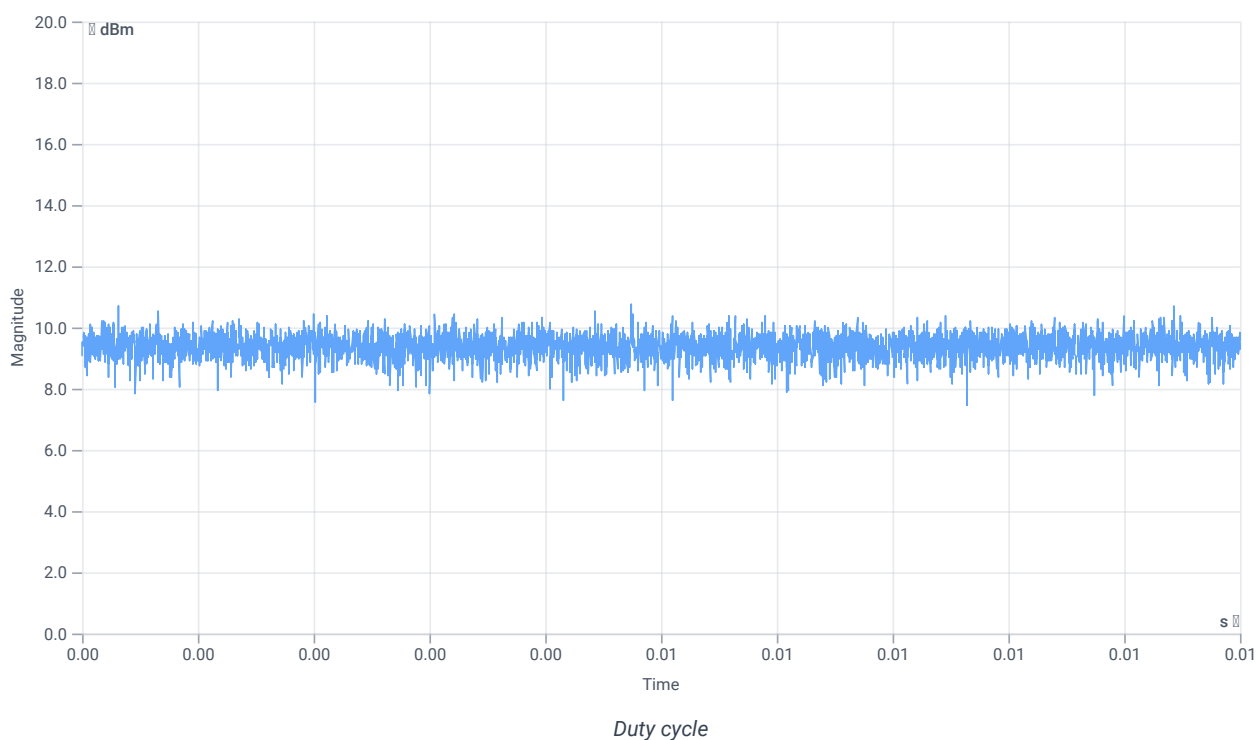

Evaluation bandwidth

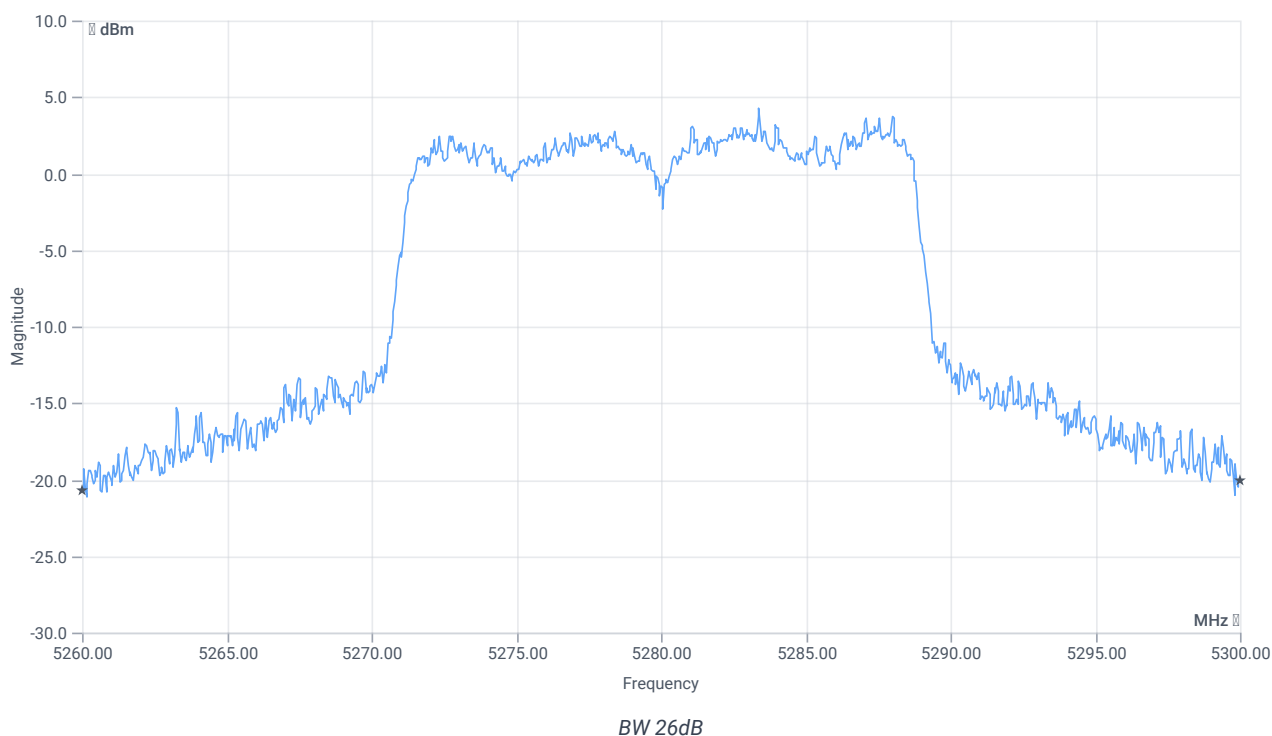

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	40	MHz	INFO
T1 26dB	---	---	5260.0000	MHz	INFO
T2 26dB	---	---	5300.0000	MHz	INFO


Maximum Output Power

Antenna gain

Considered antenna gain [dBi]: 0 @ 5280 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.26 12.59 25
Start [MHz] Stop [MHz]	5260.000 5300.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

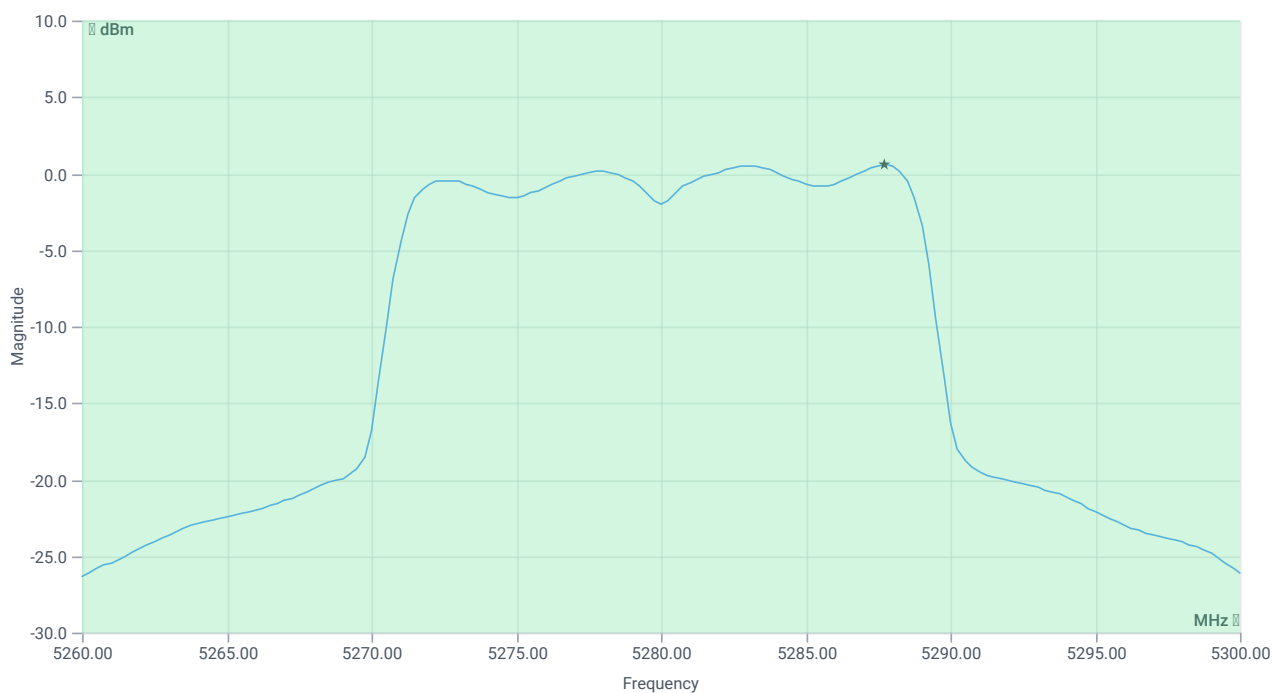

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	11.87	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	11.87	dBm	PASS
LIMIT: 11 dBm + 10 log 40					
Max output power DC corrected cond	---	27.02	11.87	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	11.87	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	0.57	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Power spectral density DC corrected cond	--	11	0.57	dBm/1MHz	PASS
--	----	----	------	----------	------

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-2A

References

TC start	12.06.2024 08:18:48
Ambit temp [°C] humidity [rel%]	23.3 36
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT20 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	True Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5320 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.80	dBm	INFO
Ref. frequency	---	---	5322.200	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

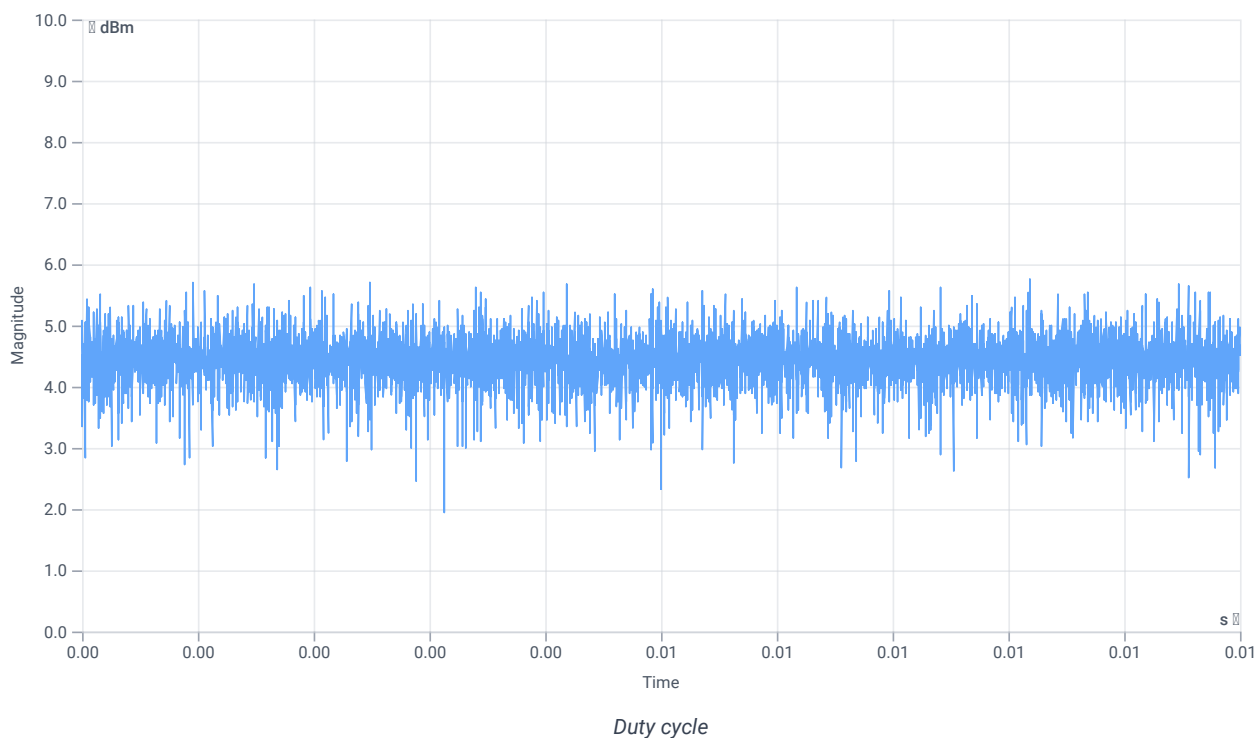

Evaluation bandwidth

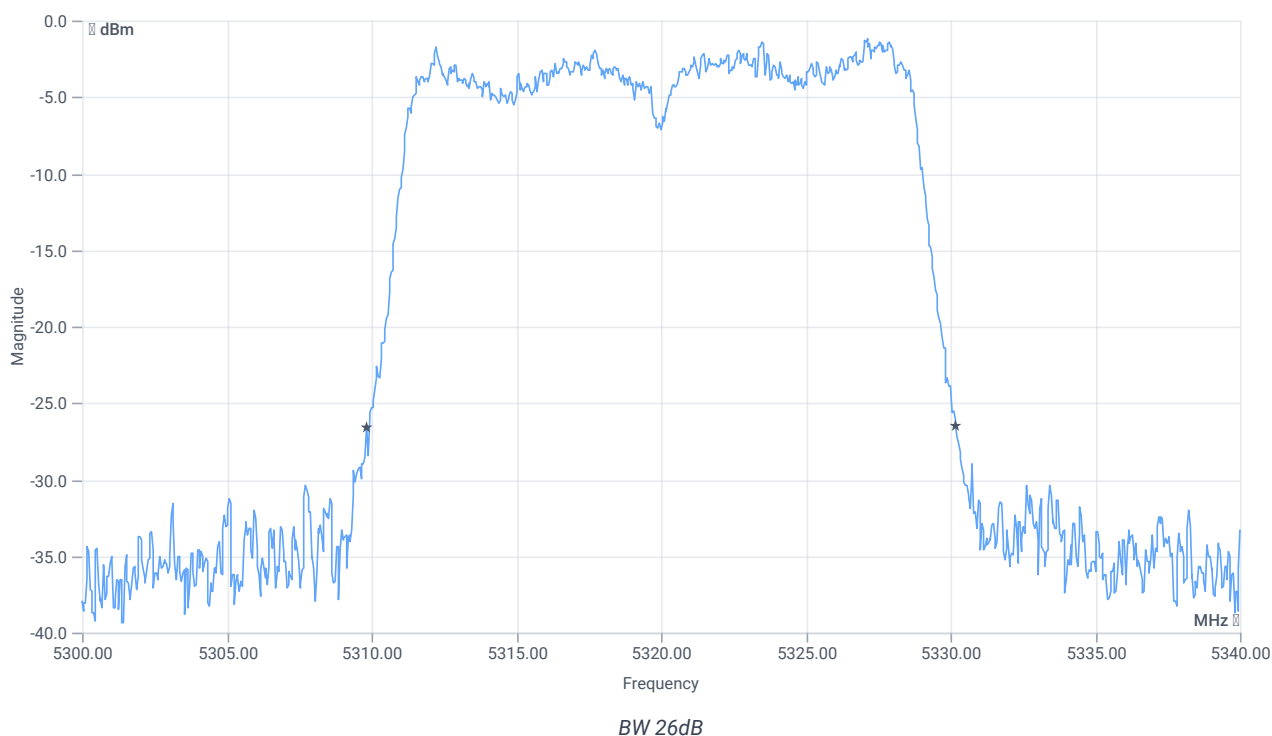

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.4	MHz	INFO
T1 26dB	---	---	5309.8000	MHz	INFO
T2 26dB	---	---	5330.2000	MHz	INFO


Maximum Output Power

Antenna gain

Considered antenna gain [dBi]: 0 @ 5320 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.80 13.26 20
Start [MHz] Stop [MHz]	5300.000 5340.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

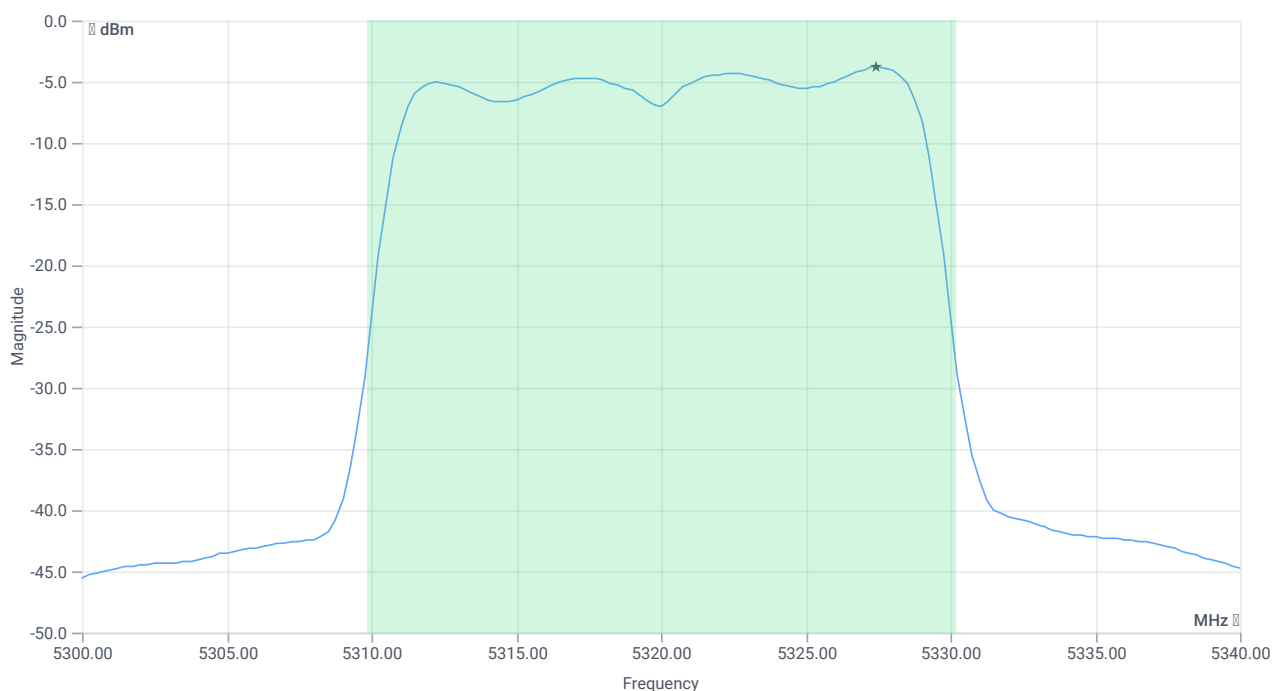

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	7.09	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	7.09	dBm	PASS
LIMIT: 11 dBm + 10 log 20.4					
Max output power DC corrected cond	---	24.1	7.09	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	7.09	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-3.8	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Power spectral density DC corrected cond	--	11	-3.8	dBm/1MHz	PASS
--	----	----	------	----------	------

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-2A

References

TC start	12.06.2024 13:40:20
Ambit temp [°C] humidity [rel%]	25.3 29
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT20 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5260 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.43	dBm	INFO
Ref. frequency	---	---	5262.000	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

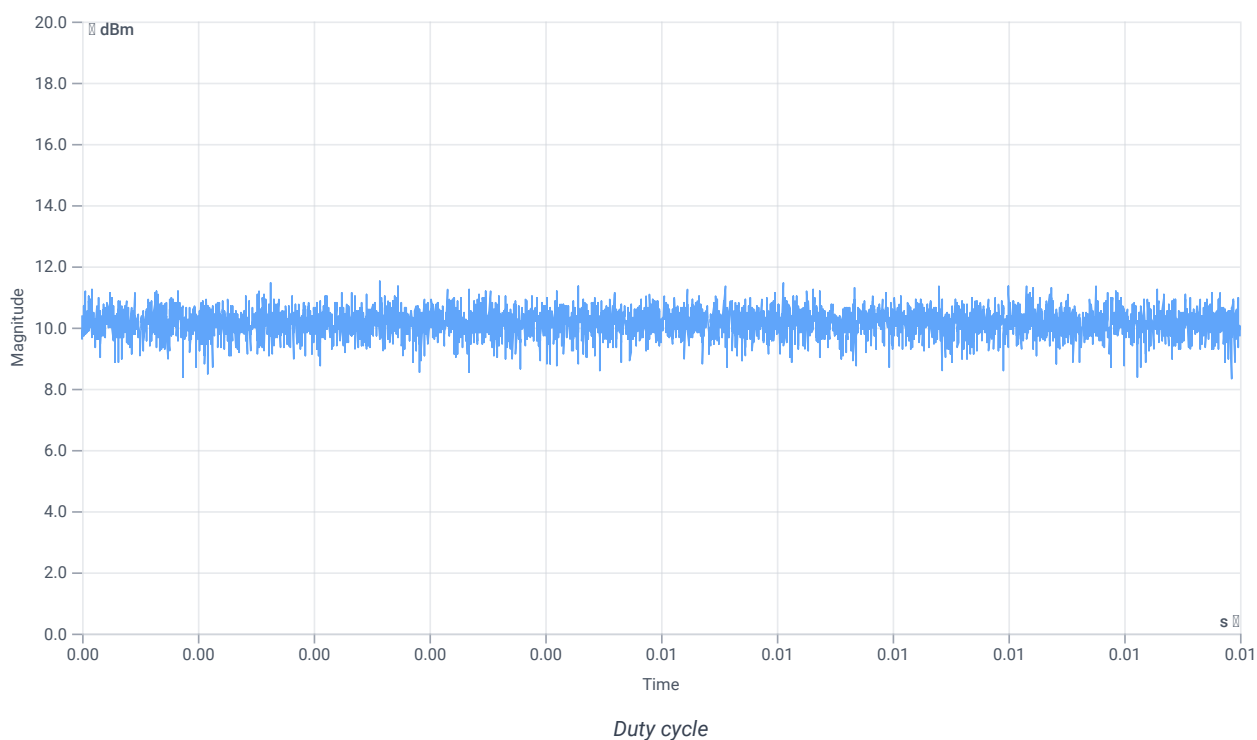

Evaluation bandwidth

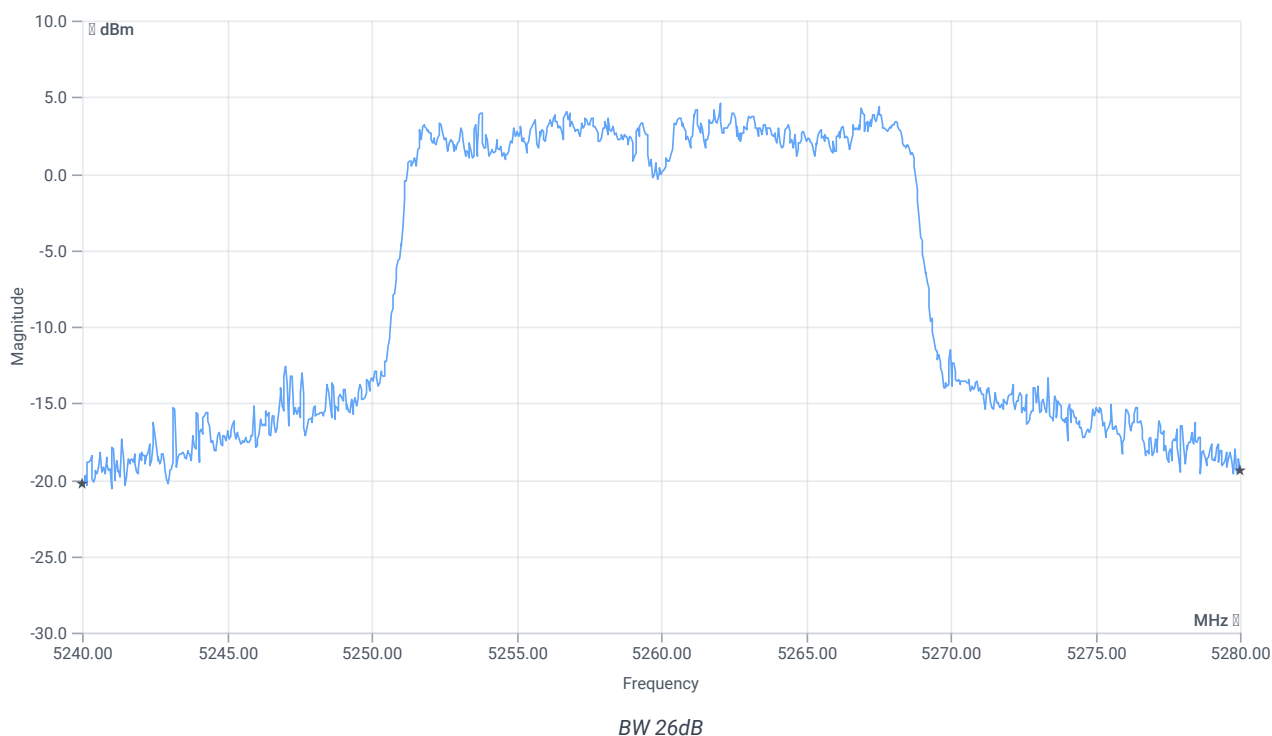

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	40	MHz	INFO
T1 26dB	---	---	5240.0000	MHz	INFO
T2 26dB	---	---	5280.0000	MHz	INFO


Maximum Output Power

Antenna gain

Considered antenna gain [dBi]: 0 @ 5260 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	21.43 12.34 25
Start [MHz] Stop [MHz]	5240.000 5280.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

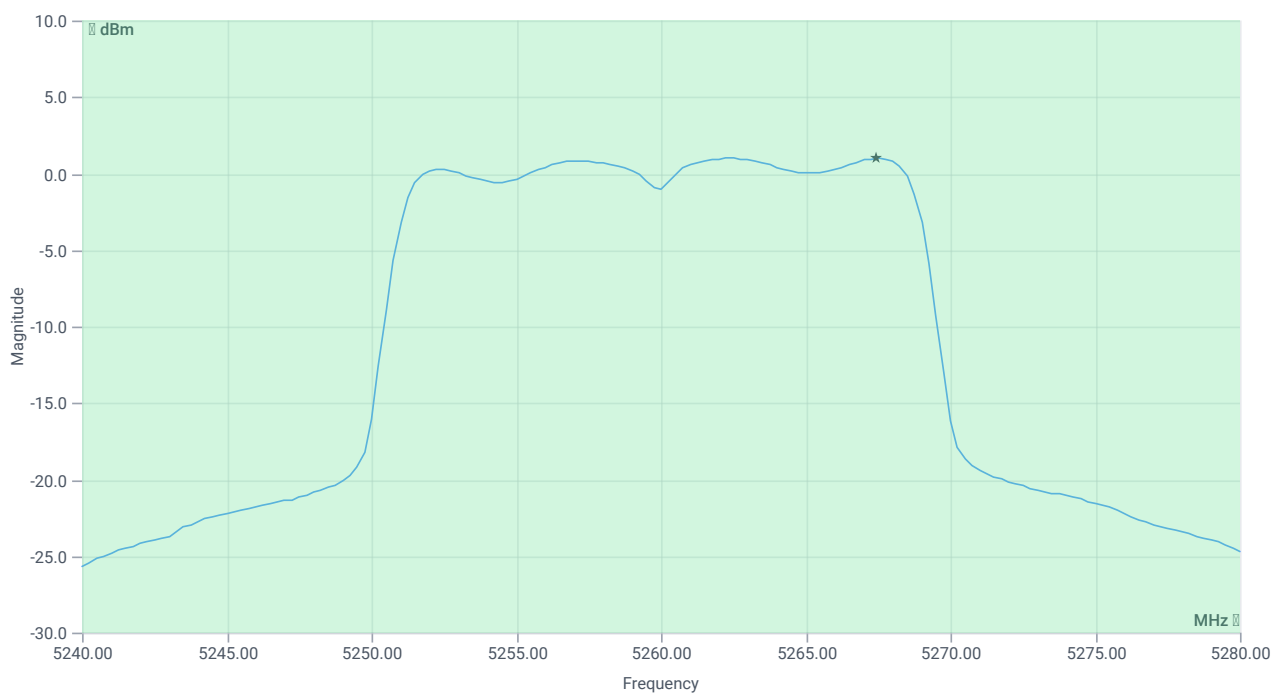

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	12.62	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	12.62	dBm	PASS
LIMIT: 11 dBm + 10 log 40					
Max output power DC corrected cond	---	27.02	12.62	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	12.62	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	1	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Power spectral density DC corrected cond	--	11	1	dBm/1MHz	PASS
--	----	----	---	----------	------

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-2A

References

TC start	12.06.2024 13:54:09
Ambit temp [°C] humidity [rel%]	25.3 28
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT20 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	True Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5280 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.08	dBm	INFO
Ref. frequency	---	---	5281.800	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

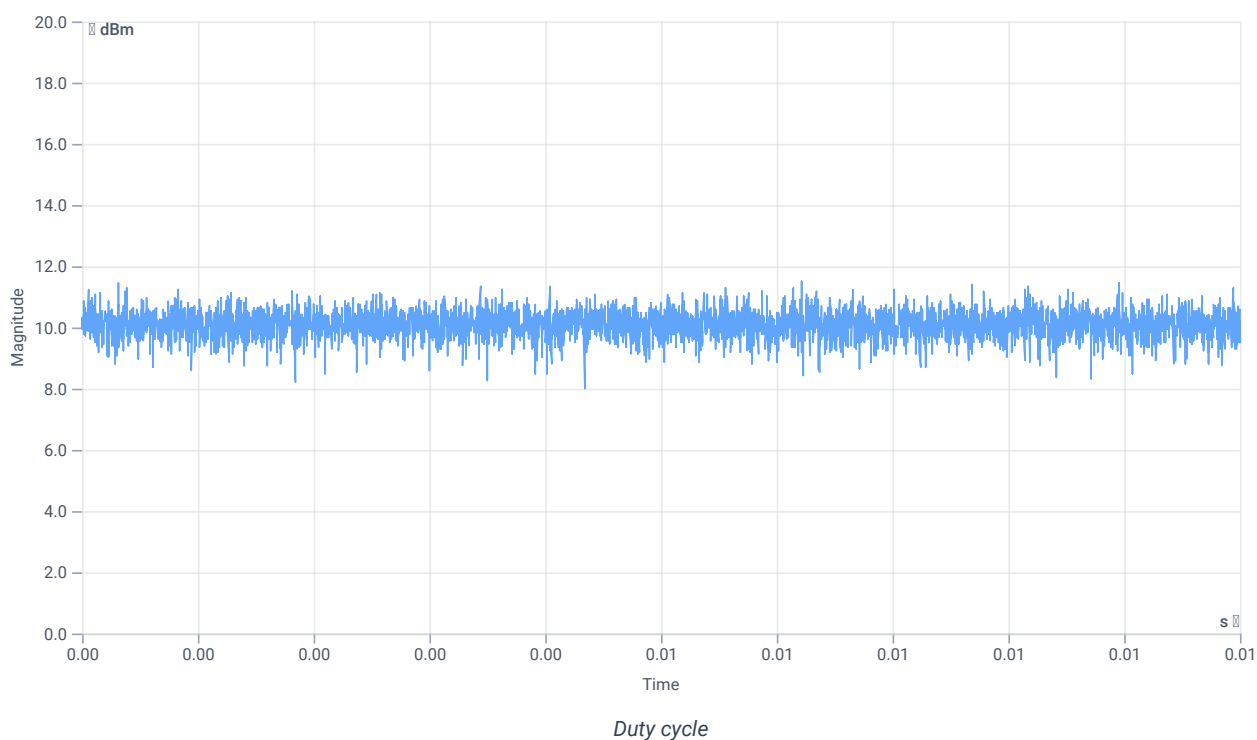

Evaluation bandwidth

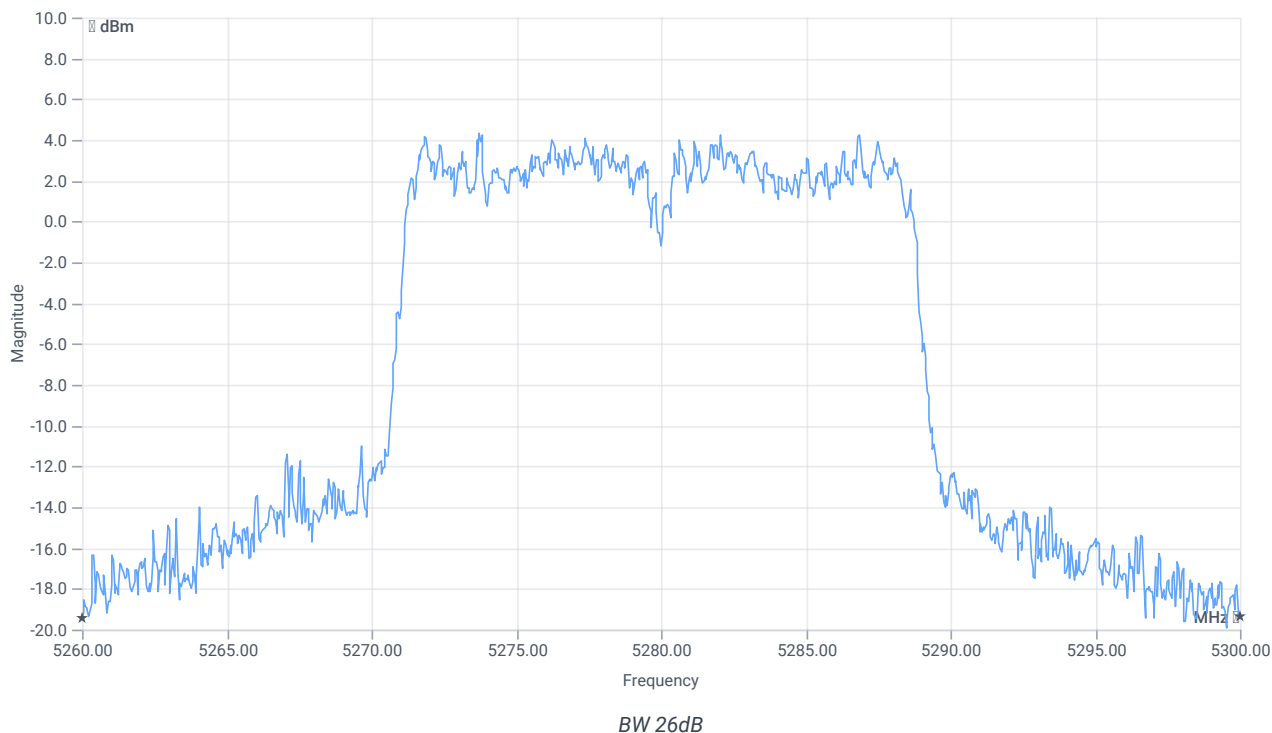

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	40	MHz	INFO
T1 26dB	---	---	5260.0000	MHz	INFO
T2 26dB	---	---	5300.0000	MHz	INFO


Maximum Output Power

Antenna gain

Considered antenna gain [dBi]: 0 @ 5280 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	21.08 12.57 25
Start [MHz] Stop [MHz]	5260.000 5300.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

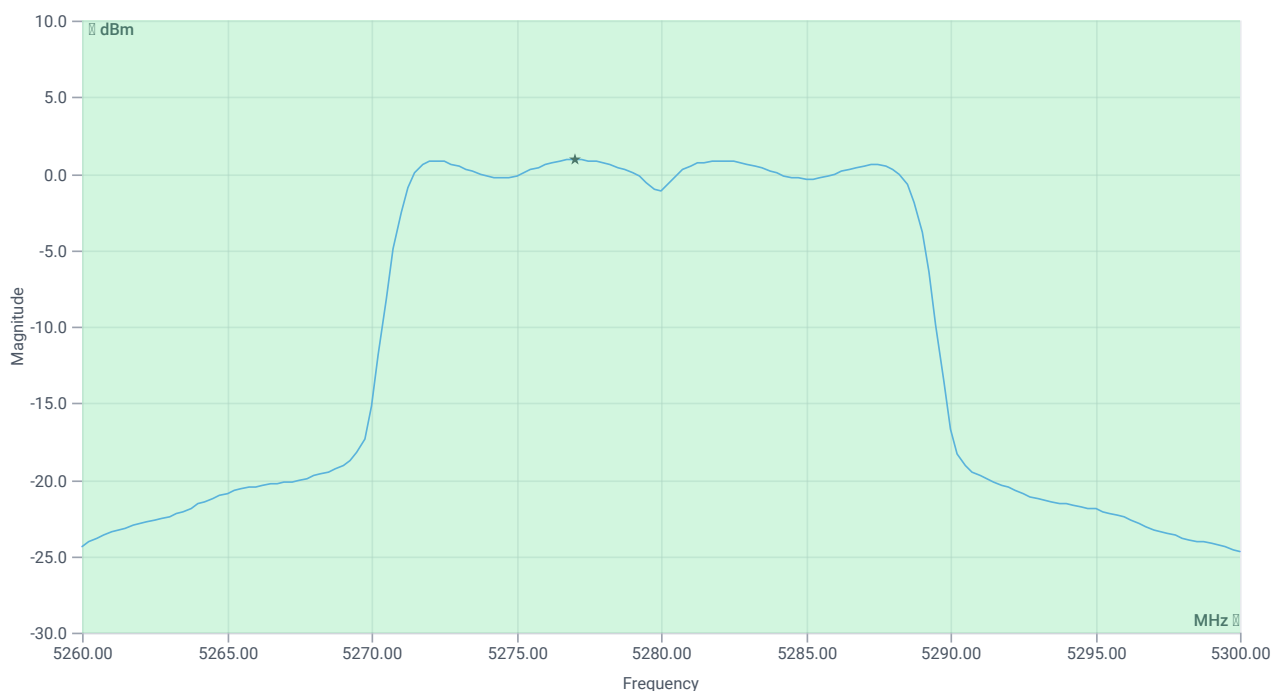

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	12.59	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	12.59	dBm	PASS
LIMIT: 11 dBm + 10 log 40					
Max output power DC corrected cond	---	27.02	12.59	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	12.59	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	0.93	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Power spectral density DC corrected cond	--	11	0.93	dBm/1MHz	PASS
--	----	----	------	----------	------

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-2A

References

TC start	12.06.2024 14:27:02
Ambit temp [°C] humidity [rel%]	25.6 28
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT20 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	True Freq [MHz] 5320
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5320 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.19	dBm	INFO
Ref. frequency	---	---	5312.410	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

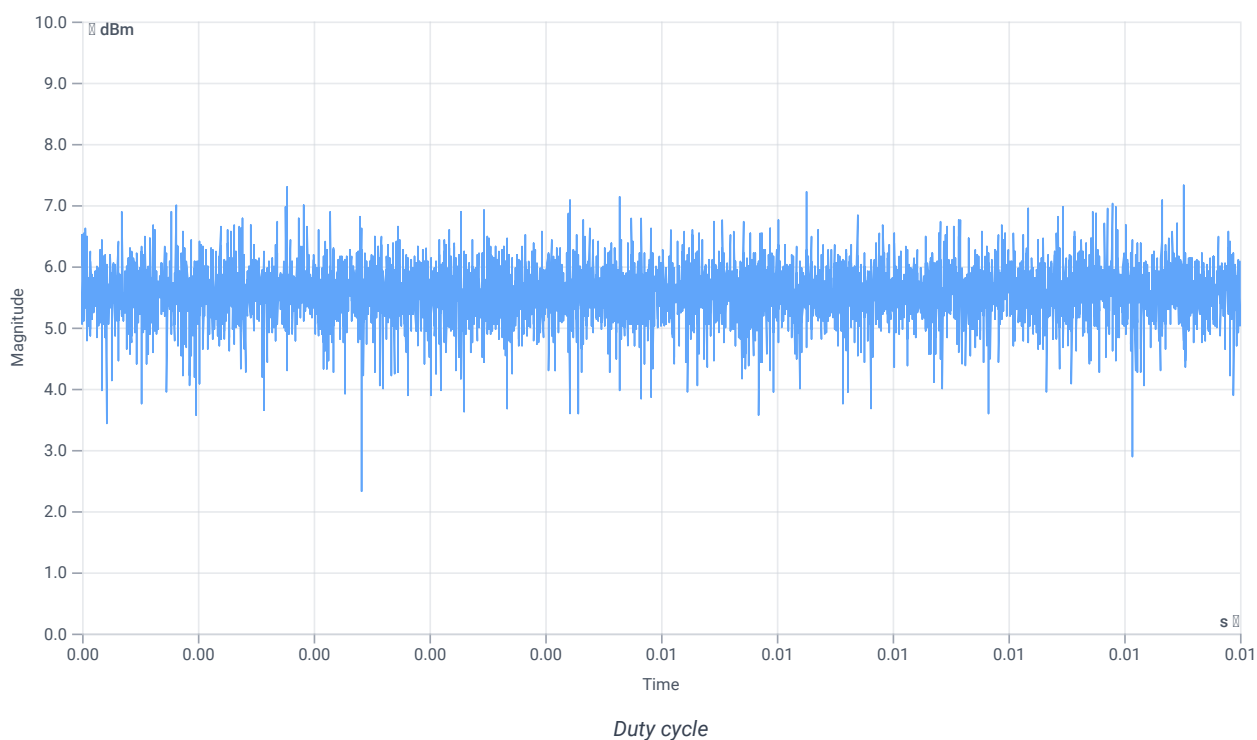

Evaluation bandwidth

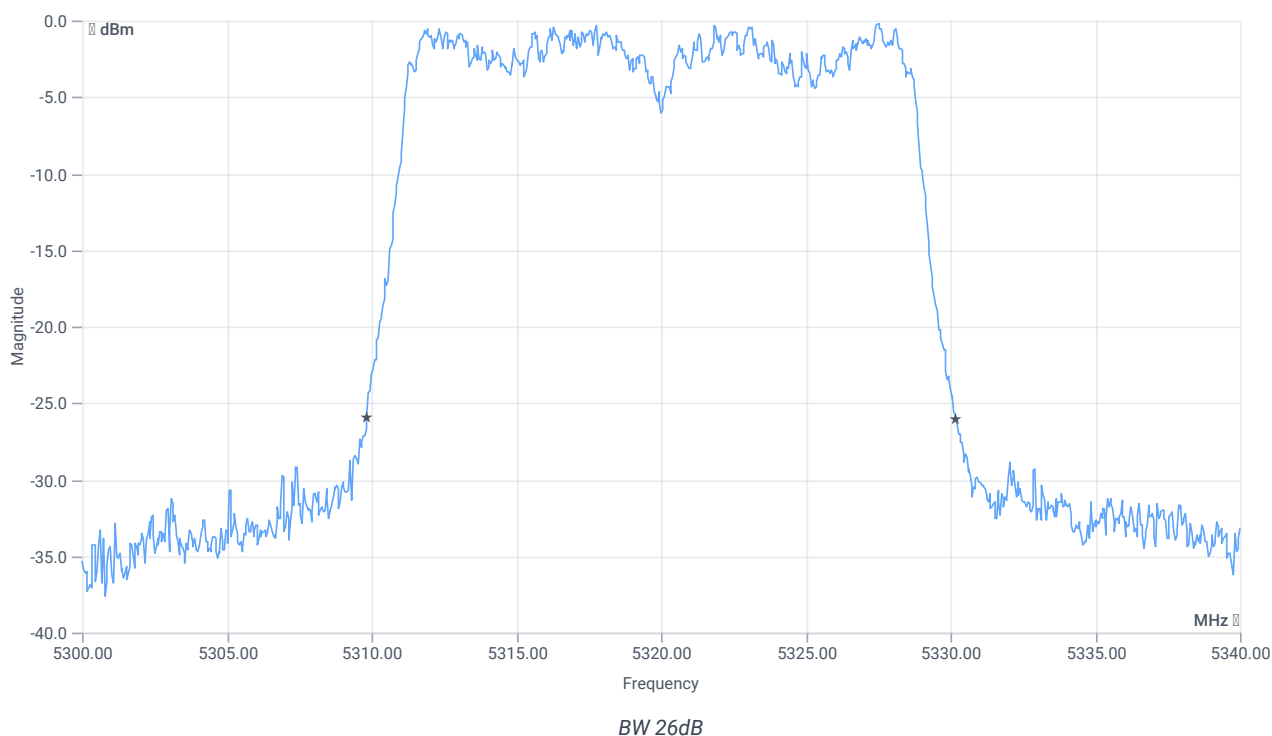

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.36	MHz	INFO
T1 26dB	---	---	5309.8400	MHz	INFO
T2 26dB	---	---	5330.2000	MHz	INFO


Maximum Output Power

Antenna gain

Considered antenna gain [dBi]: 0 @ 5320 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.19 13.02 20
Start [MHz] Stop [MHz]	5300.000 5340.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

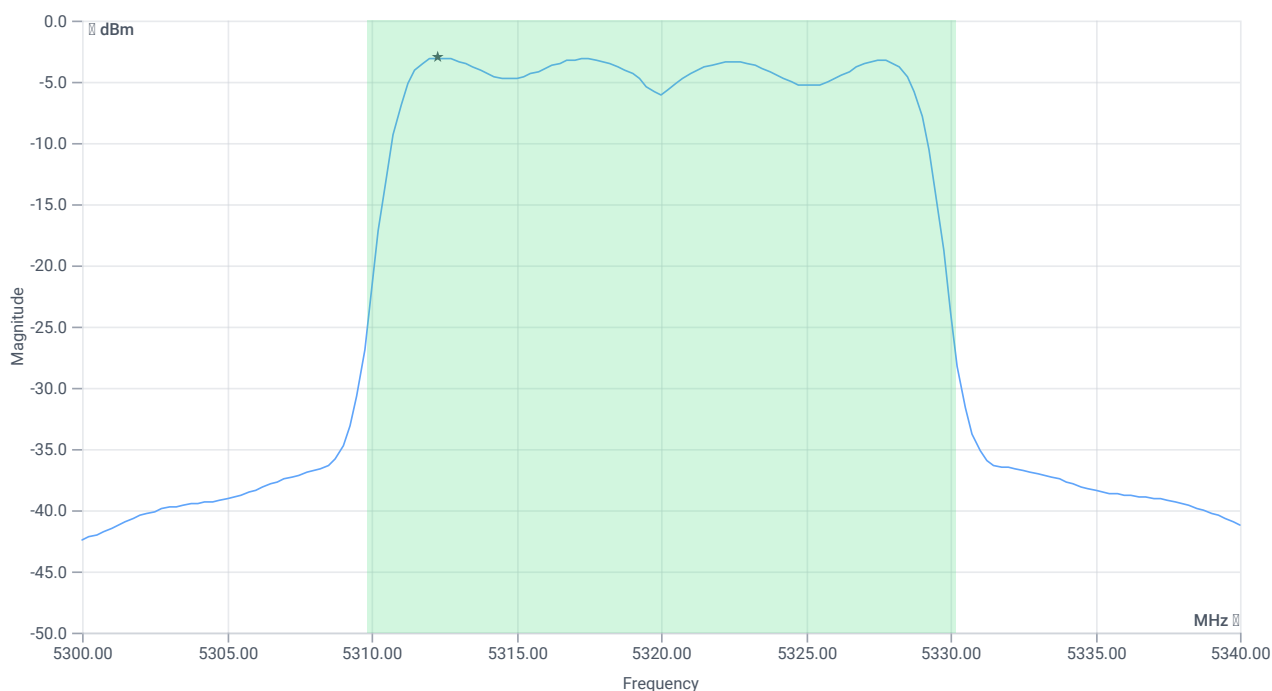

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	8.24	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	8.24	dBm	PASS
LIMIT: 11 dBm + 10 log 20.36					
Max output power DC corrected cond	---	24.09	8.24	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	8.24	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-3.04	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Power spectral density DC corrected cond	--	11	-3.04	dBm/1MHz	PASS
--	----	----	-------	----------	------

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-2A

References

TC start	12.06.2024 08:36:10
Ambit temp [°C] humidity [rel%]	23.4 35
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT40 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5270
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5310
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5270 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.13	dBm	INFO
Ref. frequency	---	---	5286.380	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

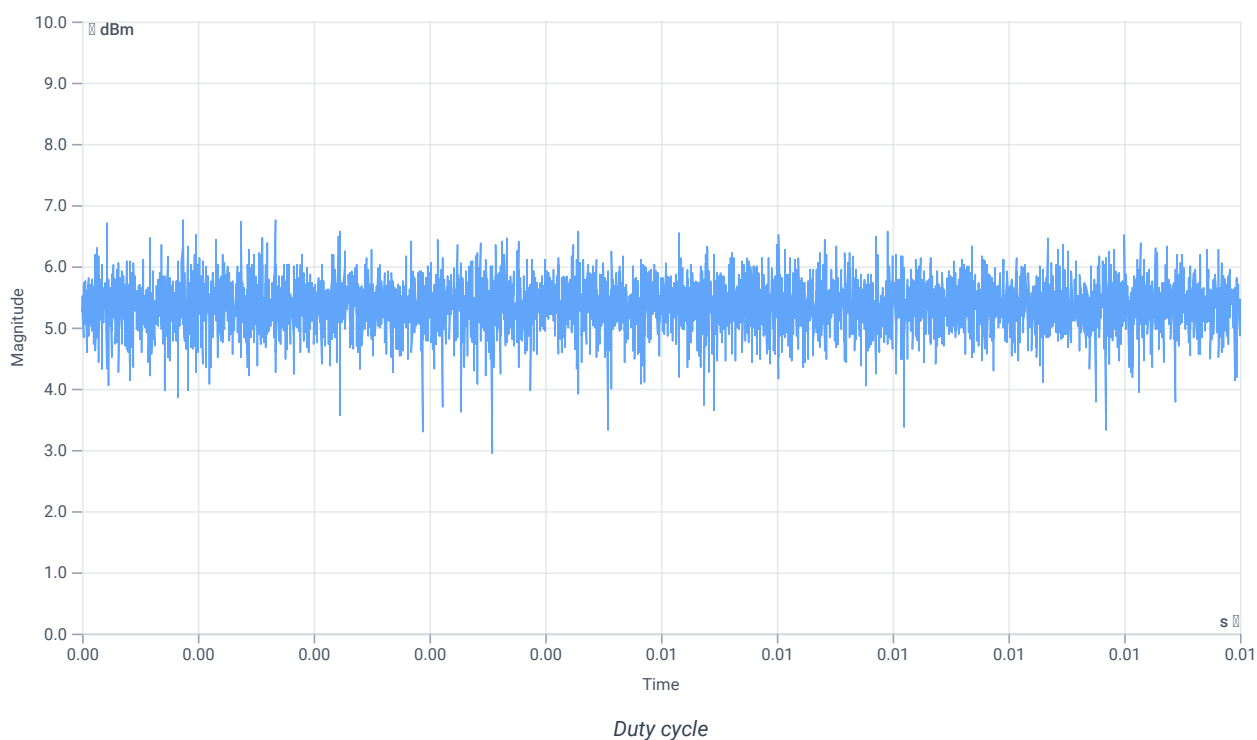

Evaluation bandwidth

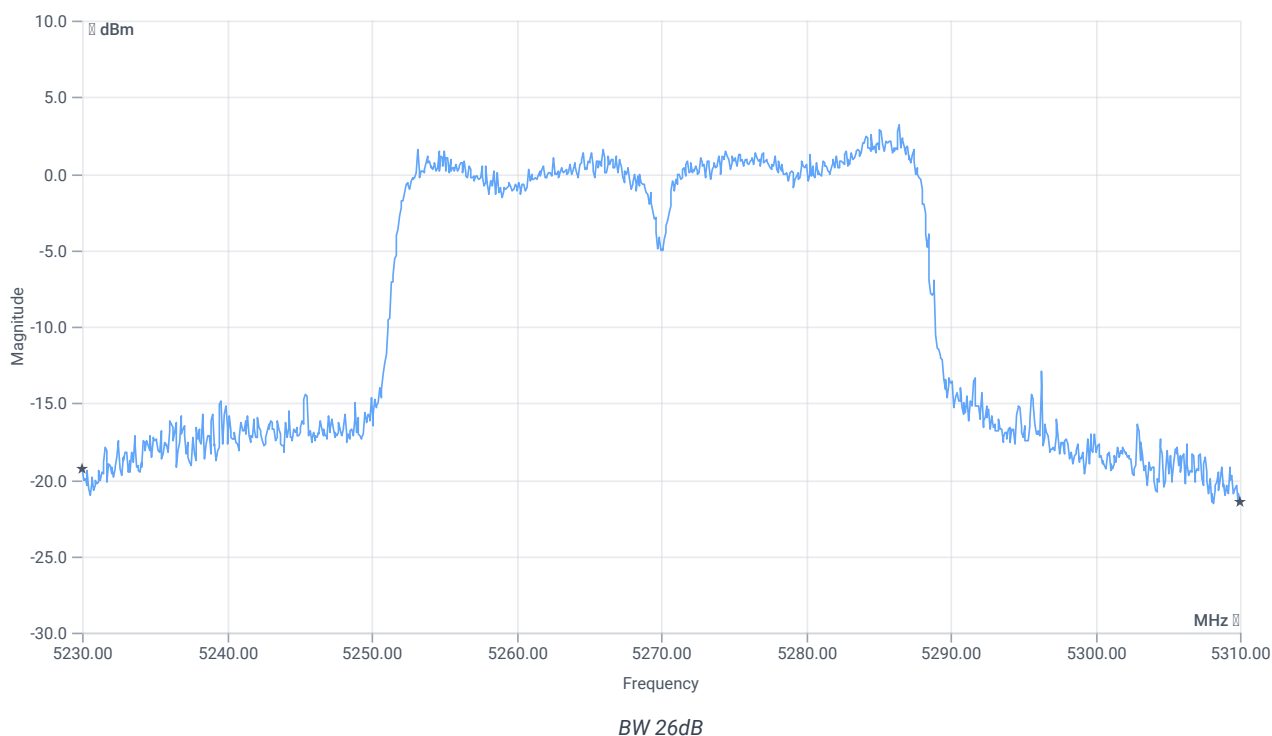

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	80	MHz	INFO
T1 26dB	---	---	5230.0000	MHz	INFO
T2 26dB	---	---	5310.0000	MHz	INFO


Maximum Output Power

Antenna gain

Considered antenna gain [dBi]: 0 @ 5270 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.13 12.57 20
Start [MHz] Stop [MHz]	5230.000 5310.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

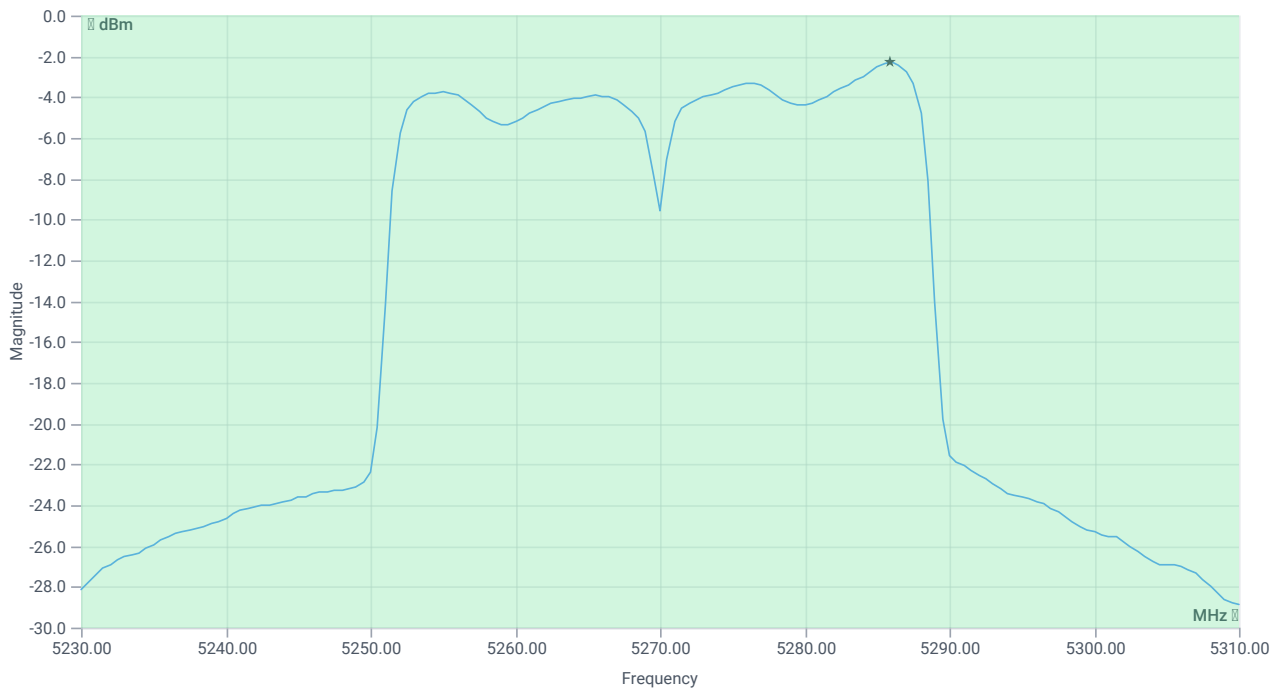

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	11.34	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	11.34	dBm	PASS
LIMIT: 11 dBm + 10 log 80					
Max output power DC corrected cond	---	30.03	11.34	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	11.34	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-2.28	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Power spectral density DC corrected cond	--	11	-2.28	dBm/1MHz	PASS
--	----	----	-------	----------	------

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-2A

References

TC start	12.06.2024 08:56:01
Ambit temp [°C] humidity [rel%]	23.5 35
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT40 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5270
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5310
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5310 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-1.25	dBm	INFO
Ref. frequency	---	---	5326.580	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

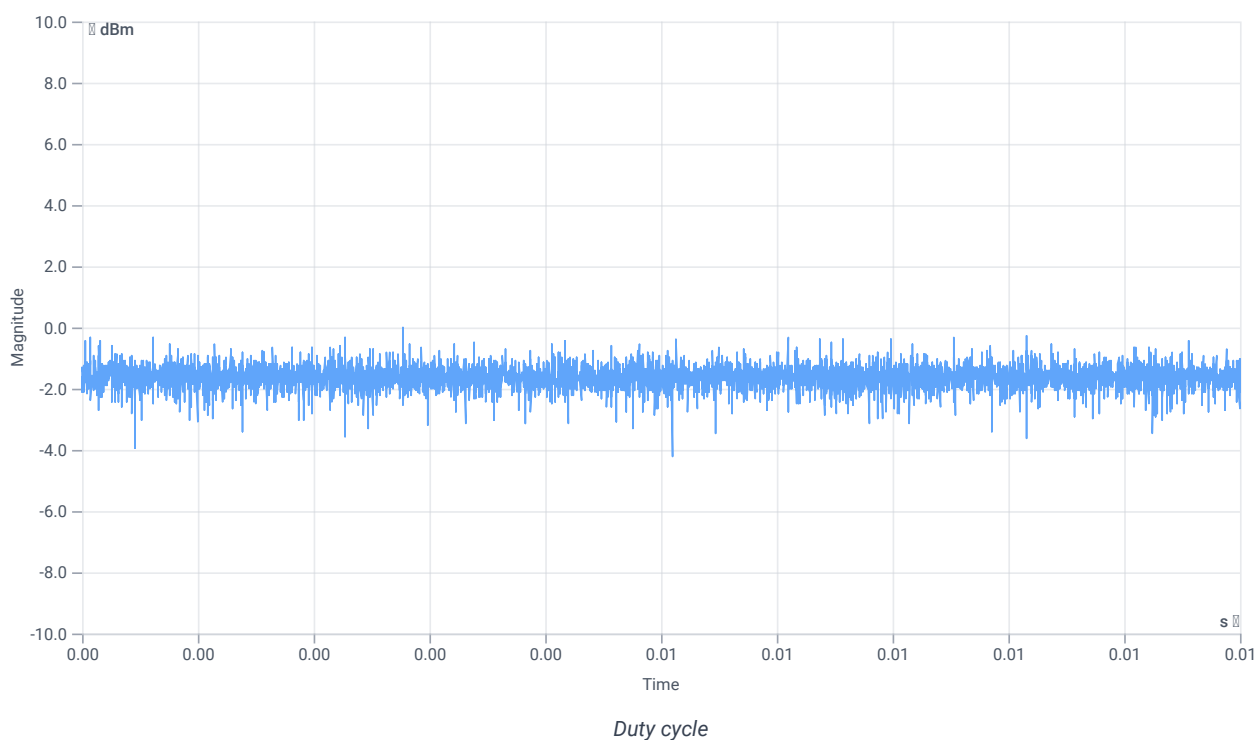

Evaluation bandwidth

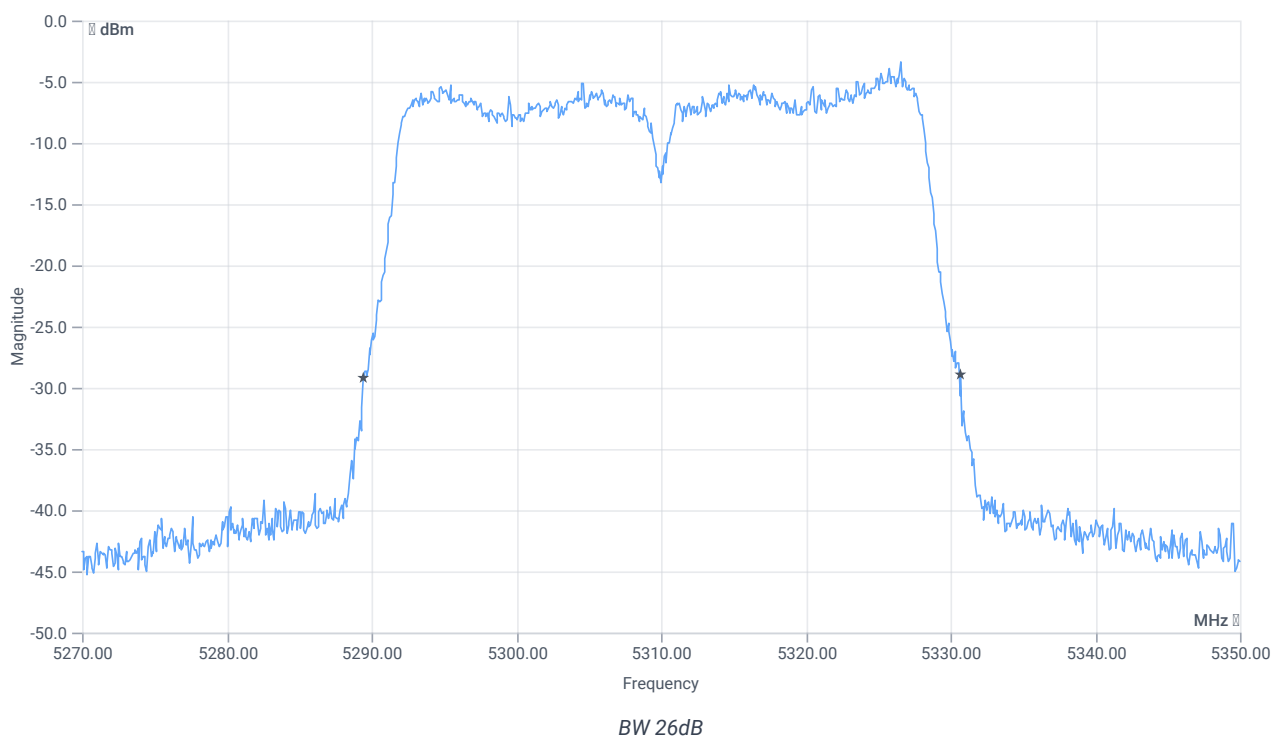

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	41.28	MHz	INFO
T1 26dB	---	---	5289.4400	MHz	INFO
T2 26dB	---	---	5330.7200	MHz	INFO


Maximum Output Power

Antenna gain

Considered antenna gain [dBi]: 0 @ 5310 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.75 13.09 15
Start [MHz] Stop [MHz]	5270.000 5350.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

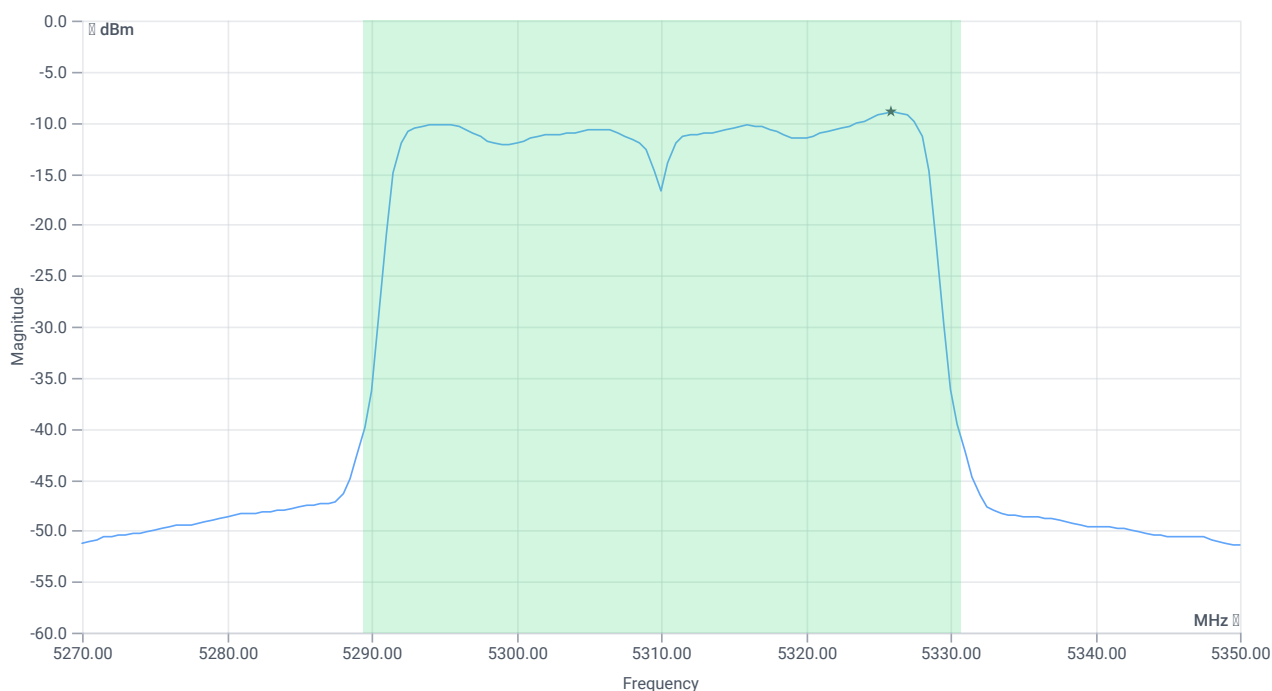

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	4.46	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	4.46	dBm	PASS
LIMIT: 11 dBm + 10 log 41.28					
Max output power DC corrected cond	---	27.16	4.46	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	4.46	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-8.97	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Power spectral density DC corrected cond	--	11	-8.97	dBm/1MHz	PASS
--	----	----	-------	----------	------

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-2A

References

TC start	12.06.2024 12:16:33
Ambit temp [°C] humidity [rel%]	24.9 30
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT40 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5270
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5310
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5270 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	6.59	dBm	INFO
Ref. frequency	---	---	5266.200	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

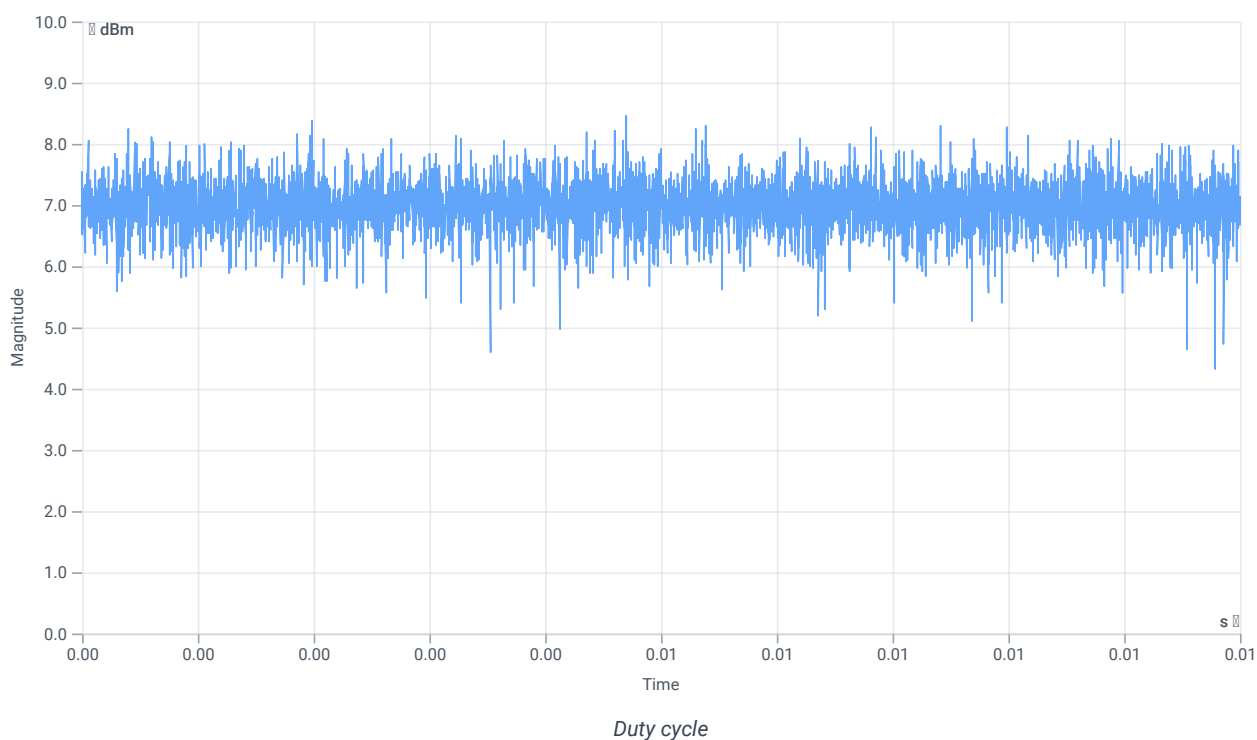

Evaluation bandwidth

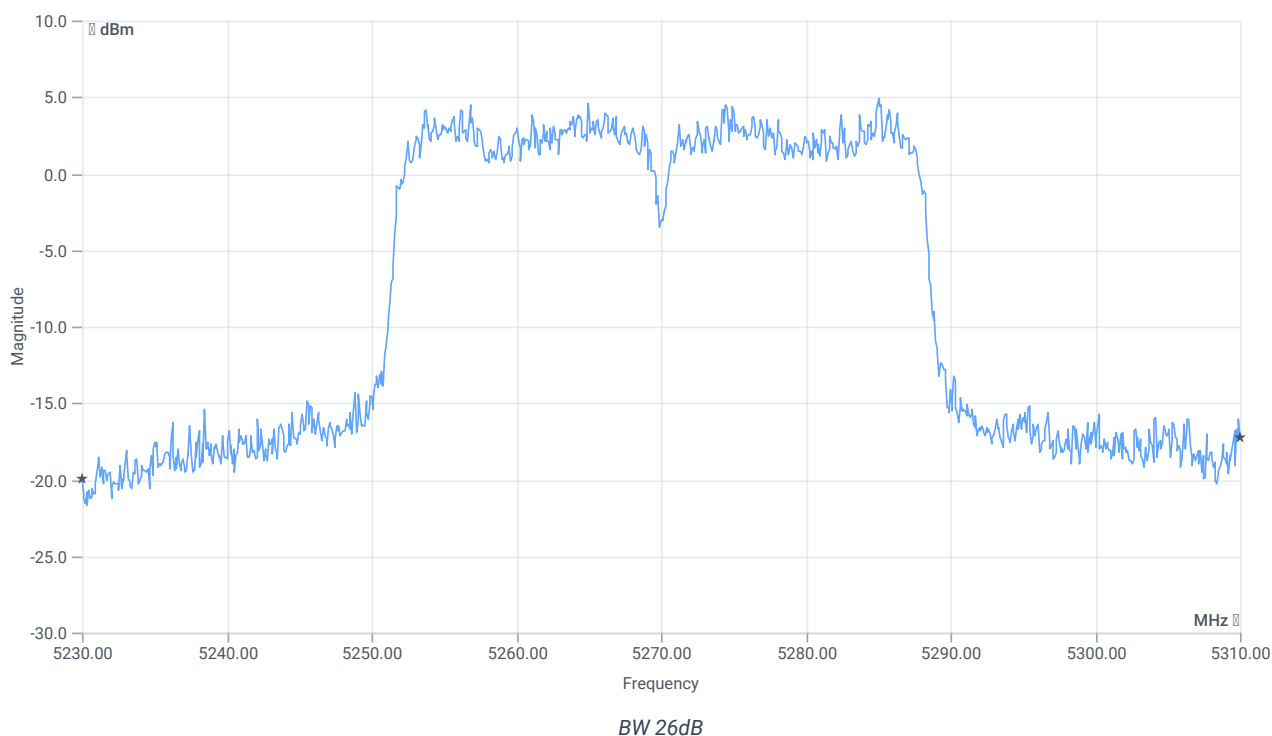

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	80	MHz	INFO
T1 26dB	---	---	5230.0000	MHz	INFO
T2 26dB	---	---	5310.0000	MHz	INFO


Maximum Output Power

Antenna gain

Considered antenna gain [dBi]: 0 @ 5270 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.59 12.45 25
Start [MHz] Stop [MHz]	5230.000 5310.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

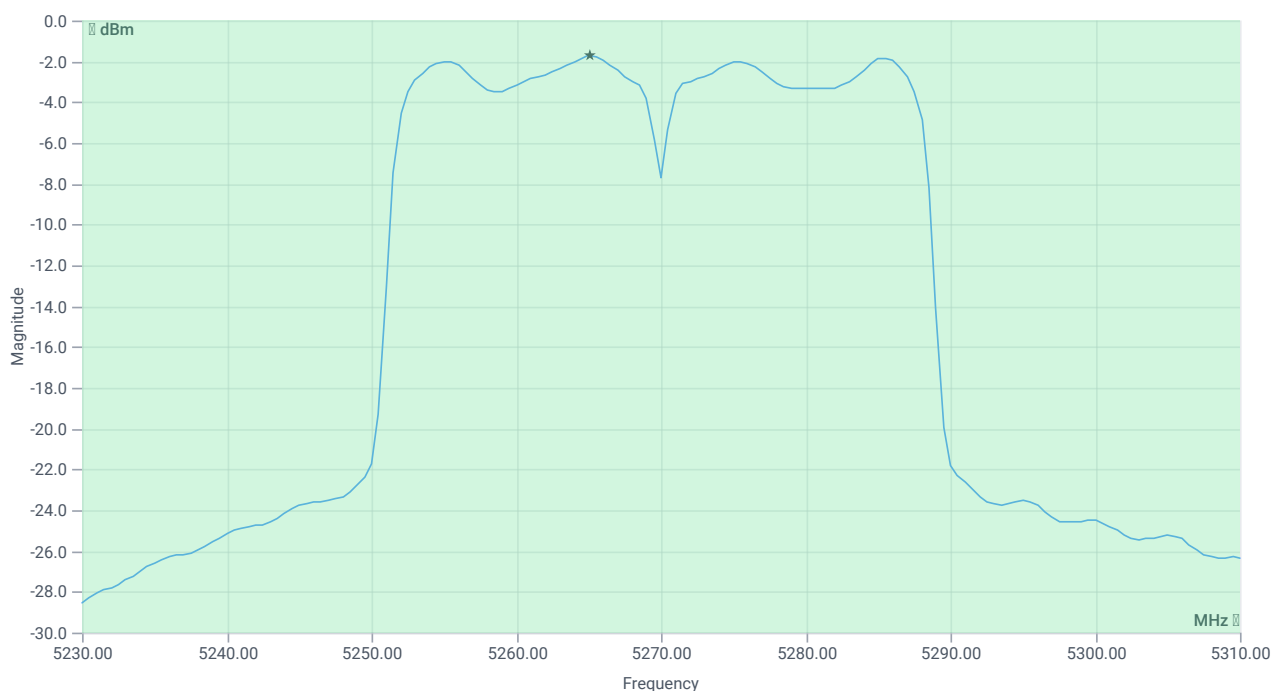

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	12.62	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	12.62	dBm	PASS
LIMIT: 11 dBm + 10 log 80					
Max output power DC corrected cond	---	30.03	12.62	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	12.62	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-1.74	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Power spectral density DC corrected cond	--	11	-1.74	dBm/1MHz	PASS
--	----	----	-------	----------	------

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT40 mode U-NII-2A

References

TC start	12.06.2024 12:35:46
Ambit temp [°C] humidity [rel%]	25.0 30
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT40 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5270
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5310
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5310 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-0.23	dBm	INFO
Ref. frequency	---	---	5315.000	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

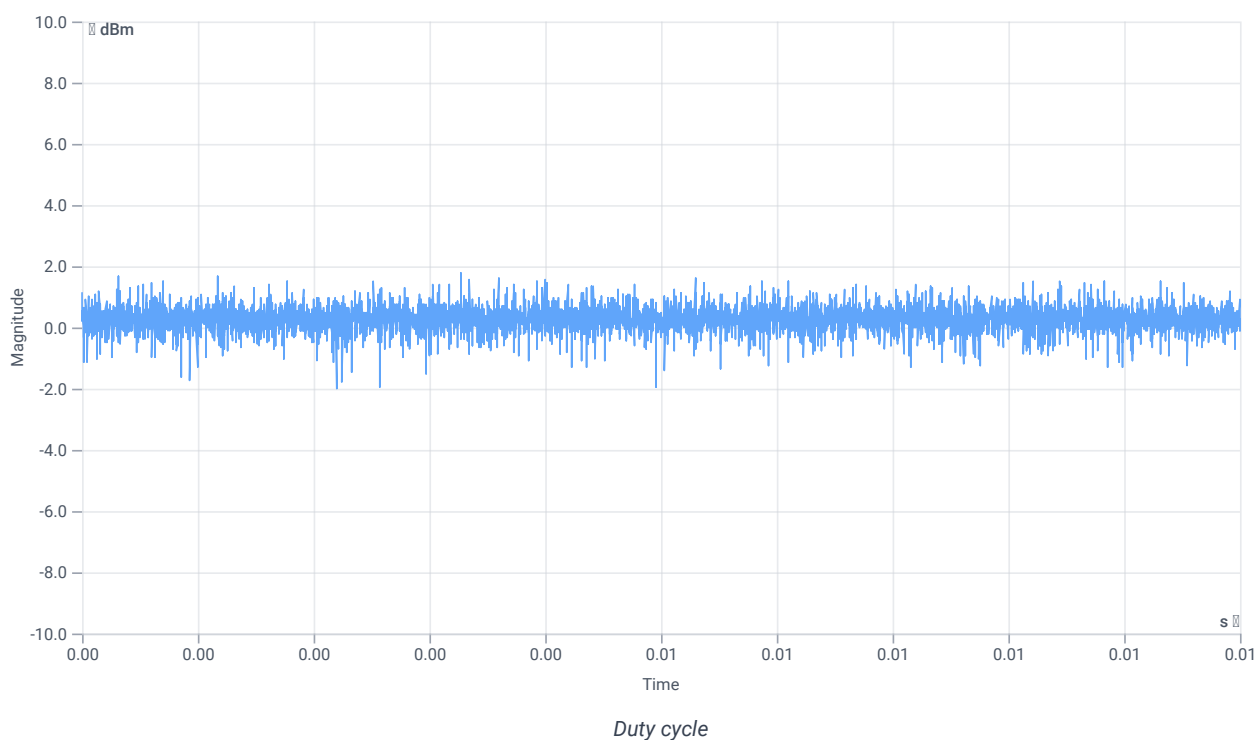

Evaluation bandwidth

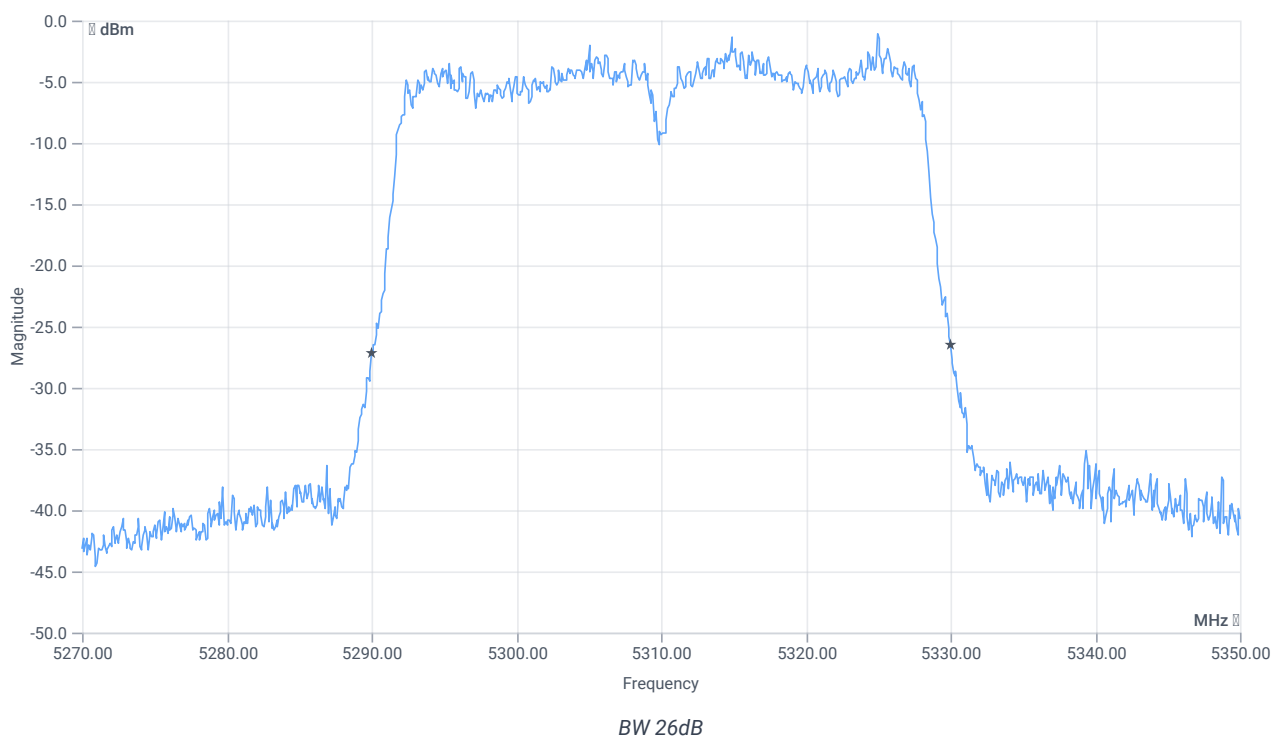

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	40	MHz	INFO
T1 26dB	---	---	5290.0000	MHz	INFO
T2 26dB	---	---	5330.0000	MHz	INFO


Maximum Output Power

Antenna gain

Considered antenna gain [dBi]: 0 @ 5310 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.77 12.91 15
Start [MHz] Stop [MHz]	5270.000 5350.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

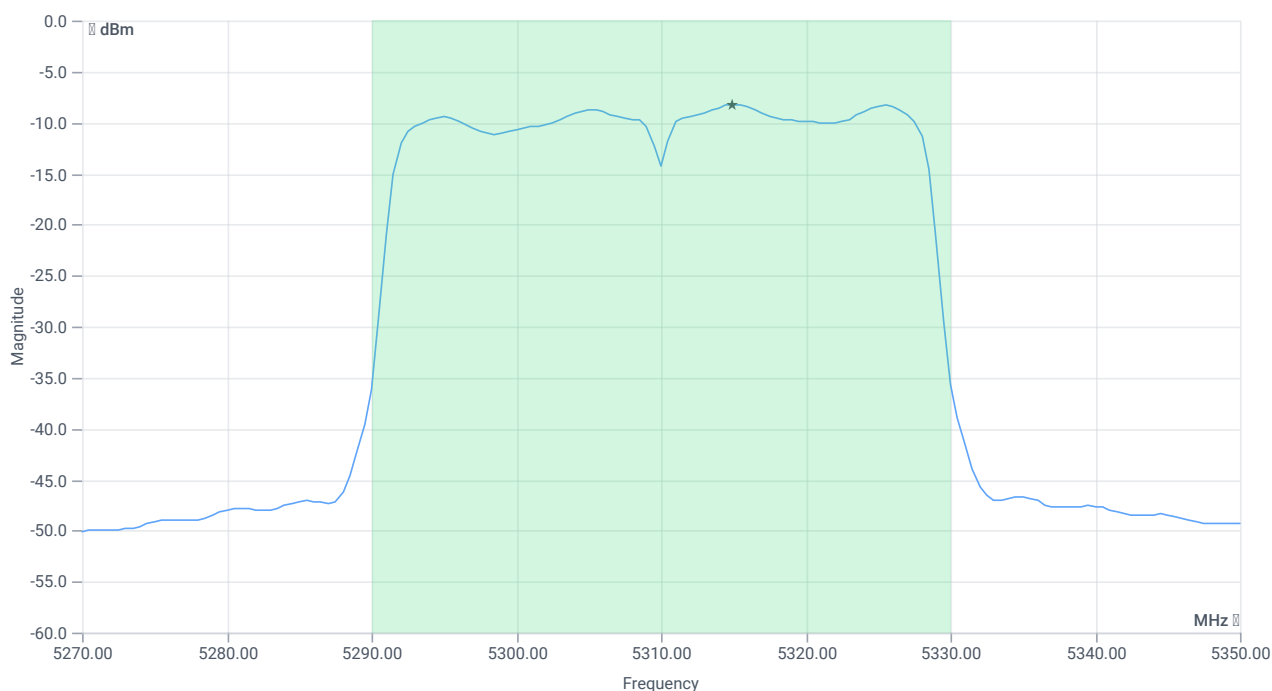

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	5.69	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	5.69	dBm	PASS
LIMIT: 11 dBm + 10 log 40					
Max output power DC corrected cond	---	27.02	5.69	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	5.69	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-8.25	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Power spectral density DC corrected cond	--	11	-8.25	dBm/1MHz	PASS
--	----	----	-------	----------	------

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-2A

References

TC start	12.06.2024 09:20:35
Ambit temp [°C] humidity [rel%]	23.8 35
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT80 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5290
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MPSIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5290 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-3.94	dBm	INFO
Ref. frequency	---	---	5321.170	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

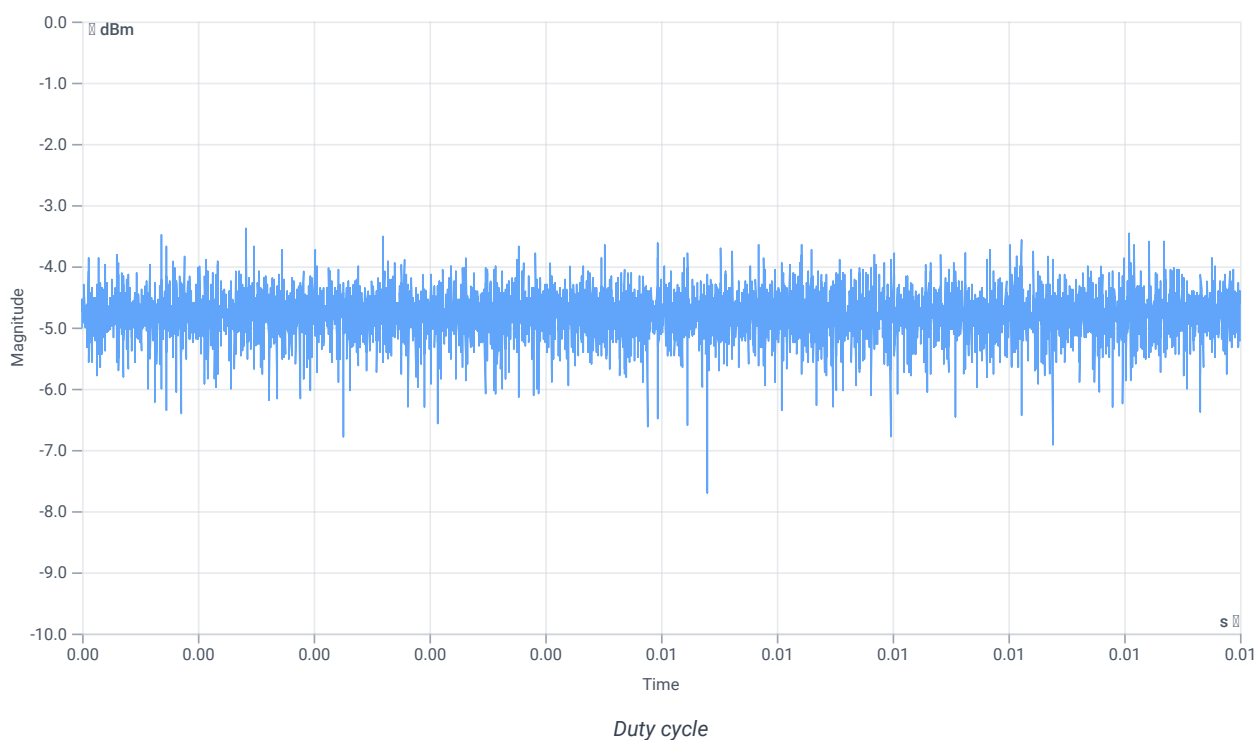

Evaluation bandwidth

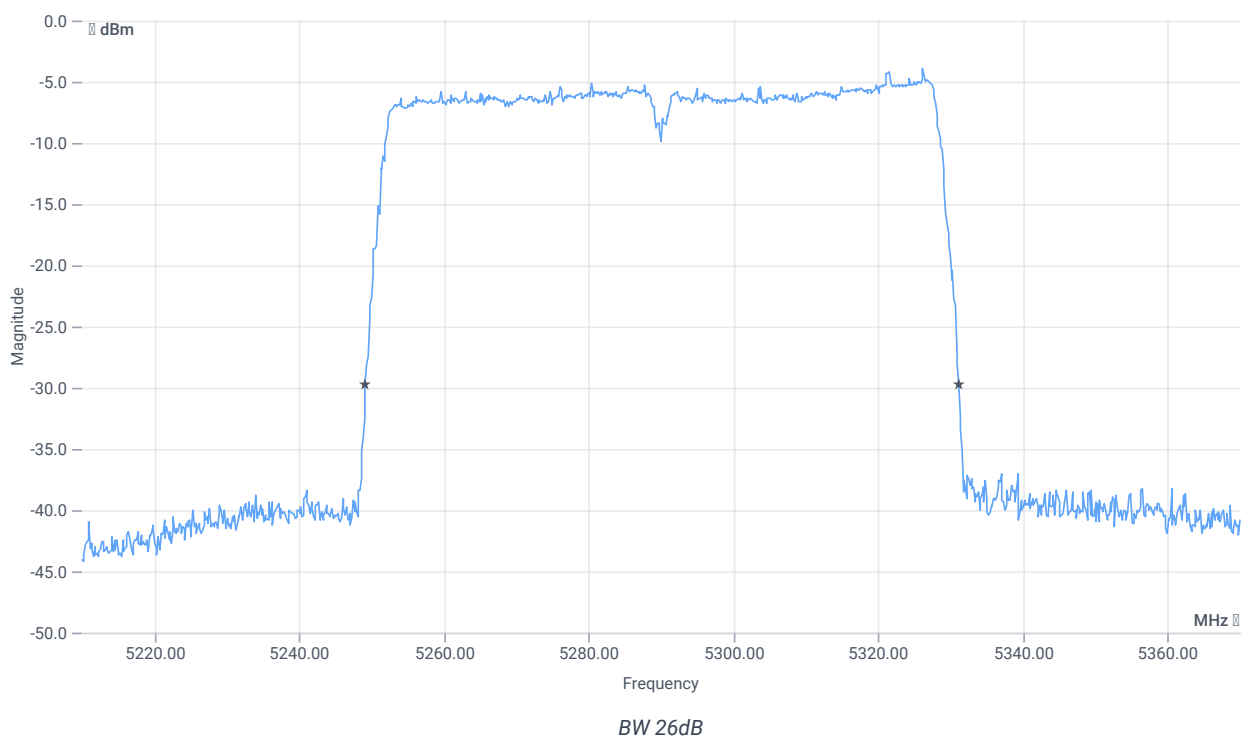

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	81.92	MHz	INFO
T1 26dB	---	---	5249.2000	MHz	INFO
T2 26dB	---	---	5331.1200	MHz	INFO


Maximum Output Power

Antenna gain

Considered antenna gain [dBi]: 0 @ 5290 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.06 12.75 10
Start [MHz] Stop [MHz]	5210.000 5370.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	10700 1 320 SWE

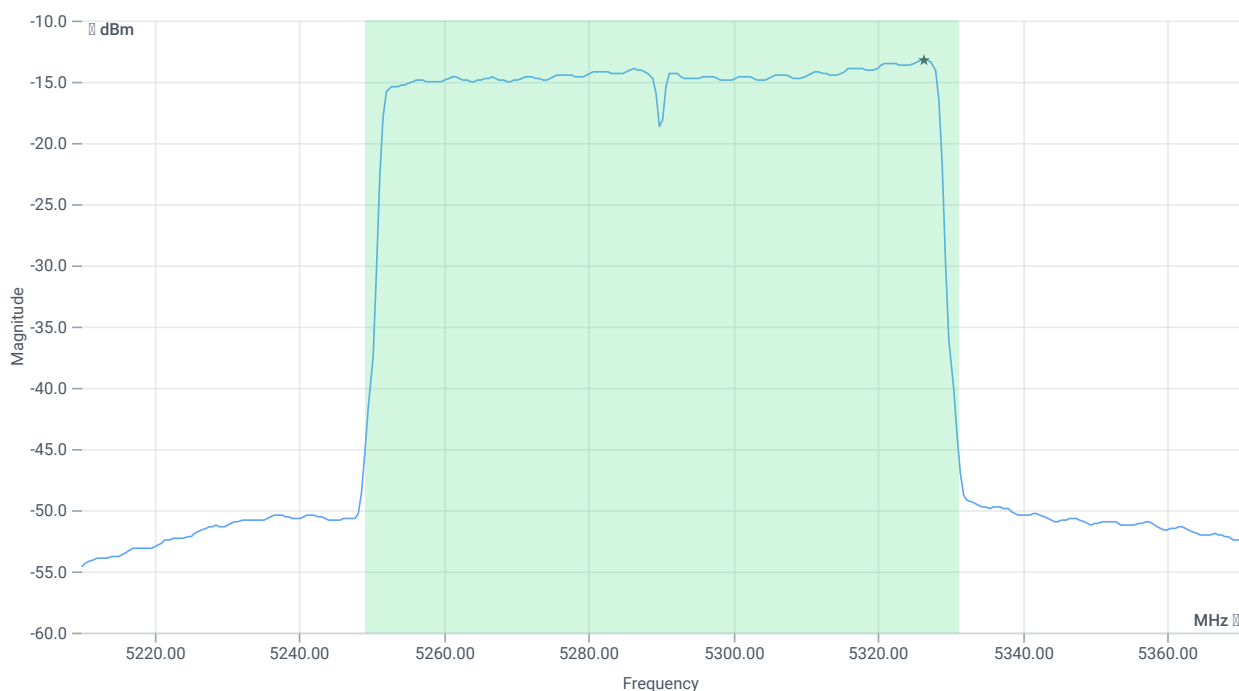

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	4.08	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	4.08	dBm	PASS
LIMIT: 11 dBm + 10 log 81.92					
Max output power DC corrected cond	---	30.13	4.08	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	4.08	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-13.18	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI					
Power spectral density DC corrected cond	--	11	-13.18	dBm/1MHz	PASS

Verdict
PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-2A

References

TC start	12.06.2024 13:09:51
Ambit temp [°C] humidity [rel%]	25.2 29
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT80 mode U-NII-2A
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5290
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5290 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-4.45	dBm	INFO
Ref. frequency	---	---	5314.780	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

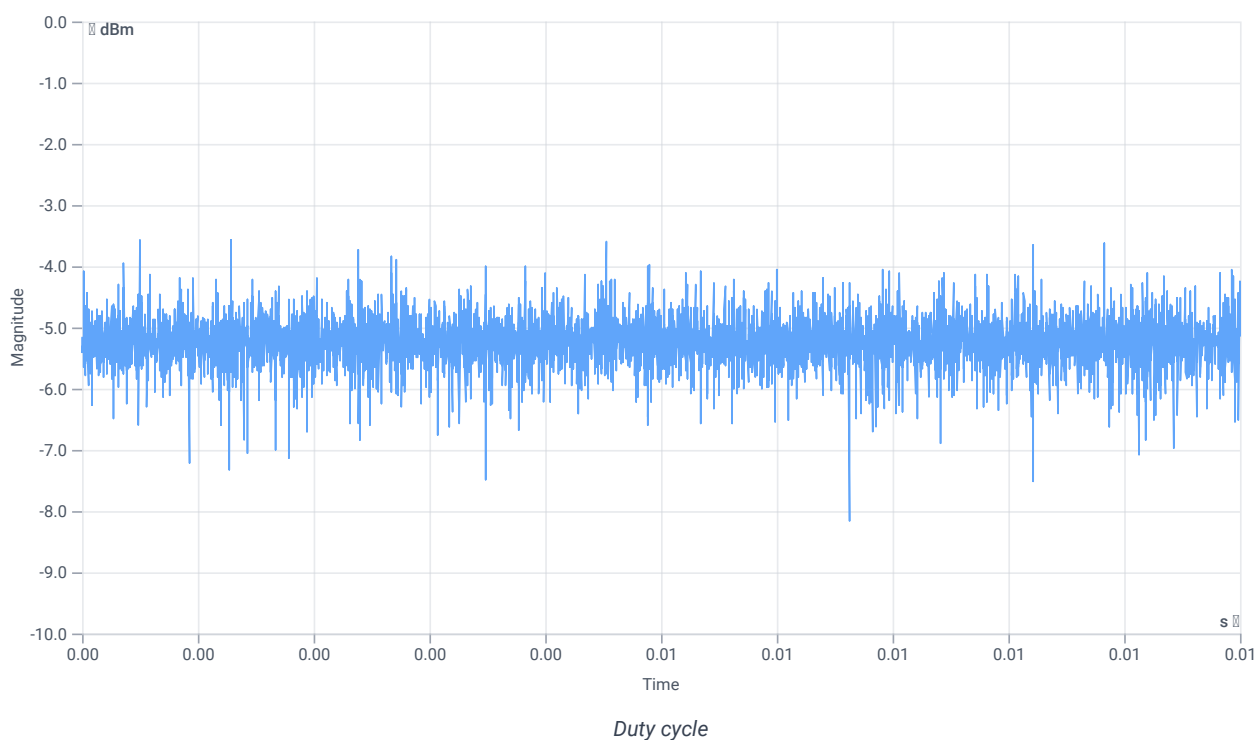

Evaluation bandwidth

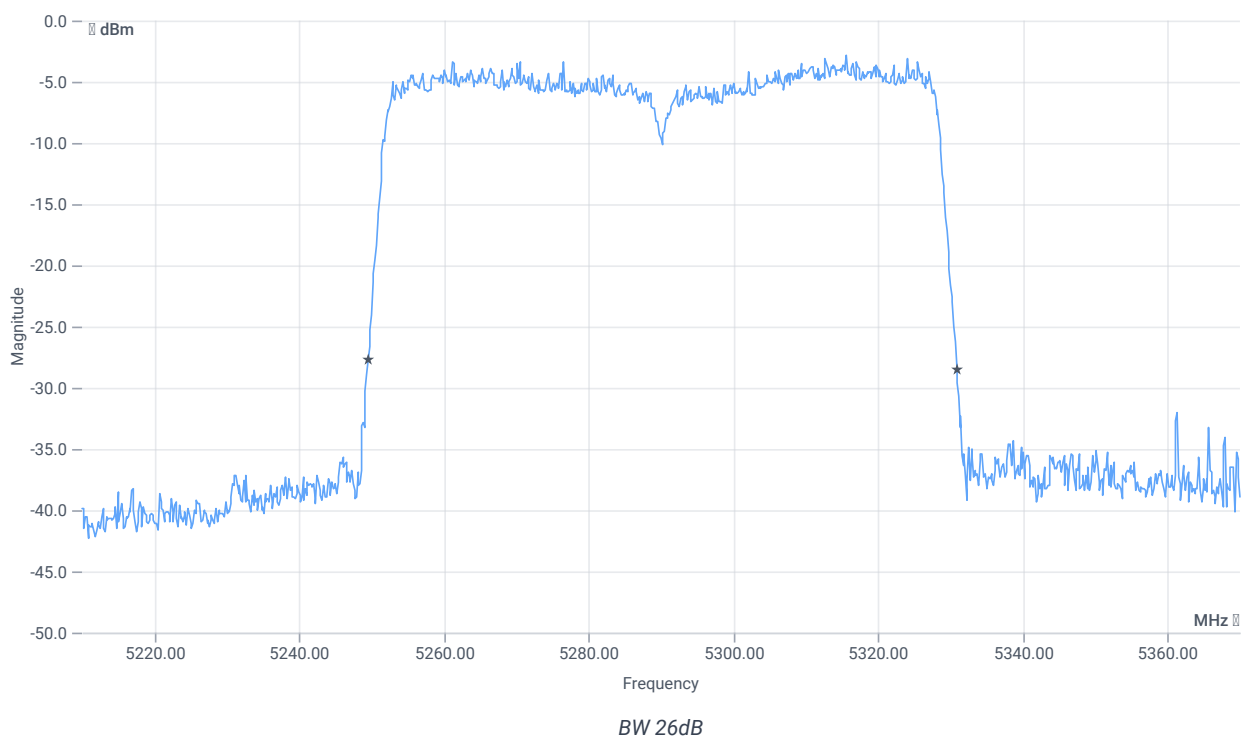

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	81.28	MHz	INFO
T1 26dB	---	---	5249.5200	MHz	INFO
T2 26dB	---	---	5330.8000	MHz	INFO


Maximum Output Power

Antenna gain

Considered antenna gain [dBi]: 0 @ 5290 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.55 12.68 10
Start [MHz] Stop [MHz]	5210.000 5370.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	10700 1 320 SWE

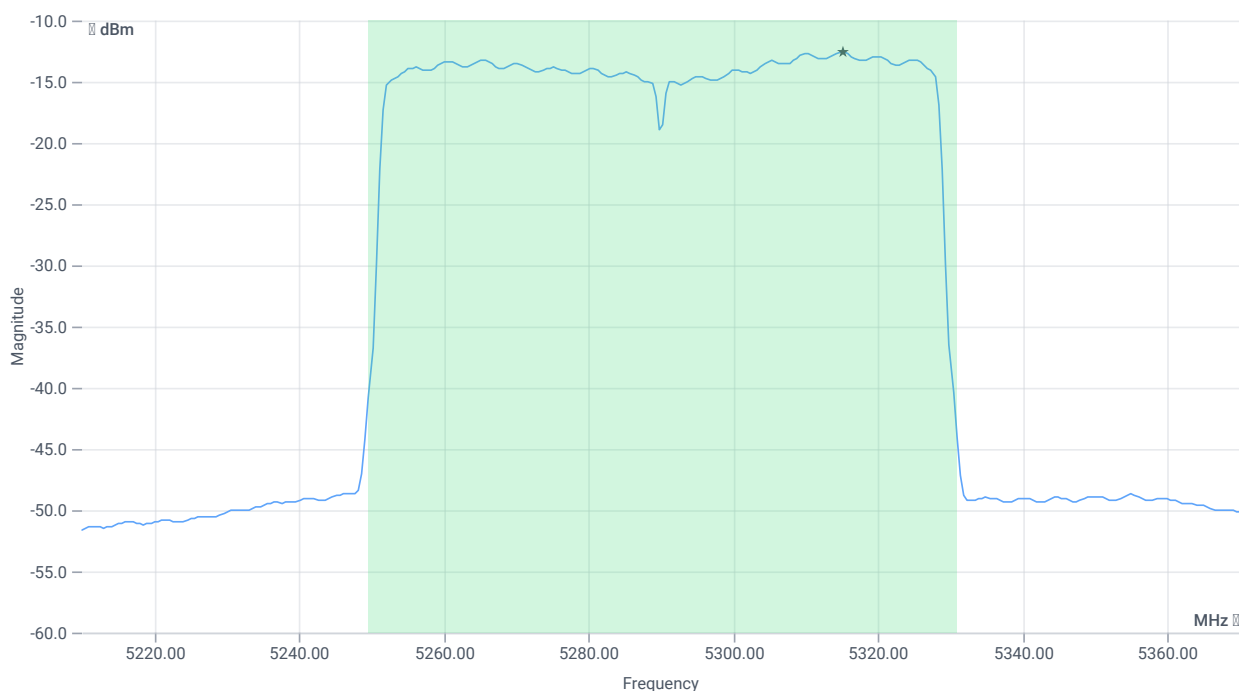

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	4.69	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	4.69	dBm	PASS
LIMIT: 11 dBm + 10 log 81.28					
Max output power DC corrected cond	---	30.1	4.69	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	4.69	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-12.6	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Power spectral density DC corrected cond	--	11	-12.6	dBm/1MHz	PASS
--	----	----	-------	----------	------

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2C

References

TC start	11.06.2024 13:45:00
Ambit temp [°C] humidity [rel%]	24.9 31
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5500 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.88	dBm	INFO
Ref. frequency	---	---	5502.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.89 12.84 20
Start [MHz] Stop [MHz]	5475.000 5525.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

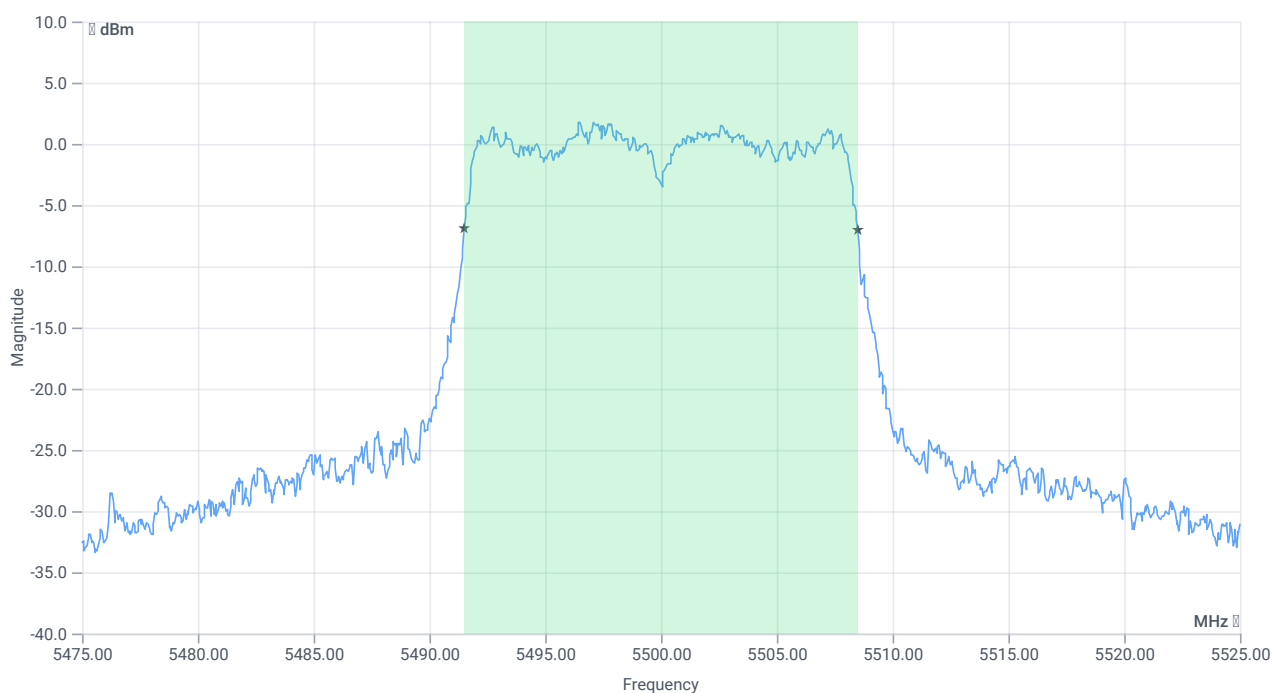


BW 99PCT




BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.983	MHz	INFO
T1 99%	5470.000000	---	5491.5085	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5508.4915	MHz	

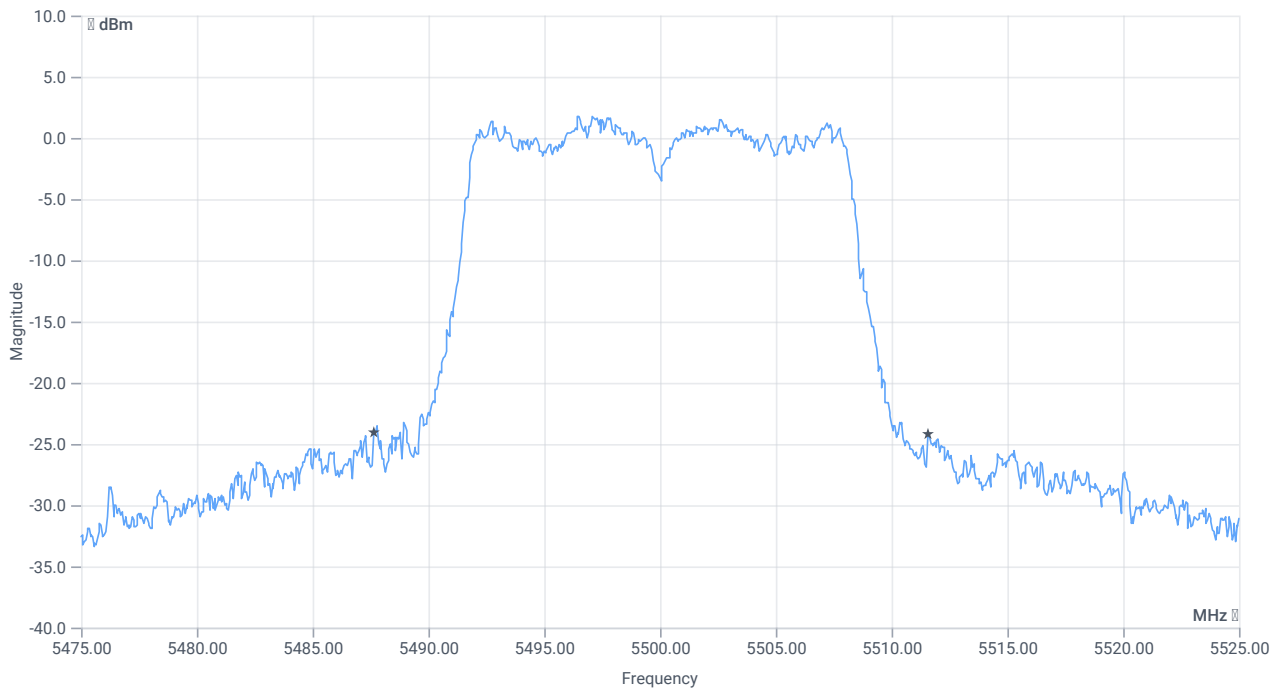

BW 26dB

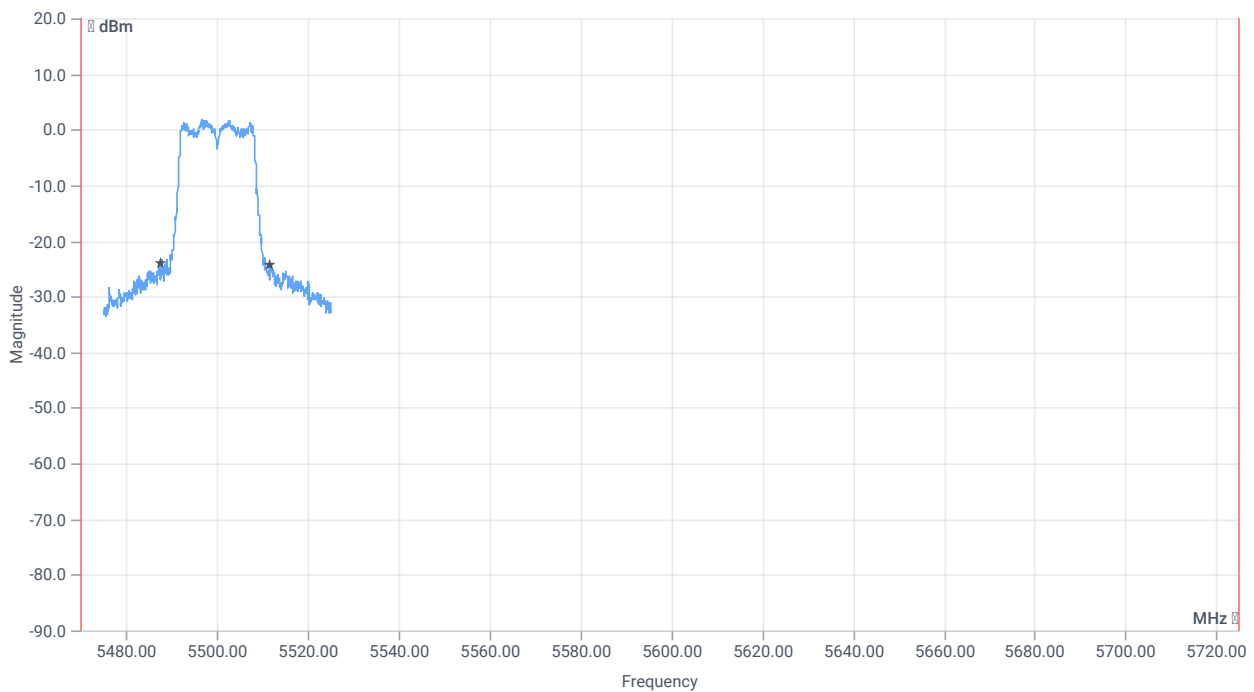

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	23.95	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5487.6500	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5511.6000	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2C

References

TC start	11.06.2024 14:01:23
Ambit temp [°C] humidity [rel%]	24.9 31
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5500
Frequency mid to test	True Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5600 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.79	dBm	INFO
Ref. frequency	---	---	5592.610	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.79 13.11 15
Start [MHz] Stop [MHz]	5575.000 5625.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


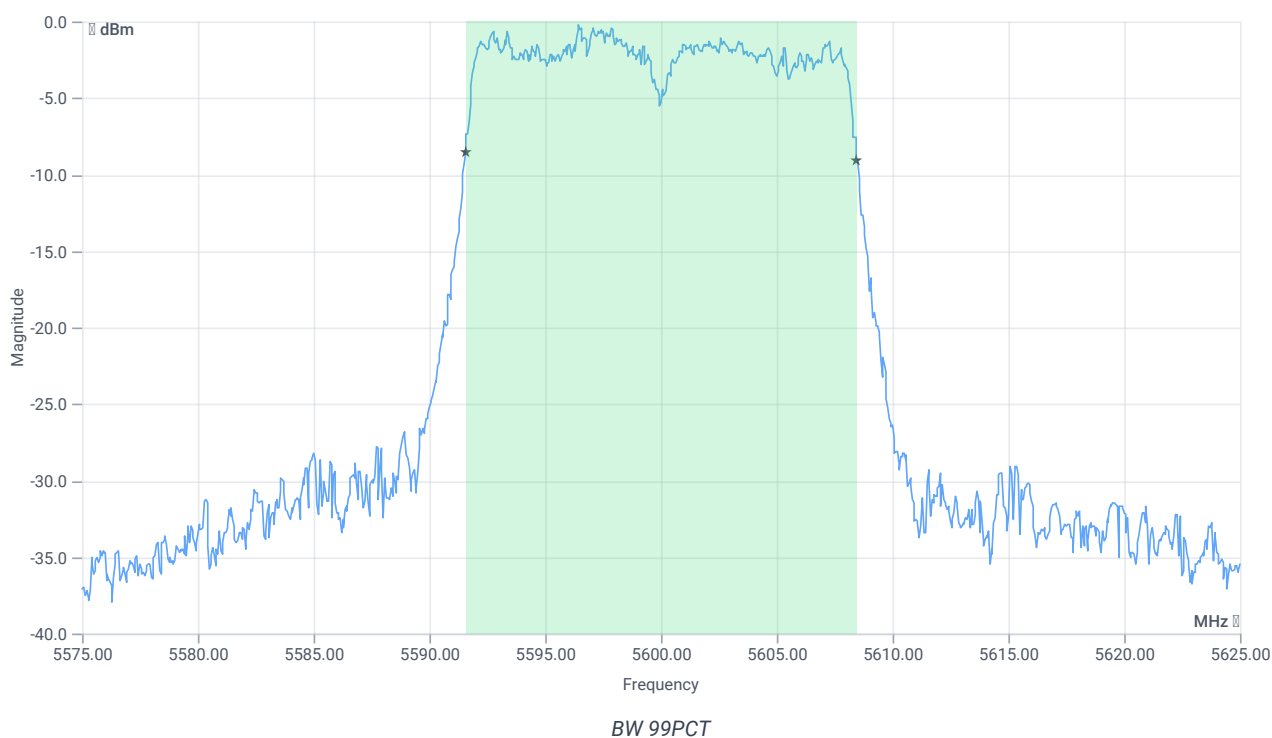


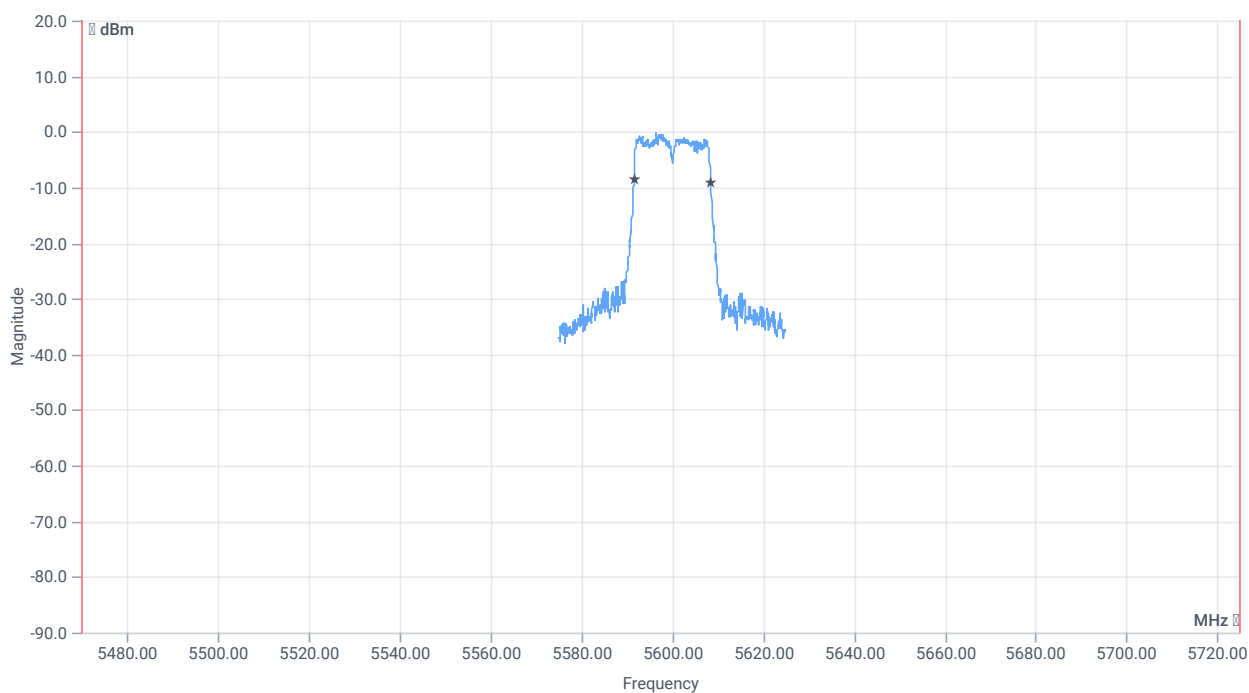

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.883	MHz	INFO
T1 99%	5470.000000	---	5591.5584	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5608.4416	MHz	

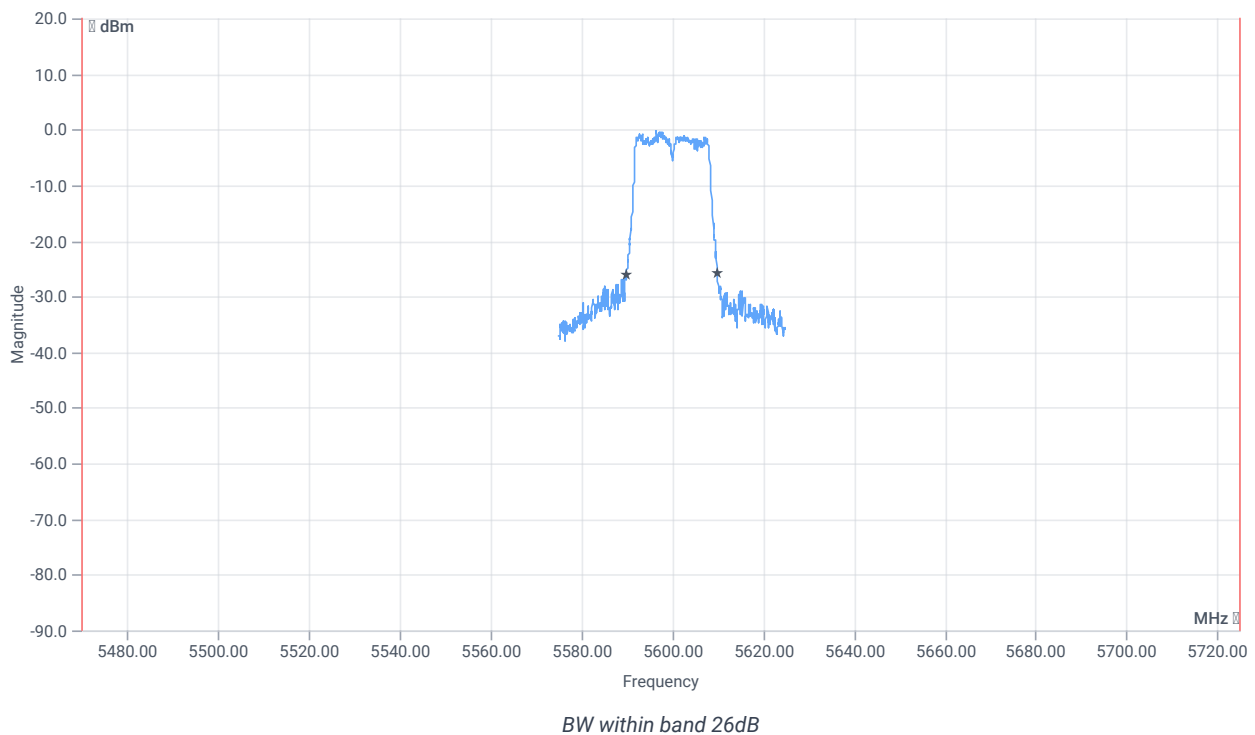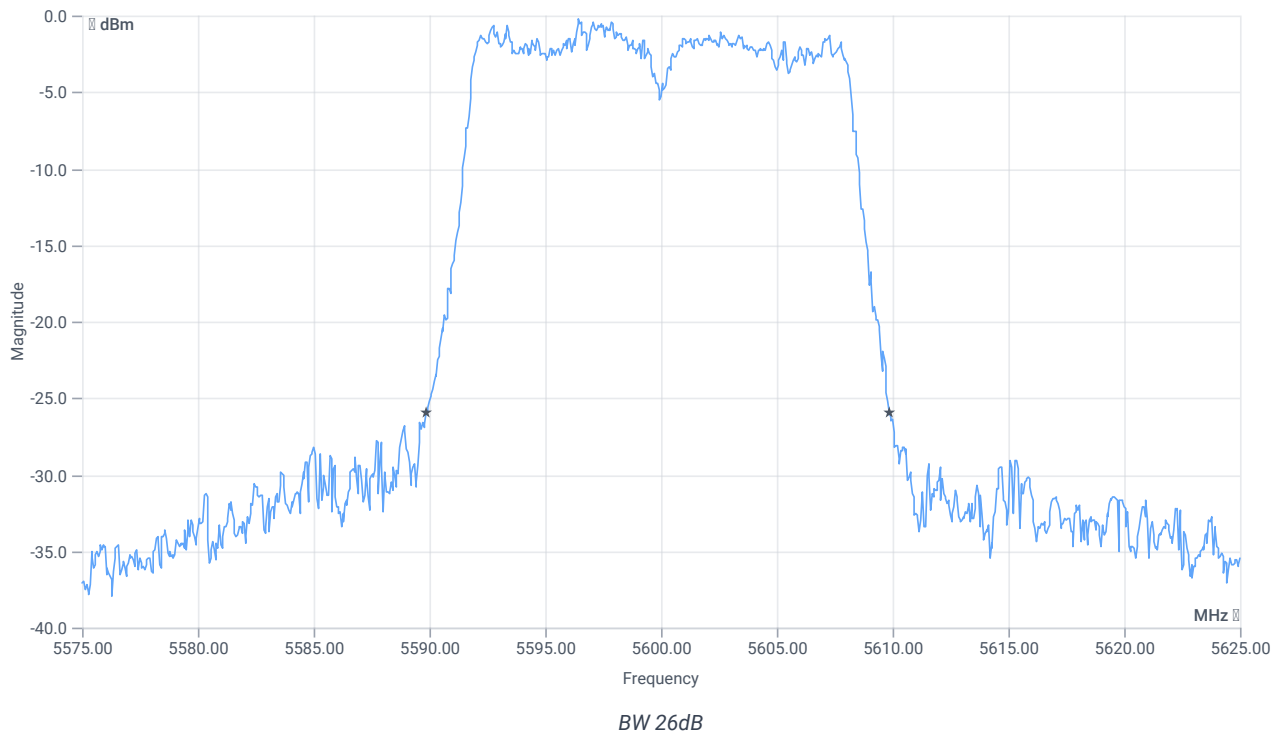

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5589.8500	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5609.8500	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2C

References

TC start	11.06.2024 14:17:43
Ambit temp [°C] humidity [rel%]	25.0 31
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	True Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5700 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.68	dBm	INFO
Ref. frequency	---	---	5707.190	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.68 12.77 15
Start [MHz] Stop [MHz]	5675.000 5725.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


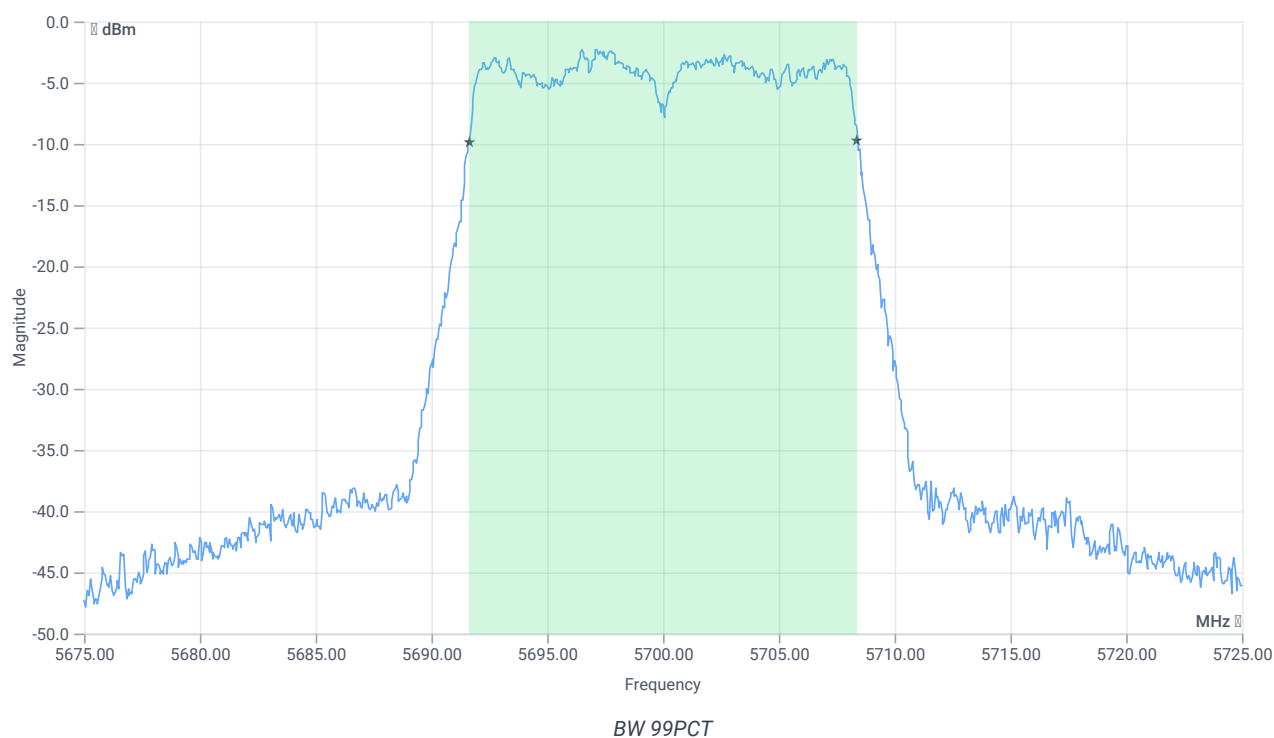


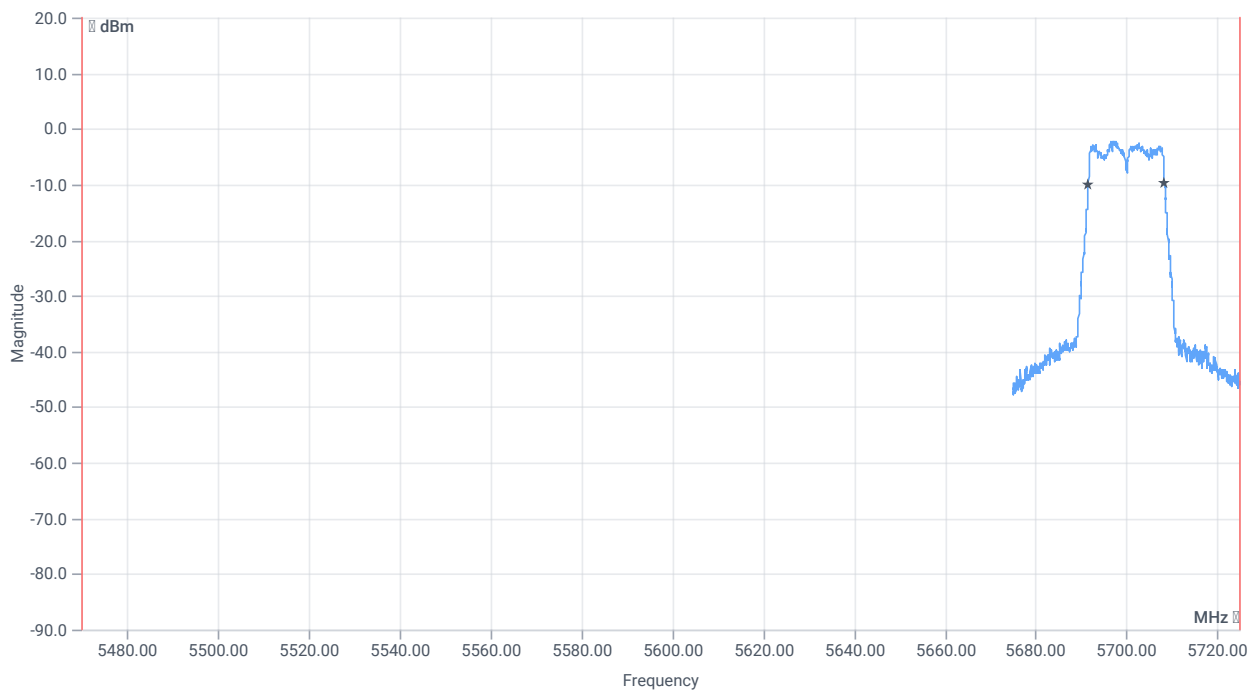

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.783	MHz	INFO
T1 99%	5470.000000	---	5691.6084	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5708.3916	MHz	

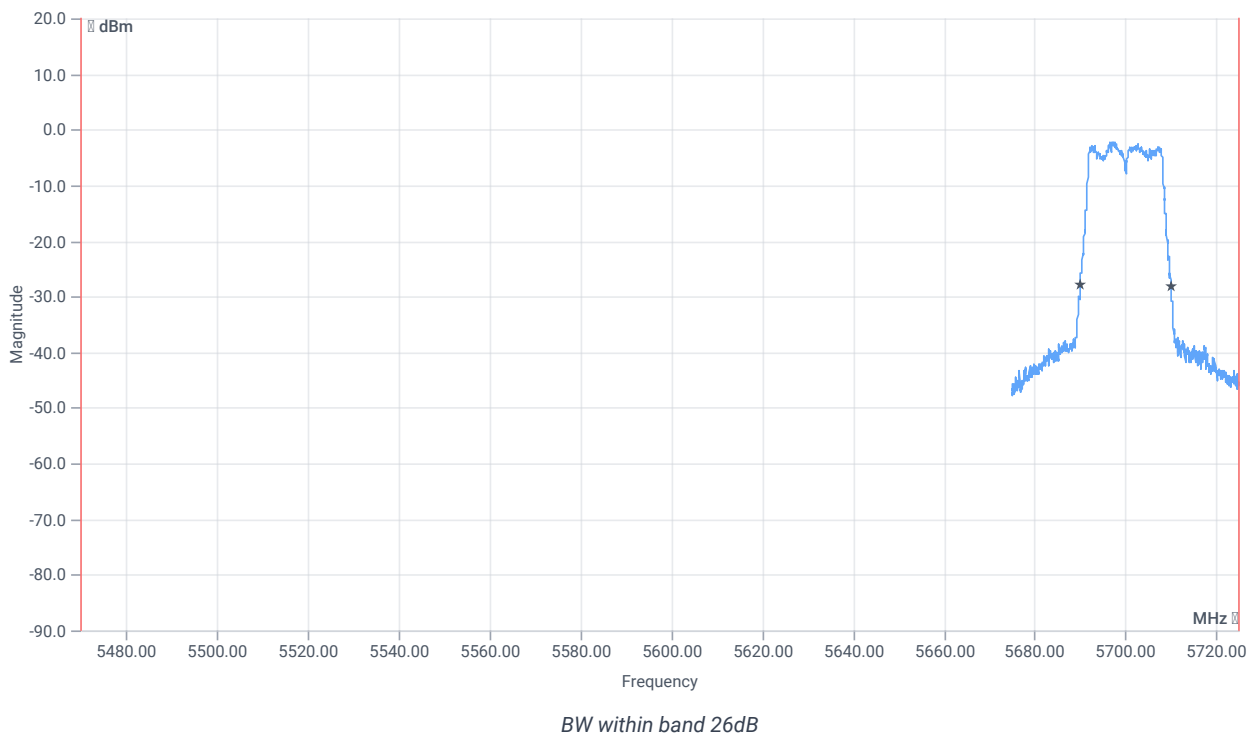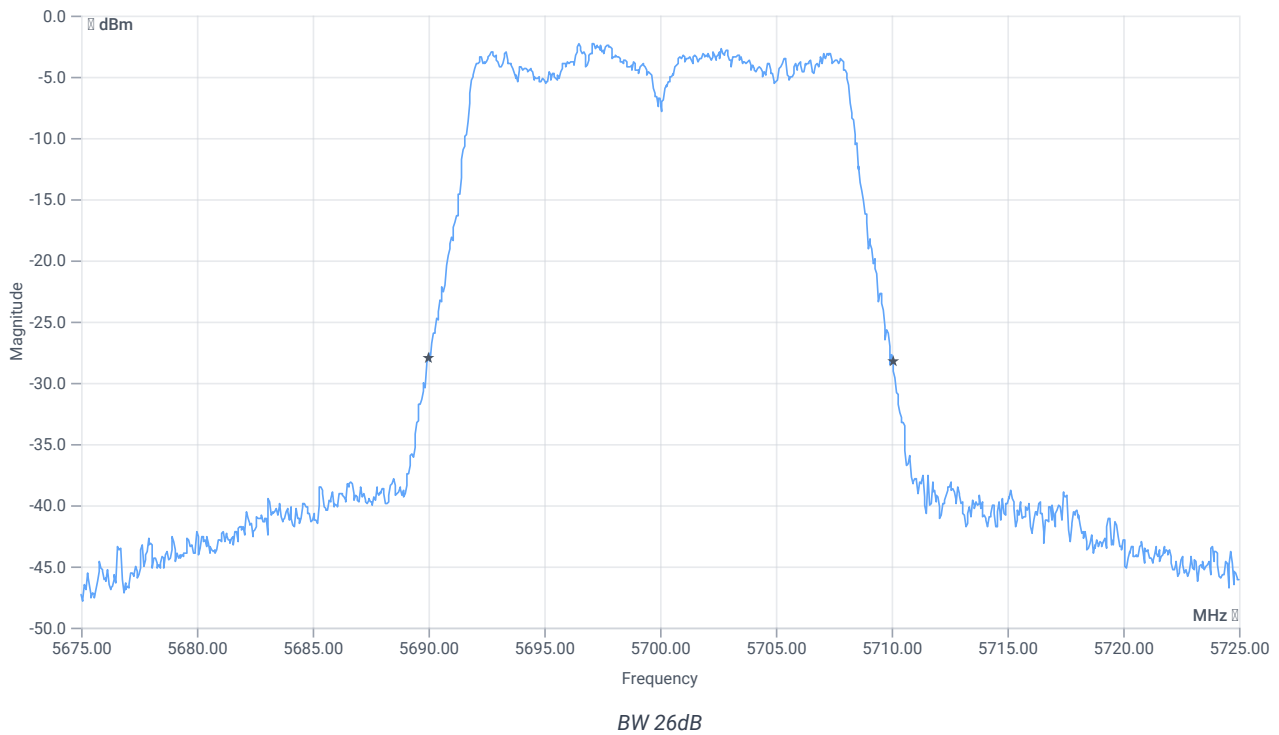

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.05	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5690.0000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5710.0500	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2C

References

TC start	12.06.2024 10:13:36
Ambit temp [°C] humidity [rel%]	24.2 34
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5500 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.71	dBm	INFO
Ref. frequency	---	---	5502.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.71 12.72 20
Start [MHz] Stop [MHz]	5475.000 5525.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

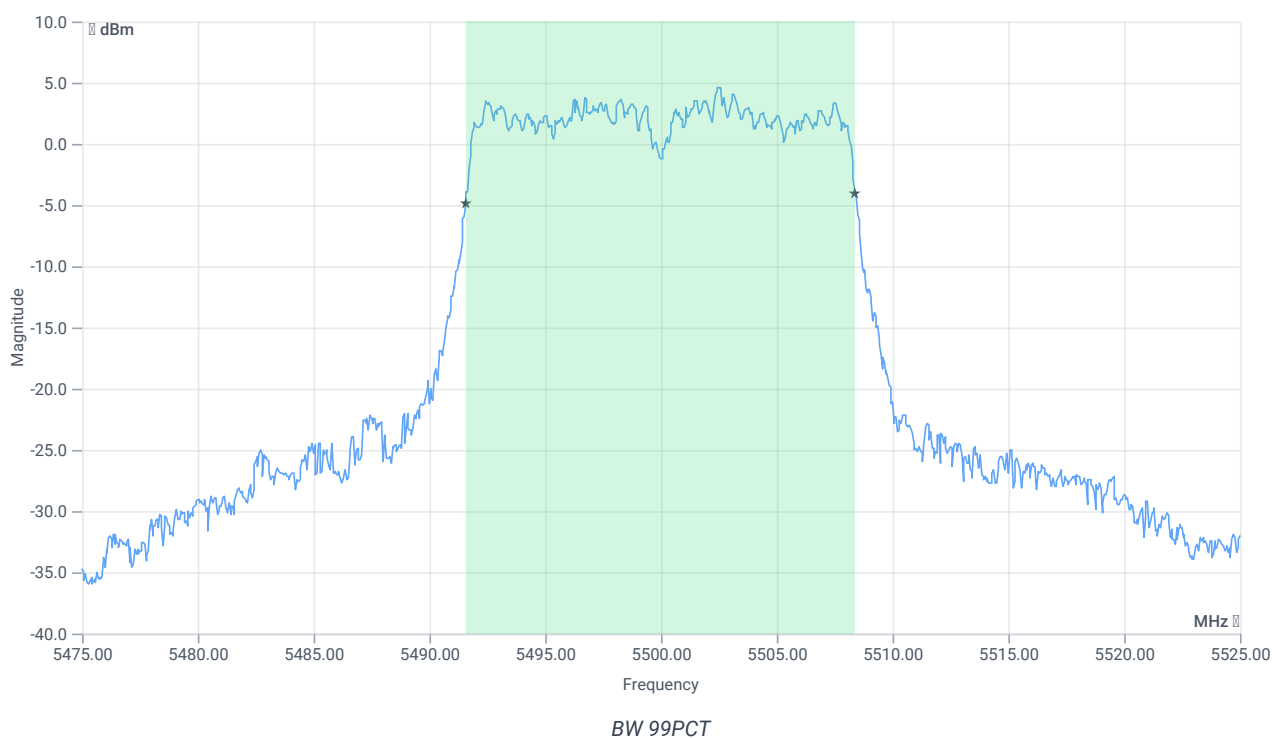


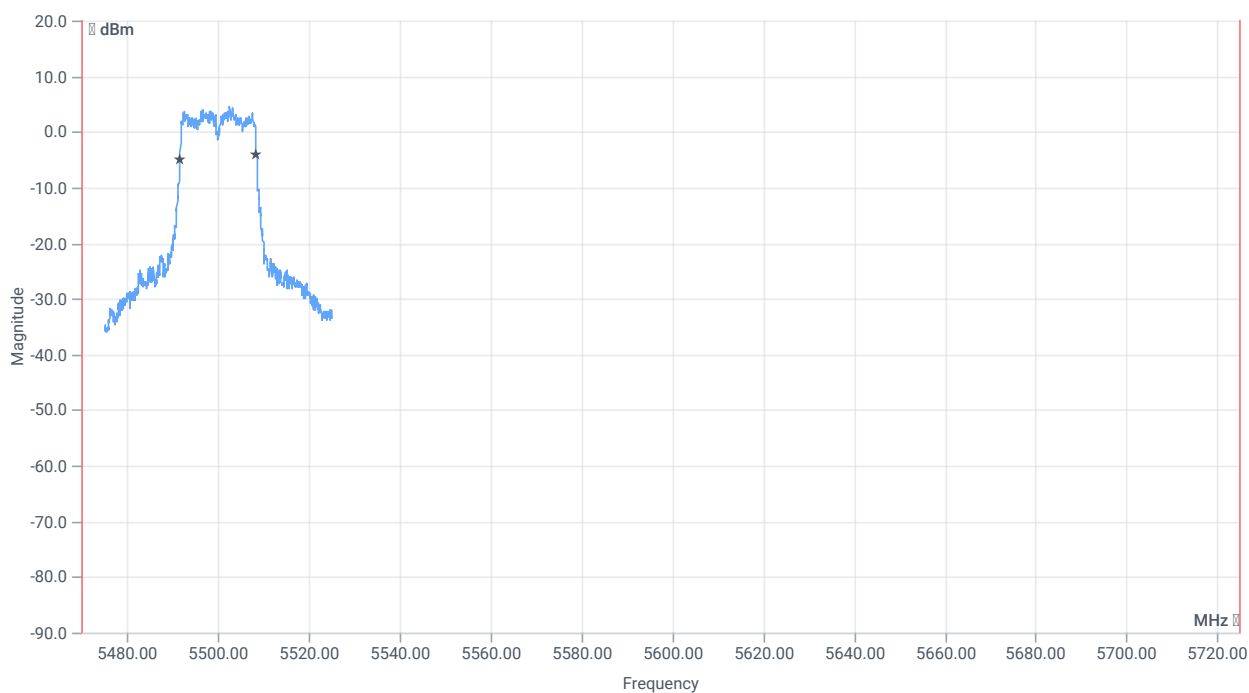


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.833	MHz	INFO
T1 99%	5470.000000	---	5491.5584	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5508.3916	MHz	

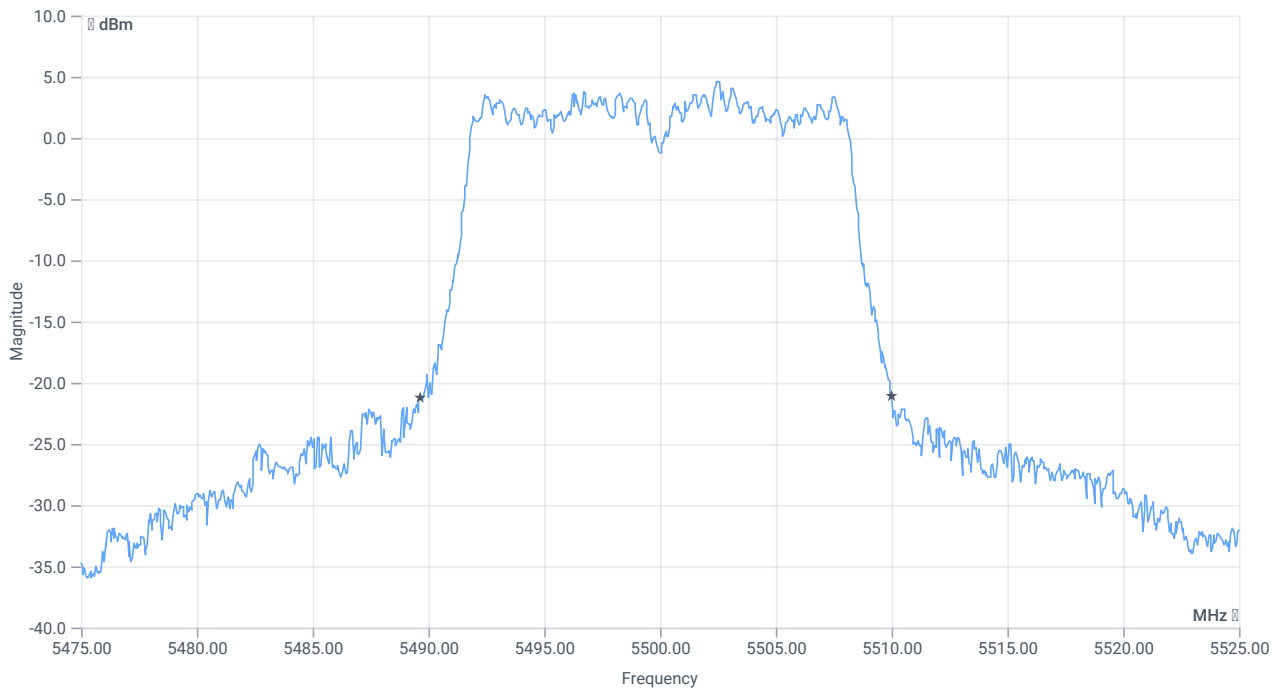

BW 26dB

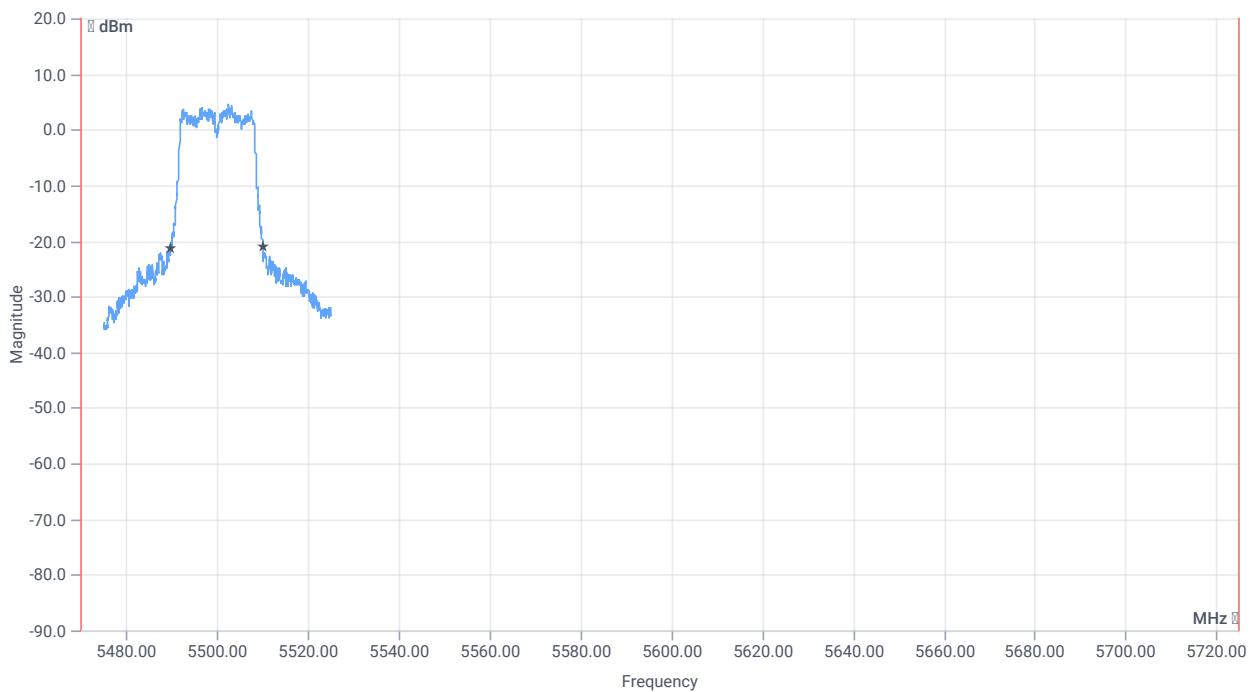

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.35	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5489.6500	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5510.0000	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2C

References

TC start	12.06.2024 10:28:00
Ambit temp [°C] humidity [rel%]	24.3 34
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5500
Frequency mid to test	True Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5600 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.30	dBm	INFO
Ref. frequency	---	---	5603.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.30 12.8 20
Start [MHz] Stop [MHz]	5575.000 5625.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


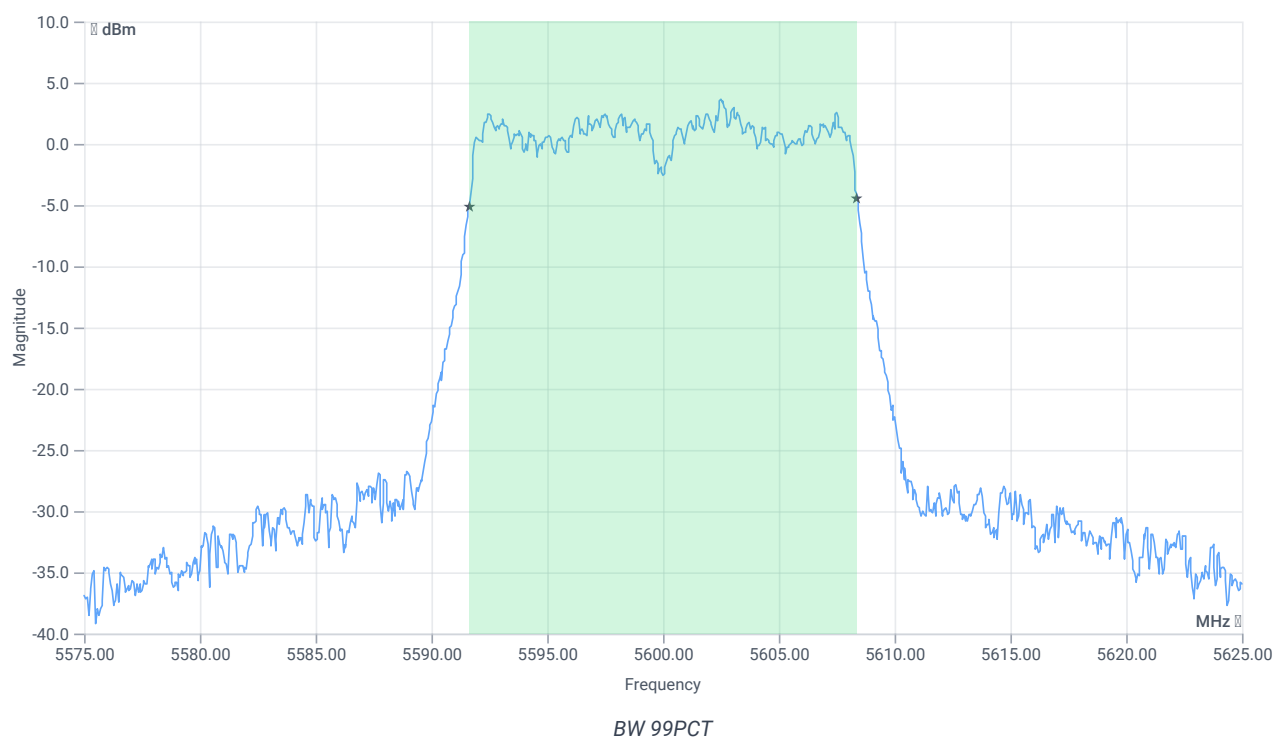




BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.783	MHz	INFO
T1 99%	5470.000000	---	5591.6084	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5608.3916	MHz	

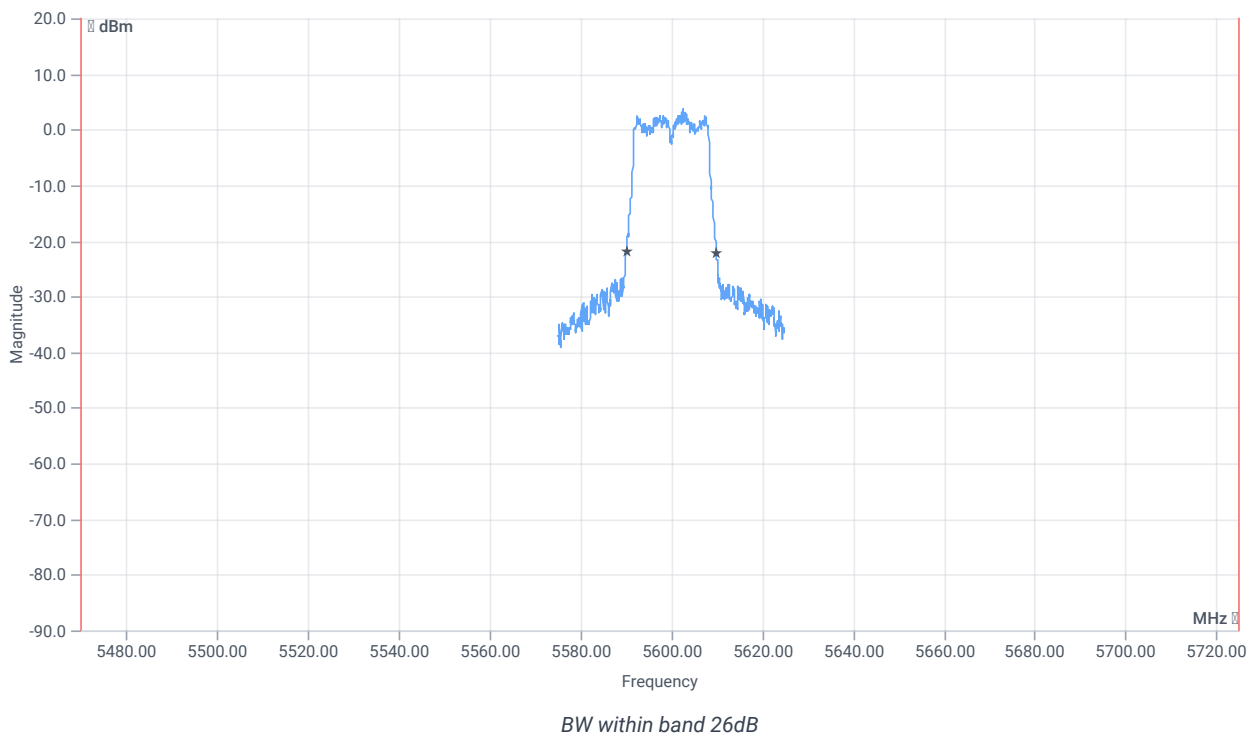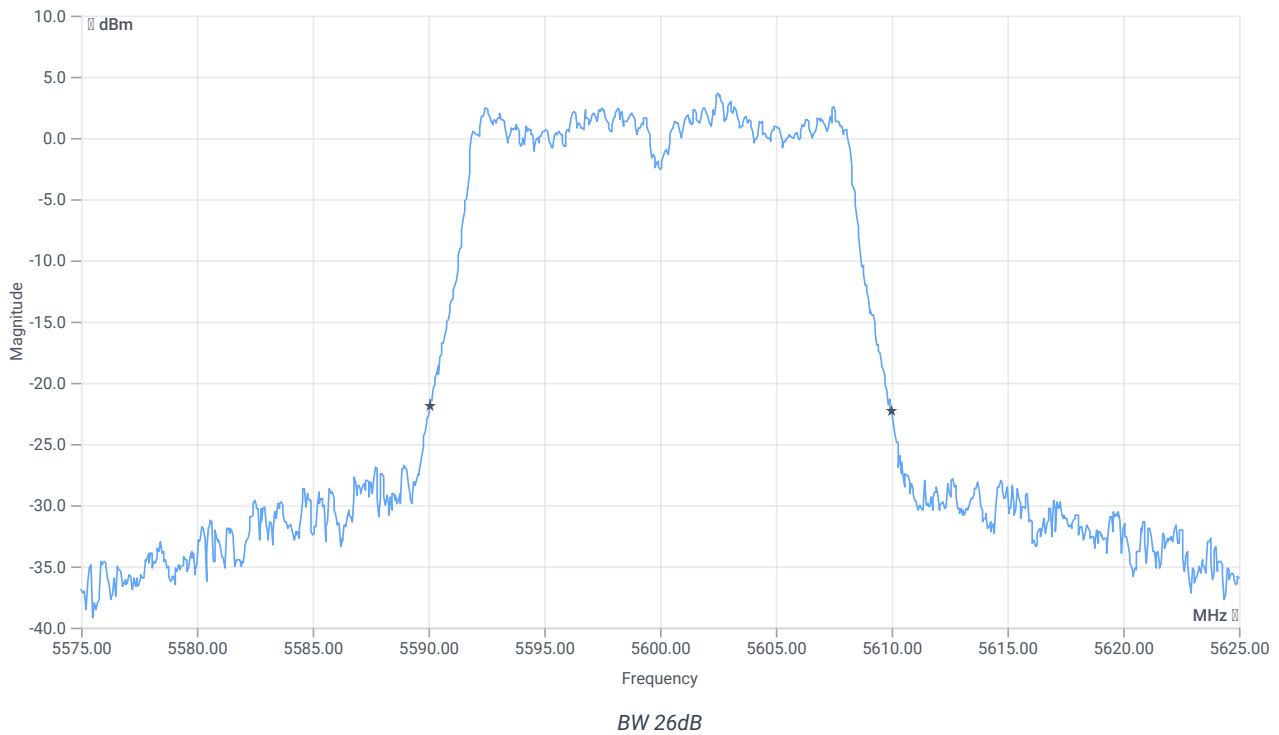

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	19.95	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5590.0500	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5610.0000	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-2C

References

TC start	12.06.2024 10:42:15
Ambit temp [°C] humidity [rel%]	24.5 33
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	True Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5700 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.50	dBm	INFO
Ref. frequency	---	---	5701.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.50 12.73 15
Start [MHz] Stop [MHz]	5675.000 5725.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


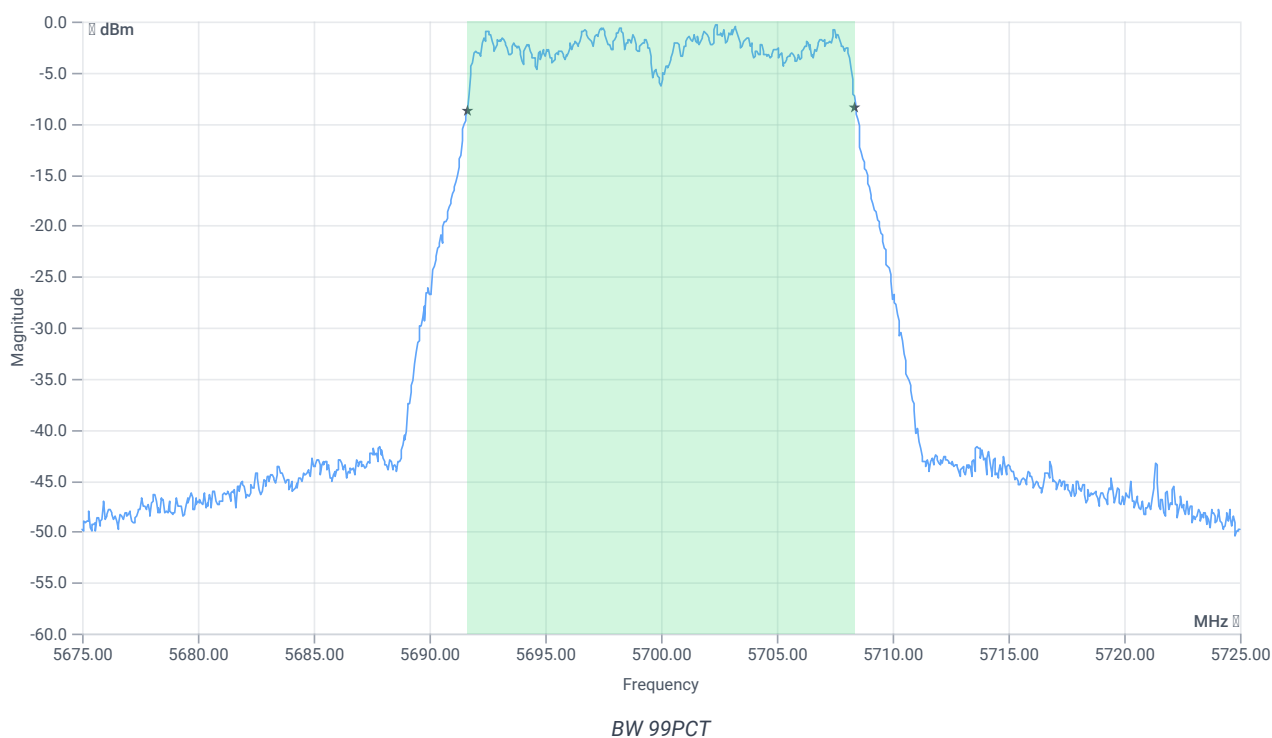


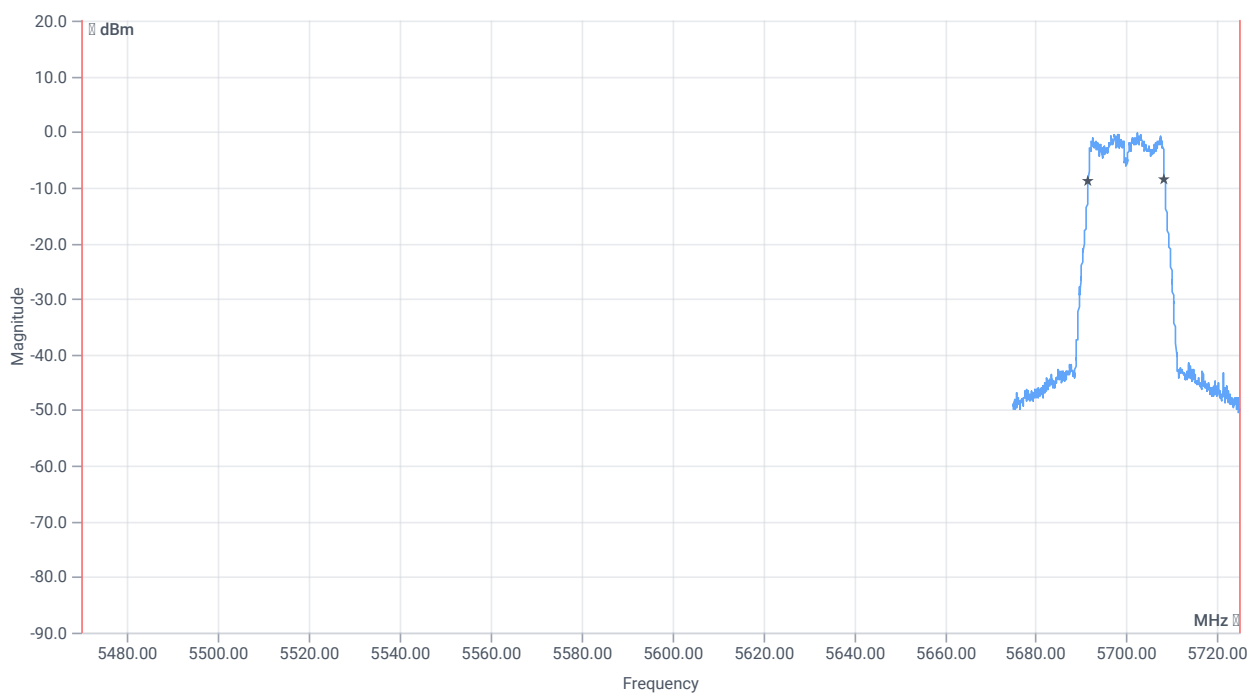

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.733	MHz	INFO
T1 99%	5470.000000	---	5691.6583	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5708.3916	MHz	

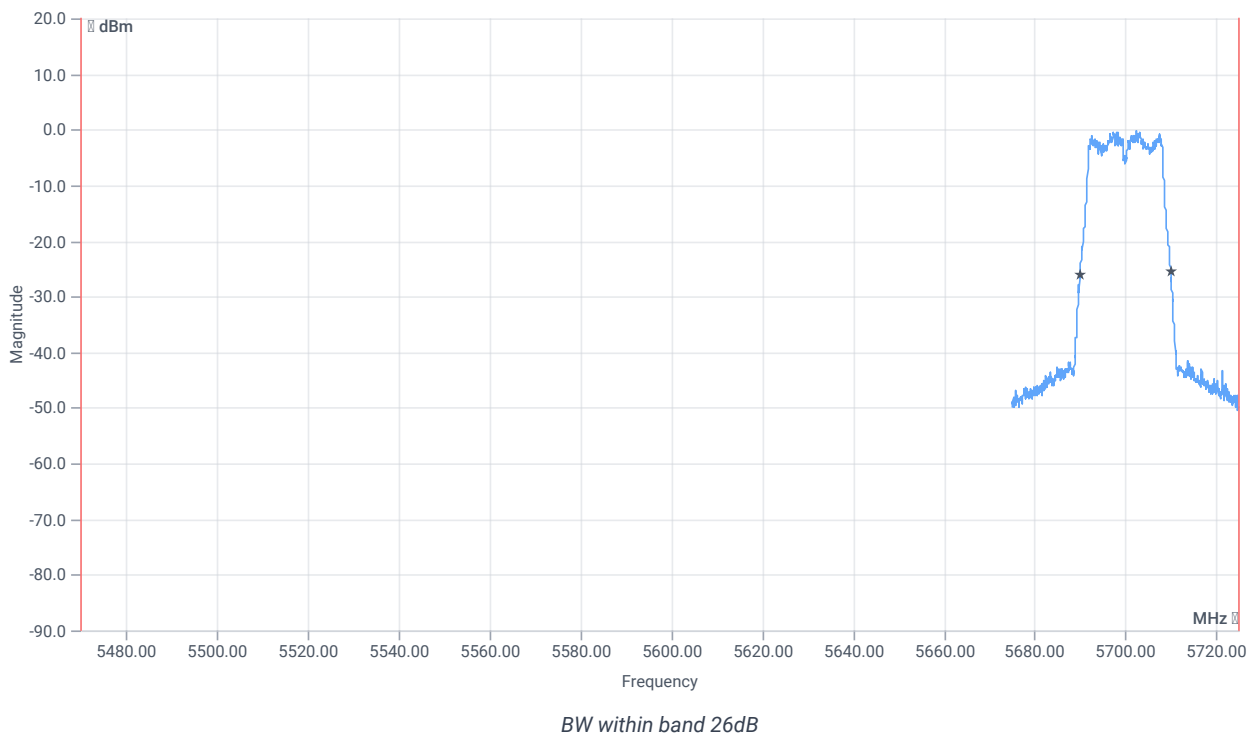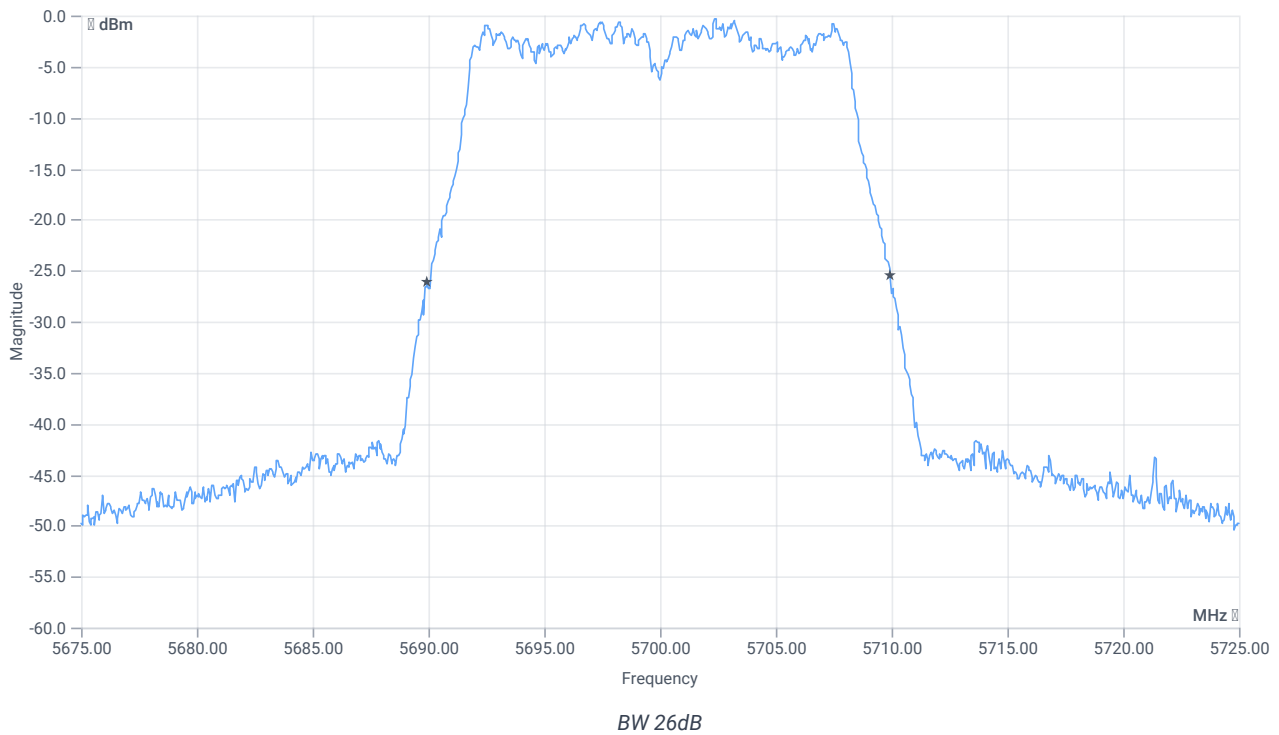

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5689.9500	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5709.9500	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2C

References

TC start	12.06.2024 07:53:41
Ambit temp [°C] humidity [rel%]	22.9 36
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT20 mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5500 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.45	dBm	INFO
Ref. frequency	---	---	5496.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.45 12.84 20
Start [MHz] Stop [MHz]	5475.000 5525.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


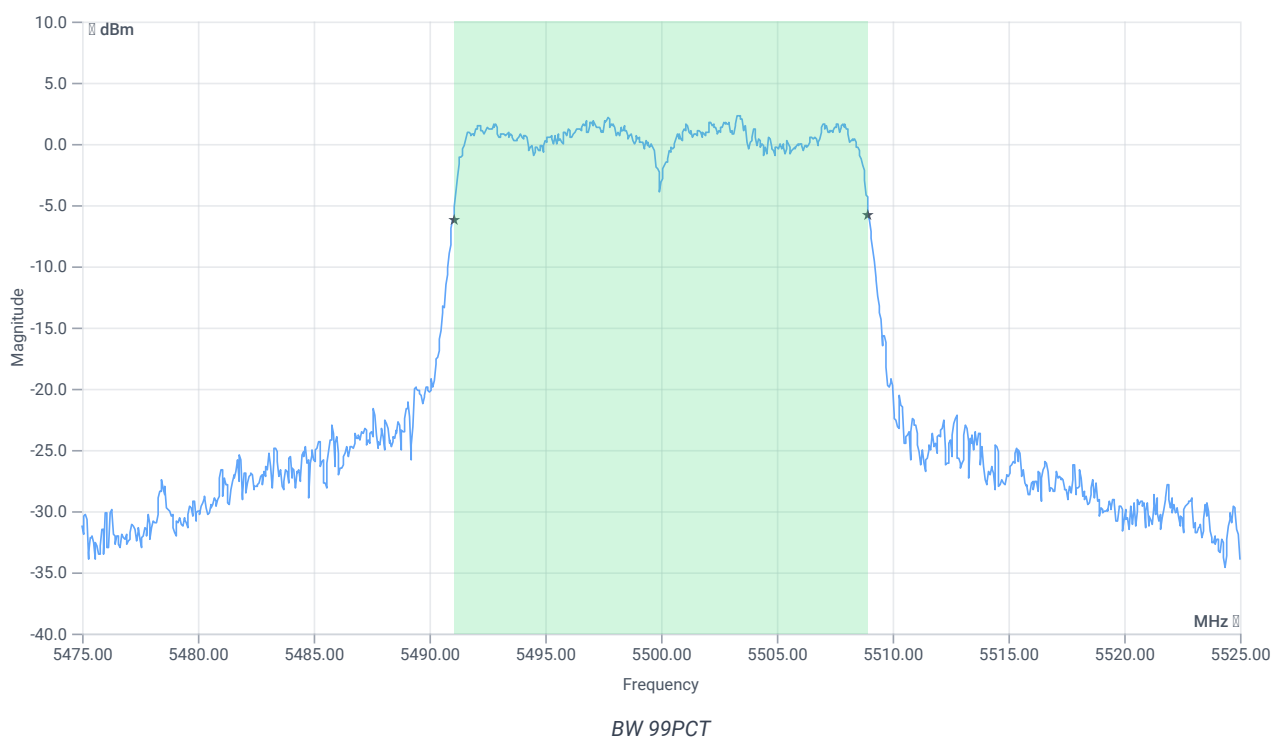




BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17.882	MHz	INFO
T1 99%	5470.000000	---	5491.0589	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5508.9411	MHz	

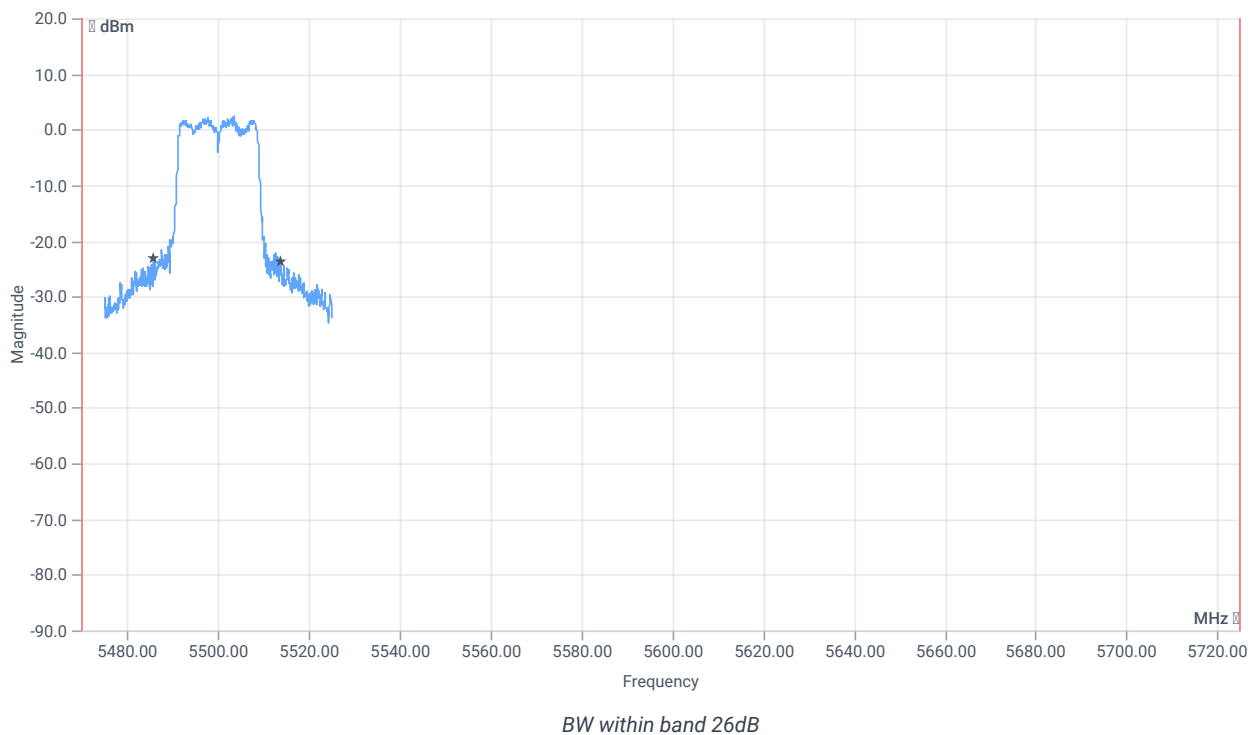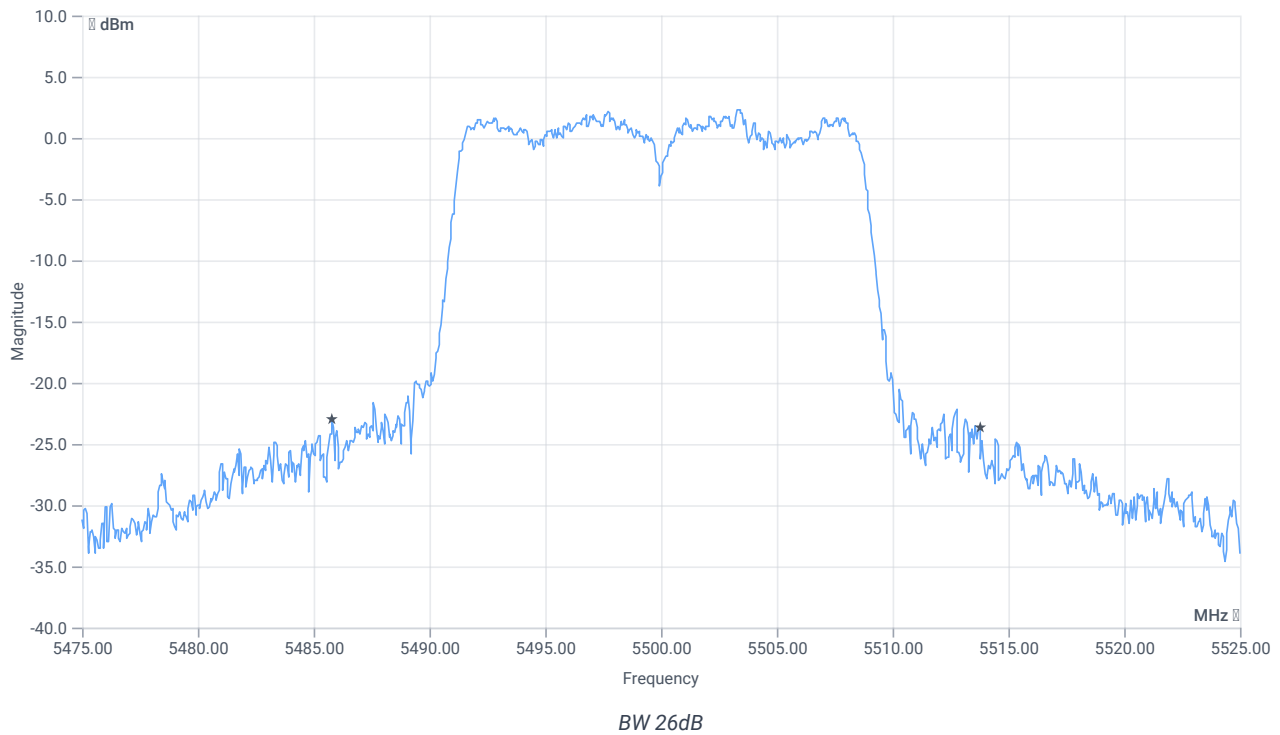

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	27.95	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5485.8000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5513.7500	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2C

References

TC start	12.06.2024 08:08:45
Ambit temp [°C] humidity [rel%]	23.1 36
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT20 mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5500
Frequency mid to test	True Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5600 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	5.11	dBm	INFO
Ref. frequency	---	---	5602.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.11 13.11 20
Start [MHz] Stop [MHz]	5575.000 5625.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

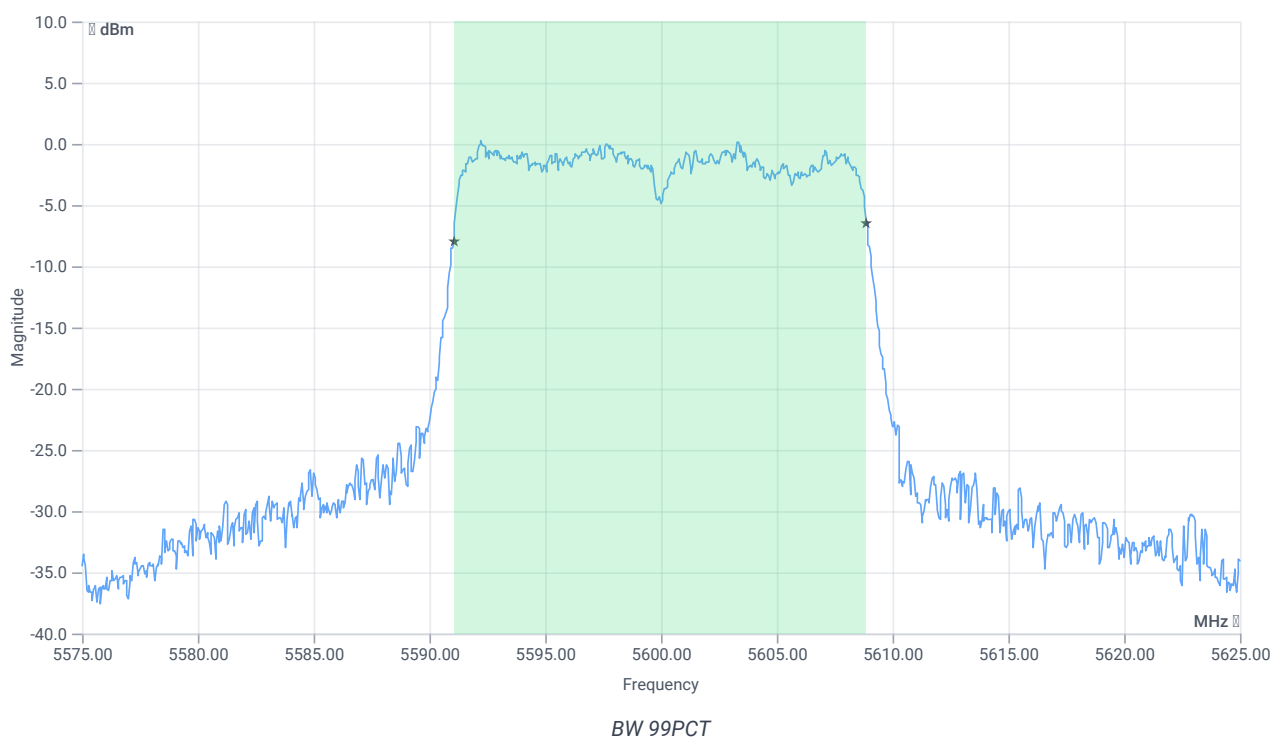





BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17.832	MHz	INFO
T1 99%	5470.000000	---	5591.0589	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5608.8911	MHz	

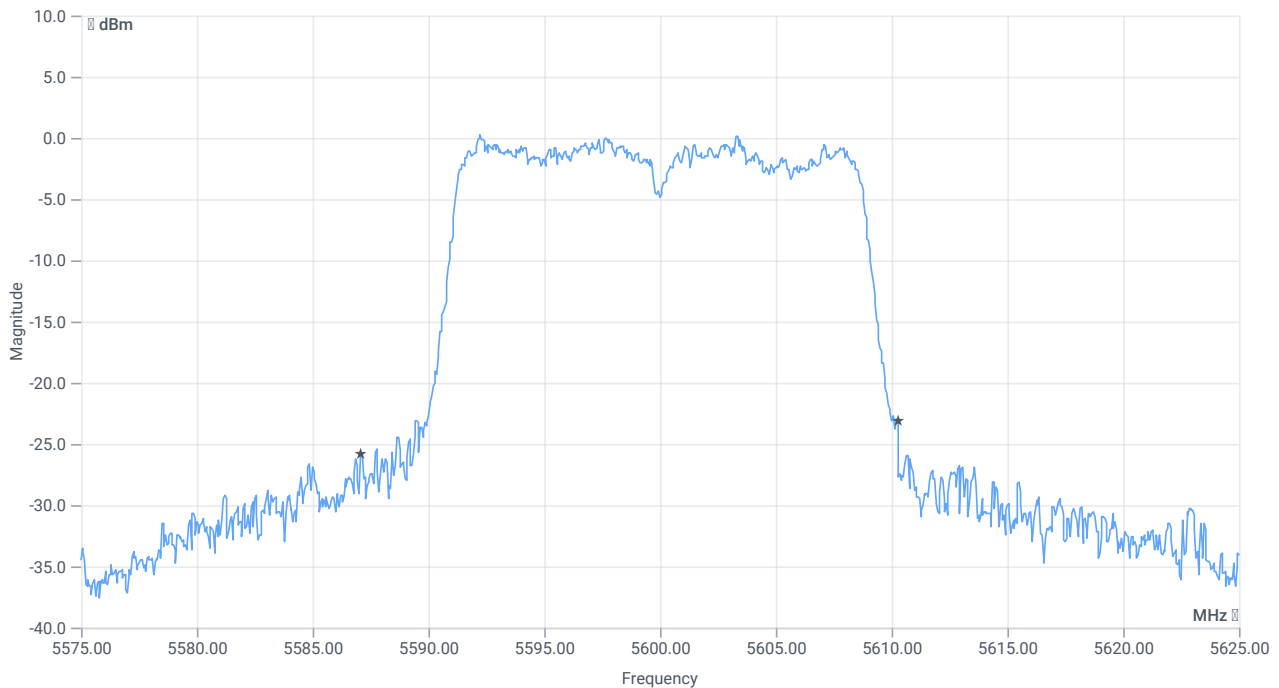

BW 26dB

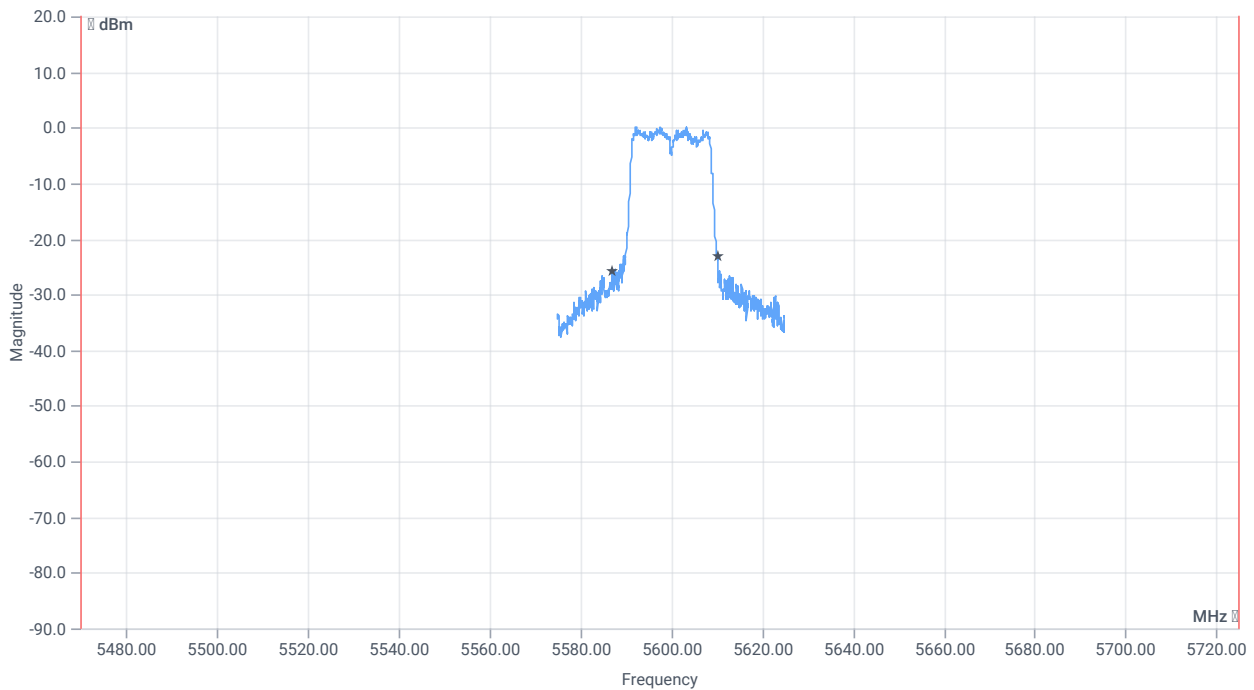

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	23.2	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5587.0500	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5610.2500	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2C

References

TC start	12.06.2024 08:23:27
Ambit temp [°C] humidity [rel%]	23.3 36
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT20 mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	True Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5700 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.37	dBm	INFO
Ref. frequency	---	---	5702.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.37 12.77 15
Start [MHz] Stop [MHz]	5675.000 5725.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


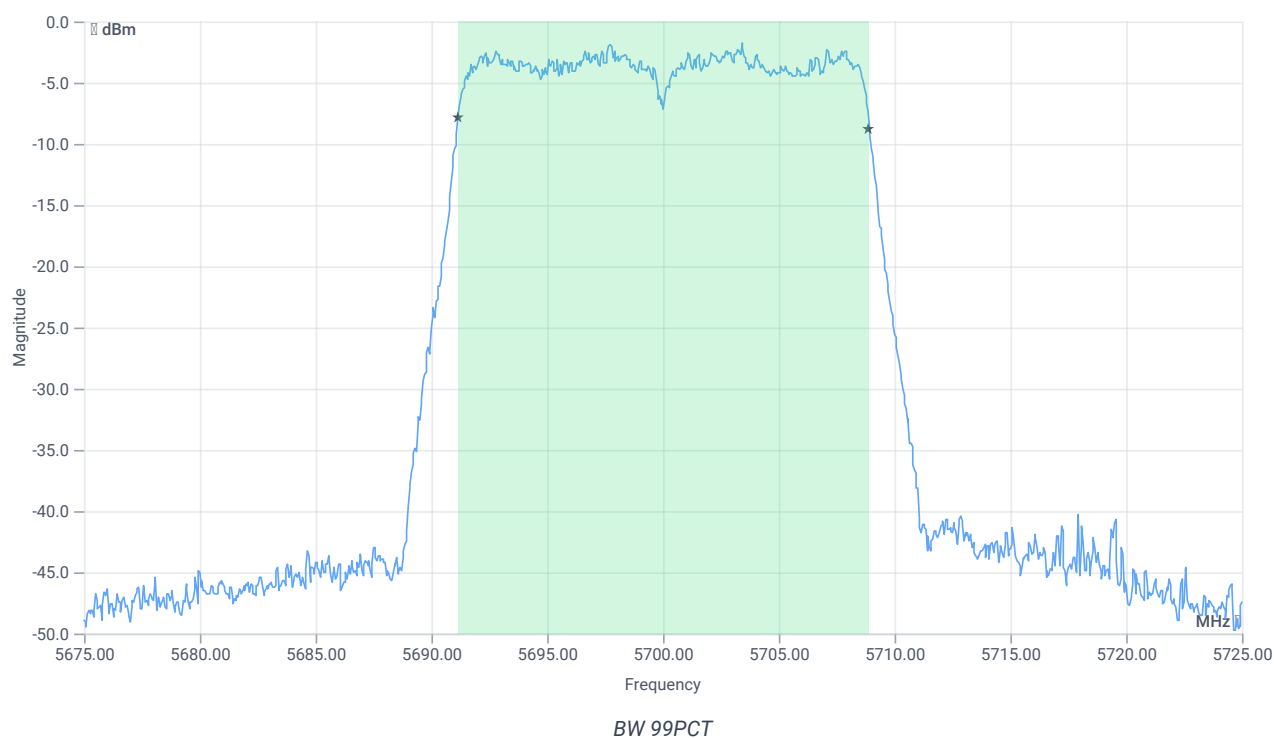


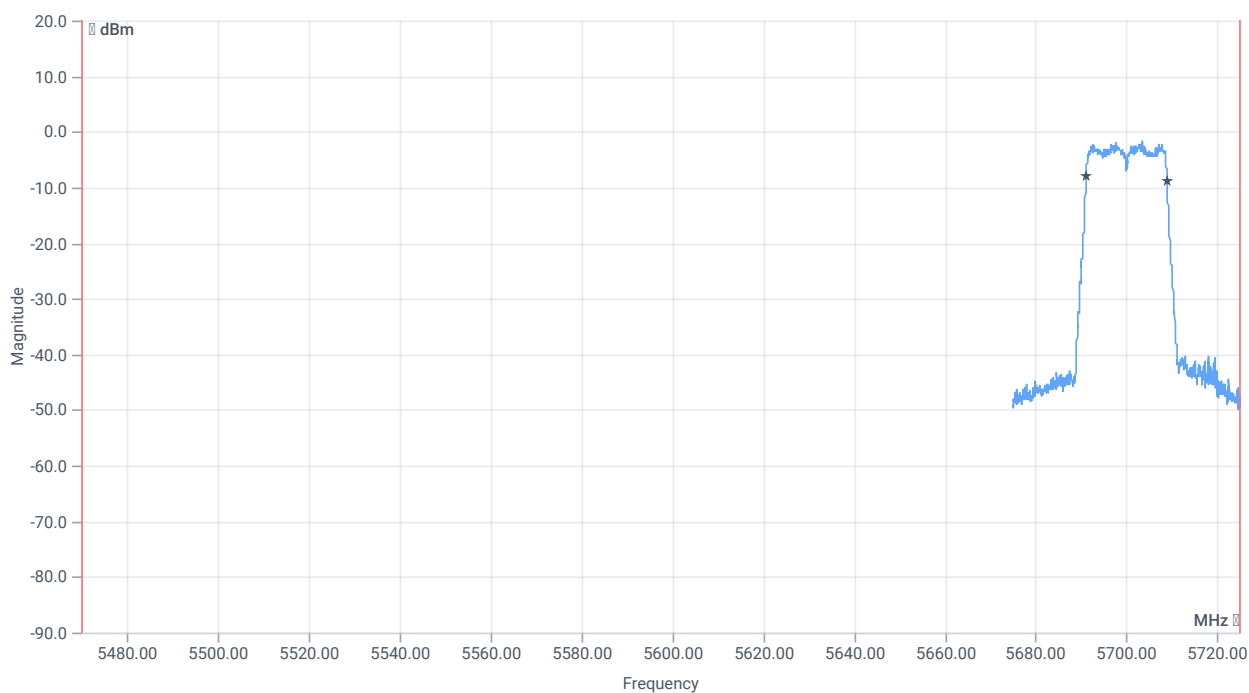

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17.732	MHz	INFO
T1 99%	5470.000000	---	5691.1588	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5708.8911	MHz	

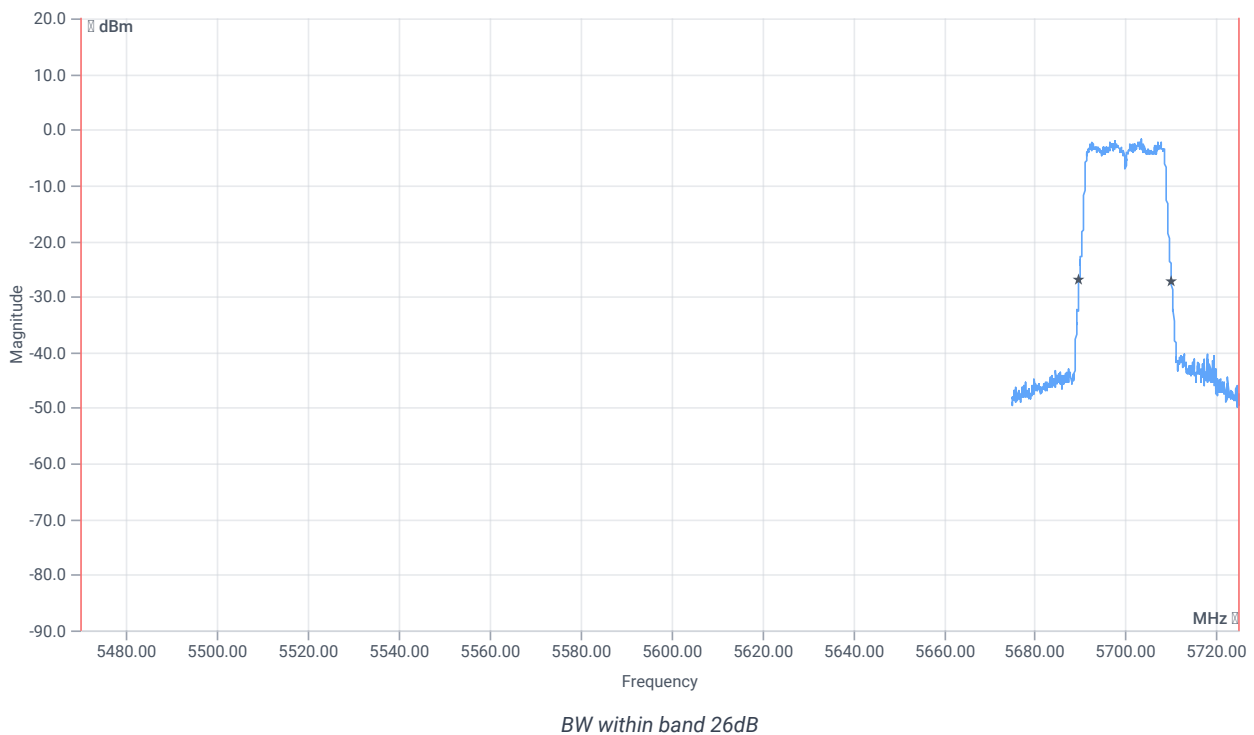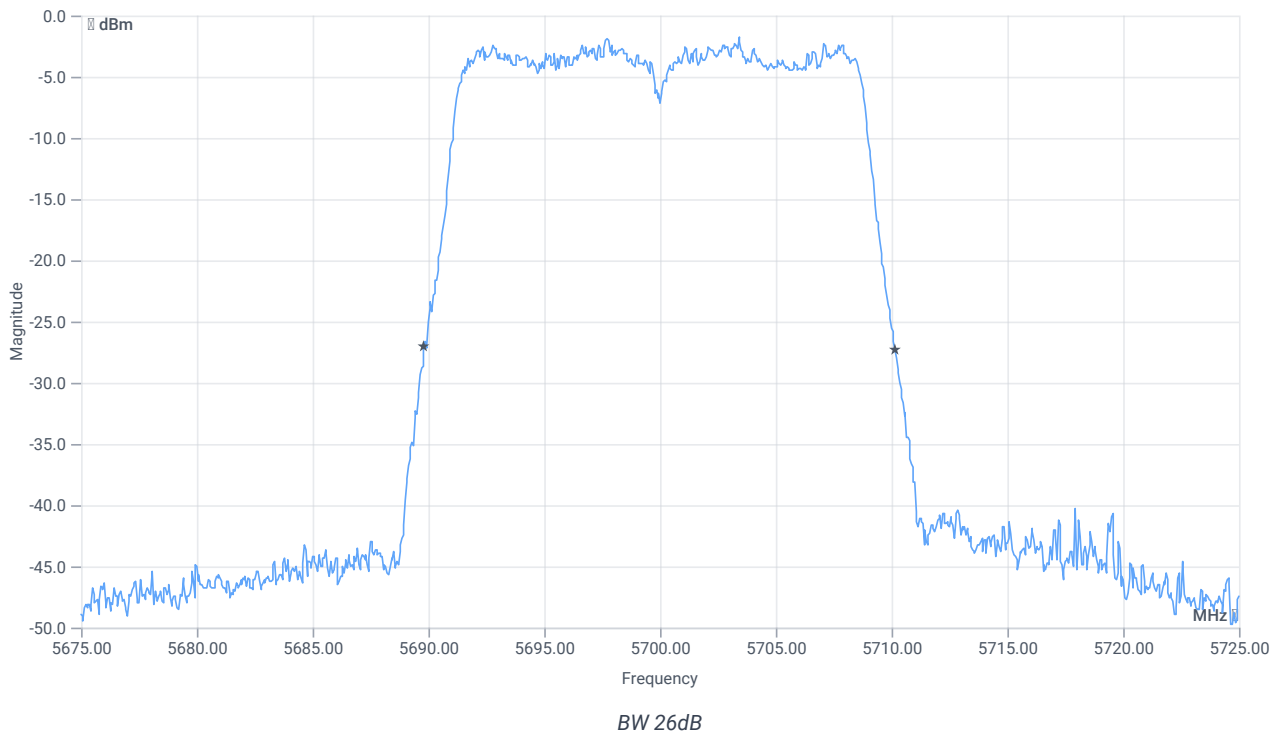

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.35	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5689.8000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5710.1500	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2C

References

TC start	12.06.2024 13:44:54
Ambit temp [°C] humidity [rel%]	25.4 29
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT20 mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5500 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.55	dBm	INFO
Ref. frequency	---	---	5502.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.55 12.72 20
Start [MHz] Stop [MHz]	5475.000 5525.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

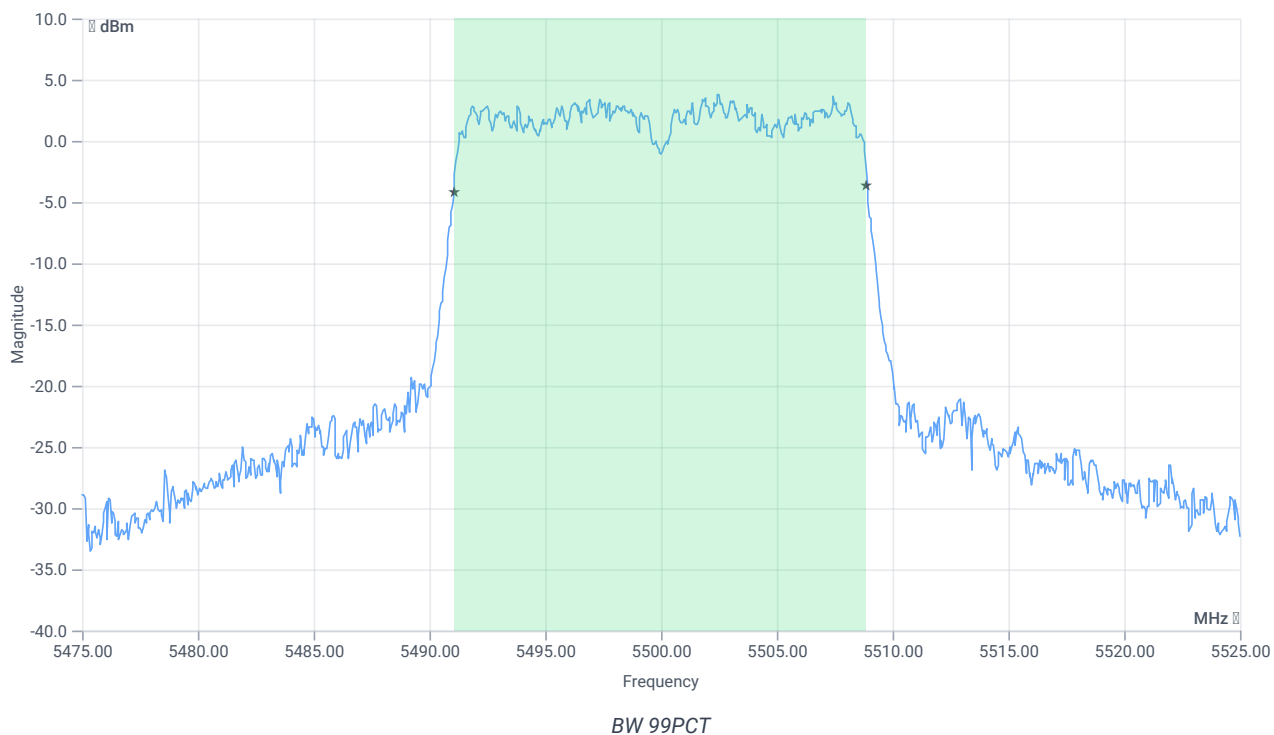


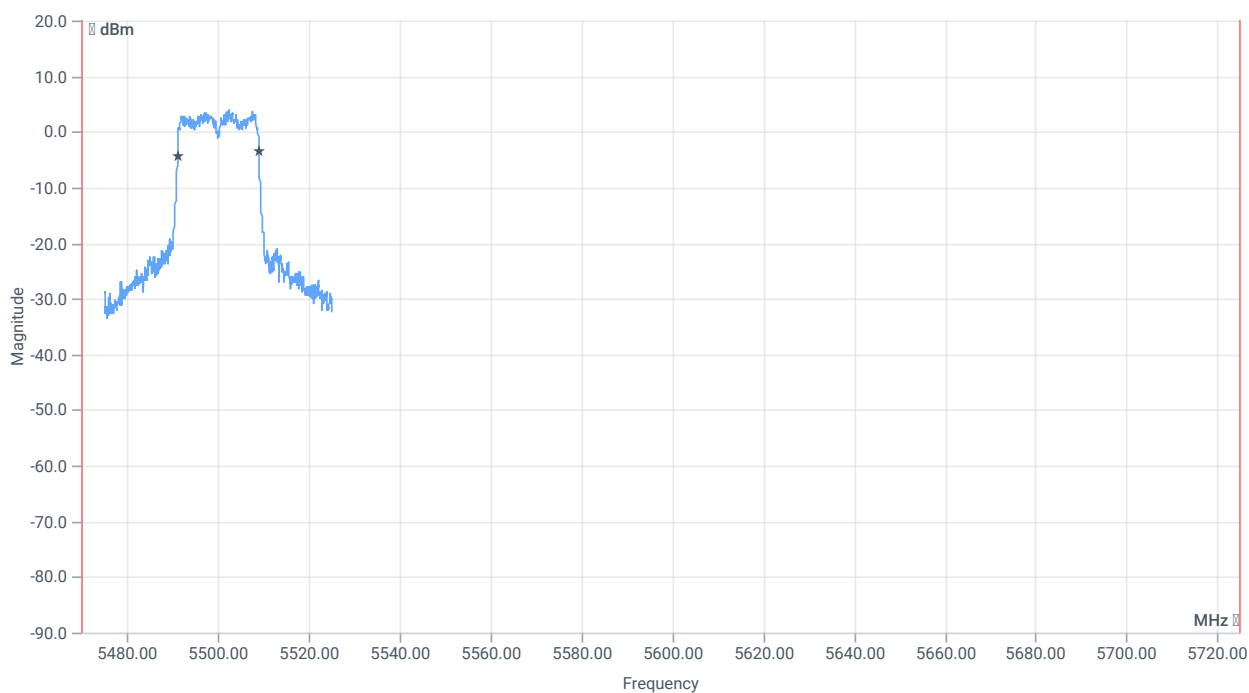


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17.832	MHz	INFO
T1 99%	5470.000000	---	5491.0589	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5508.8911	MHz	

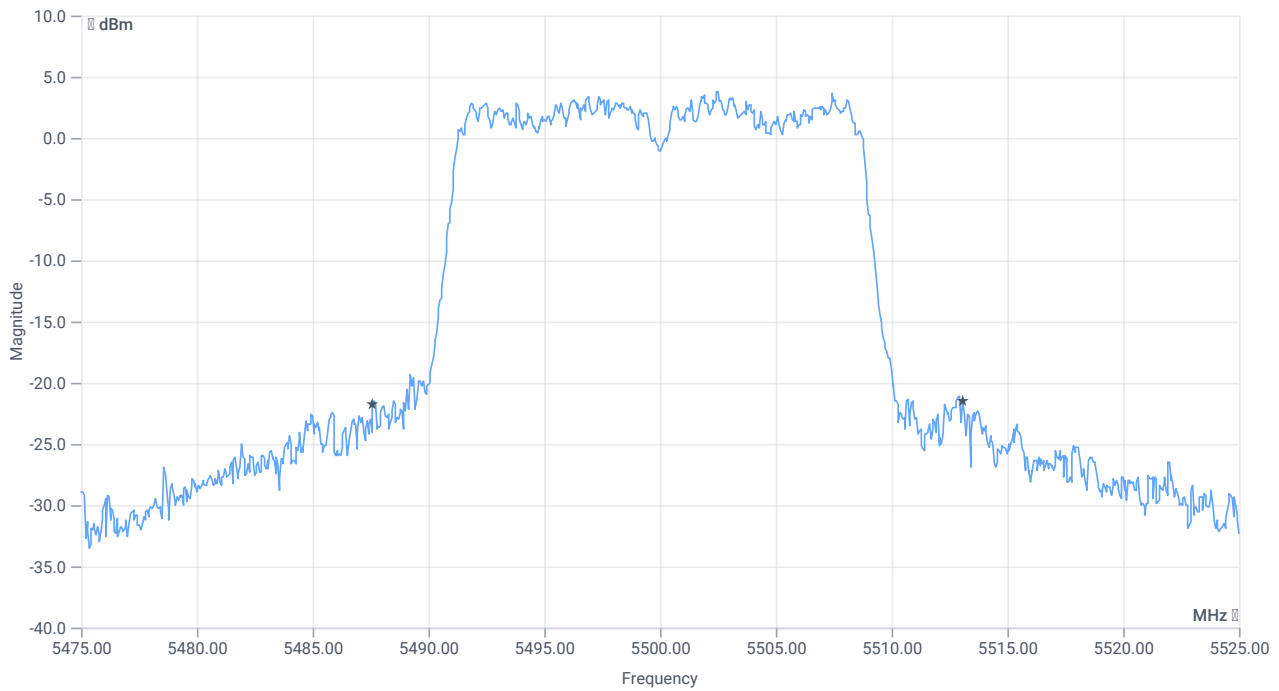

BW 26dB

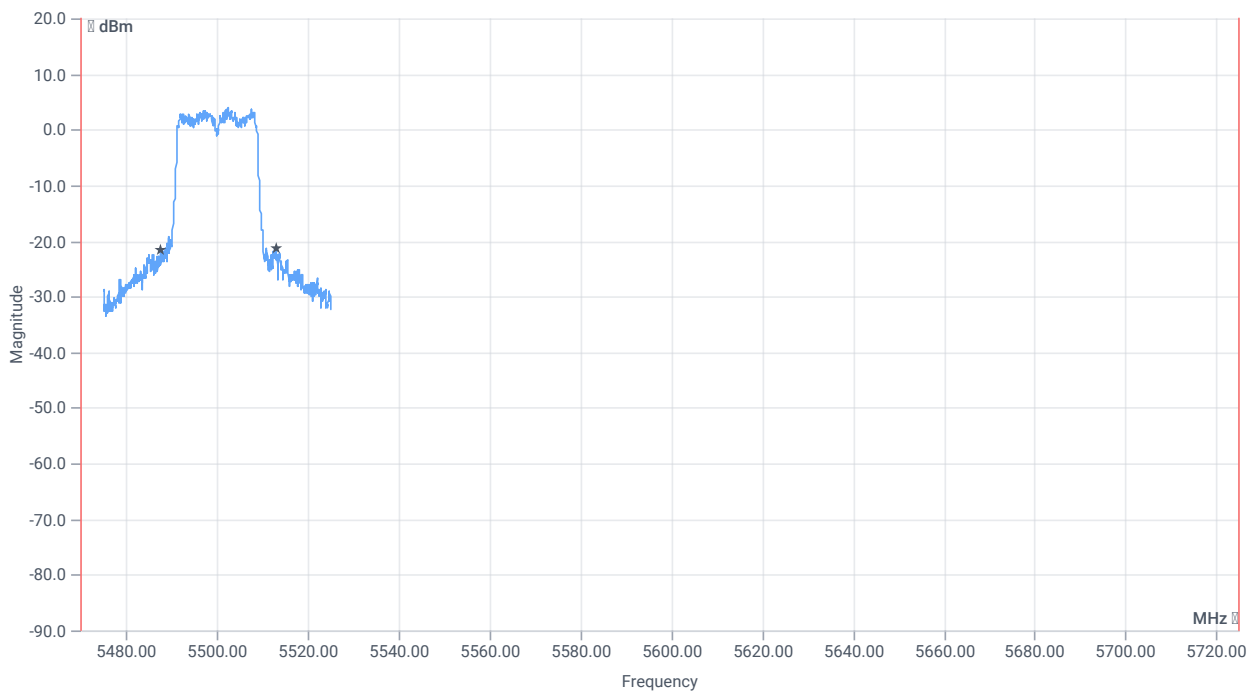

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	25.5	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5487.6000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5513.1000	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2C

References

TC start	12.06.2024 13:58:20
Ambit temp [°C] humidity [rel%]	25.4 28
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT20 mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5500
Frequency mid to test	True Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5600 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.28	dBm	INFO
Ref. frequency	---	---	5597.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.28 12.8 20
Start [MHz] Stop [MHz]	5575.000 5625.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


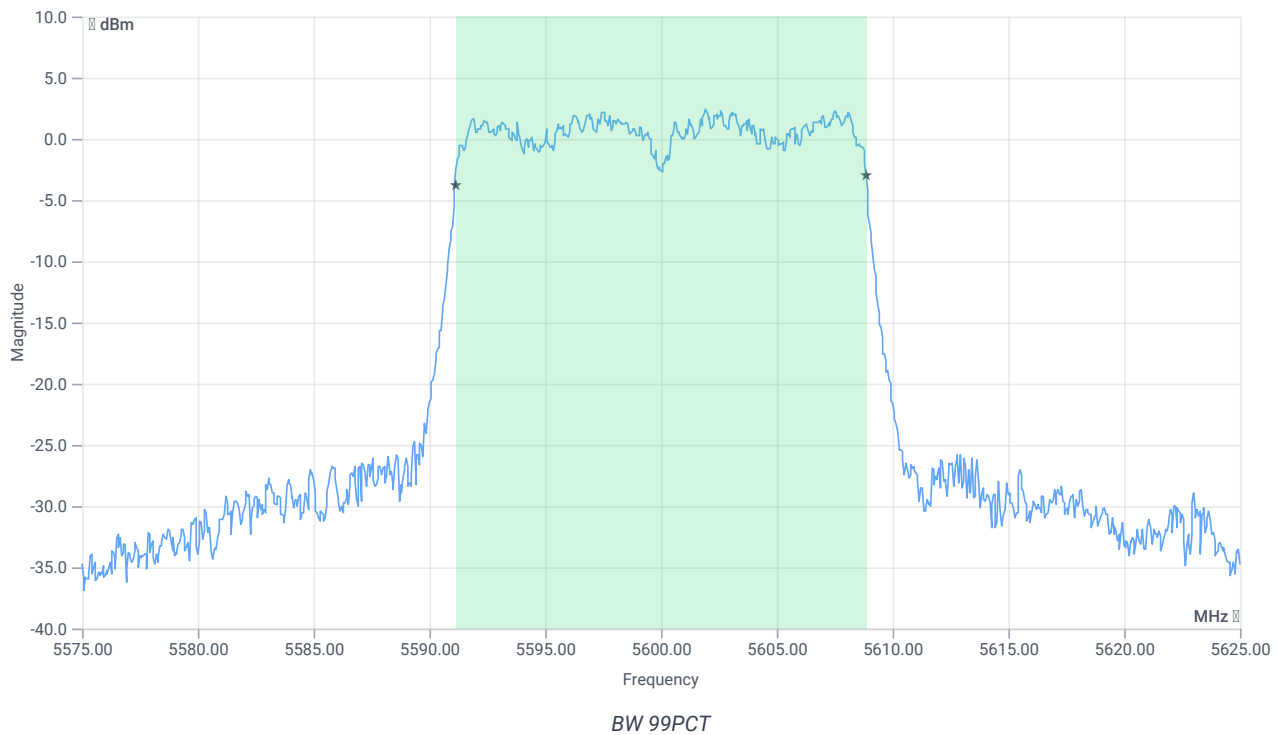




BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17.732	MHz	INFO
T1 99%	5470.000000	---	5591.1089	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5608.8412	MHz	

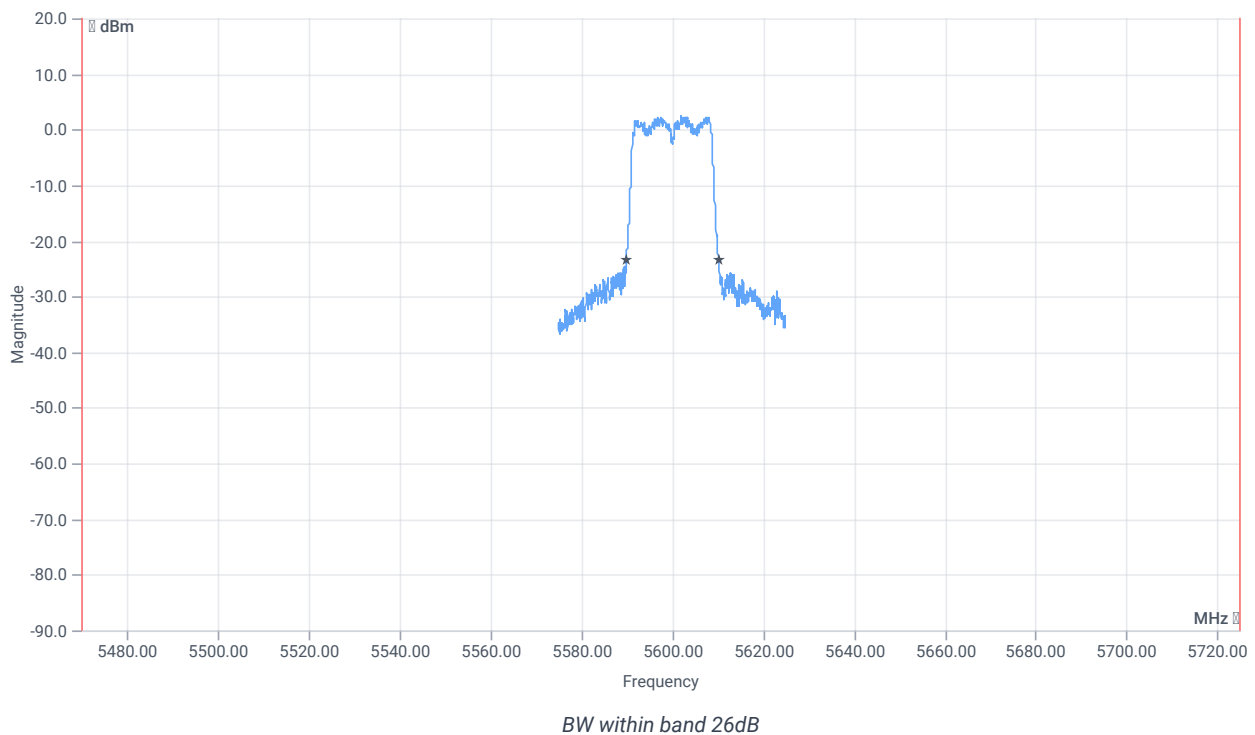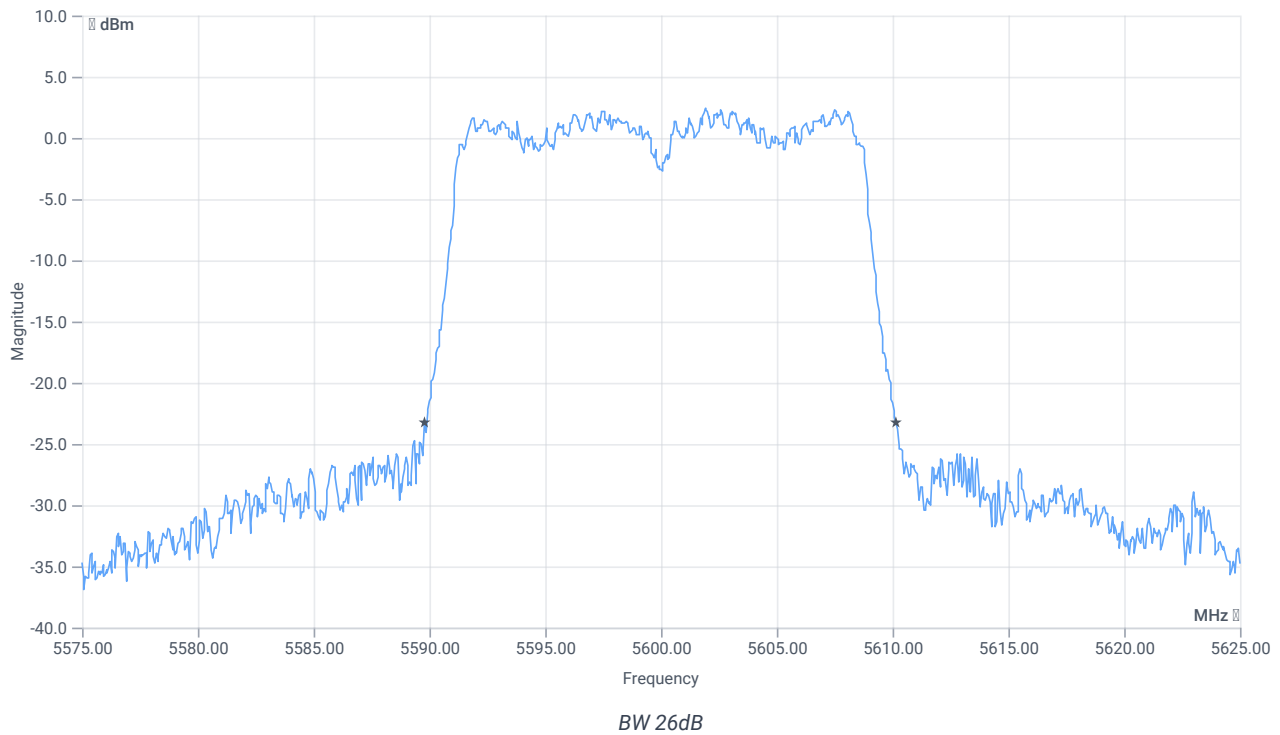

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.4	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5589.7500	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5610.1500	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT20 mode U-NII-2C

References

TC start	12.06.2024 14:31:38
Ambit temp [°C] humidity [rel%]	25.6 28
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT20 mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	True Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5700 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.37	dBm	INFO
Ref. frequency	---	---	5701.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.37 12.73 15
Start [MHz] Stop [MHz]	5675.000 5725.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


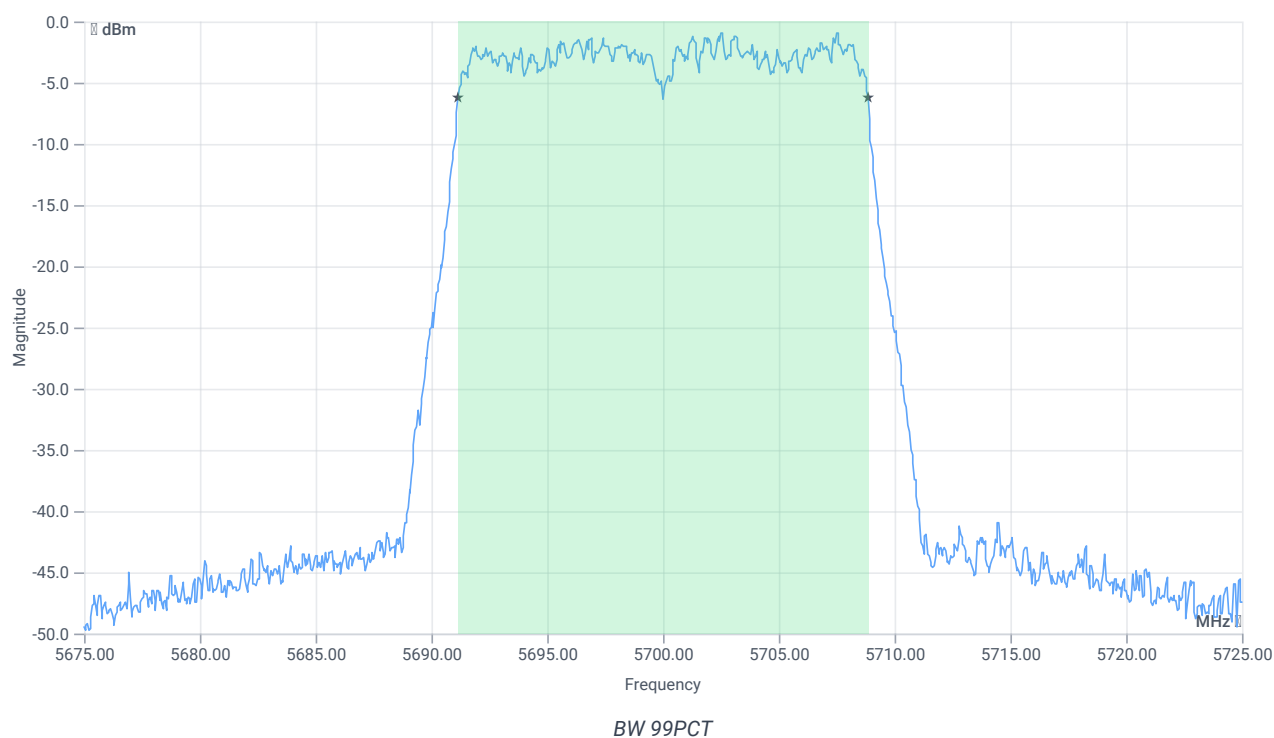


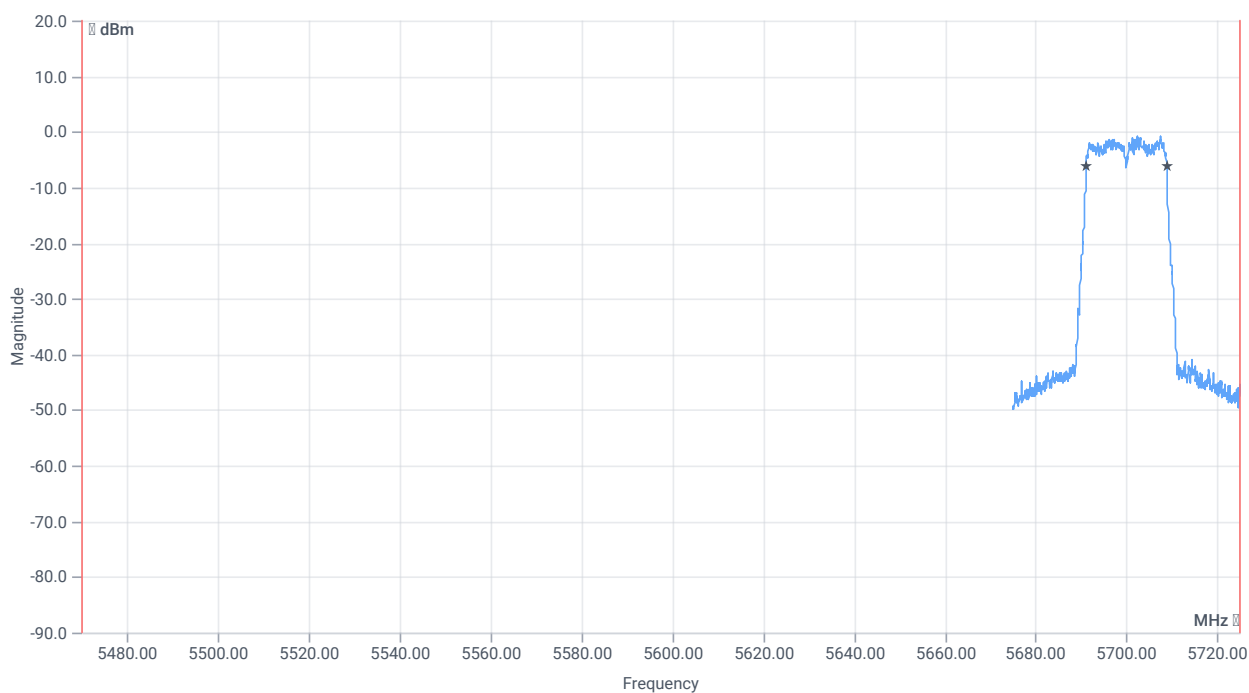

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17.682	MHz	INFO
T1 99%	5470.000000	---	5691.1588	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5708.8412	MHz	

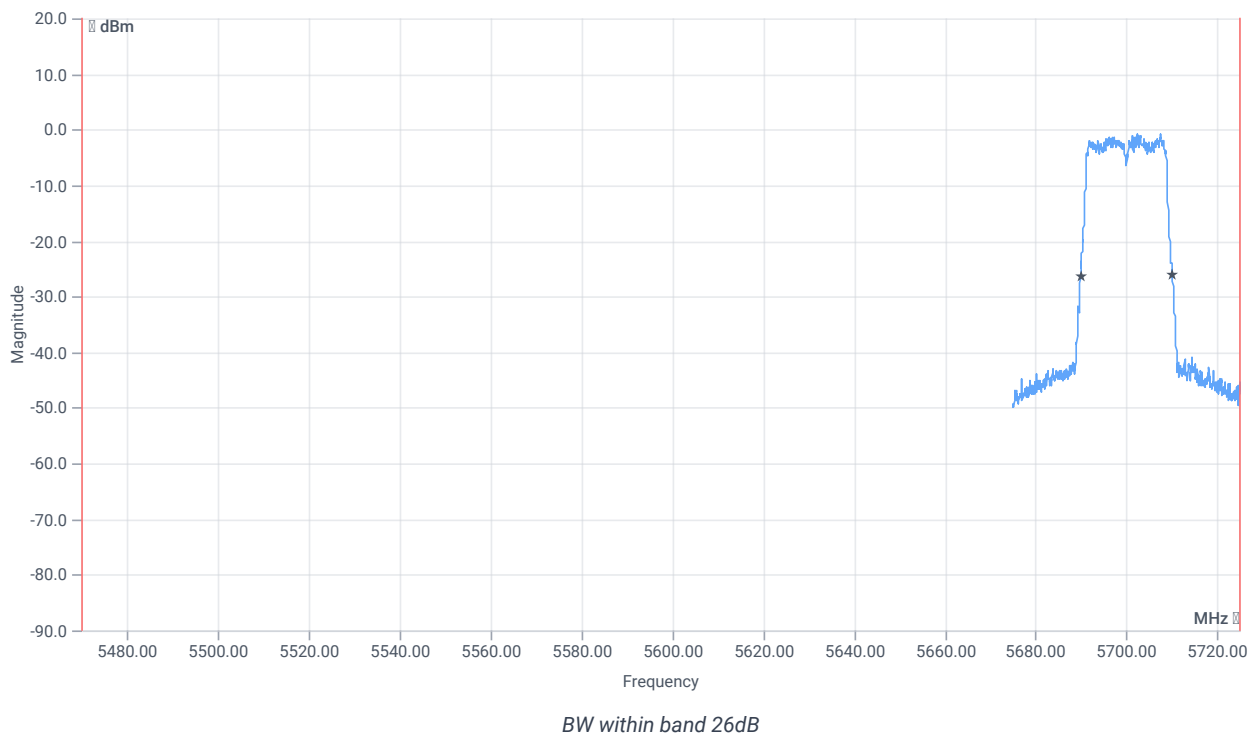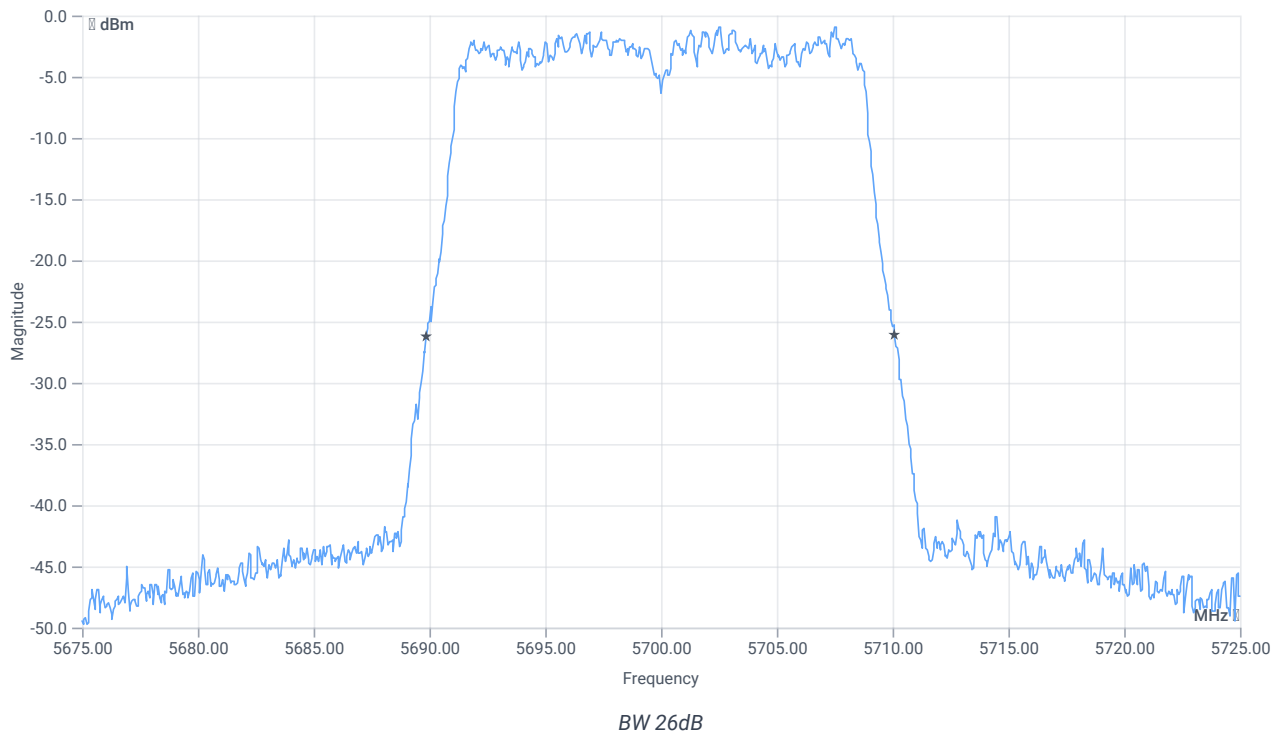

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.25	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5689.8500	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5710.1000	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-2C

References

TC start	12.06.2024 08:41:01
Ambit temp [°C] humidity [rel%]	23.4 35
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT40 mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5510
Frequency mid to test	False Freq [MHz] 5590
Frequency high to test	False Freq [MHz] 5670
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5510 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	1.98	dBm	INFO
Ref. frequency	---	---	5493.820	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.98 12.89 15
Start [MHz] Stop [MHz]	5460.000 5560.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE





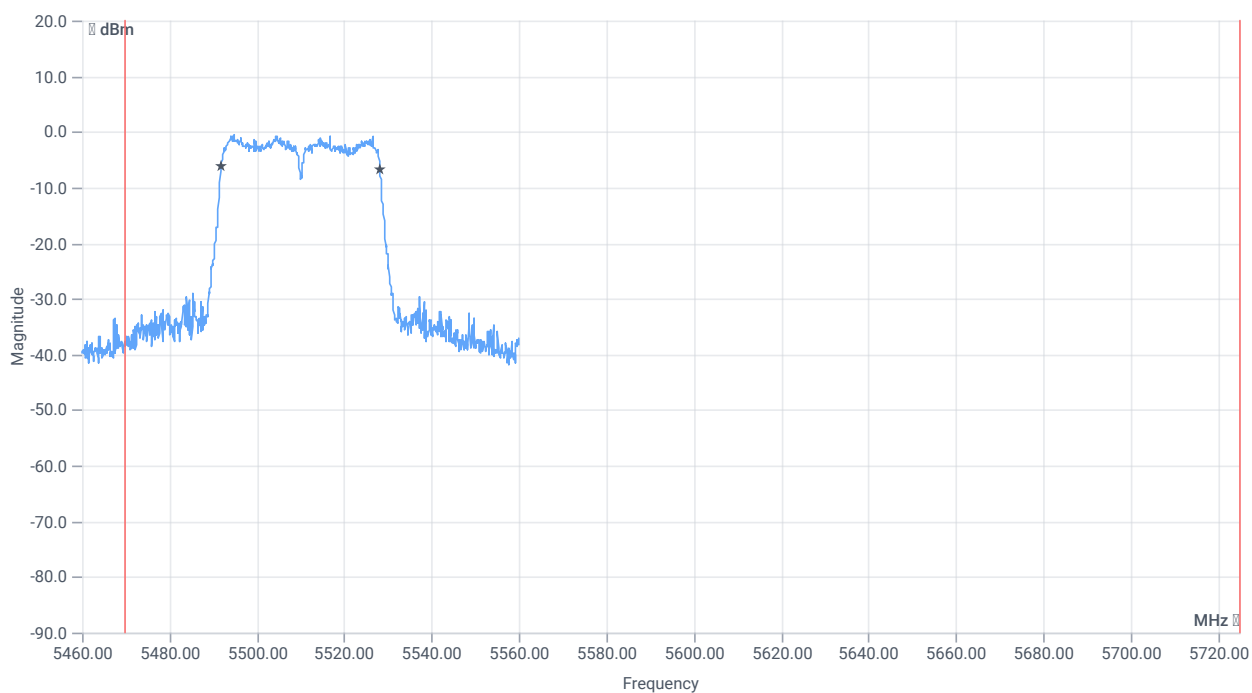

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36.364	MHz	INFO
T1 99%	5470.000000	---	5491.8182	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5528.1818	MHz	

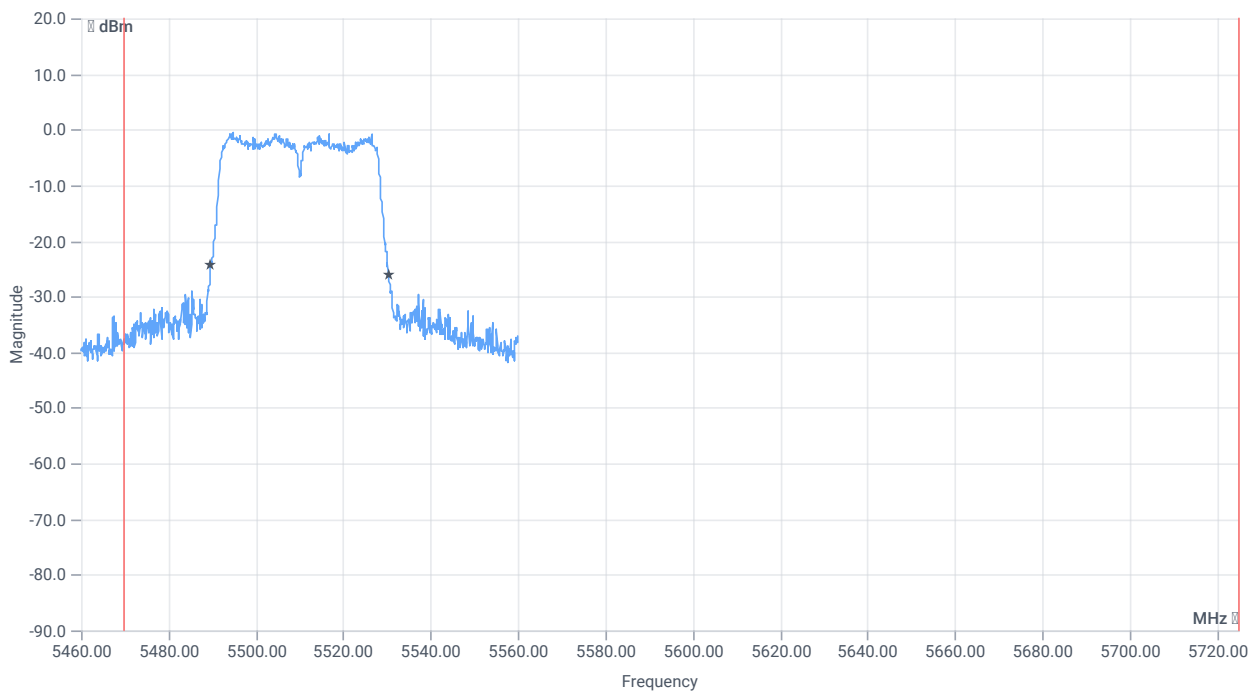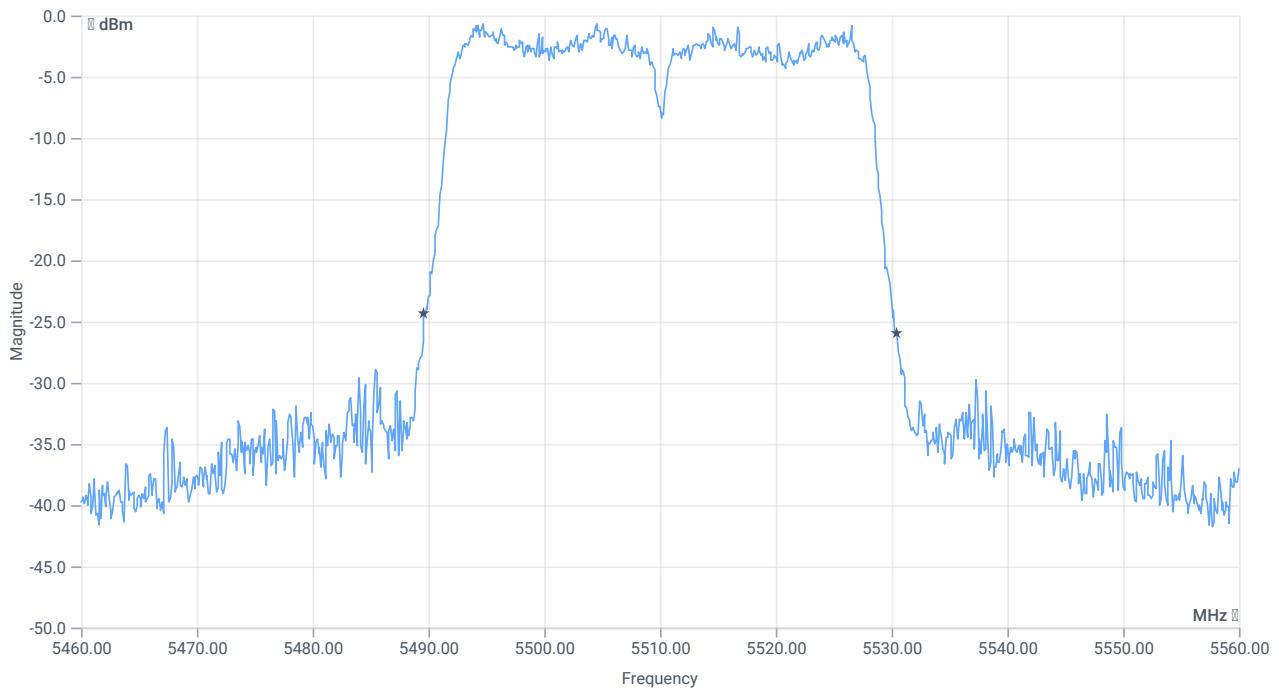

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	40.8	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5489.6000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5530.4000	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-2C

References

TC start	12.06.2024 08:49:16
Ambit temp [°C] humidity [rel%]	23.4 35
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT40 mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5510
Frequency mid to test	True Freq [MHz] 5590
Frequency high to test	False Freq [MHz] 5670
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5590 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.50	dBm	INFO
Ref. frequency	---	---	5574.620	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.50 13.1 15
Start [MHz] Stop [MHz]	5540.000 5640.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE





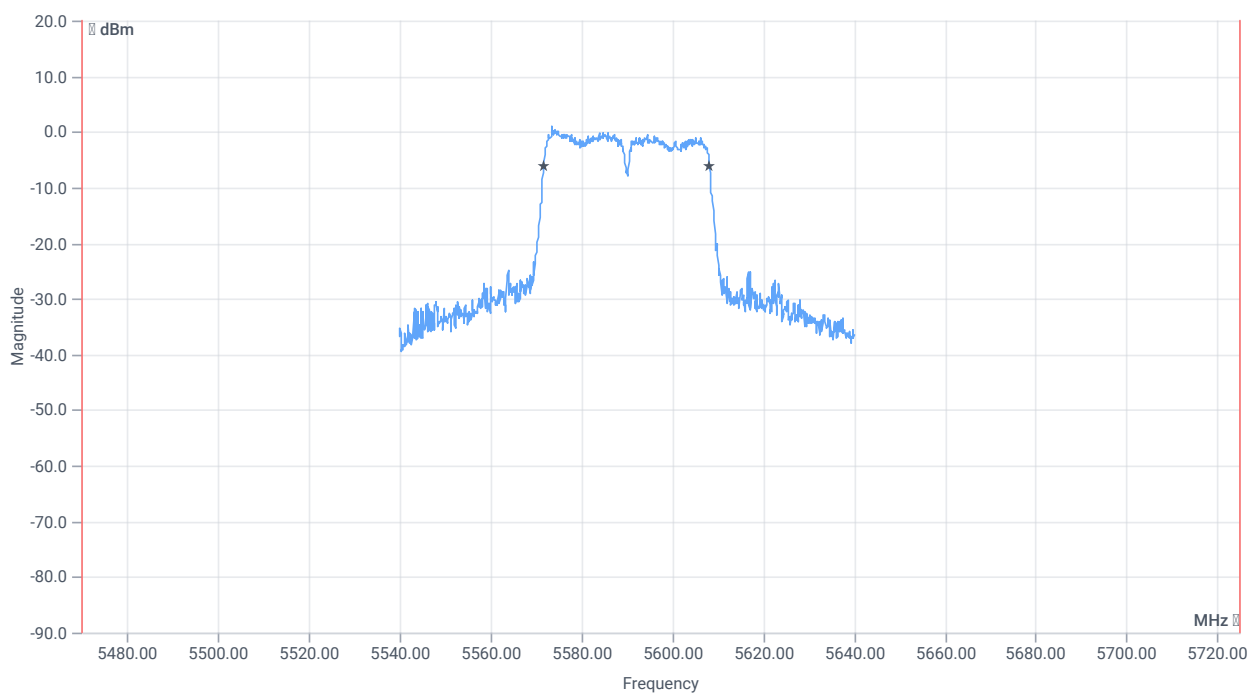

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36.464	MHz	INFO
T1 99%	5470.000000	---	5571.7183	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5608.1818	MHz	

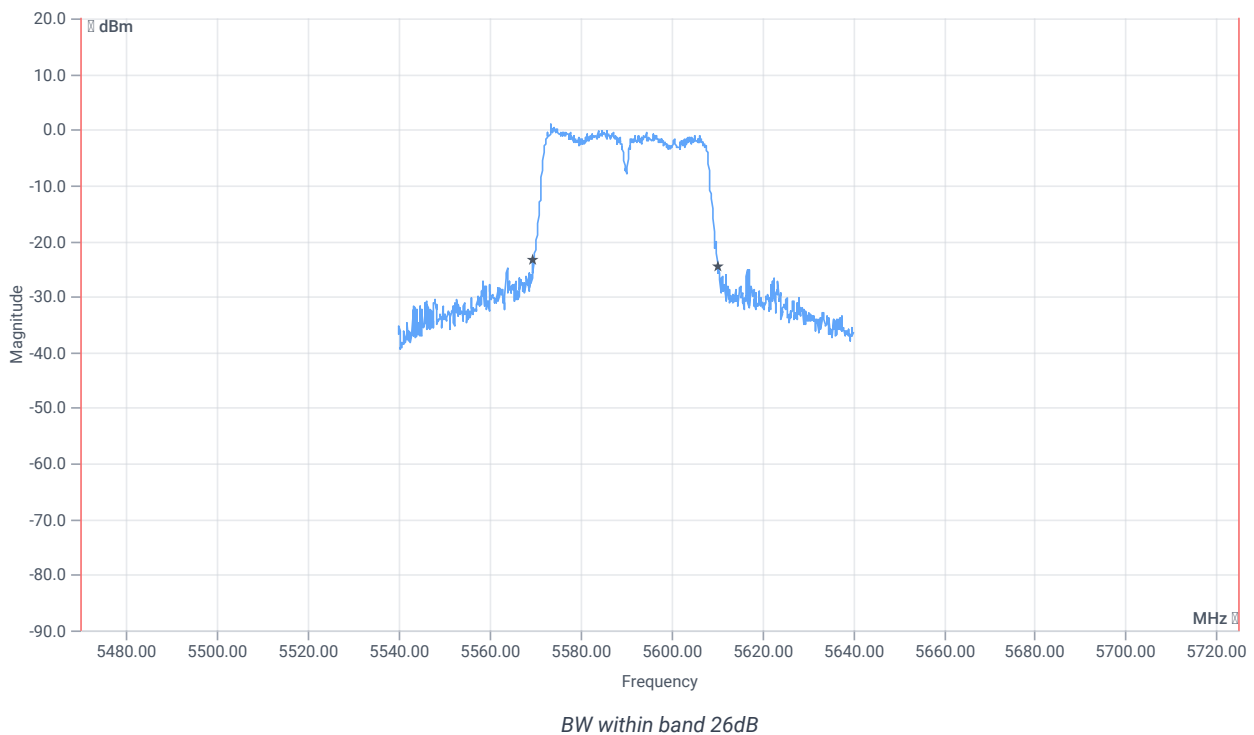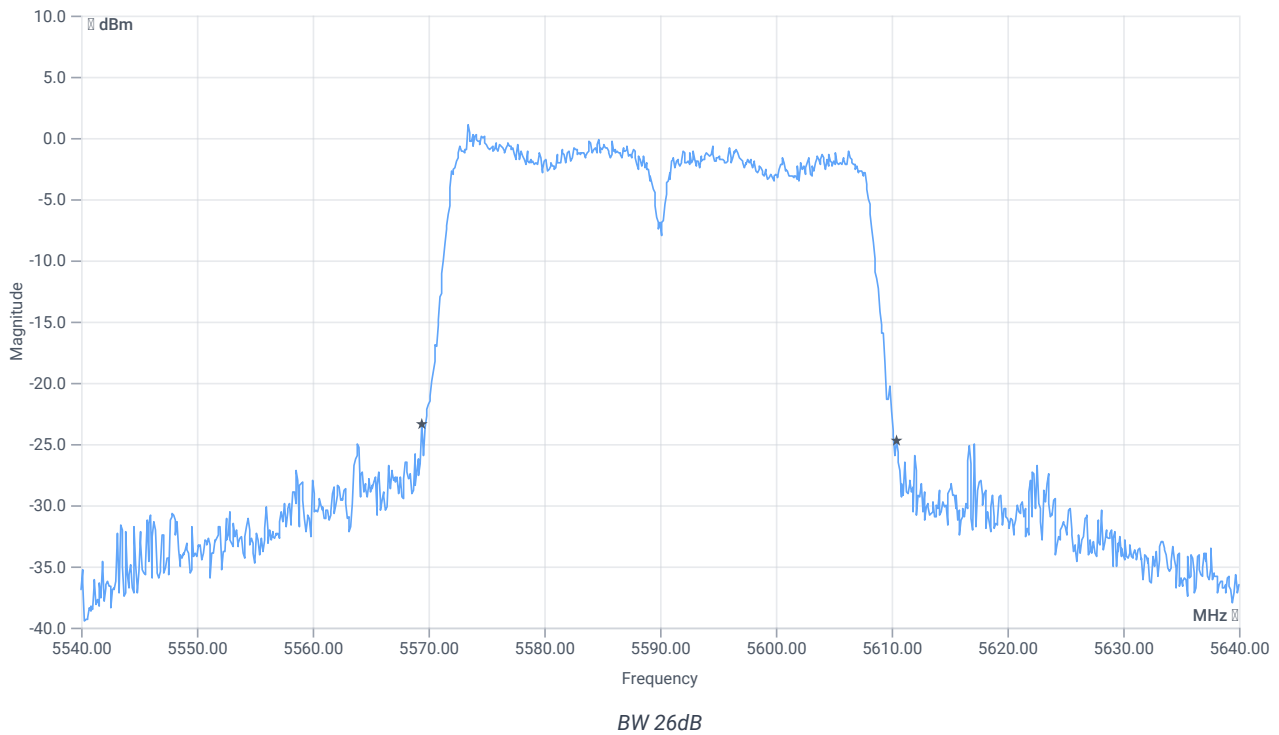

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	41	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5569.4000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5610.4000	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-2C

References

TC start	12.06.2024 09:01:24
Ambit temp [°C] humidity [rel%]	23.6 35
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT40 mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5510
Frequency mid to test	False Freq [MHz] 5590
Frequency high to test	True Freq [MHz] 5670
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5670 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	1.21	dBm	INFO
Ref. frequency	---	---	5674.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.21 12.81 15
Start [MHz] Stop [MHz]	5620.000 5720.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

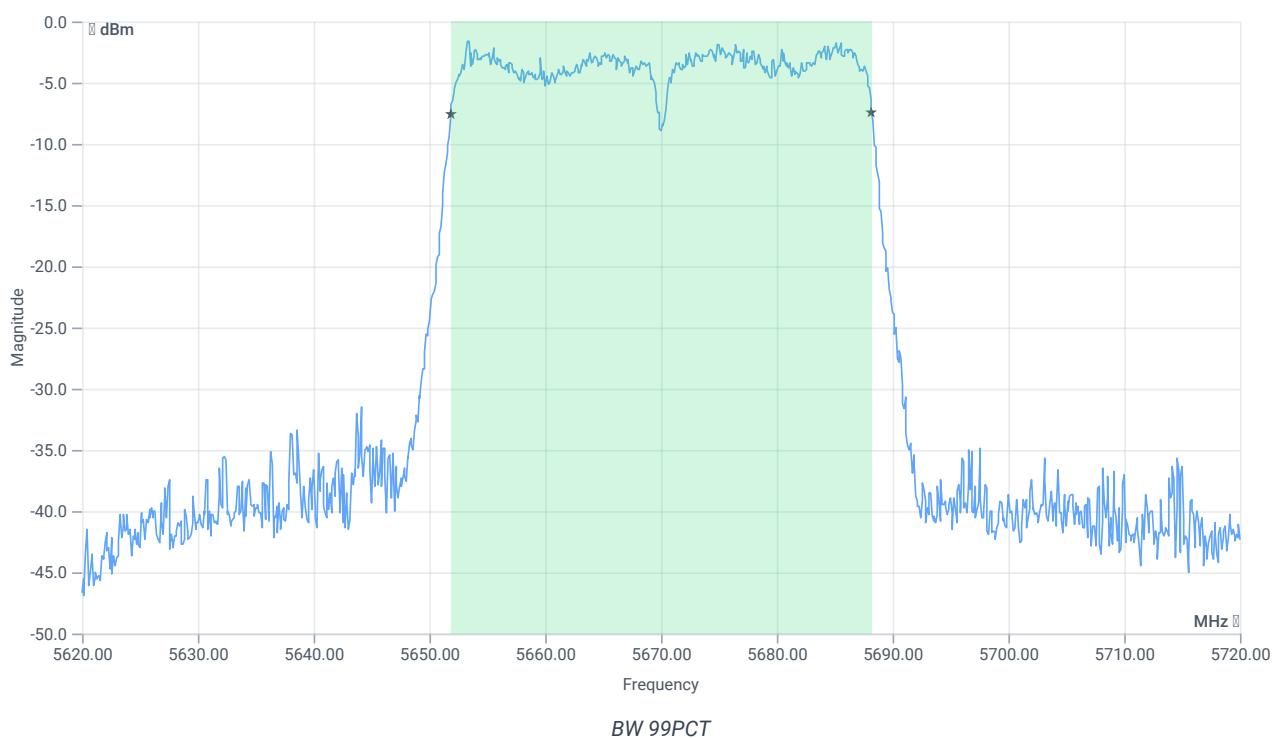


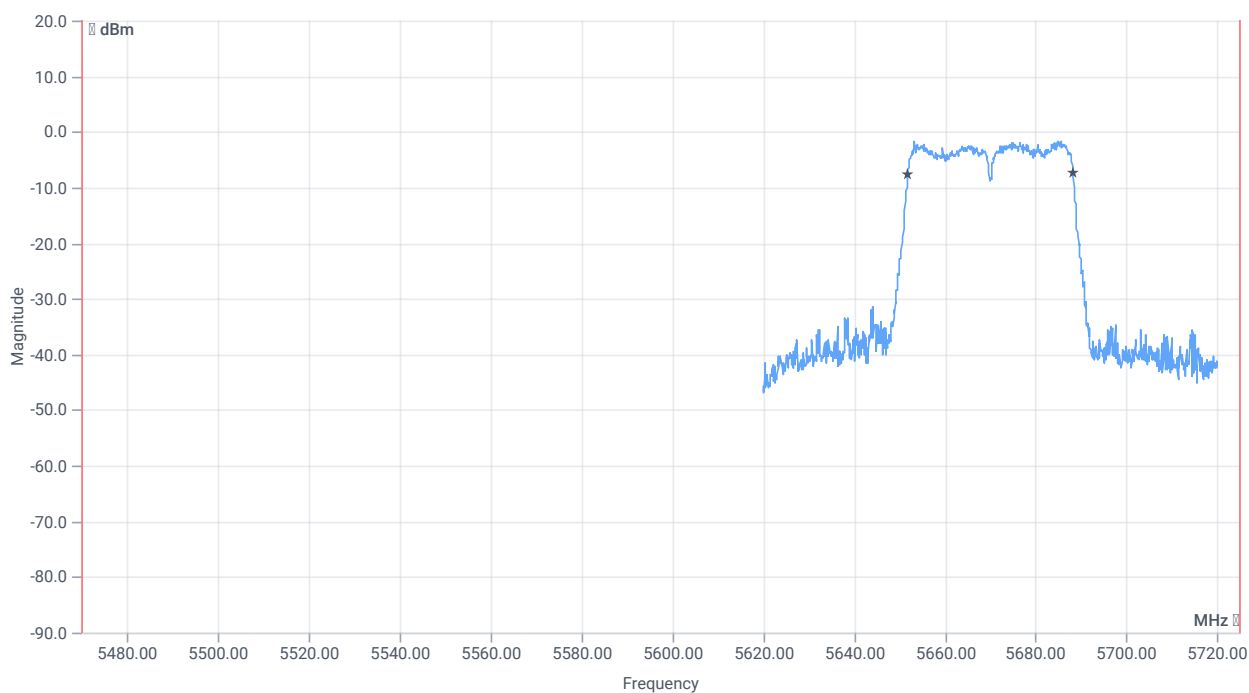


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36.364	MHz	INFO
T1 99%	5470.000000	---	5651.8182	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5688.1818	MHz	

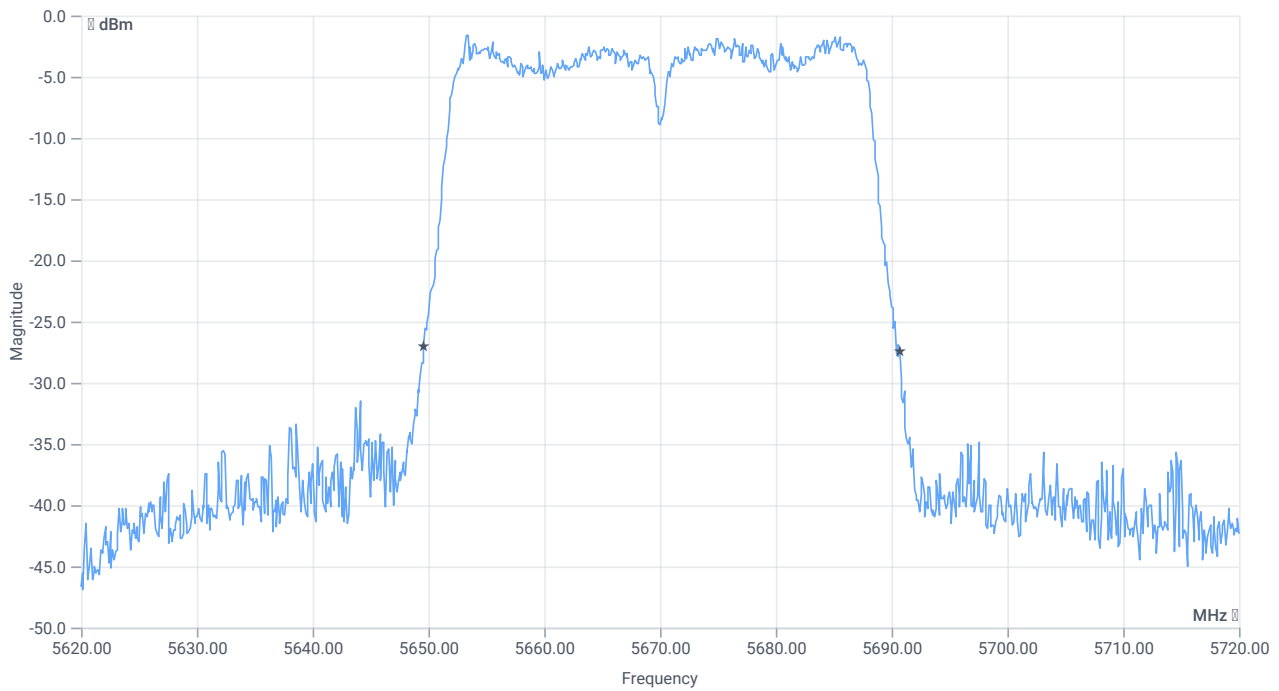

BW 26dB

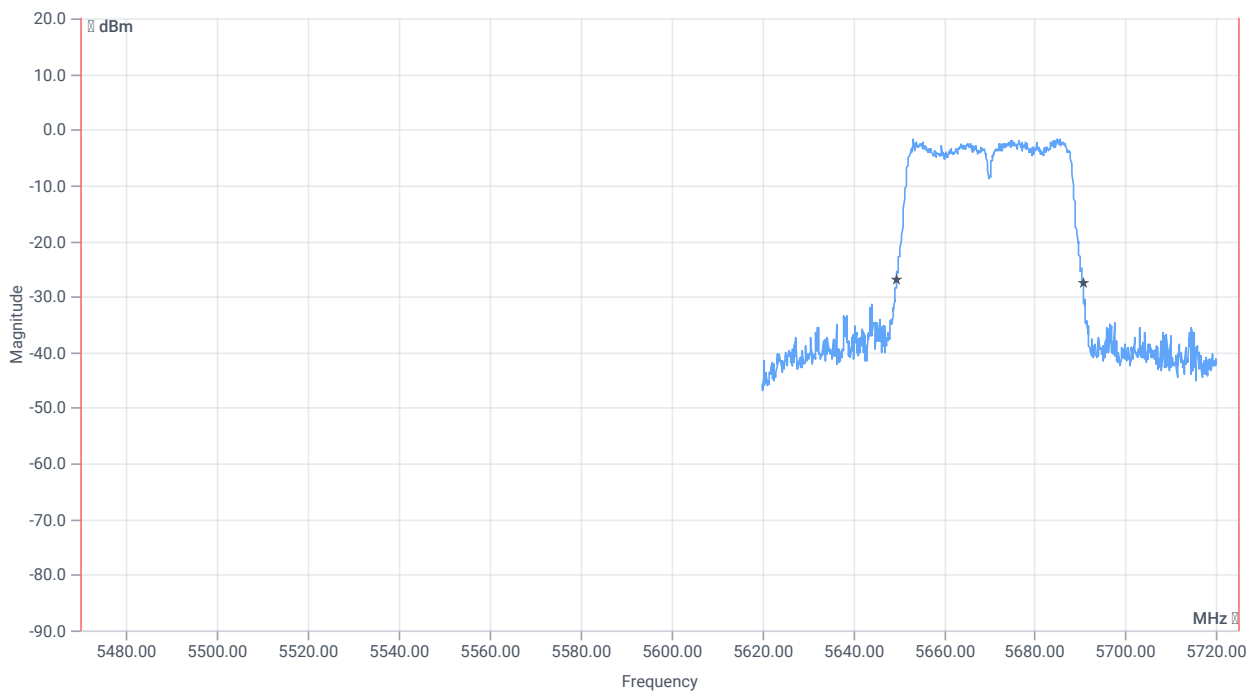

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	41.1	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5649.6000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5690.7000	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-2C

References

TC start	12.06.2024 12:21:51
Ambit temp [°C] humidity [rel%]	24.9 30
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT40 mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5510
Frequency mid to test	False Freq [MHz] 5590
Frequency high to test	False Freq [MHz] 5670
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5510 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.61	dBm	INFO
Ref. frequency	---	---	5506.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.61 12.77 15
Start [MHz] Stop [MHz]	5460.000 5560.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

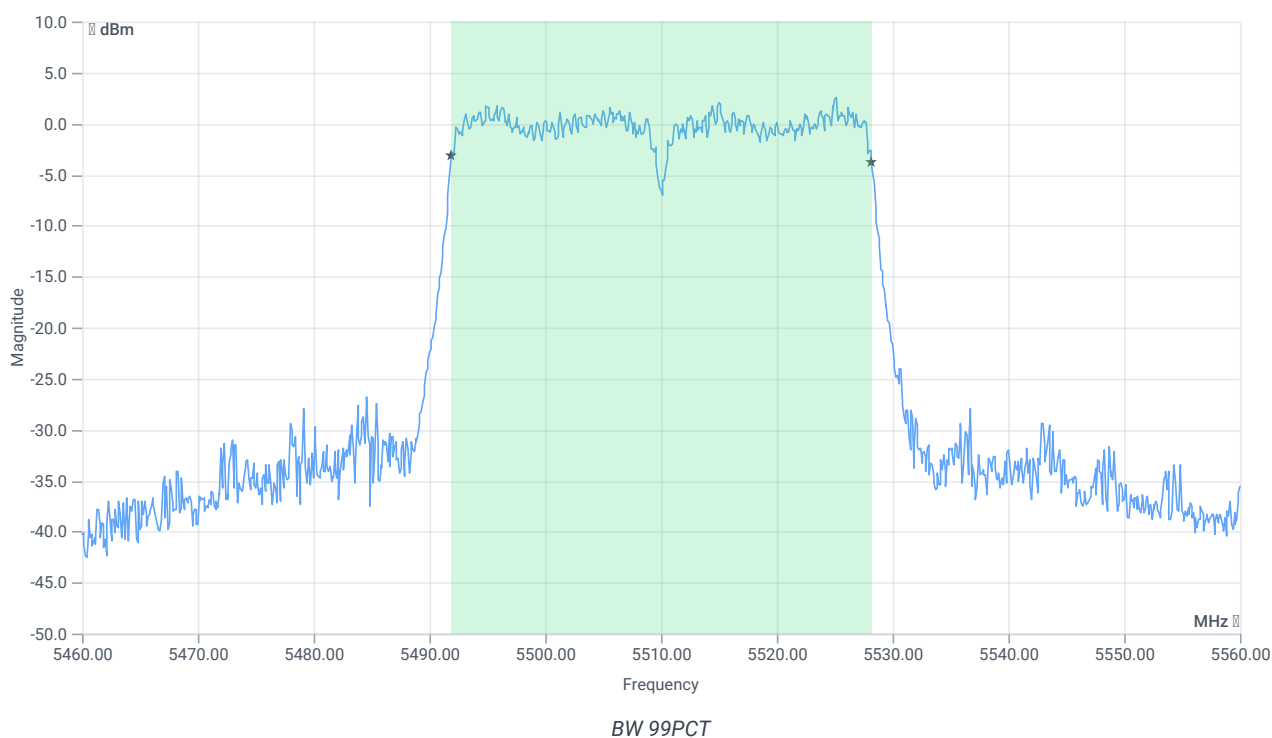




BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36.264	MHz	INFO
T1 99%	5470.000000	---	5491.9181	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5528.1818	MHz	

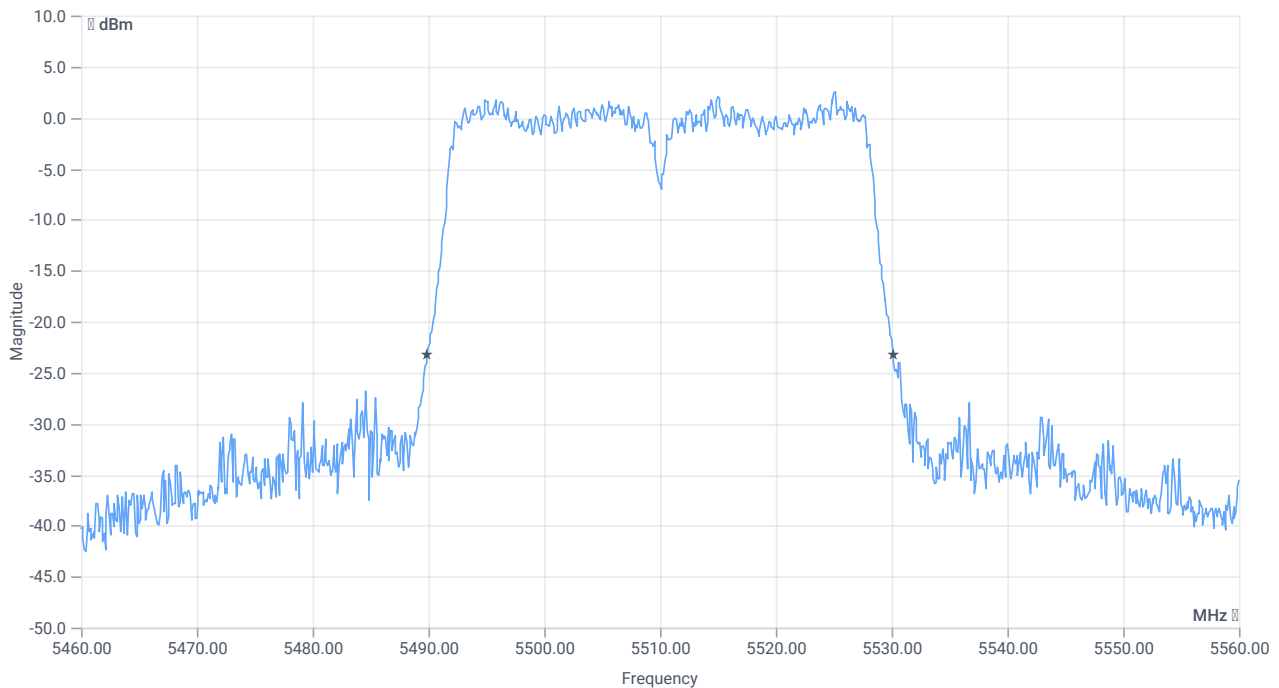

BW 26dB



BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	40.2	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5489.9000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5530.1000	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-2C

References

TC start	12.06.2024 12:30:01
Ambit temp [°C] humidity [rel%]	25.0 30
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT40 mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5510
Frequency mid to test	True Freq [MHz] 5590
Frequency high to test	False Freq [MHz] 5670
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5590 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.63	dBm	INFO
Ref. frequency	---	---	5605.180	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.63 12.81 15
Start [MHz] Stop [MHz]	5540.000 5640.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


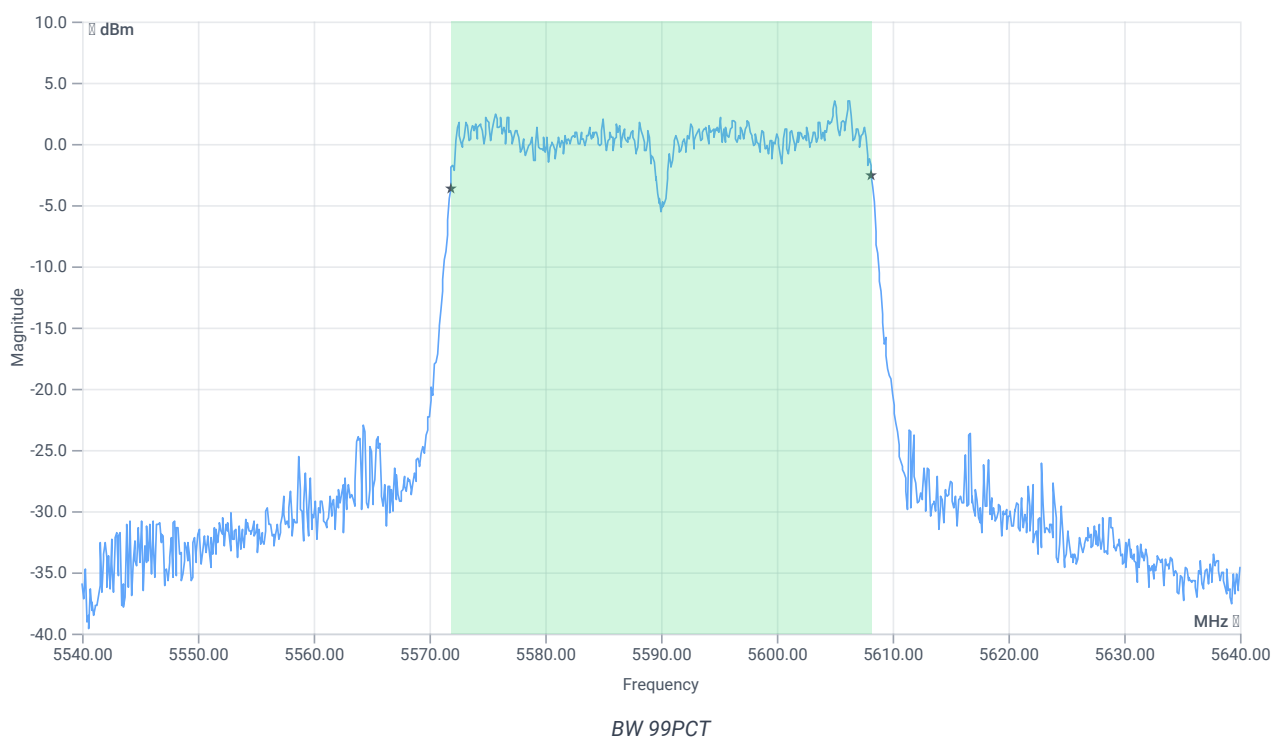


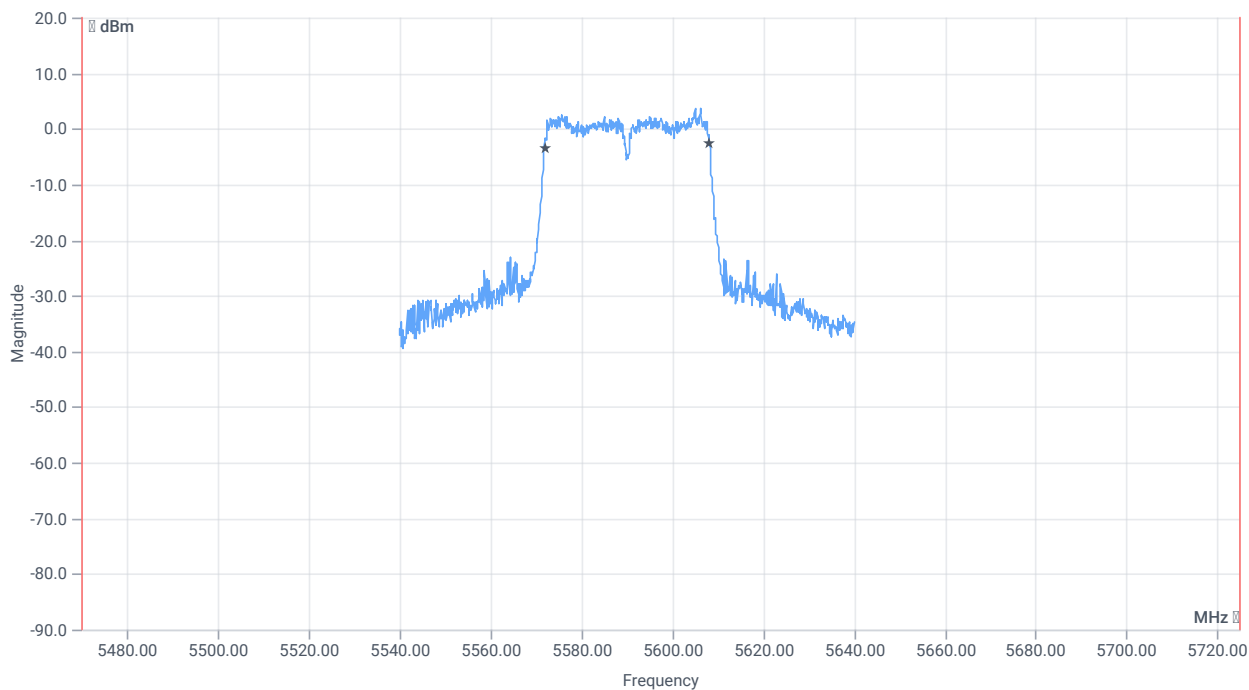

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36.364	MHz	INFO
T1 99%	5470.000000	---	5571.8182	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5608.1818	MHz	

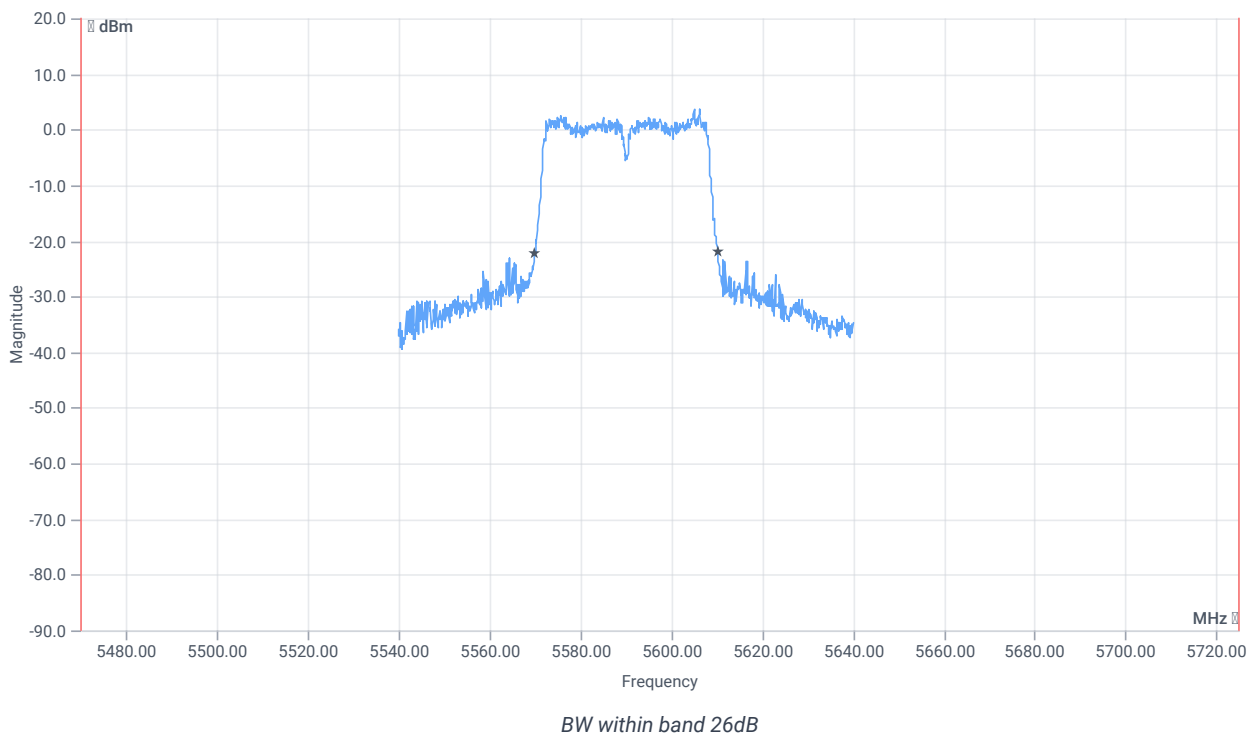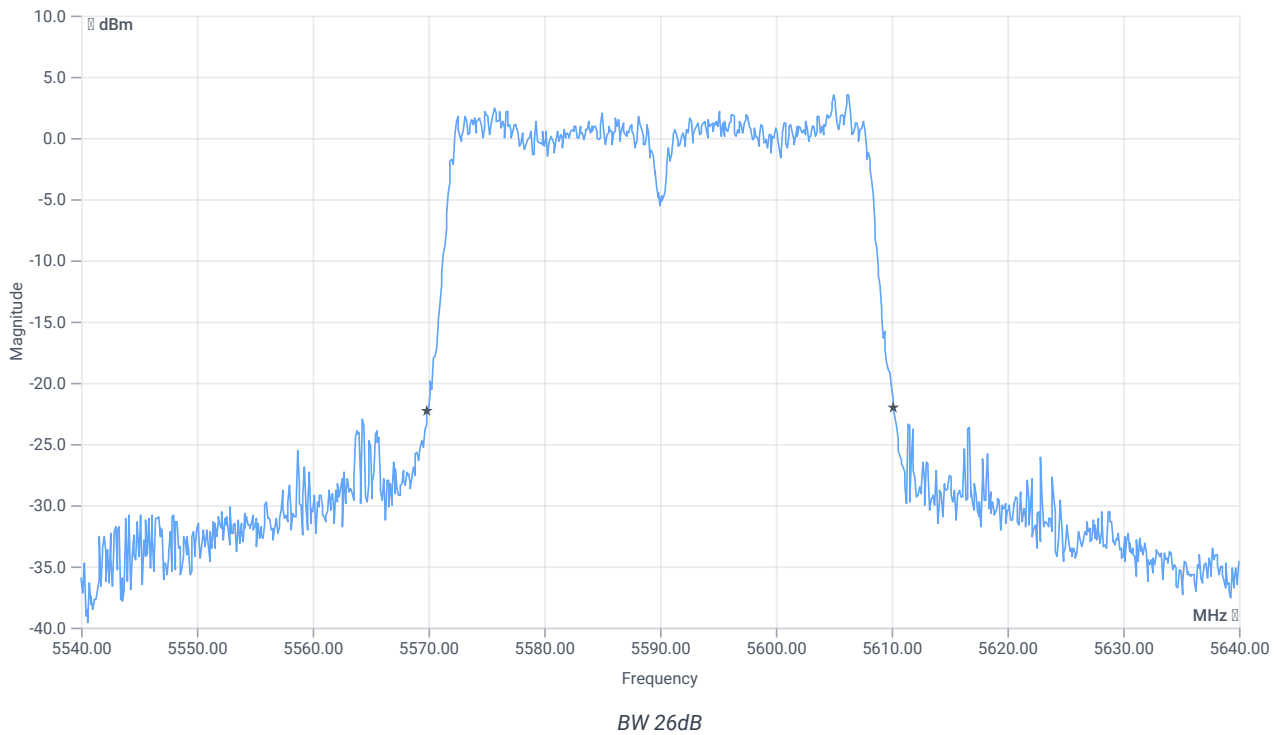

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	40.3	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5569.9000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5610.2000	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT40 mode U-NII-2C

References

TC start	12.06.2024 12:49:41
Ambit temp [°C] humidity [rel%]	25.1 30
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT40 mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5510
Frequency mid to test	False Freq [MHz] 5590
Frequency high to test	True Freq [MHz] 5670
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5670 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	1.68	dBm	INFO
Ref. frequency	---	---	5654.020	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.68 12.68 15
Start [MHz] Stop [MHz]	5620.000 5720.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE





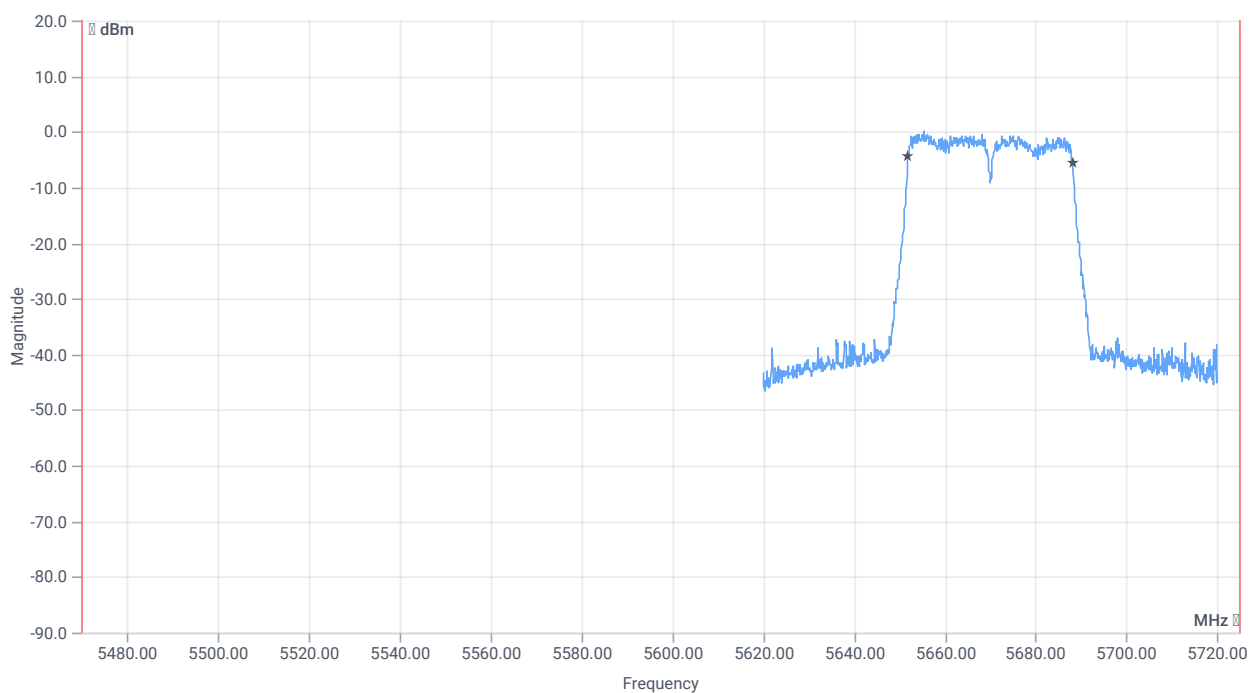

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36.164	MHz	INFO
T1 99%	5470.000000	---	5651.9181	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5688.0819	MHz	

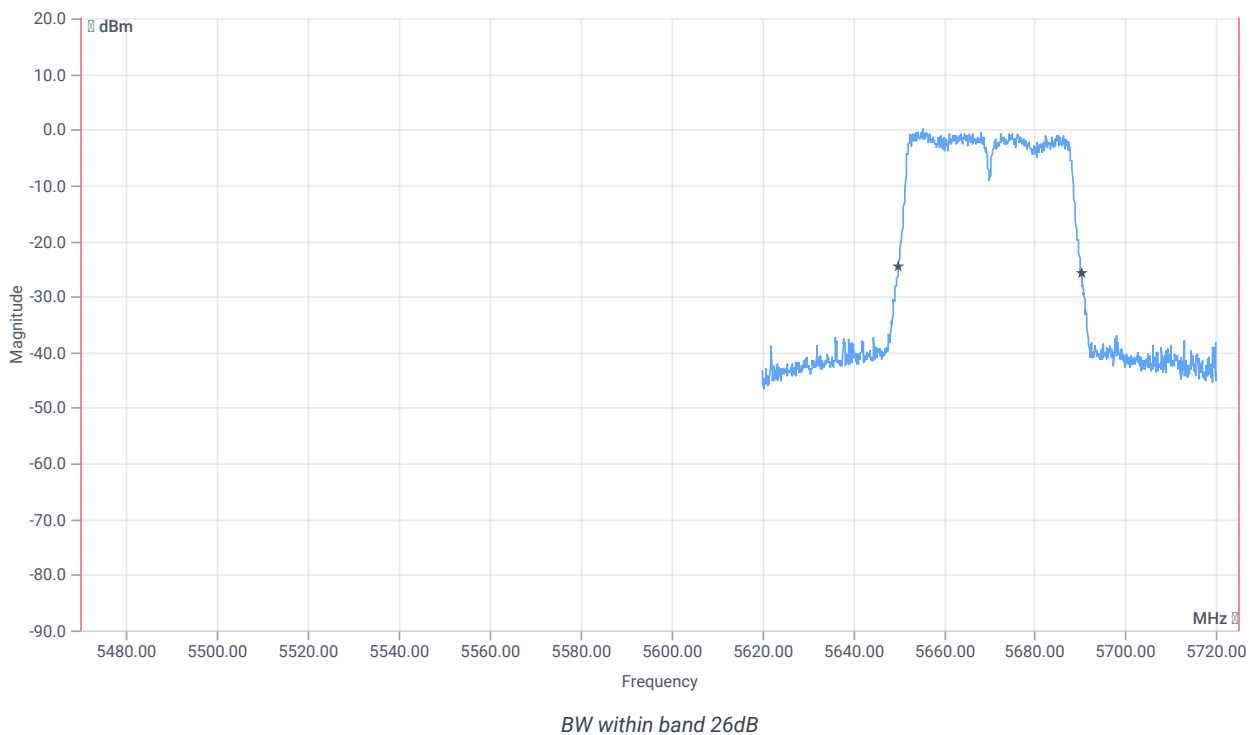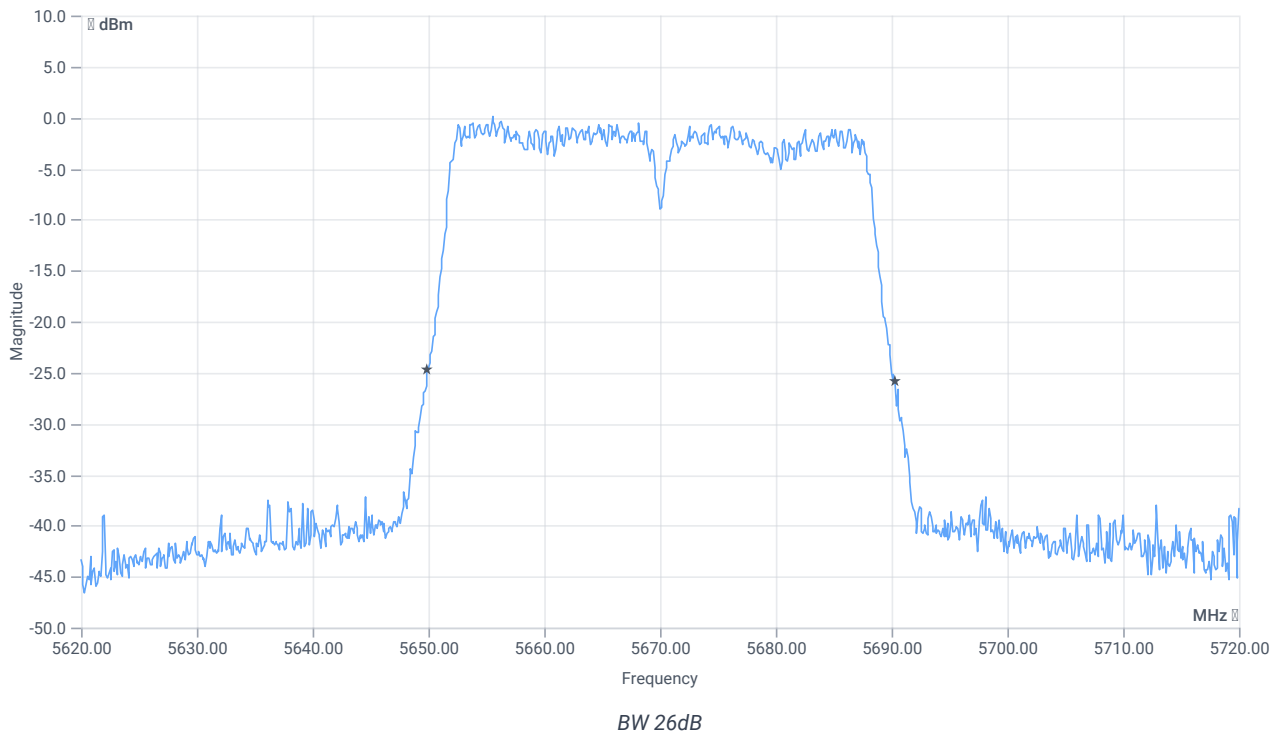

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	40.4	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5649.9000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5690.3000	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-2C

References

TC start	12.06.2024 09:12:52
Ambit temp [°C] humidity [rel%]	23.7 35
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT80 mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5530
Frequency mid to test	False Freq [MHz] 5610
Frequency high to test	False Freq [MHz] 5690
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5530 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-4.08	dBm	INFO
Ref. frequency	---	---	5504.430	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.92 12.98 10
Start [MHz] Stop [MHz]	5430.000 5630.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


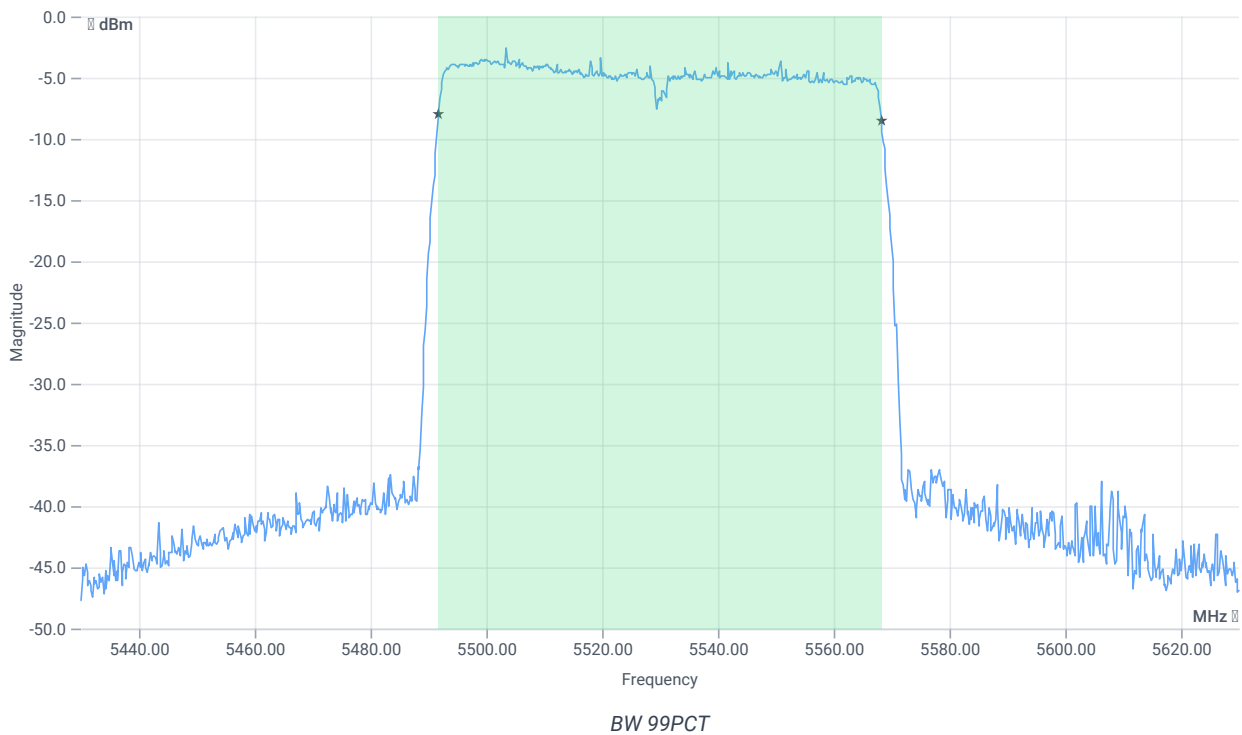


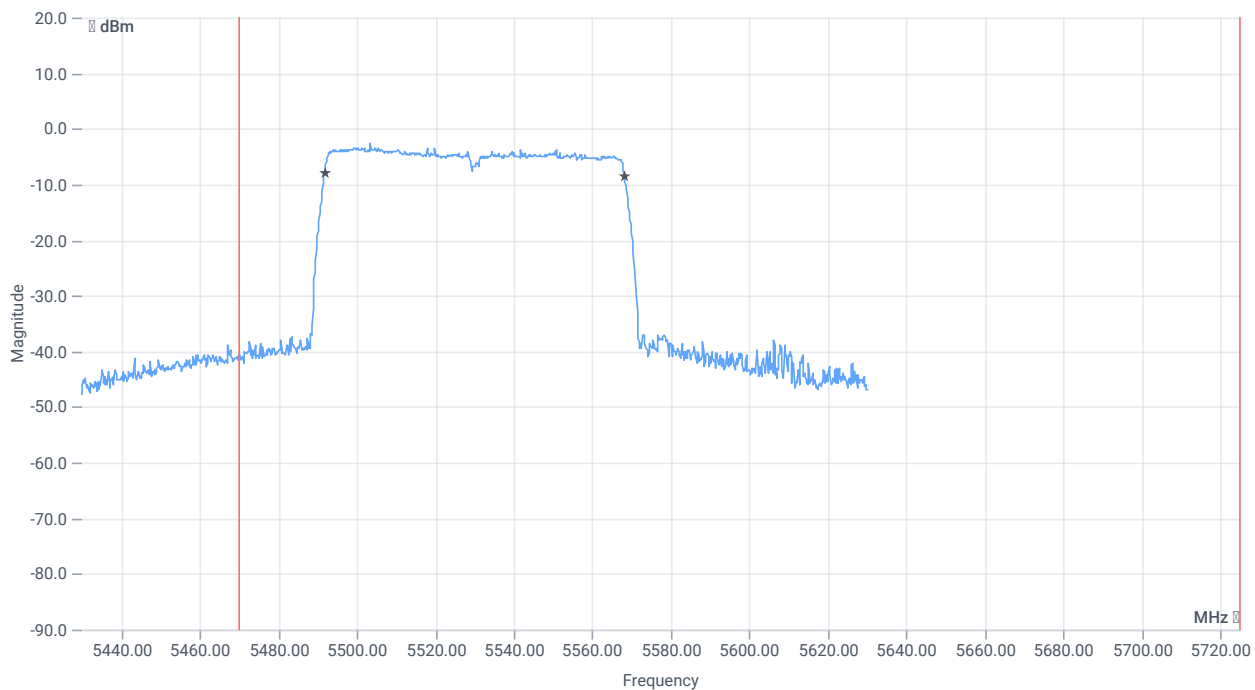

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	76.324	MHz	INFO
T1 99%	5470.000000	---	5491.8382	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5568.1618	MHz	

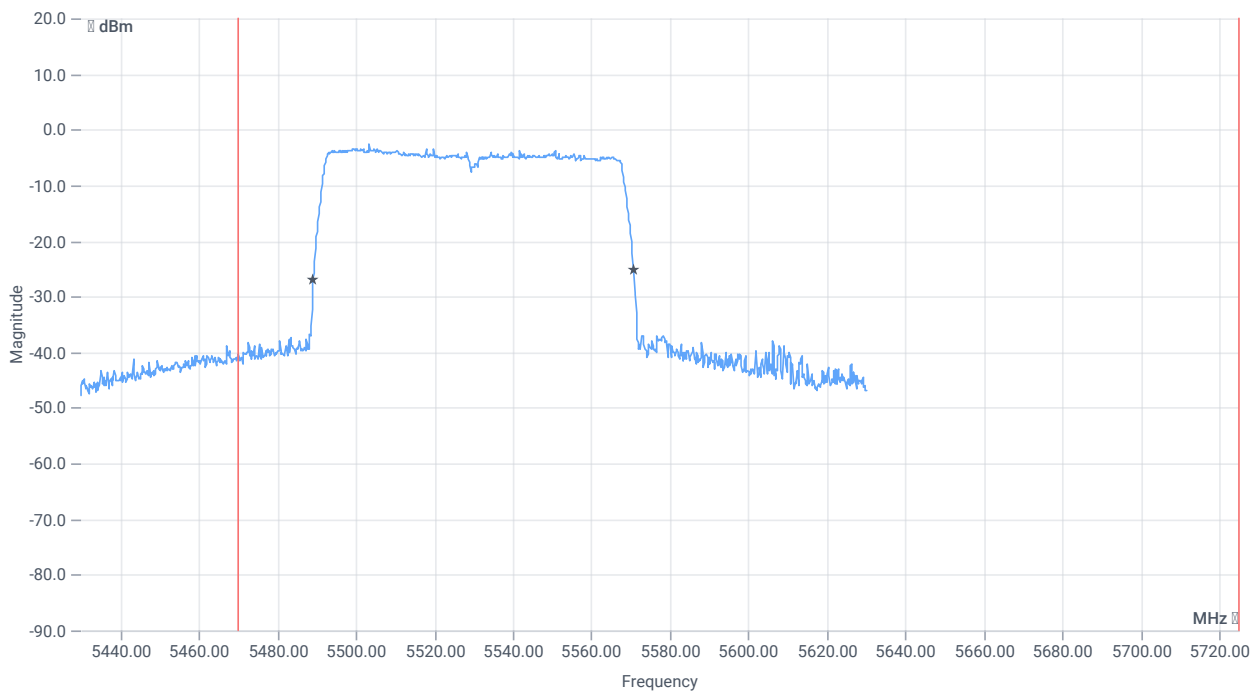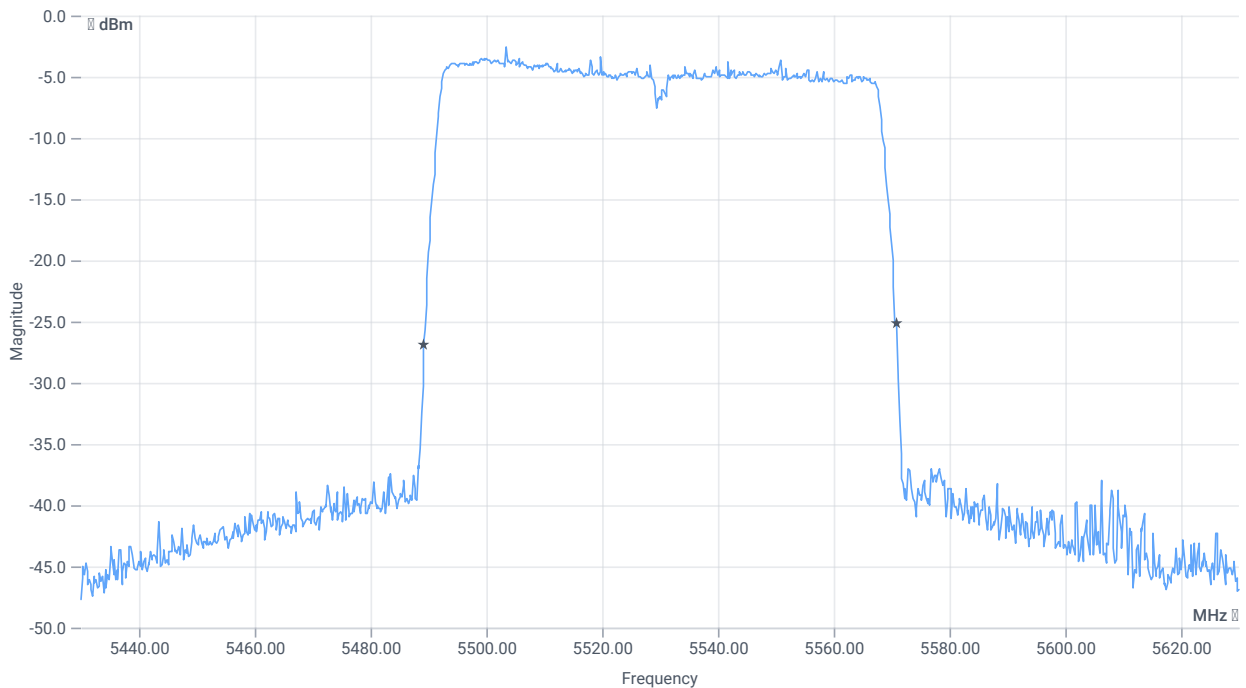

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	81.6	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5489.2000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5570.8000	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-2C

References

TC start	12.06.2024 09:25:55
Ambit temp [°C] humidity [rel%]	23.8 35
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT80 mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5530
Frequency mid to test	True Freq [MHz] 5610
Frequency high to test	False Freq [MHz] 5690
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5610 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-5.12	dBm	INFO
Ref. frequency	---	---	5575.830	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.88 13.04 5
Start [MHz] Stop [MHz]	5510.000 5710.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


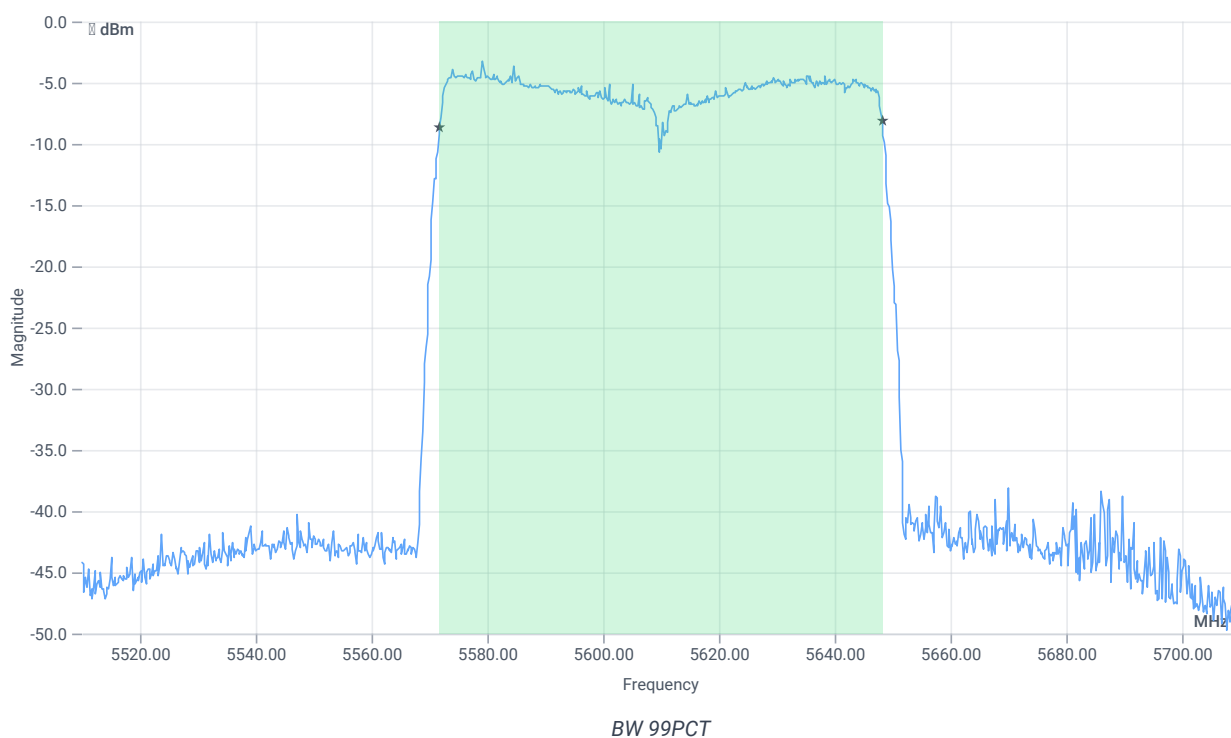


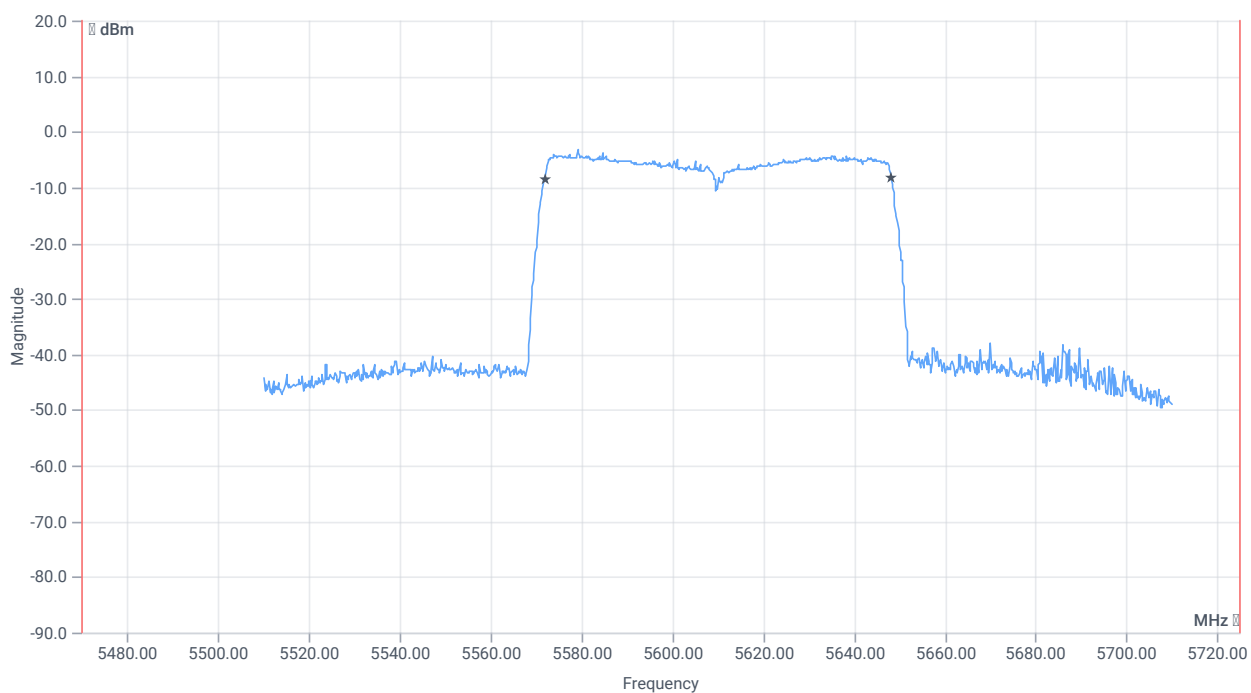

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	76.324	MHz	INFO
T1 99%	5470.000000	---	5571.8382	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5648.1618	MHz	

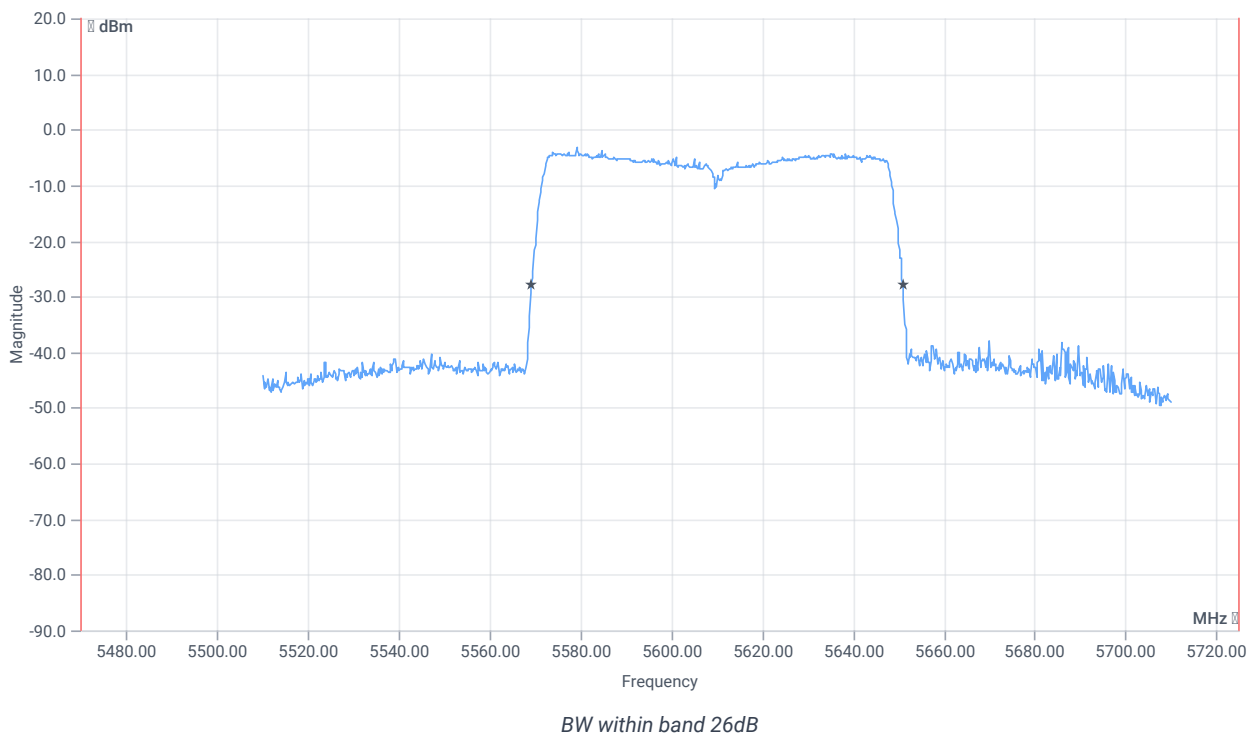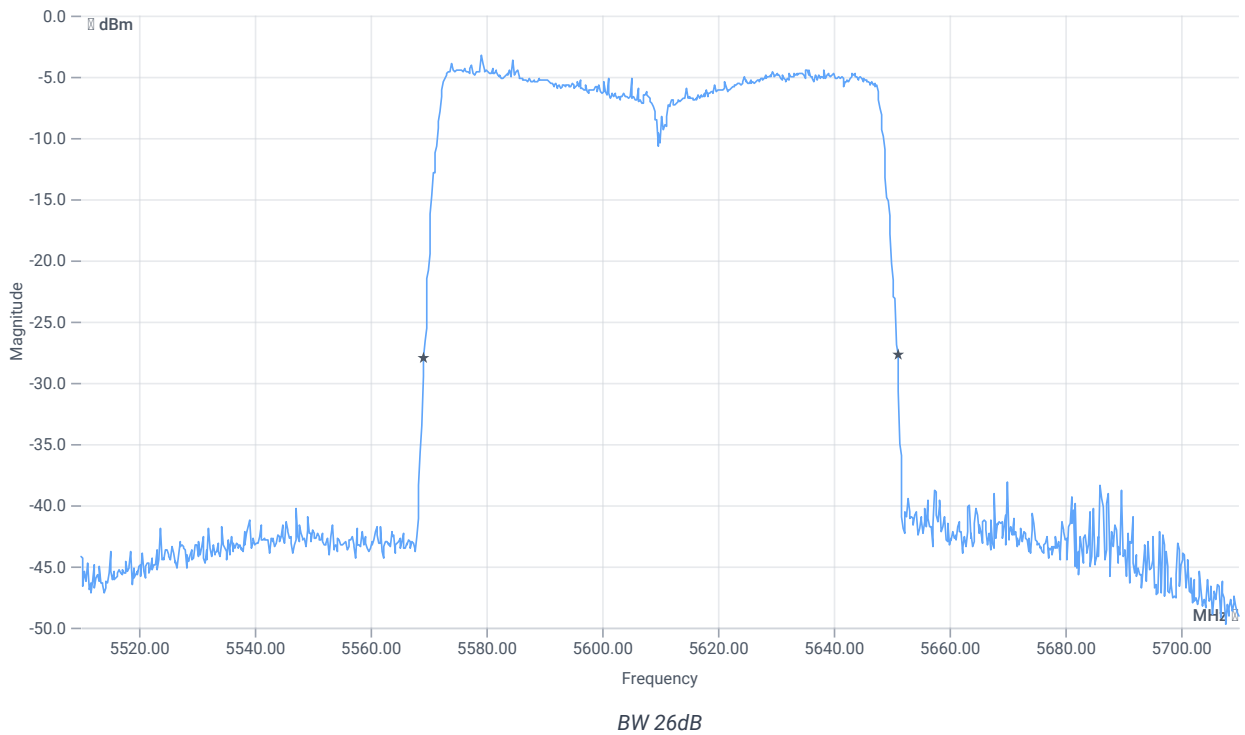

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	81.8	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5569.2000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5651.0000	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-2C

References

TC start	12.06.2024 09:44:15
Ambit temp [°C] humidity [rel%]	24.0 34
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT80 mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5530
Frequency mid to test	False Freq [MHz] 5610
Frequency high to test	True Freq [MHz] 5690
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5690 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-4.37	dBm	INFO
Ref. frequency	---	---	5706.580	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.63 12.79 10
Start [MHz] Stop [MHz]	5590.000 5790.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


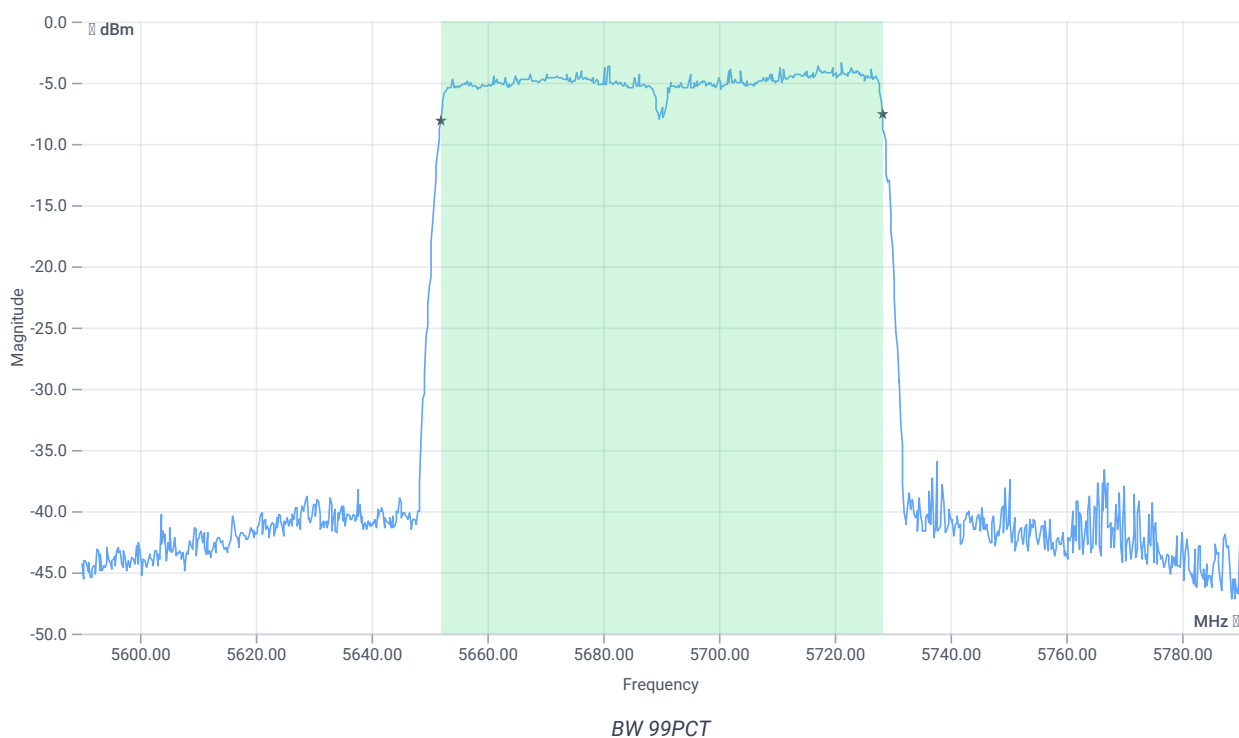


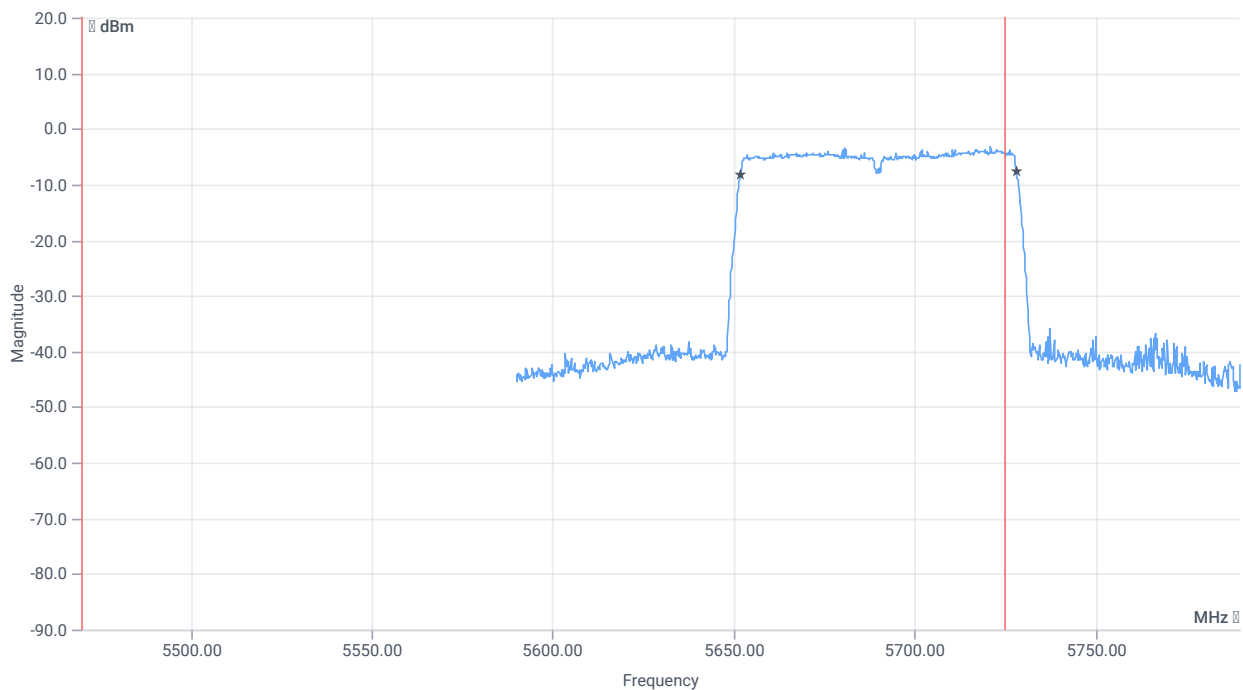

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	76.124	MHz	INFO
T1 99%	5470.000000	---	5652.0380	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5728.1618	MHz	

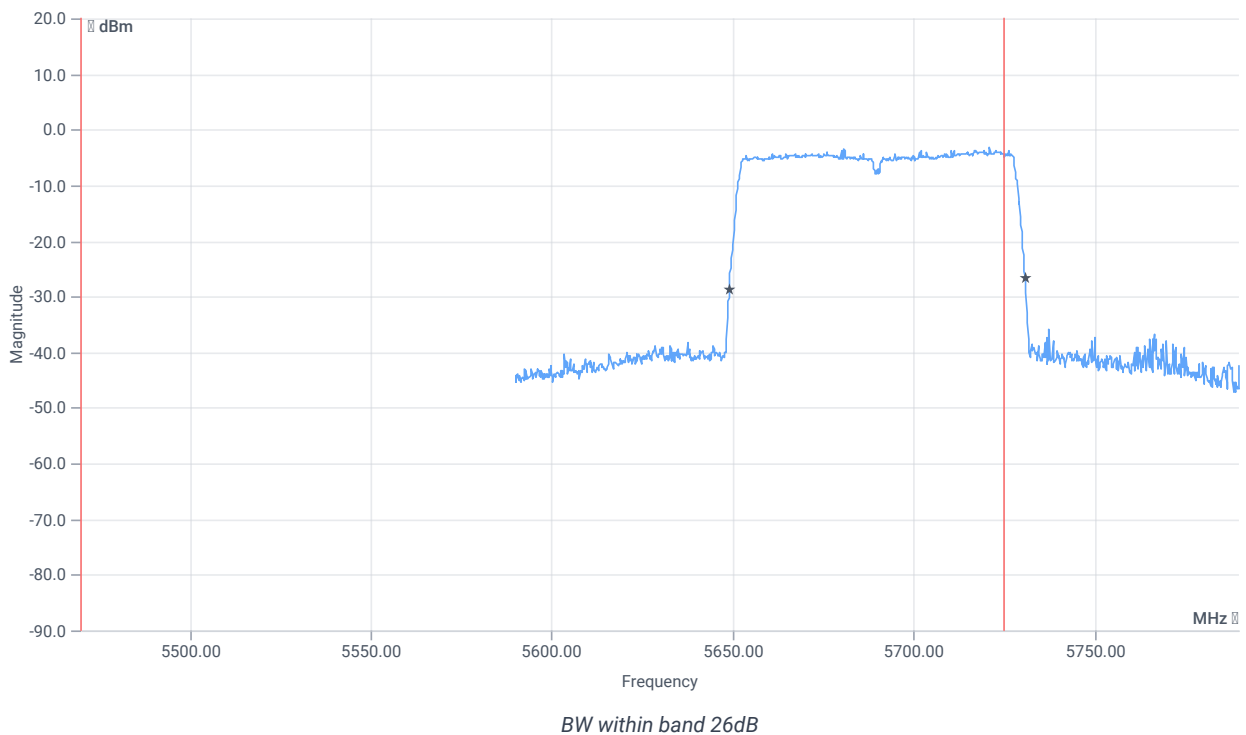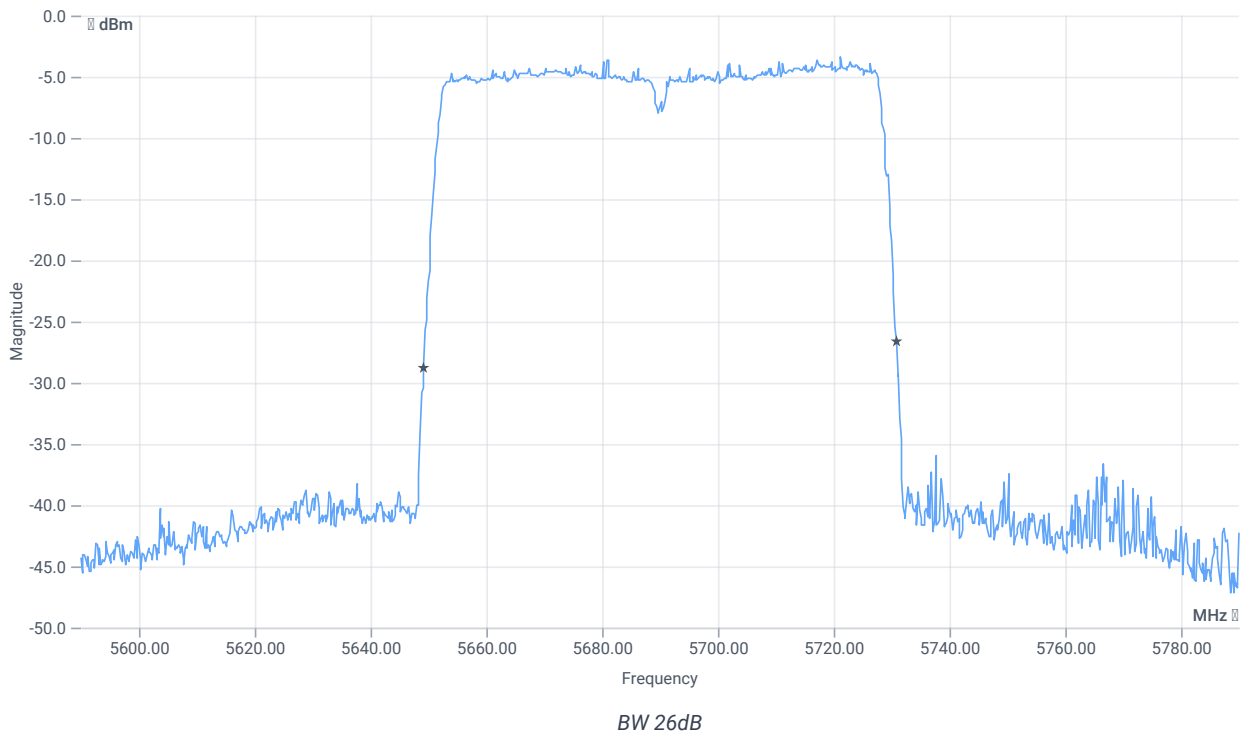

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	81.6	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5649.2000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5730.8000	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-2C

References

TC start	12.06.2024 13:02:39
Ambit temp [°C] humidity [rel%]	25.2 29
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT80 mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5530
Frequency mid to test	False Freq [MHz] 5610
Frequency high to test	False Freq [MHz] 5690
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5530 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-2.16	dBm	INFO
Ref. frequency	---	---	5512.620	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.84 12.88 10
Start [MHz] Stop [MHz]	5430.000 5630.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


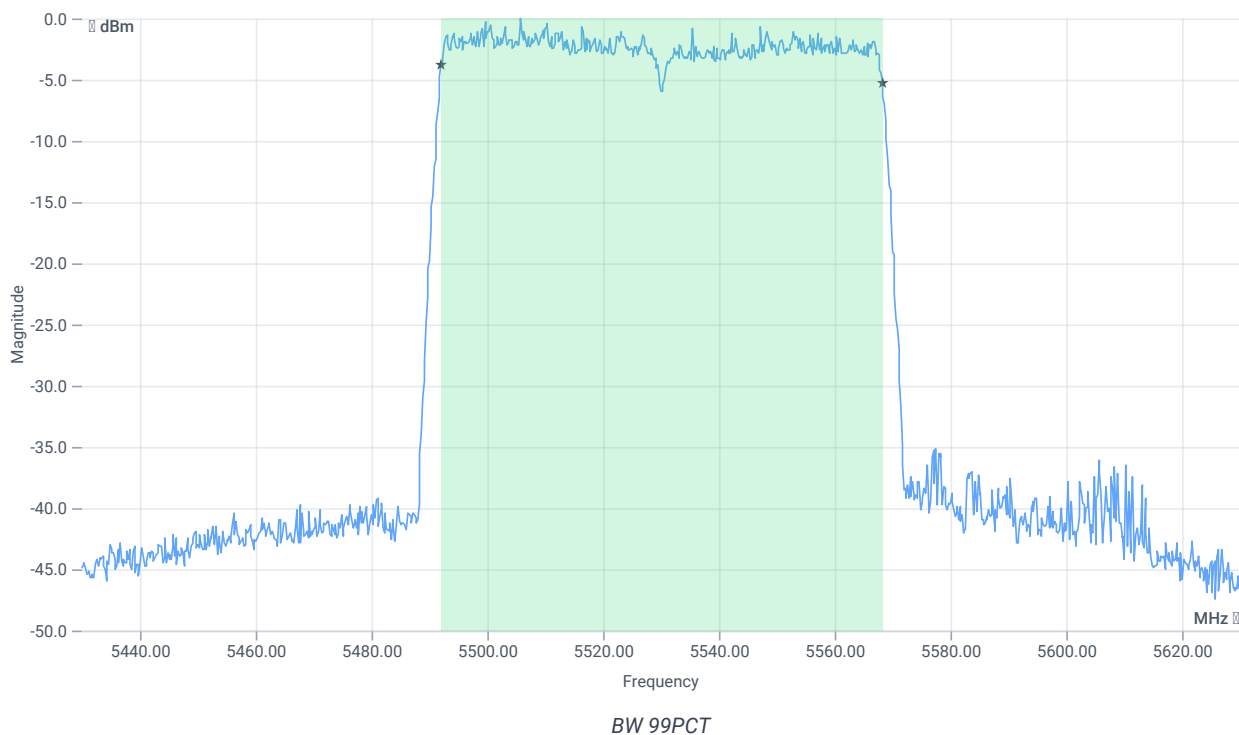


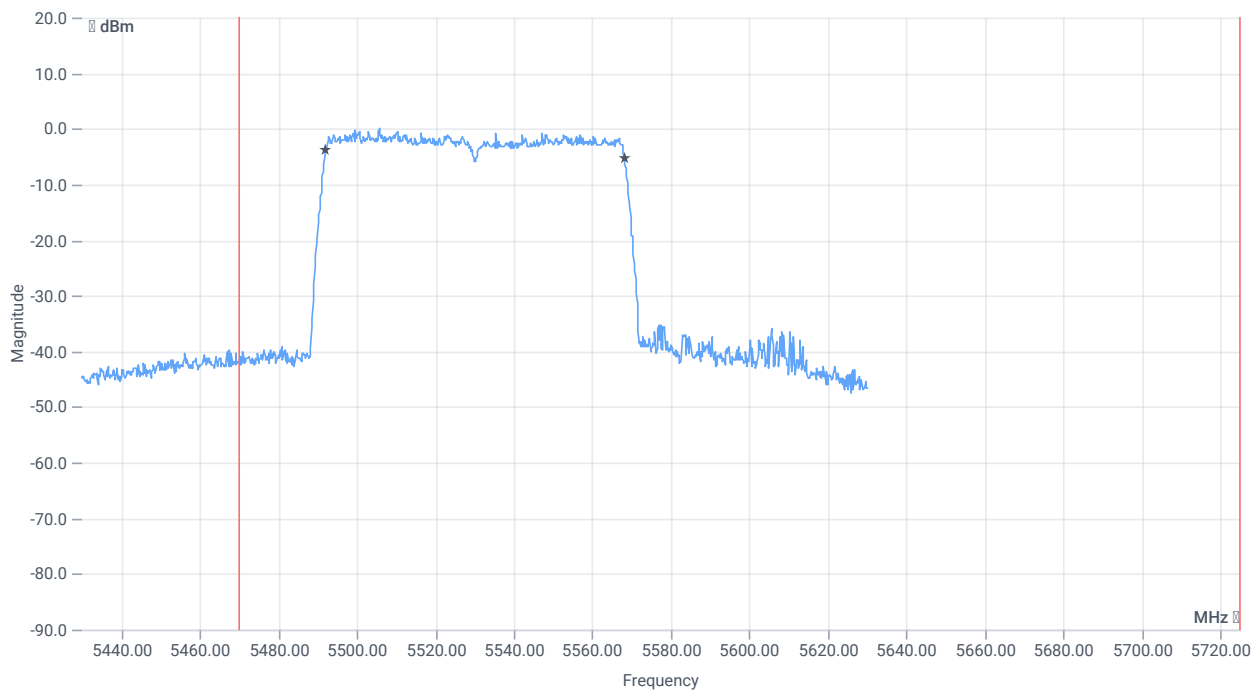

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	76.124	MHz	INFO
T1 99%	5470.000000	---	5492.0380	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5568.1618	MHz	

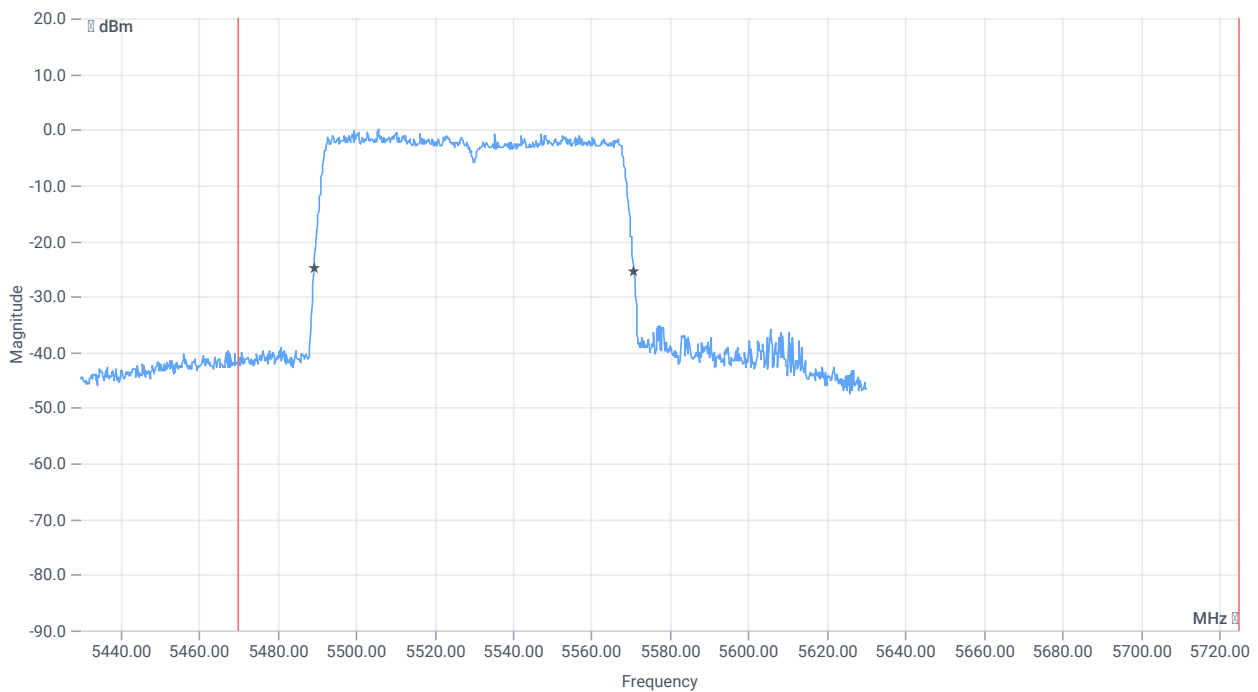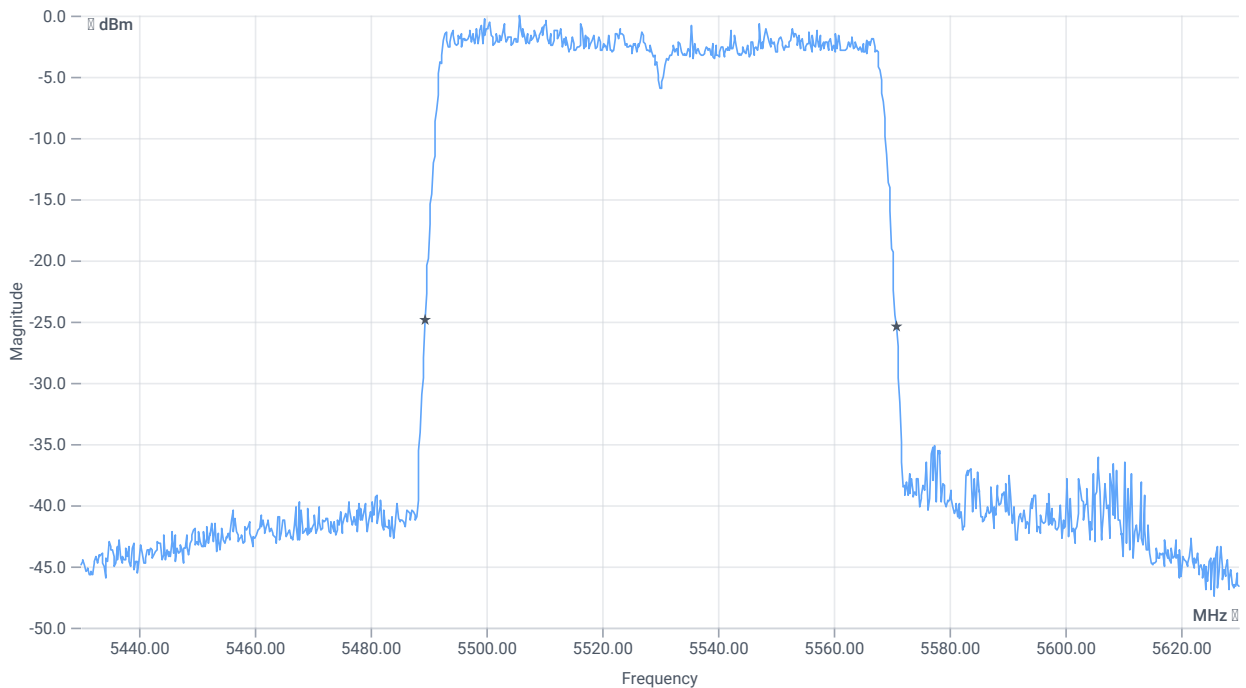

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	81.4	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5489.4000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5570.8000	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-2C

References

TC start	12.06.2024 13:16:54
Ambit temp [°C] humidity [rel%]	25.3 29
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT80 mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5530
Frequency mid to test	True Freq [MHz] 5610
Frequency high to test	False Freq [MHz] 5690
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5610 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-2.65	dBm	INFO
Ref. frequency	---	---	5579.230	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.35 12.78 10
Start [MHz] Stop [MHz]	5510.000 5710.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE


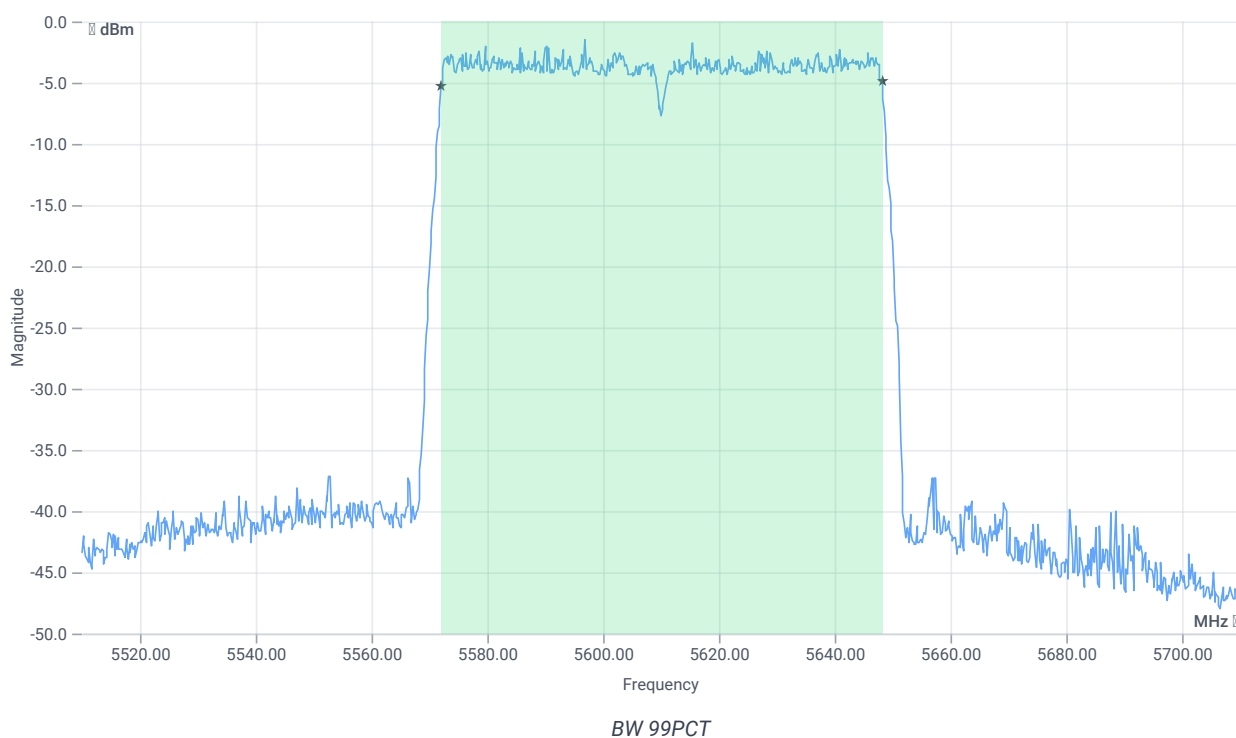


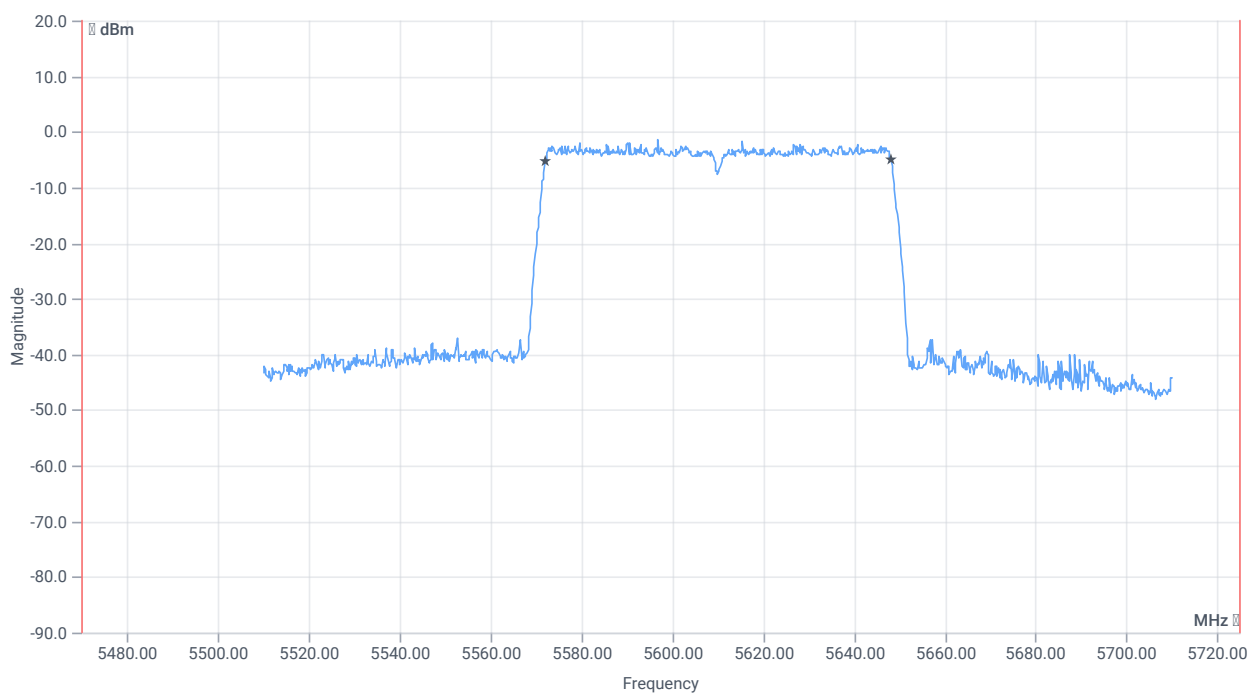

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	76.124	MHz	INFO
T1 99%	5470.000000	---	5572.0380	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5648.1618	MHz	

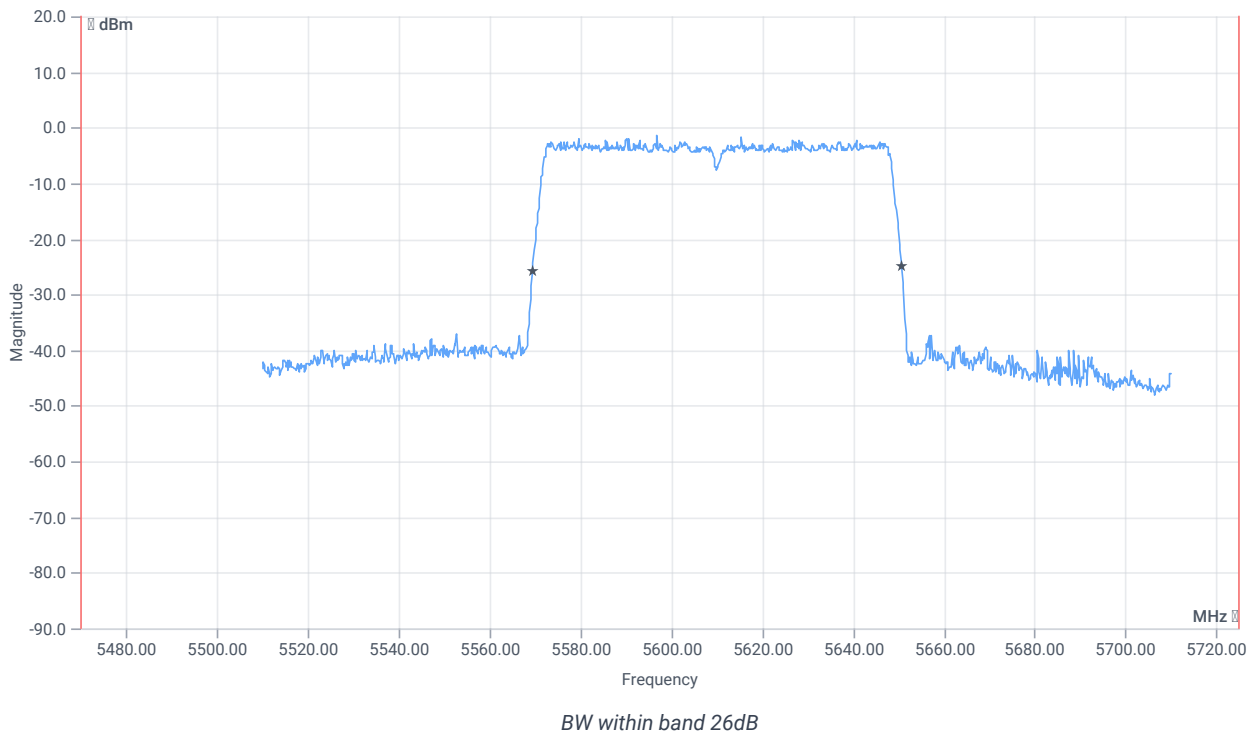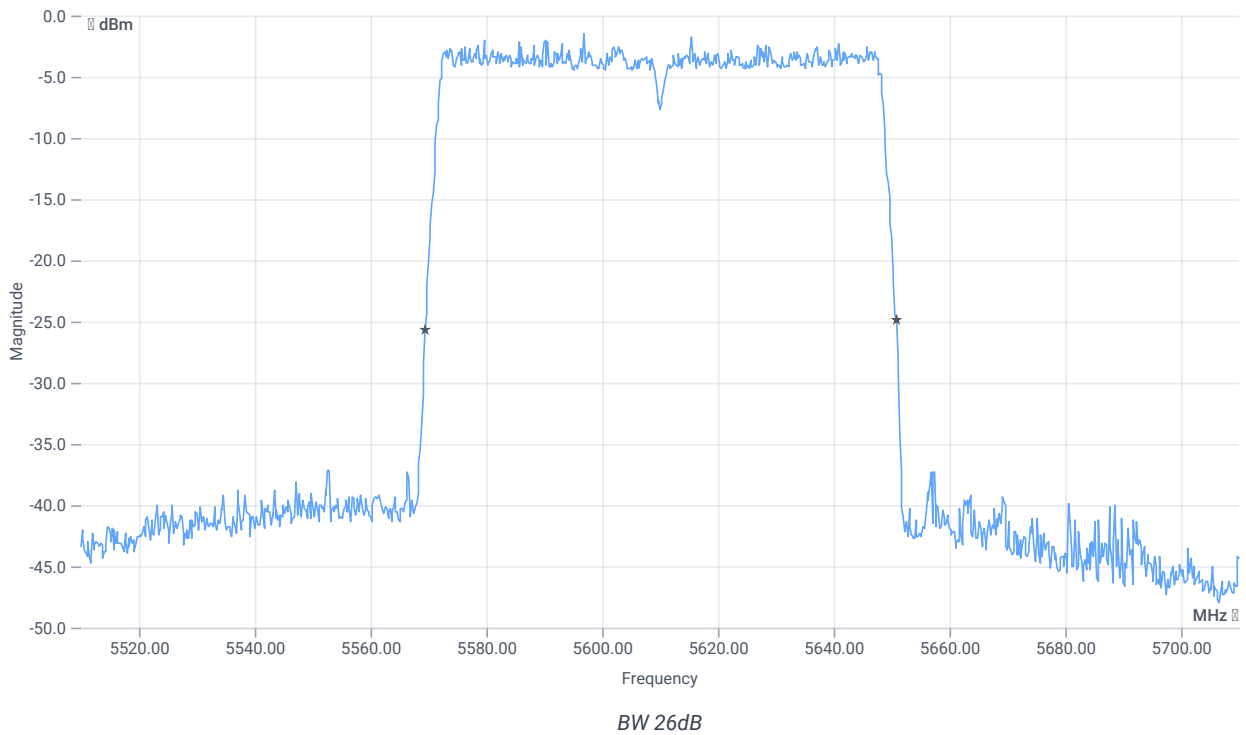

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	81.4	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5569.4000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5650.8000	MHz	

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-2C

References

TC start	12.06.2024 13:26:31
Ambit temp [°C] humidity [rel%]	25.3 29
System version	5.0.5.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT80 mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5530
Frequency mid to test	False Freq [MHz] 5610
Frequency high to test	True Freq [MHz] 5690
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5690 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-2.63	dBm	INFO
Ref. frequency	---	---	5666.220	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.37 12.71 10
Start [MHz] Stop [MHz]	5590.000 5790.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE





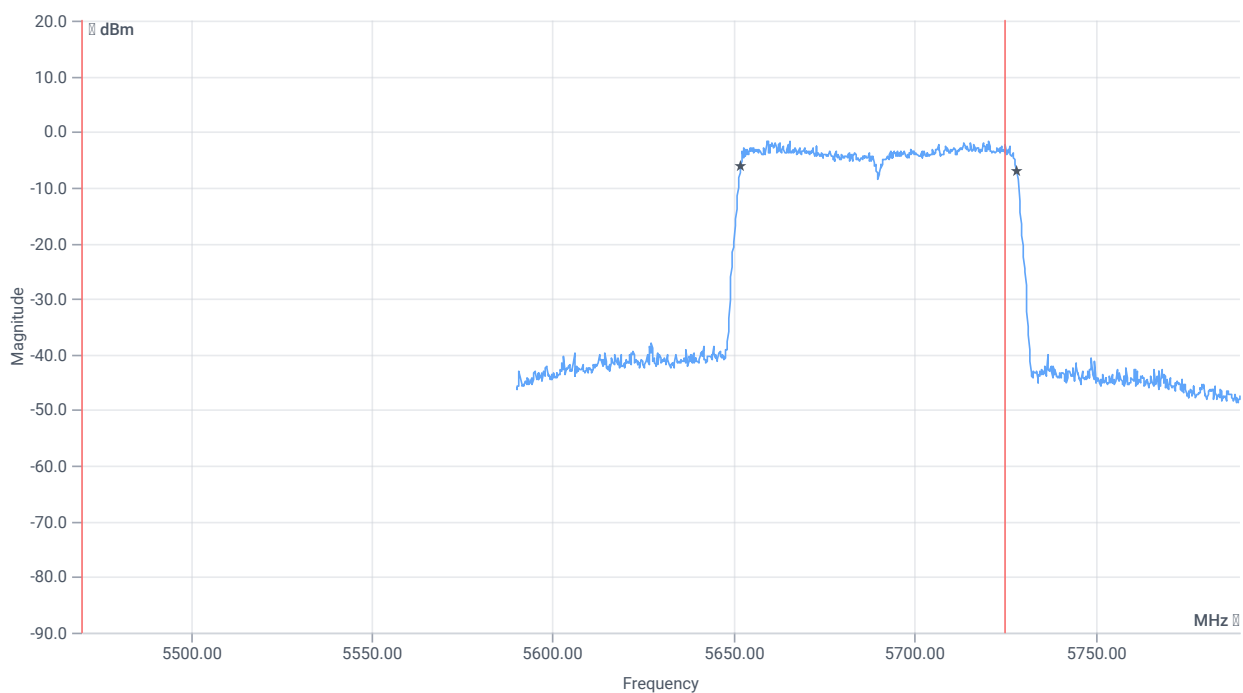

BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	76.124	MHz	INFO
T1 99%	5470.000000	---	5652.0380	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5728.1618	MHz	

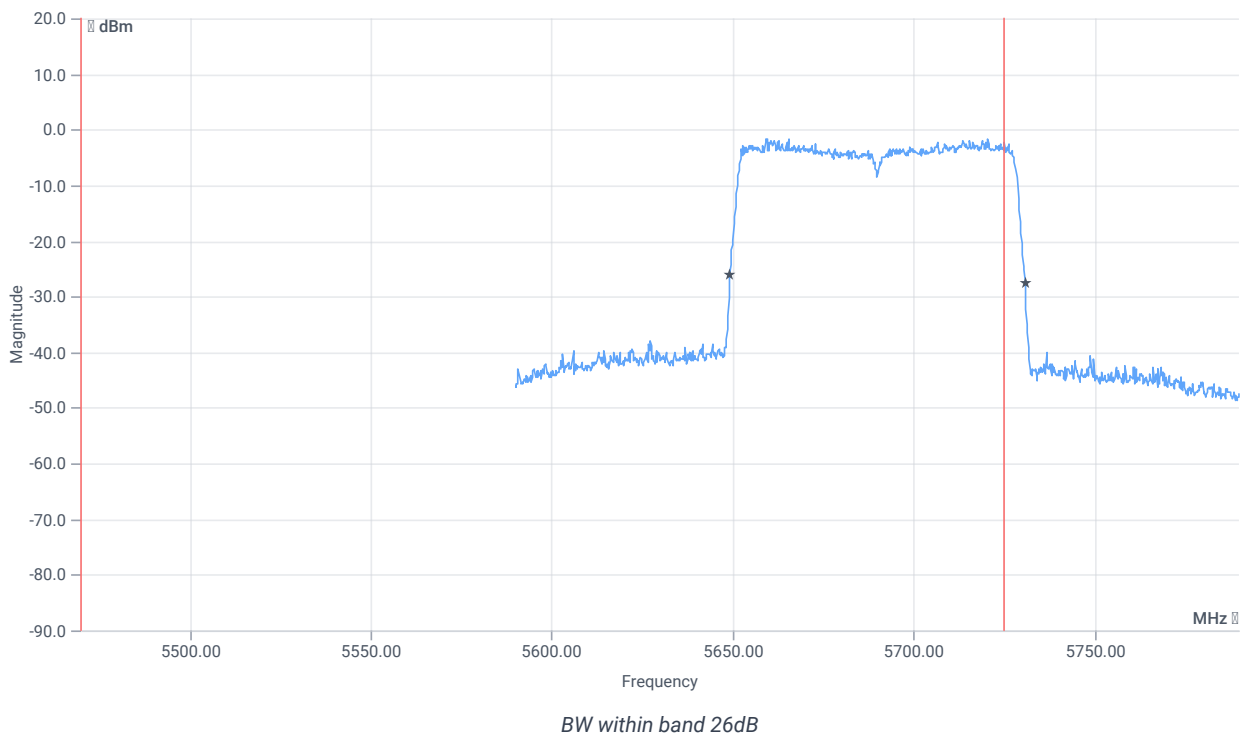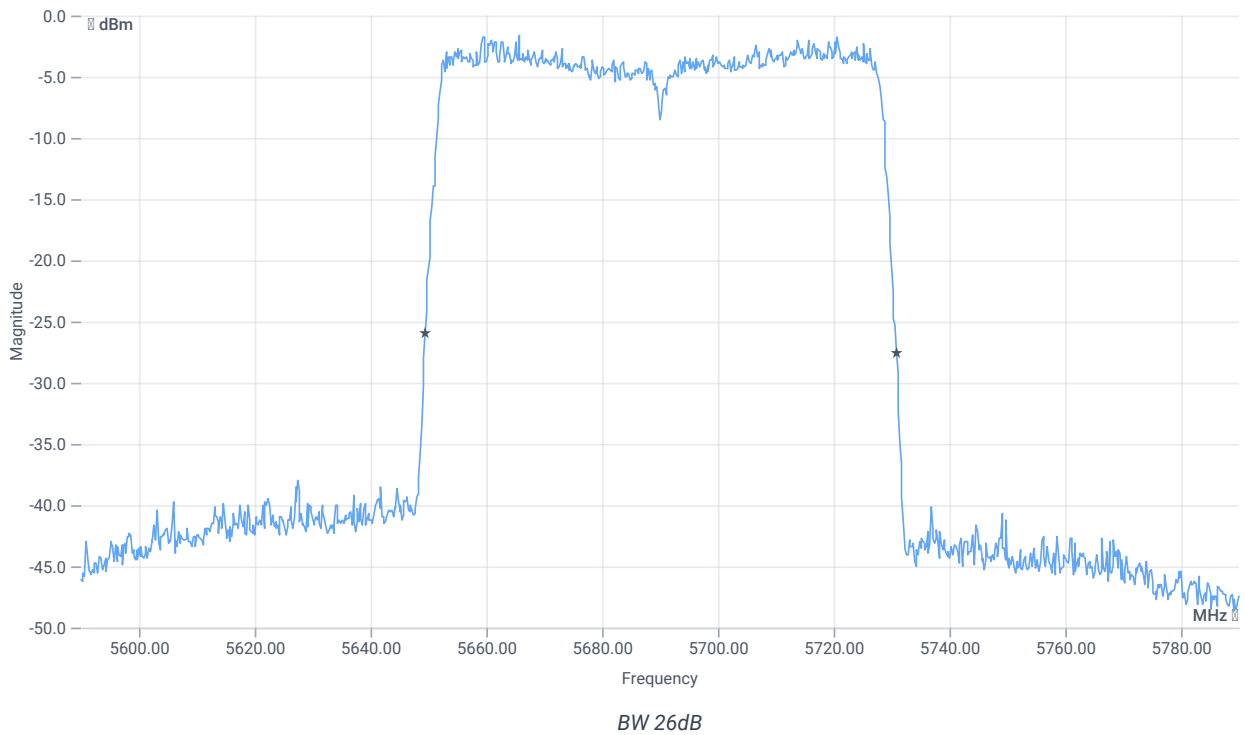

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	81.4	MHz	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
T1 26dB	5470.000000	---	5649.4000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5730.8000	MHz	

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2C

References

TC start	11.06.2024 13:43:47
Ambit temp [°C] humidity [rel%]	24.9 32
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5500 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	6.68	dBm	INFO
Ref. frequency	---	---	5492.610	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

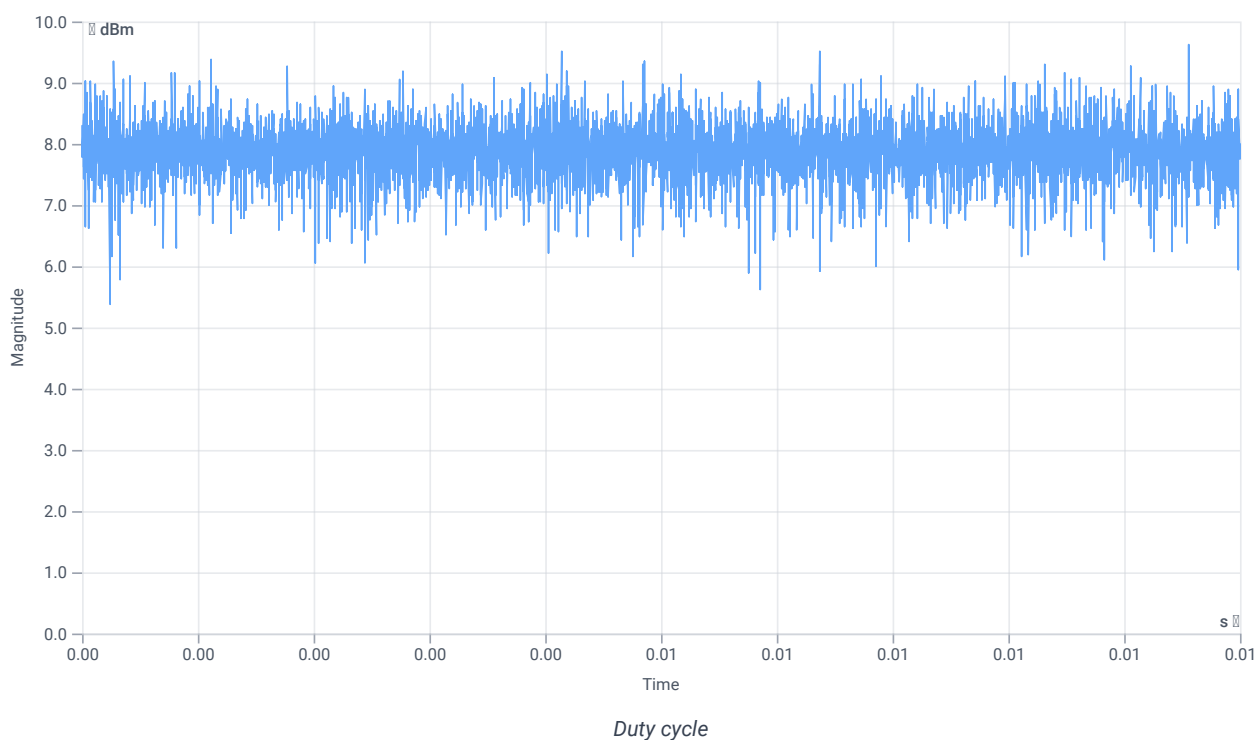

Evaluation bandwidth

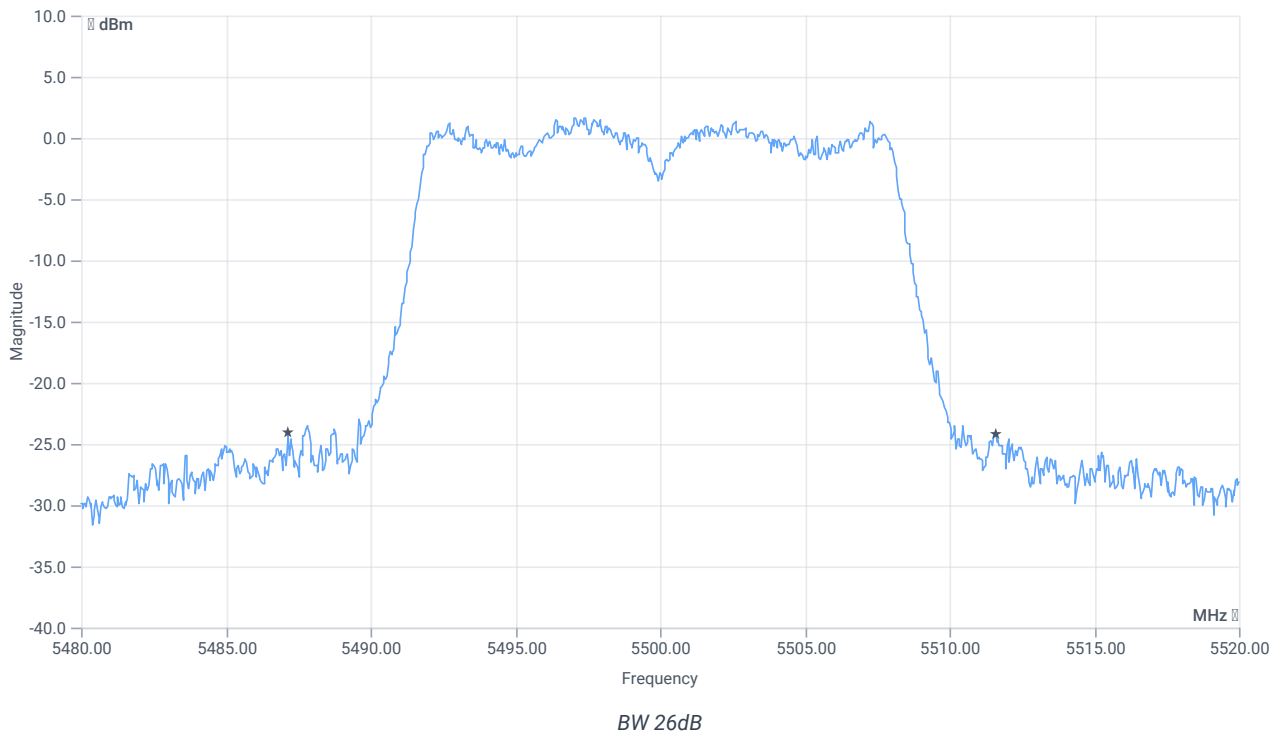


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	24.44	MHz	INFO
T1 26dB	---	---	5487.1600	MHz	INFO
T2 26dB	---	---	5511.6000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.68 12.84 20
Start [MHz] Stop [MHz]	5480.000 5520.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

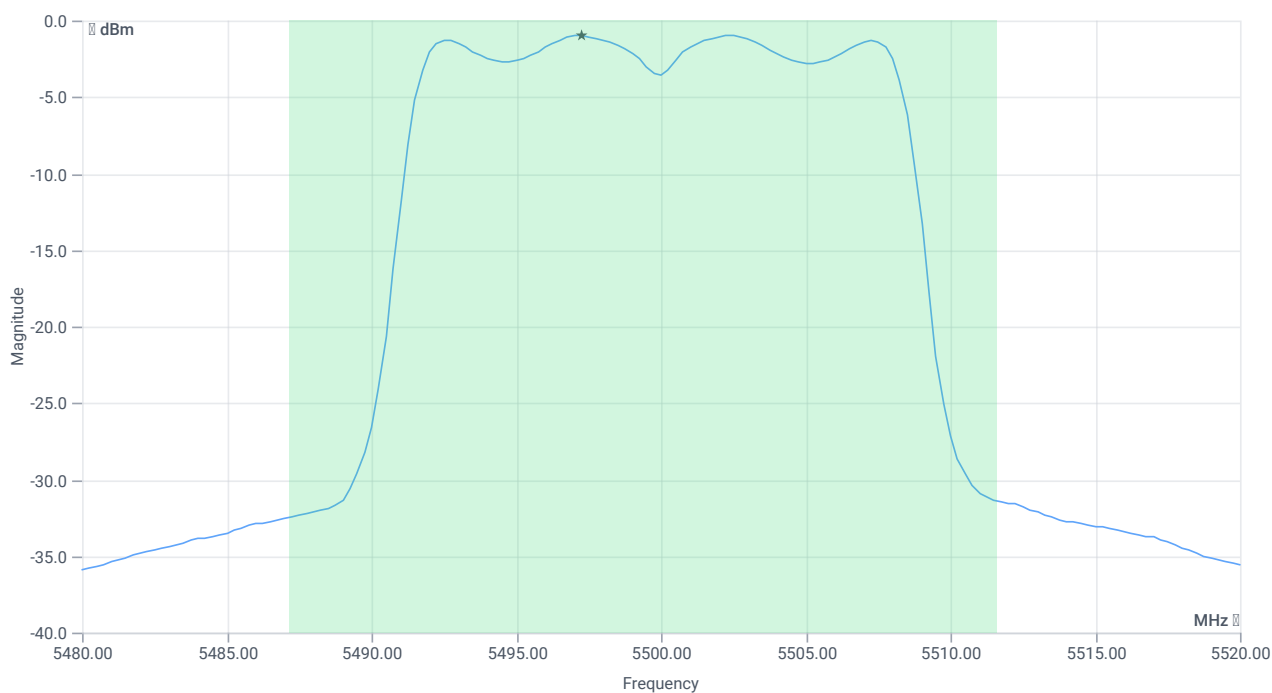

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	10.12	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	10.12	dBm	PASS
LIMIT: 11 dBm + 10 log 24.44					
Max output power DC corrected cond	---	24.88	10.12	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	10.12	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-1	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Power spectral density DC corrected cond	--	11	-1	dBm/1MHz	PASS
--	----	----	----	----------	------

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2C

References

TC start	11.06.2024 14:00:07
Ambit temp [°C] humidity [rel%]	24.9 31
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5500
Frequency mid to test	True Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5600 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.21	dBm	INFO
Ref. frequency	---	---	5603.600	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

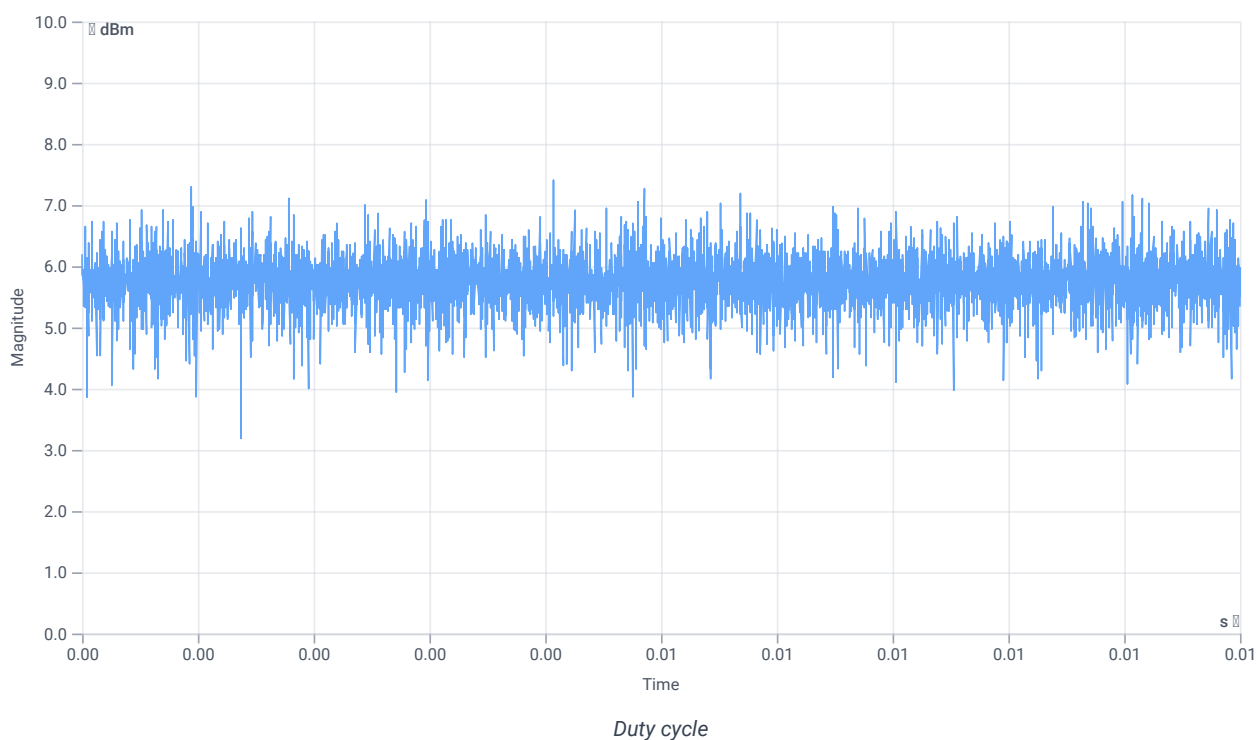

Evaluation bandwidth

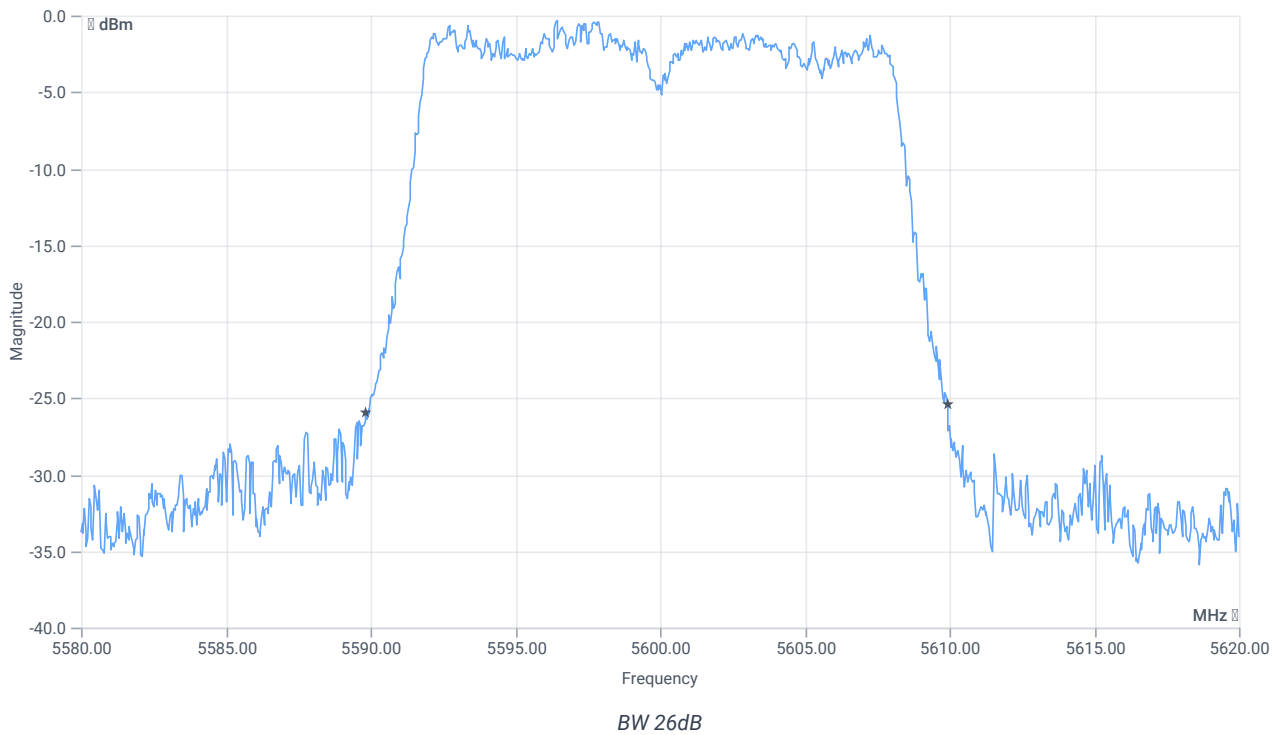


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.08	MHz	INFO
T1 26dB	---	---	5589.8400	MHz	INFO
T2 26dB	---	---	5609.9200	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.21 13.11 20
Start [MHz] Stop [MHz]	5580.000 5620.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

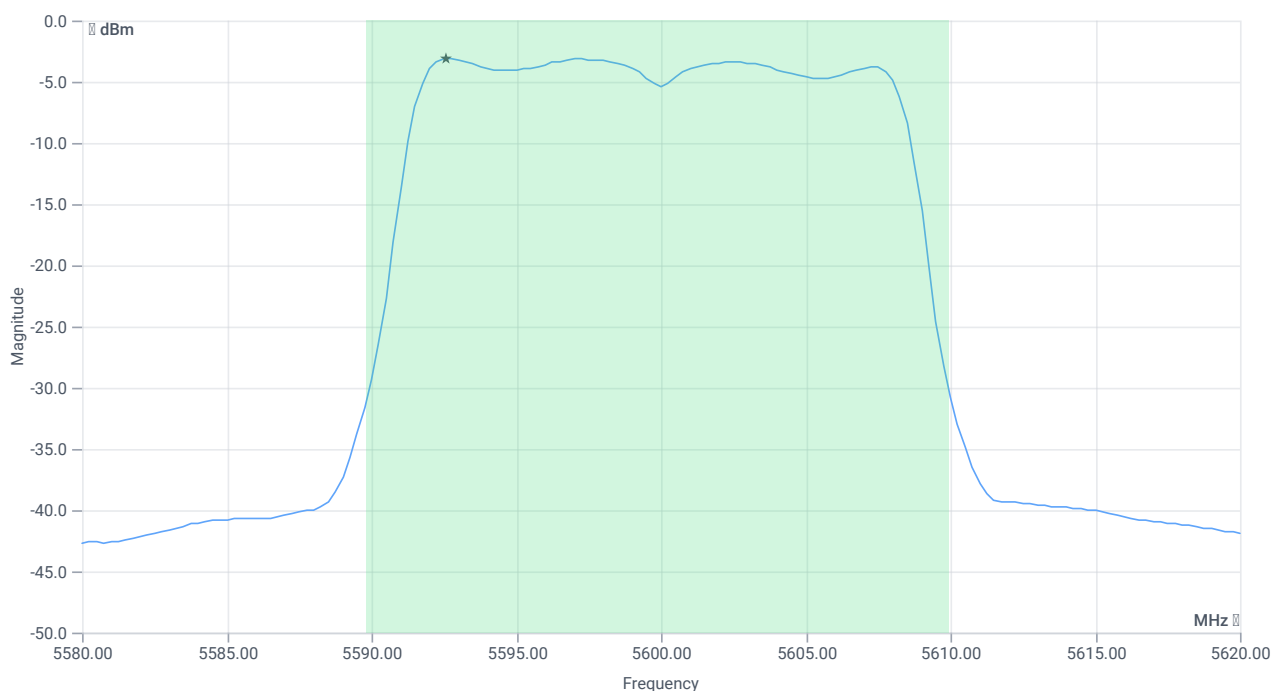

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	8.14	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	8.14	dBm	PASS
LIMIT: 11 dBm + 10 log 20.08					
Max output power DC corrected cond	---	24.03	8.14	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	8.14	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-3.1	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Power spectral density DC corrected cond	--	11	-3.1	dBm/1MHz	PASS
--	----	----	------	----------	------

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2C

References

TC start	11.06.2024 14:16:30
Ambit temp [°C] humidity [rel%]	24.9 31
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	True Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5700 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.52	dBm	INFO
Ref. frequency	---	---	5701.600	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

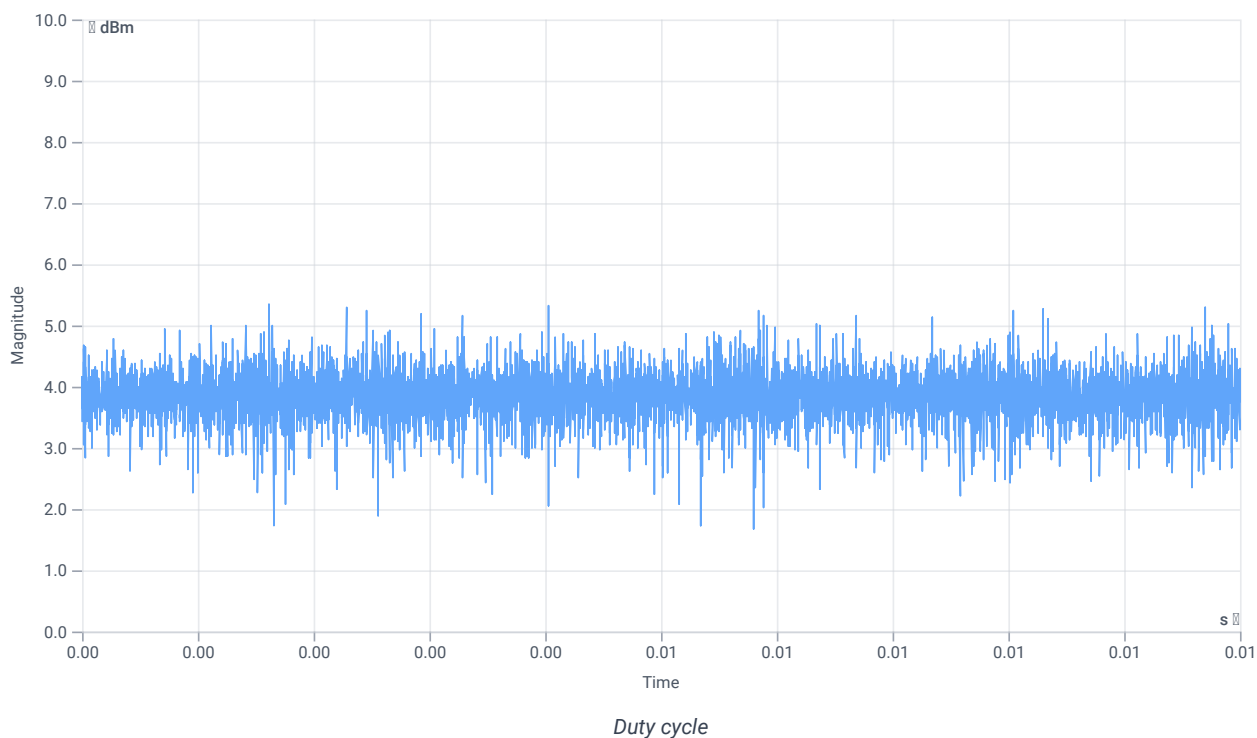

Evaluation bandwidth

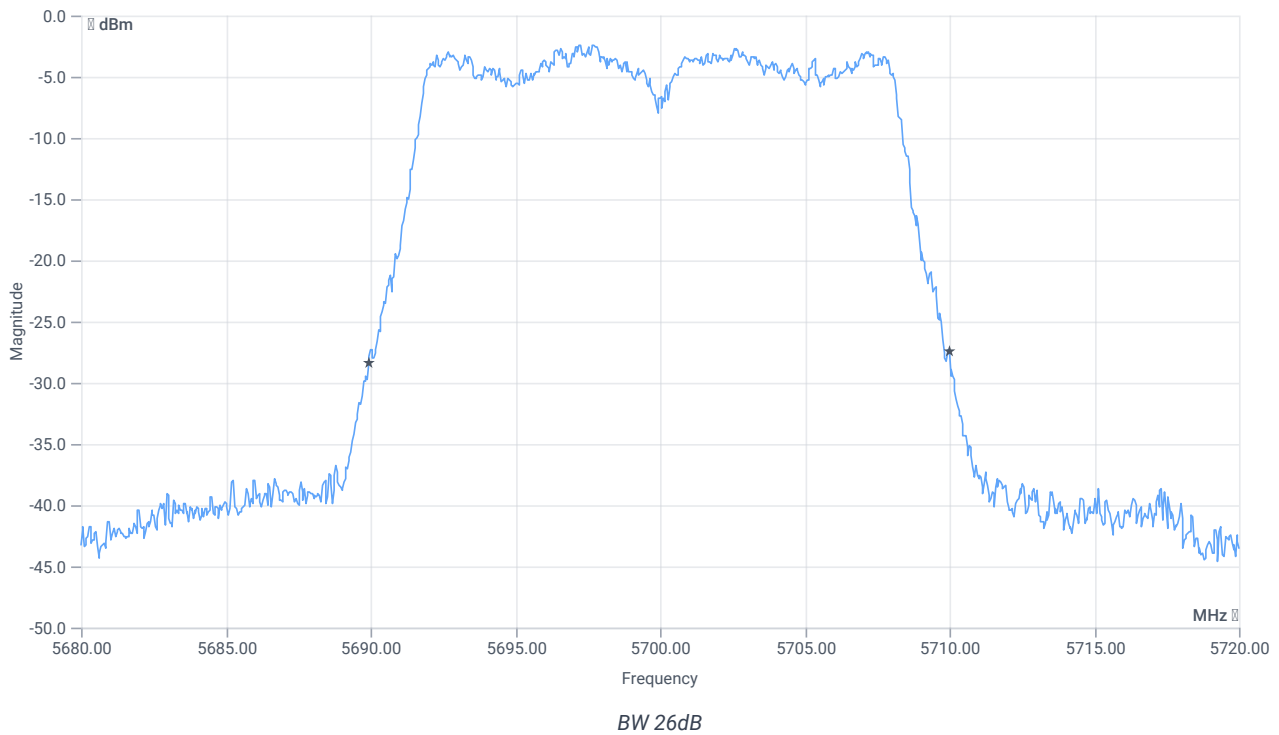


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.08	MHz	INFO
T1 26dB	---	---	5689.9200	MHz	INFO
T2 26dB	---	---	5710.0000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.52 12.77 20
Start [MHz] Stop [MHz]	5680.000 5720.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

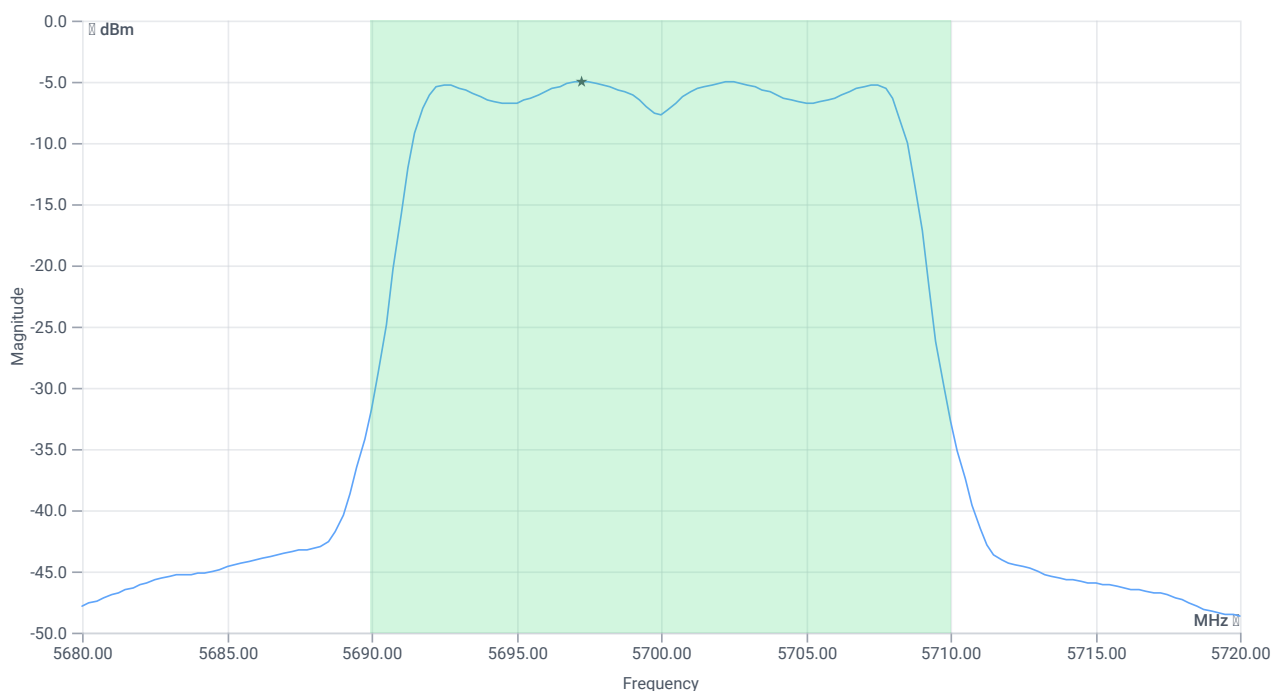

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	6.11	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	6.11	dBm	PASS
LIMIT: 11 dBm + 10 log 20.08					
Max output power DC corrected cond	---	24.03	6.11	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	6.11	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-5.03	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Power spectral density DC corrected cond	--	11	-5.03	dBm/1MHz	PASS
--	----	----	-------	----------	------

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2C

References

TC start	12.06.2024 10:12:20
Ambit temp [°C] humidity [rel%]	24.2 34
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5500 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.29	dBm	INFO
Ref. frequency	---	---	5501.400	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

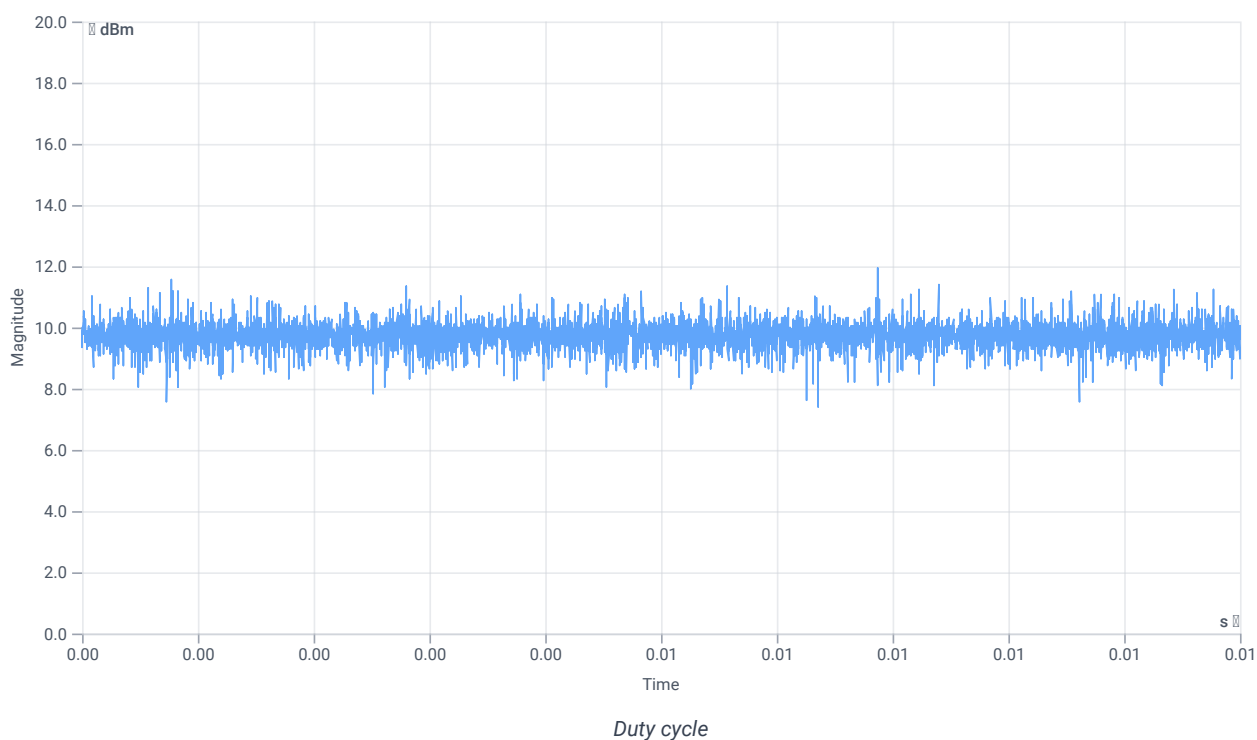

Evaluation bandwidth

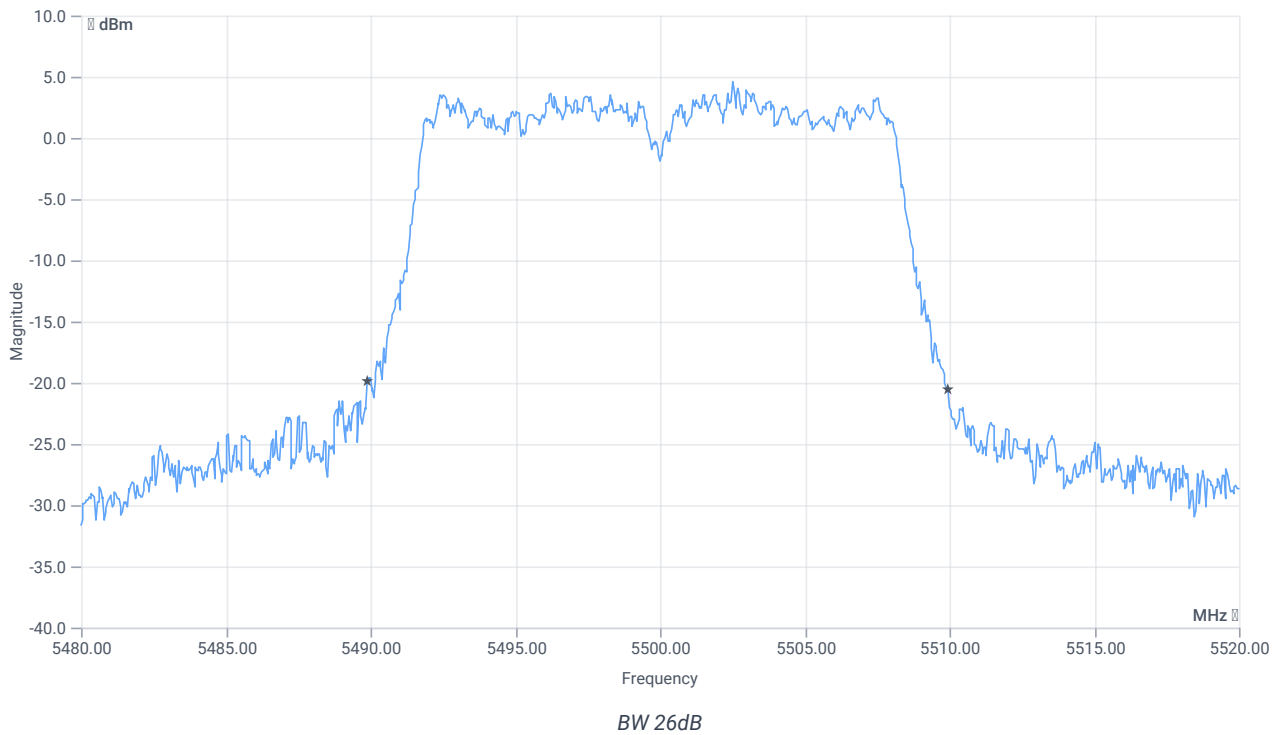


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.08	MHz	INFO
T1 26dB	---	---	5489.8800	MHz	INFO
T2 26dB	---	---	5509.9600	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	21.29 12.72 25
Start [MHz] Stop [MHz]	5480.000 5520.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

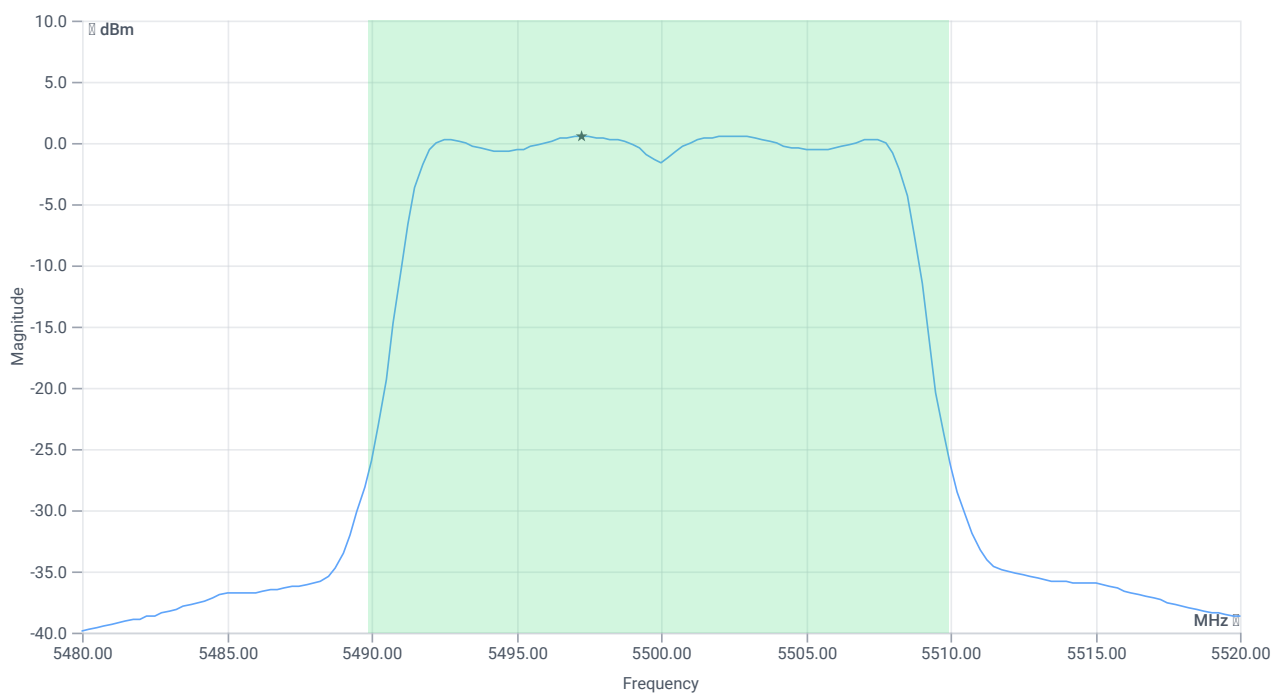

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	11.91	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	11.91	dBm	PASS
LIMIT: 11 dBm + 10 log 20.08					
Max output power DC corrected cond	---	24.03	11.91	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	11.91	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	0.55	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI					
Power spectral density DC corrected cond	--	11	0.55	dBm/1MHz	PASS

Verdict
PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2C

References

TC start	12.06.2024 10:26:46
Ambit temp [°C] humidity [rel%]	24.3 34
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5500
Frequency mid to test	True Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5600 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.72	dBm	INFO
Ref. frequency	---	---	5602.200	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

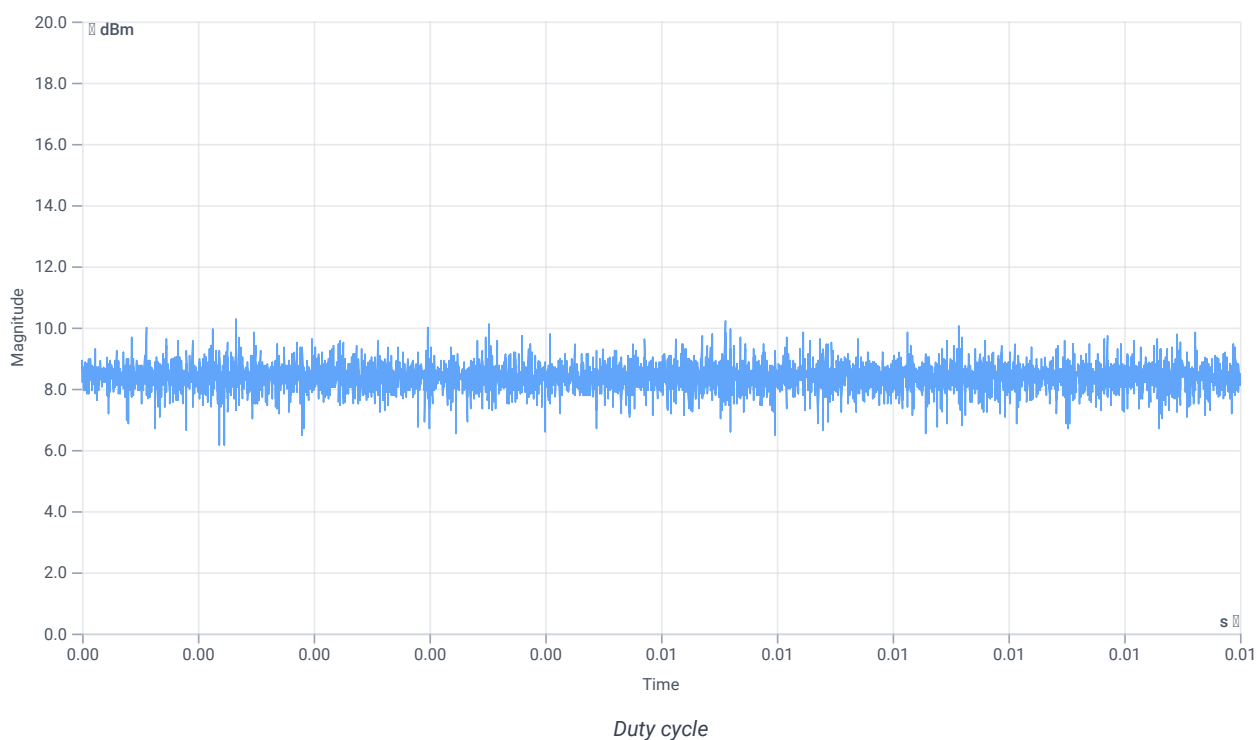

Evaluation bandwidth

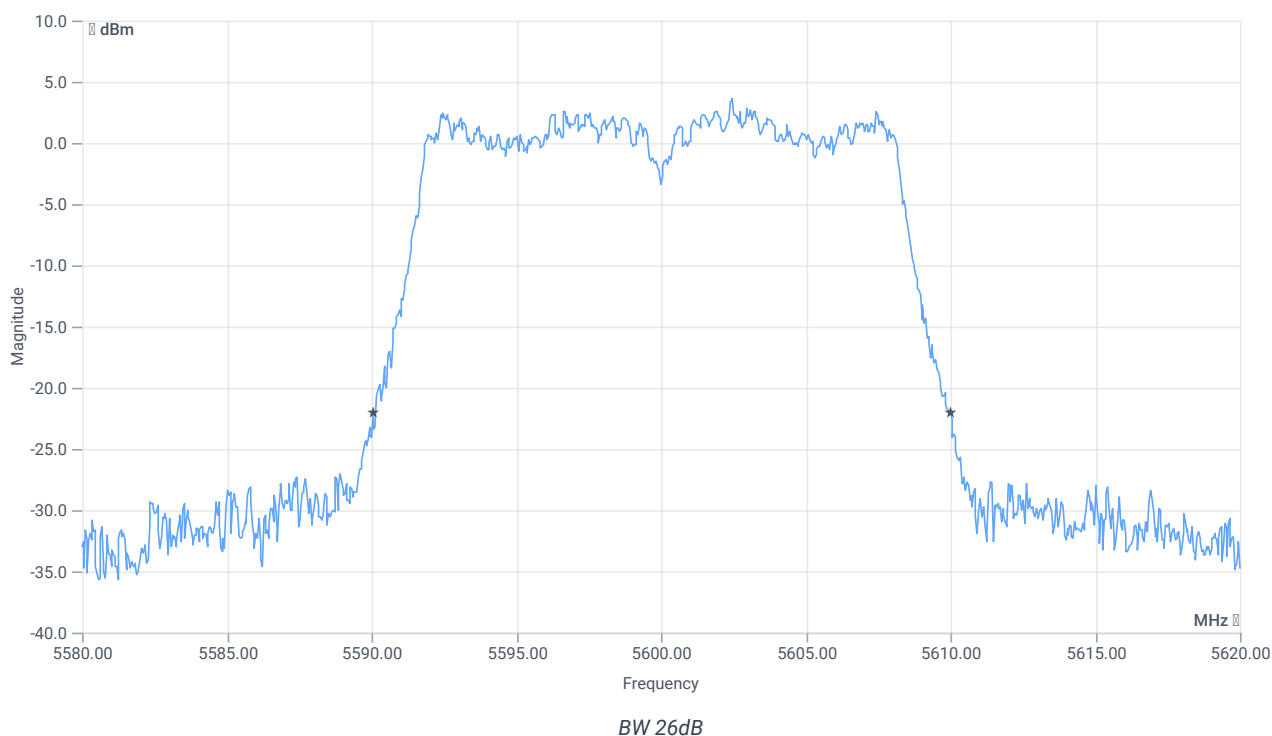


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	19.96	MHz	INFO
T1 26dB	---	---	5590.0400	MHz	INFO
T2 26dB	---	---	5610.0000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.72 12.8 25
Start [MHz] Stop [MHz]	5580.000 5620.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

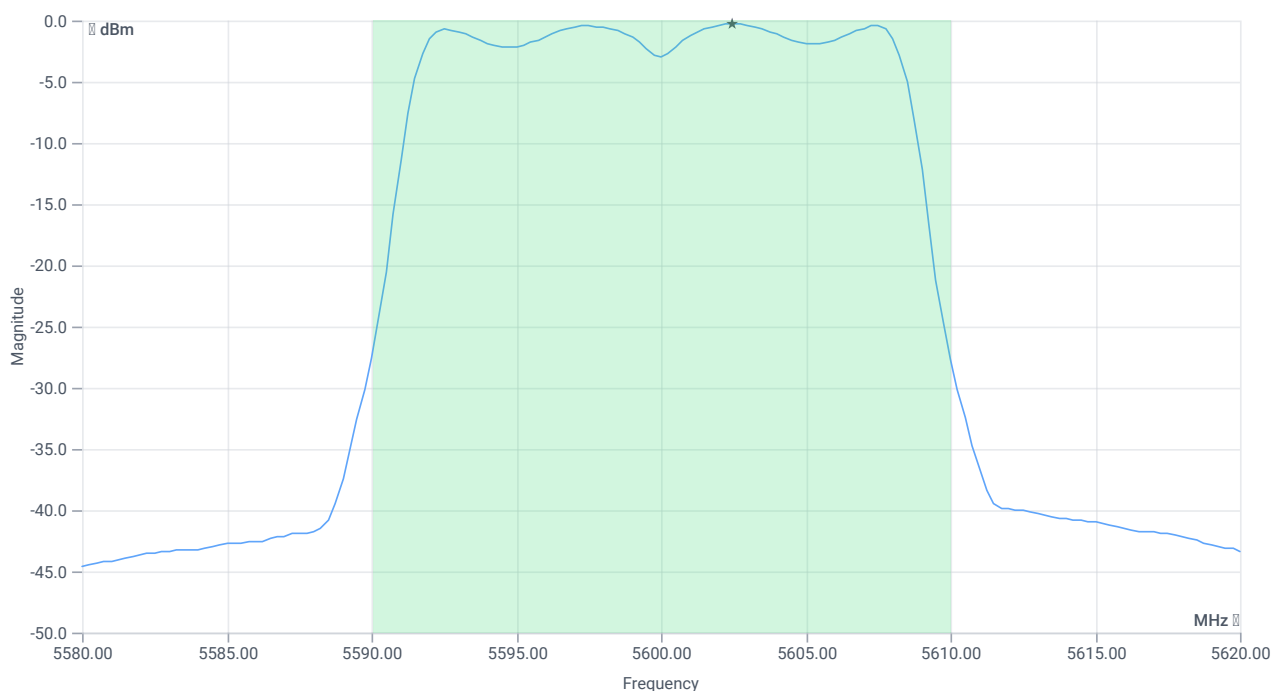

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	10.82	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	10.82	dBm	PASS
LIMIT: 11 dBm + 10 log 19.96					
Max output power DC corrected cond	---	24	10.82	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	10.82	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-0.29	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Power spectral density DC corrected cond	--	11	-0.29	dBm/1MHz	PASS
--	----	----	-------	----------	------

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-2C

References

TC start	12.06.2024 10:40:58
Ambit temp [°C] humidity [rel%]	24.5 33
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	True Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5700 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.12	dBm	INFO
Ref. frequency	---	---	5697.800	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

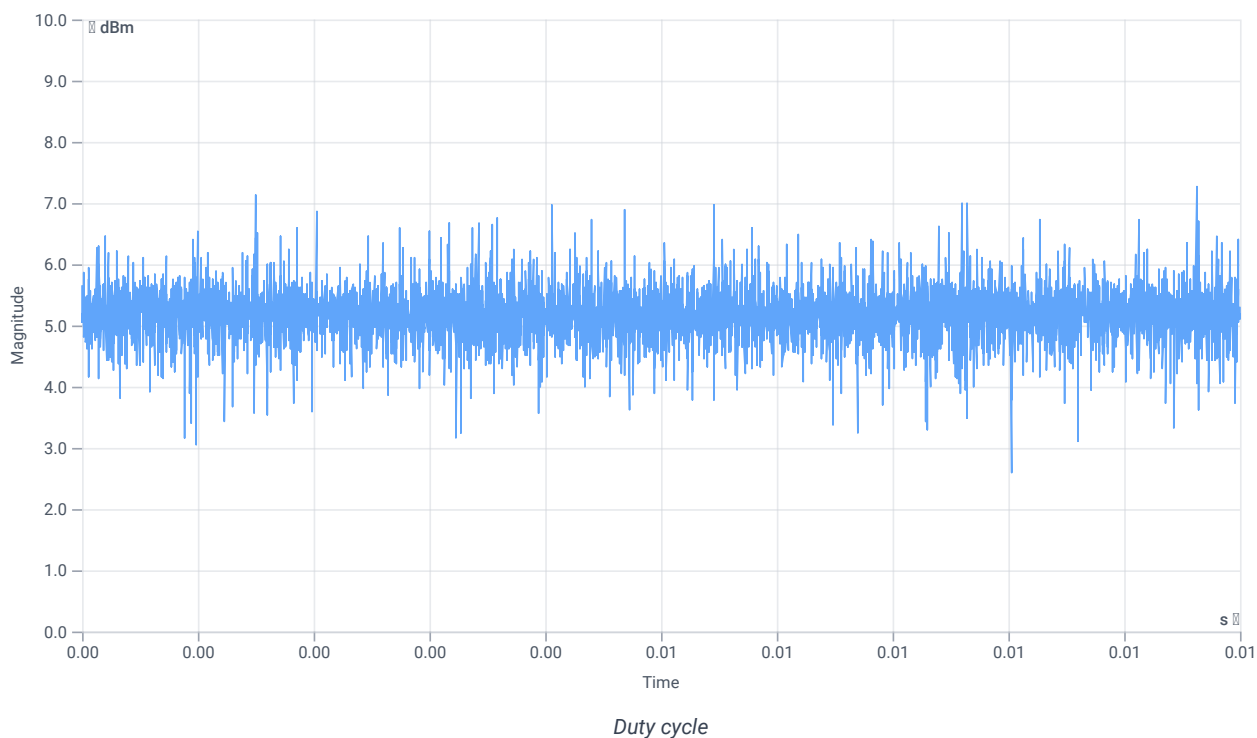

Evaluation bandwidth

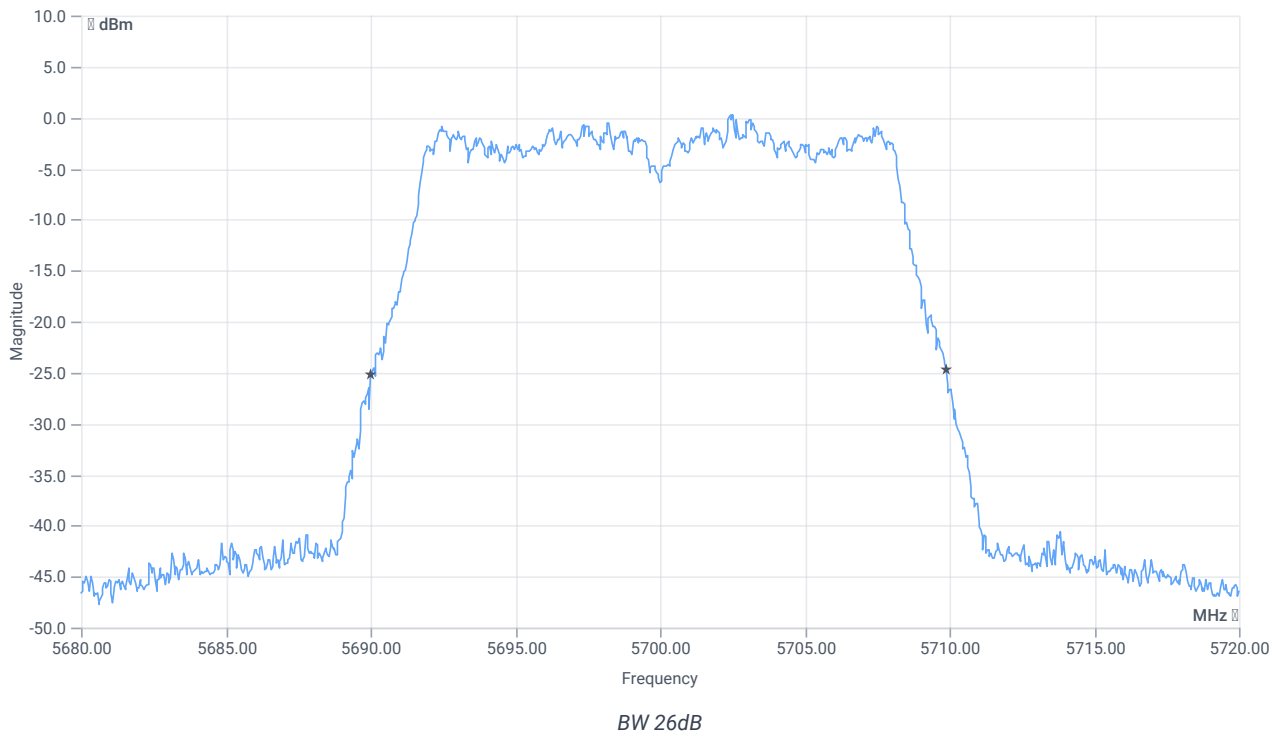


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	19.88	MHz	INFO
T1 26dB	---	---	5690.0000	MHz	INFO
T2 26dB	---	---	5709.8800	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.12 12.73 20
Start [MHz] Stop [MHz]	5680.000 5720.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

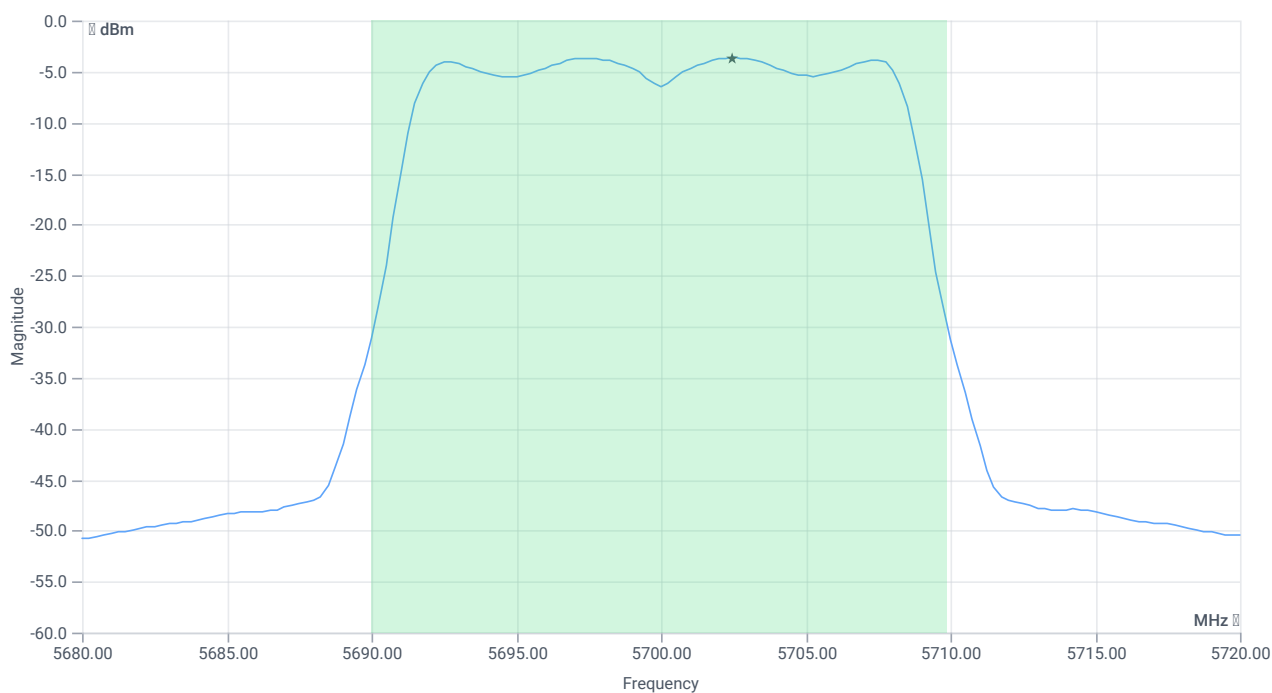

Max OP and PSD

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max output power cond	---	---	7.43	dBm	INFO
Duty cycle correction	---	---	0	dB	INFO
LIMIT absolute:					
Max output power DC corrected cond	---	24	7.43	dBm	PASS
LIMIT: 11 dBm + 10 log 19.88					
Max output power DC corrected cond	---	23.98	7.43	dBm	PASS
LIMIT absolute eirp (TPC not supported)					
Max output power DC corrected eirp	---	27	7.43	dBm	PASS

Power spectral density

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power spectral density cond	---	---	-3.65	dBm/1MHz	INFO
Duty cycle correction	---	---	0	dB	INFO

RESULT

CONDUCTED LIMITS FOR MAX ANTENNA GAIN OF 6 D BI

Power spectral density DC corrected cond	--	11	-3.65	dBm/1MHz	PASS
--	----	----	-------	----------	------

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT20 mode U-NII-2C

References

TC start	12.06.2024 07:52:19
Ambit temp [°C] humidity [rel%]	22.9 36
System version	5.0.5.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT20 mode U-NII-2C
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	2
User Interaction	No
Device class U-NII-1 (FCC)	AP outdoor
Limit W52 japan	Standard
TPC supported	No
Vehicle use (ISED)	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5500
Frequency mid to test	False Freq [MHz] 5600
Frequency high to test	False Freq [MHz] 5700
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5500 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.00	dBm	INFO
Ref. frequency	---	---	5501.800	MHz	INFO

Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
No enough bursts detected, duty cycle burst ratio set to 1					
Duty cycle (burst ratio) max	---	---	1	---	INFO
Duty cycle max	---	---	0	dB	INFO
Duty cycle (burst ratio) min	---	---	1	---	INFO
Duty cycle min	---	---	0	dB	INFO

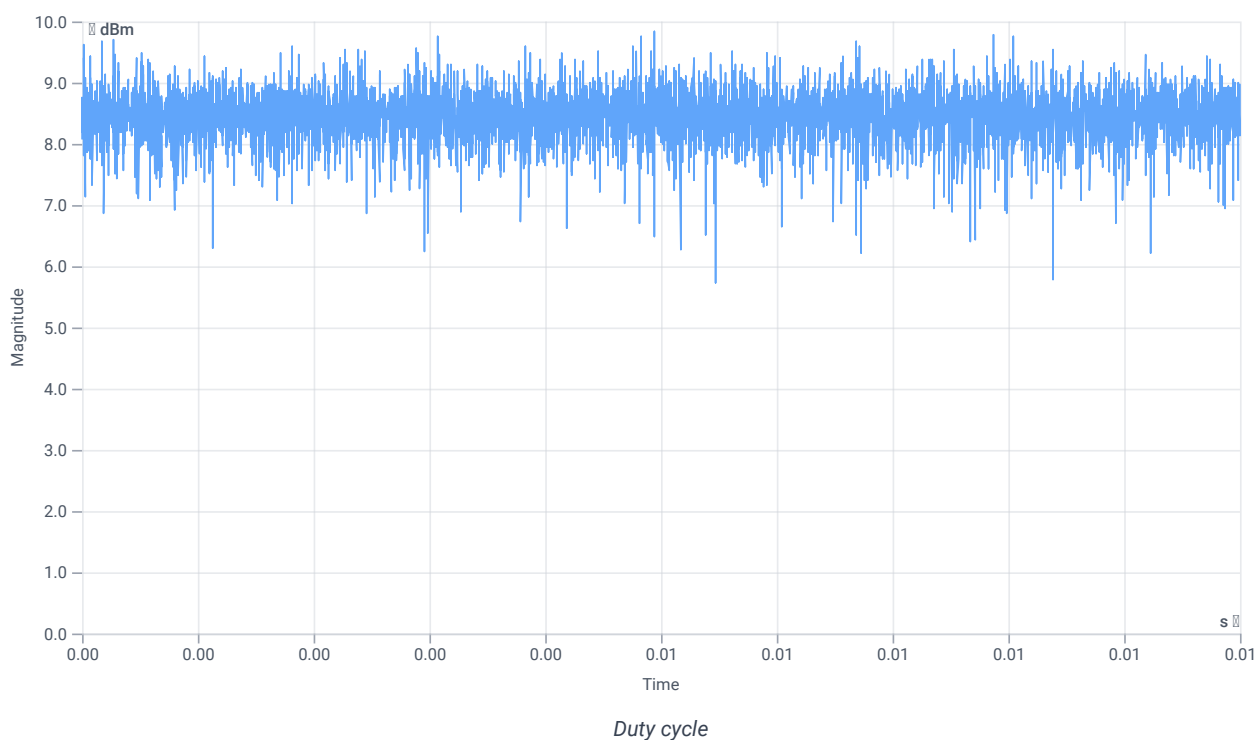

Evaluation bandwidth