

Conducted test results

No.1-7444-24-01-02_TR1-A201-R1

June 24, 2024

Test Standard(s)	FCC 15.247 - NI
	FCC 15.247, ISSED RSS247 - NI

This document is electronically signed and valid without handwritten signature.
Public keys for verification of the electronic signatures can be requested at the testing laboratory.

p.o.

Performed

Rene Oelmann

Lab Manager
Radio Labs

Table of Content

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	5
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	7
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	9
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	11
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	13
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	15
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	17
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	19
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	21
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	23
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	25
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	27
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	29
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	31
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	33
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode	35
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode	37
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode	39
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode	41
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode	43
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode	45
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	47
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	49
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	51
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	53
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	57
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	61
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	65
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	69
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	73
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	77
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	81
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	85
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	89
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	93
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	97
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	101
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	105
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	109
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode	113
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode	117

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode	121
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode	125
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode	129
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode	133
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	137
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	141
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	145
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode	149
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode	151
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode	153
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode	155
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode	157
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode	159
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode	161
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode	163
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode	165
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode	167
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode	169
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode	171
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode	173
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode	175
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode	177
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode	179
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode	181
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode	183
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode	185
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode	187
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode	189
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode	191
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode	193
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode	195
FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode	197
FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode	199
FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode	201
FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode	203
FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode	205
FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode	207
FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode	209
FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode	211
FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode	213
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode	215
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode	217
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode	219
FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode	221

FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode	223
FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode	225
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode	227
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode	229
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode	231
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode	233
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode	235
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode	237
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode	239
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode	241
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode	243
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode	245
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode	248
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode	251
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode	254
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode	257
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode	260
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode	263
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode	266
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode	269
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode	272
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode	275
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode	278
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode	281
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode	284
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode	287
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode	290
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode	293
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode	296
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode	299
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode	302
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode	305
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode	308
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode	311
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode	314

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

References

TC start	11.06.2024 07:56:16
Ambit temp [°C] humidity [rel%]	21.9 39
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.44	dBm	INFO
Ref. frequency	---	---	2413.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.44 10.48 25
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

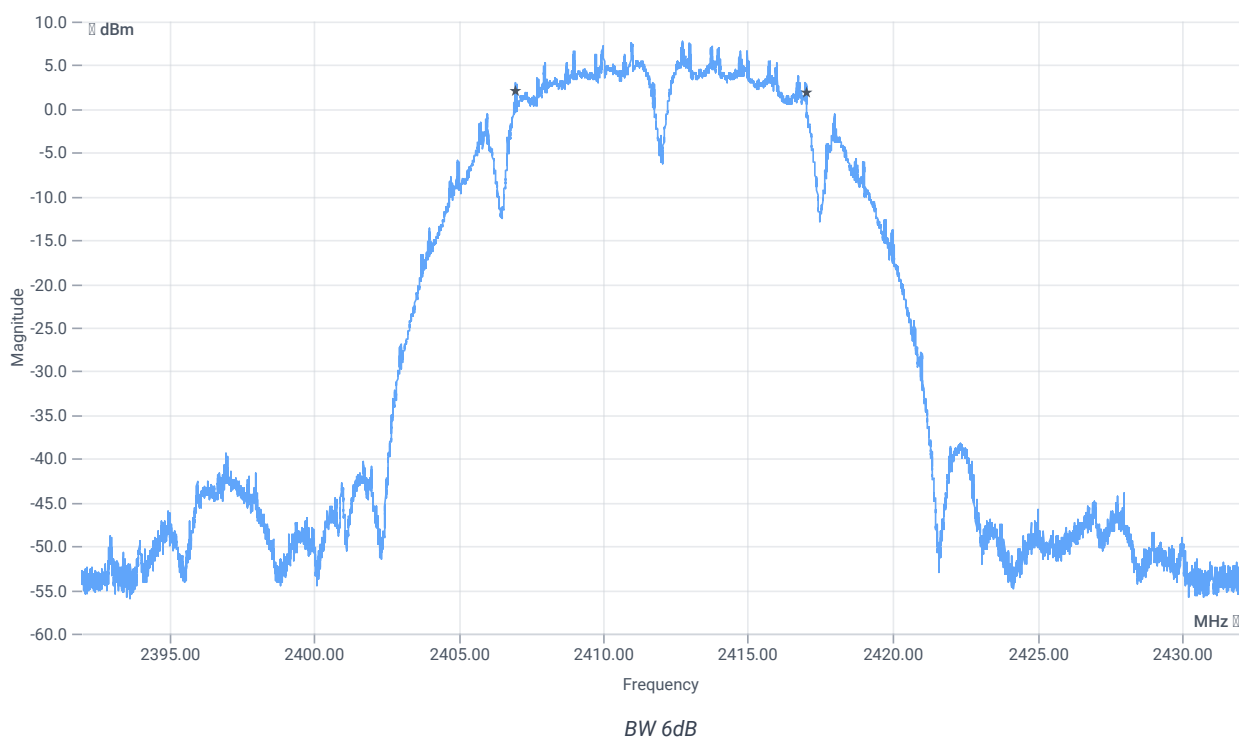

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	10064	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

References

TC start	11.06.2024 08:26:04
Ambit temp [°C] humidity [rel%]	22.4 38
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	13.37	dBm	INFO
Ref. frequency	---	---	2438.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.37 10.56 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

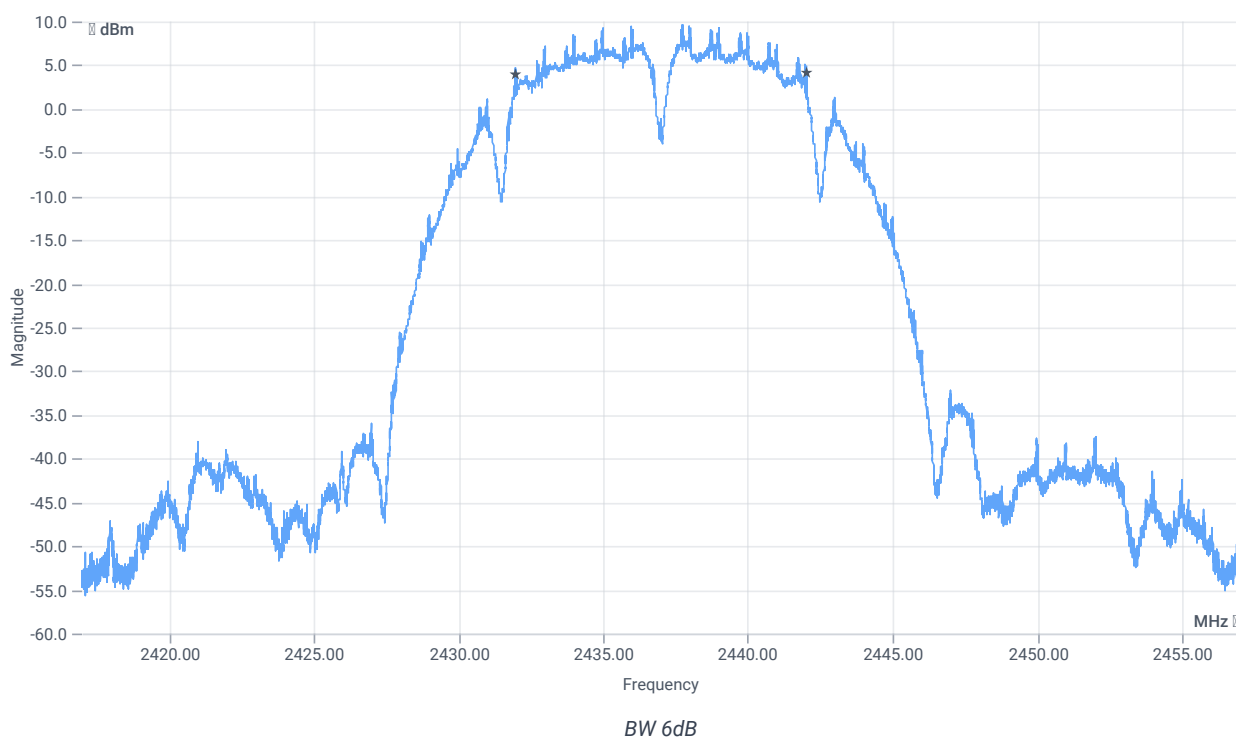

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	10060	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

References

TC start	11.06.2024 08:50:12
Ambit temp [°C] humidity [rel%]	22.7 38
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.19	dBm	INFO
Ref. frequency	---	---	2463.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.19 10.6 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

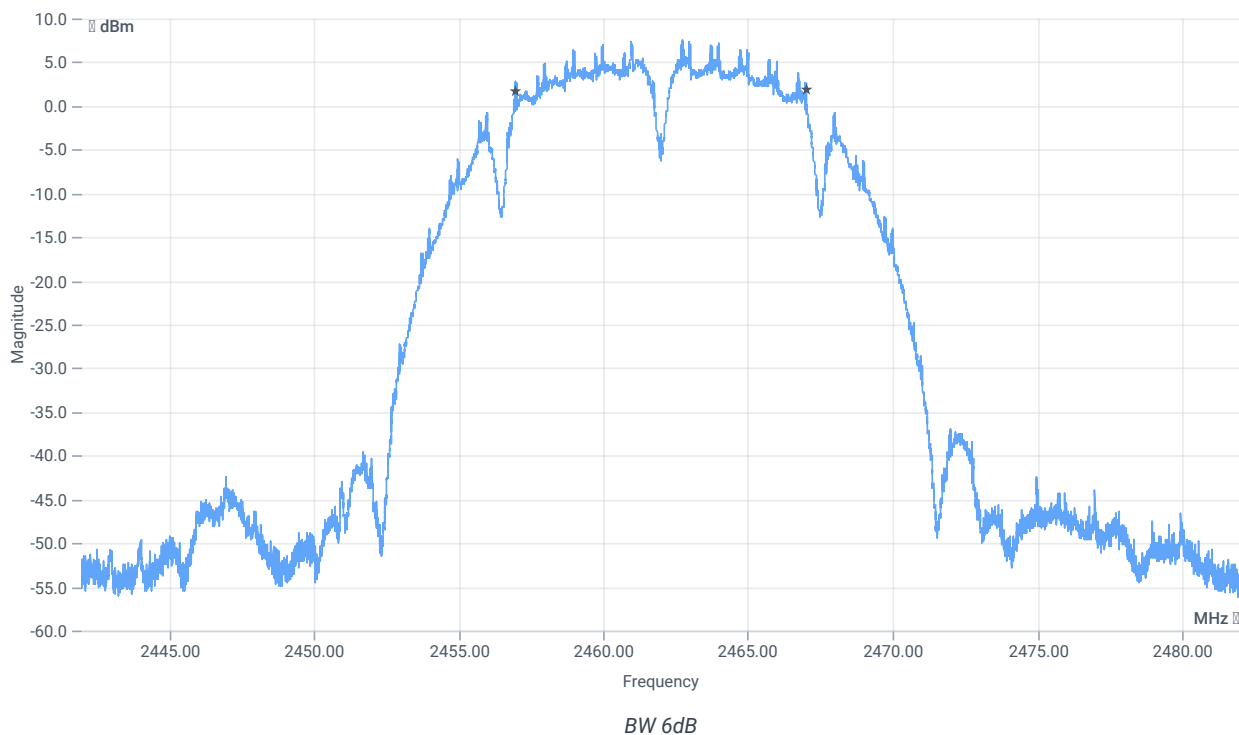

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	10064	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

References

TC start	13.06.2024 08:28:36
Ambit temp [°C] humidity [rel%]	23.8 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.75	dBm	INFO
Ref. frequency	---	---	2410.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.75 10.4 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

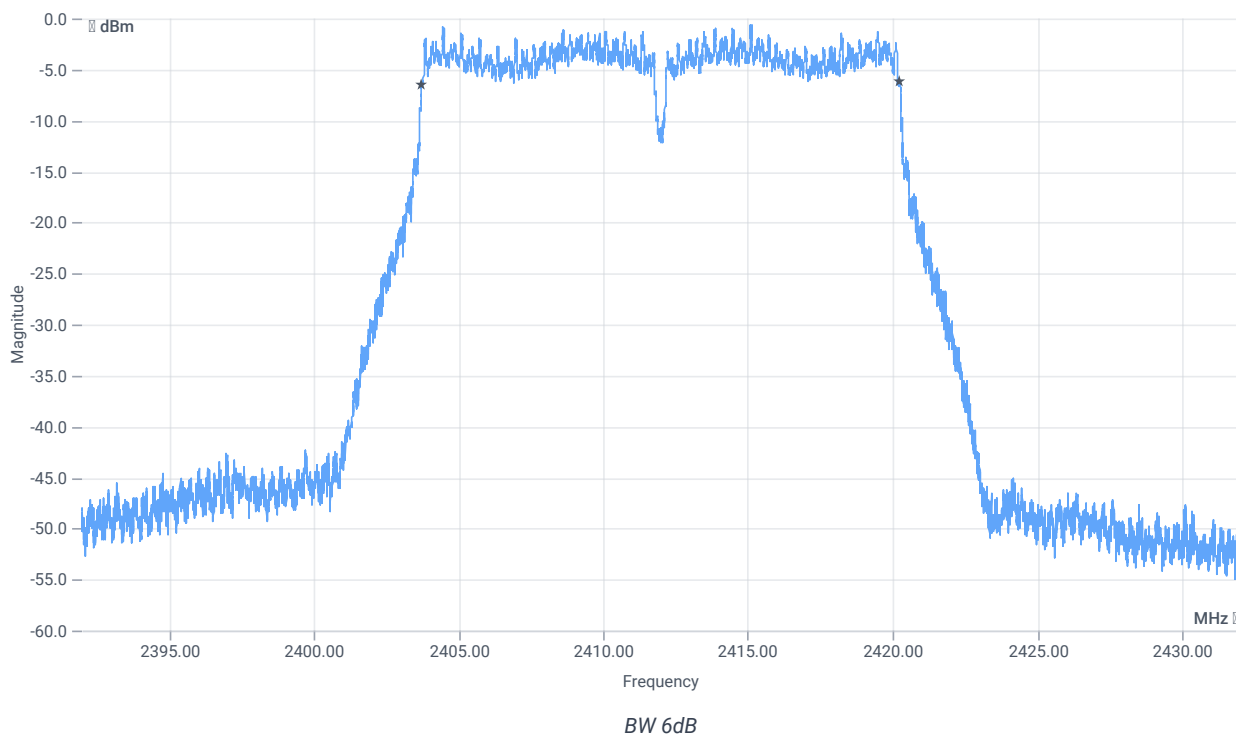

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	16540	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

References

TC start	13.06.2024 08:50:52
Ambit temp [°C] humidity [rel%]	24.0 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	18.33	dBm	INFO
Ref. frequency	---	---	2439.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	23.33 10.42 30
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

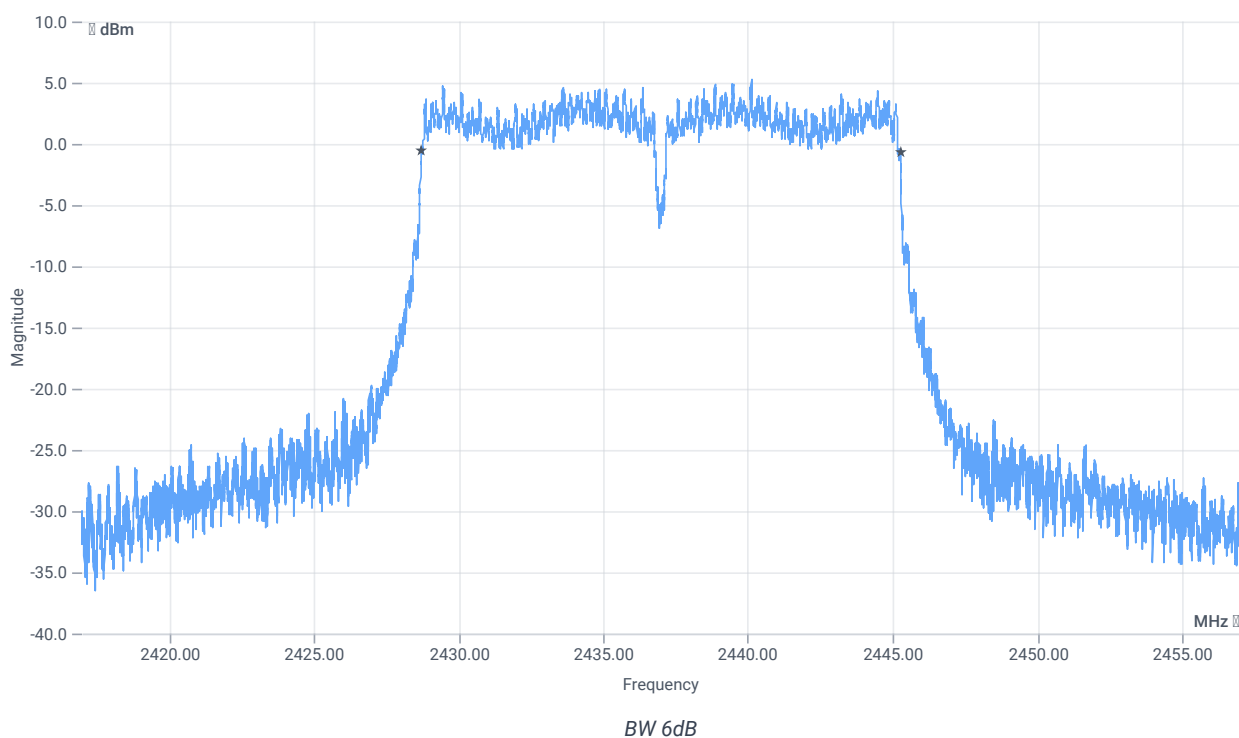

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	16532	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

References

TC start	13.06.2024 09:10:54
Ambit temp [°C] humidity [rel%]	24.1 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.60	dBm	INFO
Ref. frequency	---	---	2465.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.60 10.46 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

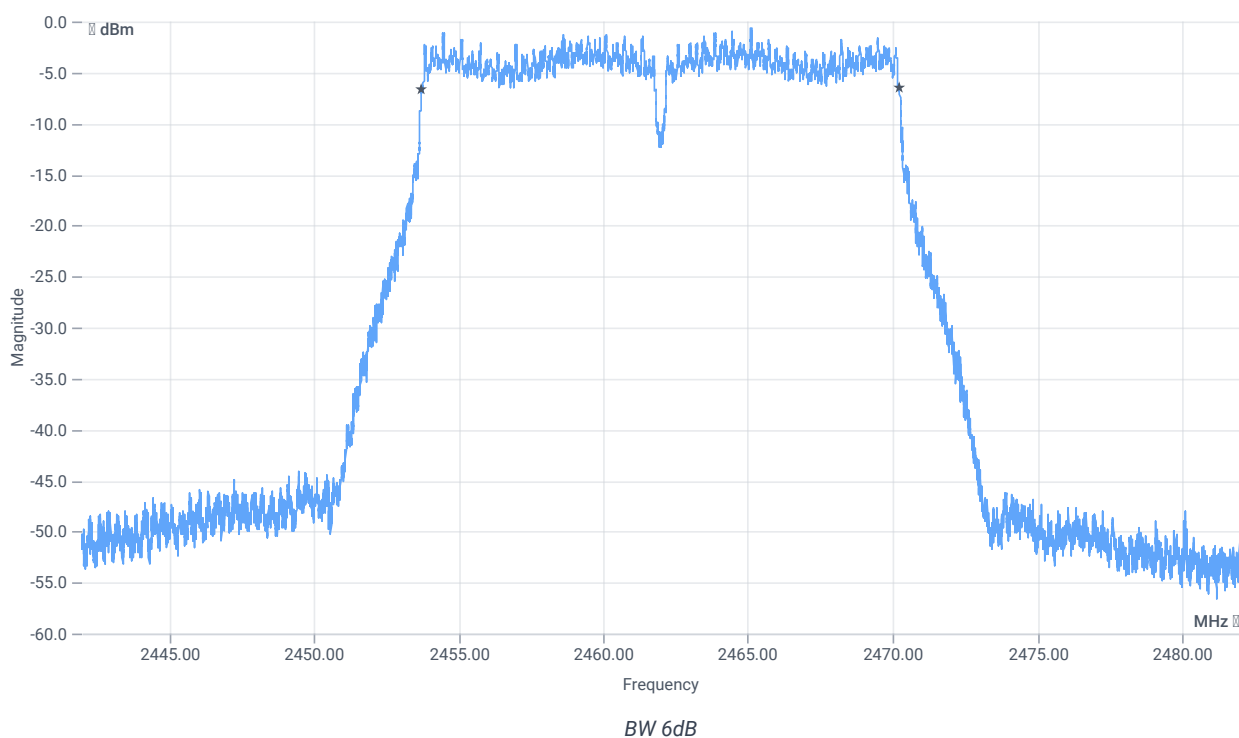

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	16516	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

References

TC start	13.06.2024 07:26:12
Ambit temp [°C] humidity [rel%]	23.3 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.18	dBm	INFO
Ref. frequency	---	---	2413.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.18 10.4 25
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

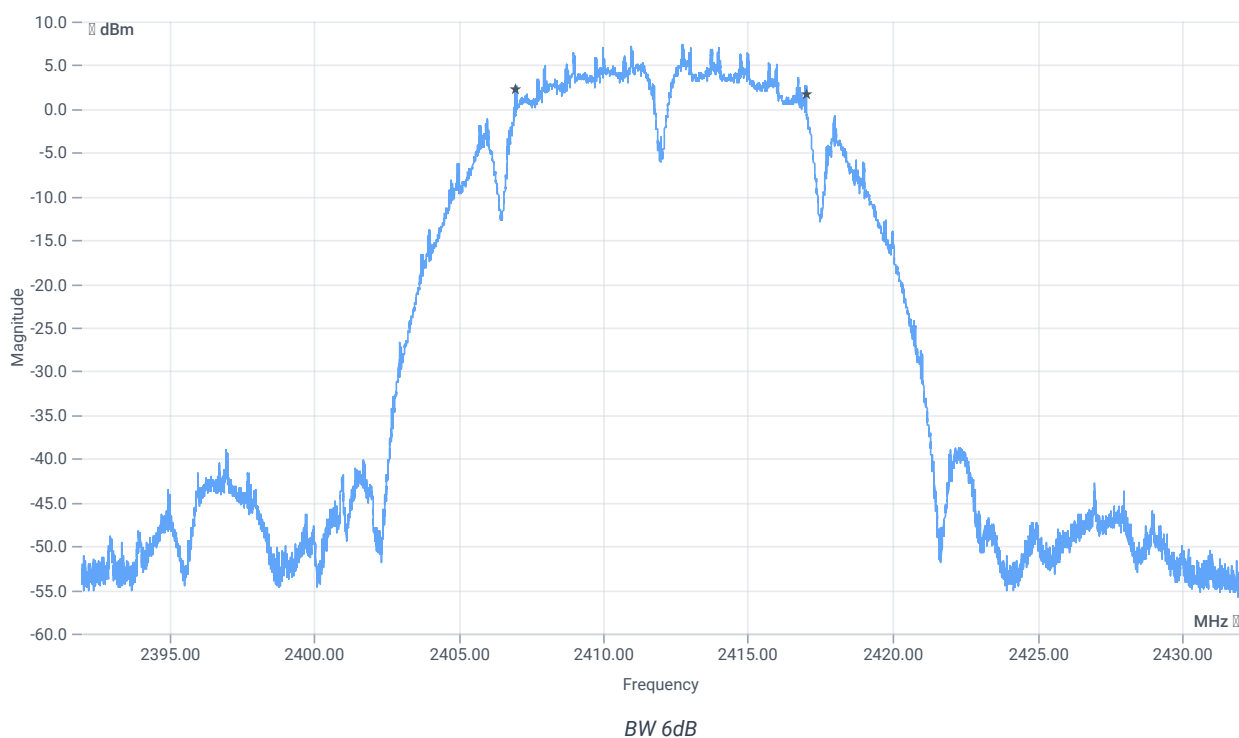

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	10052	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

References

TC start	13.06.2024 07:44:10
Ambit temp [°C] humidity [rel%]	23.5 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	13.14	dBm	INFO
Ref. frequency	---	---	2438.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.14 10.42 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

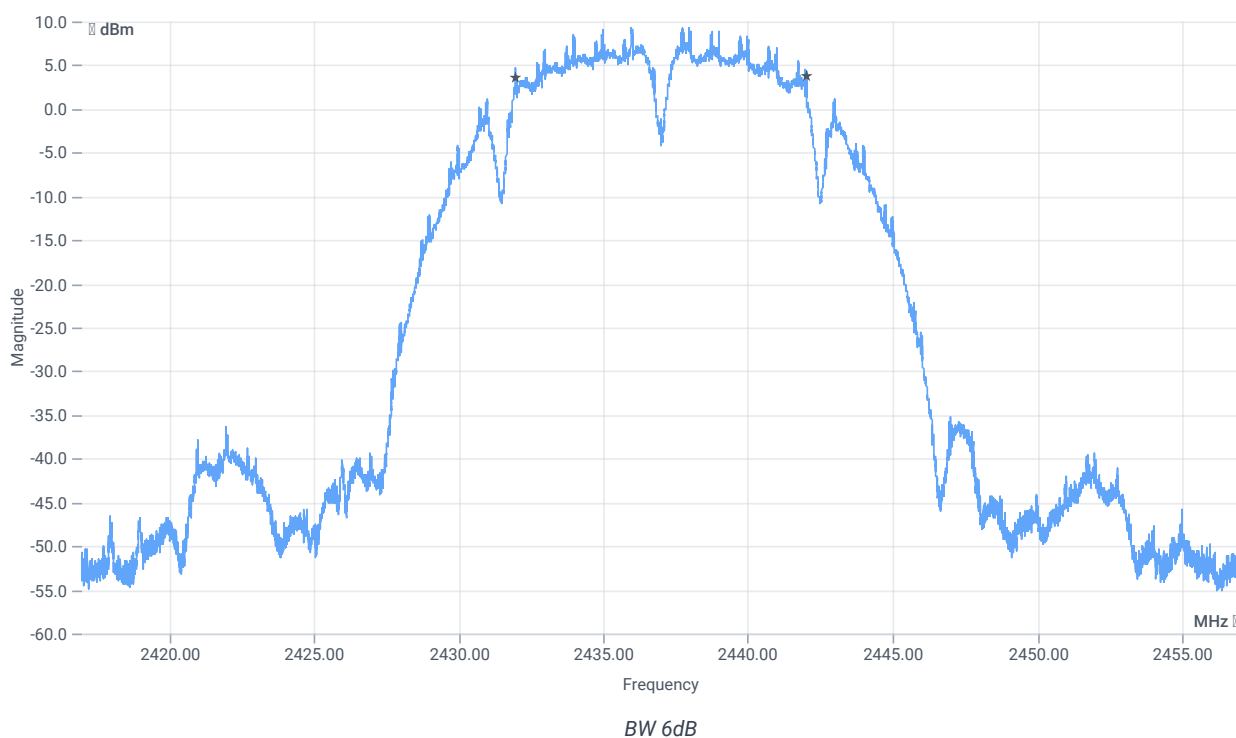

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	10064	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

References

TC start	13.06.2024 08:01:42
Ambit temp [°C] humidity [rel%]	23.6 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.15	dBm	INFO
Ref. frequency	---	---	2460.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.15 10.46 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

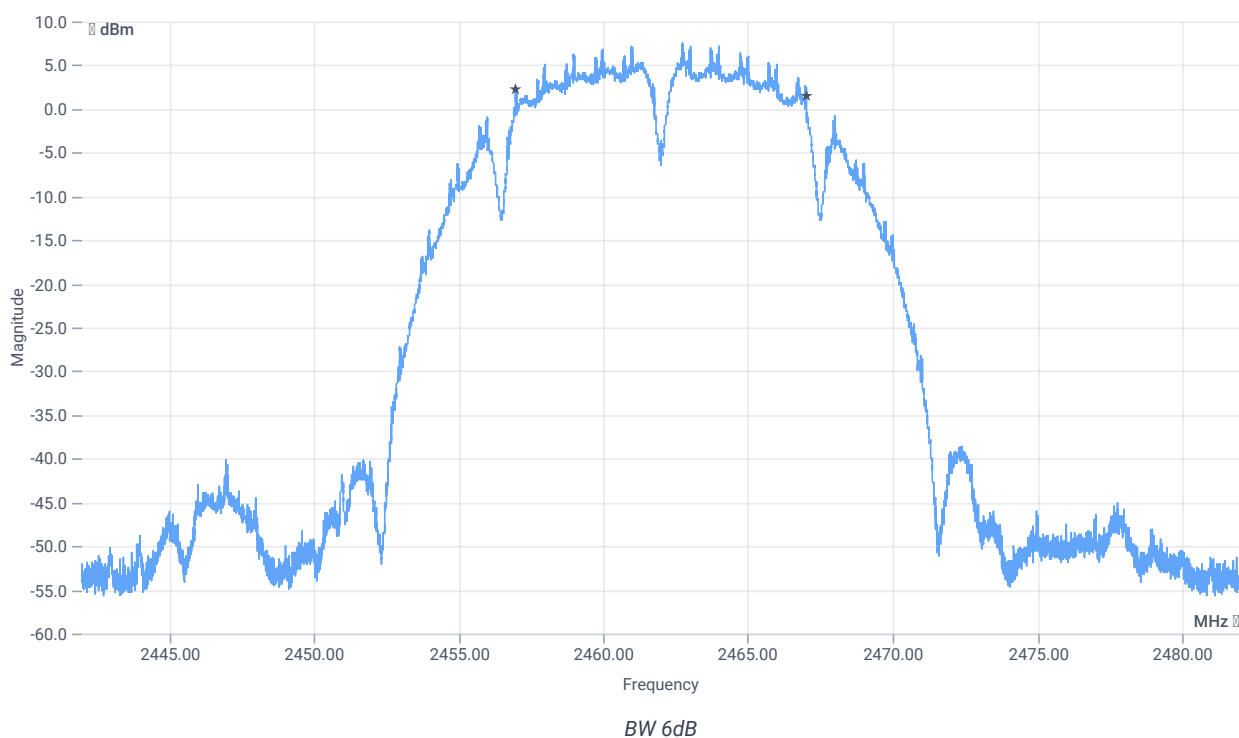

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	10056	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

References

TC start	13.06.2024 09:29:16
Ambit temp [°C] humidity [rel%]	24.3 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.80	dBm	INFO
Ref. frequency	---	---	2409.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.80 10.4 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

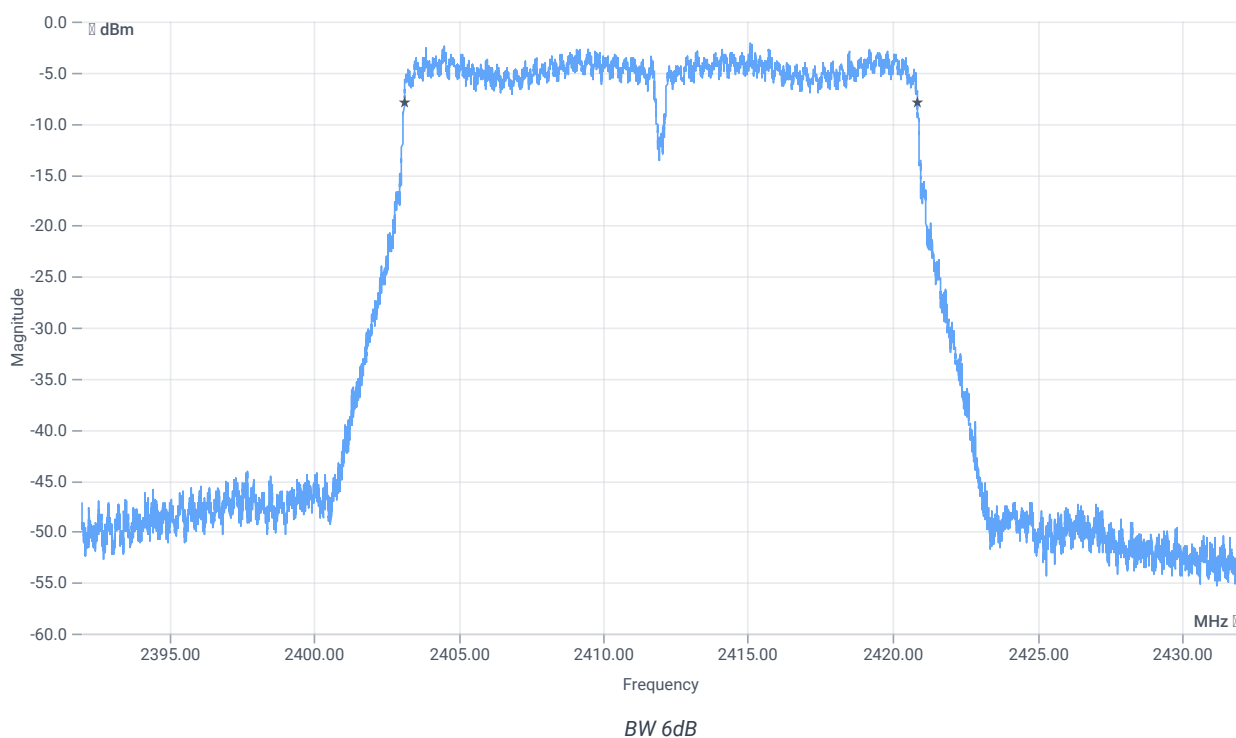

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	17728	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

References

TC start	13.06.2024 09:47:22
Ambit temp [°C] humidity [rel%]	24.3 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	14.36	dBm	INFO
Ref. frequency	---	---	2440.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.36 10.42 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

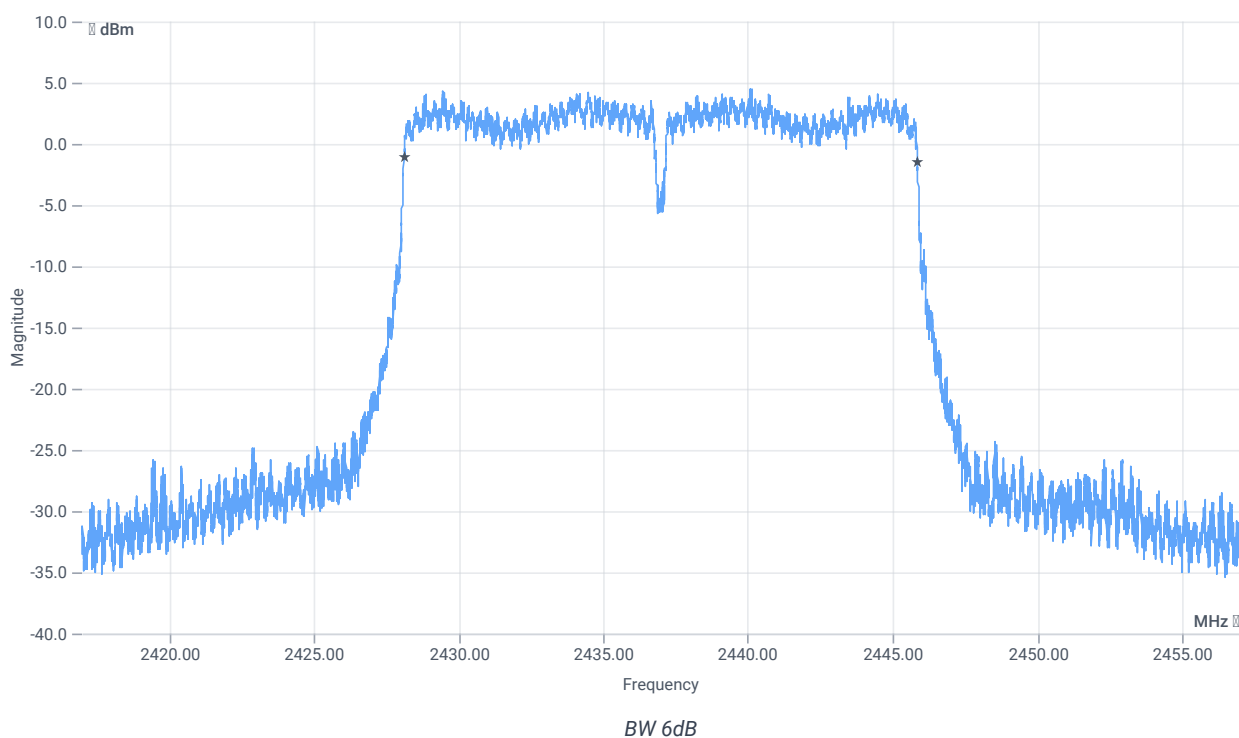

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	17744	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

References

TC start	13.06.2024 10:04:55
Ambit temp [°C] humidity [rel%]	24.4 34
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.46	dBm	INFO
Ref. frequency	---	---	2457.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.46 10.46 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

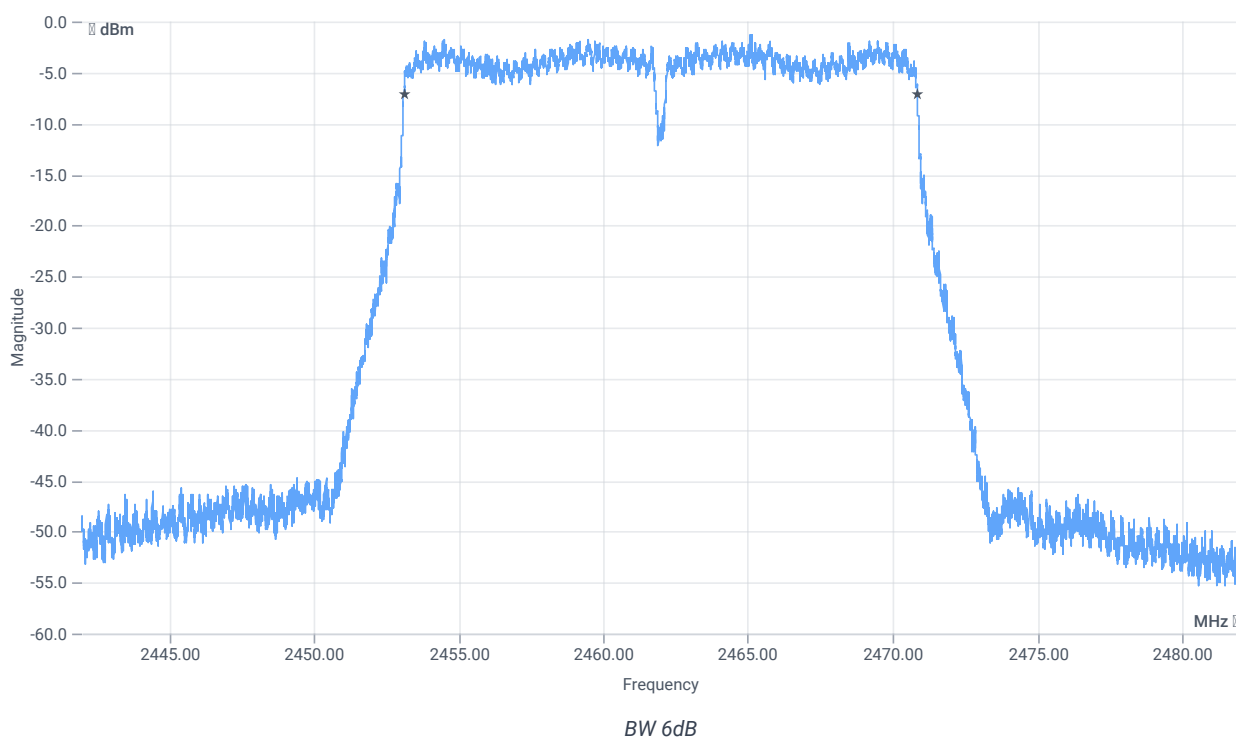

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	17736	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

References

TC start	11.06.2024 09:32:20
Ambit temp [°C] humidity [rel%]	23.3 37
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.11	dBm	INFO
Ref. frequency	---	---	2414.700	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.11 10.48 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

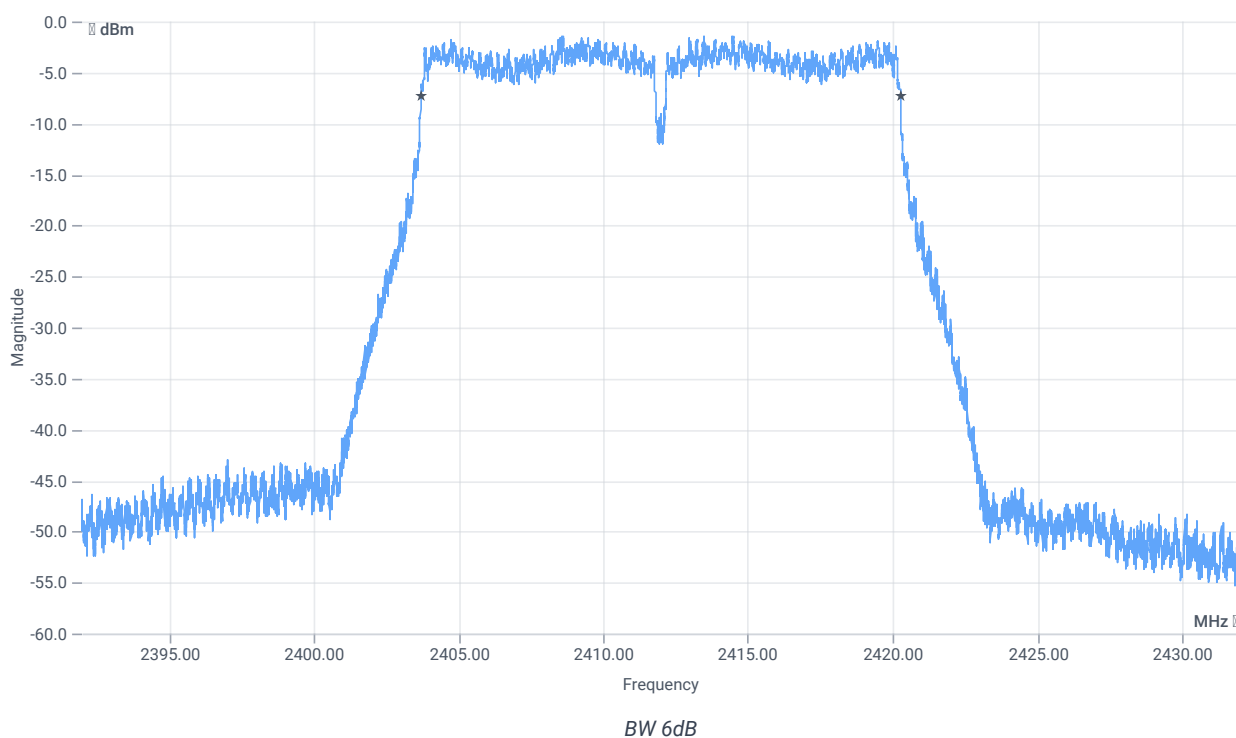

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	16564	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

References

TC start	11.06.2024 09:53:30
Ambit temp [°C] humidity [rel%]	23.5 36
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	15.74	dBm	INFO
Ref. frequency	---	---	2439.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.74 10.56 30
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

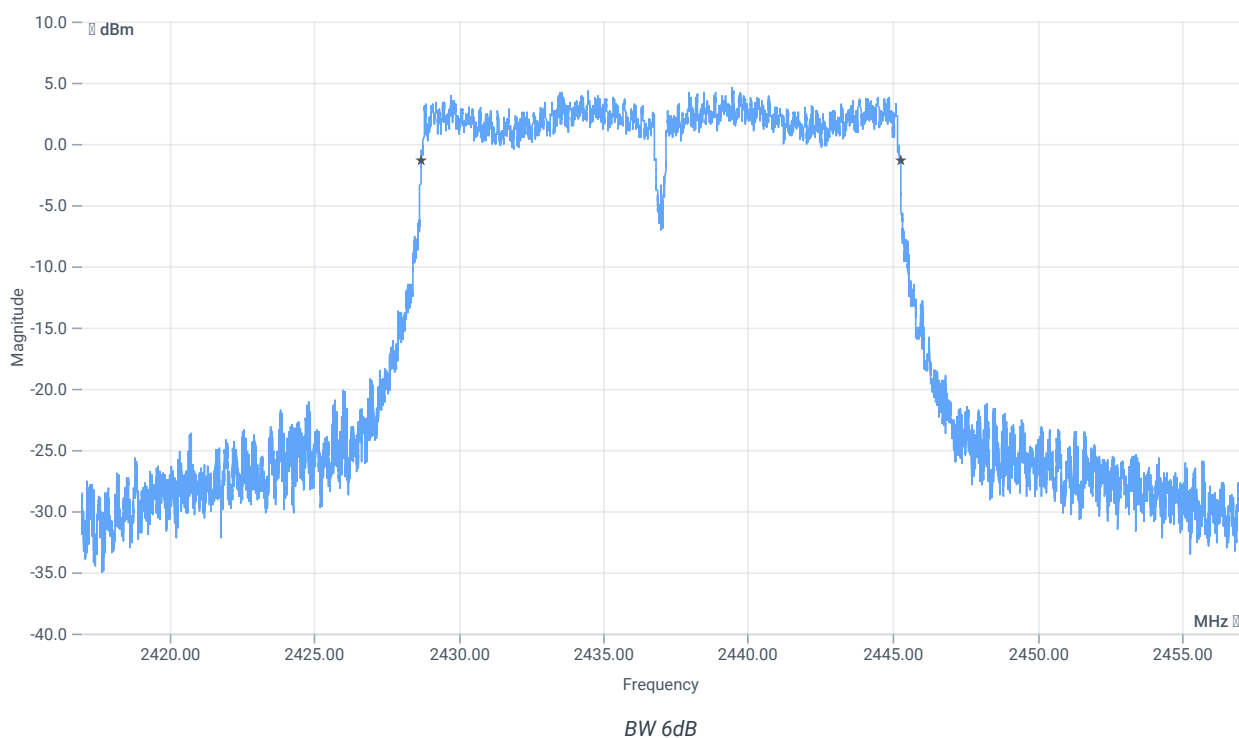

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	16552	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

References

TC start	11.06.2024 10:11:11
Ambit temp [°C] humidity [rel%]	23.7 36
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.03	dBm	INFO
Ref. frequency	---	---	2459.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.03 10.6 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

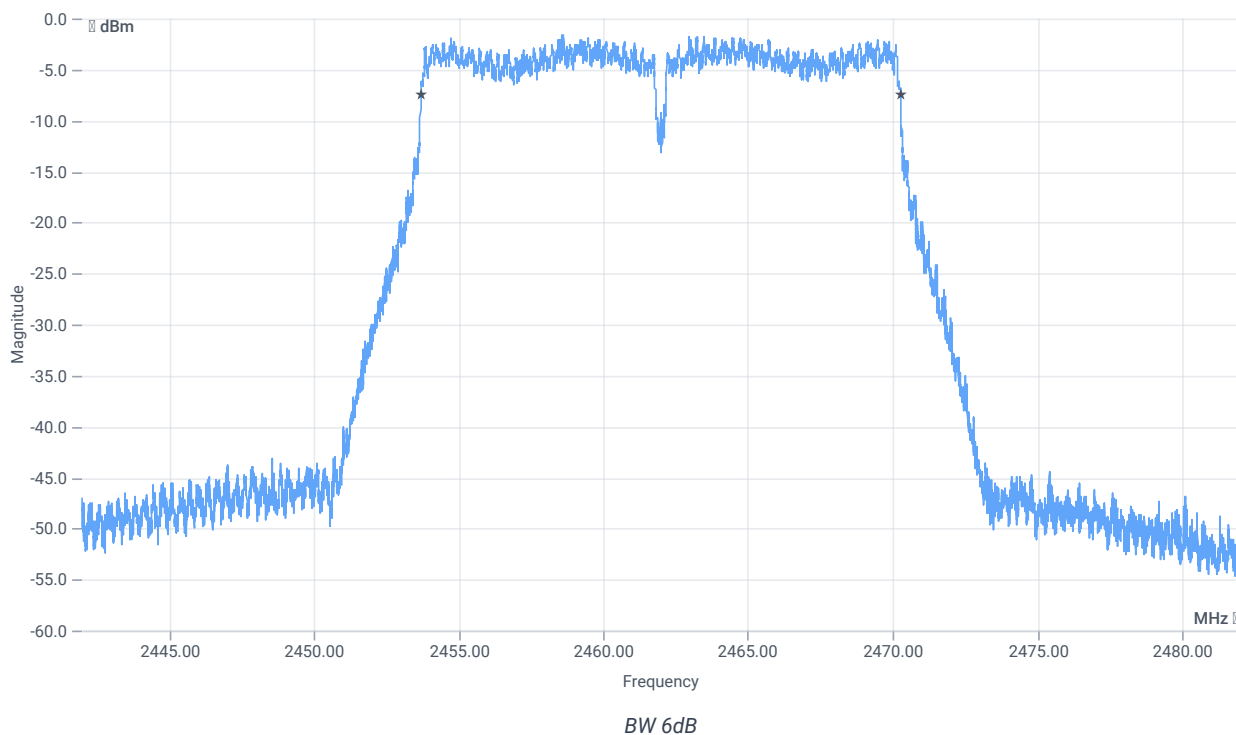

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	16564	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

References

TC start	11.06.2024 12:08:41
Ambit temp [°C] humidity [rel%]	24.3 33
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2422 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	6.67	dBm	INFO
Ref. frequency	---	---	2417.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.67 10.51 20
Start [MHz] Stop [MHz]	2382.000 2462.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

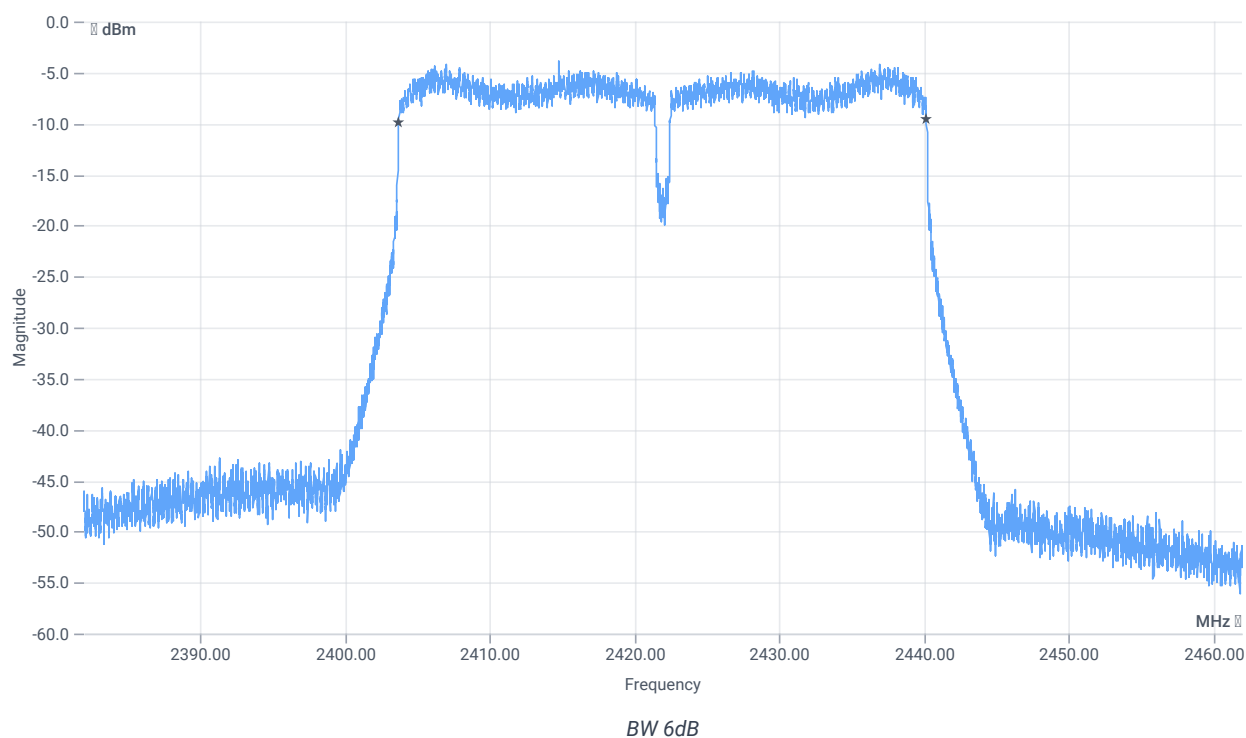

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	36456	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

References

TC start	11.06.2024 12:28:38
Ambit temp [°C] humidity [rel%]	24.4 33
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.84	dBm	INFO
Ref. frequency	---	---	2453.780	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.84 10.56 25
Start [MHz] Stop [MHz]	2397.000 2477.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

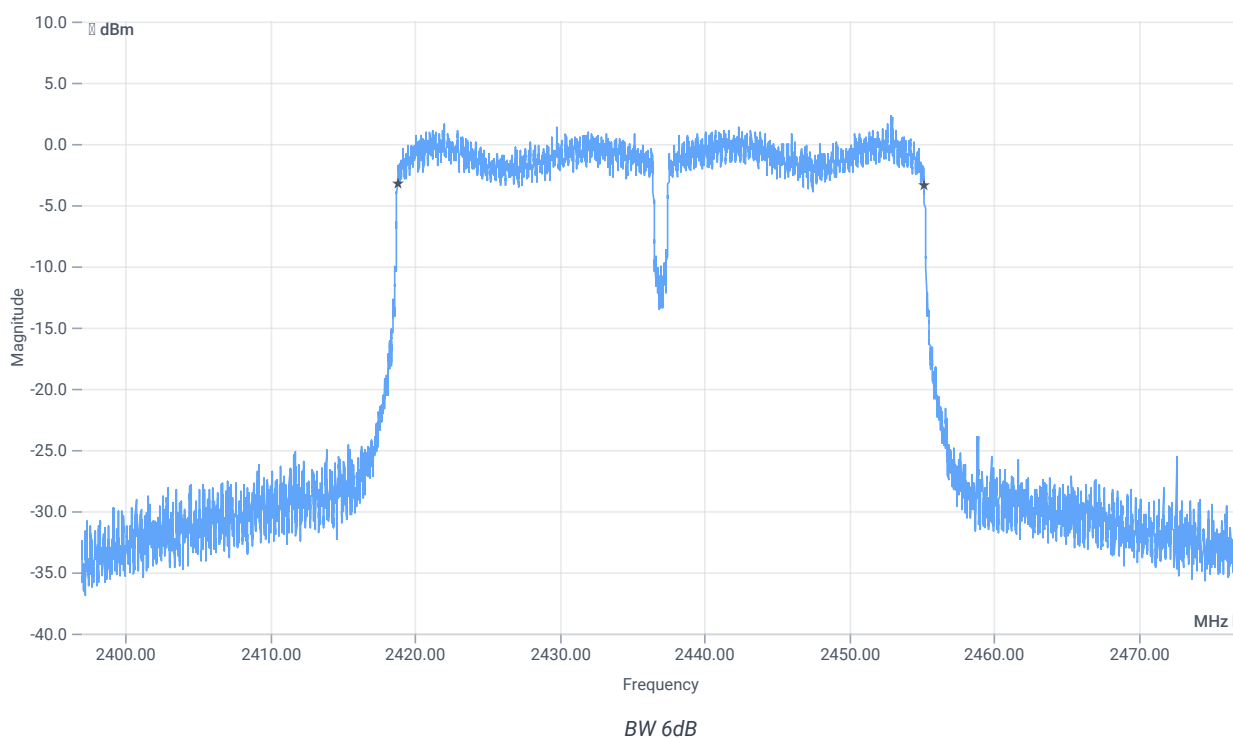

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	36416	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

References

TC start	11.06.2024 12:56:15
Ambit temp [°C] humidity [rel%]	24.6 32
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2452 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.69	dBm	INFO
Ref. frequency	---	---	2436.320	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.69 10.58 15
Start [MHz] Stop [MHz]	2412.000 2492.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

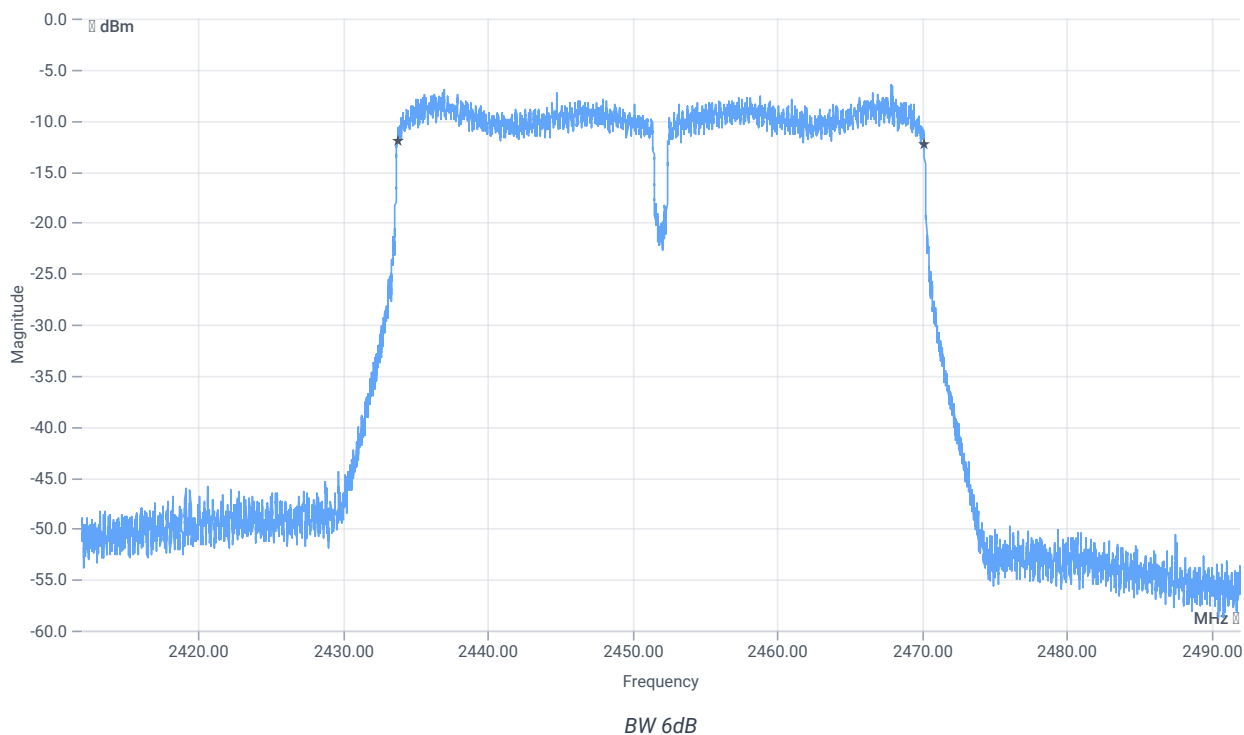

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	36432	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

References

TC start	13.06.2024 10:43:48
Ambit temp [°C] humidity [rel%]	24.6 33
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2422 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.86	dBm	INFO
Ref. frequency	---	---	2438.480	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.86 10.41 15
Start [MHz] Stop [MHz]	2382.000 2462.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

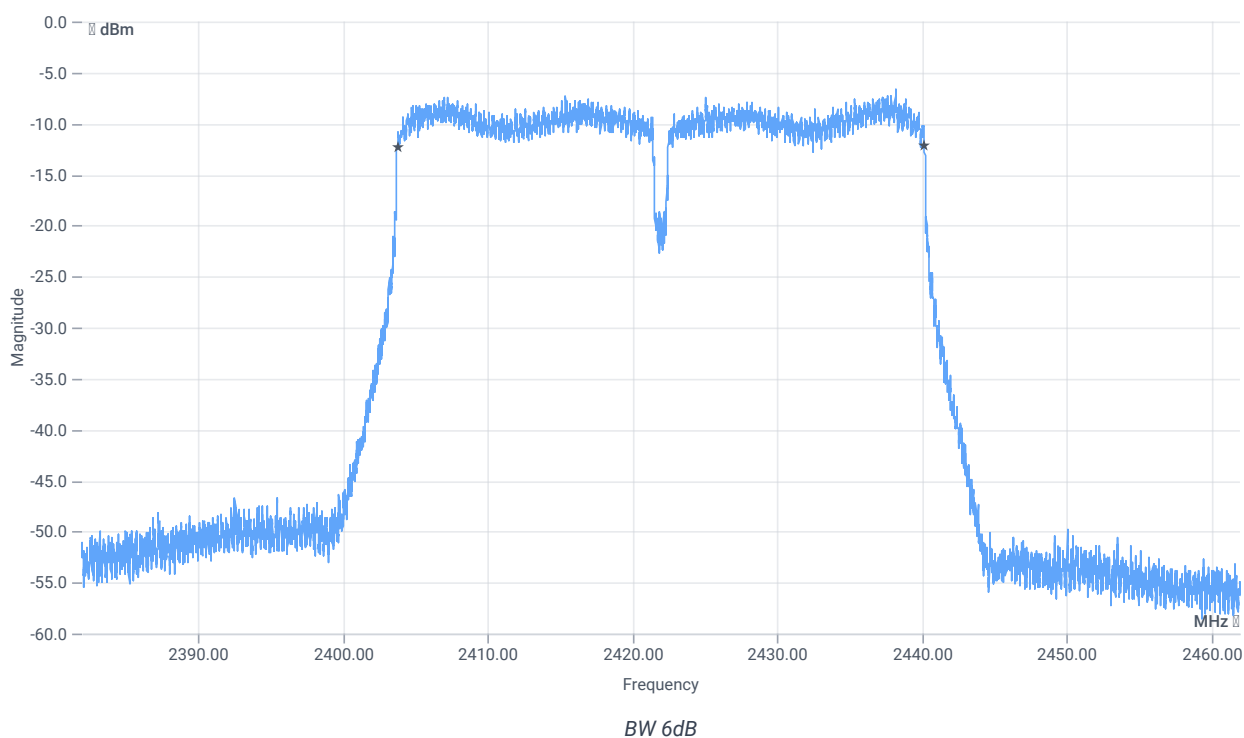

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	36432	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

References

TC start	13.06.2024 11:01:24
Ambit temp [°C] humidity [rel%]	24.7 33
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	13.52	dBm	INFO
Ref. frequency	---	---	2431.210	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.52 10.42 25
Start [MHz] Stop [MHz]	2397.000 2477.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

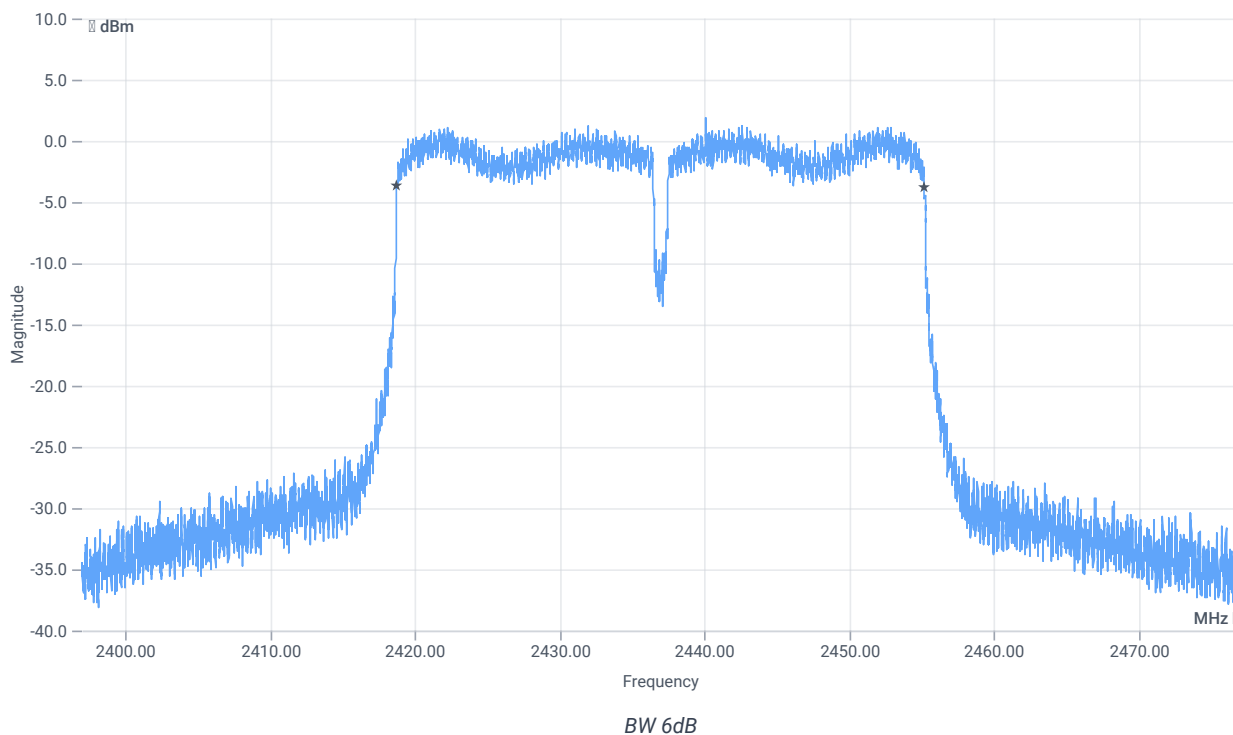

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	36440	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

References

TC start	13.06.2024 12:45:41
Ambit temp [°C] humidity [rel%]	25.2 30
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2452 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.51	dBm	INFO
Ref. frequency	---	---	2465.090	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.51 10.44 15
Start [MHz] Stop [MHz]	2412.000 2492.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

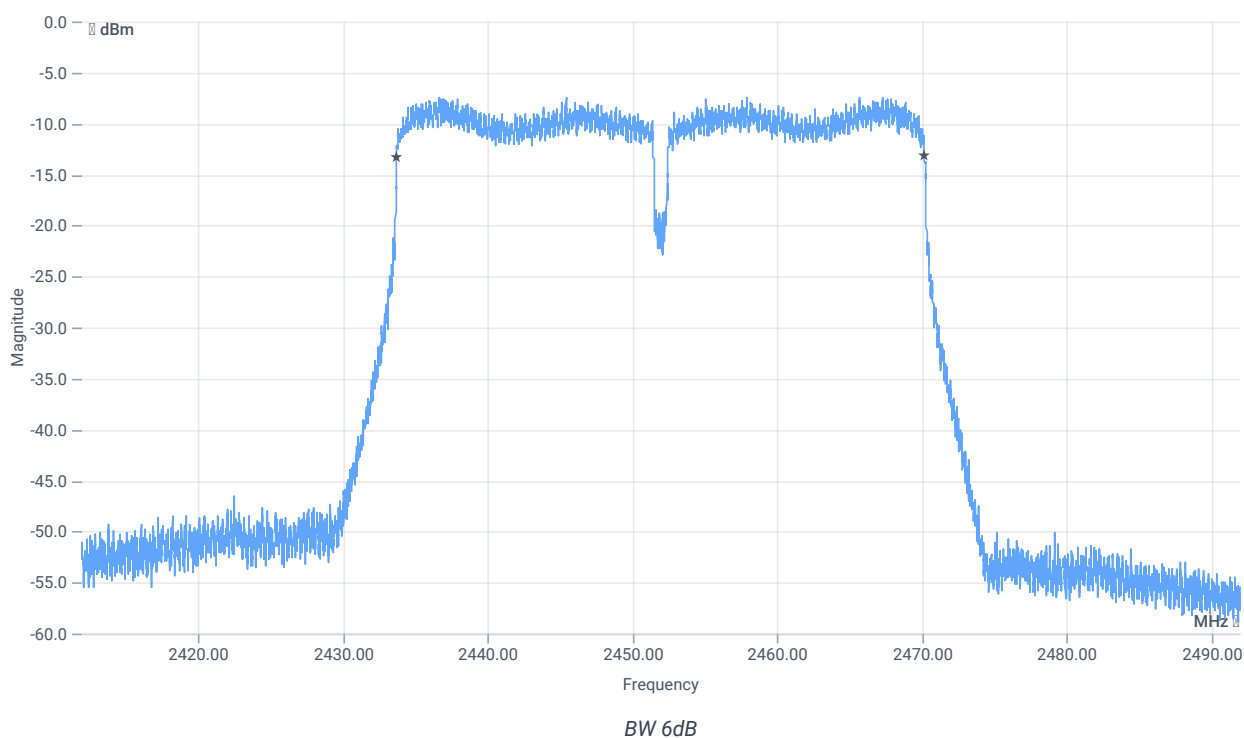

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	36472	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

References

TC start	11.06.2024 10:39:19
Ambit temp [°C] humidity [rel%]	23.8 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.85	dBm	INFO
Ref. frequency	---	---	2409.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.85 10.48 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

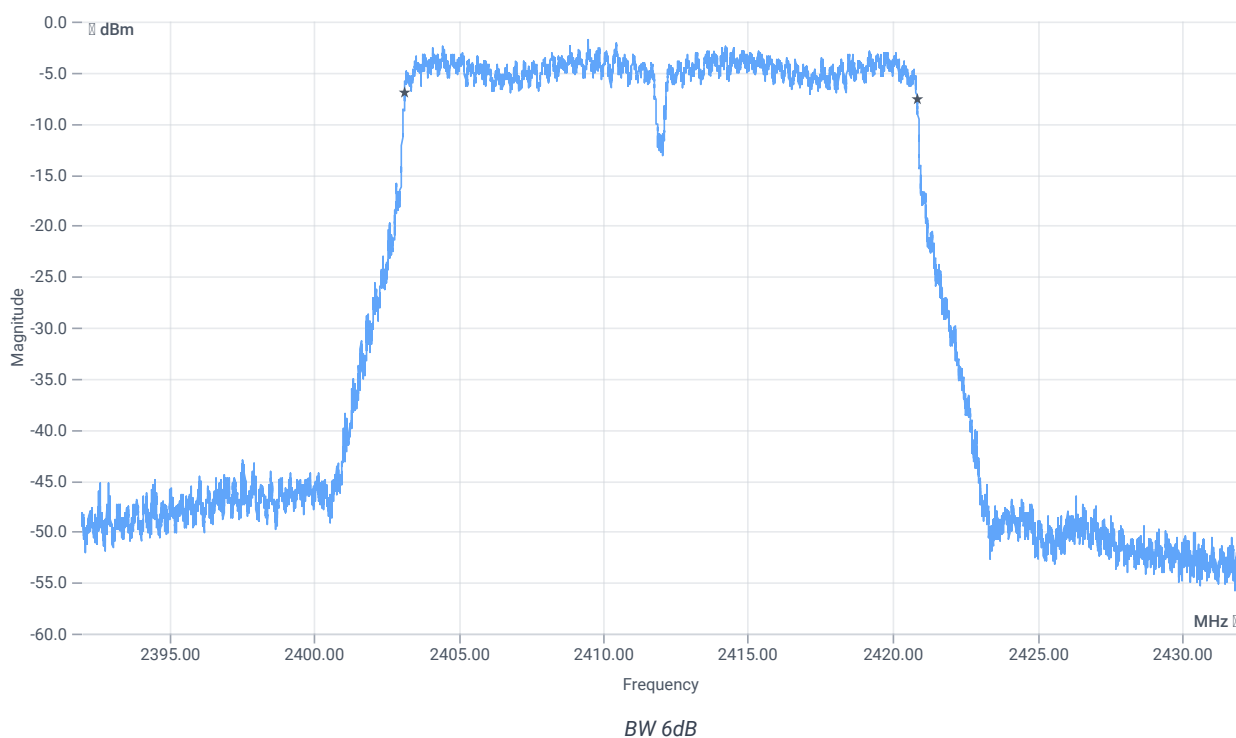

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	17712	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

References

TC start	11.06.2024 10:58:20
Ambit temp [°C] humidity [rel%]	24.0 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	14.28	dBm	INFO
Ref. frequency	---	---	2441.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.28 10.56 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

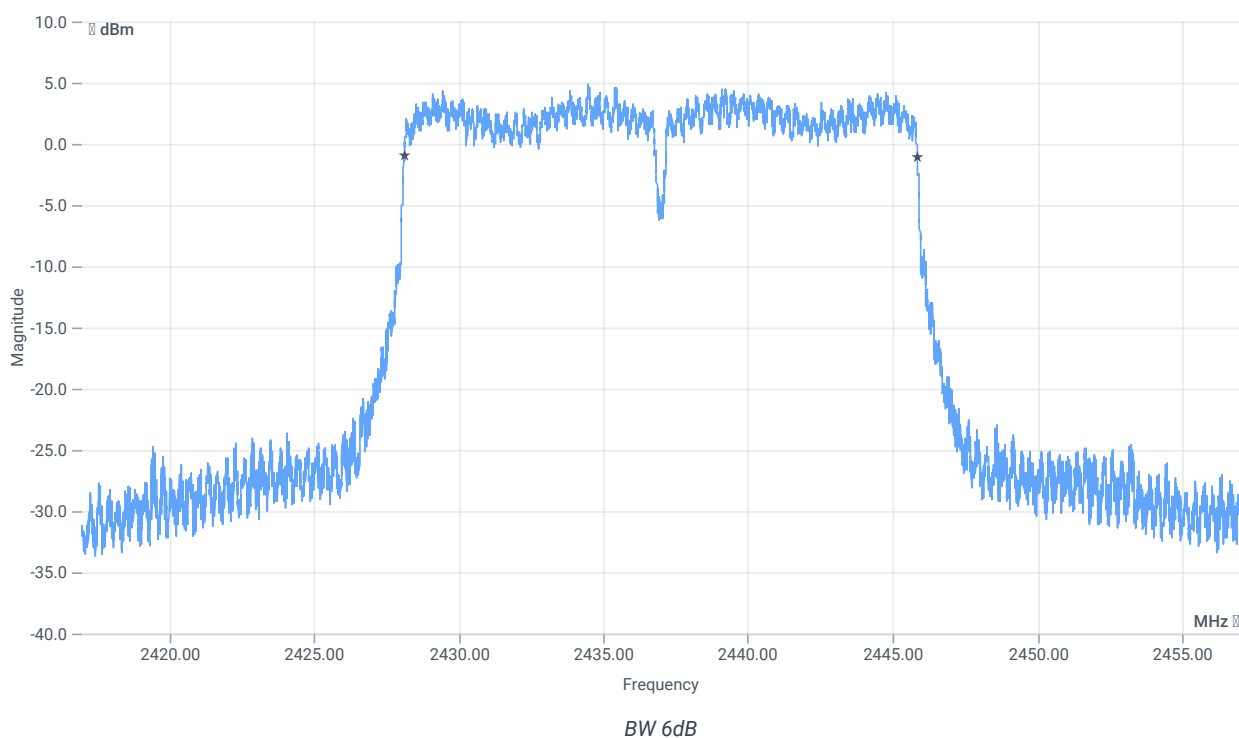

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	17732	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

References

TC start	11.06.2024 11:41:54
Ambit temp [°C] humidity [rel%]	24.1 34
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.83	dBm	INFO
Ref. frequency	---	---	2454.910	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.83 10.6 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

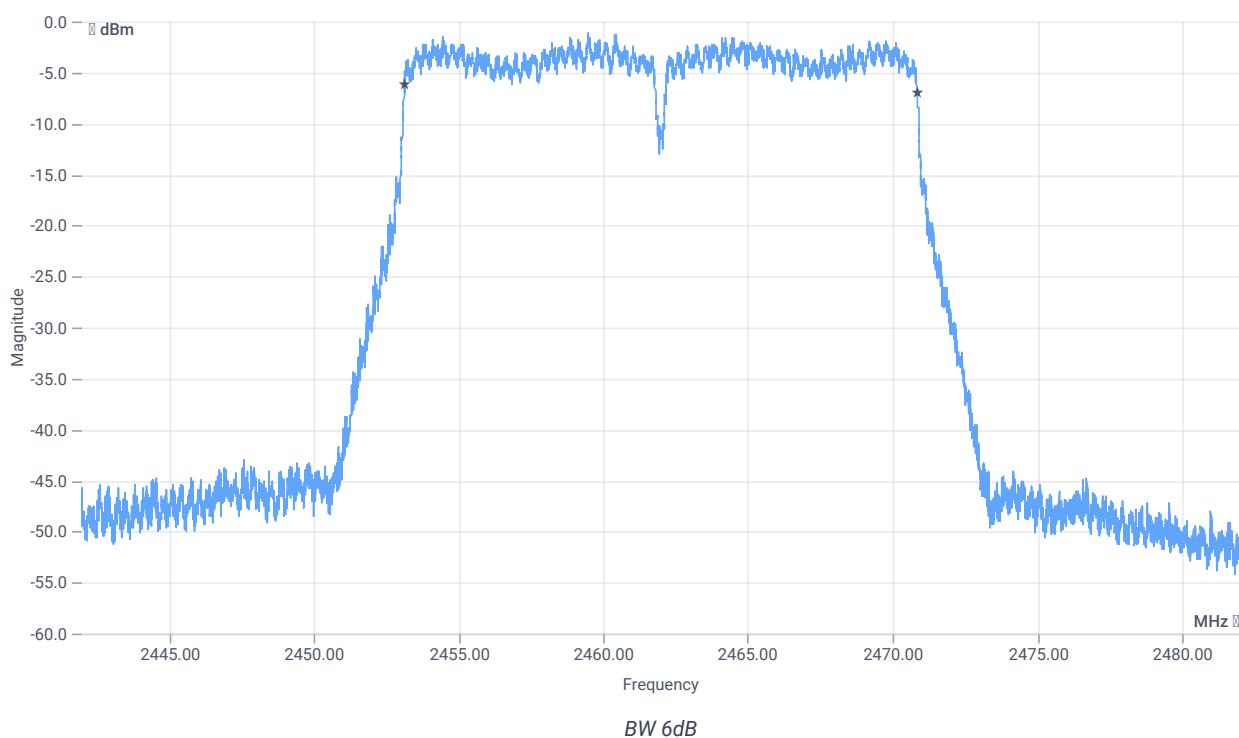

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	17736	kHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

References

TC start	11.06.2024 08:03:14
Ambit temp [°C] humidity [rel%]	22.0 39
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2412 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.44	dBm	INFO
Ref. frequency	---	---	2413.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.44 10.48 25
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

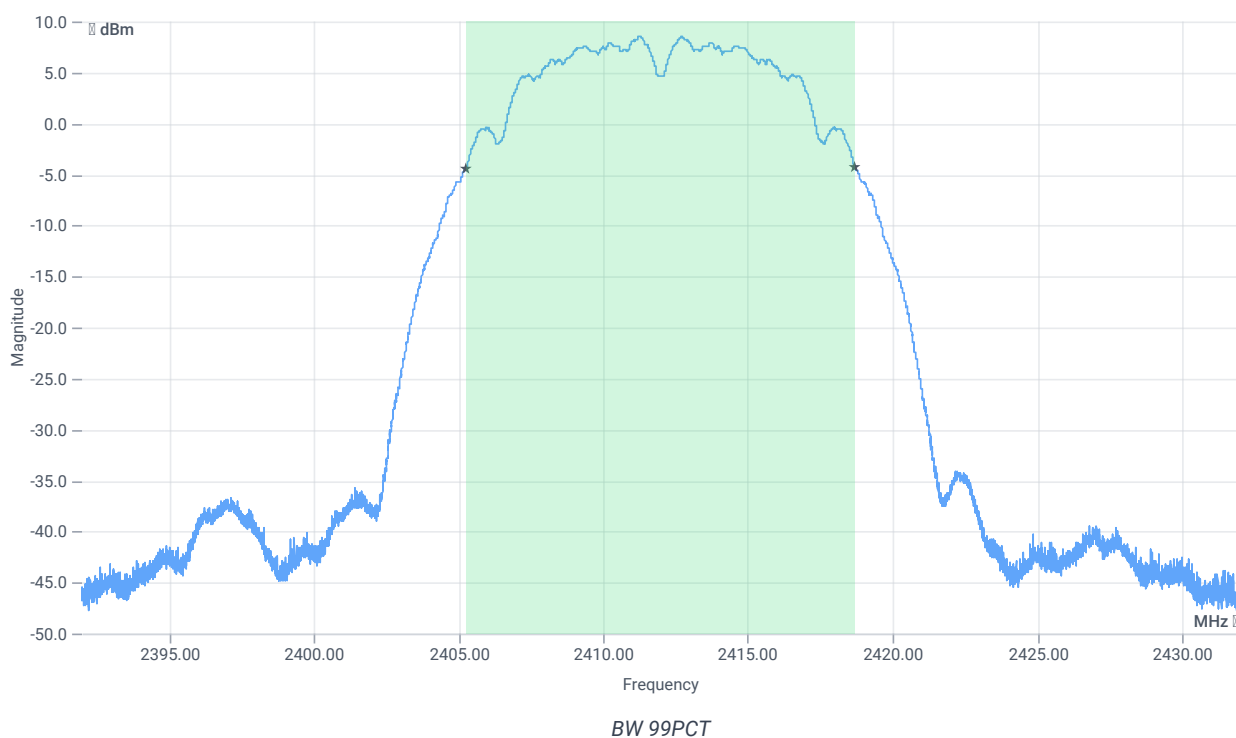


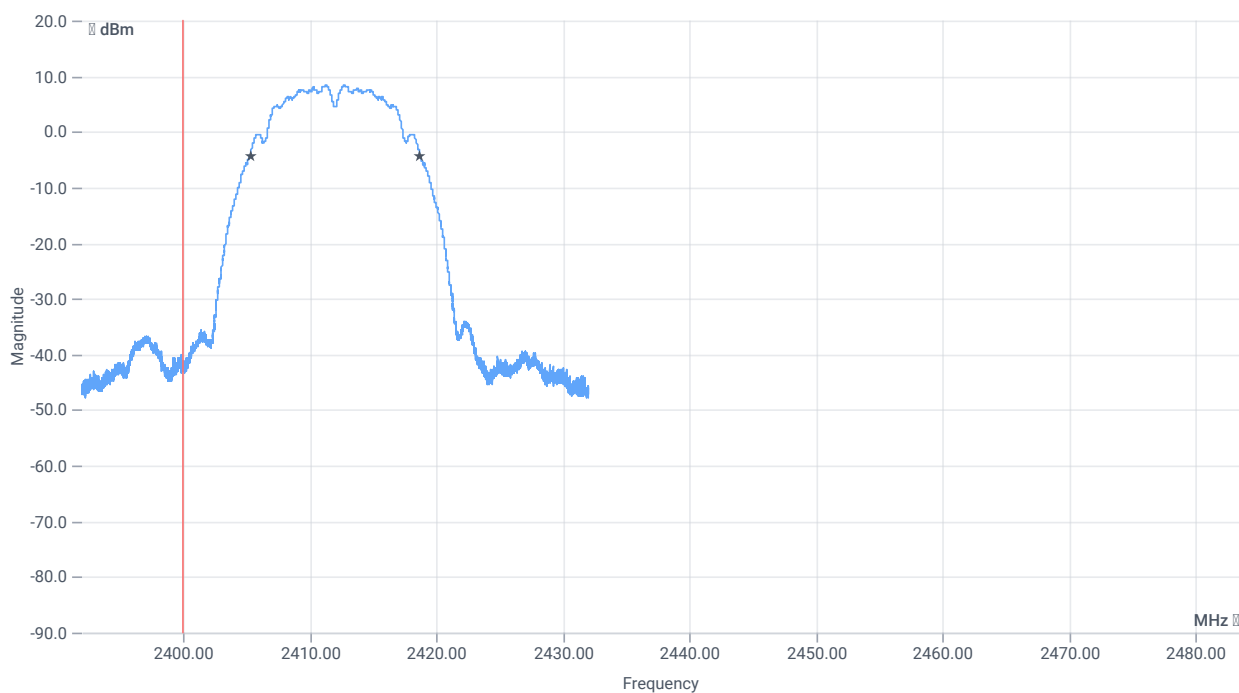


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	13423.000	kHz	INFO
T1 99%	2400.000000	---	2405.2727	MHz	PASS
T2 99%	---	2483.500000	2418.6953	MHz	PASS

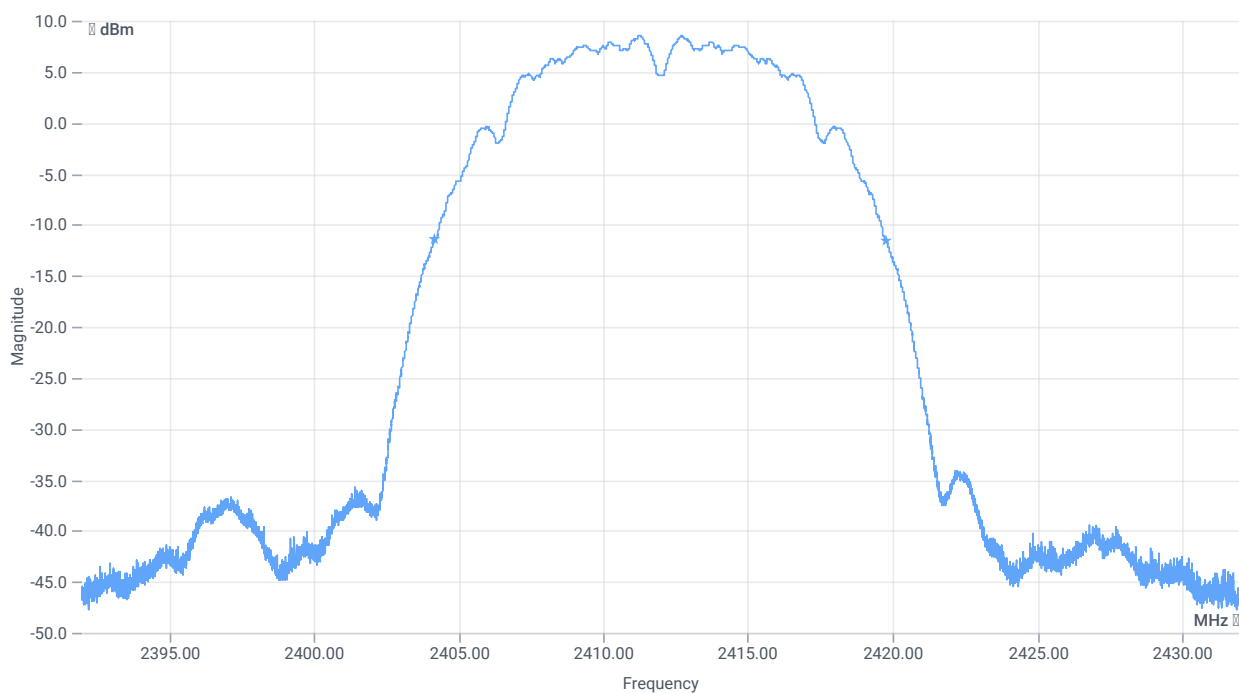

BW 20dB

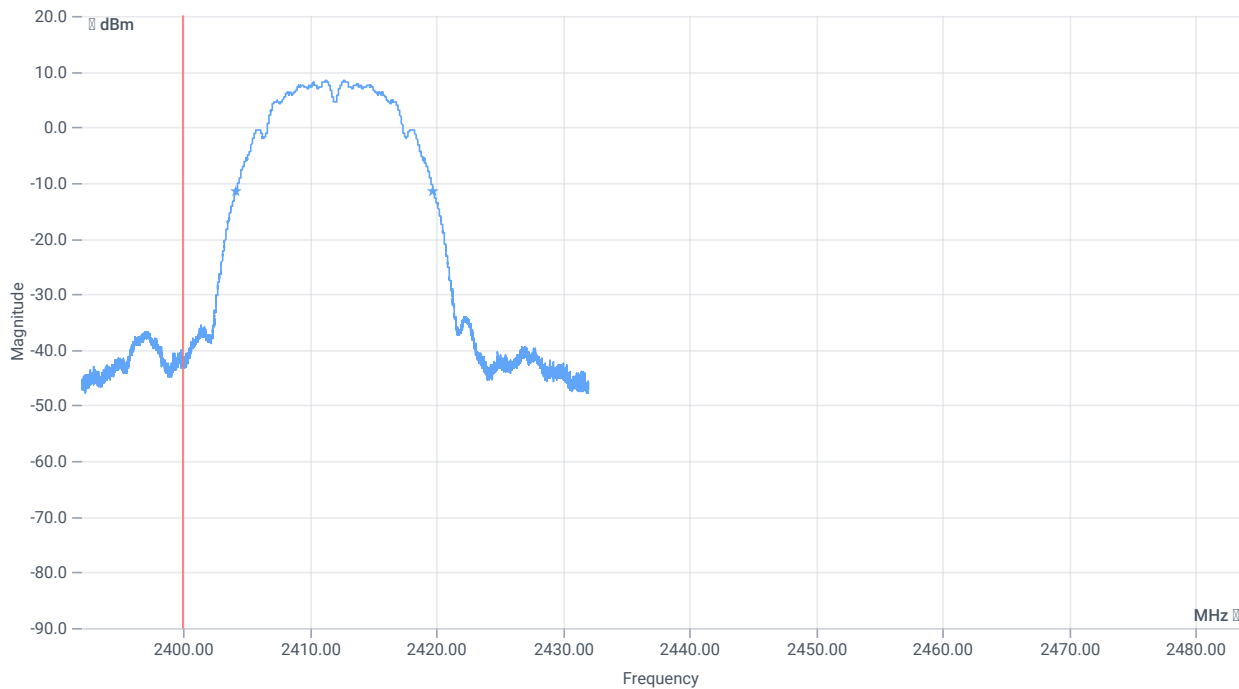

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	15552	kHz	INFO
T1 20dB	2400.000000	---	2404.1960	MHz	PASS
T2 20dB	---	2483.500000	2419.7480	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

References

TC start	11.06.2024 08:31:01
Ambit temp [°C] humidity [rel%]	22.4 38
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	13.37	dBm	INFO
Ref. frequency	---	---	2438.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.37 10.56 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

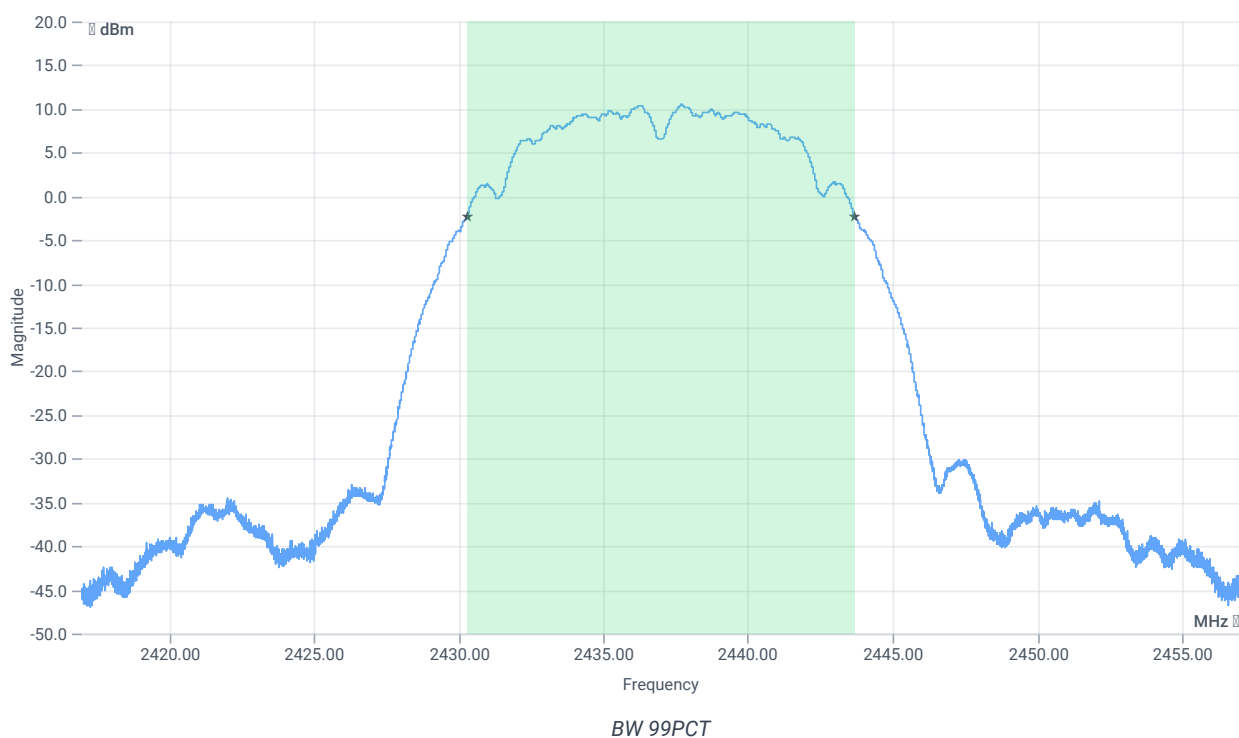


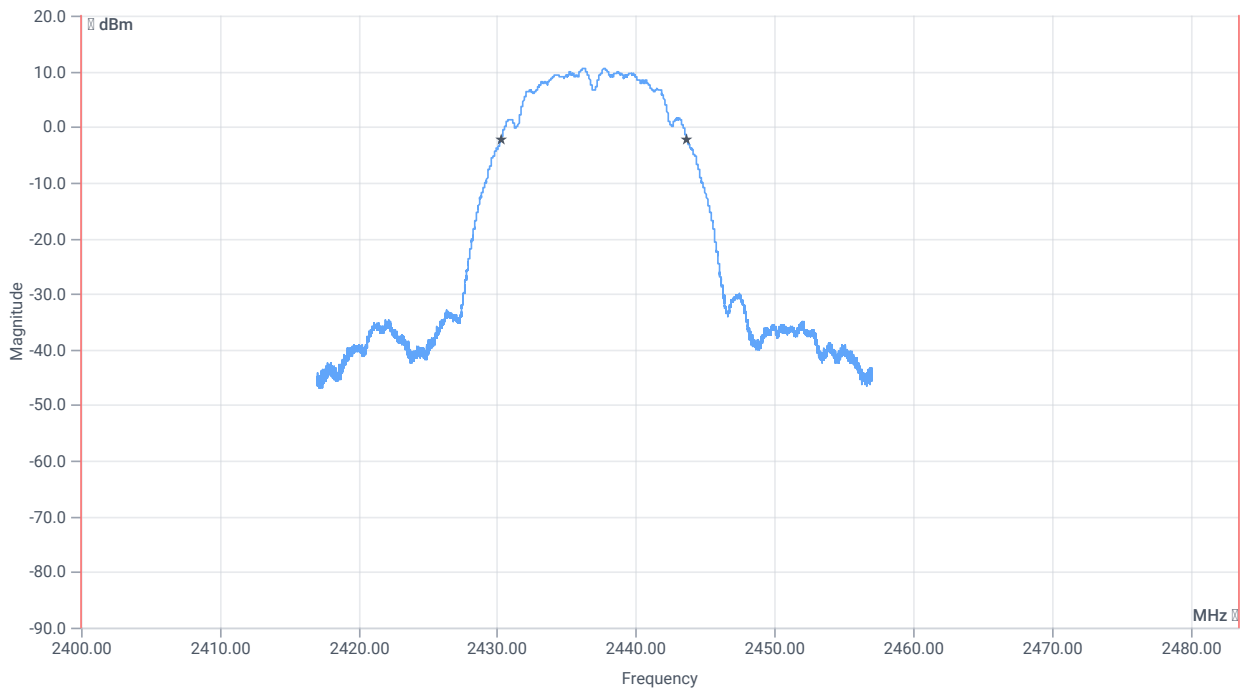


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	13375.000	kHz	INFO
T1 99%	2400.000000	---	2430.3047	MHz	PASS
T2 99%	---	2483.500000	2443.6793	MHz	PASS

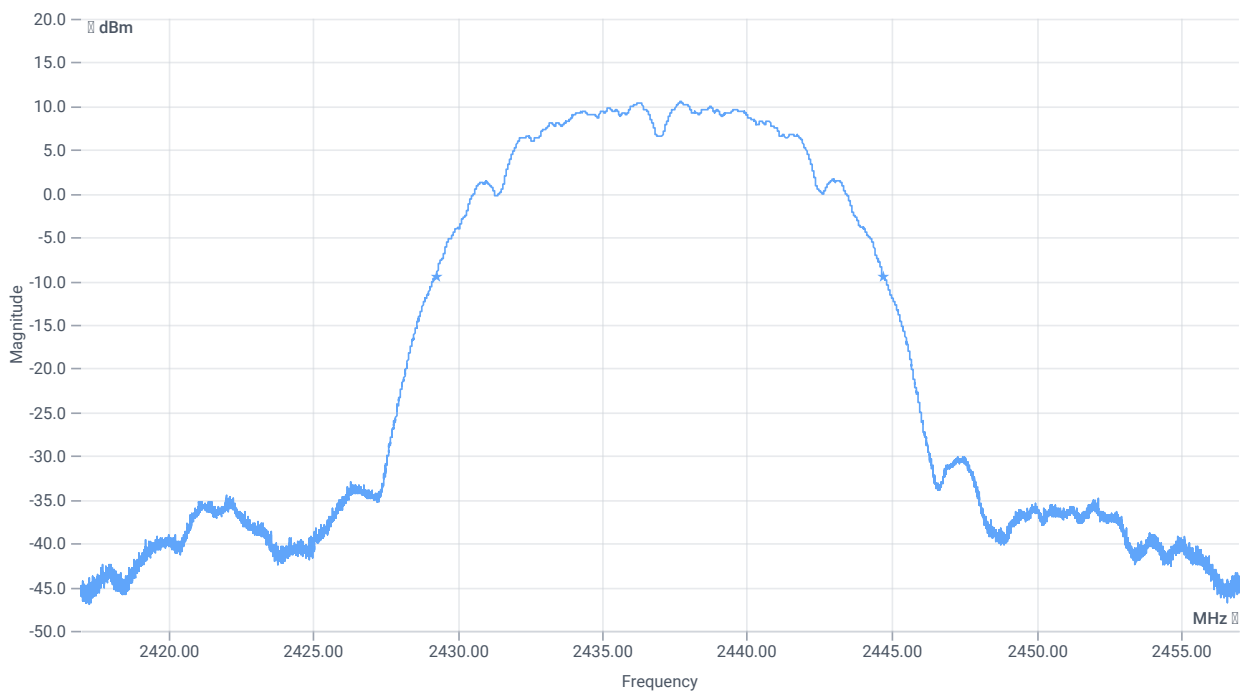

BW 20dB

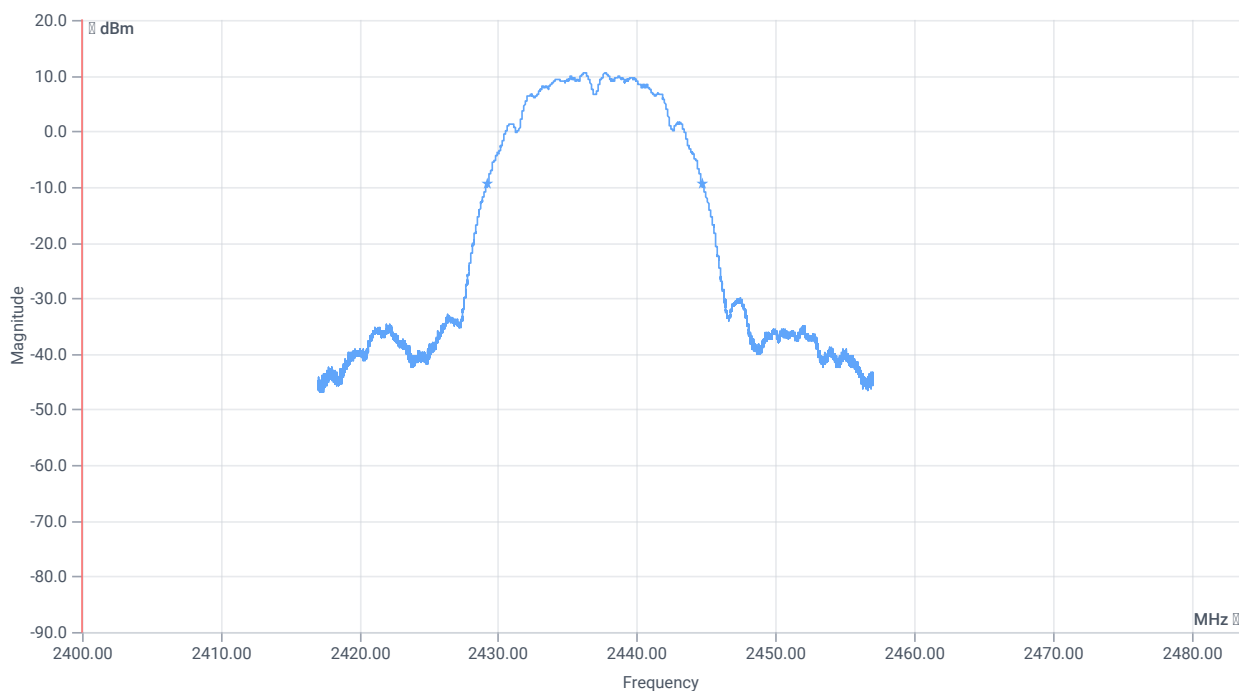

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	15440	kHz	INFO
T1 20dB	2400.000000	---	2429.2680	MHz	PASS
T2 20dB	---	2483.500000	2444.7080	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

References

TC start	11.06.2024 08:53:35
Ambit temp [°C] humidity [rel%]	22.8 38
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2462 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.18	dBm	INFO
Ref. frequency	---	---	2460.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.18 10.6 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

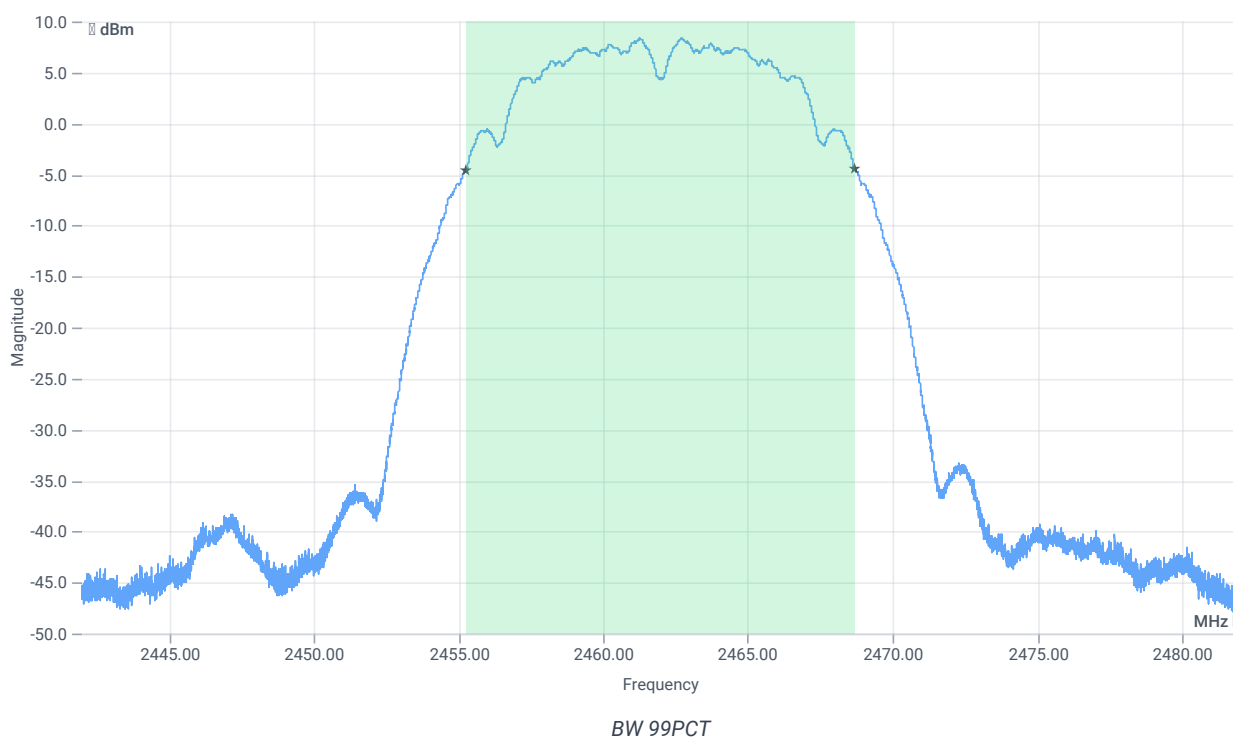


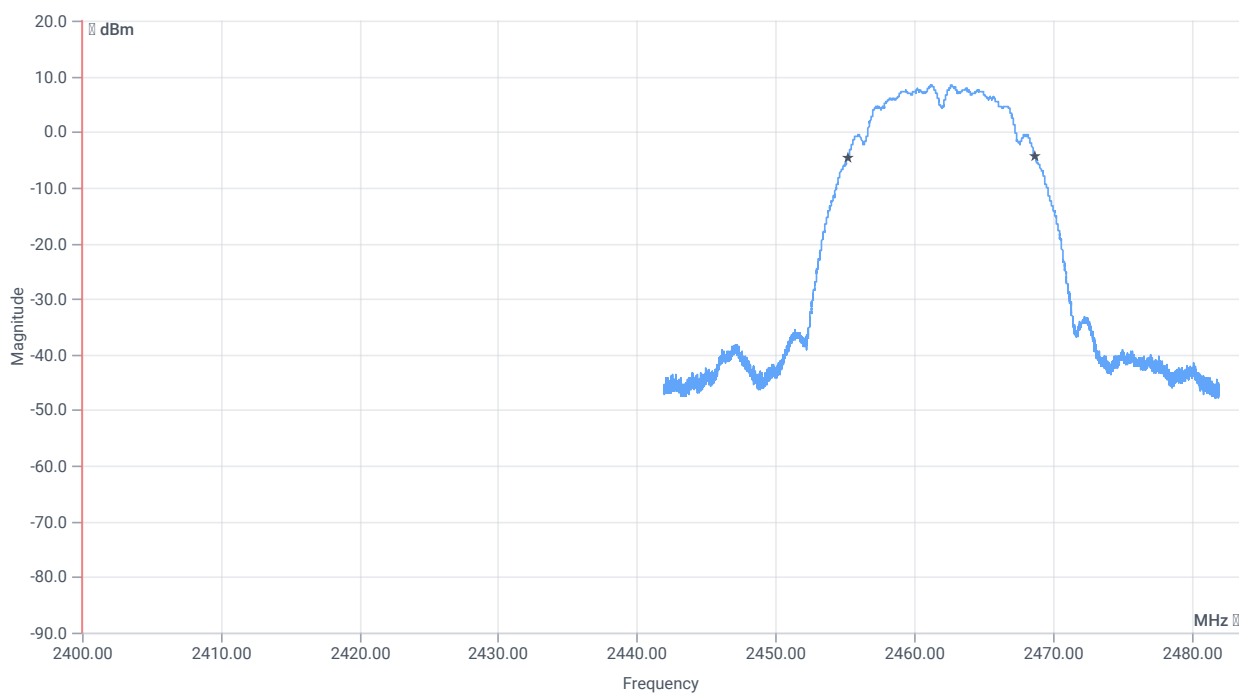


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	13411.000	kHz	INFO
T1 99%	2400.000000	---	2455.2767	MHz	PASS
T2 99%	---	2483.500000	2468.6873	MHz	PASS

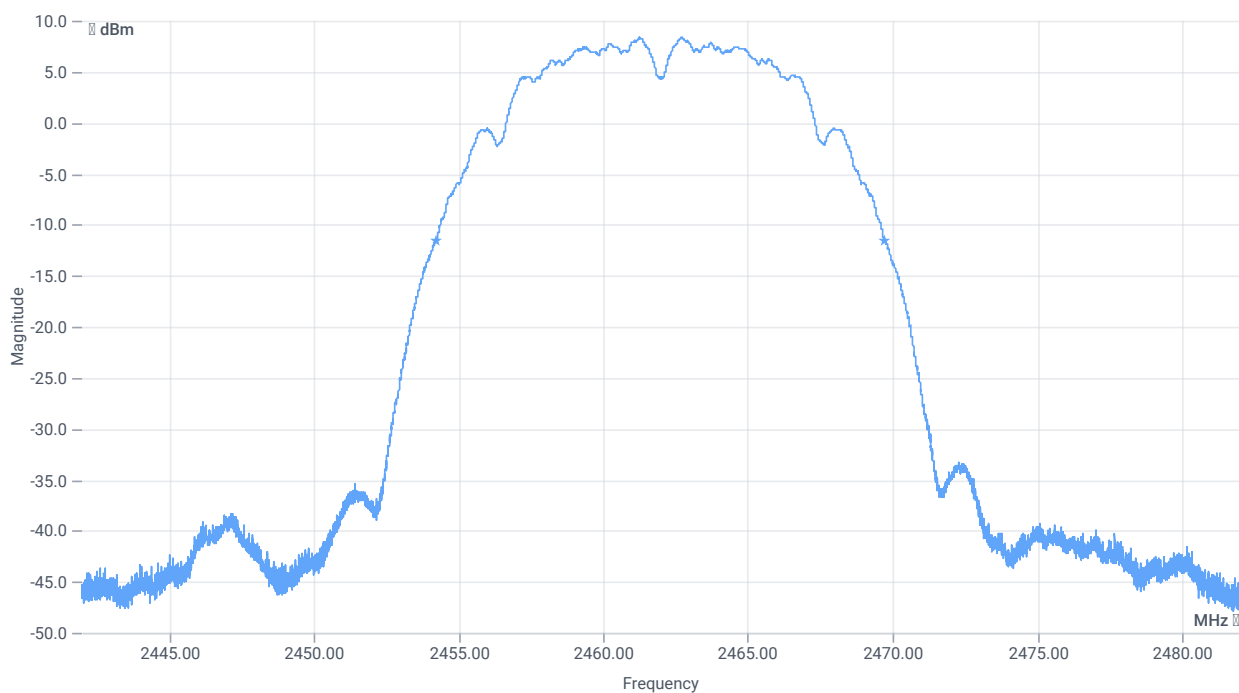

BW 20dB

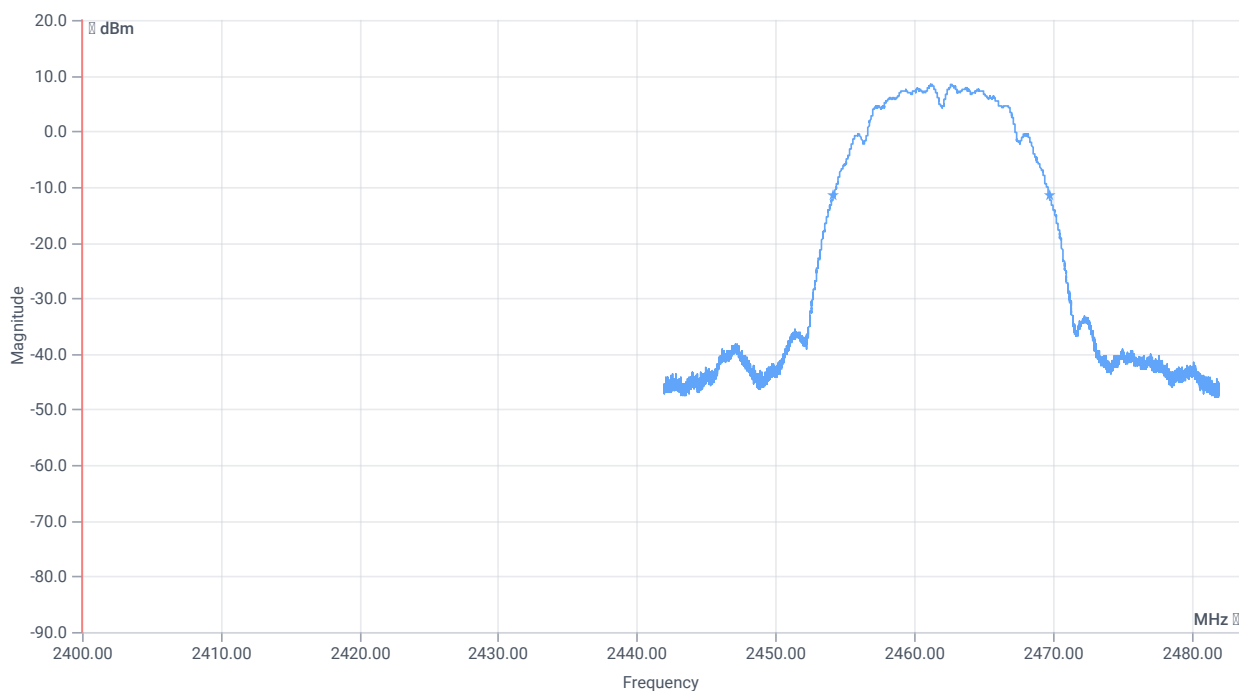

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	15520	kHz	INFO
T1 20dB	2400.000000	---	2454.2120	MHz	PASS
T2 20dB	---	2483.500000	2469.7320	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

References

TC start	13.06.2024 08:29:57
Ambit temp [°C] humidity [rel%]	23.8 35
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2412 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.97	dBm	INFO
Ref. frequency	---	---	2419.090	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.97 10.4 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

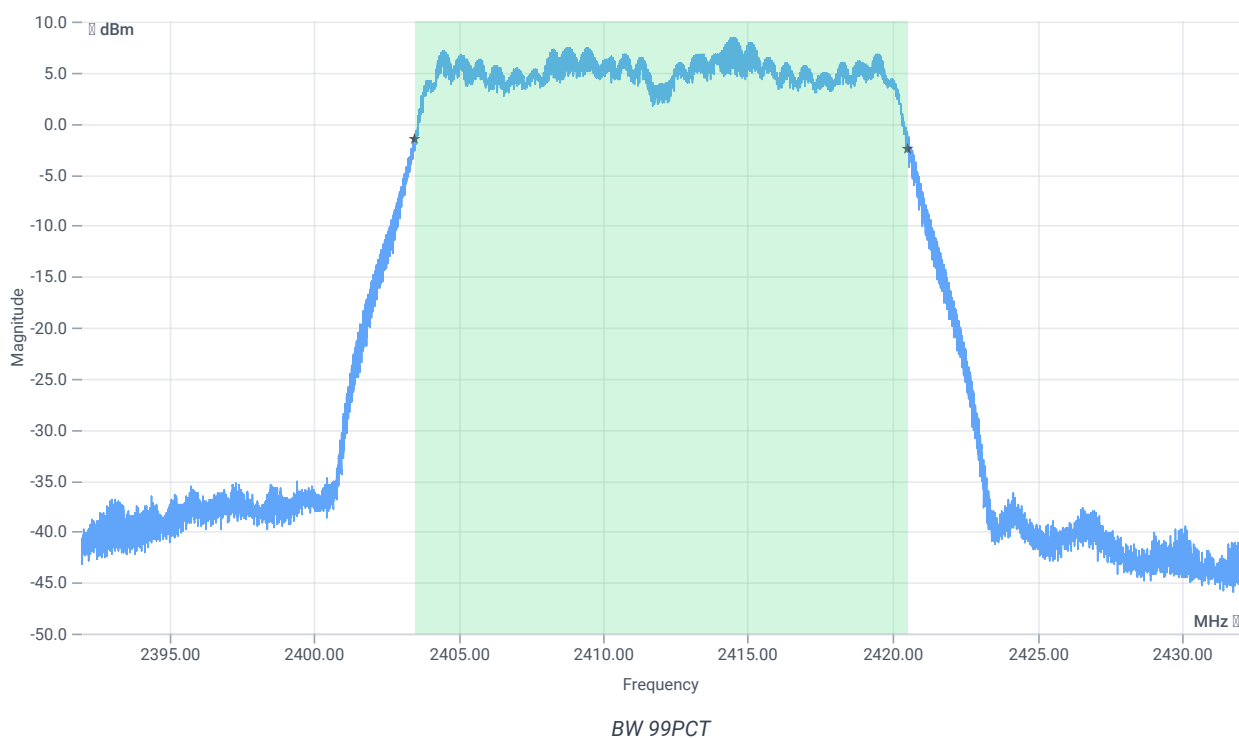


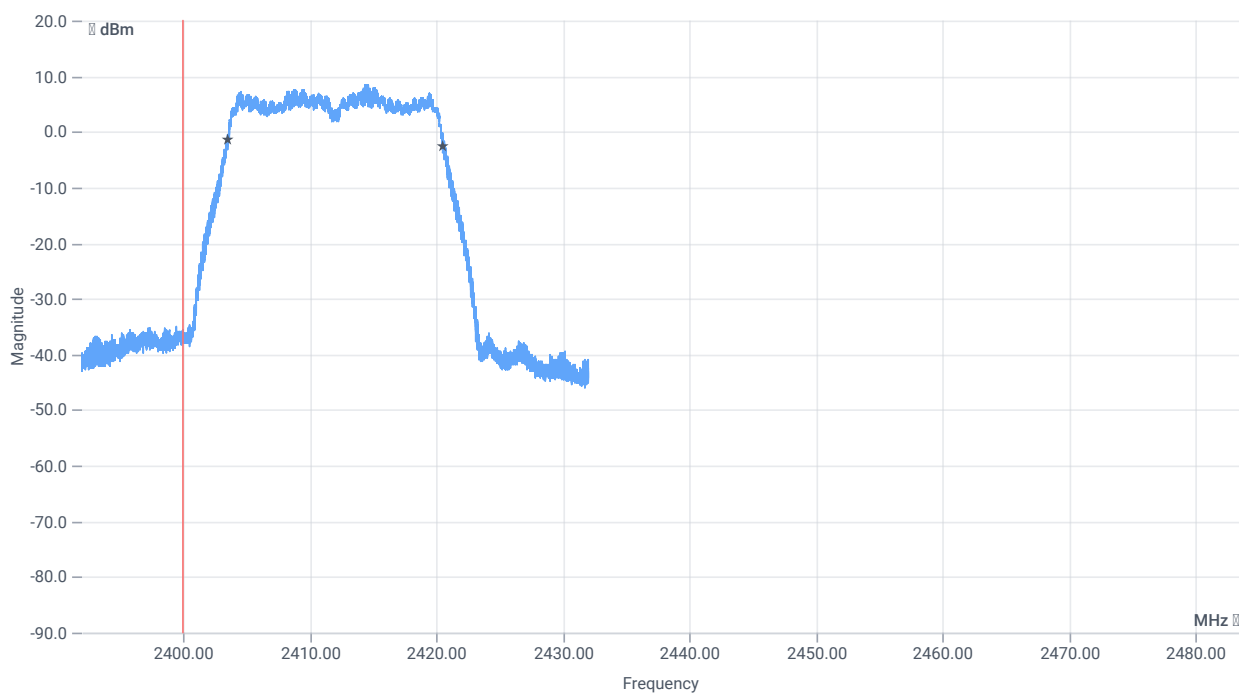


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16978.000	kHz	INFO
T1 99%	2400.000000	---	2403.5128	MHz	PASS
T2 99%	---	2483.500000	2420.4912	MHz	PASS

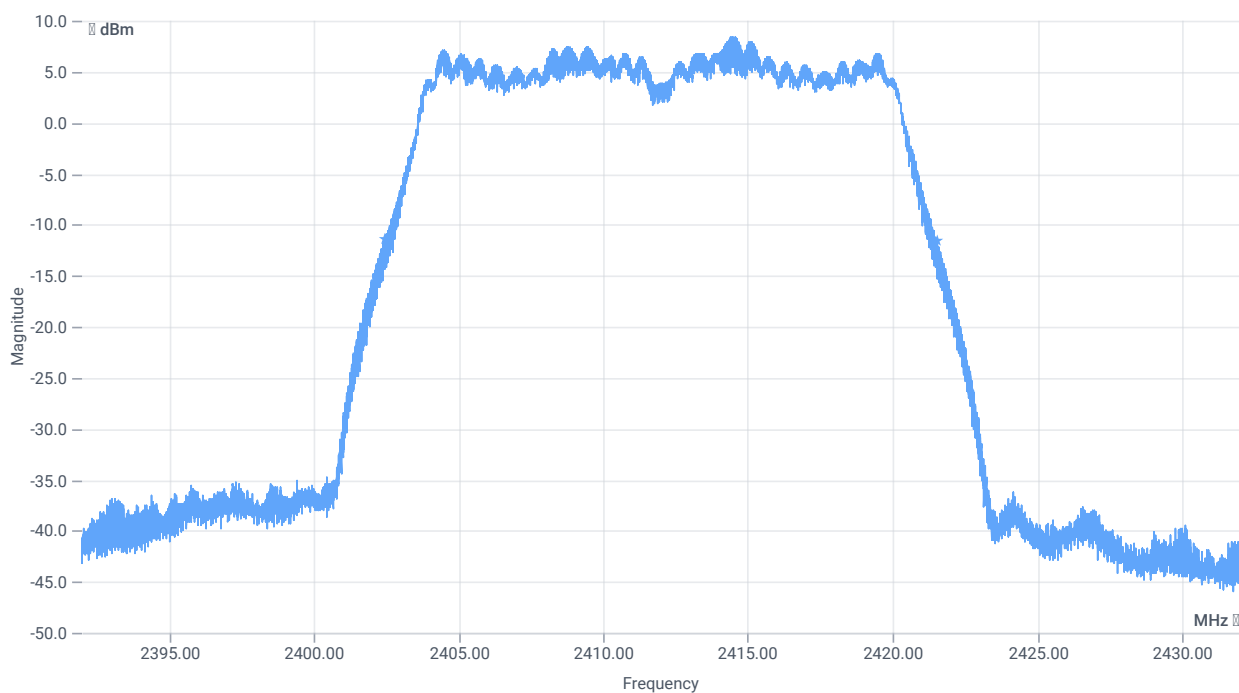

BW 20dB

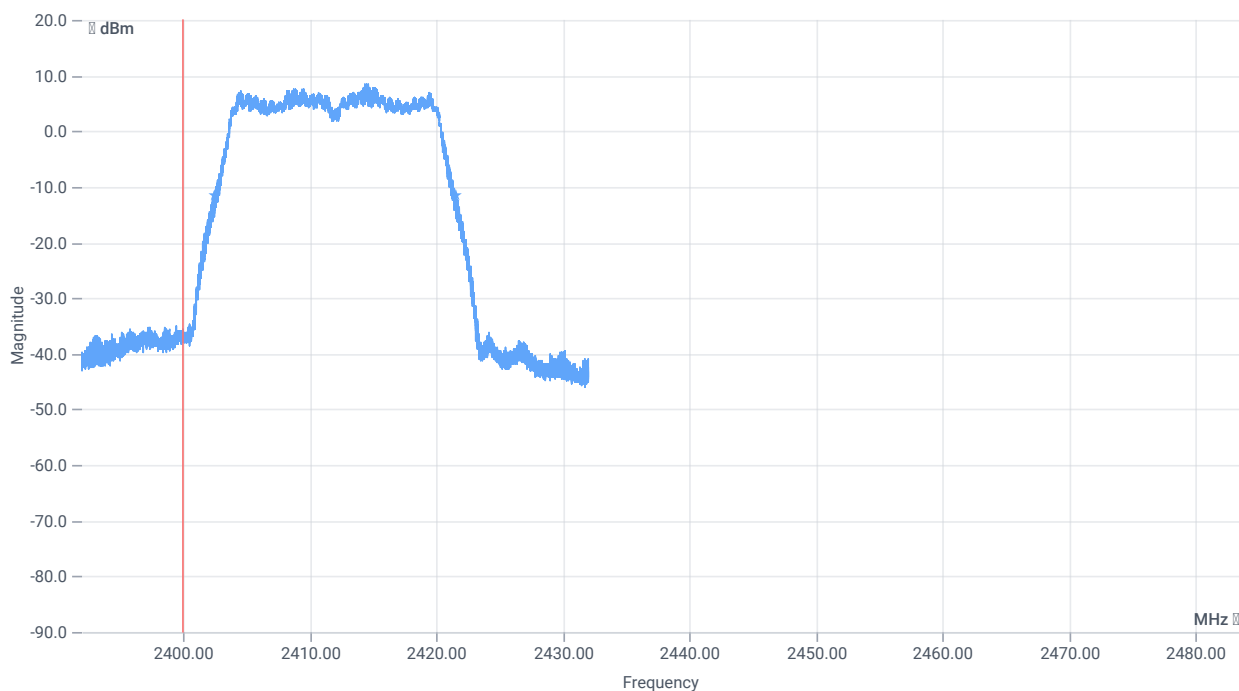

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19040	kHz	INFO
T1 20dB	2400.000000	---	2402.4760	MHz	PASS
T2 20dB	---	2483.500000	2421.5160	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

References

TC start	13.06.2024 08:52:08
Ambit temp [°C] humidity [rel%]	24.0 35
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	15.32	dBm	INFO
Ref. frequency	---	---	2439.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.32 10.42 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

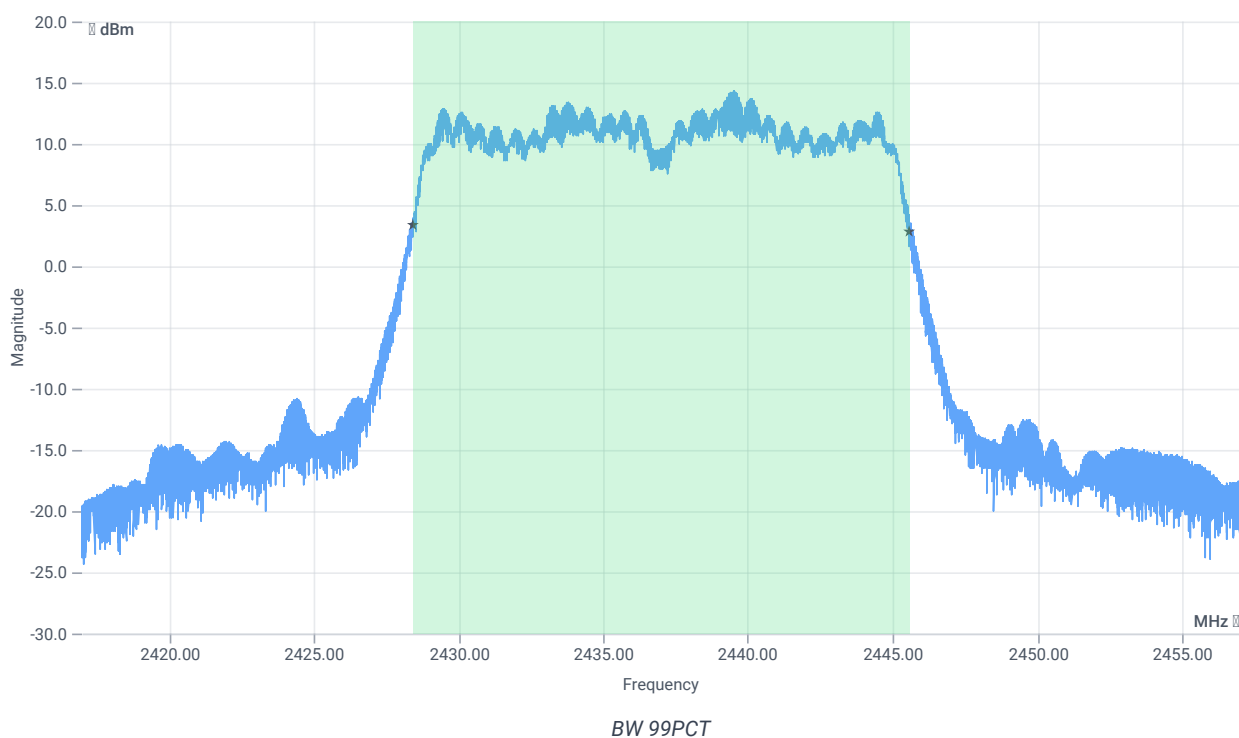


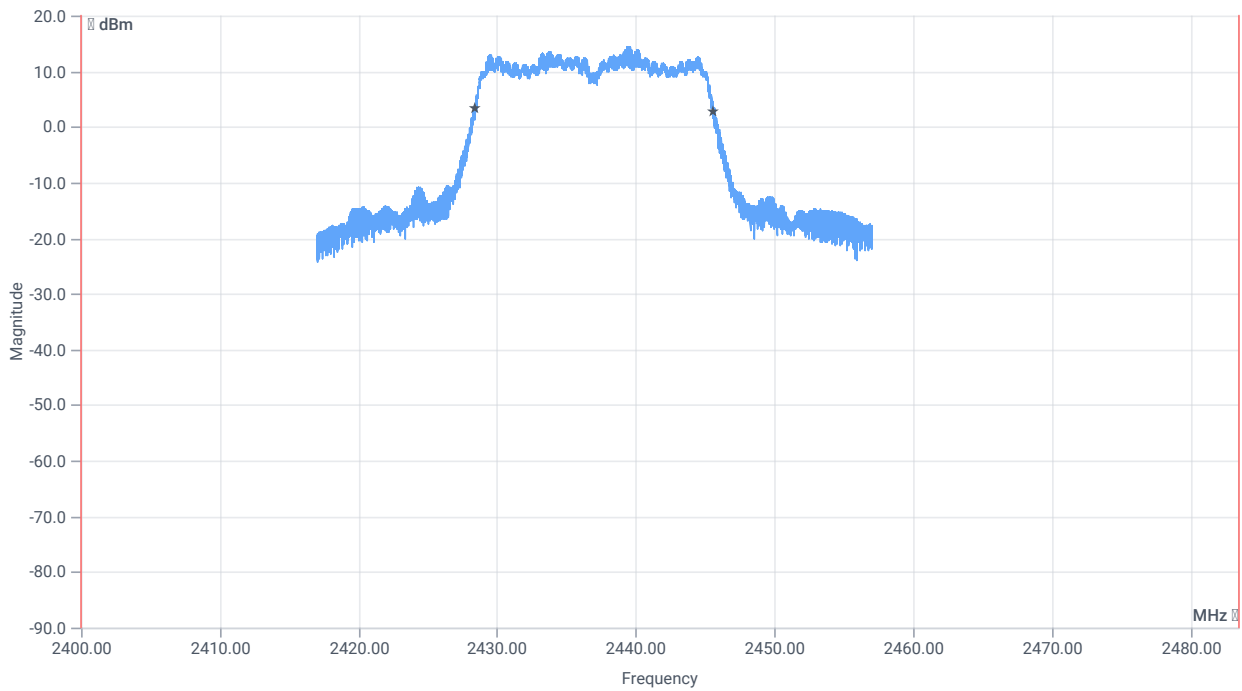


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17166.000	kHz	INFO
T1 99%	2400.000000	---	2428.4009	MHz	PASS
T2 99%	---	2483.500000	2445.5671	MHz	PASS

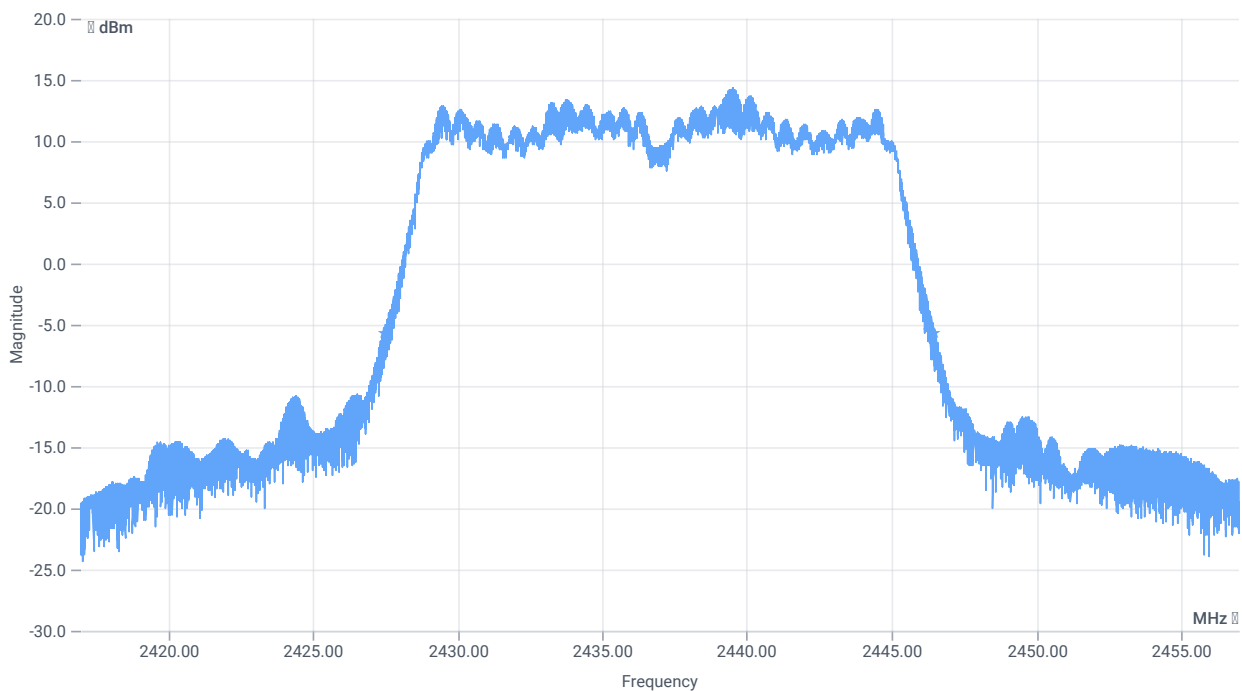

BW 20dB

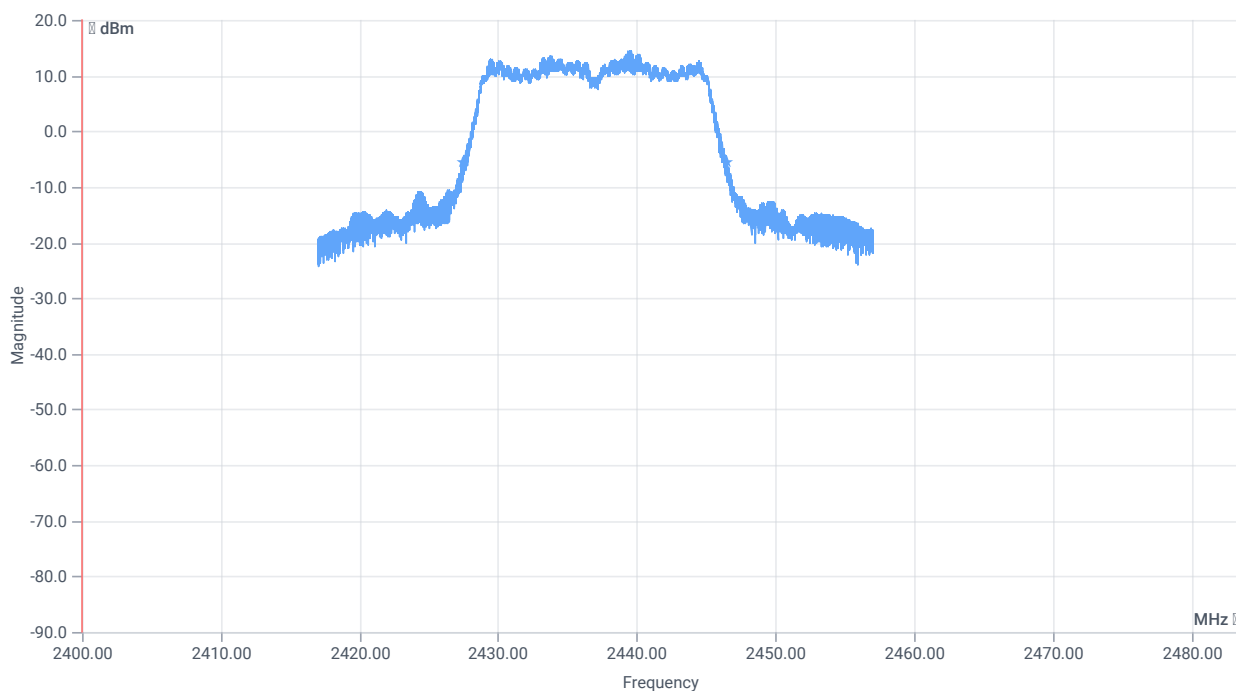

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19032	kHz	INFO
T1 20dB	2400.000000	---	2427.4440	MHz	PASS
T2 20dB	---	2483.500000	2446.4760	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

References

TC start	13.06.2024 09:12:11
Ambit temp [°C] humidity [rel%]	24.1 35
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2462 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.34	dBm	INFO
Ref. frequency	---	---	2460.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.34 10.46 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

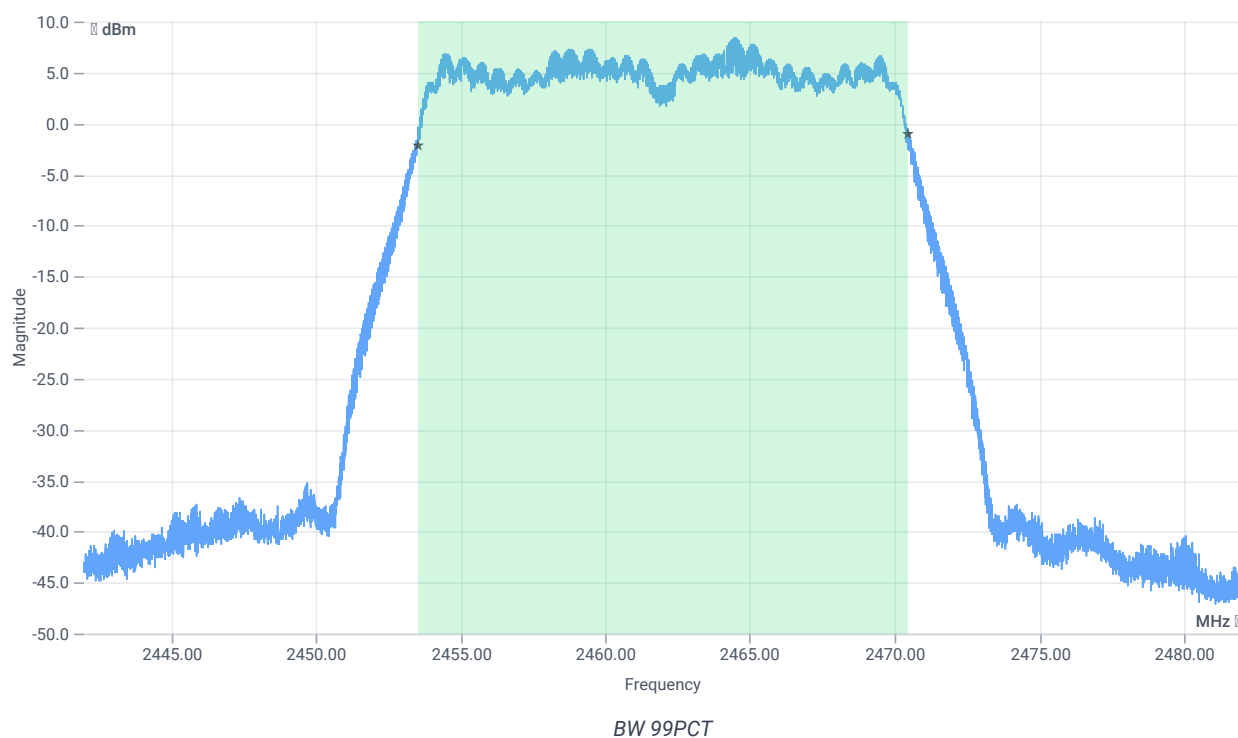


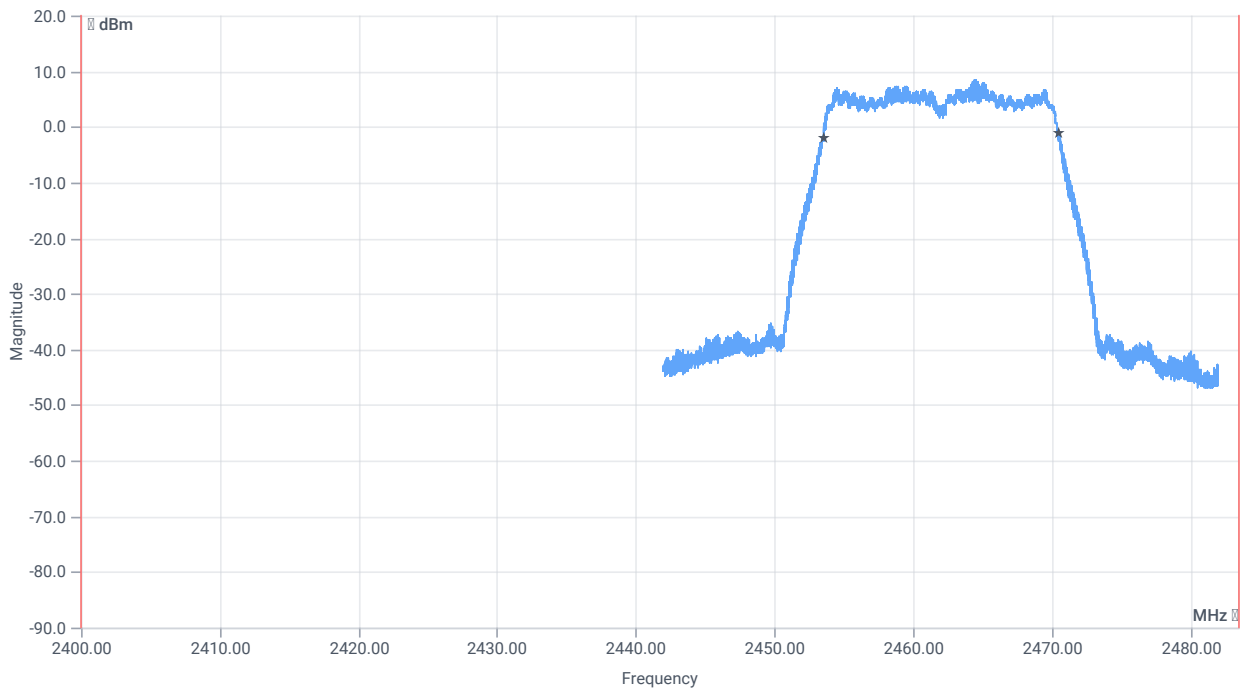


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16966.000	kHz	INFO
T1 99%	2400.000000	---	2453.5168	MHz	PASS
T2 99%	---	2483.500000	2470.4832	MHz	PASS

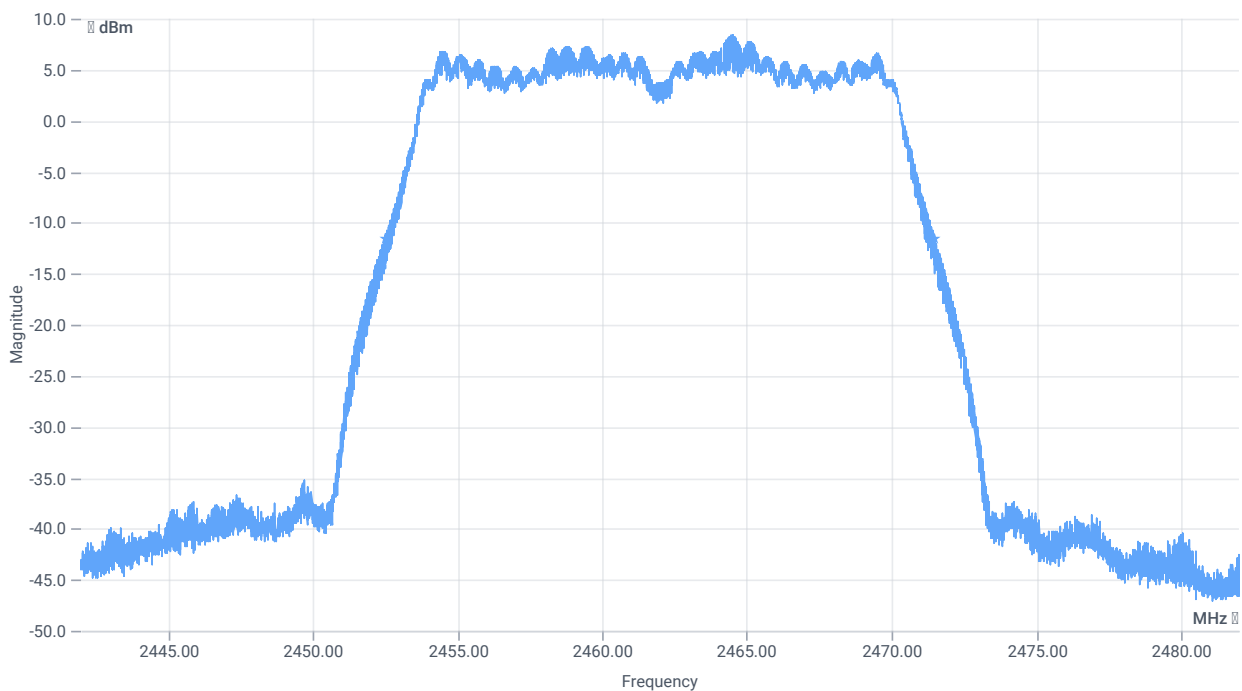

BW 20dB

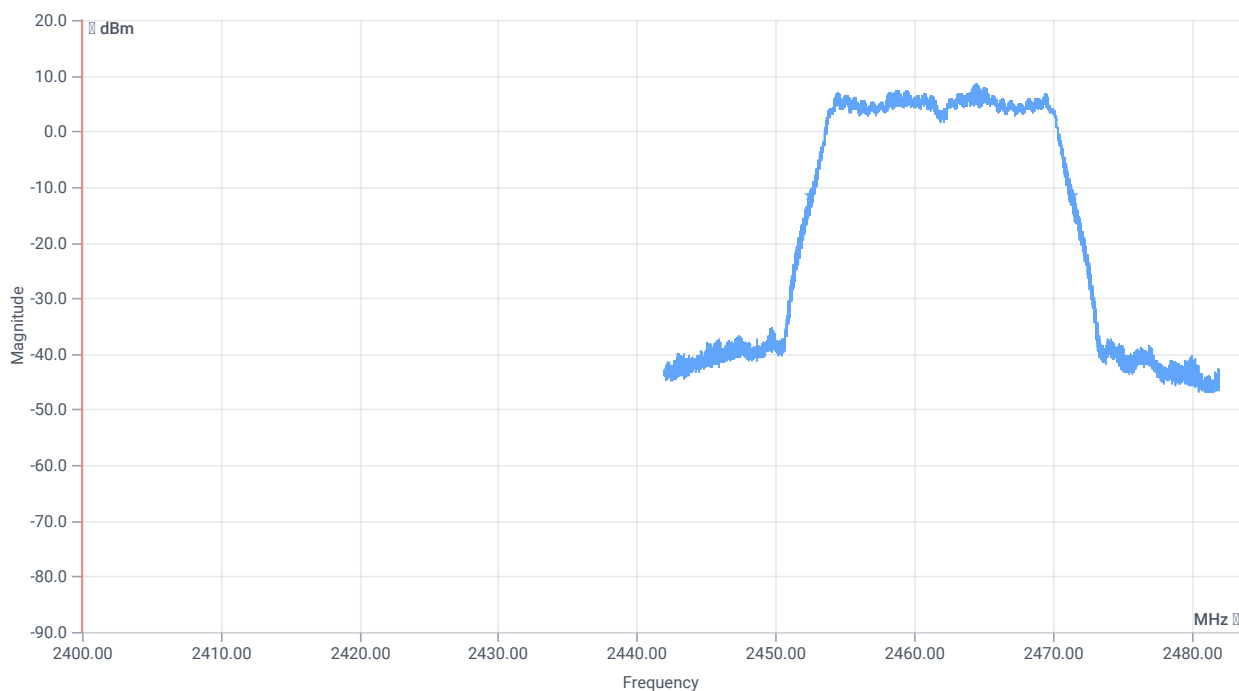

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	18968	kHz	INFO
T1 20dB	2400.000000	---	2452.5080	MHz	PASS
T2 20dB	---	2483.500000	2471.4760	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

References

TC start	13.06.2024 07:27:36
Ambit temp [°C] humidity [rel%]	23.3 35
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2412 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.22	dBm	INFO
Ref. frequency	---	---	2413.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.22 10.4 25
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

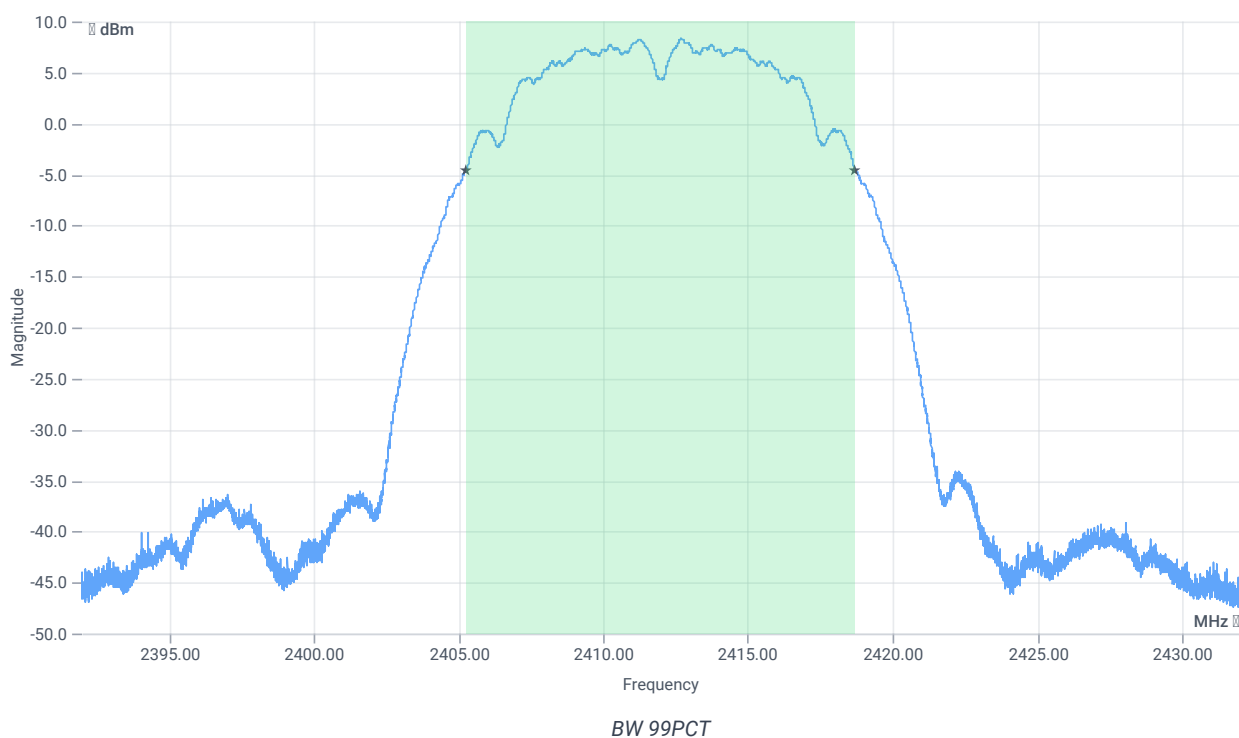


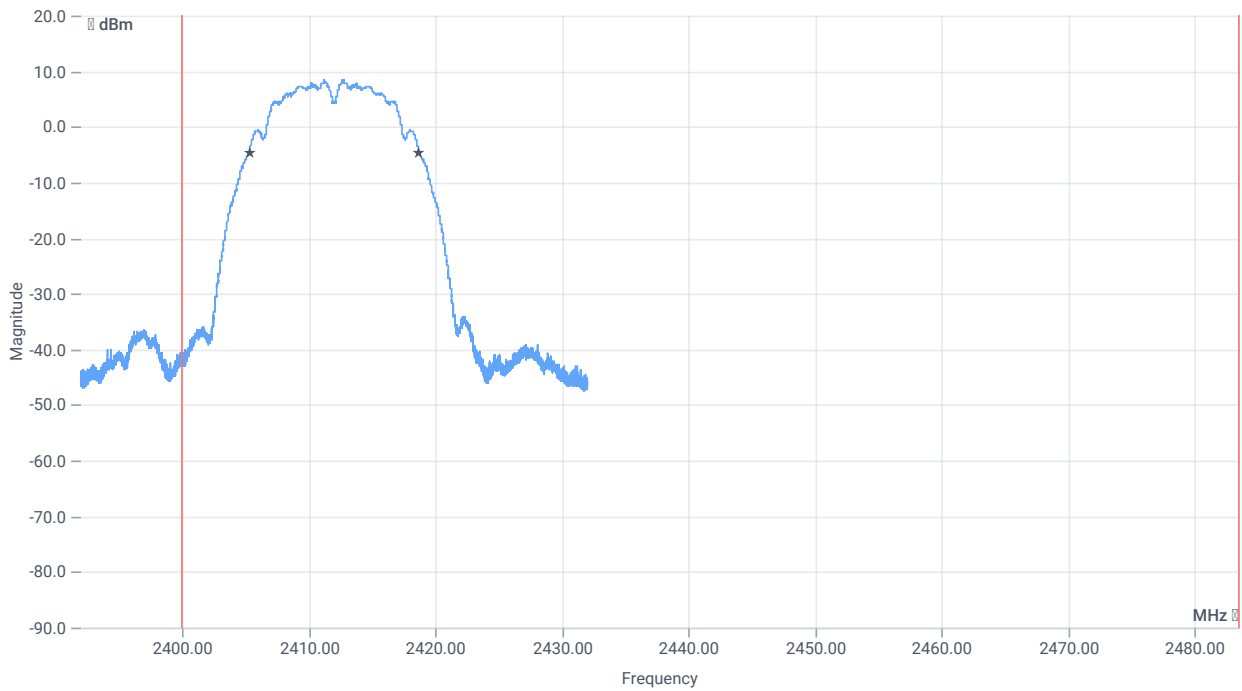


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	13439.000	kHz	INFO
T1 99%	2400.000000	---	2405.2727	MHz	PASS
T2 99%	---	2483.500000	2418.7113	MHz	PASS

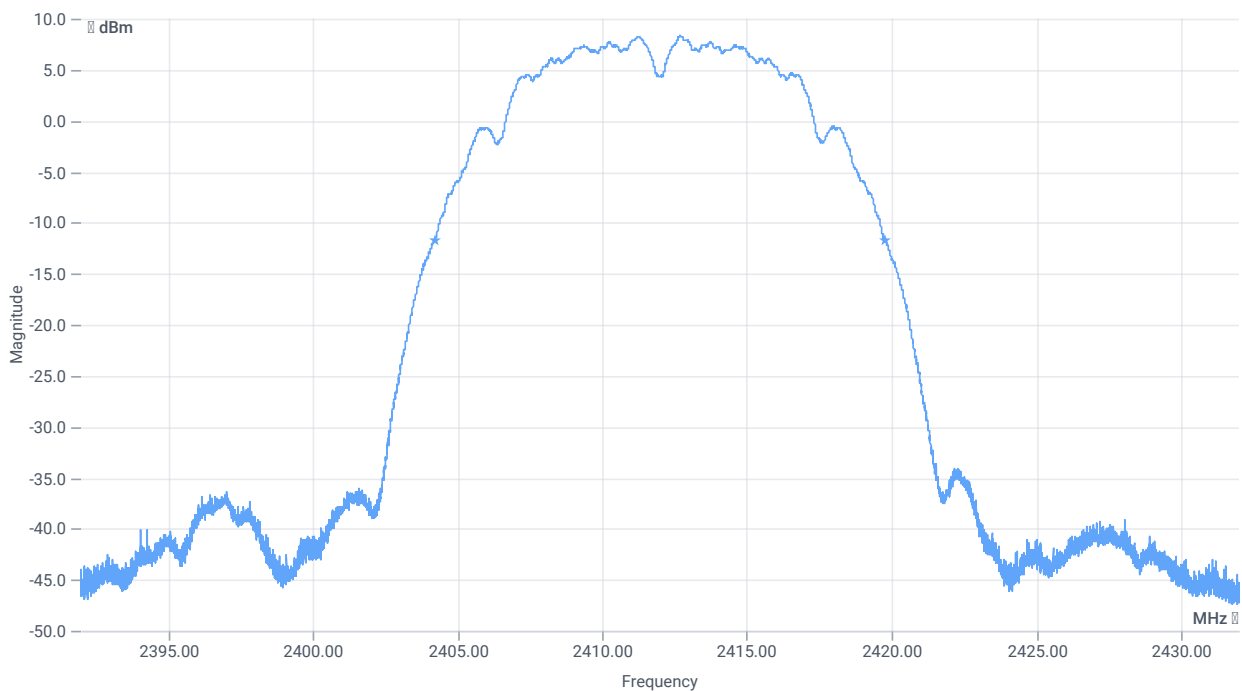

BW 20dB

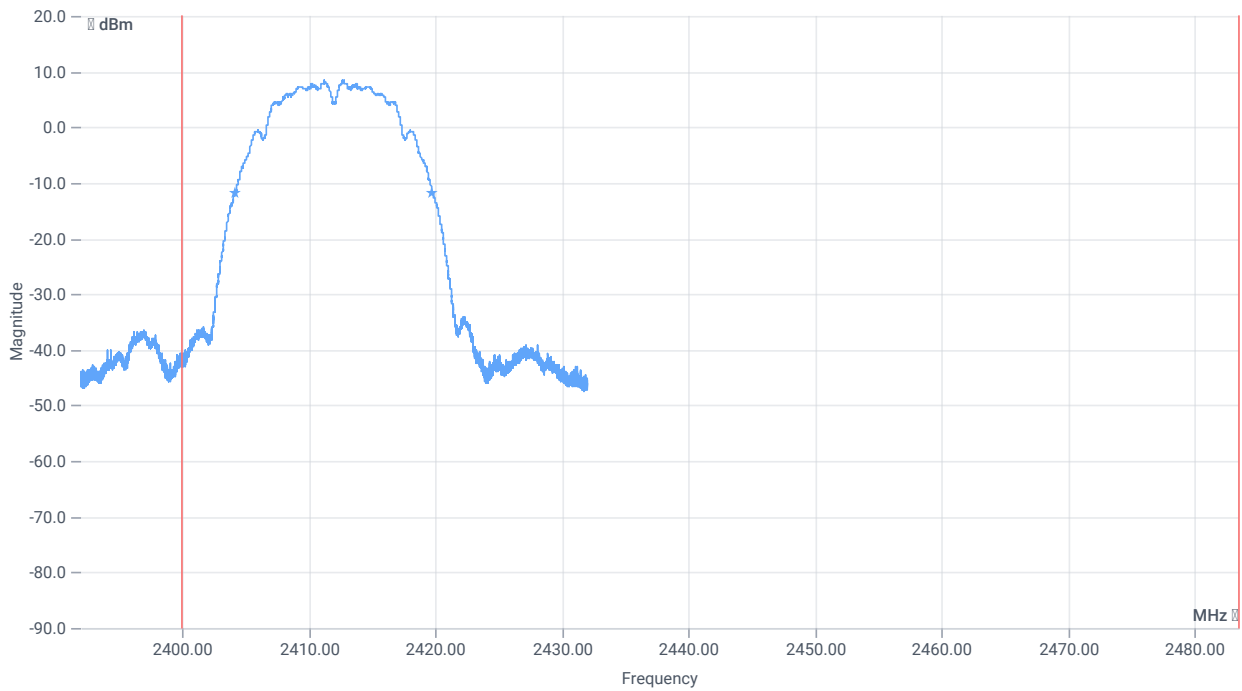

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	15556	kHz	INFO
T1 20dB	2400.000000	---	2404.2040	MHz	PASS
T2 20dB	---	2483.500000	2419.7600	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

References

TC start	13.06.2024 07:45:29
Ambit temp [°C] humidity [rel%]	23.5 35
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	13.14	dBm	INFO
Ref. frequency	---	---	2438.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.14 10.42 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

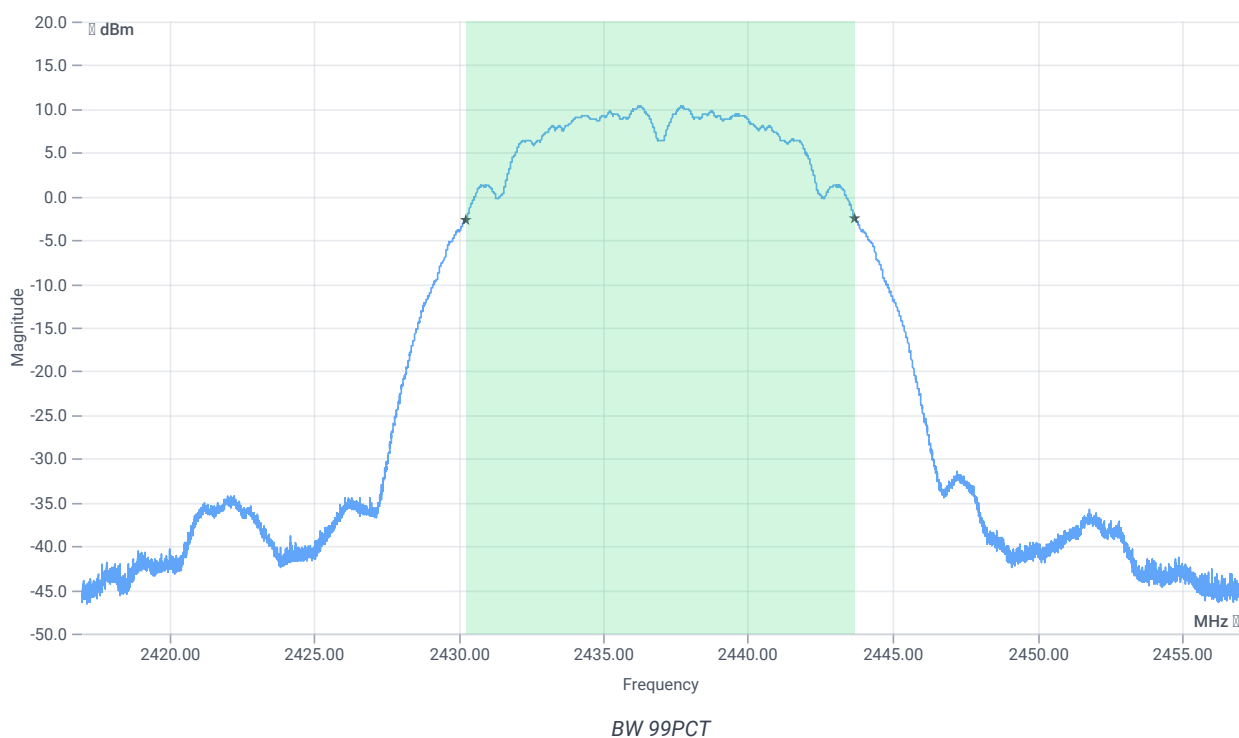


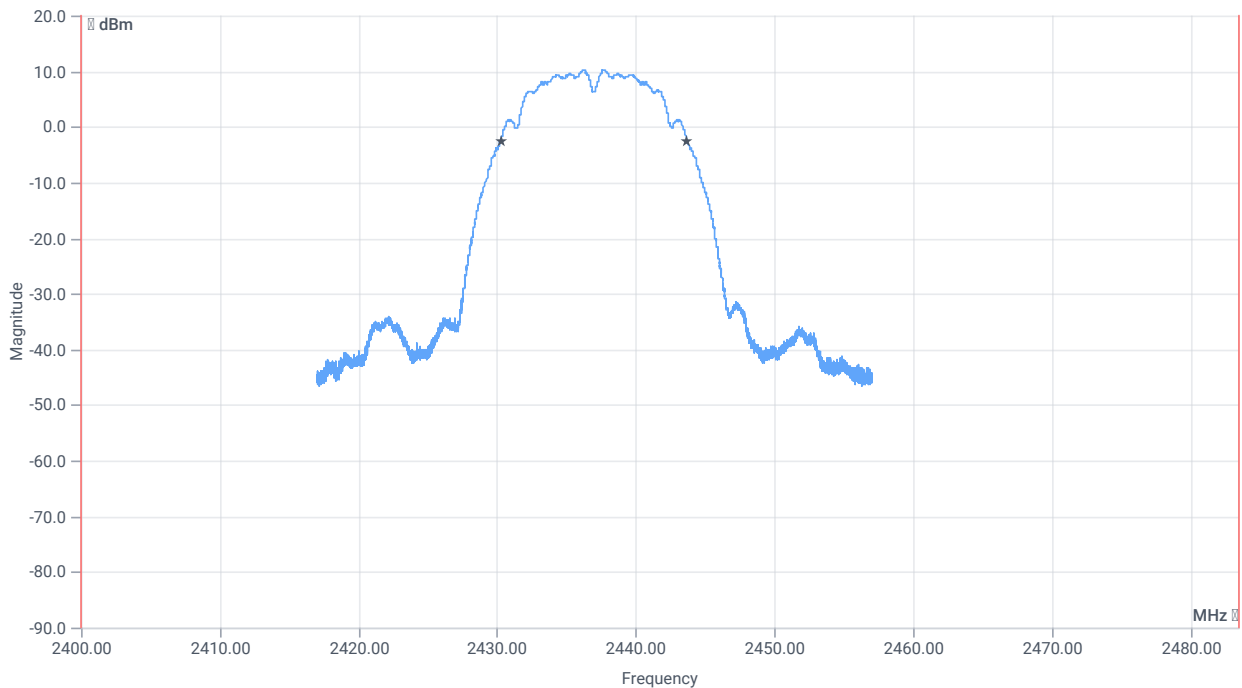


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	13411.000	kHz	INFO
T1 99%	2400.000000	---	2430.2767	MHz	PASS
T2 99%	---	2483.500000	2443.6873	MHz	PASS

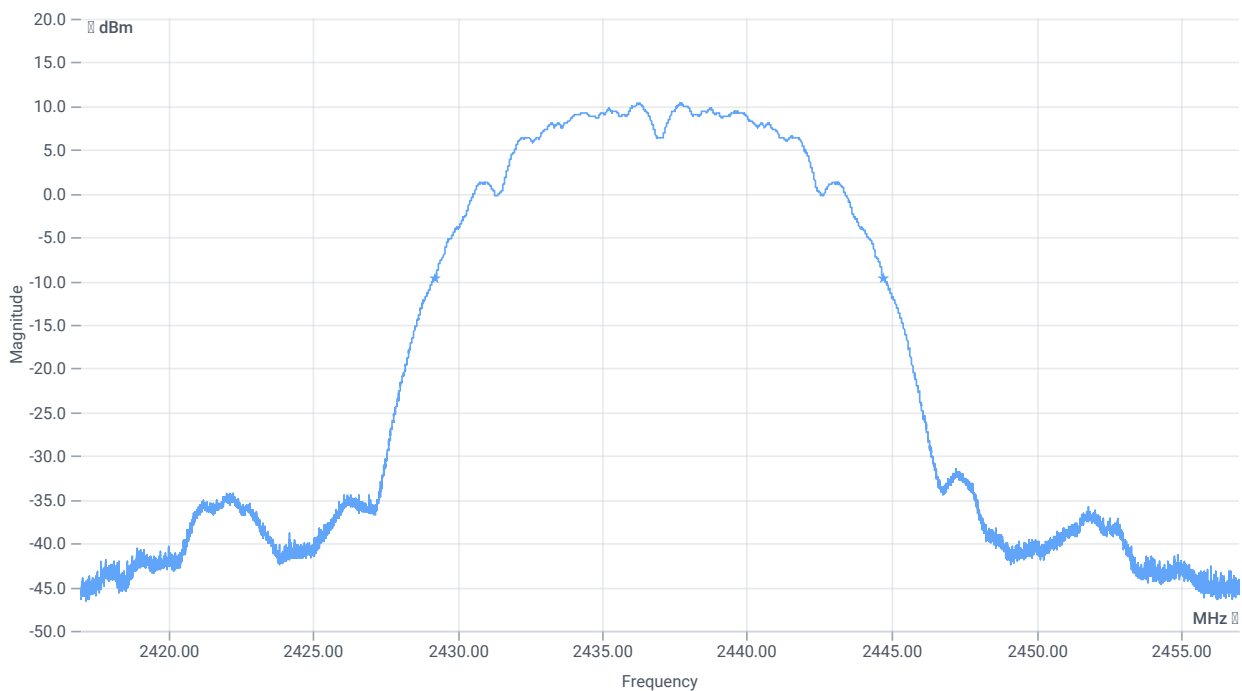

BW 20dB

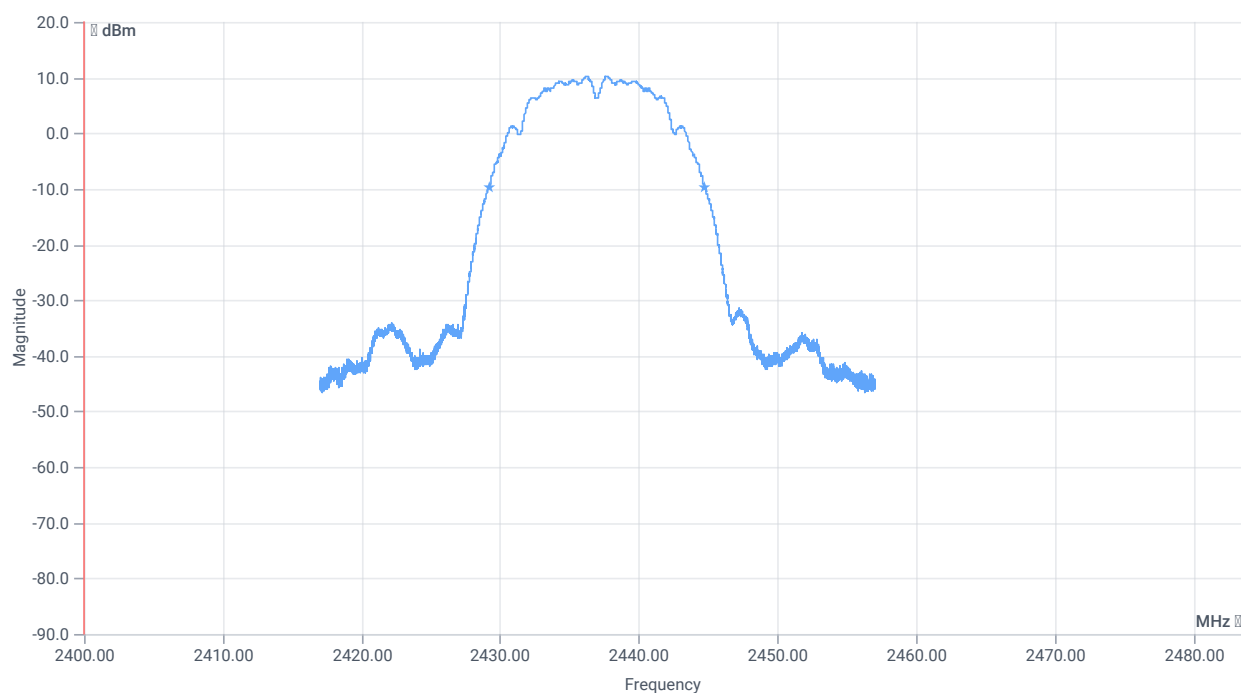

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	15524	kHz	INFO
T1 20dB	2400.000000	---	2429.2080	MHz	PASS
T2 20dB	---	2483.500000	2444.7320	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

References

TC start	13.06.2024 08:03:01
Ambit temp [°C] humidity [rel%]	23.6 35
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2462 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.18	dBm	INFO
Ref. frequency	---	---	2463.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.18 10.46 25
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

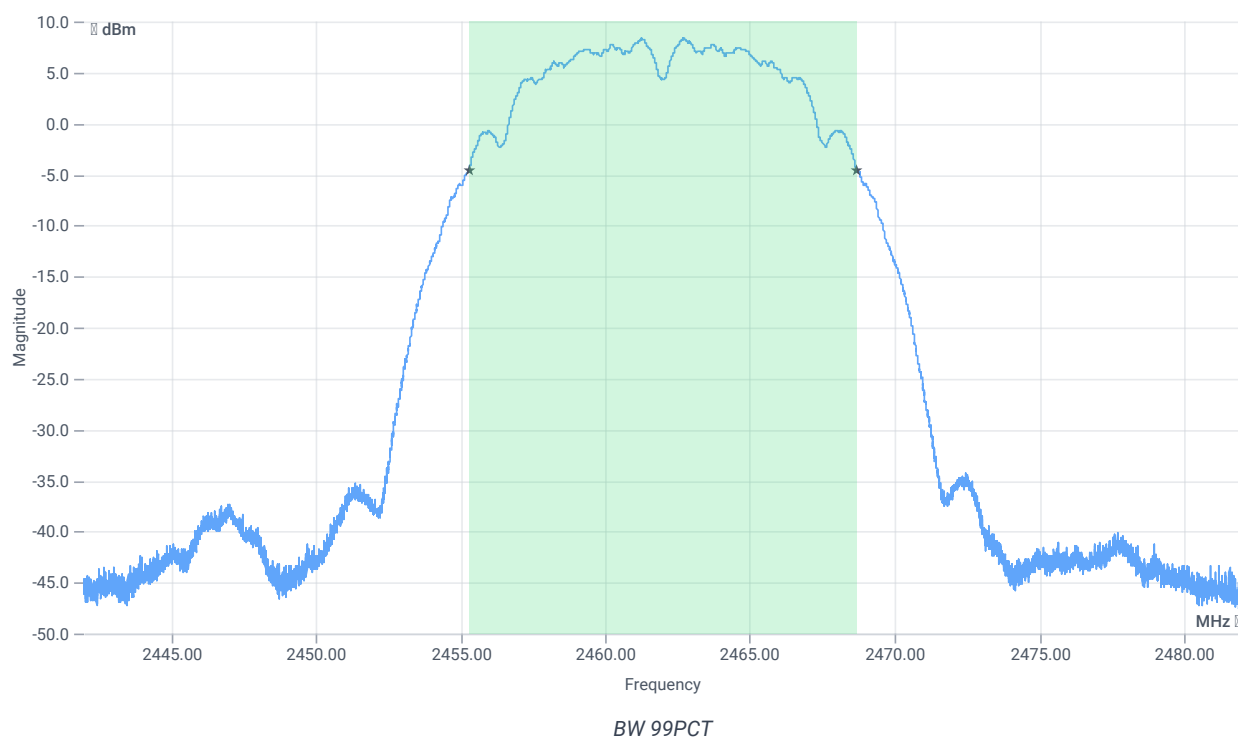


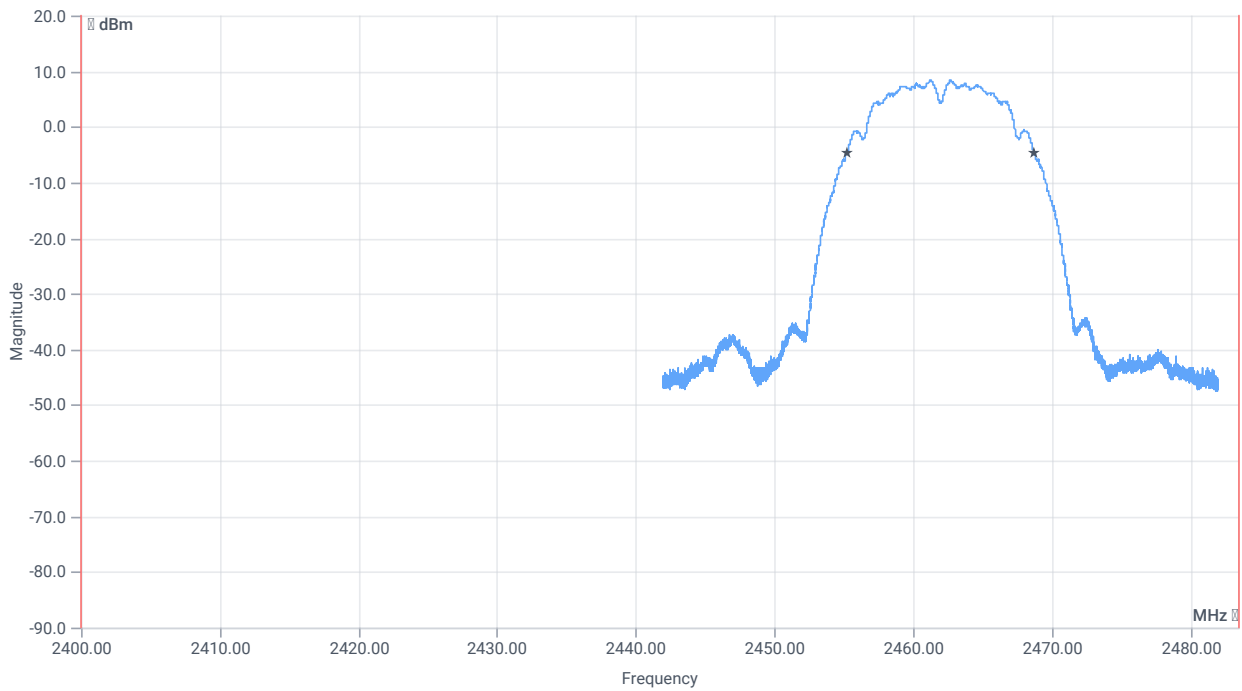


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	13399.000	kHz	INFO
T1 99%	2400.000000	---	2455.2887	MHz	PASS
T2 99%	---	2483.500000	2468.6873	MHz	PASS

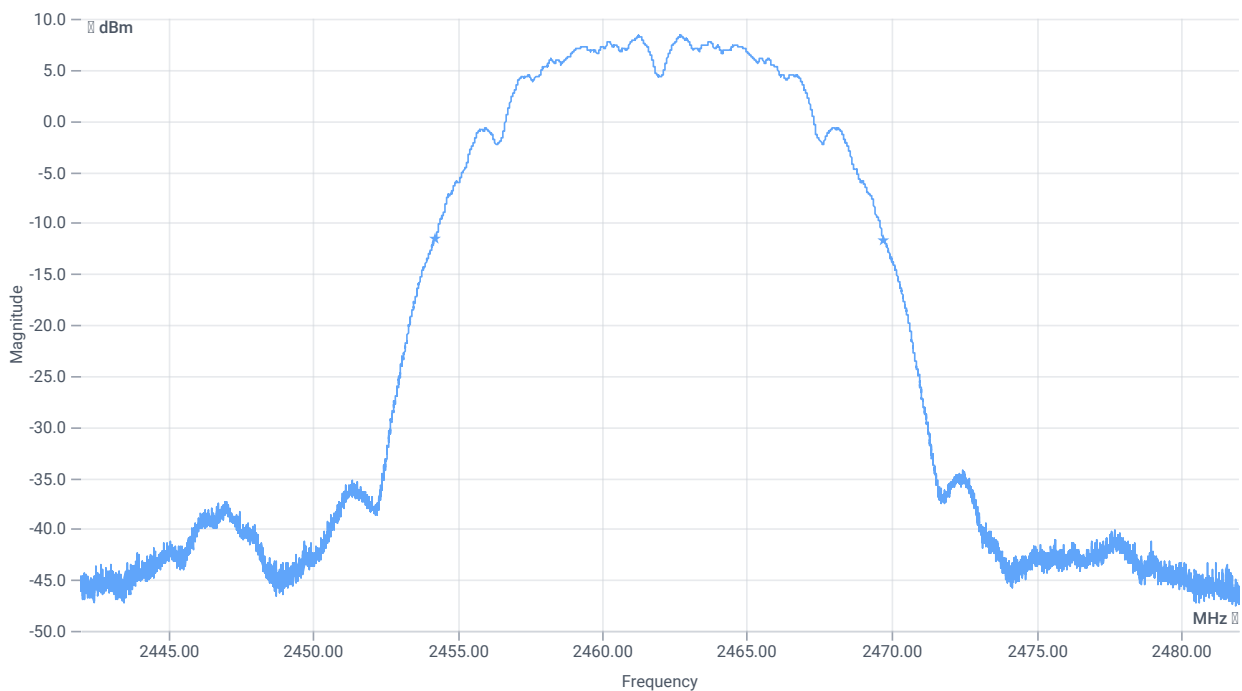

BW 20dB

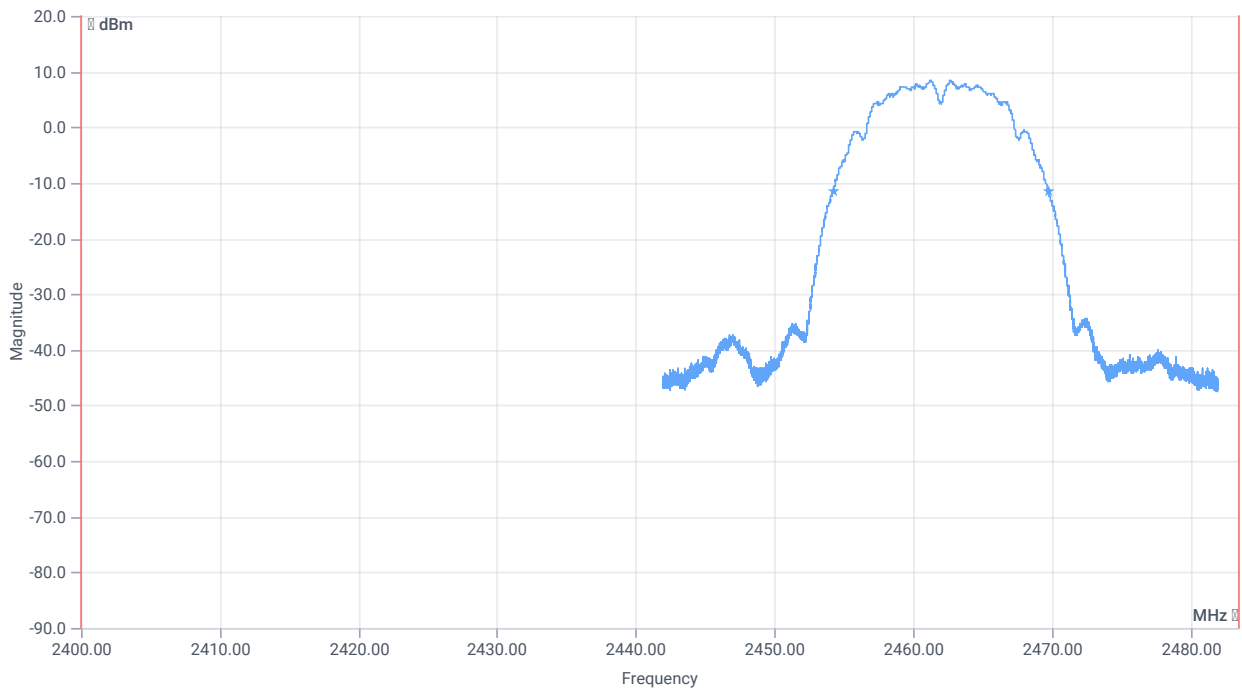

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	15488	kHz	INFO
T1 20dB	2400.000000	---	2454.2400	MHz	PASS
T2 20dB	---	2483.500000	2469.7280	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

References

TC start	13.06.2024 09:30:35
Ambit temp [°C] humidity [rel%]	24.2 35
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2412 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.75	dBm	INFO
Ref. frequency	---	---	2419.290	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.75 10.4 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

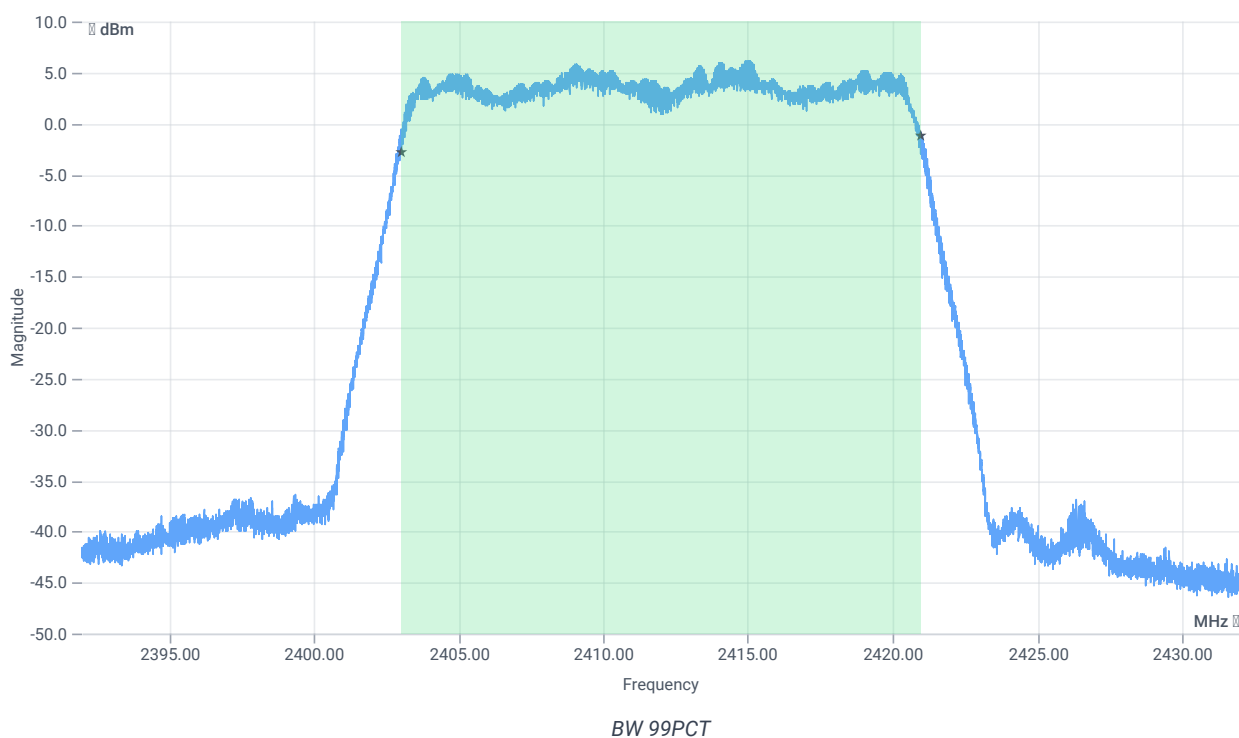


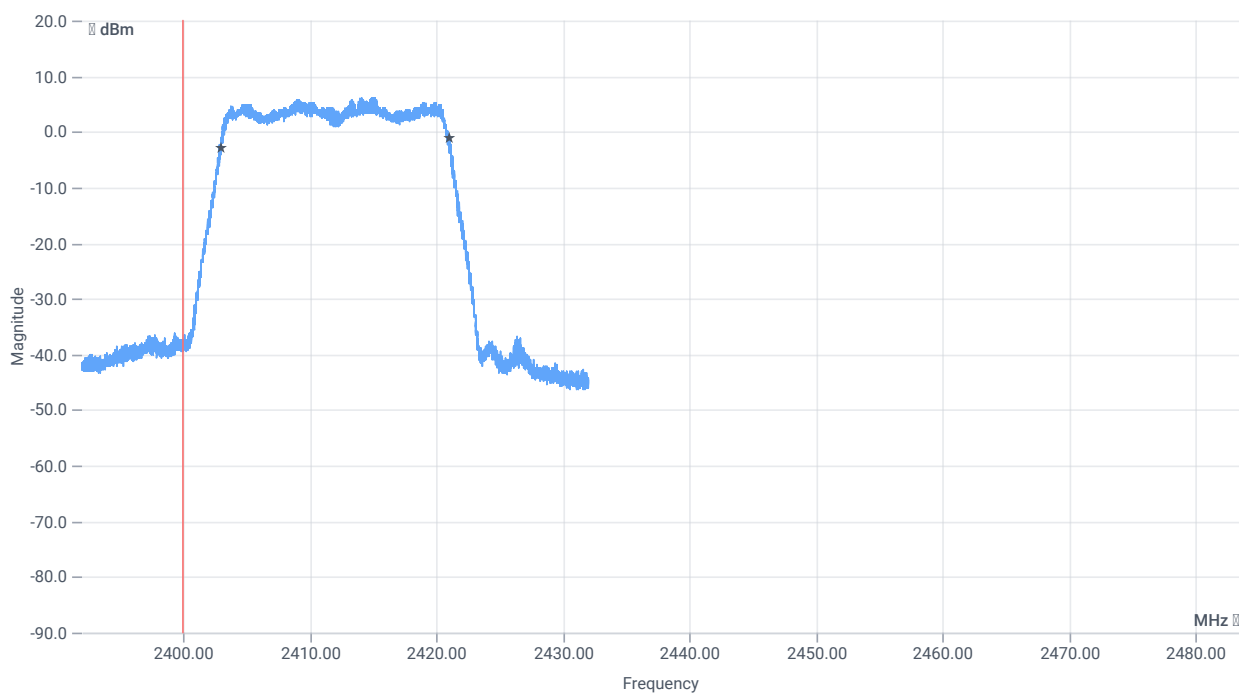


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17958.000	kHz	INFO
T1 99%	2400.000000	---	2403.0209	MHz	PASS
T2 99%	---	2483.500000	2420.9791	MHz	PASS

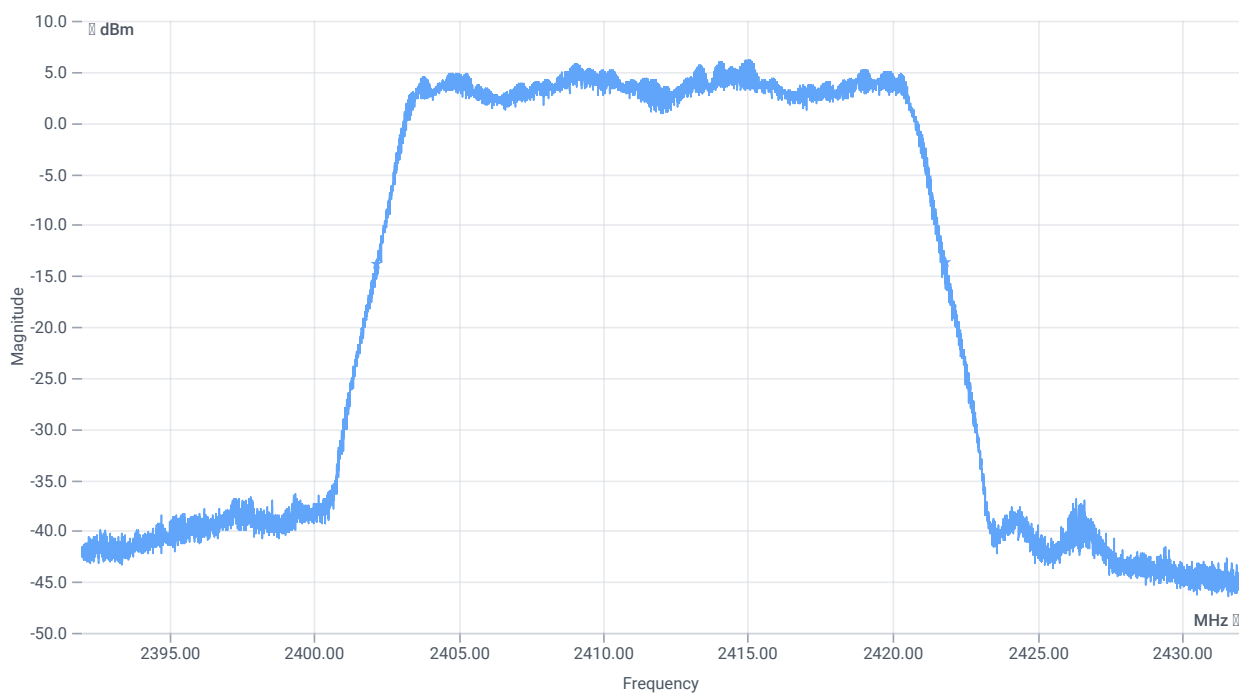

BW 20dB

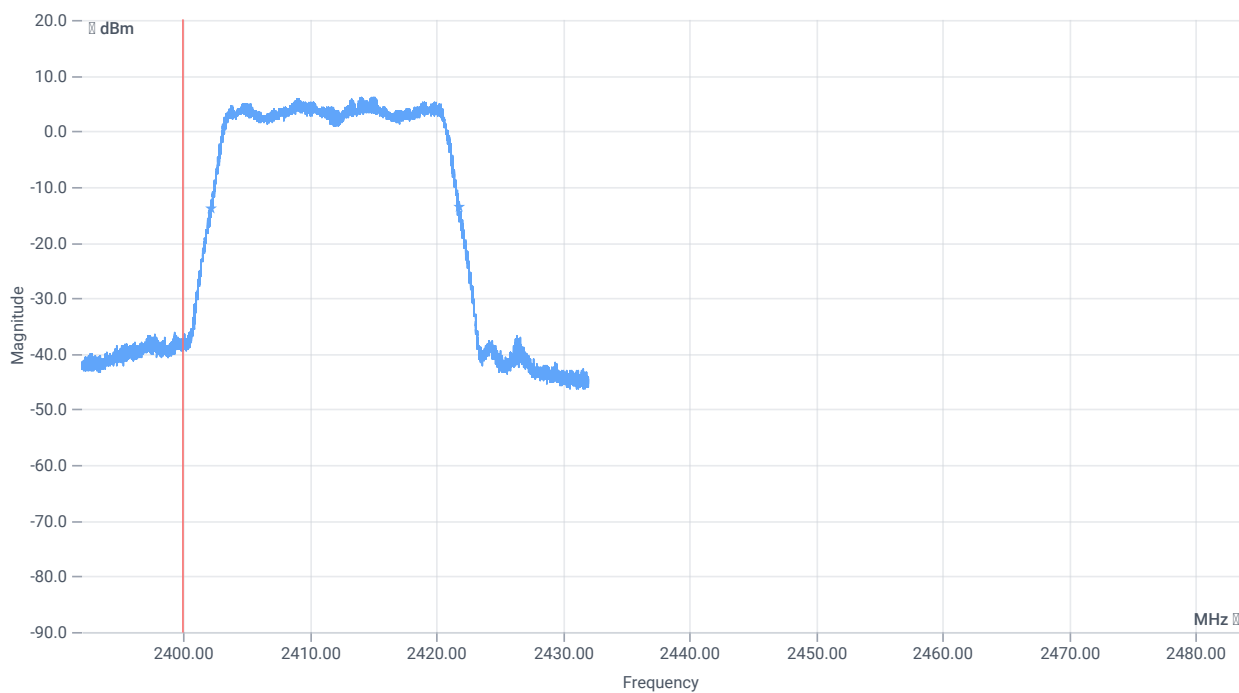

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19660	kHz	INFO
T1 20dB	2400.000000	---	2402.1640	MHz	PASS
T2 20dB	---	2483.500000	2421.8240	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

References

TC start	13.06.2024 09:48:38
Ambit temp [°C] humidity [rel%]	24.3 35
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	15.09	dBm	INFO
Ref. frequency	---	---	2434.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.09 10.42 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

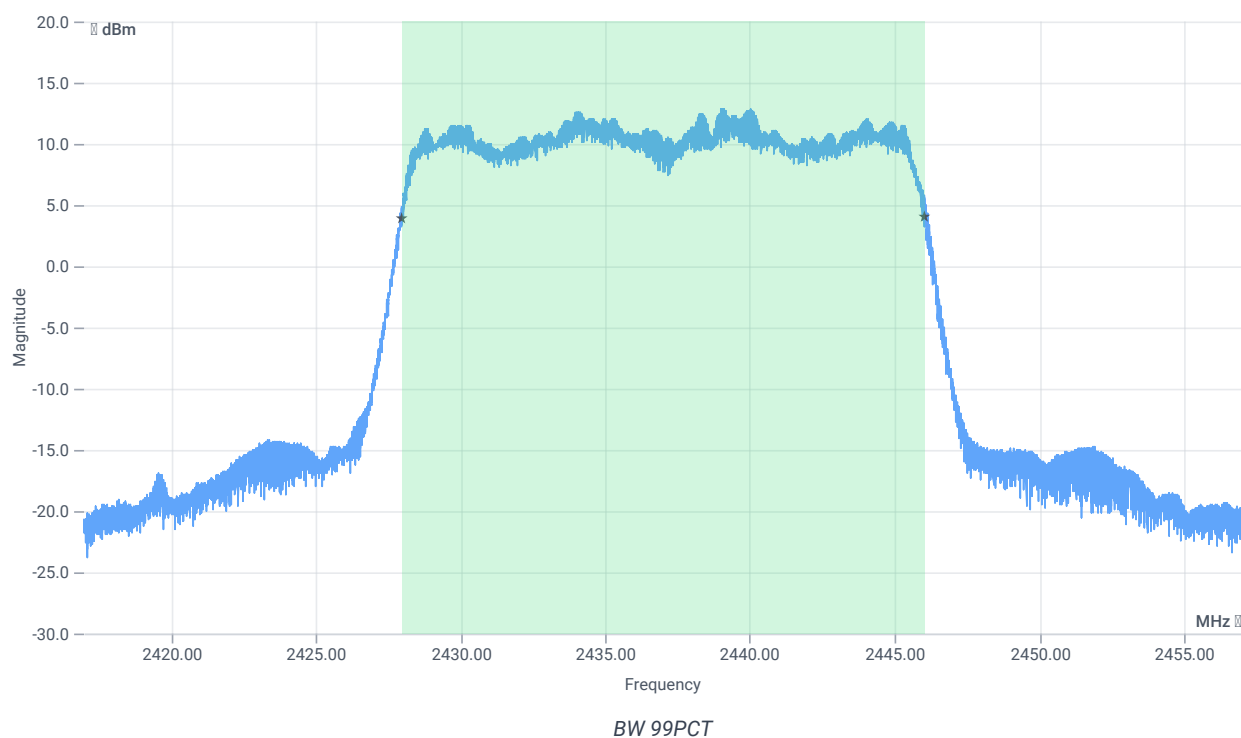


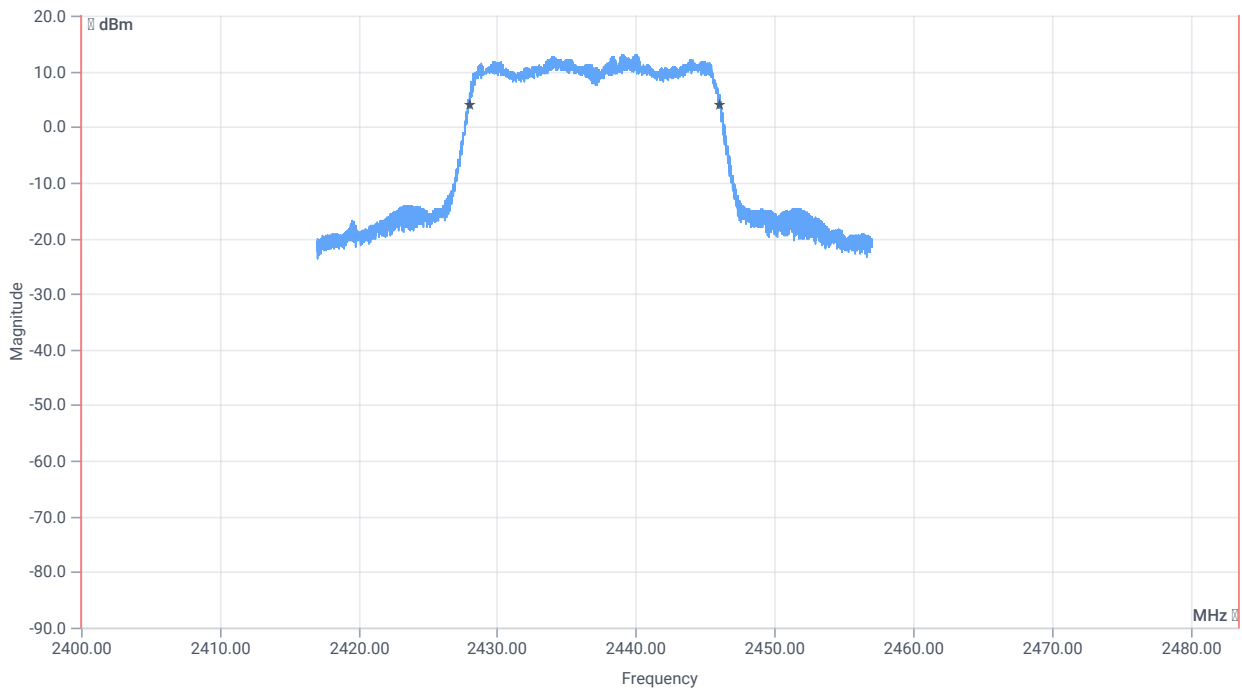


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	18046.000	kHz	INFO
T1 99%	2400.000000	---	2427.9809	MHz	PASS
T2 99%	---	2483.500000	2446.0271	MHz	PASS

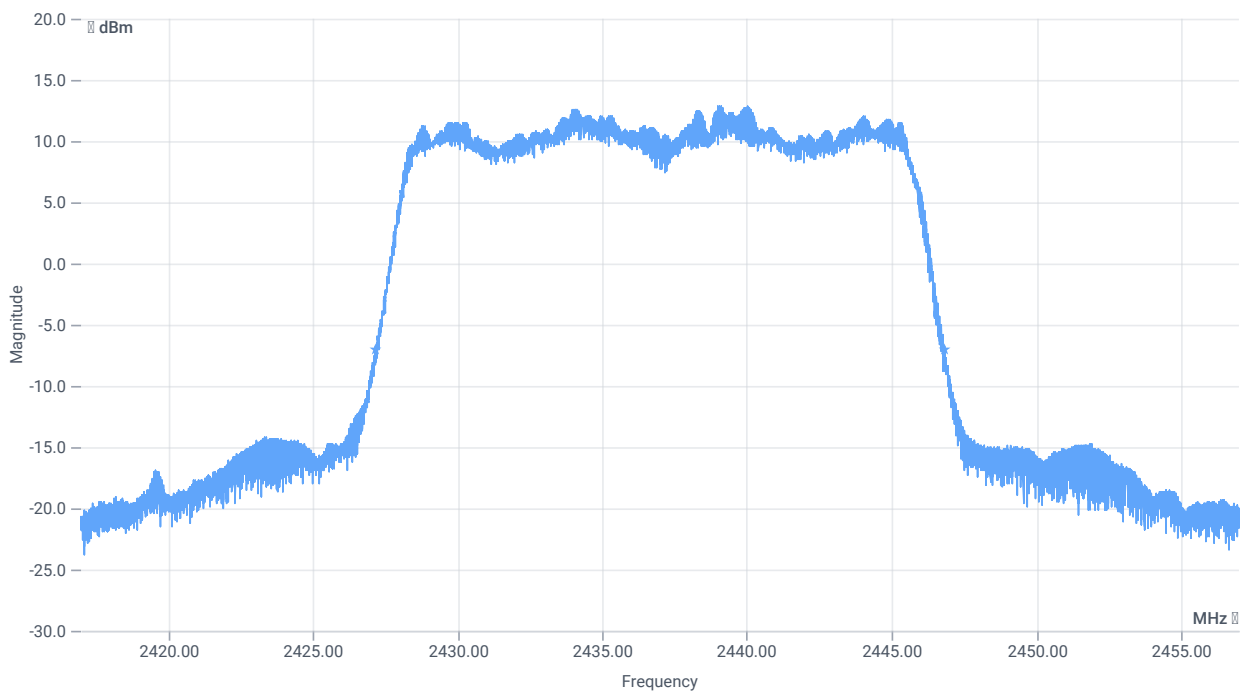

BW 20dB

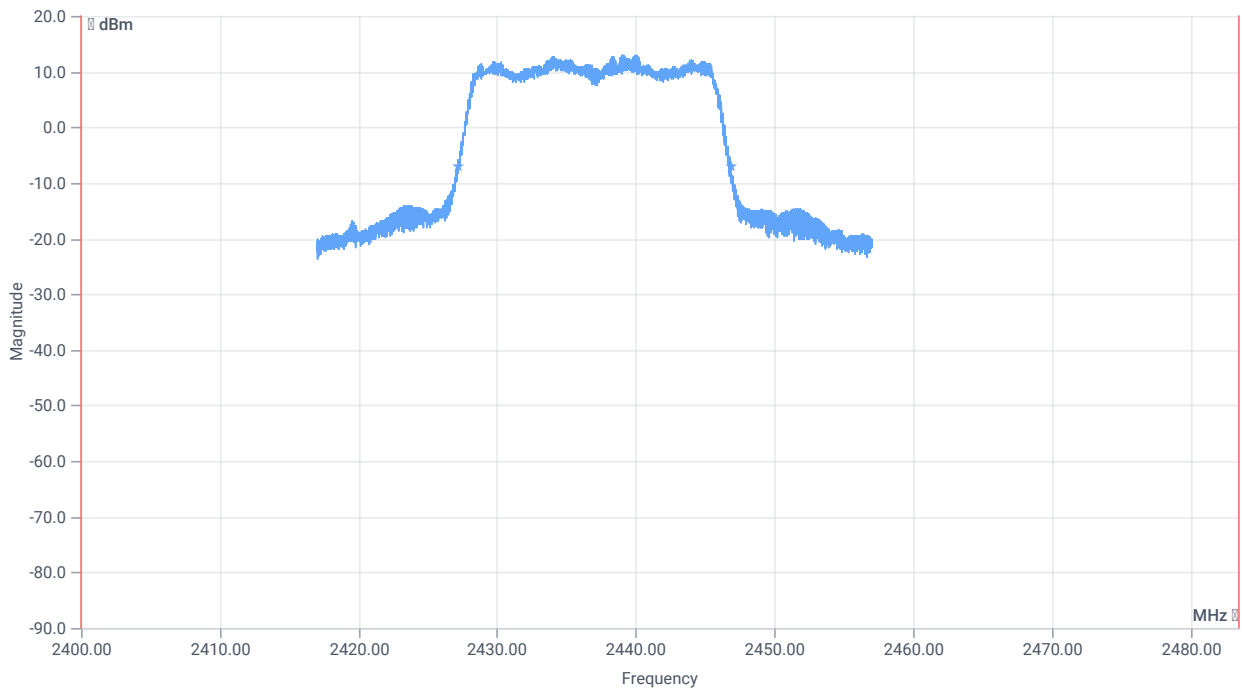

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19664	kHz	INFO
T1 20dB	2400.000000	---	2427.1680	MHz	PASS
T2 20dB	---	2483.500000	2446.8320	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

References

TC start	13.06.2024 10:06:11
Ambit temp [°C] humidity [rel%]	24.4 34
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2462 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.61	dBm	INFO
Ref. frequency	---	---	2458.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.61 10.46 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

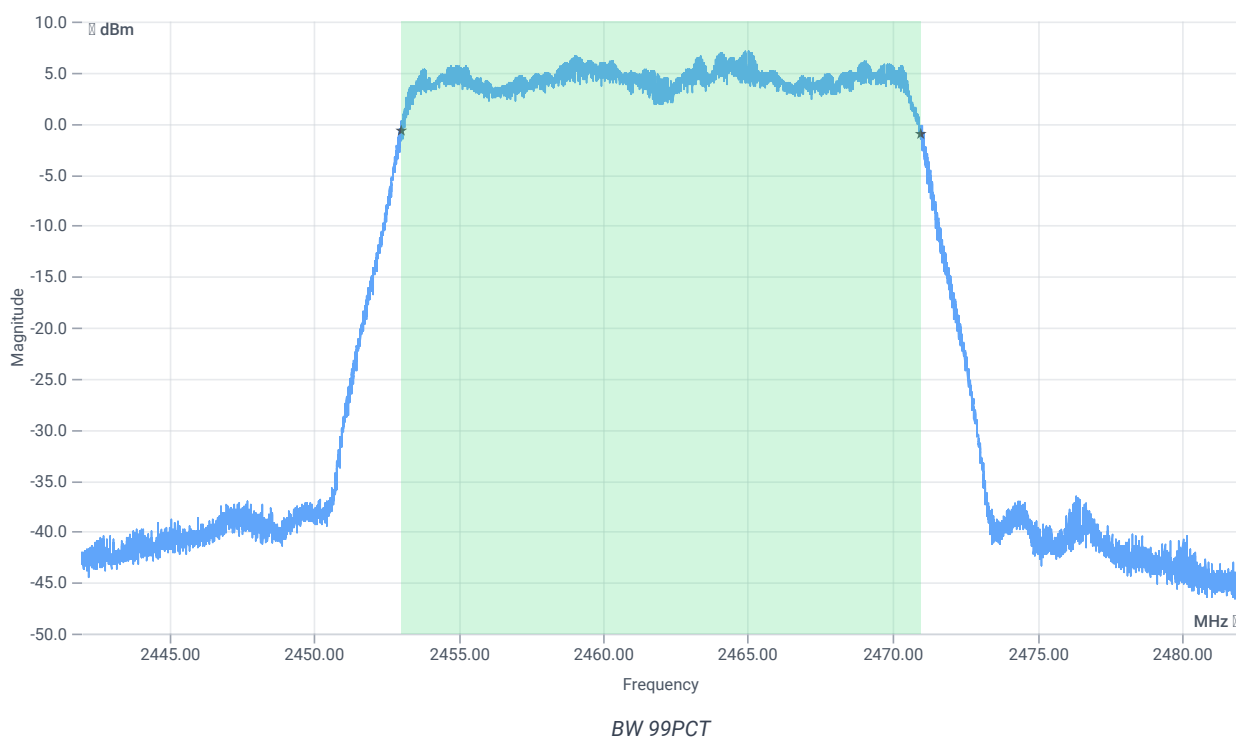


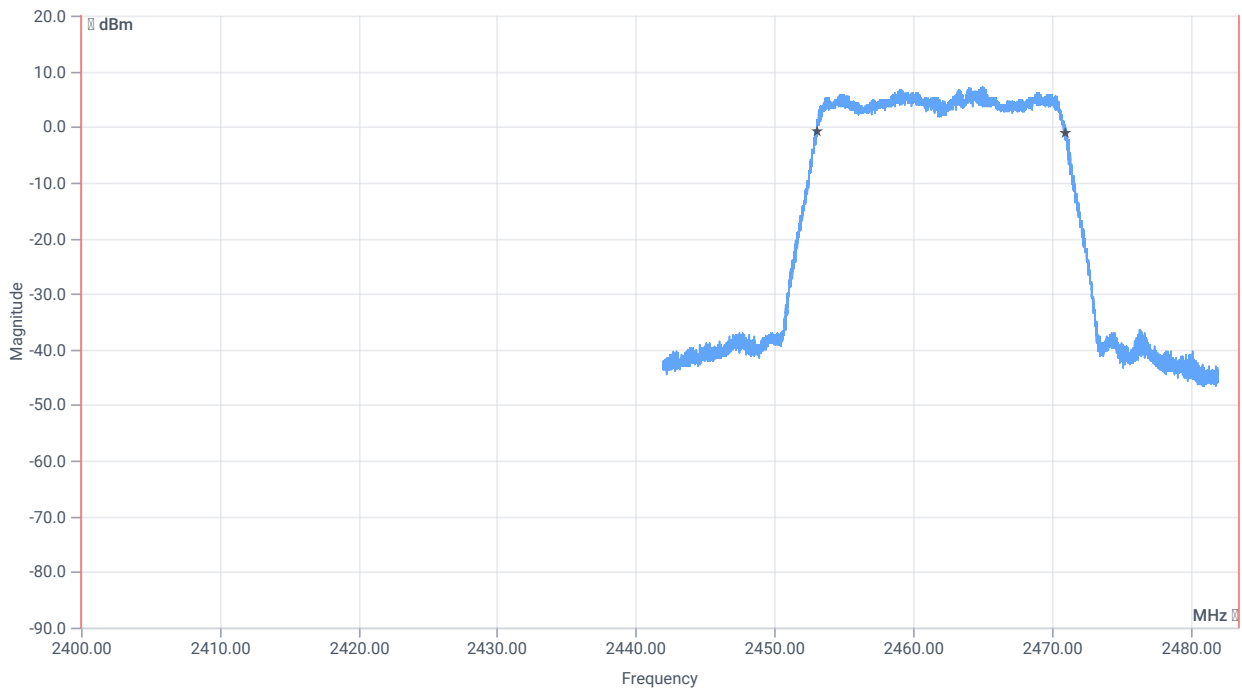


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17938.000	kHz	INFO
T1 99%	2400.000000	---	2453.0289	MHz	PASS
T2 99%	---	2483.500000	2470.9671	MHz	PASS

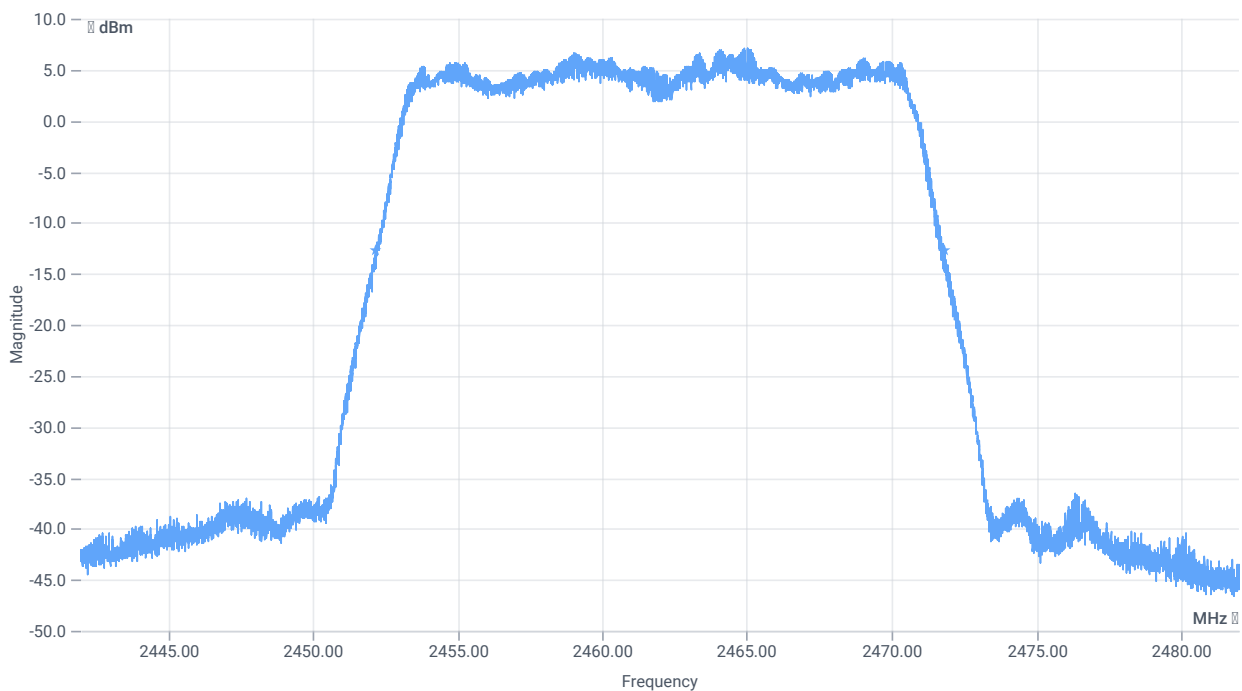

BW 20dB

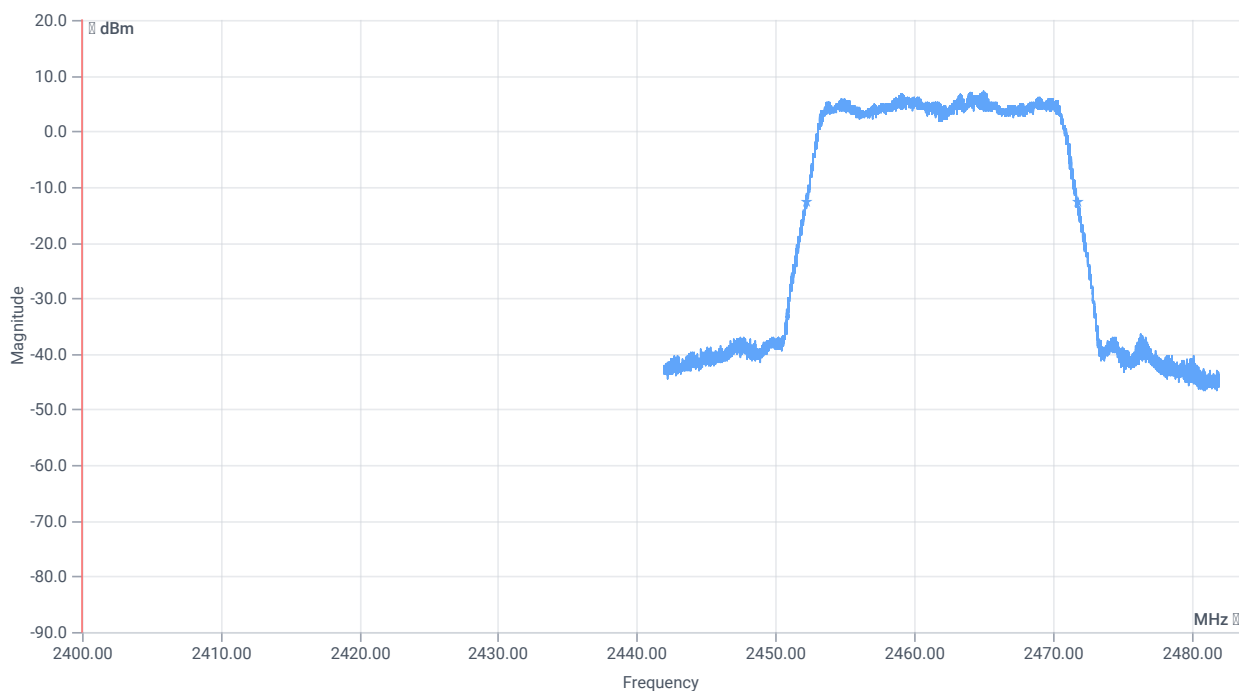

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19616	kHz	INFO
T1 20dB	2400.000000	---	2452.1920	MHz	PASS
T2 20dB	---	2483.500000	2471.8080	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

References

TC start	11.06.2024 09:34:09
Ambit temp [°C] humidity [rel%]	23.3 36
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2412 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.84	dBm	INFO
Ref. frequency	---	---	2409.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.84 10.48 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

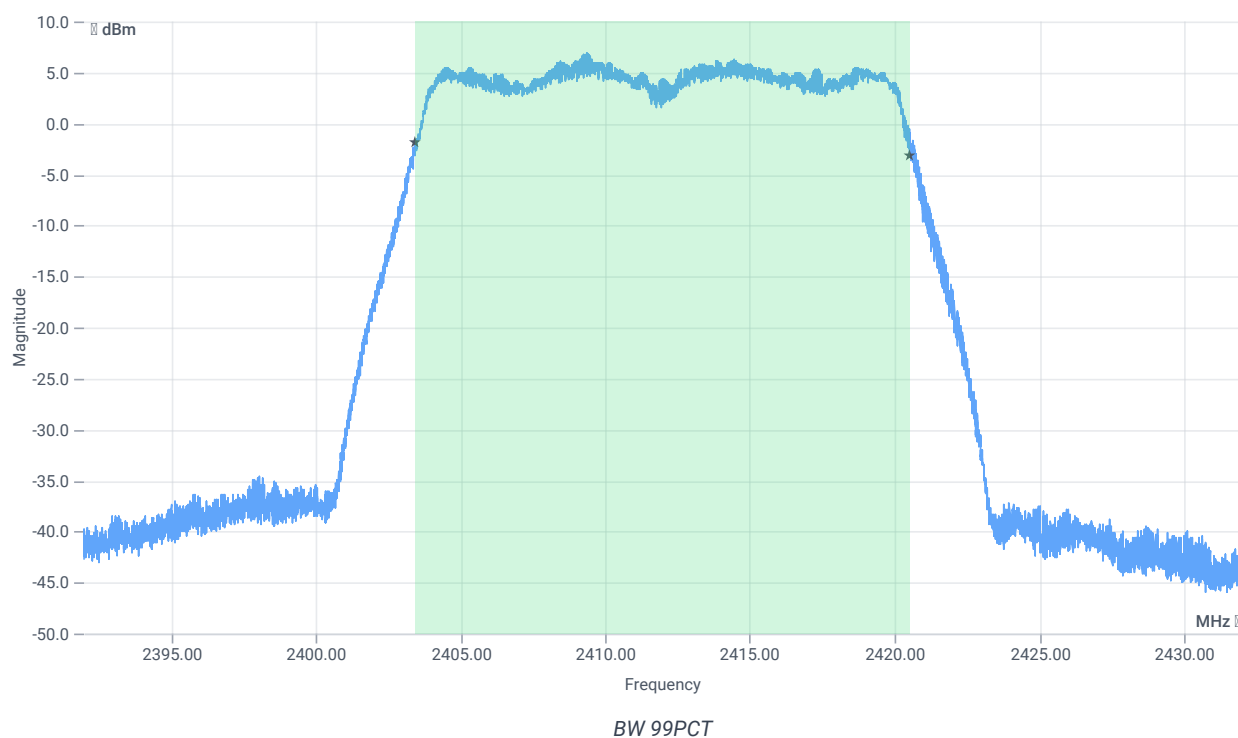


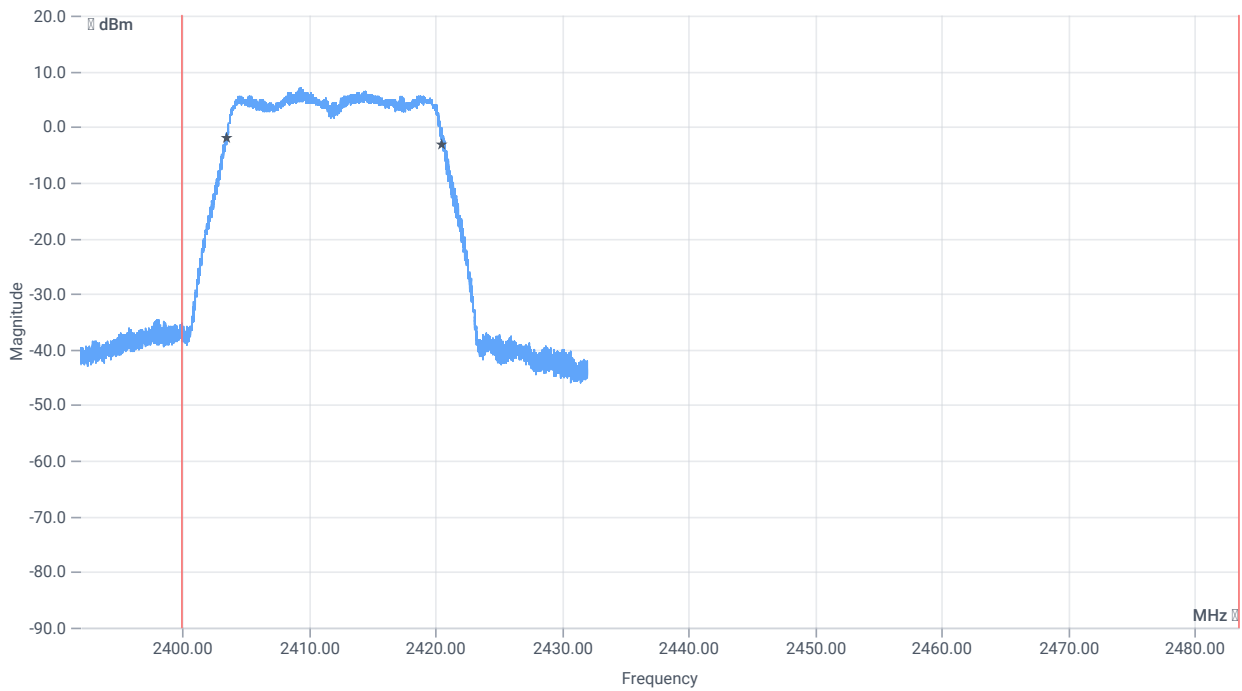


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17082.000	kHz	INFO
T1 99%	2400.000000	---	2403.4569	MHz	PASS
T2 99%	---	2483.500000	2420.5391	MHz	PASS

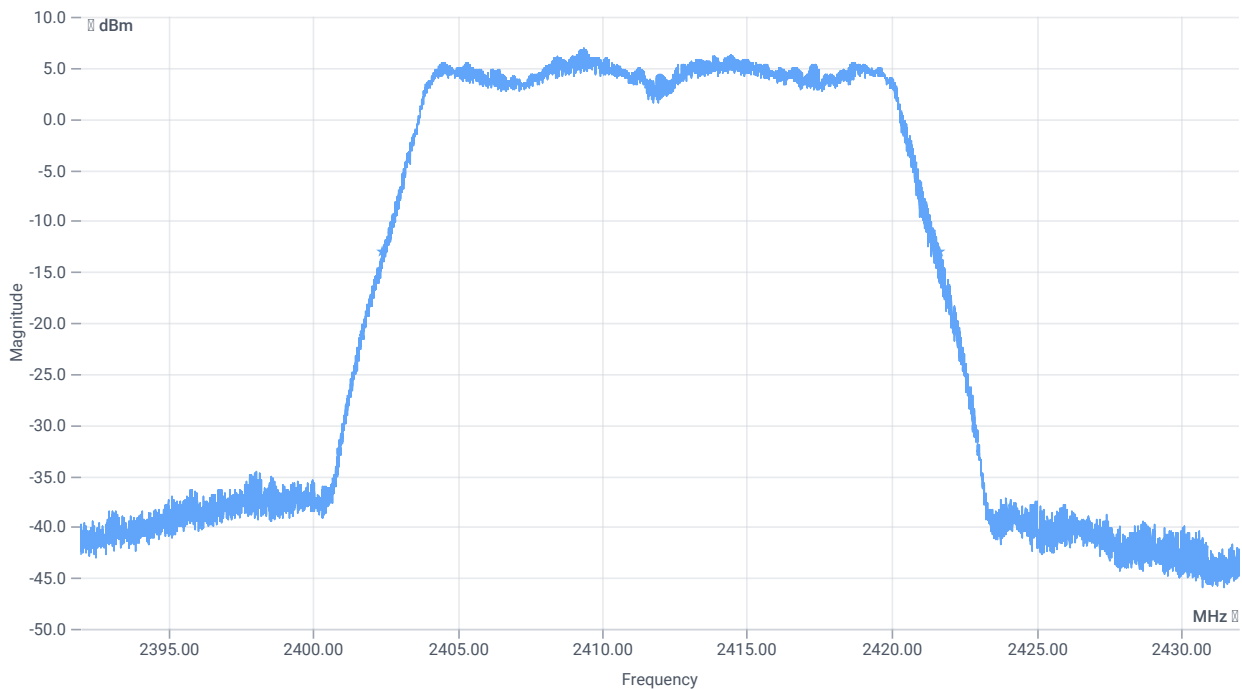

BW 20dB

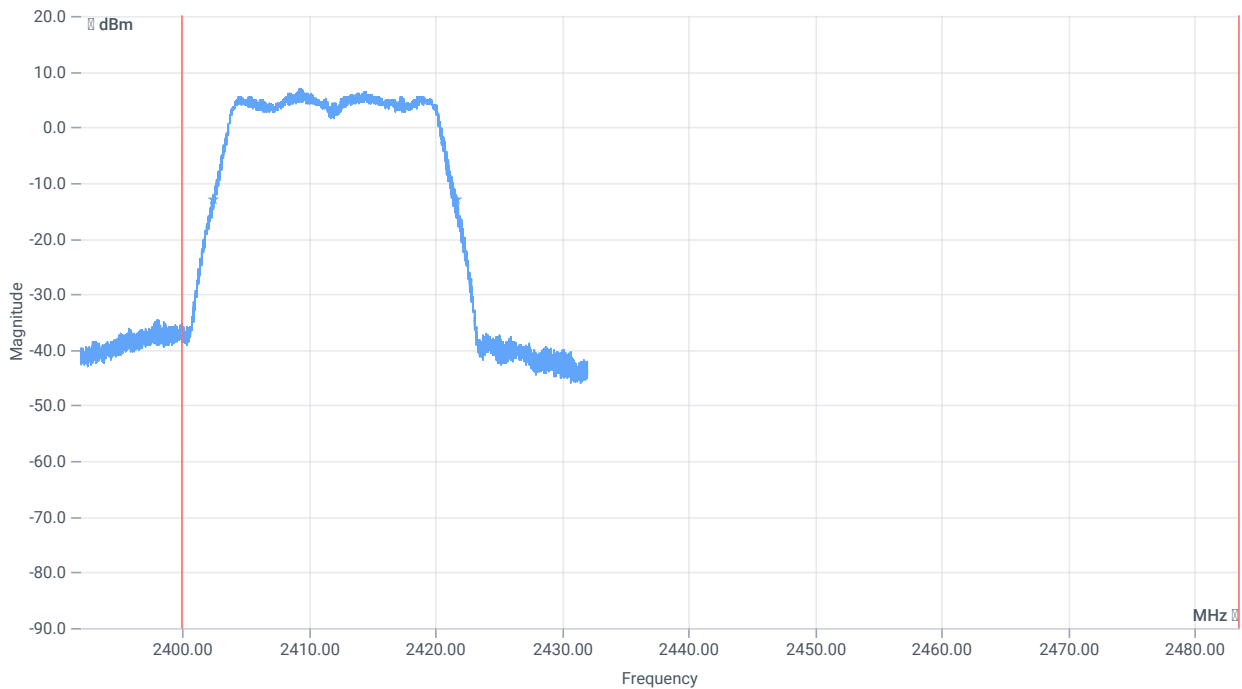

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19256	kHz	INFO
T1 20dB	2400.000000	---	2402.4080	MHz	PASS
T2 20dB	---	2483.500000	2421.6640	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

References

TC start	11.06.2024 09:54:56
Ambit temp [°C] humidity [rel%]	23.5 36
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	15.00	dBm	INFO
Ref. frequency	---	---	2439.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.00 10.56 25
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

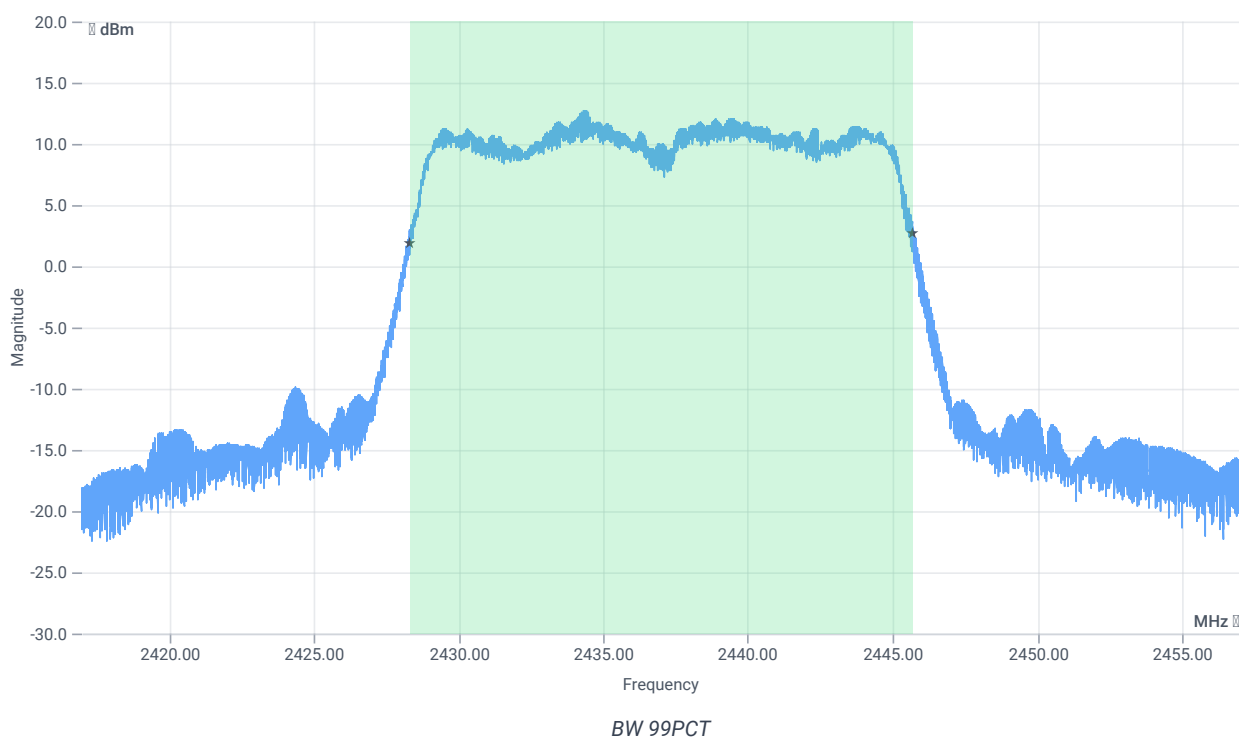


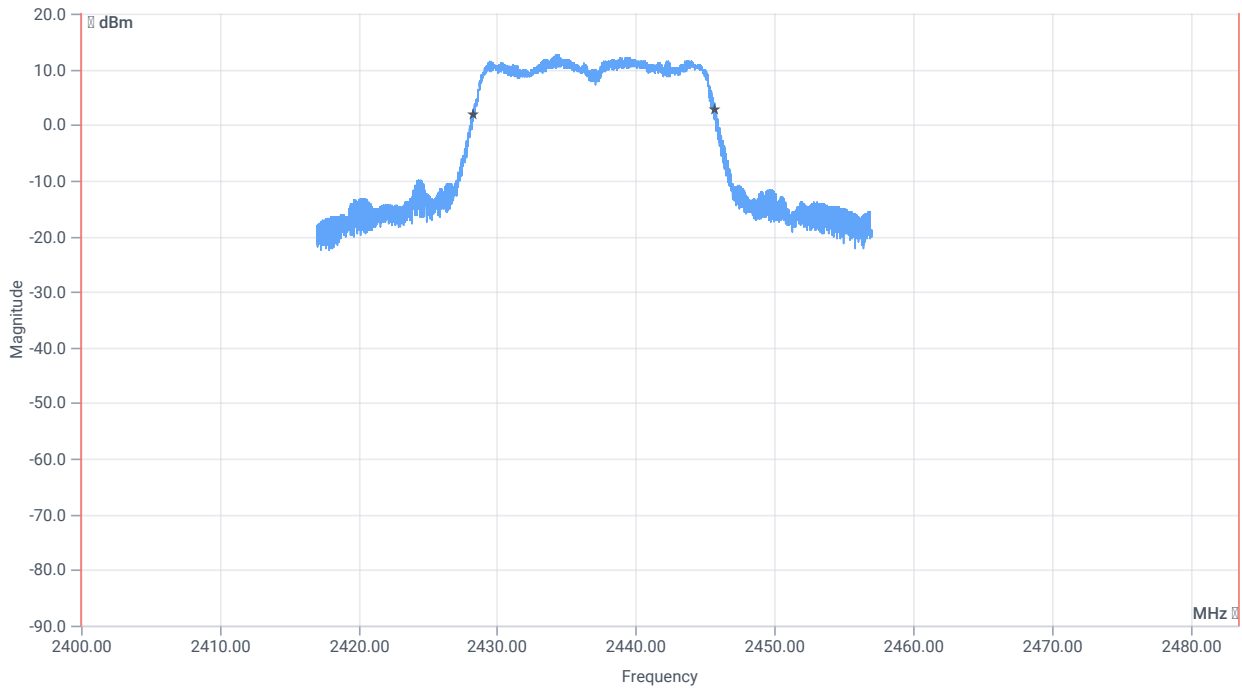


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17358.000	kHz	INFO
T1 99%	2400.000000	---	2428.3209	MHz	PASS
T2 99%	---	2483.500000	2445.6791	MHz	PASS

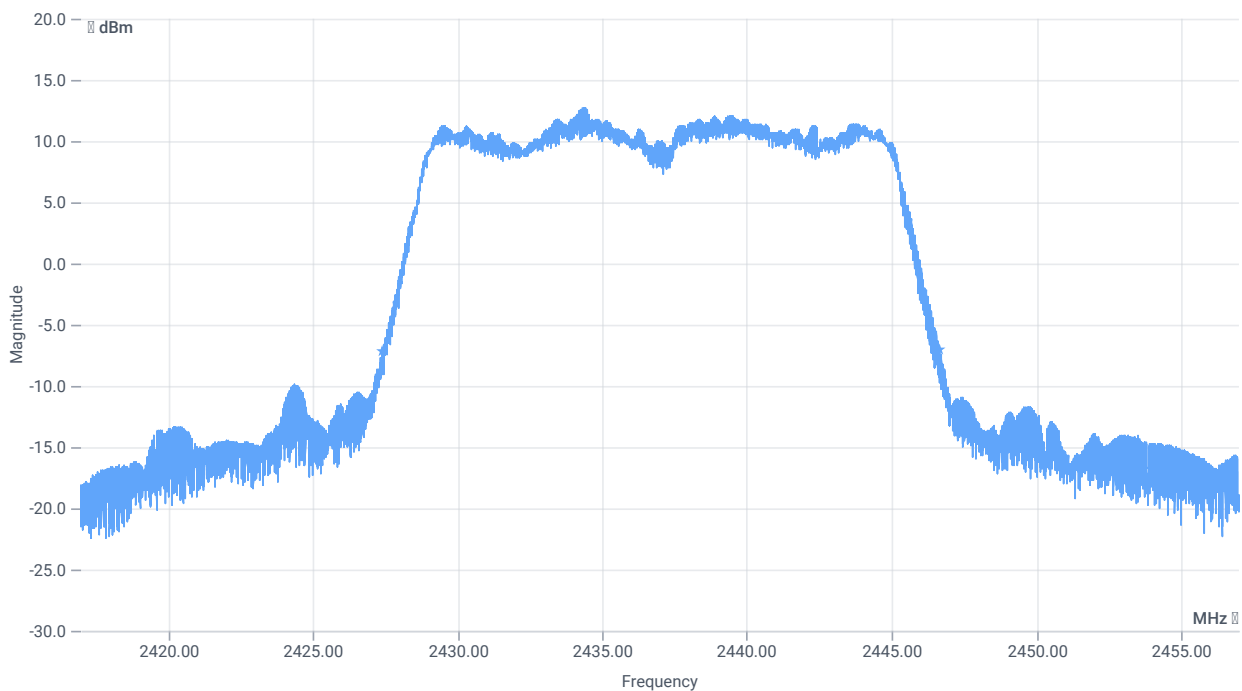

BW 20dB

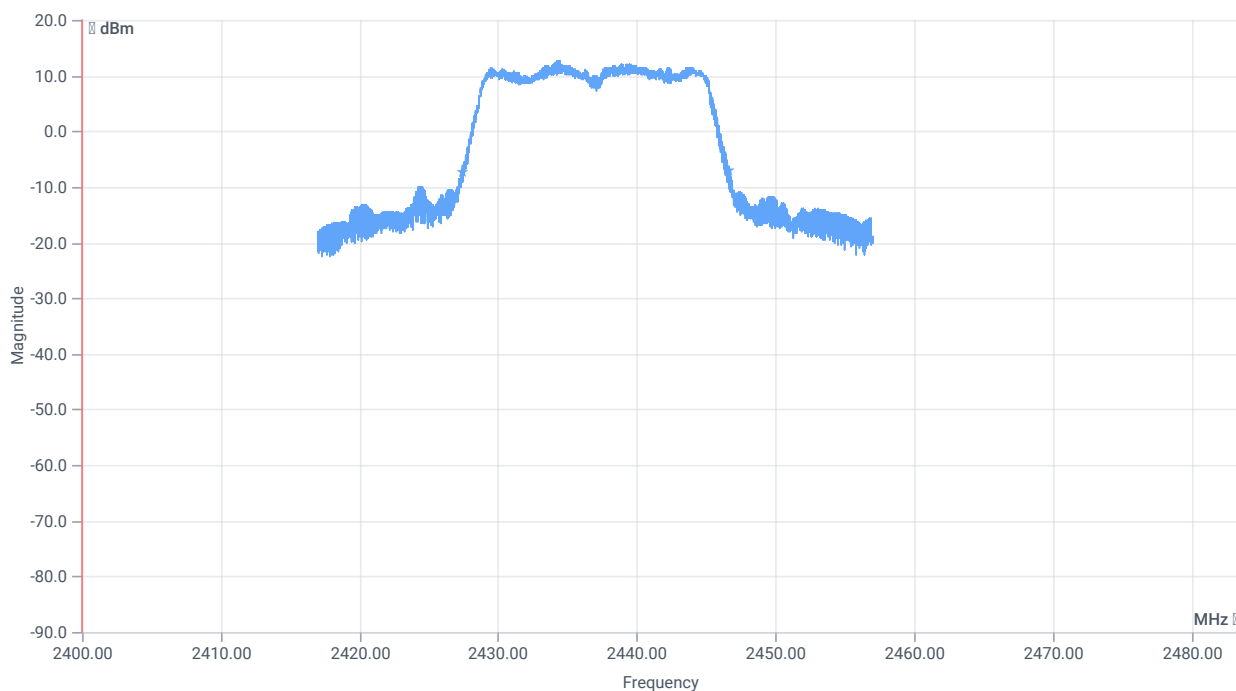

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19260	kHz	INFO
T1 20dB	2400.000000	---	2427.4080	MHz	PASS
T2 20dB	---	2483.500000	2446.6680	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

References

TC start	11.06.2024 10:12:35
Ambit temp [°C] humidity [rel%]	23.7 36
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2462 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.00	dBm	INFO
Ref. frequency	---	---	2458.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.00 10.6 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

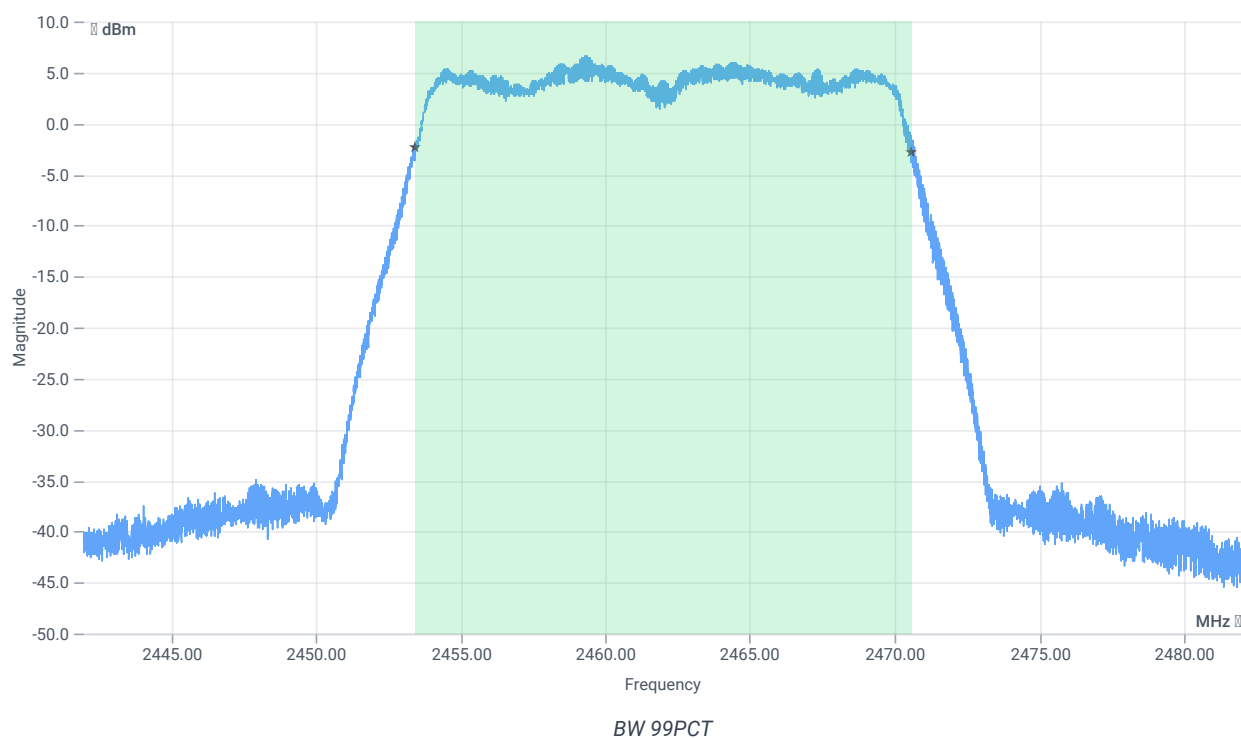


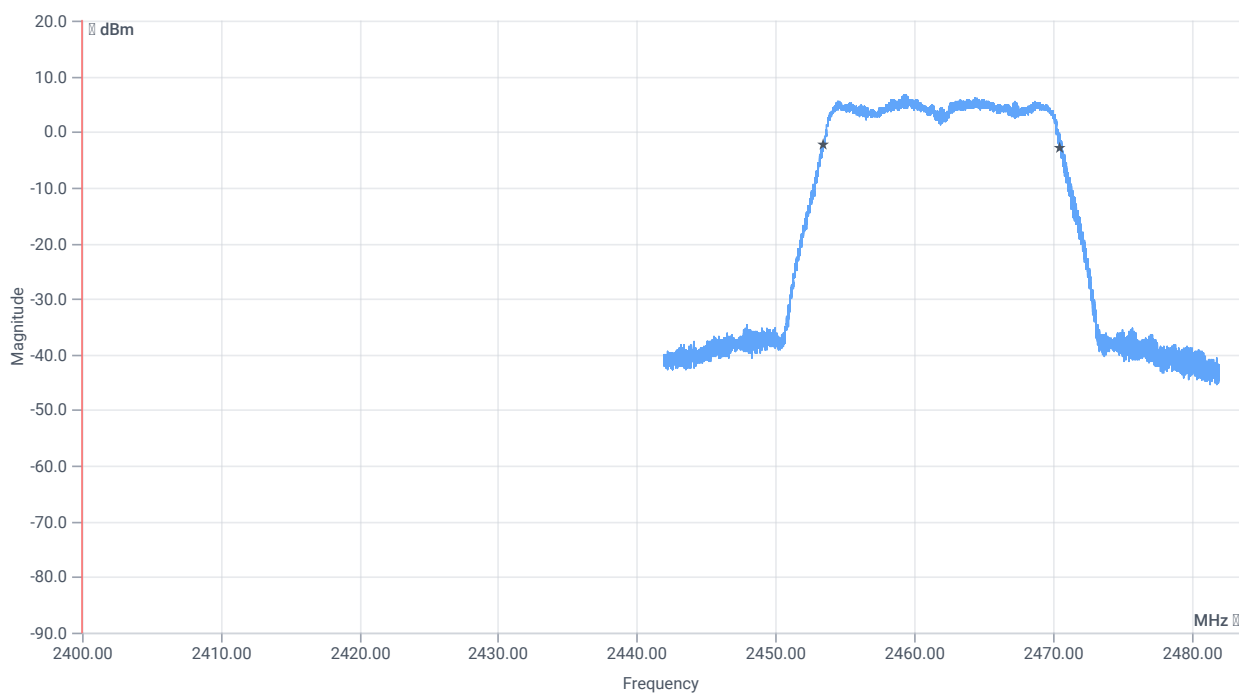


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17086.000	kHz	INFO
T1 99%	2400.000000	---	2453.4569	MHz	PASS
T2 99%	---	2483.500000	2470.5431	MHz	PASS

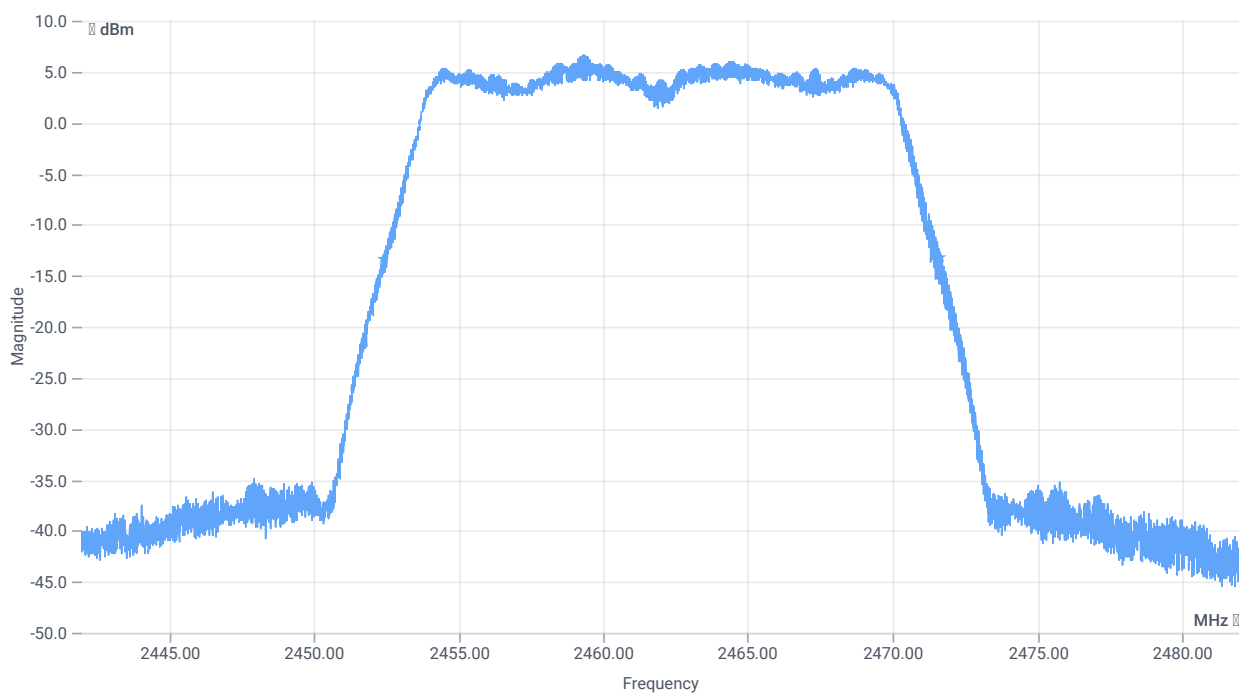

BW 20dB

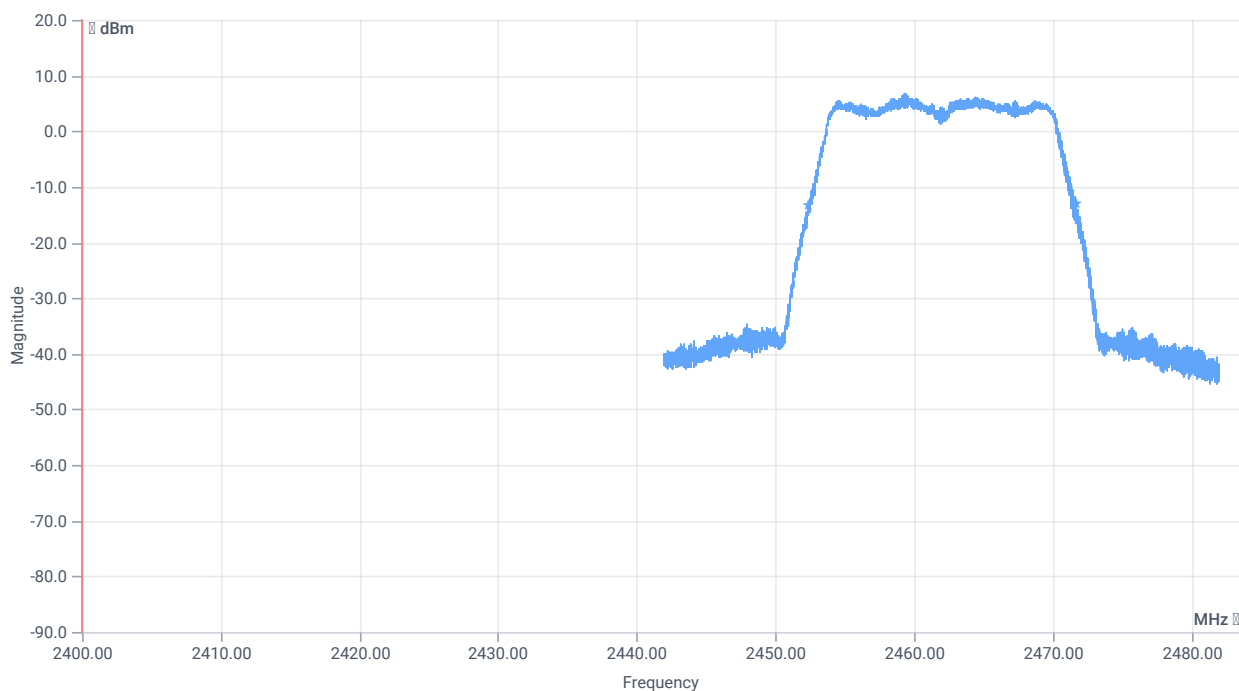

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19236	kHz	INFO
T1 20dB	2400.000000	---	2452.4080	MHz	PASS
T2 20dB	---	2483.500000	2471.6440	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

References

TC start	11.06.2024 12:10:39
Ambit temp [°C] humidity [rel%]	24.3 33
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2422 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	6.80	dBm	INFO
Ref. frequency	---	---	2426.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.80 10.51 20
Start [MHz] Stop [MHz]	2382.000 2462.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

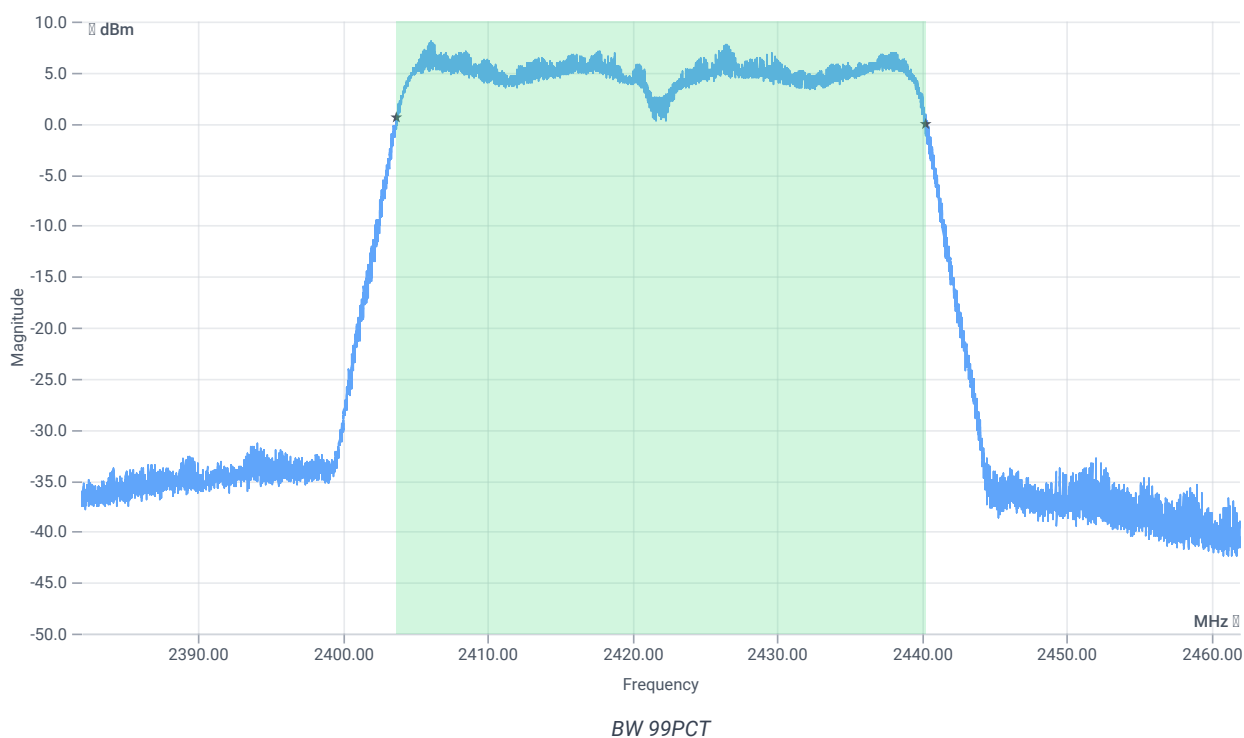


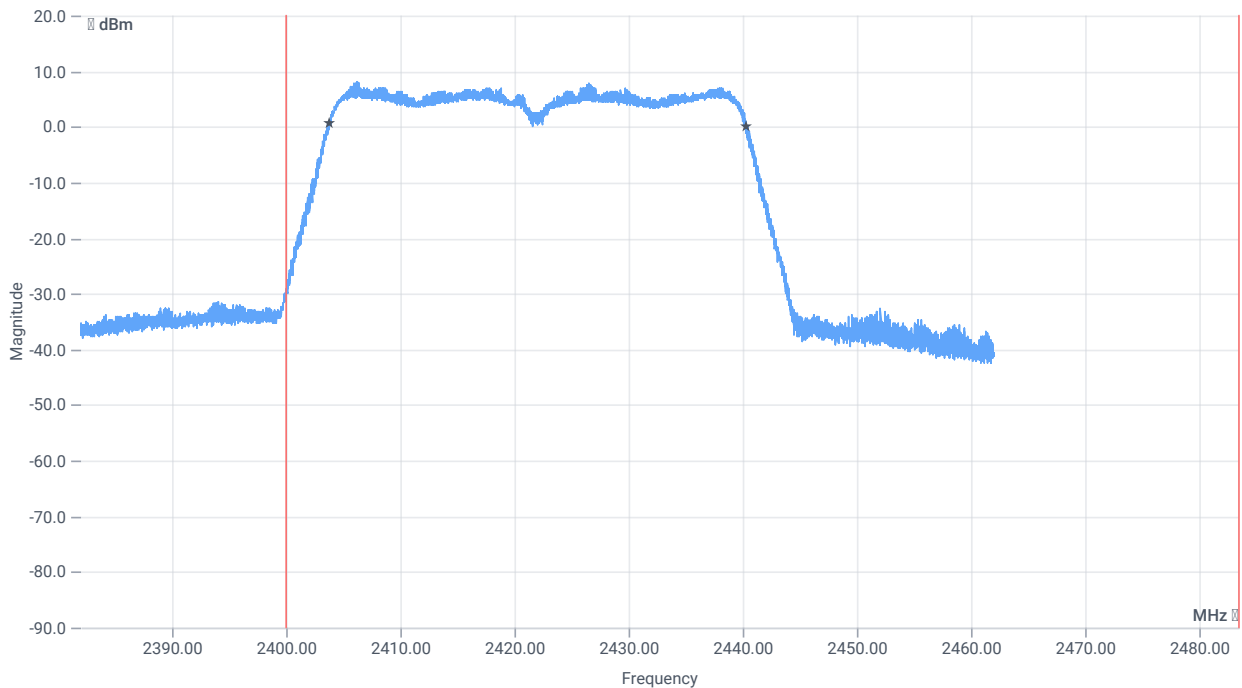


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36556.000	kHz	INFO
T1 99%	2400.000000	---	2403.7058	MHz	PASS
T2 99%	---	2483.500000	2440.2622	MHz	PASS

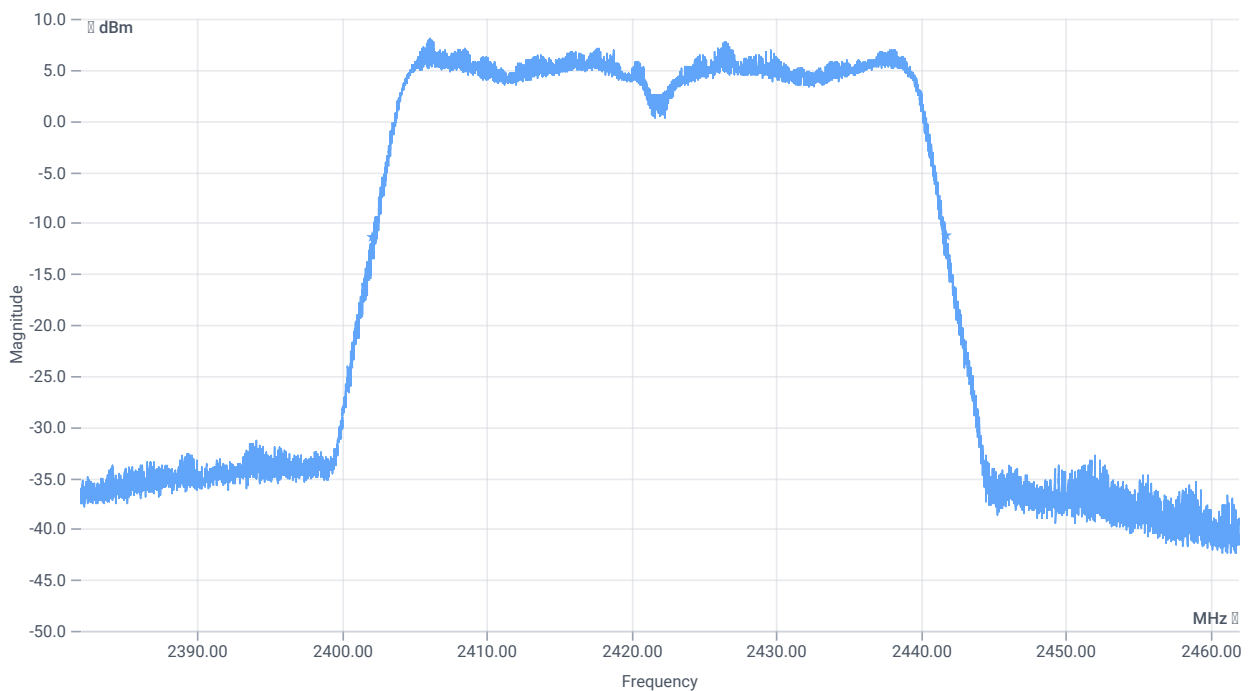

BW 20dB

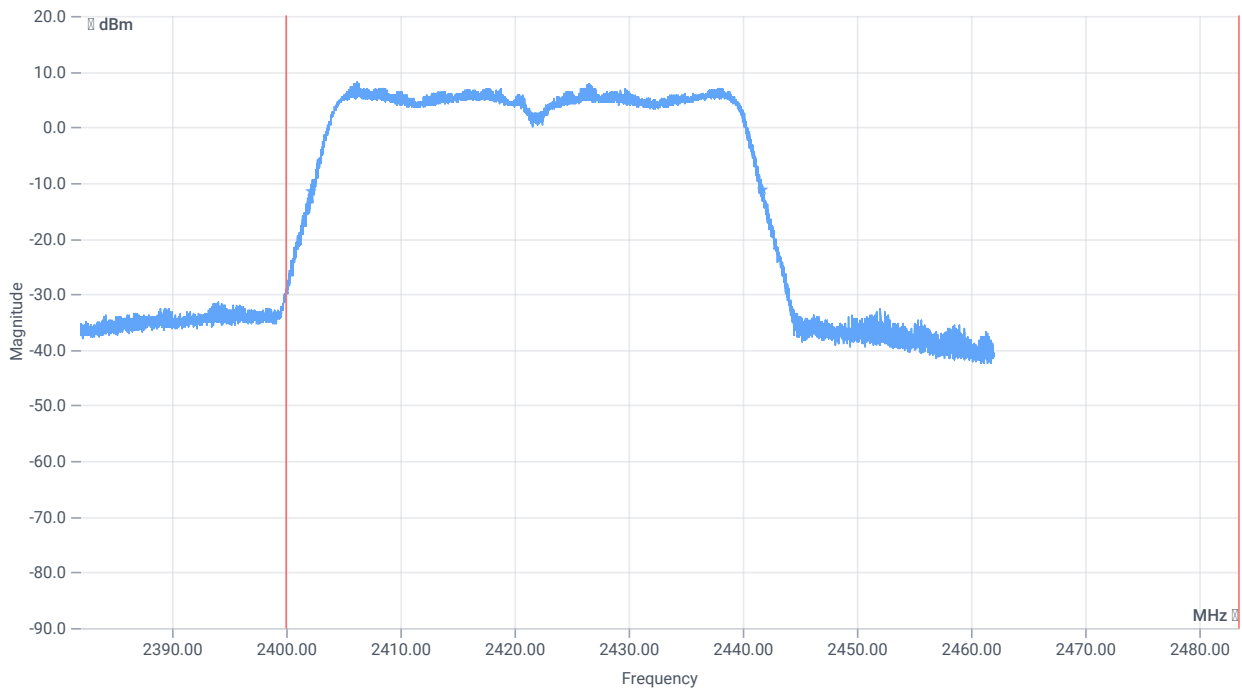

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	39664	kHz	INFO
T1 20dB	2400.000000	---	2402.1360	MHz	PASS
T2 20dB	---	2483.500000	2441.8000	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

References

TC start	11.06.2024 12:30:12
Ambit temp [°C] humidity [rel%]	24.4 33
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.56	dBm	INFO
Ref. frequency	---	---	2452.180	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.56 10.56 25
Start [MHz] Stop [MHz]	2397.000 2477.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

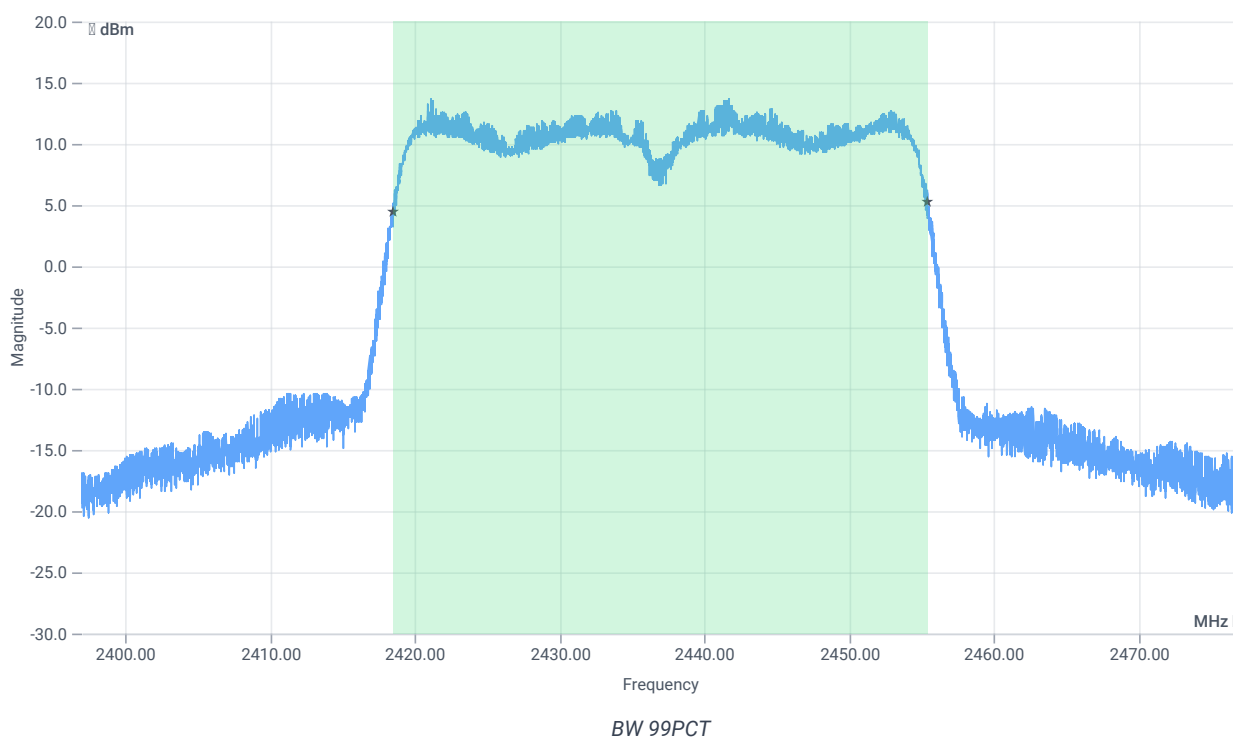


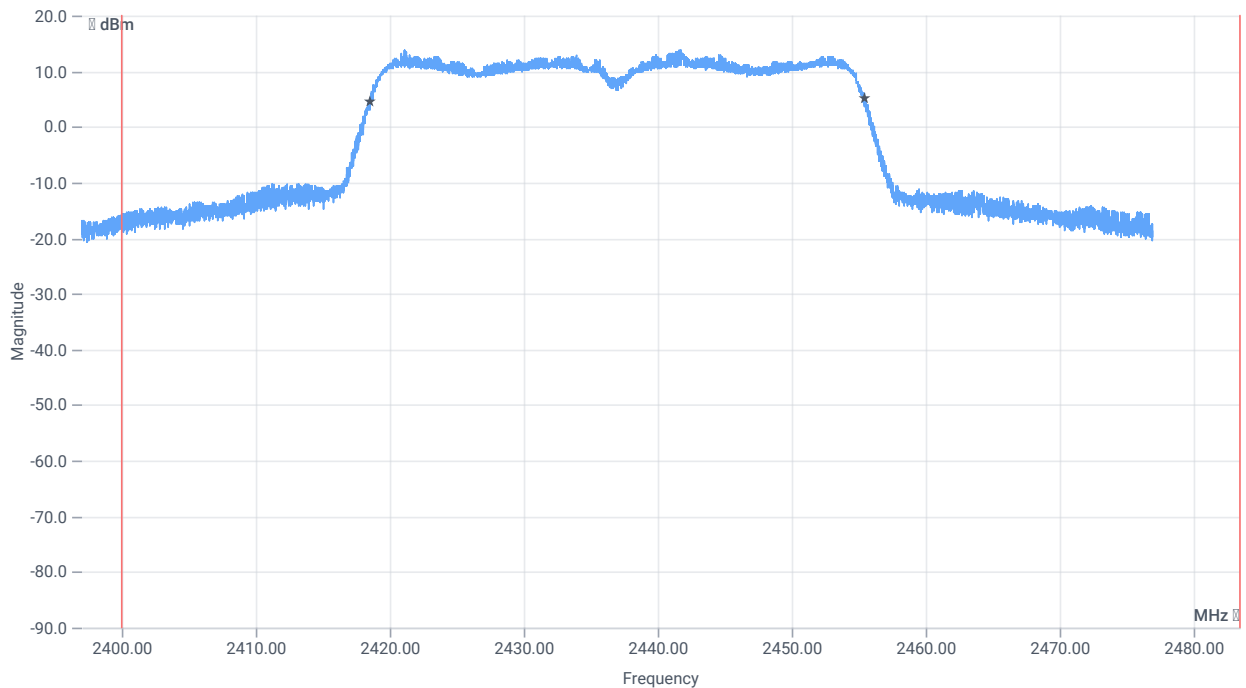


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36948.000	kHz	INFO
T1 99%	2400.000000	---	2418.4819	MHz	PASS
T2 99%	---	2483.500000	2455.4302	MHz	PASS

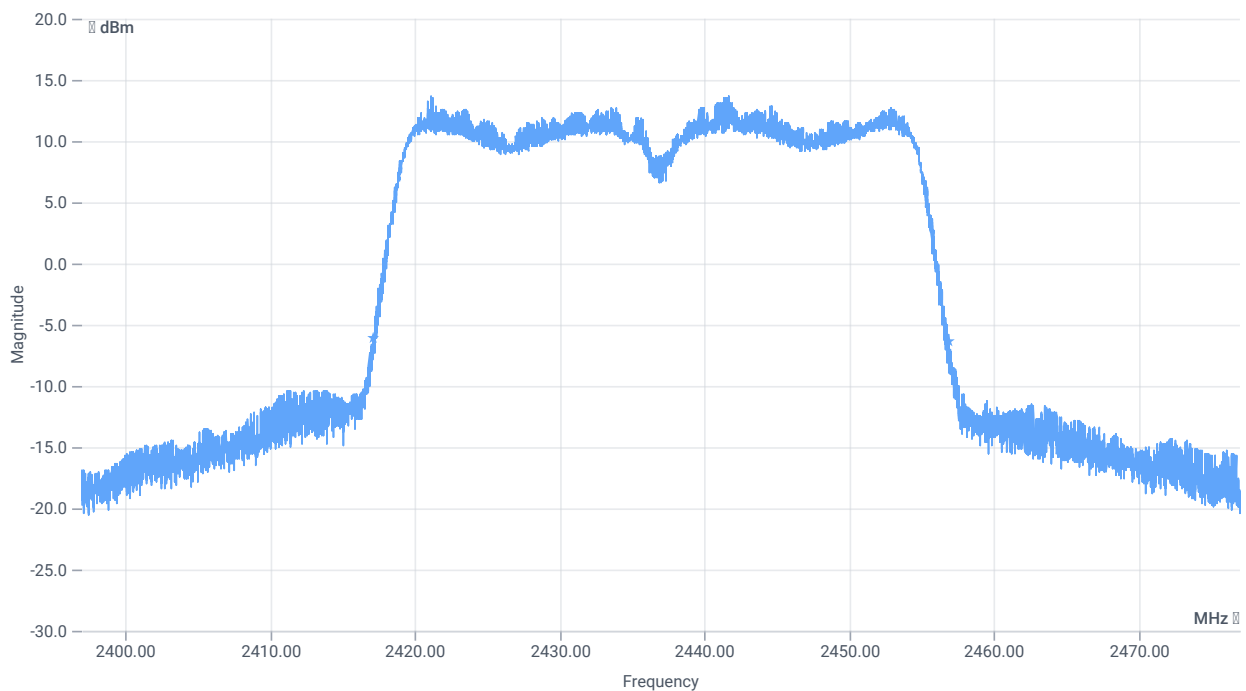

BW 20dB

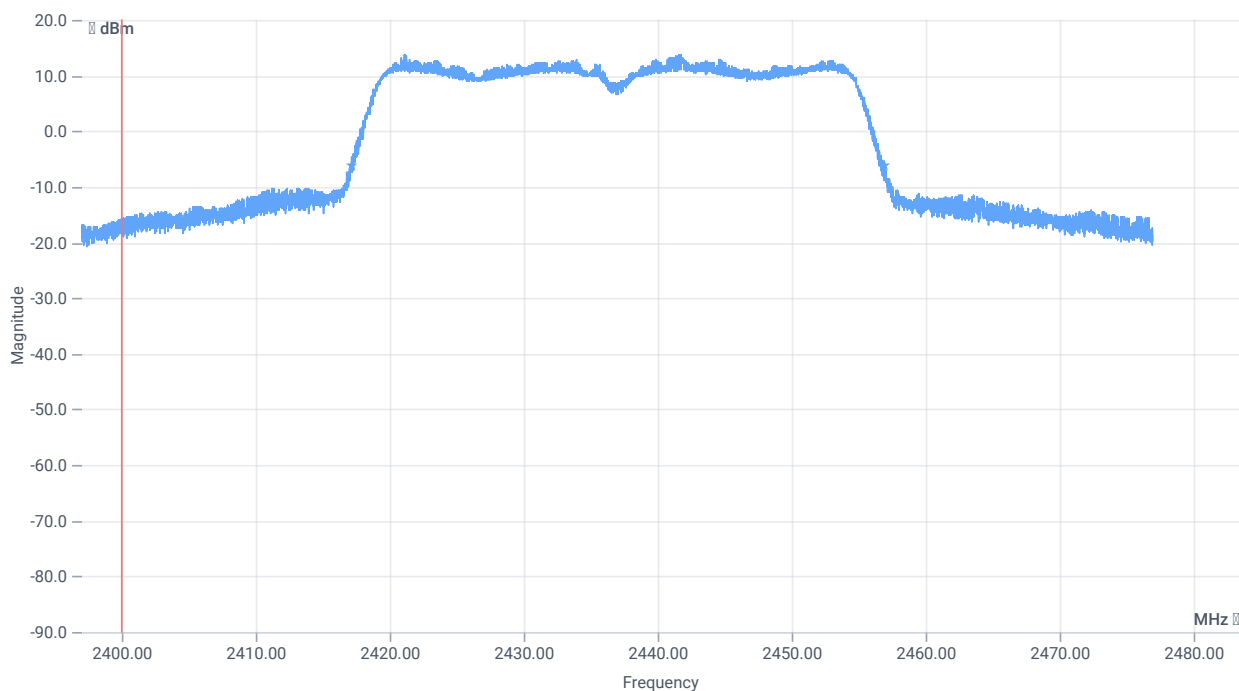

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	39768	kHz	INFO
T1 20dB	2400.000000	---	2417.1280	MHz	PASS
T2 20dB	---	2483.500000	2456.8960	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

References

TC start	11.06.2024 13:00:38
Ambit temp [°C] humidity [rel%]	24.7 32
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2452 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.36	dBm	INFO
Ref. frequency	---	---	2447.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.36 10.58 15
Start [MHz] Stop [MHz]	2412.000 2492.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

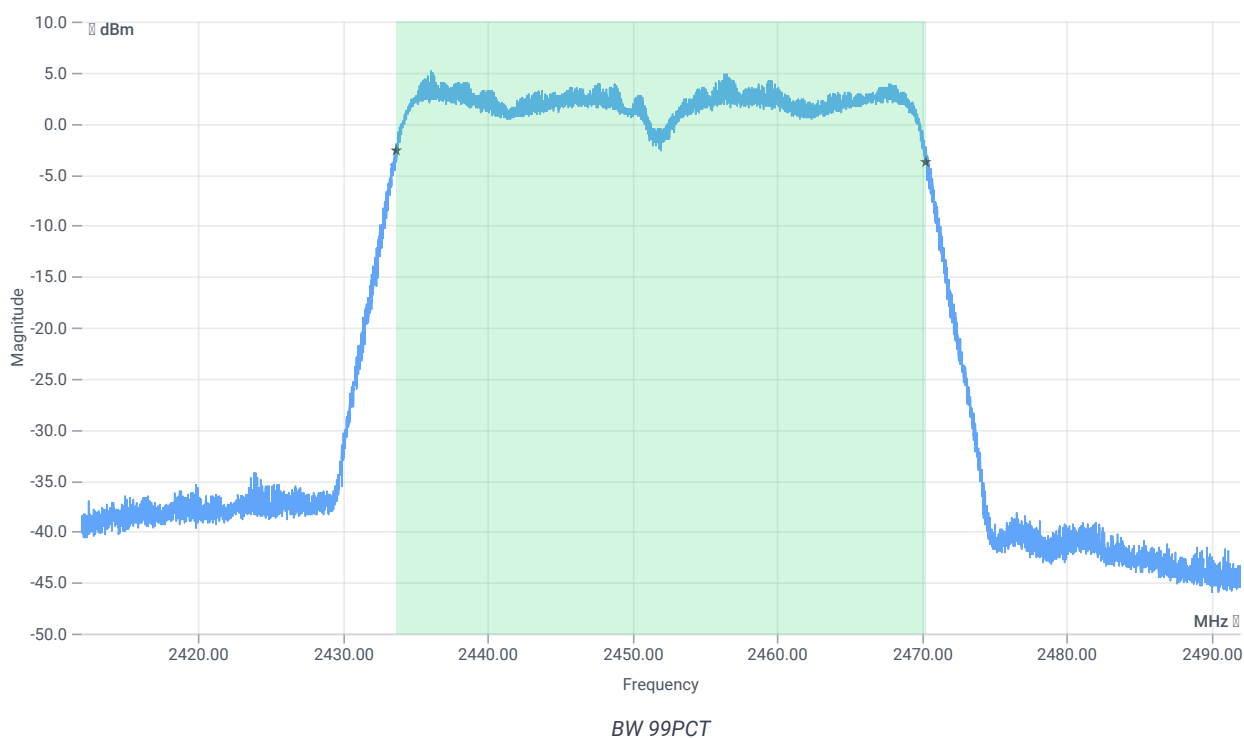


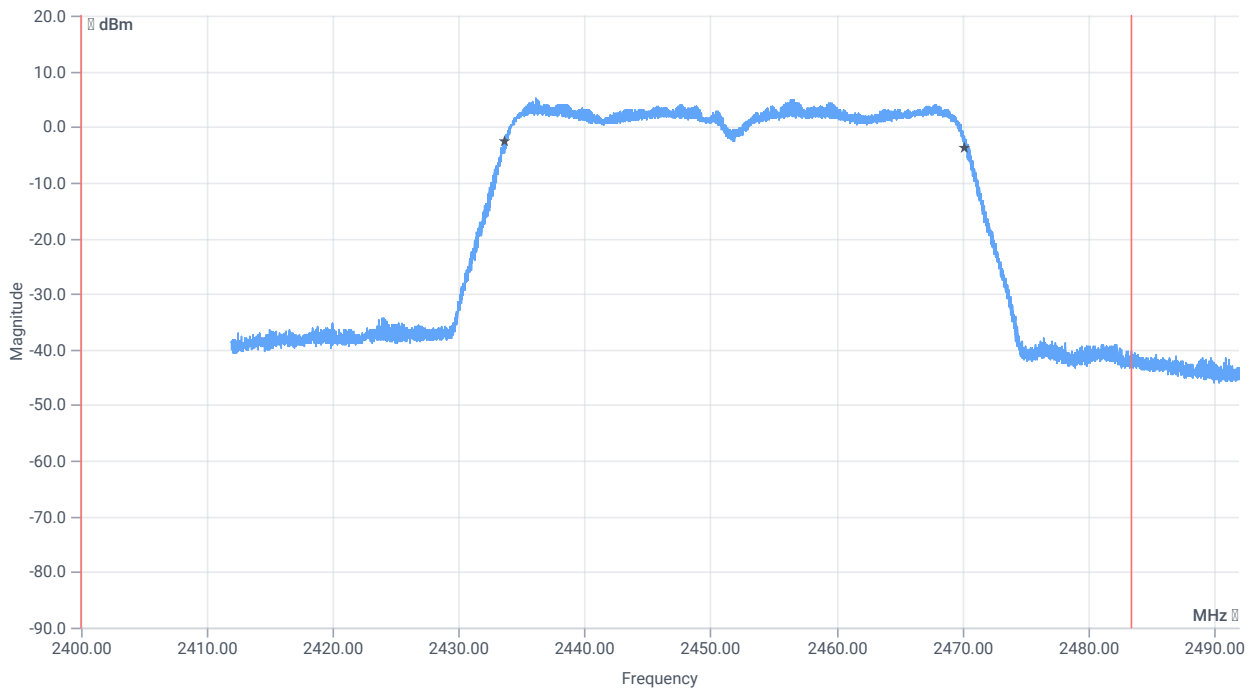


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36540.000	kHz	INFO
T1 99%	2400.000000	---	2433.6978	MHz	PASS
T2 99%	---	2483.500000	2470.2382	MHz	PASS

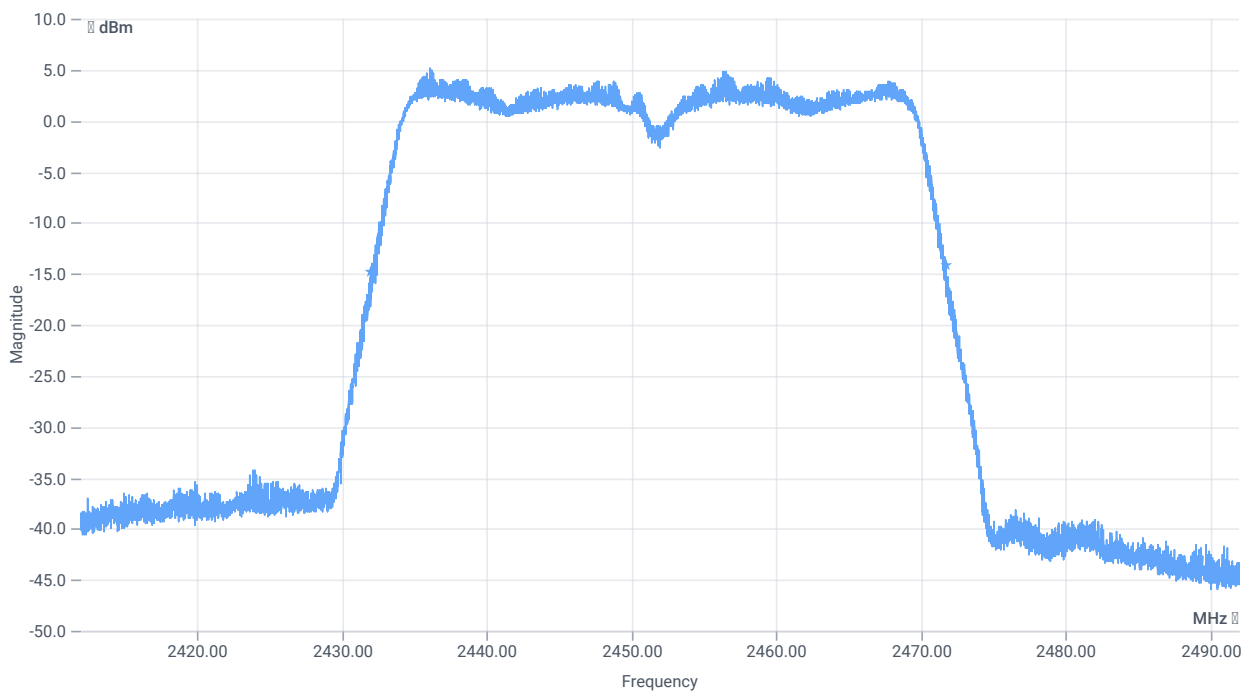

BW 20dB

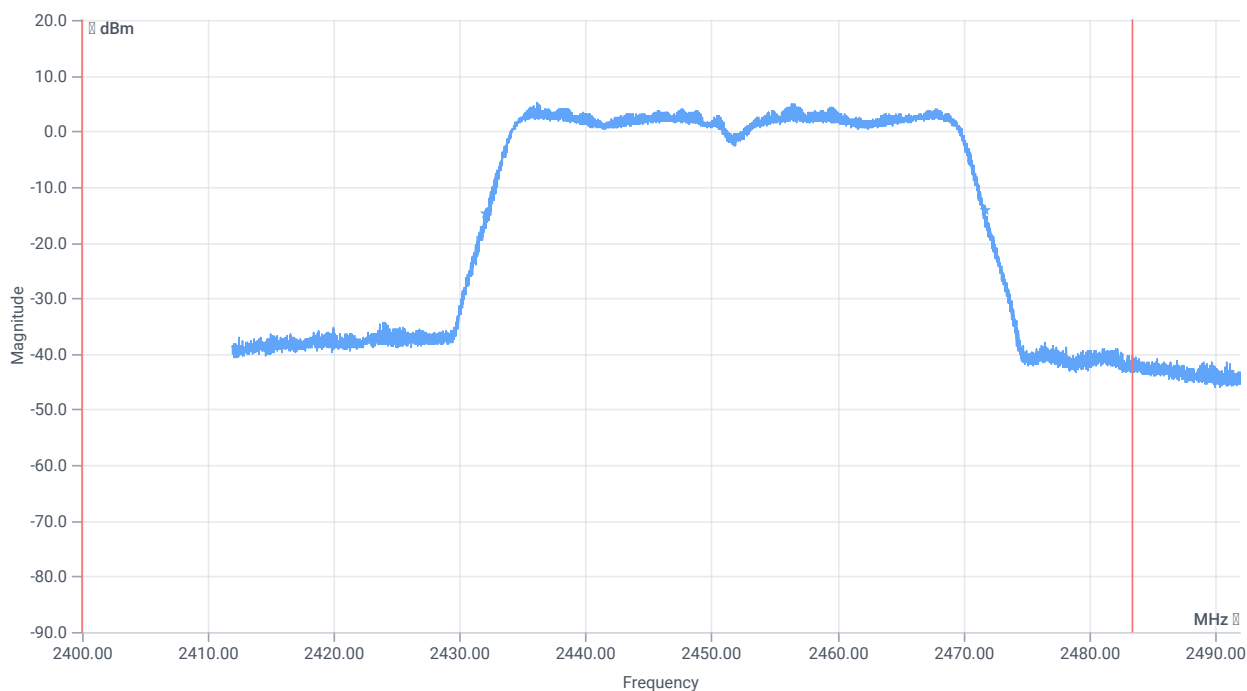

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	39696	kHz	INFO
T1 20dB	2400.000000	---	2432.0560	MHz	PASS
T2 20dB	---	2483.500000	2471.7520	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

References

TC start	13.06.2024 10:45:02
Ambit temp [°C] humidity [rel%]	24.6 33
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2422 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.88	dBm	INFO
Ref. frequency	---	---	2410.110	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.88 10.41 15
Start [MHz] Stop [MHz]	2382.000 2462.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

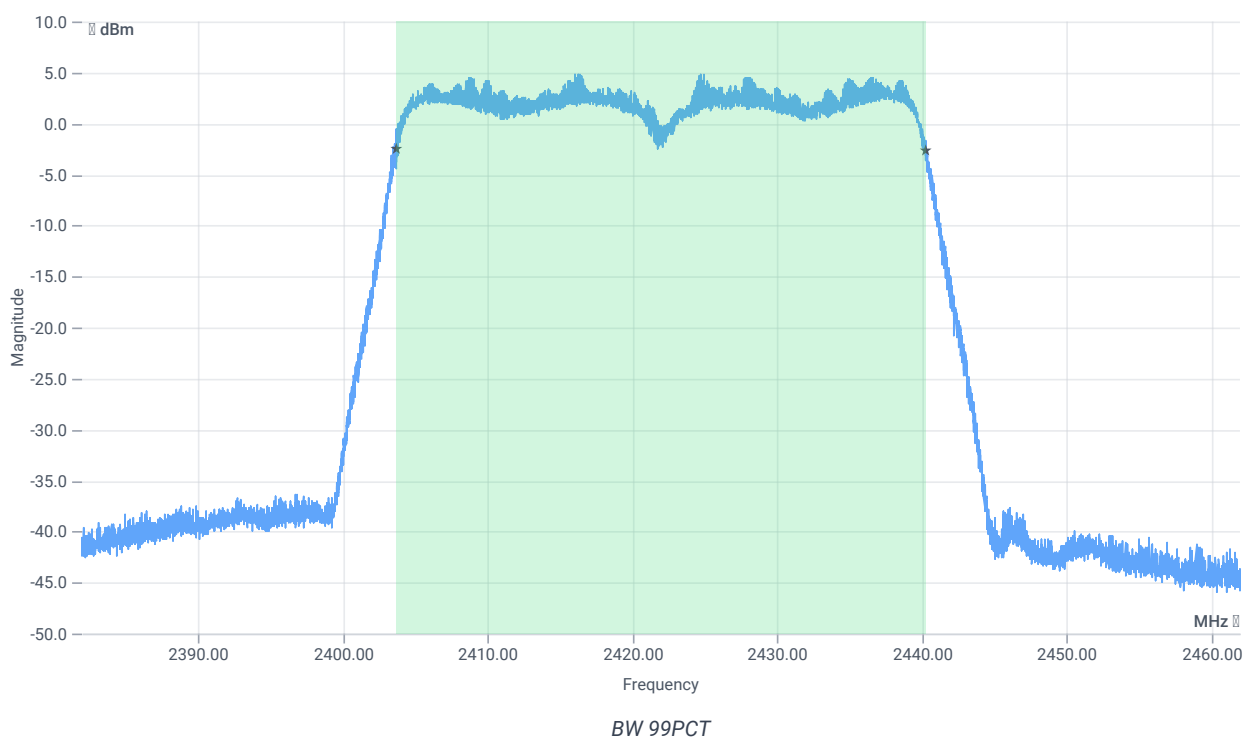


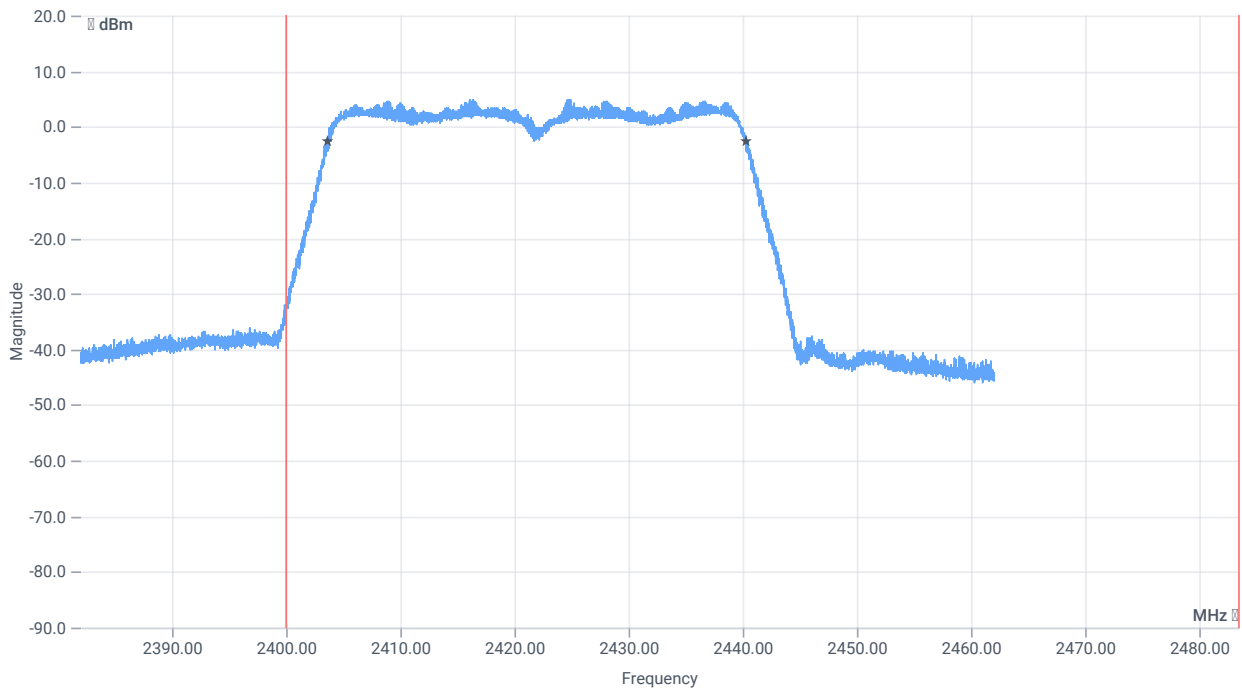


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36604.000	kHz	INFO
T1 99%	2400.000000	---	2403.6738	MHz	PASS
T2 99%	---	2483.500000	2440.2782	MHz	PASS

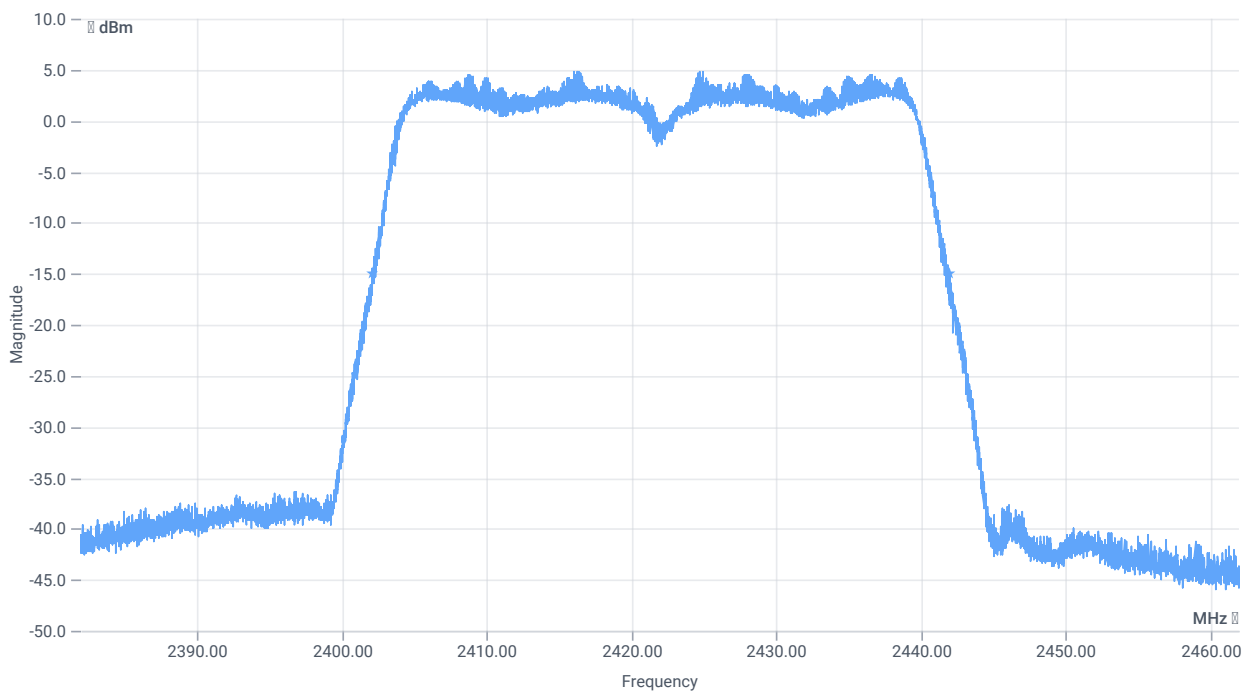

BW 20dB

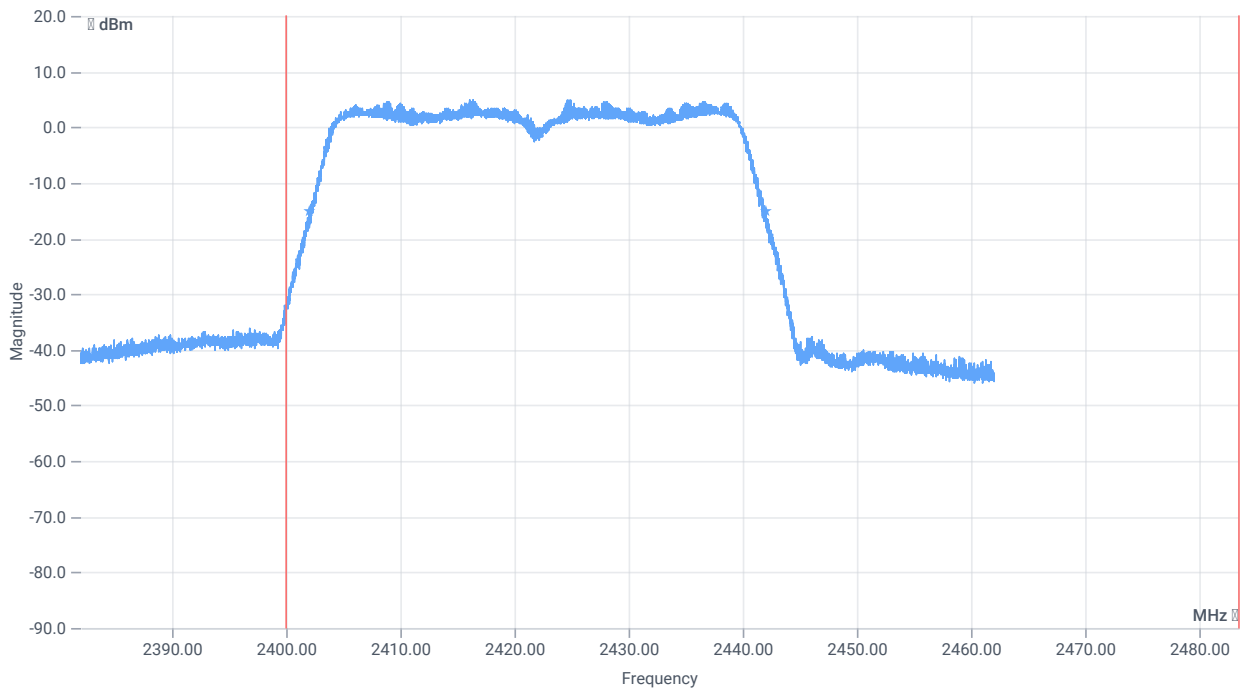

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	39912	kHz	INFO
T1 20dB	2400.000000	---	2402.0720	MHz	PASS
T2 20dB	---	2483.500000	2441.9840	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

References

TC start	13.06.2024 11:02:39
Ambit temp [°C] humidity [rel%]	24.7 33
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.88	dBm	INFO
Ref. frequency	---	---	2432.700	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.88 10.42 25
Start [MHz] Stop [MHz]	2397.000 2477.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

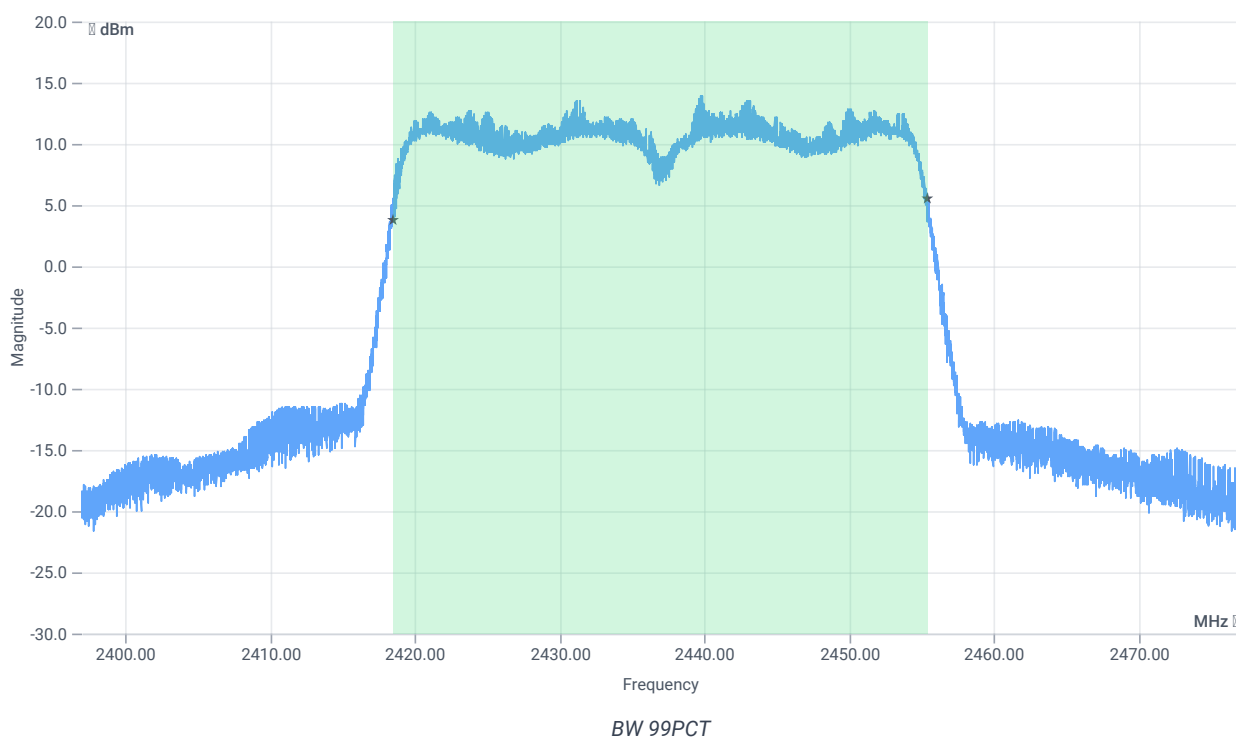


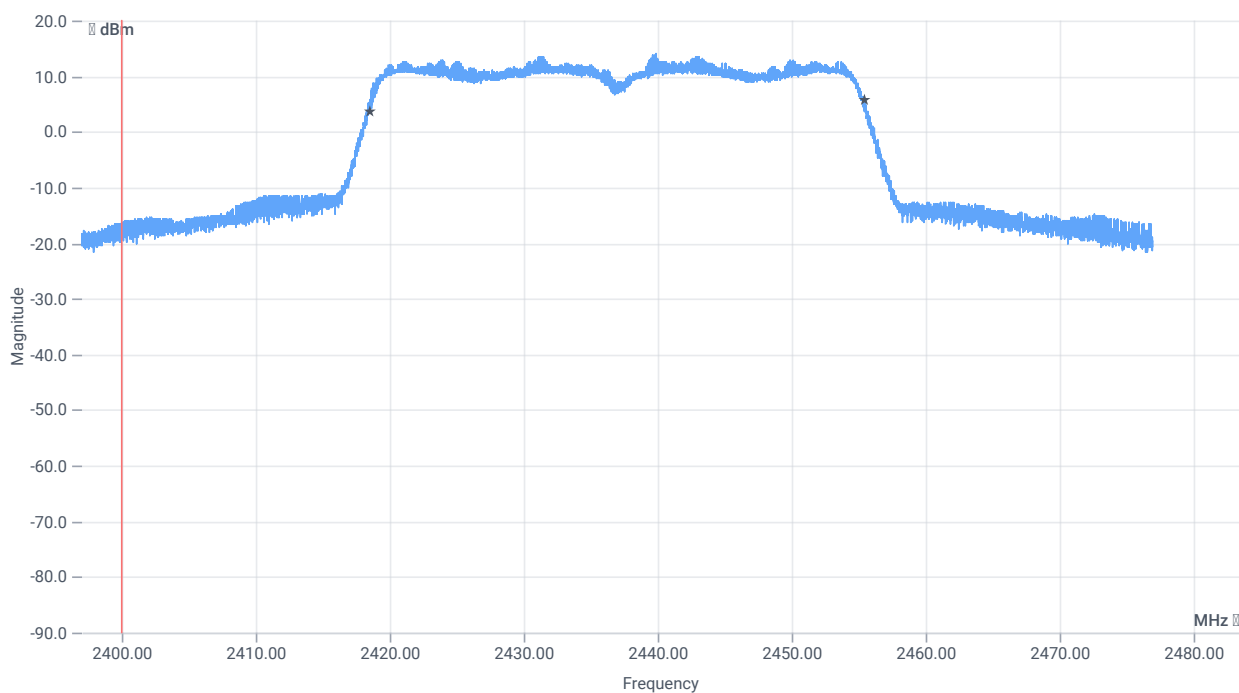


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36924.000	kHz	INFO
T1 99%	2400.000000	---	2418.4979	MHz	PASS
T2 99%	---	2483.500000	2455.4222	MHz	PASS

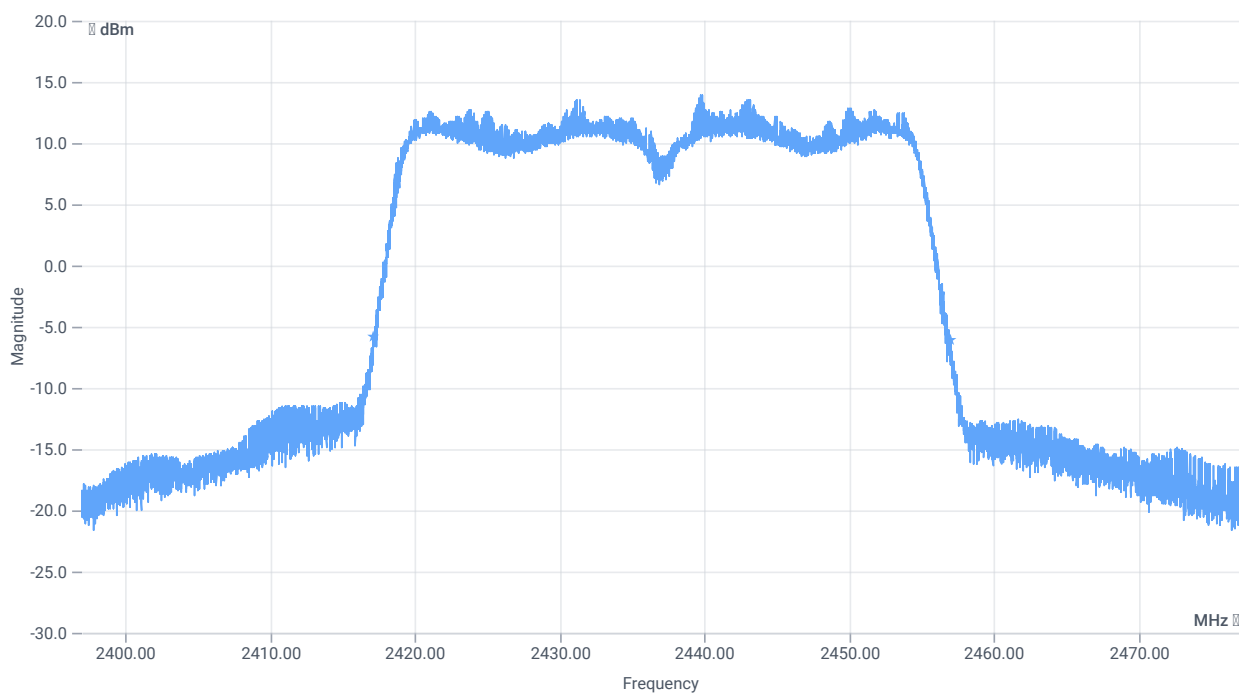

BW 20dB

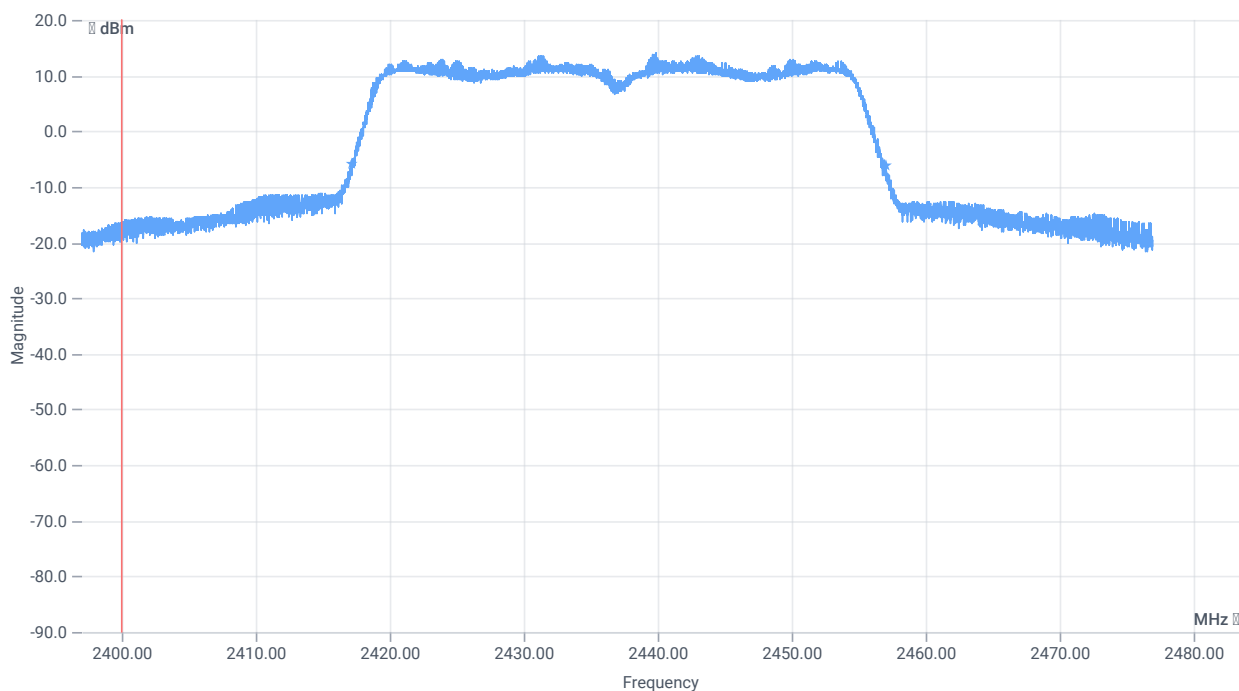

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	39872	kHz	INFO
T1 20dB	2400.000000	---	2417.1280	MHz	PASS
T2 20dB	---	2483.500000	2457.0000	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

References

TC start	13.06.2024 12:46:54
Ambit temp [°C] humidity [rel%]	25.2 30
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2452 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.18	dBm	INFO
Ref. frequency	---	---	2458.090	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.18 10.44 15
Start [MHz] Stop [MHz]	2412.000 2492.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

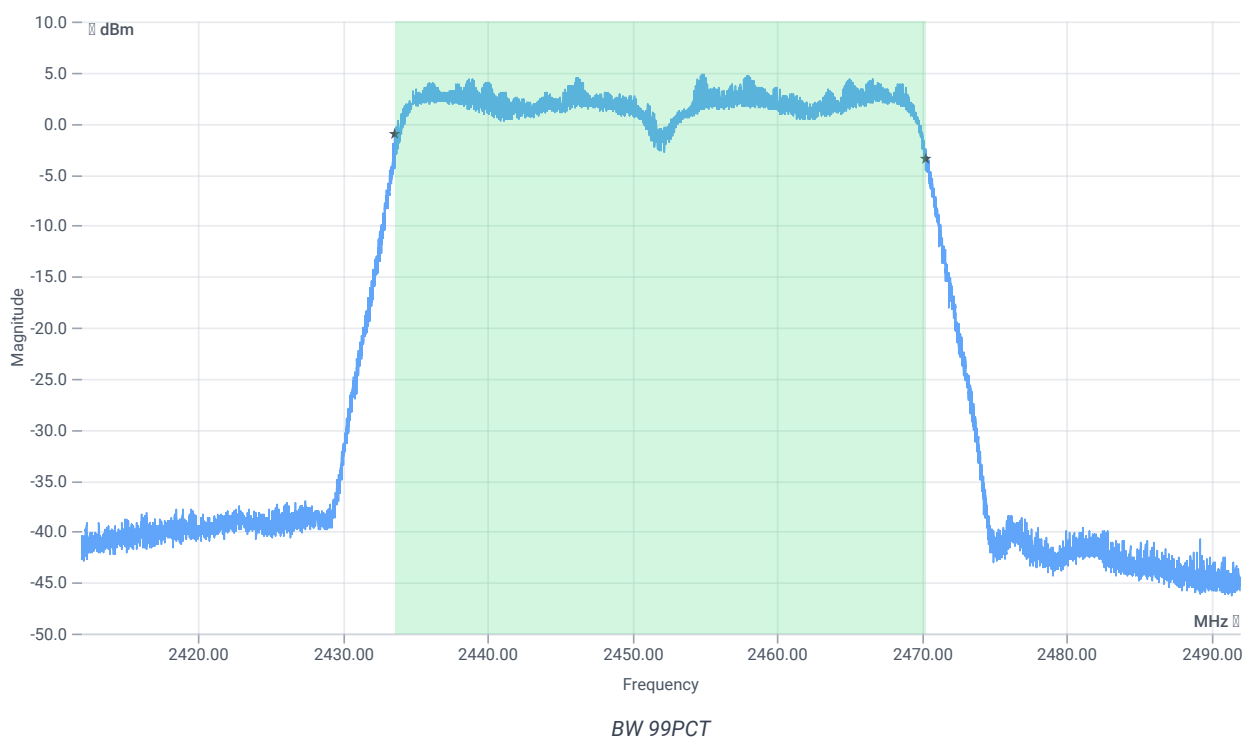


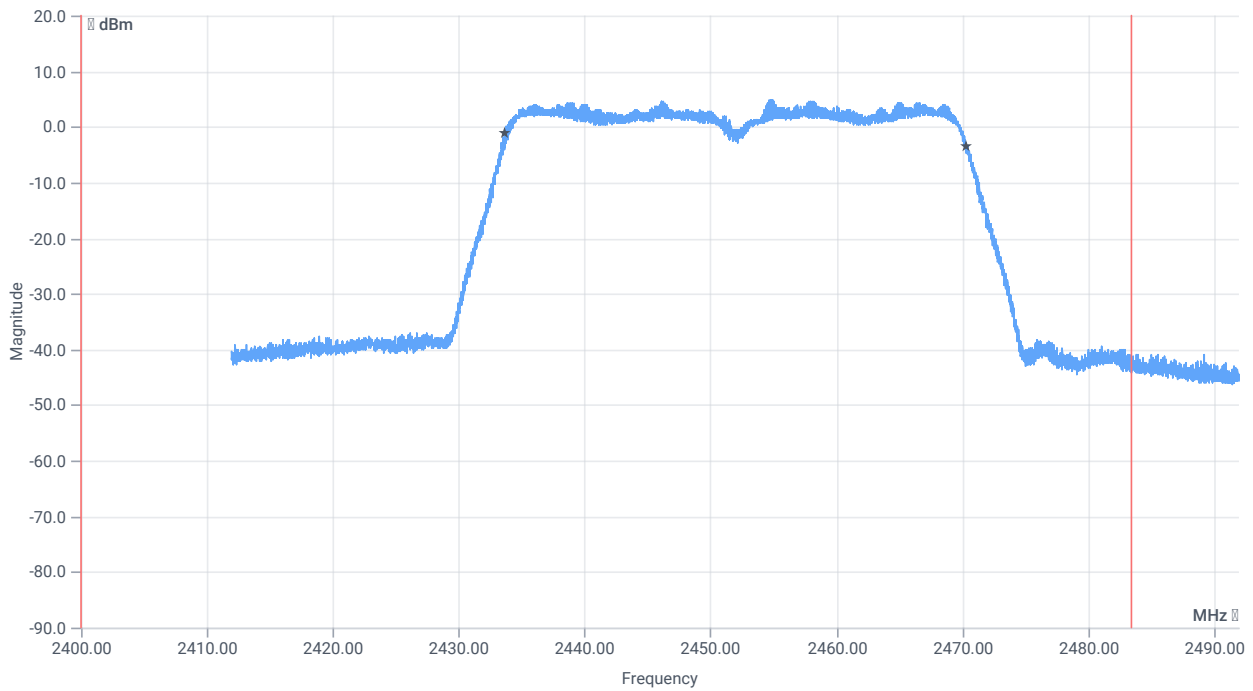


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36604.000	kHz	INFO
T1 99%	2400.000000	---	2433.6498	MHz	PASS
T2 99%	---	2483.500000	2470.2542	MHz	PASS

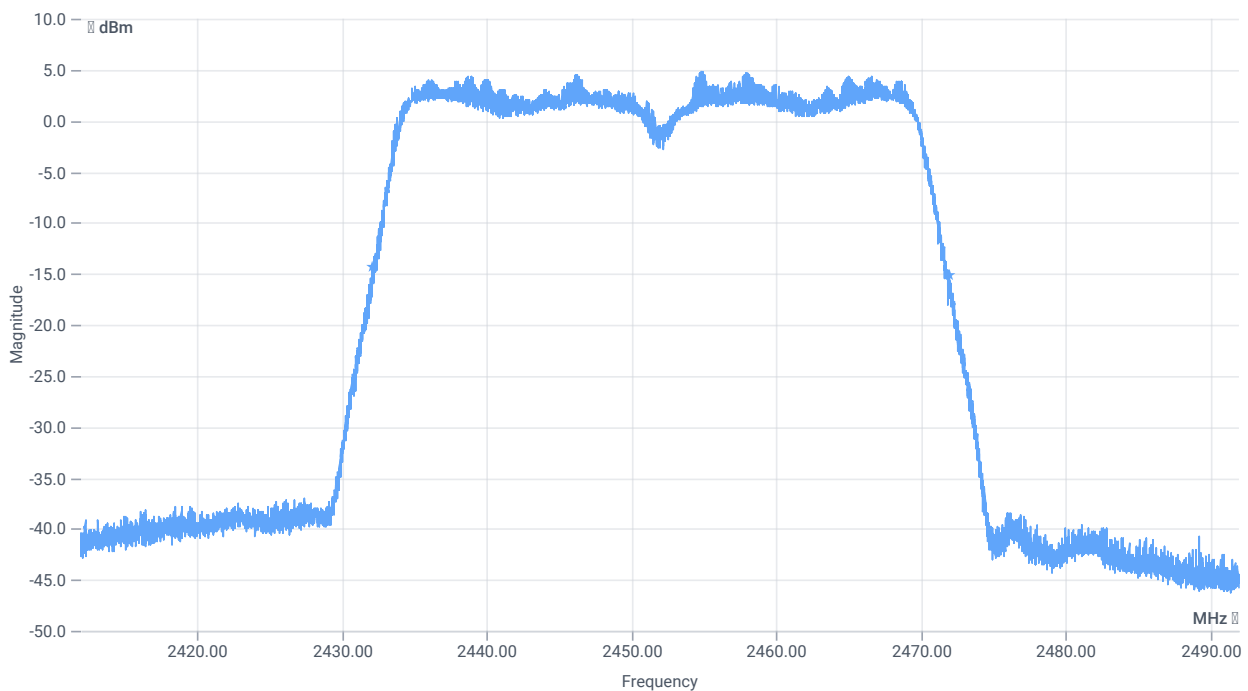

BW 20dB

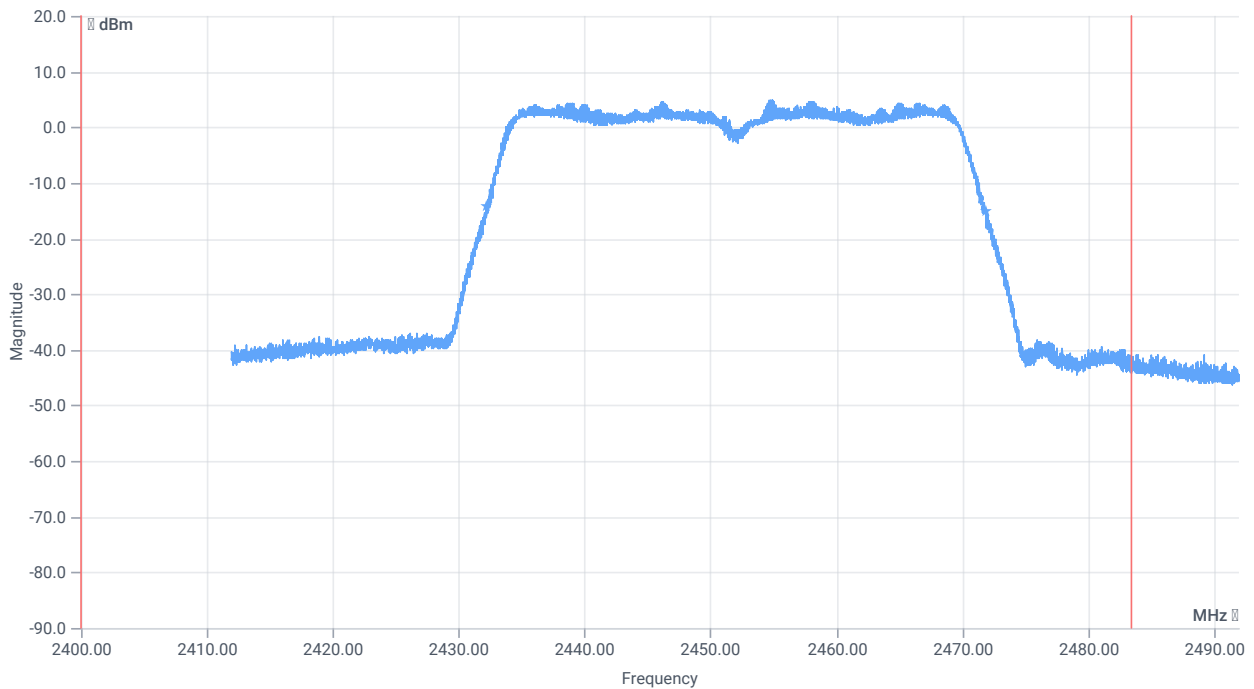

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	39792	kHz	INFO
T1 20dB	2400.000000	---	2432.1520	MHz	PASS
T2 20dB	---	2483.500000	2471.9440	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

References

TC start	11.06.2024 10:42:06
Ambit temp [°C] humidity [rel%]	23.9 35
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2412 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.40	dBm	INFO
Ref. frequency	---	---	2415.700	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.40 10.48 20
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

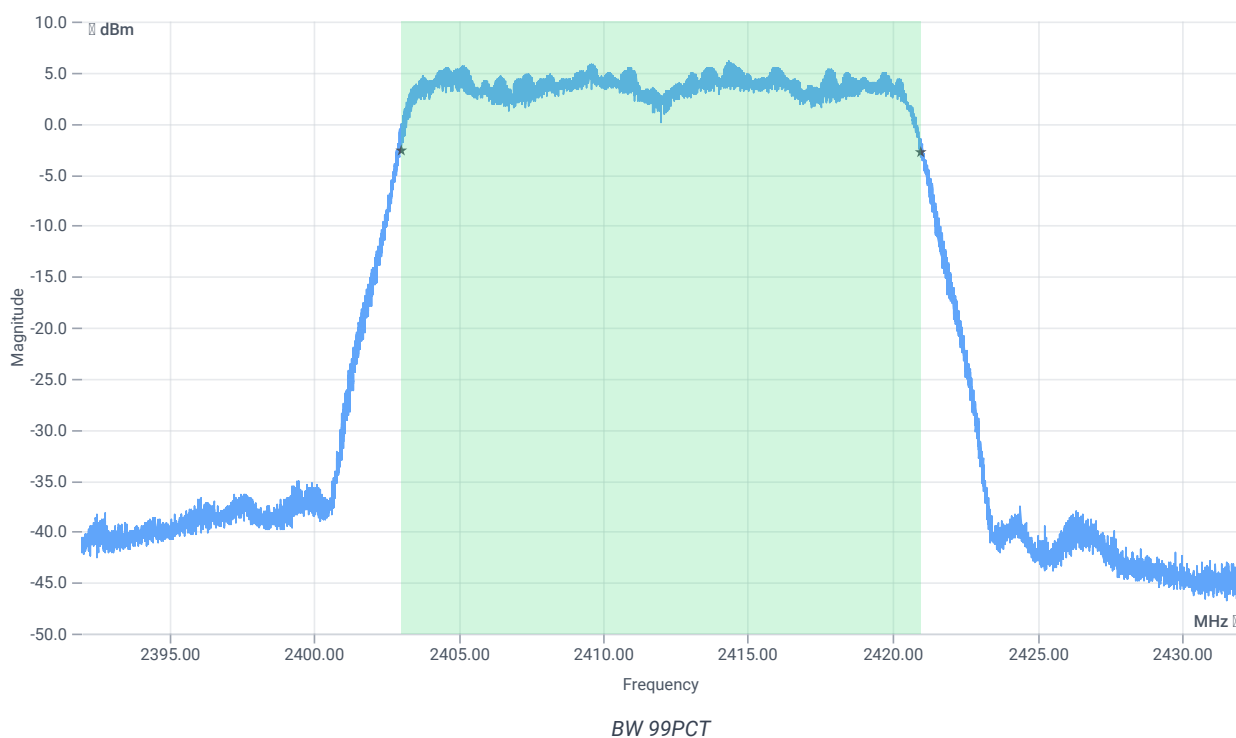


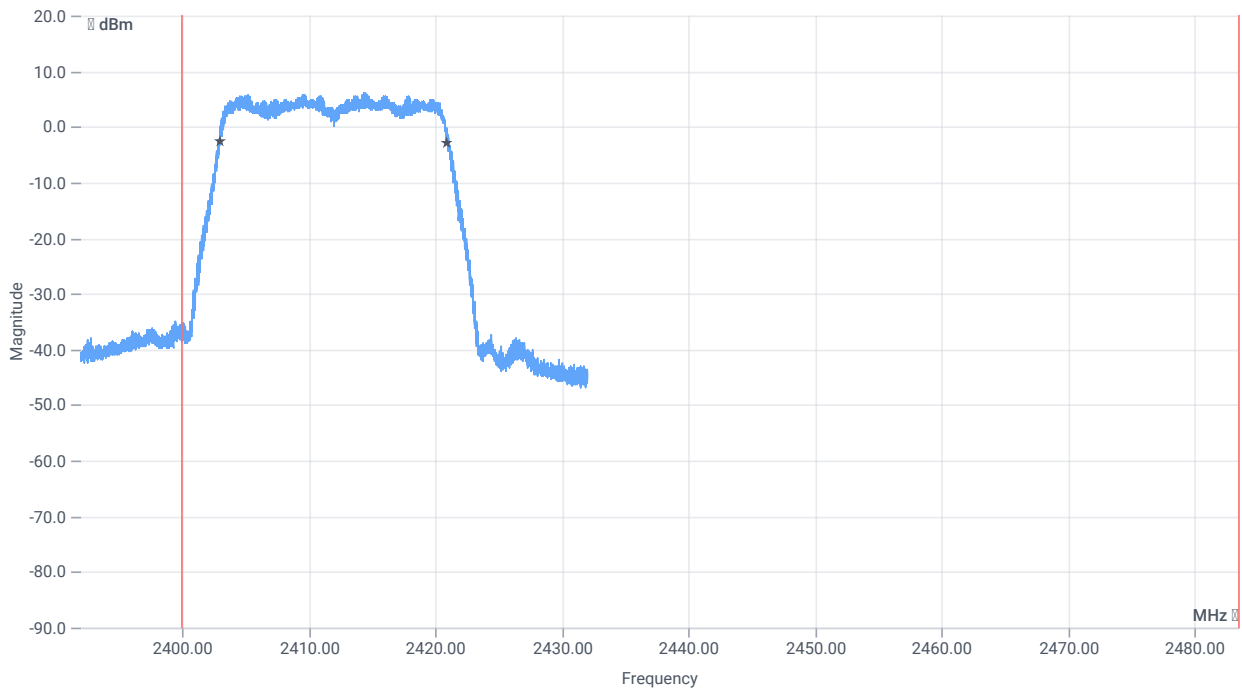


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17926.000	kHz	INFO
T1 99%	2400.000000	---	2403.0209	MHz	PASS
T2 99%	---	2483.500000	2420.9471	MHz	PASS

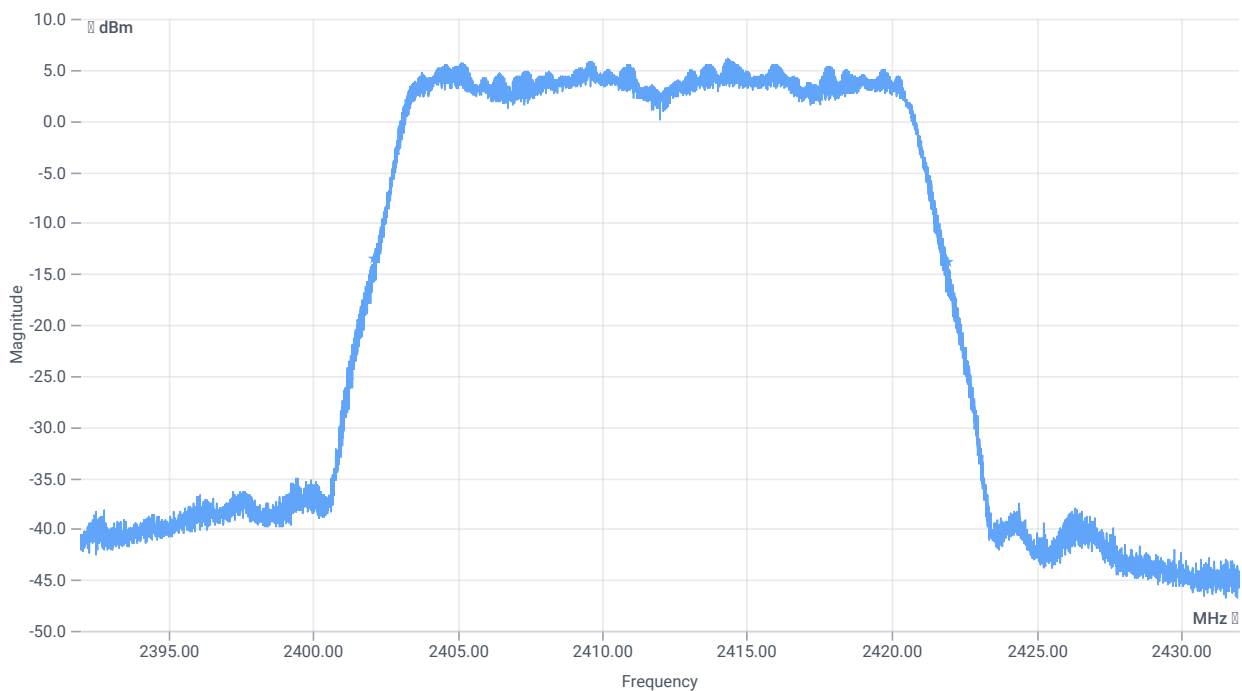

BW 20dB

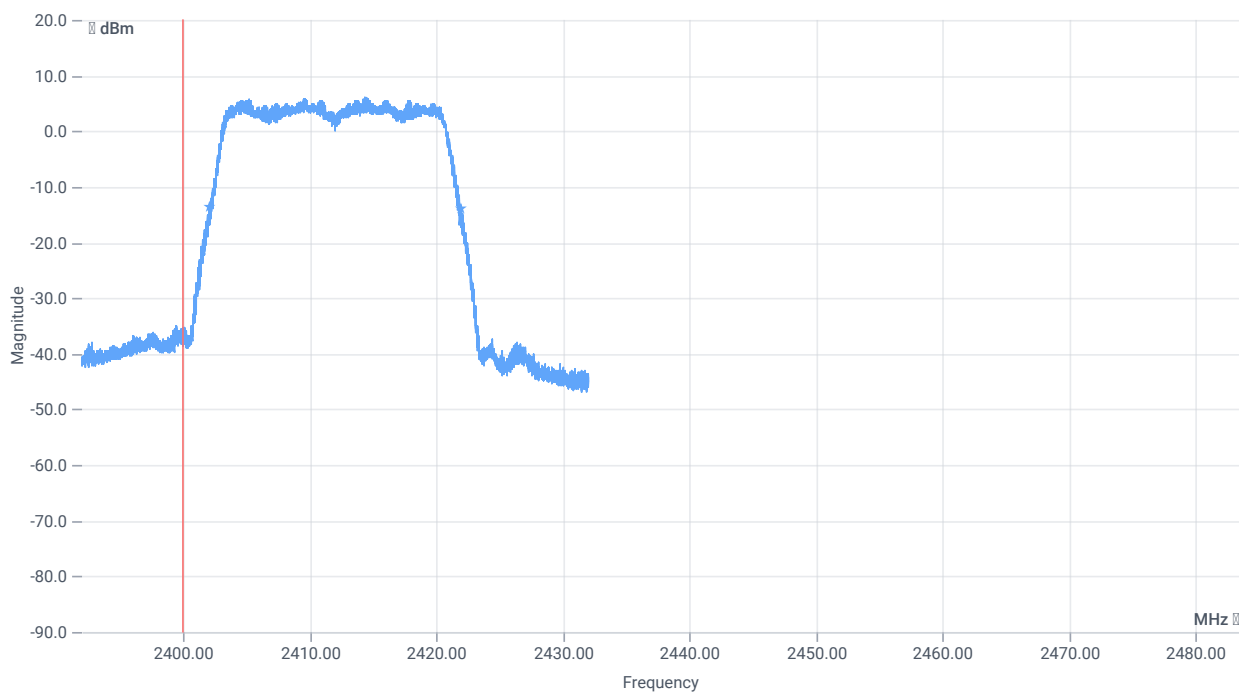

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19820	kHz	INFO
T1 20dB	2400.000000	---	2402.1080	MHz	PASS
T2 20dB	---	2483.500000	2421.9280	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

References

TC start	11.06.2024 10:59:42
Ambit temp [°C] humidity [rel%]	24.0 35
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	15.86	dBm	INFO
Ref. frequency	---	---	2438.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.86 10.56 30
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

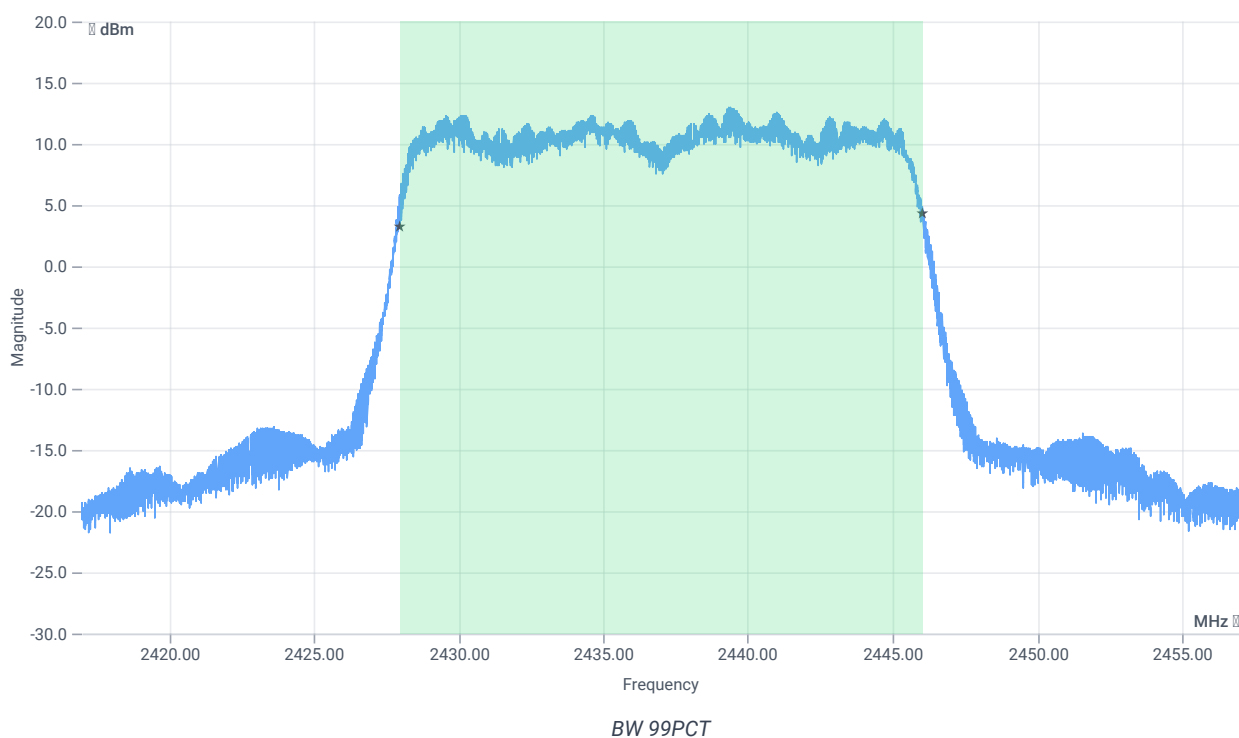


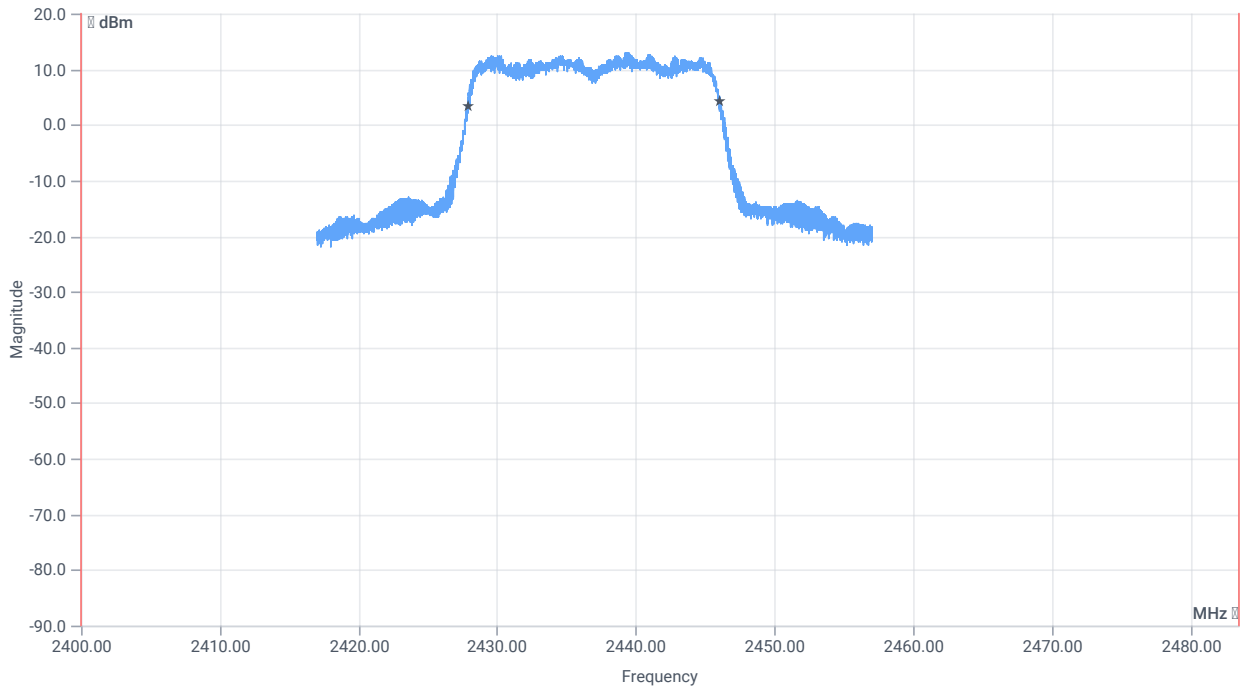


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	18074.000	kHz	INFO
T1 99%	2400.000000	---	2427.9649	MHz	PASS
T2 99%	---	2483.500000	2446.0391	MHz	PASS

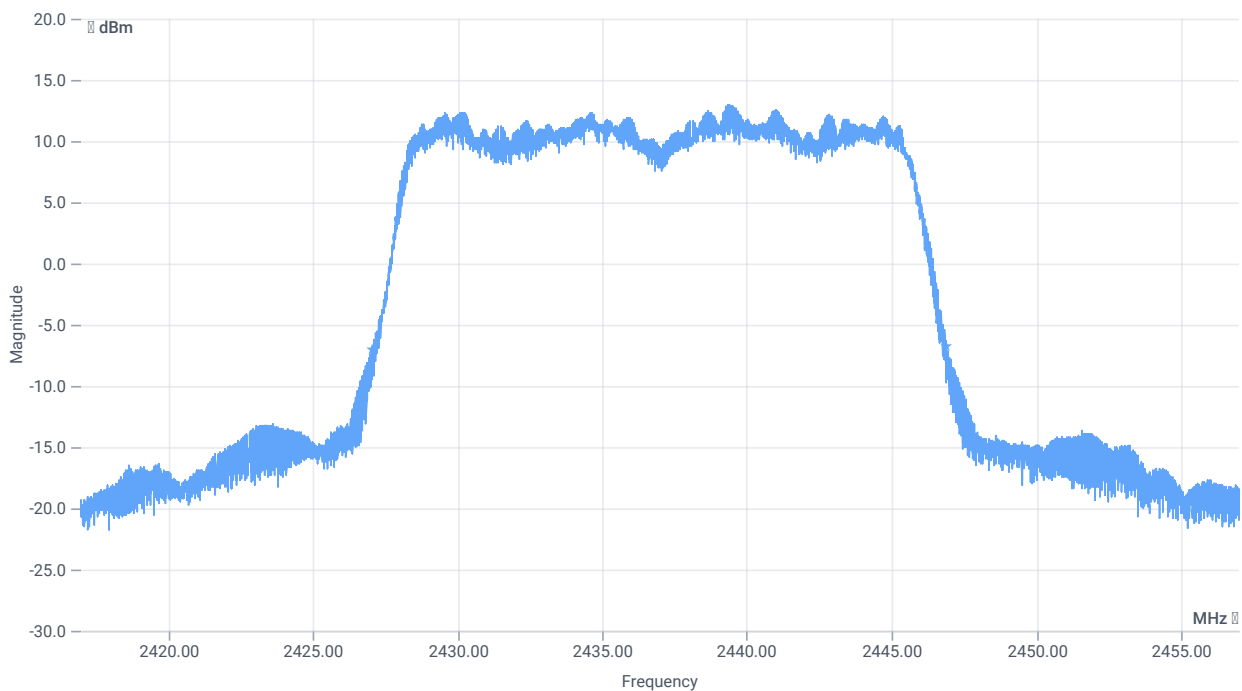

BW 20dB

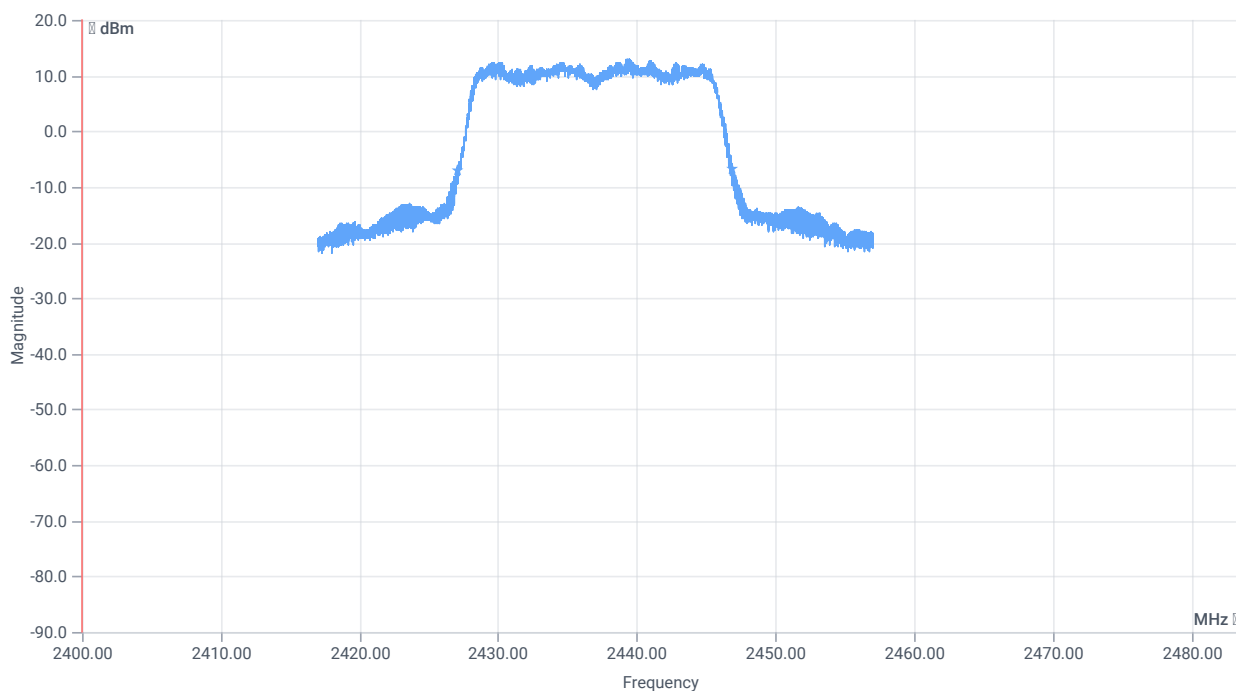

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19840	kHz	INFO
T1 20dB	2400.000000	---	2427.0600	MHz	PASS
T2 20dB	---	2483.500000	2446.9000	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

References

TC start	11.06.2024 11:43:45
Ambit temp [°C] humidity [rel%]	24.1 34
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2462 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.60	dBm	INFO
Ref. frequency	---	---	2463.700	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.60 10.6 20
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

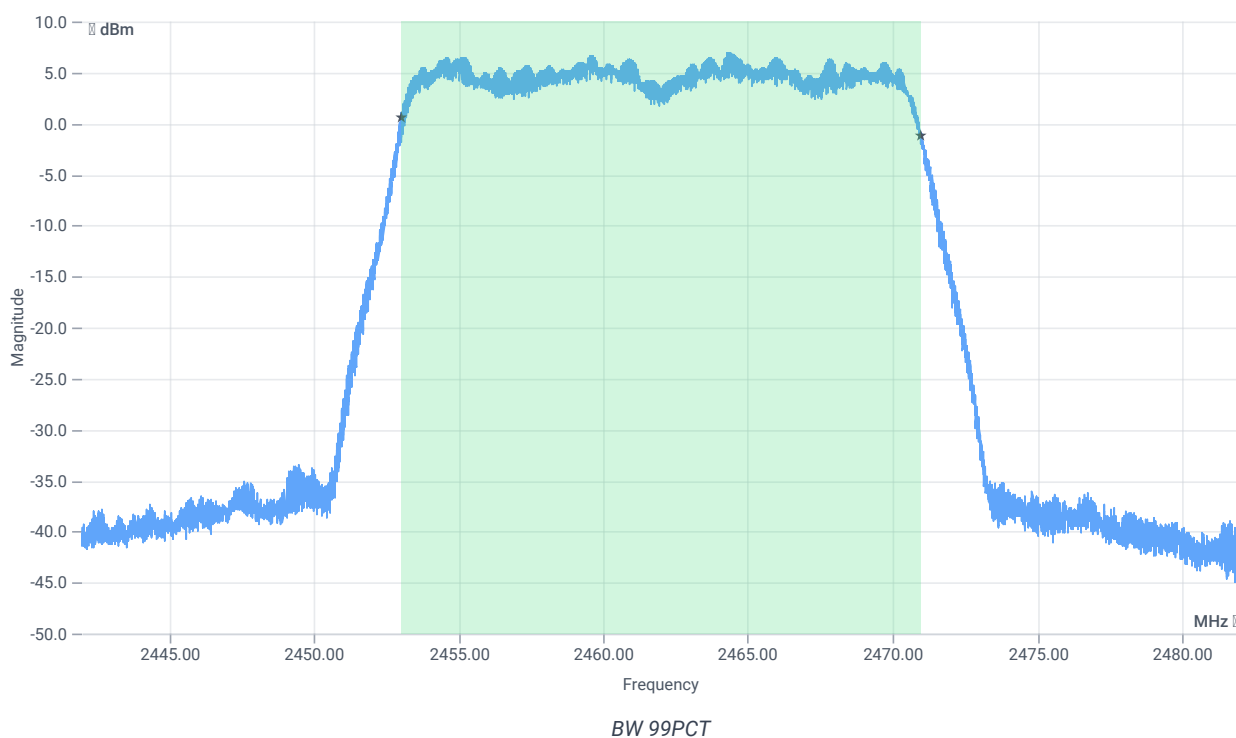


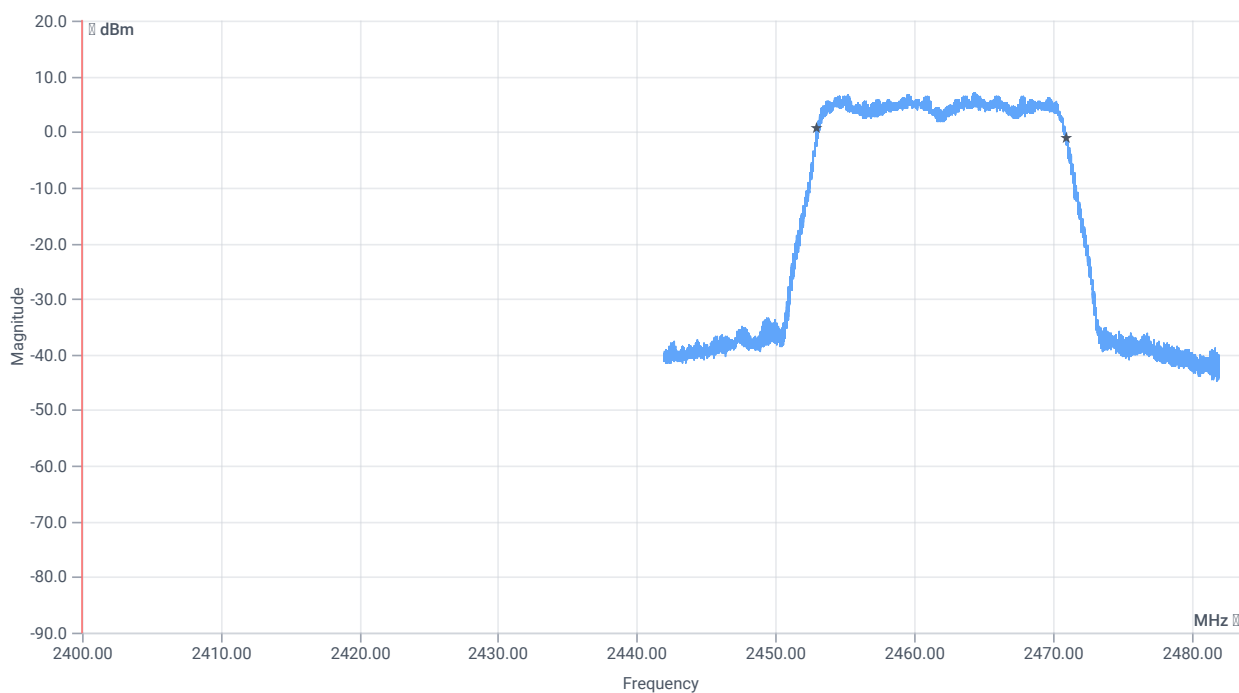


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17934.000	kHz	INFO
T1 99%	2400.000000	---	2453.0169	MHz	PASS
T2 99%	---	2483.500000	2470.9511	MHz	PASS

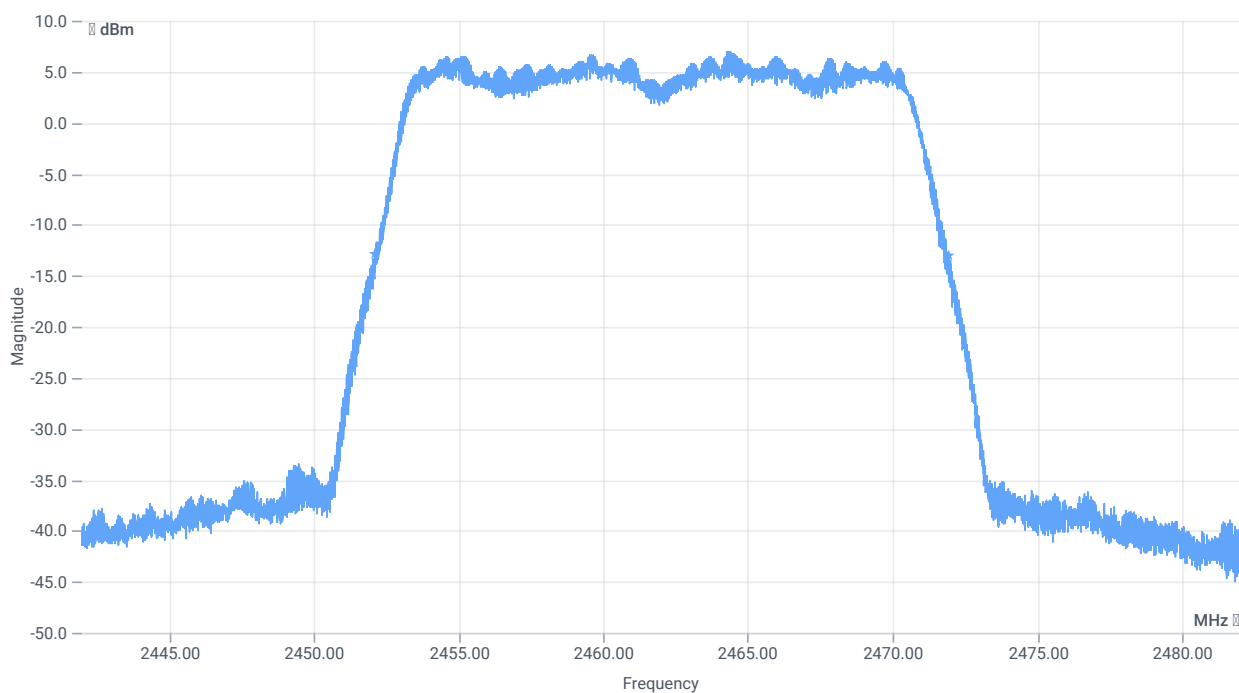

BW 20dB

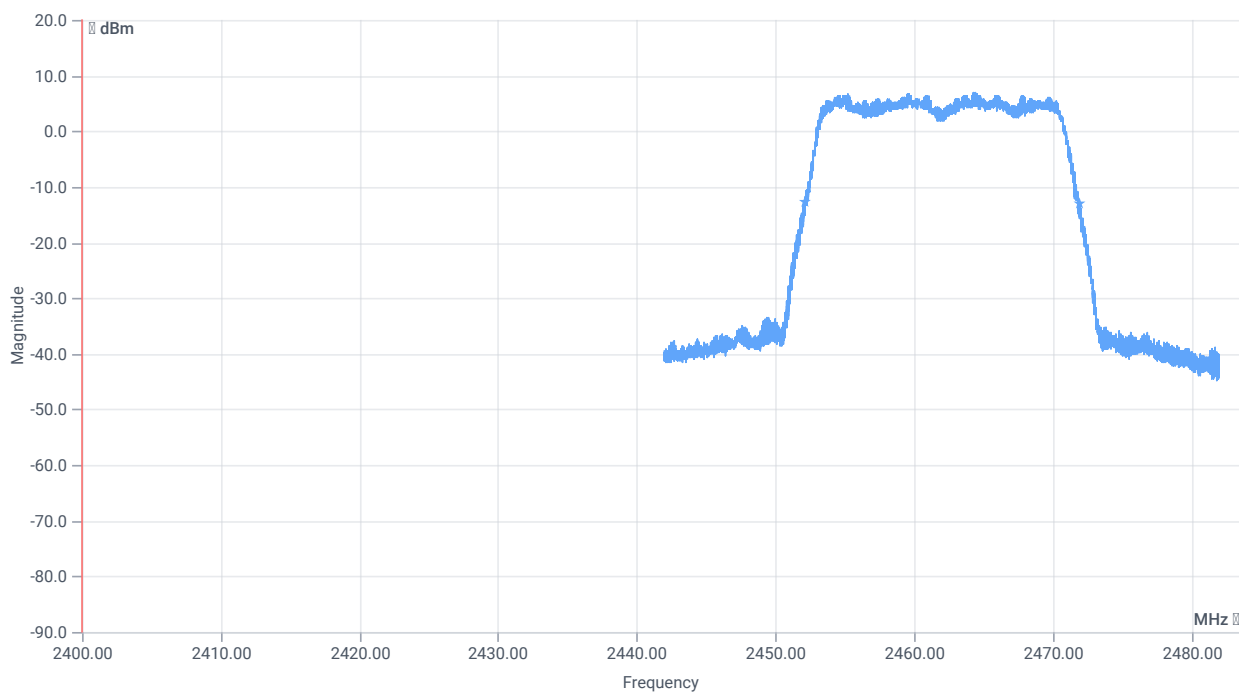

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	19832	kHz	INFO
T1 20dB	2400.000000	---	2452.0960	MHz	PASS
T2 20dB	---	2483.500000	2471.9280	MHz	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode

References

TC start	11.06.2024 08:23:57
Ambit temp [°C] humidity [rel%]	22.3 38
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2412 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	19.28	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode

References

TC start	11.06.2024 08:46:46
Ambit temp [°C] humidity [rel%]	22.6 38
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2437 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	21.25	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode

References

TC start	11.06.2024 09:14:38
Ambit temp [°C] humidity [rel%]	23.0 37
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2462 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	19.1	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode

References

TC start	13.06.2024 08:44:14
Ambit temp [°C] humidity [rel%]	23.9 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2412 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	22.4	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode

References

TC start	13.06.2024 09:06:27
Ambit temp [°C] humidity [rel%]	24.1 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2437 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	24.75	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode

References

TC start	13.06.2024 09:26:29
Ambit temp [°C] humidity [rel%]	24.2 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2462 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	22.45	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode

References

TC start	13.06.2024 07:41:53
Ambit temp [°C] humidity [rel%]	23.5 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2412 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	18.94	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode

References

TC start	13.06.2024 07:59:50
Ambit temp [°C] humidity [rel%]	23.6 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2437 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	20.93	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode

References

TC start	13.06.2024 08:17:21
Ambit temp [°C] humidity [rel%]	23.7 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2462 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	18.89	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode

References

TC start	13.06.2024 09:44:51
Ambit temp [°C] humidity [rel%]	24.2 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2412 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	20.77	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode

References

TC start	13.06.2024 10:02:55
Ambit temp [°C] humidity [rel%]	24.4 34
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2437 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	24.67	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode

References

TC start	13.06.2024 10:20:28
Ambit temp [°C] humidity [rel%]	24.5 34
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2462 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	22.35	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode

References

TC start	11.06.2024 09:50:57
Ambit temp [°C] humidity [rel%]	23.5 36
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2412 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	23	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode

References

TC start	11.06.2024 10:09:36
Ambit temp [°C] humidity [rel%]	23.7 36
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2437 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	24.78	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode

References

TC start	11.06.2024 10:26:59
Ambit temp [°C] humidity [rel%]	23.7 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2462 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	22.96	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode

References

TC start	11.06.2024 12:26:52
Ambit temp [°C] humidity [rel%]	24.3 33
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2422 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	22.25	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode

References

TC start	11.06.2024 12:45:08
Ambit temp [°C] humidity [rel%]	24.5 33
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2437 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	24.6	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode

References

TC start	11.06.2024 13:16:33
Ambit temp [°C] humidity [rel%]	24.8 32
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2452 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	19.9	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode

References

TC start	13.06.2024 10:59:19
Ambit temp [°C] humidity [rel%]	24.7 33
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2422 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	19.59	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode

References

TC start	13.06.2024 11:16:56
Ambit temp [°C] humidity [rel%]	24.7 32
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2437 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	24.6	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode

References

TC start	13.06.2024 13:01:10
Ambit temp [°C] humidity [rel%]	25.2 30
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.PM/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00010000:00000001

Test at TX 2452 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	19.36	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode

References

TC start	11.06.2024 10:56:34
Ambit temp [°C] humidity [rel%]	24.0 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2412 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	21.67	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode

References

TC start	11.06.2024 11:28:18
Ambit temp [°C] humidity [rel%]	24.1 34
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2437 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	24.7	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode

References

TC start	11.06.2024 11:59:03
Ambit temp [°C] humidity [rel%]	24.3 33
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_PM_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.PM/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00010000:00000001

Test at TX 2462 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30	22.58	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode

References

TC start	11.06.2024 08:01:55
Ambit temp [°C] humidity [rel%]	22.0 39
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.44	dBm	INFO
Ref. frequency	---	---	2413.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.44 10.48 25
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

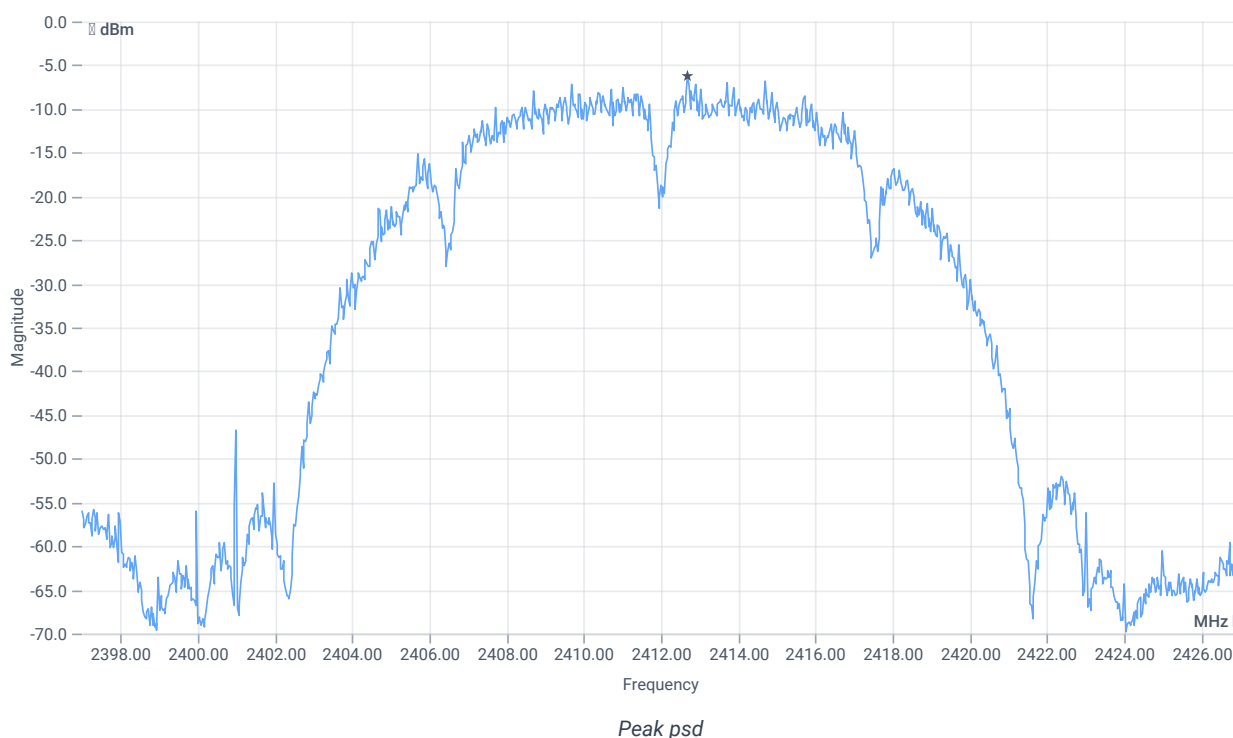

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-6.24	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode

References

TC start	11.06.2024 08:30:05
Ambit temp [°C] humidity [rel%]	22.4 38
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	13.38	dBm	INFO
Ref. frequency	---	---	2438.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.38 10.56 25
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

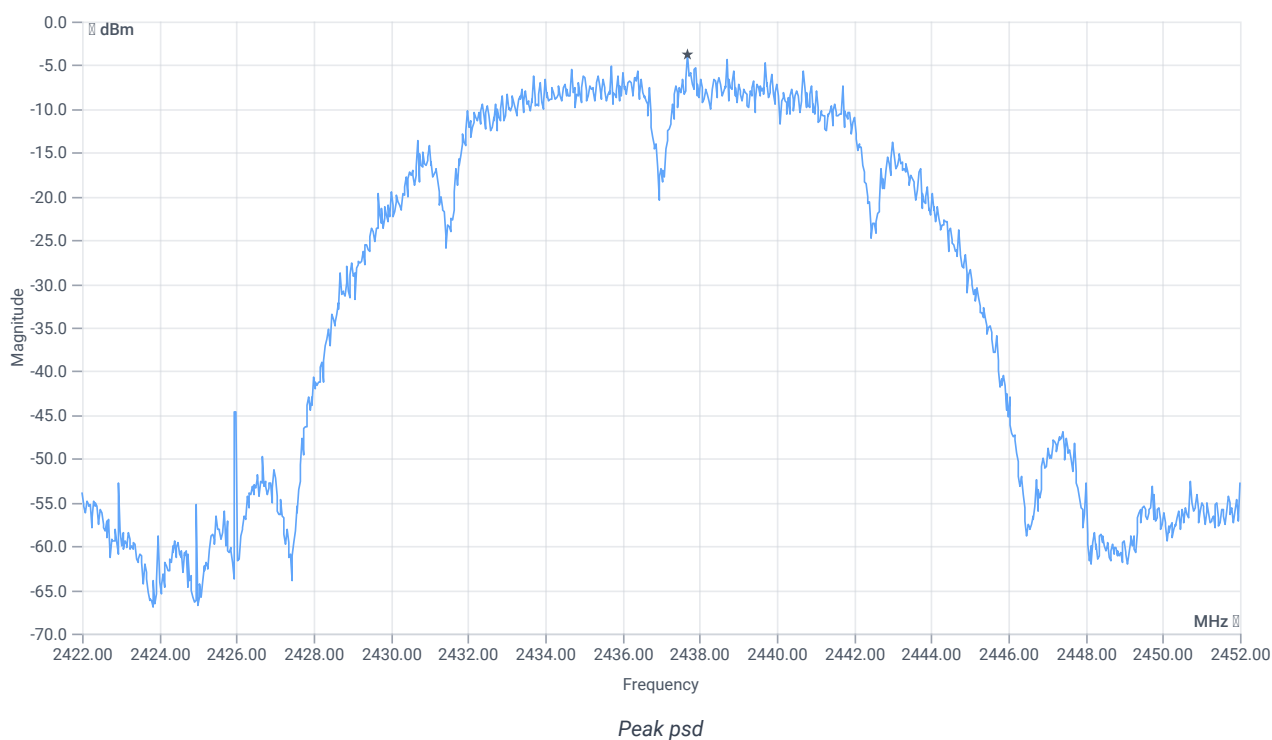

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-3.7	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode

References

TC start	11.06.2024 08:51:13
Ambit temp [°C] humidity [rel%]	22.7 38
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.17	dBm	INFO
Ref. frequency	---	---	2460.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.17 10.6 25
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

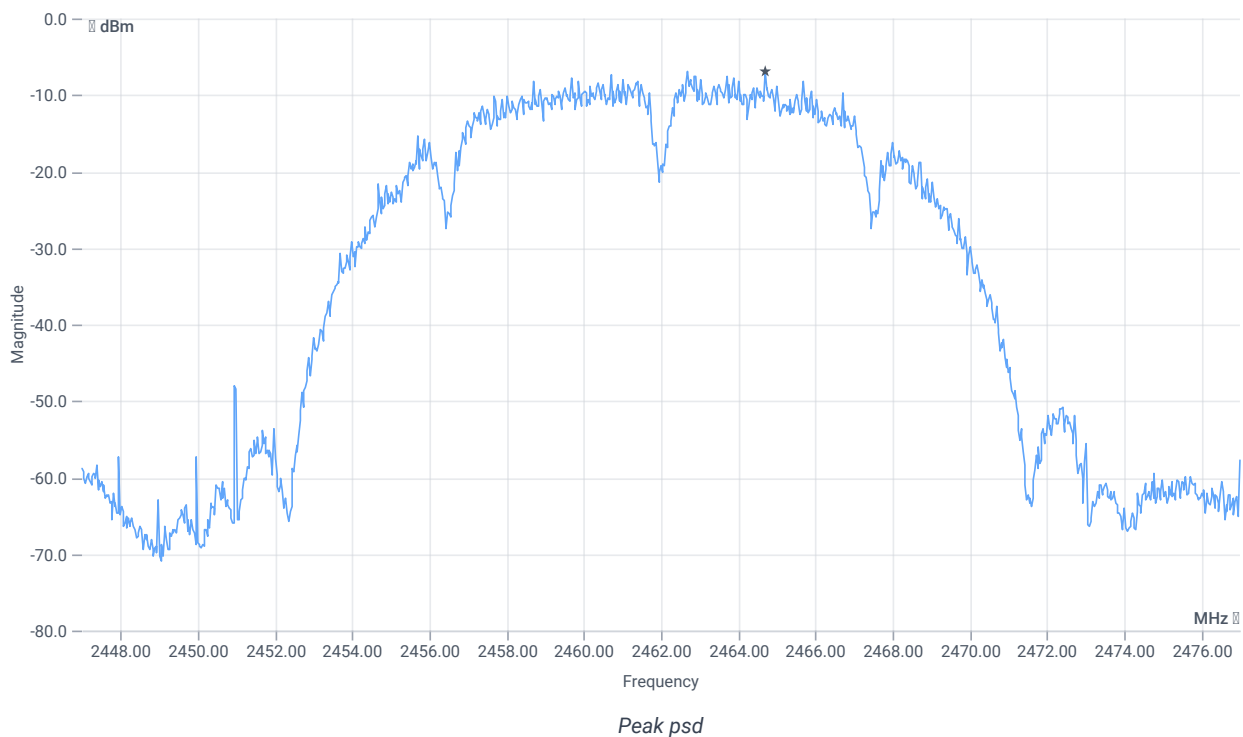

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-6.82	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode

References

TC start	13.06.2024 08:29:14
Ambit temp [°C] humidity [rel%]	23.9 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.21	dBm	INFO
Ref. frequency	---	---	2413.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.21 10.4 20
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

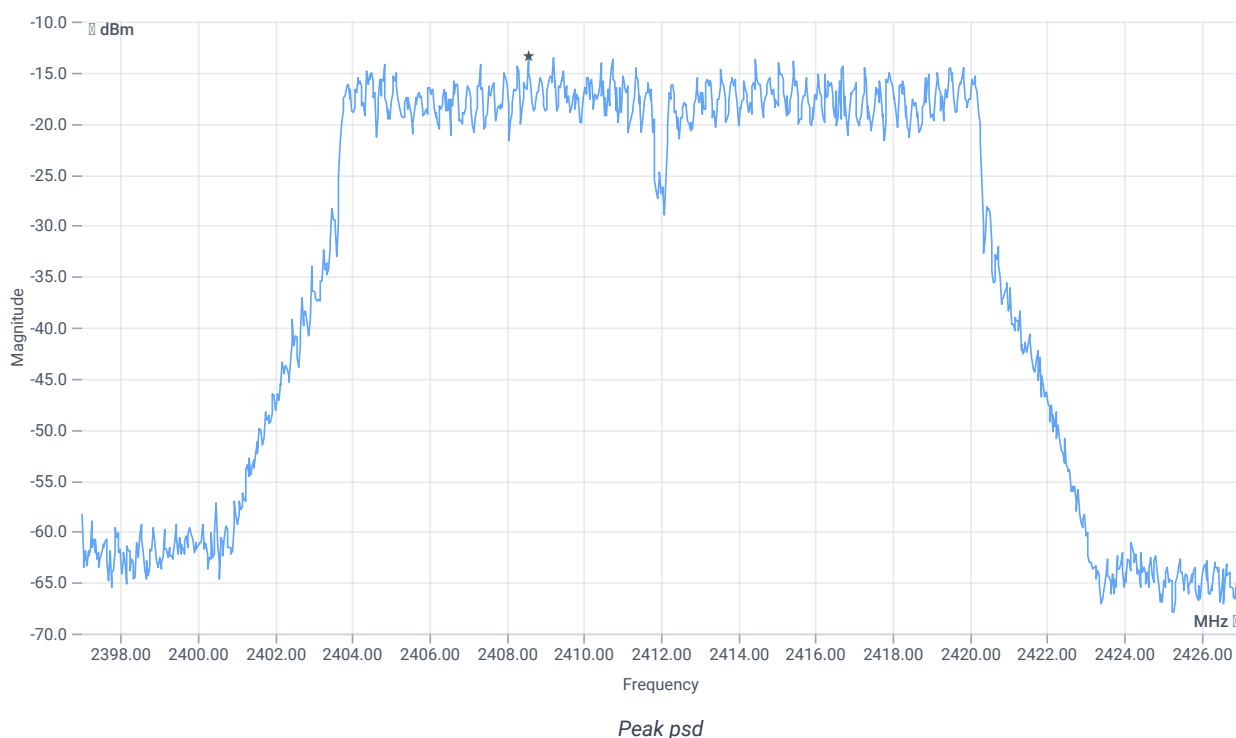

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-13.43	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode

References

TC start	13.06.2024 08:51:26
Ambit temp [°C] humidity [rel%]	24.0 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	15.93	dBm	INFO
Ref. frequency	---	---	2440.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.93 10.42 30
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

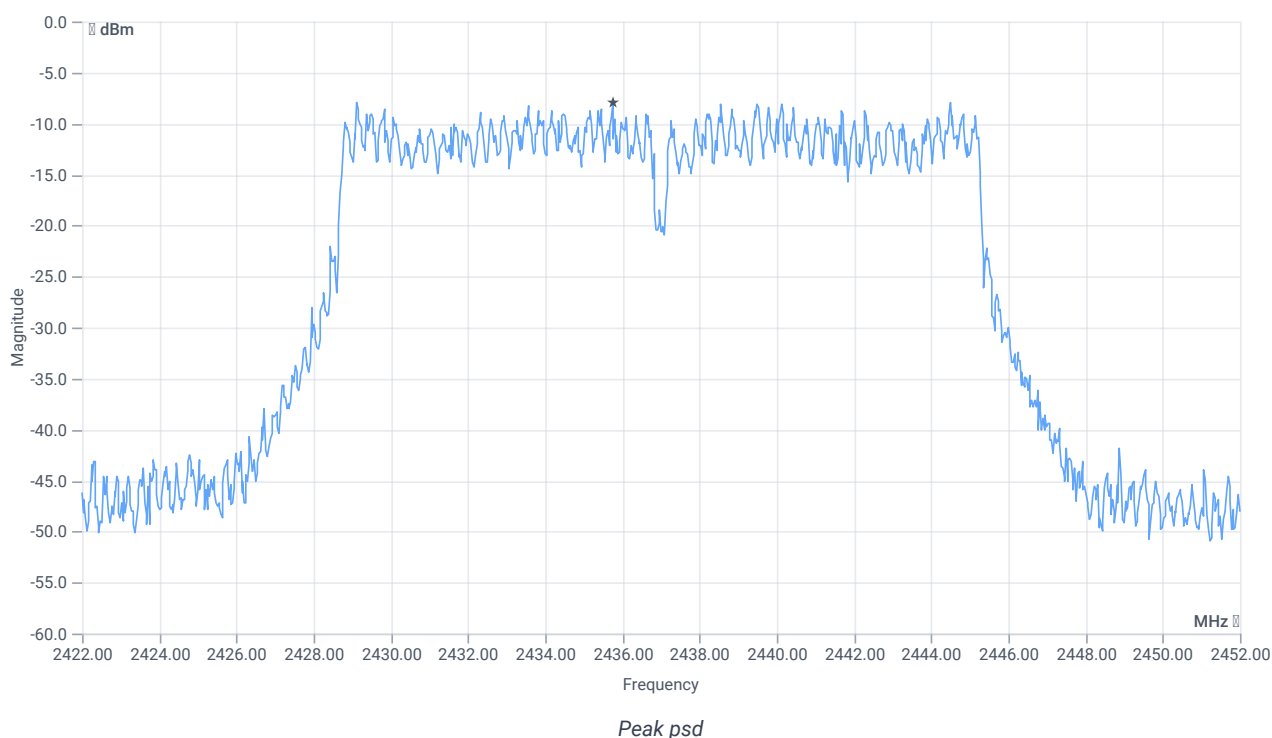

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-7.89	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode

References

TC start	13.06.2024 09:11:28
Ambit temp [°C] humidity [rel%]	24.1 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	10.21	dBm	INFO
Ref. frequency	---	---	2463.700	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.21 10.46 20
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

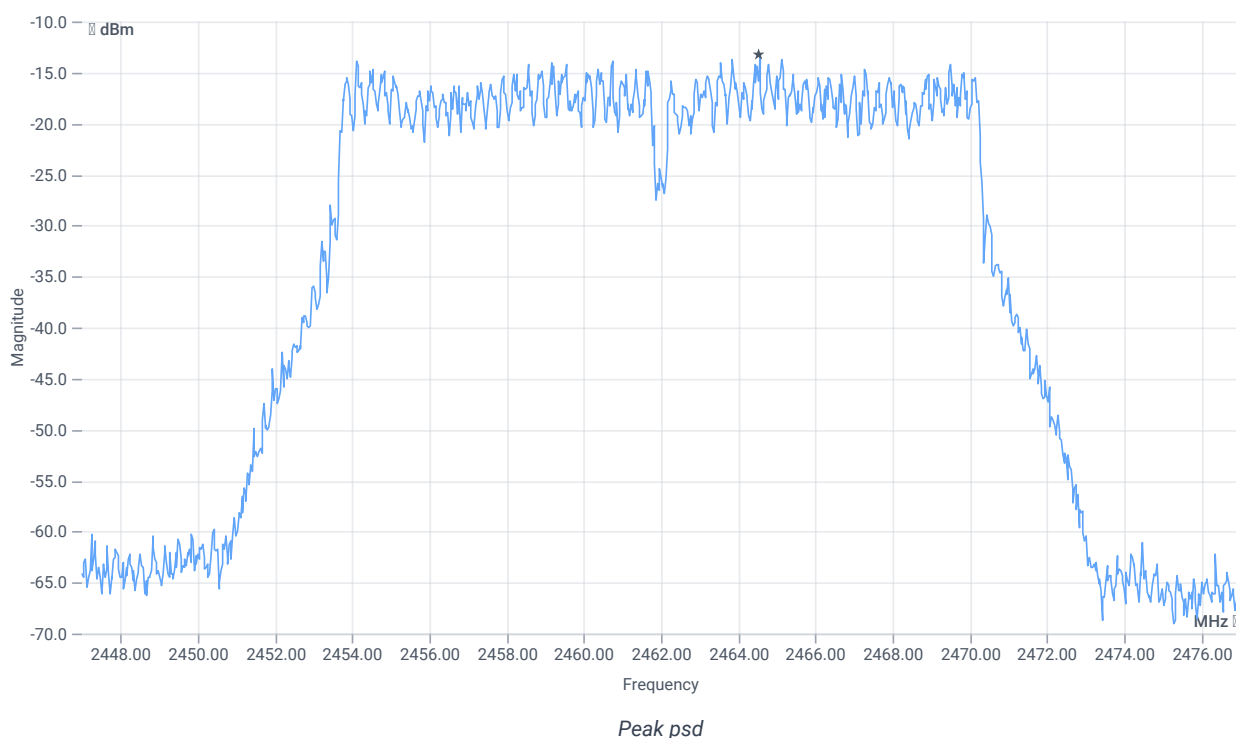

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-13.2	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode

References

TC start	13.06.2024 07:26:49
Ambit temp [°C] humidity [rel%]	23.3 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.20	dBm	INFO
Ref. frequency	---	---	2413.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.20 10.4 25
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

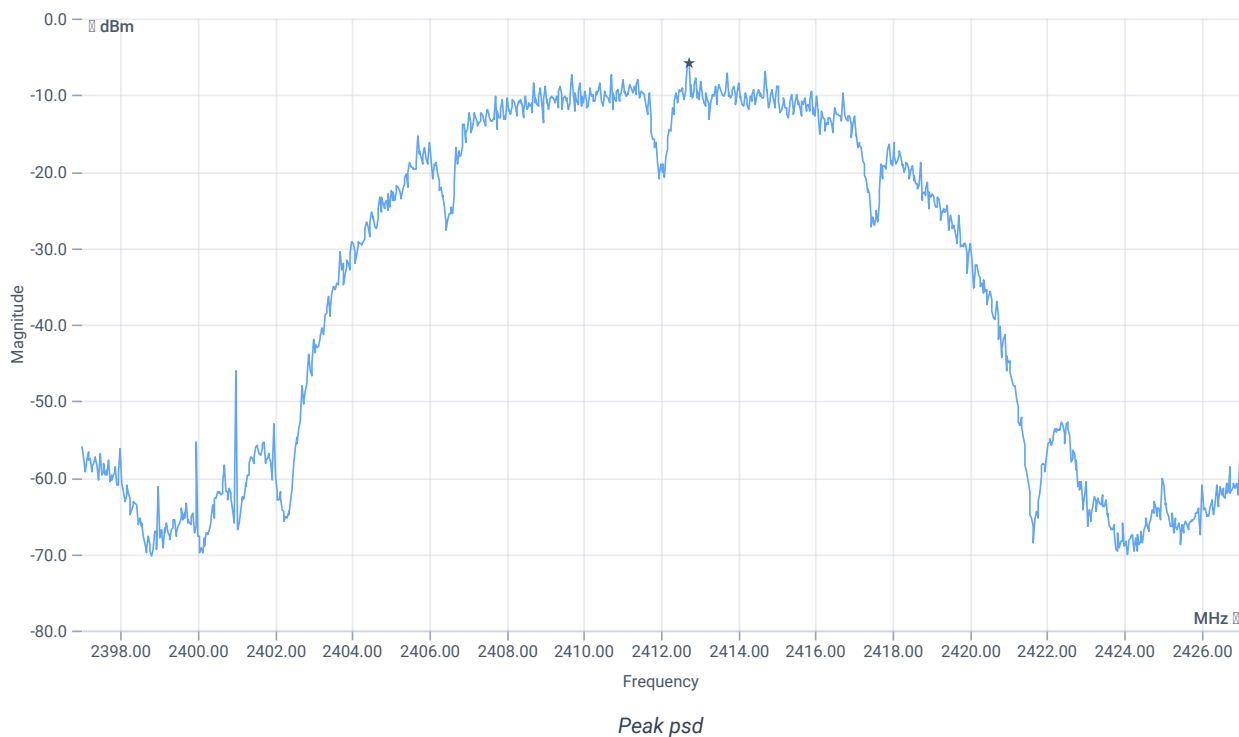

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-5.83	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode

References

TC start	13.06.2024 07:44:46
Ambit temp [°C] humidity [rel%]	23.5 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	13.14	dBm	INFO
Ref. frequency	---	---	2438.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.14 10.42 25
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

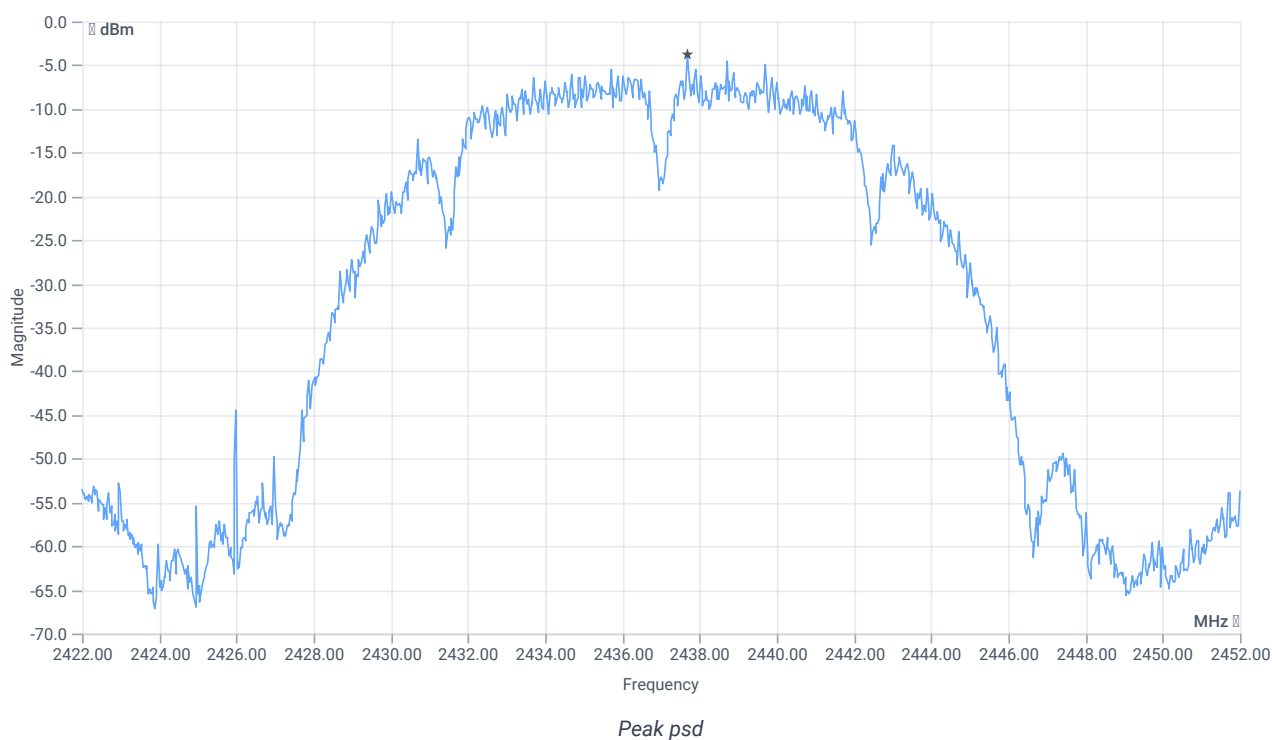

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-3.86	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode

References

TC start	13.06.2024 08:02:17
Ambit temp [°C] humidity [rel%]	23.6 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.17	dBm	INFO
Ref. frequency	---	---	2463.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.17 10.46 25
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

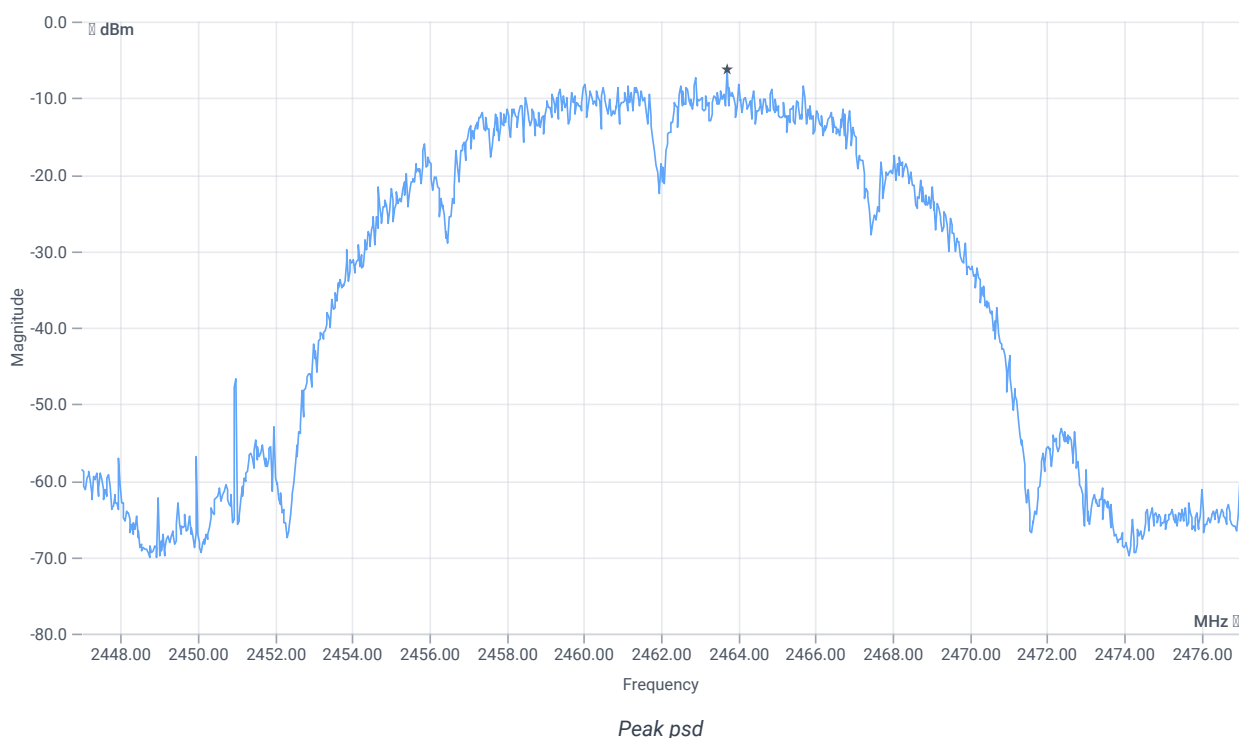

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-6.32	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode

References

TC start	13.06.2024 09:29:51
Ambit temp [°C] humidity [rel%]	24.2 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 nHT20_mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	7.96	dBm	INFO
Ref. frequency	---	---	2419.390	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.96 10.4 20
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

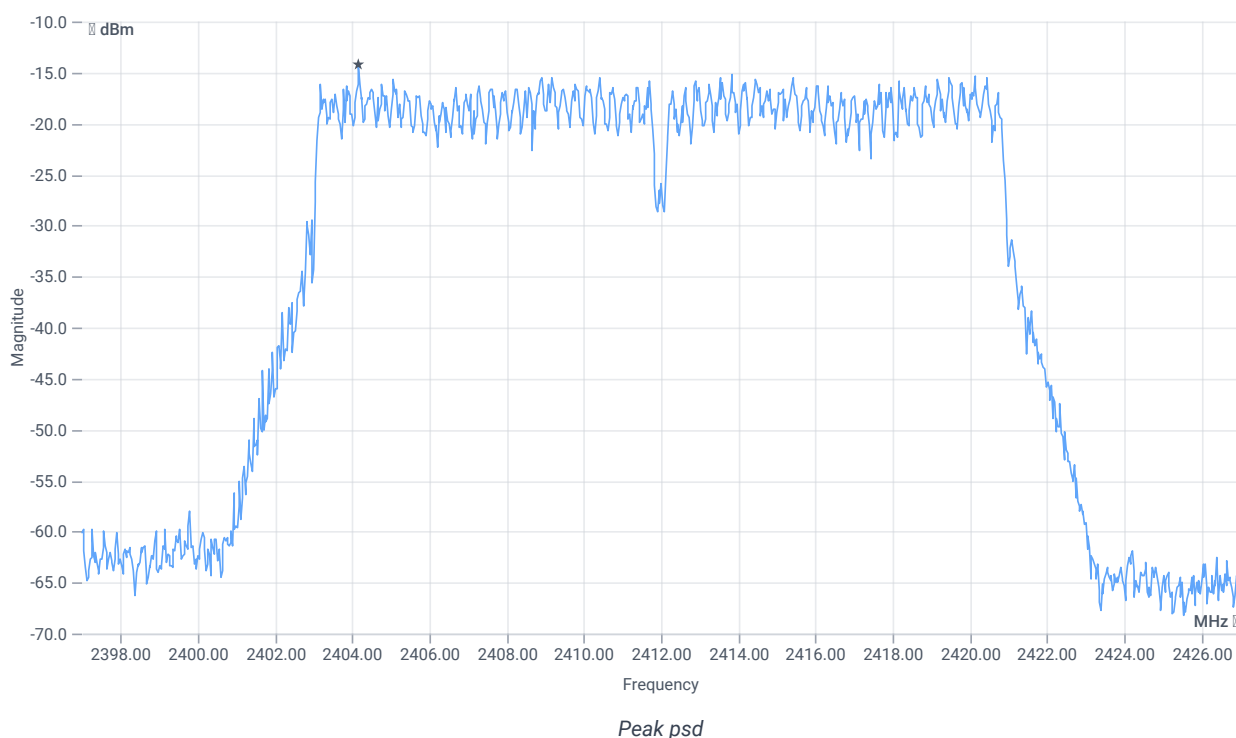

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-14.22	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode

References

TC start	13.06.2024 09:47:56
Ambit temp [°C] humidity [rel%]	24.3 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 nHT20_mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	13.98	dBm	INFO
Ref. frequency	---	---	2434.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.98 10.42 25
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

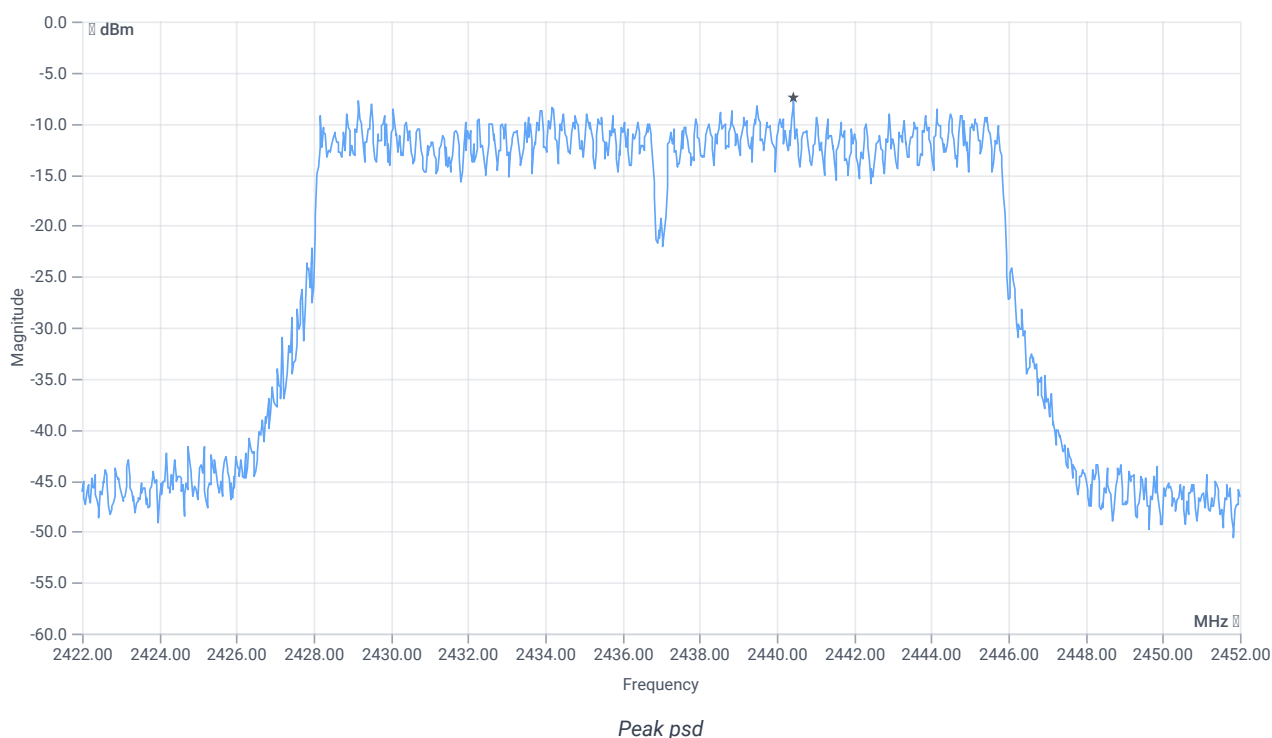

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-7.54	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode

References

TC start	13.06.2024 10:05:29
Ambit temp [°C] humidity [rel%]	24.4 34
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 nHT20_mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.02	dBm	INFO
Ref. frequency	---	---	2469.390	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.02 10.46 20
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

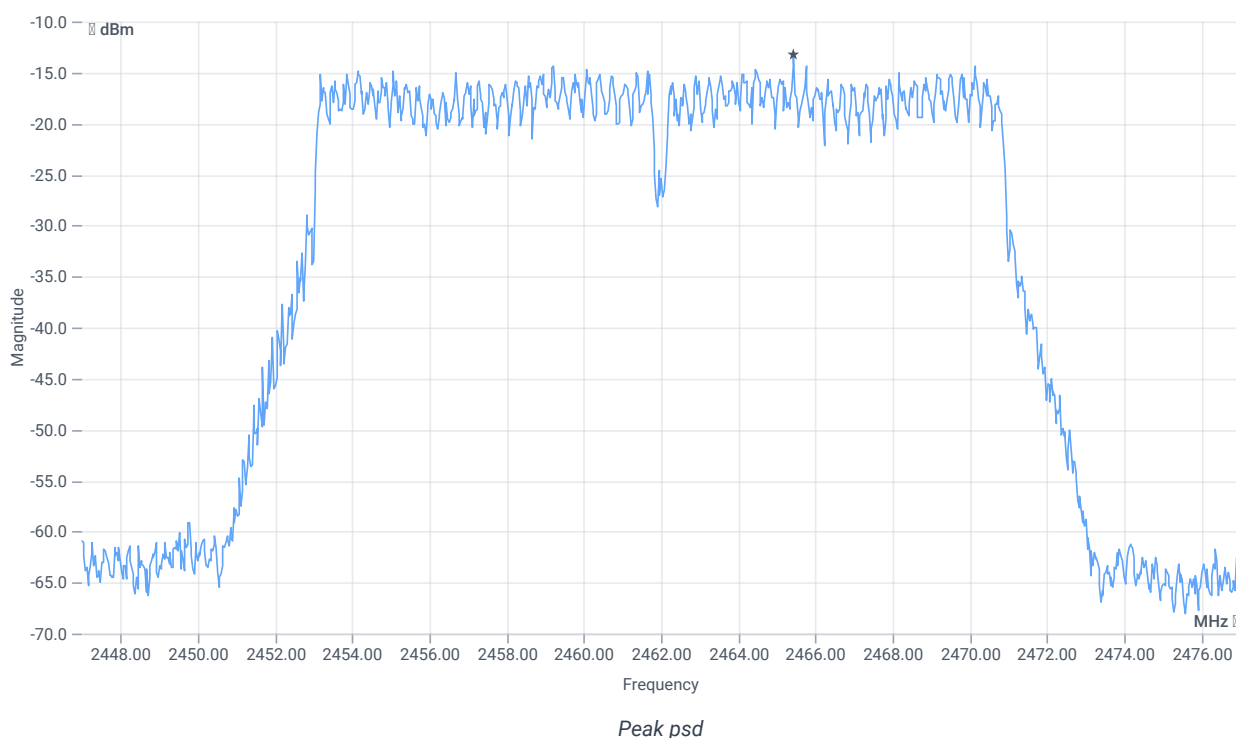

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-13.3	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode

References

TC start	11.06.2024 09:33:16
Ambit temp [°C] humidity [rel%]	23.3 37
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.14	dBm	INFO
Ref. frequency	---	---	2409.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.14 10.48 20
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

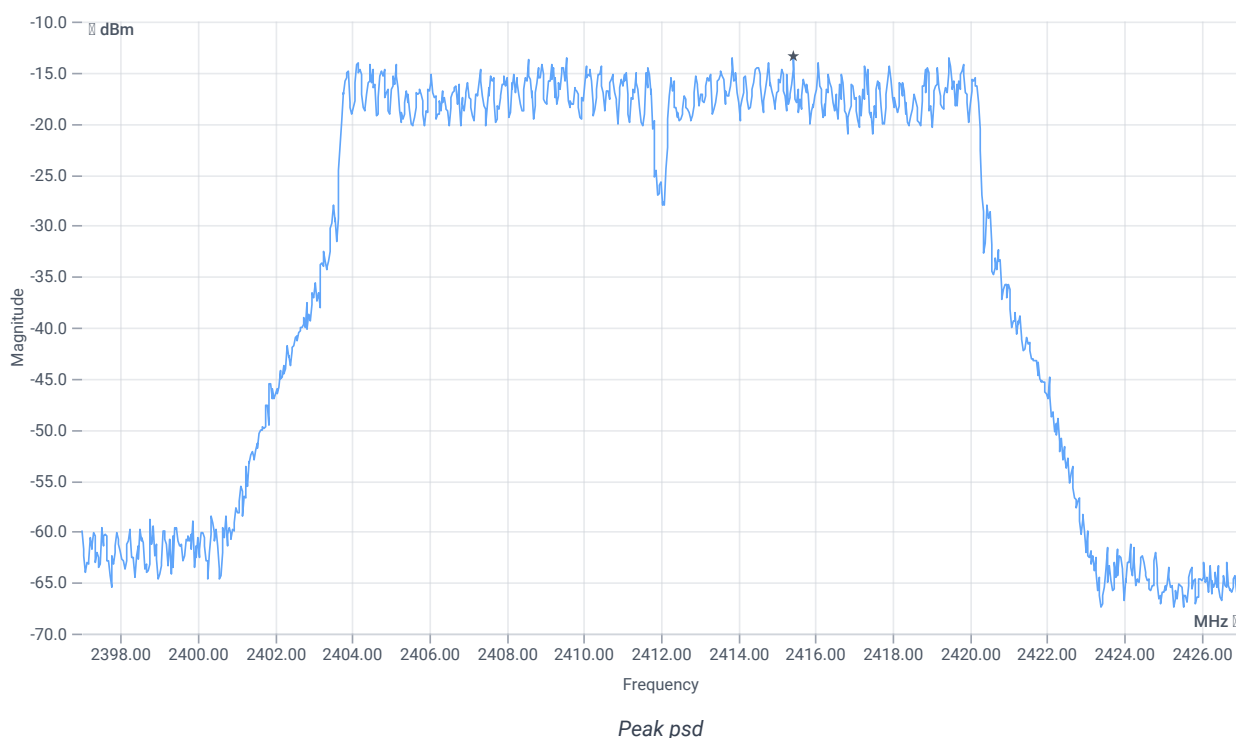

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-13.33	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode

References

TC start	11.06.2024 09:54:11
Ambit temp [°C] humidity [rel%]	23.5 36
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	15.21	dBm	INFO
Ref. frequency	---	---	2439.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.21 10.56 25
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

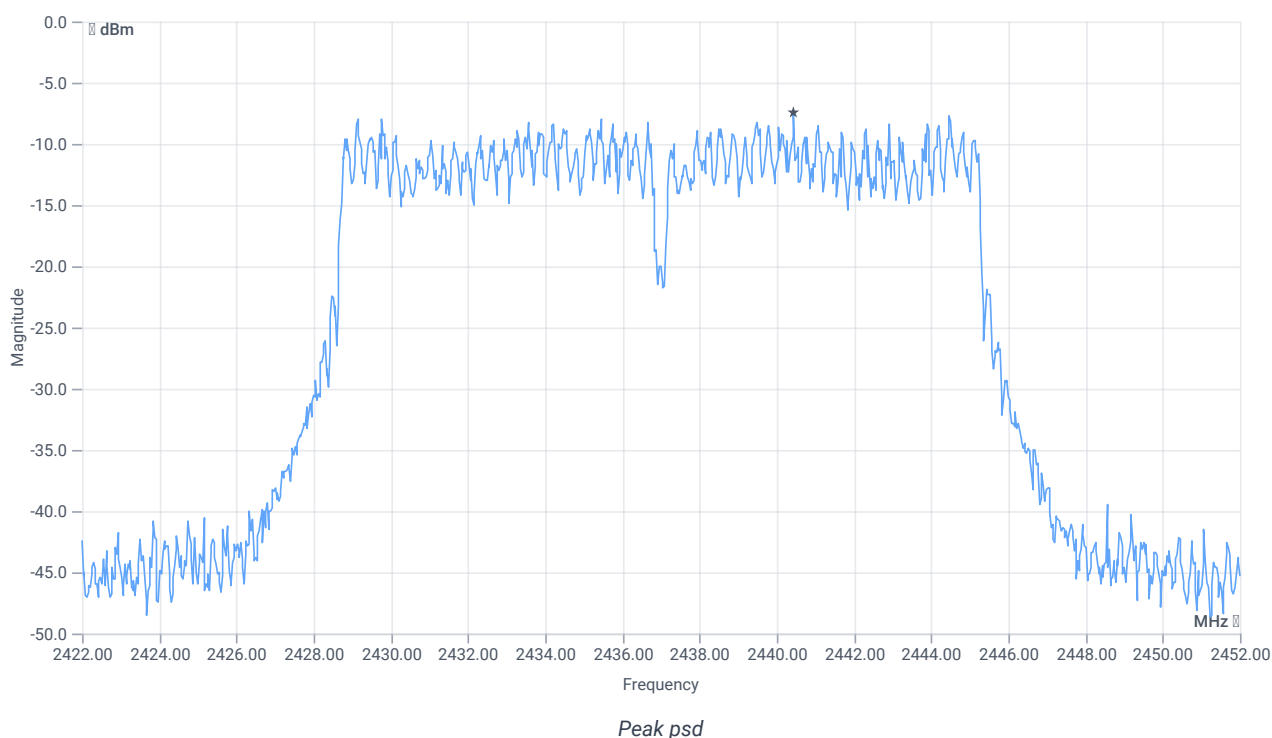

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-7.41	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode

References

TC start	11.06.2024 10:11:48
Ambit temp [°C] humidity [rel%]	23.7 36
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.00	dBm	INFO
Ref. frequency	---	---	2464.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.00 10.6 20
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

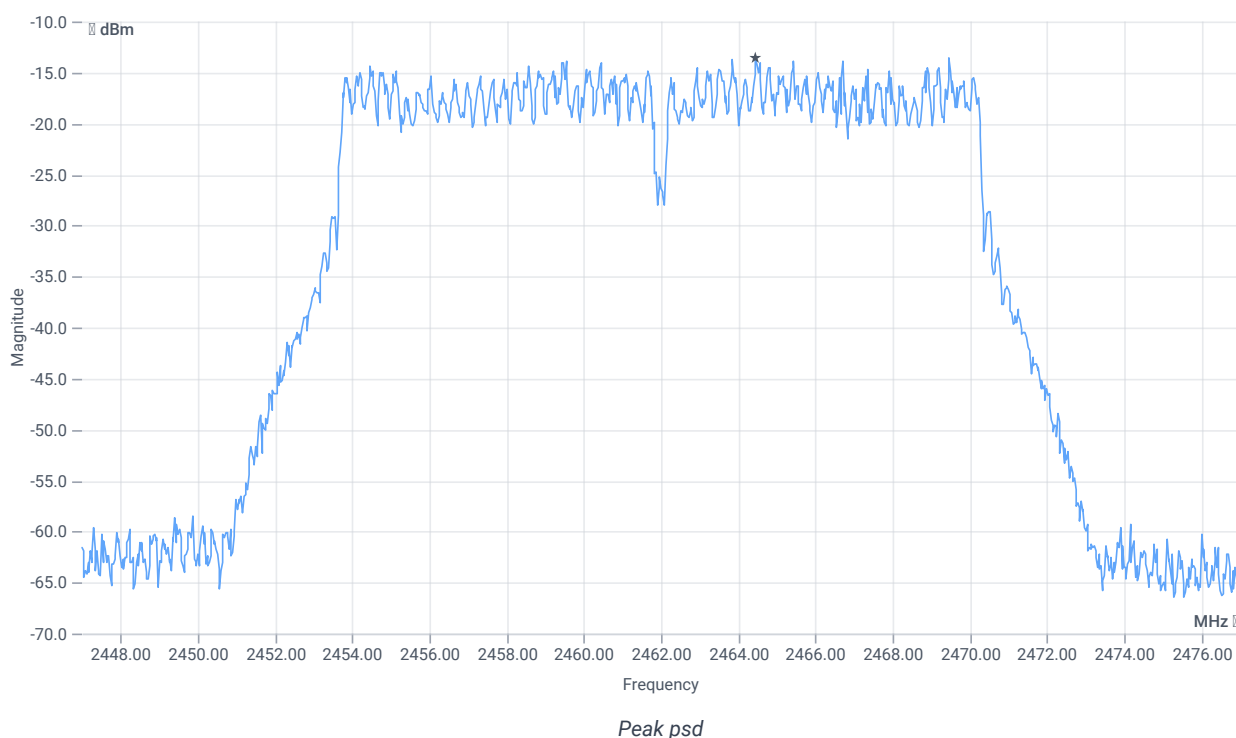

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-13.49	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode

References

TC start	11.06.2024 12:09:44
Ambit temp [°C] humidity [rel%]	24.3 33
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2422 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	6.16	dBm	INFO
Ref. frequency	---	---	2405.820	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.16 10.51 20
Start [MHz] Stop [MHz]	2392.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

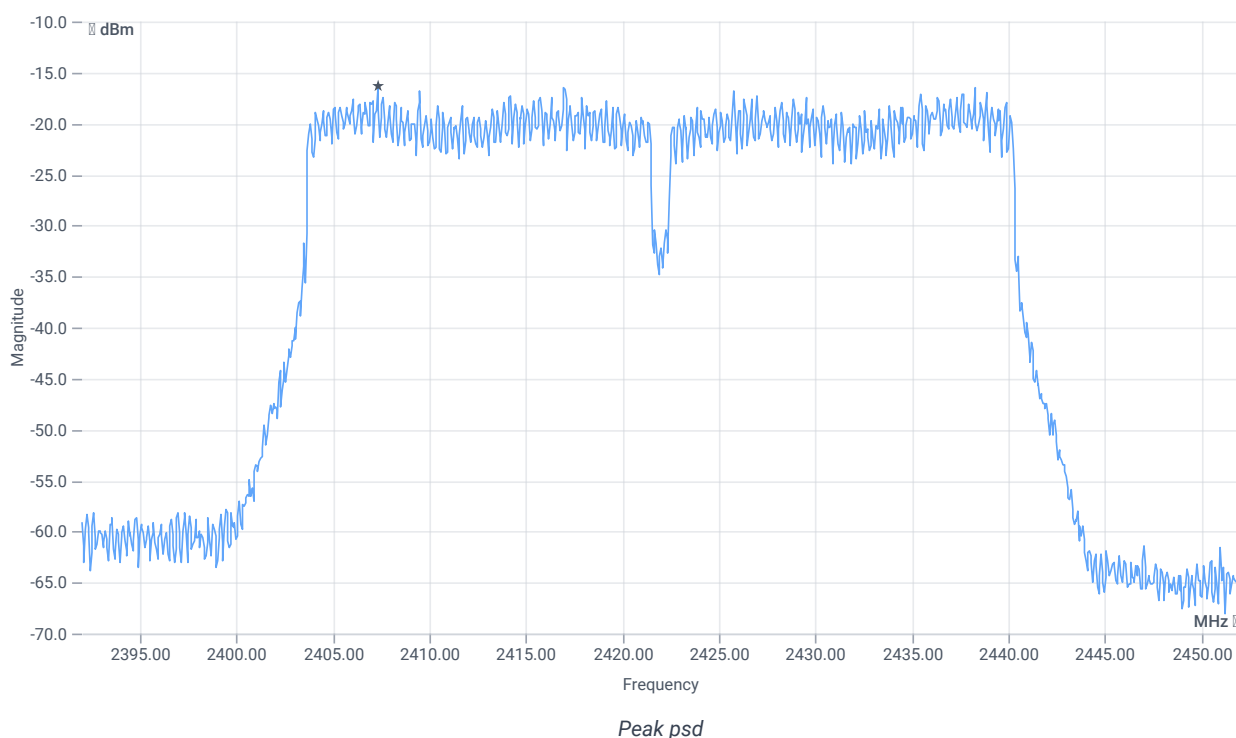

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-16.35	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode

References

TC start	11.06.2024 12:29:23
Ambit temp [°C] humidity [rel%]	24.4 33
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	12.15	dBm	INFO
Ref. frequency	---	---	2442.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.15 10.56 25
Start [MHz] Stop [MHz]	2407.000 2467.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

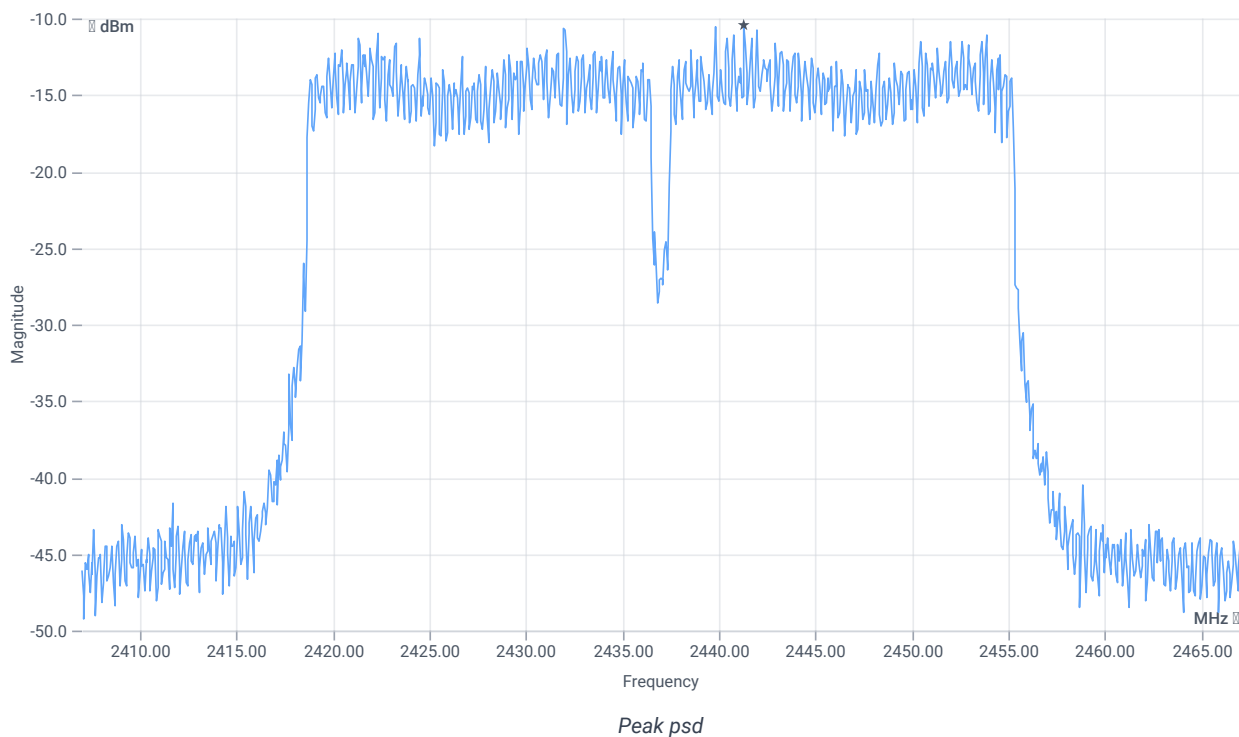

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-10.38	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode

References

TC start	11.06.2024 12:58:51
Ambit temp [°C] humidity [rel%]	24.6 32
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2452 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	2.90	dBm	INFO
Ref. frequency	---	---	2465.790	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.90 10.58 15
Start [MHz] Stop [MHz]	2422.000 2482.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

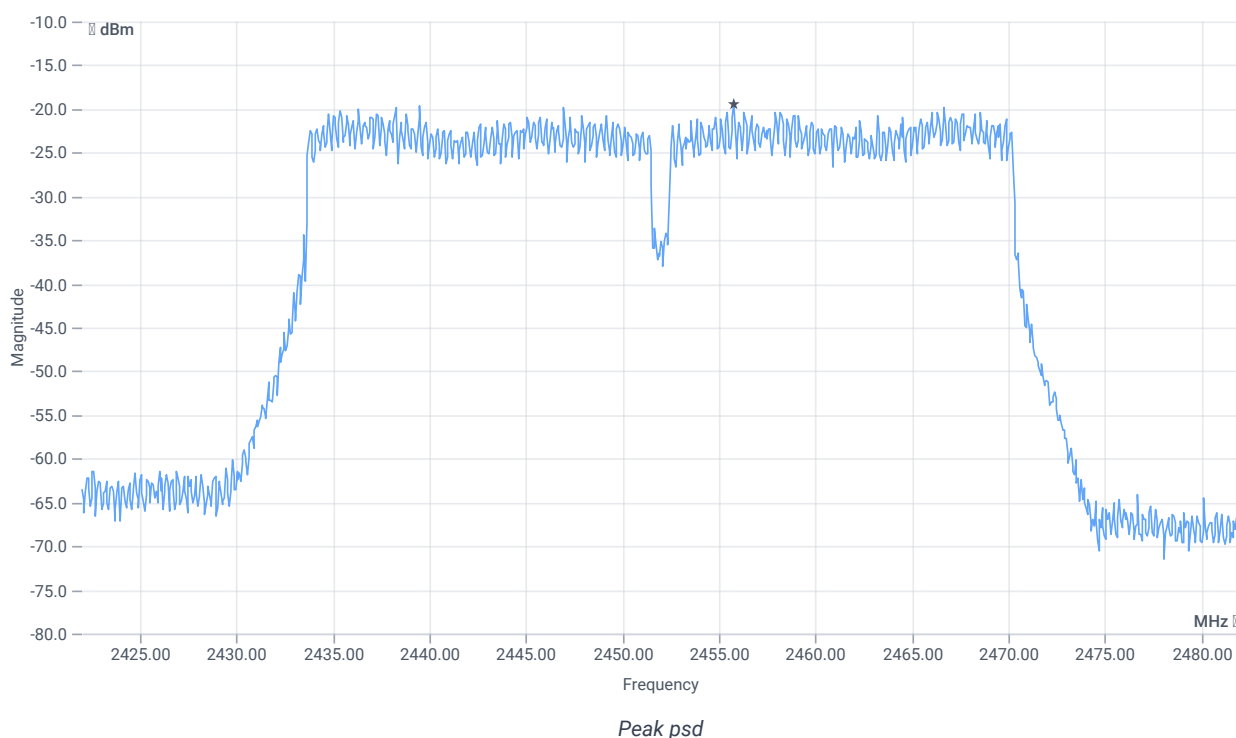

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-19.53	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode

References

TC start	13.06.2024 10:44:19
Ambit temp [°C] humidity [rel%]	24.6 33
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2422 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.52	dBm	INFO
Ref. frequency	---	---	2426.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.52 10.41 15
Start [MHz] Stop [MHz]	2392.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

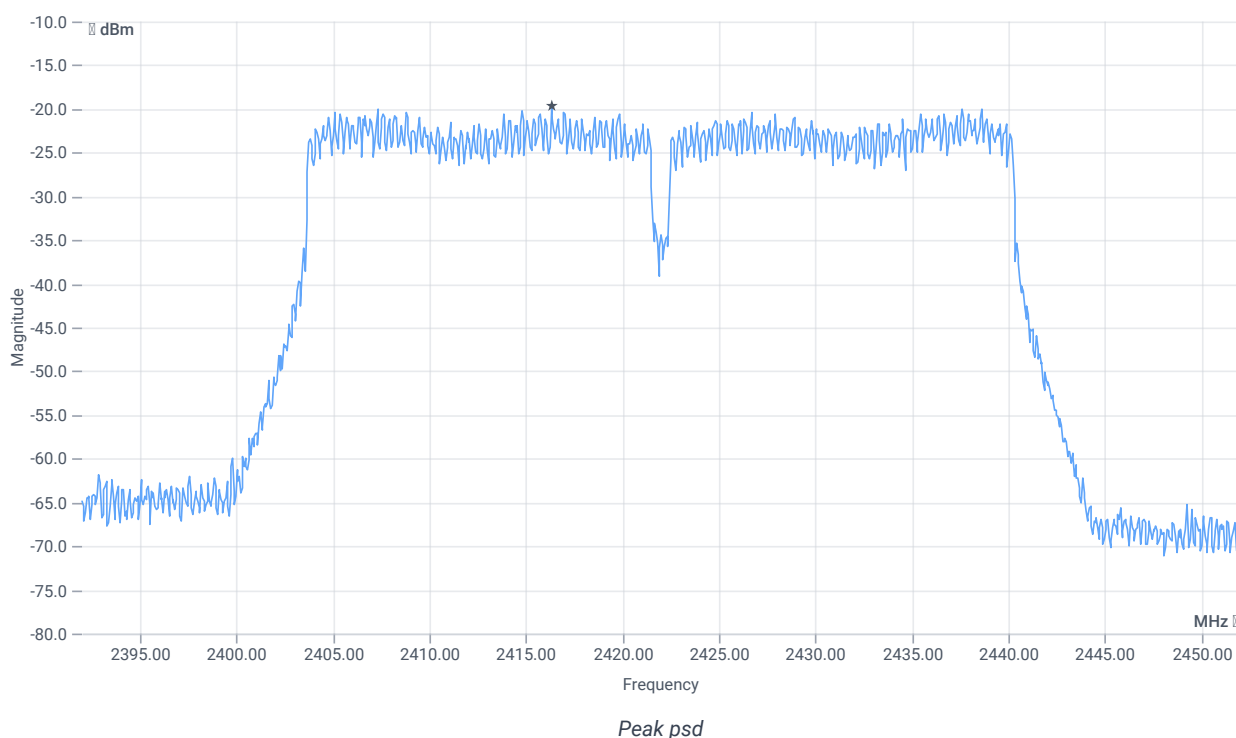

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-19.66	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode

References

TC start	13.06.2024 11:01:55
Ambit temp [°C] humidity [rel%]	24.7 33
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	13.38	dBm	INFO
Ref. frequency	---	---	2439.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.38 10.42 25
Start [MHz] Stop [MHz]	2407.000 2467.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

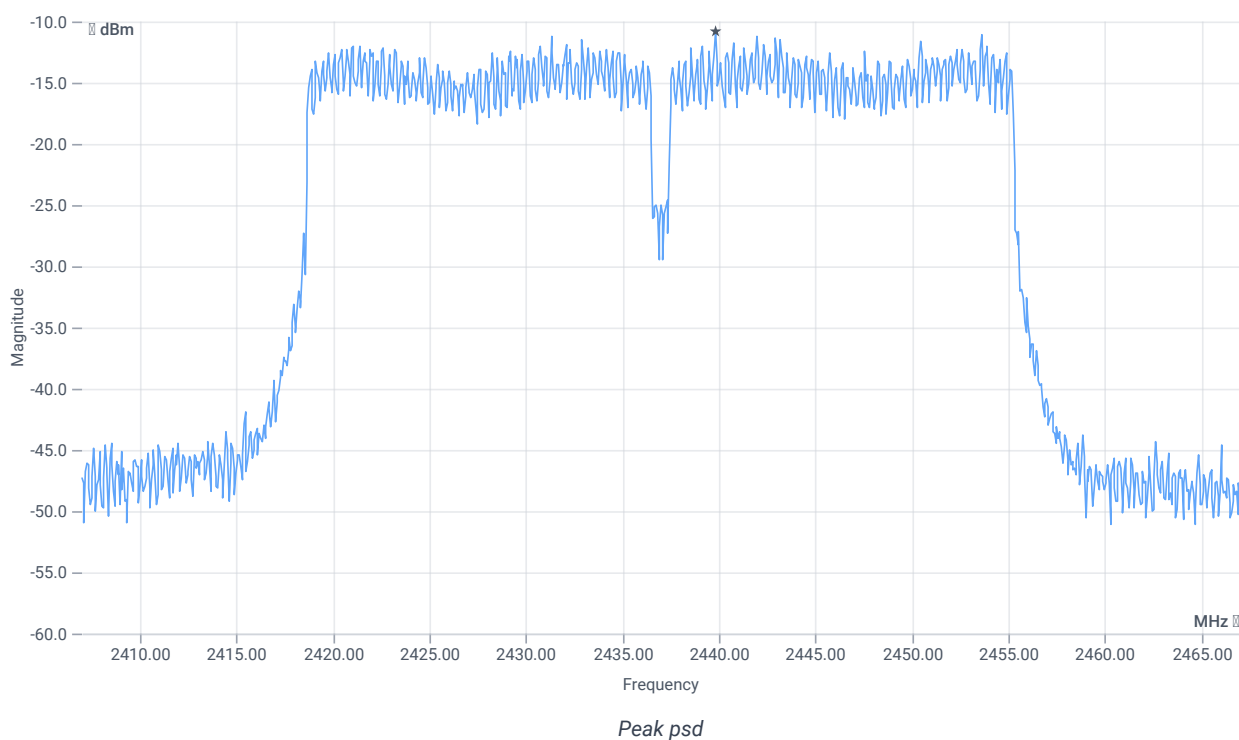

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-10.8	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode

References

TC start	13.06.2024 12:46:12
Ambit temp [°C] humidity [rel%]	25.2 30
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2452 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.84	dBm	INFO
Ref. frequency	---	---	2440.110	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.84 10.44 15
Start [MHz] Stop [MHz]	2422.000 2482.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

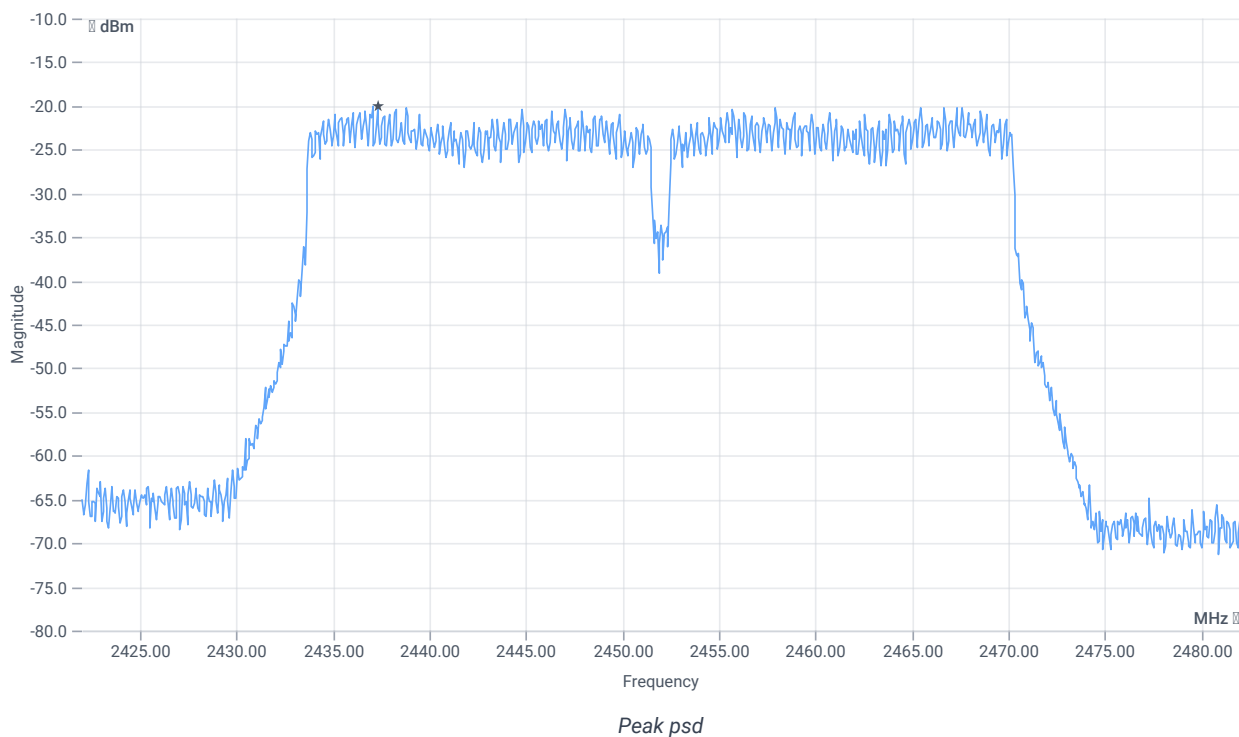

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-19.99	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode

References

TC start	11.06.2024 10:40:55
Ambit temp [°C] humidity [rel%]	23.9 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 nHT20_mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2412 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	9.37	dBm	INFO
Ref. frequency	---	---	2416.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.37 10.48 20
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

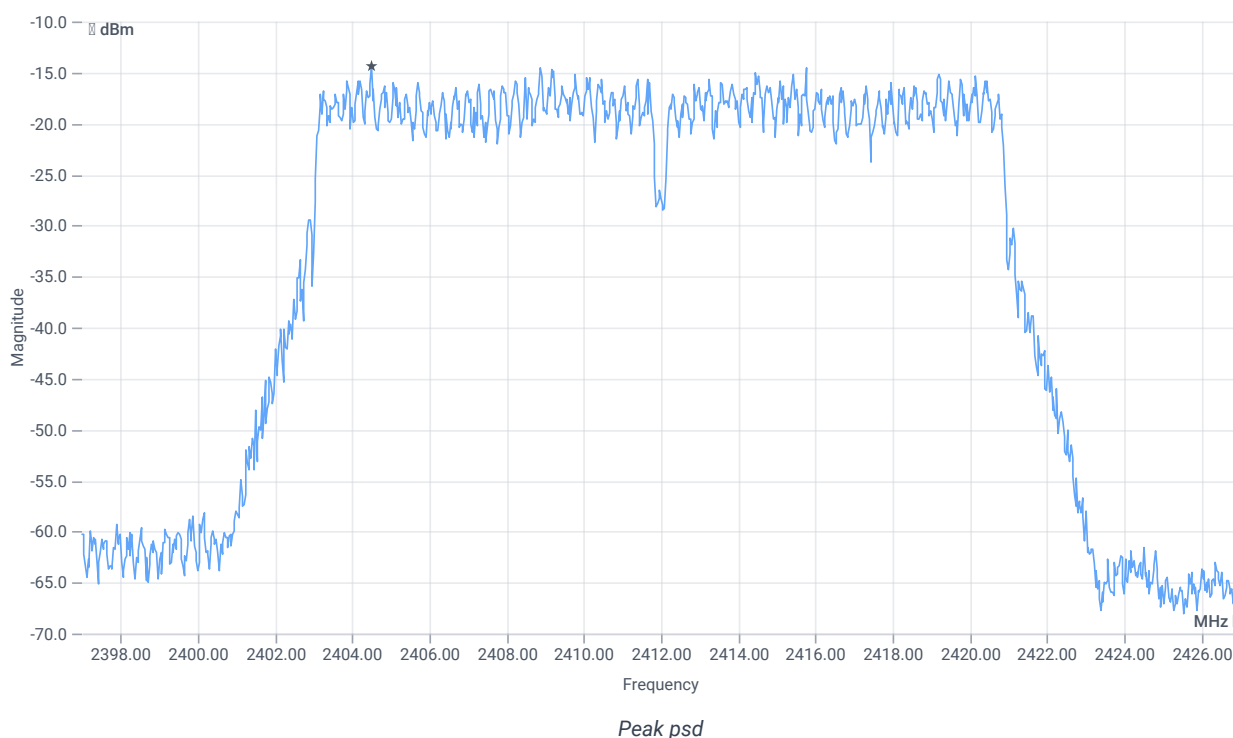

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-14.42	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode

References

TC start	11.06.2024 10:58:56
Ambit temp [°C] humidity [rel%]	24.0 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 nHT20_mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	14.71	dBm	INFO
Ref. frequency	---	---	2430.010	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.71 10.56 25
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

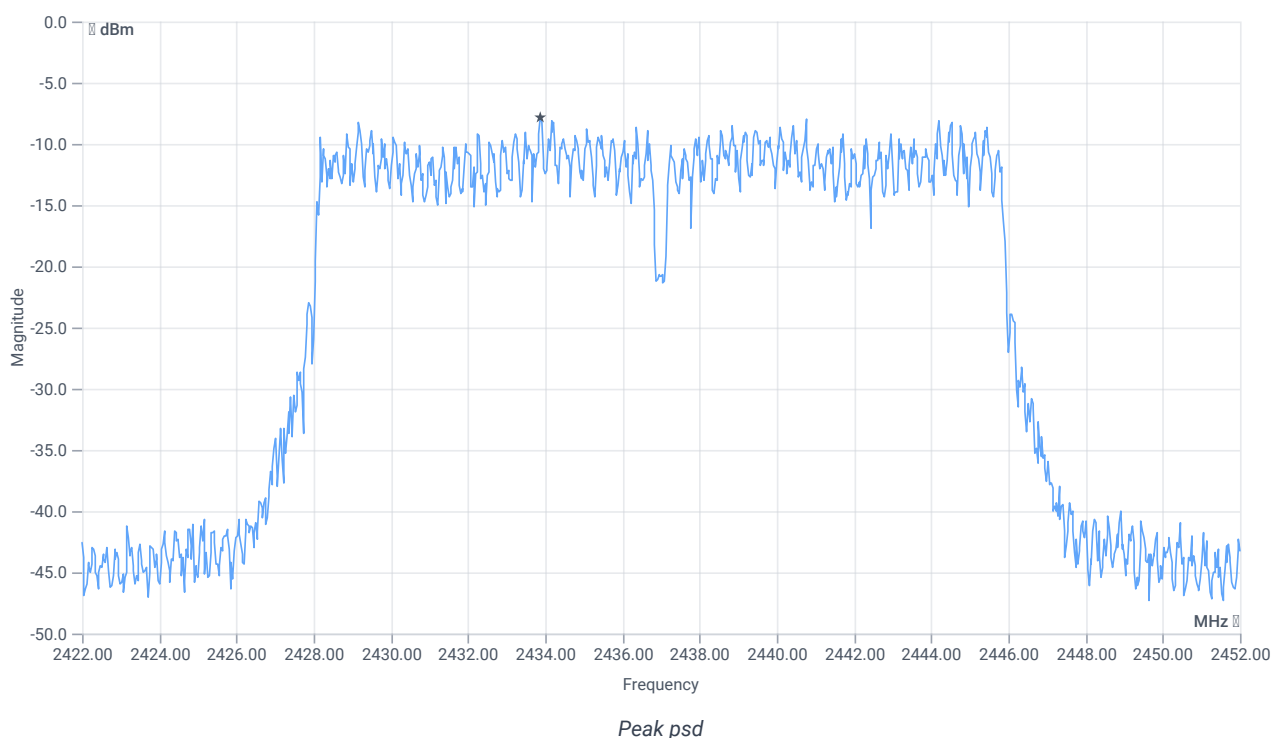

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-7.78	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode

References

TC start	11.06.2024 11:42:56
Ambit temp [°C] humidity [rel%]	24.1 34
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 nHT20_mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2462 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.60	dBm	INFO
Ref. frequency	---	---	2469.690	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.60 10.6 20
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

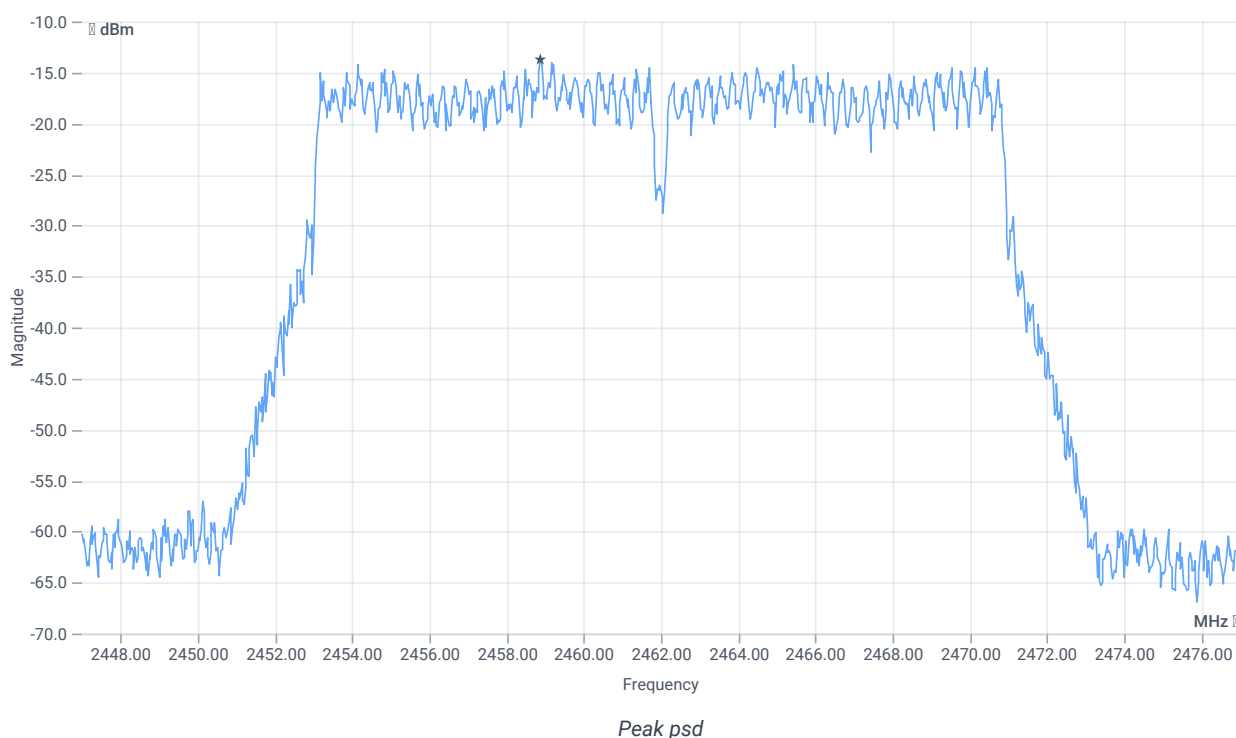

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-13.73	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode

References

TC start	11.06.2024 08:05:18
Ambit temp [°C] humidity [rel%]	22.0 39
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions cond. DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0


Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2412 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.37	dBm	INFO
Ref. frequency	---	---	2413.400	MHz	INFO

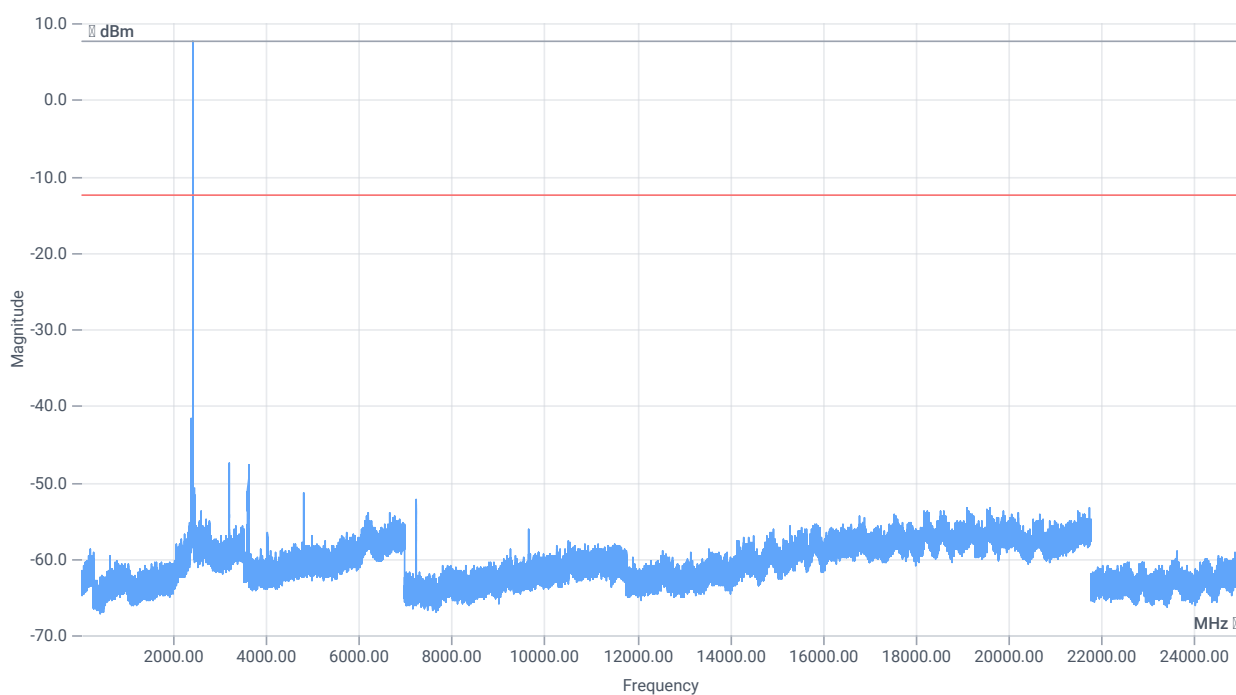

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.37 22.67 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

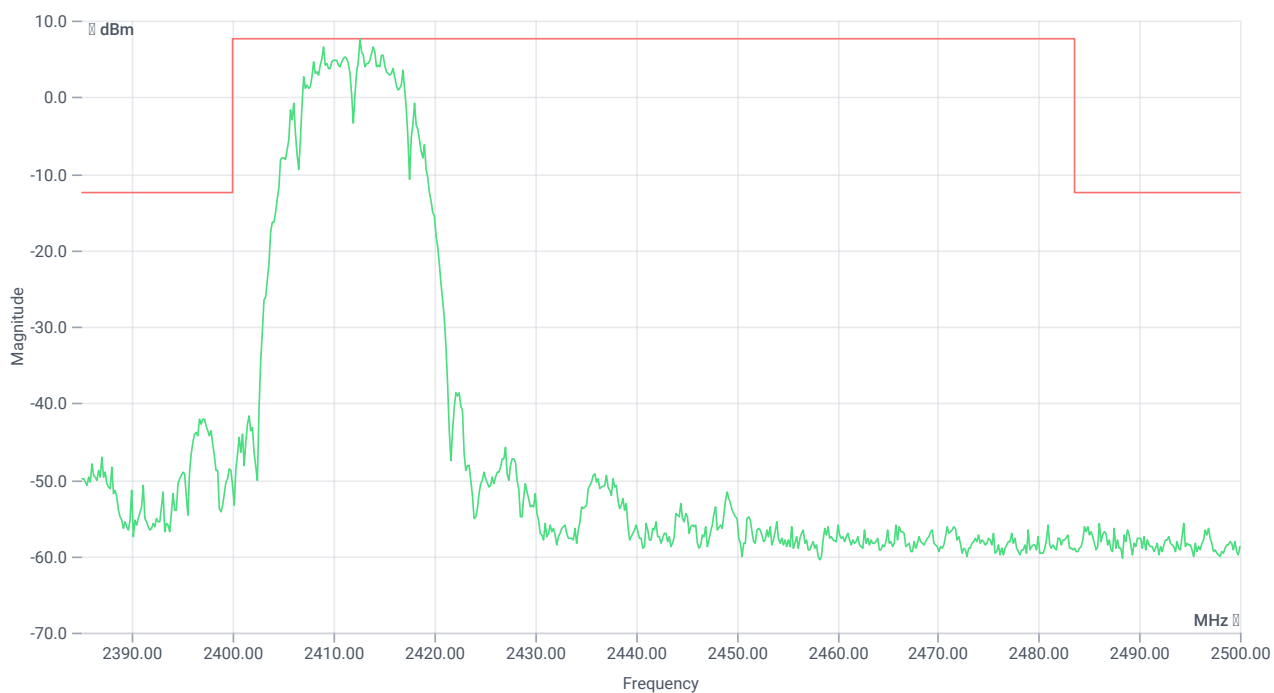

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2412.67 MHz	---	---	7.53	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2397.167 MHz	0	---	29.68	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode

References

TC start	11.06.2024 08:33:00
Ambit temp [°C] humidity [rel%]	22.4 38
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions cond. DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0


Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2437 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	13.36	dBm	INFO
Ref. frequency	---	---	2438.400	MHz	INFO

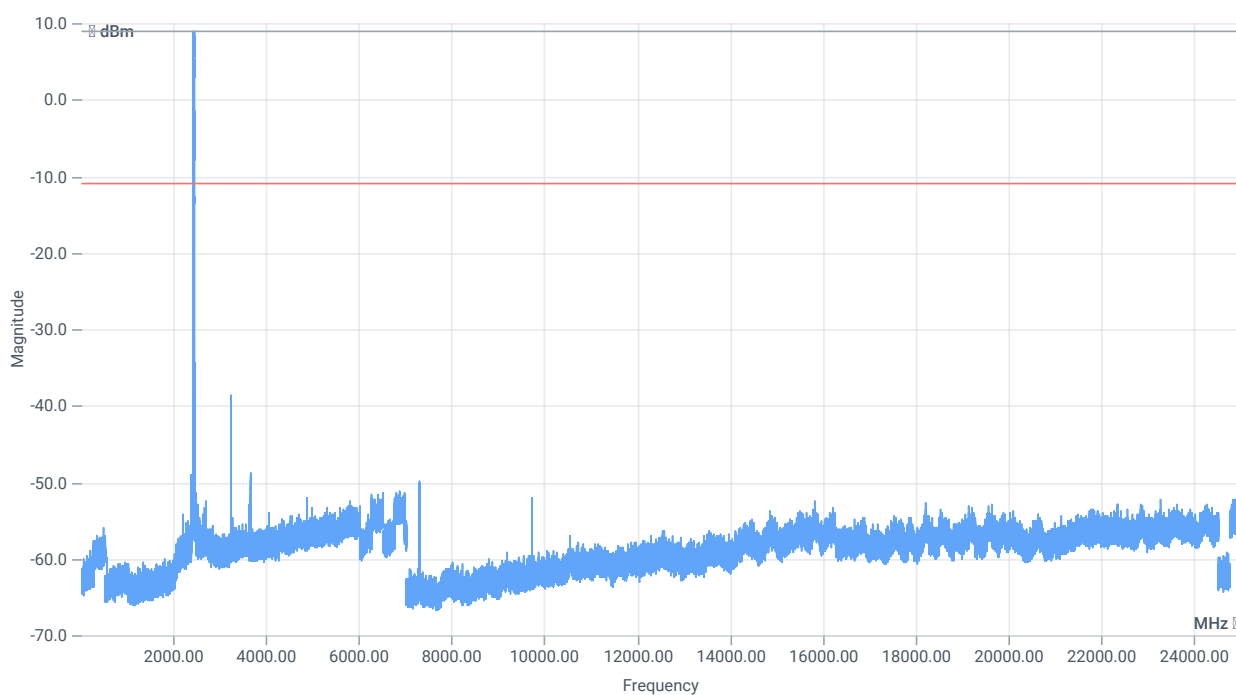

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.36 22.67 10
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE



TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2439.00 MHz	---	---	8.98	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 3249.333 MHz	0	---	27.59	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode

References

TC start	11.06.2024 08:55:01
Ambit temp [°C] humidity [rel%]	22.8 37
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions cond. DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	Yes

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0


Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2462 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.19	dBm	INFO
Ref. frequency	---	---	2460.500	MHz	INFO

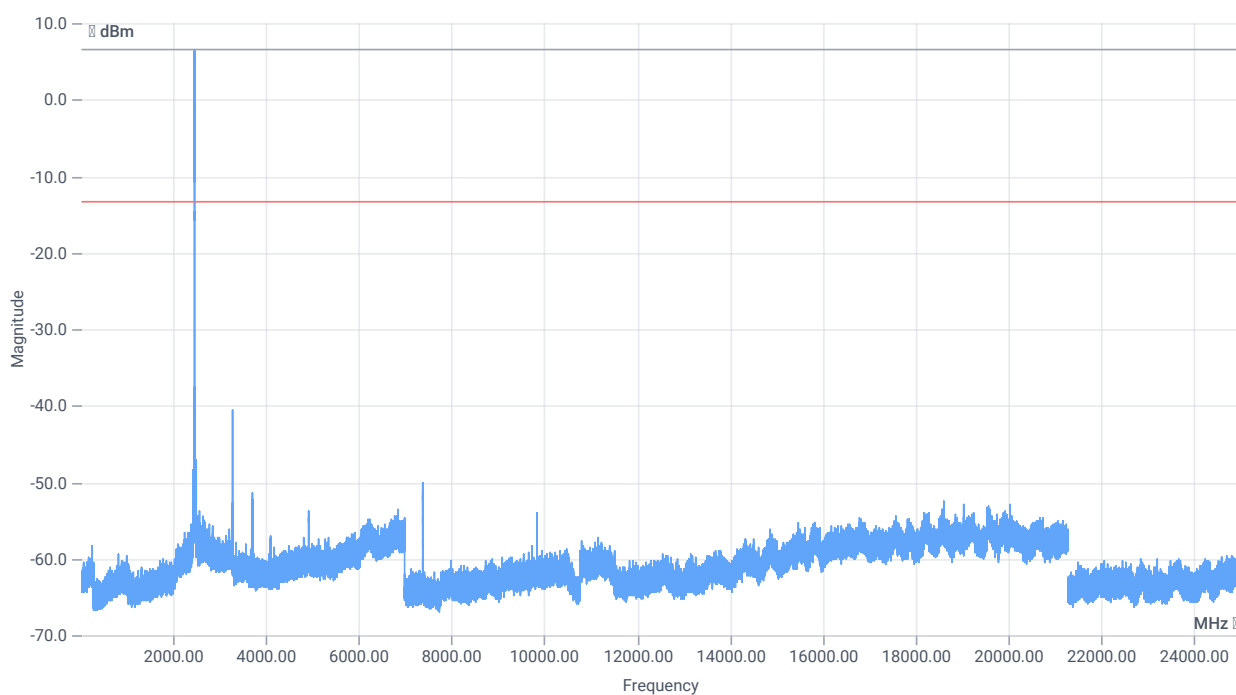

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.19 22.67 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

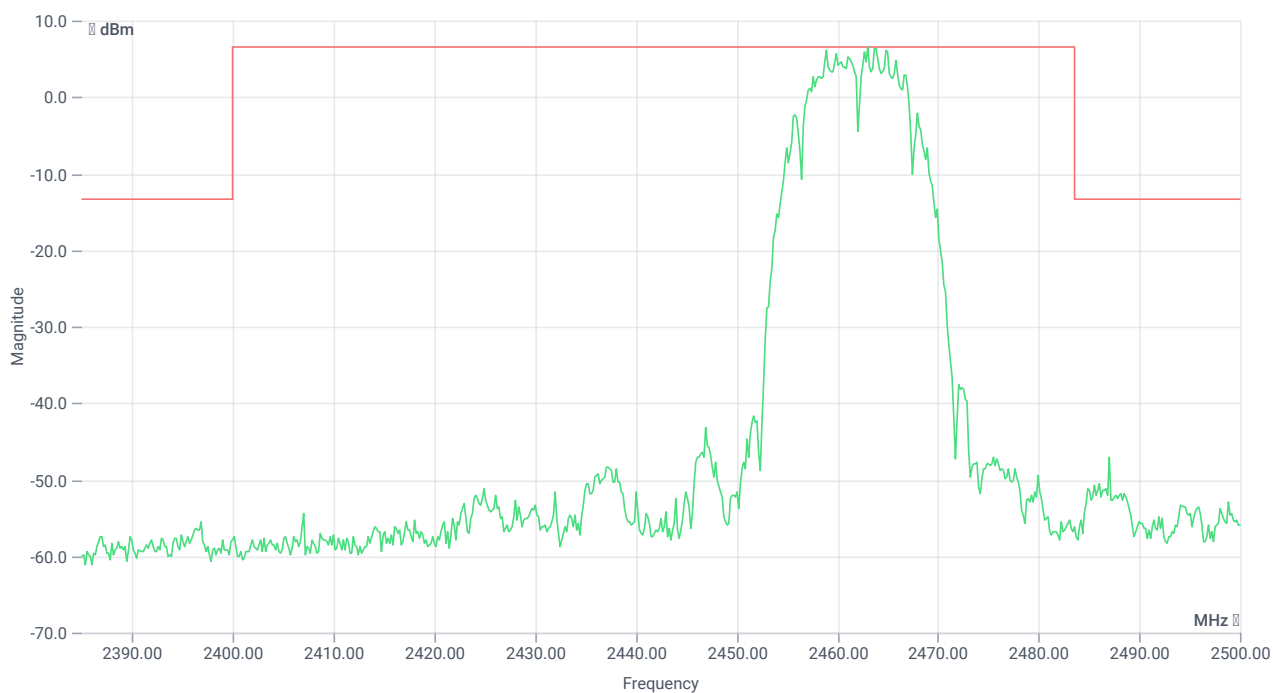

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2463.00 MHz	---	---	6.55	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 3282.5 MHz	0	---	27.15	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode

References

TC start	13.06.2024 08:30:35
Ambit temp [°C] humidity [rel%]	23.8 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions cond. DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0


Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 2412 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.09	dBm	INFO
Ref. frequency	---	---	2414.400	MHz	INFO

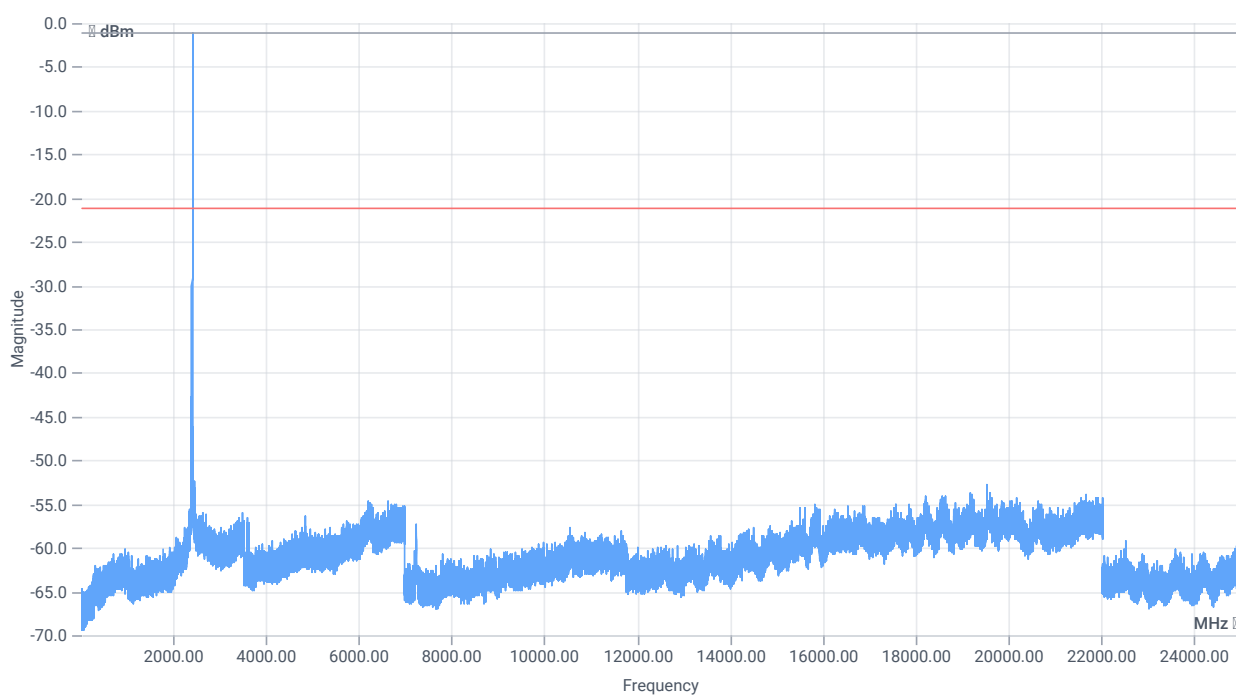

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.09 22.08 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

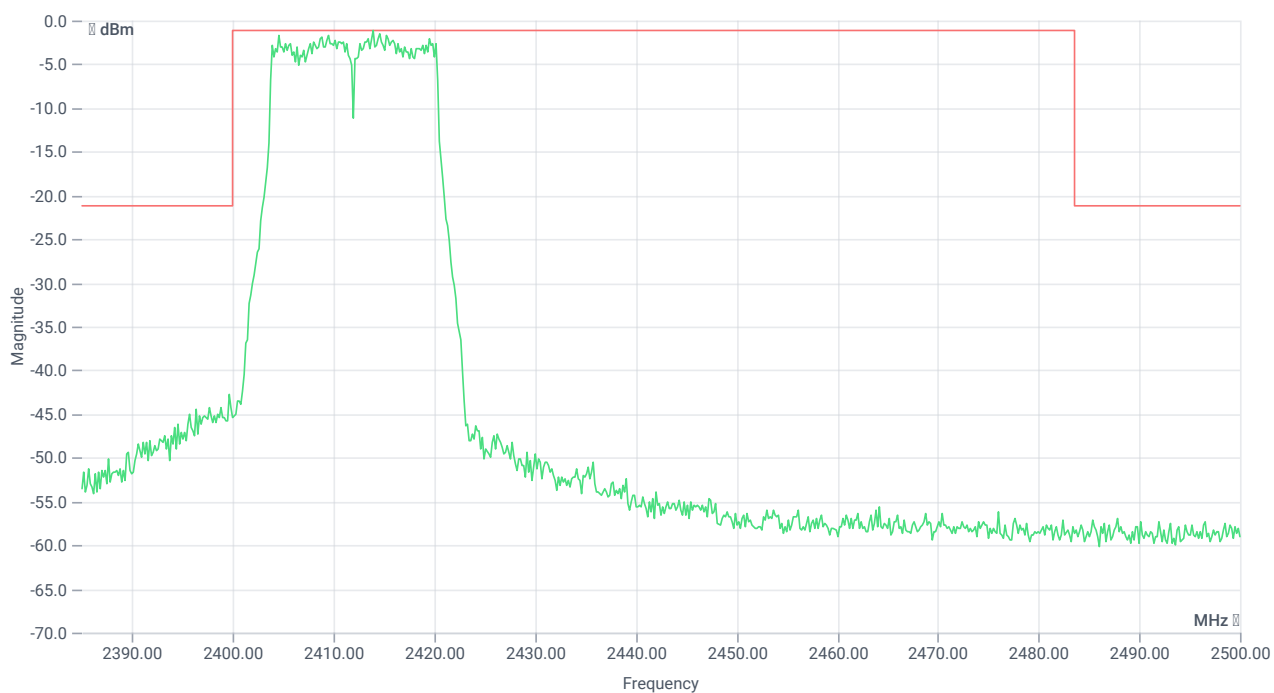

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2413.83 MHz	---	---	-1.22	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2399.667 MHz	0	---	21.48	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode

References

TC start	13.06.2024 08:52:48
Ambit temp [°C] humidity [rel%]	24.0 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions cond. DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0


Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 2437 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	16.57	dBm	INFO
Ref. frequency	---	---	2439.400	MHz	INFO

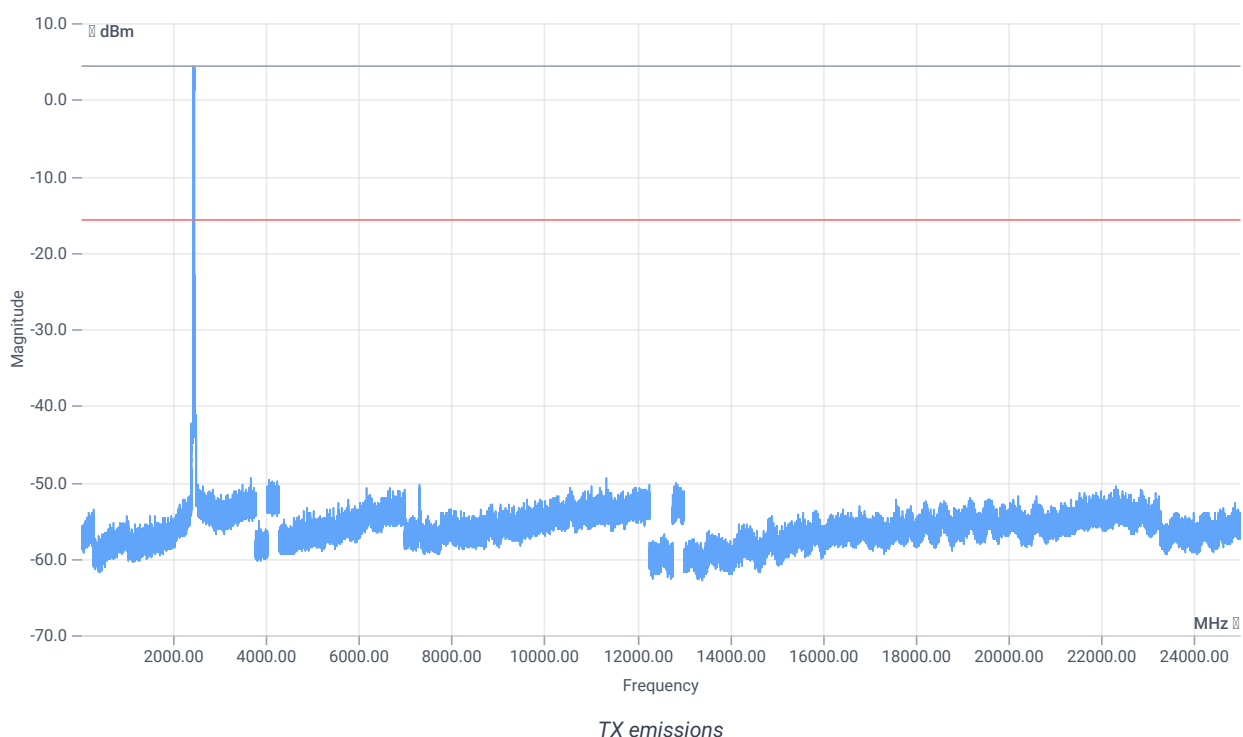

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.57 22.08 10
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

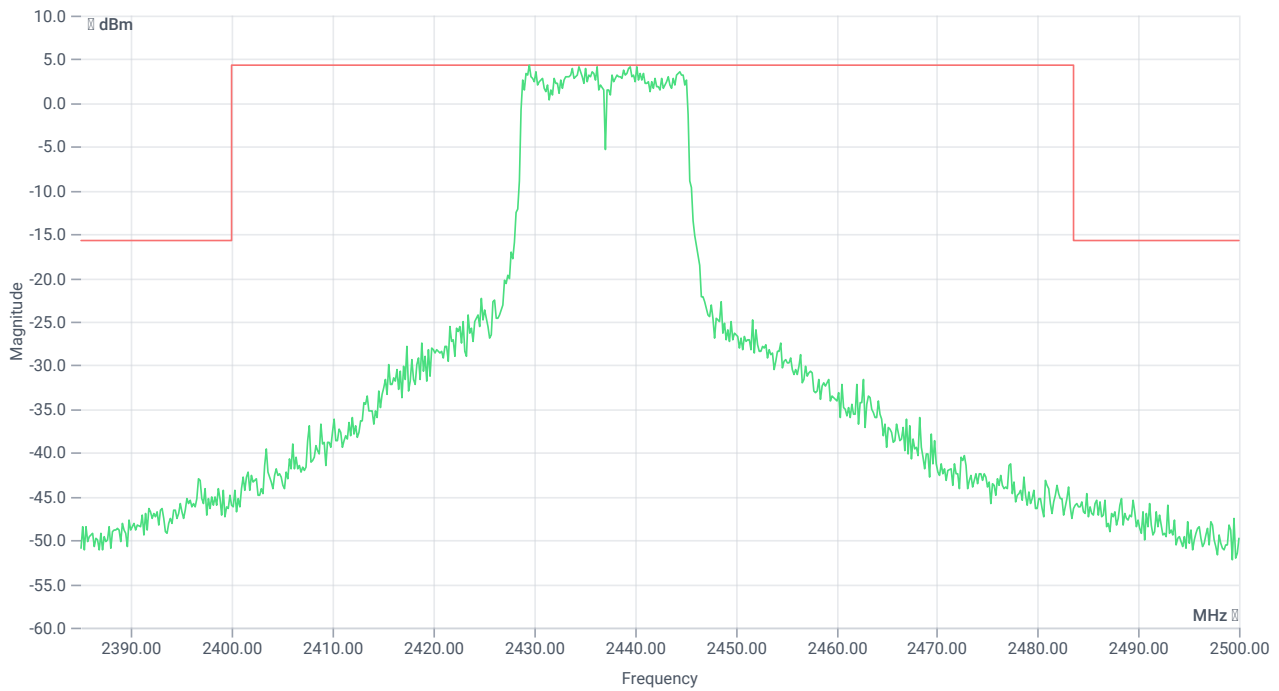

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2429.50 MHz	---	---	4.33	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-142.94	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode

References

TC start	13.06.2024 09:12:51
Ambit temp [°C] humidity [rel%]	24.1 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions cond. DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0


Test Parameter

Technology to test	WLAN2G4 g mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 2462 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.94	dBm	INFO
Ref. frequency	---	---	2464.200	MHz	INFO

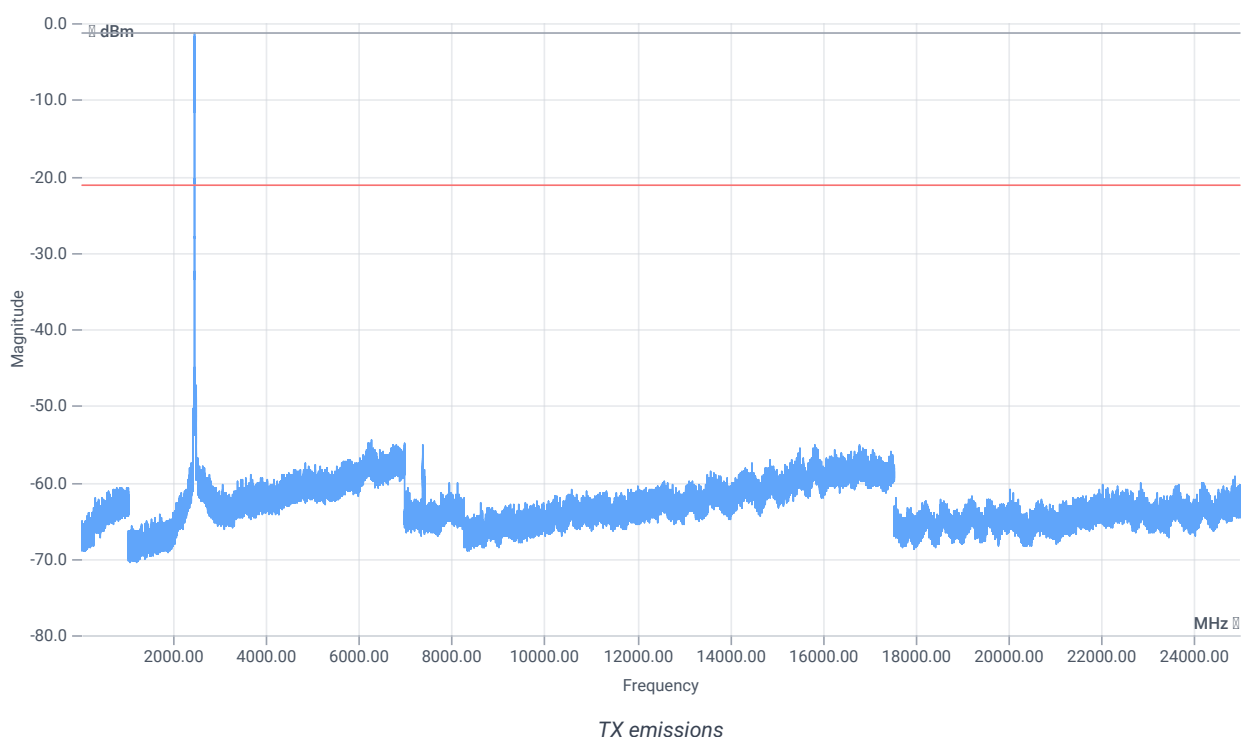

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.94 22.08 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

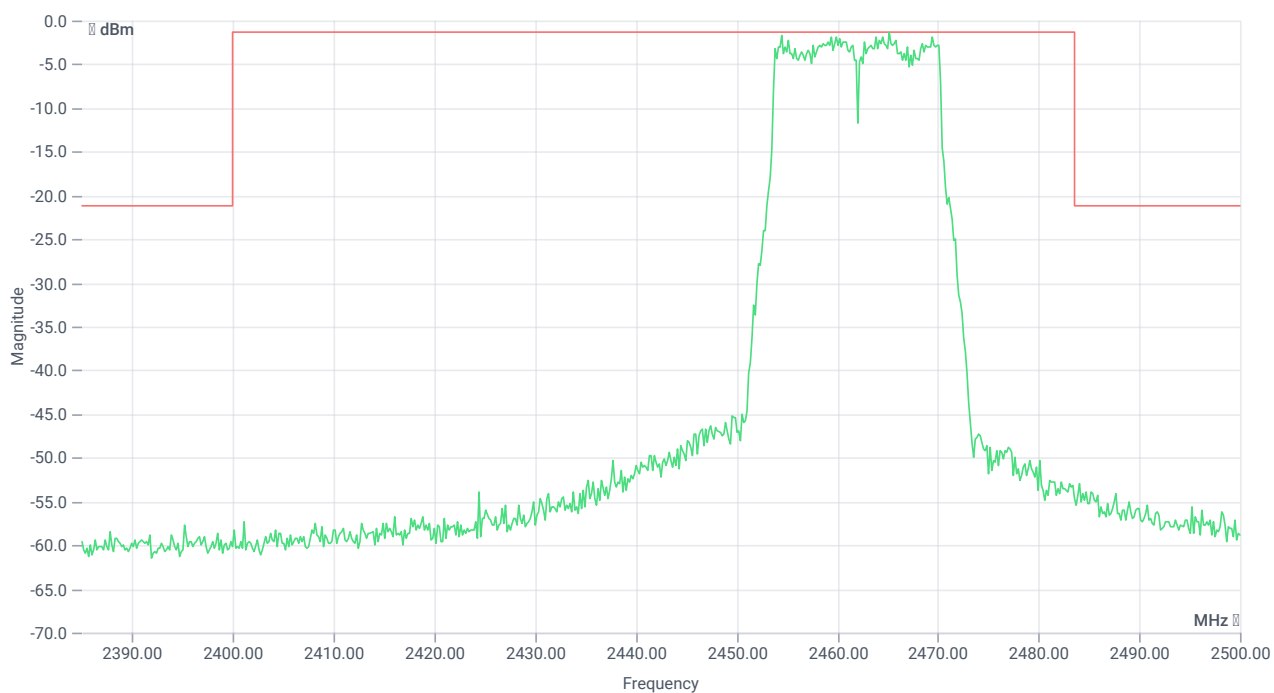

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2465.17 MHz	---	---	-1.25	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2484 MHz	0	---	31.81	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode

References

TC start	13.06.2024 07:28:16
Ambit temp [°C] humidity [rel%]	23.3 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions cond. DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0


Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 2412 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	11.22	dBm	INFO
Ref. frequency	---	---	2413.400	MHz	INFO

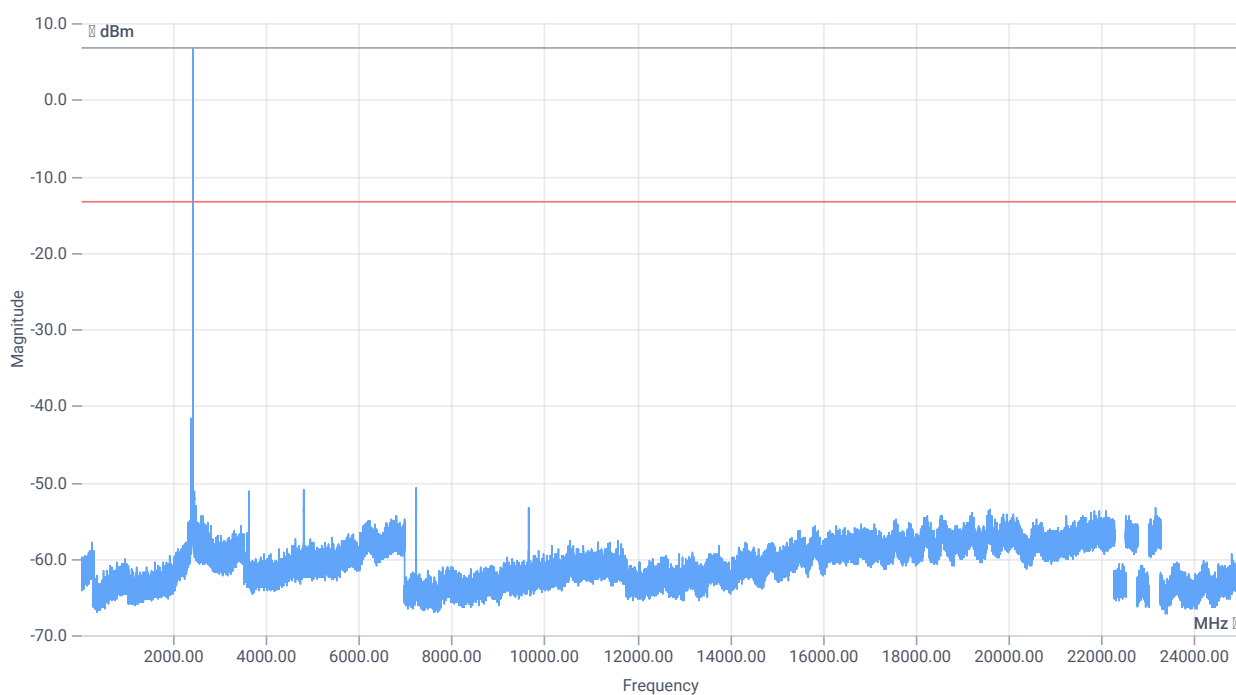

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.22 22.08 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

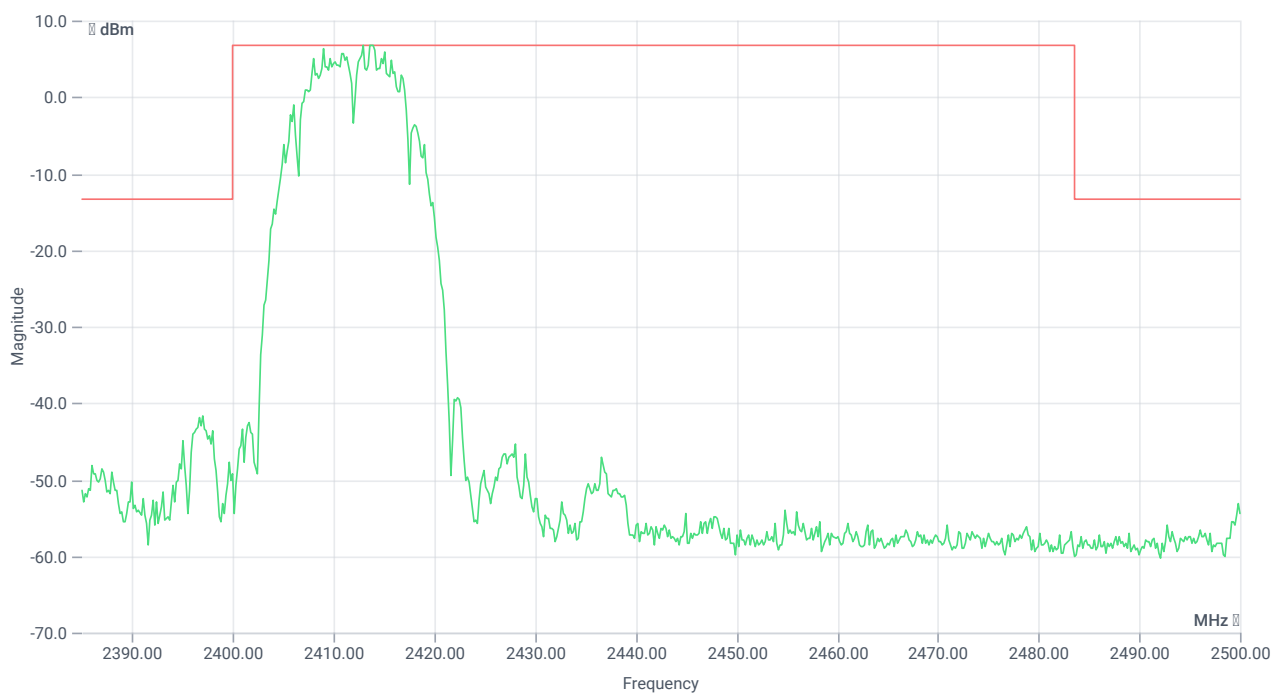

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2413.00 MHz	---	---	6.73	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2397 MHz	0	---	28.5	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode

References

TC start	13.06.2024 07:46:11
Ambit temp [°C] humidity [rel%]	23.5 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions cond. DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0


Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 2437 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	13.14	dBm	INFO
Ref. frequency	---	---	2438.400	MHz	INFO

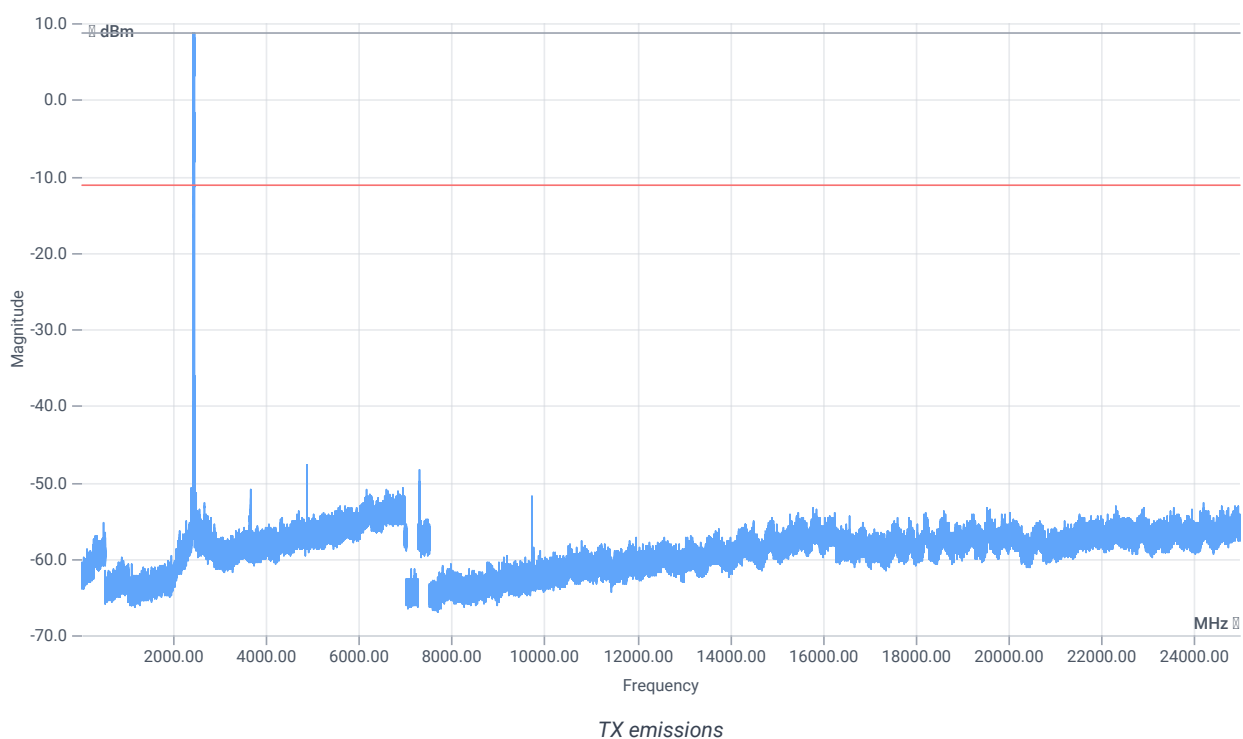

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.14 22.08 10
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

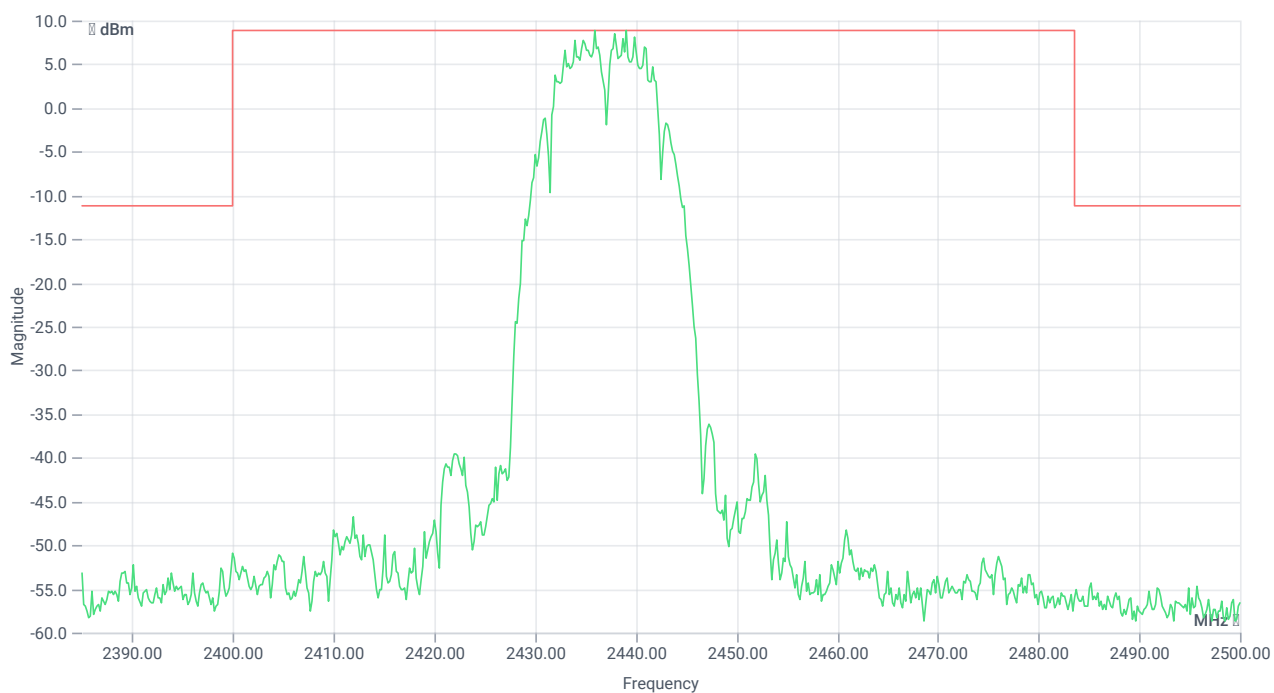

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2436.00 MHz	---	---	8.80	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 4874 MHz	0	---	36.56	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode

References

TC start	13.06.2024 08:03:41
Ambit temp [°C] humidity [rel%]	23.7 35
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions cond. DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of antenna ports	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,cetecom advanced GmbH,USM,B002,1.0.0

Test Parameter

Technology to test	WLAN2G4 b mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001