

FCC RADIO TEST REPORT

FCC ID: RONRC1018C

Product: MID(Tablet PC)
Trade Name: Qoo!
Model Name: RC1018C
Serial Model: N/A
Report No.: PT1301125003E2

Prepared for

3Q TECHNOLOGY LIMITED

3/F Jonsim Place, 228 Queen's Road East Wanchai, Hong Kong

Prepared by

DongGuan Precise Testing Service Co.,Ltd.
Room 203-204, 2F, Xinye Building, No.67 Shijing,
Guangzhang Road, Dongguan, China

Tel: 86-769-23368601 Fax: 86-769-23368602 [http:// www.pts-testing.com](http://www.pts-testing.com)

TEST RESULT CERTIFICATION

Applicant's name : 3Q TECHNOLOGY LIMITED
Address : 3/F Jonsim Place, 228 Queen's Road East Wanchai, Hong Kong
Manufacture's Name..... : 3Q TECHNOLOGY LIMITED
Address : 3/F Jonsim Place, 228 Queen's Road East Wanchai, Hong Kong

Product description

Product name : MID(Tablet PC)
Model and/or type reference : RC1018C
Serial Model : N/A

Standards : FCC Part15.247

Test procedure ANSI C63.4-2003

This device described above has been tested by PTS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTS, this document may be altered or revised by PTS, personal only, and shall be noted in the revision of the document.


Date of Test

Date (s) of performance of tests : 15 Mar. 2013 ~3 Apr. 2013

Date of Issue..... : 3 Apr. 2013

Test Result..... : **Pass**

Prepared by :



Assistant

Reviewer :



Supervisor

Approved & Authorized Signer :



Jacky Ou / Manager

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	17
3.2.1 RADIATED EMISSION LIMITS	17
3.2.2 TEST PROCEDURE	18
3.2.3 DEVIATION FROM TEST STANDARD	18
3.2.4 TEST SETUP	19
3.2.5 EUT OPERATING CONDITIONS	20
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	21
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	22
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	24
4 . POWER SPECTRAL DENSITY TEST	54
4.1 APPLIED PROCEDURES / LIMIT	54
4.1.1 TEST PROCEDURE	54
4.1.2 DEVIATION FROM STANDARD	54
4.1.3 TEST SETUP	54
4.1.4 EUT OPERATION CONDITIONS	54
4.1.5 TEST RESULTS	55
5 . BANDWIDTH TEST	61
5.1 APPLIED PROCEDURES / LIMIT	61
5.1.1 TEST PROCEDURE	61

Table of Contents

	Page
5.1.2 DEVIATION FROM STANDARD	61
5.1.3 TEST SETUP	61
5.1.4 EUT OPERATION CONDITIONS	61
5.1.5 TEST RESULTS	62
6 . PEAK OUTPUT POWER TEST	68
6.1 APPLIED PROCEDURES / LIMIT	68
6.1.1 TEST PROCEDURE	68
6.1.2 DEVIATION FROM STANDARD	68
6.1.3 TEST SETUP	68
6.1.4 EUT OPERATION CONDITIONS	68
6.1.5 TEST RESULTS	69
7 . ANTENNA REQUIREMENT	70
7.1 STANDARD REQUIREMENT	70
7.2 EUT ANTENNA	70
8 . EUT TEST PHOTO	71
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd.

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration Number: 238937; IC Registration Number: 9270A-1

CNAS Registration Number: L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	MID(Tablet PC)														
Trade Name	Qoo!														
Model Name	RC1018C														
Serial Model	N/A														
Model Difference	N/A														
Product Description	The EUT is a MID(Tablet PC) <table border="1"> <tr> <td>Operation Frequency:</td><td>802.11b/g/n:2412~2462 MHz</td></tr> <tr> <td>Modulation Type:</td><td>CCK/OFDM/DBPSK/DAPSK</td></tr> <tr> <td>Bit Rate of Transmitter</td><td>802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6 Mbps 802.11n:150/144.44/130/117/115.56/104/86.67/78/52/6.5 Mbps</td></tr> <tr> <td>Number Of Channel</td><td>802.11b/g/n20: 11CH</td></tr> <tr> <td>Antenna Designation:</td><td>Please see Note 3.</td></tr> <tr> <td>Output Power(Conducted):</td><td>802.11b: 11.84 dBm (Max.) 802.11g: 10.89 dBm (Max.) 802.11n: 9.96 dBm (Max.)</td></tr> <tr> <td>Antenna Gain (dBi)</td><td>0dbi</td></tr> </table> Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	Operation Frequency:	802.11b/g/n:2412~2462 MHz	Modulation Type:	CCK/OFDM/DBPSK/DAPSK	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6 Mbps 802.11n:150/144.44/130/117/115.56/104/86.67/78/52/6.5 Mbps	Number Of Channel	802.11b/g/n20: 11CH	Antenna Designation:	Please see Note 3.	Output Power(Conducted):	802.11b: 11.84 dBm (Max.) 802.11g: 10.89 dBm (Max.) 802.11n: 9.96 dBm (Max.)	Antenna Gain (dBi)	0dbi
Operation Frequency:	802.11b/g/n:2412~2462 MHz														
Modulation Type:	CCK/OFDM/DBPSK/DAPSK														
Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6 Mbps 802.11n:150/144.44/130/117/115.56/104/86.67/78/52/6.5 Mbps														
Number Of Channel	802.11b/g/n20: 11CH														
Antenna Designation:	Please see Note 3.														
Output Power(Conducted):	802.11b: 11.84 dBm (Max.) 802.11g: 10.89 dBm (Max.) 802.11n: 9.96 dBm (Max.)														
Antenna Gain (dBi)	0dbi														
Channel List	Please refer to the Note 2.														
Ratings	DC 5V from Adapter														
Adapter	Model No.: JK02050300-181 Input: AC 110-240V, 50-60Hz, 0.35A Output:DC 5V, 3000mA														
Battery	Rated Voltage: 3.7V Charge Limit: 4.2V Capacity :7000mAh														

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List for 802.11b/g/n(20MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
A	N/A	N/A	FPCB Antenna	N/A	0	N/A

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n CH1/ CH6/ CH11
Mode 4	TX

For Conducted Emission	
Final Test Mode	Description
Mode 5	TX


For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n CH1/ CH6/ CH11

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) With individual Verifying, the maximum output power was found at 1Mbps data for 802.11b mode, 6Mbps data rate for 802.11g mode. MSC0 for 802.11n/20MHz mode, The final test were executed under these conditions and recorded in this report individually.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test

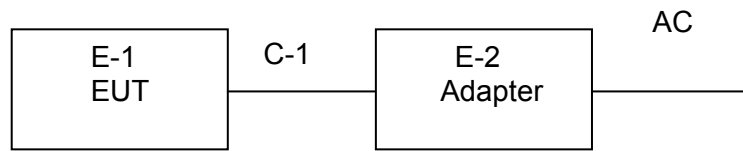

Radiated Spurious Emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	MID(Tablet PC)	Qoo!	RC1018C	N/A	EUT
E-2	Adapter		JK02050300-181	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	100cm	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	160400005	2012.07.06	2013.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2012.07.06	2013.07.05	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2012.07.06	2013.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2012.07.06	2013.07.05	1 year
5	Spectrum Analyzer	ADVANTES T	R3132	150900201	2012.07.06	2013.07.05	1 year
6	Horn Antenna	EM	EM-AH-20180	2011071402	2012.07.06	2013.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2012.07.06	2013.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2012.07.06	2013.07.05	1 year
9	Loop Antenna	ARA	PLA-2030/B	1029	2012.07.06	2013.07.05	1 year
10	Power Meter	R&S	NRVS	100696	2012.07.06	2013.07.05	1 year
11	Signal Generator	R&S	SMT 06	832080/007	2012.07.06	2013.07.05	1 year
12	Temperature & Humidity Chamber	GIANT FORCE	GTH-056P	GF-94454-1	2012.07.06	2013.07.05	1 year
13	Power Sensor	R&S	URV5-Z4	0395.1619.05	2012.07.06	2013.07.05	1 year

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

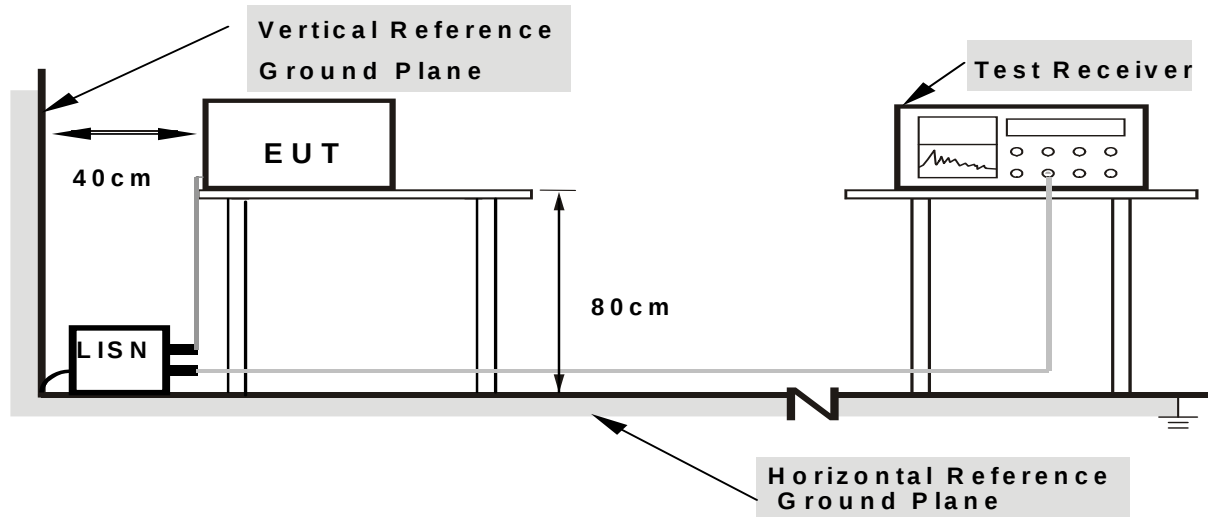

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.6 TEST RESULTS

EUT:	MID(Tablet PC)	Model Name. :	RC1018C
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 5V from PC AC 120V/60Hz	Test Mode:	Mode 4

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Detector Type
0.174	36.37	10	46.37	54.76	-8.39	AVG
0.178	46.91	10.03	56.94	64.57	-7.63	QP
0.43	20.44	10.2	30.64	47.25	-16.61	AVG
0.442	32.77	10.2	42.97	57.02	-14.05	QP
15.6179	24.79	10.55	35.34	60	-24.66	QP
15.9699	10.31	10.57	20.88	50	-29.12	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

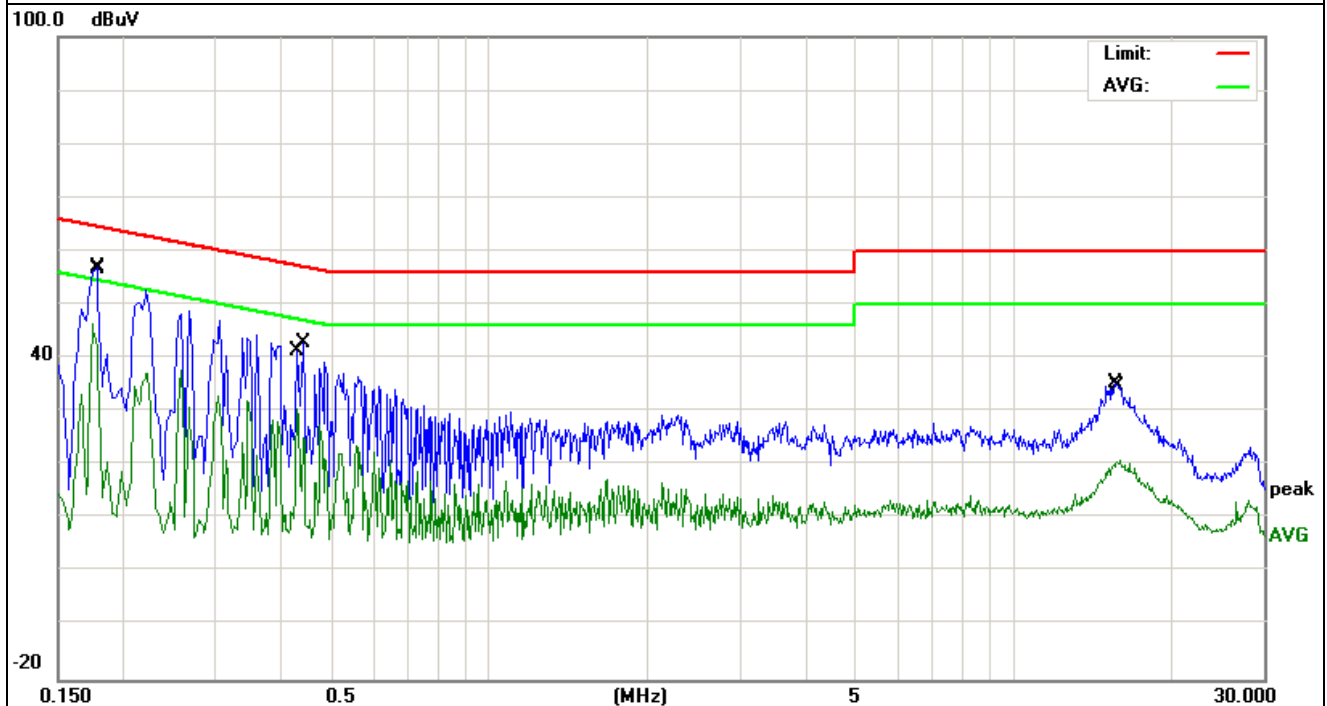


EUT:	MID(Tablet PC)	Model Name. :	RC1018C
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 5V from PC AC 120V/60Hz	Test Mode:	Mode 4

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Detector Type
0.1739	36.37	10	46.37	54.77	-8.4	AVG
0.1779	46.9	10.04	56.94	64.58	-7.64	QP
0.4786	13.89	10.2	24.09	46.36	-22.27	AVG
0.526	26.92	10.2	37.12	56	-18.88	QP
15.6179	24.79	10.55	35.34	60	-24.66	QP
15.9699	10.31	10.57	20.88	50	-29.12	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

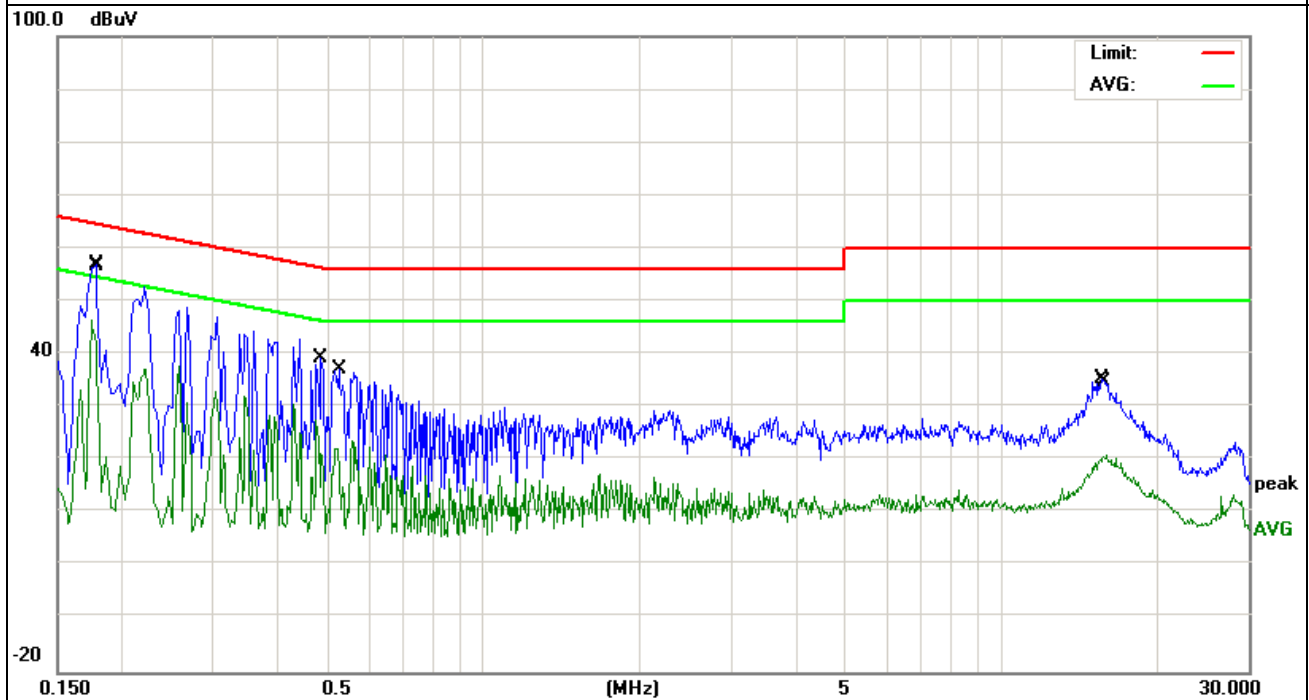

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

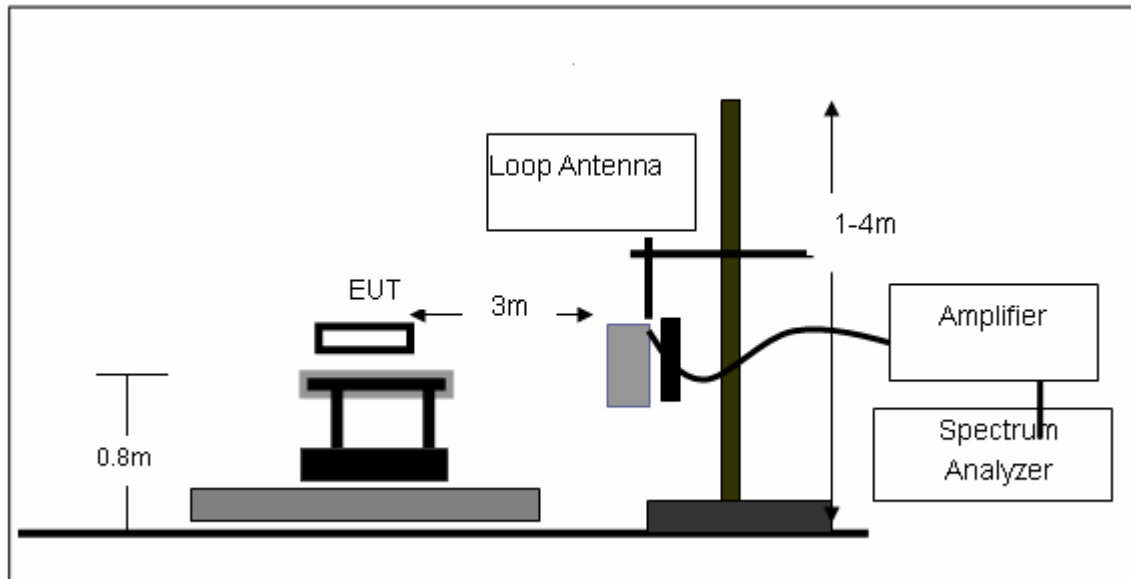

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

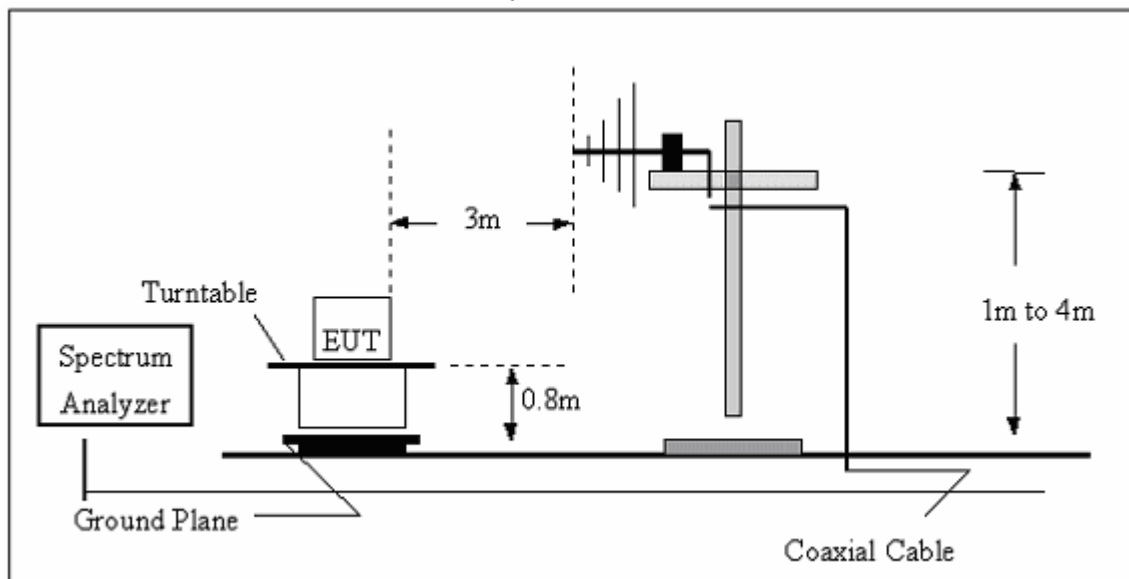

(C) Radiated Emission Test-Up Frequency Above 1GHz

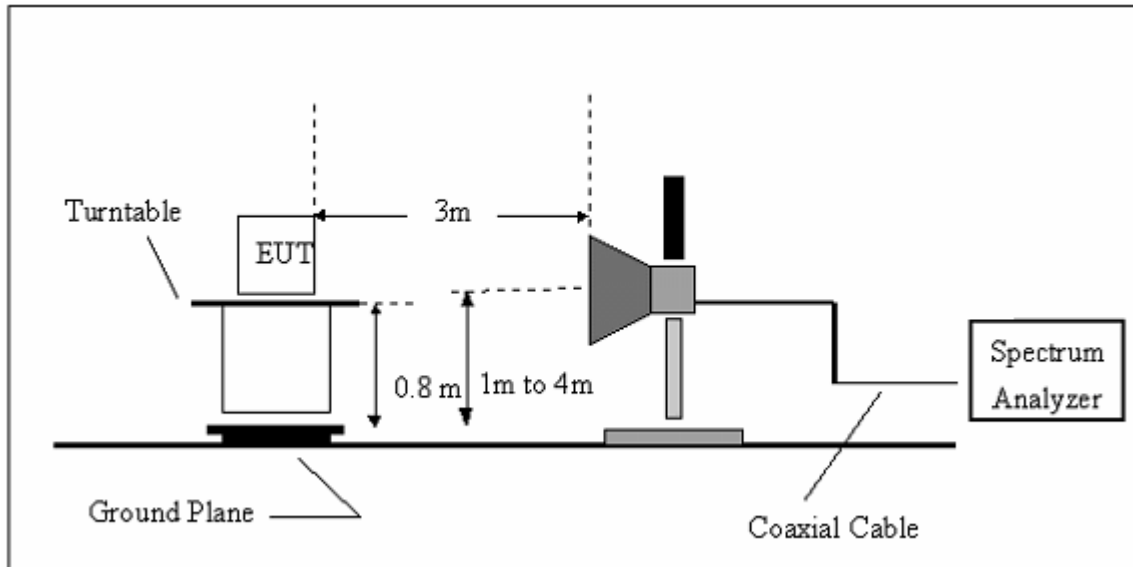

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

EUT:	MID(Tablet PC)	Model Name. :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $20 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.


3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	TX	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
43.6584	21.58	11.35	32.93	40	-7.07	QP
74.3953	28.48	6.65	35.13	40	-4.87	QP
116.132	25.39	11.71	37.1	43.5	-6.4	QP
205.675	27.09	8.95	36.04	43.5	-7.46	QP
245.09	25.34	12.31	37.65	46	-8.35	QP
406.088	17.56	17.48	35.04	46	-10.96	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

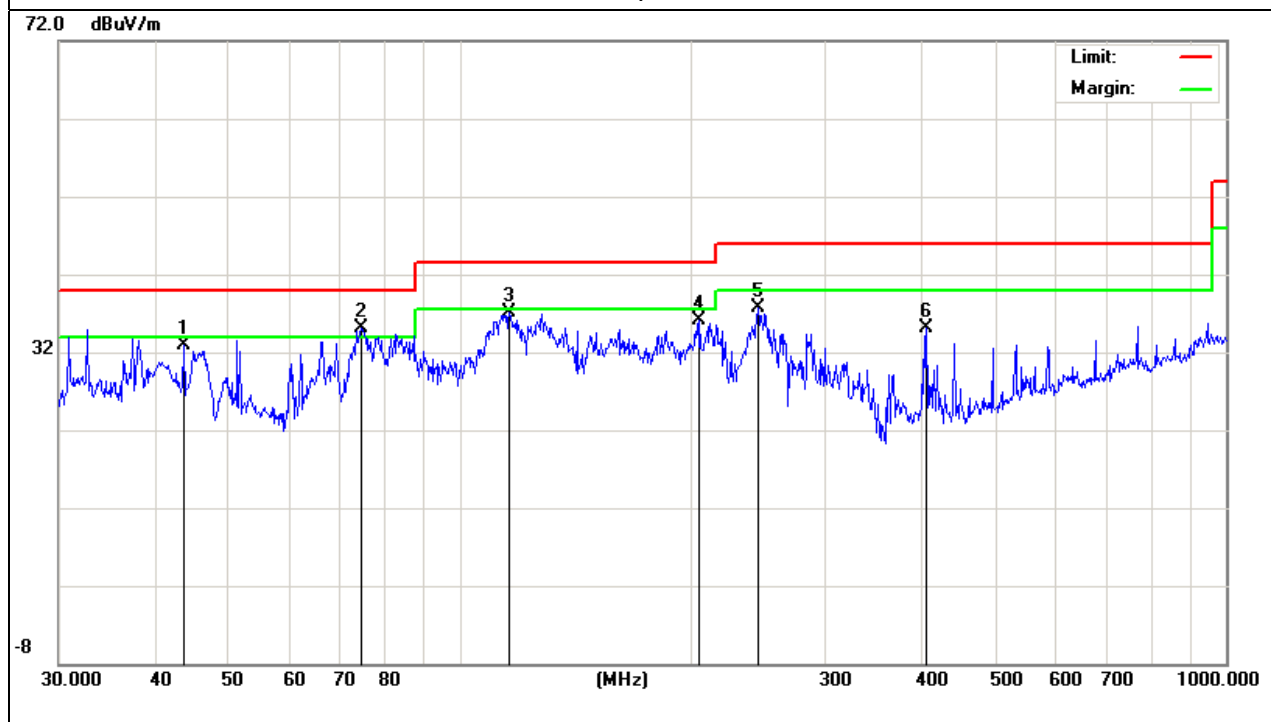


EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	TX	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
75.1822	29.44	6.78	36.22	40	-3.78	QP
118.6013	23.96	11.75	35.71	43.5	-7.79	QP
159.225	25.52	10.76	36.28	43.5	-7.22	QP
211.5264	27.99	9.36	37.35	43.5	-6.15	QP
246.8148	24.98	12.57	37.55	46	-8.45	QP
408.946	23.15	17.61	40.76	46	-5.24	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

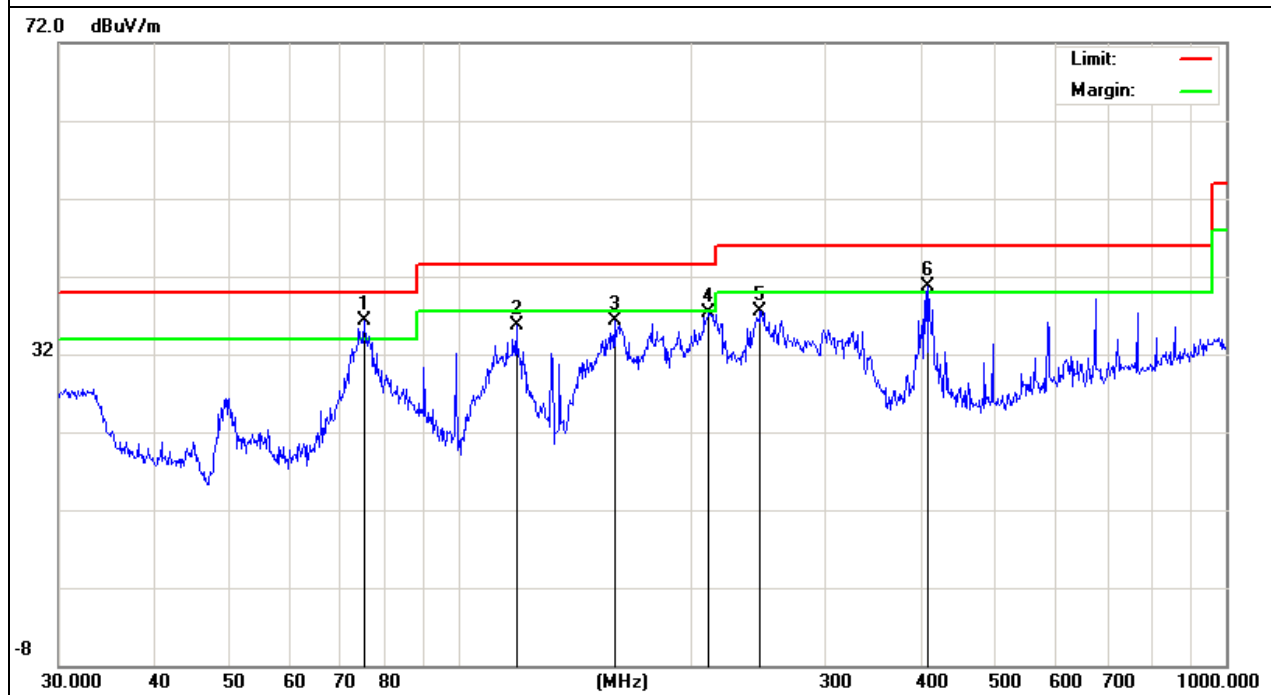


3.2.8 TEST RESULTS (ABOVE 1000 MHZ)

EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH1 (802.11b Mode)/2412	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824.157	51.03	10.44	61.47	74	-12.53	peak
4824.157	33.39	10.44	43.83	54	-10.17	AVG
7236.133	44.26	12.39	56.65	74	-17.35	peak
7236.133	29.16	12.39	41.55	54	-12.45	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

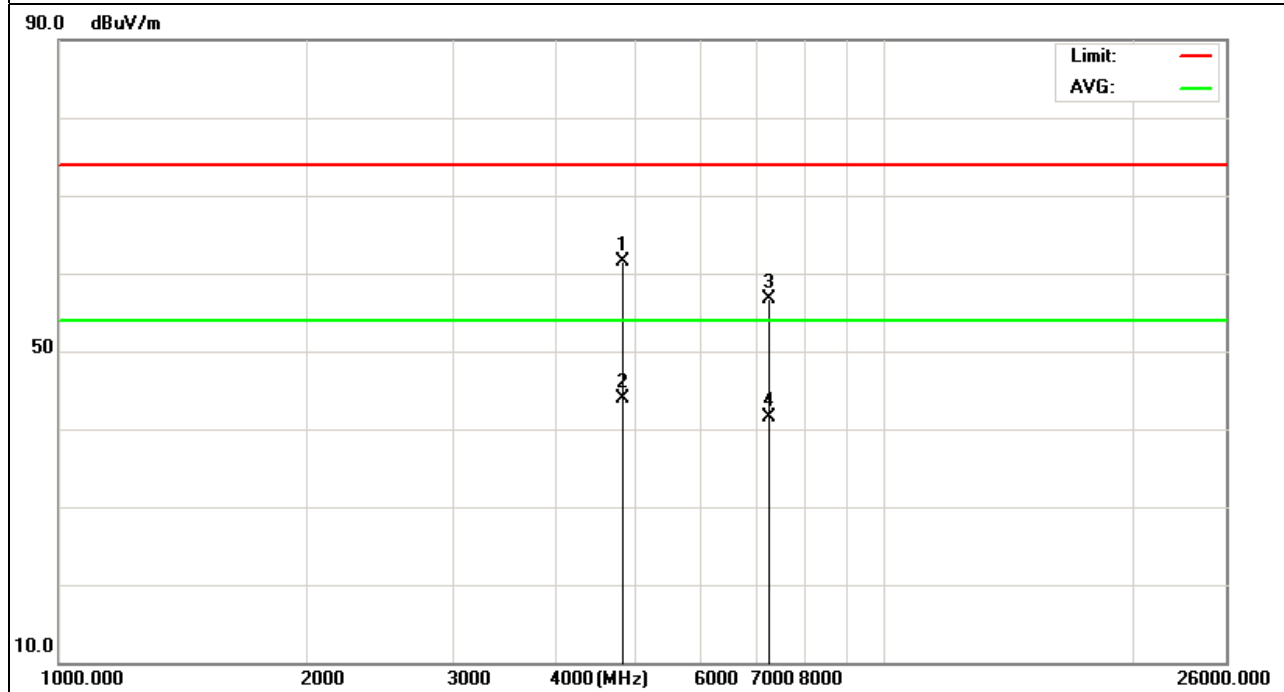


EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH1 (802.11b Mode)/2412	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874.145	50.92	10.4	61.32	74	-12.68	peak
4874.145	32.19	10.4	42.59	54	-11.41	AVG
7311.174	42.88	12.75	55.63	74	-18.37	peak
7311.174	27.77	12.75	40.52	54	-13.48	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

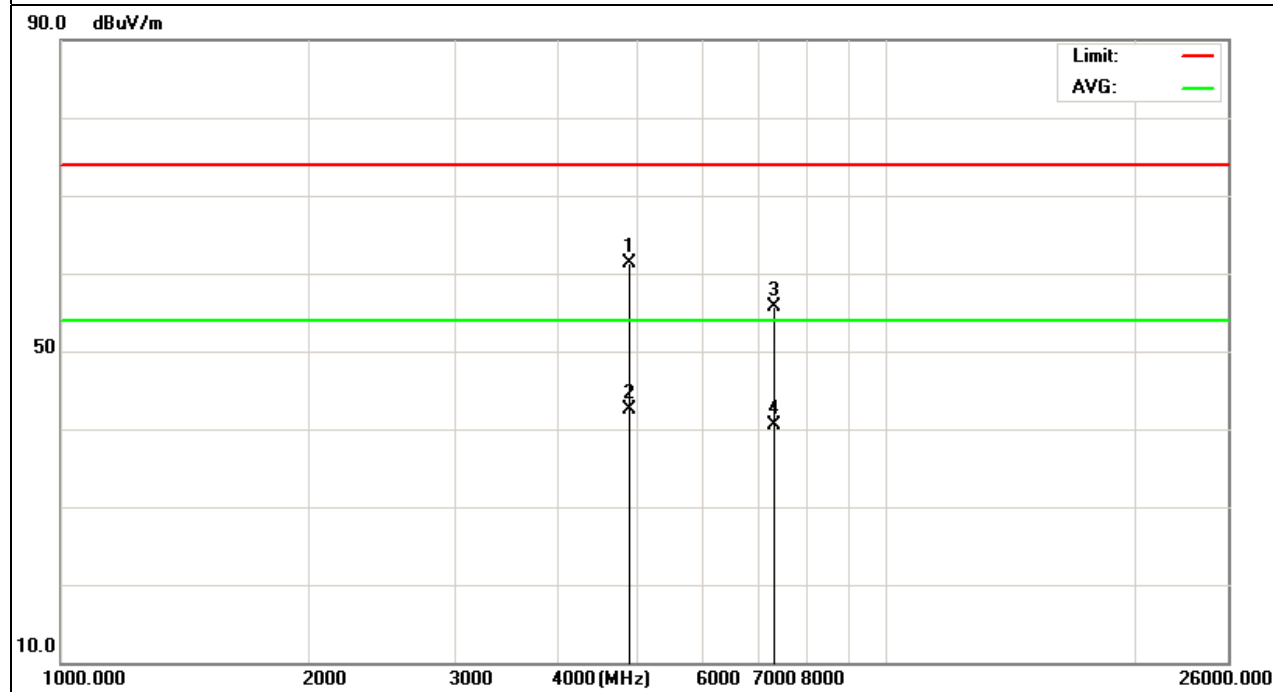


EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH6 (802.11b Mode)/2437	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874.127	50.11	10.4	60.51	74	-13.49	peak
4874.127	33.02	10.4	43.42	54	-10.58	AVG
7311.13	42.55	12.75	55.3	74	-18.7	peak
7311.13	29.73	12.75	42.48	54	-11.52	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

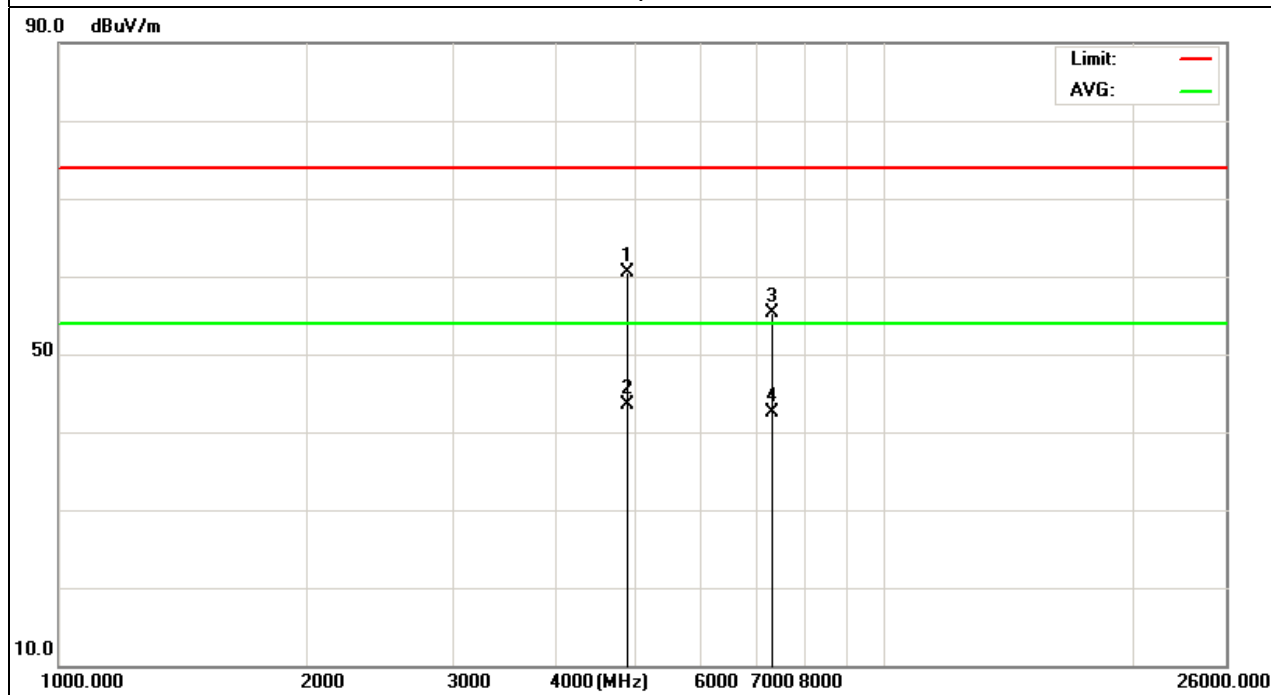


EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH6 (802.11b Mode)/2437	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924.165	51.95	10.39	62.34	74	-11.66	peak
4934.165	33.08	10.44	43.52	54	-10.48	AVG
7386.121	42.67	12.68	55.35	74	-18.65	peak
7386.121	28.79	12.68	41.47	54	-12.53	AVG

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- No emission detected above 18GHz

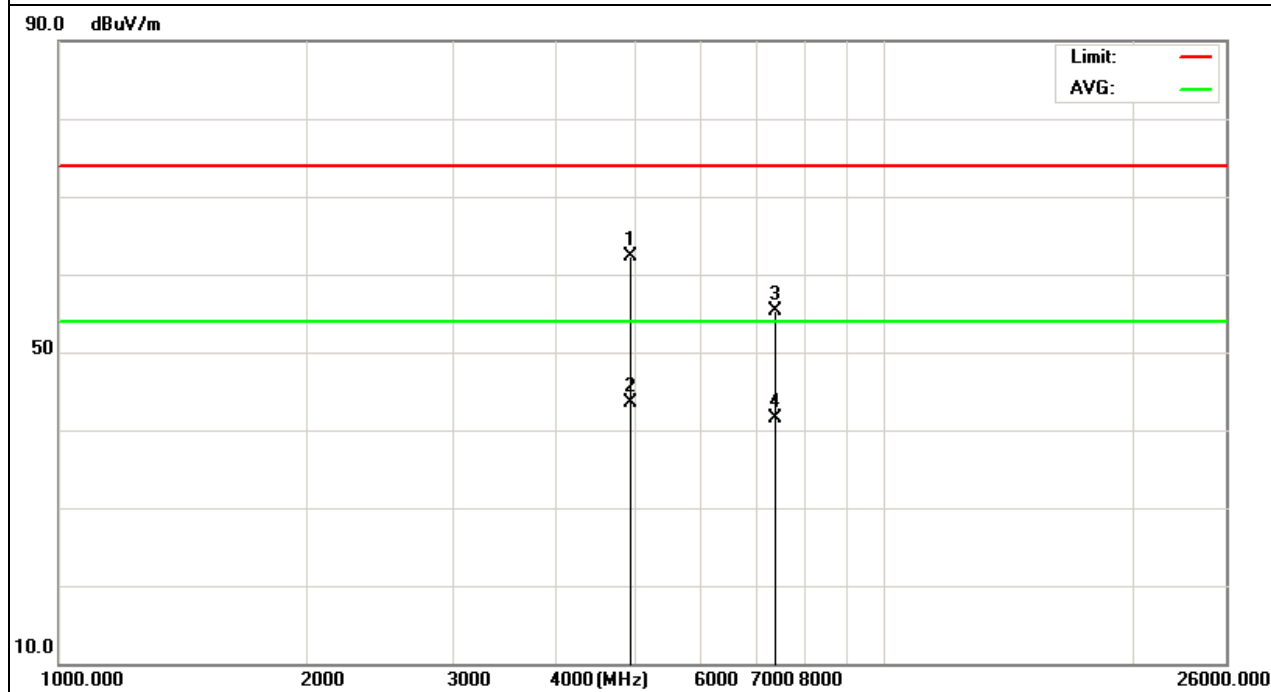


EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH11 (802.11b Mode)/2462	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924.169	50.98	10.39	61.37	74	-12.63	peak
4924.169	32.89	10.39	43.28	54	-10.72	AVG
7386.146	42.63	12.68	55.31	74	-18.69	peak
7386.146	28.5	12.68	41.18	54	-12.82	AVG

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- No emission detected above 18GHz

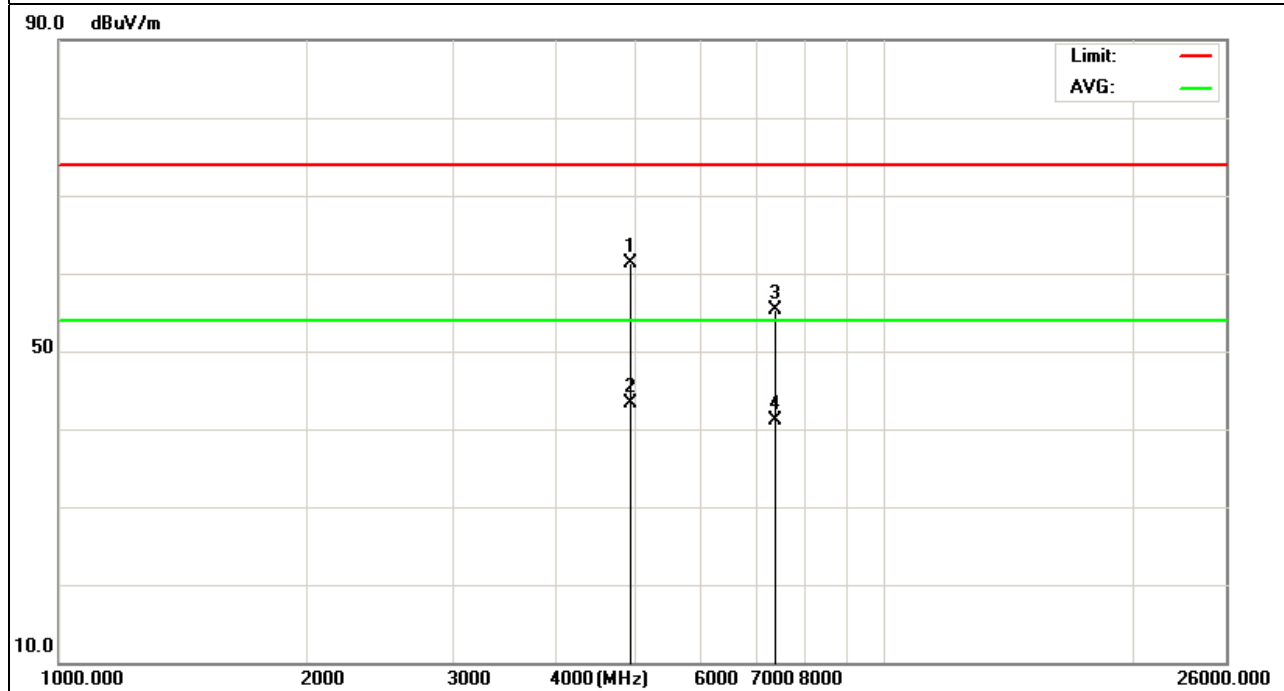


EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH11 (802.11b Mode)/2462	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924.12	51.96	10.39	62.35	74	-11.65	peak
4924.12	32.07	10.39	42.46	54	-11.54	AVG
7386.155	42.99	12.68	55.67	74	-18.33	peak
7386.155	27.85	12.68	40.53	54	-13.47	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

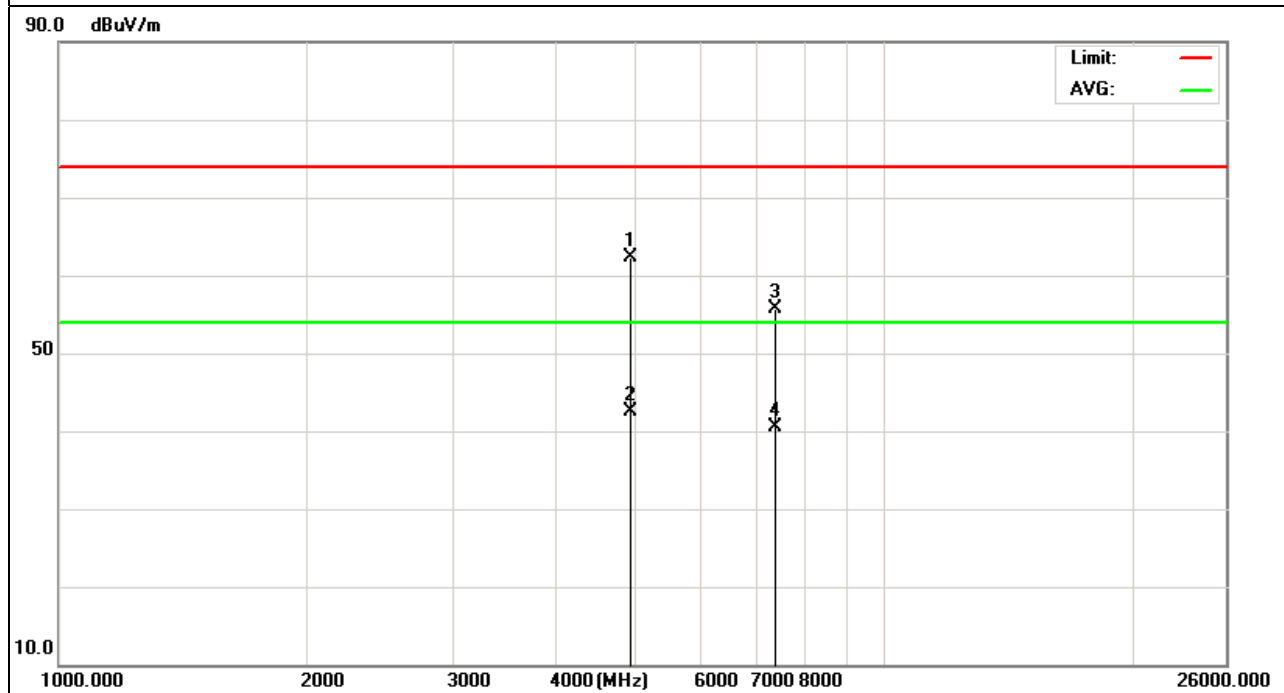


EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH1 (802.11g Mode)/2412	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824.166	47.16	10.44	57.6	74	-16.4	peak
4824.166	31.05	10.44	41.49	54	-12.51	AVG
7236.138	40.96	12.39	53.35	74	-20.65	peak
7236.138	26.07	12.39	38.46	54	-15.54	AVG

Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier.

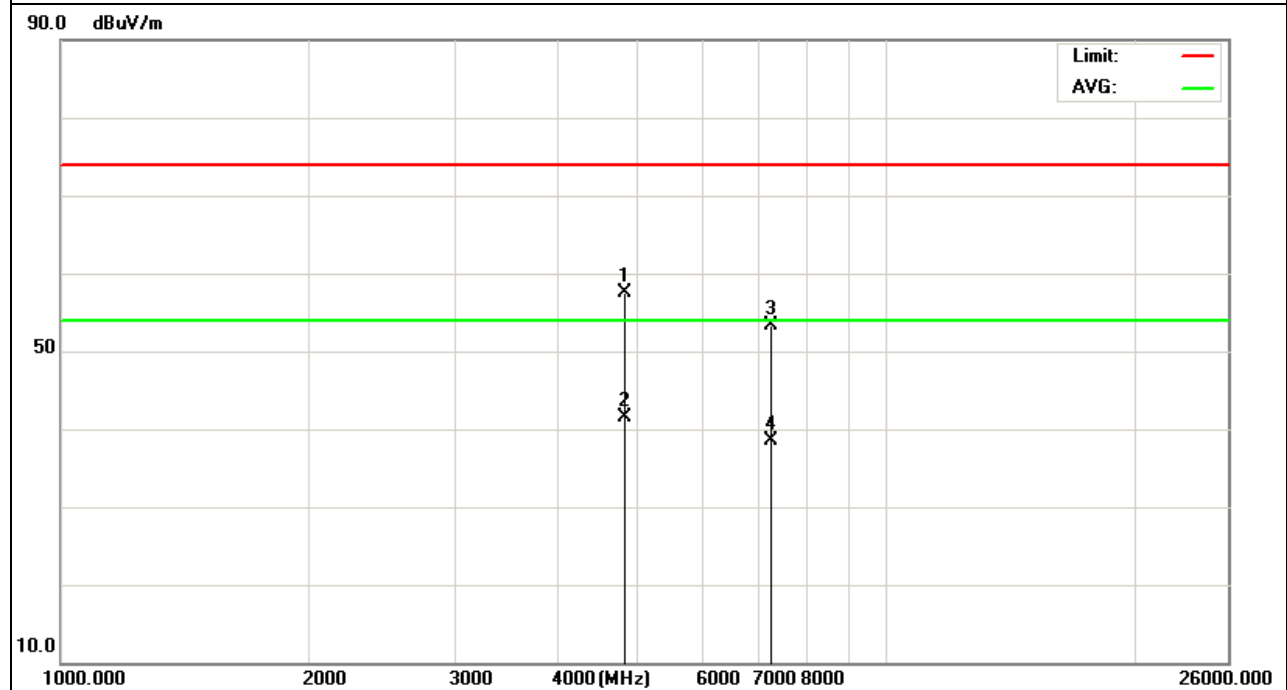

EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH1 (802.11g Mode)/2412	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824.158	48.13	10.44	58.57	74	-15.43	peak
4824.158	32.18	10.44	42.62	54	-11.38	AVG
7236.136	41.99	12.39	54.38	74	-19.62	peak
7236.136	27.97	12.39	40.36	54	-13.64	AVG


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

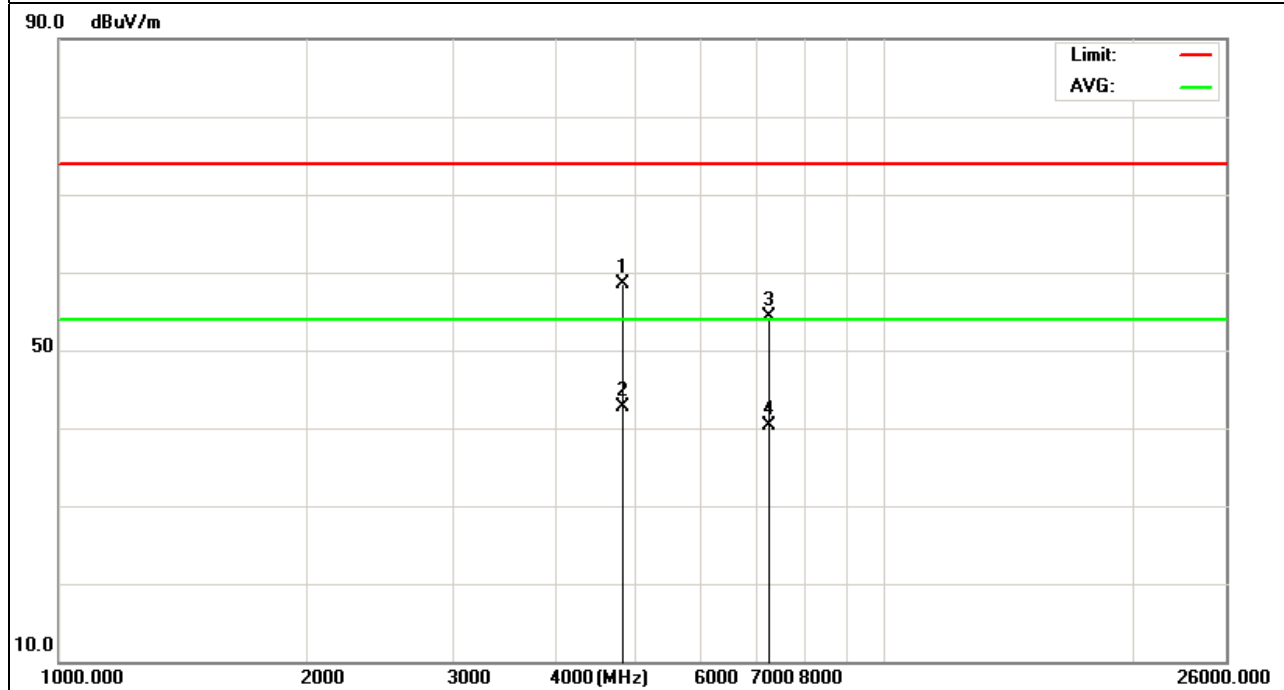

EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH6 (802.11g Mode)/2437	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874.132	48.04	10.4	58.44	74	-15.56	peak
4874.132	31.47	10.4	41.87	54	-12.13	AVG
7311.177	41.73	12.75	54.48	74	-19.52	peak
7311.177	27.01	12.75	39.76	54	-14.24	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

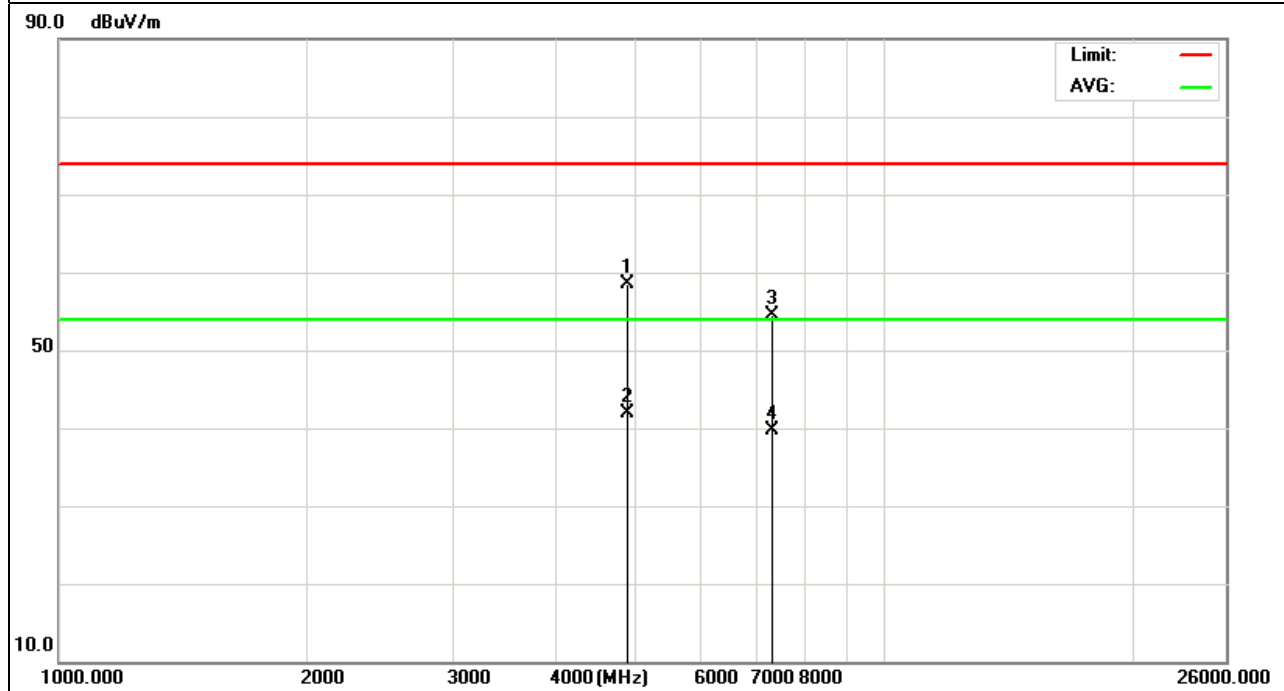


EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH6 (802.11g Mode)/2437	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874.153	48.19	10.4	58.59	74	-15.41	peak
4874.153	32.07	10.4	42.47	54	-11.53	AVG
7311.114	42.68	12.75	55.43	74	-18.57	peak
7311.114	27.92	12.75	40.67	54	-13.33	AVG

Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier.

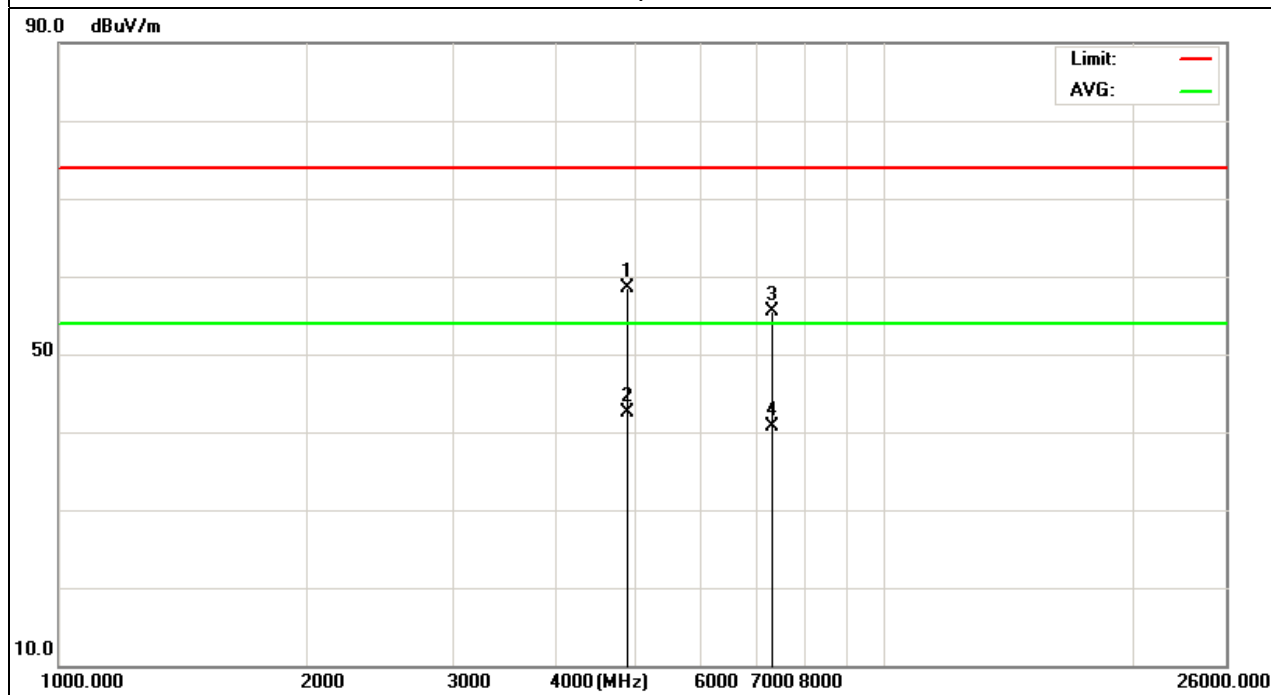

EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH11 (802.11g Mode)/2462	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924.123	48.17	10.39	58.56	74	-15.44	peak
4924.123	33.02	10.39	43.41	54	-10.59	AVG
7386.131	42.55	12.68	55.23	74	-18.77	peak
7386.131	28.02	12.68	40.7	54	-13.3	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

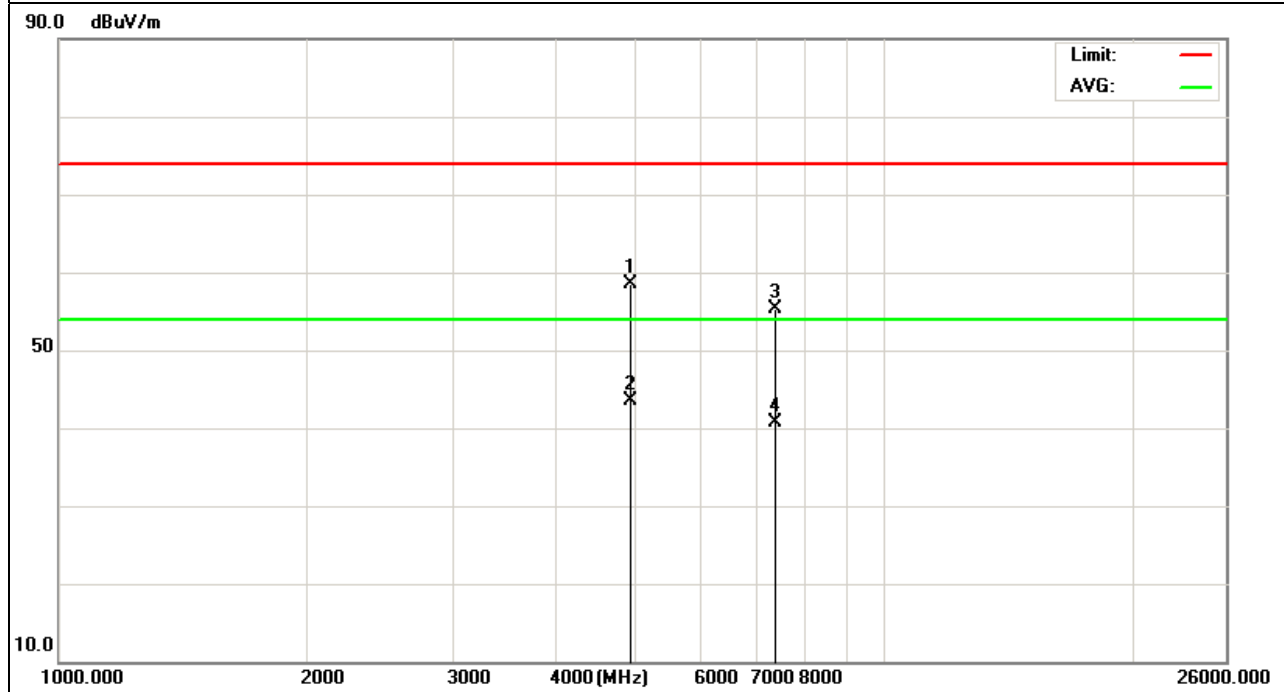


EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH11(802.11g Mode)/2462	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924.146	47.13	10.39	57.52	74	-16.48	peak
4924.146	31.96	10.39	42.35	54	-11.65	AVG
7386.125	41.98	12.68	54.66	74	-19.34	peak
7386.125	27.85	12.68	40.53	54	-13.47	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

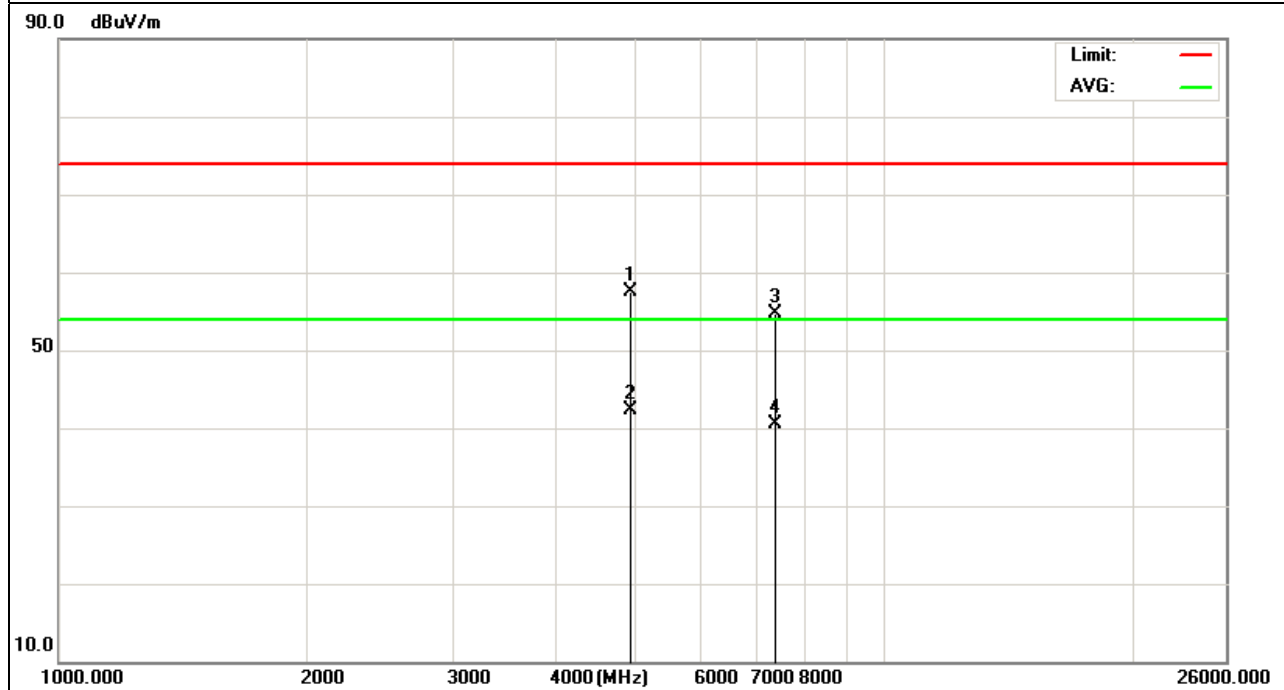


EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH1(802.11n Mode)	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824.161	49.04	10.44	59.48	74	-14.52	peak
4824.161	32.99	10.44	43.43	54	-10.57	AVG
7236.135	41.37	12.39	53.76	74	-20.24	peak
7236.135	29.29	12.39	41.68	54	-12.32	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

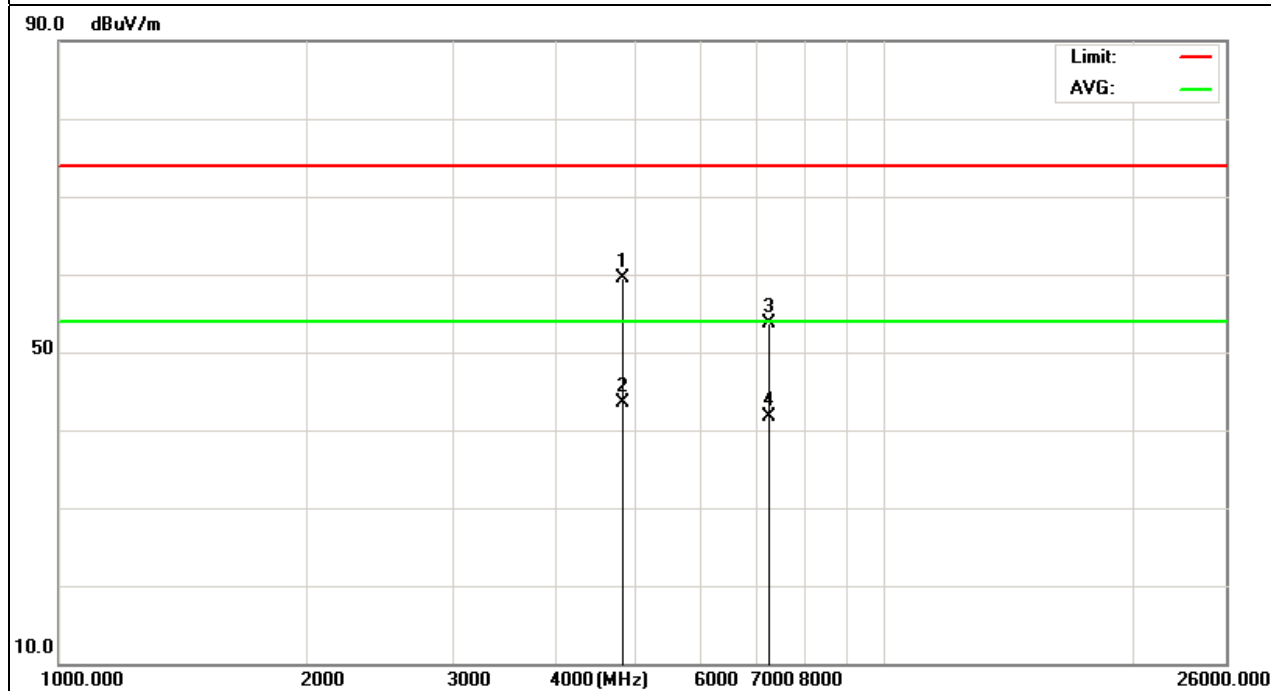


EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH1(802.11n Mode)	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824.147	48.22	10.44	58.66	74	-15.34	peak
4824.147	31.91	10.44	42.35	54	-11.65	AVG
7236.133	42.08	12.39	54.47	74	-19.53	peak
7236.133	28	12.39	40.39	54	-13.61	AVG

Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier.

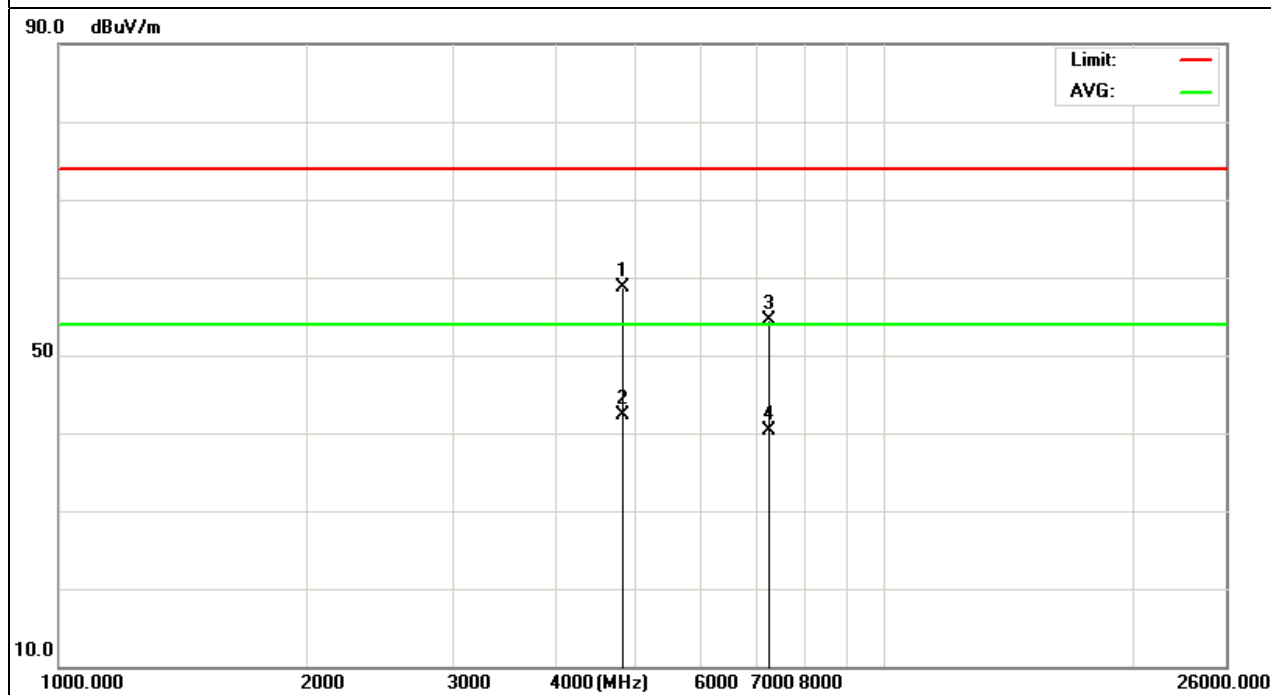

EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH6(802.11n Mode)	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874.143	48.24	10.4	58.64	74	-15.36	peak
4874.143	31.05	10.4	41.45	54	-12.55	AVG
7311.165	41.6	12.75	54.35	74	-19.65	peak
7311.165	26.78	12.75	39.53	54	-14.47	AVG


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

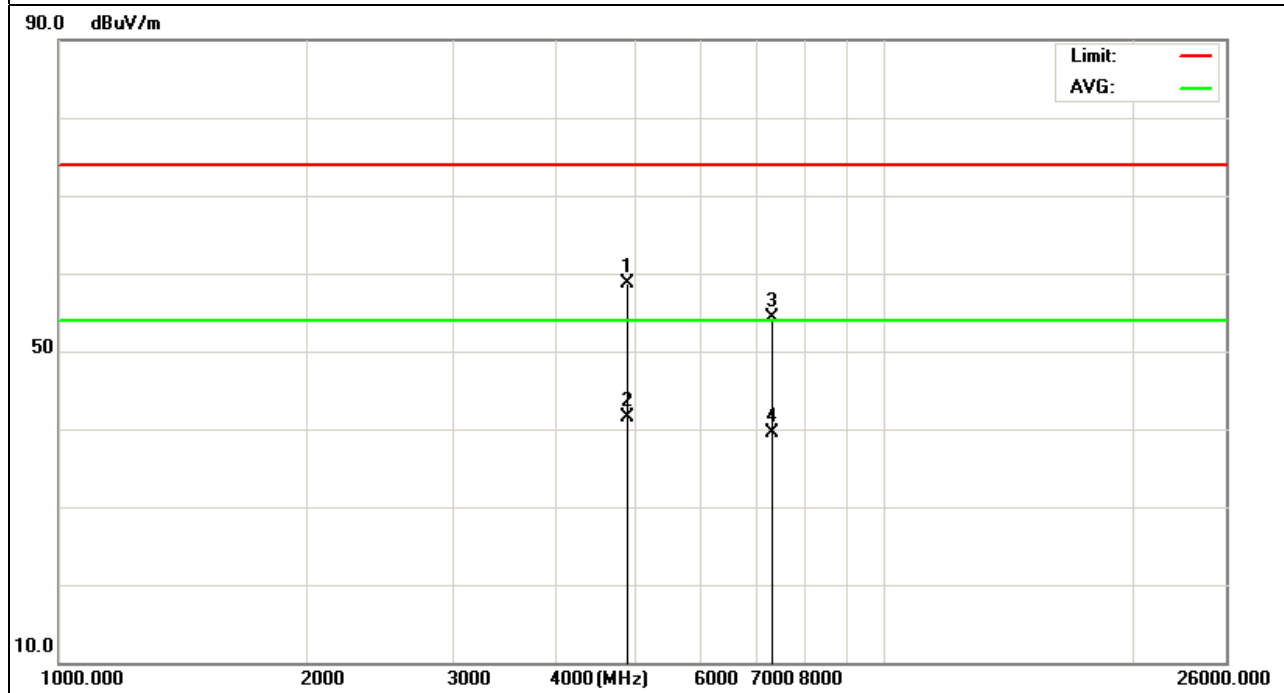

EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH6(802.11n Mode)	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.144	47.75	10.4	58.15	74	-15.85	peak
4874.144	31.17	10.4	41.57	54	-12.43	AVG
7311.015	41.62	12.75	54.37	74	-19.63	peak
7311.152	27.71	12.75	40.46	54	-13.54	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

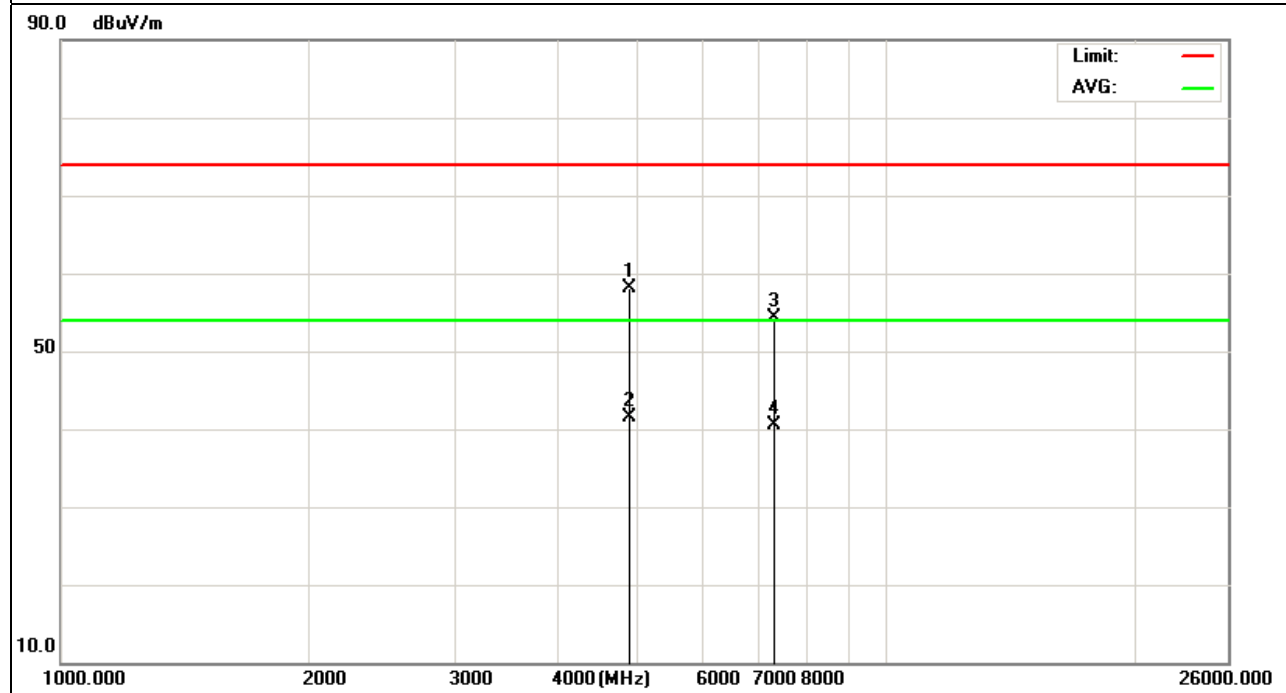


EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH11(802.11n Mode)	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924.124	48.96	10.39	59.35	74	-14.65	peak
4924.124	31.08	10.39	41.47	54	-12.53	AVG
7386.163	42.01	12.68	54.69	74	-19.31	peak
7386.163	26.58	12.68	39.26	54	-14.74	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

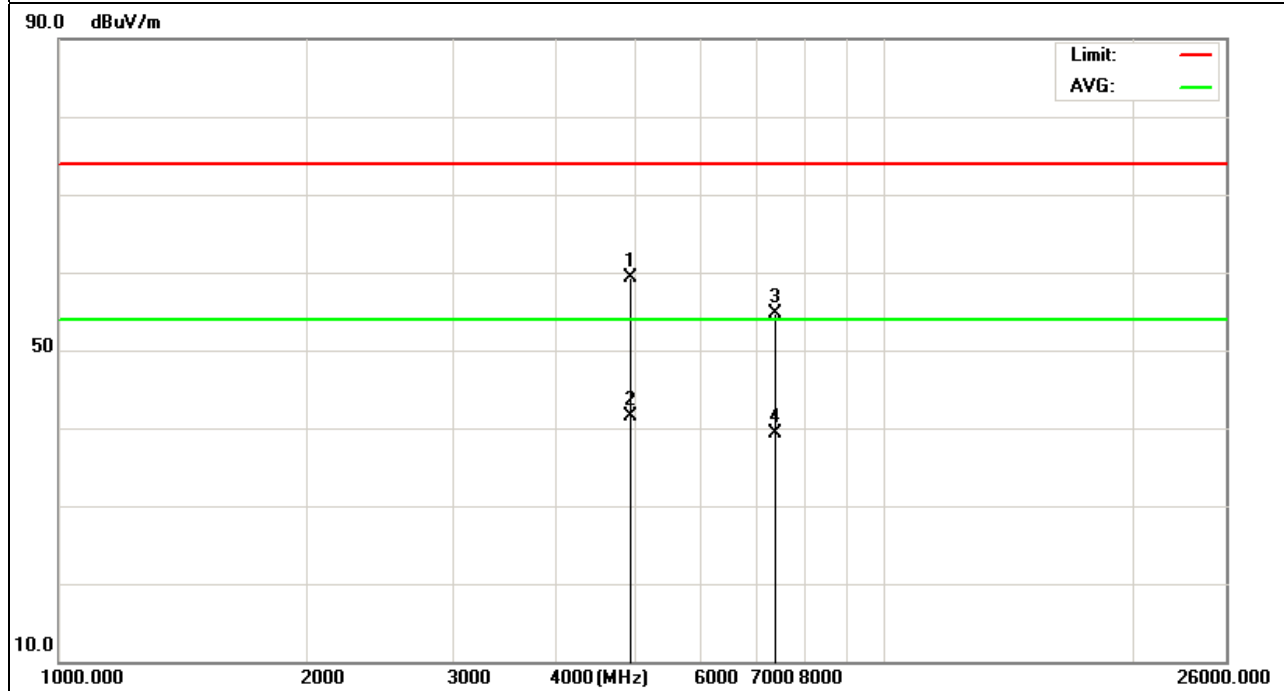


EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH11(802.11n Mode)	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924.131	49.22	10.39	59.61	74	-14.39	peak
4924.131	32.16	10.39	42.55	54	-11.45	AVG
7386.157	43.8	12.68	56.48	74	-17.52	peak
7386.157	28.18	12.68	40.86	54	-13.14	AVG

Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier.

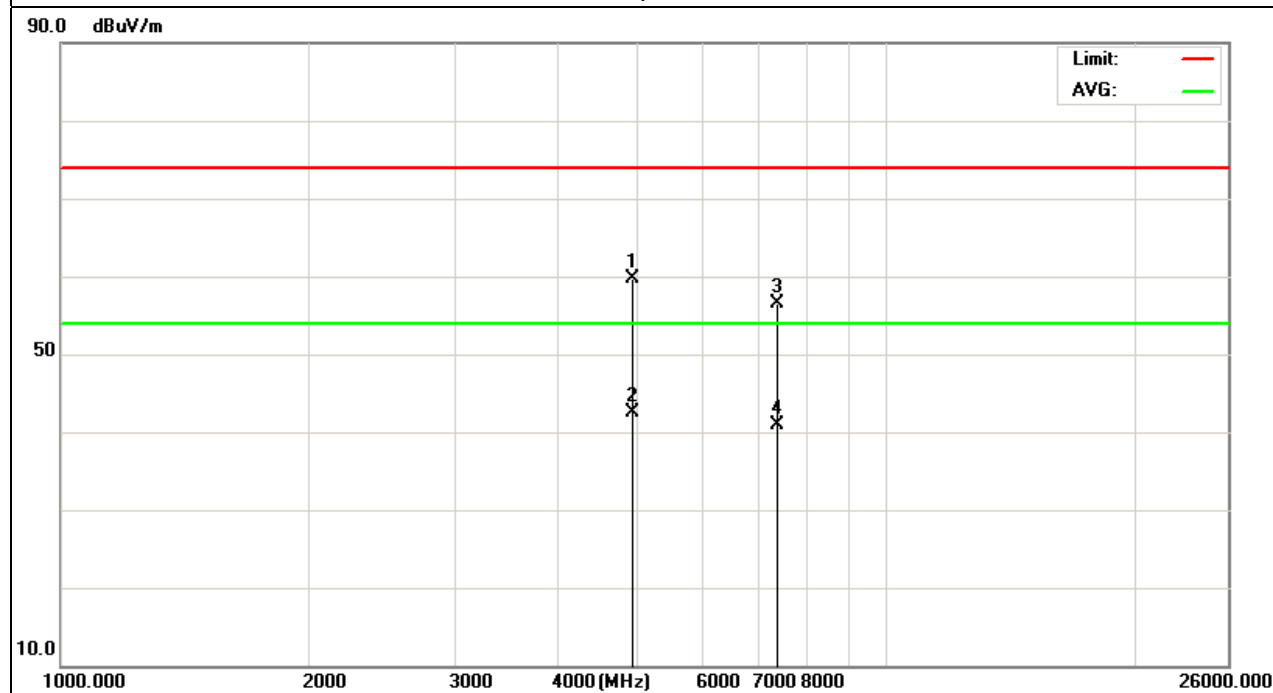

EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH1(802.11b Mode)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2397.6	84	-13	71	74	-3	peak
2397.6	59.18	-13	46.18	54	-7.82	AVG
2400	79.69	-12.99	66.7	74	-7.3	peak
2400	59.32	-12.99	46.33	54	-7.67	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

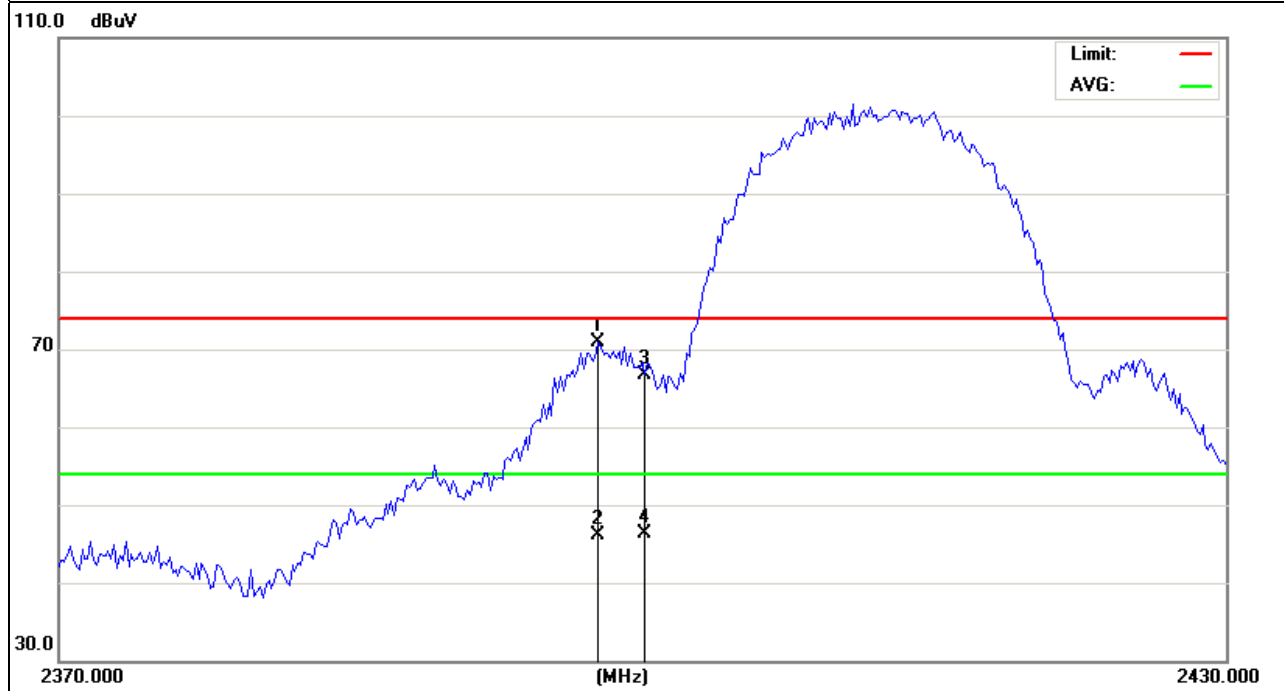


EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH1(802.11b Mode)	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2400	81.99	-12.99	69	74	-5	peak
2400	59.48	-12.99	46.49	54	-7.51	AVG

Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier.

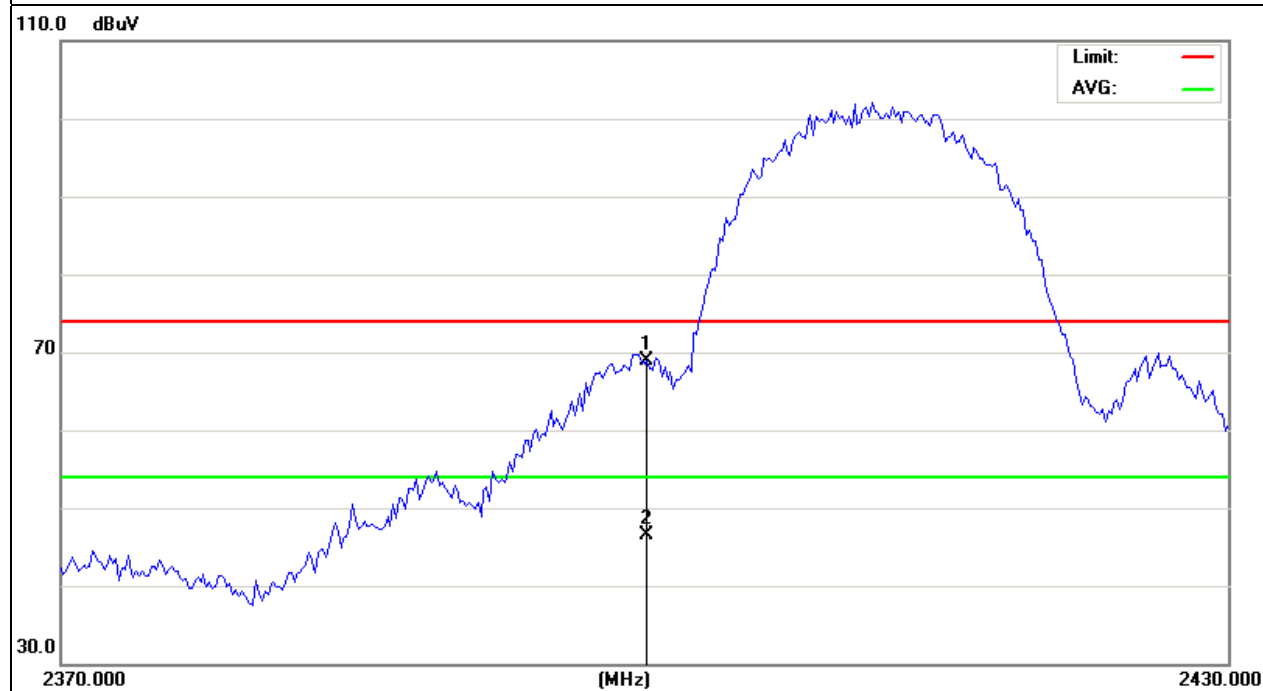

EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH11(802.11b Mode)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	60.68	-12.78	47.9	74	-26.1	peak


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

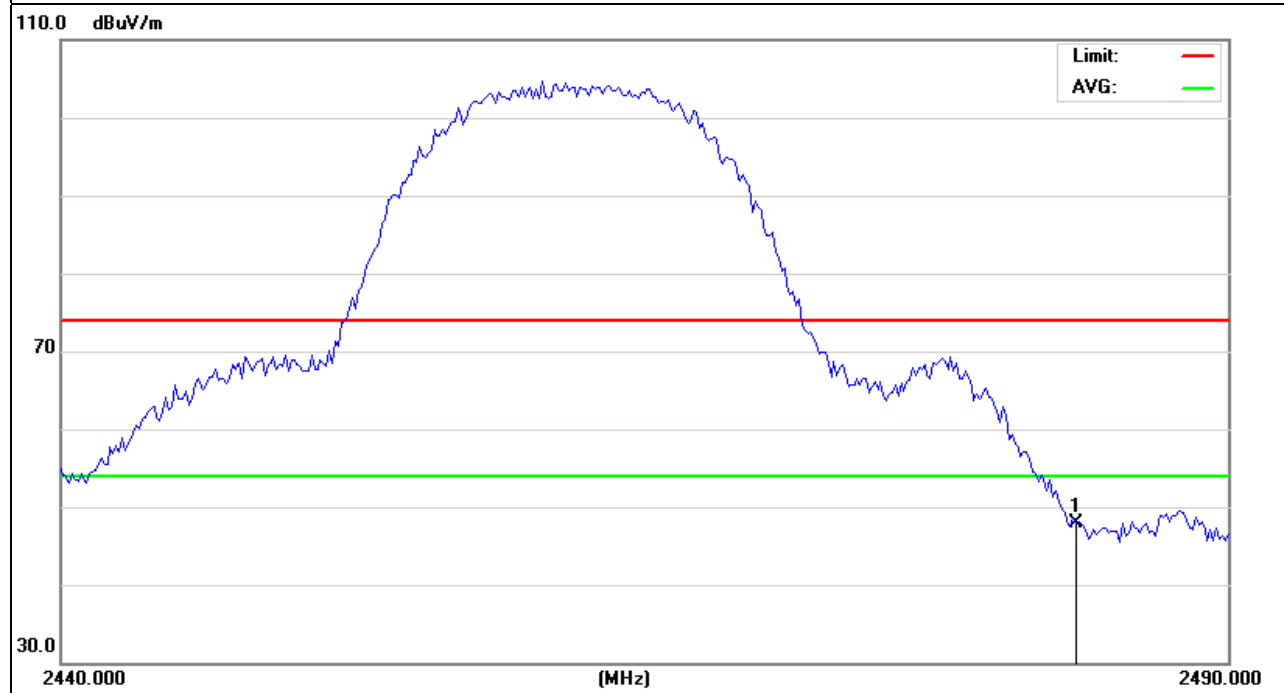

EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH11(802.11b Mode)	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	61.18	-12.78	48.4	74	-25.6	


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

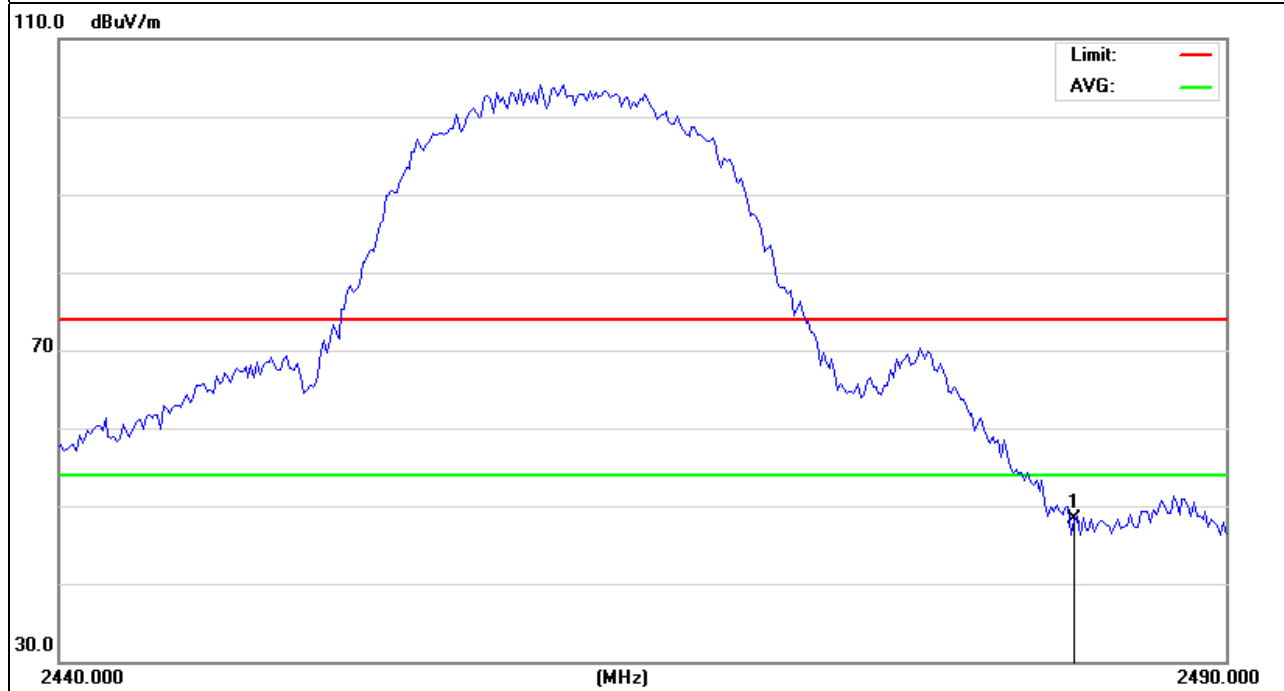

EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH1(802.11g Mode)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2400	78.32	-12.99	65.33	74	-8.67	peak
2400	56.27	-12.99	43.28	54	-10.72	AVG


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

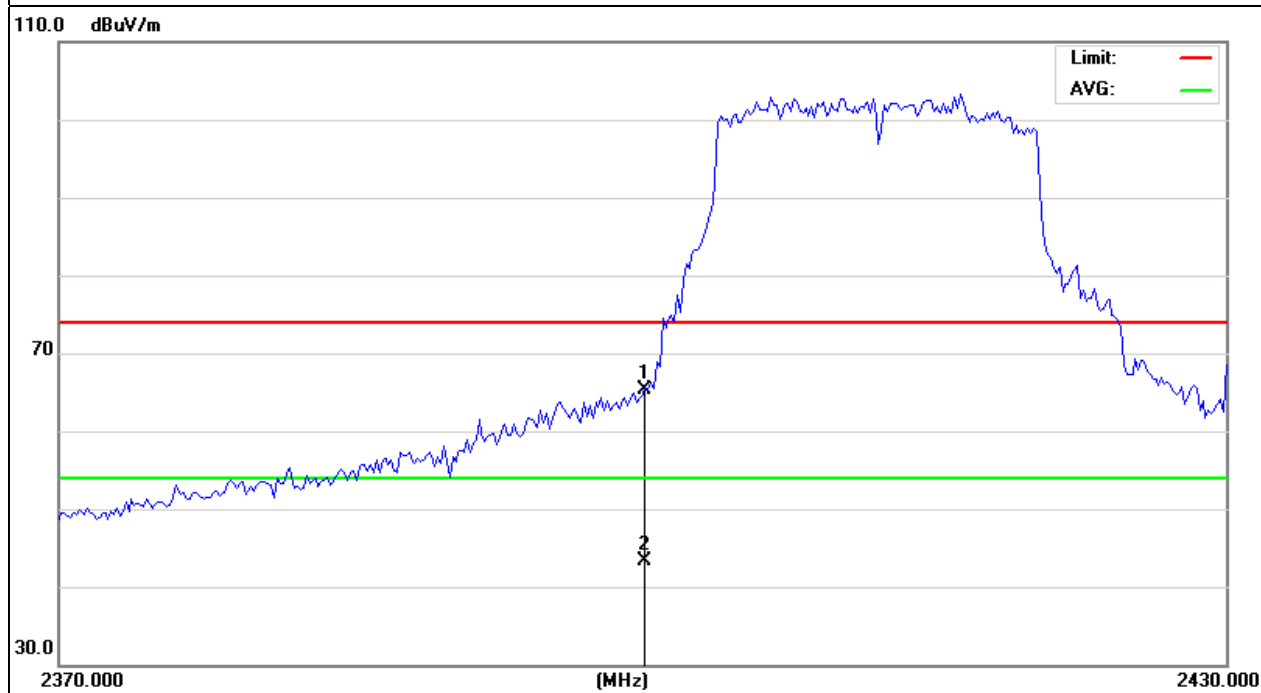

EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH1(802.11gMode)	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2400	82.59	-12.99	69.6	74	-4.4	peak
2400	59.37	-12.99	46.38	54	-7.62	AVG


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

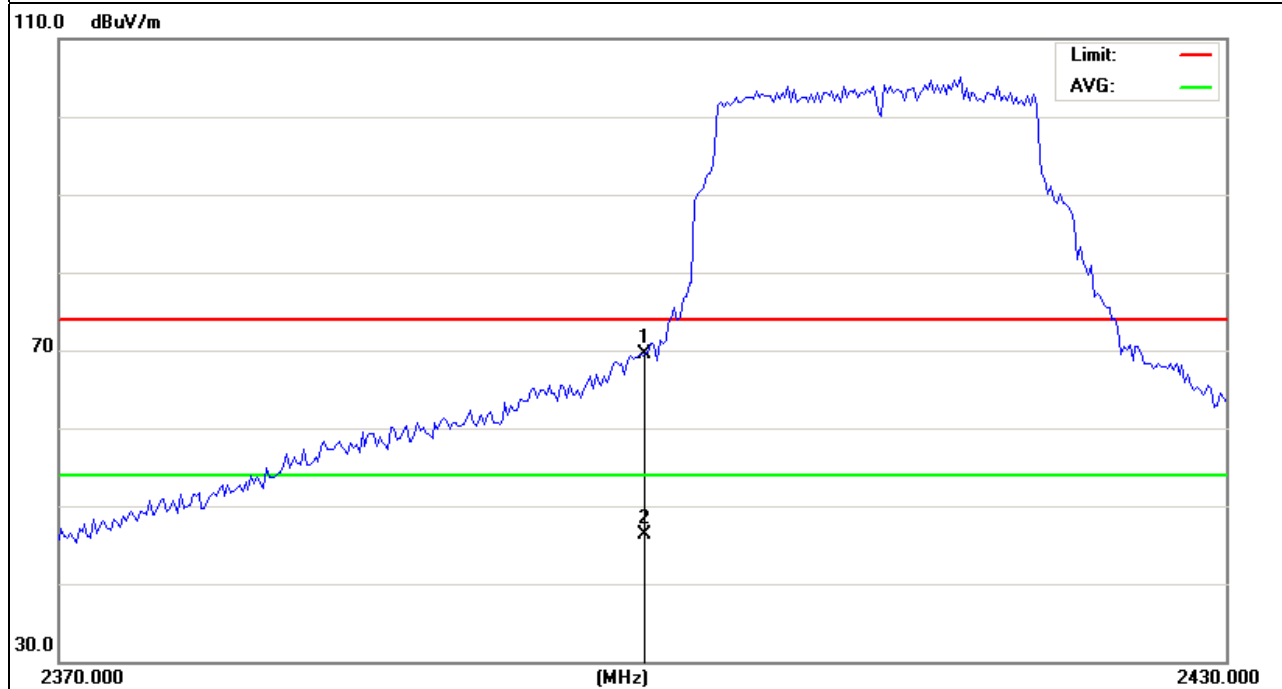

EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH11(802.11g Mode)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	63.68	-12.78	50.9	74	-23.1	peak

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

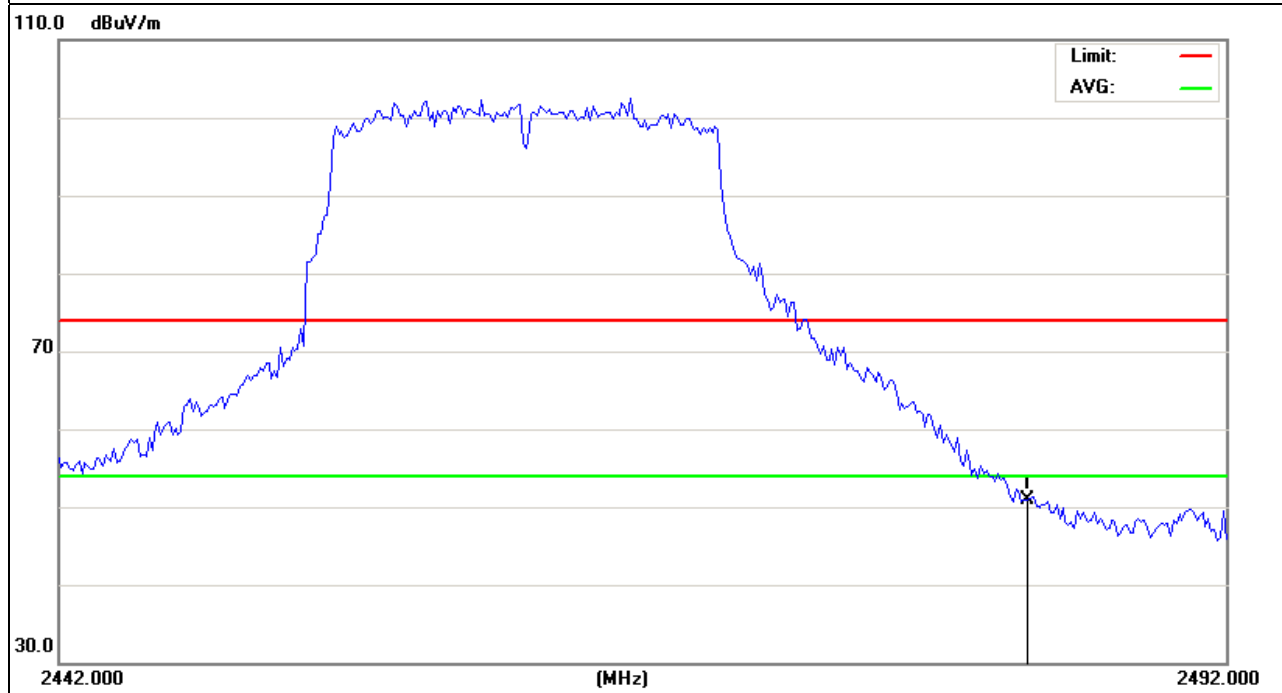


EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH11(802.11g Mode)	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	80.4	-12.78	67.62	74	-6.38	peak
2483.5	60.15	-12.78	47.37	54	-6.63	AVG

Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier.

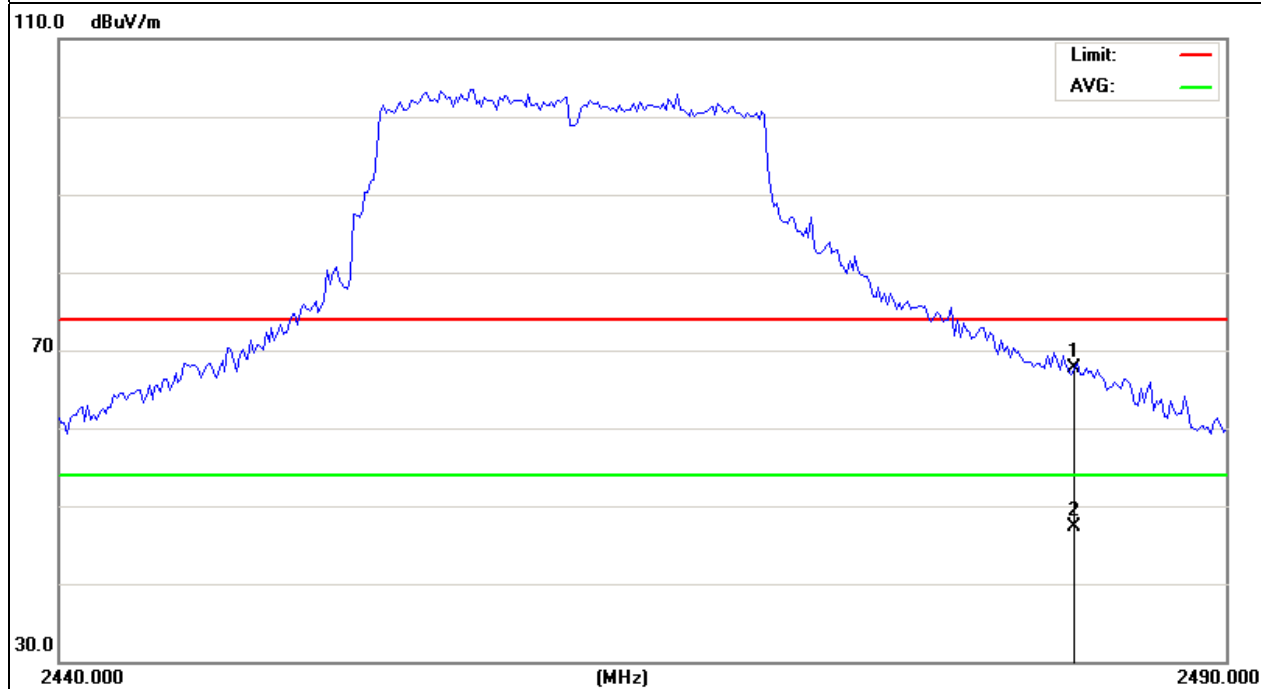

EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH1(802.11N Mode)/20MHz	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2400	85.29	-12.99	72.3	74	-1.7	peak
2400	61.84	-12.99	48.85	54	-5.15	AVG


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

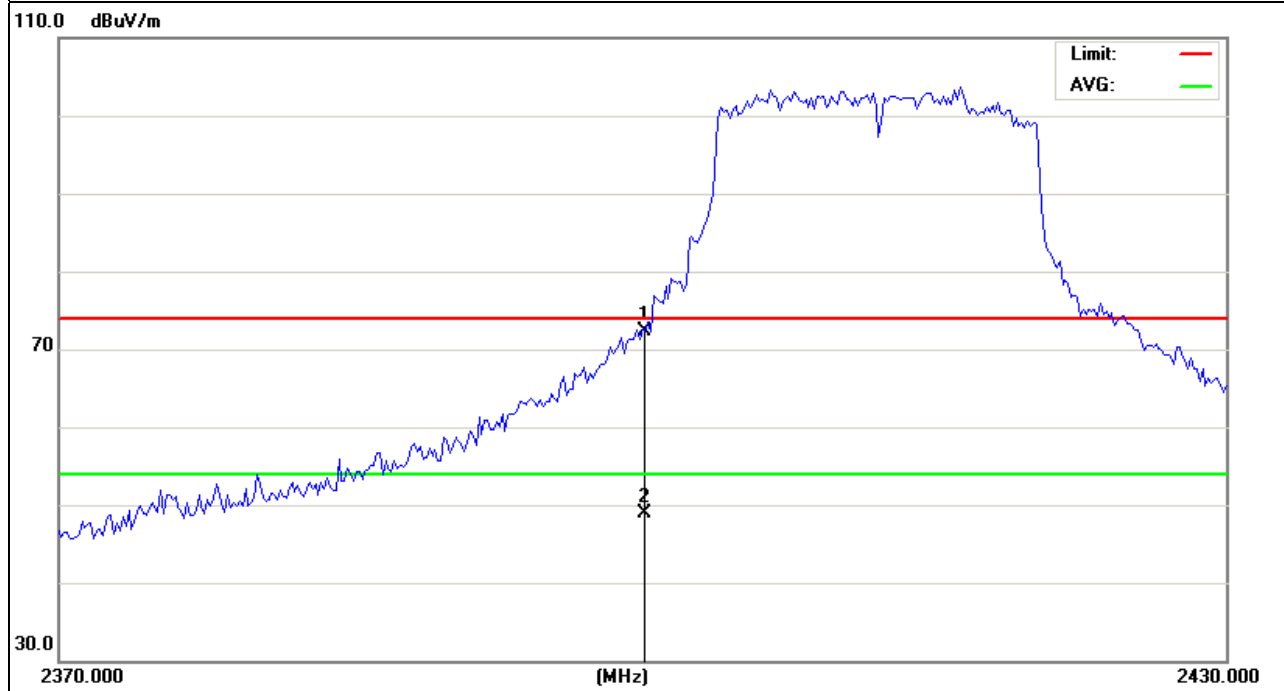

EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH1(802.11N Mode)/20M	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2400	79.59	-12.99	66.6	74	-7.4	peak
2400	55.54	-12.99	42.55	54	-11.45	AVG


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

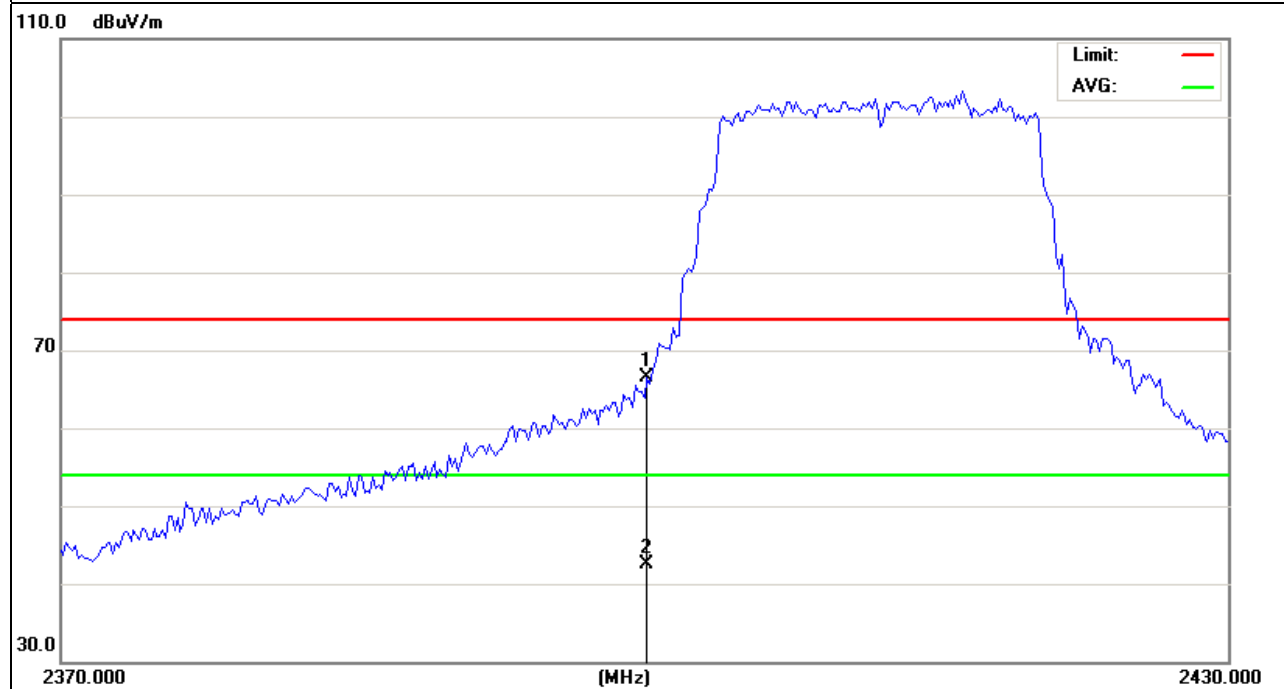

EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH11(802.11N Mode)/20MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	79.11	-12.78	66.33	74	-7.67	peak
2483.5	58.19	-12.78	45.41	54	-8.59	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

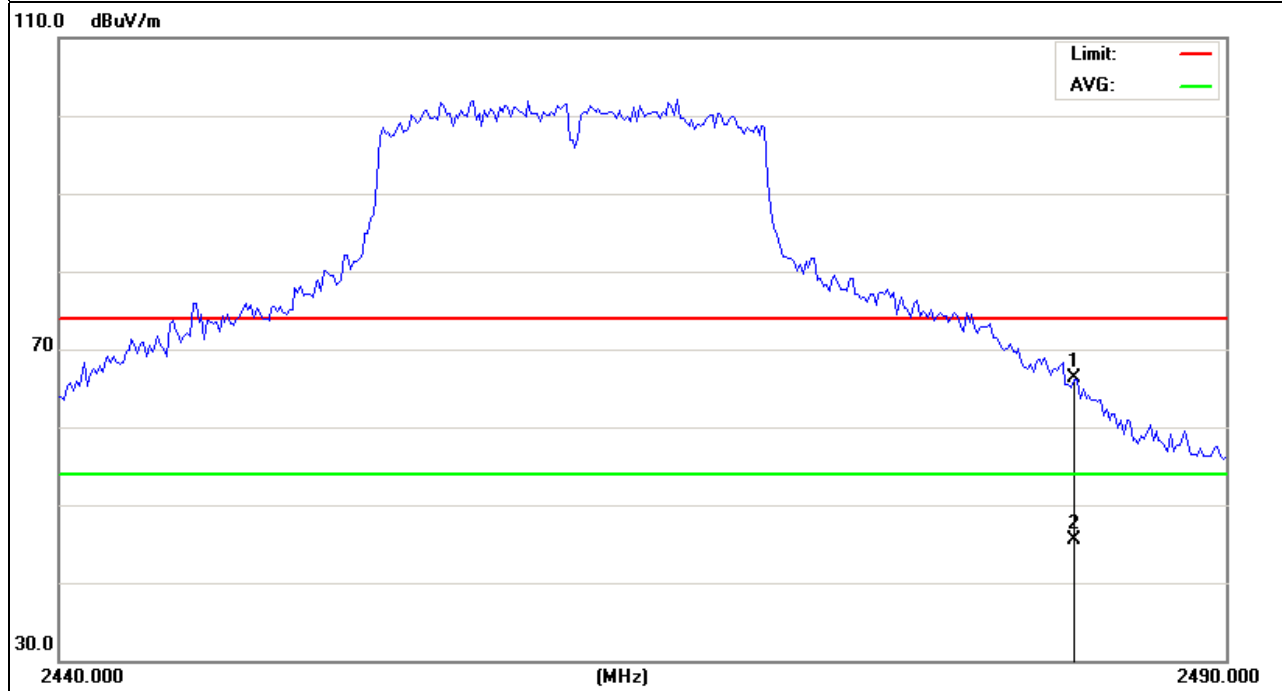


EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	CH11(802.11N Mode)	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	78.54	-12.78	65.76	74	-8.24	peak
2483.5	58.46	-12.78	45.68	54	-8.32	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

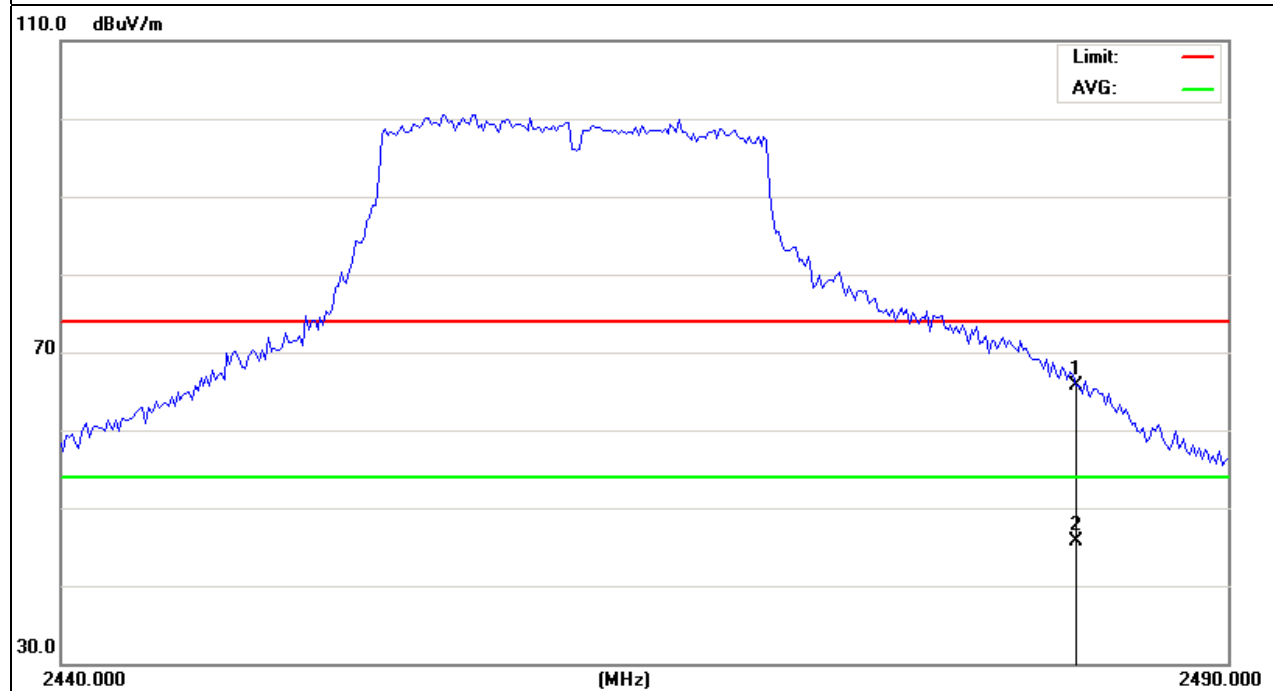

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

4.1.1 TEST PROCEDURE

1. The testing follows Measurement Procedure PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v01.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable. The path loss was compensated to the results for each measurement.
3. Record the measurement data derived from spectrum analyzer.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 KHz. Video bandwidth (VBW) >= 300 KHz In order to make an accurate measurement, set the span to 5-30% greater than Emission Bandwidth (EBW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
6. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3\text{ kHz}/100\text{ kHz}) = -15.2\text{ dB}$.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.


4.1.5 TEST RESULTS



EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1015 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	TX b Mode /CH01, CH06, CH11		

Frequency	Power Density (dBm)	PSD/ 3KHz (dBm)	Limit (dBm)	Result
2412 MHz	4.68	-10.52	8	PASS
2437 MHz	4.05	-11.15	8	PASS
2462 MHz	3.47	-11.73	8	PASS

Note:

BWCF = $10\log(3\text{ kHz}/100\text{ kHz}) = -15.2\text{ dB}$.

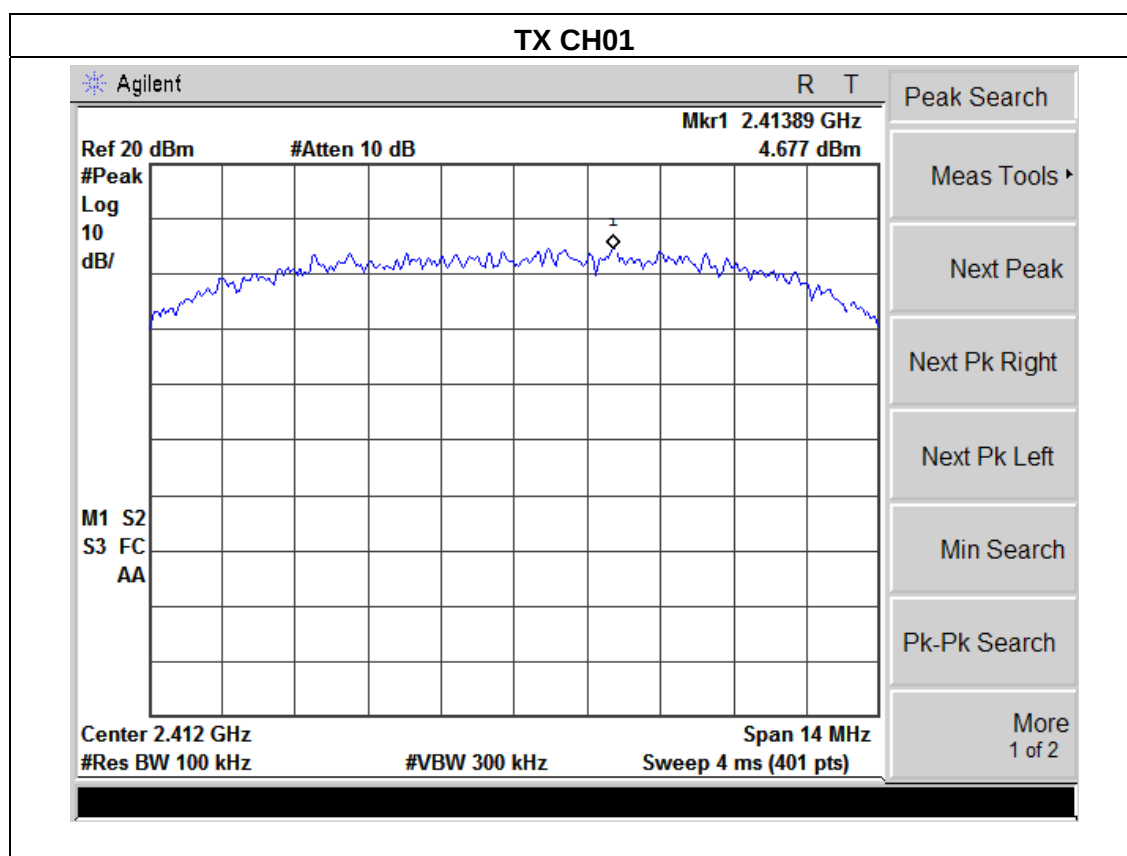

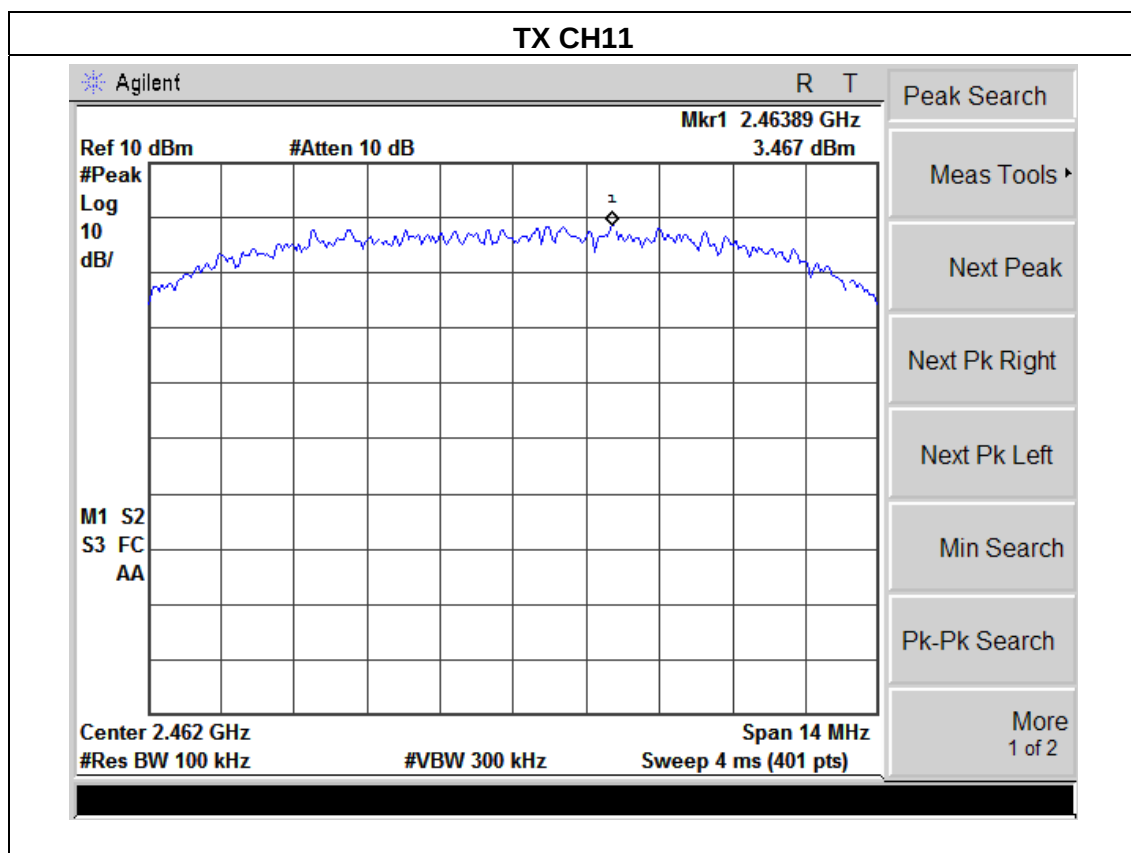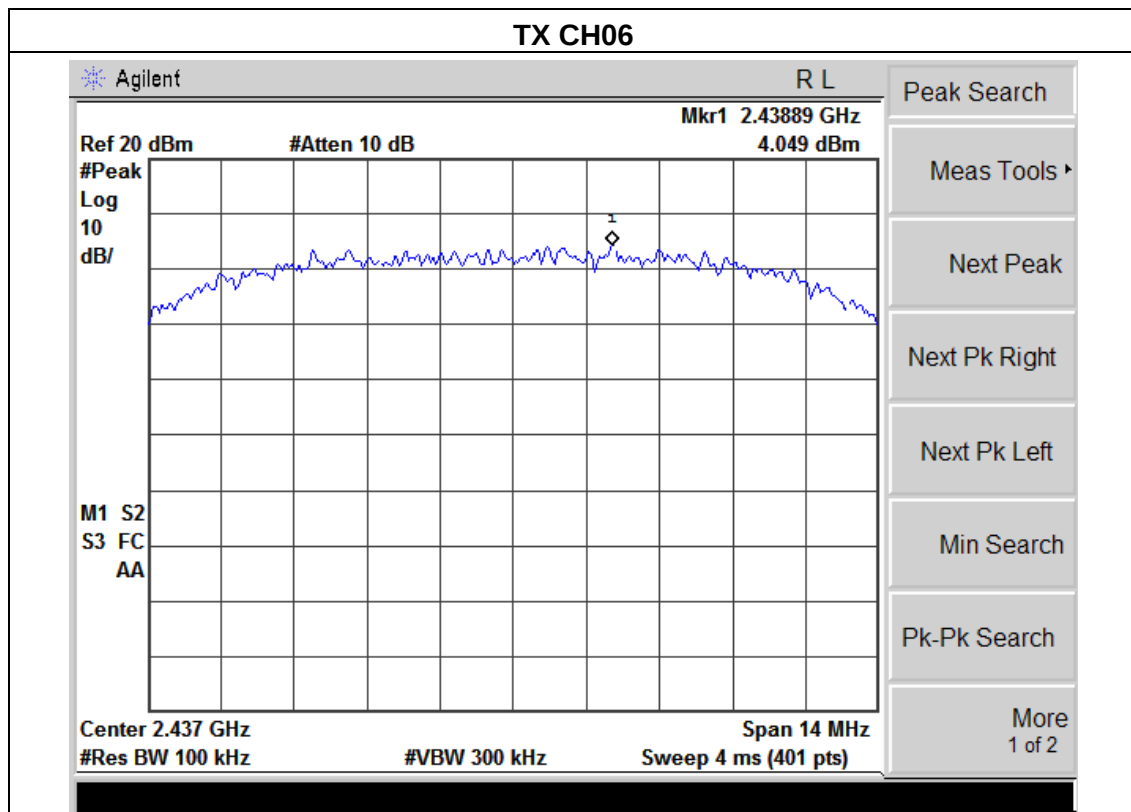




EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1015 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	TX g Mode /CH01, CH06, CH11		

Frequency	Power Density (dBm)	PSD/ 3KHz (dBm)	Limit (dBm)	Result
2412 MHz	3.19	-12.01	8	PASS
2437 MHz	3.65	-11.55	8	PASS
2462 MHz	3.19	-12.01	8	PASS

Note:

BWCF = $10\log(3\text{ kHz}/100\text{ kHz}) = -15.2\text{ dB}$.

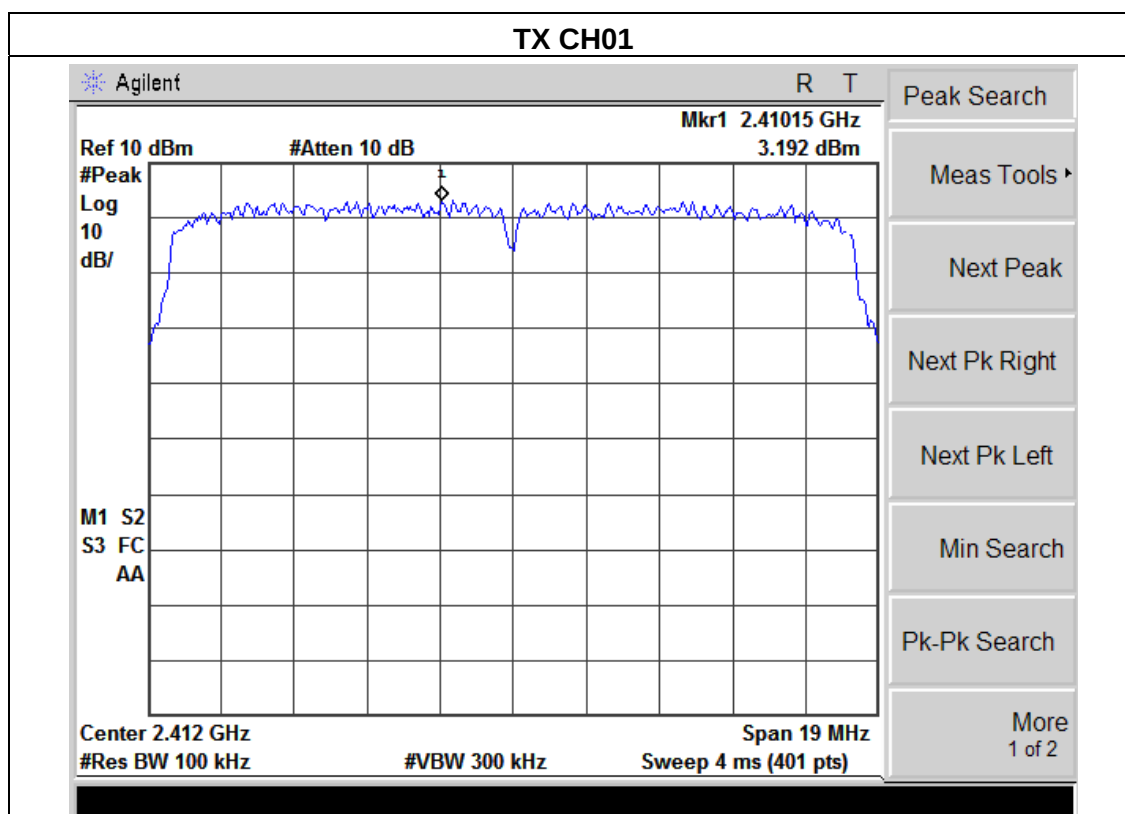

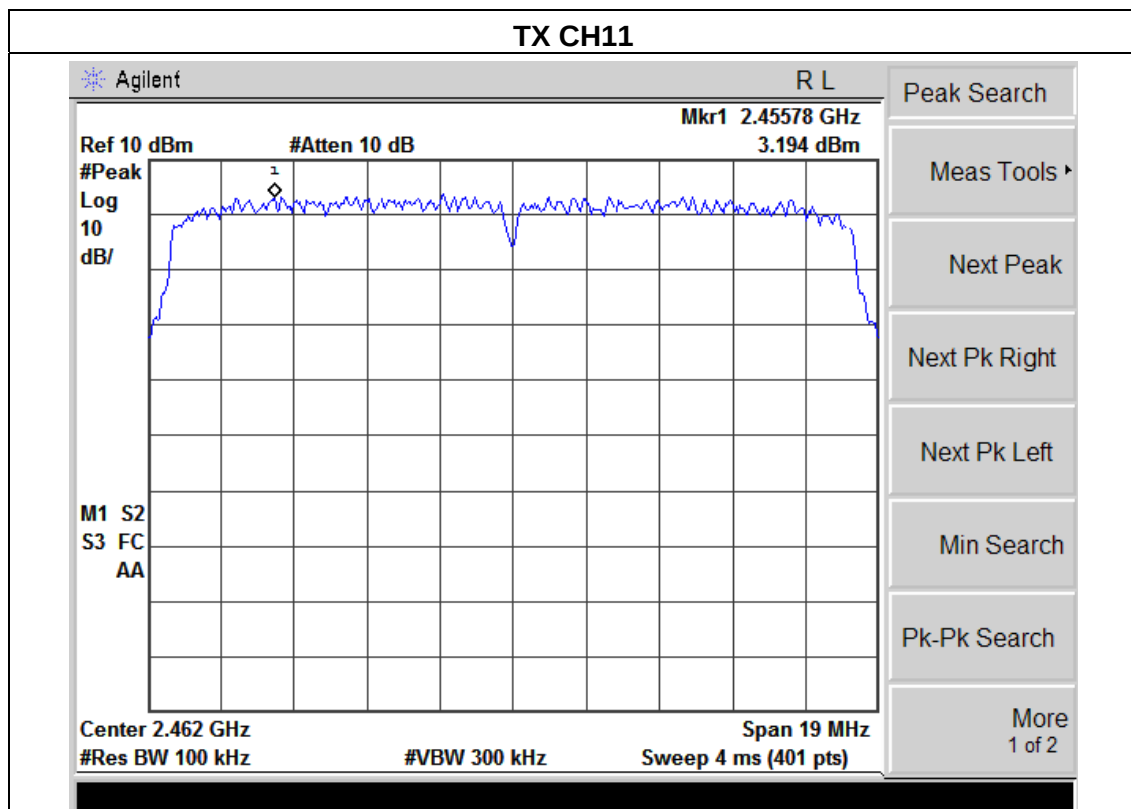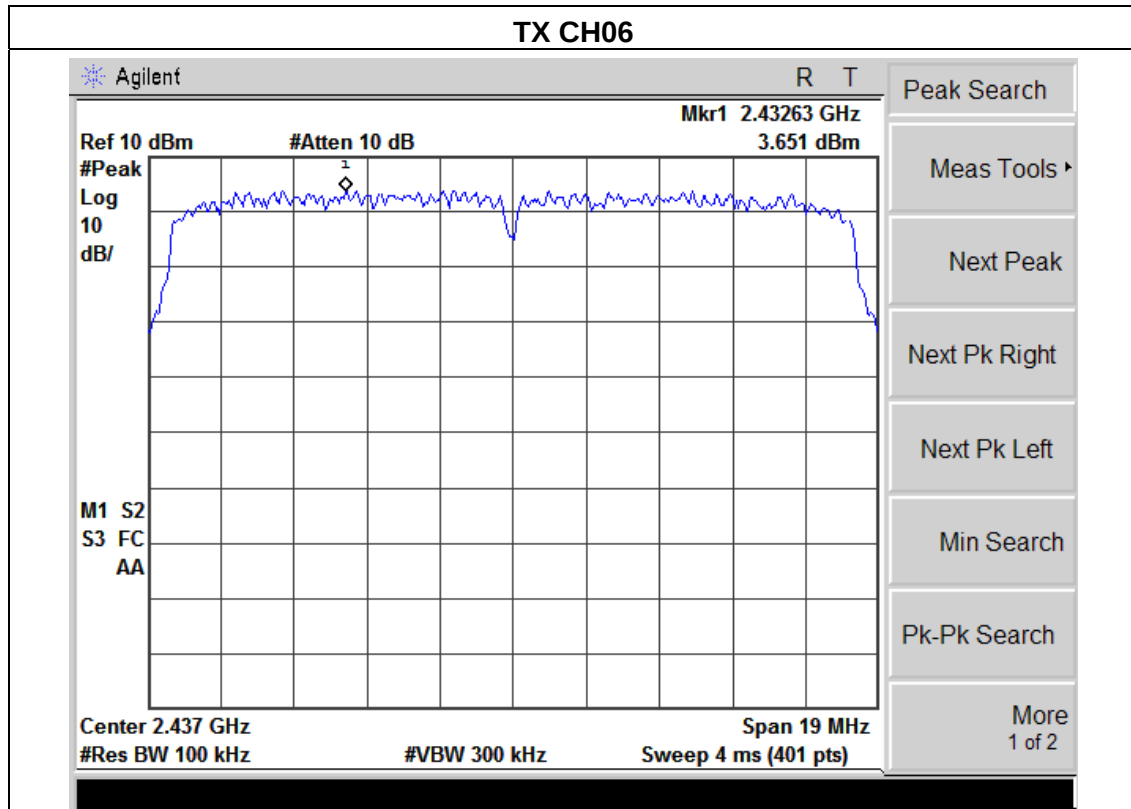




EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1015 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	TX n Mode /CH01, CH06, CH11		

Frequency	Power Density (dBm)	PSD/ 3KHz (dBm)	Limit (dBm)	Result
2412 MHz	1.05	-14.15	8	PASS
2437 MHz	1.03	-14.17	8	PASS
2462 MHz	1.03	-14.17	8	PASS

Note:

BWCF = $10\log(3\text{ kHz}/100\text{ kHz}) = -15.2\text{ dB}$.

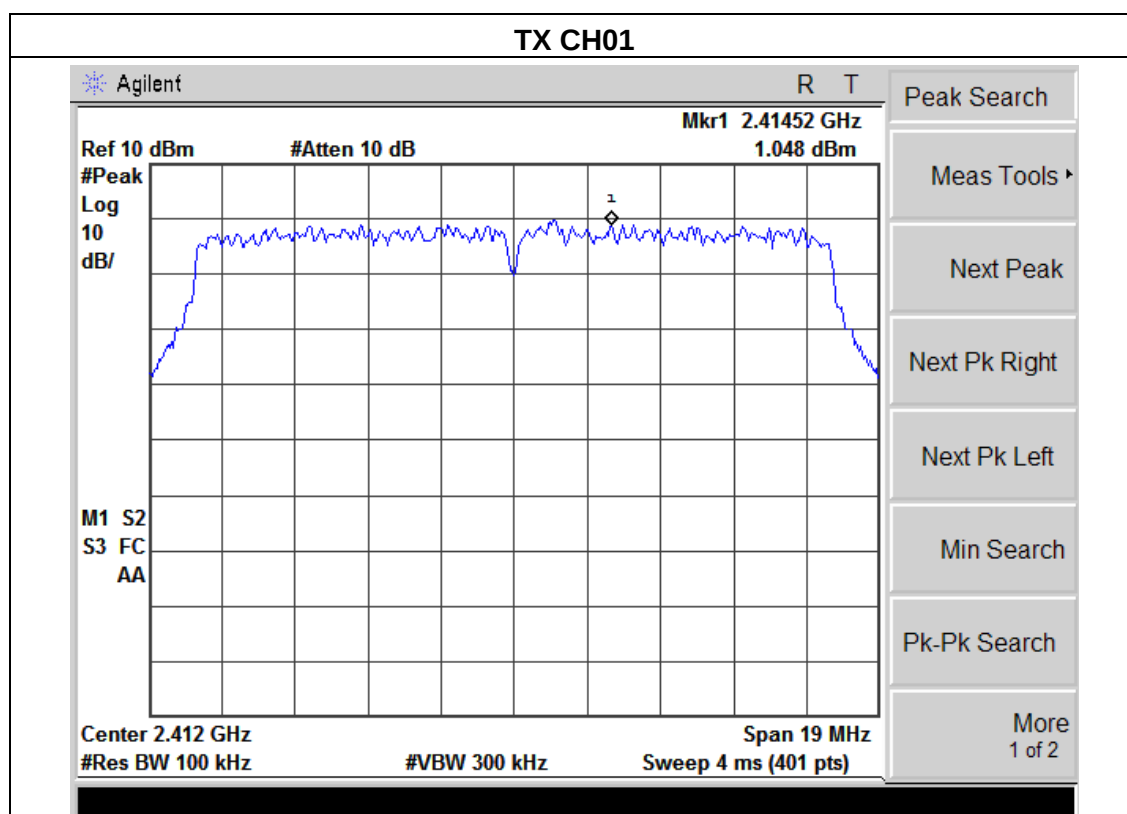

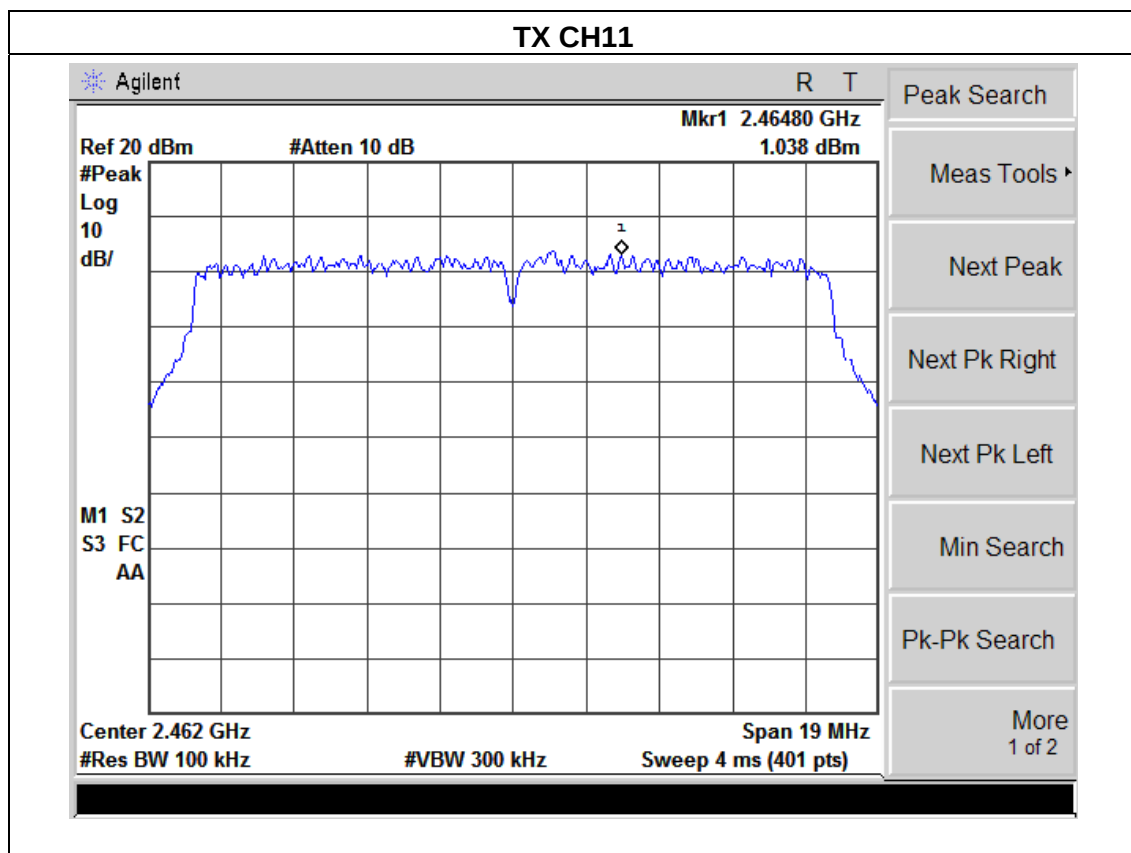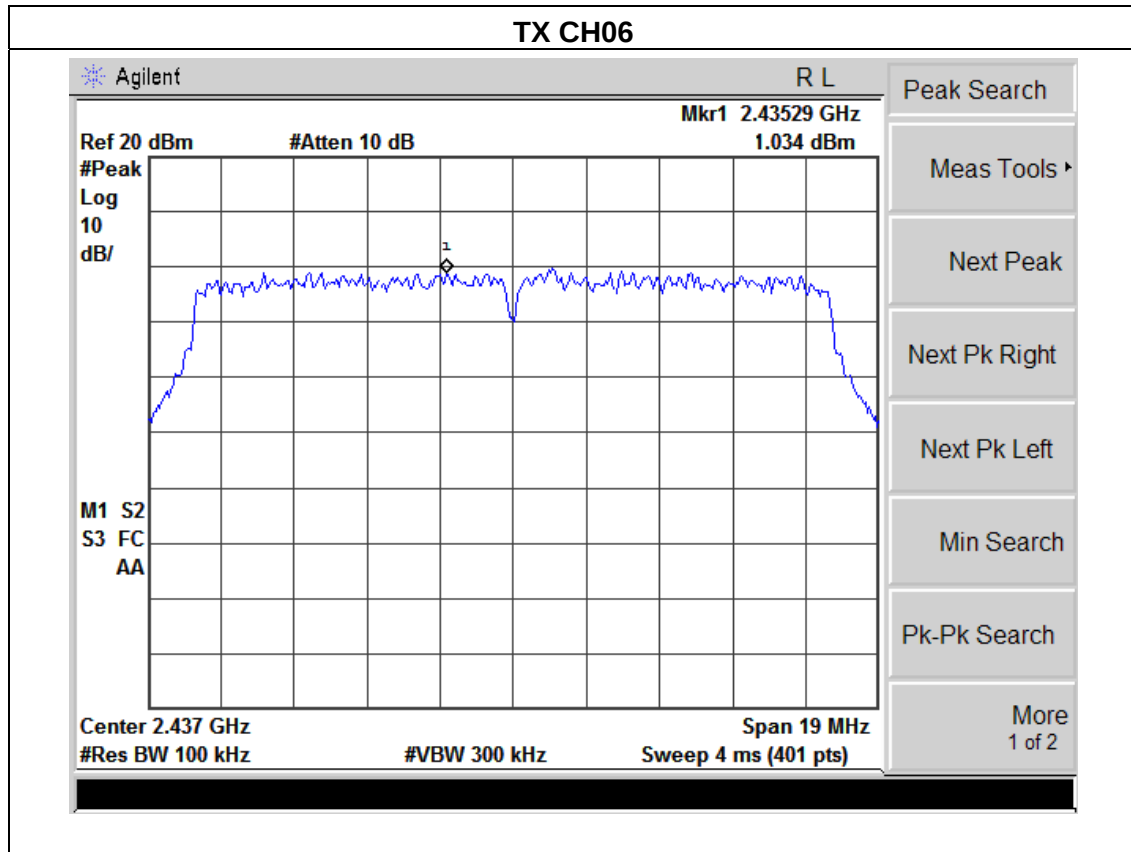

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

a.

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v01.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable. The path loss was compensated to the results for each measurement.
3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1-5% of the emission bandwidth (EBW). Set the Video bandwidth (VBW) $\geq 3 * \text{RBW}$. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 KHz.
4. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP




5.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	TX b Mode /CH01, CH06, CH11		


Frequency	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Channel Separation (MHz)	Result
2412 MHz	11.38	14.11	>=500KHz	PASS
2437 MHz	11.54	14.01	>=500KHz	PASS
2462 MHz	11.55	14.05	>=500KHz	PASS

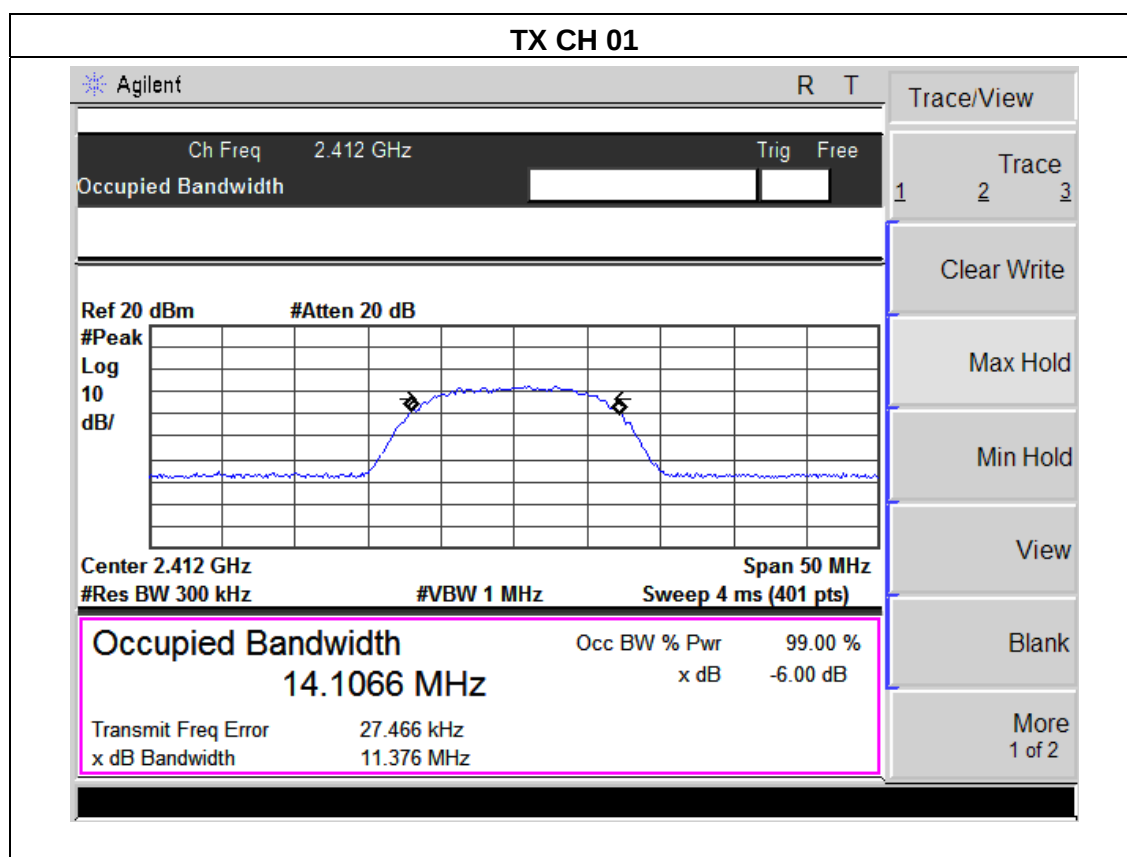

TX CH 06

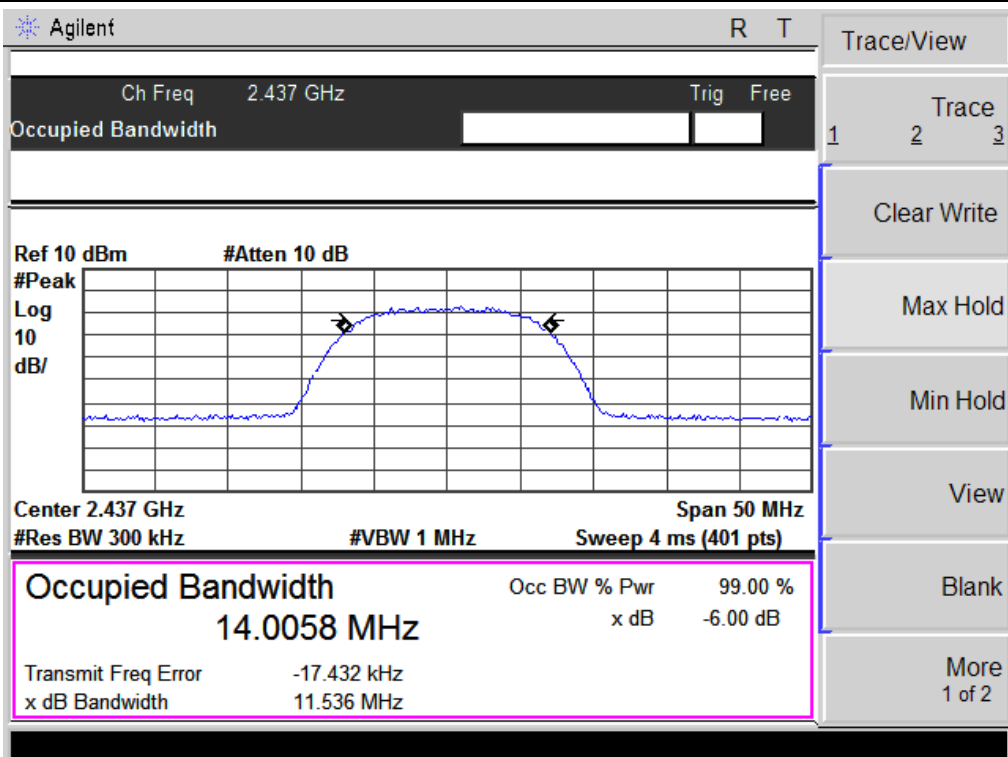


TX CH 11

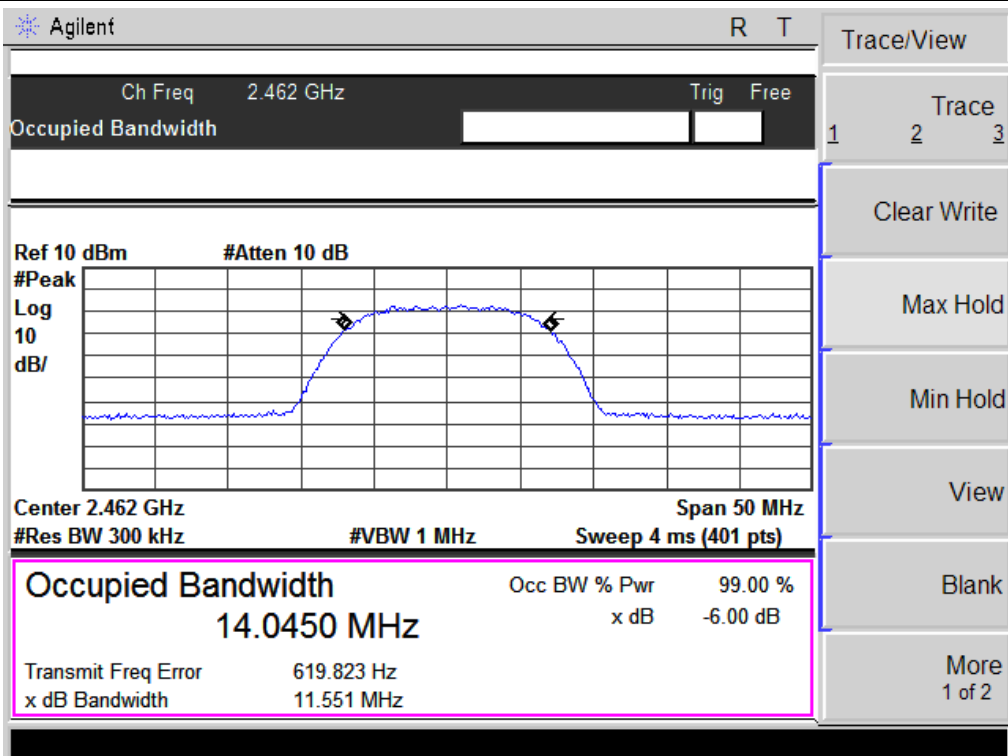


EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	TX g Mode /CH01, CH06, CH11		


Frequency	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Channel Separation (MHz)	Result
2412 MHz	16.36	16.55	>=500KHz	PASS
2437 MHz	16.38	16.57	>=500KHz	PASS
2462 MHz	16.39	16.54	>=500KHz	PASS

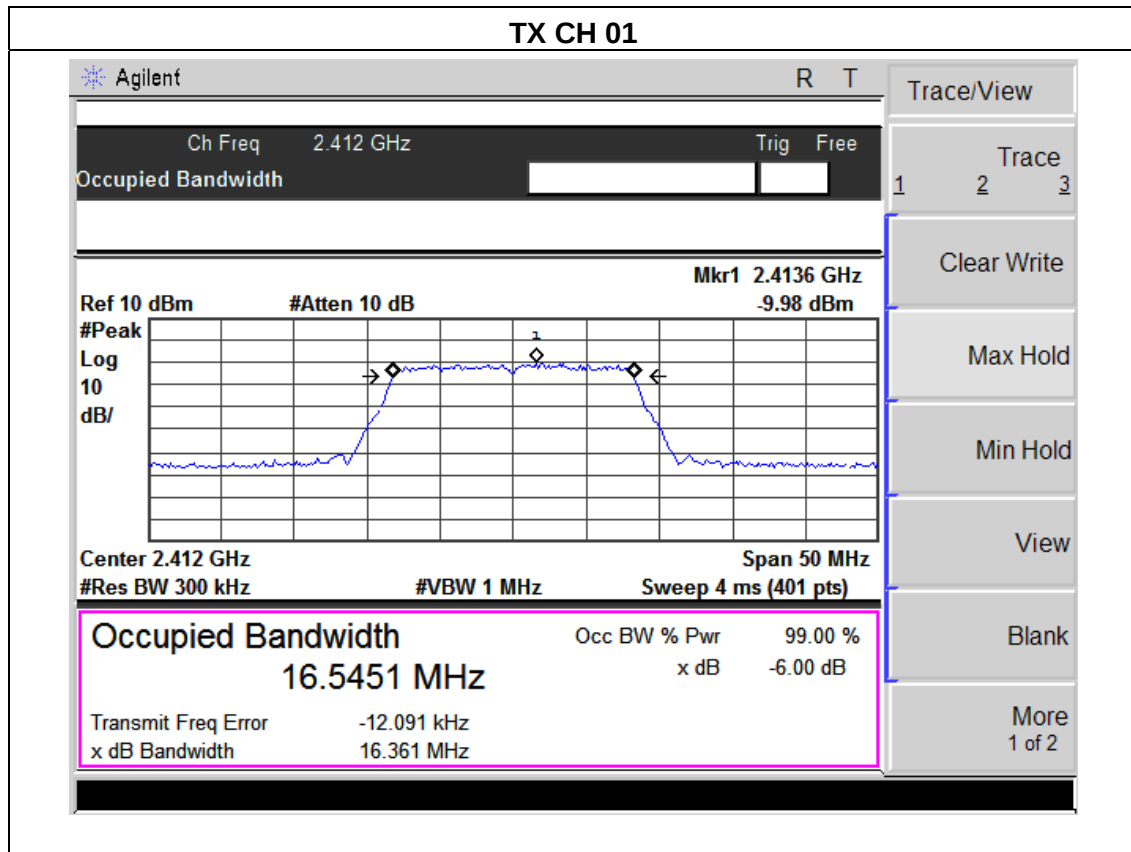

TX CH 06

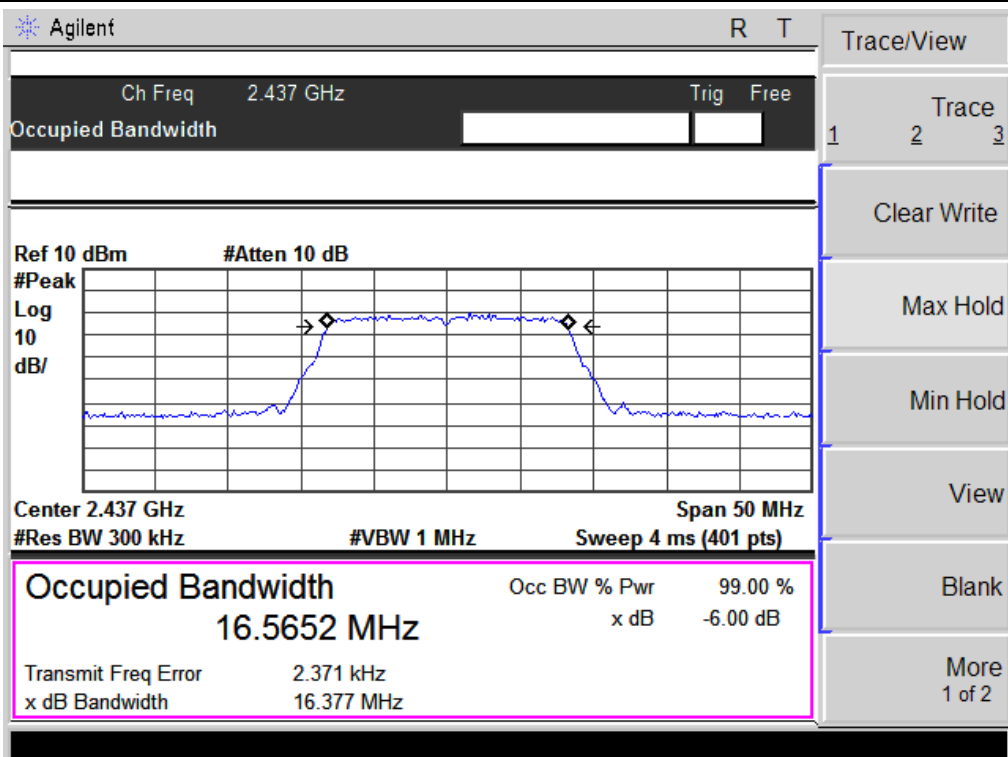



TX CH 11

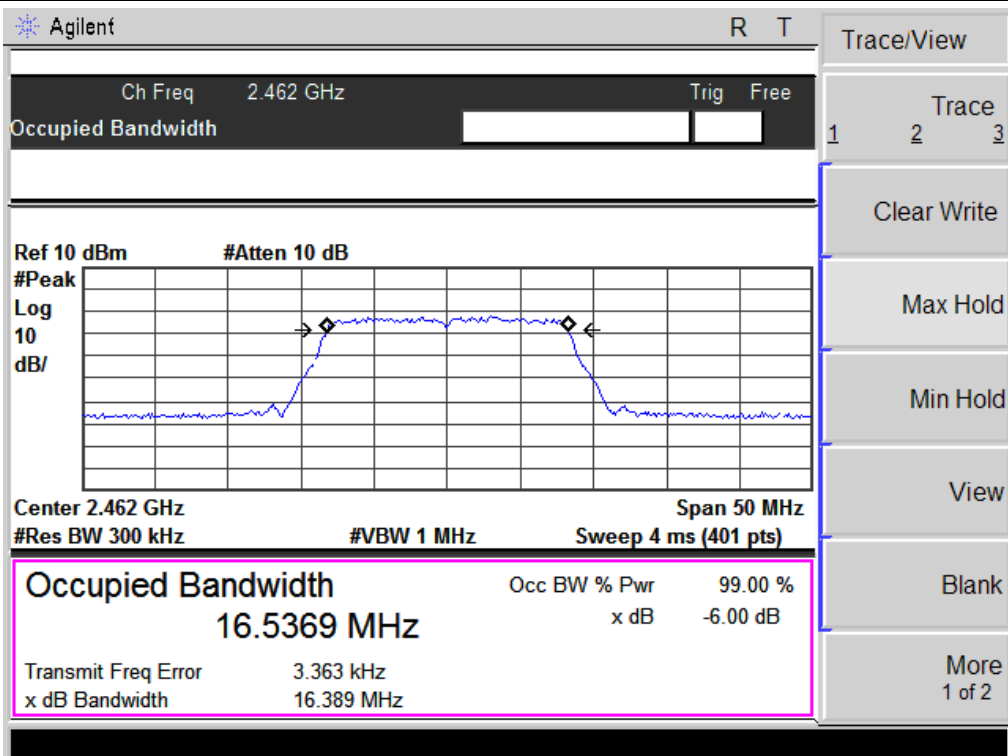

EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	TX n Mode /CH01, CH06, CH11		

Frequency	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Channel Separation (MHz)	Result
2412 MHz	17.37	17.48	>=500KHz	PASS
2437 MHz	17.30	17.50	>=500KHz	PASS
2462 MHz	17.35	17.45	>=500KHz	PASS

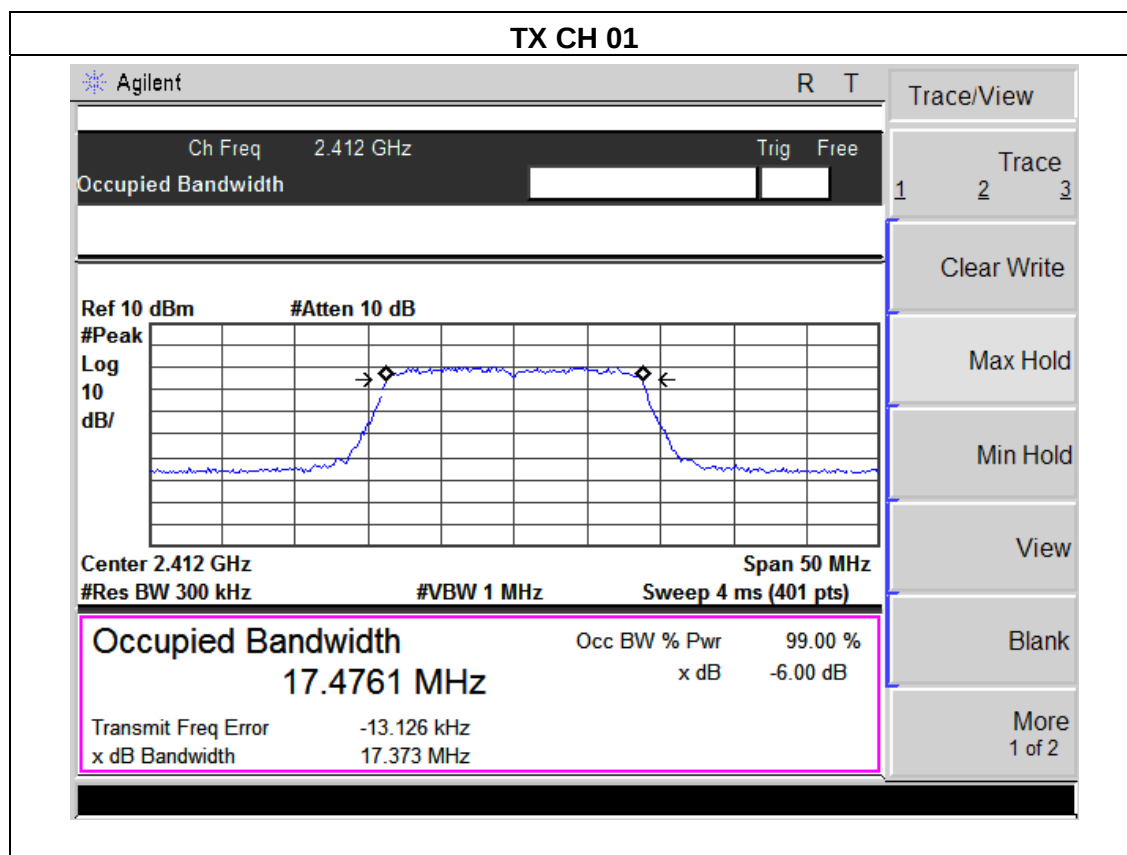

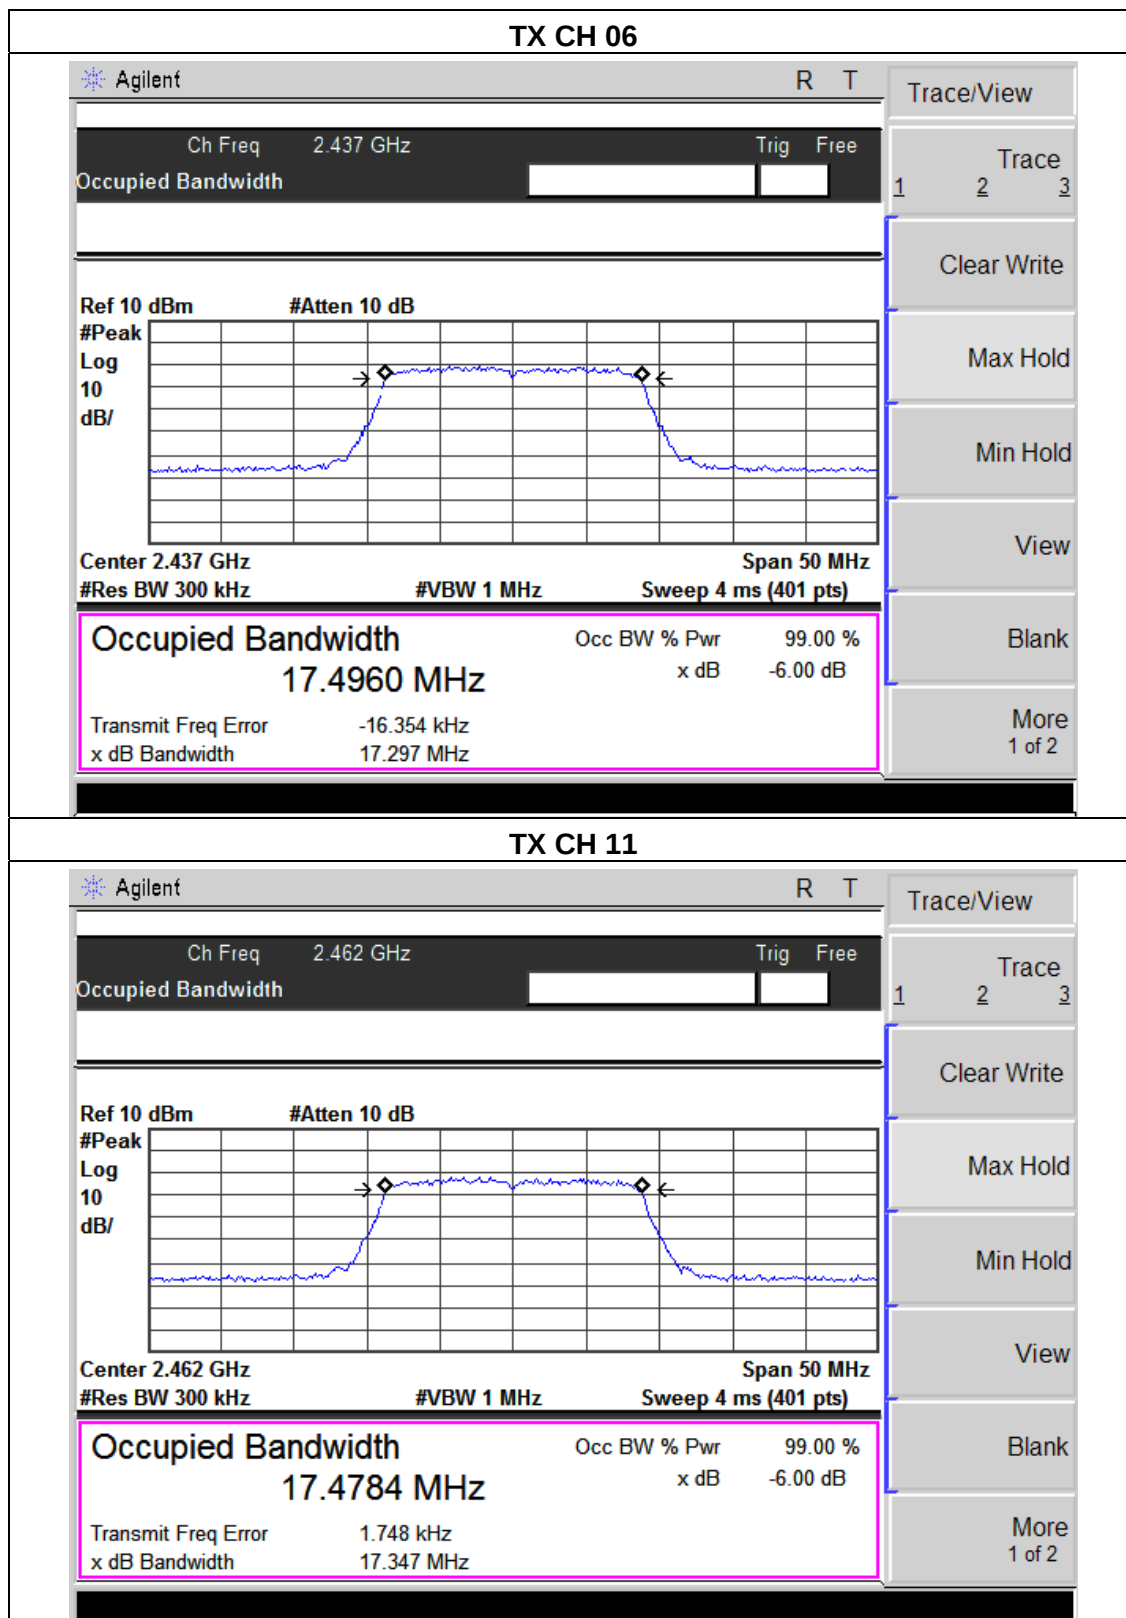

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

EUT:	MID(Tablet PC)	Model Name :	RC1018C
Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	DC 3.7V by battery
Test Mode :	TX b/g/n(20M) Mode /CH01, CH06, CH11		

TX 802.11b Mode			
Test Channel	Frequency	Output power. Antenna port	
	(MHz)	PK(dBm)	AV(dBm)
CH01	2412	11.84	9.36
CH06	2437	11.53	9.11
CH11	2462	11.69	9.08
TX 802.11g Mode			
CH01	2412	10.73	8.46
CH06	2437	10.62	8.32
CH11	2462	10.89	8.10
CH01	2412	9.87	7.98
CH06	2437	9.89	7.74
CH11	2462	9.96	8.05

7. ANTENNA REQUIREMENT

7.1 STANDARD REQUIREMENT


15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2 EUT ANTENNA

The EUT antenna is Integrated antenna. It comply with the standard requirement.

8. EUT TEST PHOTO

Radiated Measurement Photos

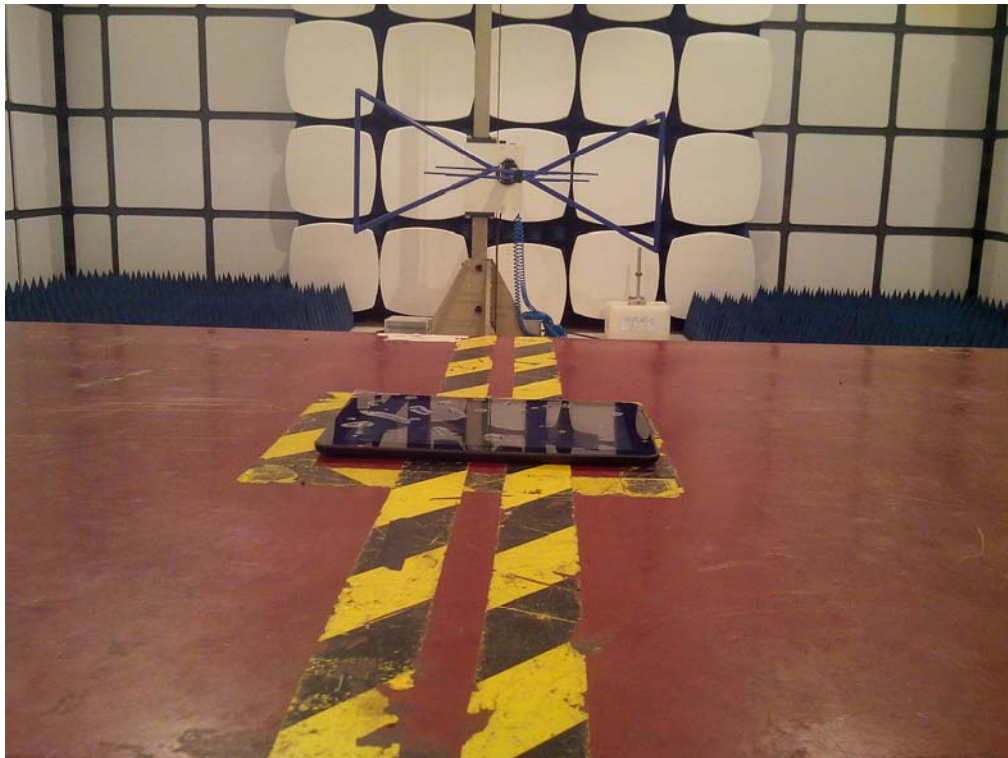

Conducted Measurement Photos

