



GSM 850-Body-Rear-CH128	2
GSM 850-Body-Edge1-CH128	3
GSM 850-Body-Edge2- CH128	4
GSM 850-Body-Edge3-CH128	5
GSM 850-Body-Edge4-CH128	6
GSM 850-Body-Edge4-CH190	8
GSM 850-Body-Edge4-CH251	9
GPRS 850-Body-Rear-CH128	11
GPRS 850-Body-Edge1-CH128	13
GPRS 850-Body-Edge2-CH128	14
GPRS 850-Body-Edge3-CH128	15
GPRS 850-Body-Edge4-CH128	16
PCS1900-Body-Rear-CH512	18
PCS1900-Body-Edge1-CH512	20
PCS1900-Body-Edge3-CH512	21
PCS1900-Body-Edge4-CH512	22
GPRS1900-Body-Rear-CH512	23
GPRS1900-Body-Edge1-CH512	25
GPRS1900-Body-Edge3-CH512	26
GPRS1900-Body-Edge4-CH512	27
WCDMA Band V-Body Rear-CH4233.....	28
WCDMA Band V-Body Edge1-CH4233	30
WCDMA Band V-Body Edge3-CH4233	31
WCDMA Band V-Body Edge4-CH4233	32



Test Laboratory: Compliance Certification Services Inc.

Date: 7/26/2013

GSM 850-Body-Rear-CH128

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.944$ S/m; $\epsilon_r = 55.694$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.1°C; Liquid Temperature: 21.7°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.07, 9.07, 9.07); Calibrated: 12/10/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH128/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.590 W/kg


CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.446 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.761 W/kg

SAR(1 g) = 0.467 W/kg; SAR(10 g) = 0.280 W/kg

Maximum value of SAR (measured) = 0.609 W/kg

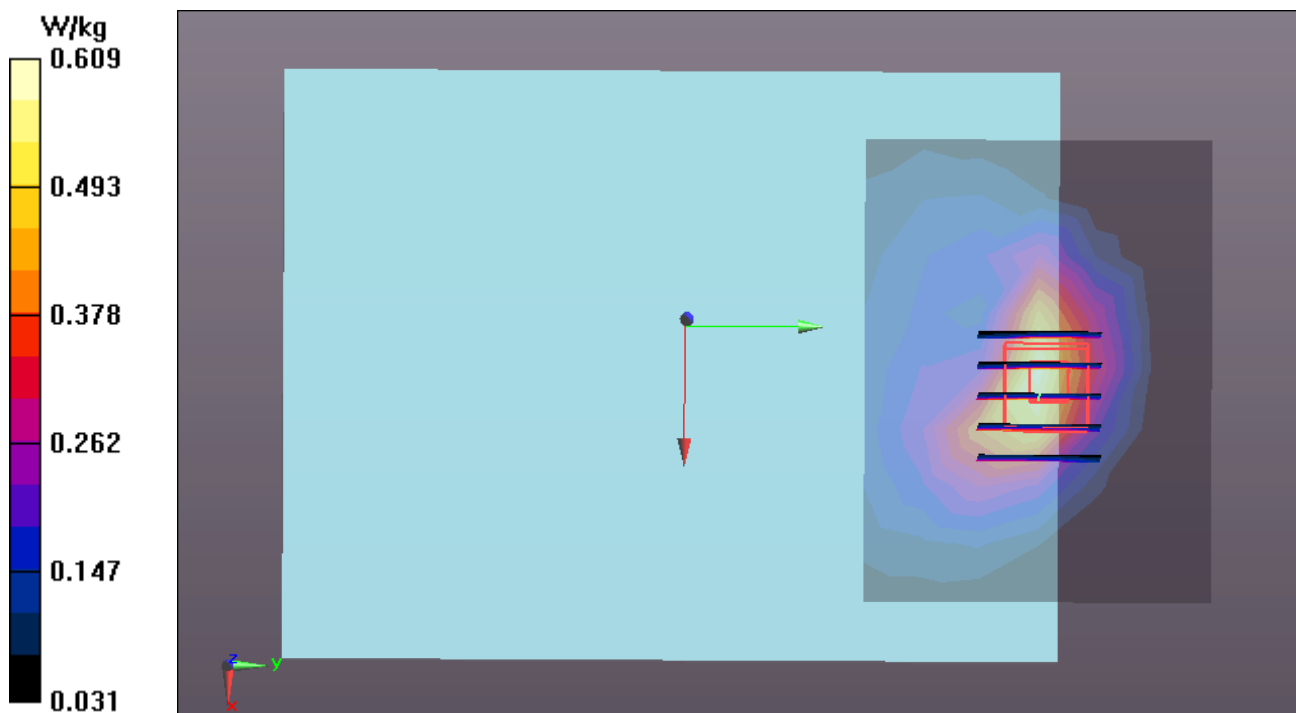



Test Laboratory: Compliance Certification Services Inc.

Date: 7/26/2013

GSM 850-Body-Edge1-CH128

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.944$ S/m; $\epsilon_r = 55.694$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.1°C; Liquid Temperature: 21.7°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.07, 9.07, 9.07); Calibrated: 12/10/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH128/Area Scan (6x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0214 W/kg


CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.797 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0380 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0316 W/kg

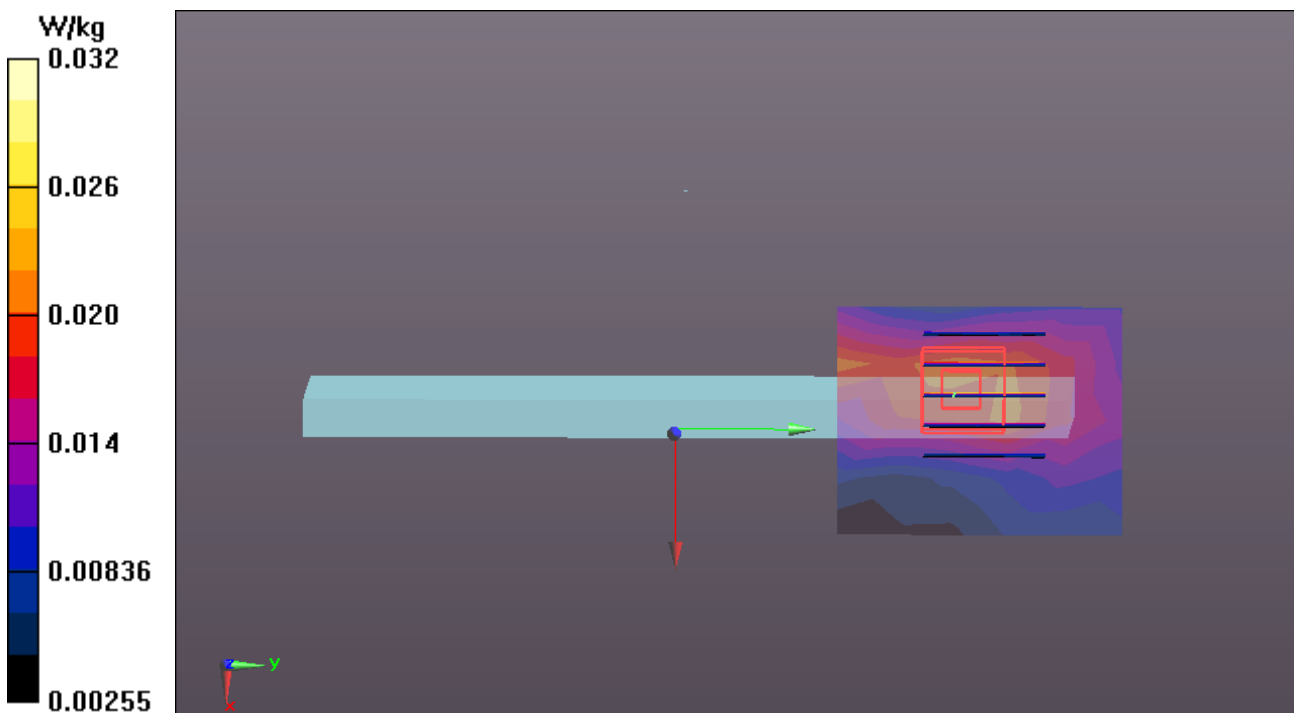



Test Laboratory: Compliance Certification Services Inc.

Date: 7/26/2013

GSM 850-Body-Edge2- CH128

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.944$ S/m; $\epsilon_r = 55.694$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.1°C; Liquid Temperature: 21.7°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.07, 9.07, 9.07); Calibrated: 12/10/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH128/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0577 W/kg


CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.763 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0680 W/kg

SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.0576 W/kg

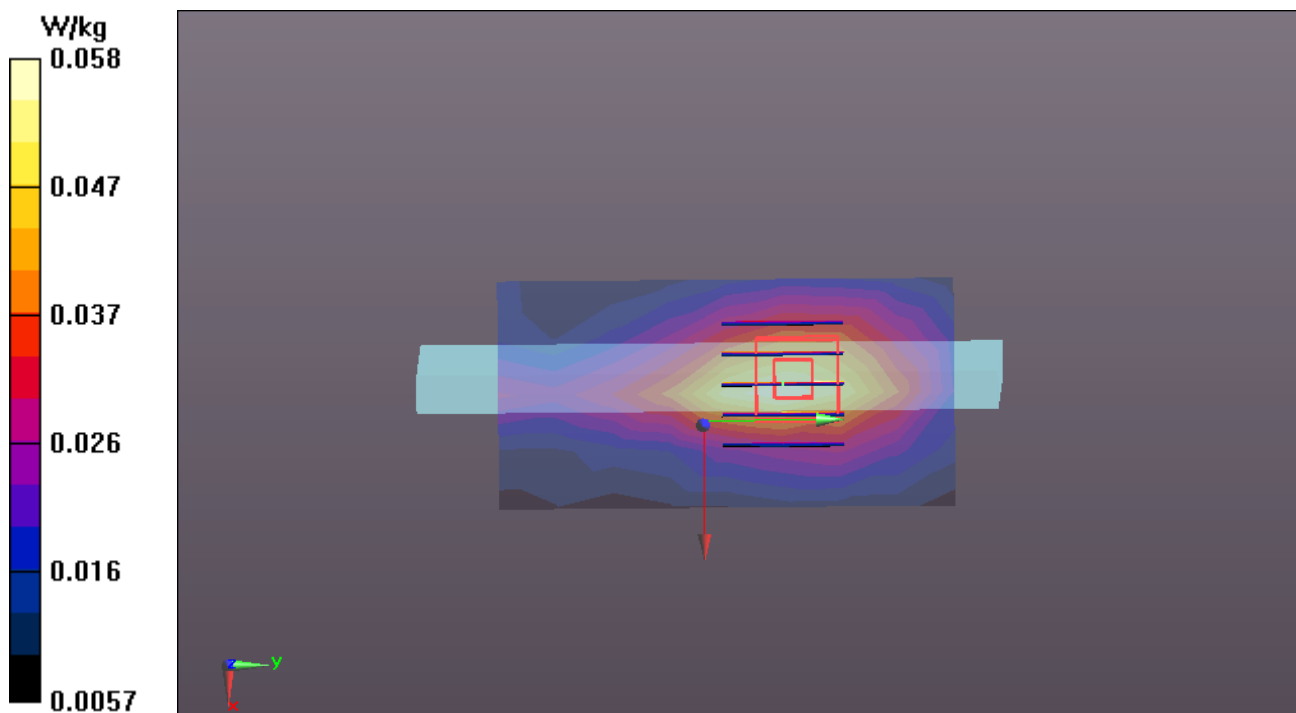



Test Laboratory: Compliance Certification Services Inc.

Date: 7/26/2013

GSM 850-Body-Edge3-CH128

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.944$ S/m; $\epsilon_r = 55.694$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.1°C; Liquid Temperature: 21.7°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.07, 9.07, 9.07); Calibrated: 12/10/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH128/Area Scan (6x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0964 W/kg


CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.508 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.104 W/kg

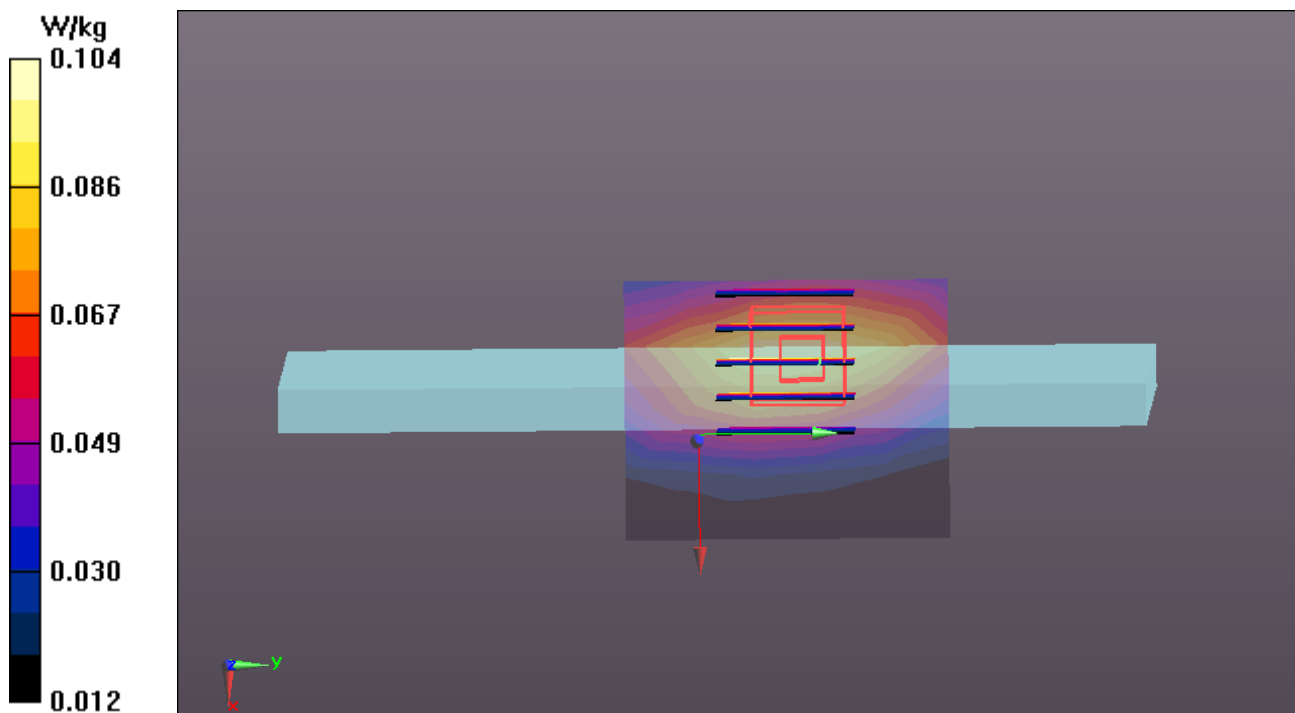



Test Laboratory: Compliance Certification Services Inc.

Date: 7/26/2013

GSM 850-Body-Edge4-CH128

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.944$ S/m; $\epsilon_r = 55.694$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.1°C; Liquid Temperature: 21.7°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.07, 9.07, 9.07); Calibrated: 12/10/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH128/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.774 W/kg


CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 29.389 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.748 W/kg; SAR(10 g) = 0.429 W/kg

Maximum value of SAR (measured) = 0.984 W/kg

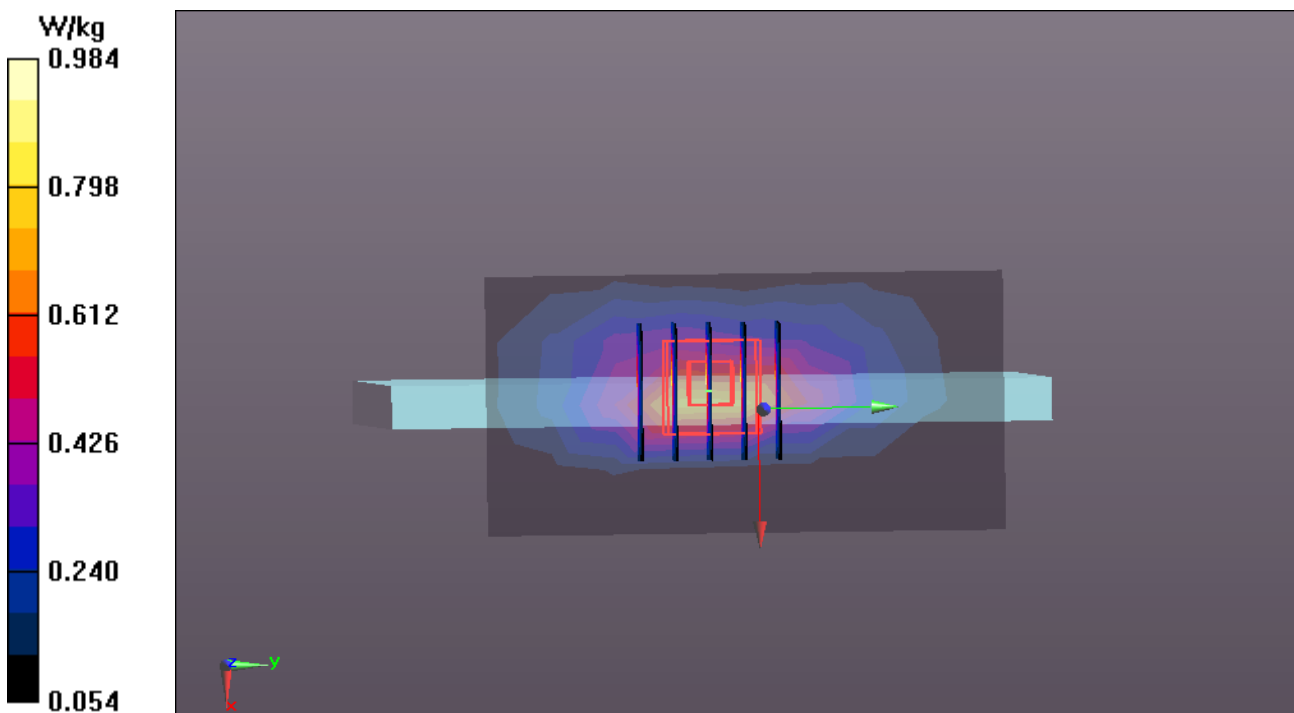

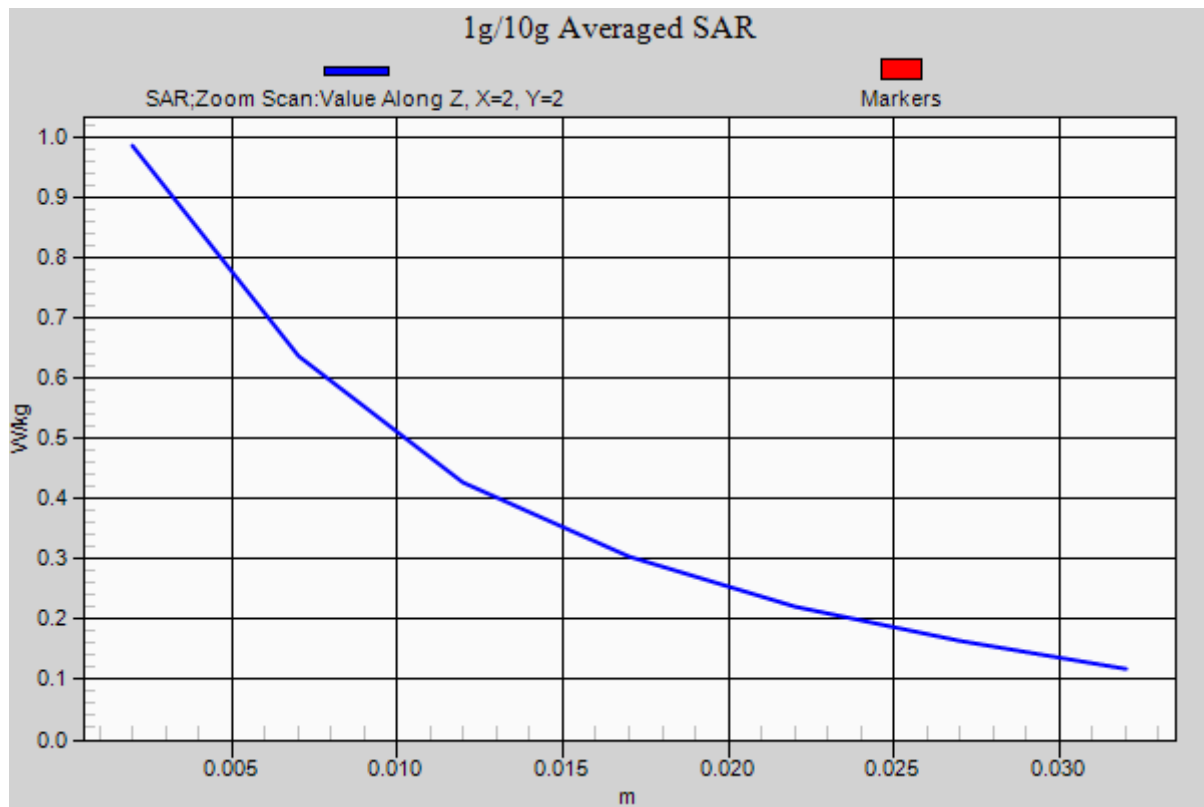



Test Laboratory: Compliance Certification Services Inc.

Date: 7/26/2013

GSM 850-Body-Edge4-CH190

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.959$ S/m; $\epsilon_r = 55.452$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.1°C; Liquid Temperature: 21.7°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.07, 9.07, 9.07); Calibrated: 12/10/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH190/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.916 W/kg


CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.781 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.776 W/kg; SAR(10 g) = 0.505 W/kg

Maximum value of SAR (measured) = 1.15 W/kg

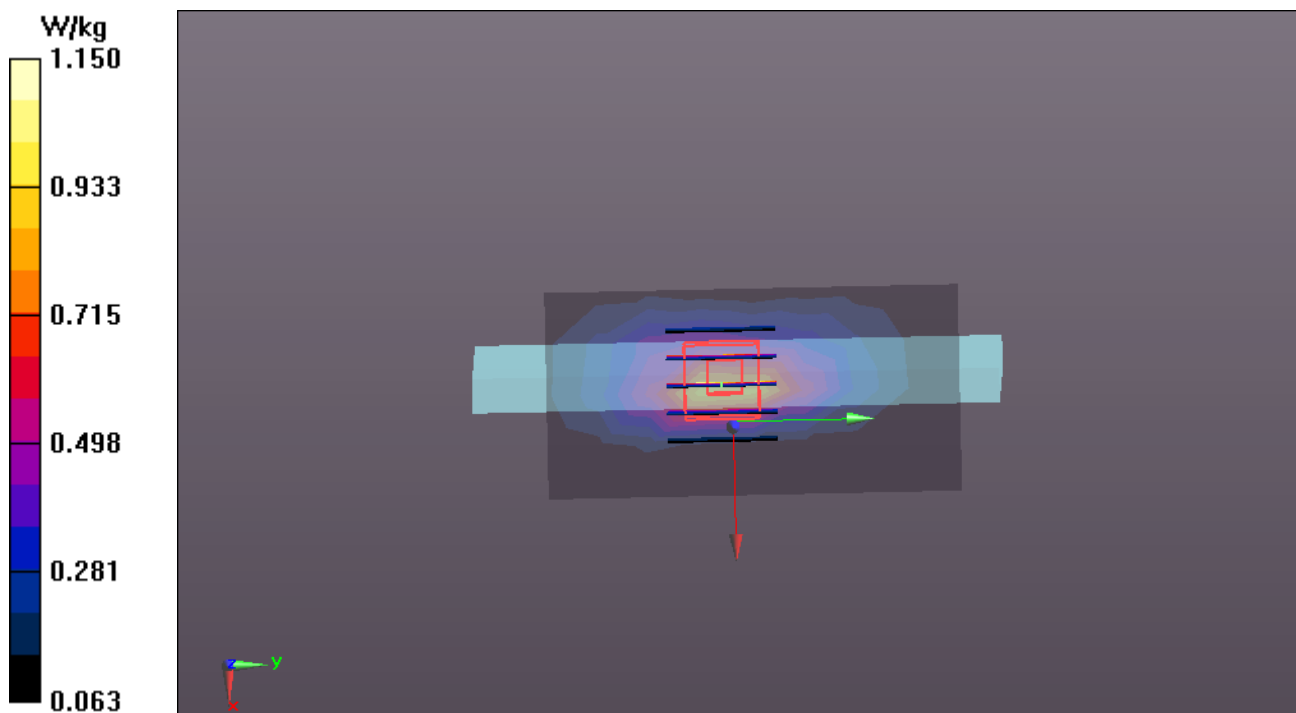



Test Laboratory: Compliance Certification Services Inc.

Date: 7/26/2013

GSM 850-Body-Edge4-CH251

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 849$ MHz; $\sigma = 0.975$ S/m; $\epsilon_r = 55.27$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.1°C; Liquid Temperature: 21.7°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.07, 9.07, 9.07); Calibrated: 12/10/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH251/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.05 W/kg


CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 32.741 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.792 W/kg; SAR(10 g) = 0.575 W/kg

Maximum value of SAR (measured) = 1.31 W/kg

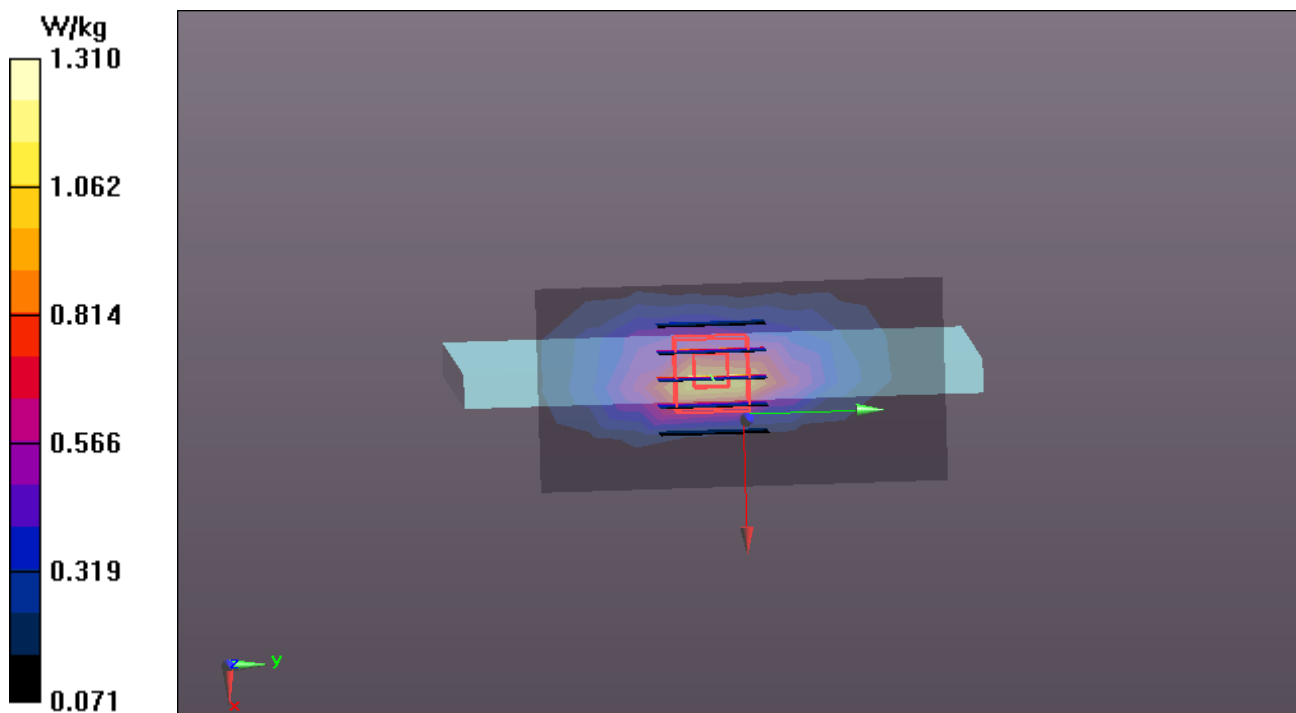

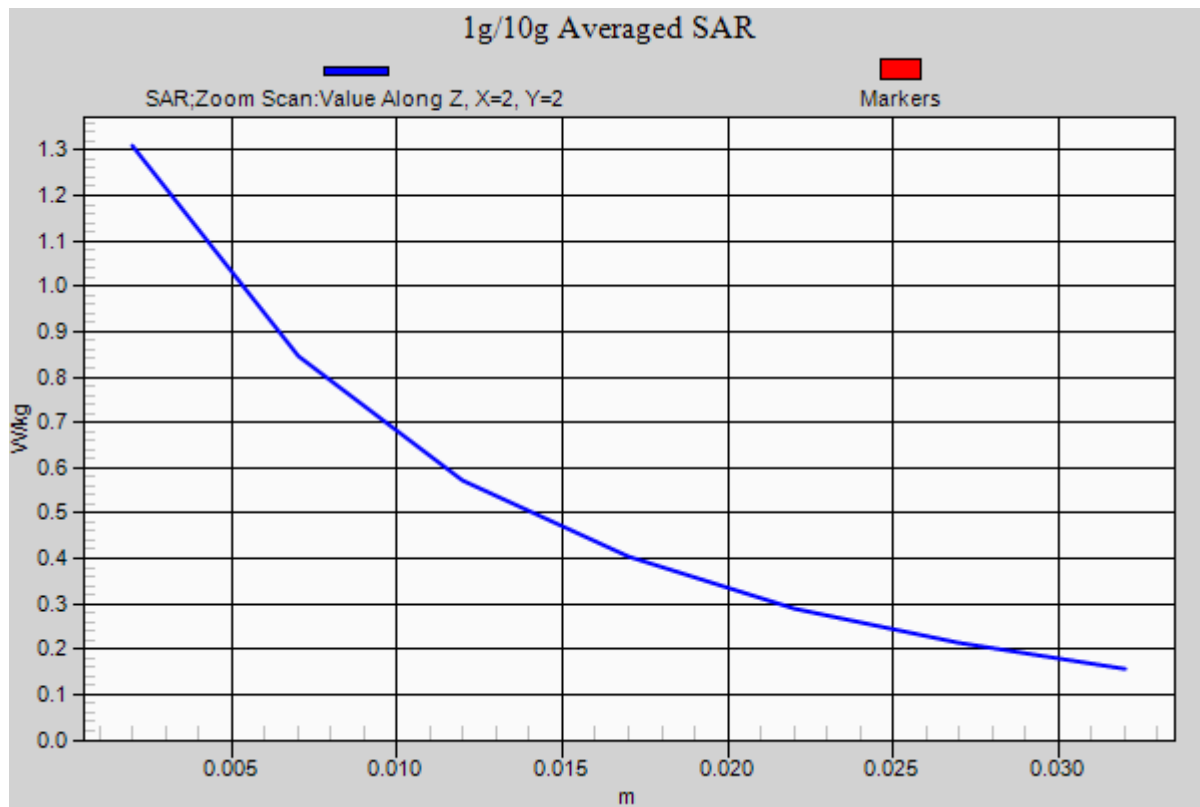



Test Laboratory: Compliance Certification Services Inc.

Date: 7/26/2013

GPRS 850-Body-Rear-CH128

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.628$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.1°C; Liquid Temperature: 21.7°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.19, 9.19, 9.19); Calibrated: 12/10/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH128/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.394 W/kg


CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 4.658 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.554 W/kg

SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.208 W/kg

Maximum value of SAR (measured) = 0.441 W/kg

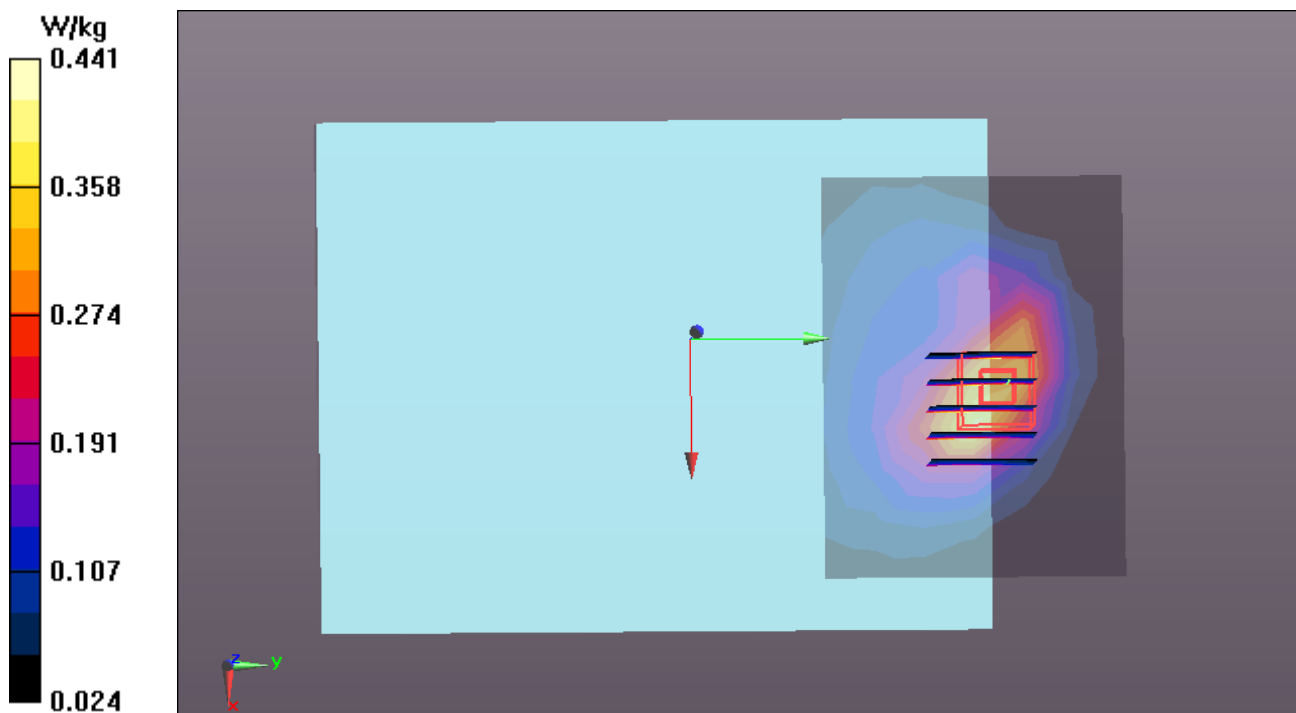

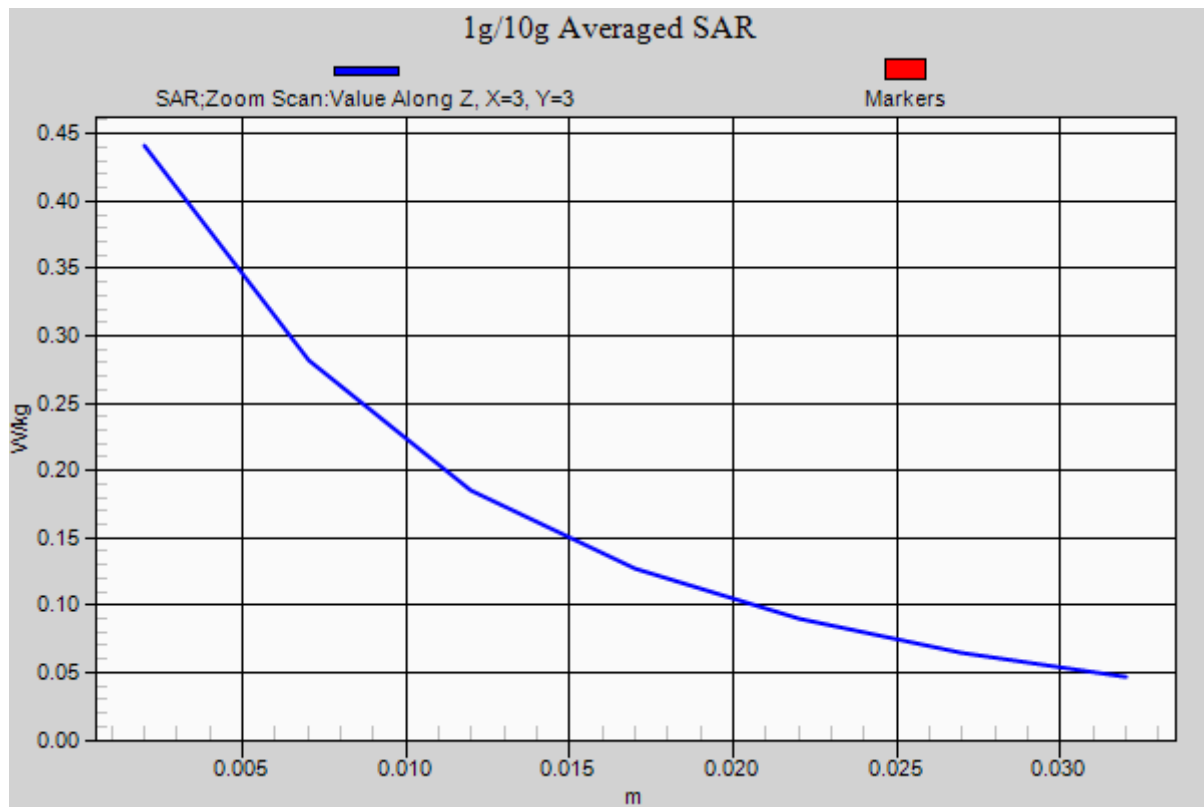



Test Laboratory: Compliance Certification Services Inc.

Date: 7/26/2013

GPRS 850-Body-Edge1-CH128

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.628$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.1°C; Liquid Temperature: 21.7°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.19, 9.19, 9.19); Calibrated: 12/10/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH128/Area Scan (6x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0215 W/kg


CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.975 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0280 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0235 W/kg

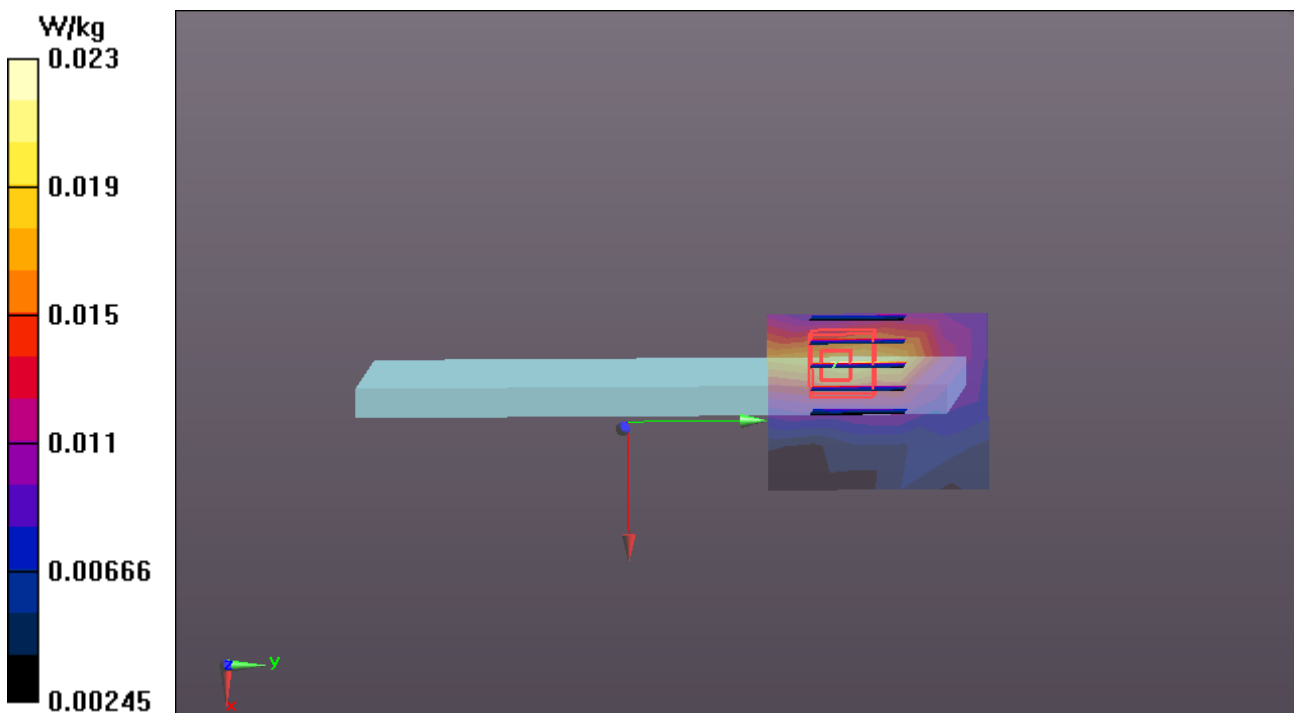



Test Laboratory: Compliance Certification Services Inc.

Date: 7/26/2013

GPRS 850-Body-Edge2-CH128

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.628$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.1°C; Liquid Temperature: 21.7°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.19, 9.19, 9.19); Calibrated: 12/10/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH128/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0428 W/kg


CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.414 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0570 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0471 W/kg

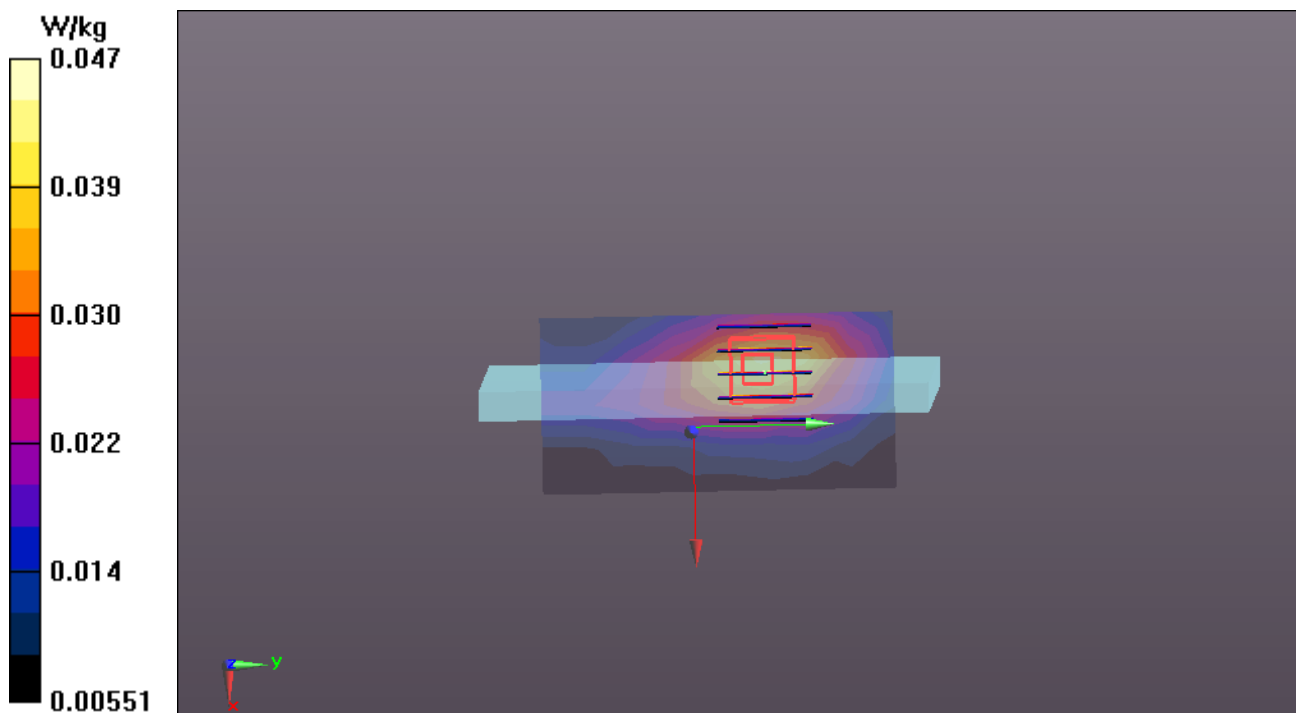



Test Laboratory: Compliance Certification Services Inc.

Date: 7/26/2013

GPRS 850-Body-Edge3-CH128

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.628$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.1°C; Liquid Temperature: 21.7°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.19, 9.19, 9.19); Calibrated: 12/10/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH128/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0610 W/kg


CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.984 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0760 W/kg

SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.0661 W/kg

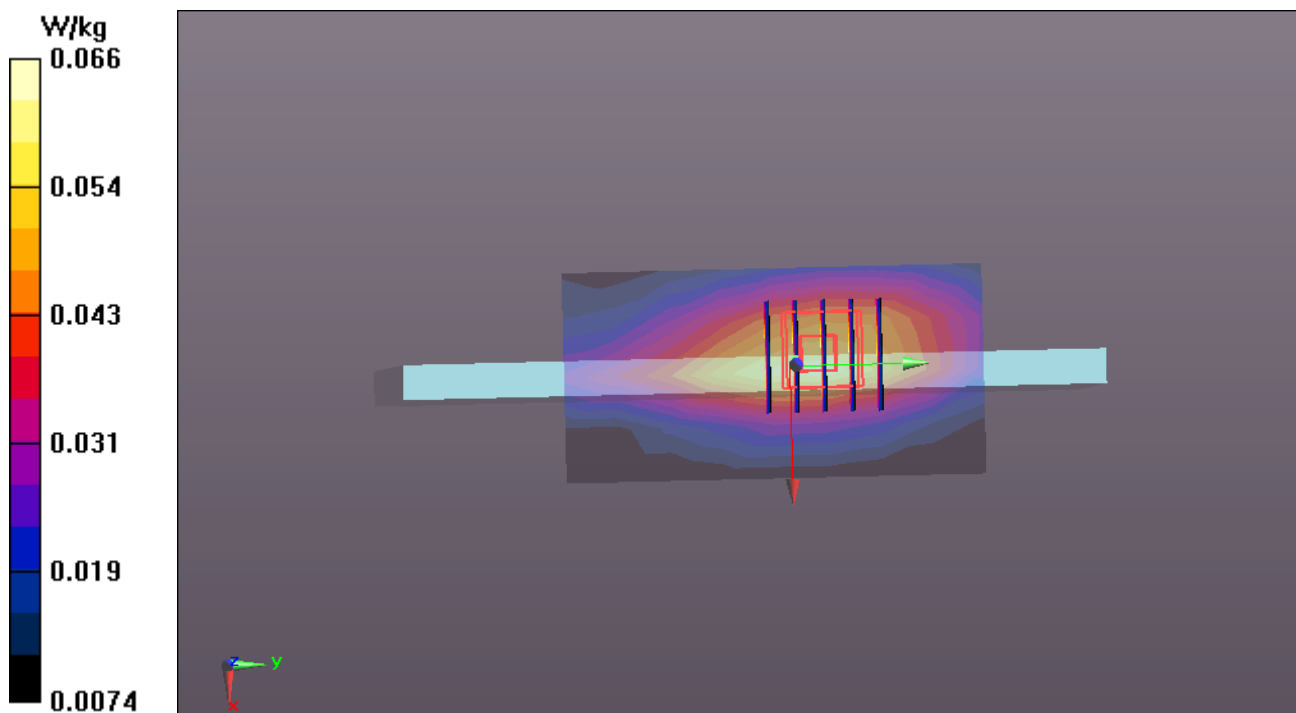



Test Laboratory: Compliance Certification Services Inc.

Date: 7/26/2013

GPRS 850-Body-Edge4-CH128

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.628$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.1°C; Liquid Temperature: 21.7°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.19, 9.19, 9.19); Calibrated: 12/10/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH128/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.499 W/kg


CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.444 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.752 W/kg

SAR(1 g) = 0.488 W/kg; SAR(10 g) = 0.291 W/kg

Maximum value of SAR (measured) = 0.640 W/kg

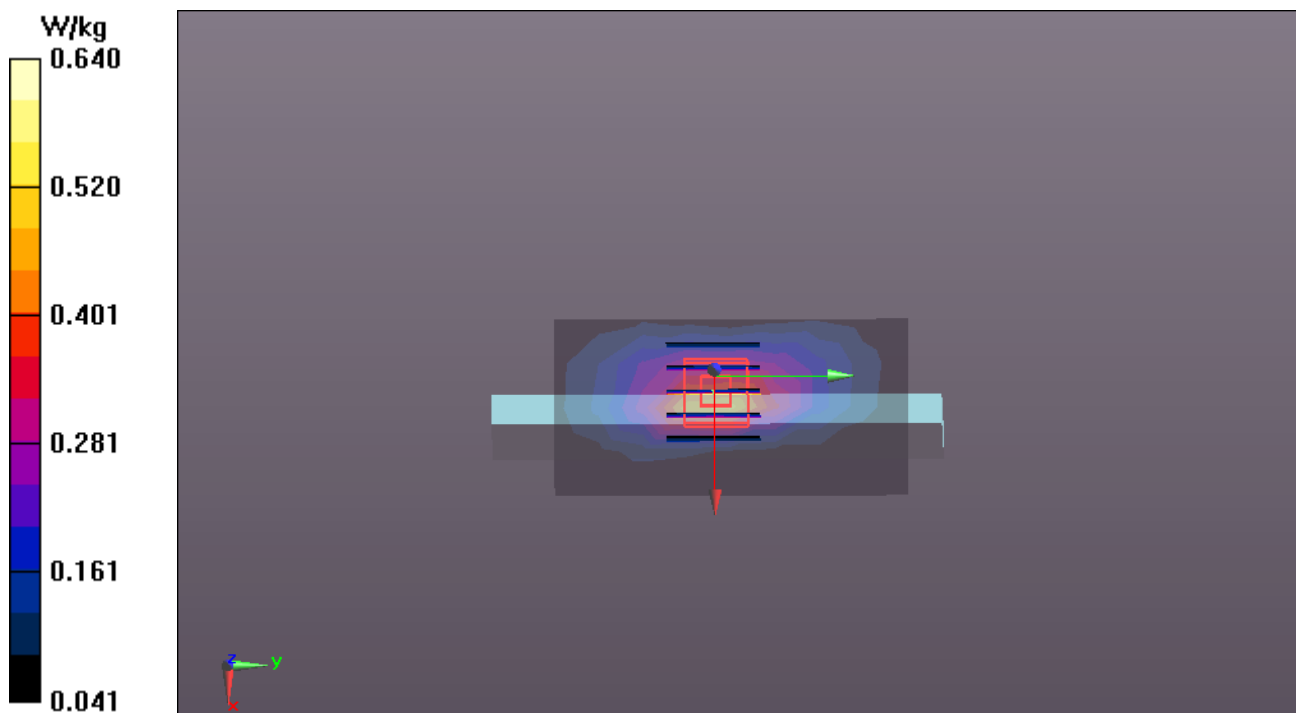

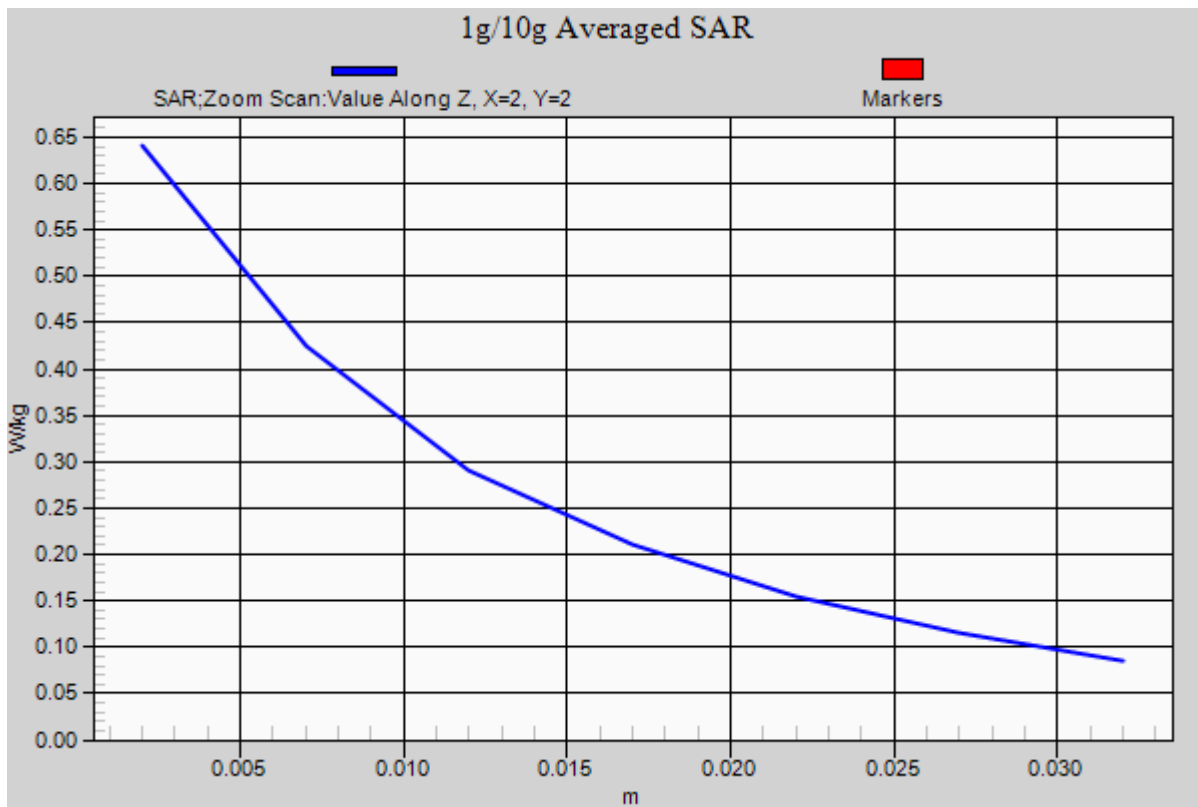



Test Laboratory: Compliance Certification Services Inc.

Date: 7/27/2013

PCS1900-Body-Rear-CH512

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.519$ S/m; $\epsilon_r = 51.958$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.4°C; Liquid Temperature: 21.8°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(7.3, 7.3, 7.3); Calibrated: 12/10/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH512/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.649 W/kg


CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 1.372 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.639 W/kg; SAR(10 g) = 0.320 W/kg

Maximum value of SAR (measured) = 0.966 W/kg

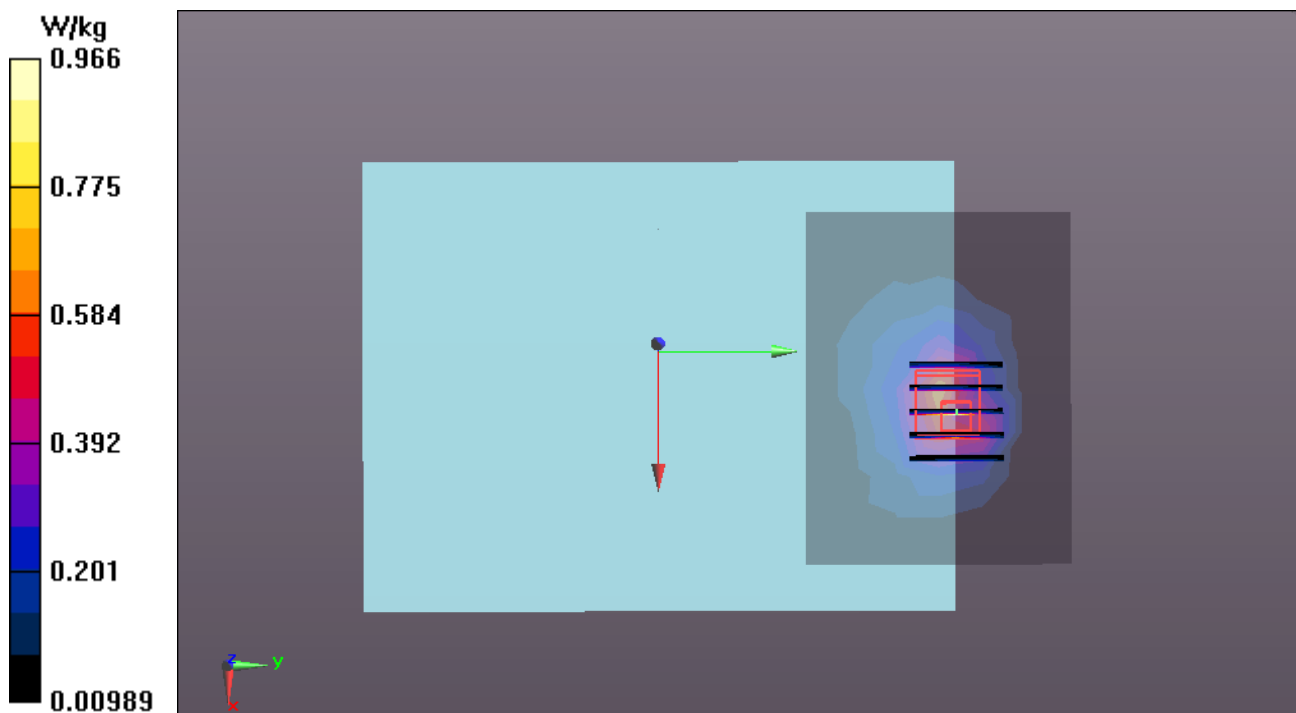

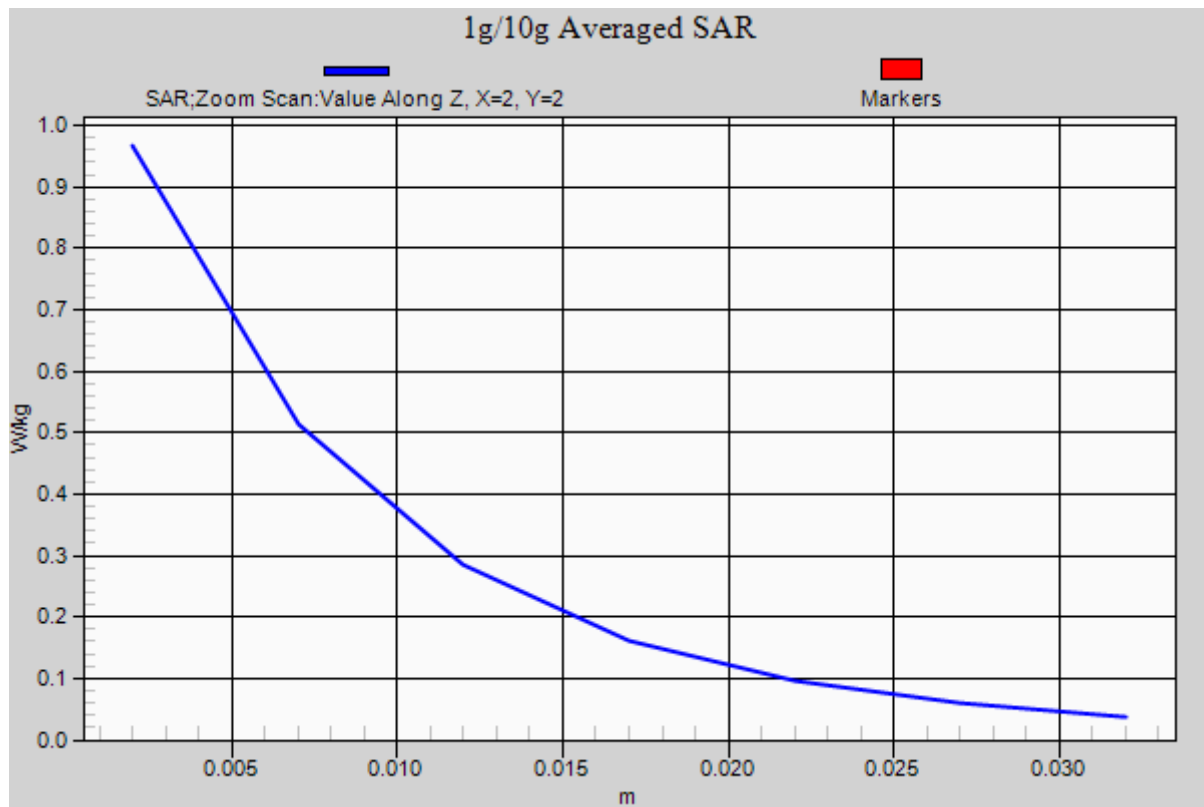



Test Laboratory: Compliance Certification Services Inc.

Date: 7/27/2013

PCS1900-Body-Edge1-CH512

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.519$ S/m; $\epsilon_r = 51.958$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.4°C; Liquid Temperature: 21.8°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(7.3, 7.3, 7.3); Calibrated: 12/10/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH512/Area Scan (6x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.129 W/kg


CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.246 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.164 W/kg

SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.137 W/kg

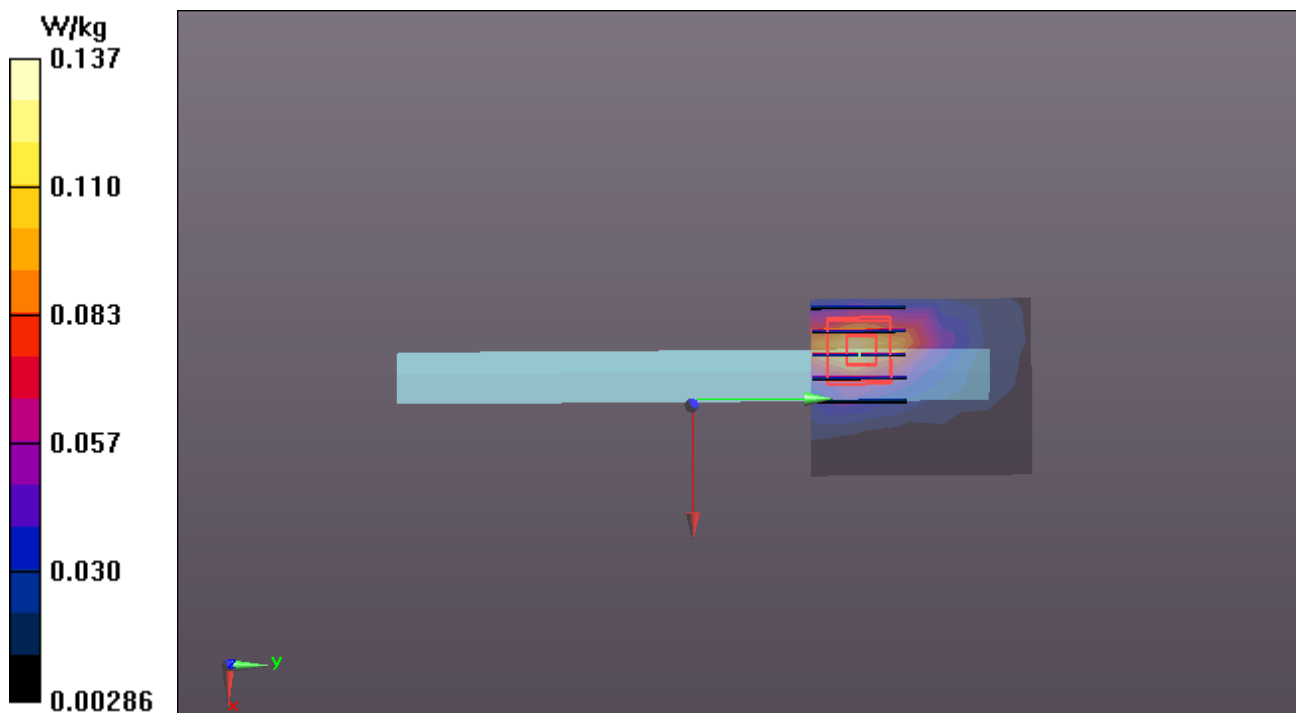



Test Laboratory: Compliance Certification Services Inc.

Date: 7/27/2013

PCS1900-Body-Edge3-CH512

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.519$ S/m; $\epsilon_r = 51.958$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.4°C; Liquid Temperature: 21.8°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(7.3, 7.3, 7.3); Calibrated: 12/10/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH512/Area Scan (6x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0353 W/kg


CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.722 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0470 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0385 W/kg

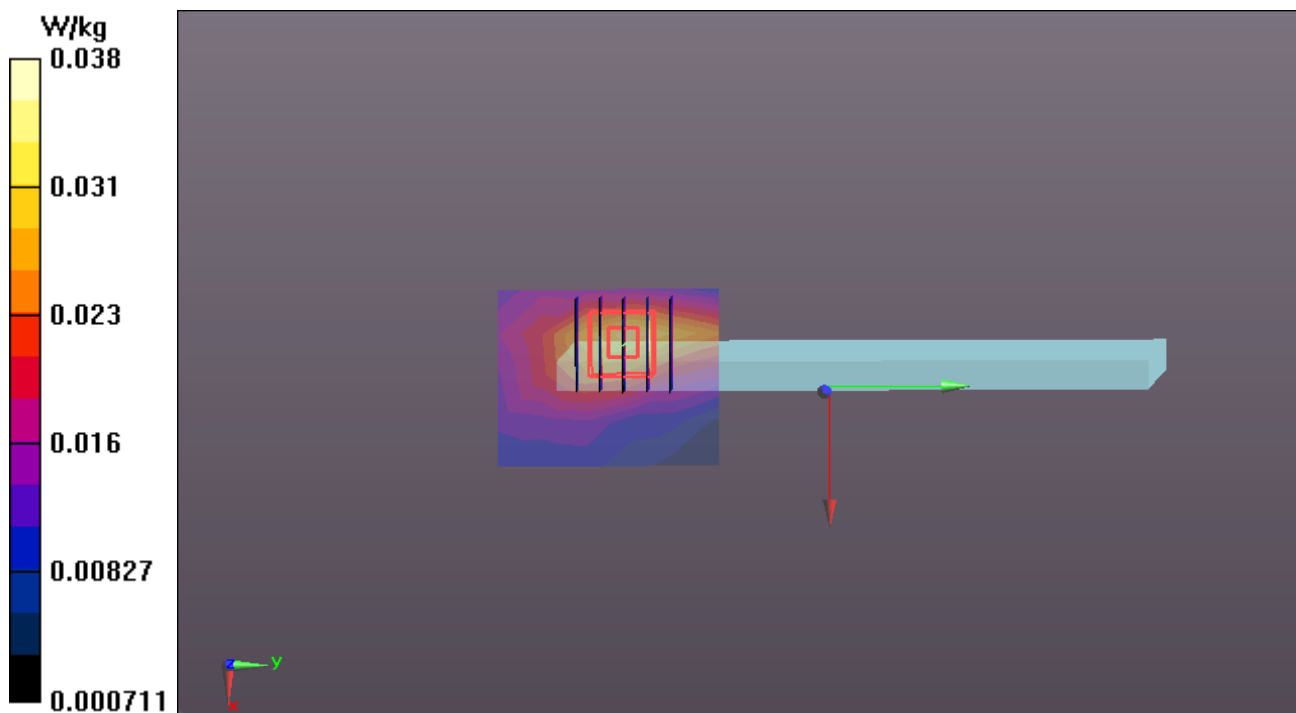



Test Laboratory: Compliance Certification Services Inc.

Date: 7/27/2013

PCS1900-Body-Edge4-CH512

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.519$ S/m; $\epsilon_r = 51.958$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.4°C; Liquid Temperature: 21.8°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(7.3, 7.3, 7.3); Calibrated: 12/10/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH512/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.493 W/kg


CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.649 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.792 W/kg

SAR(1 g) = 0.480 W/kg; SAR(10 g) = 0.258 W/kg

Maximum value of SAR (measured) = 0.645 W/kg

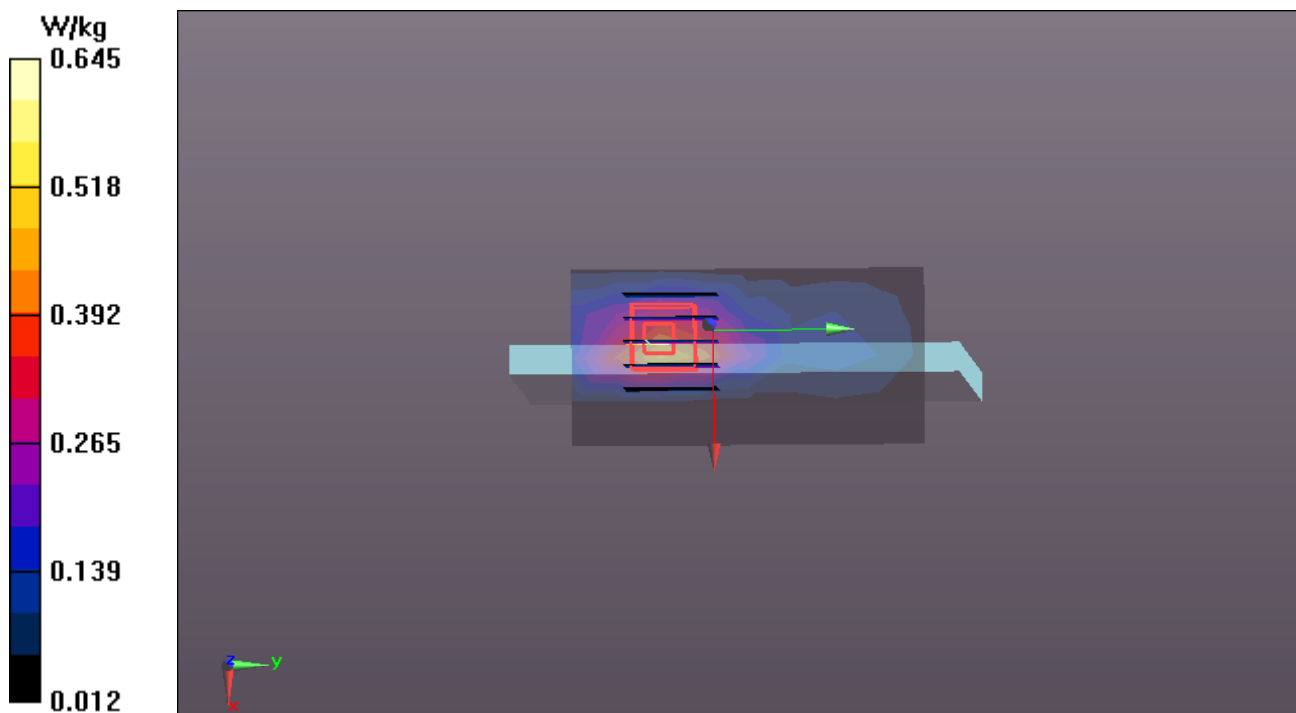



Test Laboratory: Compliance Certification Services Inc.

Date: 7/27/2013

GPRS1900-Body-Rear-CH512

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.519$ S/m; $\epsilon_r = 51.958$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.4°C; Liquid Temperature: 21.8°C

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(7.3, 7.3, 7.3); Calibrated: 12/10/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH512/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.960 W/kg


CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 0 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.611 W/kg; SAR(10 g) = 0.305 W/kg

Maximum value of SAR (measured) = 0.915 W/kg

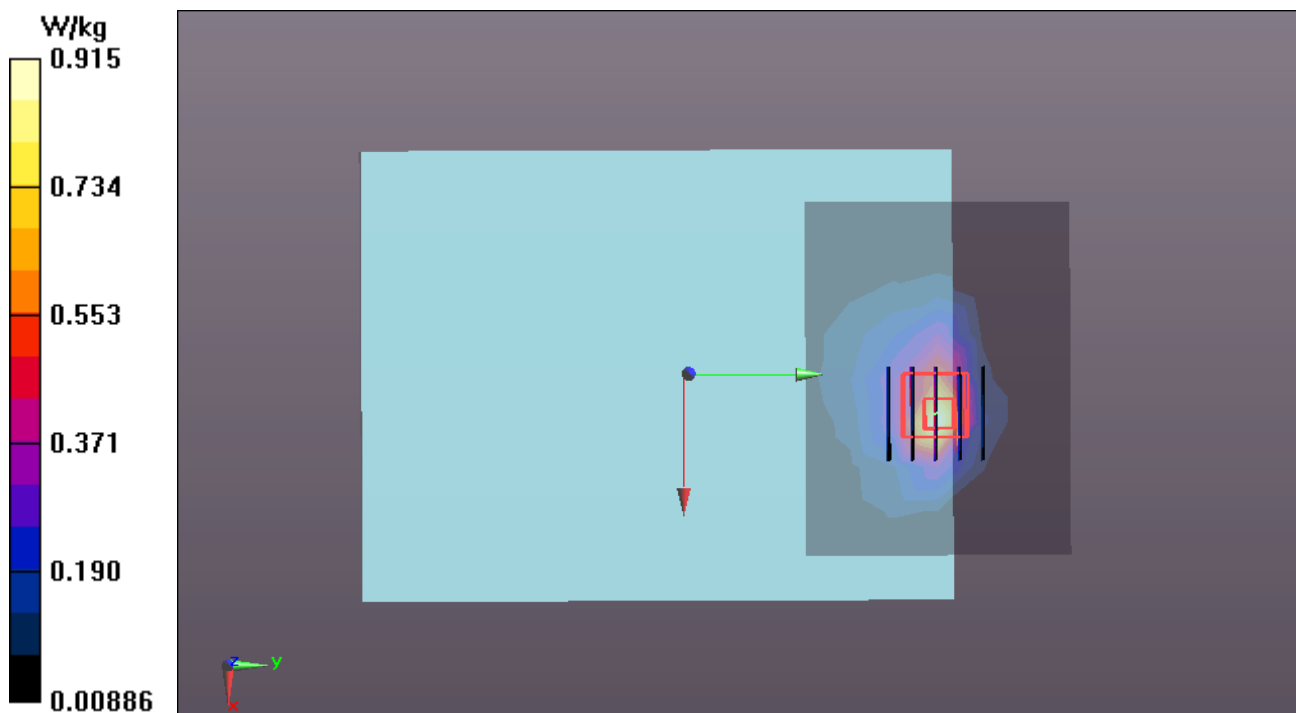

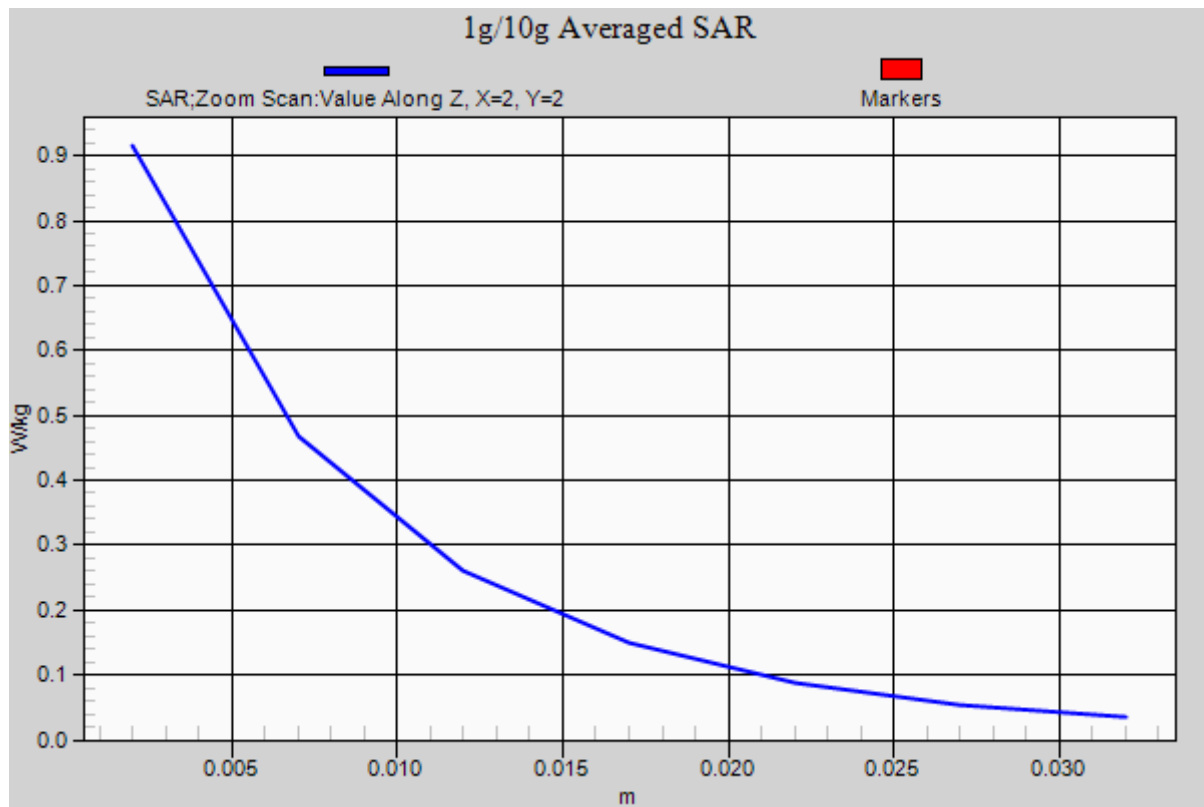



Test Laboratory: Compliance Certification Services Inc.

Date: 7/27/2013

GPRS1900-Body-Edge1-CH512

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.519$ S/m; $\epsilon_r = 51.958$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.4°C; Liquid Temperature: 21.8°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(7.3, 7.3, 7.3); Calibrated: 12/10/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH512/Area Scan (6x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.117 W/kg


CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.972 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 0.162 W/kg

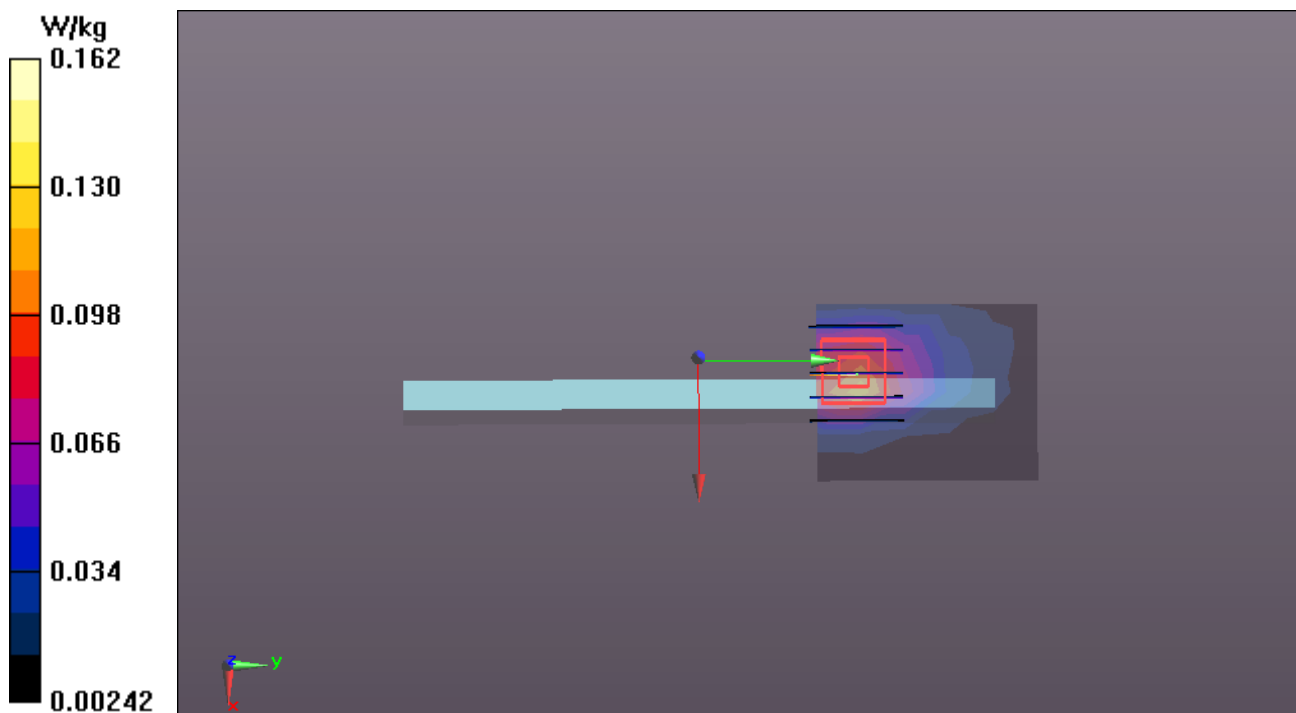



Test Laboratory: Compliance Certification Services Inc.

Date: 7/27/2013

GPRS1900-Body-Edge3-CH512

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.519$ S/m; $\epsilon_r = 51.958$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.4°C; Liquid Temperature: 21.8°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(7.3, 7.3, 7.3); Calibrated: 12/10/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH512/Area Scan (6x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0346 W/kg


CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.538 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0450 W/kg

SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0373 W/kg

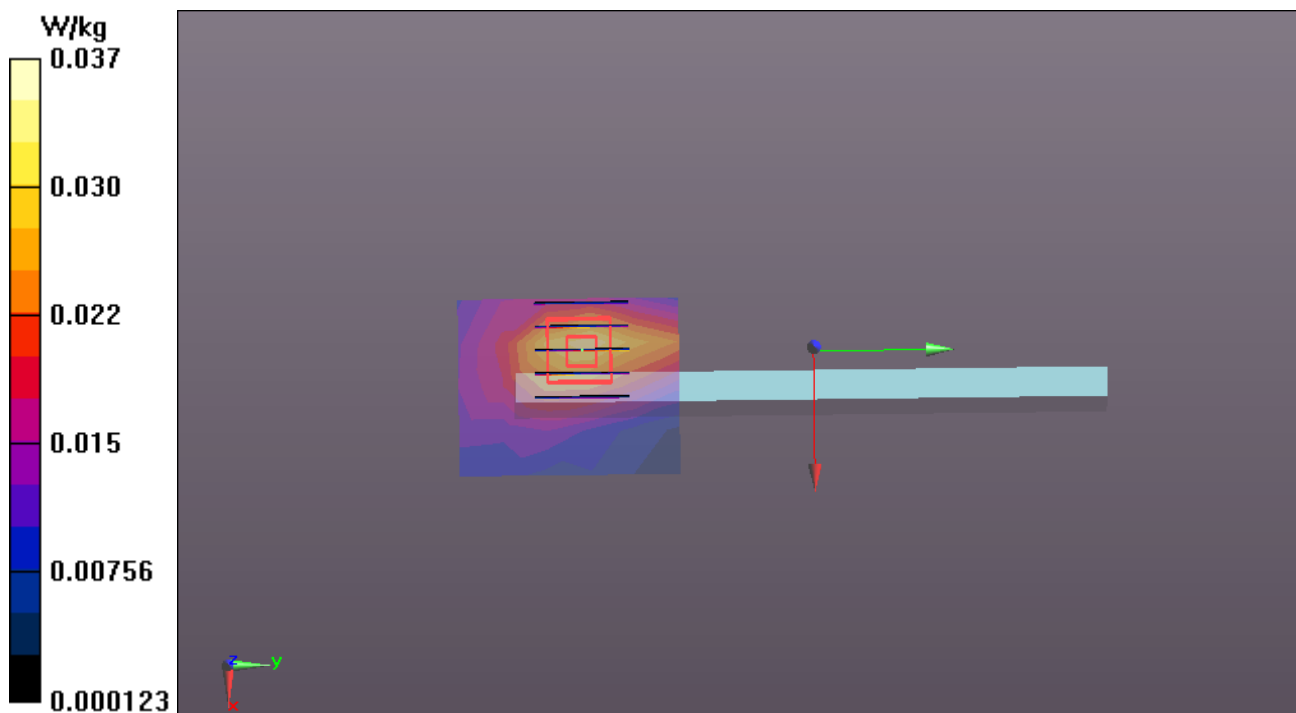



Test Laboratory: Compliance Certification Services Inc.

Date: 7/27/2013

GPRS1900-Body-Edge4-CH512

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.519$ S/m; $\epsilon_r = 51.958$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.4°C; Liquid Temperature: 21.8°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(7.3, 7.3, 7.3); Calibrated: 12/10/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH512/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.475 W/kg


CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.447 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.777 W/kg

SAR(1 g) = 0.463 W/kg; SAR(10 g) = 0.248 W/kg

Maximum value of SAR (measured) = 0.628 W/kg

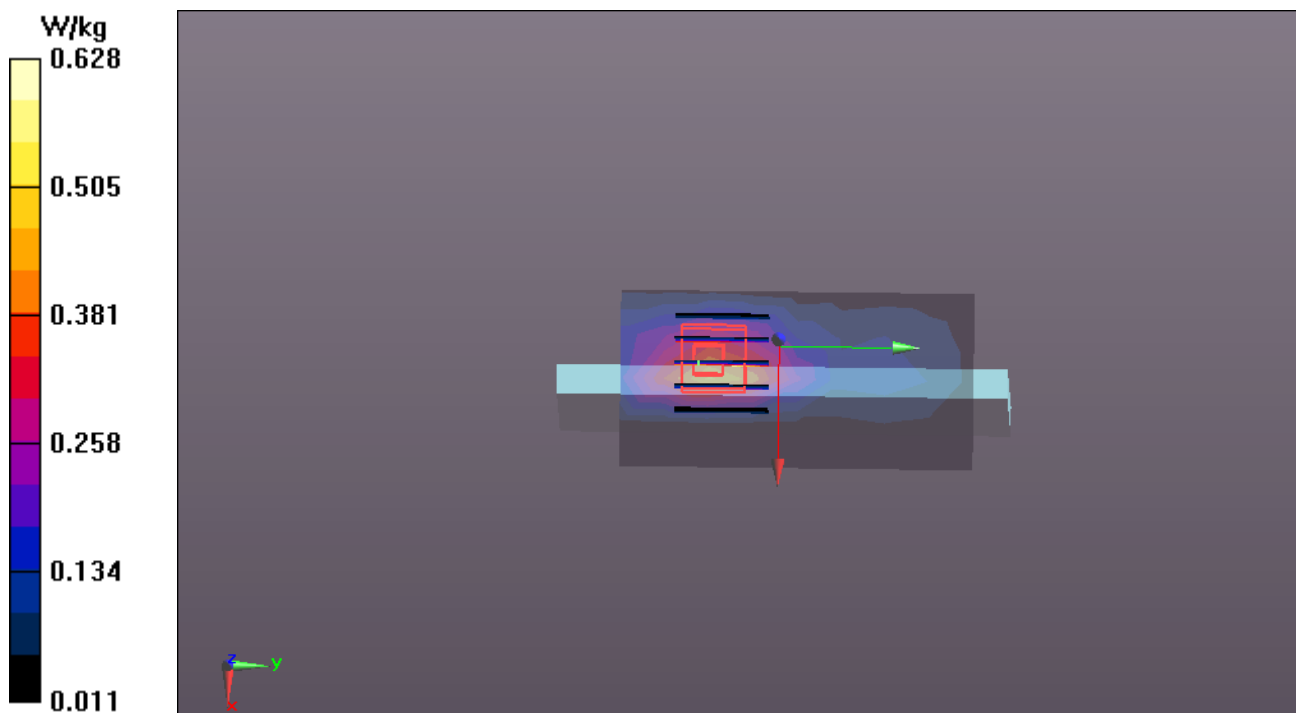



Test Laboratory: Compliance Certification Services Inc.

Date: 7/26/2013

WCDMA Band V-Body Rear-CH4233

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: FDD WCDMA; Communication System Band: Band 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.972$ S/m; $\epsilon_r = 55.295$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.1°C; Liquid Temperature: 21.7°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.07, 9.07, 9.07); Calibrated: 12/10/2012;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH4233/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.718 W/kg


CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 6.823 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.952 W/kg

SAR(1 g) = 0.581 W/kg; SAR(10 g) = 0.347 W/kg

Maximum value of SAR (measured) = 0.746 W/kg

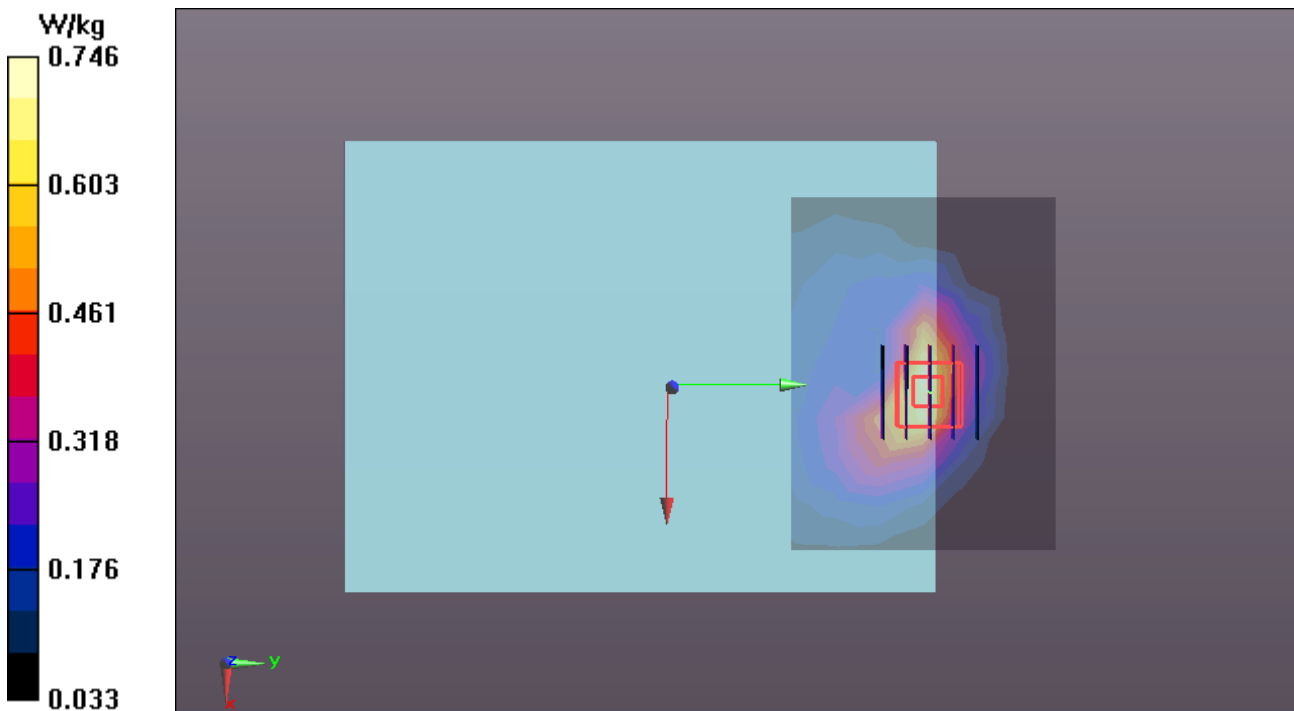

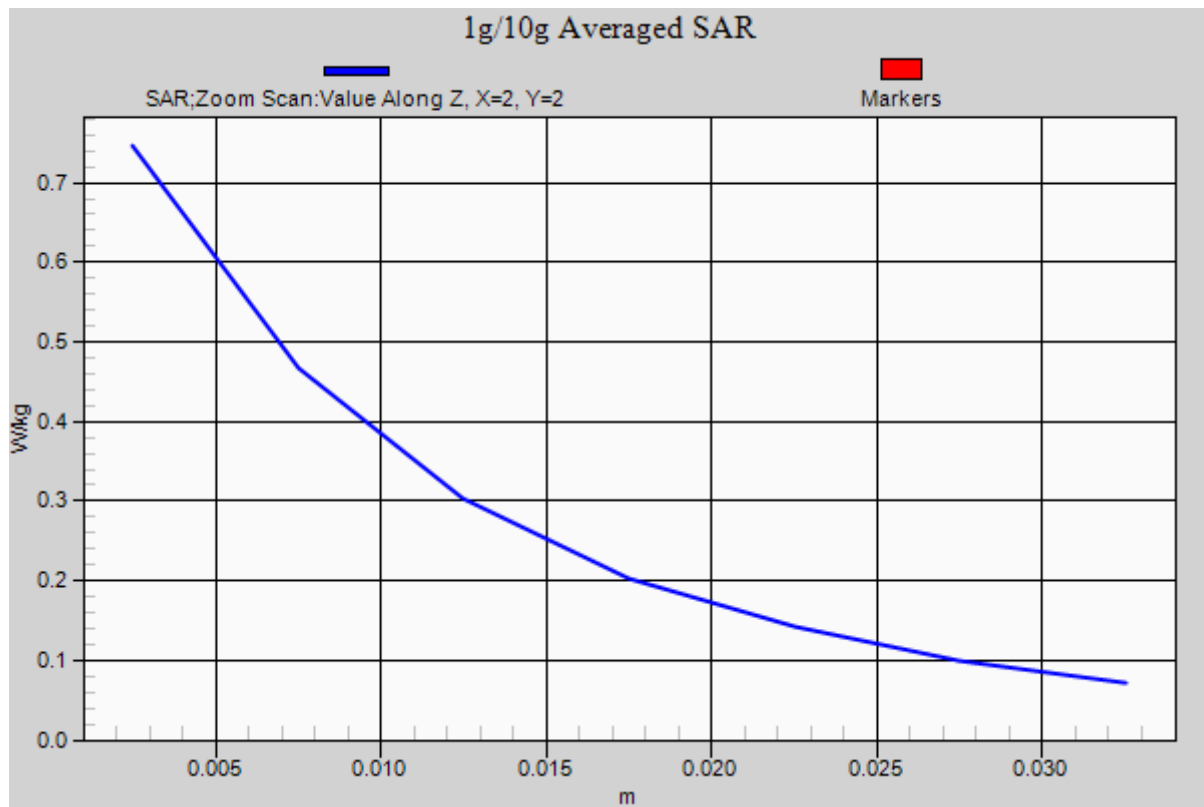



Test Laboratory: Compliance Certification Services Inc.

Date: 7/26/2013

WCDMA Band V-Body Edge1-CH4233

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: FDD WCDMA; Communication System Band: Band 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.972$ S/m; $\epsilon_r = 55.295$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.1°C; Liquid Temperature: 21.7°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.07, 9.07, 9.07); Calibrated: 12/10/2012;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH4233/Area Scan (10x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0469 W/kg


CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.072 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0640 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0539 W/kg

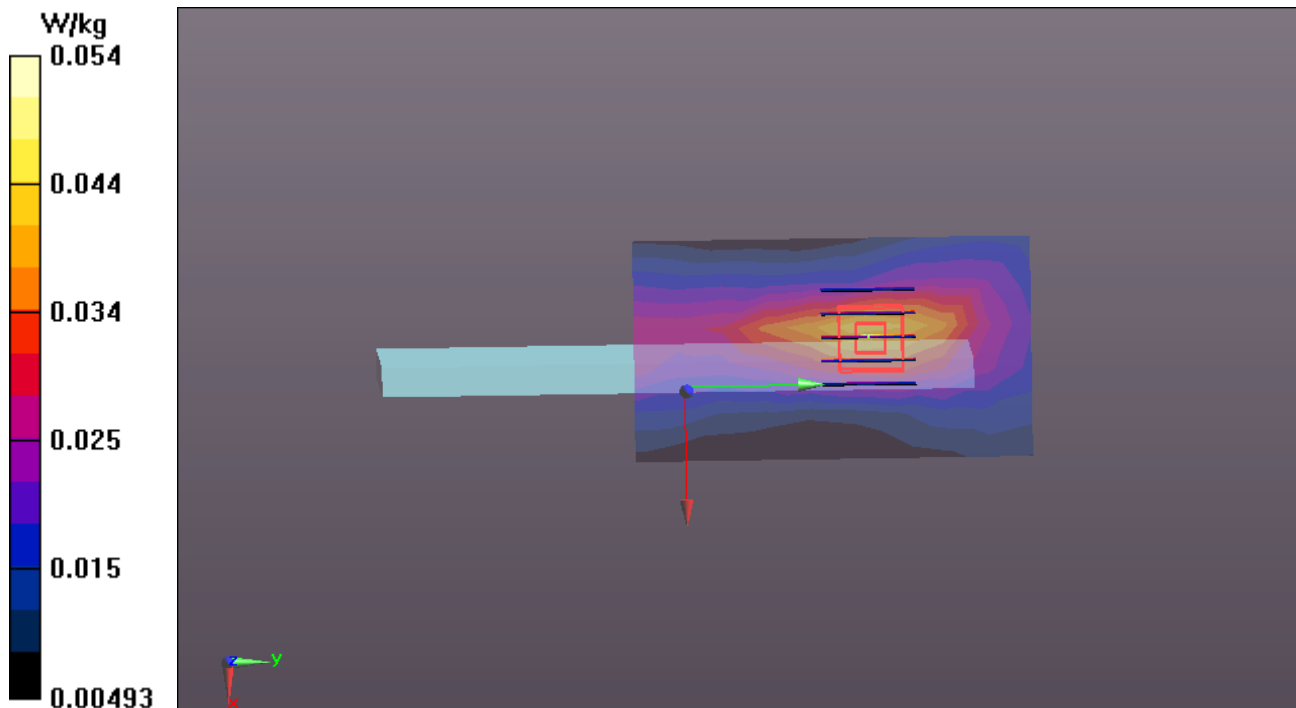



Test Laboratory: Compliance Certification Services Inc.

Date: 7/26/2013

WCDMA Band V-Body Edge3-CH4233

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: FDD WCDMA; Communication System Band: Band 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.972$ S/m; $\epsilon_r = 55.295$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.1°C; Liquid Temperature: 21.7°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.07, 9.07, 9.07); Calibrated: 12/10/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH4233/Area Scan (10x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0812 W/kg


CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.870 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.0907 W/kg

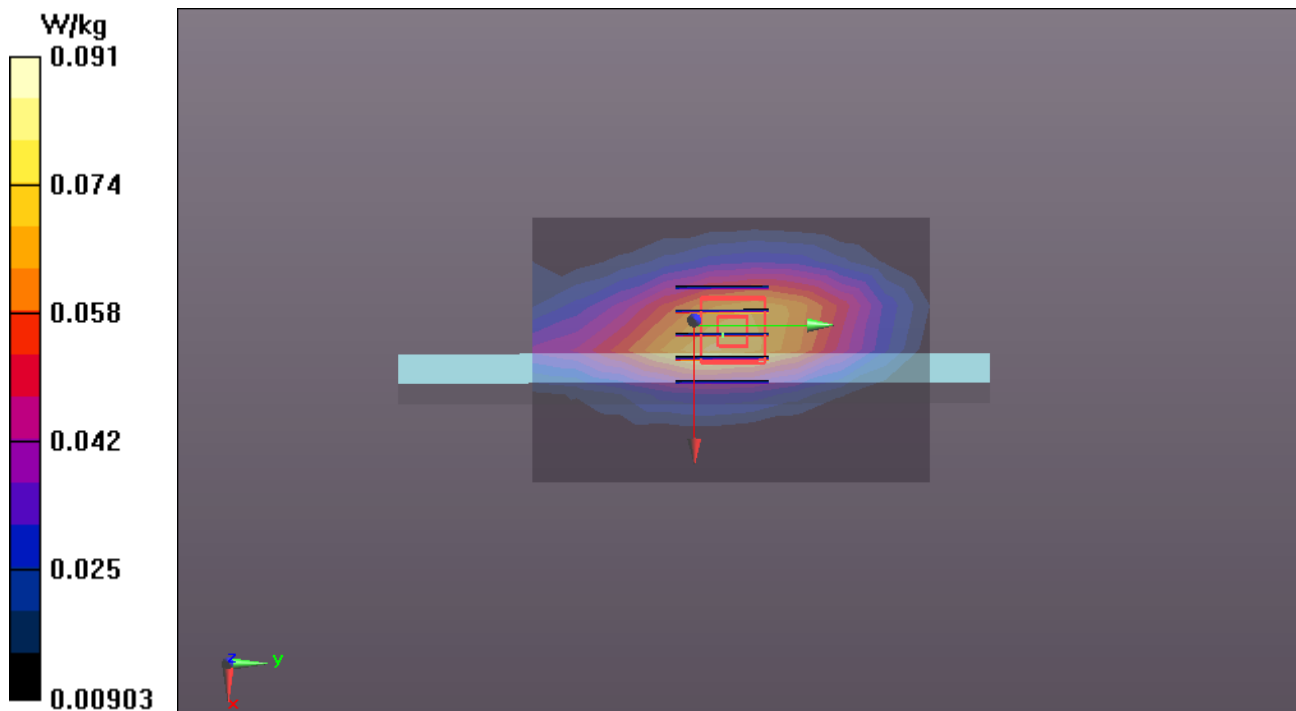



Test Laboratory: Compliance Certification Services Inc.

Date: 7/26/2013

WCDMA Band V-Body Edge4-CH4233

DUT: 8' PDA; Type: 800P11B; Serial: 353478058678930

Communication System: FDD WCDMA; Communication System Band: Band 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.972$ S/m; $\epsilon_r = 55.295$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.1°C; Liquid Temperature: 21.7°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3820; ConvF(9.07, 9.07, 9.07); Calibrated: 12/10/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 1/16/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

CH4233/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.386 W/kg

CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.510 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.514 W/kg

SAR(1 g) = 0.345 W/kg; SAR(10 g) = 0.215 W/kg

Maximum value of SAR (measured) = 0.441 W/kg

