

FCC PART 15 CLASS B
EMI MEASUREMENT AND TEST REPORT
For

Shenzhen Honson Electronics Technology Co., Ltd.
No.21 Caitian Road, Shatian Village, Kengzi Town Pingshan New District Shenzhen China

FCC ID: RQG-HPA2X

January 22, 2013

This Report Concerns: Original Report	Equipment Type: Bluetooth Speaker
Test Engineer:	Anna Lv <i>Anna Lv</i>
Test Engineer of performing the tests:	Hans Hu <i>Hans Hu</i>
Report No.:	BST12111093Y-1ER-3
Receive EUT Date/Test Date:	January 02, 2013 / January 02, 2013- January 22, 2013
Reviewed By:	Mike Moo <i>Mike Moo</i>
Prepared By:	Shenzhen BST Technology Co.,Ltd. 3F, Weames Technology Building, No. 10 Kefa Road, Science Park, Nanshan District, Shenzhen, Guangdong, China Tel: 0755-26747751-3 Fax: 0755-26747751-3 ext.826

Note: The test report is specially limited to the above company and this particular sample only.
It may not be duplicated without prior written consent of Shenzhen BST Technology Co.,Ltd.
This report must not be used by the client to claim product certification, approval, or
endorsement by NVLAP, NIST or any agency of the US Government.

TABLE OF CONTENTS

1.	GENERAL INFORMATION	3
1.1.	Report information.....	3
2.	PRODUCT DESCRIPTION	4
2.1.	EUT Description	4
2.2.	Block Diagram of EUT Configuration	4
2.3.	Support Equipment List	4
2.4.	Test Conditions	5
3.	TEST RESULTS SUMMARY	6
4.	TEST EQUIPMENT USED	7
5.	CONDUCTED EMISSION TEST	8
5.1.	Measurement Uncertainty	8
5.2.	Block Diagram of Test Setup	8
5.3.	Test Standard	8
5.4.	Conducted Emission Limit(Class B)	9
5.5.	EUT Configuration on Test	9
5.6.	Operating Condition of EUT	9
5.7.	Test Procedure	9
5.8.	Test Result	9
6.	RADIATED EMISSION MEASUREMENT	12
6.1.	Measurement Uncertainty	12
6.2.	Block Diagram of EUT Configuration	12
6.3.	Test Standard	12
6.4.	Radiated Emission Limit(Class B)	13
6.5.	EUT Configuration on Test	13
6.6.	Operating Condition of EUT	13
6.7.	Test Procedure	14
6.8.	Test Result	14

1. GENERAL INFORMATION

1.1. Report information

- 1.1.1.This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that BST approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that BST in any way guarantees the later performance of the product/equipment.
- 1.1.2.The sample/s mentioned in this report is/are supplied by Applicant, BST therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 1.1.3.Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through BST, unless the applicant has authorized BST in writing to do so.

Test Facility -

The test site used to collect the data is located on the address of

Global United Technology Service Co., Ltd

(FCC Registered Test Site Number: 600491) on

2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District,
Shenzhen, China 518102


The Test Site is constructed and calibrated to meet the FCC requirements.

2. PRODUCT DESCRIPTION

2.1. EUT Description

Applicant : Shenzhen Honson Electronics Technology Co., Ltd.
 Address : No.21 Caitian Road, Shatian Village, Kengzi Town Pingshan New District Shenzhen China
 Manufacturer : Shenzhen Honson Electronics Technology Co., Ltd.
 Address : No.21 Caitian Road, Shatian Village, Kengzi Town Pingshan New District Shenzhen China
 EUT Description : Bluetooth Speaker
 Trade Name : HONSON
 Model Number : Bluetooth speaker HPA2X, Bluetooth speaker HSBL12, Bluetooth speaker MBBT66, Bluetooth speaker HNA3X, Bluetooth speaker BTC4, Bluetooth speaker UBT6, Bluetooth speaker ABT2, Bluetooth speaker CBT13
 Receiver frequency : 2402-2480MHz
 modulation type : GFSK(1Mbps)
 Antenna gain : 0dBi
 Power Supply : DC 19V (Powered by Adapter)
 Channel : 79

2.2. Block Diagram of EUT Configuration

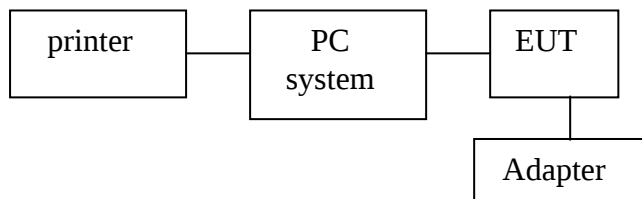

2.3. Support Equipment List

Name	Model No	S/N	Manufacturer	Used (Y/N)
AC Adapter Input:100-240V, 50/60Hz, 1.5A Max Output:19V, 4.74A	PA-1900-05	--	LINTE-NO	Y
PC system	AM1830	N/A	Acer	Y
Printer	HP1020	N/A	HP	Y

2.4. Test Conditions

Temperature: 23~27°C

Relative Humidity: 50~63 %

The series products, model name: Bluetooth speaker HPA2X, Bluetooth speaker HSBL12, Bluetooth speaker MBBT66, Bluetooth speaker HNA3X, Bluetooth speaker BTC4, Bluetooth speaker UBT6, Bluetooth speaker ABT2, Bluetooth speaker CBT13 have the same circuit diagram, PCB layout, software, RF Module, Features and functionality. The differences are the model name, so, we select Bluetooth speaker HPA2X to test.

3. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	Test Results
Conducted disturbance	Pass
Radiated disturbance	Pass

4. TEST EQUIPMENT USED

EQUIPMENT/FACILITIES	MANUFACTURER	MODEL	SERIAL NO.	DATE OF CAL.	CAL. INTERVAL
3m Semi-Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 30 2012	1 Year
Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jul. 04 2012	1 Year
BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRO NIK	VULB9163	GTS214	Feb. 25 2012	1 Year
Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRO NIK	9120D-829	GTS208	June 30 2012	1 Year
Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 30 2012	1 Year
EMI Test Software	AUDIX	E3	N/A	N/A	N/A
Cable	Resenberger	N/A	NO.1	Apr. 6, 2012	1 Year
Cable	SCHWARZBECK	N/A	NO.2	Apr. 6, 2012	1 Year
Cable	SCHWARZBECK	N/A	NO.3	Apr. 6, 2012	1 Year
Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jul. 04 2012	1 Year
Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jul. 04 2012	1 Year
Amplifier (18-26GHz)	R&S	AFS33-1800 2 650-30-8P-4 4	GTS218	June 30 2012	1 Year
Band filter	Amindeon	82346	GTS219	Mar. 31 2012	1 Year
Active Loop Antenna	Beijing Daze	ZN30900A	GTS215	Mar. 31 2012	1 Year
Power Meter	R&S	NRVS	GTS216	Apr. 6, 2012	1 Year
Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Sep. 08 2012	1 Year
EMI Test Receiver	R&S	ESCS30	GTS223	Jul. 04 2012	1 Year
10dB Pulse Limita	R&S	N/A	GTS224	Jul. 04 2012	1 Year
Coaxial Switch	ANRITSU CORP	MP59B	GTS225	Jul. 04 2012	1 Year
LISN	SCHWARZBECK MESS-ELEKTRO NIK	NSLK 8127	GTS226	Jul. 04 2012	1 Year
Coaxial Cable	SCHWARZBECK	N/A	NO.4	Apr. 6, 2012	1 Year
EMI Test Software	AUDIX	E3	N/A	N/A	N/A
Spectrum analyzer	agilent	E4440A	GTS251	N/A	N/A


5. CONDUCTED EMISSION TEST

5.1. Measurement Uncertainty


The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 1.38 dB.

5.2. Block Diagram of Test Setup

5.2.1. Block Diagram of connection between the EUT and the simulators

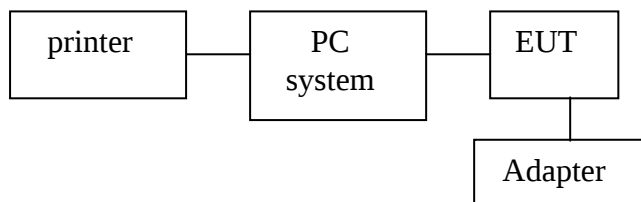

5.2.2. Test Setup Diagram

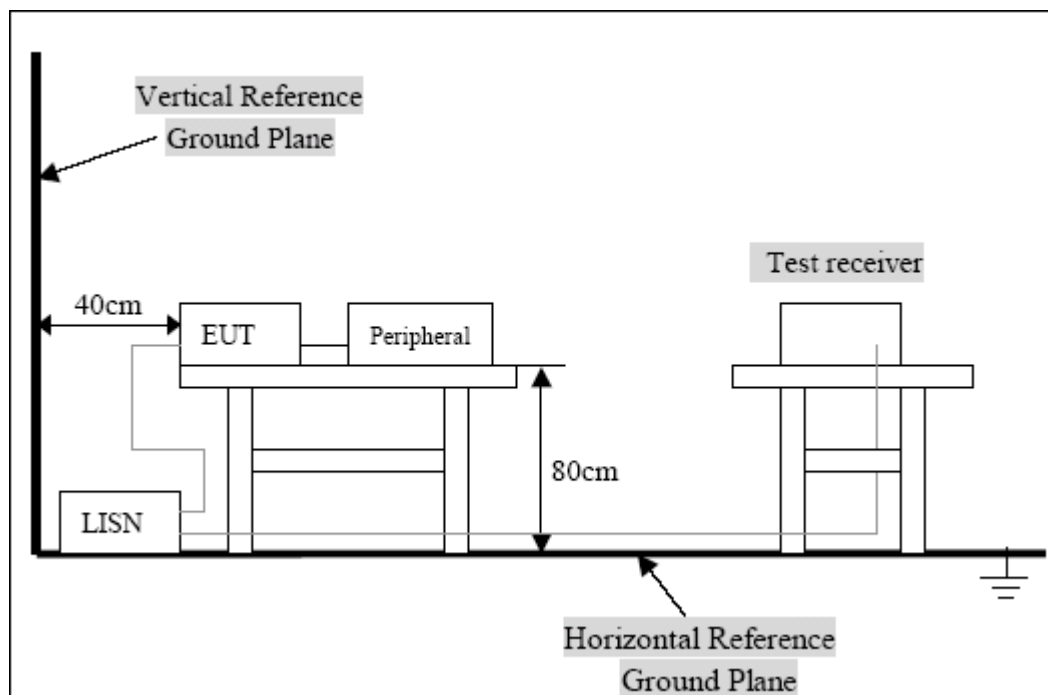

5.3. Test Standard

FCC Part 15 CLASS B

ANSI C63.4 2003

5.4. Conducted Emission Limit(Class B)

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

5.5. EUT Configuration on Test

The following equipments are installed on conducted emission test to meet FCC Part 15 requirement and operating in a manner, which tends to maximize its emission characteristics in a normal application.

5.6. Operating Condition of EUT

5.6.1. Setup the EUT and simulators as shown in Section 6.1.

5.6.2. Turn on the power of all equipments.

5.6.3. Let the EUT work in test mode and test it.


5.7. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver is used to test the emissions form both sides of AC line. The bandwidth of EMI test receiver is set at 9kHz.

5.8. Test Result

PASS

Test mode:running with PC

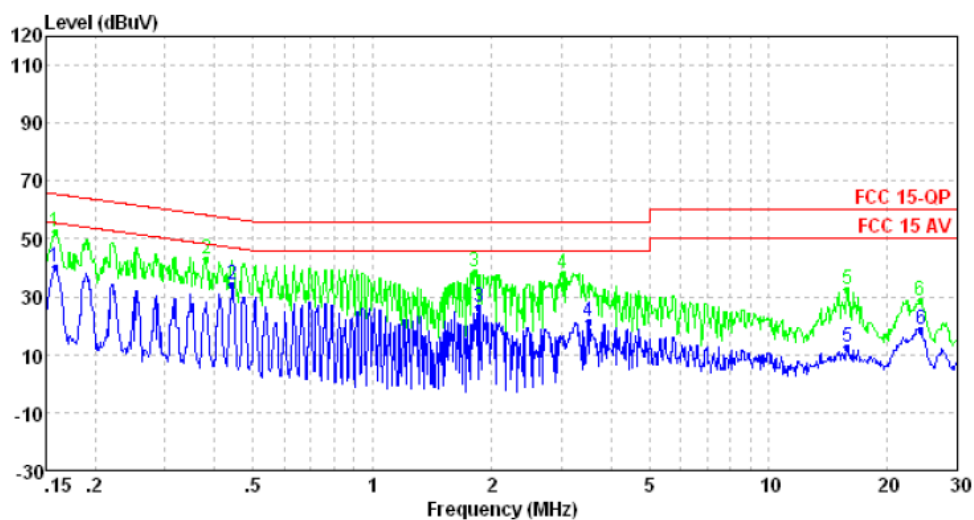

Condition:


: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	Line	Limit	dB	
1 Max	0.16	40.24	55.56	-15.32	Average	LINE
2	0.44	34.22	47.02	-12.80	Average	LINE
3	1.86	26.37	46.00	-19.63	Average	LINE
4	3.51	21.66	46.00	-24.34	Average	LINE
5	15.80	12.89	50.00	-37.11	Average	LINE
6	24.27	18.62	50.00	-31.38	Average	LINE

Condition:

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	Line	Limit	dB	
1 Max	0.16	52.64	65.56	-12.92	Peak	LINE
2	0.38	43.29	58.25	-14.96	Peak	LINE
3	1.82	38.65	56.00	-17.35	Peak	LINE
4	3.03	38.08	56.00	-17.92	Peak	LINE
5	15.80	32.42	60.00	-27.58	Peak	LINE
6	24.14	28.95	60.00	-31.05	Peak	LINE

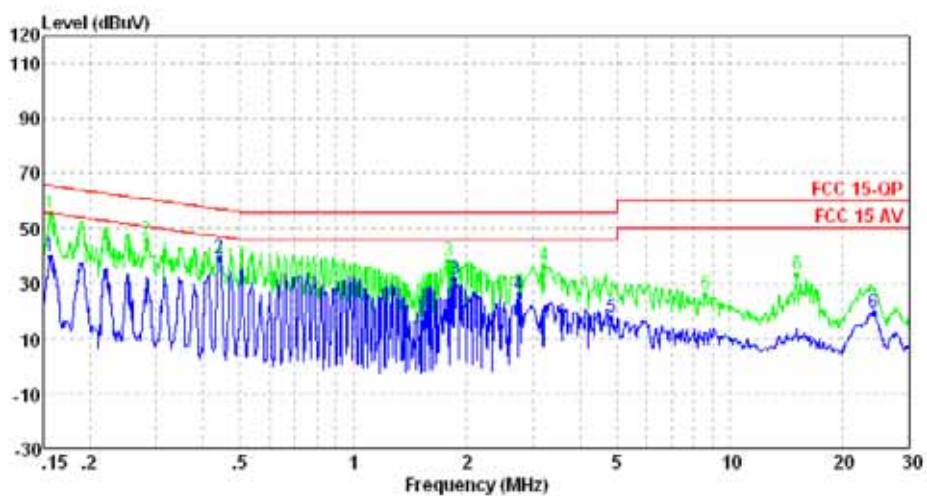

Condition:

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB		
1 Max	0.16	39.62	55.65	-16.03	Average	NEUTRAL
2	0.44	39.15	47.07	-7.92	Average	NEUTRAL
3	1.86	31.59	46.00	-14.41	Average	NEUTRAL
4	2.76	25.98	46.00	-20.02	Average	NEUTRAL
5	4.85	17.56	46.00	-28.44	Average	NEUTRAL
6	24.14	19.22	50.00	-30.78	Average	NEUTRAL

Condition:

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB		
1 Max	0.16	55.05	65.65	-10.60	Peak	NEUTRAL
2	0.28	45.92	60.76	-14.84	Peak	NEUTRAL
3	1.79	38.04	56.00	-17.96	Peak	NEUTRAL
4	3.22	36.57	56.00	-19.43	Peak	NEUTRAL
5	8.64	25.96	60.00	-34.04	Peak	NEUTRAL
6	16.07	33.26	60.00	-26.74	Peak	NEUTRAL


6. RADIATED EMISSION MEASUREMENT

6.1. Measurement Uncertainty


The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is $<1\text{G} \pm 4.68 \text{ Db}, >1\text{G} \pm 4.89 \text{ Db}$.

6.2. Block Diagram of EUT Configuration

6.2.1. Block Diagram of connection between the EUT and the simulators

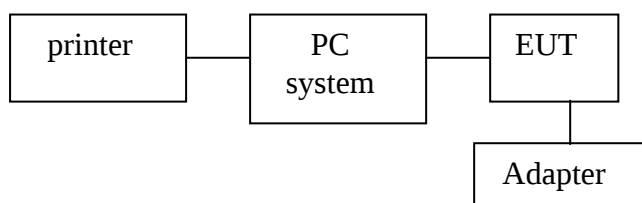

6.2.2. Semi-anechoic Chamber Test Setup Diagram

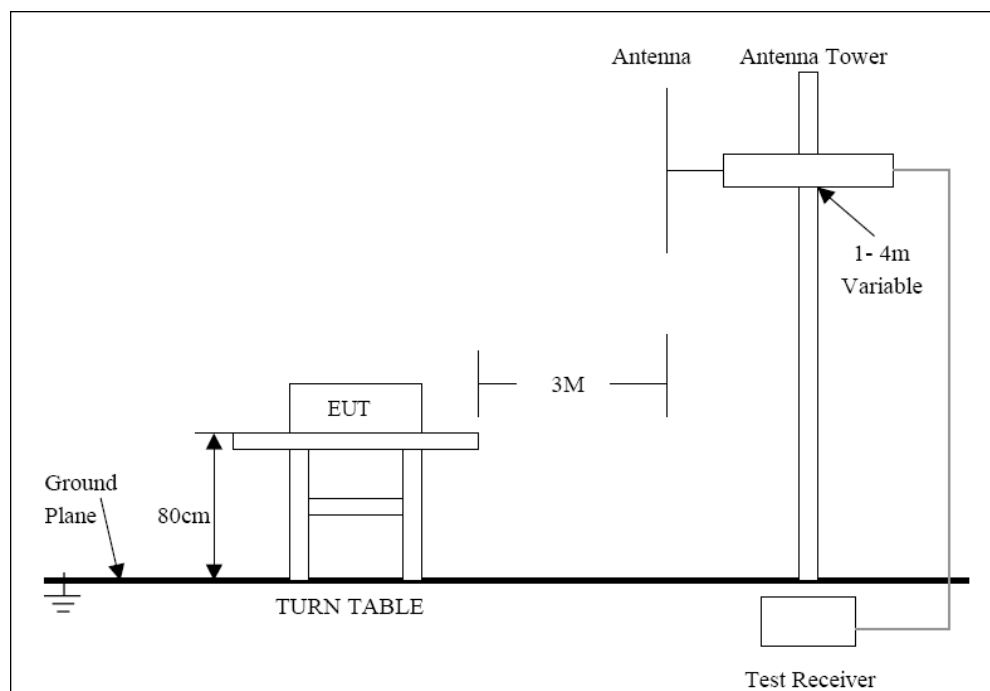

6.3. Test Standard

FCC Part 15 CLASS B
ANSI C63.4 2003

6.4. Radiated Emission Limit(Class B)

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMITS (dB μ V/m)
30 ~ 88	3	40.0
88 ~ 216	3	43.5
216 ~ 960	3	46.0
Above 1000	3	54.0

Note:(1) The smaller limit shall apply at the edge between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT or system.

6.5. EUT Configuration on Test

The following equipment are installed on Radiated Emission Measurement to meet the Commission requirements and operating regulations in a manner which tends to maximize Its emission characteristics in normal application.

6.6. Operating Condition of EUT

6.6.1.Let the EUT work in test mode and test it.

6.7. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Calibrated Loop antenna is used as receiving antenna for frequencies below 30MHz, Calibrated Bilog antenna is used as receiving antenna for frequencies between 30 MHz and 1 GHz, Calibrated Horn antenna is used as receiving antenna for frequencies above 1000MHz. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

The bandwidth of test receiver is set at 120kHz in 30-1000MHz. and set at 1000kHz above 1000MHz.


The final measurement in band above 1000MHz is performed with Peak detector and Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

6.8. Test Result

PASS


Test mode:running with PC

For 30MHz-1000MHz Spurious

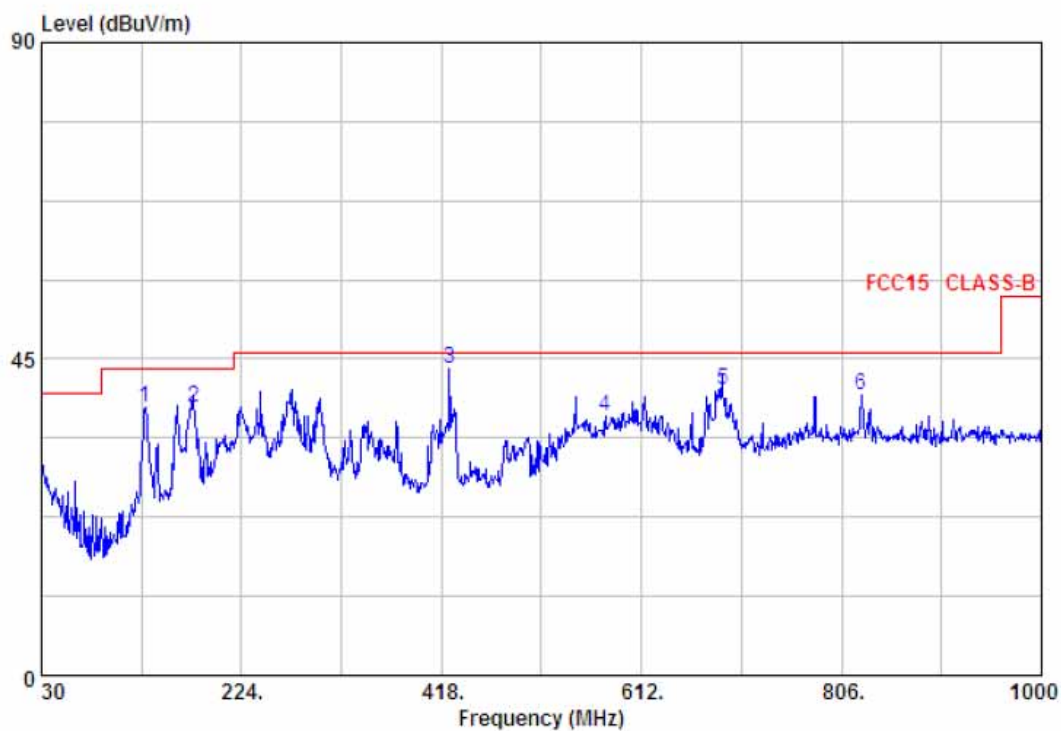

Condition : FCC15 CLASS-B 3m HORIZONTAL
 : RBW:100.000KHz VBW:300.000KHz SWT:Auto

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB		
1	130.88	38.14	43.50	-5.36	QP	HORIZONTAL
2	177.44	38.12	43.50	-5.38	QP	HORIZONTAL
3 max	425.76	43.72	46.00	-2.28	QP	HORIZONTAL
4	577.08	36.97	46.00	-9.03	QP	HORIZONTAL
5	690.57	40.73	46.00	-5.27	QP	HORIZONTAL
6	825.40	39.93	46.00	-6.07	QP	HORIZONTAL

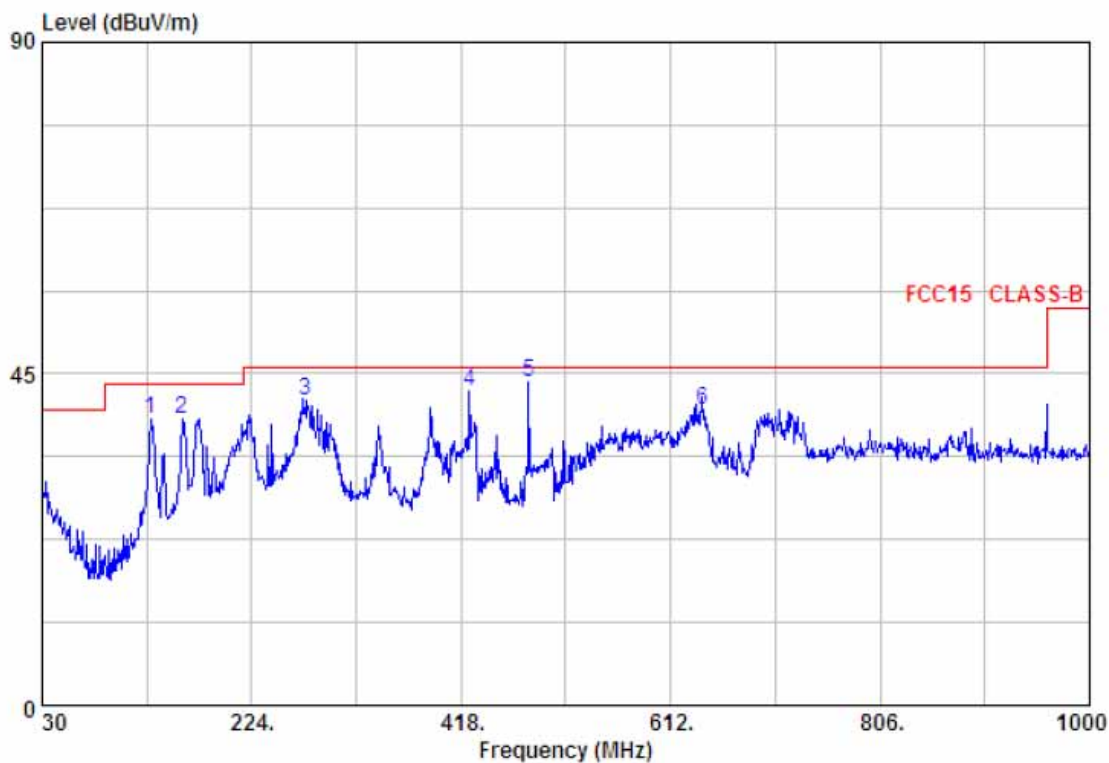

Condition : FCC15 CLASS-B 3m HORIZONTAL
 : RBW:100.000KHz VBW:300.000KHz SWT:Auto

	Freq	Level	Limit	Over		
	MHz	dBuV/m	dBuV/m	dB	Remark	Pol/Phase
1	130.88	38.80	43.50	-4.70	QP	VERTICAL
2	159.98	38.81	43.50	-4.69	QP	VERTICAL
3	274.44	41.45	46.00	-4.55	QP	VERTICAL
4	425.76	42.58	46.00	-3.42	QP	VERTICAL
5 max	480.08	43.97	46.00	-2.03	QP	VERTICAL
6	642.07	40.13	46.00	-5.87	QP	VERTICAL

For 1000MHz-25000MHz Spurious
PASS

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1057.116	34.32	10.31	44.63	74.00	-29.37	PK
1057.116	21.33	10.31	31.64	54.00	-22.36	AV
2302.147	36.25	11.32	47.57	74.00	-26.43	PK
2302.147	21.61	11.32	32.93	54.00	-21.07	AV
3736.198	36.54	12.25	48.79	74.00	-25.21	PK
3736.198	19.12	12.25	31.37	54.00	-22.63	AV

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1057.116	34.18	10.31	44.49	74.00	-29.51	PK
1057.116	20.11	10.31	30.42	54.00	-23.58	AV
2302.147	35.49	11.32	46.81	74.00	-27.19	PK
2302.147	19.48	11.32	30.8	54.00	-23.2	AV
3736.198	37.15	12.25	49.4	74.00	-24.6	PK
3736.198	20.4	12.25	32.65	54.00	-21.35	AV

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.