

# Certificate of Test

February 2004

## SAMMI INFORMATION SYSTEMS CO., LTD

Product Type : Industrial PC  
Model Number : MiniStation 12  
Test Report Number : GTK-0312027  
Date of Test : December 01, 2003- February 04, 2004

This Product was tested to the following standards at the laboratory  
of Global EMC Standard Tech. Corp., and found Compliance.

Standards:  
FCC Part 15 Subpart C Paragraph 15.247  
ANSI C63.4: 2001

<http://www.gestek.com.tw>



Sharon Chang, President

Date: February 24, 2004

### GesTek EMC Lab

No. 3, Pau-Tou-Tsuo Valley, Chia-Pau Tsuen,  
Lin Kou Hsiang, Taipei County, Taiwan, R.O.C.  
TEL:886-2-2603-5321  
FAX:886-2-2603-5325





**Test Report  
Application for  
Declaration of Conformity  
On Behalf Of**

**SAMMI INFORMATION SYSTEMS CO., LTD**

**EUT:  
Industrial PC**

**Model Number:  
MiniStation 12**

**FCC ID:  
RQKMINISTATION12**

**Prepared for:**

**SAMMI INFORMATION SYSTEMS CO., LTD  
7-9 Fl., Seo Jo Bldg, 103-15, Galwor-Dong, Yong San-Ku, Seoul, Korea**

**Report By :Global EMC Standard Tech. Corp.  
No.3 Pau-Tou-Tsuo Valley, Chia-Pau  
Tsuen, Lin Kou Hsiang, Taipei County,  
Taiwan, R.O.C.  
Tel : 886-2-2603-5321  
Fax : 886-2-2603-5325**

- 1. Test results given in this report only relate to the specimen(s) tested, measured.
- 2. This report is the property of GesTek, and shall not be reproduced, other than in full, without the written consent of GesTek.
- 3. The report must not be used by the client to claim product certification, approval, or endorsement by any agency of the federal government.
- 4. All data in this report are traceable to national standard or international standard.

## TABLE OF CONTENTS

	<b>PAGE</b>
<b>DESCRIPTION</b>	<b>PAGE</b>
<b>1. CERTIFICATION.....</b>	<b>4</b>
<b>2. GENERAL INFORMATION.....</b>	<b>5</b>
2.1 PRODUCTION DESCRIPTION .....	5
2.2 OPERATIONAL DESCRIPTION.....	7
2.3 TEST MODES & EUT COMPONENTS DESCRIPTION .....	8
2.4 CONFIGURATION OF THE TESTED SYSTEM.....	9
2.5 TEST FACILITY .....	11
2.6 TEST SETUP .....	12
2.6.1 BLOCK DIAGRAM OF CONNECTIONS BETWEEN EUT AND SIMULATORS..	12
2.7 EUT OPERATING CONDITIONS.....	12
<b>3. CONDUCTION EMISSION DATA.....</b>	<b>13</b>
3.1 TEST EQUIPMENTS .....	13
3.2 BLOCK DIAGRAM OF TEST SETUP.....	13
3.3 CONDUCTED EMISSION LIMIT .....	14
3.4 OPERATING CONDITION OF EUT .....	14
3.5 EUT CONFIGURATION ON MEASUREMENT .....	14
3.6 CONDUCTED EMISSION DATA.....	14
3.7 CONDUCTED EMISSIONS MEASUREMENT RESULTS .....	15
<b>4. RADIATION EMISSION DATA.....</b>	<b>16</b>
4.1 TEST EQUIPMENT .....	16
4.2 OPEN TEST SITE SETUP DIAGRAM.....	16
4.3 RADIATED EMISSION LIMIT .....	17
4.4 EUT CONFIGURATION .....	17
4.5 OPERATING CONDITION OF EUT .....	17
4.6 RADIATED EMISSION DATA .....	17
4.7 RADIATED EMISSIONS MEASUREMENT RESULTS .....	18
<b>5. PEAK POWER OUTPUT .....</b>	<b>48</b>
5.1 TEST EQUIPMENT .....	48
5.2 BLOCK DIAGRAM OF TEST SETUP.....	48
5.3 PEAK POWER OUTPUT LIMIT .....	48
5.4 TEST RESULT .....	49
<b>6. BAND EDGE.....</b>	<b>50</b>
6.1 TEST EQUIPMENT .....	50
6.2 BLOCK DIAGRAM OF TEST SETUP.....	50
6.3 BAND EDGE LIMIT .....	51
6.4 EUT CONFIGURATION .....	51
6.5 OPERATING CONDITION OF EUT .....	51
6.6 TEST RELULT .....	52
<b>7. OCCUPIED BANDWIDTH.....</b>	<b>63</b>
7.1 TEST EQUIPMENT .....	63
7.2 BLOCK DIAGRAM OF TEST SETUP.....	63
7.3 LIMIT .....	63
7.4 TEST RESULT .....	64
<b>8. POWER DENSITY .....</b>	<b>70</b>
8.1 TEST EQUIPMENT .....	70
8.2 BLOCK DIAGRAM OF TEST SETUP.....	70
8.3 LIMIT .....	70
8.4 TEST RESULT .....	71

<b>9.</b>	<b>DWELL TIME</b>	<b>75</b>
9.1	TEST EQUIPMENT	75
9.2	BLOCK DIAGRAM OF TEST SETUP	75
9.3	Limit	75
9.4	TEST RESULT	76
<b>10.</b>	<b>CHANNEL OF NUMBER</b>	<b>79</b>
10.1	TEST EQUIPMENT	79
10.2	BLOCK DIAGRAM OF TEST SETUP	79
10.3	Limit	79
10.4	TEST RESULT	80
<b>11.</b>	<b>CHANNEL SEPARATION</b>	<b>81</b>
11.1	TEST EQUIPMENT	81
11.2	BLOCK DIAGRAM OF TEST SETUP	81
11.3	Limit	81
11.4	TEST RESULT	82
<b>12.</b>	<b>PHOTOGRAPHS FOR TEST</b>	<b>83</b>
12.1	TEST PHOTOGRAPHS FOR CONDUCTION	83
12.2	TEST PHOTOGRAPHS FOR RADIATION	84
<b>13.</b>	<b>PHOTOGRAPHS FOR PRODUCT</b>	<b>86</b>
<b>14.</b>	<b>EMI REDUCTION METHOD DURING COMPLIANCE TESTING</b>	<b>109</b>

## 1. CERTIFICATION

**Applicant** : SAMMI INFORMATION SYSTEMS CO., LTD

EUT Description : Industrial PC  
 Model Number : MiniStation 12  
 Serial Number : N/A  
 Brade Name : SAMMI  
 FCC ID : RQKMINISTATION12  
 Tested Power Supply : 120V/60Hz

### MEASUREMENT PROCEDURES USED:

**CFR 47, Part 15** Radio Frequency Device Subpart C Paragraph 15.247 Intentional Radiators :2000  
 **ANSI C63.4** Methods of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9kHz To 40GHz. 2001

THE MEASUREMENT SHOWN IN THE ATTACHMENT WAS MADE IN ACCORDANCE WITH THE PROCEDURES INDICATED, AND THE MAXIMUM ENERGY EMITTED BY THE EQUIPMENT WAS FOUND TO BE WITHIN THE ABOVE LIMITS APPLICABLE.



Sample Received Date : December 01, 2003

Final Test Date : February 04, 2004

In order to ensure the quality and accuracy of this document, the contents have been thoroughly reviewed by the following qualified personnel from GesTek Lab.

**Documented By :**

Teresa Wu / adm. Dept. Technical Report Author

**Administrative Reviewed By :**

Joan Chein / adm. Dept. Supervisor

**Tested By :**

Kenny Cho / eng. Dept. Engineer

**Technical Reviewed By :**

Shine Chang / eng. Dept. Supervisor

**Approved By :**

Tonny Lin / General Manager

This test data shown below is traceable to National or international standard such as NIST/USA, etc. The laboratory's NVLAP accreditation in no way constitutes or implies product certification, approval, or endorsement by NVLAP or the United States government.

## 2. GENERAL INFORMATION

### 2.1 PRODUCTION DESCRIPTION

**Product Name** : Industrial PC  
**Model Number** : MiniStation 12  
**Serial Number** : N/A  
**Brade Name** : SAMMI  
**FCC ID** : RQKMINISTATION12  
**Modulation Type** : DBPSK, DQPSK, CCK, OFDM/ GFSK  
**Antenna Gain** : Bluetooth: 3dBi  
 WLAN: 2dBi  
**Antenna Type** : Printed for Bluetooth USB Adapter  
 Connecter(MMCX) for WLAN Card  
**Frequencg Range** : 2402-2480MHz for Bluetooth  
 2412-2462MHz for WLAN  
**Channel Number** : 11 Channel / 79 Channel  
**Data Rate** : 1, 2, 5.5, 11, 6, 9, 12, 18, 24, 36, 48, 54Mbps/ 1Mbps  
**Channel Control** : Auto  
**Working Voltage** : AC 120V/60Hz  
**Power Cable** : 1.7m

#### Frequency of Each Channel:

(1) WLAN :

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

## (2) Bluetooth :

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

**Note:**

1. This device is an Industrial MiniStation included 802.11b and 802.11g 2.4GHz Wireless LAN Card and Bluetooth USB Adapter . This device is not a portable device.
2. The test is included WLAN and Bluetooth transmit function. Test of channel is included the lowest , middle and highest frequency in highest data rate and to perform the test, then record in this report.
3. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
4. The device is accordance with Part 15 regulations. The function receiving was under Declaration of Conformity and record of measurement in test report that the report number is 0312027FCC DOC.

## 2.2 OPERATIONAL DESCRIPTION

The industrial-grade construction of Minestation allows your system to endure the continuous operation in hostile environments where stability and reliability are basic requirements.

The WLAN transmitter inside EUT is Mini PCI interface and powered by EUT. This device has one antenna and connect in PCB. The other instruction, please look at user manual.

This is a digital transmission system (DTS) and have four type of modulation DBPSK, DQPSK, CCK & OFDM. The data rate are 1,2,5.5,11,6,9,12,18,24,36,48.54 Mbps.

The equipment enables high-speed access without wires to network assets. This adapter uses the IEEE 802.11b & 802.11g protocol to enable wireless communications between the host computer and other computers, in the same way that the computer would use an Ethernet adapter.

The Bluetooth USB Adapter inside EUT is an USB interface with 79 channels.

This device provides wireless technology that revolutionizes personal connectivity. It is the solution for the seamless integration of Bluetooth technology into personal computer enabling short-range wireless connections between desktop/laptop computers, Bluetooth-enabled peripherals (printers, faxes,...), portable handheld devices, and connectivity to the Internet.

## 2.3 TEST MODES & EUT COMPONENTS DESCRIPTION

EUT: Industri PC, M/N: MiniStation 12	
Processor	Intel Celeron Series 1GHz or faster. (socket 370 Type)
	Intel Pentium III Series 1GHz or faster (socket 370 Type)
System Memory	SDRAM up to 512MB (one DIMM 168 pin socket), 256MB standard
Operating System Support	Windows 2000, Windows XP Embedded
Display	Color Active Matrix 12.1" TFT LCD, SVGA (800*600) with resistive touch panel
Display Brightness	300 NIT, Optional 900 NIT
H.D.D.	2.5" Hard Disk Drive, Optional 2.5" Flash Hard Disk Drive
System Expansion	16/32bit bus Dual PCMCIA Slots (external accessible), mini PCI, Compact Flash card
Multi I/O	Power, Mouse, Keyboard(PS2), Audio, Parallel, Serial (2), RJ-45 Ethernet, USB (2)
Audio	Integrated stereo speakers (2)
Power Adapter	LISHIN, M/N: LSE9901B1565 110/220V-12Volts DC Output
Power Cable	1.7m
Resolution	800 x 600, H-Sync:54KHz, V-Sync:85Hz

Test Mode	Mode 1	Mode 2	Mode 3
	WLAN (802.11b: 11Mbps)	WLAN (802.11g: 54Mbps)	Bluetooth

## 2.4 CONFIGURATION OF THE TESTED SYSTEM

The FCC IDs/Types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards, which have grants) are:

Device	No.	Configuration	
Printer	P01-016	Manufacturer : Hewlett Packard Model Number : 2225C Serial Number : 2548S40426 BSMI ID : 3892A957 FCC ID : BS46XU2225C Data Cable : Shielded, Detachable, 1.2m, Parallel Cable Power Cord : Non-Shielded, Detachable, 1.8m	
Modem	M03-018	Manufacturer : ACEEX Model Number : 1414V Serial Number : 0046171 BSMI ID : N/A FCC ID : IFAXDM1414 Data Cable : T Type:RS232, Shielded, Detachable, 1.2m Power Cord : Non-Shielded, Detachable, 1.5m Line : Type:RJ11(4P2C), Detachable, 1.8m Phone : Type:RJ11(4P2C), Detachable, 1.8m	
Modem	M03-010	Manufacturer : ACEEX Model Number : 1414 Serial Number : 960018043 BSMI ID : N/A FCC ID : IFAXDM1414 Data Cable : Type:RS232, Shielded, Detachable, 1.2m Power Cord : Non-Shielded, Detachable, 1.5m Line : Type:RJ11(4P2C), Detachable, 1.8m Phone : Type:RJ11(4P2C), Detachable, 1.8m	
PS2 Keyboard	K01-061	Manufacturer : ACER Model Number : 6311-TA BSMI ID : 3882A039 FCC ID : N/A Data Cable : Shielded, Undetachable, 1.5 m	
PS2 Mouse	M02-118	Manufacturer : Logitech Model Number : M-S48A Serial Number : LZE12800400 BSMI ID : 4882A001 FCC ID : JNZ201213 Data Cable : Shielded, Undetachable, 1.5m	
Headset & Earphone	E01-052	Manufacturer : TOKYO Model Number : SX-M1 Serial Number : N/A Data Cable : Non-Shielded, Undetachable, 1.8 m Power Cord : N/A Purchase Date : 2/22/1999	

Device	No.	Configuration	
USB Mouse	M02-270	Manufacturer	: Logitech
		Model Number	: M-U48A
		BSMI ID	: 4882A177
		FCC ID	: JNZ211360
		Data Cable	: Shielded, Undetachable, 1.5m
USB Mouse	M02-273	Manufacturer	: Logitech
		Model Number	: M-U48A
		BSMI ID	: 4882A177
		FCC ID	: JNZ211360
		Data Cable	: Shielded, Undetachable, 1.5m
Bluetooth Adaptor	---	Manufacturer	: USI
		Model Number	: UD1200
Wireless LAN Card	---	Manufacturer	: PESI
		Model Number	: W210Y
Notebook PC	----	Manufacturer	: DELL COMPUTER
		Model Number	: PP05L
		BSMI ID	: R33002
		FCC ID	: N/A
		Power Cord	: Non-Shielded, Detachable, 1.5m.
Far End Network Server	----	Manufacturer	: ASUS
		Model Number	: AP160R
		Power Cord	: Non-Shielded, Detachable, 1.8m



## 2.5 TEST FACILITY

Ambient conditions in the laboratory:

ITEMS	REQUIRED(IEC 68-1)	ACTUAL
TEMPERATURE (°C)	15-35	24-27
HUMIDITY (%RH)	25-75	50-65
BAROMETRIC PRESSURE (mbar)	860-1060	950-1000
FCC SITE DESCRIPTION	Aug. 10, 1995 /Aug. 25, 1998 File on FCC Engineering Laboratory Federal Communication Commission 7435 Oakland Mills Road Columbia, MD 21046 Reference 31040/SIT1300F2	
NVLAP LAB. CODE	200085-0 United States Department of commerce National Institute of Standards and Technology National Voluntary Laboratory Accreditation Program Accreditation on NVLAP effective through Sep. 30,2004 For CISPR 22, FCC Method and AS/NZS 3548 Measurement.	
Chinese National Laboratory Accreditation Certificate R.O.C.	 Recognized by the Council of Chinese National Laboratory Accreditation and confirmed to meet the requirements of ISO/IEC 17025 also has been registered for fifteen items, and meet the requirements of the Article 4 of Measures Governing the Recognition both Approval of Designated Laboratory for Commodities Inspection and has been registered for four items within the field of Electrical Testing. Registration No.: 1082 Registration on CNLA effective through April 30, 2006.	

## 2.6 TEST SETUP

### 2.6.1 BLOCK DIAGRAM OF CONNECTIONS BETWEEN EUT AND SIMULATORS

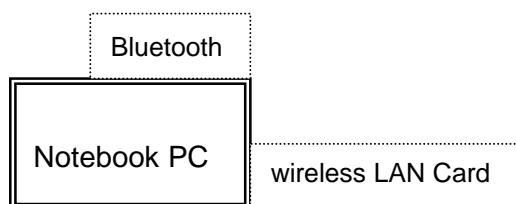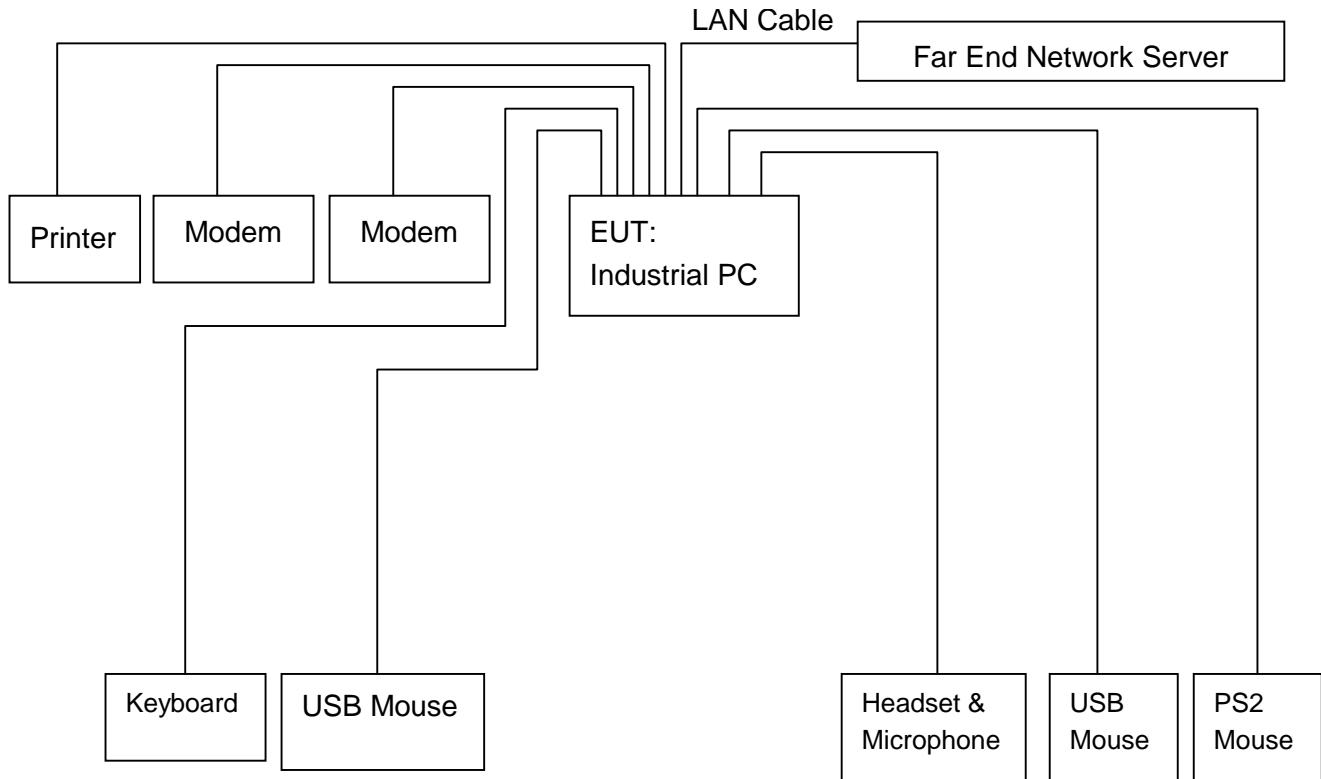

## 2.7 EUT OPERATING CONDITIONS

The EUT exercise program used during conducted testing was designed to exercise the EUT in a manner similar to a typical use. The exercise sequence is listed as below:

1. Setup the EUT and simulators as shown on 2.5.
2. Turn on the power of all equipments.
3. The EUT ping with the wireless LAN card and bluetooth
4. Repeat the above steps.

### 3. CONDUCTION EMISSION DATA


#### 3.1 TEST EQUIPMENTS

The following test equipment are used during the conducted power line tests:

Item	Instrument	Manufacturer	Type	Serial No.	Last Cal.
1	Test Receiver	Rohde & Schwarz	ESCS30	828109/010	01/02/03
2	L.I.S.N.	KYORISTU	KNW-407	8-1345-10	11/20/03
3	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	357.8810.52	08/07/03
4	RF CABLE	GesTek	N/A	GTK-E-A154-01	12/03/03
5	50 Ohm Terminator	GesTek	N/A	GTK-E-A130-01	10/11/03
6	Shielded Room	GesTek	N/A	B5	N/A

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

#### 3.2 BLOCK DIAGRAM OF TEST SETUP

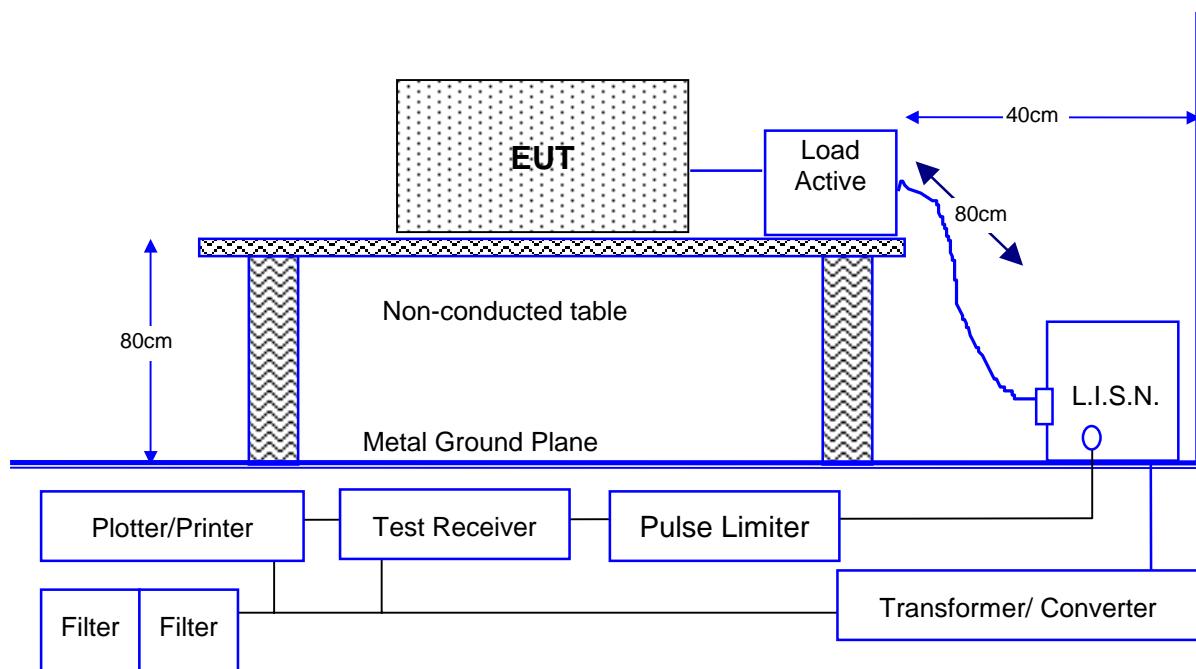

Note: This is a comprehensive setup diagram for Table-top EUT.

For Floor-standing EUT, the table will be removed with all others setup condition remain the same.

### 3.3 CONDUCTED EMISSION LIMIT

FCC Limit (15.207)

Frequency	Conducted Limits dB( $\mu$ V)	
MHz	QUASI-PEAK	AVERAGE
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5.0	56	46
5.0 to 30	60	50

Remarks : In the Above Table, the tighter limit applies at the band edges.

### 3.4 OPERATING CONDITION OF EUT

Same as section 2.6.

### 3.5 EUT CONFIGURATION ON MEASUREMENT

The equipment, which is listed 3.2, is installed on Conducted Power Line Test to meet the Commission requirement and operating in a manner, which tends to maximize its emission characteristics in a normal application.

The device under test, installed in a representative system as described in section 3.2, was placed on a non-conductive table whose total height equal to 80cm. Powered from one L.I.S.N. which signal output to receiver, and the other peripherals was powered from another L.I.S.N. which signal output was terminated by  $50\Omega$ .

### 3.6 CONDUCTED EMISSION DATA

The measurement range of conducted emissions from [0.15 MHz to 30 MHz](#) was investigated. All readings are quasi-peak and average values with a resolution Bandwidth of 9 KHz. The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range for all the test modes. Then the worst modes were reported the following data pages.

### 3.7 CONDUCTED EMISSIONS MEASUREMENT RESULTS


Date of Test	January 28, 2004	Temperature	21 °C
EUT	Industrial PC	Humidity	61 %
Test Mode	Tx Mode	Display Pattern	H Pattern

No.	FREQUENCY MHz	READING LEVEL dB $\mu$ V				LIMIT	
		LINE1 Q.P.	LINE1 AV.	LINE2 Q.P.	LINE2 AV.	Q.P.	AV.
1	0.17408	41.8	34.1	41.1	32.8	64.7	54.7
2	0.22960	37.4	31.3	36.0	28.3	62.4	52.4
3	0.34568	29.8	27.5	30.0	24.1	59.0	49.0
4	0.63640	31.3	26.0	32.2	27.2	56.0	46.0
5	**2.94788	49.6	44.0	50.3	45.0	56.0	46.0
6	26.61950	50.3	38.9	47.0	41.9	60.0	50.0


#### Remarks :

1. All readings are Quasi-peak and Average..
2. “ \* ” means that the quasi-peak reading level is lower than the average limits; it is not necessary to measure the average level.
3. “ \*\* ” means that this data is the worse case emission level.
4. Final measurement = (Receiver reading) + (Correction factor if available).

Line 1

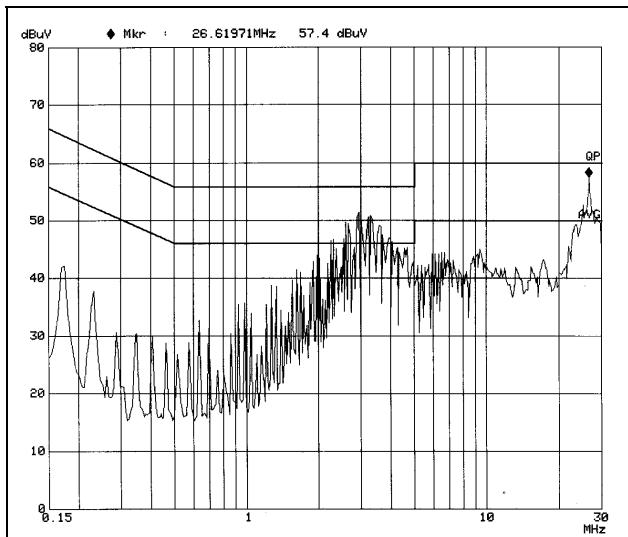

Line 2

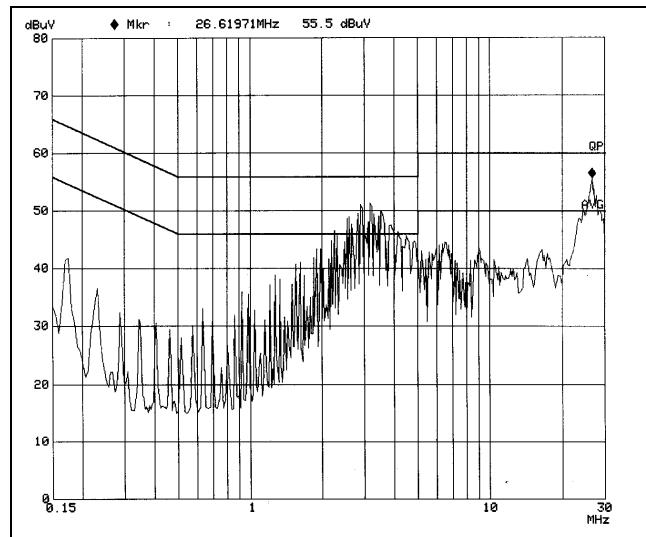

## 4. RADIATION EMISSION DATA

### 4.1 TEST EQUIPMENT

The following test equipments are used during the radiated emission tests:

Radiated test was performed on:  Site #1  Site #2  Site #3  Site #4


Item	Instrument	Manufacturer	Type	Serial No.	Last Cal.
1	Test Receiver	Rohde & Schwarz	ESVS30	829007/014	12/13/03
2	Spectrum Analyzer	ADVANTEST	R3272	82420232	02/14/03
3	Spectrum Analyzer	HP	E4407B	39240339	08/16/03
4	Power Meter	Rohde & Schwarz	NRVS	100666	02/26/03
5	Power Sensor	Rohde & Schwarz	NRV-Z32	8360191058	05/19/03
6	Pre-Amplifier	HP	8447F OPT H64	3113A04487	10/11/03
7	BILOG ANTENNA	SCHAFFNER	CBL6112B	2620	12/01/03
8	Horn Antenna	Electro-Metrics	EM-6961	103318	05/30/03
9	Horn Antenna	Schwarzbeck	BBHA 9120	D243	12/18/03
10	RF Cable	GesTek	N/A	GTK-E-A151-01	02/10/03
11	Open Site	GesTek	N/A	B1	11/25/03
12	Test Program Software	GesTek	N/A	GTK-E-S001-01	N/A

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

### 4.2 OPEN TEST SITE SETUP DIAGRAM

Note: This is a comprehensive setup diagram for Table-top EUT.

For Floor-standing EUT, the table will be removed with all others setup condition remain the same.

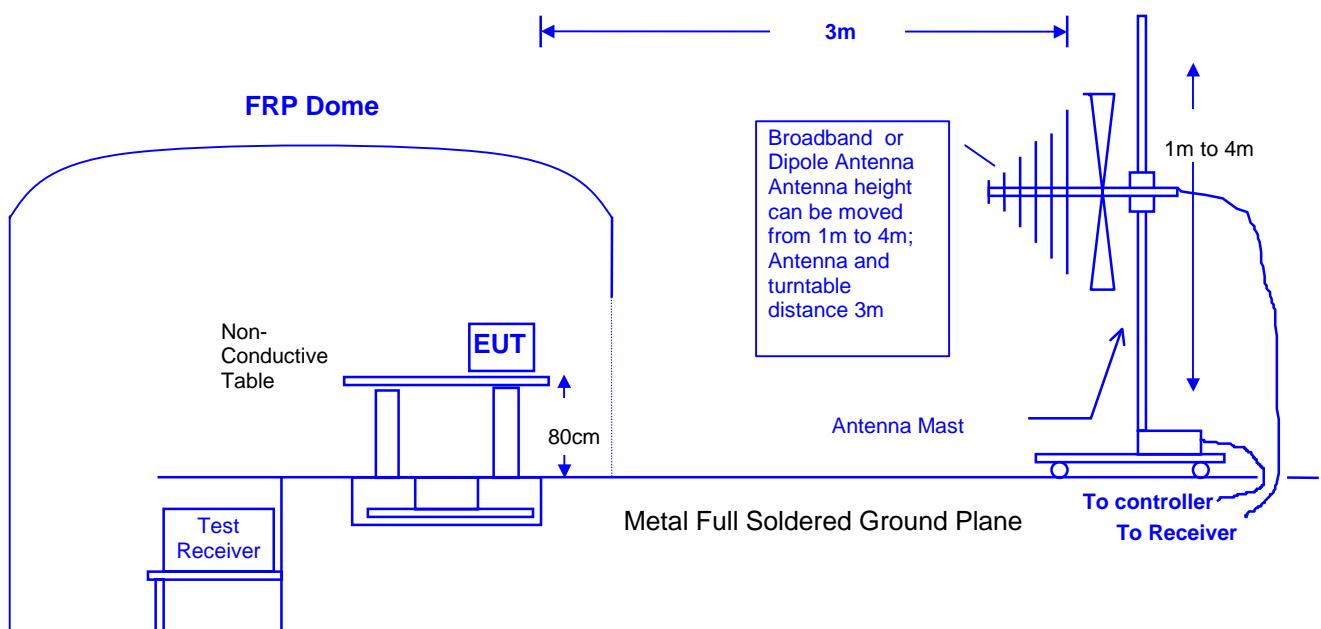

### 4.3 RADIATED EMISSION LIMIT

#### FCC Class C Limit at 3m

Frequency	Distance	Field Strength	
MHz	Meter	$\mu$ V/M	dB $\mu$ V/M
30 to 88	3	100	40.0
88 to 216	3	150	43.5
216 to 960	3	200	46.0
Above 960	3	500	54.0

Note : The frequencies above 1000MHz, as measured using instrumentation with a peak detector function was corresponding to 20dB above the maximum permitted average limit.

### 4.4 EUT CONFIGURATION

The equipment, which is listed on 4.2 was, installed on radiated emission test to meet the commission requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

The device under test, installed in a representative system as described in section 4.2, was placed on a non-conductive table whose total height equaled 80 cm. This table can be rotated 360 degree. The measurement antenna was mounted to a non-conductive mast capable of moving the antenna vertically. Antenna height was varied from 1 meter to 4 meters and the system under test was rotated from 0 degree through 360 degrees relative to the antenna position and polarization (Horizontal and Vertical). Also the I/O cable position was investigated to find the maximum emission condition.

### 4.5 OPERATING CONDITION OF EUT

Same as section 2.6.

### 4.6 RADIATED EMISSION DATA

The measurement range of radiated emissions from [30 MHz to 10 Harmonics](#) was investigated. All readings below 1GHz are quasi-peak values with a resolution bandwidth of 120 KHz. Above 1GHz are peak and avg. values with a resolution bandwidth of 1MHz. The initial step in collecting radiated emission data is a spectrum analyzer peak scans of the measurement range for all the test modes and then use test receiver for final measurement. Then the worst modes were reported the following data pages..


## 4.7 RADIATED EMISSIONS MEASUREMENT RESULTS

<b>Date of Test</b>	February 02, 2004	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	WLAN (Channel 1 )	<b>Display Pattern</b>	H Pattern
<b>Antenna distance</b>	3m at Horizontal	<b>Frequency Range</b>	30-1000MHz

No.	Frequency [MHz]	Cable Loss [dB]	Antenna Factor [dB/m]	Reading Level [dB(uV)]	Emission Level [dB(uV/m)]	Amp. Factor [dB]	Limit [dB(uV/m)]	Margin [dB]
1	41.770	0.97	15.03	11.12	27.12	0.00	40.00	-12.88
2	160.440	1.86	11.00	12.25	25.11	0.00	43.50	-18.39
3	220.410	2.23	11.50	17.49	31.22	0.00	46.00	-14.78
4	410.890	3.22	16.76	3.46	23.44	0.00	46.00	-22.56
5	561.112	3.83	18.70	8.61	31.14	0.00	46.00	-14.86
6	780.140	4.70	20.46	3.72	21.44	0.00	46.00	-24.56

### Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Emission Level= Reading + Antenna Factor + Cable loss (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
3. Margin Value=Emission level-Limit value.
4. The gray shadow means this data is the worse case emission level.

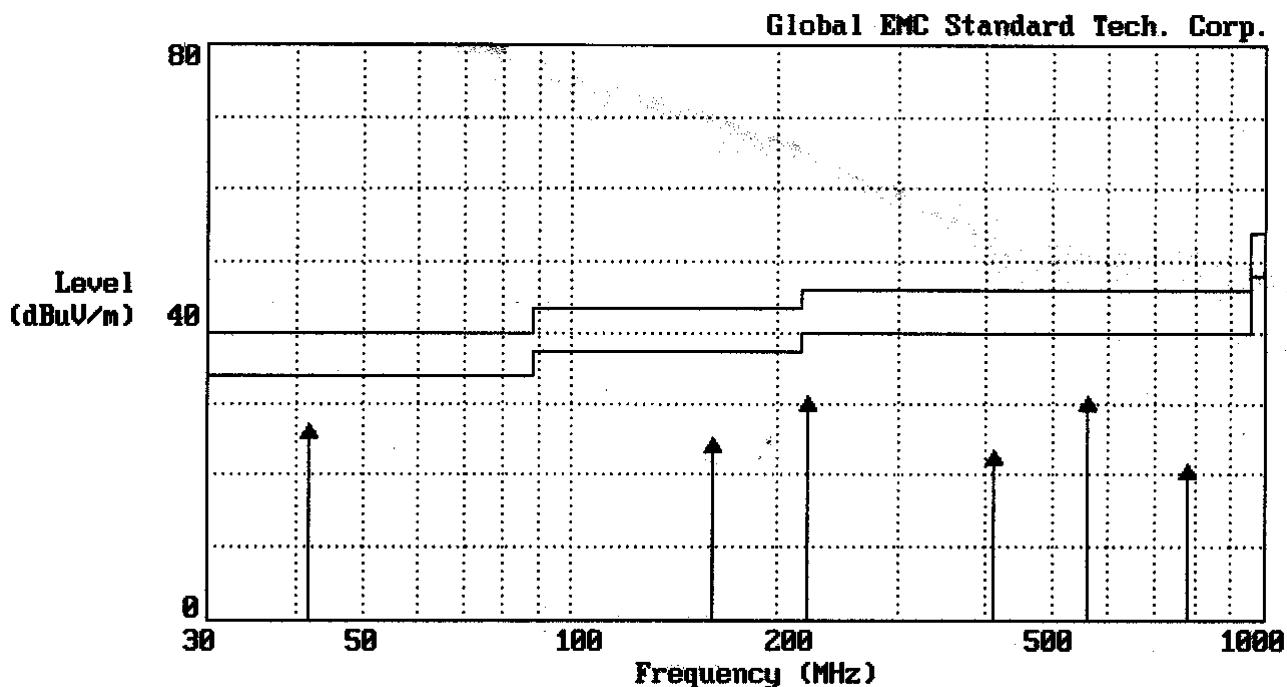


<b>Date of Test</b>	February 02, 2004	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	WLAN (Channel 1 )	<b>Display Pattern</b>	H Pattern
<b>Antenna distance</b>	3m at <b>Vertical</b>	<b>Frequency Range</b>	30-1000MHz

No.	Frequency [MHz]	Cable Loss [dB]	Antenna Factor [dB/m]	Reading Level [dB(uV)]	Emission Level [dB(uV/m)]	Amp. Factor [dB]	Limit [dB(uV/m)]	Margin [dB]
1	41.700	0.97	15.03	7.11	23.11	0.00	40.00	-16.89
2	81.520	1.39	8.06	16.66	26.11	0.00	40.00	-13.89
3	169.230	1.96	10.61	12.32	24.89	0.00	43.50	-18.61
4	260.470	2.47	13.07	15.23	30.77	0.00	46.00	-15.23
5	410.560	3.22	16.76	8.13	28.11	0.00	46.00	-17.89
6	560.440	3.83	18.69	11.59	34.11	0.00	46.00	-11.89

**Remarks:**

1. All Readings below 1GHz are Quasi-Peak.
2. Emission Level= Reading + Antenna Factor + Cable loss (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
3. Margin Value=Emission level-Limit value.
4. The gray shadow means this data is the worse case emission level.

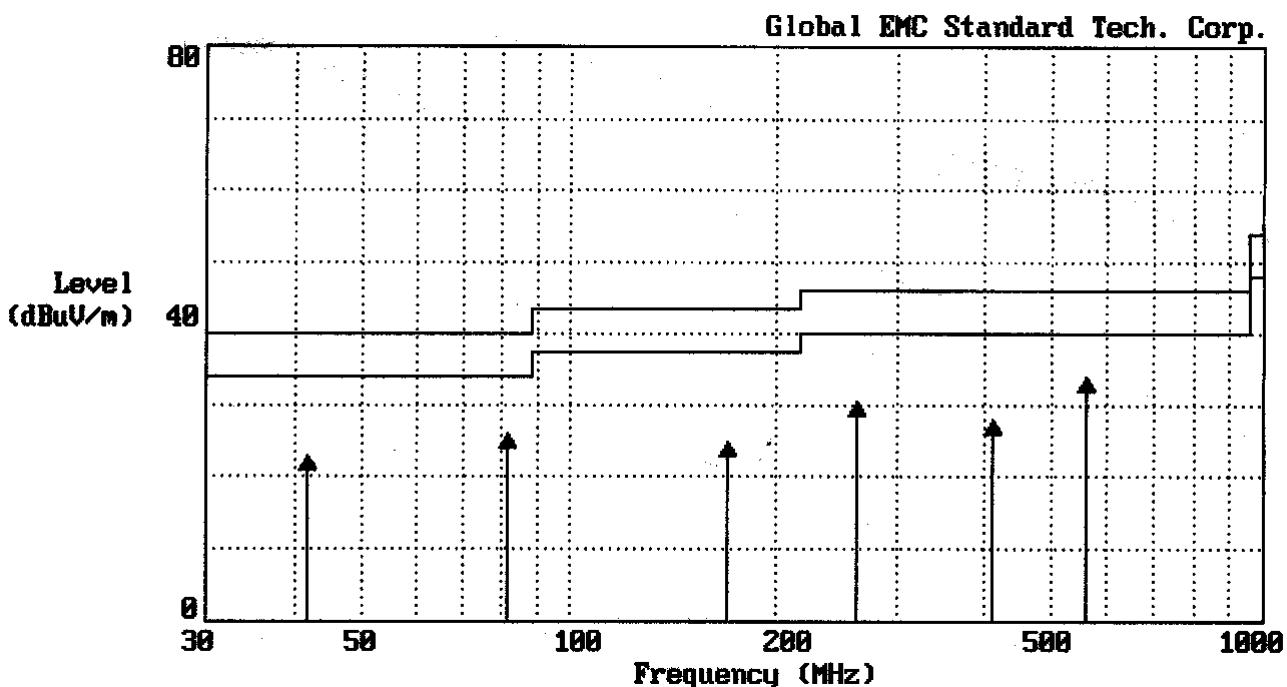


<b>Date of Test</b>	February 02, 2004	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	WLAN (Channel 6 )	<b>Display Pattern</b>	H Pattern
<b>Antenna distance</b>	3m at <b>Horizontal</b>	<b>Frequency Range</b>	30-1000MHz

No.	Frequency [MHz]	Cable Loss [dB]	Antenna Factor [dB/m]	Reading Level [dB(uV)]	Emission Level [dB(uV/m)]	Amp. Factor [dB]	Limit [dB(uV/m)]	Margin [dB]
1	41.740	0.97	15.03	13.11	29.11	0.00	40.00	-10.89
2	73.560	1.30	7.43	14.71	23.44	0.00	40.00	-16.56
3	167.410	1.91	10.69	18.62	31.22	0.00	43.50	-12.28
4	224.120	2.28	11.67	18.38	32.33	0.00	46.00	-13.67
5	376.400	3.08	16.04	12.73	31.85	0.00	46.00	-14.15
6	496.310	3.59	18.04	10.33	31.96	0.00	46.00	-14.04

**Remarks:**

1. All Readings below 1GHz are Quasi-Peak.
2. Emission Level= Reading + Antenna Factor + Cable loss (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
3. Margin Value=Emission level-Limit value.
4. The gray shadow means this data is the worse case emission level.

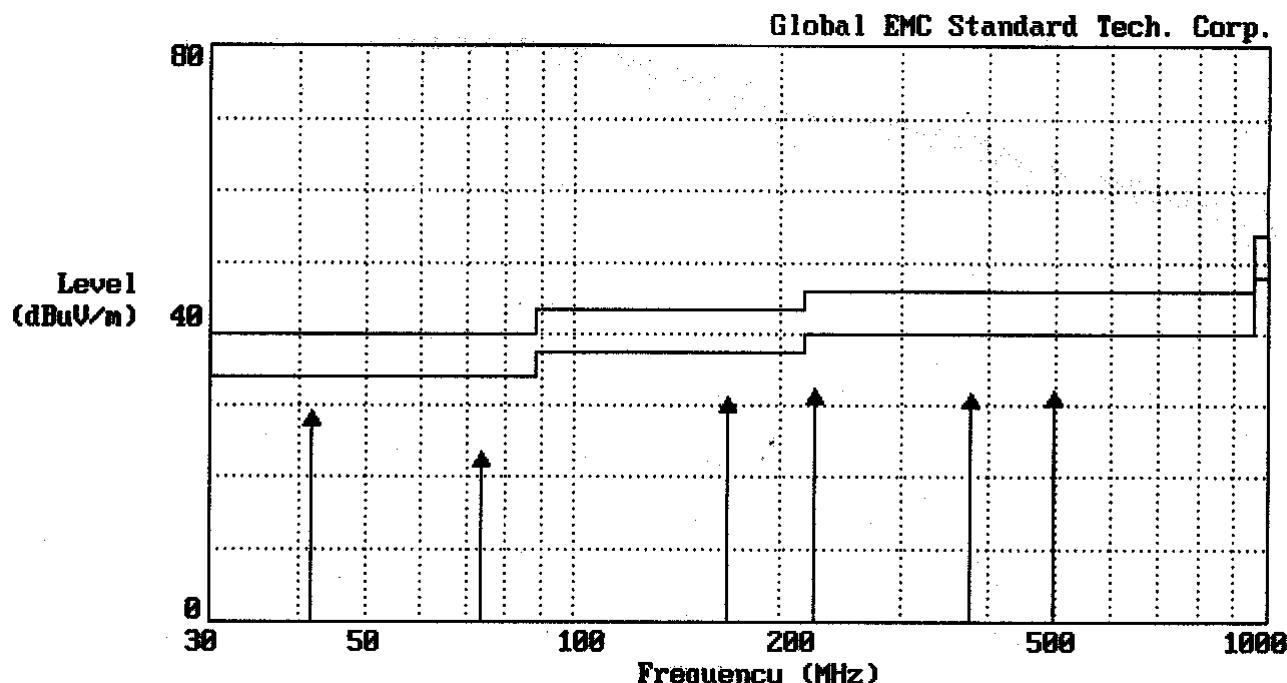


Date of Test	February 02, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	WLAN (Channel 6 )	Display Pattern	H Pattern
Antenna distance	3m at <b>Vertical</b>	Frequency Range	30-1000MHz

No.	Frequency [MHz]	Cable Loss [dB]	Antenna Factor [dB/m]	Reading Level [dB(uV)]	Emission Level [dB(uV/m)]	Amp. Factor [dB]	Limit [dB(uV/m)]	Margin [dB]
1	80.110	1.35	7.98	17.11	26.44	0.00	40.00	-13.56
2	159.110	1.86	11.05	16.20	29.11	0.00	43.50	-14.39
3	241.560	2.37	12.44	8.30	23.11	0.00	46.00	-22.89
4	260.700	2.47	13.07	15.68	31.22	0.00	46.00	-14.78
5	480.900	3.55	17.81	9.86	31.22	0.00	46.00	-14.78
6	631.220	4.09	19.34	7.68	31.11	0.00	46.00	-14.89

**Remarks:**

1. All Readings below 1GHz are Quasi-Peak.
2. Emission Level= Reading + Antenna Factor + Cable loss (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
3. Margin Value=Emission level-Limit value.
4. The gray shadow means this data is the worse case emission level.

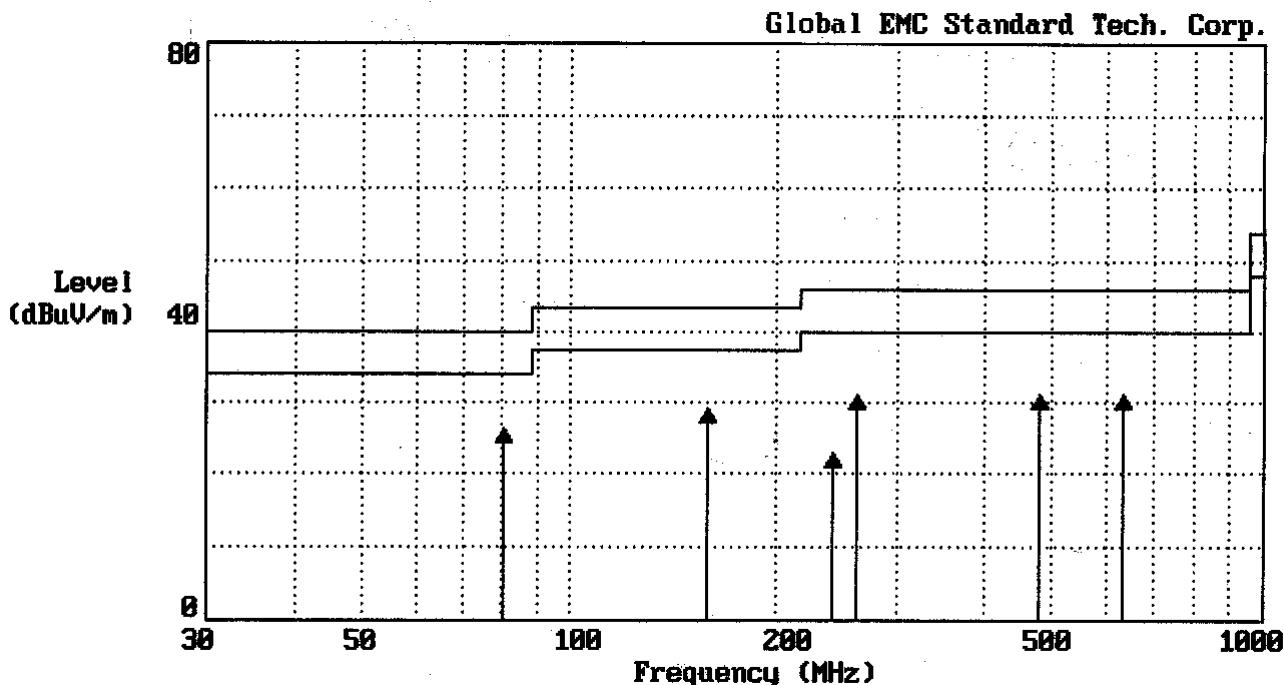


<b>Date of Test</b>	February 02, 2004	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	WLAN (Channel 11 )	<b>Display Pattern</b>	H Pattern
<b>Antenna distance</b>	3m at <b>Horizontal</b>	<b>Frequency Range</b>	30-1000MHz

No.	Frequency [MHz]	Cable Loss [dB]	Antenna Factor [dB/m]	Reading Level [dB(uV)]	Emission Level [dB(uV/m)]	Amp. Factor [dB]	Limit [dB(uV/m)]	Margin [dB]
1	46.250	1.04	13.54	12.16	26.74	0.00	40.00	-13.26
2	63.410	1.18	7.27	22.95	31.40	0.00	40.00	-8.60
3	180.740	2.03	10.10	18.53	30.66	0.00	43.50	-12.84
4	324.710	2.77	14.78	9.15	26.70	0.00	46.00	-19.30
5	440.960	3.34	17.21	11.19	31.74	0.00	46.00	-14.26
6	541.780	3.76	18.51	13.83	36.10	0.00	46.00	-9.90

**Remarks:**

1. All Readings below 1GHz are Quasi-Peak.
2. Emission Level= Reading + Antenna Factor + Cable loss (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
3. Margin Value=Emission level-Limit value.
4. The gray shadow means this data is the worse case emission level.

Global EMC Standard Tech. Corp.

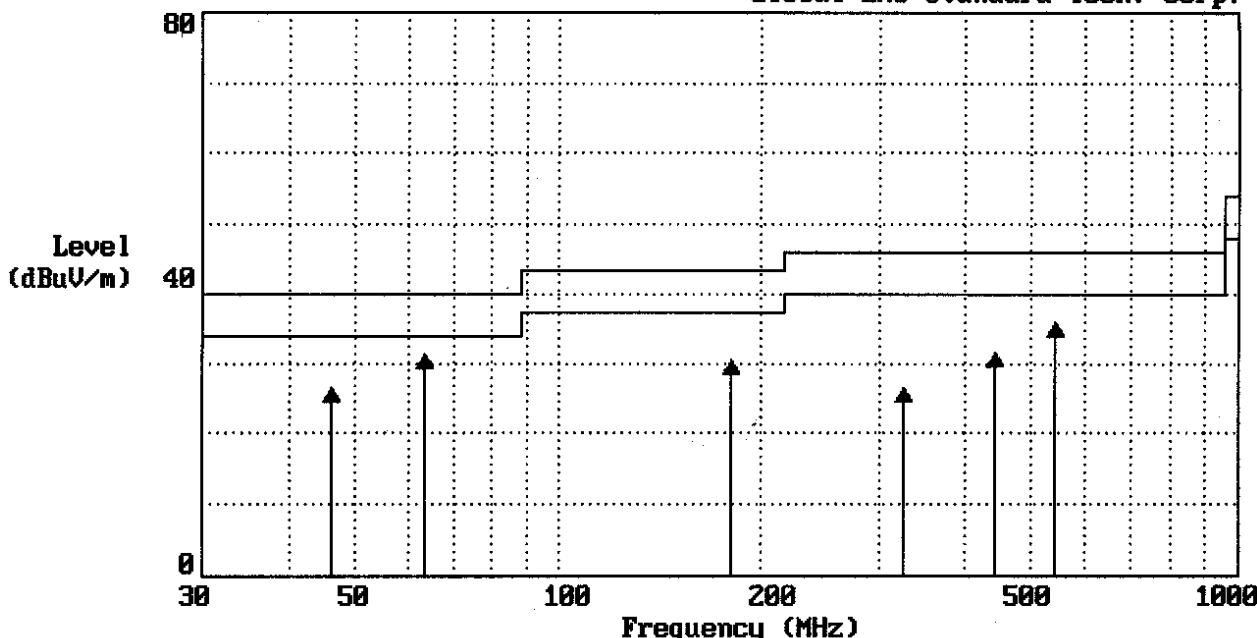


Date of Test	February 02, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	WLAN (Channel 11 )	Display Pattern	H Pattern
Antenna distance	3m at <b>Vertical</b>	Frequency Range	30-1000MHz

No.	Frequency [MHz]	Cable Loss [dB]	Antenna Factor [dB/m]	Reading Level [dB(uV)]	Emission Level [dB(uV/m)]	Amp. Factor [dB]	Limit [dB(uV/m)]	Margin [dB]
1	43.520	0.97	14.80	10.35	26.12	0.00	40.00	-13.88
2	82.150	1.39	8.06	21.55	31.00	0.00	40.00	-9.00
3	142.560	1.79	12.45	17.32	31.56	0.00	43.50	-11.94
4	198.230	2.13	10.54	16.44	29.11	0.00	43.50	-14.39
5	240.130	2.34	12.35	6.87	21.56	0.00	46.00	-24.44
6	410.230	3.20	16.75	9.26	29.21	0.00	46.00	-16.79

**Remarks:**

1. All Readings below 1GHz are Quasi-Peak.
2. Emission Level= Reading + Antenna Factor + Cable loss (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
3. Margin Value=Emission level-Limit value.
4. The gray shadow means this data is the worse case emission level.

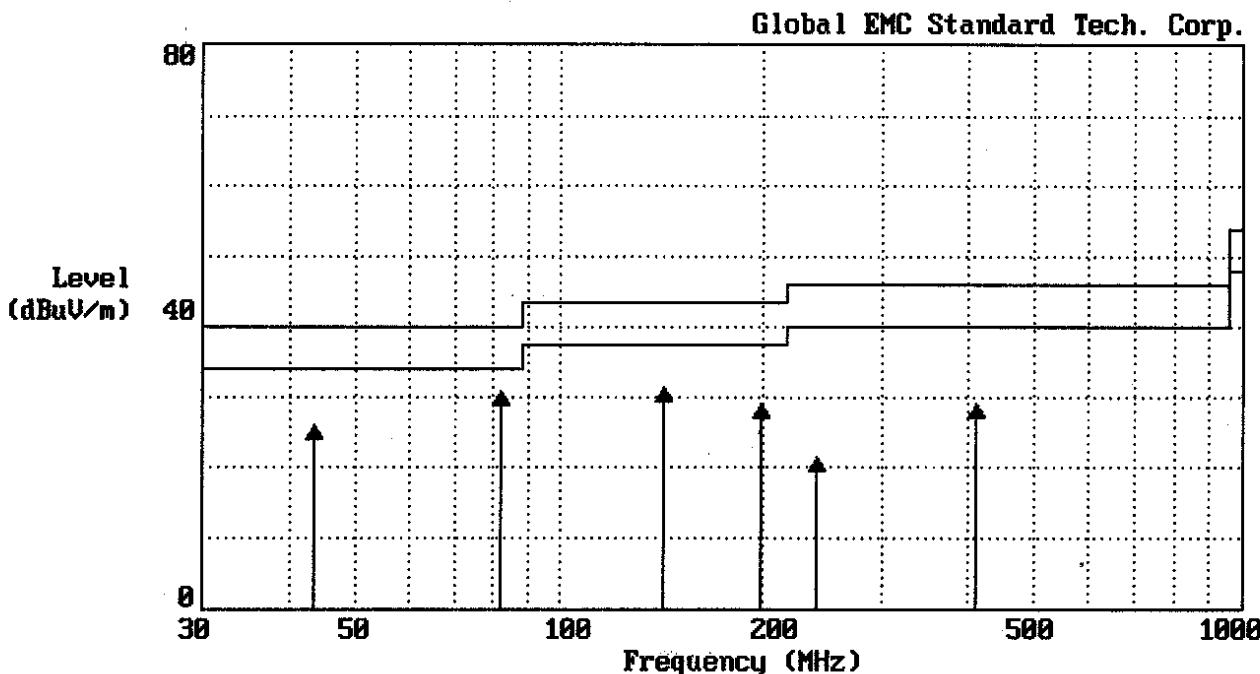


<b>Date of Test</b>	February 02, 2004	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Bluetooth (Channel 0 )	<b>Display Pattern</b>	H Pattern
<b>Antenna distance</b>	3m at <b>Horizontal</b>	<b>Frequency Range</b>	30-1000MHz

No.	Frequency [MHz]	Cable Loss [dB]	Antenna Factor [dB/m]	Reading Level [dB(uV)]	Emission Level [dB(uV/m)]	Amp. Factor [dB]	Limit [dB(uV/m)]	Margin [dB]
1	50.780	1.09	10.40	15.10	26.59	0.00	40.00	-13.41
2	81.260	1.39	8.00	13.61	23.00	0.00	40.00	-17.00
3	237.290	2.32	12.22	13.58	28.12	0.00	46.00	-17.88
4	440.890	3.34	17.21	15.34	35.89	0.00	46.00	-10.11
5	610.740	4.04	19.18	8.23	31.45	0.00	46.00	-14.55
6	810.590	4.70	20.67	7.08	32.45	0.00	46.00	-13.55

**Remarks:**

1. All Readings below 1GHz are Quasi-Peak.
2. Emission Level= Reading + Antenna Factor + Cable loss (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
3. Margin Value=Emission level-Limit value.
4. The gray shadow means this data is the worse case emission level.

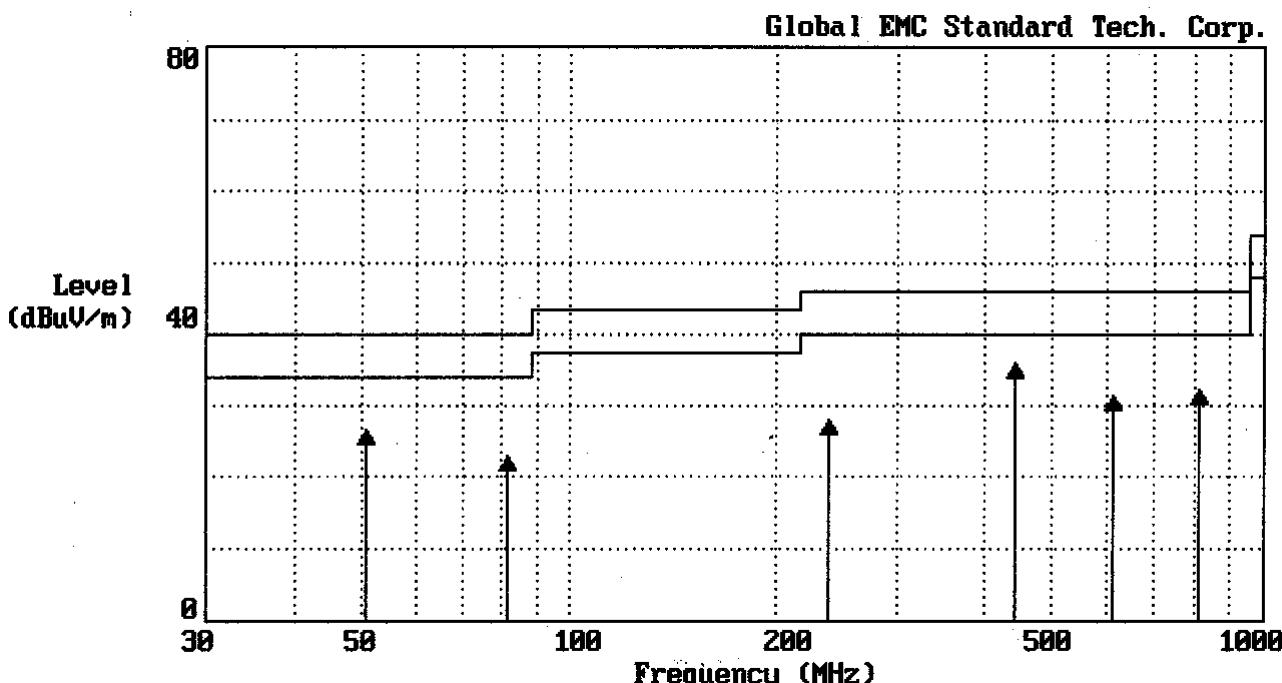


<b>Date of Test</b>	February 02, 2004	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Bluetooth (Channel 0 )	<b>Display Pattern</b>	H Pattern
<b>Antenna distance</b>	3m at <b>Vertical</b>	<b>Frequency Range</b>	30-1000MHz

No.	Frequency [MHz]	Cable Loss [dB]	Antenna Factor [dB/m]	Reading Level [dB(uV)]	Emission Level [dB(uV/m)]	Amp. Factor [dB]	Limit [dB(uV/m)]	Margin [dB]
1	86.150	1.39	8.29	16.91	26.59	0.00	40.00	-13.41
2	135.440	1.75	12.75	16.28	30.78	0.00	43.50	-12.72
3	177.580	2.01	10.21	23.04	35.26	0.00	43.50	-8.24
4	220.140	2.23	11.50	18.83	32.56	0.00	46.00	-13.44
5	265.140	2.48	13.21	21.20	36.89	0.00	46.00	-9.11
6	400.450	3.15	16.60	17.40	37.15	0.00	46.00	-8.85

**Remarks:**

1. All Readings below 1GHz are Quasi-Peak.
2. Emission Level= Reading + Antenna Factor + Cable loss (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
3. Margin Value=Emission level-Limit value.
4. The gray shadow means this data is the worse case emission level.

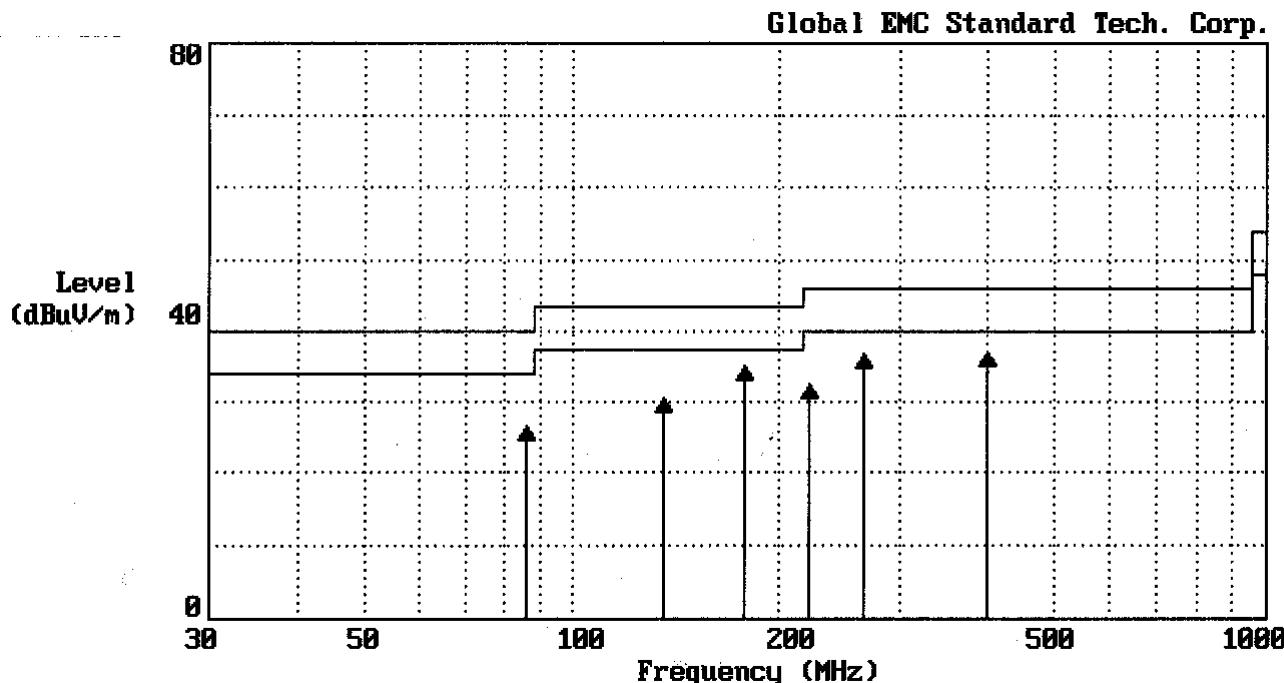


Date of Test	February 02, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	Bluetooth (Channel 39 )	Display Pattern	H Pattern
Antenna distance	3m at <b>Horizontal</b>	Frequency Range	30-1000MHz

No.	Frequency [MHz]	Cable Loss [dB]	Antenna Factor [dB/m]	Reading Level [dB(uV)]	Emission Level [dB(uV/m)]	Amp. Factor [dB]	Limit [dB(uV/m)]	Margin [dB]
1	81.450	1.39	8.06	15.66	25.11	0.00	40.00	-14.89
2	121.450	1.60	12.89	6.96	21.45	0.00	43.50	-22.05
3	240.580	2.34	12.39	14.98	29.71	0.00	46.00	-16.29
4	360.740	2.95	15.64	8.86	27.45	0.00	46.00	-18.55
5	440.890	3.34	17.21	2.56	23.11	0.00	46.00	-22.89
6	560.790	3.83	18.70	9.57	32.10	0.00	46.00	-13.90

**Remarks:**

1. All Readings below 1GHz are Quasi-Peak.
2. Emission Level= Reading + Antenna Factor + Cable loss (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
3. Margin Value=Emission level-Limit value.
4. The gray shadow means this data is the worse case emission level.

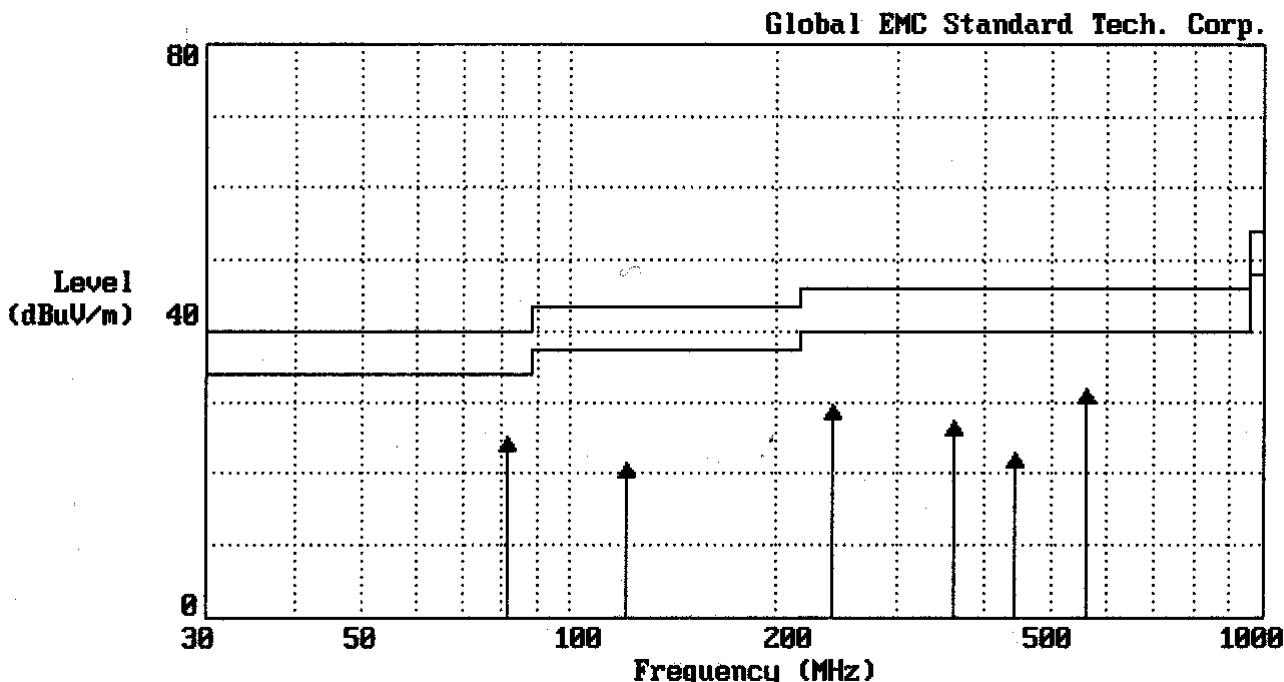


Date of Test	February 02, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	Bluetooth (Channel 39 )	Display Pattern	H Pattern
Antenna distance	3m at <b>Vertical</b>	Frequency Range	30-1000MHz

No.	Frequency [MHz]	Cable Loss [dB]	Antenna Factor [dB/m]	Reading Level [dB(uV)]	Emission Level [dB(uV/m)]	Amp. Factor [dB]	Limit [dB(uV/m)]	Margin [dB]
1	41.260	0.98	15.27	7.31	23.56	0.00	40.00	-16.44
2	81.470	1.39	8.06	21.66	31.11	0.00	40.00	-8.89
3	122.740	1.68	12.88	13.88	28.44	0.00	43.50	-15.06
4	442.110	3.34	17.23	6.21	26.78	0.00	46.00	-19.22
5	610.740	4.04	19.18	6.89	30.11	0.00	46.00	-15.89
6	799.120	4.73	20.59	8.78	34.10	0.00	46.00	-11.90

**Remarks:**

1. All Readings below 1GHz are Quasi-Peak.
2. Emission Level= Reading + Antenna Factor + Cable loss (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
3. Margin Value=Emission level-Limit value.
4. The gray shadow means this data is the worse case emission level.

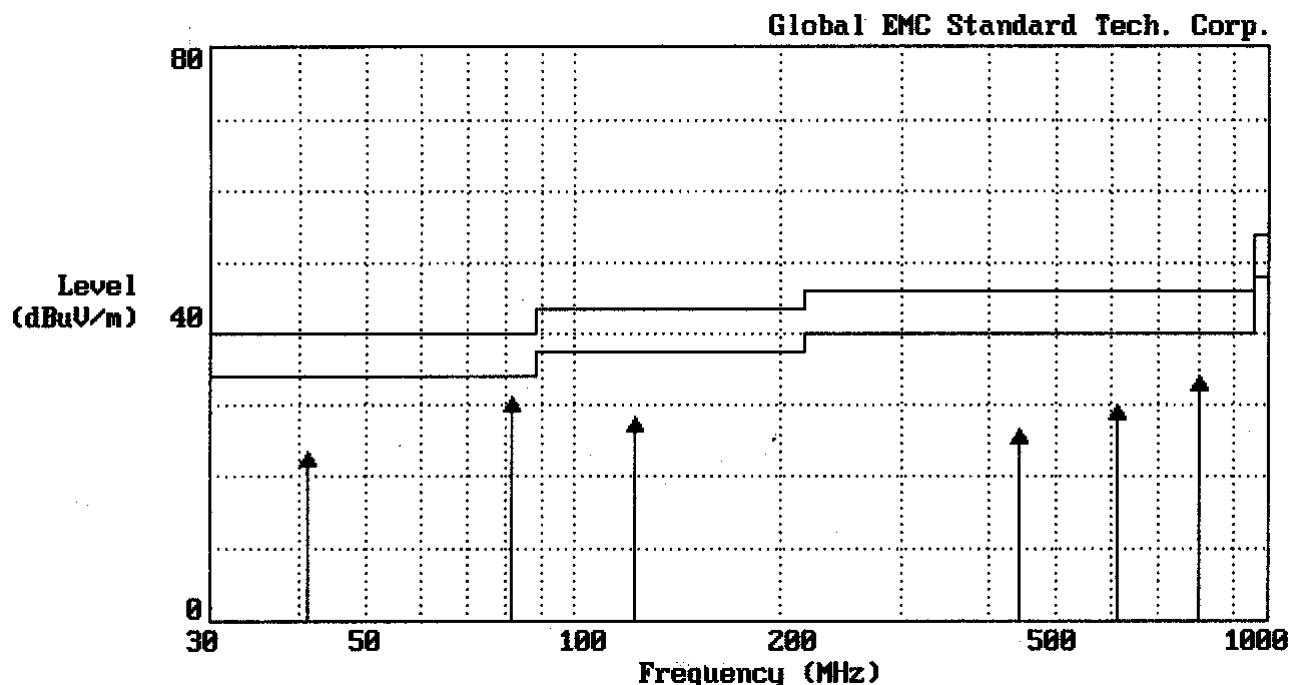


Date of Test	February 02, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	Bluetooth (Channel 78 )	Display Pattern	H Pattern
Antenna distance	3m at <b>Horizontal</b>	Frequency Range	30-1000MHz

No.	Frequency [MHz]	Cable Loss [dB]	Antenna Factor [dB/m]	Reading Level [dB(uV)]	Emission Level [dB(uV/m)]	Amp. Factor [dB]	Limit [dB(uV/m)]	Margin [dB]
1	42.150	0.97	15.03	9.80	25.80	0.00	40.00	-14.20
2	84.150	1.39	8.17	14.32	23.88	0.00	40.00	-16.12
3	127.230	1.70	12.83	9.58	24.11	0.00	43.50	-19.39
4	160.780	1.86	11.00	15.25	28.11	0.00	43.50	-15.39
5	200.900	2.15	10.64	18.43	31.22	0.00	43.50	-12.28
6	400.890	3.15	16.61	14.35	34.11	0.00	46.00	-11.89

**Remarks:**

1. All Readings below 1GHz are Quasi-Peak.
2. Emission Level= Reading + Antenna Factor + Cable loss (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
3. Margin Value=Emission level-Limit value.
4. The gray shadow means this data is the worse case emission level.

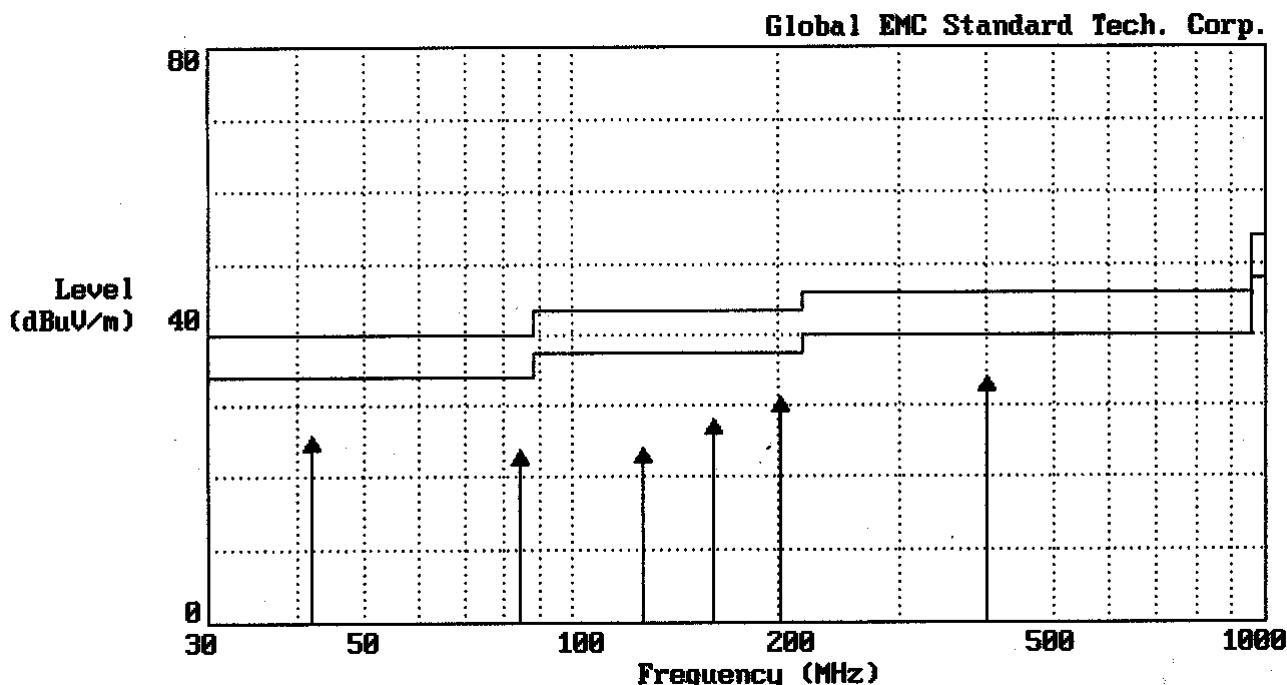


Date of Test	February 02, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	Bluetooth (Channel 78 )	Display Pattern	H Pattern
Antenna distance	3m at <b>Vertical</b>	Frequency Range	30-1000MHz

No.	Frequency [MHz]	Cable Loss [dB]	Antenna Factor [dB/m]	Reading Level [dB(uV)]	Emission Level [dB(uV/m)]	Amp. Factor [dB]	Limit [dB(uV/m)]	Margin [dB]
1	41.520	0.98	15.27	10.15	26.40	0.00	40.00	-13.60
2	135.260	1.75	12.75	12.61	27.11	0.00	43.50	-16.39
3	164.230	1.91	10.83	8.04	20.78	0.00	43.50	-22.72
4	210.700	2.18	11.07	17.75	31.00	0.00	43.50	-12.50
5	447.120	3.36	17.31	13.43	34.10	0.00	46.00	-11.90
6	571.230	3.88	18.80	-0.72	21.96	0.00	46.00	-24.04

**Remarks:**

1. All Readings below 1GHz are Quasi-Peak.
2. Emission Level= Reading + Antenna Factor + Cable loss (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
3. Margin Value=Emission level-Limit value.
4. The gray shadow means this data is the worse case emission level.

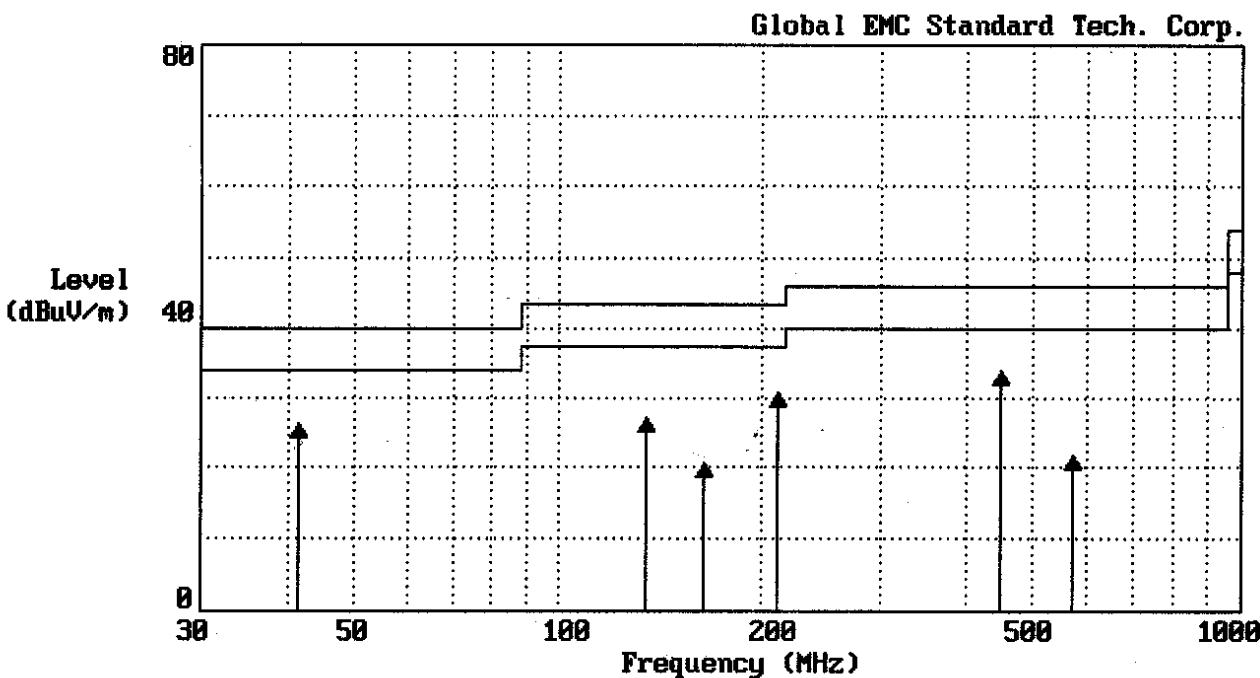

<b>Date of Test</b>	December 23, 2003	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 1 (802.11b) Channel 1	<b>Data Rate</b>	11Mbps
<b>Antenna distance</b>	3m at <b>Horizontal</b>	<b>Frequency Range</b>	Above 1GHz

## Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4823.75	60.11	2.41	62.52	74.00	-11.48
2	7236.37	56.58	-0.46	< 56.12	74.00	-17.88
3	9648.25	53.54	-0.79	< 52.75	74.00	-21.25

## Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4824.12	49.38	2.41	51.79	54.00	-2.21
2	7235.75	44.84	-0.46	< 44.38	54.00	-9.62

### Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

<b>Date of Test</b>	December 23, 2003	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 1 (802.11b) Channel 1	<b>Data Rate</b>	11Mbps
<b>Antenna distance</b>	3m at <b>Vertical</b>	<b>Frequency Range</b>	Above 1GHz

## Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4823.87	58.62	2.52	61.14	74.00	-12.86
2	7235.62	58.17	0.87	< 59.04	74.00	-14.96
3	9648.25	53.28	-0.17	< 53.11	74.00	-20.89

## Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4824.00	44.74	2.52	47.26	54.00	-6.74
2	7236.37	44.46	0.88	< 45.34	54.00	-8.66

### Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

<b>Date of Test</b>	December 23, 2003	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 1 (802.11b) Channel 6	<b>Data Rate</b>	11Mbps
<b>Antenna distance</b>	3m at <b>Horizontal</b>	<b>Frequency Range</b>	Above 1GHz

## Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4874.00	60.37	2.40	62.77	74.00	-11.23
2	7311.75	58.08	-0.49	< 57.59	74.00	-16.41
3	9748.25	52.39	-0.50	< 51.89	74.00	-22.11

## Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4874.25	49.76	2.40	52.16	54.00	-1.84
2	7310.87	45.57	-0.49	< 45.08	54.00	-8.92

### Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

<b>Date of Test</b>	December 23, 2003	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 1 (802.11b) Channel 6	<b>Data Rate</b>	11Mbps
<b>Antenna distance</b>	3m at <b>Vertical</b>	<b>Frequency Range</b>	Above 1GHz

## Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4874.00	57.22	2.36	59.58	74.00	-14.42
2	7311.12	57.80	1.22	< 59.02	74.00	-14.98
3	9747.87	53.25	0.15	< 53.40	74.00	-20.60

## Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4874.00	46.91	2.36	49.27	54.00	-4.73
2	7310.75	44.93	1.22	< 46.15	54.00	-7.85

### Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

<b>Date of Test</b>	December 23, 2003	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 1 (802.11b) Channel 11	<b>Data Rate</b>	11Mbps
<b>Antenna distance</b>	3m at <b>Horizontal</b>	<b>Frequency Range</b>	<b>Above 1GHz</b>

## Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4923.87	61.80	2.39	64.19	74.00	-9.81
2	7385.87	56.53	-0.52	< 56.01	74.00	-17.99
3	9847.62	52.34	-0.22	< 52.12	74.00	-21.88

## Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4924.62	49.06	2.39	51.45	54.00	-2.55
2	7386.12	44.73	-0.52	< 44.21	54.00	-9.79

### Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

<b>Date of Test</b>	December 23, 2003	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 1 (802.11b) Channel 11	<b>Data Rate</b>	11Mbps
<b>Antenna distance</b>	3m at <b>Vertical</b>	<b>Frequency Range</b>	<b>Above 1GHz</b>

## Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4924.00	56.93	2.21	59.14	74.00	-14.86
2	7386.87	57.41	1.58	< 58.99	74.00	-15.01
3	9848.62	52.38	0.48	< 52.86	74.00	-21.14

## Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4924.00	46.79	2.21	49.00	54.00	-5.00
2	7385.75	46.64	1.57	< 48.21	54.00	-5.79

### Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

<b>Date of Test</b>	December 23, 2003	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 2 (802.11g) Channel 1	<b>Data Rate</b>	54Mbps
<b>Antenna distance</b>	3m at <b>Horizontal</b>	<b>Frequency Range</b>	<b>Above 1GHz</b>

## Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4825.12	58.46	2.41	60.87	74.00	-13.13
2	7232.75	63.33	-0.46	62.87	74.00	-11.13
3	9648.00	52.88	-0.79	< 52.09	74.00	-21.91
4	12060.00	53.94	3.20	< 57.14	74.00	-16.86

## Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4824.75	47.35	2.41	49.76	54.00	-4.24
2	7235.87	45.37	-0.46	44.91	54.00	-9.09
3	12060.25	42.08	3.20	< 45.28	54.00	-8.72

### Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

<b>Date of Test</b>	December 23, 2003	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 2 (802.11g) Channel 1	<b>Data Rate</b>	54Mbps
<b>Antenna distance</b>	3m at <b>Vertical</b>	<b>Frequency Range</b>	Above 1GHz

## Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4824.37	56.94	2.52	59.46	74.00	-14.54
2	7246.37	66.40	0.93	67.33	74.00	-6.67
3	9647.75	53.56	-0.17	< 53.39	74.00	-20.61
4	12059.62	55.48	2.05	< 57.53	74.00	-16.47

## Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4824.00	44.35	2.52	46.87	54.00	-7.13
2	7236.50	44.51	0.88	45.39	54.00	-8.61
3	12060.25	41.82	2.05	< 43.87	54.00	-10.13

### Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

<b>Date of Test</b>	December 23, 2003	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 2 (802.11g) Channel 6	<b>Data Rate</b>	54Mbps
<b>Antenna distance</b>	3m at <b>Horizontal</b>	<b>Frequency Range</b>	<b>Above 1GHz</b>

## Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4879.37	59.59	2.40	61.99	74.00	-12.01
2	7309.12	66.73	-0.49	66.24	74.00	-7.76
3	9747.62	52.20	-0.50	< 51.70	74.00	-22.30
4	12185.37	55.39	2.48	< 57.87	74.00	-16.13

## Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4874.75	48.04	2.40	50.44	54.00	-3.56
2	7311.25	46.73	-0.49	46.24	54.00	-7.76
3	12184.75	41.99	2.48	< 44.47	54.00	-9.53

### Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

<b>Date of Test</b>	December 23, 2003	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 2 (802.11g) Channel 6	<b>Data Rate</b>	54Mbps
<b>Antenna distance</b>	3m at <b>Vertical</b>	<b>Frequency Range</b>	Above 1GHz

## Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4874.25	56.29	2.36	58.65	74.00	-15.35
2	7318.00	68.77	1.26	70.03	74.00	-3.97
3	9748.00	51.85	0.15	< 52.00	74.00	-22.00
4	12185.87	54.68	1.70	< 56.38	74.00	-17.62

## Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4874.50	45.38	2.36	47.74	54.00	-6.26
2	7312.00	47.77	1.23	49.00	54.00	-5.00
3	12185.37	42.29	1.70	< 43.99	54.00	-10.01

### Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

<b>Date of Test</b>	December 23, 2003	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 2 (802.11g) Channel 11	<b>Data Rate</b>	54Mbps
<b>Antenna distance</b>	3m at <b>Horizontal</b>	<b>Frequency Range</b>	<b>Above 1GHz</b>

## Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4931.37	60.99	2.39	63.38	74.00	-10.62
2	7382.00	65.55	-0.52	65.03	74.00	-8.97
3	9848.62	52.15	-0.22	< 51.93	74.00	-22.07
4	12309.00	54.31	1.77	< 56.08	74.00	-17.92

## Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4924.12	49.56	2.39	51.95	54.00	-2.05
2	7386.50	45.81	-0.52	45.29	54.00	-8.71
3	12310.37	41.13	1.76	< 42.89	54.00	-11.11

### Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

<b>Date of Test</b>	December 23, 2003	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 2 (802.11g) Channel 11	<b>Data Rate</b>	54Mbps
<b>Antenna distance</b>	3m at <b>Vertical</b>	<b>Frequency Range</b>	<b>Above 1GHz</b>

## Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4923.75	56.19	2.21	58.40	74.00	-15.60
2	7383.00	66.70	1.56	68.26	74.00	-5.74
3	9847.62	52.33	0.48	< 52.81	74.00	-21.19
4	12310.25	52.09	1.36	< 53.45	74.00	-20.55

## Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4923.87	47.98	2.21	50.19	54.00	-3.81
2	7386.50	46.59	1.58	48.17	54.00	-5.83

### Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

<b>Date of Test</b>	December 23, 2003	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 3 (Bluetooth) Channel 0 (2402MHz)	<b>Frequency Range</b>	Above 1GHz
<b>Antenna distance</b>	3m at <b>Horizontal</b>		

## Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4803.95	62.92	2.42	65.34	74.00	-8.66
2	7206.15	60.90	-0.45	60.45	74.00	-13.55
3	9608.05	54.26	-0.91	< 53.35	74.00	-20.65
4	12009.85	55.41	3.48	< 58.89	74.00	-15.11

## Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4804.10	50.12	2.42	52.54	54.00	-1.46
2	7206.05	52.08	-0.45	51.63	54.00	-2.37
3	12010.05	41.99	3.48	< 45.47	54.00	-8.53

### Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

<b>Date of Test</b>	December 23, 2003	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 3 (Bluetooth) Channel 0 (2402MHz)	<b>Frequency Range</b>	Above 1GHz
<b>Antenna distance</b>	3m at <b>Vertical</b>		

## Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4804.10	58.63	2.59	61.22	74.00	-12.78
2	7206.10	59.74	0.73	60.47	74.00	-13.53
3	9607.95	53.24	-0.30	< 52.94	74.00	-21.06
4	12009.95	54.33	2.18	< 56.51	74.00	-17.49

## Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4804.05	49.87	2.59	52.46	54.00	-1.54
2	7206.05	51.47	0.73	52.20	54.00	-1.80
3	12009.95	42.03	2.18	< 44.21	54.00	-9.79

### Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

<b>Date of Test</b>	December 23, 2003	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 3 (Bluetooth) Channel 39 (2441 MHz)	<b>Frequency Range</b>	Above 1GHz
<b>Antenna distance</b>	3m at <b>Horizontal</b>		

## Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4882.00	60.00	2.40	62.40	74.00	-11.60
2	7323.00	59.26	-0.50	58.76	74.00	-15.24
3	9764.00	52.32	-0.46	< 51.86	74.00	-22.14
4	12205.05	55.05	2.36	< 57.41	74.00	-16.59

## Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4882.05	50.44	2.40	52.84	54.00	-1.16
2	7323.05	52.18	-0.50	51.68	54.00	-2.32
3	12205.05	41.65	2.36	< 44.01	54.00	-9.99

### Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

<b>Date of Test</b>	December 23, 2003	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 3 (Bluetooth) Channel 39 (2441 MHz)	<b>Frequency Range</b>	Above 1GHz
<b>Antenna distance</b>	3m at <b>Vertical</b>		

## Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4882.05	57.28	2.34	59.62	74.00	-14.38
2	7323.00	59.44	1.28	60.72	74.00	-13.28
3	9764.00	51.64	0.21	< 51.85	74.00	-22.15
4	12205.00	51.06	1.65	< 52.71	74.00	-21.29

## Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4882.05	50.04	2.34	52.38	54.00	-1.62
2	7323.00	51.13	1.28	52.41	54.00	-1.59

### Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

<b>Date of Test</b>	December 23, 2003	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 3 (Bluetooth) Channel 78 (2480MHz)	<b>Frequency Range</b>	Above 1GHz
<b>Antenna distance</b>	3m at <b>Horizontal</b>		

## Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4959.95	58.34	2.38	60.72	74.00	-13.28
2	7439.95	58.80	-0.54	58.26	74.00	-15.74
3	9919.95	52.44	-0.01	< 52.43	74.00	-21.57
4	12399.95	54.20	1.24	< 55.44	74.00	-18.56

## Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4960.00	50.10	2.38	52.48	54.00	-1.52
2	7440.05	52.67	-0.54	52.13	54.00	-1.87
3	12399.05	41.90	1.24	< 43.14	54.00	-10.86

### Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

<b>Date of Test</b>	December 23, 2003	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 3 (Bluetooth) Channel 78 (2480MHz)	<b>Frequency Range</b>	Above 1GHz
<b>Antenna distance</b>	3m at <b>Vertical</b>		

## Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4960.20	56.99	2.10	59.09	74.00	-14.91
2	7439.90	60.36	1.83	62.19	74.00	-11.81
3	9920.20	53.75	0.71	< 54.46	74.00	-19.54
4	12399.95	55.31	1.11	< 56.42	74.00	-17.58

## Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4960.05	46.45	2.10	48.55	54.00	-5.45
2	7440.05	50.65	1.83	52.48	54.00	-1.52
3	9920.20	51.26	0.71	< 51.97	54.00	-2.03
4	12399.85	42.10	1.11	< 43.21	54.00	-10.79

### Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

## 5. PEAK POWER OUTPUT


### 5.1 TEST EQUIPMENT

The following test equipments are used during the Conduct tests:

Item	Instrument	Manufacturer	Type	Serial No.	Last Cal.
1	Spectrum Analyzer	Advantest	R3272	82420232	02/14/03
	Spectrum Analyzer	HP	E4407B	39240339	08/16/03
2	Power Meter	Rohde & Schwarz	NRVS	100666	02/26/03
3	Peak Power Sensor	Rohde & Schwarz	NRV-Z32	8360191058	05/19/03

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

### 5.2 BLOCK DIAGRAM OF TEST SETUP

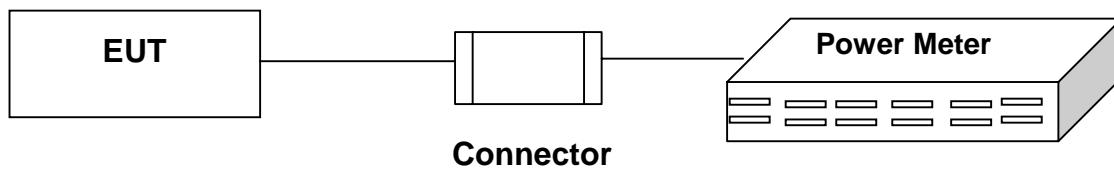

### 5.3 PEAK POWER OUTPUT LIMIT

The maximum peak power shall be less 1 Watt.

## 5.4 TEST RESULT

Date of Test	January 28, 2004
EUT	Industrial PC
Test Mode	Mode 1 (802.11b)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
1	2412	16.31	1W(30dBm)	Pass
6	2437	16.02	1W(30dBm)	Pass
11	2468	16.24	1W(30dBm)	Pass

Date of Test	January 28, 2004
EUT	Industrial PC
Test Mode	Mode 2 (802.11g)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
1	2412	21.00	1W(30dBm)	Pass
6	2437	20.75	1W(30dBm)	Pass
11	2462	20.91	1W(30dBm)	Pass

Date of Test	January 28, 2004
EUT	Industrial PC
Test Mode	Mode 3 (Bluetooth)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
1	2412	2.65	1W(30dBm)	Pass
6	2437	2.58	1W(30dBm)	Pass
11	2462	4.14	1W(30dBm)	Pass

## 6. BAND EDGE

### 6.1 TEST EQUIPMENT

The following test equipments are used during the radiated emission tests:


Radiated test was performed on:  Site #1  Site #2  Site #3  Site #4

Item	Instrument	Manufacturer	Type	Serial No.	Last Cal.
1	Test Receiver	Rohde & Schwarz	ESVS30	829007/014	12/13/03
2	Spectrum Analyzer	ADVANTEST	R3272	82420232	02/14/03
3	Spectrum Analyzer	HP	E4407B	39240339	08/16/03
4	Power Meter	Rohde & Schwarz	NRVS	100666	02/26/03
5	Power Sensor	Rohde & Schwarz	NRV-Z32	8360191058	05/19/03
6	Pre-Amplifier	HP	8447F OPT H64	3113A04487	10/11/03
7	BILOG ANTENNA	SCHAFFNER	CBL6112B	2620	12/01/03
8	Horn Antenna	Electro-Metrics	EM-6961	103318	05/30/03
9	Horn Antenna	Schwarzbeck	BBHA 9120	D243	12/18/03
10	RF Cable	GesTek	N/A	GTK-E-A151-01	02/10/03
11	Open Site	GesTek	N/A	B1	11/25/03
12	Test Program Software	GesTek	N/A	GTK-E-S001-01	N/A

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

### 6.2 BLOCK DIAGRAM OF TEST SETUP

#### ● RF Radiated Measurement: ●

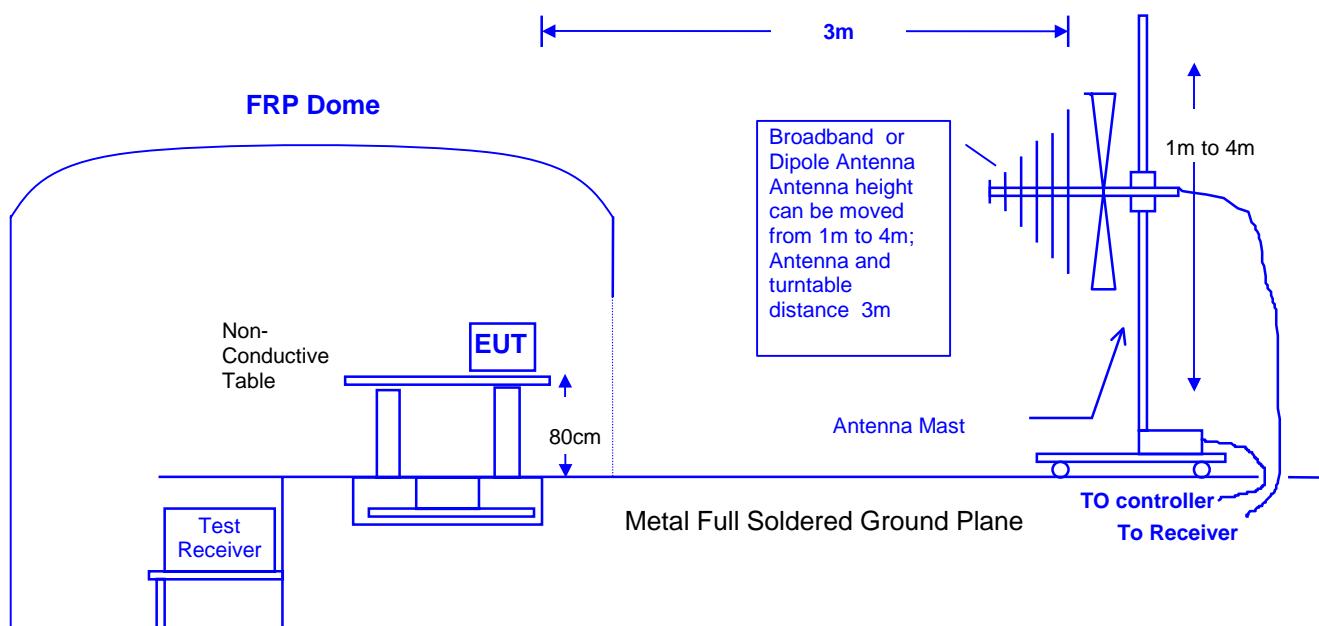

### 6.3 BAND EDGE LIMIT

In any 100KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209 (a) (see Section 15.205(c)).

### 6.4 EUT CONFIGURATION

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:2000 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120KHz, above 1GHz are 1MHz.

### 6.5 OPERATING CONDITION OF EUT

Same as section 2.6.

## 6.6 TEST RELULT

Date of Test	January 07, 2004
EUT	Industrial PC
Working Cond.	Mode 1 (802.11b)

Channel No.	Frequency(MHz)	Required Limit(dBc)	Result
1(Horizontal)	< 2400	>20	Pass
1(Vertical)	< 2400	>20	Pass

### Horizontal


No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
1	2397.00	44.21	0.27	44.48
2	2400.00	44.44	0.27	44.71
3	2409.25	87.20	0.26	87.46

### Vertical


No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
1	2348.00	38.85	-4.56	34.29
2	2400.00	40.43	-4.57	35.86
3	2408.25	78.26	-4.58	73.68

Note: RBW=100kHz, VBW=100kHz

Horizontal

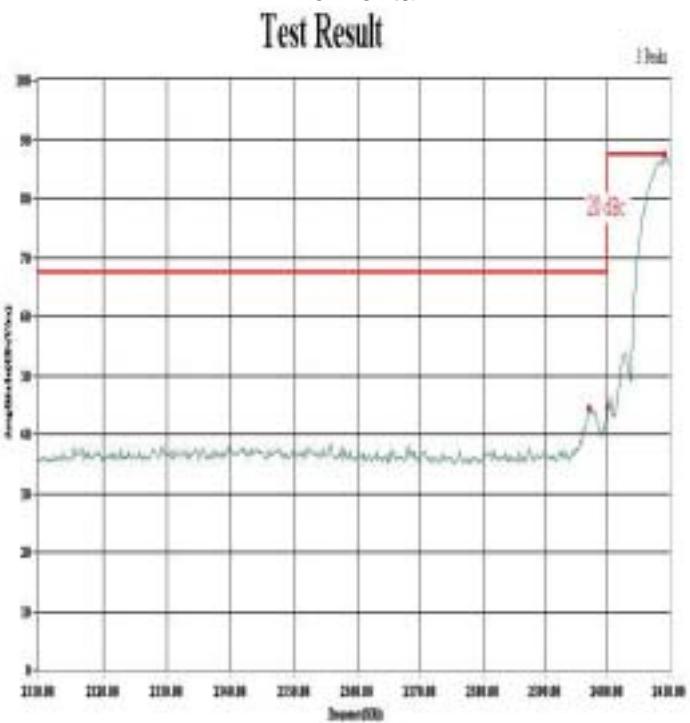

Vertical

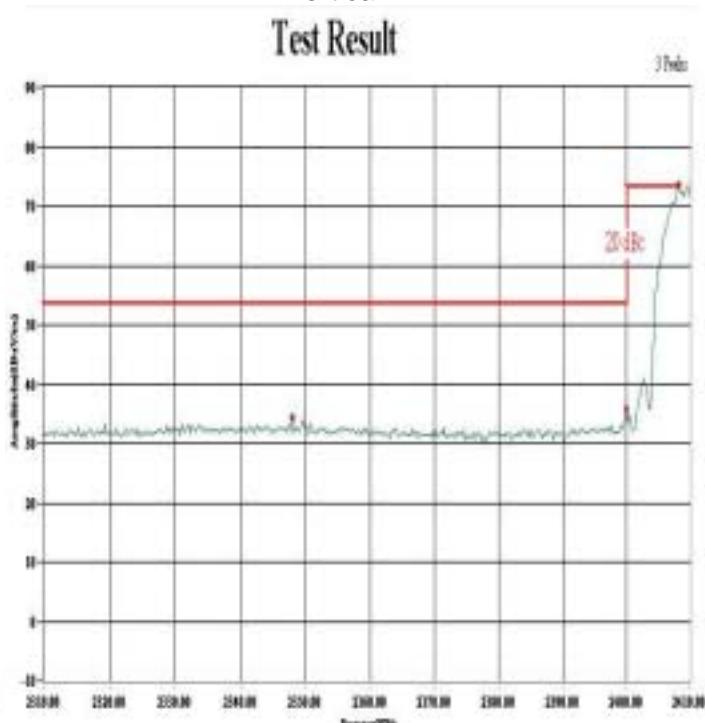

Date of Test	January 07, 2004
EUT	Industrial PC
Working Cond.	Mode 2 (802.11g)

Channel No.	Frequency(MHz)	Required Limit(dBc)	Result
1(Horizontal)	< 2400	>20	Pass
1(Vertical)	< 2400	>20	Pass

### Horizontal


No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
1	2398.75	48.35	0.27	48.62
2	2400.00	47.63	0.27	47.90
3	2408.50	85.83	0.26	86.09

### Vertical


No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
1	2394.75	38.76	-4.57	34.19
2	2400.00	39.64	-4.57	35.07
3	2408.25	74.73	-4.58	70.15

Note:RBW=100kHz, VBW=100kHz

Horizontal

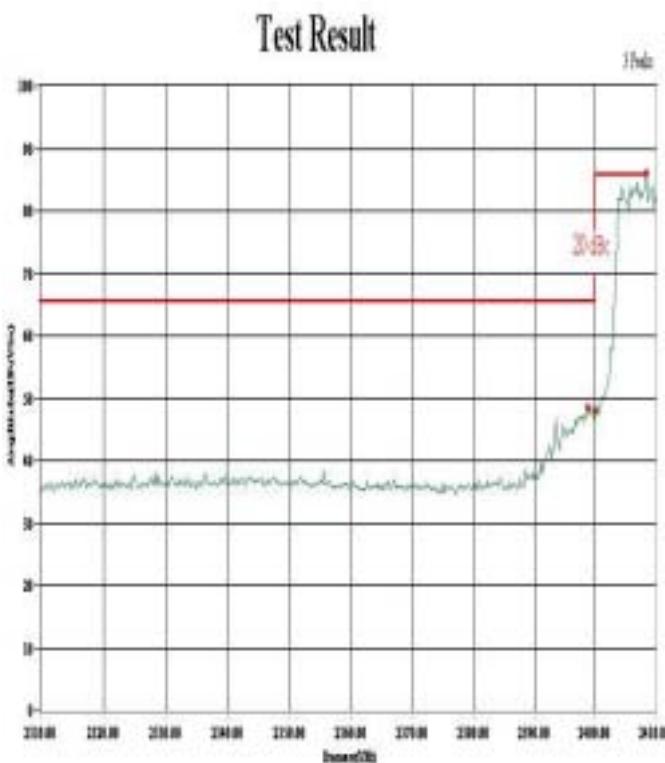

Vertical

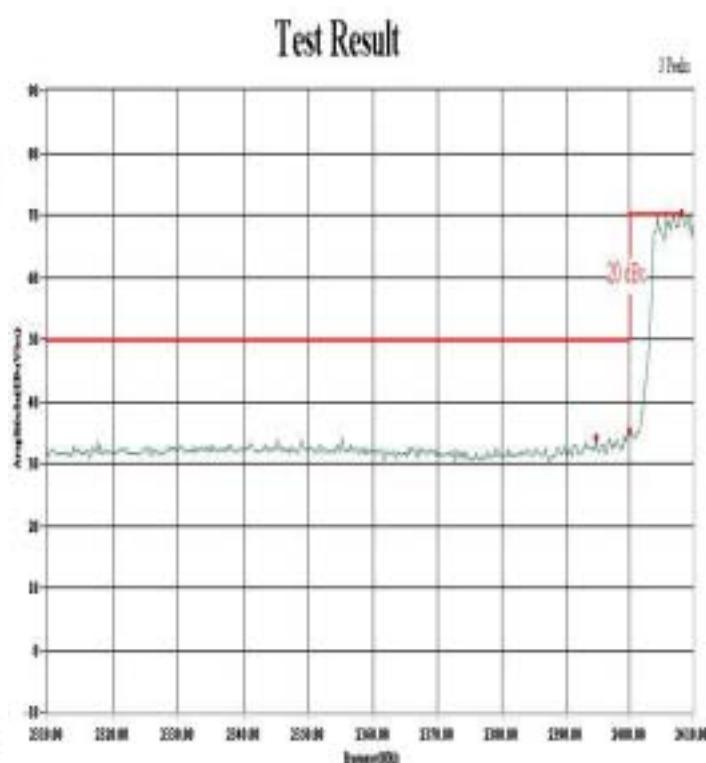

Date of Test	January 06, 2004
EUT	Industrial PC
Working Cond.	Mode 3 (Bluetooth)

Channel No.	Frequency(MHz)	Required Limit(dBc)	Result
1(Horizontal)	< 2400	>20	Pass
1(Vertical)	< 2400	>20	Pass

### Horizontal

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
1	2399.25	-39.27	-4.57	-43.84
2	2400.00	-39.35	-4.57	-43.92
3	2402.25	7.91	-4.57	3.34



### Vertical

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
1	2399.25	-45.54	-4.57	-50.11
2	2400.00	-43.27	-4.57	-47.84
3	2402.00	3.50	-4.57	-1.07

Note: RBW=100kHz, VBW=100kHz

Horizontal

Vertical

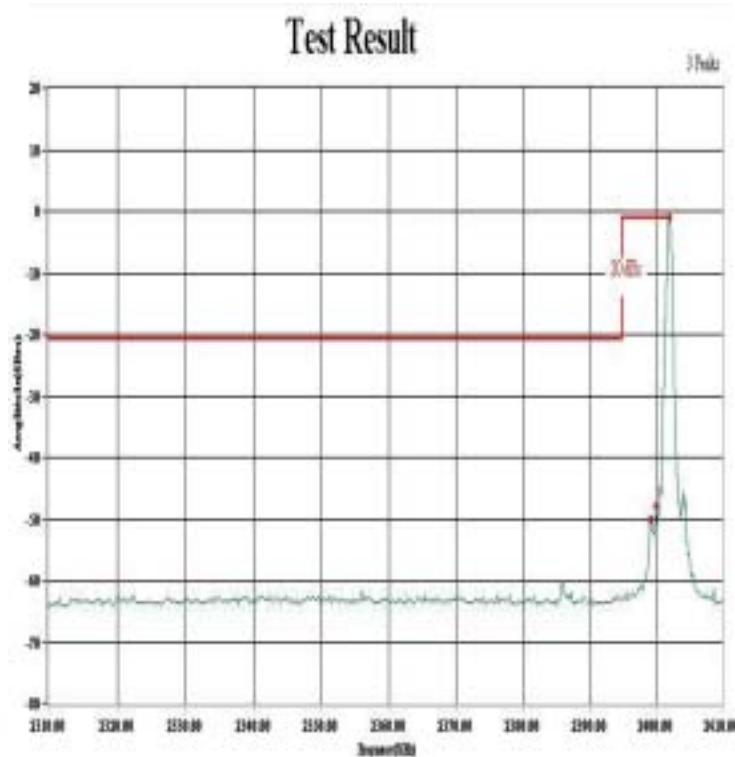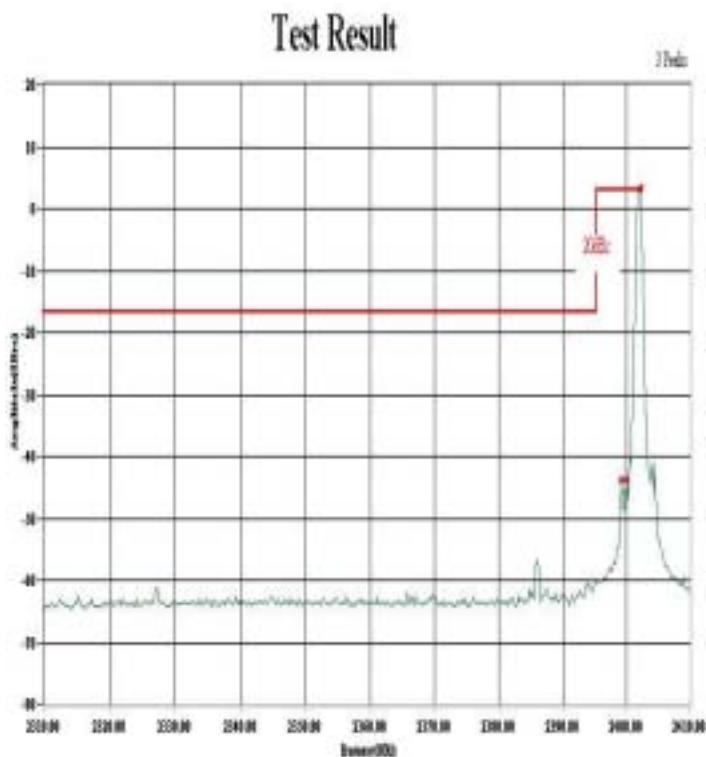

<b>Date of Test</b>	January 07, 2004	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 1 (802.11b ) Channel 11	<b>Data Rate</b>	11Mbps
<b>Antenna distance</b>	3m at <b>Horizontal</b>	<b>Frequency Range</b>	<b>Above 1GHz</b>


## Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Result
1	2463.75	92.53	0.21	92.74	74.00	N/A
2	2483.50	49.45	0.19	49.64	74.00	PASS
3	2484.50	50.66	0.19	50.85	74.00	PASS
4	2500.00	49.96	0.18	50.14	74.00	PASS

### Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ.
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

## Test Result

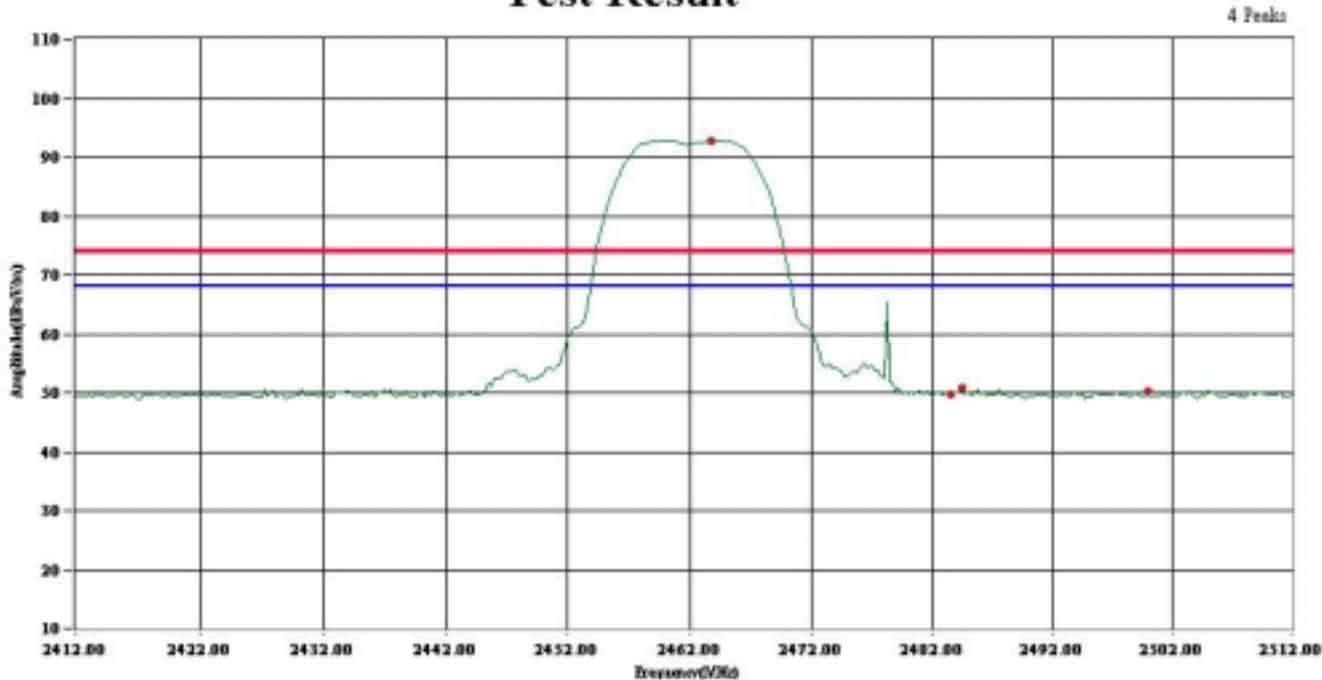

<b>Date of Test</b>	January 07, 2004	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 1 (802.11b ) Channel 11	<b>Data Rate</b>	11Mbps
<b>Antenna distance</b>	3m at <b>Vertical</b>	<b>Frequency Range</b>	<b>Above 1GHz</b>

## Peak


No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Result
1	2464.50	84.50	-4.59	79.91	74.00	N/A
2	2483.50	46.47	-4.60	41.87	74.00	PASS
3	2488.00	47.14	-4.60	42.54	74.00	PASS
4	2500.00	47.06	-4.60	42.46	74.00	PASS

### Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ.
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

## Test Result

4 Peaks

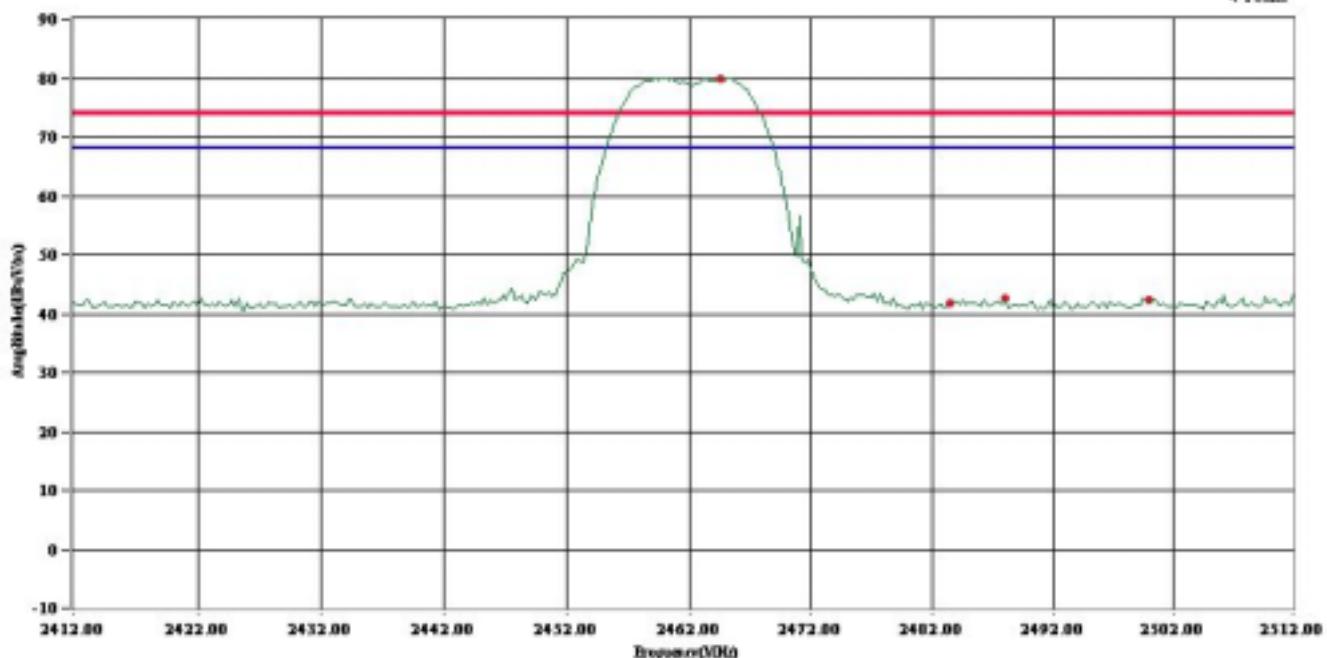

<b>Date of Test</b>	January 07, 2004	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 2 (802.11g ) Channel 11	<b>Data Rate</b>	11Mbps
<b>Antenna distance</b>	3m at <b>Horizontal</b>	<b>Frequency Range</b>	<b>Above 1GHz</b>

## Peak


No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Result
1	2467.00	92.96	0.21	93.17	74.00	N/A
2	2483.50	51.40	0.19	51.59	74.00	PASS
3	2483.75	53.45	0.19	53.64	74.00	PASS
4	2500.00	49.32	0.18	49.50	74.00	PASS

### Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ.
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

## Test Result

4 Peaks

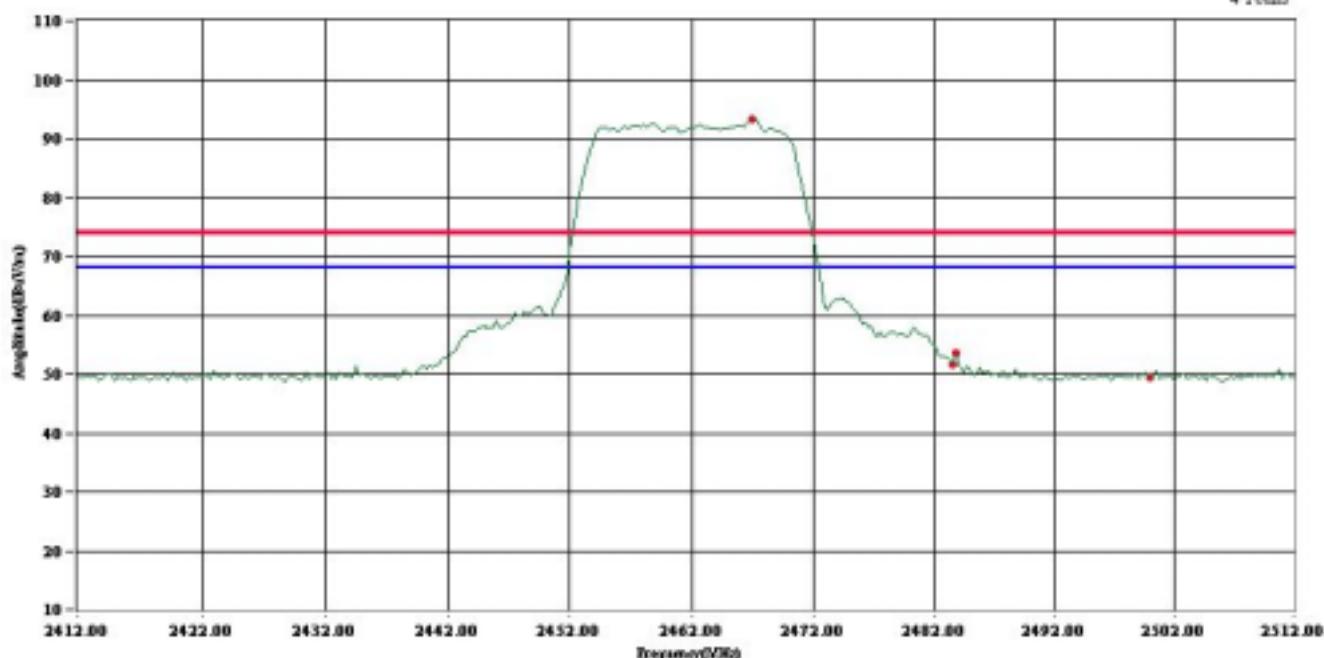

<b>Date of Test</b>	January 07, 2004	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 2 (802.11g ) Channel 11	<b>Data Rate</b>	11Mbps
<b>Antenna distance</b>	3m at <b>Vertical</b>	<b>Frequency Range</b>	<b>Above 1GHz</b>

## Peak


No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Result
1	2467.25	85.00	-4.59	80.41	74.00	N/A
2	2483.50	47.09	-4.60	42.49	74.00	PASS
3	2485.75	47.23	-4.60	42.63	74.00	PASS
4	2500.00	46.90	-4.60	42.30	74.00	PASS

### Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ.
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

## Test Result

4 Peaks

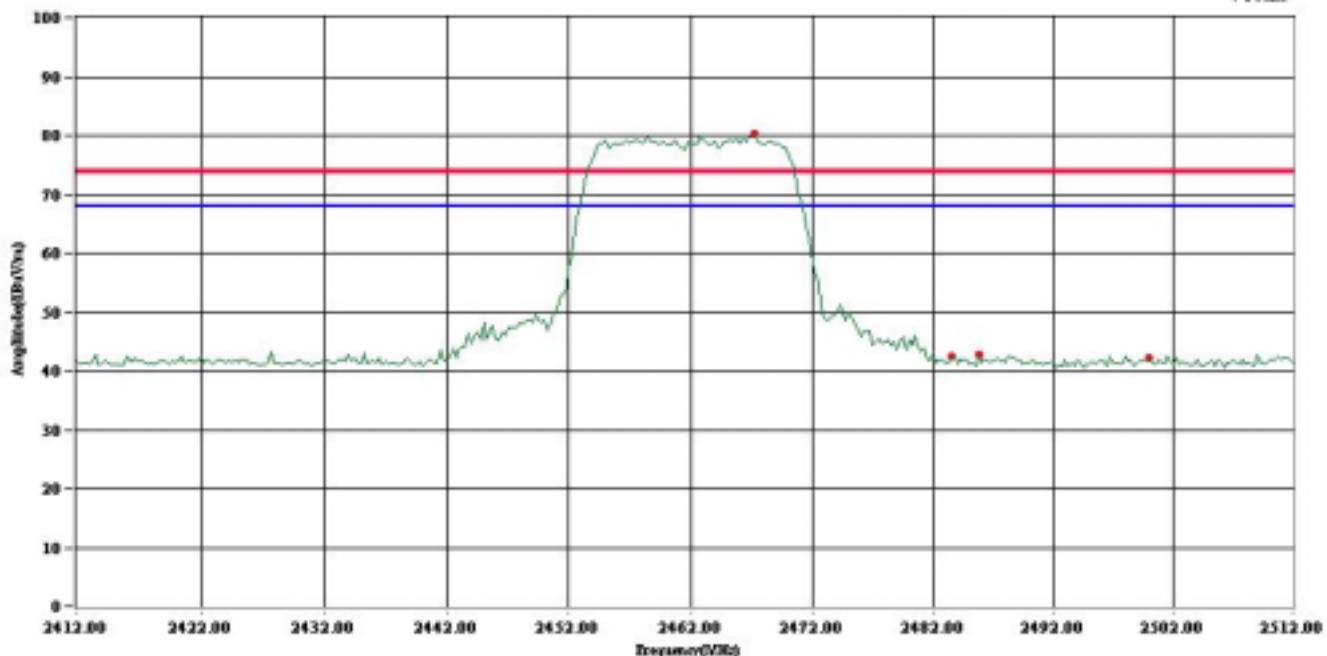

<b>Date of Test</b>	January 07, 2004	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 3 (Bluetooth) Channel 78	<b>Frequency Range</b>	Above 1GHz
<b>Antenna distance</b>	3m at <b>Horizontal</b>		

## Radiation Emission of Fundamental

### Peak


No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
1	2480.25	79.03	37.09	116.12

### Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
1	2480.25	N/A	37.09	86.12

#### Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ.
3. Average Value= peak value -20log(duty cycle).
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, base upon Bluetooth theory the transmitter is on  $0.625^*5$  per 247ms per channel. For this reason the duty cycle is  $20\log(3.125/100) = -30\text{dB}$

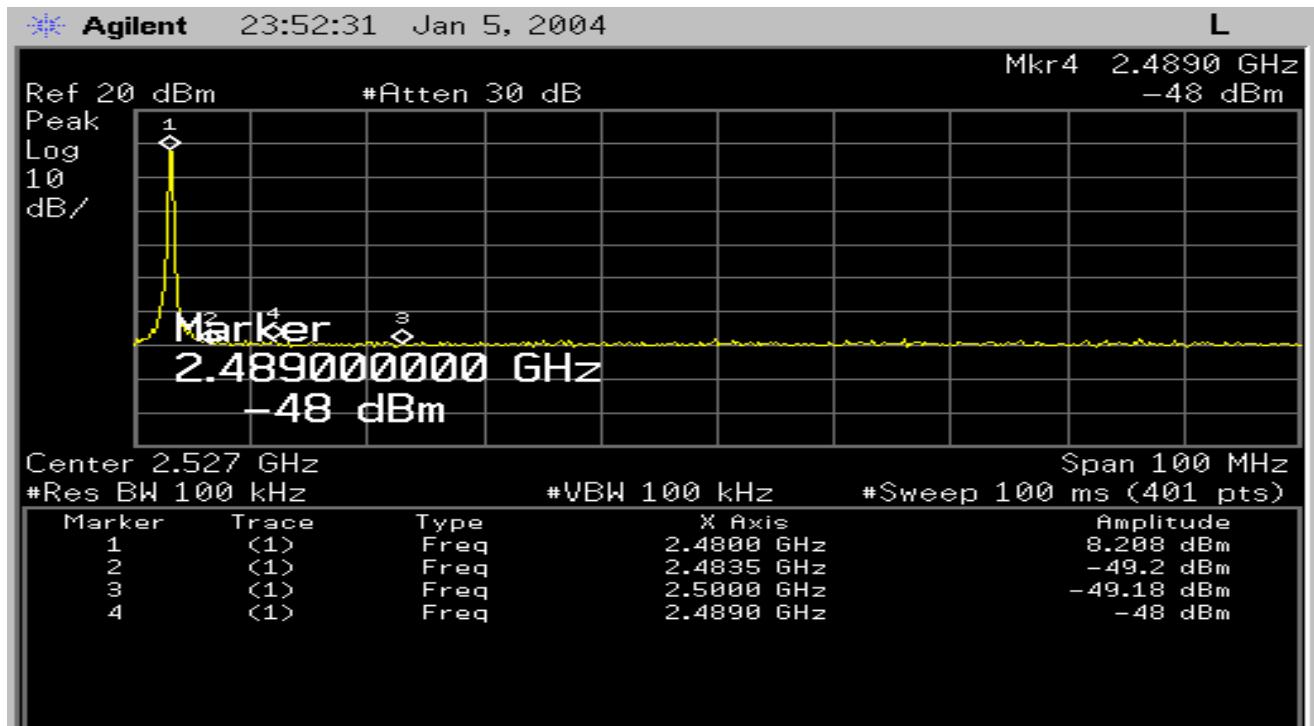

## TEST RESULT:

The band edge emission plot on above show 56.208dB delta between carry power and maximum emission in restrict band (2489MHz). The emission list of fundamental test result is 86.12dBuV/m, so maximum field strength of 2489MHz is  $86.12 - 56.208 = 29.912$ dBuV/m which is under 54dBuV/m.

<b>Date of Test</b>	January 07, 2004	<b>Temperature</b>	25 deg/C
<b>EUT</b>	Industrial PC	<b>Humidity</b>	60 %RH
<b>Working Cond.</b>	Mode 3 (2483.5 MHz)	<b>Frequency Range</b>	Above 1GHz
<b>Antenna distance</b>	3m at <b>Vertical</b>		

## Radiation Emission of Fundamental

### Peak


No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
1	2479.87	74.33	32.30	106.63

### Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
1	2479.87	N/A	32.30	76.63

#### Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ.
3. Average Value= peak value -20log(duty cycle).
4. Emission Level= Reading + Correction Factor (Could have  $\pm 0.01$  tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, base upon Bluetooth theory the transmitter is on 0.625\*5 per 247ms per channel. For this reason the duty cycle is  $20\log(3.125/100) = -30\text{dB}$

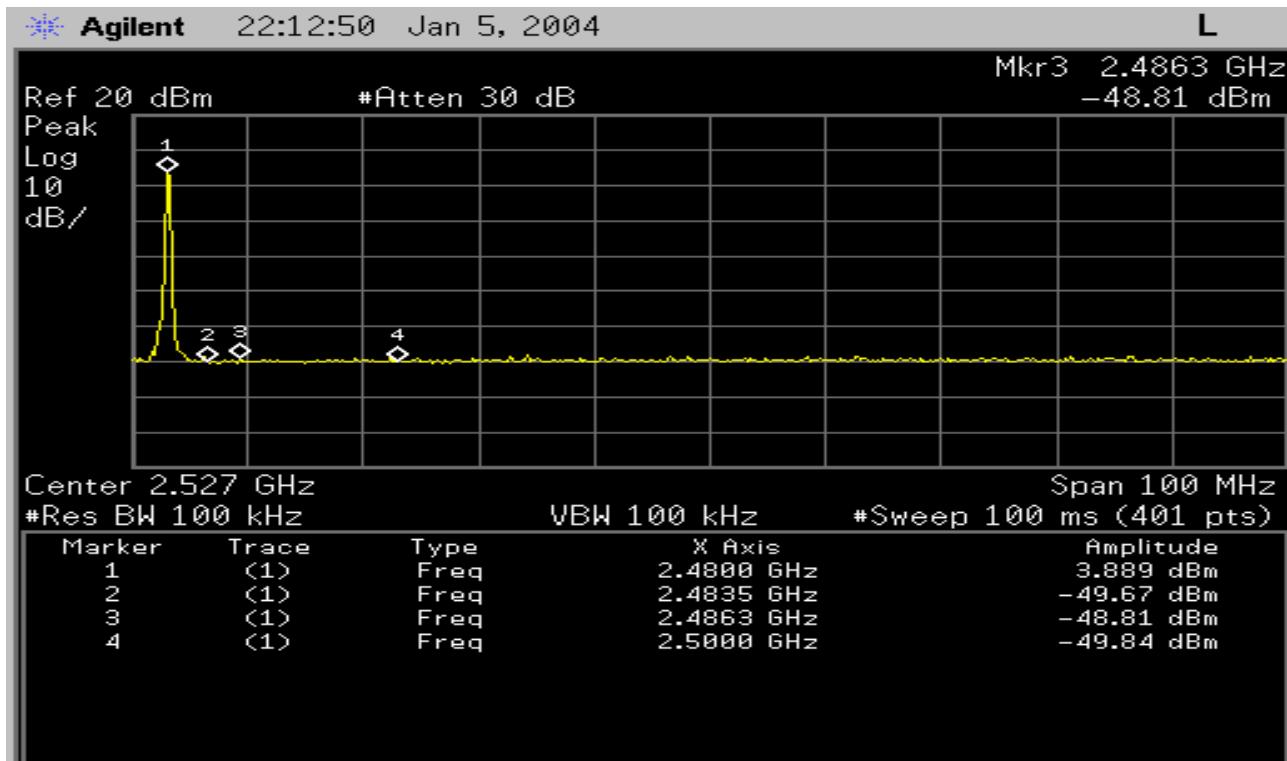

## TEST RESULT:

The band edge emission plot on above show **52.699dB** delta between carry power and maximum emission in restrict band (**2486.3MHz**). The emission list of fundamental test result is **76.63dBuV/m**, so maximum field strength of 2486.3MHz is **76.63 – 52.699 = 23.931 dBuV/m** which is under **54dBuV/m**.

## 7. OCCUPIED BANDWIDTH


### 7.1 TEST EQUIPMENT

The following test equipments are used during the radiated emission tests:

Item	Instrument	Manufacturer	Type	Serial No.	Last Cal.
2	Spectrum Analyzer	Advantest	R3272	82420232	02/14/03
3	Spectrum Analyzer	HP	E4407B	39240339	08/16/03

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

### 7.2 BLOCK DIAGRAM OF TEST SETUP

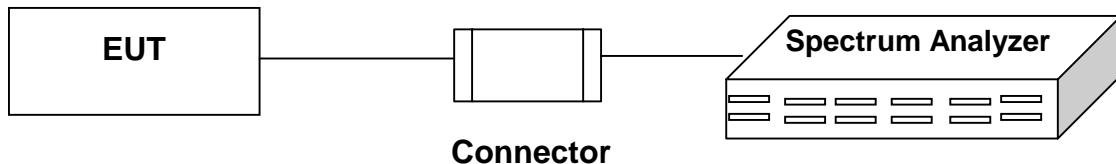

### 7.3 LIMIT

WLAN: The minimum 6dB bandwidth shall be at least 500KHz.

Bluetooth: The maximum 20 dB bandwidth of the hopping channel is 1 MHz.

## 7.4 TEST RESULT

Date of Test	December 15, 2003
EUT	Industrial PC
Working Cond.	Mode 1 (802.11b)

Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required limit (KHz)	Result
1	2412	10.9	>500	Pass
6	2437	10.9	>500	Pass
11	2462	10.8	>500	Pass

Figure Channel 1:



Figure Channel 6:

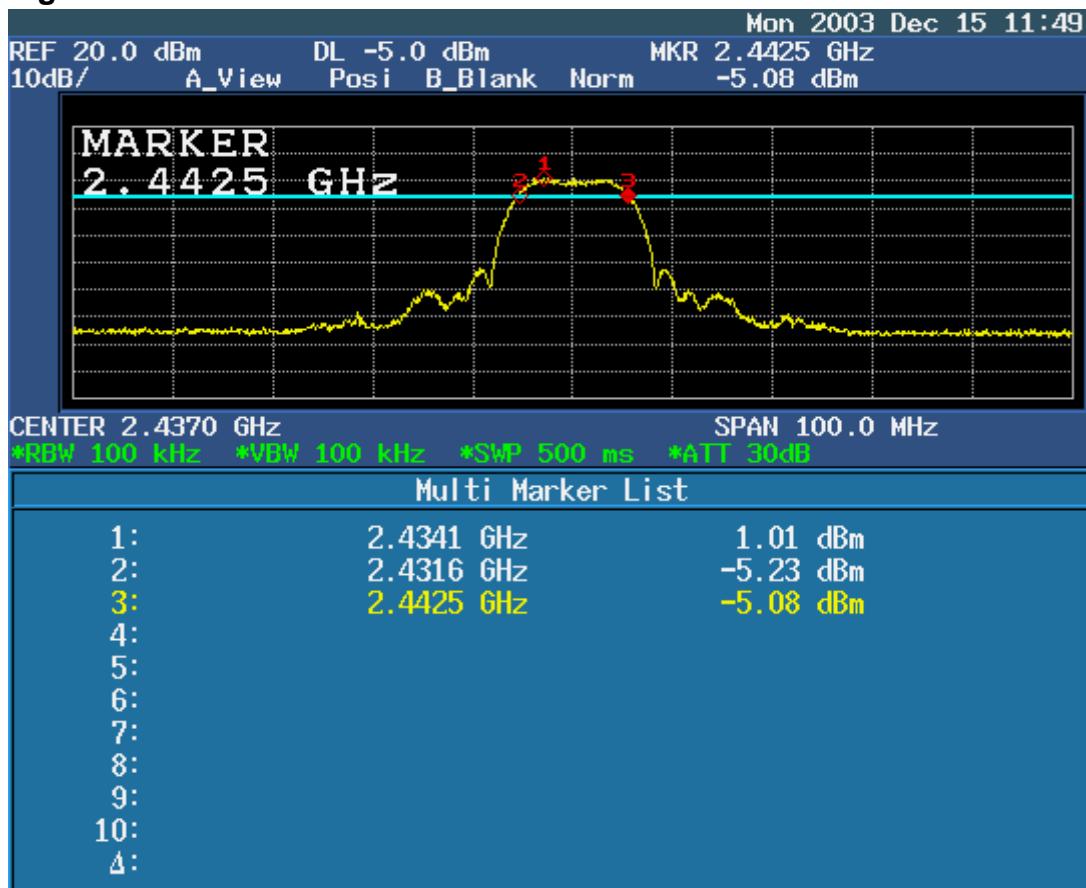


Figure Channel 11:



Date of Test	December 15, 2003
EUT	Industrial PC
Working Cond.	Mode 2 (802.11g)

Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required limit (KHz)	Result
1	2412	16.3	>500	Pass
6	2437	16.1	>500	Pass
11	2462	16.3	>500	Pass

Figure Channel 1:

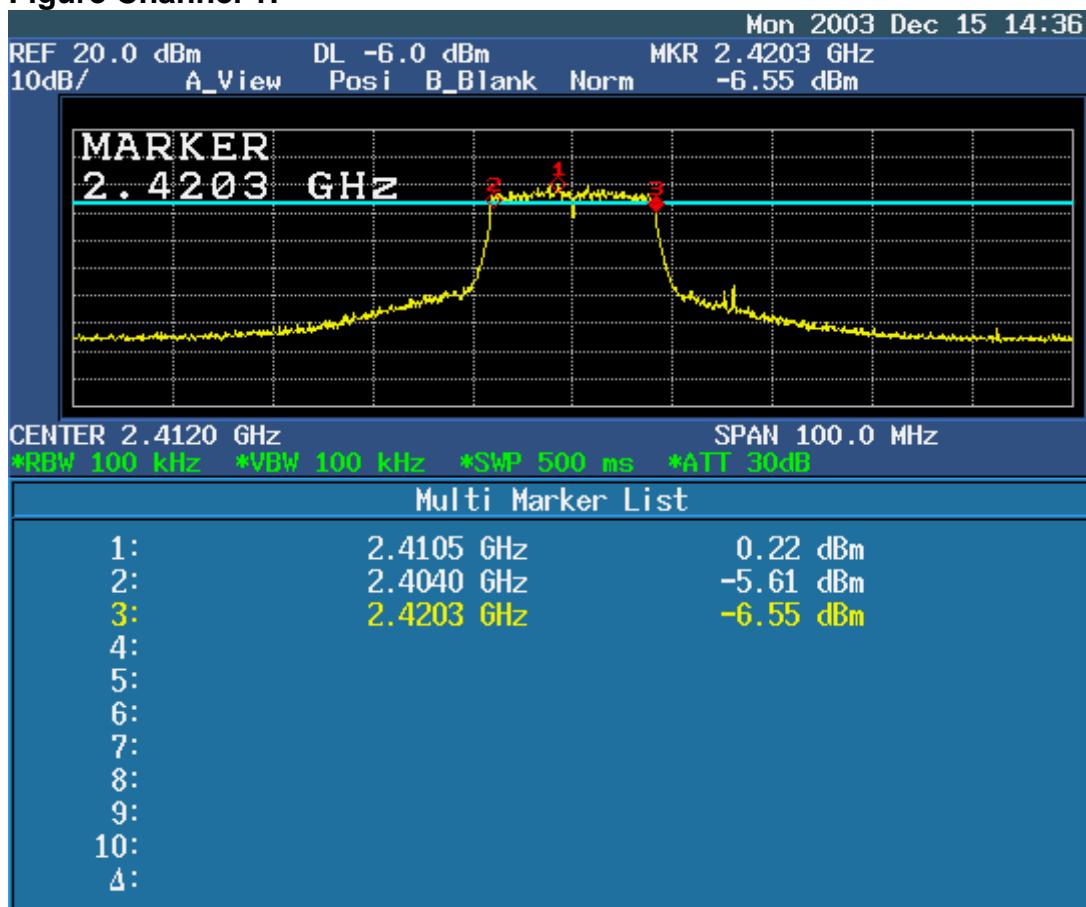


Figure Channel 6:


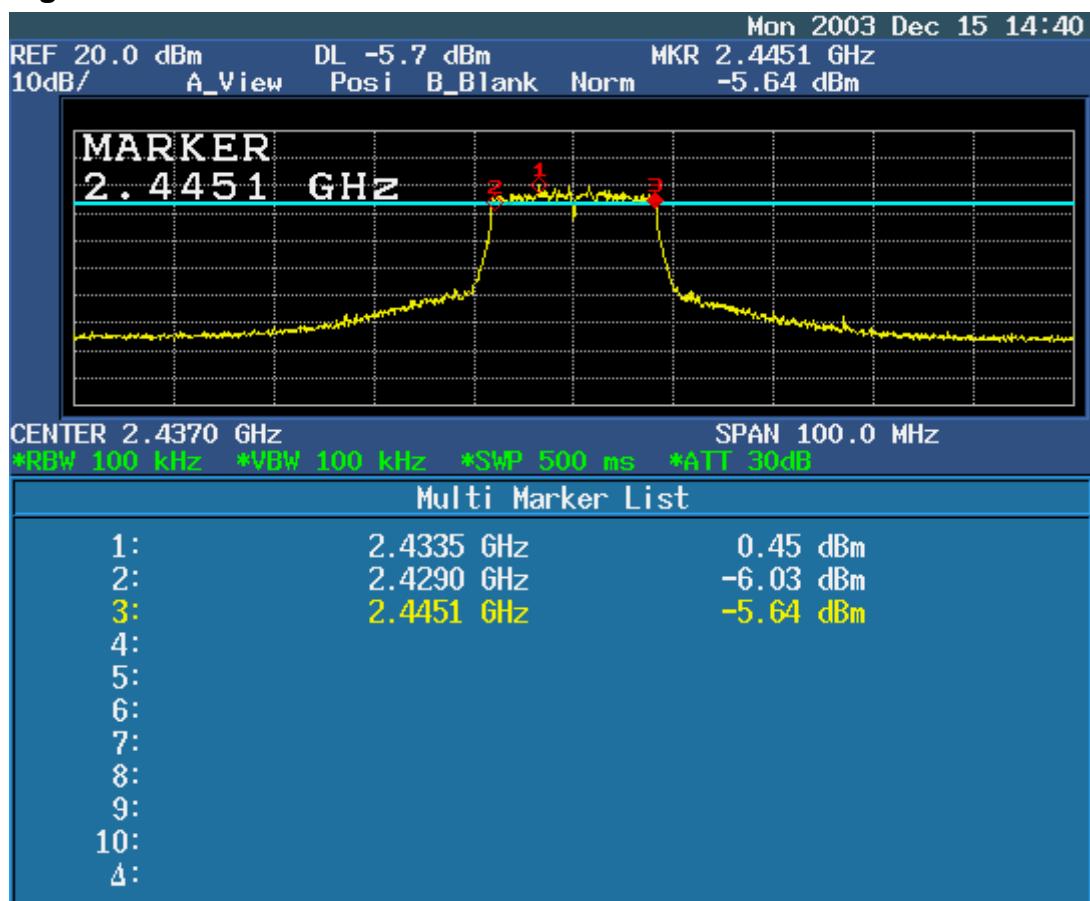


Figure Channel 11:

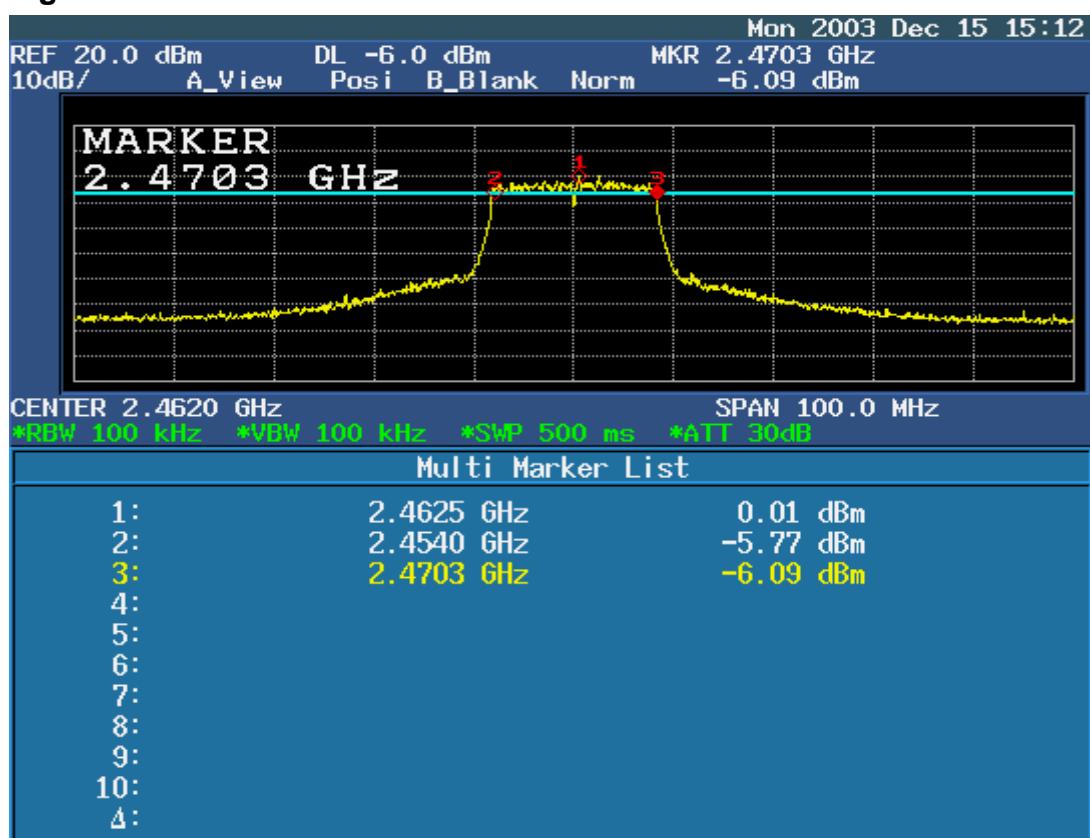

Date of Test	December 15, 2003
EUT	Industrial PC
Working Cond.	Mode 3

Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required limit (MHz)	Result
0	2402	0.4	< 1	Pass
39	2441	0.385	< 1	Pass
78	2480	0.395	< 1	Pass

Figure Channel 0:

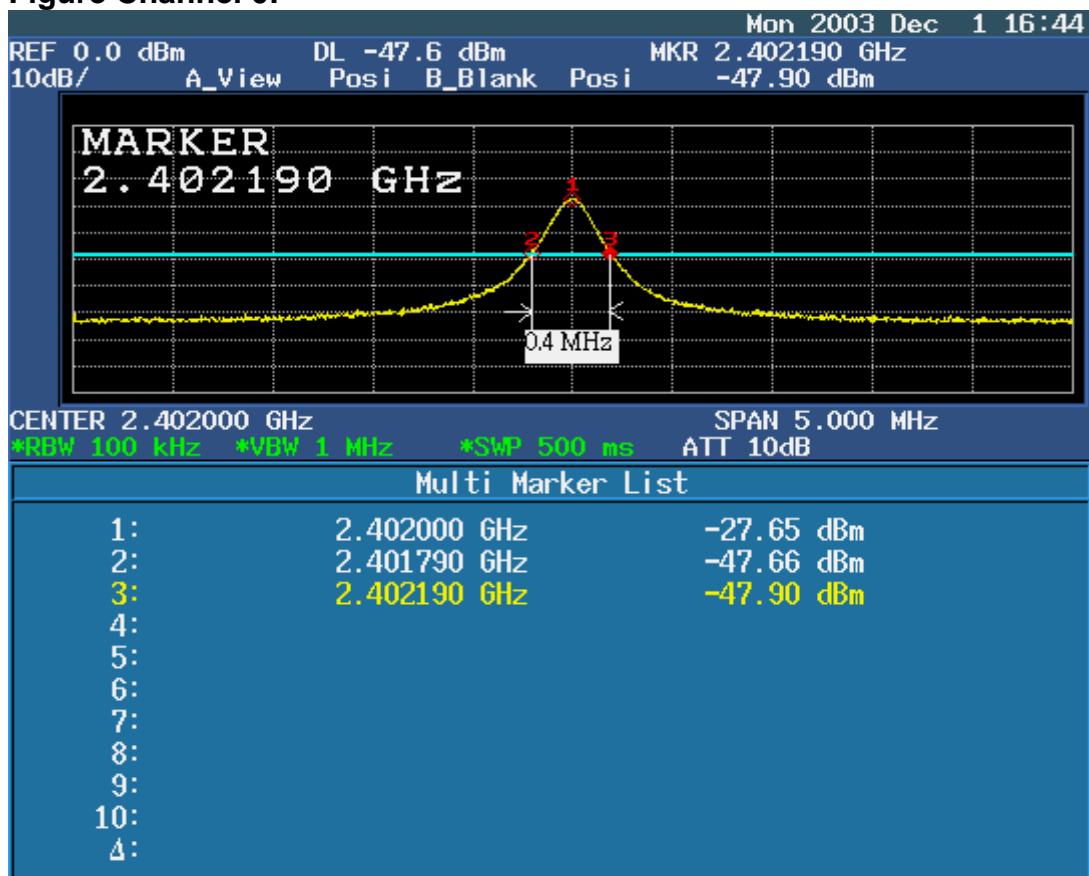


Figure Channel 39:


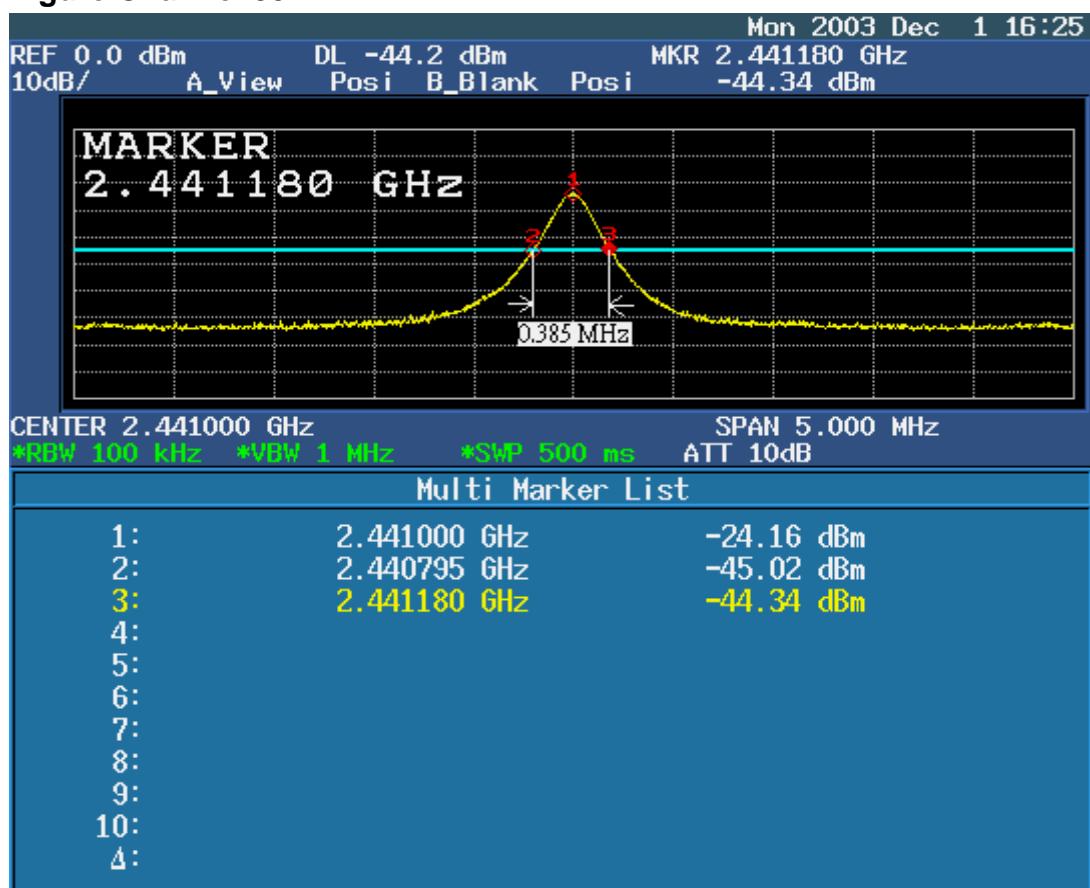


Figure Channel 78:

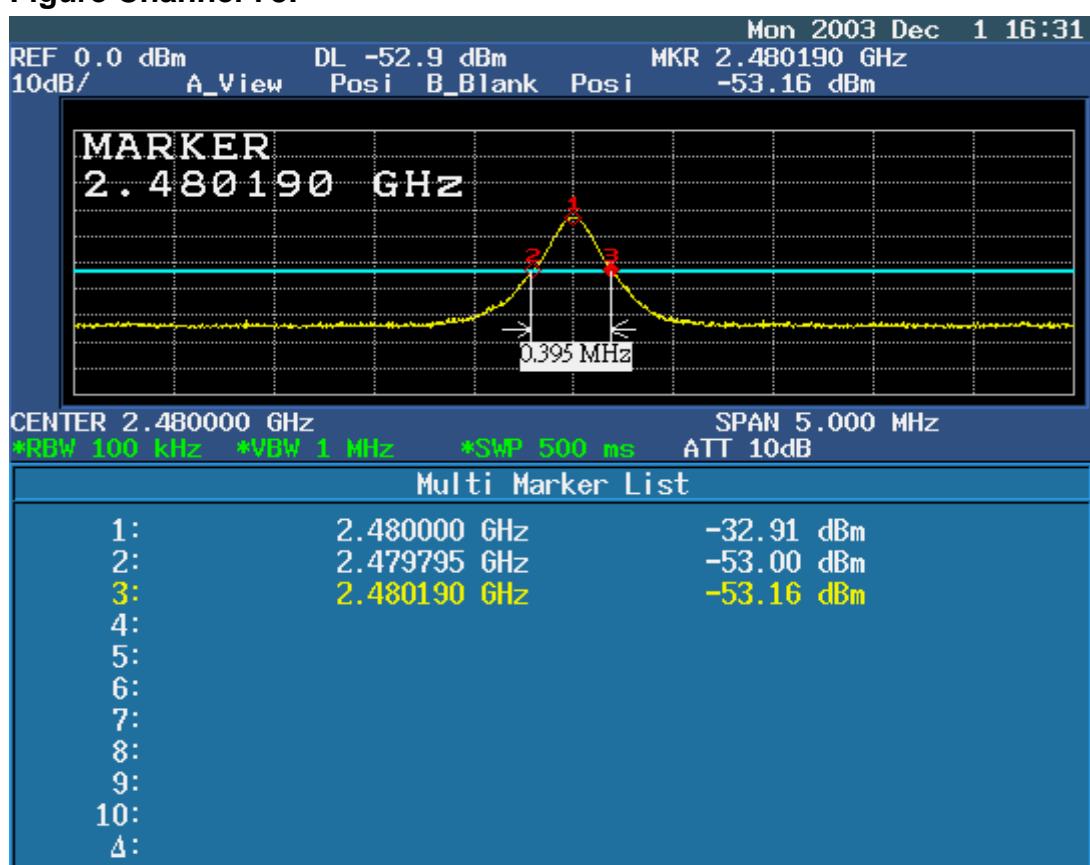

## 8. POWER DENSITY


### 8.1 TEST EQUIPMENT

The following test equipments are used during the radiated emission tests:

Item	Instrument	Manufacturer	Type	Serial No.	Last Cal.
1	Spectrum Analyzer	Advantest	R3272	82420232	02/14/03
2	Spectrum Analyzer	HP	E4407B	39240339	08/16/03

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

### 8.2 BLOCK DIAGRAM OF TEST SETUP

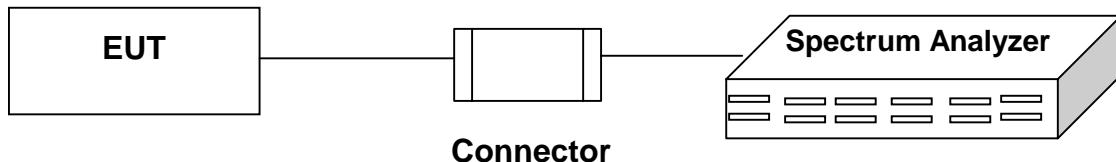

### 8.3 LIMIT

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3KHz bandwidth.

## 8.4 TEST RESULT

Date of Test	December 15, 2003
EUT	Industrial PC
Working Cond.	Mode 1 (802.11b)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required limit (dBm)	Result
1	2411.8749	-14.88	<8dBm	Pass
6	8436.8755	-15.07	<8dBm	Pass
11	2461.8764	-14.79	<8dBm	Pass

Figure Channel 1:

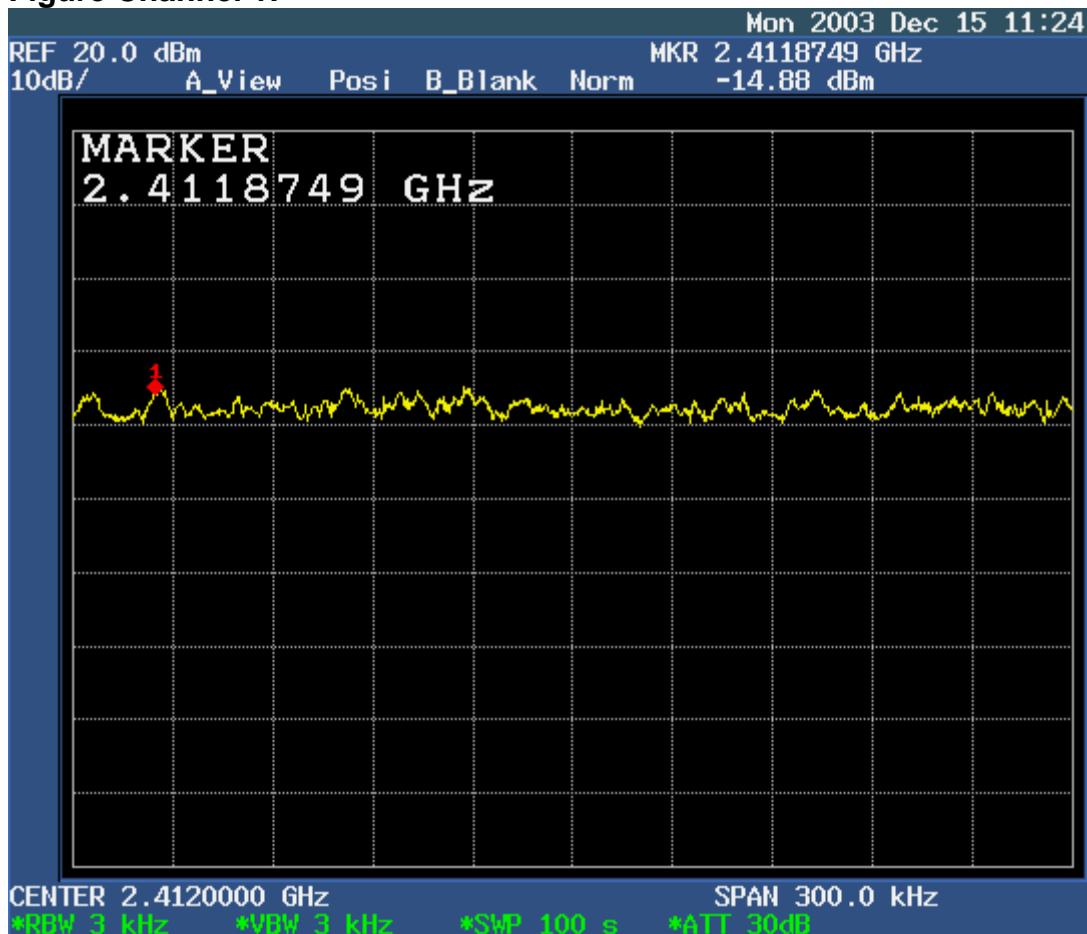


Figure Channel 6:



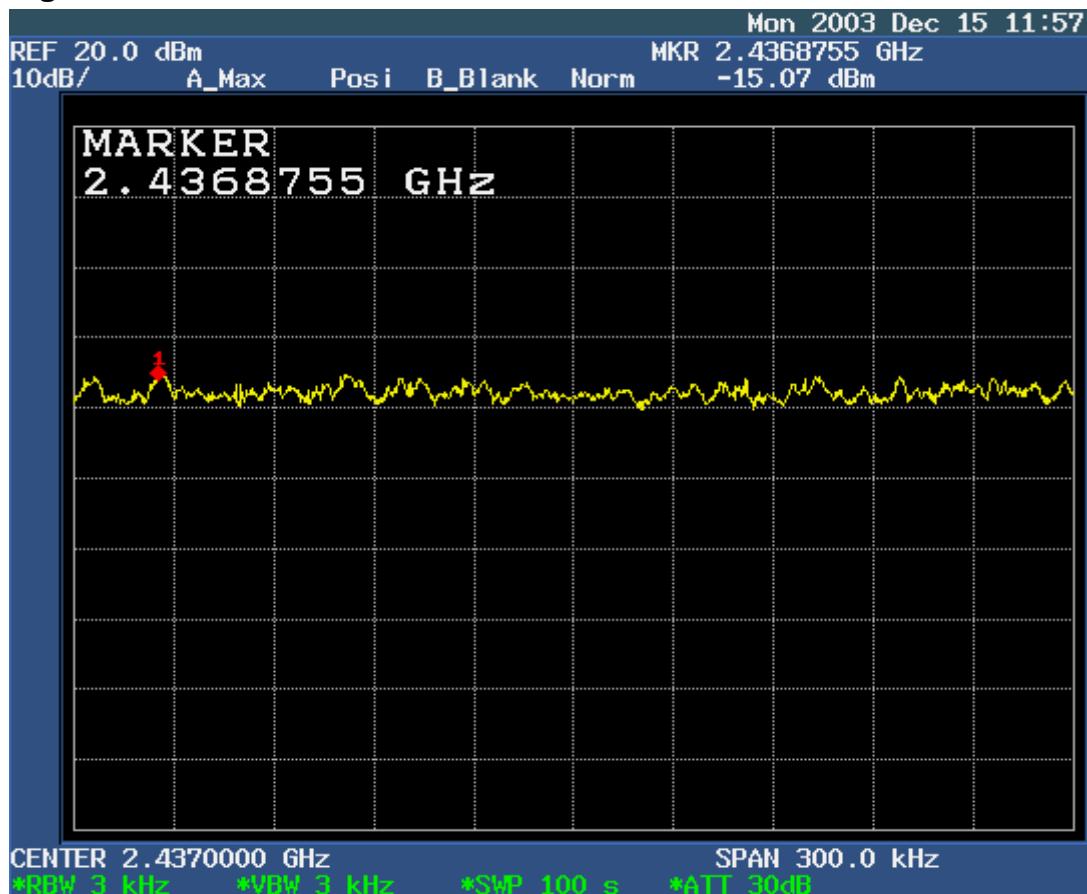




Figure Channel 11:

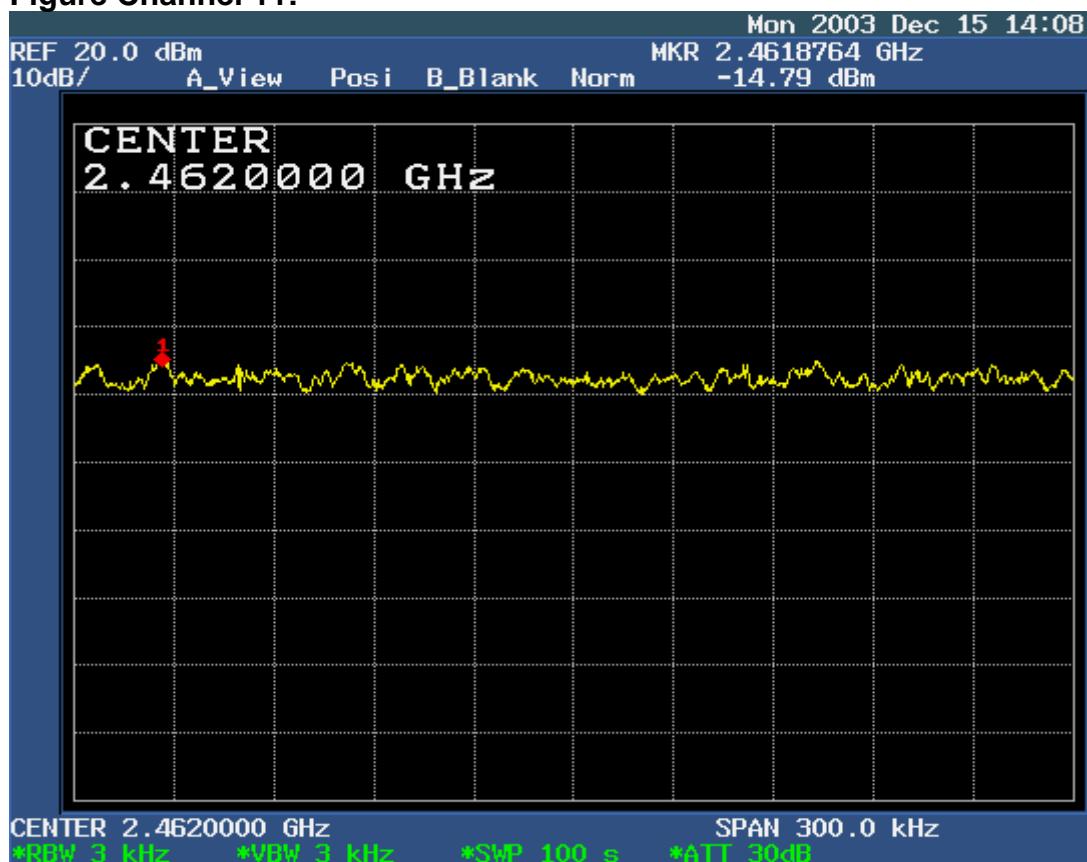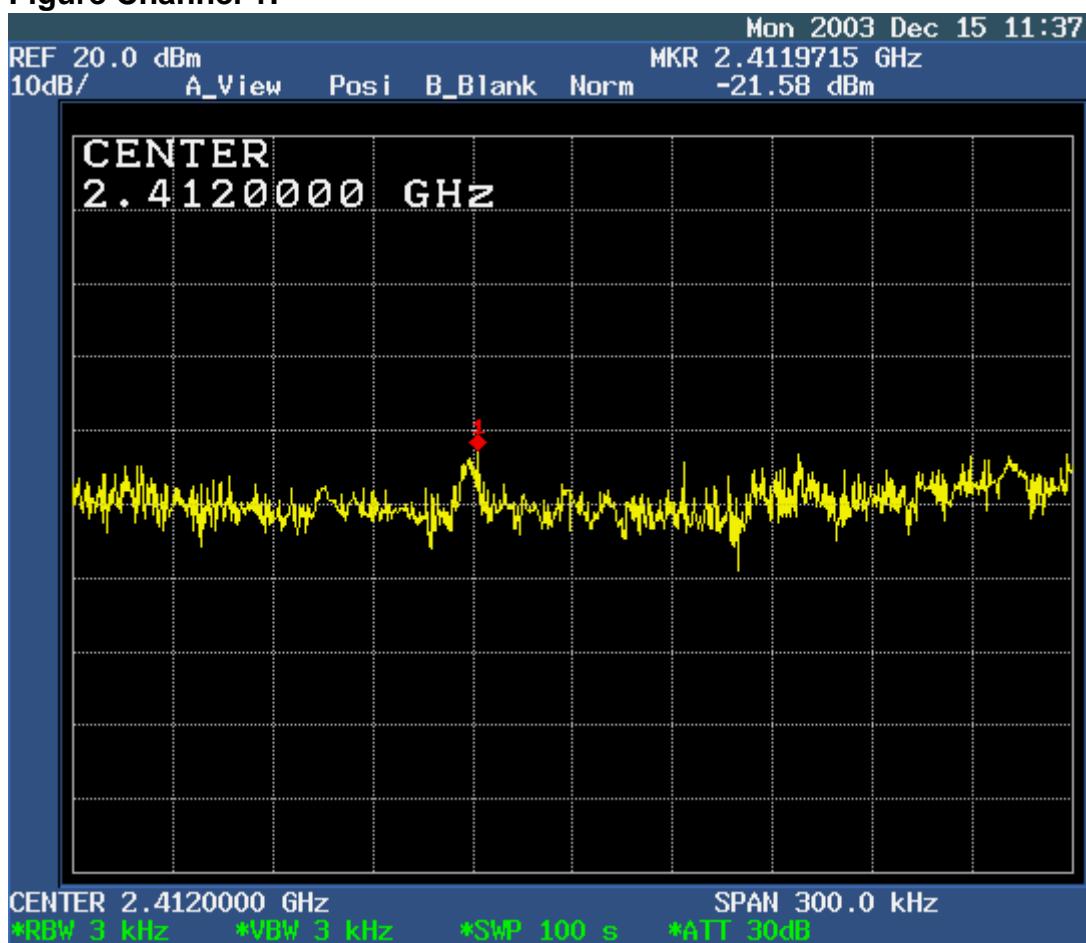

Date of Test	December 15, 2003
EUT	Industrial PC
Working Cond.	Mode 2 (802.11g)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required limit (dBm)	Result
1	2411.9715	-21.58	<8dBm	Pass
6	2436.9691	-22.80	<8dBm	Pass
11	2462.1431	-22.48	<8dBm	Pass

**Figure Channel 1:**

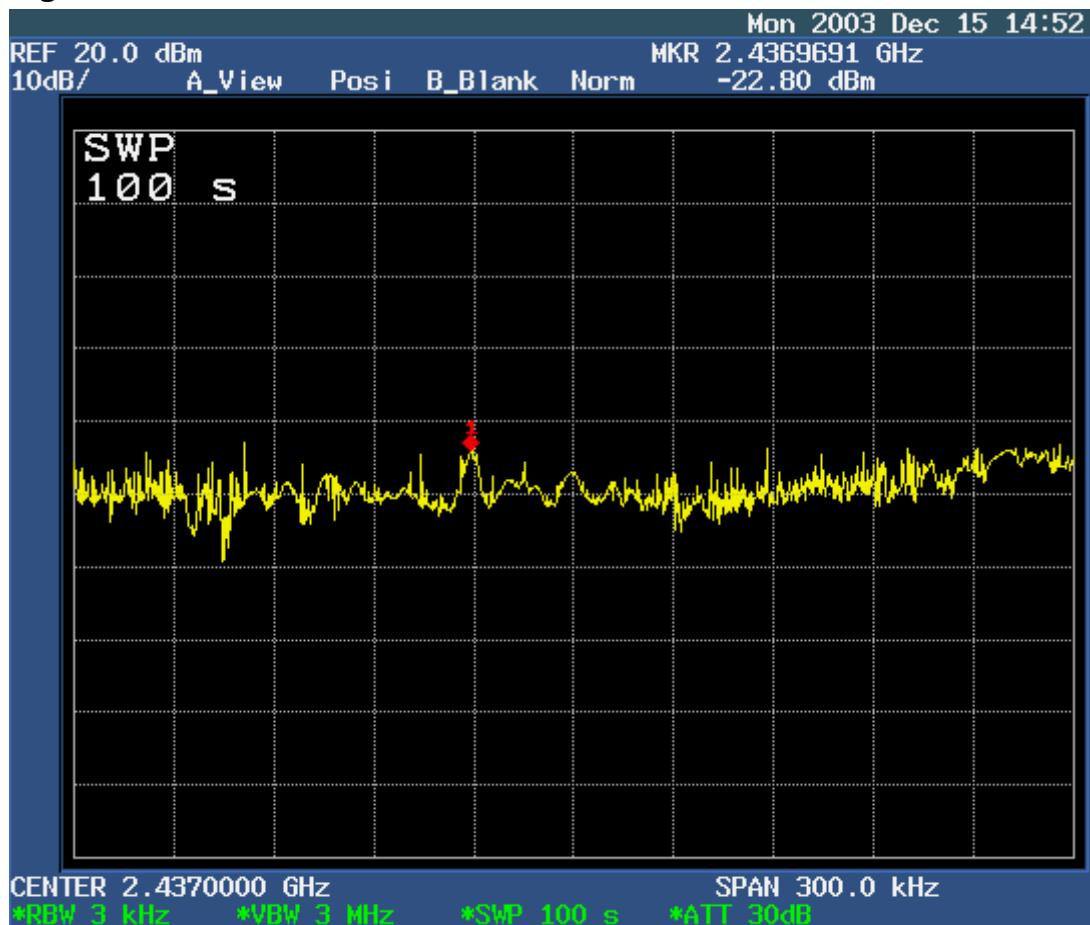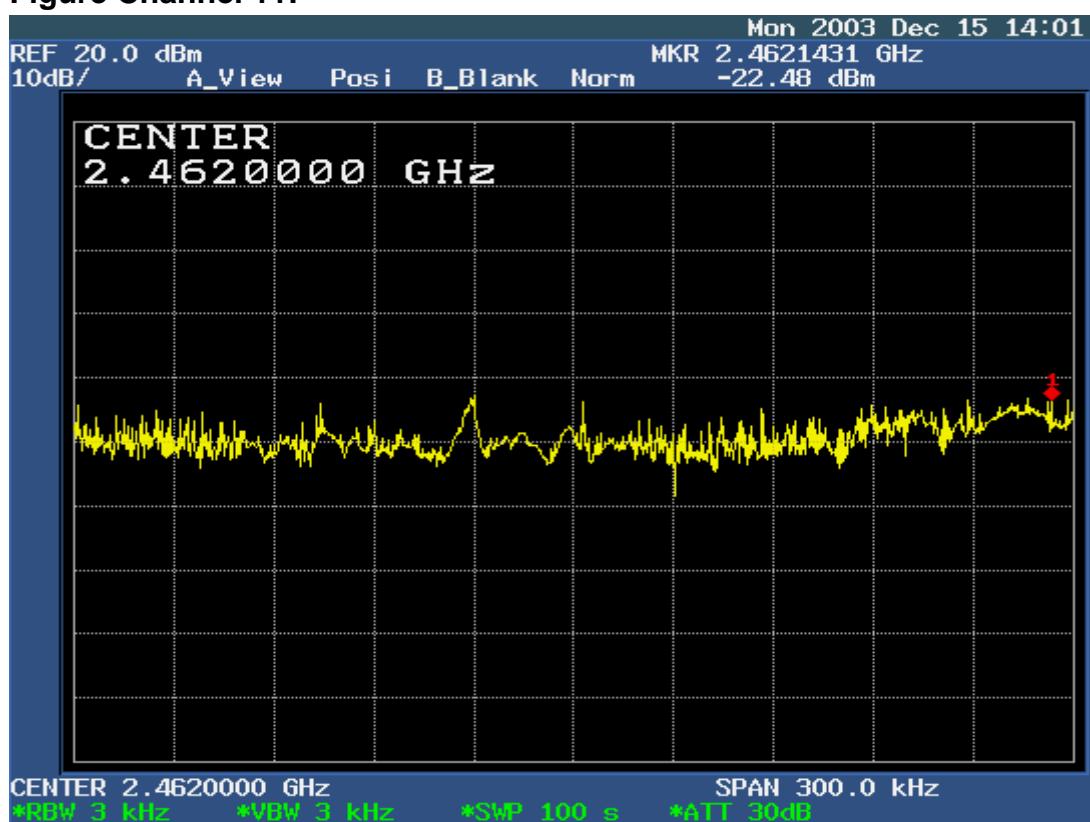**Figure Channel 6:****Figure Channel 11:**

## 9. DWELL TIME


### 9.1 TEST EQUIPMENT

The following test equipments are used during the radiated emission tests:

Item	Instrument	Manufacturer	Type	Serial No.	Last Cal.
2	Spectrum Analyzer	Advantest	R3272	82420232	02/14/03
3	Spectrum Analyzer	HP	E4407B	39240339	08/16/03

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

### 9.2 BLOCK DIAGRAM OF TEST SETUP

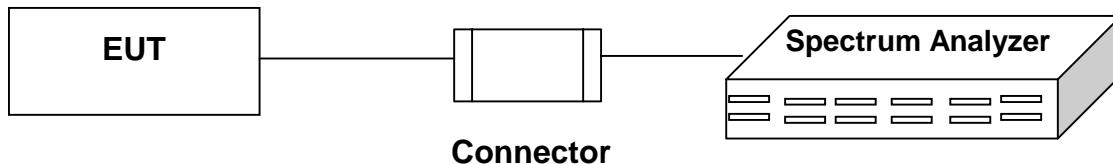

### 9.3 Limit


The dwell time shall be the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

## 9.4 TEST RESULT

Date of Test	December 01, 2003
EUT	Industrial PC
Working Cond.	Mode 3 (Channel 0)

Measurement Level (sec)	Required Limit (sec)	Result
(1) Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) (2) Hop rate = 40 / 50 (ms) = 800 / sec (3) Time slot length = 462 (μs) = 0.000462 (sec)	< 0.4	Pass
※ Dwell Time = 0.000462 * ( 800 / 79 ) * 31.6 = 0.14784 (sec)		



Note: Dwell time = time slot length \* hop rate / number of hopping channels \* period

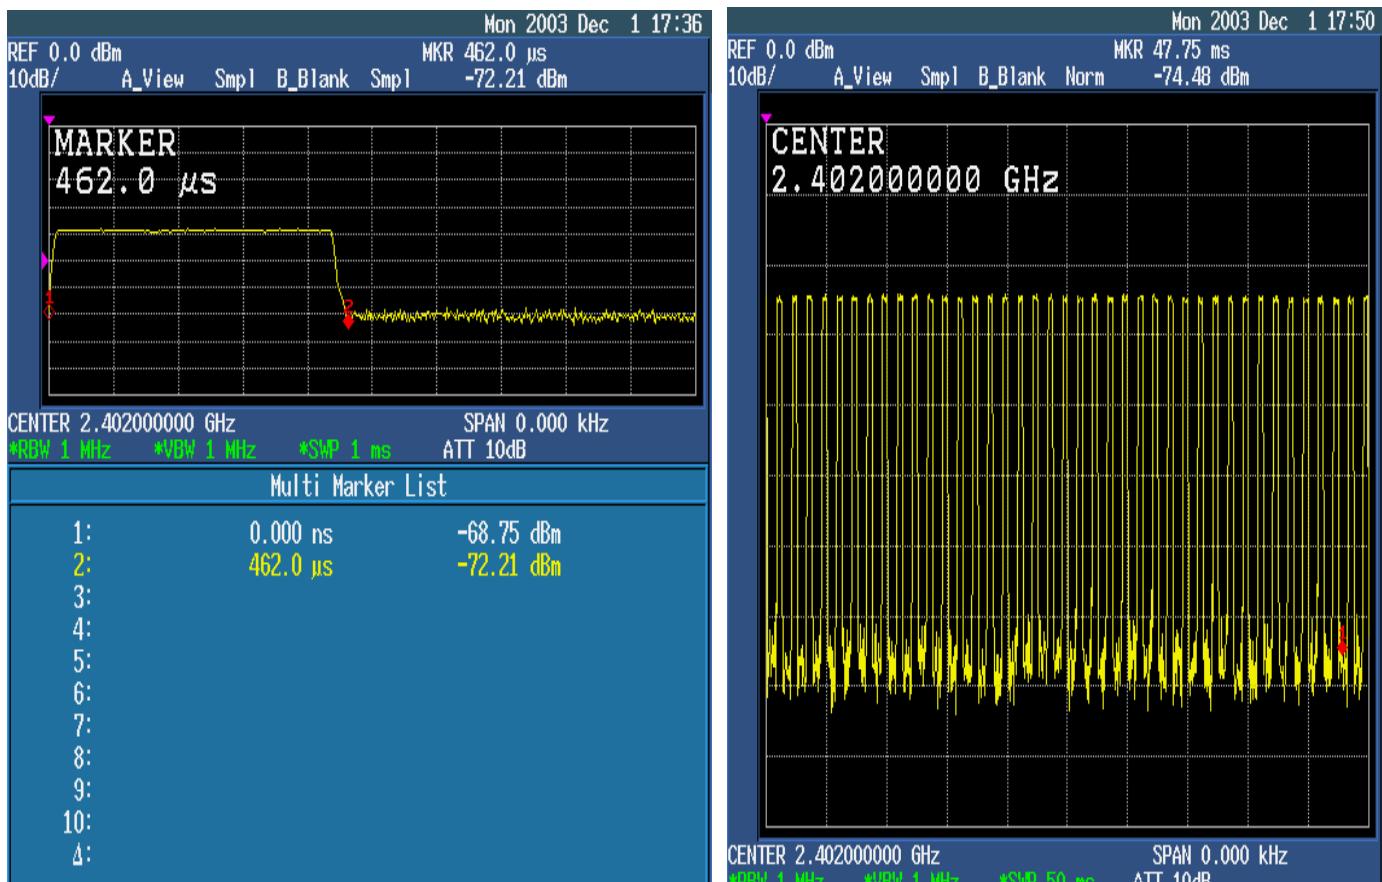

Date of Test	December 01, 2003
EUT	Industrial PC
Working Cond.	Mode 3 (Channel 39)

Measurement Level (sec)	Required Limit (sec)	Result
(2) Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec)		
(2) Hop rate = 40 / 50 (ms) = 800 / sec	< 0.4	
(3) Time slot length = 464 (μs) = 0.000464 (sec)		Pass
※ Dwell Time = 0.000464 * ( 800 / 79 ) * 31.6 = 0.14848 (sec)		



Note: Dwell time = time slot length \* hop rate / number of hopping channels \* period

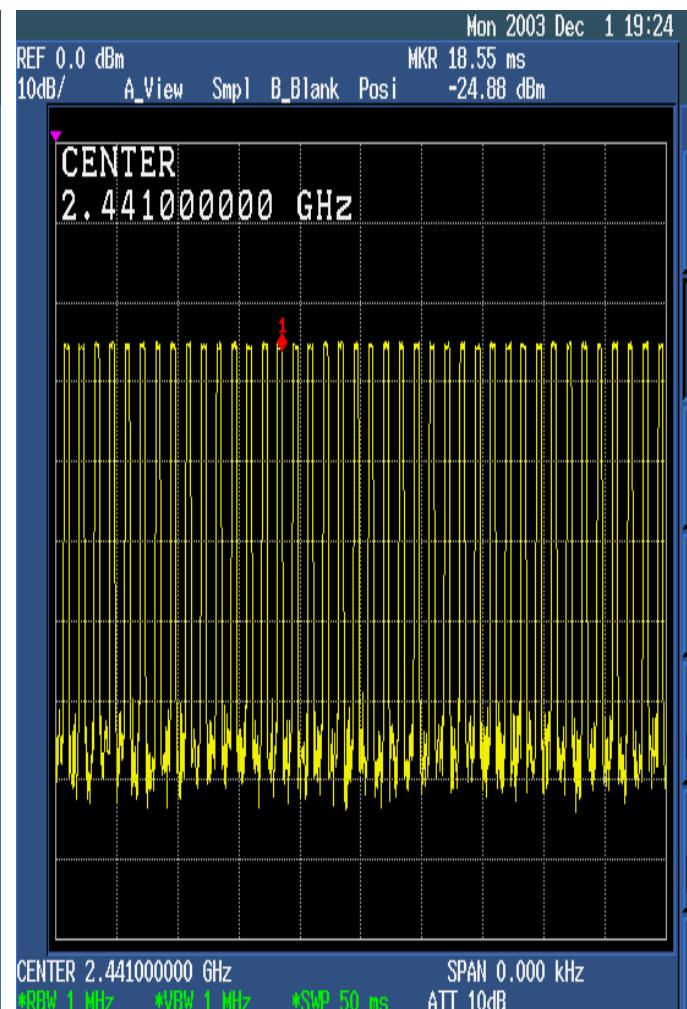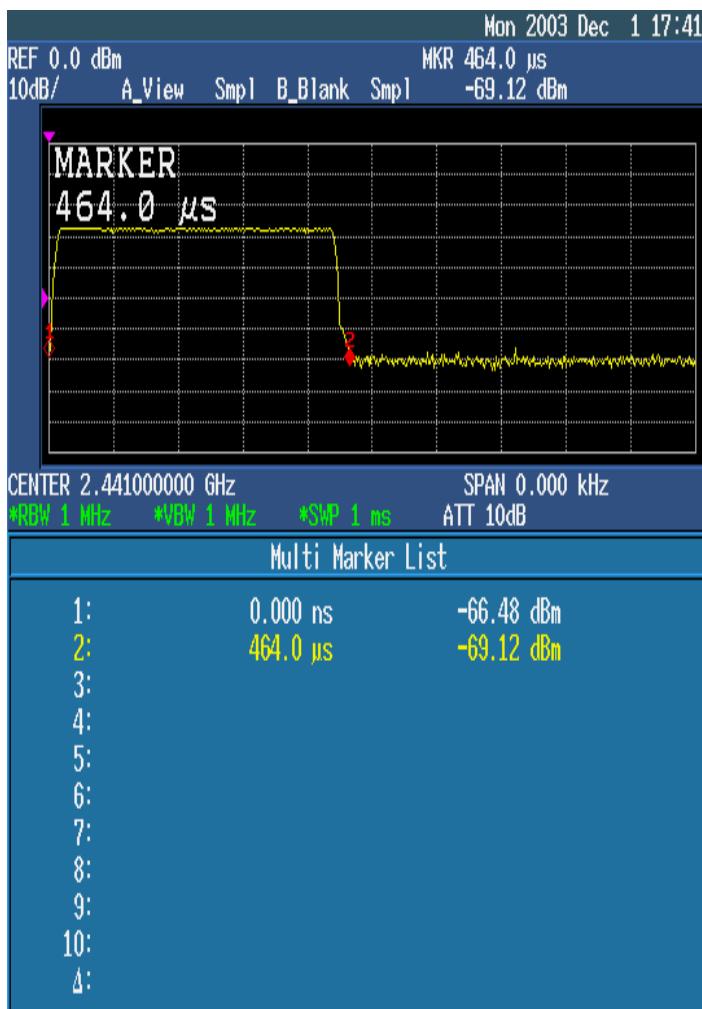

Date of Test	December 01, 2003
EUT	Industrial PC
Working Cond.	Mode 3 (Channel 79)

Measurement Level (sec)	Required Limit (sec)	Result
(3) Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) (2) Hop rate = 40 / 50 (ms) = 800 / sec (3) Time slot length = 466 (μs) = 0.000466 (sec)	< 0.4	Pass
※ Dwell Time = 0.000466 * ( 800 / 79 ) * 31.6 = 0.14912 (sec)		

Note: Dwell time = time slot length \* hop rate / number of hopping channels \* period

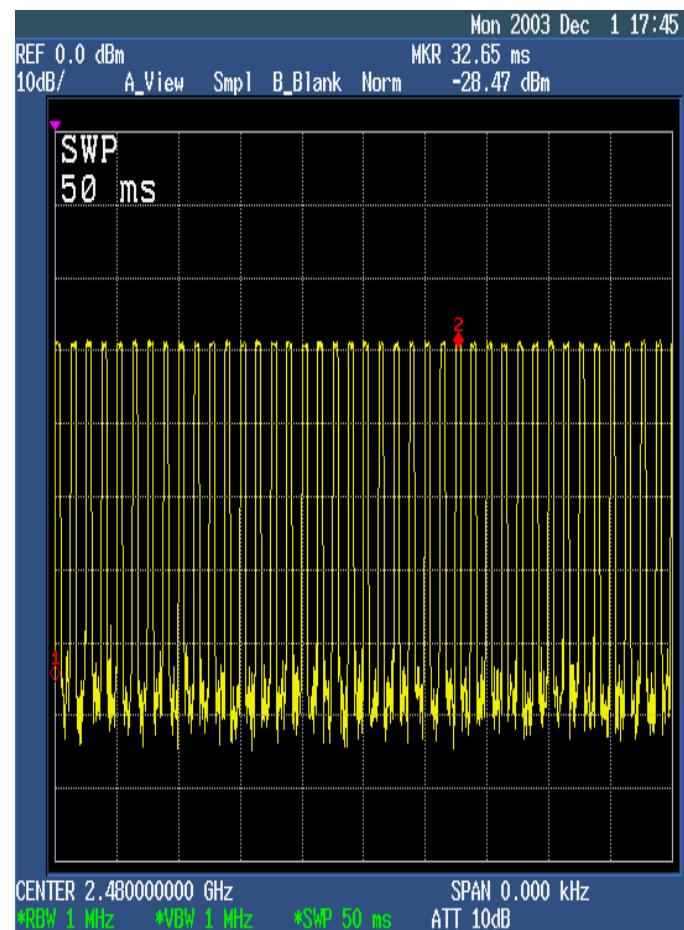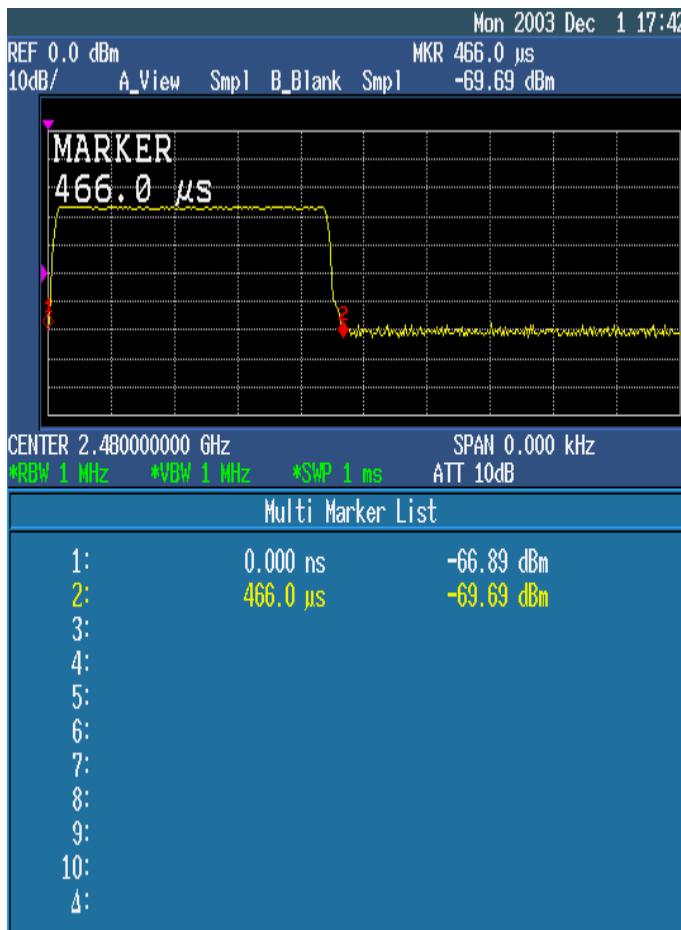

## 10. CHANNEL OF NUMBER


### 10.1 TEST EQUIPMENT

The following test equipments are used during the radiated emission tests:

Item	Instrument	Manufacturer	Type	Serial No.	Last Cal.
2	Spectrum Analyzer	Advantest	R3272	82420232	02/14/03
3	Spectrum Analyzer	HP	E4407B	39240339	08/16/03

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

### 10.2 BLOCK DIAGRAM OF TEST SETUP

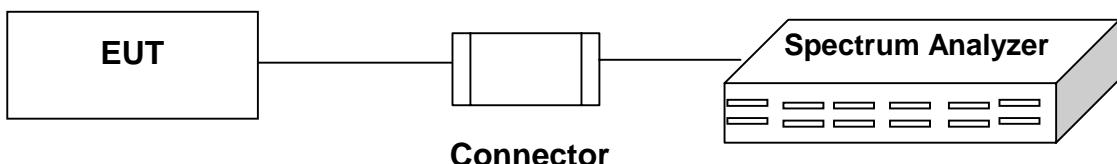


### 10.3 Limit

Frequency hopping systems operating in the 2400-2483.5 MHz bands shall use at least 75 hopping frequencies.

## 10.4 TEST RESULT

Date of Test	January 12, 2004
EUT	Industrial PC
Working Cond.	Mode 3

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass

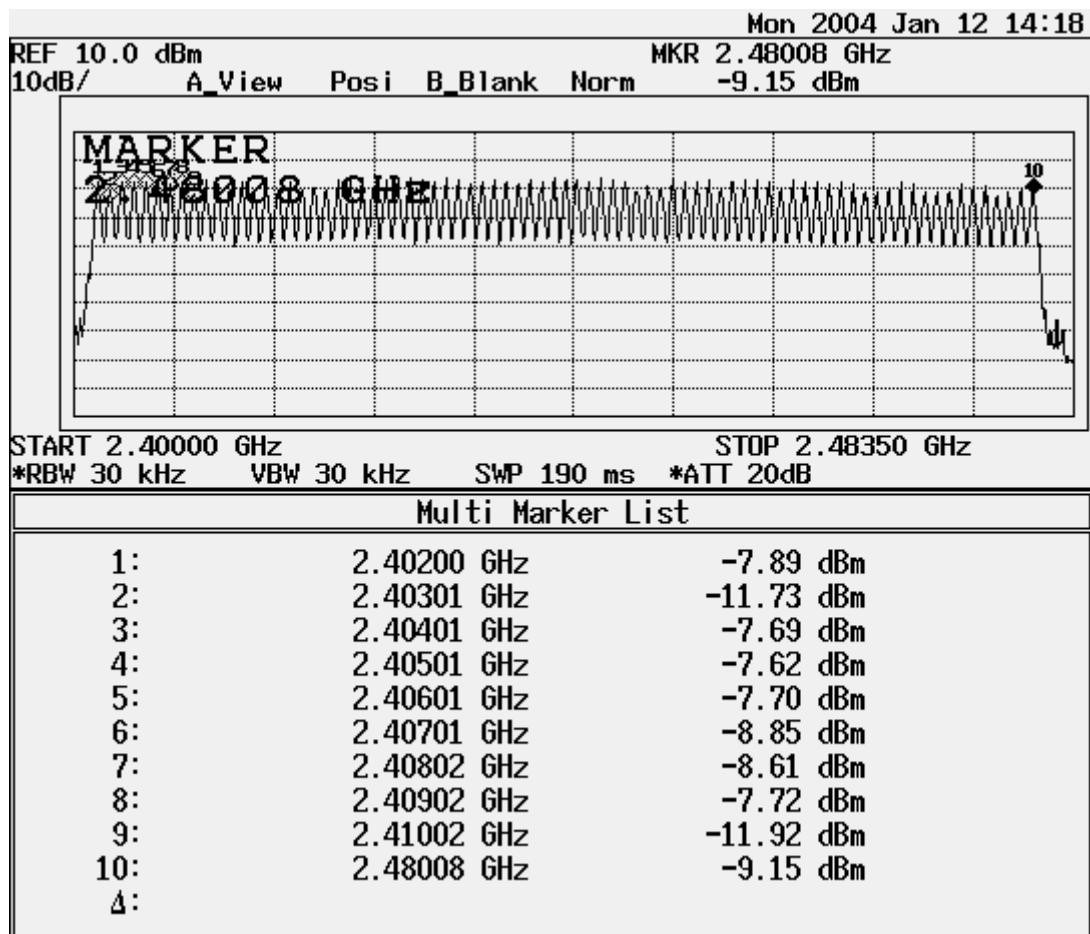

## 11. CHANNEL SEPARATION


### 11.1 TEST EQUIPMENT

The following test equipments are used during the radiated emission tests:

Item	Instrument	Manufacturer	Type	Serial No.	Last Cal.
2	Spectrum Analyzer	Advantest	R3272	82420232	02/14/03
3	Spectrum Analyzer	HP	E4407B	39240339	08/16/03

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

### 11.2 BLOCK DIAGRAM OF TEST SETUP

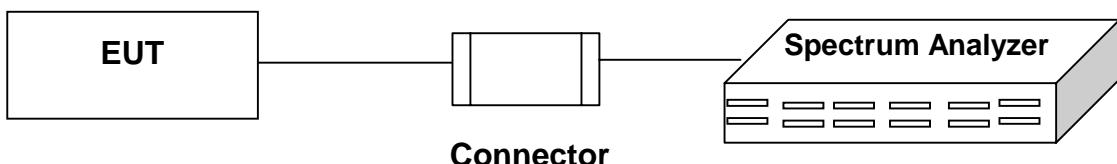


### 11.3 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

## 11.4 TEST RESULT

Date of Test	December 01, 2003
EUT	Industrial PC
Working Cond.	Mode 3

Measurement Level (MHz)	Required Limit (kHz)	Result
0.98	>25	Pass

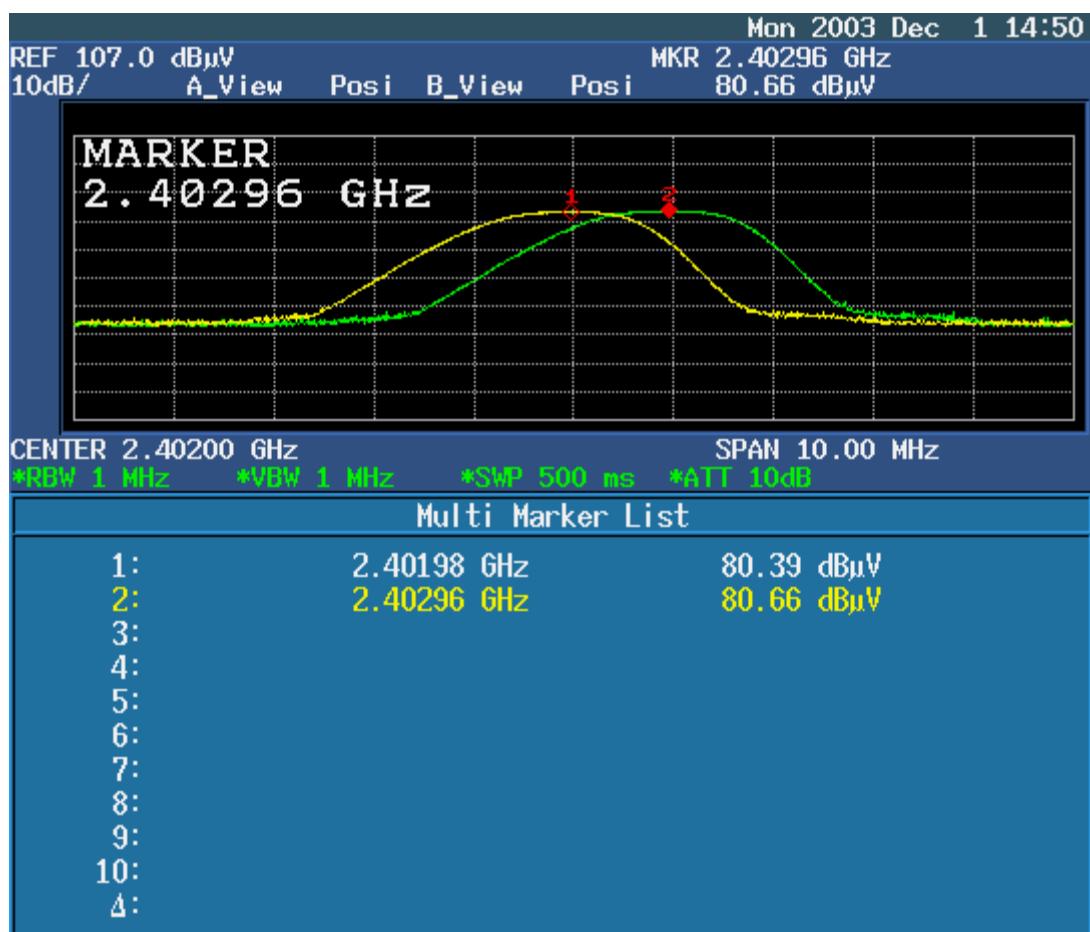

## 14. EMI REDUCTION METHOD DURING COMPLIANCE TESTING

No modification was made during testing.

## Appendix A

### Circuit (Block) Diagram

(Shall be added by Applicant)

## **Appendix B**

## **User Manual**

(Shall be added by Applicant)