

Certificate of Test

April 2004

SAMMI INFORMATION SYSTEMS CO., LTD

Product Type : Industrial PC
Model Number : MiniStation 15
Test Report Number : GTK-0402054
Date of Test : December 15, 2003- April 21, 2004

This Product was tested to the following standards at the laboratory
of Global EMC Standard Tech. Corp., and found Compliance.

Standards:
FCC Part 15 Subpart C Paragraph 15.247
ANSI C63.4: 2001

<http://www.gestek.com.tw>



Sharon Chang, President

Date: April 28, 2004

GesTek EMC Lab

No. 3, Pau-Tou-Tsuo Valley, Chia-Pau Tsuen,
Lin Kou Hsiang, Taipei County, Taiwan, R.O.C.
TEL:886-2-2603-5321
FAX:886-2-2603-5325



**Test Report
Application for
Declaration of Conformity
On Behalf Of**

SAMMI INFORMATION SYSTEMS CO., LTD
EUT:
Industrial PC

Model Number:

MiniStation 15

FCC ID:
RQKMINISTATION15

Prepared for:
SAMMI INFORMATION SYSTEMS CO., LTD
7-9 F1., Seo Jo Bldg, 103-15, Galwor-Dong, Yong San-Ku, Seoul, Korea

Report By :Global EMC Standard Tech. Corp.
No.3 Pau-Tou-Tsuo Valley, Chia-Pau
Tsuen, Lin Kou Hsiang, Taipei County,
Taiwan, R.O.C.
Tel : 886-2-2603-5321
Fax : 886-2-2603-5325

- 1. Test results given in this report only relate to the specimen(s) tested, measured.
- 2. This report is the property of GesTek, and shall not be reproduced, other than in full, without the written consent of GesTek.
- 3. The report must not be used by the client to claim product certification, approval, or endorsement by any agency of the federal government.
- 4. All data in this report are traceable to national standard or international standard.

TABLE OF CONTENTS

DESCRIPTION	PAGE
1. CERTIFICATION.....	3
2. GENERAL INFORMATION.....	4
2.1 PRODUCTION DESCRIPTION	4
2.2 OPERATIONAL DESCRIPTION.....	5
2.3 TEST MODES & EUT COMPONENTS DESCRIPTION.....	5
2.4 CONFIGURATION OF THE TESTED SYSTEM.....	6
2.5 TEST FACILITY	8
2.6 TEST SETUP	9
2.6.1 BLOCK DIAGRAM OF CONNECTIONS BETWEEN EUT AND SIMULATORS	9
2.7 EUT OPERATING CONDITIONS	9
3. CONDUCTION EMISSION DATA.....	10
3.1 TEST EQUIPMENTS	10
3.2 BLOCK DIAGRAM OF TEST SETUP.....	10
3.3 CONDUCTED EMISSION LIMIT	11
3.4 OPERATING CONDITION OF EUT	11
3.5 EUT CONFIGURATION ON MEASUREMENT	11
3.6 CONDUCTED EMISSION DATA.....	11
3.7 CONDUCTED EMISSIONS MEASUREMENT RESULTS	12
4. RADIATION EMISSION DATA.....	14
4.1 TEST EQUIPMENT	14
4.2 OPEN TEST SITE SETUP DIAGRAM.....	14
4.3 RADIATED EMISSION LIMIT	15
4.4 EUT CONFIGURATION.....	15
4.5 OPERATING CONDITION OF EUT	15
4.6 RADIATED EMISSION DATA	15
4.7 RADIATED EMISSIONS MEASUREMENT RESULTS	16
5. PEAK POWER OUTPUT	34
5.1 TEST EQUIPMENT	34
5.2 BLOCK DIAGRAM OF TEST SETUP	34
5.3 PEAK POWER OUTPUT LIMIT	34
5.4 TEST RESULT	35
6. BAND EDGE	36
6.1 TEST EQUIPMENT	36
6.2 BLOCK DIAGRAM OF TEST SETUP	36
6.3 BAND EDGE LIMIT	37
6.4 EUT CONFIGURATION.....	37
6.5 OPERATING CONDITION OF EUT	37
6.6 TEST RELULT	38
7. OCCUPIED BANDWIDTH.....	46
7.1 TEST EQUIPMENT	46
7.2 BLOCK DIAGRAM OF TEST SETUP	46
7.3 LIMIT.....	46
7.4 TEST RESULT	47
8. POWER DENSITY	51
8.1 TEST EQUIPMENT	51
8.2 BLOCK DIAGRAM OF TEST SETUP.....	51
8.3 LIMIT	51
8.4 TEST RESULT	52
9. PHOTOGRAPHS FOR TEST	56
9.1 TEST PHOTOGRAPHS FOR CONDUCTION	56
9.2 TEST PHOTOGRAPHS FOR RADIATION	57
10. PHOTOGRAPHS FOR PRODUCT	59
11. EMI REDUCTION METHOD DURING COMPLIANCE TESTING	79

1. CERTIFICATION

Applicant

EUT Description : Industrial PC
 Model Number : MiniStation 15
 Serial Number : N/A
 Brand Name : SAMMI
 FCC ID : RQKMINISTATION15
 Tested Power Supply : 120V/60Hz

: SAMMI INFORMATION SYSTEMS CO., LTD

MEASUREMENT PROCEDURES USED:

CFR 47, Part 15

Radio Frequency Device Subpart C Paragraph 15.247 Intentional Radiators :2000

ANSI C63.4

Methods of Measurements of Radio-Noise Emissions from Low- Voltage Electrical and Electronic Equipment in the range of 9kHz To 40GHz. 2001

THE MEASUREMENT SHOWN IN THE ATTACHMENT WAS MADE IN ACCORDANCE WITH THE PROCEDURES INDICATED, AND THE MAXIMUM ENERGY EMITTED BY THE EQUIPMENT WAS FOUND TO BE WITHIN THE ABOVE LIMITS APPLICABLE.



Sample Received Date : December 15, 2003

Final Test Date : April 21, 2004

In order to ensure the quality and accuracy of this document, the contents have been thoroughly reviewed by the following qualified personnel from GesTek Lab.

Documented By :

Rini Chen

Rini Chen / adm. Dept. Technical Report Author

Test By :

Kenny Cho

Kenny Cho / eng. Dept. Engineer

Technical Reviewed By :

Shine Chang

Shine Chang / eng. Dept. Supervisor

Approved By :

Tonny Lin

Tonny Lin / General Manager

This test data shown below is traceable to National or international standard such as NIST/USA, etc. The laboratory's NVLAP accreditation in no way constitutes or implies product certification, approval, or endorsement by NVLAP or the United States government.

2. GENERAL INFORMATION

2.1 PRODUCTION DESCRIPTION

Product Name	: Industrial PC
Model Number	: MiniStation 15
Serial Number	: N/A
Brade Name	: SAMMI
FCC ID	: RQKMINISTATION15
Modulation Type	: DBPSK, DQPSK, CCK, OFDM
Antenna Gain	: 2dBi
Antenna Type	: Connecter(MMCX)
Frequency Range	: 2412-2462MHz
Channel Number	: 11 Channel
Data Rate	: 1, 2, 5.5, 6, 9, 11, 12, 18, 24, 36, 48, 54Mbps
Channel Control	: Manual
Working Voltage	: AC 120V/60Hz
Power Cable	: 1.8m, Non-Shielded.

Frequency of Each Channel:

WLAN :

Channel	Frequency (MHz)
1	2412
2	2417
3	2422
4	2427

Channel	Frequency (MHz)
5	2432
6	2437
7	2442
8	2447

Channel	Frequency (MHz)
9	2452
10	2457
11	2462

Note:

1. This device is an Industrial MiniStation included 802.11b and 802.11g 2.4GHz Wireless LAN Card. This device is not a portable device.
2. The test is included WLAN function. Test of channel is included the lowest, middle and highest frequency in highest data rate and to perform the test, then record in this report.
3. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
4. The device is accordance with Part 15 regulations. The function receiving was under Declaration of Conformity and record of measurement in test report that the report number is 0402054FCC DOC.

2.2 OPERATIONAL DESCRIPTION

The industrial-grade construction of Ministation allows your system to endure the continuous operation in hostile environments where stability and reliability are basic requirements.

The WLAN transmitter inside EUT is Mini PCI interface and powered by EUT. This device has one antenna and connect in PCB. The other instruction, please look at user manual.

This is a digital transmission system (DTS) and have four types of modulation DBPSK, DQPSK, CCK & OFDM. The data rates are 1,2,5.5,11,6,9,12,18,24,36,48.54 Mbps.

The equipment enables high-speed access without wires to network assets. This adapter uses the IEEE 802.11b & 802.11g protocol to enable wireless communications between the host computer and other computers, in the same way that the computer would use an Ethernet adapter.

2.3 TEST MODES & EUT COMPONENTS DESCRIPTION

Test Mode	Mode 1	Mode 2
	WLAN (802.11b: 11Mbps)	WLAN (802.11g: 54Mbps)

EUT: Industrial PC, M/N: MiniStation 15

CPU	Intel Pentium III, 1.26GHz
SDRAM	256MB
Display	Color Active Matrix 15" TFT LCD , XGA (1024 x 768)
Display Brightness	250 NIT
H.D.D. Drives	IBM, 2.5" Hard Disk
System Expansion	16/32bit bus Dual PCMCIA Slots, mini PCI, Compact Flash card
Multi I/O	Power, Mouse, Keyboard(PS2), Audio, Parallel, Serial x 2, RJ-45, USB x 2
Wireless LAN Card	USI M/N: MP-G-BR-01
Power Adapter	LI SHIN, M/N: 0218B1270, AC Input : 100-240V, DC Output: 12V
Power Cable	1.8m, Non-Shielded.
Resolution	800 x 600, H-Sync:54KHz, V-Sync:85Hz

2.4 CONFIGURATION OF THE TESTED SYSTEM

The FCC IDs/Types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards, which have grants) are:

Device	No.	Configuration	
Modem	M03-016	Manufacturer : ACEEX Model Number : 1414 Serial Number : 960011392 BSMI ID : N/A FCC ID : IFAXDM1414 Data Cable : Type:RS232, Shielded, Detachable, 1.2m Power Cord : Non-Shielded, Detachable, 1.5m Line : Type:RJ11(4P2C), Detachable, 1.8m Phone : Type:RJ11(4P2C), Detachable, 1.8m	
Modem	M03-006	Manufacturer : ACEEX Model Number : 2814 Serial Number : 960018051 BSMI ID : N/A FCC ID : IFAXDM2814 Data Cable : Type:RS232, Shielded, Detachable, 1.2m Power Cord : Non-Shielded, Detachable, 1.5m Line : Type:RJ11(4P2C), Detachable, 1.8m Phone : Type:RJ11(4P2C), Detachable, 1.8m	
PS2 Keyboard	K01-068	Manufacturer : ACER Model Number : 6311-TA BSMI ID : 3882A039 FCC ID : N/A Data Cable : Shielded, Undetachable, 1.5 m	
PS2 Mouse	M02-303	Manufacturer : IBM Model Number : MU29J Serial Number : 23021308 BSMI ID : 3902A581 FCC ID : N/A Data Cable : Shielded, Undetachable, 1.5m	
Headset & Earphone	E01-082	Manufacturer : TOKYO Model Number : SX-M1 Serial Number : N/A Data Cable : Non-Shielded, Undetachable, 1.8 m Power Cord : N/A Purchase Date : 2/22/1999	
USB Mouse	M02-270	Manufacturer : Logitech Model Number : M-U48A BSMI ID : 4882A177 FCC ID : JNZ211360 Data Cable : Shielded, Undetachable, 1.5m	

Device	No.	Configuration	
USB Mouse	M02-223	Manufacturer : Logitech Model Number : M-U48A BSMI ID : 4882A177 FCC ID : JNZ211360 Data Cable : Shielded, Undetachable, 1.5m	
Printer	P01-022	Manufacturer : Hewlett Packard Model Number : 2225C Serial Number : 2441S63748 BSMI ID : 3892A957 FCC ID : BS46XU2225C Data Cable : Shielded, Detachable, 1.2m, Parallel Cable Power Cord : Non-Shielded, Detachable, 1.8m	
Wireless LAN Card	---	Manufacturer : PESI Model Number : CPWUA001	
Notebook PC	----	Manufacturer : DELL COMPUTER Model Number : PP05L BSMI ID : R33002 FCC ID : N/A Power Cord : Non-Shielded, Detachable, 1.5m.	
Far End Network Server	-----	Manufacturer : ASUS Model Number : AP160R Power Cord : Non- Shielded, Detachable, 1.8m	


2.5 TEST FACILITY

Ambient conditions in the laboratory:

ITEMS	REQIORED(IEC 68-1)	ACTUAL
TEMPERATURE (°C)	15-35	24-27
HUMIDITY (%RH)	25-75	50-65
BAROMETRIC PRESSURE (mbar)	860-1060	950-1000
FCC SITE DESCRIPTION	Aug. 10, 1995 /Aug. 25, 1998 File on FCC Engineering Laboratory Federal Communication Commission 7435 Oakland Mills Road Columbia, MD 21046 Reference 31040/SIT1300F2	
NVLAP LAB. CODE	200085-0 United Stated Department of commerce National Institute of Standards and Technology National Voluntary Laboratory Accreditation Program Accreditation on NVLAP effective through Sep. 30,2004 For CISPR 22, FCC Method and AS/NZS 3548 Measurement.	
Chinese National Laboratory Accreditation Certificate R.O.C. 	Recognized by the Council of Chinese National Laboratory Accreditation and confirmed to meet the requirements of ISO/IEC 17025 also has been registered for fifteen items, and meet the requirements of the Article 4 of Measures Governing the Recognition both Approval of Designated Laboratory for Commodities Inspection and has been registered for four items within the field of Electrical Testing. Registration No.: 1082 Registration on CNLA effective through April 30, 2006.	

2.6 TEST SETUP

2.6.1 BLOCK DIAGRAM OF CONNECTIONS BETWEEN EUT AND SIMULATORS

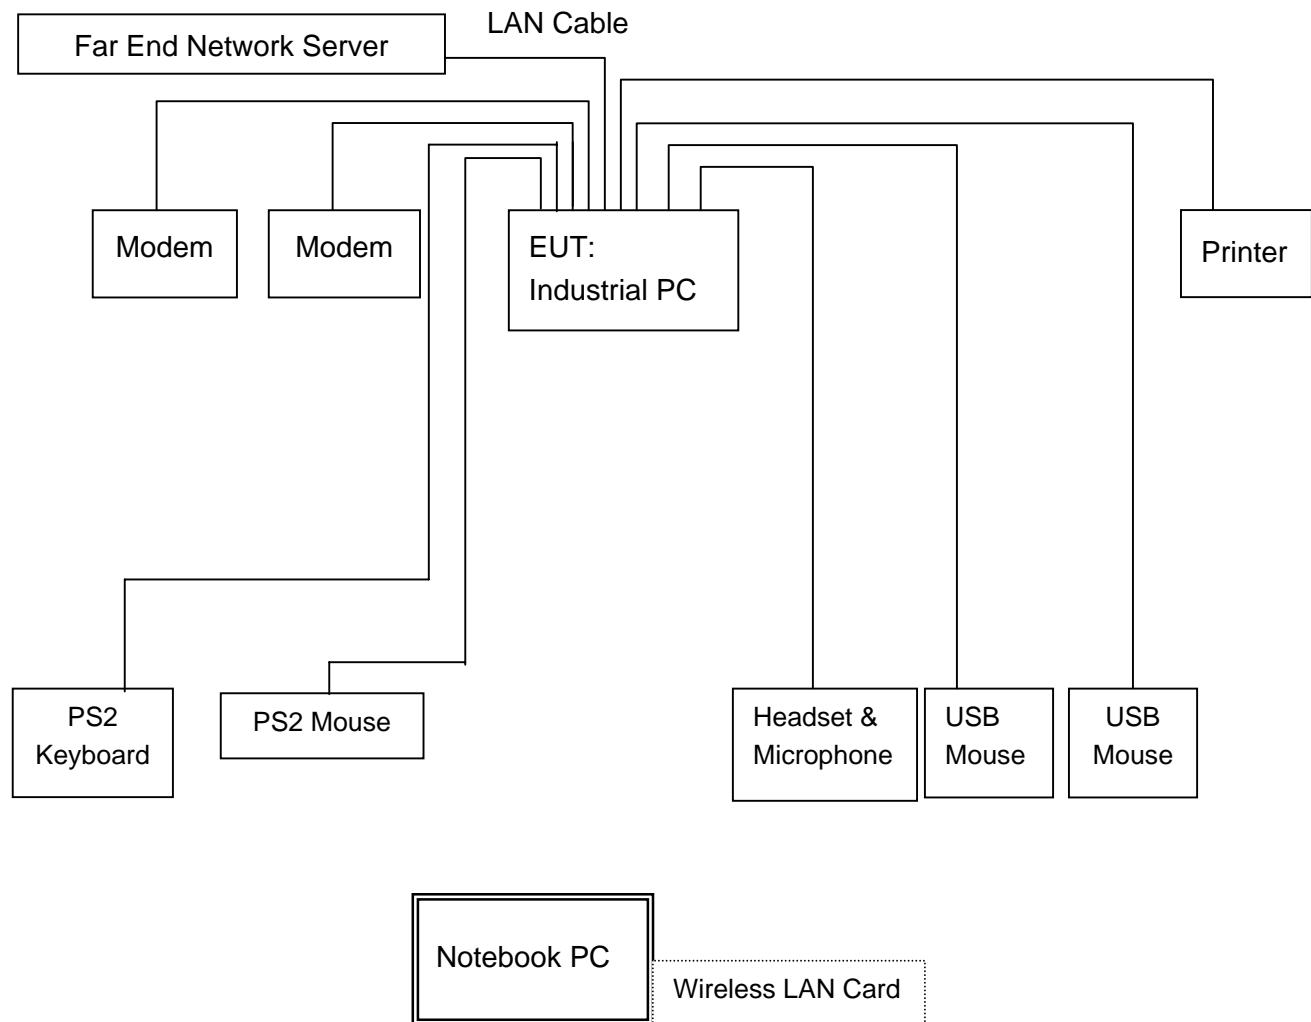

2.7 EUT OPERATING CONDITIONS

The EUT exercise program used during conducted testing was designed to exercise the EUT in a manner similar to a typical use. The exercise sequence is listed as below:

1. Setup the EUT and simulators as shown on 2.6.
2. Turn on the power of all equipments.
3. The EUT ping with the wireless LAN card.
4. Repeat the above steps.

3. CONDUCTION EMISSION DATA


3.1 TEST EQUIPMENTS

The following test equipment are used during the conducted power line tests:

Item	Instrument	Manufacturer	Type	Serial No.	Last Cal.
1	Test Receiver	Rohde & Schwarz	ESHS30	828109/010	12/22/03
2	L.I.S.N.	KYORISTU	KNW-407	8-1345-10	11/20/03
3	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	357.8810.52	08/07/03
4	RF CABLE	GesTek	N/A	GTK-E-A154-01	12/03/03
5	50 Ohm Terminator	GesTek	N/A	GTK-E-A130-01	10/11/03
6	Shielded Room	GesTek	N/A	B5	N/A

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

3.2 BLOCK DIAGRAM OF TEST SETUP

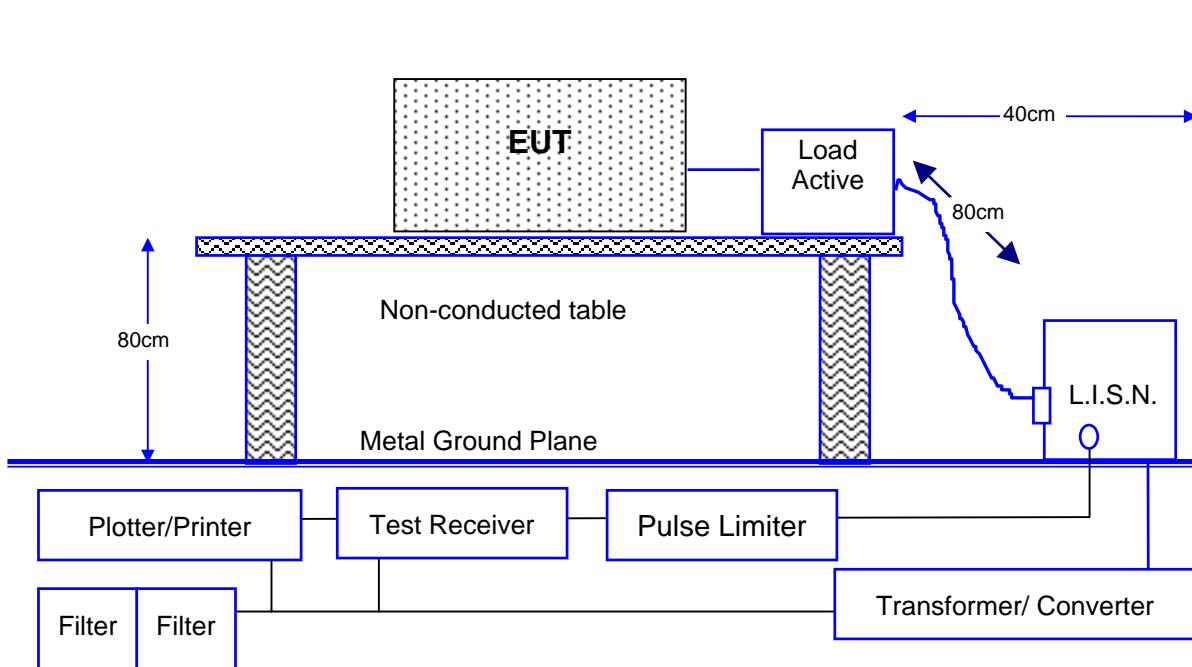

Note: This is a comprehensive setup diagram for Table-top EUT.

For Floor-standing EUT, the table will be removed with all others setup condition remain the same.

3.3 CONDUCTED EMISSION LIMIT

FCC Limit (15.207)

Frequency	Conducted Limits dB(μV)	
MHz	QUASI-PEAK	AVERAGE
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5.0	56	46
5.0 to 30	60	50

Remarks : In the Above Table, the tighter limit applies at the band edges.

3.4 OPERATING CONDITION OF EUT

Same as section 2.7.

3.5 EUT CONFIGURATION ON MEASUREMENT

The equipment, which is listed 3.1, is installed on Conducted Power Line Test to meet the Commission requirement and operating in a manner, which tends to maximize its emission characteristics in a normal application.

The device under test, installed in a representative system as described in section 3.2, was placed on a non-conductive table whose total height equal to 80cm. Powered from one L.I.S.N. which signal output to receiver, and the other peripherals were powered from another L.I.S.N. which signal output was terminated by 50Ω .

3.6 CONDUCTED EMISSION DATA

The measurement range of conducted emissions from [0.15 MHz to 30 MHz](#) was investigated. All readings are quasi-peak and average values with a resolution Bandwidth of 9 KHz. The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range for all the test modes. Then the worst modes were reported the following data pages.

3.7 CONDUCTED EMISSIONS MEASUREMENT RESULTS

Date of Test	April 21, 2004	Temperature	22
EUT	Industrial PC	Humidity	59 %
Test Mode	Tx Mode	Display Pattern	H Pattern


No.	FREQUENCY MHz	READING LEVEL dB μ V		LIMIT	
		LINE1 Q.P.	LINE1 AV.	Q.P.	AV.
1	0.1882	43.91	38.14	64.11	54.11
2	0.2502	45.02	43.02	61.75	51.75
3	0.3140	39.06	36.87	59.86	49.86
4	7.3363	41.52	30.01	60.00	50.00
5	22.6329	45.14	42.66	60.00	50.00
6	27.7169	43.58	37.91	60.00	50.00

No.	FREQUENCY MHz	READING LEVEL dB μ V		LIMIT	
		LINE2 Q.P.	LINE2 AV.	Q.P.	AV.
1	0.1880	44.27	38.34	64.12	54.12
2	0.2502	45.04	40.85	61.75	51.75
3	0.9981	38.53	33.71	56.00	46.00
4	2.1815	36.61	26.48	56.00	46.00
5	22.6360	44.95	42.99	60.00	50.00
6	27.4253	42.76	37.28	60.00	50.00


Remarks :

- 1 All readings are Quasi-peak and Average..
- 2 “ ” means that this data is the worse case emission level.
- 3 Final measurement = (Receiver reading) + (Correction factor if available).

Line 1

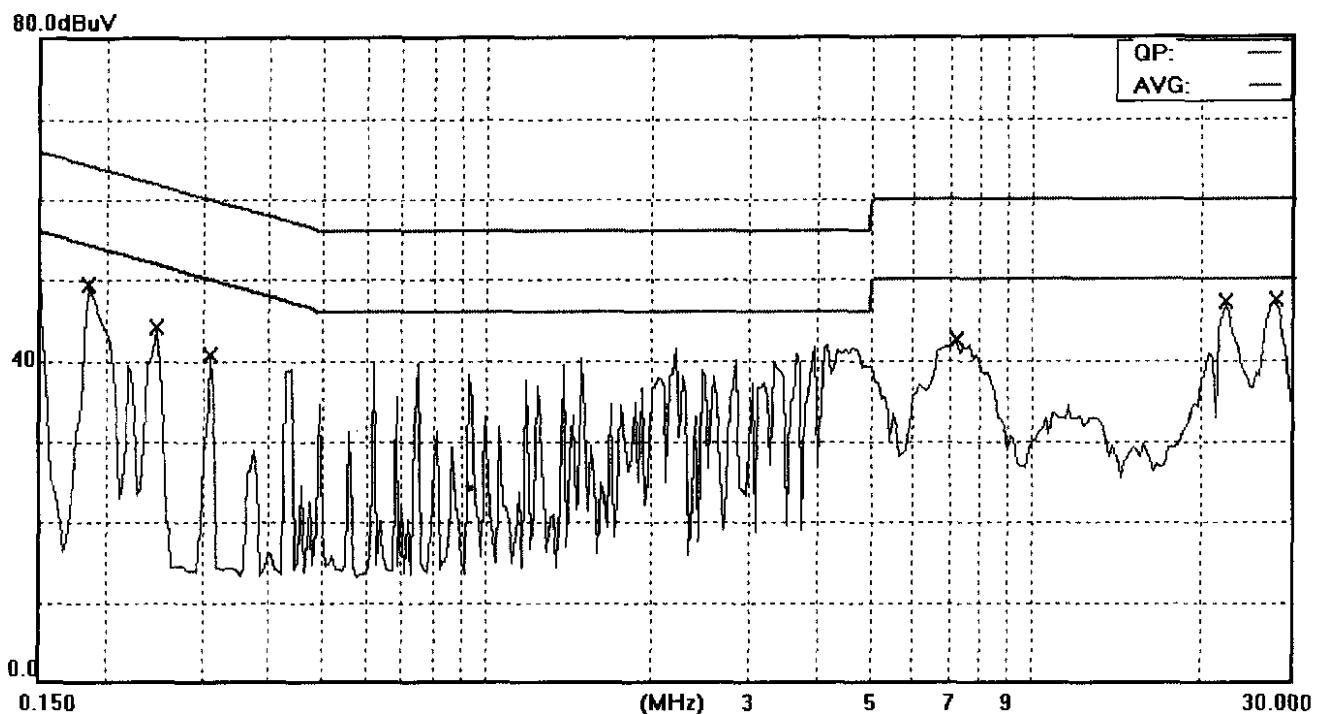

Line 2

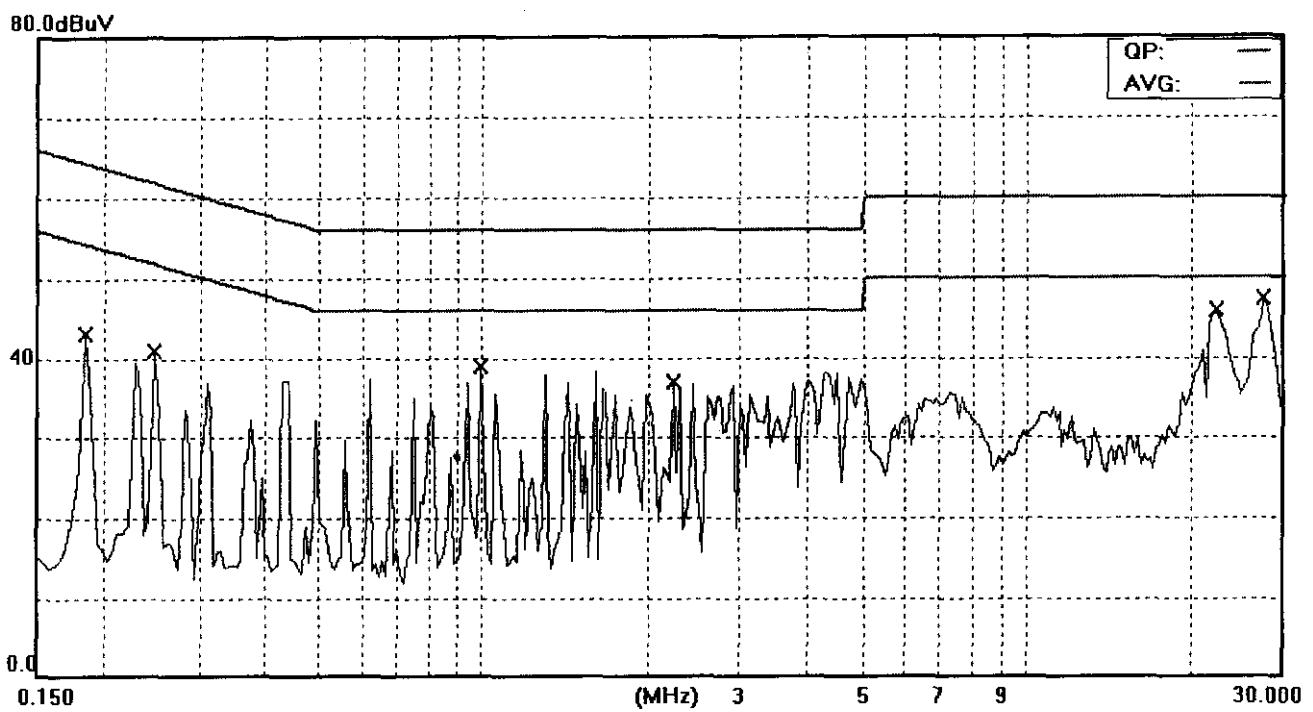

4. RADIATION EMISSION DATA

4.1 TEST EQUIPMENT

The following test equipments are used during the radiated emission tests:

Radiated test was performed on: Site #1 Site #2 Site #3 Site #4


Item	Instrument	Manufacturer	Type	Serial No.	Last Cal.
1	Test Receiver	Rohde & Schwarz	ESVS30	829007/014	12/13/03
2	Spectrum Analyzer	Rohde & Schwarz	FSP40	100061	03/16/04
3	Spectrum Analyzer	HP	E4407B	39240339	08/16/03
4	Power Meter	Rohde & Schwarz	NRVS	100666	04/26/04
5	Power Sensor	Rohde & Schwarz	NRV-Z32	8360191058	05/19/03
6	Pre-Amplifier	HP	8447F OPT H64	3113A04487	10/11/03
7	BILOG ANTENNA	SCHAFFNER	CBL6112B	2620	12/01/03
8	Horn Antenna	Electro-Metrics	EM-6961	103318	05/30/03
9	Horn Antenna	Schwarzbeck	BBHA 9120	D243	12/18/03
10	RF Cable	GesTek	N/A	GTK-E-A151-01	02/09/04
11	Open Site	GesTek	N/A	B1	11/25/03
12	Test Program Software	GesTek	N/A	GTK-E-S001-01	N/A

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

4.2 OPEN TEST SITE SETUP DIAGRAM

Note: This is a reprehensive setup diagram for Table-top EUT.

For Floor-standing EUT, the table will be removed with all others setup condition remain the same.

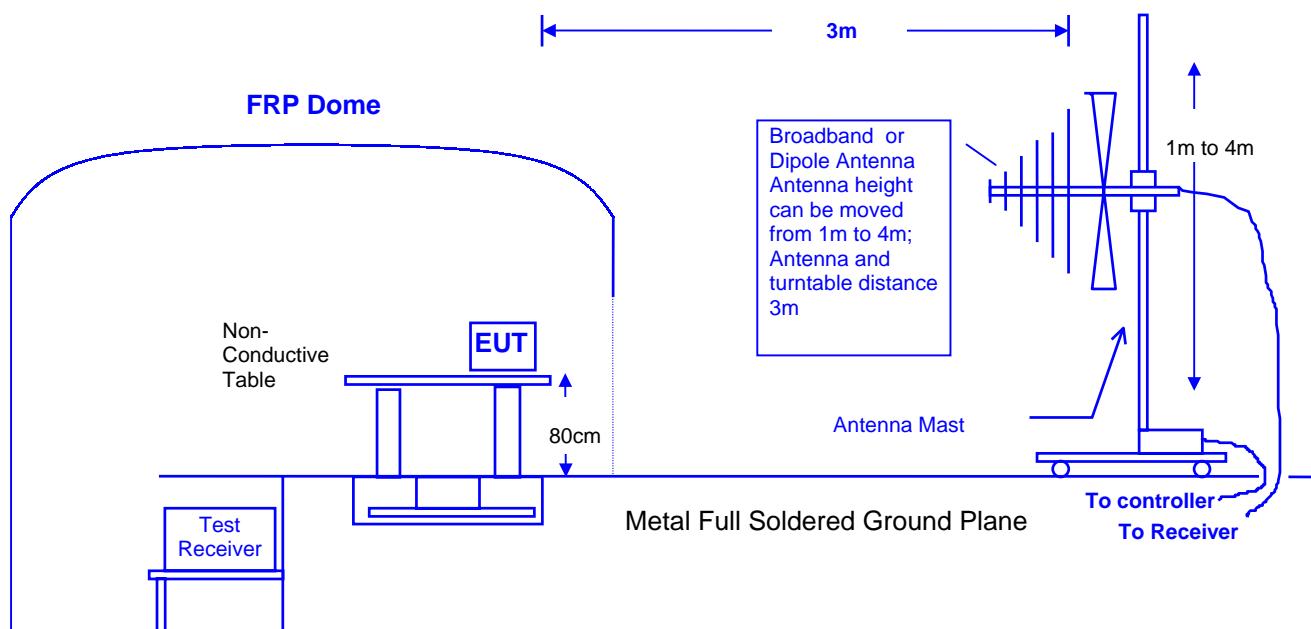

4.3 RADIATED EMISSION LIMIT

FCC Class C Limit at 3m

Frequency	Distance	Field Strength	
MHz	Meter	µV/M	dBµV/M
30 to 88	3	100	40.0
88 to 216	3	150	43.5
216 to 960	3	200	46.0
Above 960	3	500	54.0

Note: The frequencies above 1000MHz, as measured using instrumentation with a peak detector function was corresponding to 20dB above the maximum permitted average limit.

4.4 EUT CONFIGURATION

The equipment, which is listed on 4.1 was installed on radiated emission test to meet the commission requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

The device under test, installed in a representative system as described in section 4.2, was placed on a non-conductive table whose total height equaled 80 cm. This table can be rotated 360 degree. The measurement antenna was mounted to a non-conductive mast capable of moving the antenna vertically. Antenna height was varied from 1 meter to 4 meters and the system under test was rotated from 0 degree through 360 degrees relative to the antenna position and polarization (Horizontal and Vertical). Also the I/O cable position was investigated to find the maximum emission condition.

4.5 OPERATING CONDITION OF EUT

Same as section 2.7.

4.6 RADIATED EMISSION DATA

The measurement range of radiated emission from **30 MHz to 10 Harmonics** was investigated. All readings below 1GHz are quasi-peak values with a resolution bandwidth of 120 KHz. Above 1GHz are peak and avg. values with a resolution bandwidth of 1MHz. The initial step in collecting radiated emission data is a spectrum analyzer peak scans of the measurement range for all the test modes and then use test receiver for final measurement. Then the worst modes were reported the following data pages..


4.7 RADIATED EMISSIONS MEASUREMENT RESULTS

Date of Test	April 15, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	55 %RH
Working Cond.	WLAN (Channel 1)	Display Pattern	H Pattern
Antenna distance	3m at Horizontal	Frequency Range	30-1000MHz

No.	Frequency [MHz]	Cable Loss [dB]	Antenna Factor [dB/m]	Reading Level [dB(uV)]	Emission Level [dB(uV/m)]	Amp. Factor [dB]	Limit [dB(uV/m)]	Margin [dB]
1	85.150	2.05	8.23	21.60	31.88	0.00	40.00	-8.12
2	122.880	2.38	12.88	21.54	36.80	0.00	43.50	-6.70
3	166.890	2.90	10.69	23.68	37.27	0.00	43.50	-6.23
4	240.550	3.77	12.39	18.43	34.59	0.00	46.00	-11.41
5	300.150	4.60	14.20	17.34	36.14	0.00	46.00	-9.86
6	660.150	7.02	19.57	3.52	30.11	0.00	46.00	-15.89

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Emission Level= Reading + Antenna Factor + Cable loss (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
3. Margin Value=Emission level-Limit value.
4. The “ ” means this data is the worse case emission level.

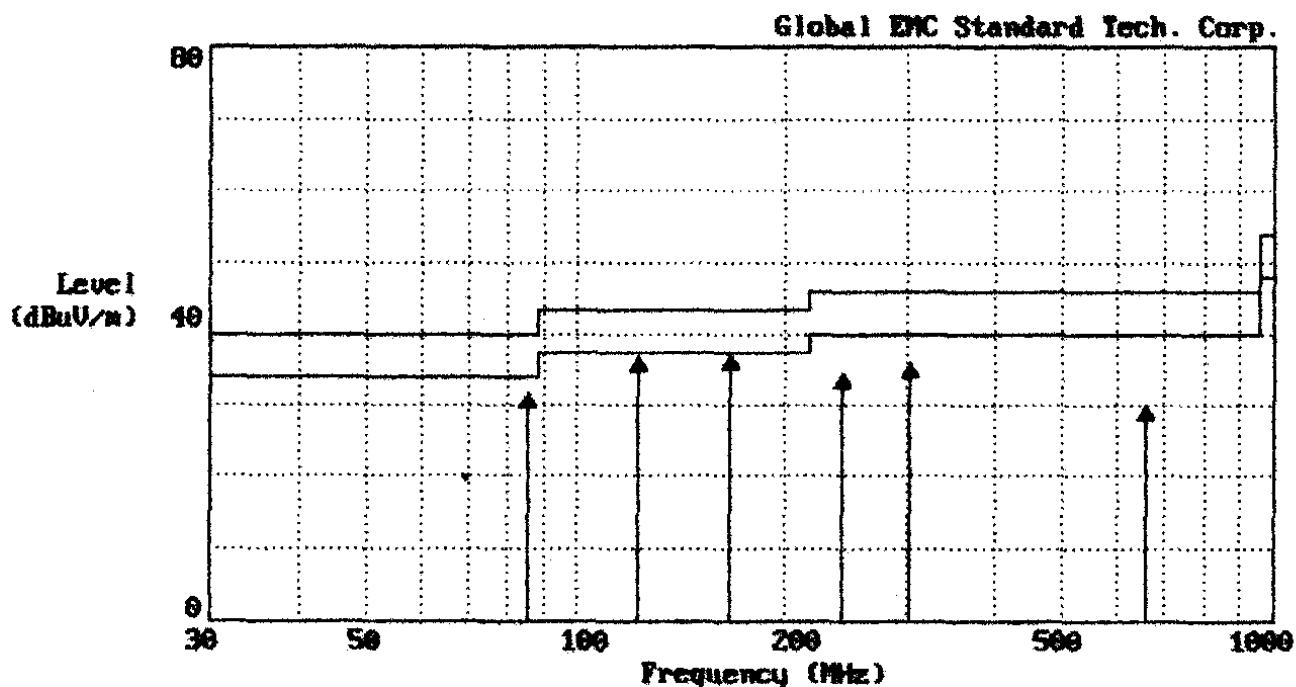


Date of Test	April 15, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	55 %RH
Working Cond.	WLAN (Channel 1)	Display Pattern	H Pattern
Antenna distance	3m at Vertical	Frequency Range	30-1000MHz

No.	Frequency [MHz]	Cable Loss [dB]	Antenna Factor [dB/m]	Reading Level [dB(uV)]	Emission Level [dB(uV/m)]	Amp. Factor [dB]	Limit [dB(uV/m)]	Margin [dB]
1	99.930	2.17	11.20	17.98	31.35	0.00	43.50	-12.15
2	110.730	2.27	12.11	19.95	34.33	0.00	43.50	-9.17
3	147.450	2.71	12.04	20.78	35.53	0.00	43.50	-7.97
4	280.020	4.27	13.61	22.46	40.34	0.00	46.00	-5.66
5	440.510	5.68	17.21	7.59	30.48	0.00	46.00	-15.52
6	700.400	7.36	19.90	14.78	42.04	0.00	46.00	-3.96

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Emission Level= Reading + Antenna Factor + Cable loss (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
3. Margin Value=Emission level-Limit value.
4. The " " means this data is the worse case emission level.

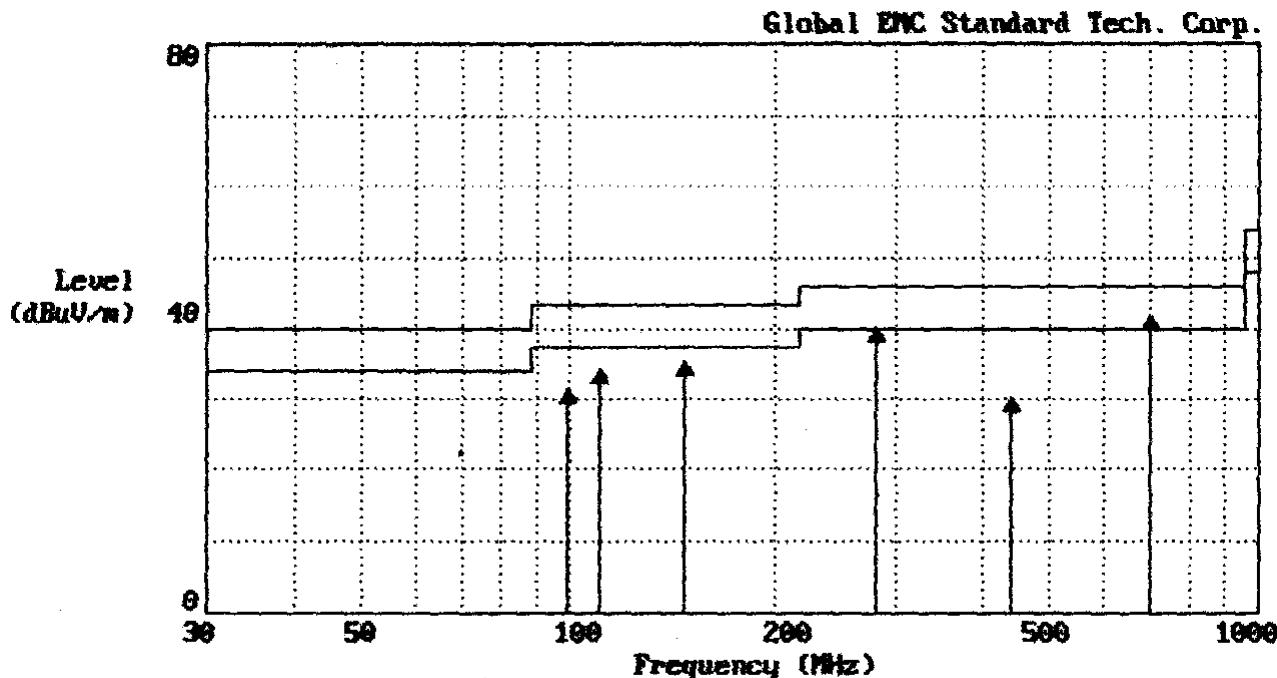


Date of Test	April 15, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	55 %RH
Working Cond.	WLAN (Channel 6)	Display Pattern	H Pattern
Antenna distance	3m at Horizontal	Frequency Range	30-1000MHz

No.	Frequency [MHz]	Cable Loss [dB]	Antenna Factor [dB/m]	Reading Level [dB(uV)]	Emission Level [dB(uV/m)]	Amp. Factor [dB]	Limit [dB(uV/m)]	Margin [dB]
1	122.880	2.38	12.88	21.54	36.80	0.00	43.50	-6.70
2	135.000	2.52	12.75	21.95	37.22	0.00	43.50	-6.28
3	180.120	3.06	10.13	23.03	36.22	0.00	43.50	-7.28
4	258.690	4.03	13.02	15.56	32.61	0.00	46.00	-13.39
5	359.100	5.11	15.62	18.43	39.16	0.00	46.00	-6.84
6	500.510	5.94	18.10	5.10	29.14	0.00	46.00	-16.86

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Emission Level= Reading + Antenna Factor + Cable loss (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
3. Margin Value=Emission level-Limit value.
4. The " " means this data is the worse case emission level.

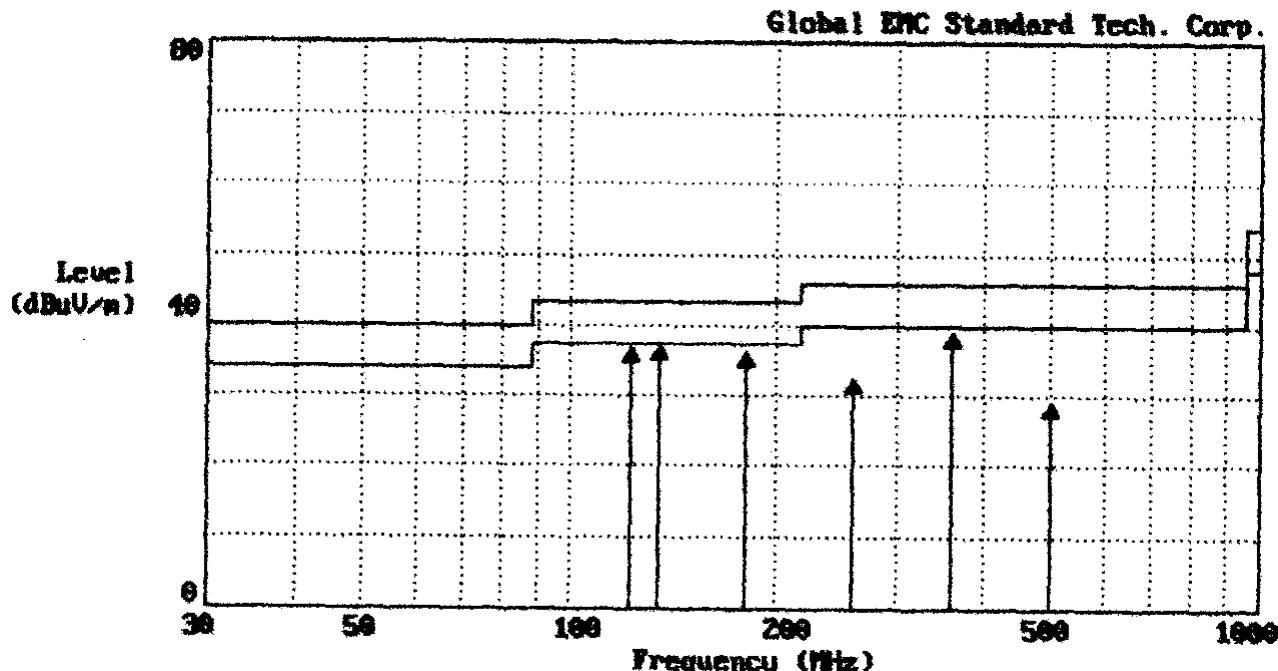


Date of Test	April 15, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	55 %RH
Working Cond.	WLAN (Channel 6)	Display Pattern	H Pattern
Antenna distance	3m at Vertical	Frequency Range	30-1000MHz

No.	Frequency [MHz]	Cable Loss [dB]	Antenna Factor [dB/m]	Reading Level [dB(uV)]	Emission Level [dB(uV/m)]	Amp. Factor [dB]	Limit [dB(uV/m)]	Margin [dB]
1	73.480	1.87	7.43	21.56	30.86	0.00	40.00	-9.14
2	159.980	2.83	11.05	19.33	33.21	0.00	43.50	-10.29
3	184.710	3.09	10.20	22.67	35.96	0.00	43.50	-7.54
4	200.620	3.28	10.60	20.13	34.01	0.00	46.00	-9.49
5	440.150	5.68	17.20	12.81	35.69	0.00	46.00	-10.31
6	800.210	8.08	20.60	2.54	31.22	0.00	46.00	-14.78

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Emission Level= Reading + Antenna Factor + Cable loss (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
3. Margin Value=Emission level-Limit value.
4. The " " means this data is the worse case emission level.

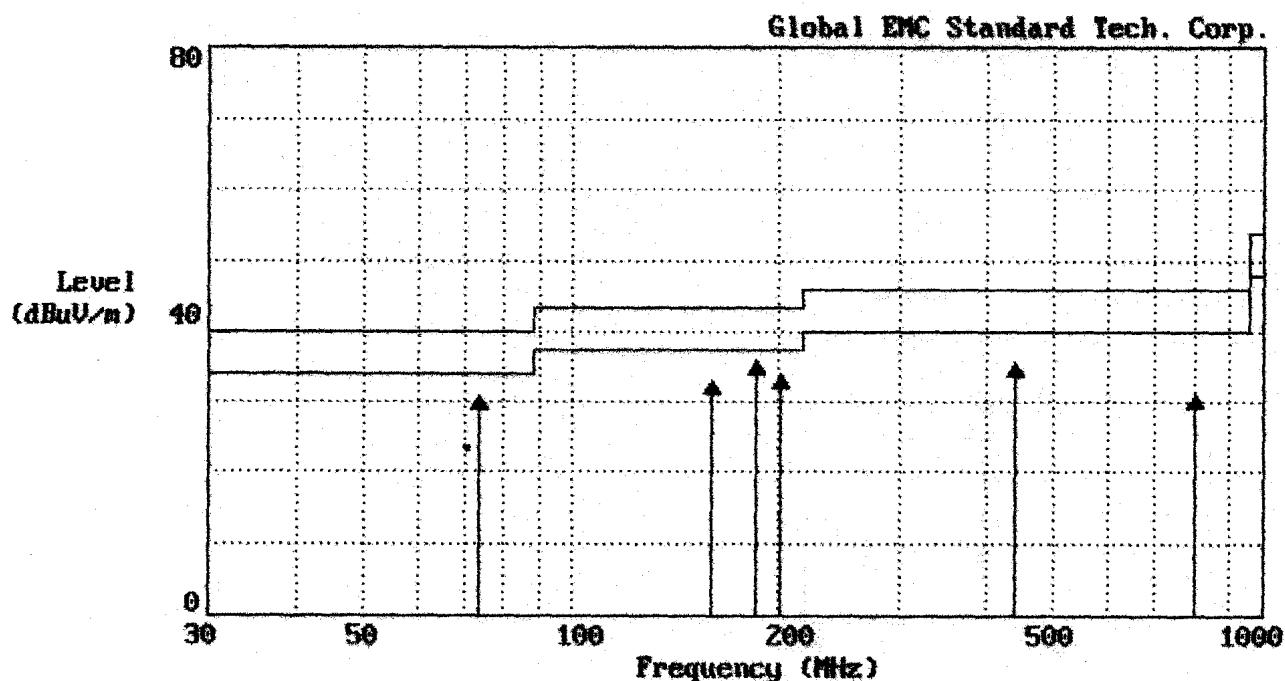


Date of Test	April 15, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	55 %RH
Working Cond.	WLAN (Channel 11)	Display Pattern	H Pattern
Antenna distance	3m at Horizontal	Frequency Range	30-1000MHz

No.	Frequency [MHz]	Cable Loss [dB]	Antenna Factor [dB/m]	Reading Level [dB(uV)]	Emission Level [dB(uV/m)]	Amp. Factor [dB]	Limit [dB(uV/m)]	Margin [dB]
1	122.800	2.38	12.88	21.54	36.80	0.00	43.50	-6.70
2	210.500	3.42	11.07	16.76	31.25	0.00	43.50	-12.25
3	258.700	4.03	13.02	15.56	32.61	0.00	46.00	-13.39
4	380.500	5.30	16.13	10.42	31.85	0.00	46.00	-14.15
5	465.840	5.84	17.59	10.69	34.12	0.00	46.00	-11.88
6	812.410	8.25	20.68	4.48	33.41	0.00	46.00	-12.59

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Emission Level= Reading + Antenna Factor + Cable loss (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
3. Margin Value=Emission level-Limit value.
4. The " " means this data is the worse case emission level.

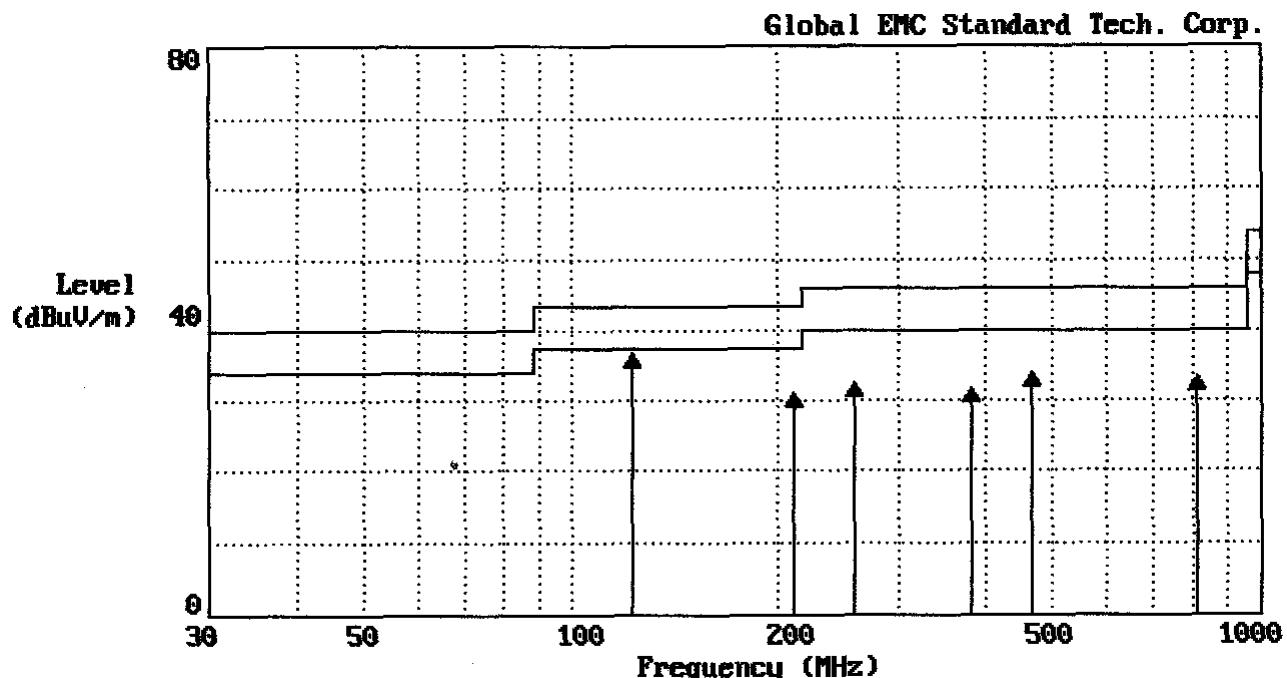


Date of Test	April 15, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	55 %RH
Working Cond.	WLAN (Channel 11)	Display Pattern	H Pattern
Antenna distance	3m at Vertical	Frequency Range	30-1000MHz

No.	Frequency [MHz]	Cable Loss [dB]	Antenna Factor [dB/m]	Reading Level [dB(uV)]	Emission Level [dB(uV/m)]	Amp. Factor [dB]	Limit [dB(uV/m)]	Margin [dB]
1	77.790	1.94	7.82	16.39	26.15	0.00	40.00	-13.85
2	145.210	2.66	12.29	20.40	35.35	0.00	43.50	-8.15
3	288.020	4.39	13.83	20.93	39.15	0.00	46.00	-6.85
4	400.770	5.41	16.61	10.49	32.51	0.00	46.00	-13.46
5	650.140	6.95	19.50	5.00	31.45	0.00	46.00	-14.55
6	700.770	7.36	19.90	4.85	32.11	0.00	46.00	-13.89

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Emission Level= Reading + Antenna Factor + Cable loss (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
3. Margin Value=Emission level-Limit value.
4. The " " means this data is the worse case emission level.

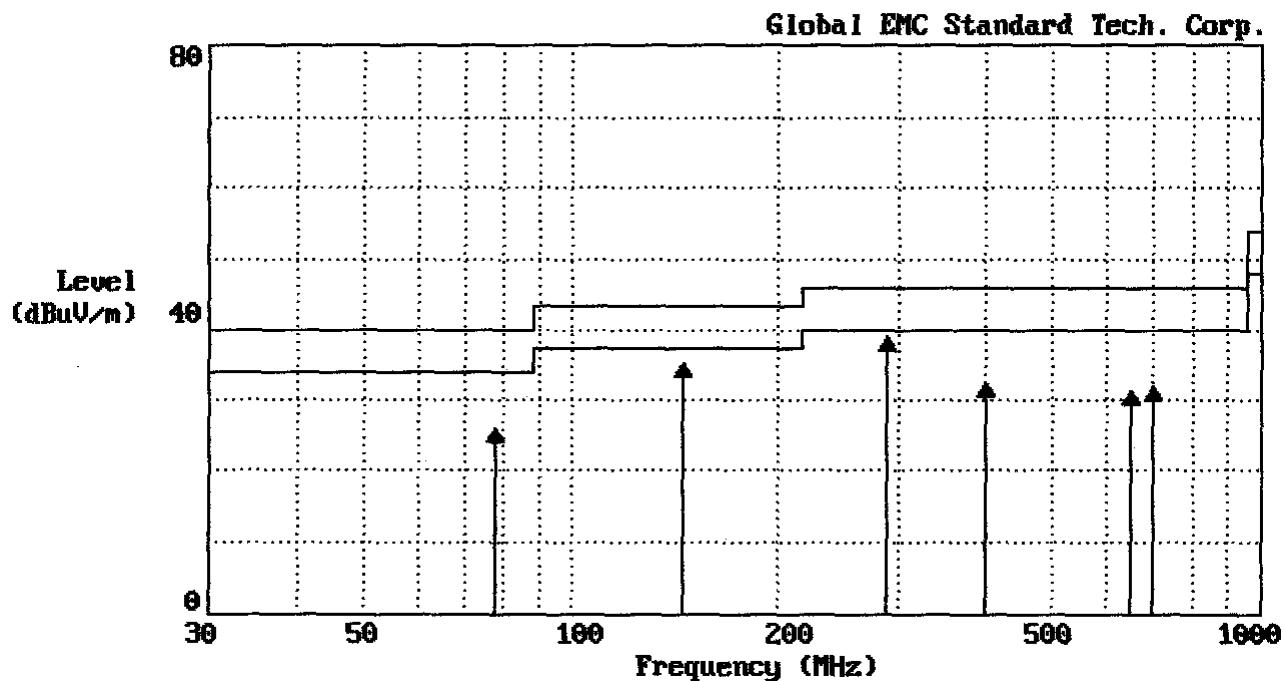

Date of Test	February 09, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	Mode 1 (802.11b) Channel 1	Data Rate	11Mbps
Antenna distance	3m at Horizontal	Frequency Range	Above 1GHz

Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4825.25	47.20	4.73	51.93	74.00	-22.07
2	7238.25	47.09	11.26	< 58.35	74.00	-15.65
3	9647.50	46.13	14.09	< 60.22	74.00	-13.78

Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	7237.25	34.86	11.25	< 46.11	54.00	-7.89
2	9648.00	34.38	14.09	< 48.47	54.00	-5.53

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

Date of Test	February 09, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	Mode 1 (802.11b) Channel 1	Data Rate	11Mbps
Antenna distance	3m at Vertical	Frequency Range	Above 1GHz

Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4822.75	47.24	4.62	51.86	74.00	-22.14
2	7236.00	45.44	13.28	< 58.72	74.00	-15.28
3	9648.25	45.89	14.51	< 60.40	74.00	-13.60

Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	7237.00	34.22	13.29	< 47.51	54.00	-6.49
2	9647.50	34.24	14.51	< 48.75	54.00	-5.25

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

Date of Test	February 09, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	Mode 1 (802.11b) Channel 6	Data Rate	11Mbps
Antenna distance	3m at Horizontal	Frequency Range	Above 1GHz

Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4785.00	48.37	4.79	53.16	74.00	-20.84
2	7313.25	48.26	11.68	< 59.94	74.00	-14.06
3	9748.75	46.66	14.09	< 60.75	74.00	-13.25

Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	7307.00	35.92	11.64	< 47.56	54.00	-6.44
2	9745.25	34.60	14.09	< 48.69	54.00	-5.31

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

Date of Test	February 09, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	Mode 1 (802.11b) Channel 6	Data Rate	11Mbps
Antenna distance	3m at Vertical	Frequency Range	Above 1GHz

Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4881.00	48.71	5.05	53.76	74.00	-20.24
2	7312.00	45.99	13.61	< 59.60	74.00	-14.40
3	9747.00	45.57	14.56	< 60.13	74.00	-13.87

Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	7310.00	34.65	13.60	< 48.25	54.00	-5.75
2	9746.50	34.16	14.56	< 48.72	54.00	-5.28

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

Date of Test	February 09, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	Mode 1 (802.11b) Channel 11	Data Rate	11Mbps
Antenna distance	3m at Horizontal	Frequency Range	Above 1GHz

Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4924.00	47.99	4.85	52.84	74.00	-21.16
2	7384.75	47.44	12.08	< 59.52	74.00	-14.48
3	9848.75	47.09	14.08	< 61.17	74.00	-12.83

Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	7386.50	34.89	12.09	< 46.98	54.00	-7.02
2	9847.25	34.12	14.08	< 48.20	54.00	-5.80

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

Date of Test	April 09, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	Mode 1 (802.11b) Channel 11	Data Rate	11Mbps
Antenna distance	3m at Vertical	Frequency Range	Above 1GHz

Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4925.25	47.07	5.37	52.44	74.00	-21.56
2	7386.25	46.44	13.93	< 60.36	74.00	-13.64
3	9850.50	46.83	14.61	< 61.44	74.00	-12.56

Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	7385.75	34.39	13.92	< 48.31	54.00	-5.69
2	9848.25	34.25	14.61	< 48.86	54.00	-5.14

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

Date of Test	February 09, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	Mode 2 (802.11g) Channel 1	Data Rate	54Mbps
Antenna distance	3m at Horizontal	Frequency Range	Above 1GHz

Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4823.25	46.84	4.73	51.57	74.00	-22.43
2	7238.00	47.02	11.26	< 58.28	74.00	-15.42
3	9647.75	47.62	14.09	< 61.71	74.00	-12.29

Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	7235.25	35.04	11.24	< 46.28	54.00	-7.72
2	9648.25	34.22	14.09	< 48.31	54.00	-5.69

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

Date of Test	February 09, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	Mode 2 (802.11g) Channel 1	Data Rate	54Mbps
Antenna distance	3m at Vertical	Frequency Range	Above 1GHz

Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4827.50	48.58	4.66	53.24	74.00	-20.76
2	7235.75	45.86	13.28	< 59.14	74.00	-14.86
3	9646.50	45.43	14.51	< 59.94	74.00	-14.06

Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	7235.00	34.12	13.28	< 47.40	54.00	-6.60
2	9647.00	34.20	14.51	< 48.71	54.00	-5.29

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

Date of Test	April 09, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	Mode 2 (802.11g) Channel 6	Data Rate	54Mbps
Antenna distance	3m at Horizontal	Frequency Range	Above 1GHz

Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4873.75	46.75	4.79	51.54	74.00	-22.46
2	7308.50	50.03	11.65	< 61.68	74.00	-12.32
3	9750.00	46.73	14.09	< 60.82	74.00	-13.18

Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	7311.25	35.14	11.67	< 46.81	54.00	-7.19
2	9746.75	34.56	14.09	< 48.65	54.00	-5.35

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

Date of Test	February 09, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	Mode 2 (802.11g) Channel 6	Data Rate	54Mbps
Antenna distance	3m at Vertical	Frequency Range	Above 1GHz

Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4873.25	45.87	5.00	50.87	74.00	-23.13
2	7310.50	45.71	13.60	< 59.31	74.00	-14.69
3	9748.00	45.48	14.56	< 60.04	74.00	13.96

Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	7310.50	34.50	13.60	< 48.10	54.00	-5.90
2	9748.25	34.21	14.56	< 48.77	54.00	-5.23

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

Date of Test	February 09, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	Mode 2 (802.11g) Channel 11	Data Rate	54Mbps
Antenna distance	3m at Horizontal	Frequency Range	Above 1GHz

Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4922.50	49.03	4.84	53.87	74.00	-20.12
2	7386.00	45.70	12.09	< 57.79	74.00	-16.21
3	9846.00	45.97	14.08	< 60.05	74.00	-13.95

Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	7385.50	34.49	12.08	< 46.57	54.00	-7.43
2	9847.50	34.19	14.08	< 48.27	54.00	-5.73

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

Date of Test	February 09, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	Mode 2 (802.11g) Channel 11	Data Rate	54Mbps
Antenna distance	3m at Vertical	Frequency Range	Above 1GHz

Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	4924.25	47.66	5.36	53.02	74.00	-20.98
2	7387.25	46.52	13.93	< 60.45	74.00	-13.55
3	9847.75	45.67	14.61	< 60.28	74.00	-13.72

Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
1	7386.25	34.23	13.93	< 48.16	54.00	-5.84
2	9848.25	34.24	14.61	< 48.85	54.00	-5.15

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ, Span=20MHz.
4. Emission Level= Reading + Correction Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

5. PEAK POWER OUTPUT


5.1 TEST EQUIPMENT

The following test equipments are used during the Conduct tests:

Item	Instrument	Manufacturer	Type	Serial No.	Last Cal.
1	Spectrum Analyzer	Rohde & Schwarz	FSP40	100061	03/16/04
2	Spectrum Analyzer	HP	E4407B	39240339	08/16/03
3	Power Meter	Rohde & Schwarz	NRVS	100666	04/26/04
4	Peak Power Sensor	Rohde & Schwarz	NRV-Z32	8360191058	05/19/03

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

5.2 BLOCK DIAGRAM OF TEST SETUP

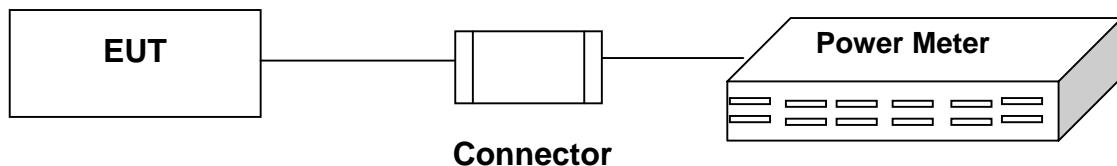

5.3 PEAK POWER OUTPUT LIMIT

The maximum peak power shall be less 1 Watt.

5.4 TEST RESULT

Date of Test	January 28, 2004
EUT	Industrial PC
Test Mode	Mode 1 (802.11b)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
1	2412	16.31	1W(30dBm)	Pass
6	2437	16.02	1W(30dBm)	Pass
11	2468	16.24	1W(30dBm)	Pass

Date of Test	January 28, 2004
EUT	Industrial PC
Test Mode	Mode 2 (802.11g)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
1	2412	21.00	1W(30dBm)	Pass
6	2437	20.75	1W(30dBm)	Pass
11	2462	20.91	1W(30dBm)	Pass

6. BAND EDGE


6.1 TEST EQUIPMENT

Item	Instrument	Manufacturer	Type	Serial No.	Last Cal.
1	Test Receiver	Rohde & Schwarz	ESVS30	829007/014	12/13/03
2	Spectrum Analyzer	Rohde & Schwarz	FSP40	100061	03/16/04
3	Spectrum Analyzer	HP	E4407B	39240339	08/16/03
4	Power Meter	Rohde & Schwarz	NRVS	100666	04/26/04
5	Power Sensor	Rohde & Schwarz	NRV-Z32	8360191058	05/19/03
6	Pre-Amplifier	HP	8447F OPT H64	3113A04487	10/11/03
7	BILOG ANTENNA	SCHAFFNER	CBL6112B	2620	12/01/03
8	Horn Antenna	Electro-Metrics	EM-6961	103318	05/30/03
9	Horn Antenna	Schwarzbeck	BBHA 9120	D243	12/18/03
10	RF Cable	GesTek	N/A	GTK-E-A151-01	02/09/04
11	Open Site	GesTek	N/A	B1	11/25/03
12	Test Program Software	GesTek	N/A	GTK-E-S001-01	N/A

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

6.2 BLOCK DIAGRAM OF TEST SETUP

◎ RF Radiated Measurement: ◎

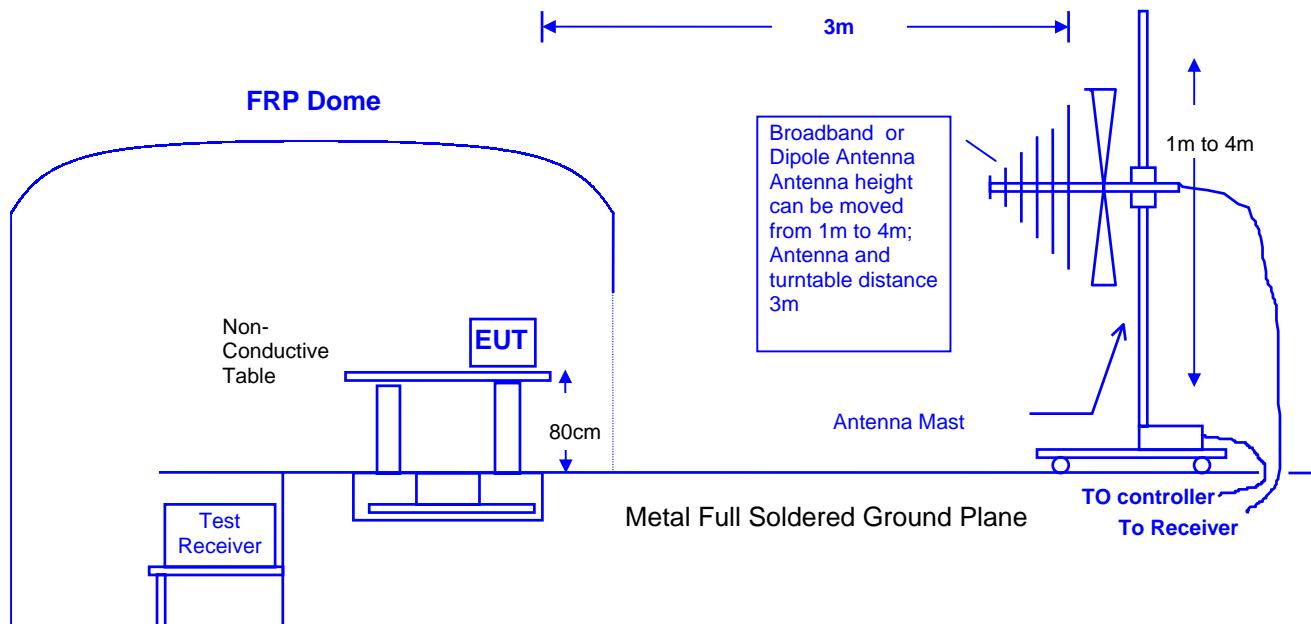

6.3 BAND EDGE LIMIT

In any 100KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209 (a) (see Section 15.205(c)).

6.4 EUT CONFIGURATION

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:2000 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120KHz, above 1GHz are 1MHz.

6.5 OPERATING CONDITION OF EUT

Same as section 2.7.

6.6 TEST RELULT

Date of Test	February 09, 2004
EUT	Industrial PC
Working Cond.	Mode 1 (802.11b)

Channel No.	Frequency(MHz)	Required Limit(dBc)	Result
1(Horizontal)	< 2400	>20	Pass
1(Vertical)	< 2400	>20	Pass

Horizontal

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
1	2397.00	63.72	0.27	63.99
2	2400.00	60.94	0.27	61.21
3	2409.25	100.56	0.26	100.82

Vertical

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
1	2397.00	55.12	-4.57	50.55
2	2400.00	52.06	-4.57	47.49
3	2409.50	92.53	-4.58	87.95



Note: RBW=100kHz, VBW=100kHz

Horizontal

Vertical

Test Result

Test Result

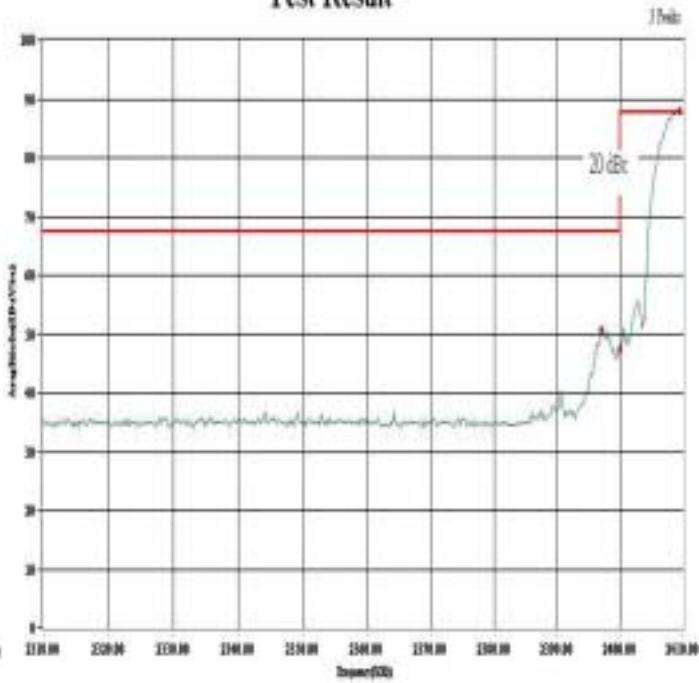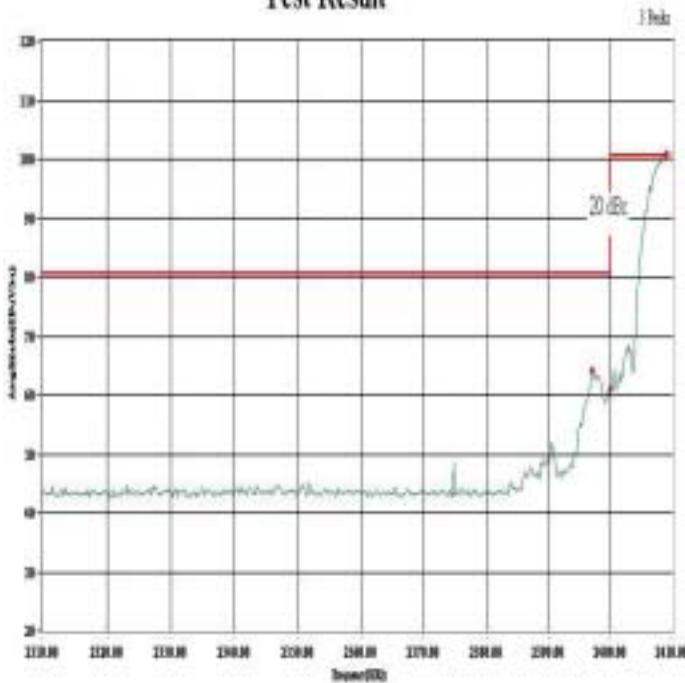

Date of Test	February 09, 2004
EUT	Industrial PC
Working Cond.	Mode 2 (802.11g)

Channel No.	Frequency(MHz)	Required Limit(dBc)	Result
1(Horizontal)	< 2400	>20	Pass
1(Vertical)	< 2400	>20	Pass

Horizontal

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
1	2399.75	68.60	0.27	68.87
2	2400.00	67.44	0.27	67.71
3	2407.00	100.59	0.27	100.86



Vertical

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
1	2399.25	56.48	-4.57	51.91
2	2400.00	56.47	-4.57	51.90
3	2409.25	90.74	-4.58	86.16

Note:RBW=100kHz, VBW=100kHz

Horizontal

Vertical

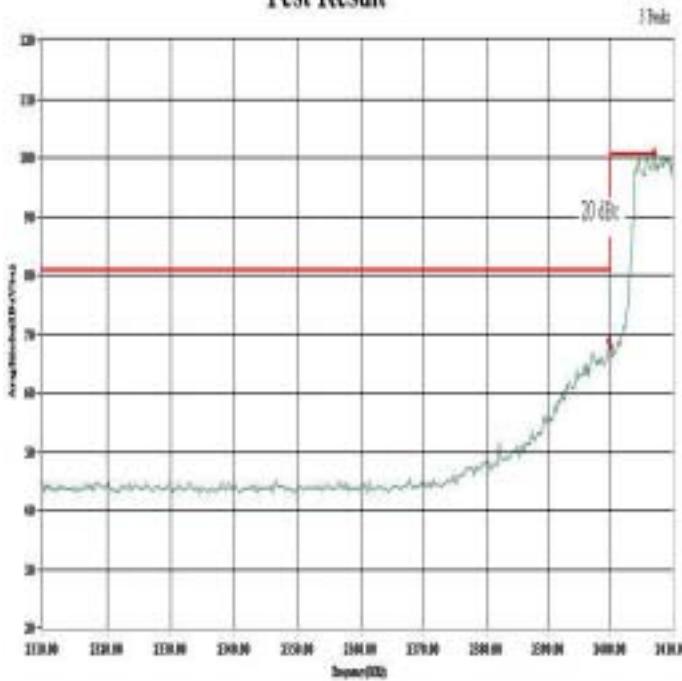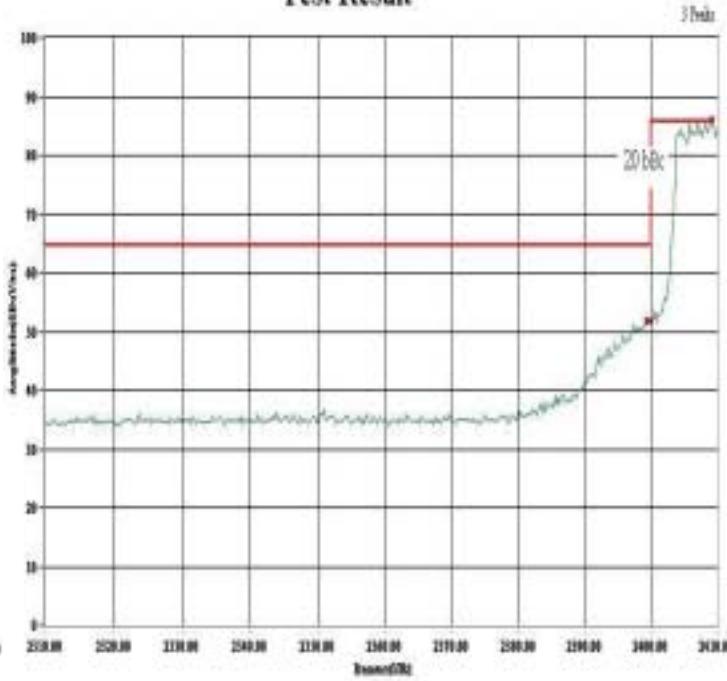Test Result**Test Result**

Date of Test	February 09, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	Mode 1 (802.11b) Channel 11	Data Rate	11Mbps
Antenna distance	3m at Horizontal	Frequency Range	Above 1GHz

Peak


No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Result
1	2460.25	110.27	0.22	110.49	74.00	N/A
2	2483.50	61.81	0.19	62.00	74.00	PASS
3	2484.50	62.01	0.19	62.20	74.00	PASS
4	2500.00	57.61	0.18	57.79	74.00	PASS

Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ.
4. Emission Level= Reading + Correction Factor (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

Test Result

4 Peaks

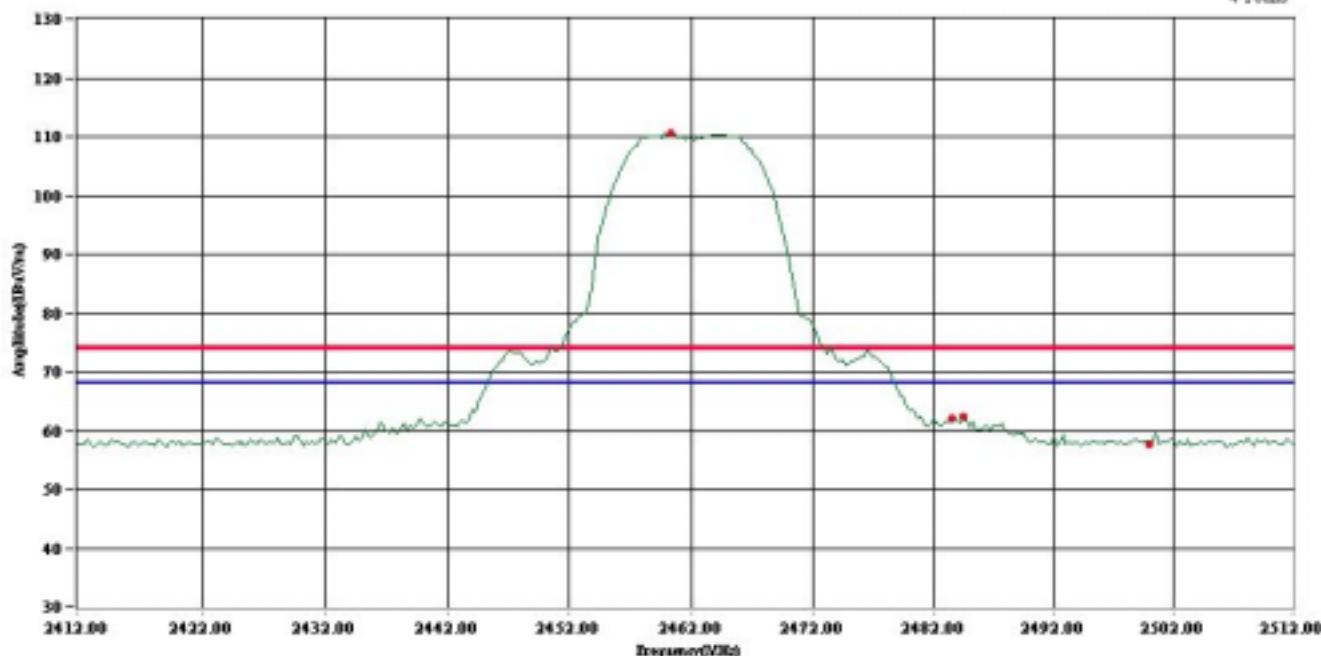

Date of Test	February 09, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	Mode 1 (802.11b) Channel 11	Data Rate	11Mbps
Antenna distance	3m at Horizontal	Frequency Range	Above 1GHz


Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Result
1	2464.75	102.00	0.21	102.21	54.00	N/A
2	2483.50	51.30	0.19	51.49	54.00	PASS
3	2500.00	48.46	0.18	48.64	54.00	PASS

Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ.
4. Emission Level= Reading + Correction Factor (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

Test Result

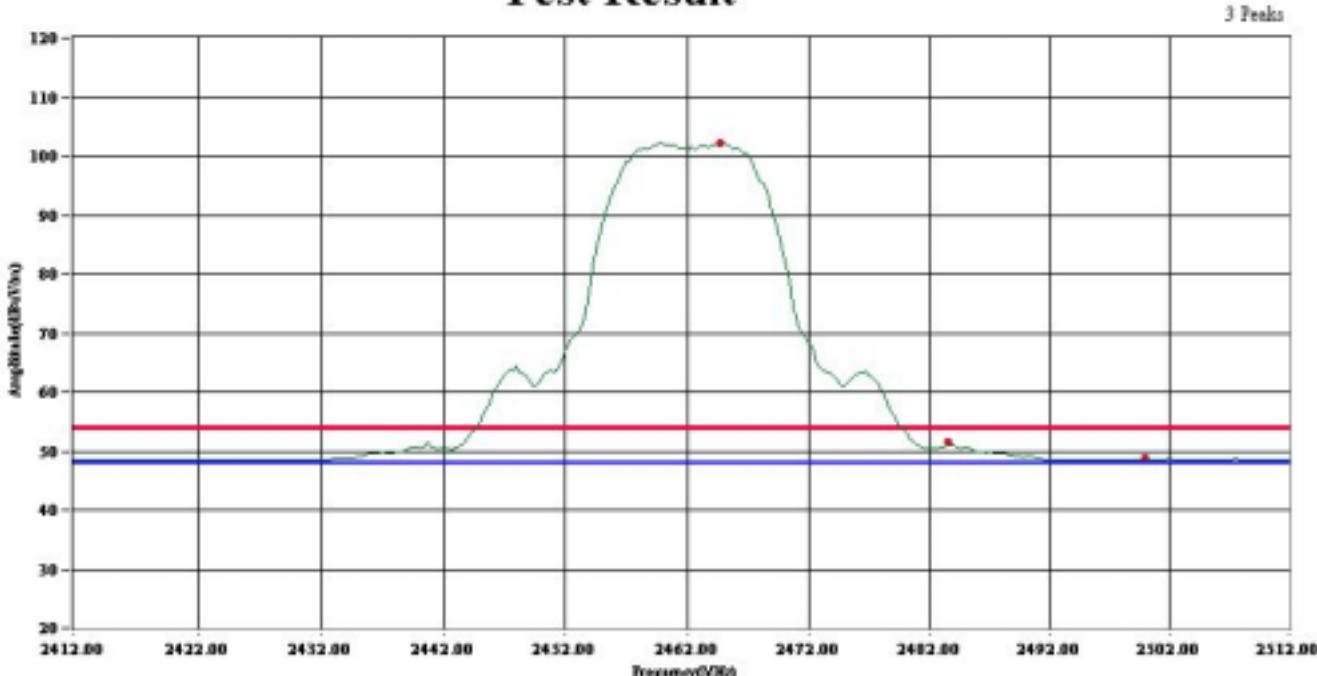

Date of Test	February 09, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	Mode 1 (802.11b) Channel 11	Data Rate	11Mbps
Antenna distance	3m at Vertical	Frequency Range	Above 1GHz


Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Result
1	2459.50	101.05	-4.59	96.46	74.00	N/A
2	2483.50	51.76	-4.60	47.16	74.00	PASS
3	2492.25	56.96	-4.60	52.36	74.00	PASS
4	2500.00	50.33	-4.60	45.73	74.00	PASS

Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ.
4. Emission Level= Reading + Correction Factor (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

Test Result

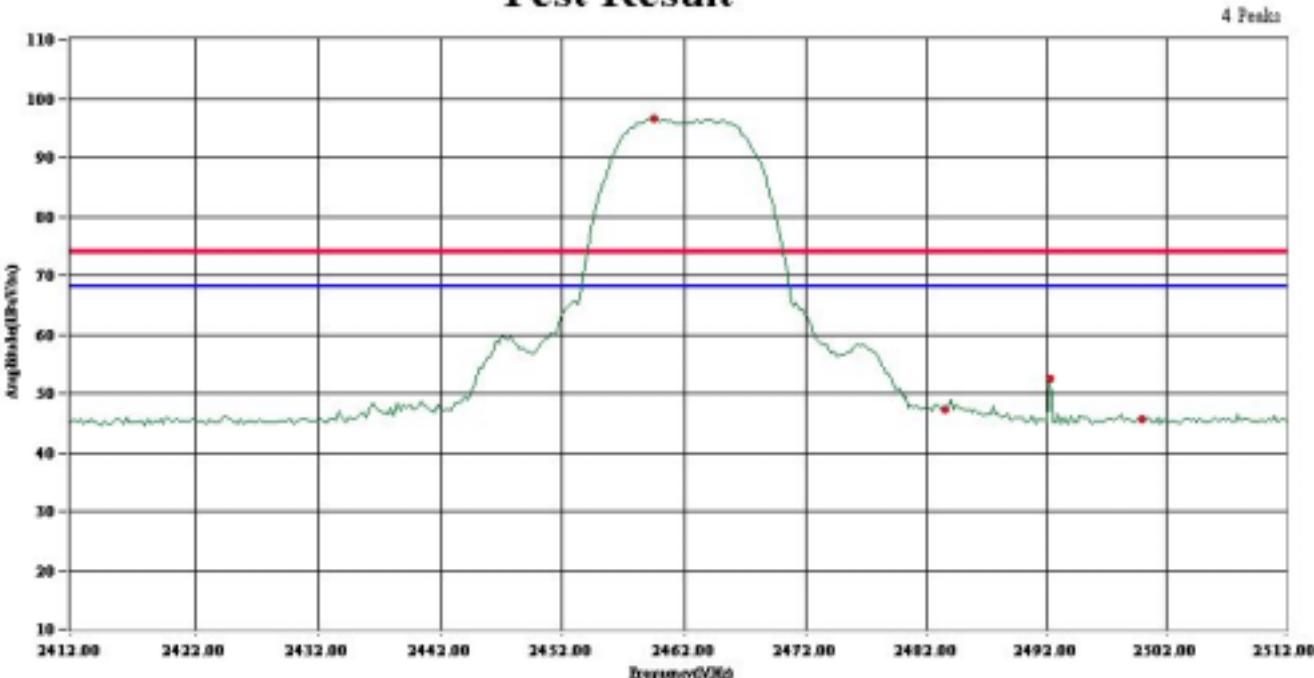

Date of Test	February 09, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	Mode 2 (802.11g) Channel 11	Data Rate	11Mbps
Antenna distance	3m at Horizontal	Frequency Range	Above 1GHz


Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Result
1	2467.00	110.04	0.21	110.25	74.00	N/A
2	2483.50	68.71	0.19	68.90	74.00	PASS
3	2500.00	58.23	0.18	58.41	74.00	PASS

Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ.
4. Emission Level= Reading + Correction Factor (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

Test Result

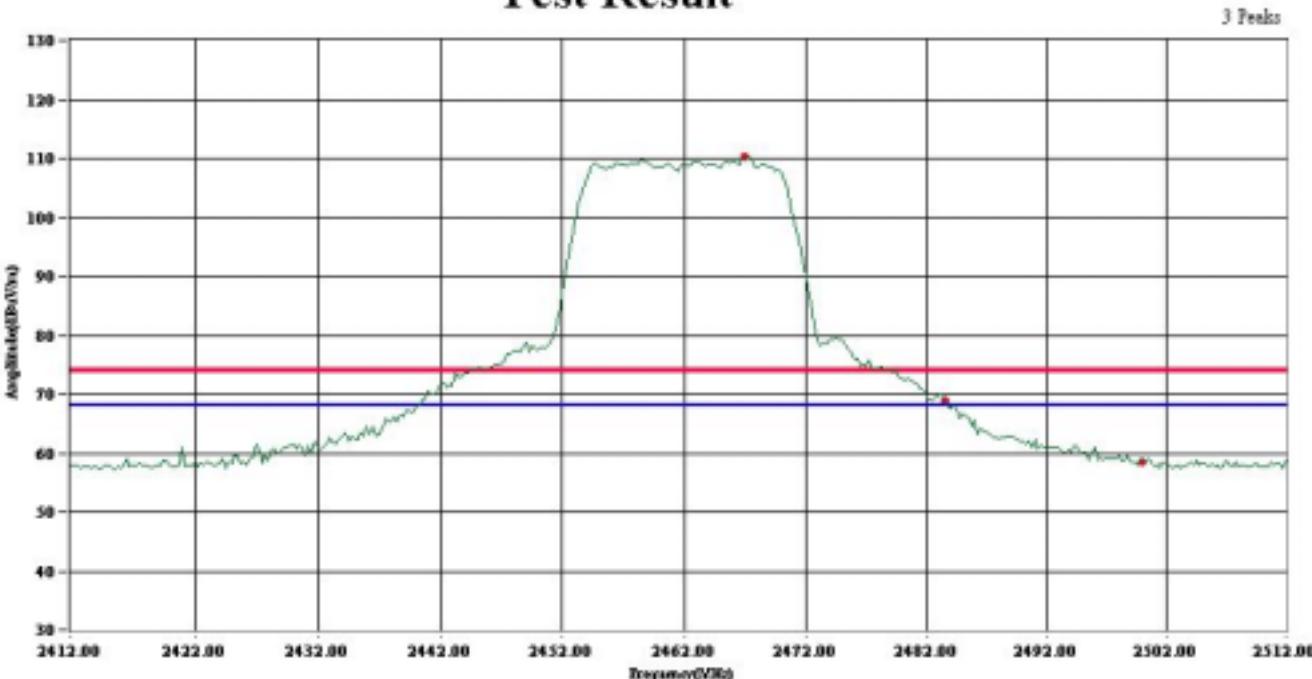

Date of Test	February 09, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	Mode 2 (802.11g) Channel 11	Data Rate	11Mbps
Antenna distance	3m at Horizontal	Frequency Range	Above 1GHz


Average

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Result
1	2461.25	94.65	0.22	94.87	54.00	N/A
2	2483.50	50.04	0.19	50.23	54.00	PASS
3	2483.75	50.43	0.19	50.62	54.00	PASS
4	2500.00	42.08	0.18	42.26	54.00	PASS

Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ.
4. Emission Level= Reading + Correction Factor (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

Test Result

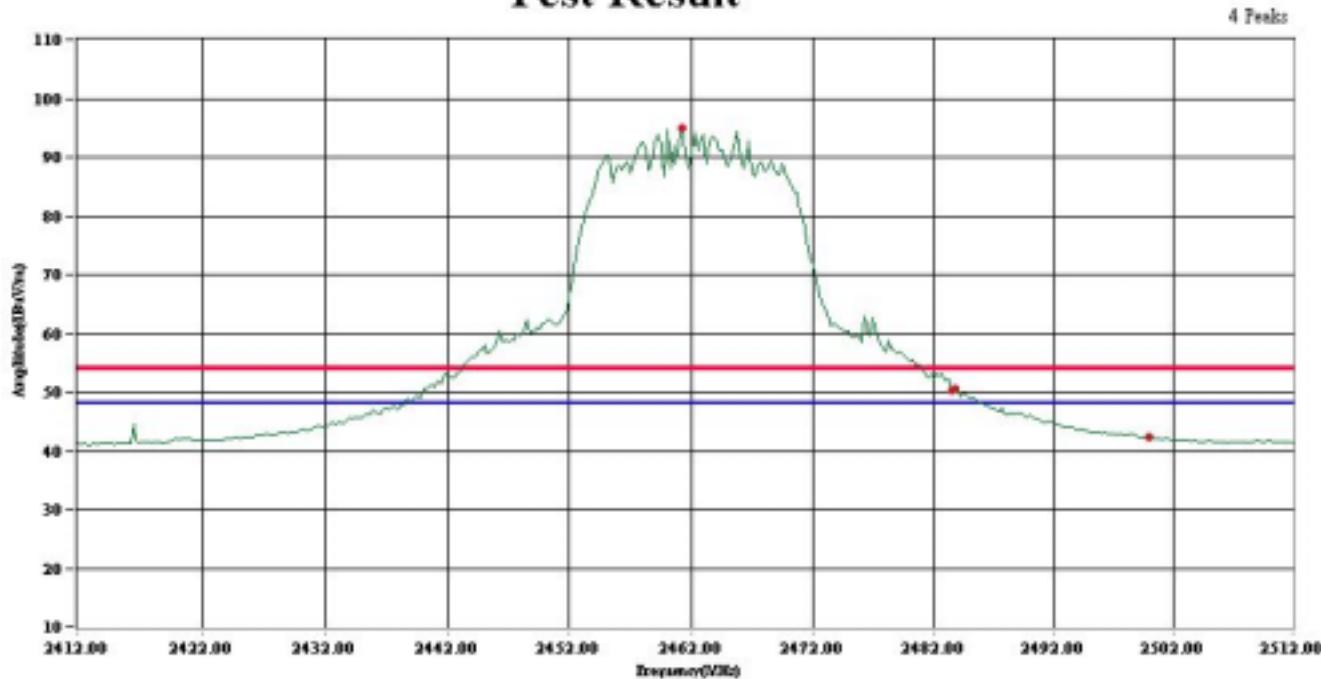

Date of Test	February 09, 2004	Temperature	25 deg/C
EUT	Industrial PC	Humidity	60 %RH
Working Cond.	Mode 2 (802.11g) Channel 11	Data Rate	11Mbps
Antenna distance	3m at Vertical	Frequency Range	Above 1GHz


Peak

No.	Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]	Limit [dB(uV/m)]	Result
1	2467.00	101.03	-4.59	96.44	74.00	N/A
2	2483.50	58.56	-4.60	53.96	74.00	PASS
3	2500.00	50.80	-4.60	46.20	74.00	PASS

Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ.
3. Spectrum Analyzer Setting(AVG Detector): RBW=1MHz, VBW=30HZ.
4. Emission Level= Reading + Correction Factor (Could have \pm 0.01 tolerance due to computer automatically round off calculation).
5. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor
6. Margin Value=Emission level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.

Test Result

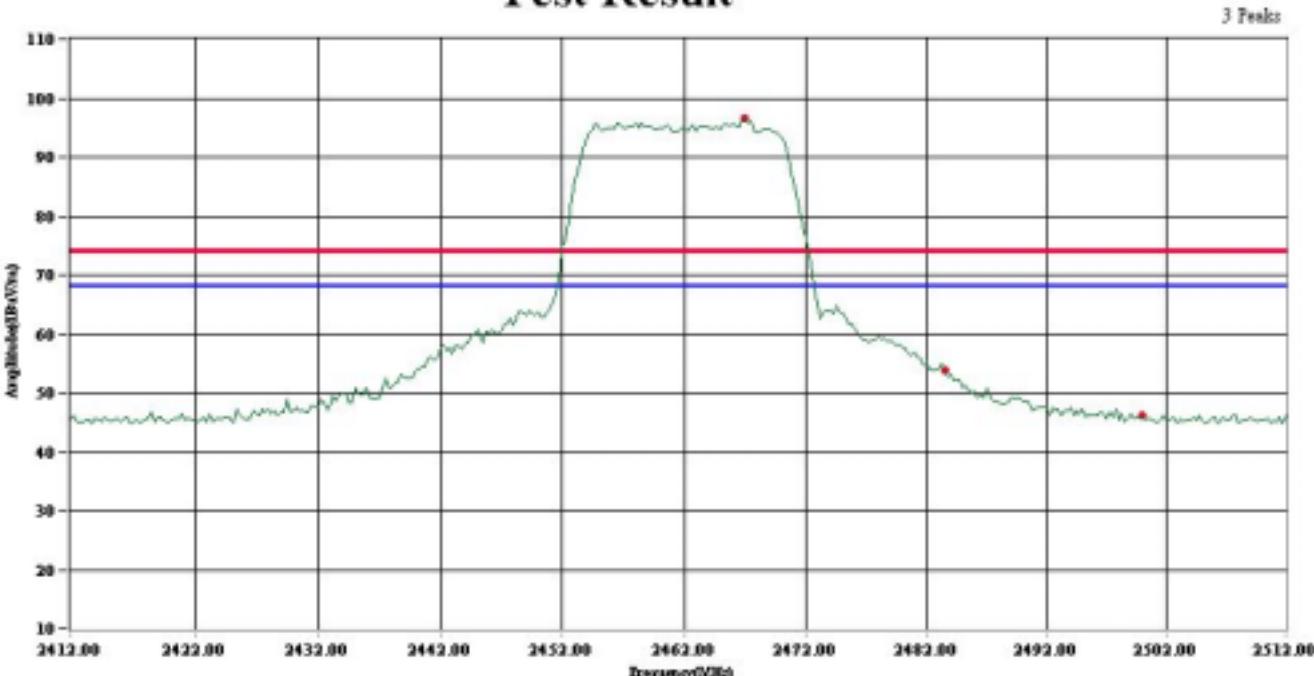

7. OCCUPIED BANDWIDTH


7.1 TEST EQUIPMENT

The following test equipments are used during the radiated emission tests:

Item	Instrument	Manufacturer	Type	Serial No.	Last Cal.
1	Spectrum Analyzer	Rohde & Schwarz	FSP40	100061	03/16/04
2	Spectrum Analyzer	HP	E4407B	39240339	08/16/03

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

7.2 BLOCK DIAGRAM OF TEST SETUP

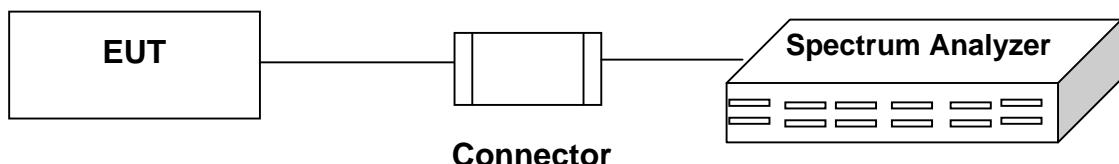

7.3 LIMIT

WLAN: The minimum 6dB bandwidth shall be at least 500KHz.

7.4 TEST RESULT

Date of Test	December 15, 2003
EUT	Industrial PC
Working Cond.	Mode 1 (802.11b)

Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required limit (KHz)	Result
1	2412	10.9	>500	Pass
6	2437	10.9	>500	Pass
11	2462	10.8	>500	Pass

Figure Channel 1:



Figure Channel 6:



Figure Channel 11:



Date of Test	December 15, 2003
EUT	Industrial PC
Working Cond.	Mode 2 (802.11g)

Channel No.	Frequency (MHz)	Measurement Level (MHz)	Required limit (KHz)	Result
1	2412	16.3	>500	Pass
6	2437	16.1	>500	Pass
11	2462	16.3	>500	Pass

Figure Channel 1:


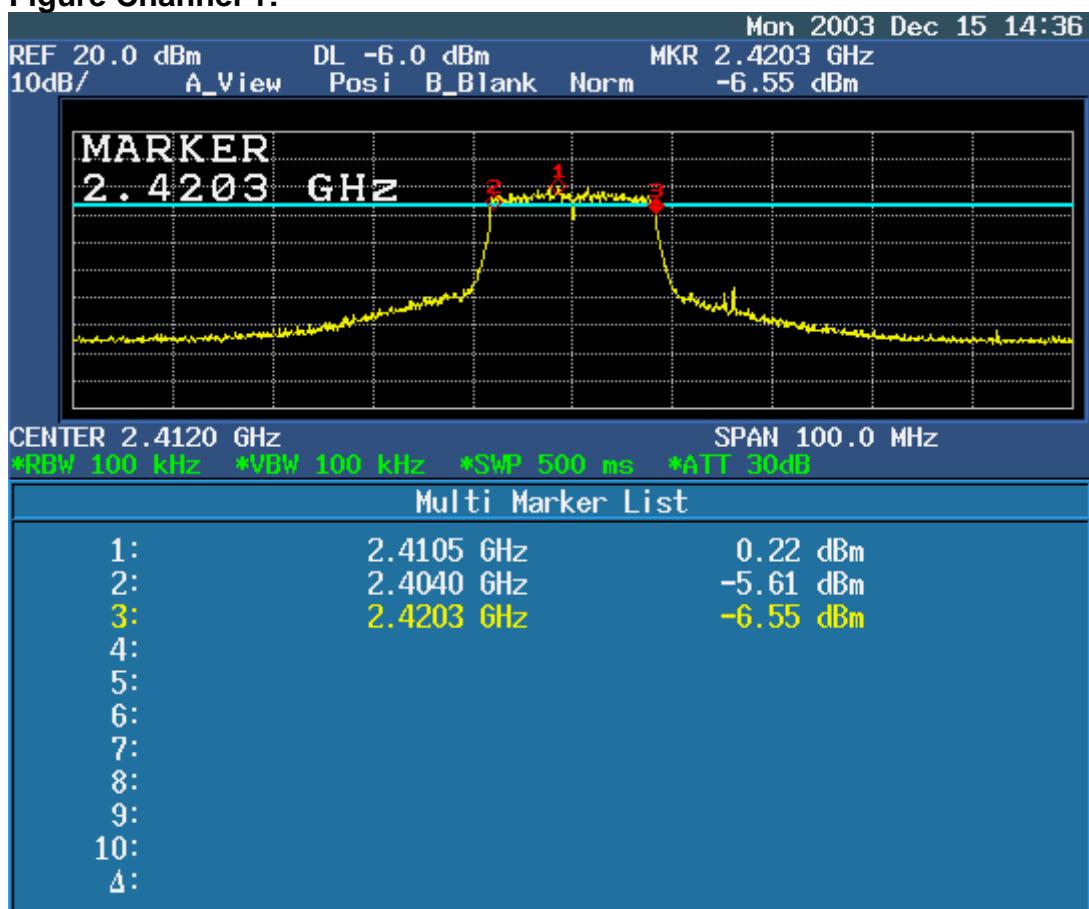


Figure Channel 6:



Figure Channel 11:

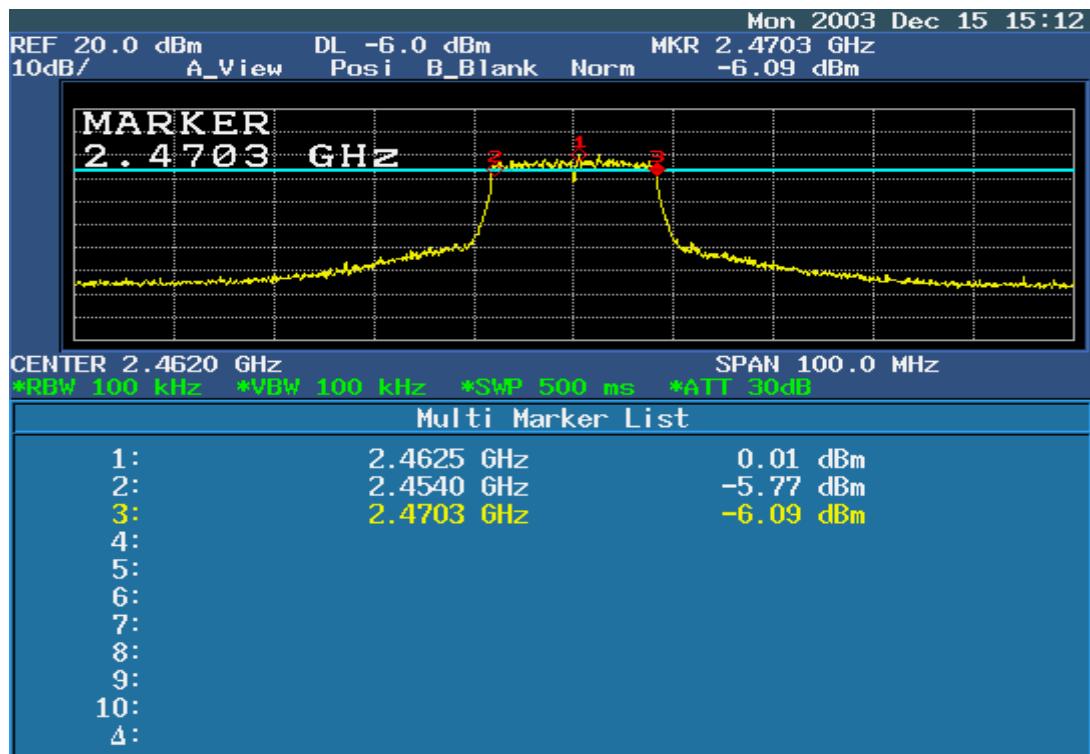

8. POWER DENSITY


8.1 TEST EQUIPMENT

The following test equipments are used during the radiated emission tests:

Item	Instrument	Manufacturer	Type	Serial No.	Last Cal.
1	Spectrum Analyzer	Rohde & Schwarz	FSP40	100061	03/16/04
2	Spectrum Analyzer	HP	E4407B	39240339	08/16/03

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

8.2 BLOCK DIAGRAM OF TEST SETUP

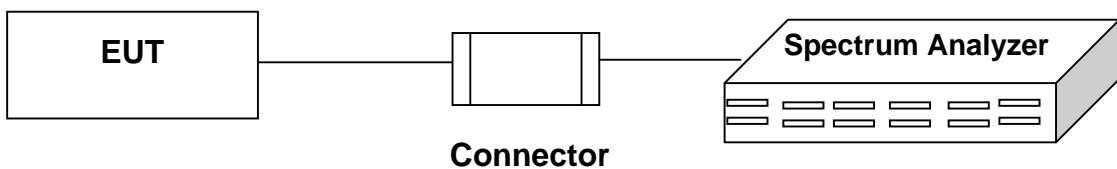

8.3 LIMIT

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3KHz bandwidth.

8.4 TEST RESULT

Date of Test	December 15, 2003
EUT	Industrial PC
Working Cond.	Mode 1 (802.11b)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required limit (dBm)	Result
1	2411.8749	-14.88	<8dBm	Pass
6	8436.8755	-15.07	<8dBm	Pass
11	2461.8764	-14.79	<8dBm	Pass

Figure Channel 1:

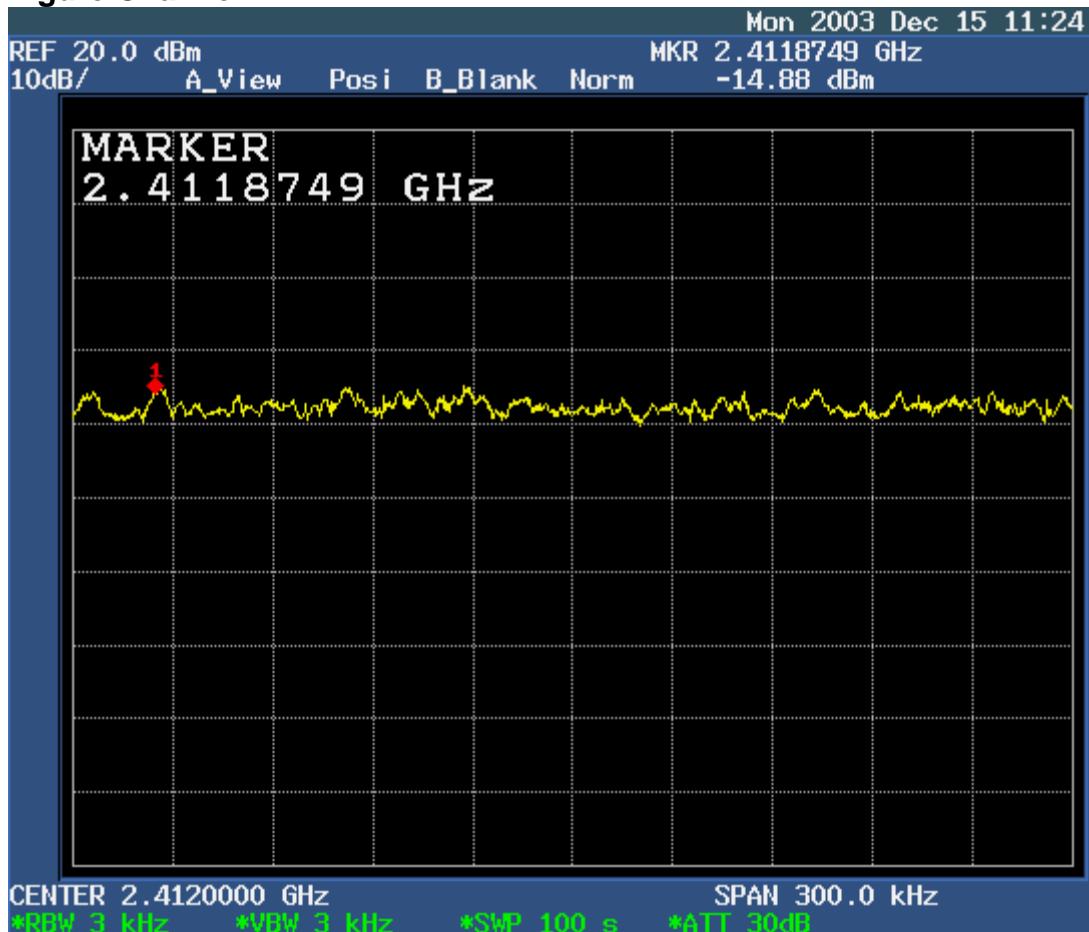


Figure Channel 6:


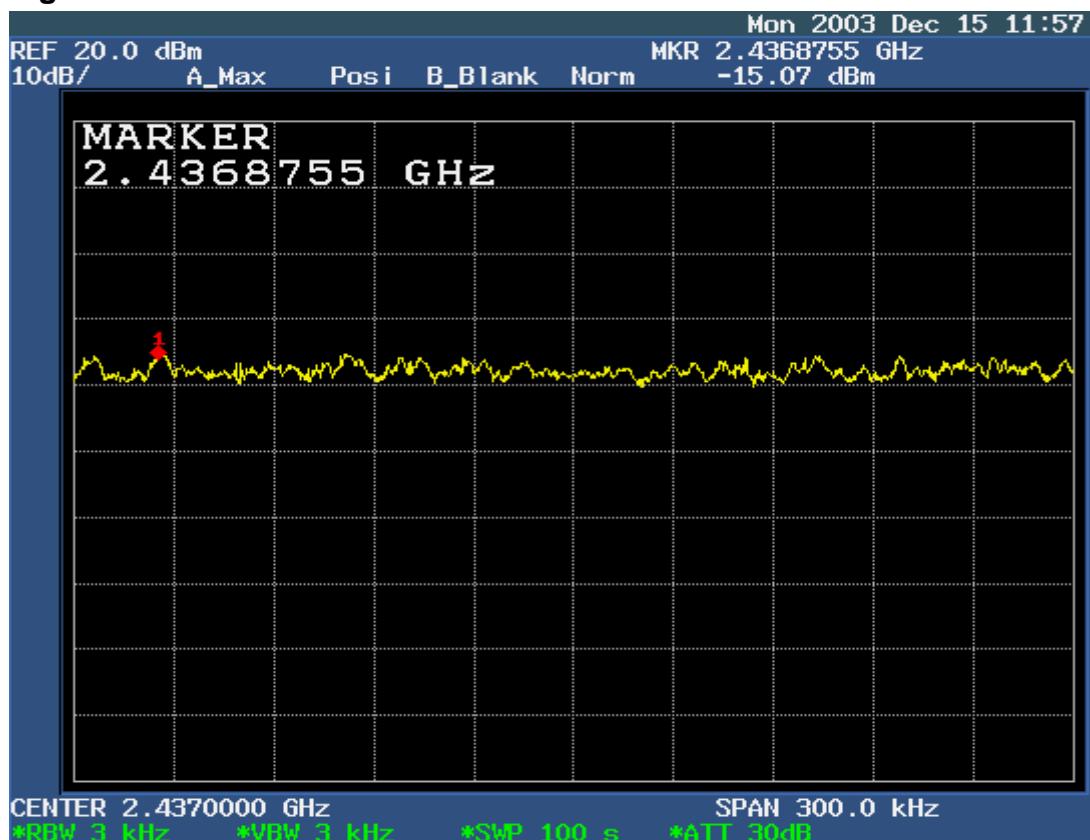


Figure Channel 11:

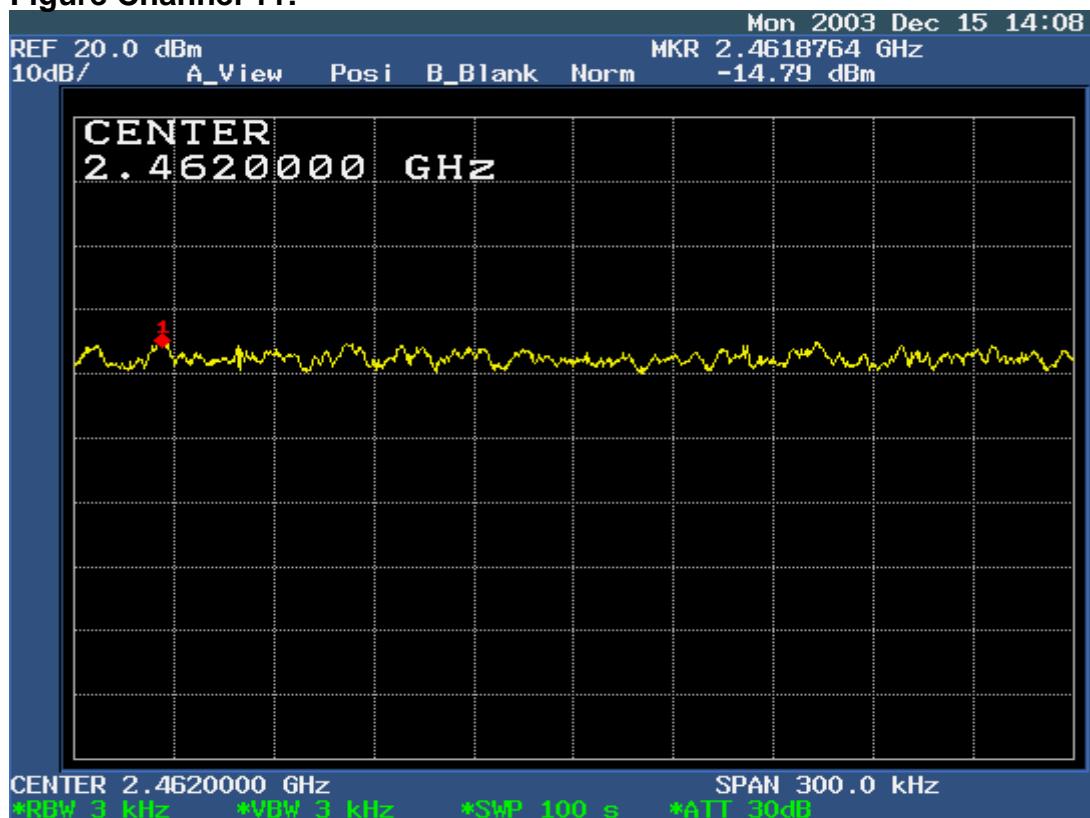

Date of Test	December 15, 2003
EUT	Industrial PC
Working Cond.	Mode 2 (802.11g)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required limit (dBm)	Result
1	2411.9715	-21.58	<8dBm	Pass
6	2436.9691	-22.80	<8dBm	Pass
11	2462.1431	-22.48	<8dBm	Pass

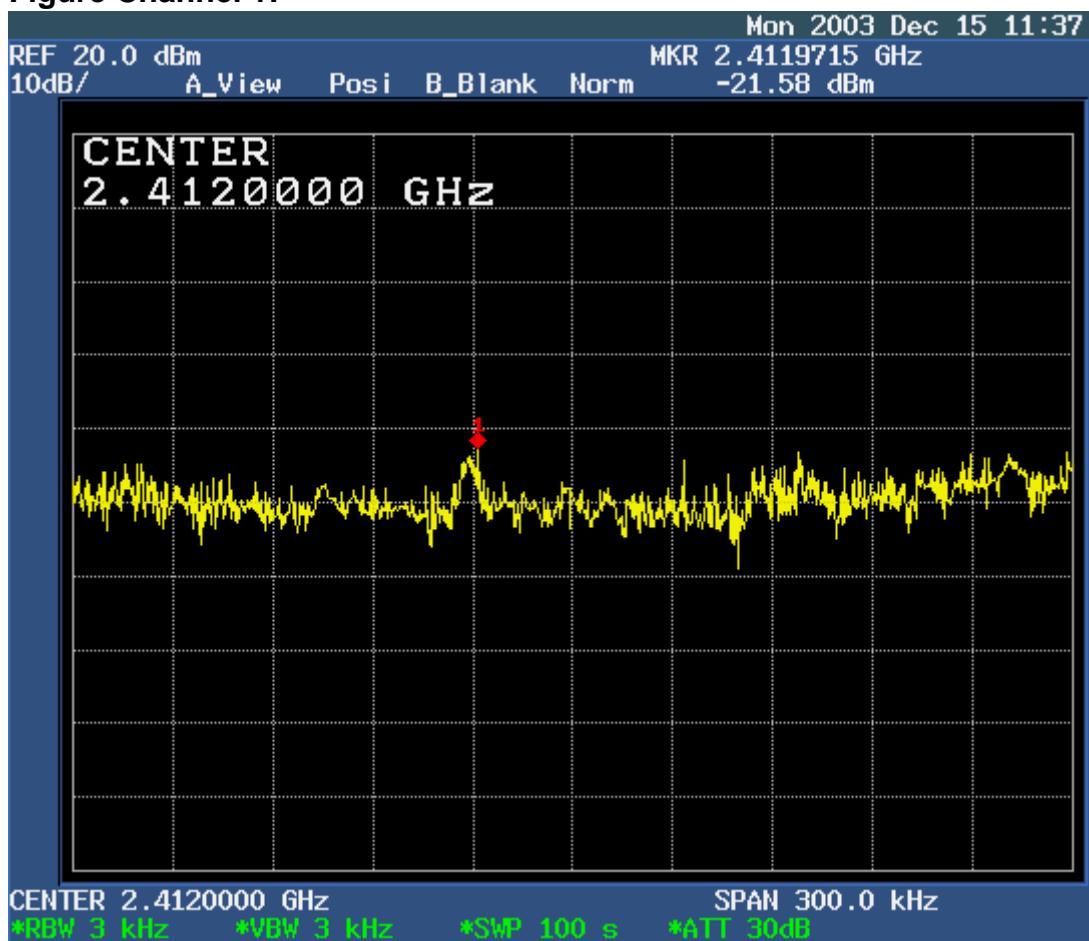
Figure Channel 1:

Figure Channel 6:


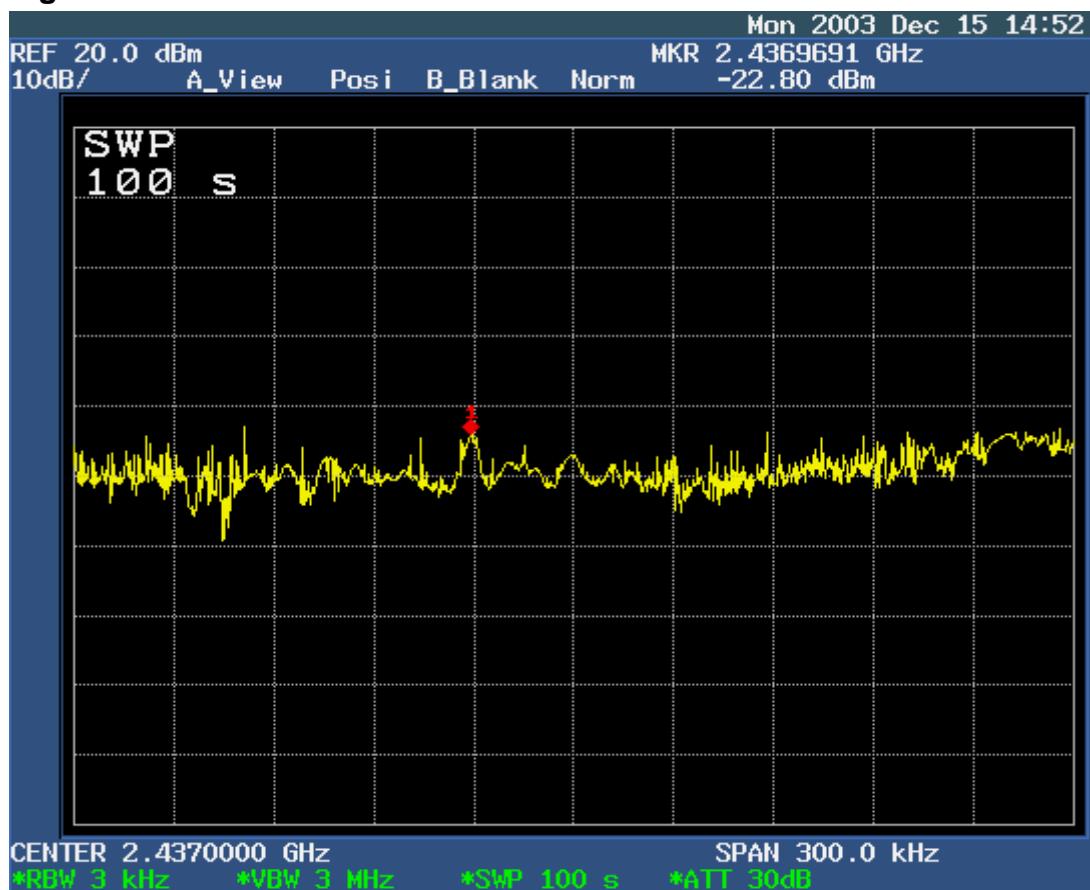


Figure Channel 11:

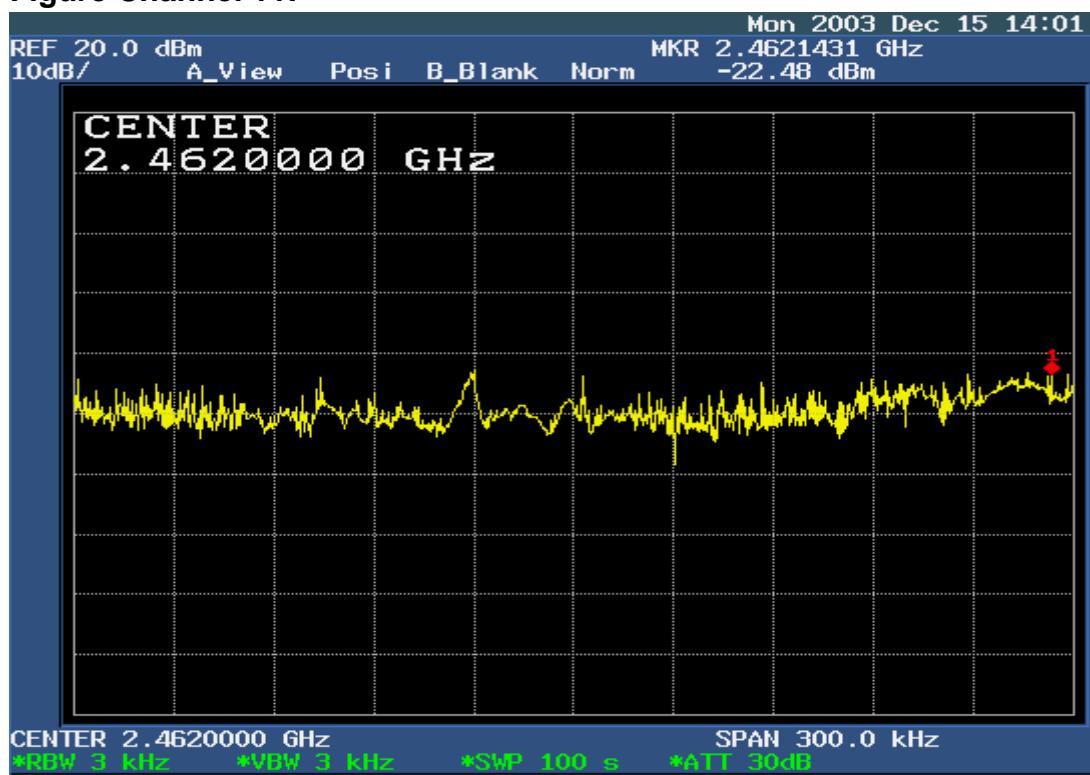

11. EMI REDUCTION METHOD DURING COMPLIANCE TESTING

No modification was made during testing.

Appendix A

Circuit (Block) Diagram

(Shall be added by Applicant)

Appendix B

User Manual

(Shall be added by Applicant)