



Valued Quality. Delivered.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



TEST REPORT


Report No.: 14071200HKG-001

Goldsound Electronic Limited

Application
For
Certification
(Original Grant)
(FCC ID: RQU-BSS862)

Transceiver

Prepared and Checked by:


Wong Cheuk Ho, Herbert
Lead Engineer

Approved by:


Chan Chi Hung, Terry
Supervisor
Date: September 01, 2014

- Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.
- This report shall not be reproduced, except in full.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client, in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

**GENERAL INFORMATION**

Grantee:	Goldsound Electronic Limited
Grantee Address:	Room 13, 3/F., Hewlett Centre, 54 Hoi Yuen Road, Kwun Tong, Hong Kong.
Contact Person:	Raymond Tse
Tel:	(852) 2191 2681
Fax:	(852) 2191 3781
e-mail:	N/A
Manufacturer:	Goldsound Electronic Manufactory
Manufacturer Address:	Building B, C, Tanghuanling Industrial Park, Chashan Town, Dongguan, China.
Brand Name:	Goldsound / Memorex / Sylvania / Pyle Vintage
Model:	BSS-862, BSS-863, MX5540, SP303, PWPBT-250BK, PWPBT-250YL, PWPBT-250OR
Type of EUT:	Transceiver
Description of EUT:	Bluetooth Speaker with PLL Radio and USB/SD
Serial Number:	N/A
FCC ID:	RQU-BSS862
Date of Sample Submitted:	July 29, 2014
Date of Test:	July 29, 2014 to August 20, 2014
Report No.:	14071200HKG-001
Report Date:	September 01, 2014
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

**SUMMARY OF TEST RESULT**

TEST SPECIFICATION	REFERENCE	RESULTS
Transmitter Power Line Conducted Emissions	15.207	Pass
Radiated Emission Radiated Emission on the Bandedge	15.249	Pass
Radiated Emission in Restricted Bands	15.205	Pass

The equipment under test is found to be complying with the following standards:
FCC Part 15, October 1, 2012 Edition

Note: 1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.
2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

**Table of Contents**

1.0	<u>General Description</u>	1
1.1	Product Description	1
1.2	Related Submittal(s) Grants	1
1.3	Test Methodology	2
1.4	Test Facility	2
2.0	<u>System Test Configuration</u>	3
2.1	Justification	3
2.2	EUT Exercising Software	3
2.3	Special Accessories	3
2.4	Measurement Uncertainty	3
2.5	Support Equipment List and Description	4
3.0	<u>Emission Results</u>	5
3.1	Field Strength Calculation	5
3.2	Radiated Emission Configuration Photograph	6
3.3	Radiated Emission Data	6
3.4	Conducted Emission Configuration Photograph	6
3.5	Conducted Emission Data	6
4.0	<u>Equipment Photographs</u>	12
5.0	<u>Product Labelling</u>	12
6.0	<u>Technical Specifications</u>	12
7.0	<u>Instruction Manual</u>	12
8.0	<u>Miscellaneous Information</u>	13
8.1	Radiated Emission on the Bandedge	13
8.2	Discussion of Pulse Desensitization	16
8.3	Calculation of Average Factor	16
8.4	Emissions Test Procedures	17
9.0	<u>Equipment List</u>	19

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

**1.0 General Description****1.1 Product Description**

The Equipment Under Test (EUT) is a Bluetooth Speaker with PLL Radio and USB/SD. The EUT is using adaptive frequency hopping for Bluetooth module. The Bluetooth portion is operating between 2402MHz and 2480MHz (79 channels with 1MHz channel spacing). When the EUT is switched ON in Bluetooth mode, the display will show "BT" and a LED flashing. The Bluetooth enabled device would be searched and connected the EUT before playing audio. After pairing, the "BT" LED will stay lit. The audio signal will be amplified and fed to internal stereo loudspeaker. The EUT also have FM radio and playback MP3 function. A LED display acts as the visual interface. The EUT is powered by 12V DC from an AC/DC adaptor and/or eight size C batteries (1.5VDC). The AC/DC adaptor can accept 100-240VAC. A USB port (5VDC) is for charging purpose and playback MP3 from USB drive only. A SD card slot is for playback MP3 from SD Card only. The Aux port is for playback MP3 from MP3 device only.

The Model: BSS-863, MX5540, SP303, PWPBT-250BK, PWPBT-250YL and PWPBT-250OR are the same as the Model: BSS-862 in hardware aspect. The difference in color, cosmetic details, model number and brand name serves as marketing strategy.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

1.2 Related Submittal(s) Grants

This is a single application for certification of a transceiver.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2009). All radiated measurements were performed in an Open Area Test Site. Preliminary scans were performed in the Open Area Test Site only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **“Justification Section”** of this Application.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been placed on file with the FCC.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

**2.0 System Test Configuration****2.1 Justification**

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2009).

The device was powered by 120VAC adaptor and/or eight Size C alkaline battery (1.5V).

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

2.2 EUT Exercising Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

2.3 Special Accessories

(1)AC/DC Adaptor with ferrite
(Model: AS360-120-AA200, Brand: KINGWALL, Input: 100-240VAC 50/60Hz, Output: 12.0VDC 2.0A)

2.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Issuing Laboratory:**Intertek Testing Services Hong Kong Limited**

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

**2.5 Support Equipment List and Description**

- (1) Iphone 5, Model: MD297, FCC ID:BCG-E2599A(Supplied by Intertek)
- (2) Ipod Nano, Model:A1446, FCC ID:BCG-A1446A(Supplied by Intertek)
- (3) USB thumbdrive (Supplied by Intertek)
- (4) SD card (Supplied by Intertek)
- (5) Aux cable with 1meter long (Supplied by Intertek)
- (6) 8xAlkaline battery (1.5V)

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



3.0 Emission Results

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where FS = Field Strength in dB μ V/m

RA = Receiver Amplitude (including preamplifier) in dB μ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where FS = Field Strength in dB μ V/m

RR = RA - AG - AV in dB μ V

LF = CF + AF in dB

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$RA = 52.0 \text{ dB}\mu\text{V}/\text{m}$$

$$AF = 7.4 \text{ dB}$$

$$RR = 18.0 \text{ dB}\mu\text{V}$$

$$CF = 1.6 \text{ dB}$$

$$LF = 9.0 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$AV = 5.0 \text{ dB}$$

$$FS = RR + LF$$

$$FS = 18 + 9 = 27 \text{ dB}\mu\text{V}/\text{m}$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(27 \text{ dB}\mu\text{V}/\text{m})/20] = 22.4 \mu\text{V}/\text{m}$$

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

**3.2 Radiated Emission Configuration Photograph**

The worst case in radiated emission was found at 33.870 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 7.8 dB

3.4 Conducted Emission Configuration Photograph

The worst case in line-conducted emission was found at 0.456 MHz

For electronic filing, the worst case line-conducted configuration photographs are saved with filename: conducted photo.pdf.


3.5 Conducted Emission Data

For electronic filing, the graph and data table of conducted emission is saved with filename: conducted.pdf.

Judgment: Pass by 8.55 dB



Worst-Case Operating Mode: Transmitting (Bluetooth)

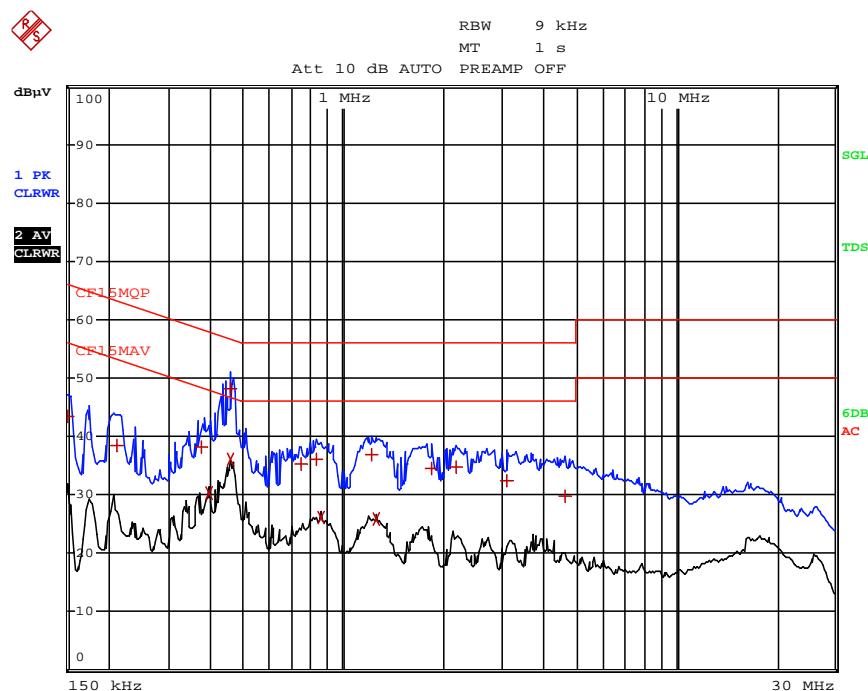

EDIT PEAK LIST (Final Measurement Results)						
TRACE	FREQUENCY	LEVEL	dB μ V	DELTA	LIMIT	dB
1	Quasi Peak 150 kHz	43.40	N	-22.59		
1	Quasi Peak 213 kHz	38.34	N	-24.74		
1	Quasi Peak 379.5 kHz	38.28	L1	-20.00		
2	CISPR Average 393 kHz	30.29	L1	-17.70		
1	Quasi Peak 456 kHz	48.20	L1	-8.55		
2	CISPR Average 456 kHz	36.10	L1	-10.66		
1	Quasi Peak 748.5 kHz	35.33	N	-20.67		
1	Quasi Peak 834 kHz	36.16	L1	-19.83		
2	CISPR Average 856.5 kHz	26.19	L1	-19.80		
1	Quasi Peak 1.221 MHz	36.82	L1	-19.17		
2	CISPR Average 1.2615 MHz	25.94	L1	-20.05		
1	Quasi Peak 1.842 MHz	34.52	L1	-21.47		
1	Quasi Peak 2.1885 MHz	34.86	L1	-21.13		
1	Quasi Peak 3.1065 MHz	32.52	N	-23.47		
1	Quasi Peak 4.65 MHz	29.78	N	-26.22		

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Applicant: Goldsound Electronic Limited

Date of Test: August 20, 2014

Model: BSS-862

Worst-Case Operating Mode: Transmitting (Bluetooth)

Table 1

Radiated Emissions
Pursuant to FCC Part 15 Section 15.249 Requirement

Lowest Channel

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	2402.000	89.1	33	29.4	85.5	24	61.5	94.0	-32.5
V	4804.000	47.6	33	34.9	49.5	24	25.5	54.0	-28.5
V	7206.000	45.1	33	37.9	50.0	24	26.0	54.0	-28.0
V	9608.000	46.1	33	40.4	53.5	24	29.5	54.0	-24.5
V	12010.000	49.4	33	40.5	56.9	24	32.9	54.0	-21.1
V	14412.000	53.4	33	40.0	60.4	24	36.4	54.0	-17.6

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	2402.000	89.1	33	29.4	85.5	114.0	-28.5
V	4804.000	47.6	33	34.9	49.5	74.0	-24.5
V	7206.000	45.1	33	37.9	50.0	74.0	-24.0
V	9608.000	46.1	33	40.4	53.5	74.0	-20.5
V	12010.000	49.4	33	40.5	56.9	74.0	-17.1
V	14412.000	53.4	33	40.0	60.4	74.0	-13.6

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative sign in the column shows value below limit.

4. Horn antenna is used for the emission over 1000MHz.

5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Applicant: Goldsound Electronic Limited

Date of Test: August 20, 2014

Model: BSS-862

Worst-Case Operating Mode: Transmitting (Bluetooth)

Table 2

Radiated Emissions
Pursuant to FCC Part 15 Section 15.249 Requirement

Middle Channel

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	2440.000	88.9	33	29.4	85.3	24	61.3	94.0	-32.7
V	4880.000	48.4	33	34.9	50.3	24	26.3	54.0	-27.7
V	7320.000	45.5	33	37.9	50.4	24	26.4	54.0	-27.6
V	9760.000	46.3	33	40.4	53.7	24	29.7	54.0	-24.3
V	12200.000	49.3	33	40.5	56.8	24	32.8	54.0	-21.2
V	14640.000	55.3	33	38.4	60.7	24	36.7	54.0	-17.3

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	2440.000	88.9	33	29.4	85.3	114.0	-28.7
V	4880.000	48.4	33	34.9	50.3	74.0	-23.7
V	7320.000	45.5	33	37.9	50.4	74.0	-23.6
V	9760.000	46.3	33	40.4	53.7	74.0	-20.3
V	12200.000	49.3	33	40.5	56.8	74.0	-17.2
V	14640.000	55.3	33	38.4	60.7	74.0	-13.3

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Applicant: Goldsound Electronic Limited

Date of Test: August 20, 2014

Model: BSS-862

Worst-Case Operating Mode: Transmitting (Bluetooth)

Table 3

Radiated Emissions
Pursuant to FCC Part 15 Section 15.249 Requirement

Highest Channel

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	2480.000	89.3	33	29.4	85.7	24	61.7	94.0	-32.3
V	4960.000	47.7	33	34.9	49.6	24	25.6	54.0	-28.4
V	7440.000	45.7	33	37.9	50.6	24	26.6	54.0	-27.4
V	9920.000	45.8	33	40.4	53.2	24	29.2	54.0	-24.8
V	12400.000	49.4	33	40.5	56.9	24	32.9	54.0	-21.1
V	14880.000	46.4	33	38.4	51.8	24	27.8	54.0	-26.2

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	2480.000	89.3	33	29.4	85.7	114.0	-28.3
V	4960.000	47.7	33	34.9	49.6	74.0	-24.4
V	7440.000	45.7	33	37.9	50.6	74.0	-23.4
V	9920.000	45.8	33	40.4	53.2	74.0	-20.8
V	12400.000	49.4	33	40.5	56.9	74.0	-17.1
V	14880.000	46.4	33	38.4	51.8	74.0	-22.2

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Applicant: Goldsound Electronic Limited

Date of Test: August 20, 2014

Model: BSS-862

Worst-Case Operating Mode: Transmitting (music play via Bluetooth)

Table 4

**Radiated Emissions
Pursuant to FCC Part 15 Section 15.209 Requirement**

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	33.870	38.2	16	10.0	32.2	40.0	-7.8
V	143.996	30.2	16	14.0	28.2	43.5	-15.3
H	155.996	30.8	16	16.0	30.8	43.5	-12.7
H	179.996	24.7	16	20.0	28.7	43.5	-14.8
H	191.995	30.4	16	16.0	30.4	43.5	-13.1
H	307.200	24.5	16	23.0	31.5	46.0	-14.5
H	528.400	24.0	16	27.0	35.0	46.0	-11.0
H	620.883	22.6	16	29.0	35.6	46.0	-10.4

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

Issuing Laboratory:**Intertek Testing Services Hong Kong Limited**

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

**4.0 Equipment Photographs**

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

5.0 Product Labelling

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

6.0 Technical Specifications

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

7.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

**8.0 Miscellaneous Information**

The miscellaneous information includes details of the test procedure and measured bandwidth / calculation of factor such as pulse desensitization and averaging factor (calculation and timing diagram).

8.1 Radiated Emission on the Bandedge



From the following plots, they show that the fundamental emissions are confined in the specified band (2400MHz to 2483.5MHz). In case of the fundamental emissions are within two standard bandwidths from the bandedge, the delta measurement technique is used for determining bandedge compliance. Standard bandwidth is the bandwidth specified by ANSI C63.4 (2009) for frequency being measured.

Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50dB below the level of the fundamental or to the general radiated emissions limits in Section 15.209, whichever is the lesser attenuation, which meet the requirement of part 15.249(d).

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HOKLAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

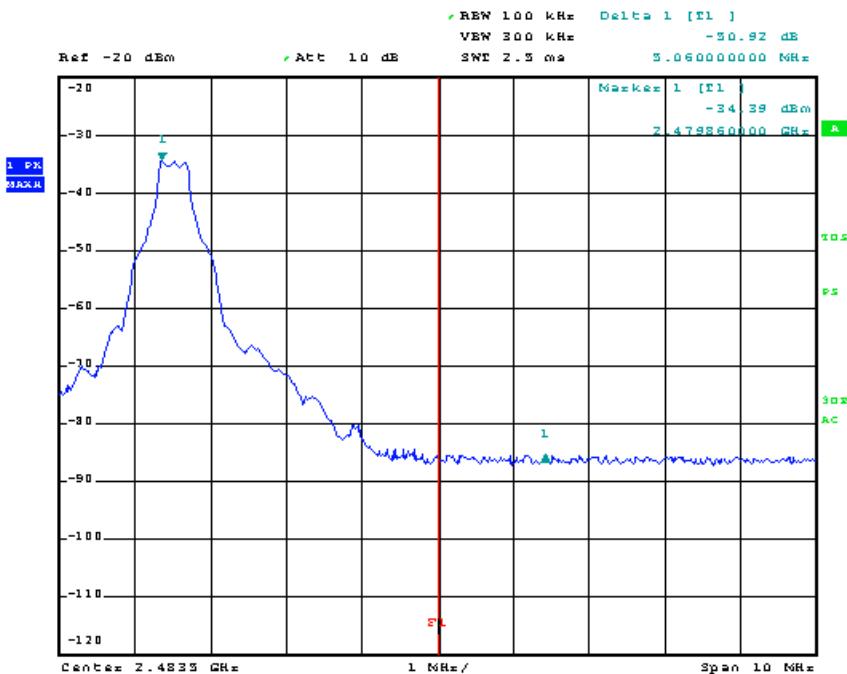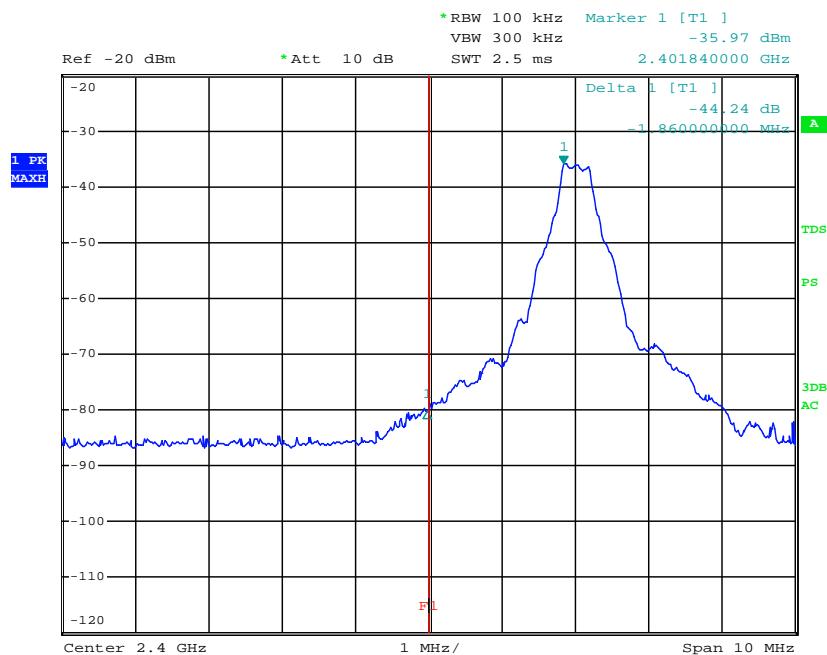

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

**Peak Measurement**

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

$$\begin{aligned} &= 85.5 \text{ dB}\mu\text{V/m} - 44.2 \text{ dB} \\ &= 41.3 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

$$\begin{aligned} &= 61.5 \text{ dB}\mu\text{V/m} - 44.2 \text{ dB} \\ &= 17.3 \text{ dB}\mu\text{V/m} \end{aligned}$$

Upper bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

$$\begin{aligned} &= 85.7 \text{ dB}\mu\text{V/m} - 34.4 \text{ dB} \\ &= 51.3 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

$$\begin{aligned} &= 61.7 \text{ dB}\mu\text{V/m} - 34.4 \text{ dB} \\ &= 27.3 \text{ dB}\mu\text{V/m} \end{aligned}$$

The resultant field strength meets the general radiated emission limit in Section 15.209, which does not exceed 74 dB μ V/m (Peak Limit) and 54 dB μ V/m (Average Limit).

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period (Teff) is approximately 0.625ms for a digital “1” bit which illustrated on technical specification, with a resolution bandwidth (3dB) of 1MHz, so the pulse desensitivity factor is 0dB.

8.3 Calculation of Average Factor

Based on the Bluetooth Specification Version 3.0 + EDR, the transmitter ON time for each timeslot of Bluetooth is 625 μ s. DH5 has the maximum duty cycle, which consists of 5 continuous Tx slots and 1 Rx slot. Therefore one hopset take $(5+1) \times 625\mu\text{s} = 3.75\text{ms}$. For one period for a pseudo-random hopping through at least 20 RF channels in adaptive mode (worse case), it take: $20 \times 3.75\text{ms} = 75\text{ms}$.

The dwell time for DH5 is $5 \times 625\mu\text{s} = 3.125\text{ms}$.

For the worst case calculation, there are two transmissions might occur in 100ms. Therefore,

$$\begin{aligned}\text{Duty Cycle (DC)} &= \text{Maximum On time in 100ms/100ms} \\ &= 3.125\text{ms} \times 2/100\text{ms} \\ &= 0.0625\end{aligned}$$

$$\begin{aligned}\text{Average Factor (AF) of Bluetooth in dB} &= 20 \log_{10} (0.0625) \\ &= -24 \text{ dB}\end{aligned}$$

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately one meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower. For line conducted emissions, the range scanned is 150 kHz to 30 MHz.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

**8.4 Emissions Test Procedures (cont'd)**

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.4 (2009).

The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 1 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.

Issuing Laboratory:

Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.

**10.0 Equipment List****1) Radiated Emissions Test**

Equipment	EMI Test Receiver	Biconical Antenna	Log Periodic Antenna
Registration No.	EW-2666	EW-0571	EW-0572
Manufacturer	R&S	EMCO	EMCO
Model No.	ESCI7	3104C	3146
Calibration Date	Jun. 20, 2013	Nov. 01, 2013	Jun. 26, 2013
Calibration Due Date	Sep. 20, 2014	May 01, 2015	Dec. 26, 2014

Equipment	Spectrum Analyzer	Pyramidal Horn Antenna	Double Ridged Guide Antenna
Registration No.	EW-2253	EW-0905	EW-1015
Manufacturer	R&S	EMCO	EMCO
Model No.	FSP40	3160-09	3115
Calibration Date	May 08, 2014	Jan. 28, 2014	Mar. 05, 2013
Calibration Due Date	May 08, 2015	Jul. 28, 2015	Sep. 05, 2014

2) Conducted Emissions Test

Equipment	EMI Test Receiver	LISN
Registration No.	EW-2251	EW-2501
Manufacturer	R&S	R&S
Model No.	ESCI	ENV-216
Calibration Date	Nov. 20, 2013	Dec. 25, 2013
Calibration Due Date	Nov. 20, 2014	Nov. 30, 2014

3) Bandedge Measurement

Equipment	Spectrum Analyzer
Registration No.	EW-2329
Manufacturer	R&S
Model No.	FSP3
Calibration Date	Jun. 19, 2014
Calibration Due Date	Jun. 19, 2015

END OF TEST REPORT