

No.198 Kezhu Road, Science Town Economic& Technology Development

District Guangzhou, China 510663

Telephone: +86 (0) 20 8215 5555 Fax: +86 (0) 20 8207 5059

Email: sgs_internet_operations@sgs.com

Report No.: SZEMO081206244RFF

Page: 1 of 67 FCC ID: RR7BT-060

TEST REPORT

Application No: SZEMO081206244RF

Applicant/ Manufacturer/

Factory: Great Well Electronic Limited

FCC ID: RR7BT-060

Fundamental Carrier

Frequency: 2.402GHz to 2.480GHz

Equipment Under Test (EUT):

Name: Bluetooth Mono Headset

Model: BT-060

Standards: FCC PART 15 Subpart C: 2008

Date of Receipt: 19 December 2008

Date of Test: 19 December to 08 January 2009

Date of Issue: 20 January 2009

Test Result : PASS *

* In the configuration tested, the EUT detailed in this report complied with the standards specified above. Please refer to section 2 of this report for further detail.

Authorized Signature:

Robinson Lo Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEMO081206244RFF

Page: 2 of 67 FCC ID: RR7BT-060

2 Test Summary

Test	Test Requirement	Standard Paragraph	Result
Antenna Requirement	FCC PART 15 :2008	Section 15.247 (c)	PASS
Conducted Emission	FCC PART 15 :2008	Section 15.207	PASS
Occupied Bandwidth	FCC PART 15 :2008	Section 15.247 (a1)	PASS
Carrier Frequencies Separated	FCC PART 15 :2008	Section 15.247(a)(1)	PASS
Hopping Channel Number	FCC PART 15 :2008	Section 15.247(a)(1)(iii)	PASS
Dwell Time	FCC PART 15 :2008	Section 15.247(a)(1)(iii)	PASS
Pseudorandom Frequency Hopping Sequence	FCC PART 15 :2008	Section 15.247(a)(1)	PASS
Maximum Peak Output Power	FCC PART 15 :2008	Section 15.247(b)(1)	PASS
RF Exposure Compliance	FCC PART 15 :2008	15.247(b)(4)& TCB Exclusion List	D4.00
Requirement		(7 July 2002)	PASS
Radiated Emission	FCC PART 15 :2008	Section 15.209, 15.247(d)&15.205	PASS*

Remark: 1.The EUT was tested installing fully charged batteries



Report No.: SZEMO081206244RFF

Page: 3 of 67 FCC ID: RR7BT-060

3 Contents

		Page
1	COVER PAGE	1
2	TEST SUMMARY	2
3	CONTENTS	3
4		
7		
	4.1 CLIENT INFORMATION	
	4.2 GENERAL DESCRIPTION OF E.U.T.4.3 DESCRIPTION OF SUPPORT UNITS.	
	4.4 STANDARDS APPLICABLE FOR TESTING	
	4.5 TEST LOCATION	
	4.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	4.7 Test Facility	
5	EQUIPMENTS USED DURING TEST	6
6		
	6.1 E.U.T. TEST CONDITIONS	7
	6.2 Antenna Requirement	
	6.2.1 Standard requirement	
	6.2.2 EUT Antenna	
	6.3 CONDUCTED EMISSIONS AT MAINS TERMINALS 150 KHZ TO 30MHZ	
	6.4 OCCUPIED BANDWIDTH	
	6.5 CARRIER FREQUENCIES SEPARATED	
	6.6 HOPPING CHANNEL NUMBER	
	6.8 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	
	6.8.1 Standard requirement	
	6.8.2 EUT Pseudorandom Frequency Hopping Sequence	
	6.9 MAXIMUM PEAK OUTPUT POWER	
	6.10 RF Exposure Compliance Requirement	
	6.10.1 Standard requirement	
	6.10.2 EUT RF Exposure	
	6.11 BAND EDGE	
	6.12 RADIATED EMISSIONS	
	6.12.2 Transmitter emission above 1GHz	

FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 4 of 67 FCC ID: RR7BT-060

4 General Information

4.1 Client Information

Applicant/ Manufacturer/ Great Well Electronic Limited

Factory:

Address of Applicant: The Third Industrial Area Guanlan Town Shenzhen 518110 China

4.2 General Description of E.U.T

Product Name: Bluetooth Mono Headset

Model: BT-060

Number of Channels 79 Channels

Channel Separation 1 MHz

Type of Modulation FHSS (Frequency Hopping Spread Spectrum);

Adaptive Frequency Hopping (AFH) is used.

Dwell time Per channel is less than 0.4s.

Antenna Type Integral

Power Supply: Input: AC 100-240V 50/60Hz 0.15A

Output: DC 5.0V 300mA

4.3 Description of Support Units

The EUT was tested independently

4.4 Standards Applicable for Testing

The customer requested FCC tests for the EUT.

The standard used was FCC PART 15 Subpart C: 2007. ANSI C63.4:2003.and DA 00-705.

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory. No.198 Kezhu Road, Science Town Economic& Technology Development District Guangzhou. China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

4.6 Other Information Requested by the Customer

None.

FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 5 of 67 FCC ID: RR7BT-060

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

NVLAP – Lab Code: 200611-0

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

• FCC – Registration No.: 282399

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399. May 31. 2002. With the above and NVLAP's accreditation. SGS-CSTC is an authorized test laboratory for the DoC process.



Report No.: SZEMO081206244RFF

Page: 6 of 67 FCC ID: RR7BT-060

5 Equipments Used during Test

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	16-06-2007	15-06-2009
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	12-12-2008	11-12-2009
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A
4	Coaxial cable	SGS	N/A	SEL0028	18-06-2008	17-06-2009
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0014	12-08-2008	11-08-2009
6	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	18-06-2008	17-06-2009
7	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0005	12-08-2008	11-08-2009
8	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	12-08-2008	11-08-2009
9	Pre-amplifier (1-18GHz)	Rohde & Schwarz	AFS42-00101 800-25-S-42	SEL0081	18-06-2008	17-06-2009
10	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33- 18002650-30- 8P-44	SEL0080	18-06-2008	17-06-2009
11	Band filter	Amindeon	82346	SEL0094	18-06-2008	17-06-2009
12	Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	15-06-2008	14-06-2009

	Conducted Emission									
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)				
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	N/A	N/A				
2	LISN	ETS-LINDGREN	3816/2	SEL0021	18-06-2008	17-06-2009				
3	ISN	Rohde & Schwarz	ENY 22 1109	EMC0114	18-06-2008	17-06-2009				
4	ISN	Rohde & Schwarz	ENY 41 1110	EMC0115	18-06-2008	17-06-2009				
5	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	18-06-2008	17-06-2009				
6	Coaxial Cable	SGS	N/A	SEL0024	18-06-2008	17-06-2009				

FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 7 of 67 FCC ID: RR7BT-060

6 Test Results

6.1 E.U.T. test conditions

Operating Environment:

Temperature: 24.0 °C
Humidity: 50 % RH
Atmospheric Pressure: 1010 mbar

Test frequencies: According to the 15.31(m) Measurements on intentional radiators or

receivers, other than TV broadcast receivers, shall be performed and. if required. reported for each band in which the device can be operated with the device operating at the number of frequencies in

each band specified in the following table:

Frequency range over which device operates frequencies of operation

1 MHz or less 1 Middle 1 to 10 MHz 2 1 near top and 1 near bottom

More than 10 MHz 3 1 near top. 1 near middle and 1 near bottom

Test frequency is the lowest channel: 0 channel(2402MHz), middle channel: 38 channel(2441MHz) and highest channel: 78 channel(2480MHz)

6.2 Antenna Requirement

6.2.1 Standard requirement

15.203 requirement:

For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

6.2.2 EUT Antenna

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2dBi.

Test result: The unit does meet the FCC requirements.

FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 8 of 67 FCC ID: RR7BT-060

6.3 Conducted Emissions at Mains Terminals 150 kHz to 30MHz

Test Requirement: FCC Part 15.207
Test Method: ANSI C63.4:2003
Frequency Range: 150KHz to 30MHz

Detector: RBW=9KHz VBW=30KHz


Quasi-Peak if maximised peak within 6dB of Quasi-Peak limit

EUT Operation: Test the EUT in Bluetooth mode and charging mode

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Plan View of Test Setup

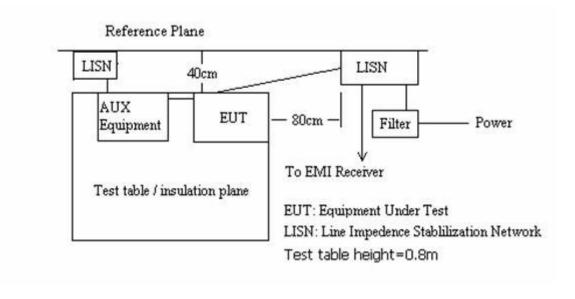

FCC ID: RR7BT-060




Report No.: SZEMO081206244RFF

Page: 9 of 67 FCC ID: RR7BT-060

Bluetooth mode

live line:

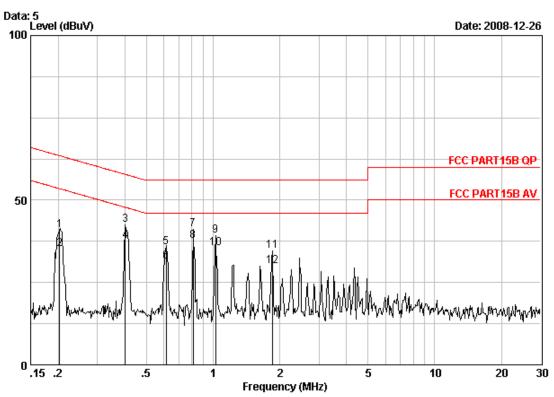

Site : Shielding Room

Condition : FCC PART1SB QP CE LINE EUT : Bluetooth Mono Headset

Job No. : 6244RF Test mode : Bluetooth

est mu	de Diletoria	Freq MHz	Cable Loss dB	LISN Factor dB	Read Level dBuV	Level dBuV	Limit Line dBuV	Over Limit ———————————————————————————————————	Remark
1		0.20289	0.04	-0.04	40.96	40.96	63.49	-22.53	QP
2		0.20289	0.04	-0.04	35.21	35.21	53.49	-18.29	Average
3		0.40187	0.06	-0.04	42.42	42.44	57.81	-15.38	QP
4		0.40187	0.06	-0.04	37.48	37.49	47.81	-10.32	Average
5		0.61400	0.06	-0.05	35.80	35.81	56.00	-20.19	QP
6		0.61400	0.06	-0.05	31.20	31.21	46.00	-14.79	Average
7		0.81305	0.07	-0.05	41.19	41.21	56.00	-14.79	QP
8	0	0.81305	0.07	-0.05	37.49	37.51	46.00	-8.49	Average
9		1.027	0.08	-0.05	39.16	39.20	56.00	-16.80	QP
10		1.027	0.08	-0.05	35.27	35.30	46.00	-10.70	Average
11		1.848	0.11	-0.06	34.59	34.65	56.00	-21.35	QP
12		1.848	0.11	-0.06	30.02	30.07	46.00	-15.93	Average


FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 10 of 67 FCC ID: RR7BT-060

Neutral line:

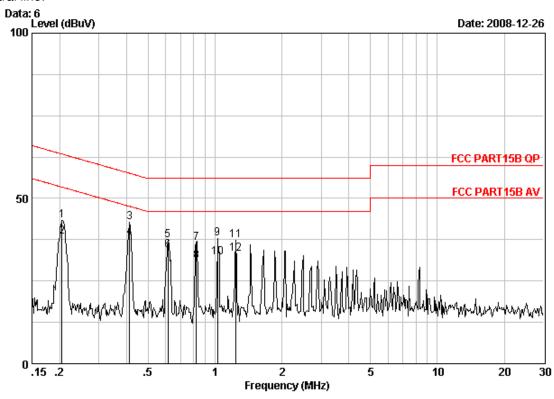

Site : Shielding Room

Condition : FCC PART15B QP CE NEUTRAL

EUT : Bluetooth Mono Headset

Job No. : 6244RF Test mode : Bluetooth

Test flowe . Bluetooth	Freq MHz	Cable Loss dB	LISN Factor dB	Read Level	Level	Limit Line dBuV	Over Limit	Remark
1	0.20505	0.04	-0.04	43.33	43.33	63.40	-20.08	QP
2	0.20505	0.04	-0.04	38.52	38.52	53.40	-14.88	Average
3	0.41266	0.06	-0.04	42.76	42.78	57.59	-14.81	QP
4 @	0.41266	0.06	-0.04	38.16	38.18	47.59	-9.42	Average
5	0.61400	0.06	-0.04	37.43	37.45	56.00	-18.55	QP
6	0.61400	0.06	-0.04	34.20	34.22	46.00	-11.78	Average
7	0.82172	0.07	-0.04	36.36	36.39	56.00	-19.61	QP
8	0.82172	0.07	-0.04	31.05	31.08	46.00	-14.92	Average
9	1.027	0.08	-0.05	37.74	37.77	56.00	-18.23	QP
10	1.027	0.08	-0.05	32.15	32.19	46.00	-13.81	Average
11	1.242	0.09	-0.05	37.26	37.30	56.00	-18.70	QP
12	1.242	0.09	-0.05	33.12	33.16	46.00	-12.84	Average

FCC ID: RR7BT-060




Report No.: SZEMO081206244RFF

Page: 11 of 67 FCC ID: RR7BT-060

Charge mode:

live line:

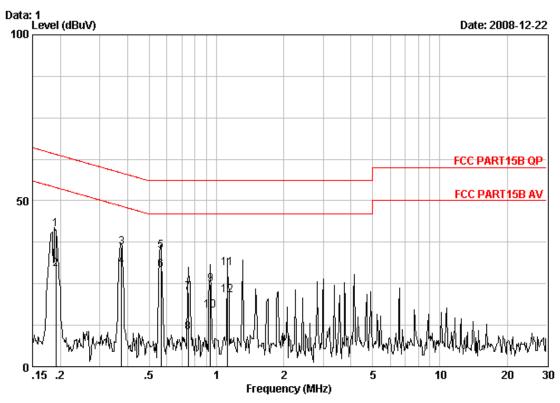

Site : Shielding Room

Condition : FCC PART15B QP CE LINE EUT : Bluetooth Mono Headset

Job No. : 6244RF Test mode : Charge

rest mode . Charge								
		Cable	LISN	Read		Limit	Over	
	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.19039	0.04	-0.05	41.32	41.31	64.02	-22.71	QP
2	0.19039	0.04	-0.05	29.47	29.46	54.02	-24.56	AVERAGE
3	0.37512	0.05	-0.04	35.98	35.99	58.39	-22.40	QP
4	0.37512	0.05	-0.04	30.36	30.37	48.39	-18.01	AVERAGE
5	0.56409	0.06	-0.04	34.82	34.84	56.00	-21.16	QP
6	0.56409	0.06	-0.04	29.24	29.26	46.00	-16.74	AVERAGE
7	0.74697	0.06	-0.05	22.28	22.30	56.00	-33.70	QP
8	0.74697	0.06	-0.05	10.47	10.48	46.00	-35.52	AVERAGE
9	0.93810	0.08	-0.05	24.80	24.82	56.00	-31.18	QP
10	0.93810	0.08	-0.05	16.85	16.87	46.00	-29.13	AVERAGE
11	1.117	0.09	-0.05	29.58	29.62	56.00	-26.38	QP
12	1.117	0.09	-0.05	21.58	21.62	46.00	-24.38	AVERAGE


FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 12 of 67 FCC ID: RR7BT-060

Neutral line:

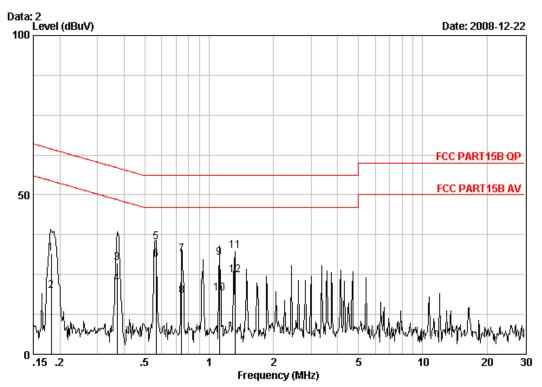

Site : Shielding Room

Condition : FCC PART15B QP CE NEUTRAL

EUT : Bluetooth Mono Headset

Job No. : 6244RF Test mode : Charge

est mode		Freq MHz	Cable Loss dB	LISN Factor ————————————————————————————————————	Read Level dBuV	Level	Limit Line dBuV	Over Limit	Remark
1	0.	18249	0.04	-0.04	31.49	31.48	64.37	-32.89	QP
2	0.	18249	0.04	-0.04	19.92	19.92	54.37	-34.46	AVERAGE
3	0.	37117	0.05	-0.04	28.68	28.69	58.47	-29.78	QP
4	0.	37117	0.05	-0.04	22.00	22.01	48.47	-26.46	AVERAGE
5	0.	56409	0.06	-0.04	35.24	35.26	56.00	-20.74	QP
6 0	0.	56409	0.06	-0.04	29.64	29.66	46.00	-16.34	AVERAGE
7	0.	74302	0.06	-0.04	31.35	31.37	56.00	-24.63	QP
8	0.	74302	0.06	-0.04	18.37	18.39	46.00	-27.61	AVERAGE
9		1.117	0.09	-0.05	30.18	30.22	56.00	-25.78	QP
10		1.117	0.09	-0.05	18.99	19.03	46.00	-26.97	AVERAGE
11		1.320	0.10	-0.05	32.40	32.44	56.00	-23.56	QP
12		1.320	0.10	-0.05	24.70	24.74	46.00	-21.26	Average

Remark: Level = Real Level + Cable loss + LISN factor

TEST RESULTS: The unit does meet the FCC requirements

FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 13 of 67 FCC ID: RR7BT-060

6.4 Occupied Bandwidth

Test Requirement: FCC 15.247(a)

Test Method: ANSI C63.4:2003 & DA 00-705

Test Status: Test in fixing operating frequency at lowest, Middle, highest channel.

Test Procedure:

The Transmitter output of EUT was connected to the spectrum analyzer. The 20 dB bandwidth of the fundamental frequency was measured. The setting of spectrum analyzer is as follows;

Equipment Mode Spectrum Analyzer

Detector Function Peak Mode

RBW 30KHz

VBW 100KHz

Test result: 20dB Bandwidth

	GFSK mode	
Lowest Frequency 2.402GHz	Middle Frequency 2.441GHz	Highest Frequency 2.480GHz
796 KHz	792 KHz	796 KHz
	PI/4QPSK mode	
Lowest Frequency 2.402GHz	Middle Frequency 2.441GHz	Highest Frequency 2.480GHz
1.210MHz	1.216 MHz	1.220 MHz
	8DPSK mode	
Lowest Frequency 2.402GHz	Middle Frequency 2.441GHz	Highest Frequency 2.480GHz
1.204 MHz	1.200 MHz	1.204 MHz




Report No.: SZEMO081206244RFF

Page: 14 of 67 FCC ID: RR7BT-060

Result plot as follows:


1. Lowest Channel:

GFSK mode:

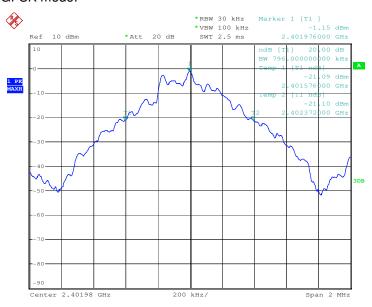

Date: 6.JAN.2009 11:45:42

PI/4QPSK mode:

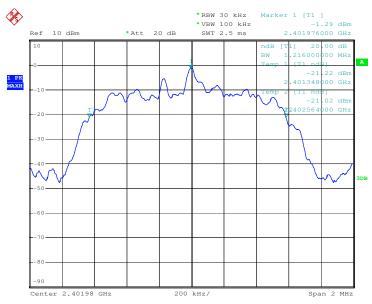

Date: 6.JAN.2009 09:48:28

FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 15 of 67 FCC ID: RR7BT-060

8DPSK mode:



Date: 6.JAN.2009 13:07:20

2. Middle Channel:

Date: 29.DEC.2008 14:10:59


FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF


Page: 16 of 67 FCC ID: RR7BT-060

PI/4QPSK mode:

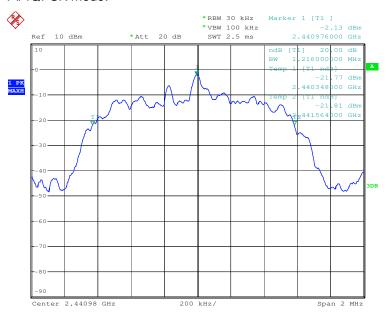

Date: 6.JAN.2009 10:04:10

8DPSK mode:

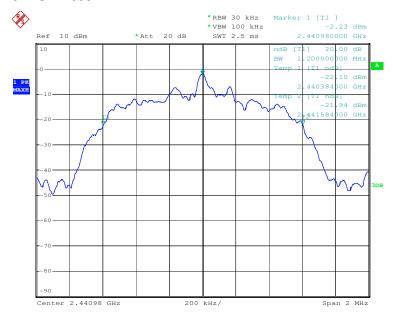

Date: 6.JAN.2009 13:10:50


FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 17 of 67 FCC ID: RR7BT-060

3. Highest Channel:

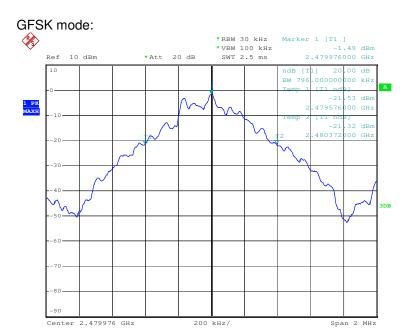

Date: 29.DEC.2008 14:21:57

PI/4QPSK mode:



Date: 6.JAN.2009 10:18:23


FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 18 of 67 FCC ID: RR7BT-060

8DPSK mode:

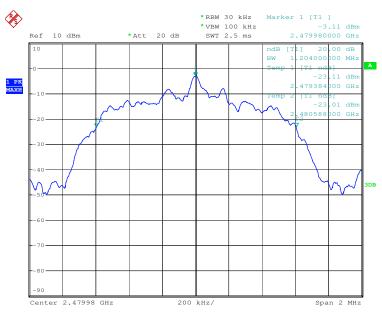

Date: 6.JAN.2009 13:17:23

Test result: The unit does meet the FCC requirements.

FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 19 of 67 FCC ID: RR7BT-060

6.5 Carrier Frequencies Separated

Test Requirement: FCC 15.247(a)

Test Method: ANSI C63.4:2003 & DA 00-705

Test requirements: Regulation 15.247(a),(1) Frequency hopping systems shall have hopping

channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater

than 125 mW.

Test Status: Test in hopping transmitting operating mode.

Test Procedure:

1. Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.

Equipment mode: Spectrum analyzer

Equipment Mode	Spectrum Analyzer
Detector Function	Peak Mode
RBW	100KHz
VBW	300KHz

- 2. By using the Max-Hold function record the separation of two adjacent channels.
- 3. Measure the frequency difference of these two adjacent channels by spectrum analyzer Marker function.
- 4. Repeat above procedures until all frequencies measured were complete.



Report No.: SZEMO081206244RFF

Page: 20 of 67 FCC ID: RR7BT-060

Test result:

Lowest channel: (2.402 GHz)

	Test mode							
	GFSK	PI/4QPSK	8DPSK					
Carrier Frequencies separated	1.004MHz	1.000MHz	1.002MHz					

Middle channel: (2.441GHz)


	Test mode							
	GFSK	PI/4QPSK	8DPSK					
Carrier Frequencies separated	1.004MHz	1.004MHz	1.004MHz					

Highest channel: (2.480GHz)

	Test mode		
	GFSK	PI/4QPSK	8DPSK
Carrier Frequencies separated	1.004MHz	1.008MHz	1.008MHz

1. Lowest Channel:



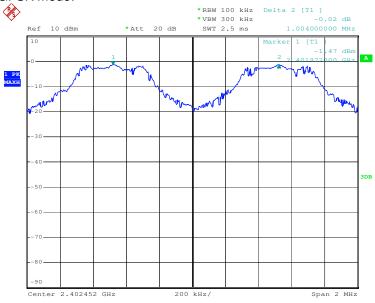

Date: 29.DEC.2008 14:33:24


FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF


Page: 21 of 67 FCC ID: RR7BT-060

PI/4QPSK mode:

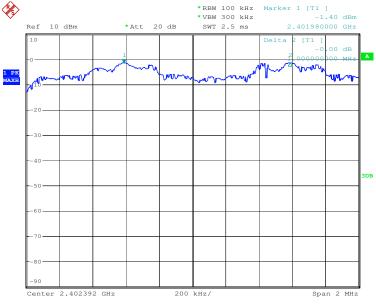

Date: 6.JAN.2009 10:57:11

8DPSK mode:

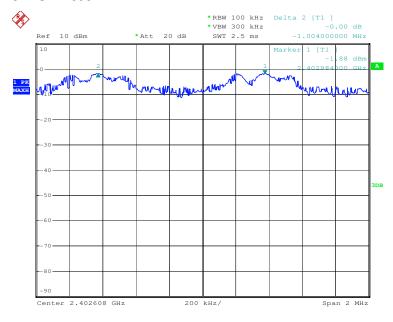

Date: 6.JAN.2009 13:57:58


FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF


Page: 22 of 67 FCC ID: RR7BT-060

2. Middle Channel:

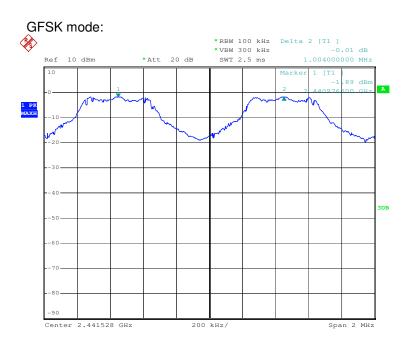

Date: 29.DEC.2008 14:37:03

PI/4QPSK mode:

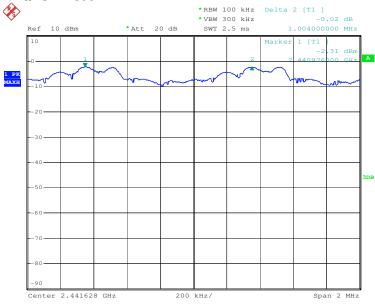

Date: 6.JAN.2009 10:45:00


FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 23 of 67 FCC ID: RR7BT-060

8DPSK mode:

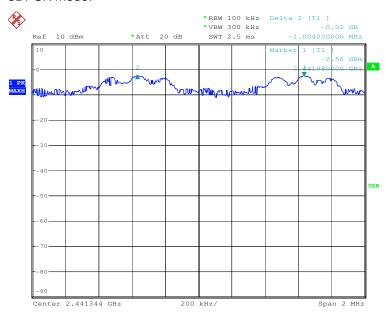

Date: 6.JAN.2009 14:06:44

3. Highest Channel:

Date: 29.DEC.2008 14:43:34


FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF


Page: 24 of 67 FCC ID: RR7BT-060

PI/4QPSK mode:

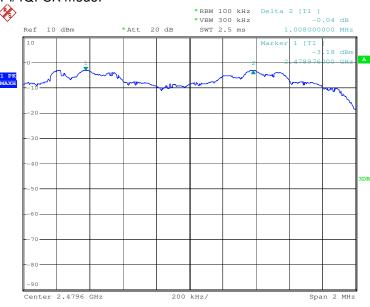

Date: 6.JAN.2009 10:52:09

8DPSK mode:

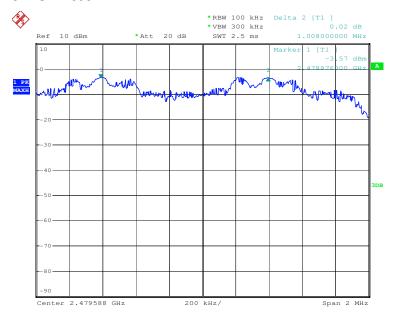

Date: 6.JAN.2009 14:17:31

Test result: The unit does meet the FCC requirements.

FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 25 of 67 FCC ID: RR7BT-060

6.6 Hopping Channel Number

Test Requirement: FCC 15.247(a)

Test Method: ANSI C63.4:2003 15.247 & DA 00-705

Regulation 15.247 (a) (1)(iii) Frequency hopping systems in the 2400-

2483.5 MHz band shall use at least 15 channels.

Test Status: Test in hopping transmitting operating mode.

Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.

- 2. Set the spectrum analyzer: RBW = 100 kHz. VBW = 100 kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
- Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
- 4. Set the spectrum analyzer: start frequency = 2400MHz. stop frequency = 2483.5MHz. Submit the test result graph.

Test result: Total channels are 79 channels.

Hopping channel numbers

GFSK mode:

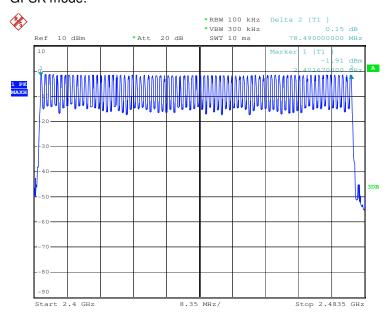

Date: 29.DEC.2008 14:28:41


FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF


Page: 26 of 67 FCC ID: RR7BT-060

PI/4QPSK mode:

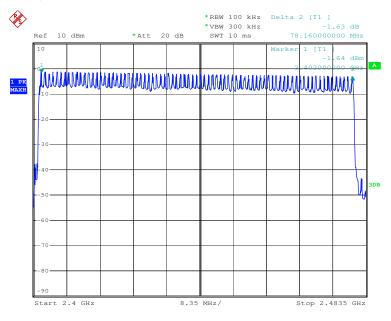

Date: 6.JAN.2009 10:30:52

8DPSK mode:

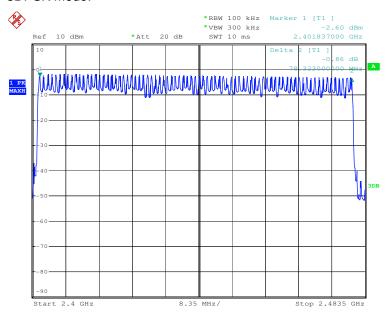

Date: 6.JAN.2009 13:49:38

Test result: The unit does meet the FCC requirements.

FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 27 of 67 FCC ID: RR7BT-060

6.7 Dwell Time

Test Requirement: FCC 15.247(a)

Test Method: ANSI C63.4:2003 & DA 00-705

Test requirements: Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-

2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a

minimum of 15 channels are used.

Test Status: Test in hopping transmitting operating mode.

Test Procedure:

1. Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.

Equipment mode: spectrum analyzer, detector function: Peak RBW=1MHz, VBW=1MHz, Span=zero.

2. Adjust the center frequency of spectrum analyzer on any frequency be measured.

3. Measure the Dwell Time by spectrum analyzer Marker function.

4. Repeat above procedures until all frequencies measured were complete.

Test Result:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

GFSK mode:

1. Lowest channel: (2.402GHz)

DH1 time slot=0.555(ms)*(1600/ (2*79))*31.6=177.6 ms

DH3 time slot=1.82(ms)*(1600/ (4*79))*31.6=284.8 ms

DH5 time slot=3.08(ms)*(1600/ (6*79))*31.6=328.53ms

2. Middle channel: (2.441GHz)

DH1 time slot=0.55(ms)*(1600/ (2*79))*31.6=176 ms

DH3 time slot=1.82(ms)*(1600/ (4*79))*31.6=284.8 ms

DH5 time slot=3.1(ms)*(1600/ (6*79))*31.6=330.7ms

3. Highest channel: (2.480GHz)

DH1 time slot=0.555(ms)*(1600/(2*79))*31.6=177.6ms

DH3 time slot=1.82(ms)*(1600/ (4*79))*31.6=284.8ms

DH5 time slot=3.10(ms)*(1600/ (6*79))*31.6=330.7ms

FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 28 of 67 FCC ID: RR7BT-060

PI-4QPSK mode:

- 1. Lowest channel: (2.402GHz)
 - 3-DH1 time slot=0.57(ms)*(1600/ (2*79))*31.6=182.4ms
 - 3-DH3 time slot=1.83(ms)*(1600/ (4*79))*31.6=292.8ms
 - 3-DH5 time slot=1.88(ms)*(1600/ (6*79))*31.6=200.5ms
- 2. Middle channel: (2.441GHz)
 - 3-DH1 time slot=0.575(ms)*(1600/ (2*79))*31.6=184.0ms
 - 3-DH3 time slot=1.84(ms)*(1600/ (4*79))*31.6=294.4ms
 - 3-DH5 time slot=1.88(ms)*(1600/ (6*79))*31.6=200.5ms
- 3. Highest channel: (2.480GHz)
 - 3-DH1 time slot=0.575(ms)*(1600/(2*79))*31.6=184.0ms
 - 3-DH3 time slot=1.83(ms)*(1600/ (4*79))*31.6=292.8ms
 - 3-DH5 time slot=1.89(ms)*(1600/ (6*79))*31.6=201.6ms

8DPSK mode:

- 1. Lowest channel: (2.402GHz)
 - 3-DH1 time slot=0.57(ms)*(1600/ (2*79))*31.6=182.4ms
 - 3-DH3 time slot=1.84(ms)*(1600/ (4*79))*31.6=294.4ms
 - 3-DH5 time slot=3.12(ms)*(1600/ (6*79))*31.6=332.8ms
- 2. Middle channel: (2.441GHz)
 - 3-DH1 time slot=0.575(ms)*(1600/(2*79))*31.6=184.0ms
 - 3-DH3 time slot=1.84(ms)*(1600/ (4*79))*31.6=294.4ms
 - 3-DH5 time slot=3.12(ms)*(1600/ (6*79))*31.6=332.8ms
- 3. Highest channel: (2.480GHz)
 - 3-DH1 time slot=0.57(ms)*(1600/ (2*79))*31.6=182.4ms
 - 3-DH3 time slot=1.83(ms)*(1600/ (4*79))*31.6=292.8ms
 - 3-DH5 time slot=3.12(ms)*(1600/ (6*79))*31.6=332.8ms

The results are not greater than 0.4 seconds.

The unit does meet the FCC requirements.

FCC ID: RR7BT-060




Report No.: SZEMO081206244RFF

Page: 29 of 67 FCC ID: RR7BT-060


Please refer the graph as below:

GFSK mode

1. Lowest channel (2.402 GHz):

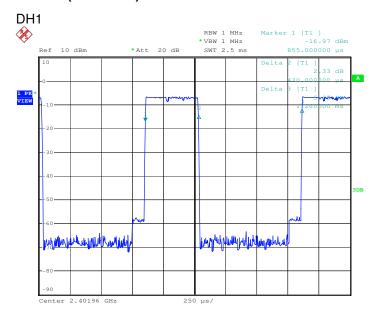

Date: 16.SEP.2008 14:18:25

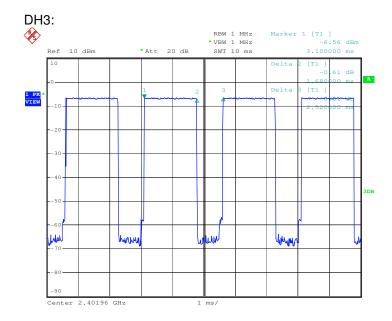


Date: 16.SEP.2008 14:19:41

FCC ID: RR7BT-060




Report No.: SZEMO081206244RFF

Page: 30 of 67 FCC ID: RR7BT-060

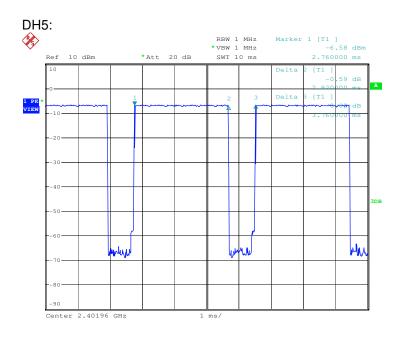

Date: 16.SEP.2008 14:20:27

2. Middle channel (2.441 GHz):

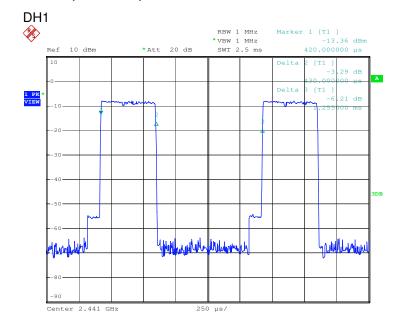


Date: 16.SEP.2008 15:34:12

FCC ID: RR7BT-060




Report No.: SZEMO081206244RFF

Page: 31 of 67 FCC ID: RR7BT-060

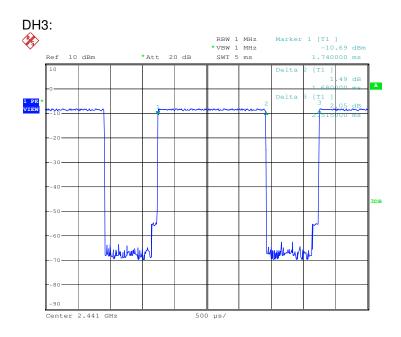

Date: 16.SEP.2008 15:35:16

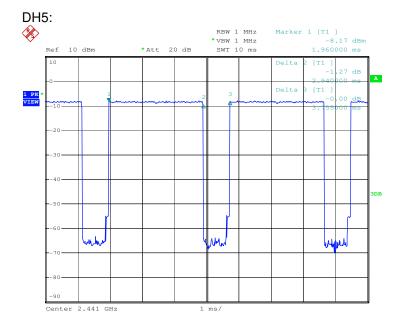

Date: 16.SEP.2008 15:36:02


FCC ID: RR7BT-060




Report No.: SZEMO081206244RFF

Page: 32 of 67 FCC ID: RR7BT-060

3. Highest channel (2.480 GHz):

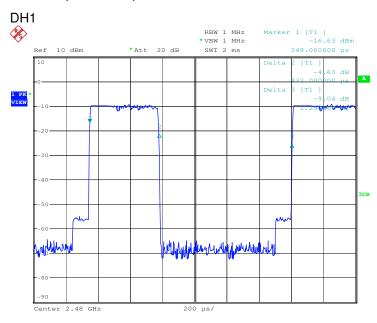

Date: 16.SEP.2008 15:38:23

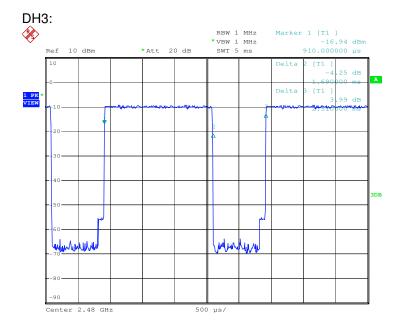


Date: 16.SEP.2008 15:39:14

FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 33 of 67 FCC ID: RR7BT-060

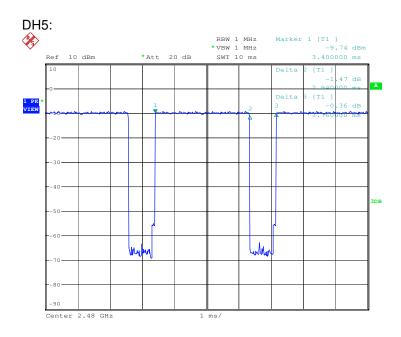

Date: 16.SEP.2008 15:39:59

FCC ID: RR7BT-060




Report No.: SZEMO081206244RFF


Page: 34 of 67 FCC ID: RR7BT-060

PI-4QPSK mode

1. Lowest channel (2.402 GHz):

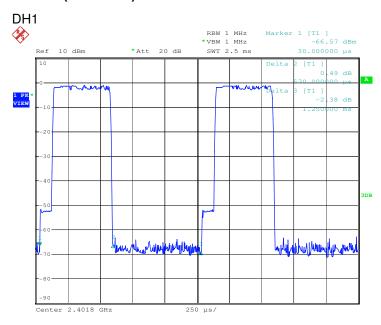

Date: 6.JAN.2009 09:47:22

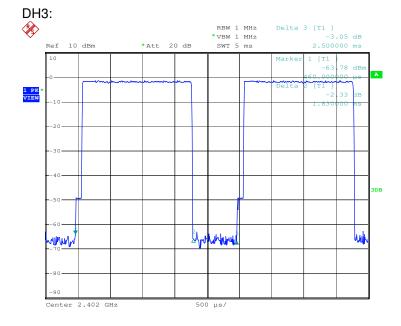


Date: 6.JAN.2009 20:55:41

FCC ID: RR7BT-060




Report No.: SZEMO081206244RFF

Page: 35 of 67 FCC ID: RR7BT-060

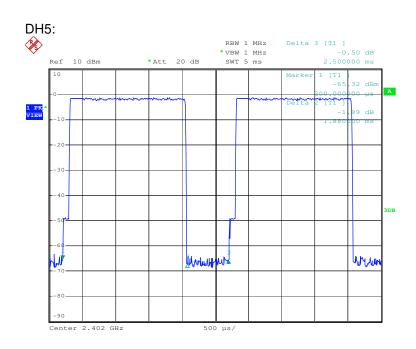

Date: 6.JAN.2009 20:56:41

2. Middle channel (2.441 GHz):

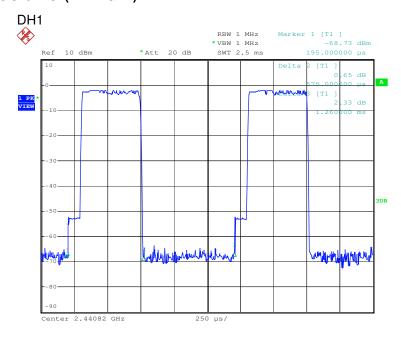


Date: 6.JAN.2009 10:02:37

FCC ID: RR7BT-060




Report No.: SZEMO081206244RFF

Page: 36 of 67 FCC ID: RR7BT-060

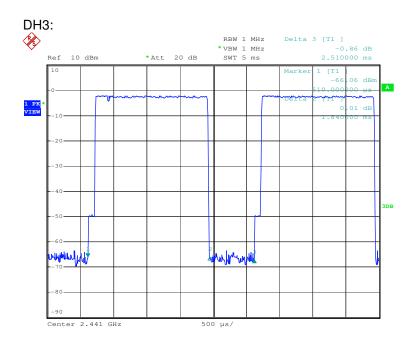

Date: 6.JAN.2009 20:54:28

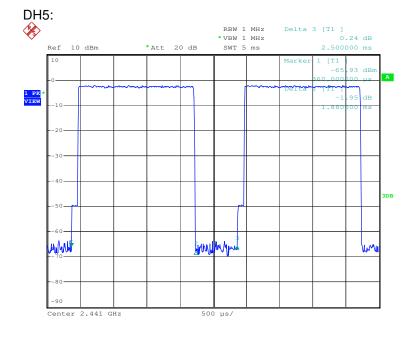

Date: 6.JAN.2009 20:57:31


FCC ID: RR7BT-060




Report No.: SZEMO081206244RFF

Page: 37 of 67 FCC ID: RR7BT-060

3. Highest channel (2.480 GHz):

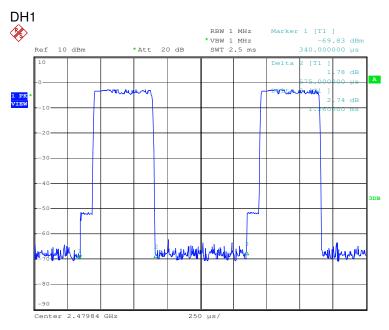

Date: 6.JAN.2009 10:16:53

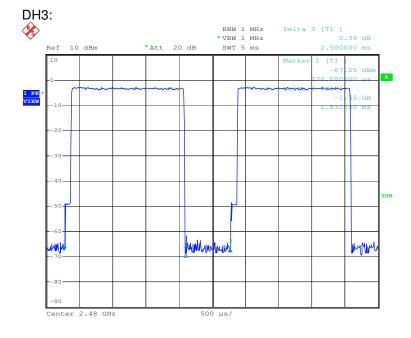


Date: 6.JAN.2009 20:52:53

FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 38 of 67 FCC ID: RR7BT-060

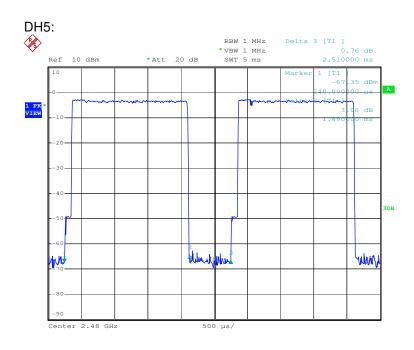

Date: 6.JAN.2009 22:21:32




Report No.: SZEMO081206244RFF


Page: 39 of 67 FCC ID: RR7BT-060

8DPSK mode

1. Lowest channel (2.402 GHz):

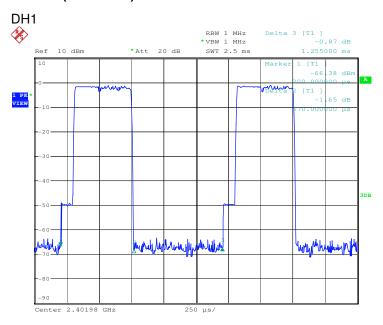

Date: 6.JAN.2009 12:59:59

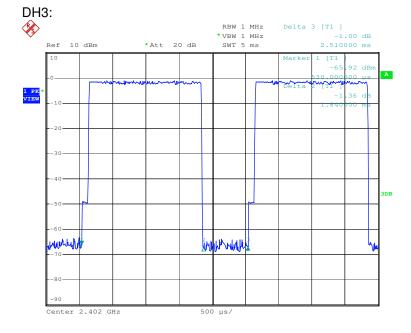


Date: 6.JAN.2009 21:02:31

FCC ID: RR7BT-060




Report No.: SZEMO081206244RFF

Page: 40 of 67 FCC ID: RR7BT-060

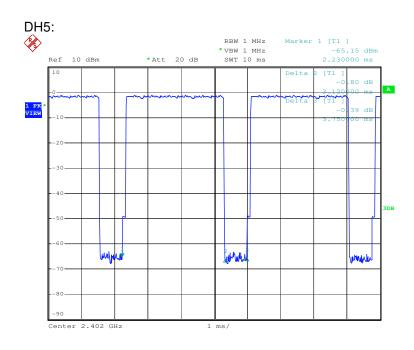

Date: 6.JAN.2009 21:05:52

2. Middle channel (2.441 GHz):

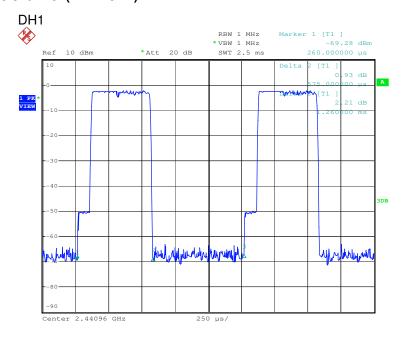


Date: 6.JAN.2009 13:09:36

FCC ID: RR7BT-060




Report No.: SZEMO081206244RFF

Page: 41 of 67 FCC ID: RR7BT-060

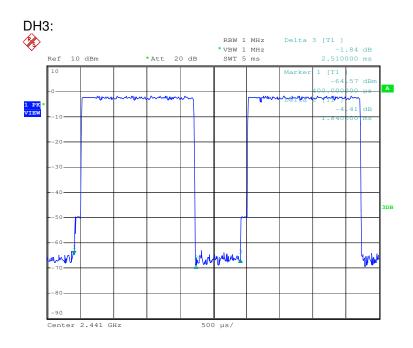

Date: 6.JAN.2009 21:01:41

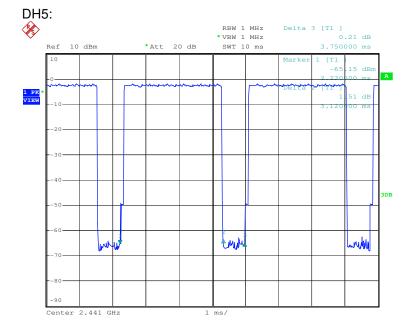

Date: 6.JAN.2009 21:06:42


FCC ID: RR7BT-060




Report No.: SZEMO081206244RFF

Page: 42 of 67 FCC ID: RR7BT-060

3. Highest channel (2.480 GHz):

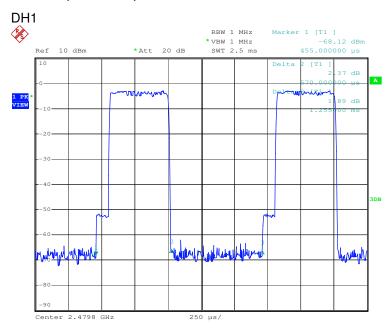

Date: 6.JAN.2009 13:15:58

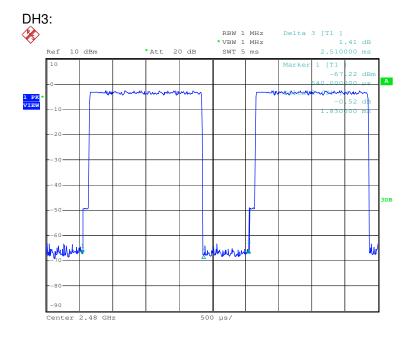


Date: 6.JAN.2009 21:00:35

FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 43 of 67 FCC ID: RR7BT-060

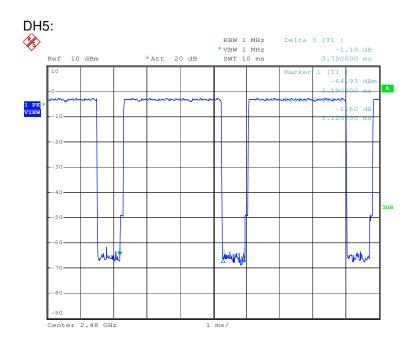

Date: 6.JAN.2009 21:07:20

FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 44 of 67 FCC ID: RR7BT-060

6.8 Pseudorandom Frequency Hopping Sequence

6.8.1 Standard requirement


15.247(a)(1) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

6.8.2 EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- · Number of shift register stages: 9
- Length of pseudo-random sequence: 2⁹-1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



Report No.: SZEMO081206244RFF

Page: 45 of 67 FCC ID: RR7BT-060

6.9 Maximum Peak Output Power

Test Requirement: FCC Part 15.247 & DA 00-705

Test Method: ANSI C63.4:2003 & DA 00-705

Test Limit: Regulation 15.247 (b)(1)For frequency hopping systems operating in

the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in


the 2400-2483.5 MHz band: 0.125 watts.

Refer to the result "Hopping channel number" of this document. The 1

watt (30.0dBm) limit applies.

Test mode: Test in GFSK mode, PI/4PI/4QPSK mode, and 8DPSK mode

Test Configuration:



Test Procedure:

- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2. Set the spectrum analyzer: RBW = 3 MHz. VBW = 10 MHz. Sweep = auto; Detector Function = Peak.
- 3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.



Report No.: SZEMO081206244RFF

Page: 46 of 67 FCC ID: RR7BT-060

Test Result:

Lowest channel: (2.402GHz)

20 WOOK ONG MICHOLOGY										
Test Mode	Reading Power (dBm)	Cable Loss (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)					
GFSK mode	-1.14	1.2	0.06	30.00	30.06					
PI/4QPSK mode	-1.38	1.2	-0.18	30.00	30.18					
8DPSK mode	-1.54	1.2	-0.34	30.00	30.34					

Middle channel; (2.441GHz)

Test Mode	Reading Power (dBm)	Cable Loss (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)
GFSK mode	-1.38	1.2	-0.18	30.00	30.18
PI/4QPSK mode	-2.27	1.2	-1.07	30.00	31.07
8DPSK mode	-1.99	1.2	-0.79	30.00	30.79

Highest channel: (2.480GHz)

Test Mode	Reading Power (dBm)	Cable Loss (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)
GFSK mode	-1.54	1.2	-0.34	30.00	30.34
PI/4QPSK mode	-2.21	1.2	-1.01	30.00	31.01
8DPSK mode	-1.96	1.2	-0.76	30.00	30.76

Test result: The unit does meet the FCC requirements.

Test result plot as follows:



Report No.: SZEMO081206244RFF

Page: 47 of 67 FCC ID: RR7BT-060

1. Lowest Channel: (2.402GHz)



Date: 20.JAN.2009 14:49:54

PI/4QPSK mode:



Date: 20.JAN.2009 14:56:15

FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 48 of 67 FCC ID: RR7BT-060






Date: 20.JAN.2009 14:58:42

2. Middle Channel: (2.441GHz)

GFSK mode:

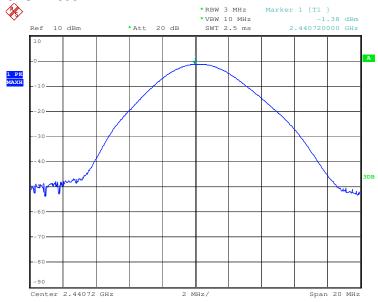

Date: 20.JAN.2009 14:51:38


FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF


Page: 49 of 67 FCC ID: RR7BT-060

PI/4QPSK mode:

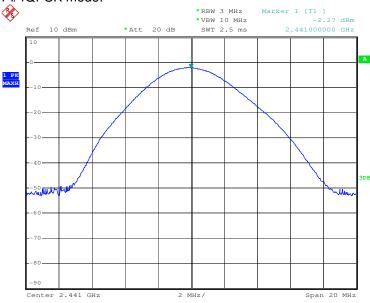

Date: 20.JAN.2009 14:56:56

8DPSK mode:

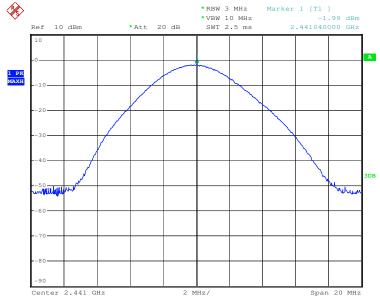

Date: 20.JAN.2009 14:58:20

FCC ID: RR7BT-060




Report No.: SZEMO081206244RFF

Page: 50 of 67 FCC ID: RR7BT-060


3. Highest Channel: (2.480GHz)

GFSK mode:

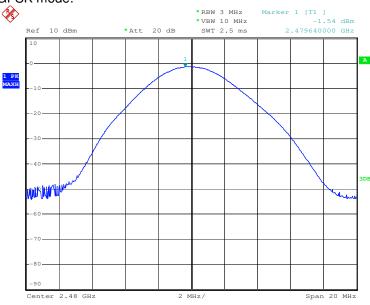

Date: 20.JAN.2009 14:52:02

PI/4QPSK mode:

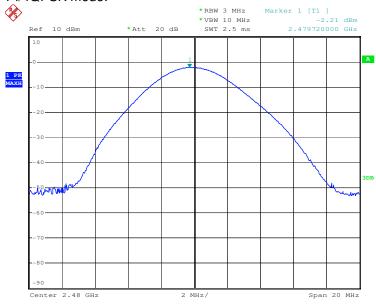

Date: 20.JAN.2009 14:57:21


FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 51 of 67 FCC ID: RR7BT-060

8DPSK mode:

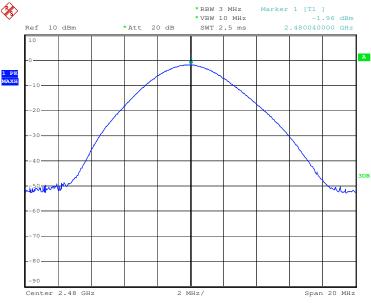

Date: 20.JAN.2009 14:58:01



Report No.: SZEMO081206244RFF

Page: 52 of 67 FCC ID: RR7BT-060

6.10 RF Exposure Compliance Requirement

6.10.1 Standard requirement

15.247(b)(4) requirement:

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section. if transmitting antennas of directional gain greater than 6 dBi are used. the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1). (b)(2). and (b)(3) of this section. as appropriate. by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TCB Exclusion List (7 July 2002)

Exposure category	low threshold	high threshold		
general population	(60/fGHz) mW. d < 2.5 cm (120/fGHz) mW. d ≥ 2.5 cm	(900/fGHz) mW. d < 20 cm		
occupational	(375/fGHz) mW. d < 2.5 cm (900/fGHz) mW. d ≥ 2.5 cm	(2250/fGHz) mW. d < 20 cm		

6.10.2 EUT RF Exposure

The Max Conducted Peak Output Power is **-0.17dBm(0.962mW)** in Lowest channel (2.402GHz);

The best case gain of the antenna is 2dBi.

2dB logarithmic terms convert to numeric result is nearly 1.58

According to the formula. calculate the EIRP test result:

EIRP= P x G = $0.962 \text{ mW} \times 1.58 = 1.51996 \text{mW}$ ①

SAR requirement:

S = 60 / f(GHz) = 60/2.402 = 24.98 mW ②;

(1) < (2).

So the SAR report is not required.



Report No.: SZEMO081206244RFF

Page: 53 of 67 FCC ID: RR7BT-060

6.11 Band edge

Test Requirement: FCC 15.247(d)

Test Method: ANSI C63.4:2003 & DA 00-705

Test Status: Test lowest channel, highest channel.

Test site: The transmitter output is connected to spectrum analyzer. The resolution

bandwidth is set to 100KHz. The video bandwidth is set to 300KHz.

Limit: 15.247(d)In any 100 kHz bandwidth outside the frequency band in which

the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF

conducted or a radiated measurement.




Report No.: SZEMO081206244RFF

Page: 54 of 67 FCC ID: RR7BT-060

Out-OFF-band spurious emissions-conducted measurement:


1. The lowest channel (2402MHz)

GFSK mode:

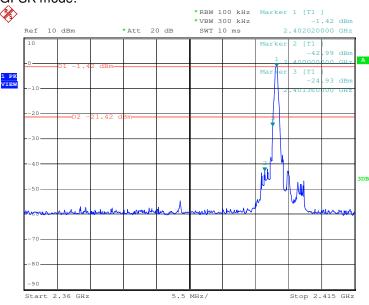

Date: 29.DEC.2008 14:01:30

PI/4QPSK mode:

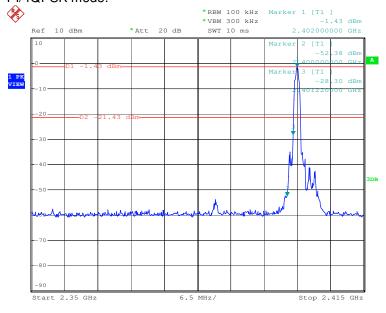

Date: 6.JAN.2009 09:52:04


FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 55 of 67 FCC ID: RR7BT-060


8DPSK mode:

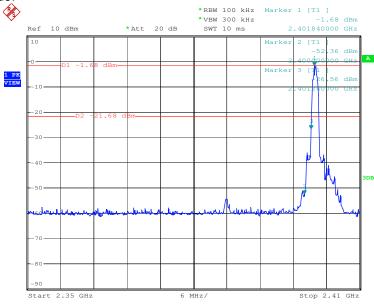

Date: 6.JAN.2009 13:02:45

2. The highest channel (2480MHz)

GFSK mode:

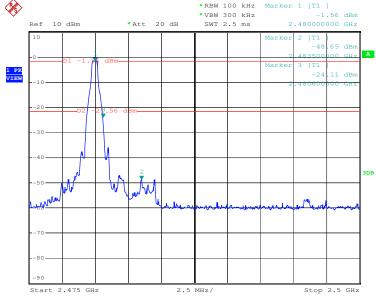

Date: 29.DEC.2008 14:21:07


FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF


Page: 56 of 67 FCC ID: RR7BT-060

PI/4QPSK mode:

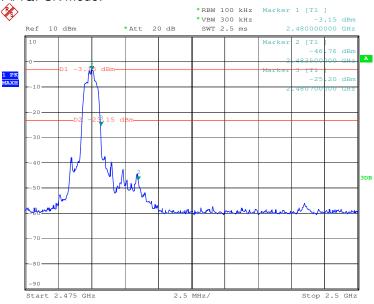

Date: 6.JAN.2009 10:22:22

8DPSK mode:

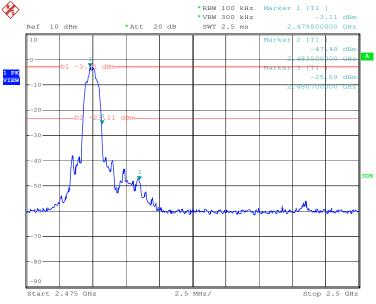

Date: 6.JAN.2009 13:21:18


FCC ID: RR7BT-060





Report No.: SZEMO081206244RFF

Page: 57 of 67 FCC ID: RR7BT-060

Hopping Mode

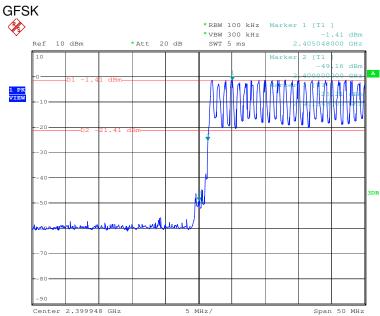



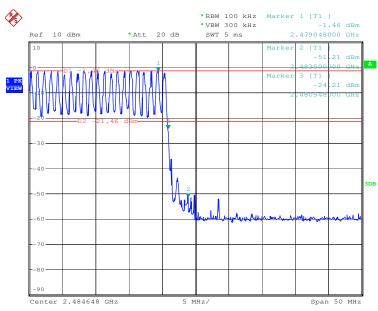

Date: 29.DEC.2008 16:52:33


FCC ID: RR7BT-060




Report No.: SZEMO081206244RFF

Page: 58 of 67 FCC ID: RR7BT-060



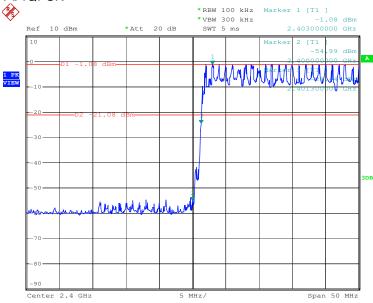

Date: 6.JAN.2009 14:32:18

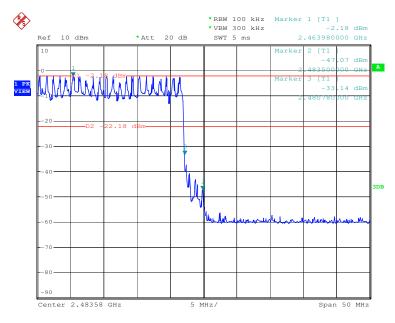


Date: 6.JAN.2009 14:29:21


FCC ID: RR7BT-060




Report No.: SZEMO081206244RFF

Page: 59 of 67 FCC ID: RR7BT-060

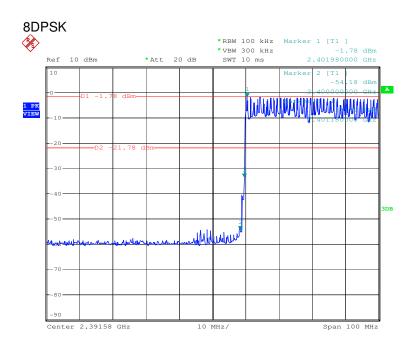



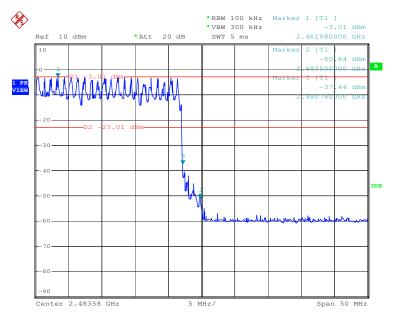

Date: 6.JAN.2009 14:25:44

FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 60 of 67 FCC ID: RR7BT-060

6.12 Radiated Emissions

Test Requirement: 15.247(d),15.209 & 15.205

Test Method: ANSI C63.4:2003 & DA 00-705

Test Status: Test lowest channel, Middle, highest channel.

Test site: Measurement Distance: 3m (Semi-Anechoic Chamber)

Teat Model GFSK

Test Range 30MHz to 25GHz

30MHz-1000MHz: RBW=100KHz, VBW=300KHz

Above 1GHz: PK RBW=1MHz, VBW=3MHz

Average RBW=1MHz, VBW=10Hz

15.209 Limit: 40.0 dBµV/m between 30MHz & 88MHz

 $43.5 \text{ dB}\mu\text{V/m}$ between 88MHz & 216MHz

 $46.0 \text{ dB}\mu\text{V/m}$ between 216MHz & 960MHz

above 960MHz: Average value Limit 54.0 dB μ V/m

Peak value Limit 74.0 dBµV/m.

Test Configuration:

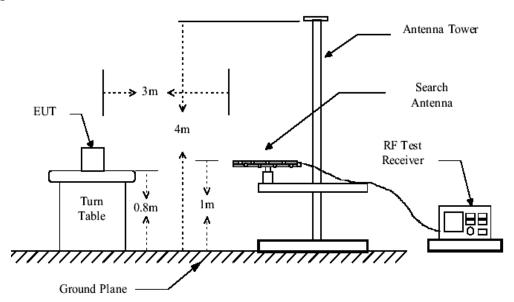


Figure 1. 30MHz to 1GHz radiated emissions test configuration

FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 61 of 67 FCC ID: RR7BT-060

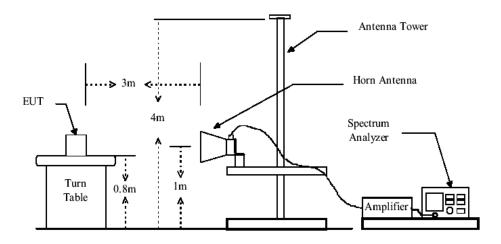


Figure 2. Above 1GHz radiated emissions test configuration

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Repeat above procedures until the measurements for all frequencies are complete.
- 7 The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.
- 8 Pre-scan GFSK, 1/4QPSK, 8DPSK, found GFSK is worst case.



Report No.: SZEMO081206244RFF

Page: 62 of 67 FCC ID: RR7BT-060

6.12.1 Radiated emission below 1GHz

Test in Bluetooth mode.

Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
32.910	0.60	13.91	28.16	25.25	11.60	40.00	-28.40
91.110	1.11	8.76	27.94	24.52	6.45	43.50	-37.05
332.640	2.01	15.01	26.97	24.31	14.36	46.00	-31.64
672.140	2.85	21.32	27.37	26.35	23.15	46.00	-22.85
899.120	3.60	23.20	26.43	24.16	24.53	46.00	-21.47
980.600	3.68	24.09	26.44	24.30	25.63	54.00	-28.37

Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
33.880	0.60	13.47	28.15	25.17	11.09	40.00	-28.91
149.310	1.32	8.91	27.46	32.70	15.47	43.50	-28.03
284.140	1.83	13.21	26.78	24.48	12.74	46.00	-33.26
640.130	2.78	20.56	27.48	26.46	22.32	46.00	-23.68
836.070	3.35	22.40	26.75	24.98	23.98	46.00	-22.02
934.040	3.63	23.30	26.43	26.65	27.15	46.00	-18.85



Report No.: SZEMO081206244RFF

Page: 63 of 67 FCC ID: RR7BT-060

Test in charging mode.

Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
32.910	0.60	13.91	28.16	31.93	18.28	40.00	-21.72
55.220	0.80	7.56	28.08	34.69	14.97	40.00	-25.03
98.870	1.19	9.06	27.89	33.46	15.82	43.50	-27.68
149.310	1.32	8.91	27.46	29.34	12.11	43.50	-31.39
469.410	2.48	17.61	27.63	24.84	17.30	46.00	-28.70
903.000	3.60	23.21	26.43	24.58	24.96	46.00	-21.04

Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
34.850	0.60	13.05	28.14	24.69	10.20	40.00	-29.80
149.310	1.32	8.91	27.46	32.61	15.38	43.50	-28.12
419.940	2.29	16.38	27.47	24.26	15.46	46.00	-30.54
621.700	2.75	20.37	27.53	25.79	21.38	46.00	-24.62
780.780	3.15	22.02	27.00	25.79	23.96	46.00	-22.04
881.660	3.53	23.06	26.51	24.03	24.11	46.00	-21.89



Report No.: SZEMO081206244RFF

Page: 64 of 67 FCC ID: RR7BT-060

6.12.2 Transmitter emission above 1GHz

The lowest channel (2.402GHz)

Peak Measurement

		•			1			
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4859	6.63	34.03	45.41	53.28	48.53	74.00	-25.47	Vertical
7239	7.62	36.25	44.48	50.09	49.48	74.00	-24.52	Vertical
9738	8.62	37.08	42.09	48.64	52.25	74.00	-21.75	Vertical
12067	10.12	38.84	43.40	50.24	55.80	74.00	-18.20	Vertical
4825	6.62	34.03	45.40	51.90	47.15	74.00	-26.85	Horizontal
7273	7.61	36.21	44.44	52.24	51.62	74.00	-22.38	Horizontal
9687	8.58	37.06	42.14	48.59	52.09	74.00	-21.91	Horizontal
12220	10.17	38.93	43.59	49.60	55.11	74.00	-18.89	Horizontal

Average Measurement

7 Wordge Wedst								
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over limit	Polarization
4825	6.62	34.03	45.40	38.66	33.91	54.00	-20.09	Vertical
7188	7.65	36.36	44.53	37.74	37.22	54.00	-16.78	Vertical
9585	8.50	36.97	42.23	35.80	39.04	54.00	-14.96	Vertical
12509	10.29	39.10	43.95	36.92	42.36	54.00	-11.64	Vertical
4825	6.62	34.03	45.40	38.70	33.95	54.00	-20.05	Horizontal
7273	7.61	36.21	44.44	37.78	37.16	54.00	-16.84	Horizontal
9772	8.65	37.12	42.06	35.75	39.46	54.00	-14.54	Horizontal
12611	10.48	39.12	44.08	37.07	42.59	54.00	-11.41	Horizontal



Report No.: SZEMO081206244RFF

Page: 65 of 67 FCC ID: RR7BT-060

The middle channel (2.441GHz)

Peak Measurement

reak ivieasui	CITICITE							
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over limit	Polarization
4876	6.64	34.02	45.42	52.79	48.03	74.00	-25.97	Vertical
7307	7.59	36.14	44.41	52.36	51.68	74.00	-22.32	Vertical
9857	8.72	37.19	41.98	49.74	53.67	74.00	-20.33	Vertical
12713	10.67	39.15	44.21	48.90	54.51	74.00	-19.49	Vertical
4876	6.64	34.02	45.42	52.65	47.89	74.00	-26.11	Horizontal
7273	7.61	36.21	44.44	52.24	51.62	74.00	-22.38	Horizontal
9891	8.75	37.21	41.95	48.69	52.70	74.00	-21.30	Horizontal
12067	10.12	38.84	43.40	49.72	55.28	74.00	-18.72	Horizontal

Average Measurement

Average ivie	asurement							
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over limit	Polarization
4723	6.57	34.05	45.37	38.68	33.93	54.00	-20.07	Vertical
7324	7.58	36.10	44.39	37.84	37.13	54.00	-16.87	Vertical
9738	8.62	37.08	42.09	35.83	39.44	54.00	-14.56	Vertical
12611	10.48	39.12	44.08	37.07	42.59	54.00	-11.41	Vertical
4893	6.65	34.02	45.42	38.74	33.99	54.00	-20.01	Horizontal
7392	7.55	35.99	44.32	37.89	37.11	54.00	-16.89	Horizontal
9891	8.75	37.21	41.95	35.93	39.94	54.00	-14.06	Horizontal
12968	11.15	39.20	44.53	37.04	42.86	54.00	-11.14	Horizontal



Report No.: SZEMO081206244RFF

Page: 66 of 67 FCC ID: RR7BT-060

The highest channel (2.480GHz)

Peak Measurement

oak woadard								
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Over limit	Polarization
4978	6.68	34.01	45.45	50.88	46.12	74.00	-27.88	Vertical
7426	7.53	35.91	44.28	50.97	50.13	74.00	-23.87	Vertical
9925	8.77	37.23	41.92	49.74	53.82	74.00	-20.18	Vertical
12033	10.11	38.82	43.35	49.28	54.86	74.00	-19.14	Vertical
4842	6.62	34.03	45.41	51.75	46.99	74.00	-27.01	Horizontal
7307	7.59	36.14	44.41	52.54	51.86	74.00	-22.14	Horizontal
9891	8.75	37.21	41.95	48.69	52.70	74.00	-21.30	Horizontal
12968	11.15	39.20	44.53	50.00	55.82	74.00	-18.18	Horizontal

Average Measurement

Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over limit	Polarization
4910	6.65	34.02	45.43	38.74	33.98	54.00	-20.02	Vertical
7477	7.51	35.84	44.23	37.71	36.83	54.00	-17.17	Vertical
9857	8.72	37.19	41.98	35.87	39.80	54.00	-14.20	Vertical
12764	10.77	39.15	44.27	36.98	42.63	54.00	-11.37	Vertical
4808	6.61	34.04	45.40	38.70	33.95	54.00	-20.05	Horizontal
7307	7.59	36.14	44.41	37.85	37.17	54.00	-16.83	Horizontal
9891	8.75	37.21	41.95	35.93	39.94	54.00	-14.06	Horizontal
12424	10.24	39.06	43.85	36.95	42.40	54.00	-11.60	Horizontal

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor.

Remark: No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

FCC ID: RR7BT-060



Report No.: SZEMO081206244RFF

Page: 67 of 67 FCC ID: RR7BT-060

Remark:

- 1). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
- 2). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.
- 3) For this intentional radiator operates below 25 GHz. The spectrum shall be investigated to the tenth harmonic of the highest fundamental frequency. And above the third harmonic of this intentional radiator, the disturbance is very low. So the test result only displays to 4th harmonic.

Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section. only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz	
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15	
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46	
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75	
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5	
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2	
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5	
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7	
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4	
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5	
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2	
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4	
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12	
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0	
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8	
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5	
12.57675 - 12.57725	240 - 285	3600 - 4400		
13.36 - 13.41	322 - 335.4			

Test result: The unit does meet the FCC requirements.

FCC ID: RR7BT-060