



FCC TEST REPORT

REPORT NO.: 070117FIA01

MODEL NO.: GW-GPS-009 / GW-GPS-005

RECEIVED: Jan. 25, 2007

TESTED: Jan. 25 ~ Feb. 7, 2007

ISSUED: Feb. 9, 2007

APPLICANT: GREAT WELL ELECTRONIC LIMITED

ADDRESS: Industrial Area Gangtou chenwu Village Guanlan
Road Guanlan Town Baoan District Shenzhen City

ISSUED BY: ADT (Shanghai) Corporation

ADDRESS: 2F, Building C, No.1618, Yishan Rd., 201103,
Shanghai, China

This test report consists of 58 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards. This report contains data that were produced under Laboratory ADT (Shanghai) Corporation.

ADT (Shanghai) Corporation.



V 1.0



TABLE OF CONTENTS

1.	CERTIFICATION	5
2.	SUMMARY OF TEST RESULTS.....	6
2.1	MEASUREMENT UNCERTAINTY	7
3.	GENERAL INFORMATION	8
3.1	GENERAL DESCRIPTION OF EUT	8
3.2	DESCRIPTION OF TEST MODES.....	9
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	10
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.2.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	13
3.2.4	DESCRIPTION OF SUPPORT UNITS	13
4.	TEST TYPES AND RESULTS.....	14
4.1	RADIATED EMISSION MEASUREMENT	14
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	14
4.1.2	TEST INSTRUMENTS	15
4.1.3	TEST PROCEDURES	16
4.1.4	DEVIATION FROM TEST STANDARD	16
4.1.5	TEST SETUP	17
4.1.6	EUT OPERATING CONDITIONS	17
4.1.7	TEST RESULTS	18
4.2	NUMBER OF HOPPING FREQUENCY USED	34
4.2.1	LIMIT OF HOPPING FREQUENCY USED	34
4.2.2	TEST INSTRUMENTS	34
4.2.3	TEST PROCEDURES	34
4.2.4	DEVIATION FROM TEST STANDARD	34
4.2.5	TEST SETUP	35
4.2.6	EUT OPERATING CONDITIONS	35
4.2.7	TEST RESULTS	36



4.3	DWELL TIME ON EACH CHANNEL	37
4.3.1	LIMIT OF DWELL TIME USED	37
4.3.2	TEST INSTRUMENTS	37
4.3.3	TEST PROCEDURES	37
4.3.4	DEVIATION FROM TEST STANDARD	38
4.3.5	TEST SETUP	38
4.3.6	EUT OPERATING CONDITIONS	38
4.3.7	TEST RESULTS	39
4.4	CHANNEL BANDWIDTH	43
4.4.1	LIMITS OF CHANNEL BANDWIDTH	43
4.4.2	TEST INSTRUMENTS	43
4.4.3	TEST PROCEDURE	43
4.4.4	DEVIATION FROM TEST STANDARD	43
4.4.5	TEST SETUP	44
4.4.6	EUT OPERATING CONDITION	44
4.4.7	TEST RESULTS	45
4.5	HOPPING CHANNEL SEPARATION	47
4.5.1	LIMIT OF HOPPING CHANNEL SEPARATION	47
4.5.2	TEST INSTRUMENTS	47
4.5.3	TEST PROCEDURES	47
4.5.4	DEVIATION FROM TEST STANDARD	47
4.5.5	TEST SETUP	48
4.5.6	EUT OPERATING CONDITIONS	48
4.5.7	TEST RESULTS	49
4.6	MAXIMUM PEAK OUTPUT POWER	51
4.6.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	51
4.6.2	TEST INSTRUMENTS	51
4.6.3	TEST PROCEDURES	51
4.6.4	DEVIATION FROM TEST STANDARD	52
4.6.5	TEST SETUP	52
4.6.6	EUT OPERATING CONDITION	52
4.6.7	TEST RESULTS	53



4.7	BAND EDGES MEASUREMENT	54
4.7.1	LIMITS OF BAND EDGES MEASUREMENT	54
4.7.2	TEST INSTRUMENTS	54
4.7.3	TEST PROCEDURE	54
4.7.4	DEVIATION FROM TEST STANDARD	54
4.7.5	EUT OPERATING CONDITION	54
4.7.6	TEST RESULTS	55
4.8	ANTENNA REQUIREMENT	56
4.8.1	STANDARD APPLICABLE	56
4.8.2	ANTENNA CONNECTED CONSTRUCTION	56
5.	INFORMATION ON THE TESTING LABORATORY	57
APPENDIX-A.....		A-1



1. CERTIFICATION

PRODUCT: Bluetooth GPS
MODEL NO.: GW-GPS-009 / GW-GPS-005
APPLICANT: GREAT WELL ELECTRONIC LIMITED
TESTED: Jan. 25 ~ Feb. 7, 2007
TEST ITEM: Engineering Sample
STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

We, **ADT (Shanghai) Corporation**, declare that the equipment above has been tested in our facility and found compliance with the requirement limits of applicable standards. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate under the standards herein specified.

**TECHNICAL
ACCEPTANCE :**

A handwritten signature in cursive script that reads 'Bright Tong'.

Bright Tong
Engineering Supervisor

DATE: Feb. 9, 2007

APPROVED BY :

A handwritten signature in cursive script that reads 'Wallace Pan'.

Wallace Pan
Director of Operations

DATE: Feb. 9, 2007

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	N/A	
15.247(a)(1)(iii)	Number of Hopping Frequency Used Spec.: At least 15 channels	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel Spec.: Max. 0.4 second within 31.6 second	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation Spec. : Min. 25 kHz or two-thirds of 20 dB bandwidth, whichever is greater 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Spec.: max. 1W	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Spec.: Table 15.209 (GW-GPS-005, Test mode A1)	PASS	Meet the requirement of limit. Minimum passing margin is -7.31dB at 36.05MHz.
	Transmitter Radiated Emissions Spec.: Table 15.209 (GW-GPS-005, Test mode A2)	PASS	Meet the requirement of limit. Minimum passing margin is -10.46dB at 35.98MHz.
	Transmitter Radiated Emissions Spec.: Table 15.209 (GW-GPS-009, Test mode A1)	PASS	Meet the requirement of limit. Minimum passing margin is - 3.85dB at 36.23MHz.
	Transmitter Radiated Emissions Spec.: Table 15.209 (GW-GPS-009, Test mode A2)	PASS	Meet the requirement of limit. Minimum passing margin is - 9.46dB at 35.50MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.

Note: If the Frequency Hopping System operating in 2400-2483.5 MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20dB bandwidth of hopping channel, whichever is greater.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz ~ 30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.73 dB
	200MHz ~ 1000MHz	3.74 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Bluetooth GPS
MODEL NO.	GW-GPS-009 / GW-GPS-005
POWER SUPPLY	For test mode A1: 12Vdc from adapter For test mode A2: 24Vdc from adapter
POWER ADAPTER SUPPLIED	Cable out: 2.8m, shielded, non-detachable
MODULATION TYPE	GFSK
RADIO TECHNOLOGY	FHSS
TRANSFER RATE	1Mbps
FREQUENCY RANGE	2400 ~ 2483.5 MHz
NUMBER OF CHANNEL	79
OUTPUT POWER	2.094mW
ANTENNA TYPE	Soldered on PCB
ANTENNA GAIN	4.5dBi
DATA CABLE	N/A
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	N/A

NOTE: 1. Model GW-GPS-005 & GW-GPS-009 are the same as each other except in their PCB sizes and plastic outlines, so we just chose model GW-GPS-009 to have the tests and the test results were applicable to both of them (For cautiousness, the RE test was performed by both of the models).

2. Please take the following table for the specifications of power adapter:

Type of Equipment	Manufacturer	Model No.	Input	Output
Loepard Car Charger	Great Well Electronic Ltd	GW-SC-008	12/24Vdc	5.8V, 800mA

3. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.


3.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2431	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

For test mode A1 & A2

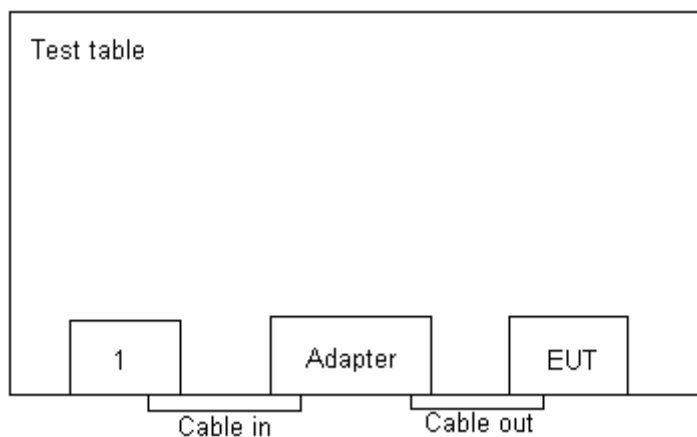

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	Applicable to							Description
	DT	CB	HCS	MPOP	BM	CE	RE	
A1	--	--	--	--	--	--	√	Powered by 12Vdc adapter
A2	√	√	√	√	√	--	√	Powered by 24Vdc adapter

Where

DT: Dwell Time on Each Channel**CB:** Channel Bandwidth**HCS:** Hopping Channel Separation**MPOP:** Maximum Peak Output Power**BM:** Band edge Measurement**RE:** Radiated Emission

DWELL TIME ON EACH CHANNEL:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet types and X.Y.Z. axis.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE	AXIS
A2	0 ~ 78	0, 39, 78	FHSS	GFSK	1Mbps	X

CHANNEL BANDWIDTH:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet types and X.Y.Z. axis.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE	AXIS
A2	0 ~ 78	0, 39, 78	FHSS	GFSK	1Mbps	X

HOPPING CHANNEL SEPARATION

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet types and X.Y.Z. axis.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE	AXIS
A2	0 ~ 78	0, 39, 78	FHSS	GFSK	1Mbps	X

**MAXIMUM PEAK OUTPUT POWER**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet types and X.Y.Z. axis.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE	AXIS
A2	0 ~ 78	0, 39, 78	FHSS	GFSK	1Mbps	X

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet types and X.Y.Z. axis..
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE	AXIS
A2	0 ~ 78	0, 78	FHSS	GFSK	1Mbps	X

RADIATED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet types and X.Y.Z. axis.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE	AXIS
A1 & A2	0 ~ 78	0, 39, 78	FHSS	GFSK	1Mbps	X

3.2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Bluetooth GPS. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4- 2003

All test items have been performed and recorded as per the above standards.

3.2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Battery	KOBA	N/A	N/A	N/A

Note: 2m non-shielded input power cable was used during the test.

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	E1R1001	Apr. 19, 2007
BILOG Antenna SCHWARZBECK	VULB9168	E1A1001	Sept. 26, 2007
Preamplifier Agilent	8447D	E1A2001	Jan. 27, 2008
Preamplifier Agilent	8449B	E1A2002	Jan. 27, 2008
Double Ridged Broadband Horn Antenna Schwarzbeck	BBHA 9120D	E1A1002	Feb. 15, 2007
Spectrum Analyzer Agilent	E4403B	E1S1001	Jan. 13, 2008
Signal Analyzer ROHDE & SCHWARZ	FSP	E1S1002	May. 16, 2007
Software ADT	ADT_Radiated_V7.5	N/A	N/A

- NOTE:**
1. The calibration interval of the above test instruments is 12 months.
 2. “*” = These equipment are used for the final measurement.
 3. The horn antenna and Agilent preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The Spectrum Analyzer (model: FSP) and RF signal cable (SERIAL: E1CBH16&E1CBH20) are used only for the measurement of emission frequency above 1GHz if tested.



4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

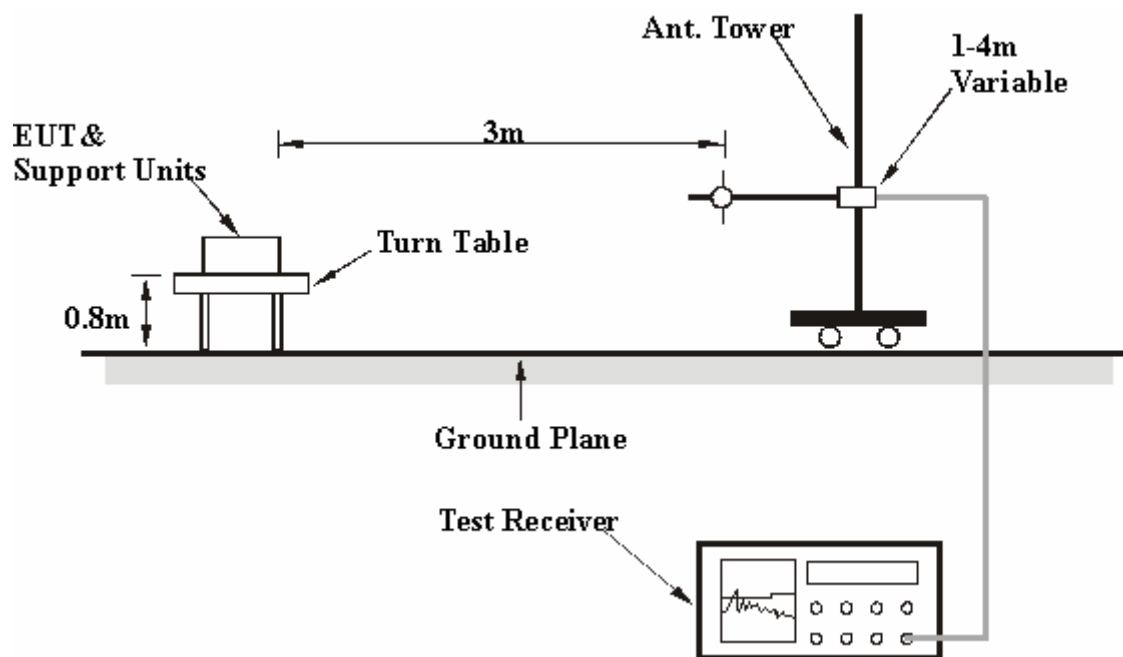

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

Below 1 GHz: Normal operation (hopping according to its hoplist).

Above 1 GHz: Continuously transmitting with modulation on a certain channel that can be set by the software (with typical data input as the modulation source).

4.1.7 TEST RESULTS

Below 1 GHz Worst Case

EUT	Bluetooth GPS	MEASUREMENT DETAIL	
MODEL	GW-GPS-005	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 0	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001hPa
TEST MODE	A1	INPUT POWER	12Vdc from battery
TESTED BY	Rebecca		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	37.27	15.56	6.38	21.94	40.00	-18.06	198.00	42.00
2	103.87	12.95	7.82	20.77	43.50	-22.73	299.00	0.00
3	192.47	13.32	8.57	21.89	43.50	-21.61	100.00	19.00
4	432.55	19.67	-6.51	13.17	46.00	-32.83	120.00	97.00
5	612.00	23.36	-8.07	15.29	46.00	-30.71	131.00	167.00
6	793.87	25.77	-8.21	17.56	46.00	-28.44	113.00	258.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	36.05	15.40	17.29	32.69	40.00	-7.31	99.00	0.00
2	104.28	12.99	-0.47	12.51	43.50	-30.99	99.00	82.00
3	192.00	13.34	2.70	16.04	43.50	-27.46	99.00	19.00
4	444.68	19.98	-6.84	13.14	46.00	-32.86	99.00	288.00
5	648.37	23.87	-6.32	17.55	46.00	-28.45	99.00	150.00
6	864.20	26.36	-7.54	18.82	46.00	-27.18	100.00	0.00

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



EUT	Bluetooth GPS	MEASUREMENT DETAIL	
MODEL	GW-GPS-005	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 0	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001hPa
TEST MODE	A2	INPUT POWER	24Vdc from battery
TESTED BY	Rebecca		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	37.27	15.56	-7.73	7.83	40.00	-32.17	100.00	160.00
2	103.47	12.91	1.73	14.64	43.50	-28.86	180.00	0.00
3	192.00	13.34	9.42	22.76	43.50	-20.74	138.00	0.00
4	432.00	19.66	3.82	23.48	46.00	-22.52	99.00	349.00
5	643.52	23.81	-8.08	15.73	46.00	-30.27	107.00	296.00
6	847.23	26.15	-7.96	18.18	46.00	-27.82	102.00	236.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	35.98	15.39	14.15	29.54	40.00	-10.46	99.00	0.00
2	165.80	16.51	-7.96	8.56	43.50	-34.94	99.00	68.00
3	291.90	16.28	-7.89	8.39	46.00	-37.61	99.00	333.00
4	534.40	21.65	-8.08	13.57	46.00	-32.43	99.00	196.00
5	738.10	25.22	-8.58	16.64	46.00	-29.36	99.00	269.00
6	895.73	27.11	-8.46	18.66	46.00	-27.34	99.00	205.00

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



EUT	Bluetooth GPS	MEASUREMENT DETAIL	
MODEL	GW-GPS-009	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 0	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001hPa
TEST MODE	A1	INPUT POWER	12Vdc from battery
TESTED BY	Rebecca		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	35.85	15.37	5.93	21.30	40.00	-18.70	210.00	24.00
2	95.85	12.23	14.65	26.88	43.50	-16.62	303.00	355.00
3	153.18	17.00	1.13	18.13	43.50	-25.37	162.00	24.00
4	515.00	21.19	-8.02	13.17	46.00	-32.83	107.00	44.00
5	723.55	25.06	-8.34	16.72	46.00	-29.28	100.00	127.00
6	888.45	26.92	-8.11	18.80	46.00	-27.20	106.00	206.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	36.23	15.42	20.72	36.15	40.00	-3.85	100.00	348.00
2	95.85	12.23	9.66	21.89	43.50	-21.61	99.00	244.00
3	445.01	19.99	0.89	20.89	46.00	-25.11	104.00	348.00
4	483.48	20.63	-6.39	14.24	46.00	-31.76	104.00	118.00
5	631.40	23.67	-7.74	15.93	46.00	-30.07	104.00	200.00
6	798.73	25.81	-7.98	17.83	46.00	-28.17	102.00	146.00

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



EUT	Bluetooth GPS	MEASUREMENT DETAIL	
MODEL	GW-GPS-009	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 0	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001hPa
TEST MODE	A2	INPUT POWER	24Vdc from battery
TESTED BY	Rebecca		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	35.40	15.31	0.74	16.06	40.00	-23.94	179.00	0.00
2	95.90	12.24	12.22	24.45	43.50	-19.05	255.00	0.00
3	153.15	17.00	-0.53	16.47	43.50	-27.03	193.00	349.00
4	534.40	21.65	-7.96	13.69	46.00	-32.31	110.00	83.00
5	699.30	24.57	-7.44	17.12	46.00	-28.88	104.00	335.00
6	893.30	27.05	-8.33	18.72	46.00	-27.28	117.00	217.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	35.50	15.33	15.22	30.54	40.00	-9.46	99.00	0.00
2	95.50	12.20	4.12	16.33	43.50	-27.17	99.00	0.00
3	250.68	14.83	-7.49	7.34	46.00	-38.66	105.00	15.00
4	454.50	20.19	-1.11	19.08	46.00	-26.92	103.00	3.00
5	735.67	25.19	-8.52	16.68	46.00	-29.32	102.00	5.00
6	917.55	27.55	-7.70	19.85	46.00	-26.15	103.00	3.00

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

Above 1 GHz

EUT	Bluetooth GPS	MEASUREMENT DETAIL	
MODEL	GW-GPS-005	FREQUENCY RANGE	Above 1GHz
CHANNEL	Channel 0	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001hPa
TEST MODE	A1	INPUT POWER	12Vdc from battery
TESTED BY	Bright		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.5PK	32.76	18.34	51.10	74.00	-22.90	100.00	134.00
1	2483.5AV	32.76	-1.66	31.10	54.00	-22.90	100.00	134.00
2	4804PK	38.05	16.99	55.04	74.00	-18.96	100.00	226.00
2	4804AV	38.05	-3.01	35.04	54.00	-18.96	100.00	226.00
3	7206PK	45.18	11.76	56.94	74.00	-17.06	100.00	115.00
3	7206AV	45.18	-8.24	36.94	54.00	-17.06	100.00	115.00
4	9608PK	47.91	9.99	57.90	74.00	-16.10	100.00	48.00
4	9608AV	47.91	-10.01	37.90	54.00	-16.10	100.00	48.00
5	12010PK	49.05	10.21	59.26	74.00	-14.74	100.00	33.00
5	12010AV	49.05	-9.79	39.26	54.00	-14.74	100.00	33.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.5PK	32.76	18.84	51.60	74.00	-22.40	100	215
1	2483.5AV	32.76	-1.16	31.60	54.00	-22.40	100	215
2	4804PK	38.05	15.38	53.43	74.00	-20.57	100	331
2	4804AV	38.05	-4.62	33.43	54.00	-20.57	100	331
3	7206PK	45.18	10.94	56.12	74.00	-17.88	100	216
3	7206AV	45.18	-9.06	36.12	54.00	-17.88	100	216
4	9608PK	47.91	9.41	57.32	74.00	-16.68	100	78
4	9608AV	47.91	-10.59	37.32	54.00	-16.68	100	78
5	12010PK	49.05	10.12	59.17	74.00	-14.83	100	49
5	12010AV	49.05	-9.88	39.17	54.00	-14.83	100	49

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle is equal to: $20\log(3.125/100) = -30$ dB
 6. Average value = peak reading – 20dB.

EUT	Bluetooth GPS	MEASUREMENT DETAIL	
MODEL	GW-GPS-005	FREQUENCY RANGE	Above 1GHz
CHANNEL	Channel 39	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001hPa
TEST MODE	A1	INPUT POWER	12Vdc from adapter
TESTED BY	Bright		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.5PK	32.76	18.23	50.99	74	-23.01	100	164
1	2483.5AV	32.76	-1.77	30.99	54	-23.01	100	164
2	4882PK	38.35	18.19	56.54	74	-17.46	100	332
2	4882AV	38.35	-1.81	36.54	54	-17.46	100	332
3	7323PK	45.26	12.21	57.47	74	-16.53	100	265
3	7323AV	45.26	-7.79	37.47	54	-16.53	100	265
4	9764PK	48.32	9.21	57.53	74	-16.47	100	74
4	9764AV	48.32	-10.79	37.53	54	-16.47	100	74
5	12205PK	49.16	10.39	59.55	74	-14.45	100	123
5	12205AV	49.16	-9.61	39.55	54	-14.45	100	123

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.5PK	32.76	18.84	51.60	74.00	-22.40	100	21
1	2483.5AV	32.76	-1.16	31.60	54.00	-22.40	100	21
2	4882PK	38.35	16.94	55.29	74.00	-18.71	100	168
2	4882AV	38.35	-3.06	35.29	54.00	-18.71	100	168
3	7323PK	45.26	10.65	55.91	74.00	-18.09	100	92
3	7323AV	45.26	-9.35	35.91	54.00	-18.09	100	92
4	9764PK	48.32	9.88	58.20	74.00	-15.80	100	0
4	9764AV	48.32	-10.12	38.20	54.00	-15.80	100	0
5	12205PK	49.16	11.39	60.55	74.00	-13.45	100	290
5	12205AV	49.16	-8.61	40.55	54.00	-13.45	100	290

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle is equal to: $20\log(3.125/100) = -30$ dB
 6. Average value = peak reading – 20dB.

EUT	Bluetooth GPS	MEASUREMENT DETAIL	
MODEL	GW-GPS-005	FREQUENCY RANGE	Above 1GHz
CHANNEL	Channel 78	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001hPa
TEST MODE	A1	INPUT POWER	12Vdc from adapter
TESTED BY	Bright		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.5PK	32.76	23.88	56.64	74.00	-17.36	100	133
1	2483.5AV	32.76	3.88	36.64	54.00	-17.36	100	133
2	4960PK	38.64	16.54	55.18	74.00	-18.82	100	125
2	4960AV	38.64	-3.46	35.18	54.00	-18.82	100	125
3	7440PK	45.2	10.31	55.51	74.00	-18.49	100	339
3	7440AV	45.2	-9.69	35.51	54.00	-18.49	100	339
4	9920PK	48.53	11.67	60.20	74.00	-13.80	100	78
4	9920AV	48.53	-8.33	40.20	54.00	-13.80	100	78
5	12400PK	49.27	11.69	60.96	74.00	-13.04	100	294
5	12400AV	49.27	-8.31	40.96	54.00	-13.04	100	294

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.5PK	32.76	21.23	53.1	74	-20.9	100	261
1	2483.5AV	32.76	1.23	33.1	54	-20.9	100	261
2	4960PK	38.64	15.97	54.61	74	-19.39	100	78
2	4960AV	38.64	-4.03	34.61	54	-19.39	100	78
3	7440PK	45.2	10.48	55.68	74	-18.32	100	332
3	7440AV	45.2	-9.52	35.68	54	-18.32	100	332
4	9920PK	48.53	10.92	59.45	74	-14.55	100	75
4	9920AV	48.53	-9.08	39.45	54	-14.55	100	75
5	12400PK	49.27	10.04	59.31	74	-14.69	100	168
5	12400AV	49.27	-9.96	39.31	54	-14.69	100	168

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle is equal to: $20\log(3.125/100) = -30$ dB
 6. Average value = peak reading – 20dB.

EUT	Bluetooth GPS	MEASUREMENT DETAIL	
MODEL	GW-GPS-009	FREQUENCY RANGE	Above 1GHz
CHANNEL	Channel 0	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001hPa
TEST MODE	A1	INPUT POWER	12Vdc from adapter
TESTED BY	Bright		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.5PK	32.76	17.56	50.32	74	-23.68	100	119
1	2483.5AV	32.76	-2.44	30.32	54	-23.68	100	119
2	4804PK	38.05	16.91	54.96	74	-19.04	100	223
2	4804AV	38.05	-3.09	34.96	54	-19.04	100	223
3	7206PK	45.18	11.4	56.58	74	-17.42	100	16
3	7206AV	45.18	-8.6	36.58	54	-17.42	100	16
4	9608PK	47.91	9.88	57.79	74	-16.21	100	255
4	9608AV	47.91	-10.12	37.79	54	-16.21	100	255
5	12010PK	49.05	10.19	59.24	74	-14.76	100	8
5	12010AV	49.05	-9.81	39.24	54	-14.76	100	8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.5PK	32.76	18.96	51.72	74	-22.28	100	167
1	2483.5AV	32.76	-1.04	31.72	54	-22.28	100	167
2	4804PK	38.05	15.98	54.03	74	-19.97	100	113
2	4804AV	38.05	-4.02	34.03	54	-19.97	100	113
3	7206PK	45.18	10.87	56.05	74	-17.95	100	247
3	7206AV	45.18	-9.13	36.05	54	-17.95	100	247
4	9608PK	47.91	9.43	57.34	74	-16.66	100	264
4	9608AV	47.91	-10.57	37.34	54	-16.66	100	264
5	12010PK	49.05	10.12	59.17	74	-14.83	100	118
5	12010AV	49.05	-9.88	39.17	54	-14.83	100	118

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle is equal to: $20\log(3.125/100) = -30$ dB
 6. Average value = peak reading – 20dB.

EUT	Bluetooth GPS	MEASUREMENT DETAIL	
MODEL	GW-GPS-009	FREQUENCY RANGE	Above 1GHz
CHANNEL	Channel 39	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001hPa
TEST MODE	A1	INPUT POWER	12Vdc from adapter
TESTED BY	Bright		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.5PK	32.76	18.59	51.35	74	-22.65	100	116
1	2483.5AV	32.76	-1.41	31.35	54	-22.65	100	116
2	4882PK	38.35	18.03	56.38	74	-17.62	100	97
2	4882AV	38.35	-1.97	36.38	54	-17.62	100	97
3	7323PK	45.26	11.97	57.23	74	-16.77	100	48
3	7323AV	45.26	-8.03	37.23	54	-16.77	100	48
4	9764PK	48.32	9.43	57.75	74	-16.25	100	89
4	9764AV	48.32	-10.57	37.75	54	-16.25	100	89
5	12205PK	49.16	10.36	59.52	74	-14.48	100	111
5	12205AV	49.16	-9.64	39.52	54	-14.48	100	111

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.5PK	32.76	18.79	51.55	74	-22.45	100	10
1	2483.5AV	32.76	-1.21	31.55	54	-22.45	100	10
2	4882PK	38.35	16.63	54.98	74	-19.02	100	167
2	4882AV	38.35	-3.37	34.98	54	-19.02	100	167
3	7323PK	45.26	10.87	56.13	74	-17.87	100	79
3	7323AV	45.26	-9.13	36.13	54	-17.87	100	79
4	9764PK	48.32	9.53	57.85	74	-16.15	100	18
4	9764AV	48.32	-10.47	37.85	54	-16.15	100	18
5	12205PK	49.16	11.33	60.49	74	-13.51	100	267
5	12205AV	49.16	-8.67	40.49	54	-13.51	100	267

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle is equal to: $20\log(3.125/100) = -30$ dB
 6. Average value = peak reading – 20dB.

EUT	Bluetooth GPS	MEASUREMENT DETAIL	
MODEL	GW-GPS-009	FREQUENCY RANGE	Above 1GHz
CHANNEL	Channel 78	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001hPa
TEST MODE	A1	INPUT POWER	12Vdc from adapter
TESTED BY	Bright		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.5PK	32.76	23.34	56.1	74	-17.9	100	111
1	2483.5AV	32.76	3.34	36.1	54	-17.9	100	111
2	4960PK	38.64	16.22	54.86	74	-19.14	100	119
2	4960AV	38.64	-3.78	34.86	54	-19.14	100	119
3	7440PK	45.2	10.92	56.12	74	-17.88	100	332
3	7440AV	45.2	-9.08	36.12	54	-17.88	100	332
4	9920PK	48.53	11.25	59.78	74	-14.22	100	46
4	9920AV	48.53	-8.75	39.78	54	-14.22	100	46
5	12400PK	49.27	10.51	59.78	74	-14.22	100	278
5	12400AV	49.27	-9.49	39.78	54	-14.22	100	278

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.5PK	32.76	20.34	53.1	74	-20.9	100	223
1	2483.5AV	32.76	0.34	33.1	54	-20.9	100	223
2	4960PK	38.64	16.28	54.92	74	-19.08	100	49
2	4960AV	38.64	-3.72	34.92	54	-19.08	100	49
3	7440PK	45.2	10.48	55.68	74	-18.32	100	331
3	7440AV	45.2	-9.52	35.68	54	-18.32	100	331
4	9920PK	48.53	10.92	59.45	74	-14.55	100	255
4	9920AV	48.53	-9.08	39.45	54	-14.55	100	255
5	12400PK	49.27	10.04	59.31	74	-14.69	100	74
5	12400AV	49.27	-9.96	39.31	54	-14.69	100	74

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle is equal to: $20\log(3.125/100) = -30$ dB
 6. Average value = peak reading – 20dB.

EUT	Bluetooth GPS	MEASUREMENT DETAIL	
MODEL	GW-GPS-005	FREQUENCY RANGE	Above 1GHz
CHANNEL	Channel 0	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001hPa
TEST MODE	A2	INPUT POWER	24Vdc from adapter
TESTED BY	Bright		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.5PK	32.76	18.21	50.97	74.00	-23.03	100.00	144.00
1	2483.5AV	32.76	-1.79	30.97	54.00	-23.03	100.00	144.00
2	4804PK	38.05	17.03	55.08	74.00	-18.92	100.00	203.00
2	4804AV	38.05	-2.97	35.08	54.00	-18.92	100.00	203.00
3	7206PK	45.18	11.84	57.02	74.00	-16.98	100.00	124.00
3	7206AV	45.18	-8.16	37.02	54.00	-16.98	100.00	124.00
4	9608PK	47.91	10.23	58.14	74.00	-15.86	100.00	76.00
4	9608AV	47.91	-9.77	38.14	54.00	-15.86	100.00	76.00
5	12010PK	49.05	10.79	59.84	74.00	-14.16	100.00	45.00
5	12010AV	49.05	-9.21	39.84	54.00	-14.16	100.00	45.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.50 PK	32.76	18.64	51.40	74.00	-22.60	100	234
1	2483.50 AV	32.76	-1.36	31.40	54.00	-22.60	100	234
2	4804 PK	38.05	16.34	54.39	74.00	-19.61	100	322
2	4804 AV	38.05	-3.66	34.39	54.00	-19.61	100	322
3	7206 PK	45.18	10.34	55.52	74.00	-18.48	100	236
3	7206 AV	45.18	-9.66	35.52	54.00	-18.48	100	236
4	9608 PK	47.91	9.45	57.36	74.00	-16.64	100	46
4	9608 AV	47.91	-10.55	37.36	54.00	-16.64	100	46
5	12010 PK	49.05	10.34	59.39	74.00	-14.61	100	74
5	12010 AV	49.05	-9.88	39.17	54.00	-14.83	100	74

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle is equal to: $20\log(3.125/100) = -30$ dB
 6. Average value = peak reading – 20dB.

EUT	Bluetooth GPS	MEASUREMENT DETAIL	
MODEL	GW-GPS-005	FREQUENCY RANGE	Above 1GHz
CHANNEL	Channel 39	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001hPa
TEST MODE	A2	INPUT POWER	24Vdc from adapter
TESTED BY	Bright		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.50 PK	32.76	19.03	51.79	74	-22.21	100	174
1	2483.50 AV	32.76	-0.97	31.79	54	-22.21	100	174
2	4882 PK	38.35	16.34	54.69	74	-19.31	100	306
2	4882 AV	38.35	-3.66	34.69	54	-19.31	100	306
3	7323 PK	45.26	13.01	58.27	74	-15.73	100	246
3	7323 AV	45.26	-6.99	38.27	54	-15.73	100	246
4	9764 PK	48.32	10.21	58.53	74	-15.47	100	89
4	9764 AV	48.32	-9.79	38.53	54	-15.47	100	89
5	12205 PK	49.16	9.98	59.14	74	-14.86	100	133
5	12205 AV	49.16	-10.02	39.14	54	-14.86	100	133

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.50 PK	32.76	19.03	51.79	74.00	-22.21	100	24
1	2483.50 AV	32.76	-0.97	31.79	54.00	-22.21	100	24
2	4882 PK	38.35	14.34	52.69	74.00	-21.31	100	178
2	4882 AV	38.35	-5.66	32.69	54.00	-21.31	100	178
3	7323 PK	45.26	12.31	57.57	74.00	-16.43	100	98
3	7323 AV	45.26	-7.69	37.57	54.00	-16.43	100	98
4	9764 PK	48.32	10.23	58.55	74.00	-15.45	100	10
4	9764 AV	48.32	-9.77	38.55	54.00	-15.45	100	10
5	12205 PK	49.16	11.34	60.50	74.00	-13.50	100	264
5	12205 AV	49.16	-8.66	40.50	54.00	-13.50	100	264

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle is equal to: $20\log(3.125/100) = -30$ dB
 6. Average value = peak reading – 20dB.

EUT	Bluetooth GPS	MEASUREMENT DETAIL	
MODEL	GW-GPS-005	FREQUENCY RANGE	Above 1GHz
CHANNEL	Channel 78	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001hPa
TEST MODE	A2	INPUT POWER	24Vdc from adapter
TESTED BY	Bright		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.50 PK	32.76	24.65	57.41	74.00	-16.59	100	141
1	2483.50 AV	32.76	4.65	37.41	54.00	-16.59	100	141
2	4960 PK	38.64	16.78	55.42	74.00	-18.58	100	136
2	4960 AV	38.64	-3.22	35.42	54.00	-18.58	100	136
3	7440 PK	45.2	10.65	55.85	74.00	-18.15	100	333
3	7440 AV	45.2	-9.35	35.85	54.00	-18.15	100	333
4	9920 PK	48.53	11.98	60.51	74.00	-13.49	100	98
4	9920 AV	48.53	-8.02	40.51	54.00	-13.49	100	98
5	12400 PK	49.27	11.98	61.25	74.00	-12.75	100	194
5	12400 AV	49.27	-8.02	41.25	54.00	-12.75	100	194

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.50 PK	32.76	21.48	54.24	74	-19.76	100	234
1	2483.50 AV	32.76	1.48	34.24	54	-19.76	100	234
2	4959.94 PK	38.64	16.26	54.9	74	-19.1	100	79
2	4959.94 AV	38.64	-3.74	34.9	54	-19.1	100	79
3	7440 PK	45.2	10.49	55.69	74	-18.31	100	333
3	7440 AV	45.2	-9.51	35.69	54	-18.31	100	333
4	9920 PK	48.53	10.84	59.37	74	-14.63	100	46
4	9920 AV	48.53	-9.16	39.37	54	-14.63	100	46
5	12400 PK	49.27	9.98	59.25	74	-14.75	100	173
5	12400 AV	49.27	-10.02	39.25	54	-14.75	100	173

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle is equal to: $20\log(3.125/100) = -30$ dB
 6. Average value = peak reading – 20dB.

EUT	Bluetooth GPS	MEASUREMENT DETAIL	
MODEL	GW-GPS-009	FREQUENCY RANGE	Above 1GHz
CHANNEL	Channel 0	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001hPa
TEST MODE	A2	INPUT POWER	24Vdc from adapter
TESTED BY	Bright		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.50 PK	32.76	17.47	50.23	74	-23.77	100	126
1	2483.50 AV	32.76	-2.53	30.23	54	-23.77	100	126
2	4804 PK	38.05	16.64	54.69	74	-19.31	100	133
2	4804 AV	38.05	-3.36	34.69	54	-19.31	100	133
3	7206 PK	45.18	11.84	57.02	74	-16.98	100	46
3	7206 AV	45.18	-8.16	37.02	54	-16.98	100	46
4	9608 PK	47.91	9.74	57.65	74	-16.35	100	79
4	9608 AV	47.91	-10.26	37.65	54	-16.35	100	79
5	12010 PK	49.05	10.23	59.28	74	-14.72	100	12
5	12010 AV	49.05	-9.77	39.28	54	-14.72	100	12

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.50 PK	32.76	17.91	50.67	74	-23.33	100	146
1	2483.50 AV	32.76	-2.09	30.67	54	-23.33	100	146
2	4804 PK	38.05	15.68	53.73	74	-20.27	100	122
2	4804 AV	38.05	-4.32	33.73	54	-20.27	100	122
3	7206 PK	45.18	11.02	56.2	74	-17.8	100	264
3	7206 AV	45.18	-8.98	36.2	54	-17.8	100	264
4	9608 PK	47.91	9.87	57.78	74	-16.22	100	221
4	9608 AV	47.91	-10.13	37.78	54	-16.22	100	221
5	12010 PK	49.05	11.03	60.08	74	-13.92	100	132
5	12010 AV	49.05	-8.97	40.08	54	-13.92	100	132

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle is equal to: $20\log(3.125/100) = -30$ dB
 6. Average value = peak reading – 20dB.

EUT	Bluetooth GPS	MEASUREMENT DETAIL	
MODEL	GW-GPS-009	FREQUENCY RANGE	Above 1GHz
CHANNEL	Channel 39	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001hPa
TEST MODE	A2	INPUT POWER	24Vdc from adapter
TESTED BY	Bright		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.50 PK	32.76	18.72	51.48	74	-22.52	100	122
1	2483.50 AV	32.76	-1.28	31.48	54	-22.52	100	122
2	4882 PK	38.35	17.94	56.29	74	-17.71	100	84
2	4882 AV	38.35	-2.06	36.29	54	-17.71	100	84
3	7323 PK	45.26	12.33	57.59	74	-16.41	100	61
3	7323 AV	45.26	-7.67	37.59	54	-16.41	100	61
4	9764 PK	48.32	9.67	57.99	74	-16.01	100	96
4	9764 AV	48.32	-10.33	37.99	54	-16.01	100	96
5	12205 PK	49.16	10.31	59.47	74	-14.53	100	122
5	12205 AV	49.16	-9.69	39.47	54	-14.53	100	122

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.50 PK	32.76	19.03	51.79	74	-22.21	100	13
1	2483.50 AV	32.76	-0.97	31.79	54	-22.21	100	13
2	4882 PK	38.35	16.33	54.68	74	-19.32	100	168
2	4882 AV	38.35	-3.67	34.68	54	-19.32	100	168
3	7323 PK	45.26	10.94	56.2	74	-17.8	100	84
3	7323 AV	45.26	-9.06	36.2	54	-17.8	100	84
4	9764 PK	48.32	9.61	57.93	74	-16.07	100	7
4	9764 AV	48.32	-10.39	37.93	54	-16.07	100	7
5	12205 PK	49.16	12.31	61.47	74	-12.53	100	299
5	12205 AV	49.16	-7.69	41.47	54	-12.53	100	299

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle is equal to: $20\log(3.125/100) = -30$ dB
 6. Average value = peak reading – 20dB.

EUT	Bluetooth GPS	MEASUREMENT DETAIL	
MODEL	GW-GPS-009	FREQUENCY RANGE	Above 1GHz
CHANNEL	Channel 78	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001hPa
TEST MODE	A2	INPUT POWER	24Vdc from adapter
TESTED BY	Bright		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.50 PK	32.76	24.21	56.97	74	-17.03	100	122
1	2483.50 AV	32.76	4.21	36.97	54	-17.03	100	122
2	4960 PK	38.64	16.64	55.28	74	-18.72	100	131
2	4960 AV	38.64	-3.36	35.28	54	-18.72	100	131
3	7440 PK	45.2	11.32	56.52	74	-17.48	100	346
3	7440 AV	45.2	-8.68	36.52	54	-17.48	100	346
4	9920 PK	48.53	12.31	60.84	74	-13.16	100	74
4	9920 AV	48.53	-7.69	40.84	54	-13.16	100	74
5	12400 PK	49.27	10.68	59.95	74	-14.05	100	298
5	12400 AV	49.27	-9.32	39.95	54	-14.05	100	298

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2483.50 PK	32.76	20.61	53.37	74	-20.63	100	224
1	2483.50 AV	32.76	0.61	33.37	54	-20.63	100	224
2	4959.94 PK	38.64	17.03	55.67	74	-18.33	100	74
2	4959.94 AV	38.64	-2.97	35.67	54	-18.33	100	74
3	7440 PK	45.2	10.94	56.14	74	-17.86	100	321
3	7440 AV	45.2	-9.06	36.14	54	-17.86	100	321
4	9920 PK	48.53	9.87	58.4	74	-15.6	100	269
4	9920 AV	48.53	-10.13	38.4	54	-15.6	100	269
5	12400 PK	49.27	9.64	58.91	74	-15.09	100	56
5	12400 AV	49.27	-10.36	38.91	54	-15.09	100	56

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle is equal to: $20\log(3.125/100) = -30$ dB
 6. Average value = peak reading – 20dB.

4.2 NUMBER OF HOPPING FREQUENCY USED

4.2.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Spectrum Analyzer ROHDE & SCHWARZ	FSP	E1S1002	May. 15, 2007

NOTE: The calibration interval of the above test instruments is 12 months.


4.2.3 TEST PROCEDURES

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP


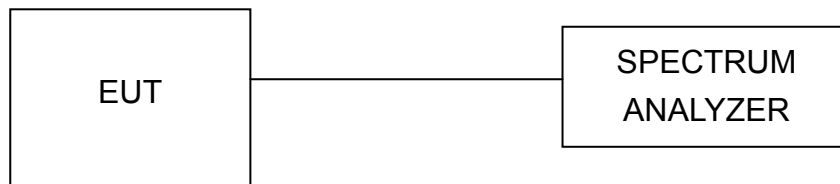


4.2.6 EUT OPERATING CONDITIONS

Normal operation (Hopping according to its hoplist).

4.2.7 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next page for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

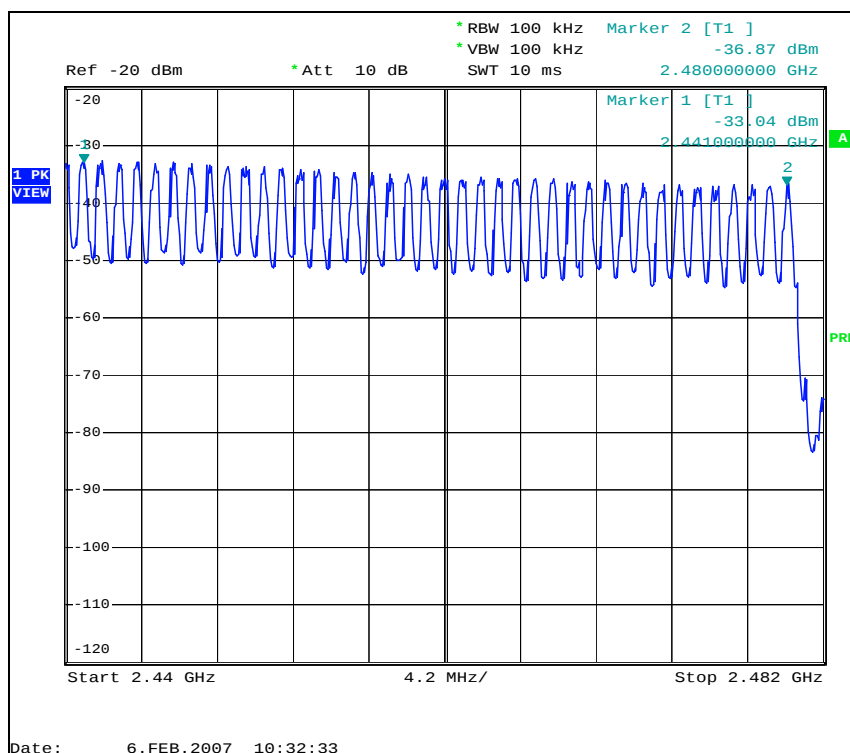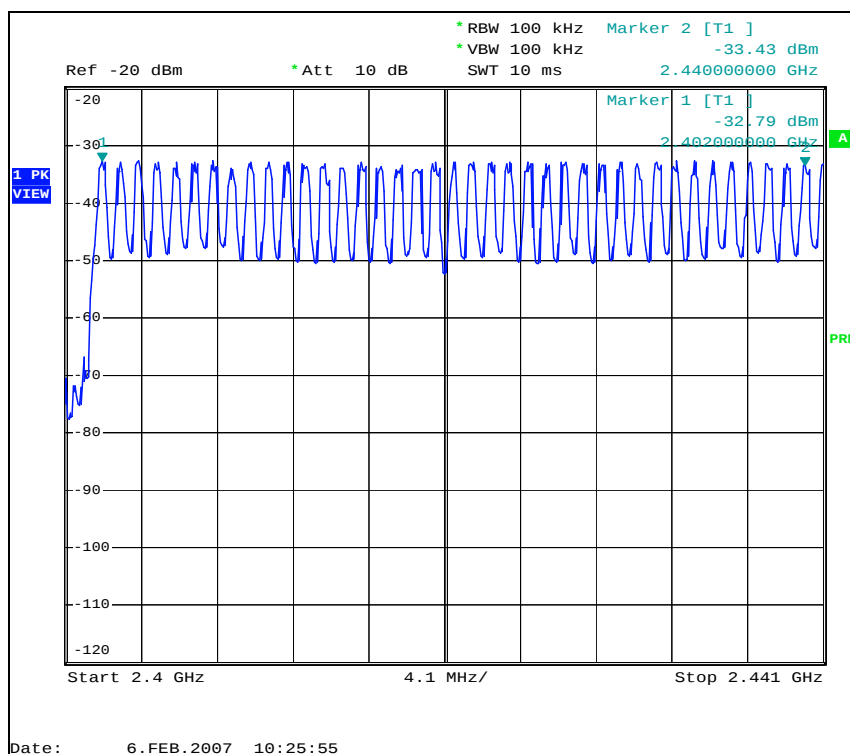



4.3 DWELL TIME ON EACH CHANNEL

4.3.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
*Spectrum Analyzer ROHDE & SCHWARZ	FSP	E1S1002	May. 15, 2007

NOTES: The calibration interval of the above test instruments is 12 months.

4.3.3 TEST PROCEDURES

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

Normal operation (Hopping according to its hoplist).





4.3.7 TEST RESULTS

EUT	Bluetooth GPS	MODEL	GW-GPS-009
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001Hpa
INPUT POWER	24Vdc from adapter	TESTED BY	Bright



MODE	NUMBER OF TRANSMISSION IN A 31.6 (79HOPPING * 0.4)	LENGTH OF TRANSMISSION TIME (msec)	RESULT (msec)	LIMIT (msec)
CH0	10(times/1sec)*31.6=316 times	0.49	154.84	400
CH39	10(times/1sec)*31.6=316 times	0.48	158.00	400
CH78	10(times/1sec)*31.6=316 times	0.49	154.84	400

NOTE: Test plots of the transmitting time slot are shown on next 3 pages.



CH0

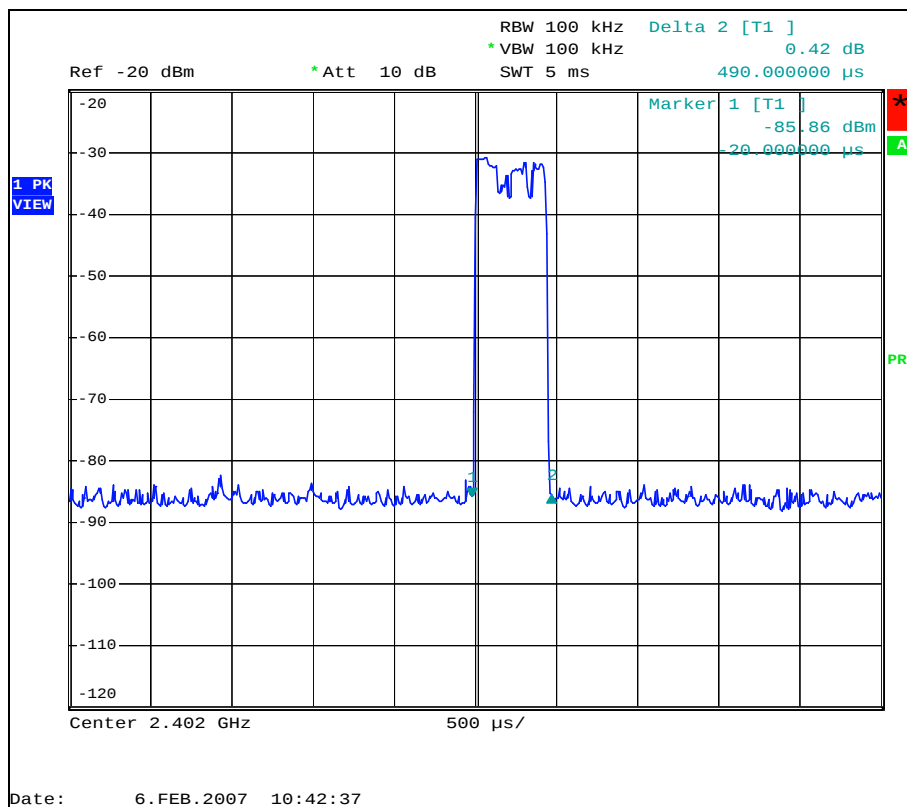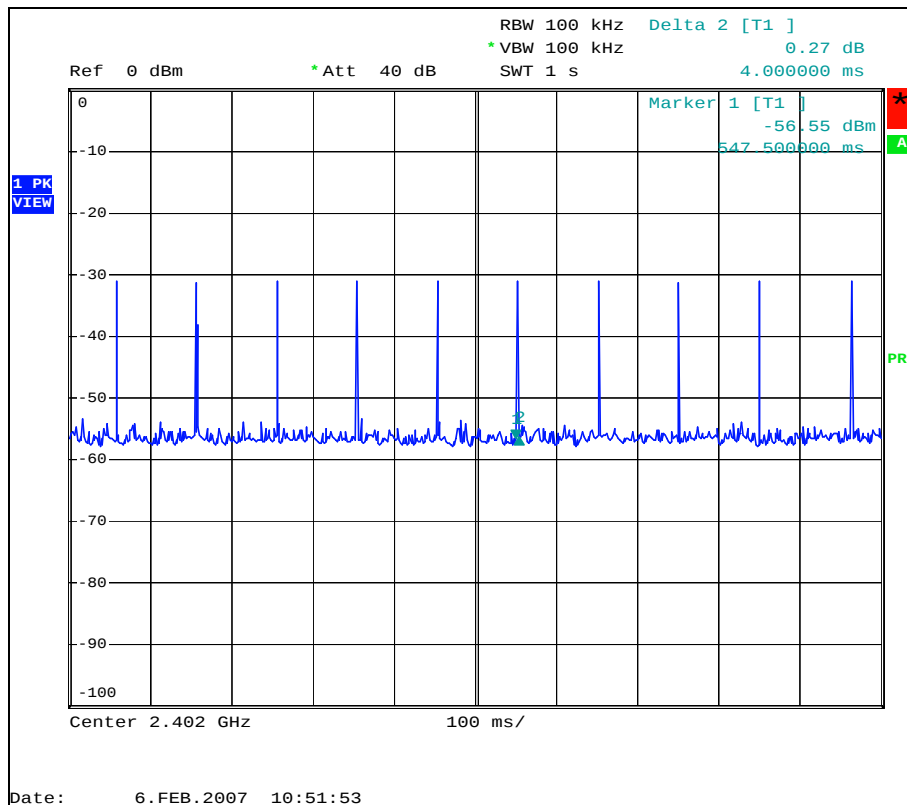

CH39

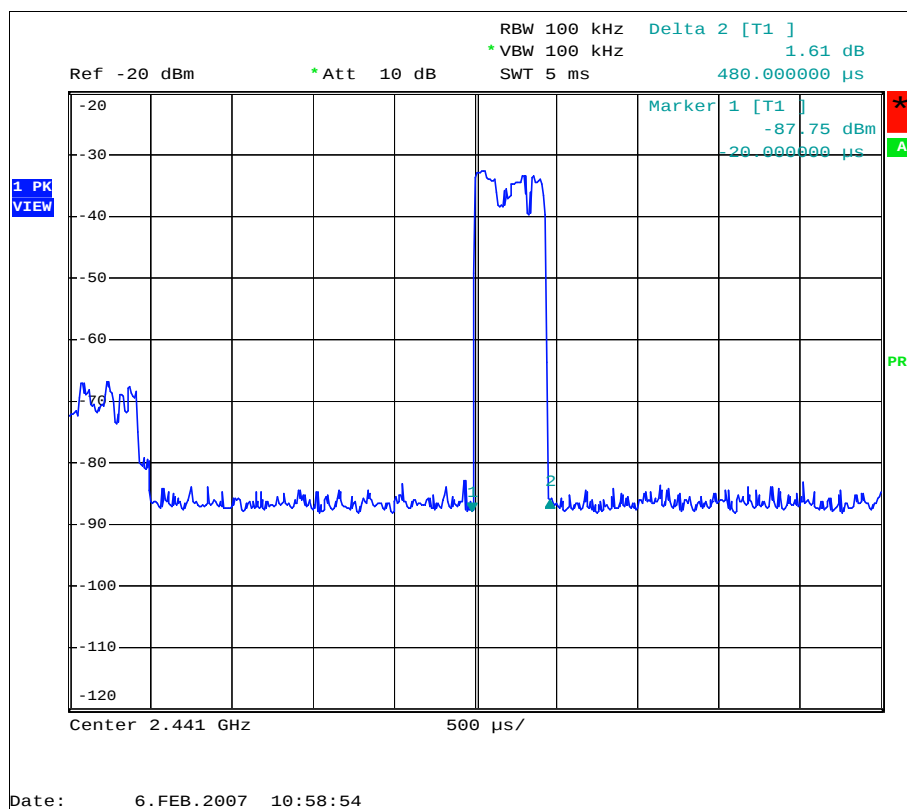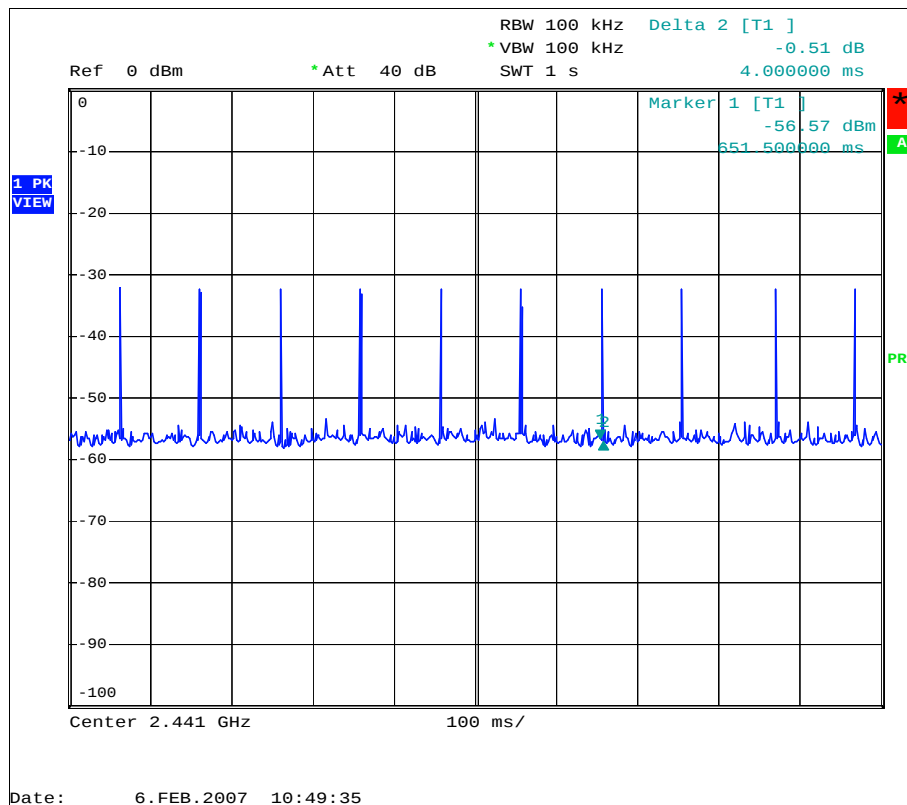

CH78

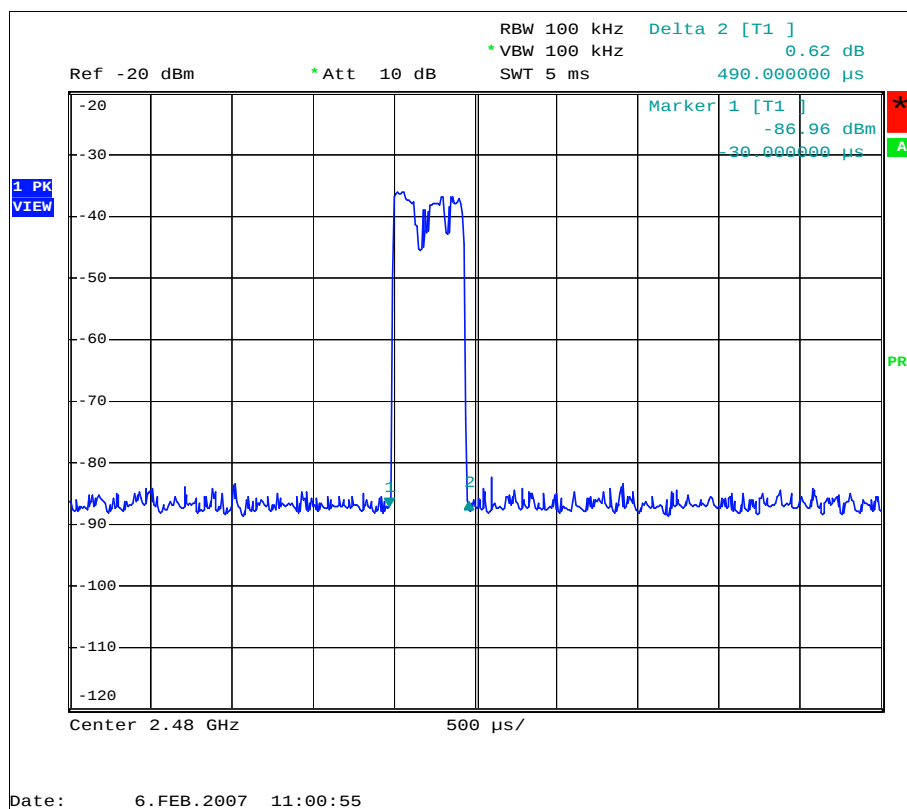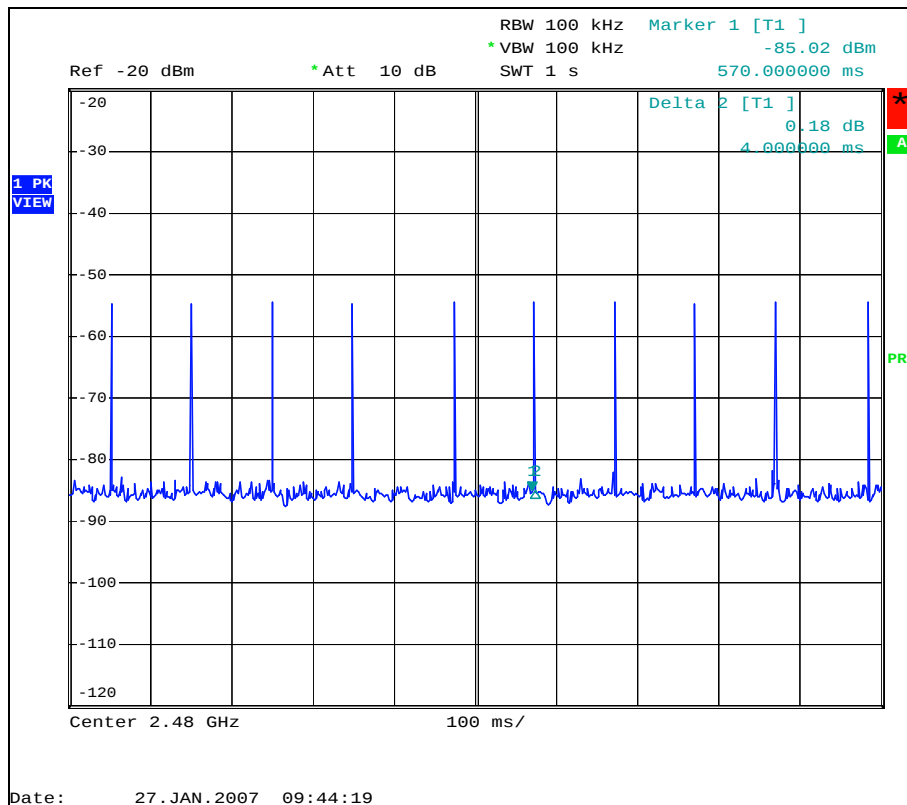

4.4 CHANNEL BANDWIDTH

4.4.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Spectrum Analyzer ROHDE & SCHWARZ	FSP	E1S1002	May. 15, 2007

NOTE: The calibration interval of the above test instruments is 12 months.

4.4.3 TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITION


Continuously transmitting with modulation on a certain channel that can be set by the software (with typical data input as the modulation source).

4.4.7 TEST RESULTS


EUT	Bluetooth GPS	MODEL	GW-GPS-009
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001Hpa
INPUT POWER	24Vdc from adapter	TESTED BY	Bright

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	0.840
39	2441	0.832
78	2480	0.836


CH0

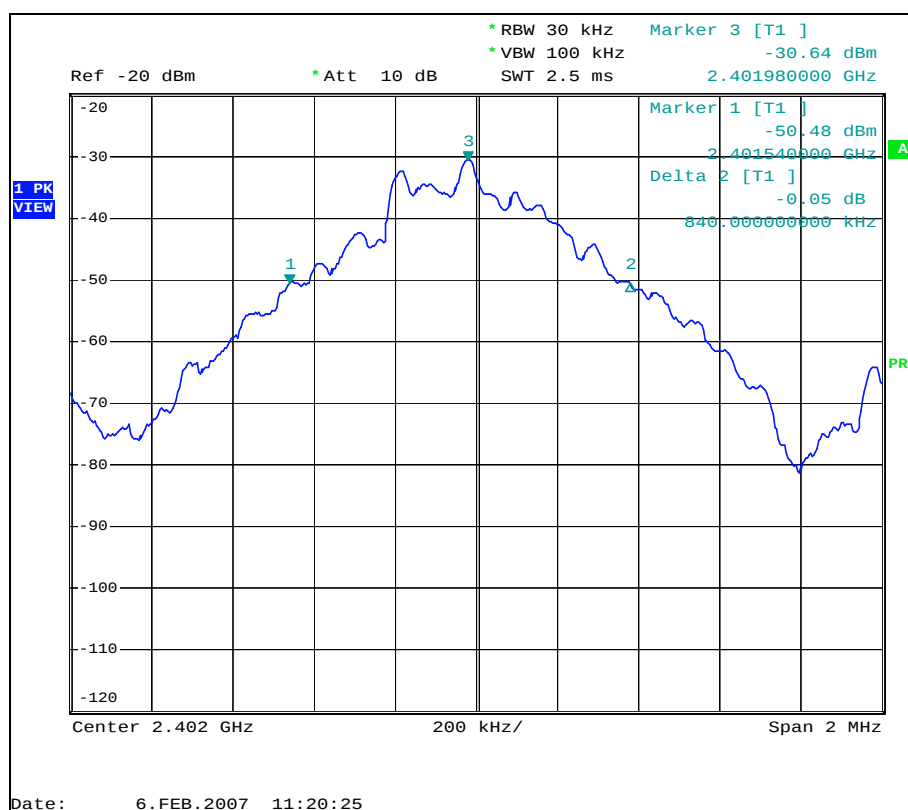

CH39

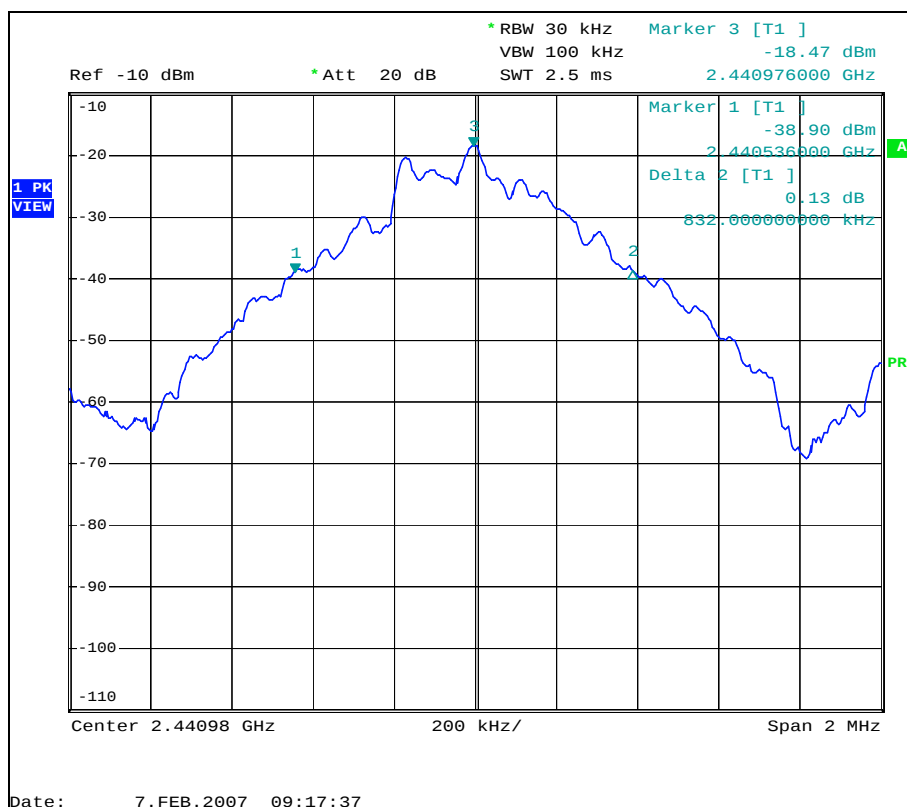

CH78

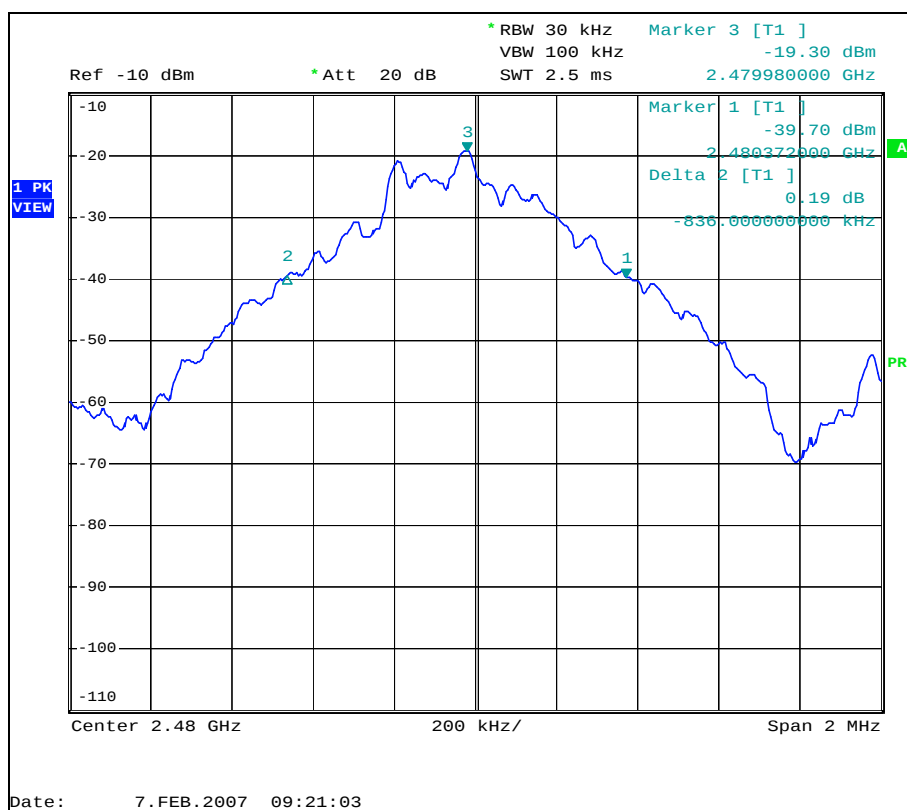

4.5 HOPPING CHANNEL SEPARATION

4.5.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25 kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Spectrum Analyzer ROHDE & SCHWARZ	FSP	E1S1002	May. 15, 2007

NOTES: The calibration interval of the above test instruments is 12 months.


4.5.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP

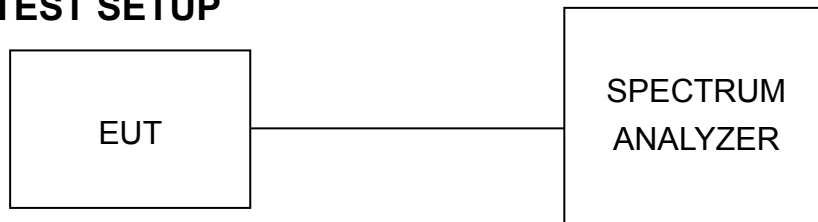

4.5.6 EUT OPERATING CONDITIONS

Normal operation (Hopping according to its hoplist).


4.5.7 TEST RESULTS

EUT	Bluetooth GPS	MODEL	GW-GPS-009
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001Hpa
INPUT POWER	24Vdc from adapter	TESTED BY	Bright


CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.000	0.840	0.560	pass
39	2441	1.000	0.832	0.555	pass
78	2480	1.004	0.836	0.557	pass

NOTE: The minimum limit is two-third of 20dB bandwidth.


CH0

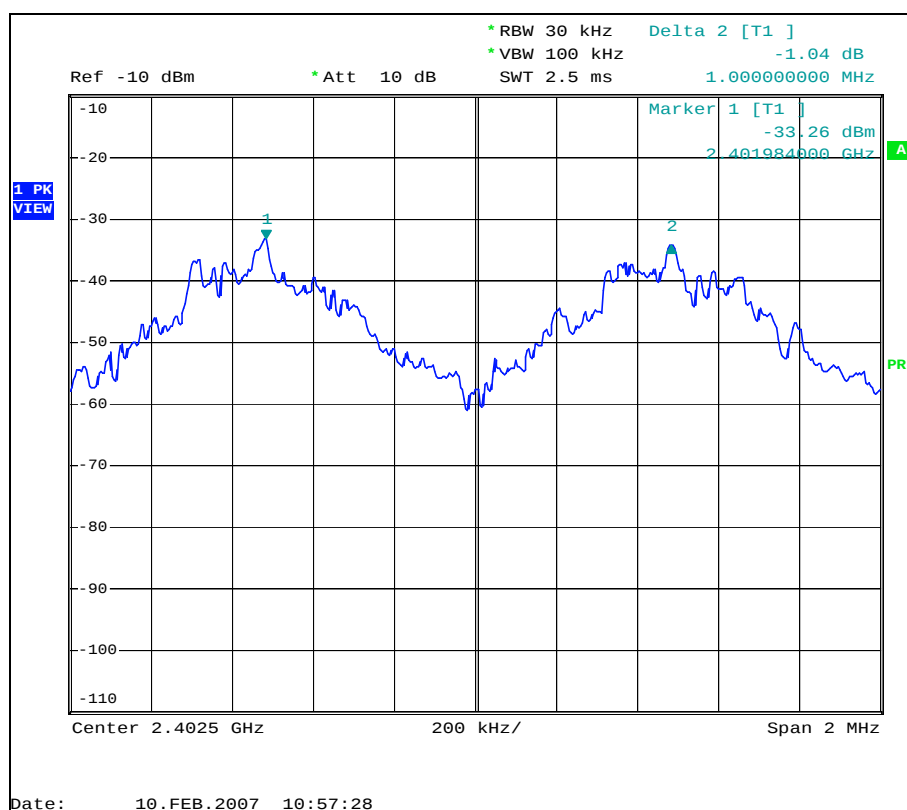

CH39

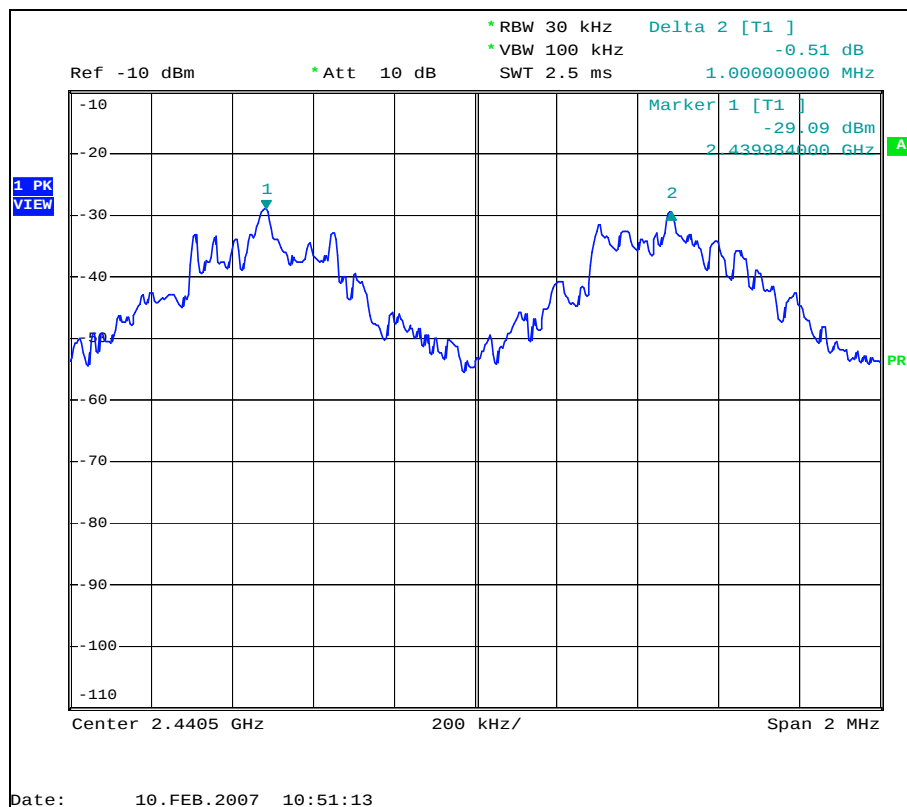

CH78

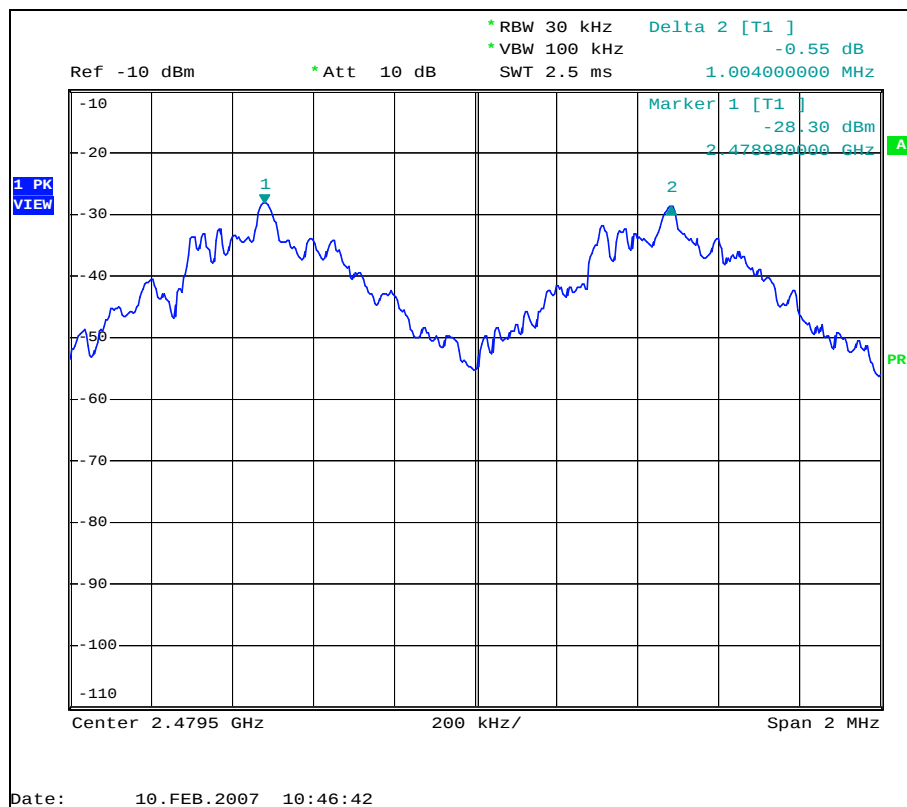

4.6 MAXIMUM PEAK OUTPUT POWER

4.6.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 1W.

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
*Spectrum Analyzer ROHDE & SCHWARZ	FSP	E1S1002	May. 15, 2007

NOTE: The calibration interval of the above test instruments is 12 months.

4.6.3 TEST PROCEDURES

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using 1 MHz RBW and 3 MHz VBW.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.6.6 EUT OPERATING CONDITION

Continuously transmitting with modulation on a certain channel that can be set by the software (with typical data input as the modulation source).

4.6.7 TEST RESULTS

EUT	Bluetooth GPS	MODEL	GW-GPS-009
MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001Hpa
INPUT POWER	24Vdc from adapter	TESTED BY	Bright

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
0	2402	1.34	30	PASS
39	2441	3.21	30	PASS
78	2480	0.49	30	PASS

4.7 BAND EDGES MEASUREMENT

4.7.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band.

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Spectrum Analyzer ROHDE & SCHWARZ	FSP	E1S1002	May. 15, 2007

NOTES: The calibration interval of the above test instruments is 12 months.

4.7.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer with suitable frequency span including bandwidth from band edge. The band edges was measured and recorded.

4.7.4 DEVIATION FROM TEST STANDARD



No deviation.

4.7.5 EUT OPERATING CONDITION

Continuously transmitting with modulation on a certain channel that can be set by the software (with typical data input as the modulation source).

4.7.6 TEST RESULTS

The spectrum plots are attached on the following 2 images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

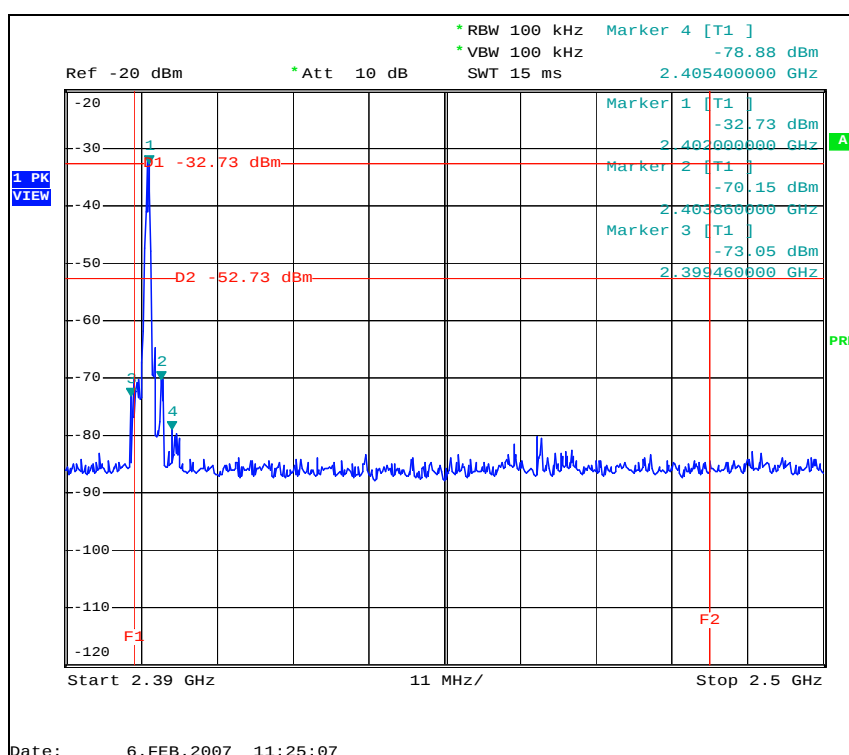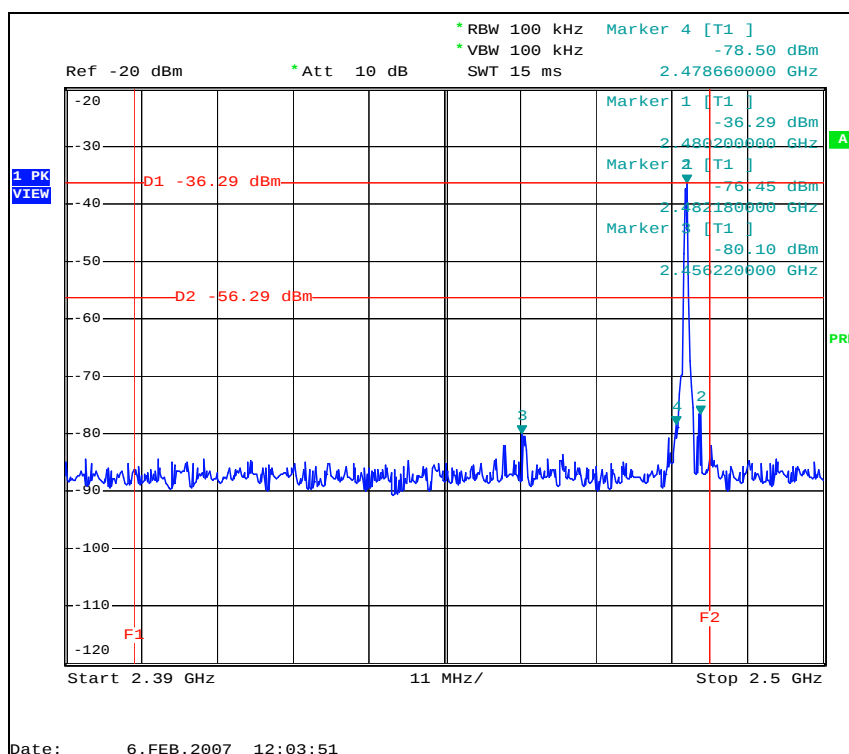



4.8 ANTENNA REQUIREMENT

4.8.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.8.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is printed on PCB without antenna connector. The maximum gain of this antenna is 4.5dBi.

5. INFORMATION ON THE TESTING LABORATORY

We, ADT (Shanghai) Corp., was founded in 2003 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratory is accredited and approved by the following approval agencies according to ISO / IEC 17025 (2005).

The client should not use it to claim product endorsement by CNLS, A2LA, or any government agency.

Japan	VCCI
USA	FCC, A2LA
Norway	DNV
China	CNAS



Copies of accreditation certificates of our laboratory obtained from approval agencies can be downloaded from our web site: www.cnadt.com

If you have any comments, please feel free to contact us at the following:

ADT (Shanghai) Corporation

TEL :86-21-6465-9091

Fax : 86-21-6465-9092

Email: service@adt-sh.com

Web Site: www.cnadt.com



APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.