


Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	20°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	Normal Link

Horizontal

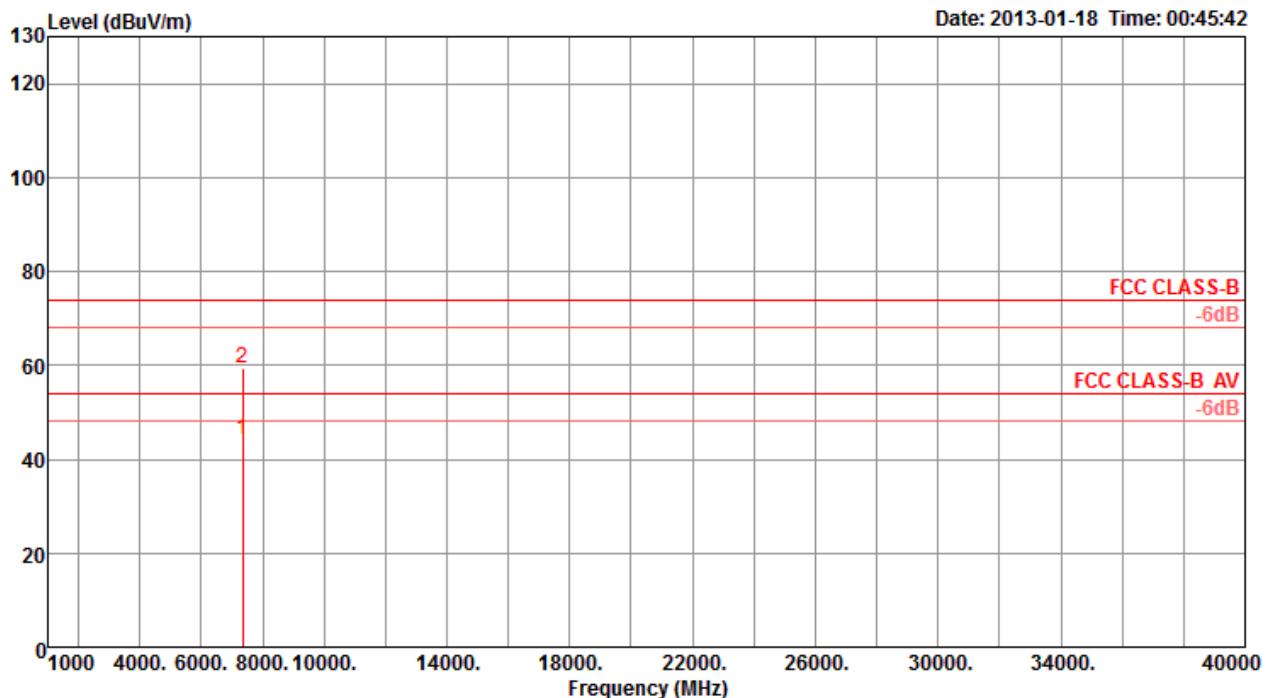

Freq	Level	Limit	Over	Read	Cable PreampAntenna			T/Pos	A/Pos	Pol/Phase
					Line	Limit	Factor			
MHz	dBuV/m	dBuV/m	dB	dBuV				deg	cm	
1 a	7337.63	44.08	54.00	-9.92	36.67	5.35	34.95	37.01	Average	80 100 HORIZONTAL
2 p	7337.91	59.40	74.00	-14.60	51.99	5.35	34.95	37.01	Peak	80 100 HORIZONTAL

Vertical

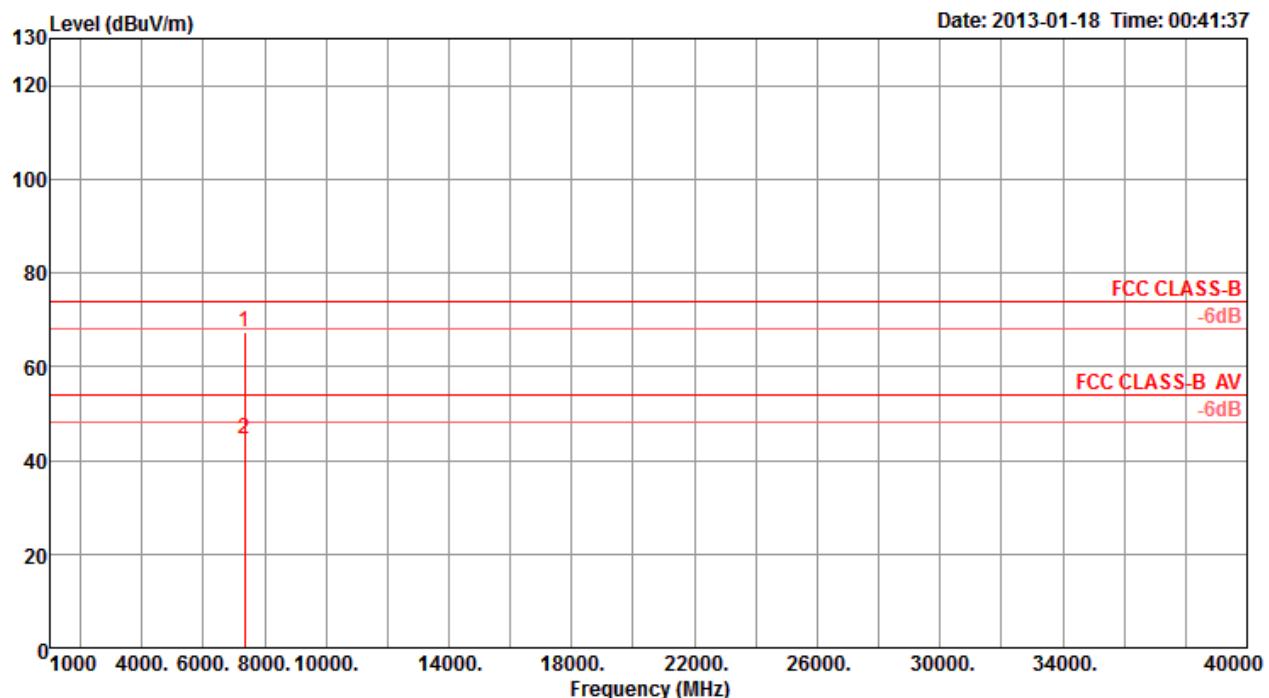

Freq	Level	Limit	Over	Read	Cable			Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
					Line	Limit	dB	dBuV	dB	dB	dB/m		
1 p	7337.98	67.17	74.00	-6.83	59.76	5.35	34.95	37.01	Peak	70	100	VERTICAL	
2 a	7338.62	44.58	54.00	-9.42	37.17	5.35	34.95	37.01	Average	70	100	VERTICAL	