

Test Laboratory: Compliance Certification Services Inc.

D2450V2 SN-728 Body

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:728

Communication System: CW2450; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.91 \text{ mho/m}$; $\epsilon_r = 51.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Pin=250mW,d=10mm/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 9.92 mW/g

Pin=250mW,d=10mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 86.8 V/m; Power Drift = -0.087 dB



Peak SAR (extrapolated) = 32.6 W/kg

SAR(1 g) = 13.6 mW/g; SAR(10 g) = 6.0 mW/g

Maximum value of SAR (measured) = 15.5 mW/g

Pin=250mW,d=10mm/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 15.7 mW/g

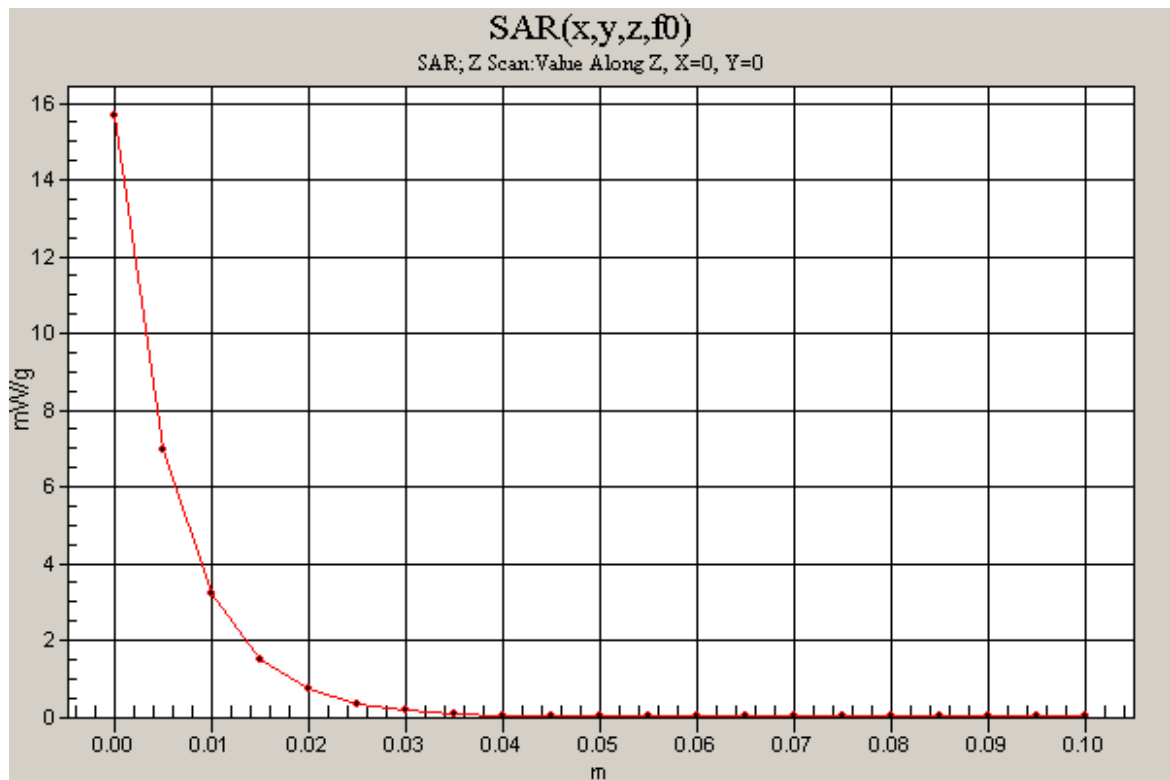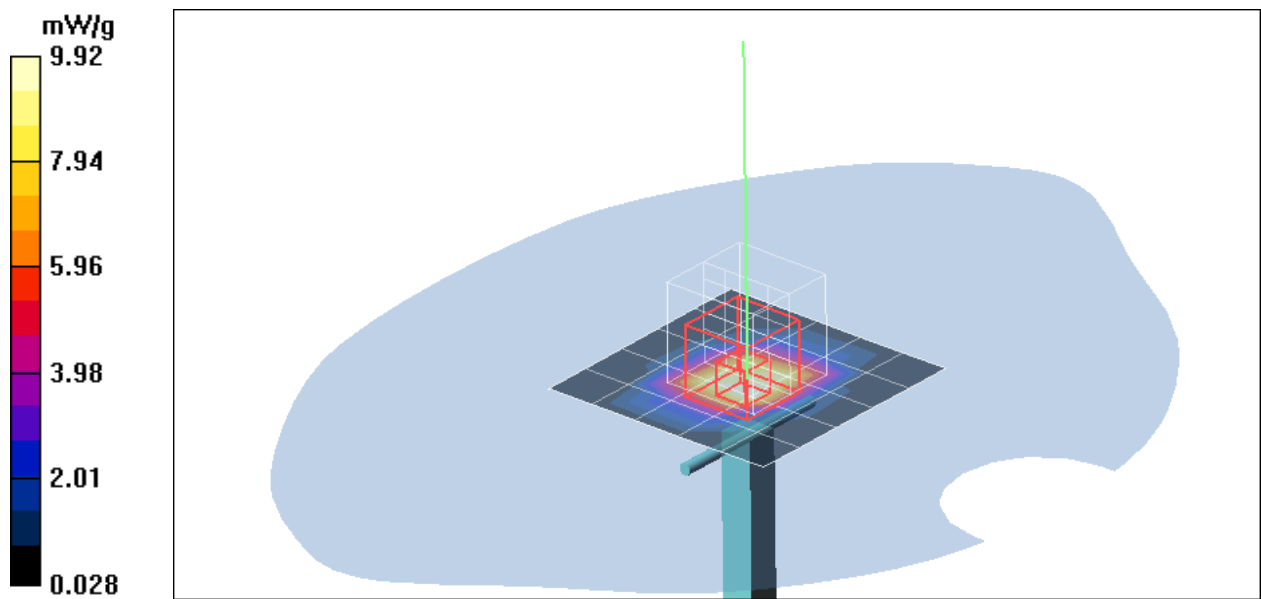

Test Laboratory: Compliance Certification Services Inc.

802.11b Bottom Flat Touch mode sony

DUT: AWLC6080; Type: Wireless LAN Card; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Middle CH, Rate=1M/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.323 mW/g


Middle CH, Rate=1M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.07 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 0.594 W/kg

SAR(1 g) = 0.282 mW/g; SAR(10 g) = 0.140 mW/g

Maximum value of SAR (measured) = 0.390 mW/g

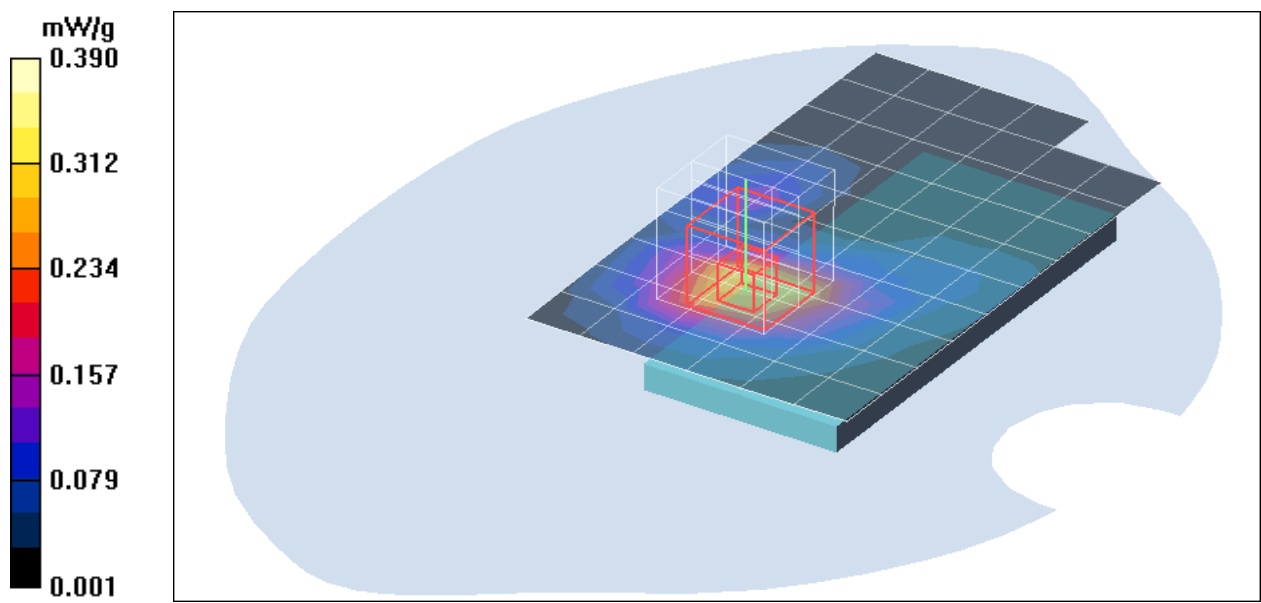

Test Laboratory: Compliance Certification Services Inc.

802.11g Bottom Flat Touch mode sony

DUT: AWLC6080; Type: Wireless LAN Card; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Middle CH, Rate=6M/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.472 mW/g

Middle CH, Rate=6M/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.452 mW/g; SAR(10 g) = 0.199 mW/g

Maximum value of SAR (measured) = 0.498 mW/g

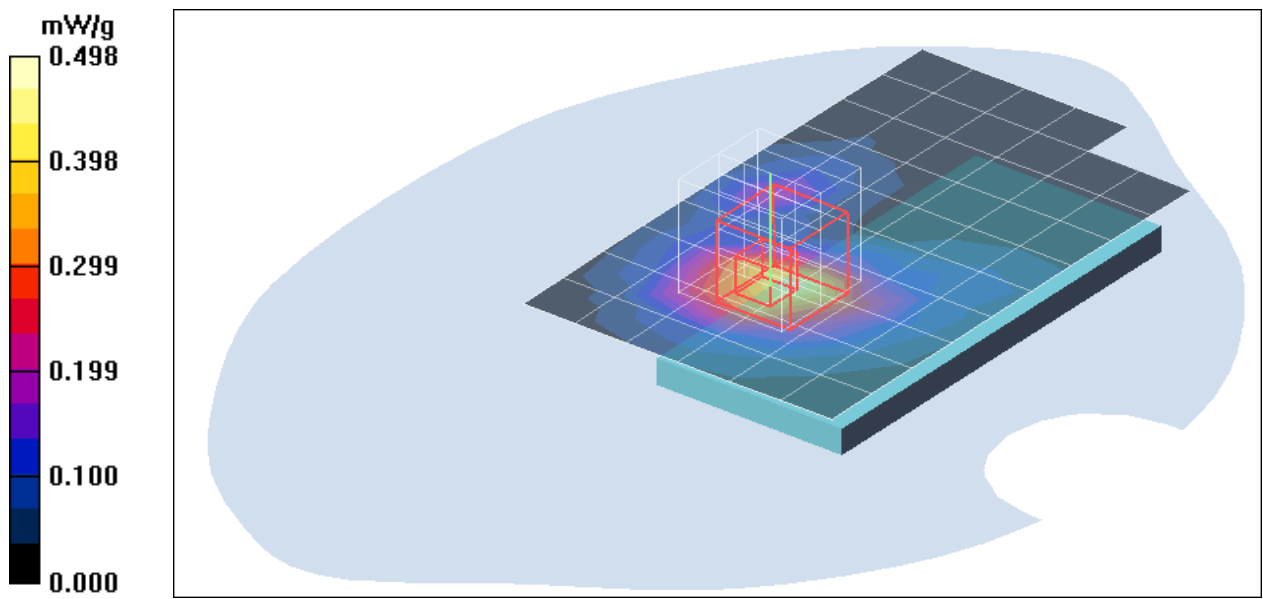

Test Laboratory: Compliance Certification Services Inc.

802.11n Bottom Flat Touch mode HT20 sony

DUT: AWLC6080; Type: Wireless LAN Card; Serial: N/A

Communication System: IEEE 802.11n WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Middle CH, Rate=6.5M/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.574 mW/g


Middle CH, Rate=6.5M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.0 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 0.899 W/kg

SAR(1 g) = 0.446 mW/g; SAR(10 g) = 0.239 mW/g

Maximum value of SAR (measured) = 0.600 mW/g

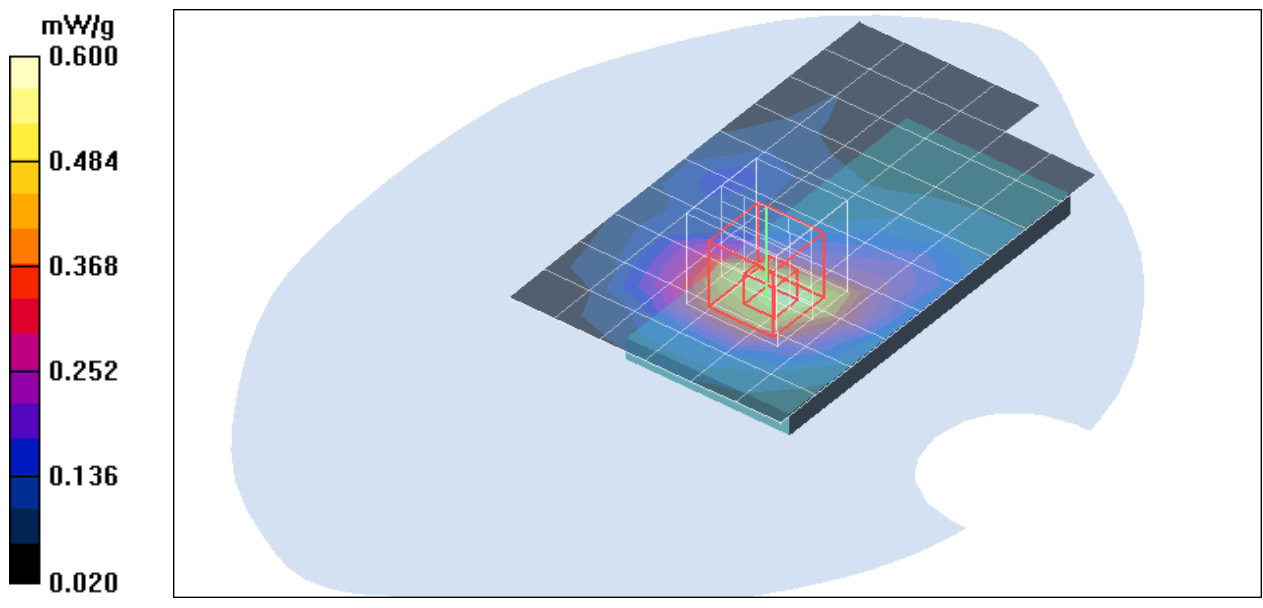

Test Laboratory: Compliance Certification Services Inc.

802.11n Bottom Flat Touch mode HT40 sony

DUT: AWLC6080; Type: Wireless LAN Card; Serial: N/A

Communication System: IEEE 802.11n WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Middle CH, Rate=13M/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.273 mW/g


Middle CH, Rate=13M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.47 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 0.410 W/kg

SAR(1 g) = 0.215 mW/g; SAR(10 g) = 0.130 mW/g

Maximum value of SAR (measured) = 0.278 mW/g

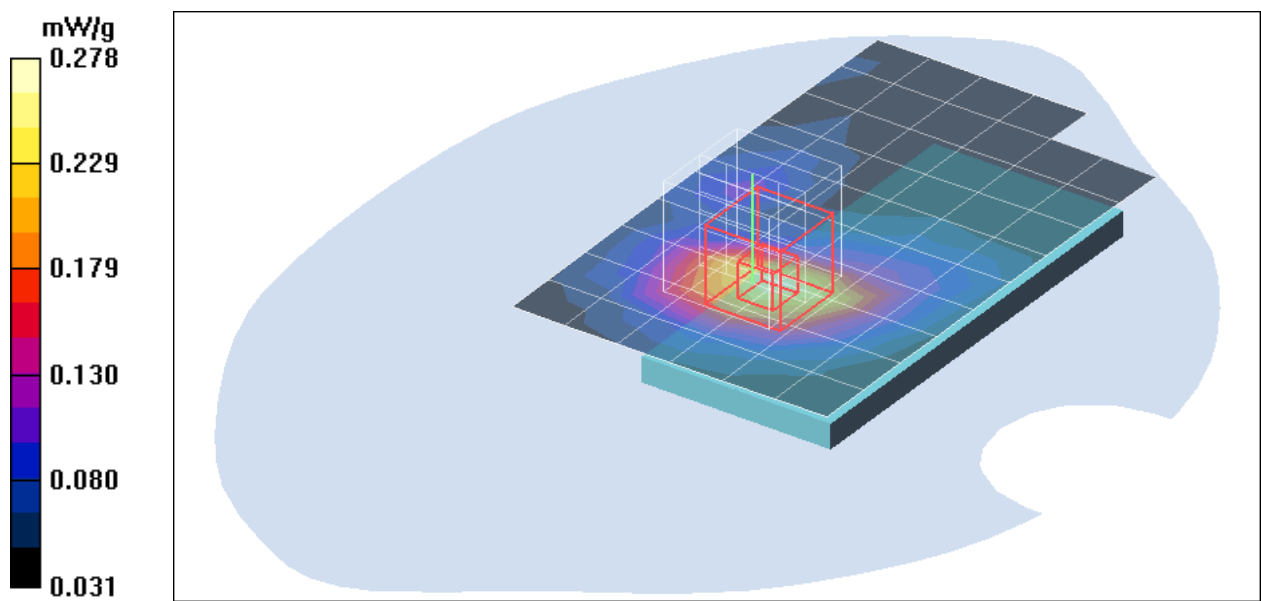

Test Laboratory: Compliance Certification Services Inc.

802.11b Bottom Face Touch mode Acer

DUT: AWLC6080; Type: Wireless LAN Card; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Middle CH, Rate=1M/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.715 mW/g

Middle CH, Rate=1M/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = 0.057 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.681 mW/g; SAR(10 g) = 0.315 mW/g

Maximum value of SAR (measured) = 0.979 mW/g

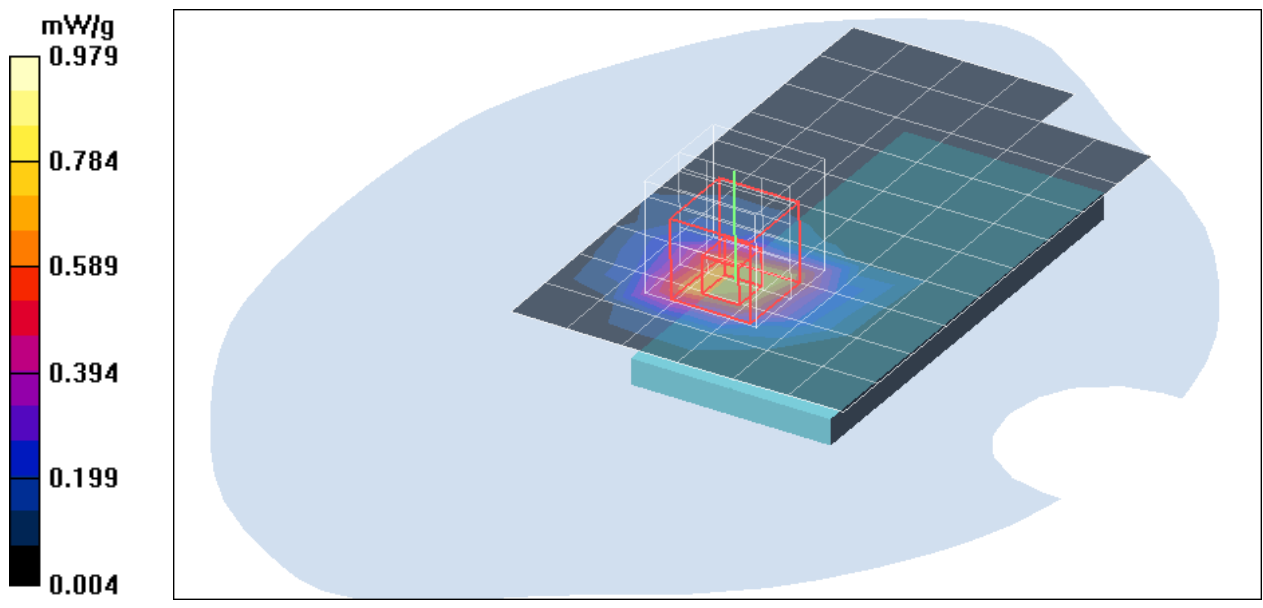

Test Laboratory: Compliance Certification Services Inc.

802.11g Bottom Face Touch mode Acer

DUT: AWLC6080; Type: Wireless LAN Card; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.83 \text{ mho/m}$; $\epsilon_r = 52$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Low CH, Rate=6M/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.864 mW/g


Low CH, Rate=6M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.2 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.712 mW/g; SAR(10 g) = 0.334 mW/g

Maximum value of SAR (measured) = 1.01 mW/g

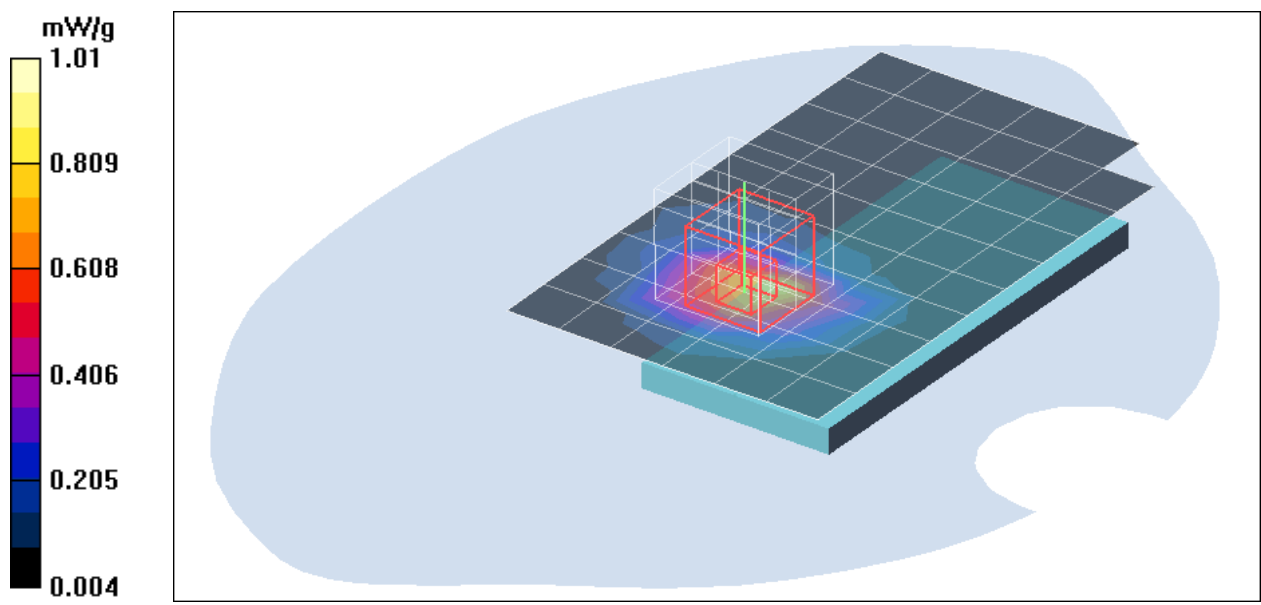

Test Laboratory: Compliance Certification Services Inc.

802.11g Bottom Face Touch mode Acer

DUT: AWLC6080; Type: Wireless LAN Card; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Middle CH, Rate=6M/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.913 mW/g


Middle CH, Rate=6M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.9 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 0.857 mW/g; SAR(10 g) = 0.397 mW/g

Maximum value of SAR (measured) = 1.23 mW/g

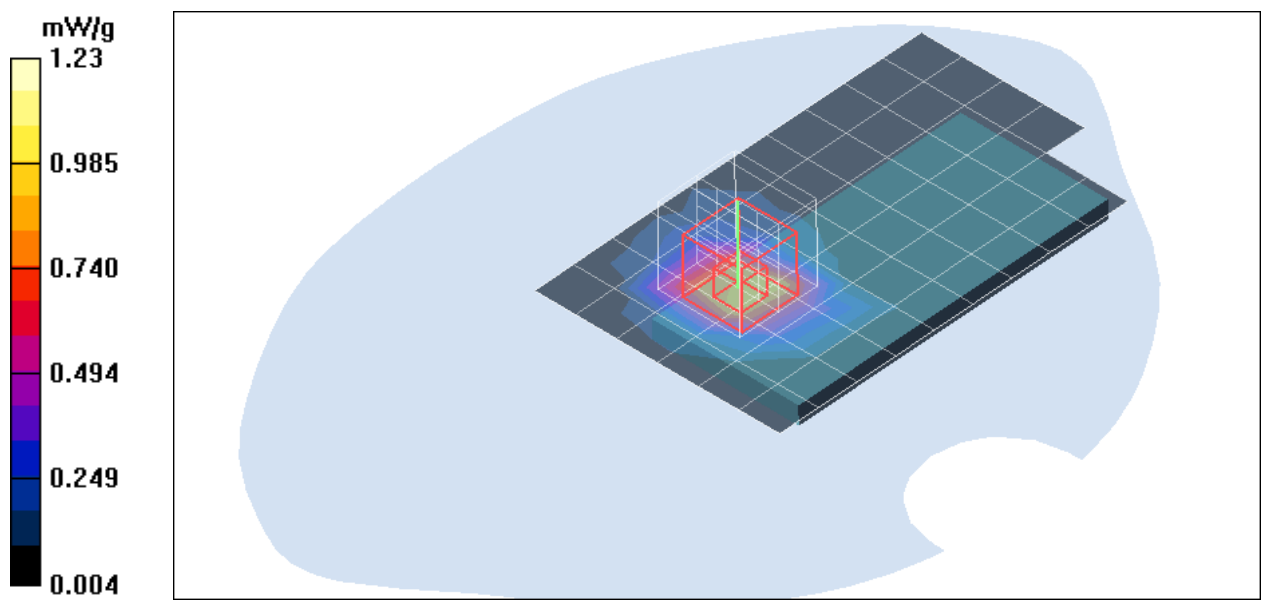

Test Laboratory: Compliance Certification Services Inc.

802.11g Bottom Face Touch mode Acer

DUT: AWLC6080; Type: Wireless LAN Card; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.93 \text{ mho/m}$; $\epsilon_r = 51.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

High CH, Rate=6M/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.12 mW/g

High CH, Rate=6M/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.9 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 0.932 mW/g; SAR(10 g) = 0.430 mW/g

Maximum value of SAR (measured) = 1.34 mW/g

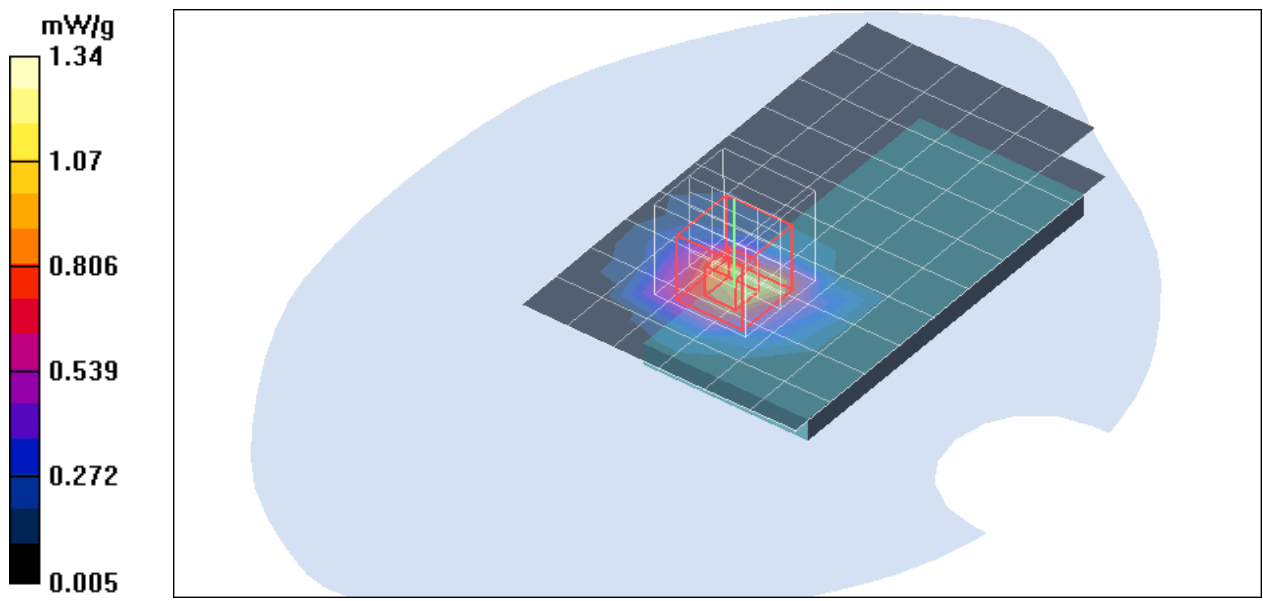

Test Laboratory: Compliance Certification Services Inc.

802.11n Bottom Flat Touch mode HT20 Acer

DUT: AWLC6080; Type: Wireless LAN Card; Serial: N/A

Communication System: IEEE 802.11n WLAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.83 \text{ mho/m}$; $\epsilon_r = 52$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Low CH, Rate=6.5M/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.04 mW/g


Low CH, Rate=6.5M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.8 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.906 mW/g; SAR(10 g) = 0.447 mW/g

Maximum value of SAR (measured) = 1.23 mW/g

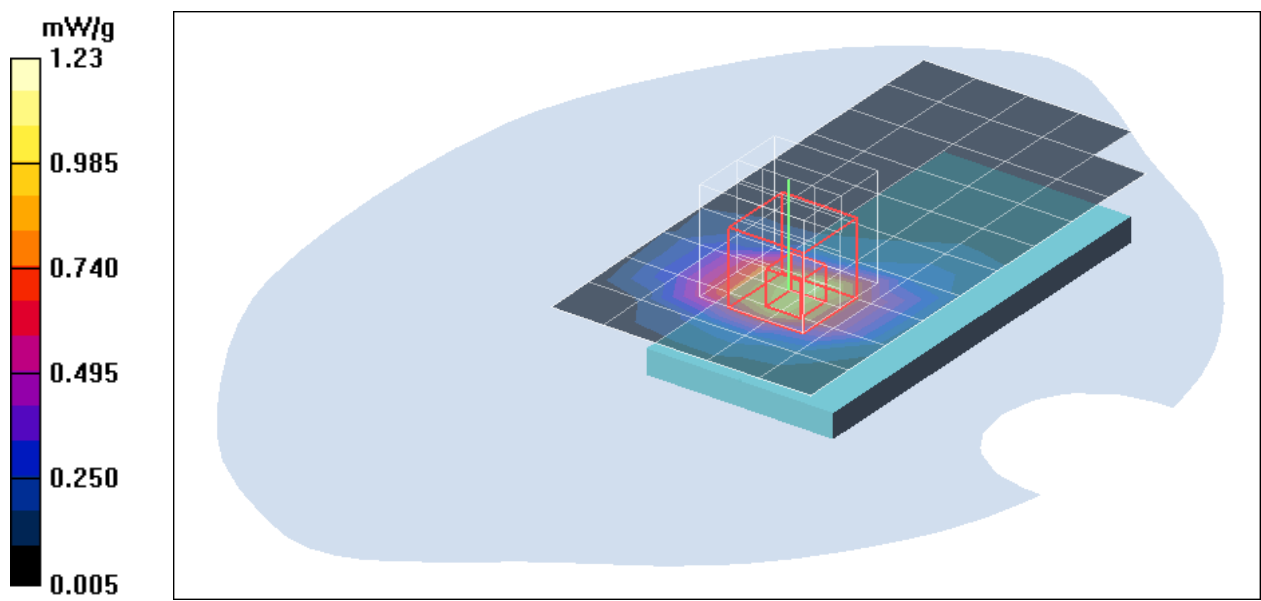

Test Laboratory: Compliance Certification Services Inc.

802.11n Bottom Flat Touch mode HT20 Acer

DUT: AWLC6080; Type: Wireless LAN Card; Serial: N/A

Communication System: IEEE 802.11n WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Middle CH, Rate=6.5M/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.02 mW/g


Middle CH, Rate=6.5M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.5 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 0.875 mW/g; SAR(10 g) = 0.423 mW/g

Maximum value of SAR (measured) = 1.21 mW/g

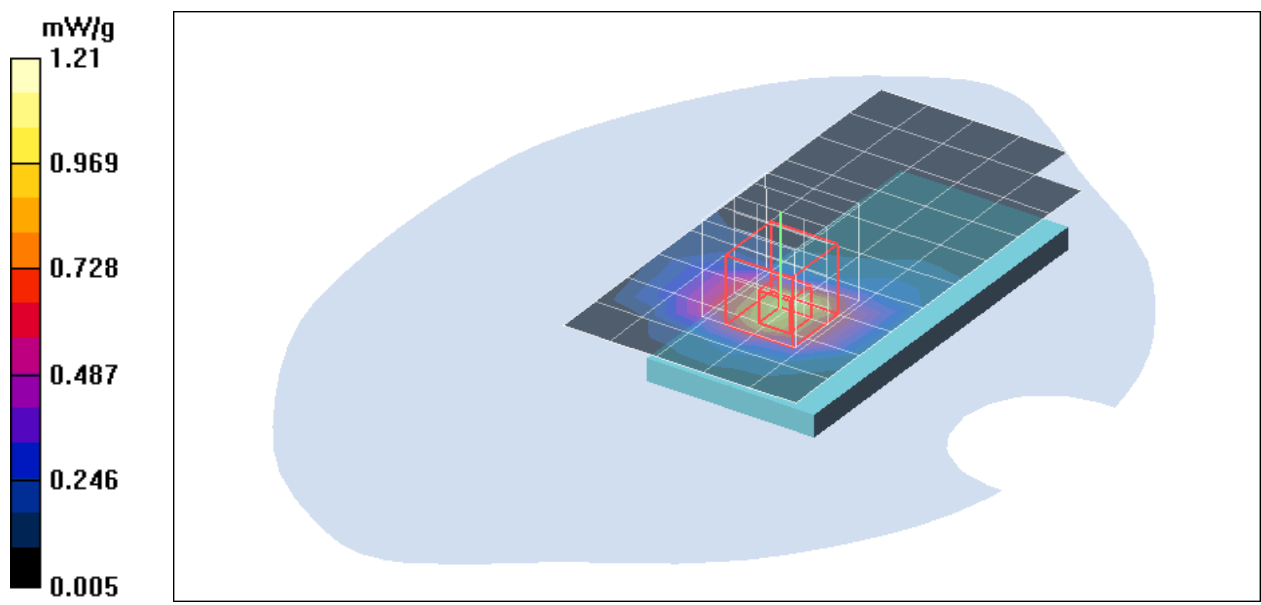

Test Laboratory: Compliance Certification Services Inc.

802.11n Bottom Flat Touch mode HT20 Acer

DUT: AWLC6080; Type: Wireless LAN Card; Serial: N/A

Communication System: IEEE 802.11n WLAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.93 \text{ mho/m}$; $\epsilon_r = 51.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

High CH, Rate=6.5M/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.23 mW/g

High CH, Rate=6.5M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.9 V/m; Power Drift = -0.032 dB



Peak SAR (extrapolated) = 2.21 W/kg

SAR(1 g) = 1.010 mW/g; SAR(10 g) = 0.483 mW/g

Maximum value of SAR (measured) = 1.40 mW/g

High CH, Rate=6.5M/Z Scan (1x1x26): Measurement grid: dx=20mm, dy=20mm, dz=4mm

Maximum value of SAR (measured) = 0.346 mW/g

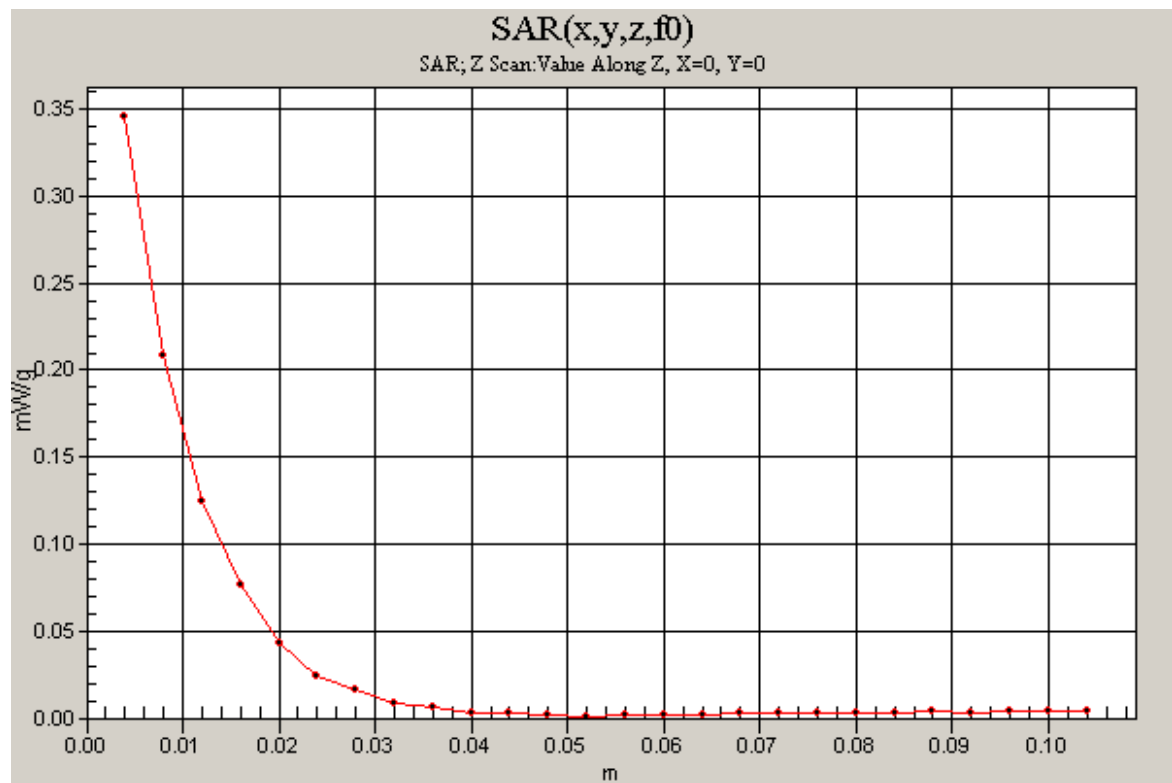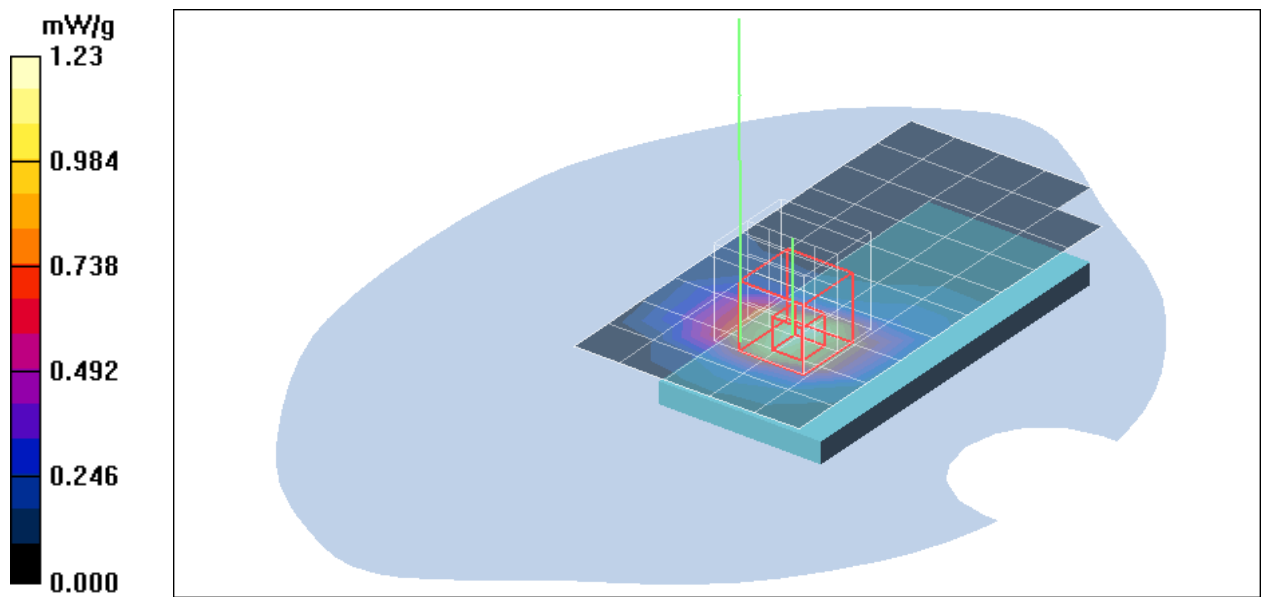

Test Laboratory: Compliance Certification Services Inc.

802.11n Bottom Flat Touch mode HT40 Acer

DUT: AWLC6080; Type: Wireless LAN Card; Serial: N/A

Communication System: IEEE 802.11n WLAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.83 \text{ mho/m}$; $\epsilon_r = 52$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Low CH, Rate=13M/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.853 mW/g


Low CH, Rate=13M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.4 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.738 mW/g; SAR(10 g) = 0.360 mW/g

Maximum value of SAR (measured) = 1.01 mW/g

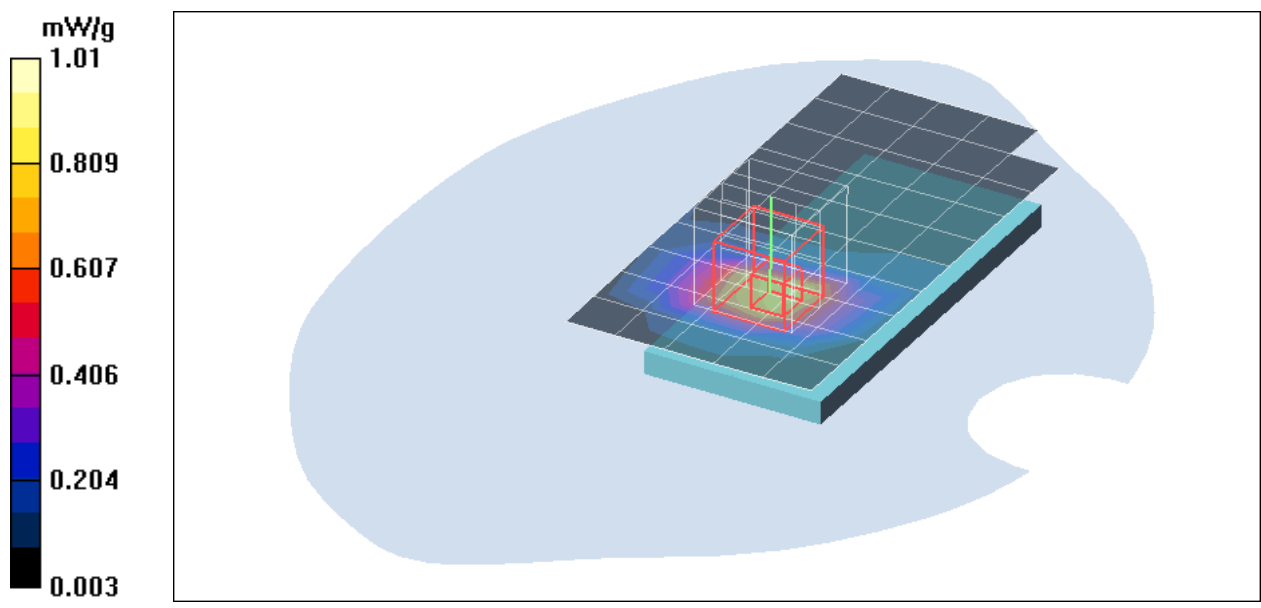

Test Laboratory: Compliance Certification Services Inc.

802.11n Bottom Flat Touch mode HT40 Acer

DUT: AWLC6080; Type: Wireless LAN Card; Serial: N/A

Communication System: IEEE 802.11n WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Middle CH, Rate=13M/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.896 mW/g


Middle CH, Rate=13M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.6 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.861 mW/g; SAR(10 g) = 0.412 mW/g

Maximum value of SAR (measured) = 1.20 mW/g

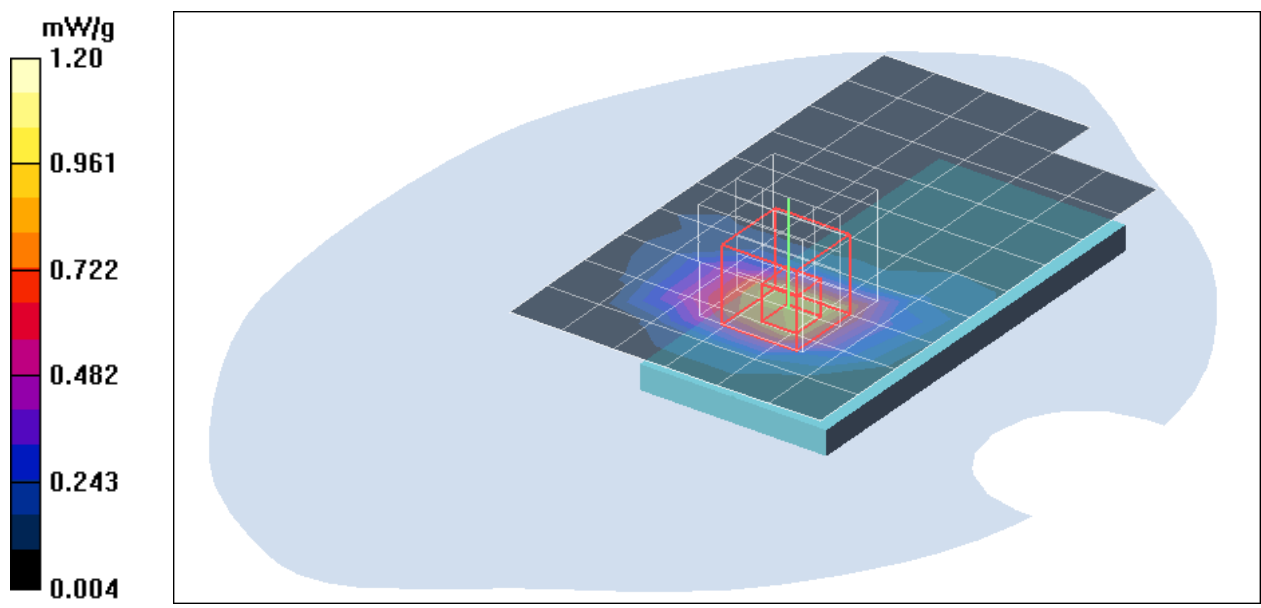

Test Laboratory: Compliance Certification Services Inc.

802.11n Bottom Flat Touch mode HT40 Acer

DUT: AWLC6080; Type: Wireless LAN Card; Serial: N/A

Communication System: IEEE 802.11n WLAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.93 \text{ mho/m}$; $\epsilon_r = 51.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

High CH, Rate=13M/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.14 mW/g

High CH, Rate=13M/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.4 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 0.969 mW/g; SAR(10 g) = 0.463 mW/g

Maximum value of SAR (measured) = 1.33 mW/g

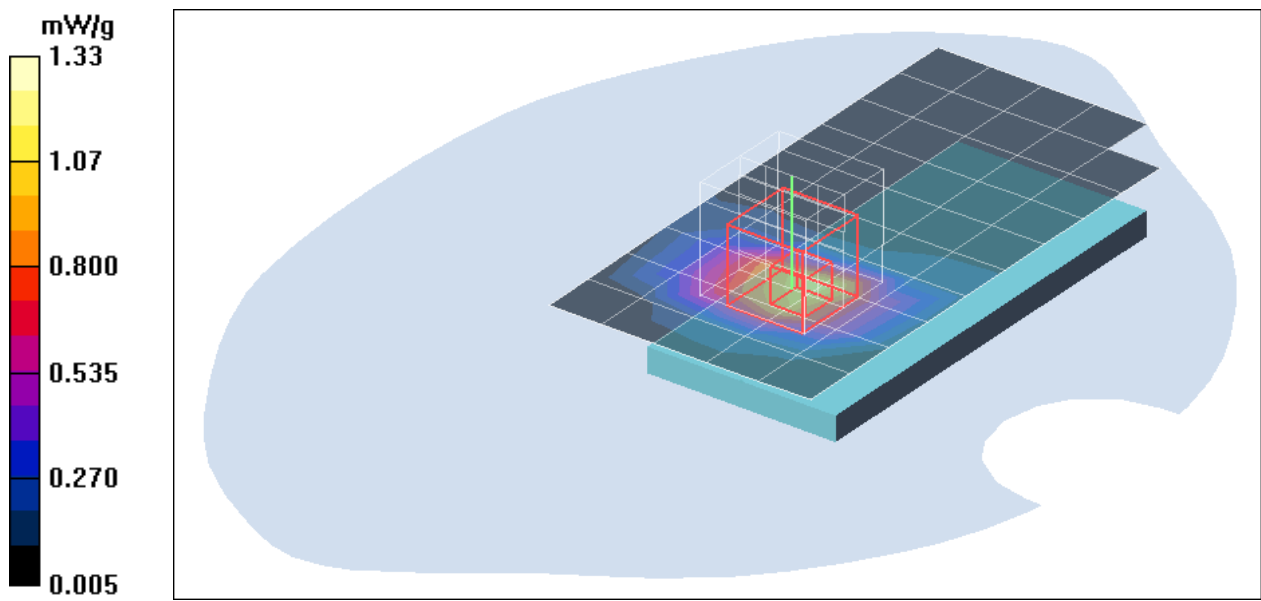

Test Laboratory: Compliance Certification Services Inc.

802.11b Bottom Flat Touch mode Dell

DUT: AWLC6080; Type: Wireless LAN Card; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Middle CH, Rate=1M/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.554 mW/g

Middle CH, Rate=1M/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.478 mW/g; SAR(10 g) = 0.229 mW/g

Maximum value of SAR (measured) = 0.680 mW/g

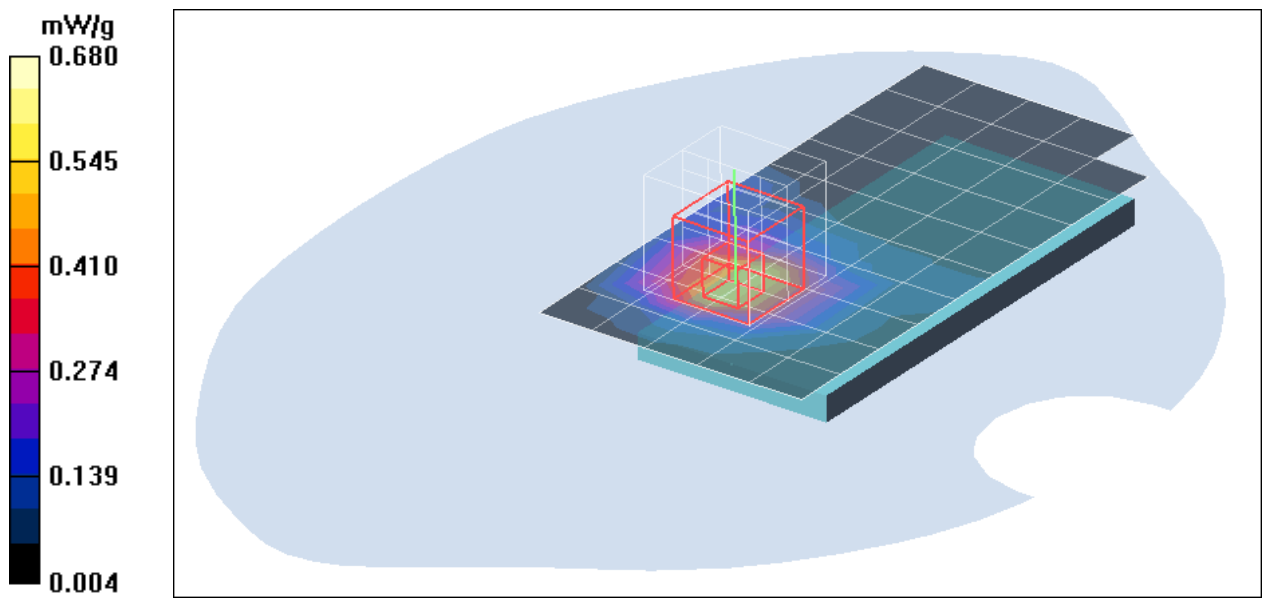

Test Laboratory: Compliance Certification Services Inc.

802.11g Bottom Flat Touch mode Dell

DUT: AWLC6080; Type: Wireless LAN Card; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Middle CH, Rate=6M/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.691 mW/g

Middle CH, Rate=6M/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.597 mW/g; SAR(10 g) = 0.287 mW/g

Maximum value of SAR (measured) = 0.847 mW/g

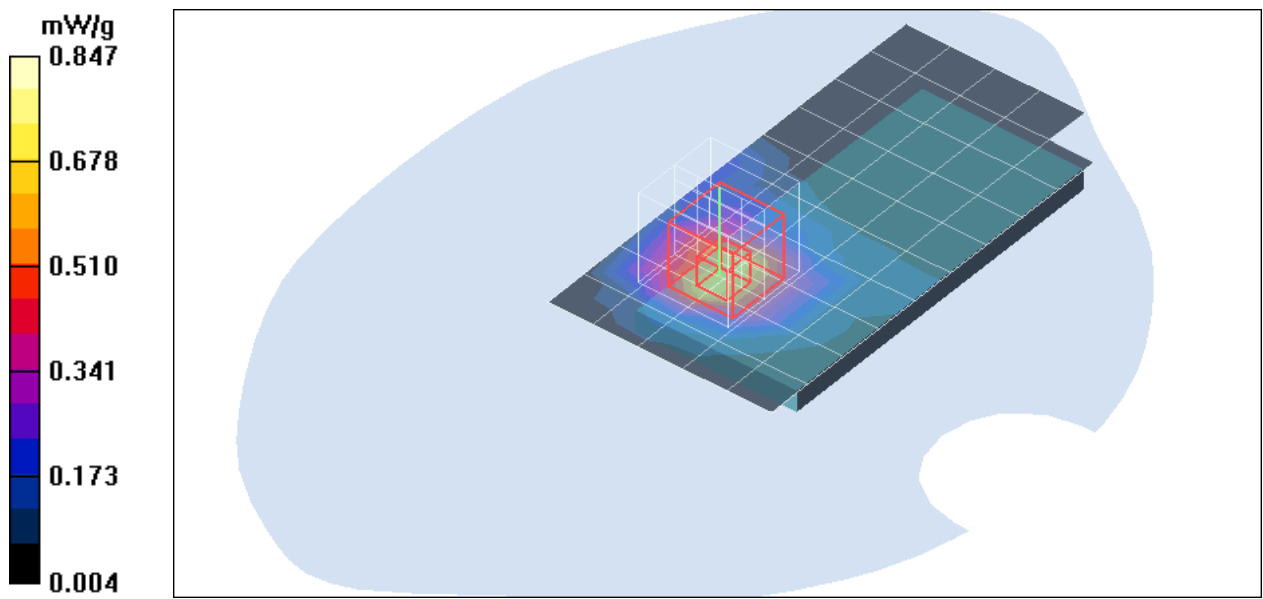

Test Laboratory: Compliance Certification Services Inc.

802.11n Bottom Flat Touch mode HT20 Dell

DUT: AWLC6080; Type: Wireless LAN Card; Serial: N/A

Communication System: IEEE 802.11n WLAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.83 \text{ mho/m}$; $\epsilon_r = 52$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Low CH, Rate=6.5M/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.47 mW/g


Low CH, Rate=6.5M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.6 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 2.35 W/kg

SAR(1 g) = 1.150 mW/g; SAR(10 g) = 0.588 mW/g

Maximum value of SAR (measured) = 1.55 mW/g

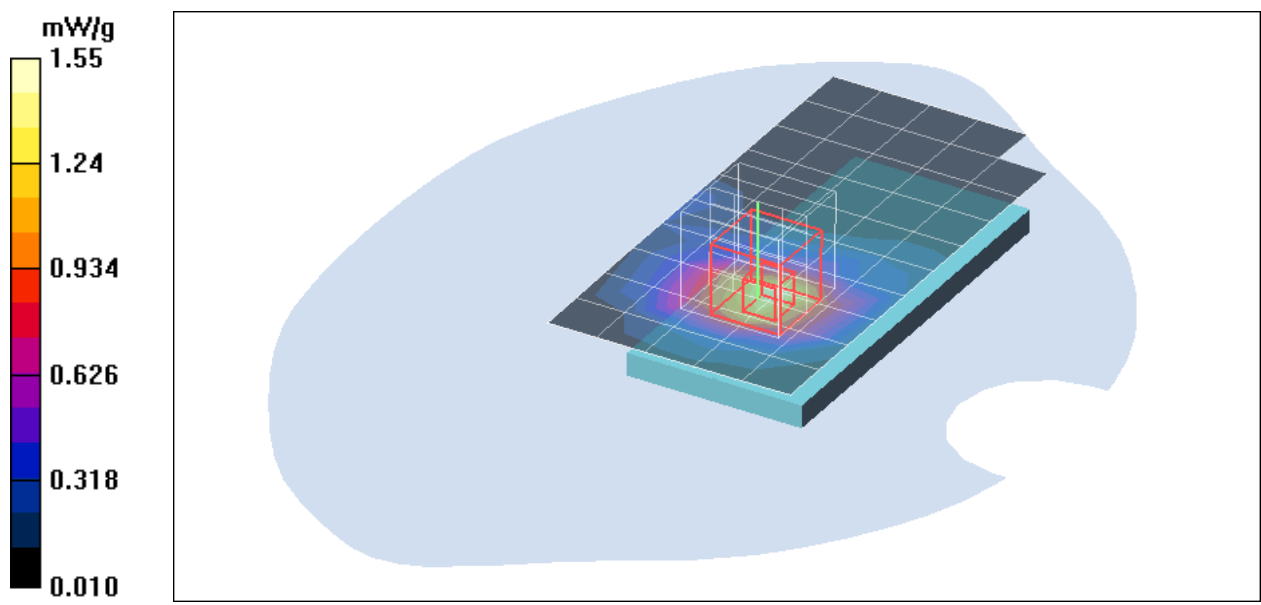

Test Laboratory: Compliance Certification Services Inc.

802.11n Bottom Flat Touch mode HT20 Dell

DUT: AWLC6080; Type: Wireless LAN Card; Serial: N/A

Communication System: IEEE 802.11n WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437 \text{ MHz}$; $\sigma = 1.88 \text{ mho/m}$; $\epsilon_r = 51.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Middle CH, Rate=6.5M/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.54 mW/g


Middle CH, Rate=6.5M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 19.2 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 2.51 W/kg

SAR(1 g) = 1.220 mW/g; SAR(10 g) = 0.622 mW/g

Maximum value of SAR (measured) = 1.64 mW/g

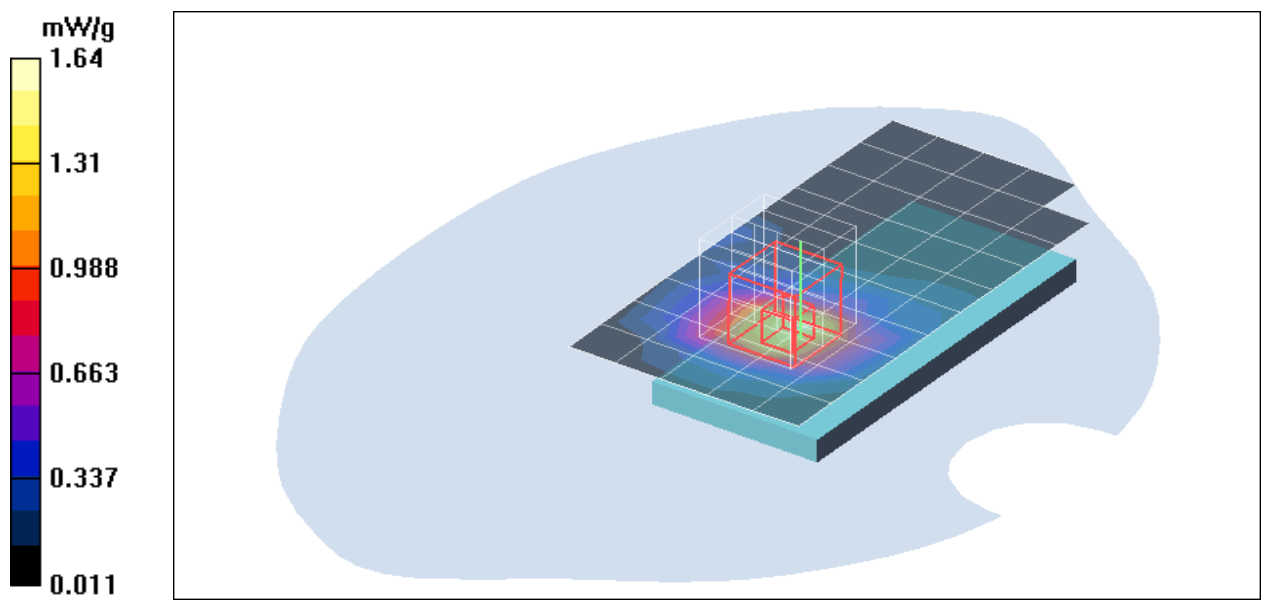

Test Laboratory: Compliance Certification Services Inc.

802.11n Bottom Flat Touch mode HT20 Dell

DUT: AWLC6080; Type: Wireless LAN Card; Serial: N/A

Communication System: IEEE 802.11n WLAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.93 \text{ mho/m}$; $\epsilon_r = 51.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

High CH, Rate=6.5M/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.67 mW/g

High CH, Rate=6.5M/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 19.7 V/m; Power Drift = -0.013 dB



Peak SAR (extrapolated) = 2.73 W/kg

SAR(1 g) = 1.320 mW/g; SAR(10 g) = 0.669 mW/g

Maximum value of SAR (measured) = 1.78 mW/g

High CH, Rate=6.5M/Z Scan (1x1x26): Measurement grid: dx=20mm, dy=20mm, dz=4mm

Maximum value of SAR (measured) = 0.525 mW/g

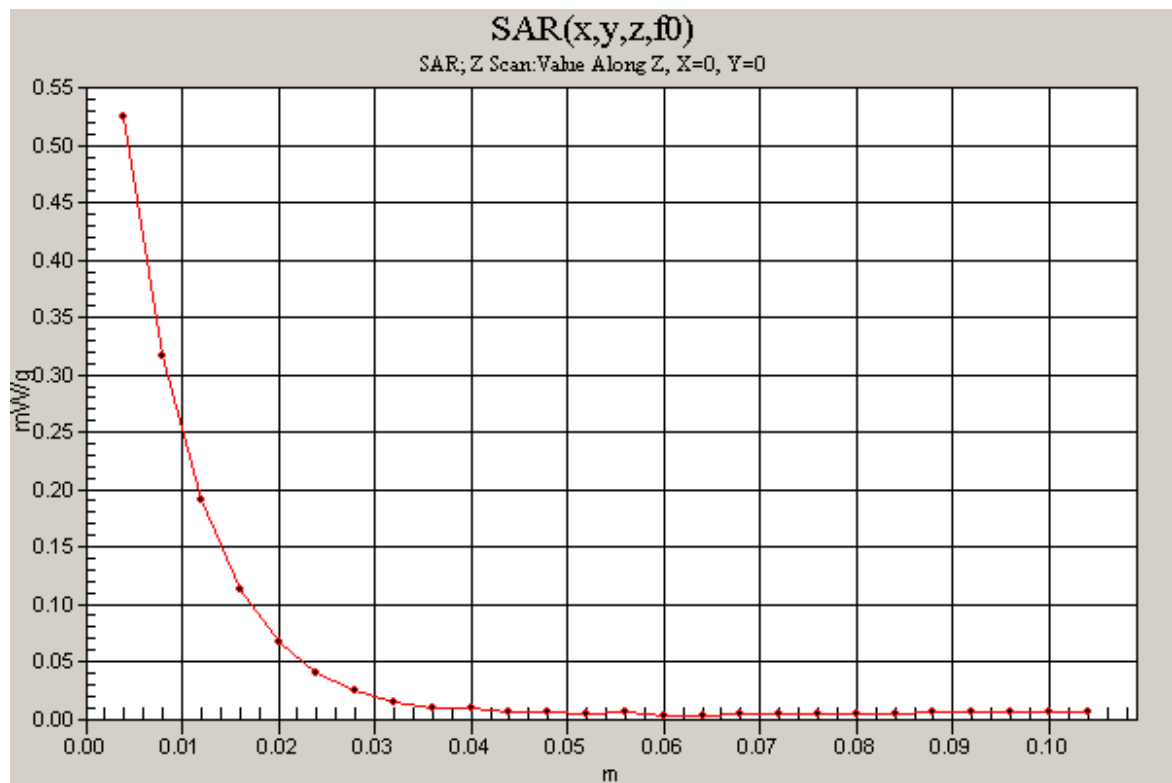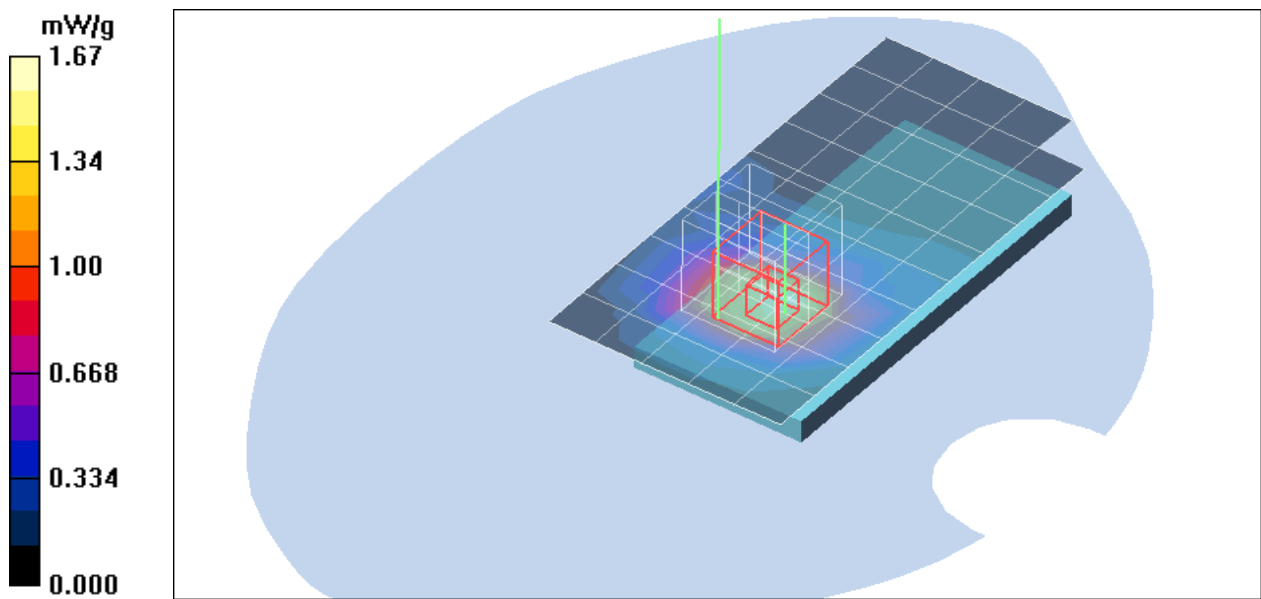

Test Laboratory: Compliance Certification Services Inc.

802.11n Bottom Flat Touch mode HT40 Dell

DUT: AWLC6080; Type: Wireless LAN Card; Serial: N/A

Communication System: IEEE 802.11n WLAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Low CH, Rate=13M/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.753 mW/g


Low CH, Rate=13M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.0 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.608 mW/g; SAR(10 g) = 0.309 mW/g

Maximum value of SAR (measured) = 0.817 mW/g

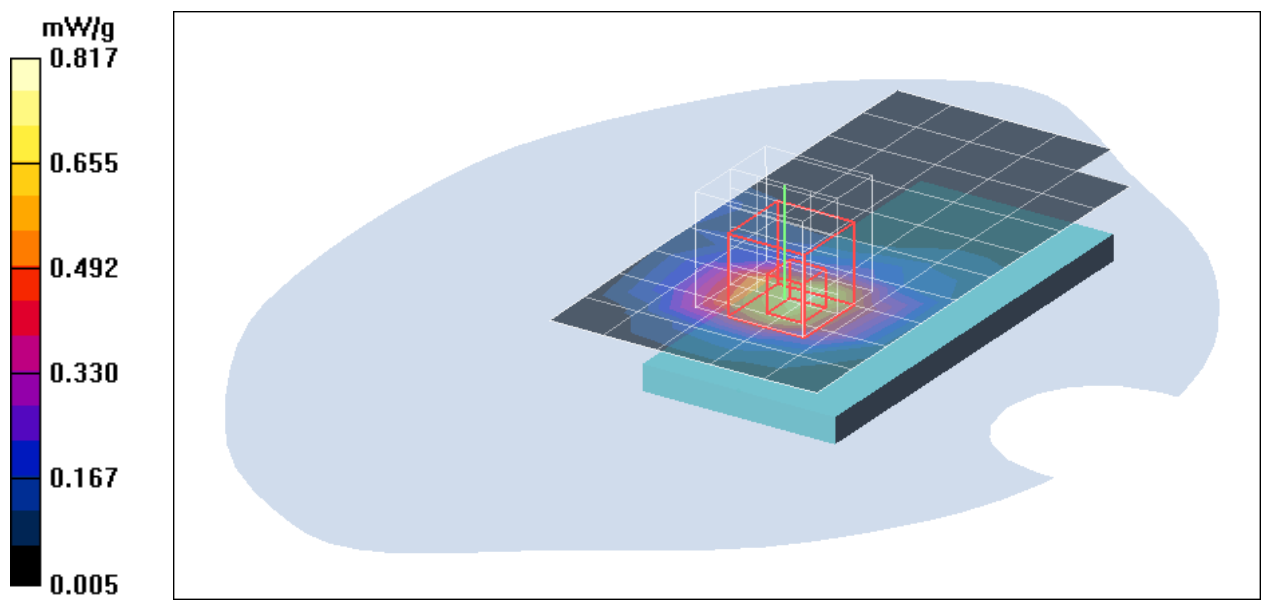

Test Laboratory: Compliance Certification Services Inc.

802.11n Bottom Flat Touch mode HT40 Dell

DUT: AWLC6080; Type: Wireless LAN Card; Serial: N/A

Communication System: IEEE 802.11n WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Middle CH, Rate=13M/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.851 mW/g


Middle CH, Rate=13M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.3 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.681 mW/g; SAR(10 g) = 0.346 mW/g

Maximum value of SAR (measured) = 0.928 mW/g

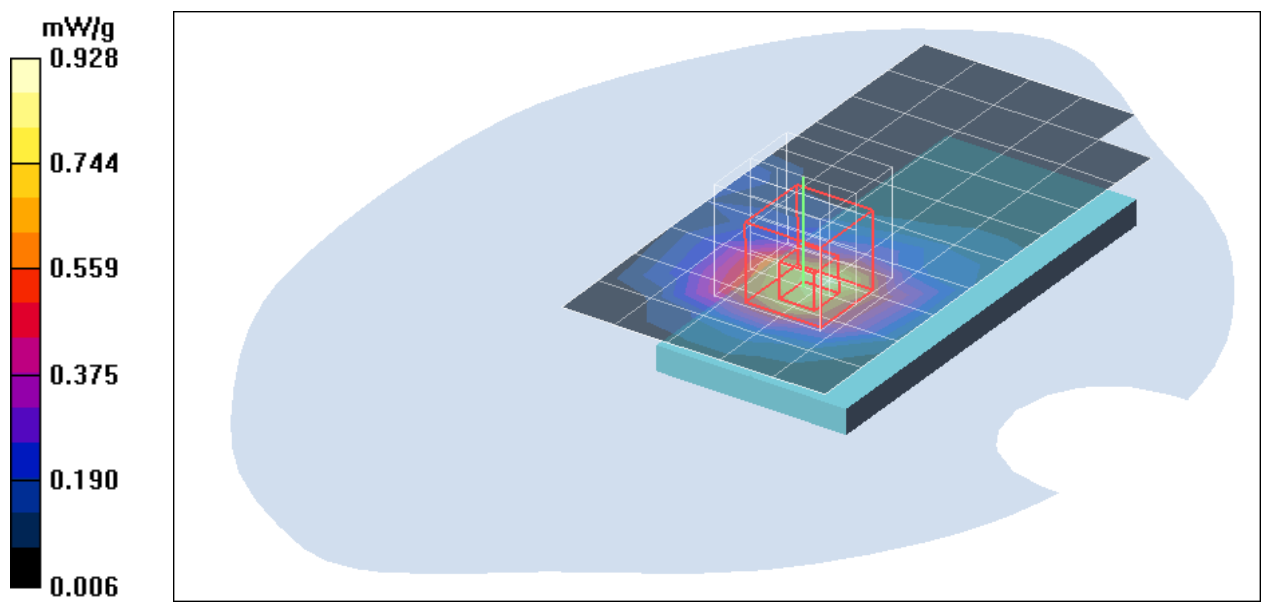

Test Laboratory: Compliance Certification Services Inc.

802.11n Bottom Flat Touch mode HT40 Dell

DUT: AWLC6080; Type: Wireless LAN Card; Serial: N/A

Communication System: IEEE 802.11n WLAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.93 \text{ mho/m}$; $\epsilon_r = 51.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Air Temperature: 24.8 deg C; Liquid Temperature: 23.8 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

High CH, Rate=13M/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.673 mW/g

High CH, Rate=13M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.0 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.552 mW/g; SAR(10 g) = 0.282 mW/g

Maximum value of SAR (measured) = 0.746 mW/g

