

FCC TEST REPORT (15.247)

REPORT NO.: RF120210E05 R1

MODEL NO.: E2F

FCC: RRK-E2F

RECEIVED: Feb. 10, 2012

TESTED: Feb. 15 to 17, 2012

ISSUED: Apr. 13, 2012

APPLICANT: Alpha Networks Inc.

ADDRESS: No.8 Li-shing 7th Rd., Science-based
Industrial Park, Hsinchu, Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

This test report consists of 90 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

RELEASE CONTROL RECORD.....	5
1. CERTIFICATION.....	6
2. SUMMARY OF TEST RESULTS.....	7
2.1 MEASUREMENT UNCERTAINTY	8
3. GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT.....	9
3.2 DESCRIPTION OF TEST MODES.....	12
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	13
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	16
3.4 DESCRIPTION OF SUPPORT UNITS	17
3.5 CONFIGURATION OF SYSTEM UNDER TEST	18
4. TEST TYPES AND RESULTS (802.11b & g, 2400 ~ 2483.5MHz Band).....	19
4.1 CONDUCTED EMISSION MEASUREMENT	19
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	19
4.1.2 TEST INSTRUMENTS	19
4.1.3 TEST PROCEDURES.....	20
4.1.4 DEVIATION FROM TEST STANDARD	20
4.1.5 TEST SETUP	21
4.1.6 EUT OPERATING CONDITIONS.....	21
4.1.7 TEST RESULTS.....	22
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT	24
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT ...	24
4.2.2 TEST INSTRUMENTS	25
4.2.3 TEST PROCEDURES.....	27
4.2.4 DEVIATION FROM TEST STANDARD	27
4.2.5 TEST SETUP	28
4.2.6 EUT OPERATING CONDITIONS.....	28
4.2.7 TEST RESULTS.....	29
4.3 6dB BANDWIDTH MEASUREMENT	42
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	42
4.3.2 TEST INSTRUMENTS	42
4.3.3 TEST PROCEDURE	42
4.3.4 DEVIATION FROM TEST STANDARD	42
4.3.5 TEST SETUP	42
4.3.6 EUT OPERATING CONDITIONS.....	43
4.3.7 TEST RESULTS.....	44
4.4 CONDUCTED OUTPUT POWER.....	46



A D T

4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	46
4.4.2	INSTRUMENTS	46
4.4.3	TEST PROCEDURES.....	46
4.4.4	DEVIATION FROM TEST STANDARD	46
4.4.5	TEST SETUP	46
4.4.6	EUT OPERATING CONDITIONS.....	46
4.4.7	TEST RESULTS.....	47
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	48
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	48
4.5.2	TEST INSTRUMENTS	48
4.5.3	TEST PROCEDURE	48
4.5.4	DEVIATION FROM TEST STANDARD	48
4.5.5	TEST SETUP	48
4.5.6	EUT OPERATING CONDITION	48
4.5.7	TEST RESULTS.....	49
4.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	51
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	51
4.6.2	TEST INSTRUMENTS	51
4.6.3	TEST PROCEDURE	51
4.6.4	DEVIATION FROM TEST STANDARD	52
4.6.5	TEST SETUP	52
4.6.6	EUT OPERATING CONDITION	52
4.6.7	TEST RESULTS.....	52
5.	TEST TYPES AND RESULTS (802.11a, 5725~5850MHz Band)	57
5.1	CONDUCTED EMISSION MEASUREMENT	57
5.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	57
5.1.2	TEST INSTRUMENTS	57
5.1.3	TEST PROCEDURES.....	58
5.1.4	DEVIATION FROM TEST STANDARD	58
5.1.5	TEST SETUP	59
5.1.6	EUT OPERATING CONDITIONS.....	59
5.1.7	TEST RESULTS.....	60
5.2	RADIATED AND BANDEDGE EMISSION MEASUREMENT.....	62
5.2.1	LIMITS OF RADIATED AND BANDEDGE EMISSION MEASUREMENT	62
5.2.2	TEST INSTRUMENTS	63
5.2.3	TEST PROCEDURES.....	64
5.2.4	DEVIATION FROM TEST STANDARD	64
5.2.5	TEST SETUP	65
5.2.6	EUT OPERATING CONDITIONS.....	65



A D T

5.2.7	TEST RESULTS.....	66
5.3	6dB BANDWIDTH MEASUREMENT	75
5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	75
5.3.2	TEST INSTRUMENTS	75
5.3.3	TEST PROCEDURE	75
5.3.4	DEVIATION FROM TEST STANDARD	75
5.3.5	TEST SETUP	75
5.3.6	EUT OPERATING CONDITIONS.....	76
5.3.7	TEST RESULTS.....	77
5.4	CONDUCTED OUTPUT POWER	78
5.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	78
5.4.2	INSTRUMENTS	78
5.4.3	TEST PROCEDURES.....	78
5.4.4	DEVIATION FROM TEST STANDARD	78
5.4.5	TEST SETUP	78
5.4.6	EUT OPERATING CONDITIONS.....	78
5.4.7	TEST RESULTS.....	79
5.5	POWER SPECTRAL DENSITY MEASUREMENT.....	80
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	80
5.5.2	TEST INSTRUMENTS	80
5.5.3	TEST PROCEDURE	80
5.5.4	DEVIATION FROM TEST STANDARD	80
5.5.5	TEST SETUP	80
5.5.6	EUT OPERATING CONDITION	80
5.5.7	TEST RESULTS.....	81
5.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	83
5.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	83
5.6.2	TEST INSTRUMENTS	83
5.6.3	TEST PROCEDURE	83
5.6.4	DEVIATION FROM TEST STANDARD	84
5.6.5	EUT OPERATING CONDITION	84
5.6.6	TEST RESULTS.....	84
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	88
7.	INFORMATION ON THE TESTING LABORATORIES	89
8.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	90


RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120210E05	Original release	Apr. 10, 2012
RF120210E05 R1	Modified Antenna Connector type of the EUT	Apr. 13, 2012

1. CERTIFICATION

PRODUCT: MY NET N750
BRAND NAME: WD
MODEL NO.: E2F
TEST SAMPLE: MASS-PRODUCTION
APPLICANT: Alpha Networks Inc.
TESTED: Feb. 15 to 17, 2012
STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10-2009

The above equipment (Model: E2F) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE:** Apr. 13, 2012
(Elsie Hsu, Specialist)

APPROVED BY :  , **DATE:** Apr. 13, 2012
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For 2.4GHz, 2412~2462MHz Band

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -18.33dB at 0.18139MHz
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.50dB at 2483.50MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

For 5GHz, 5745~5825MHz Band

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -18.58dB at 0.17985MHz
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.50dB at 5000.00MHz and 11650.00MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is MHF not a standard connector.

NOTE: The EUT was operating in 2400 ~ 2483.5MHz, 5.15~5.25GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 2400 ~ 2483.5MHz and 5.725~5.850GHz. For the 5.15~5.25GHz RF parameters was recorded in another test report.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)	3.81 dB
Radiated emissions (1GHz -18GHz)	2.19 dB
Radiated emissions (18GHz -40GHz)	2.56 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	MY NET N750
MODEL NO.	E2F
FCC	RRK-E2F
POWER SUPPLY	DC 12V from external power adaptor
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: up to 11Mbps 802.11a / g: up to 54Mbps 802.11n: up to 450Mbps
OPERATING FREQUENCY	For 15.407 802.11a: 5.18 ~ 5.24GHz
	For 15.247 802.11b/g: 2.412 ~ 2.462GHz 802.11a: 5.745 ~ 5.825GHz
NUMBER OF CHANNEL	For 15.407 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
	For 15.247 (2.4GHz) 11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz) For 15.247 (5GHz) 5 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)

MAXIMUM OUTPUT POWER	For 15.407 802.11a: 20.6mW 802.11n (20MHz): 45.1mW 802.11n (40MHz): 47.2mW For 15.247 (2.4GHz) 802.11b: 191.8mW 802.11g: 564.3mW 802.11n (20MHz): 806.8mW 802.11n (40MHz): 390.1mW For 15.247 (5GHz) 802.11a: 291.3mW 802.11n (20MHz): 563.1mW 802.11n (40MHz): 571.9mW
ANTENNA TYPE	Please see note
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	Adapter x 1

NOTE:

- The antennas provided to the EUT, please refer to the following table:

For 2.4GHz					
Transmitter Circuit	Brand	Model	Peak Gain (dBi)	Antenna Type	Connector Type
Chain (0)	WHA YU GROUP	C037-511171-A (SSR-14424)	3	PCB	NA
Chain (1)	WHA YU GROUP	C037-511170-A (SSR-2011130)	3	PCB	NA
For 5GHz					
Transmitter Circuit	Brand	Model	Peak Gain (dBi)	Antenna Type	Connector Type
Chain (0)	WHA YU GROUP	C037-511158-A (SSR-14469)	5	PCB	MHF
Chain (1)	WHA YU GROUP	C037-511172-A (SSR-2011133)	5	PCB	MHF
Chain (2)	WHA YU GROUP	C037-511176-A (SSR-14470)	5	PCB	MHF

2. The EUT must be supplied with a power adapter as following table:

Brand	Model No.	Spec.
APD	WA-24E12FU	Input: 100-240V, 50-60Hz, 0.65A Max Output: 12V, 2A DC output cable (unshielded, with one core, 1.8m)

3. The EUT incorporates a MIMO function. Physically, the EUT provides three completed transmitters and three receivers.

MODULATION MODE	TX/RX FUNCTION
802.11b	2Tx/2Rx
802.11g	2Tx/2Rx
802.11a	3Tx/3Rx
802.11n (20MHz) for 2.4GHz	2Tx/2Rx
802.11n (40MHz) for 2.4GHz	2Tx/2Rx
802.11n (20MHz) for 5GHz	3Tx/3Rx
802.11n (40MHz) for 5GHz	3Tx/3Rx

4. Spurious emission of the simultaneous operation (2.4GHz & 5GHz) has been evaluated and no non-compliance was found.

5. The EUT is 3 * 3 spatial MIMO (3Tx & 3Rx) without beam forming function.

6. The EUT incorporates CDD function with 802.11a, 802.11b, 802.11g.

7. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 23.

8. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

Eleven channels are provided for 802.11b, 802.11g, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

Operated in 5725 ~ 5850MHz band:

Five channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

Two channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY
151	5755 MHz
159	5795 MHz

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ³ 1G	APCM	OB	
-	√	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ³ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6
For 5 GHz 802.11n (20MHz)	149 to 165	149	OFDM	BPSK	6

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6
For 5 GHz 802.11n (20MHz)	149 to 165	149	OFDM	BPSK	6.5

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
For 2.4 GHz 802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
For 5 GHz 802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
For 5 GHz 802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
For 2.4 GHz 802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
For 5 GHz 802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
For 5 GHz 802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	13.5

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
For 2.4 GHz 802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
For 5 GHz 802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
For 5 GHz 802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	13.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	24deg. C, 75%RH	120Vac, 60Hz	Scott Chen
RE<1G	19deg. C, 62%RH	120Vac, 60Hz	Nike Chang
RE ³ 1G	23deg. C, 69%RH 24deg. C, 71%RH	120Vac, 60Hz	Frank Liu / Nelson Teng
APCM	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang
OB	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	FSLB32S	FCC DoC
2	NOTEBOOK COMPUTER	DELL	PP32LA	GSLB32S	FCC DoC
3	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC
4	HDD	WD	WDBAAE5000A SL-PESN	WX51A6172904	FCC DoC
5	HDD	WD	WDBACG0010H CH-SESN	WCAZA4888800	FCC DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	UTP cable (10m)
2	UTP cable (10m)
3	UTP cable (10m)
4	USB cable (0.3m)
5	USB cable (0.3m)

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

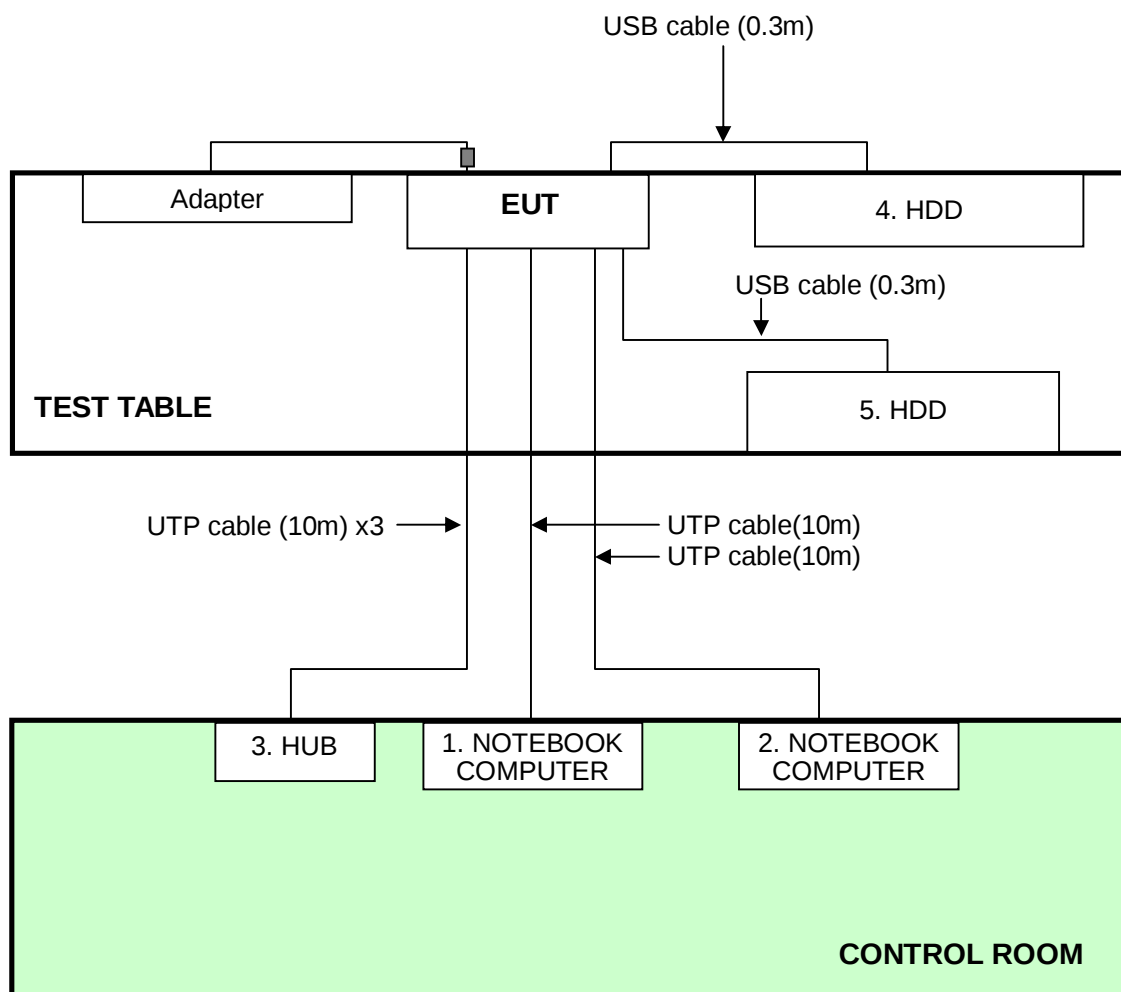

4. TEST TYPES AND RESULTS (802.11b & g, 2400 ~ 2483.5MHz Band)

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 09, 2011	Mar. 08, 2012
Line-Impedance Stabilization Network (for EUT)	NSLK8127	8127-522	Sep. 07, 2011	Sep. 06, 2012
Line-Impedance Stabilization Network (for Peripheral)	ESH3-Z5	848773/004	Nov. 01, 2011	Oct. 31, 2012
RF Cable (JYEBAO)	5DFB	COCCAB-002	Aug. 29, 2011	Aug. 28, 2012
50 ohms Terminator	50	3	Nov. 02, 2011	Nov. 01, 2012
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Feb. 17, 2012


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

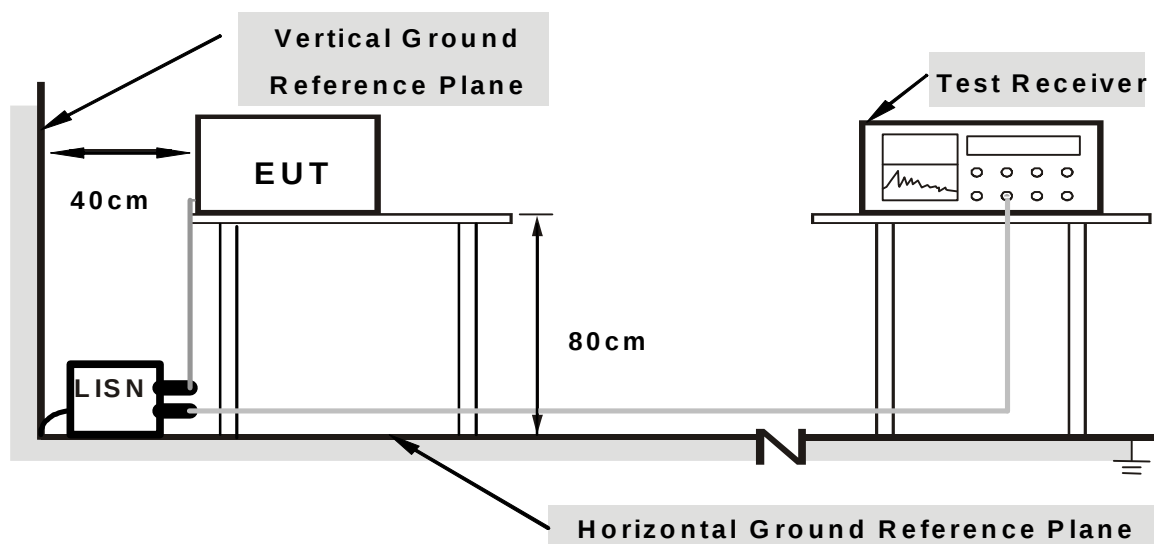

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


1. Placed the EUT on testing table.
2. Prepared other computer system (support unit 1) to act as communication partners and placed them outside of testing area.
3. The communication partners ran test program “artgui.exe” to enable EUT under transmission/receiving condition continuously via one UTP cable transmission.

4.1.7 TEST RESULTS

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15741	0.09	44.36	35.42	44.45	35.51	65.60	55.60	-21.15	-20.09
2	0.18139	0.10	44.25	35.99	44.35	36.09	64.42	54.42	-20.07	-18.33
3	0.35345	0.13	36.09	28.56	36.22	28.69	58.88	48.88	-22.66	-20.19
4	0.87272	0.18	30.85	24.21	31.03	24.39	56.00	46.00	-24.97	-21.61
5	5.29254	0.47	29.33	22.88	29.80	23.35	60.00	50.00	-30.20	-26.65
6	9.83285	0.71	28.29	22.51	29.00	23.22	60.00	50.00	-31.00	-26.78


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

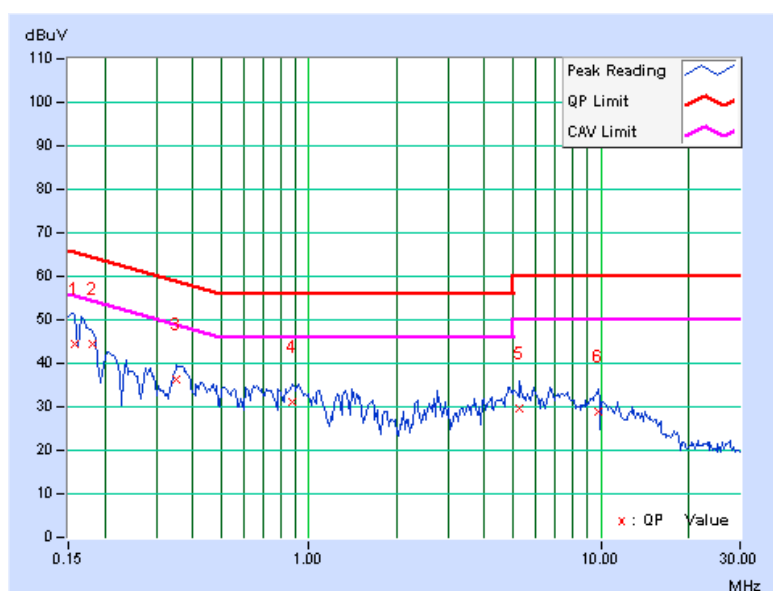

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15802	0.08	44.21	36.51	44.29	36.59	65.57	55.57	-21.28	-18.98
2	0.17711	0.09	44.69	35.56	44.78	35.65	64.62	54.62	-19.84	-18.97
3	0.35781	0.12	36.77	29.59	36.89	29.71	58.78	48.78	-21.89	-19.07
4	2.78566	0.24	31.21	24.87	31.45	25.11	56.00	46.00	-24.55	-20.89
5	3.82887	0.30	31.95	24.69	32.25	24.99	56.00	46.00	-23.75	-21.01
6	8.43745	0.52	28.15	22.78	28.67	23.30	60.00	50.00	-31.33	-26.70

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

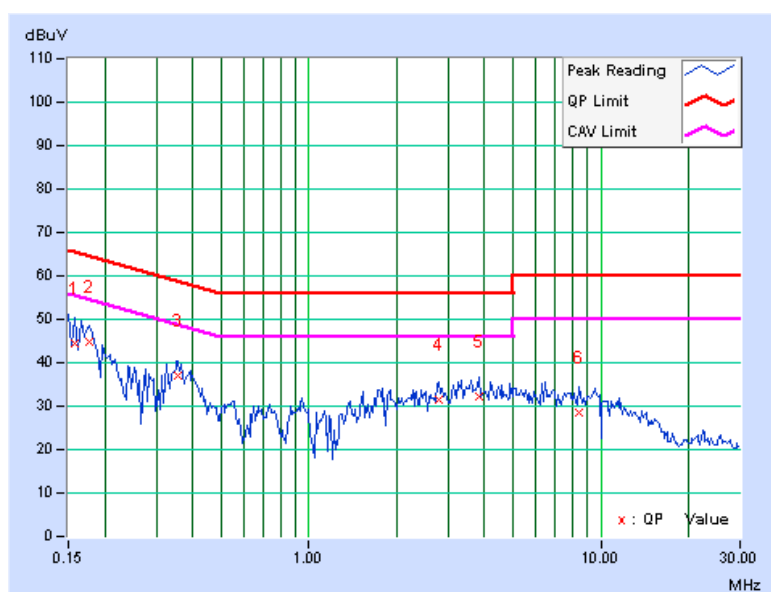

4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012
Agilent Pre-Selector	N9039A	MY46520311	July 12, 2011	July 11, 2012
Agilent Signal Generator	N5181A	MY49060517	July 12, 2011	July 11, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-03	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02578	July 04, 2011	July 03, 2012
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-360	Apr. 14, 2011	Apr. 13, 2012
AISI Horn Antenna	AIH.8018	0000320091110	Nov. 14, 2011	Nov. 13, 2012
SCHWARZBECK Horn Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF CABLE	NA	RF104-201 RF104-203 RF104-204	Dec. 26, 2011	Dec. 25, 2012
RF Cable	NA	CHGCAB_001	Oct. 07, 2011	Oct. 06, 2012
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
5. The VCCI Site Registration No. is G-137.
6. The CANADA Site Registration No. is IC 7450H-2.
7. Tested Date: Feb. 15 to 17, 2012

**A D T**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250253	Aug. 29, 2011	Aug. 28, 2012
Agilent Pre-Selector	N9039A	MY46520310	Aug. 29, 2011	Aug. 28, 2012
Agilent Signal Generator	N5181A	MY49060347	July 25, 2011	July 24, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-04	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02465	Feb. 28, 2011	Feb. 27, 2012
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-361	Apr. 14, 2011	Apr. 13, 2012
AISI Horn Antenna	AIH.8018	0000220091110	Nov. 23, 2011	Nov. 22, 2012
SCHWARZBECK Horn Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF CABLE	NA	RF104-205 RF104-207 RF104-202	Dec. 27, 2011	Dec. 26, 2012
RF Cable	NA	CHHCAB_001	Oct. 08, 2011	Oct. 07, 2012
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
5. The CANADA Site Registration No. is IC 7450H-3.
6. Tested Date: Feb. 17, 2012

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

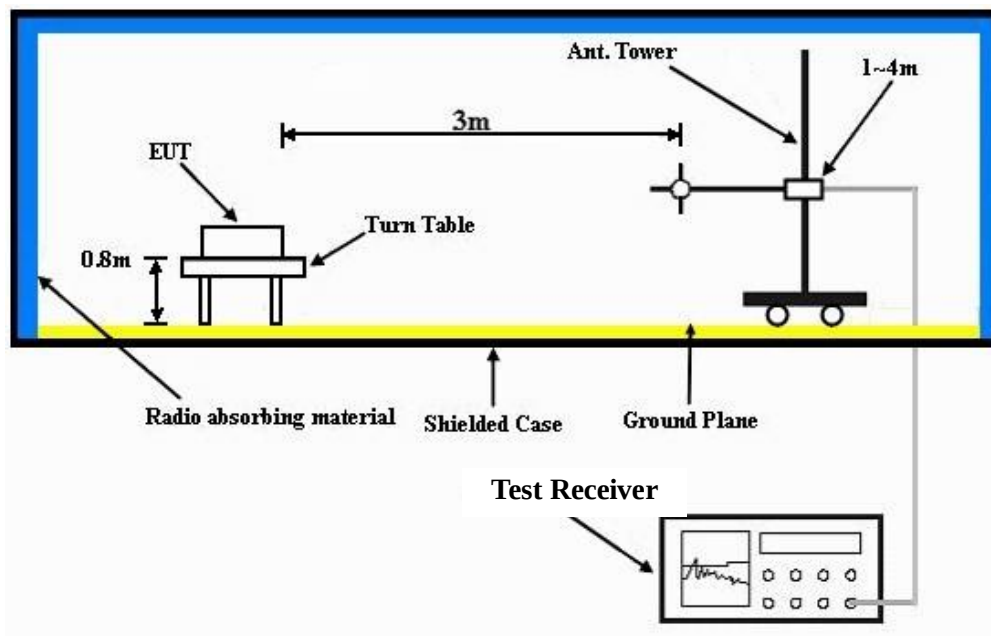

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	58.78	26.2 QP	40.0	-13.9	1.00 H	60	12.39	13.76
2	250.03	34.2 QP	46.0	-11.8	1.50 H	93	20.82	13.35
3	480.01	32.4 QP	46.0	-13.6	2.00 H	0	12.53	19.84
4	599.97	32.2 QP	46.0	-13.8	2.00 H	0	9.65	22.58
5	720.05	36.6 QP	46.0	-9.4	1.00 H	0	12.98	23.60
6	920.06	34.3 QP	46.0	-11.7	2.00 H	0	6.76	27.52
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	43.03	33.0 QP	40.0	-7.1	1.00 V	208	18.77	14.18
2	71.33	33.2 QP	40.0	-6.8	1.00 V	339	21.01	12.17
3	250.03	30.6 QP	46.0	-15.4	1.00 V	131	17.27	13.35
4	500.02	29.8 QP	46.0	-16.3	1.00 V	291	9.44	20.31
5	720.05	31.8 QP	46.0	-14.2	1.50 V	308	8.24	23.60
6	919.95	34.3 QP	46.0	-11.7	1.00 V	360	6.78	27.52

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2330.27	65.3 PK	74.0	-8.7	1.00 H	246	33.58	31.72
2	2330.27	49.4 AV	54.0	-4.6	1.00 H	246	17.68	31.72
3	2386.30	60.2 PK	74.0	-13.8	1.00 H	248	28.33	31.87
4	2386.30	50.9 AV	54.0	-3.1	1.00 H	248	19.03	31.87
5	*2412.00	110.8 PK			1.01 H	291	78.85	31.95
6	*2412.00	108.4 AV			1.01 H	291	76.45	31.95
7	4824.00	46.9 PK	74.0	-27.1	1.22 H	60	5.68	41.22
8	4824.00	42.7 AV	54.0	-11.3	1.22 H	60	1.48	41.22
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2390.00	56.6 PK	74.0	-17.4	1.05 V	300	24.72	31.88
2	2390.00	45.3 AV	54.0	-8.7	1.05 V	300	13.42	31.88
3	*2412.00	101.7 PK			1.05 V	300	69.75	31.95
4	*2412.00	99.4 AV			1.05 V	300	67.45	31.95
5	4824.00	53.6 PK	74.0	-20.4	1.71 V	174	12.38	41.22
6	4824.00	49.7 AV	54.0	-4.3	1.71 V	174	8.48	41.22

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*2437.00	110.5 PK			1.00 H	303	78.46	32.04
2	*2437.00	108.5 AV			1.00 H	303	76.46	32.04
3	4874.00	46.8 PK	74.0	-27.2	1.26 H	47	5.44	41.36
4	4874.00	42.6 AV	54.0	-11.4	1.26 H	47	1.24	41.36
5	7311.00	54.6 PK	74.0	-19.4	1.55 H	262	8.93	45.67
6	7311.00	43.6 AV	54.0	-10.4	1.55 H	262	-2.07	45.67
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*2437.00	100.8 PK			1.00 V	290	68.76	32.04
2	*2437.00	98.5 AV			1.00 V	290	66.46	32.04
3	4874.00	51.6 PK	74.0	-22.4	1.82 V	164	10.24	41.36
4	4874.00	45.1 AV	54.0	-8.9	1.82 V	164	3.74	41.36
5	7311.00	58.2 PK	74.0	-15.8	1.72 V	189	12.53	45.67
6	7311.00	49.3 AV	54.0	-4.7	1.72 V	189	3.63	45.67

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*2462.00	111.0 PK			1.03 H	292	78.88	32.12
2	*2462.00	108.6 AV			1.03 H	292	76.48	32.12
3	2487.76	60.0 PK	74.0	-14.0	1.00 H	248	27.79	32.21
4	2487.76	48.0 AV	54.0	-6.0	1.00 H	248	15.79	32.21
5	4924.00	47.2 PK	74.0	-26.8	1.24 H	66	5.72	41.48
6	4924.00	42.5 AV	54.0	-11.5	1.24 H	66	1.02	41.48
7	7386.00	55.6 PK	74.0	-18.4	1.53 H	265	9.69	45.91
8	7386.00	44.3 AV	54.0	-9.7	1.53 H	265	-1.61	45.91
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*2462.00	100.4 PK			1.02 V	290	68.28	32.12
2	*2462.00	98.1 AV			1.02 V	290	65.98	32.12
3	2483.50	56.1 PK	74.0	-17.9	1.02 V	290	23.91	32.19
4	2483.50	45.6 AV	54.0	-8.4	1.02 V	290	13.41	32.19
5	4924.00	54.4 PK	74.0	-19.6	2.00 V	176	12.92	41.48
6	4924.00	49.7 AV	54.0	-4.3	2.00 V	176	8.22	41.48
7	7386.00	57.3 PK	74.0	-16.7	1.84 V	186	11.39	45.91
8	7386.00	46.8 AV	54.0	-7.2	1.84 V	186	0.89	45.91

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2390.00	71.9 PK	74.0	-2.1	1.00 H	248	40.02	31.88
2	2390.00	53.3 AV	54.0	-0.7	1.00 H	248	21.42	31.88
3	*2412.00	111.5 PK			1.00 H	250	79.55	31.95
4	*2412.00	100.1 AV			1.00 H	250	68.15	31.95
5	4824.00	46.5 PK	74.0	-27.5	1.10 H	57	5.28	41.22
6	4824.00	36.6 AV	54.0	-17.4	1.10 H	57	-4.62	41.22
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2390.00	58.5 PK	74.0	-15.5	1.00 V	294	26.62	31.88
2	2390.00	46.3 AV	54.0	-7.7	1.00 V	294	14.42	31.88
3	*2412.00	101.0 PK			1.00 V	294	69.05	31.95
4	*2412.00	92.3 AV			1.00 V	294	60.35	31.95
5	4824.00	50.1 PK	74.0	-23.9	1.78 V	165	8.88	41.22
6	4824.00	38.6 AV	54.0	-15.4	1.78 V	165	-2.62	41.22

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2360.00	72.4 PK	74.0	-1.6	1.02 H	246	40.60	31.80
2	2360.00	50.6 AV	54.0	-3.4	1.02 H	246	18.80	31.80
3	*2437.00	117.1 PK			1.00 H	244	85.06	32.04
4	*2437.00	105.6 AV			1.00 H	244	73.56	32.04
5	2483.94	71.6 PK	74.0	-2.4	1.05 H	242	39.40	32.20
6	2483.94	49.9 AV	54.0	-4.1	1.05 H	242	17.70	32.20
7	4874.00	47.7 PK	74.0	-26.3	1.15 H	22	6.34	41.36
8	4874.00	37.4 AV	54.0	-16.6	1.15 H	22	-3.96	41.36
9	7311.00	55.8 PK	74.0	-18.2	1.28 H	213	10.13	45.67
10	7311.00	44.0 AV	54.0	-10.0	1.28 H	213	-1.67	45.67
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*2437.00	104.6 PK			1.00 V	296	72.56	32.04
2	*2437.00	95.3 AV			1.00 V	296	63.26	32.04
3	4874.00	51.3 PK	74.0	-22.7	1.79 V	151	9.94	41.36
4	4874.00	39.5 AV	54.0	-14.5	1.79 V	151	-1.86	41.36
5	7311.00	63.5 PK	74.0	-10.5	1.78 V	186	17.83	45.67
6	7311.00	49.1 AV	54.0	-4.9	1.78 V	186	3.43	45.67

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*2462.00	112.6 PK			1.02 H	255	80.48	32.12
2	*2462.00	101.4 AV			1.02 H	255	69.28	32.12
3	2483.50	73.0 PK	74.0	-1.0	1.00 H	249	40.81	32.19
4	2483.50	52.2 AV	54.0	-1.8	1.00 H	249	20.01	32.19
5	4924.00	47.3 PK	74.0	-26.7	1.12 H	67	5.82	41.48
6	4924.00	37.1 AV	54.0	-16.9	1.12 H	67	-4.38	41.48
7	7386.00	54.8 PK	74.0	-19.2	1.41 H	212	8.89	45.91
8	7386.00	42.3 AV	54.0	-11.7	1.41 H	212	-3.61	45.91
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*2462.00	102.4 PK			1.00 V	299	70.28	32.12
2	*2462.00	93.1 AV			1.00 V	299	60.98	32.12
3	2483.50	72.2 PK	74.0	-1.8	1.02 V	300	40.01	32.19
4	2483.50	49.7 AV	54.0	-4.3	1.02 V	300	17.51	32.19
5	4924.00	49.7 PK	74.0	-24.3	1.83 V	168	8.22	41.48
6	4924.00	38.1 AV	54.0	-15.9	1.83 V	168	-3.38	41.48
7	7386.00	58.9 PK	74.0	-15.1	1.86 V	187	12.99	45.91
8	7386.00	47.6 AV	54.0	-6.4	1.86 V	187	1.69	45.91

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * " : Fundamental frequency.

802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2390.00	70.9 PK	74.0	-3.1	1.00 H	291	39.02	31.88
2	2390.00	52.8 AV	54.0	-1.2	1.00 H	291	20.92	31.88
3	*2412.00	109.7 PK			1.00 H	249	77.75	31.95
4	*2412.00	98.7 AV			1.00 H	249	66.75	31.95
5	4824.00	46.8 PK	74.0	-27.2	1.04 H	59	5.58	41.22
6	4824.00	36.6 AV	54.0	-17.4	1.04 H	59	-4.62	41.22
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2390.00	57.4 PK	74.0	-16.6	1.00 V	229	25.52	31.88
2	2390.00	47.2 AV	54.0	-6.8	1.00 V	229	15.32	31.88
3	*2412.00	98.1 PK			1.00 V	229	66.15	31.95
4	*2412.00	88.2 AV			1.00 V	229	56.25	31.95
5	4824.00	49.2 PK	74.0	-24.8	1.89 V	169	7.98	41.22
6	4824.00	38.0 AV	54.0	-16.0	1.89 V	169	-3.22	41.22

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2360.05	72.1 PK	74.0	-1.9	1.03 H	244	40.30	31.80
2	2360.05	50.5 AV	54.0	-3.5	1.03 H	244	18.70	31.80
3	*2437.00	115.9 PK			1.05 H	251	83.86	32.04
4	*2437.00	104.6 AV			1.05 H	251	72.56	32.04
5	2483.61	71.3 PK	74.0	-2.7	1.02 H	237	39.11	32.19
6	2483.61	49.5 AV	54.0	-4.5	1.02 H	237	17.31	32.19
7	4874.00	48.0 PK	74.0	-26.0	1.10 H	44	6.64	41.36
8	4874.00	37.6 AV	54.0	-16.4	1.10 H	44	-3.76	41.36
9	7311.00	56.4 PK	74.0	-17.6	1.34 H	235	10.73	45.67
10	7311.00	44.5 AV	54.0	-9.5	1.34 H	235	-1.17	45.67
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*2437.00	102.2 PK			1.00 V	255	70.16	32.04
2	*2437.00	91.5 AV			1.00 V	255	59.46	32.04
3	4874.00	51.2 PK	74.0	-22.8	1.68 V	140	9.84	41.36
4	4874.00	39.5 AV	54.0	-14.5	1.68 V	140	-1.86	41.36
5	7311.00	63.6 PK	74.0	-10.4	1.76 V	188	17.93	45.67
6	7311.00	50.0 AV	54.0	-4.0	1.76 V	188	4.33	45.67

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*2462.00	112.6 PK			1.03 H	246	80.48	32.12
2	*2462.00	100.8 AV			1.03 H	246	68.68	32.12
3	2483.50	69.7 PK	74.0	-4.3	1.00 H	249	37.51	32.19
4	2483.50	53.0 AV	54.0	-1.0	1.00 H	249	20.81	32.19
5	4924.00	47.4 PK	74.0	-26.6	1.13 H	55	5.92	41.48
6	4924.00	36.9 AV	54.0	-17.1	1.13 H	55	-4.58	41.48
7	7386.00	55.6 PK	74.0	-18.4	1.42 H	219	9.69	45.91
8	7386.00	43.2 AV	54.0	-10.8	1.42 H	219	-2.71	45.91
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*2462.00	100.5 PK			1.00 V	250	68.38	32.12
2	*2462.00	89.4 AV			1.00 V	250	57.28	32.12
3	2483.50	59.8 PK	74.0	-14.2	1.00 V	250	27.61	32.19
4	2483.50	46.9 AV	54.0	-7.1	1.00 V	250	14.71	32.19
5	4924.00	49.3 PK	74.0	-24.7	1.69 V	166	7.82	41.48
6	4924.00	37.9 AV	54.0	-16.1	1.69 V	166	-3.58	41.48
7	7386.00	58.8 PK	74.0	-15.2	1.88 V	170	12.89	45.91
8	7386.00	47.2 AV	54.0	-6.8	1.88 V	170	1.29	45.91

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

802.11n (40MHz)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2390.00	70.8 PK	74.0	-3.2	1.06 H	241	38.92	31.88
2	2390.00	53.4 AV	54.0	-0.6	1.06 H	241	21.52	31.88
3	*2422.00	104.7 PK			1.02 H	245	72.72	31.98
4	*2422.00	91.9 AV			1.02 H	245	59.92	31.98
5	4844.00	46.8 PK	74.0	-27.2	1.21 H	66	5.52	41.28
6	4844.00	36.8 AV	54.0	-17.2	1.21 H	66	-4.48	41.28
7	7266.00	55.2 PK	74.0	-18.8	1.53 H	241	9.65	45.55
8	7266.00	42.8 AV	54.0	-11.2	1.53 H	241	-2.75	45.55
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2390.00	64.9 PK	74.0	-9.1	1.01 V	55	33.02	31.88
2	2390.00	46.6 AV	54.0	-7.4	1.01 V	55	14.72	31.88
3	*2422.00	95.6 PK			1.01 V	55	63.62	31.98
4	*2422.00	84.9 AV			1.01 V	55	52.92	31.98
5	4844.00	48.6 PK	74.0	-25.4	1.66 V	150	7.32	41.28
6	4844.00	37.5 AV	54.0	-16.5	1.66 V	150	-3.78	41.28
7	7266.00	57.1 PK	74.0	-16.9	1.88 V	133	11.55	45.55
8	7266.00	43.5 AV	54.0	-10.5	1.88 V	133	-2.05	45.55

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2390.00	71.1 PK	74.0	-2.9	1.00 H	252	39.22	31.88
2	2390.00	52.1 AV	54.0	-1.9	1.00 H	252	20.22	31.88
3	*2437.00	109.2 PK			1.00 H	249	77.16	32.04
4	*2437.00	96.4 AV			1.00 H	249	64.36	32.04
5	2483.50	71.2 PK	74.0	-2.8	1.02 H	246	39.01	32.19
6	2483.50	47.4 AV	54.0	-6.6	1.02 H	246	15.21	32.19
7	4874.00	47.4 PK	74.0	-26.6	1.21 H	76	6.04	41.36
8	4874.00	37.1 AV	54.0	-16.9	1.21 H	76	-4.26	41.36
9	7311.00	56.3 PK	74.0	-17.7	1.51 H	247	10.63	45.67
10	7311.00	43.4 AV	54.0	-10.6	1.51 H	247	-2.27	45.67

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2390.00	68.6 PK	74.0	-5.4	1.02 V	57	36.72	31.88
2	2390.00	50.7 AV	54.0	-3.3	1.02 V	57	18.82	31.88
3	*2437.00	99.1 PK			1.02 V	57	67.06	32.04
4	*2437.00	87.9 AV			1.02 V	57	55.86	32.04
5	4874.00	49.9 PK	74.0	-24.1	1.65 V	153	8.54	41.36
6	4874.00	38.4 AV	54.0	-15.6	1.65 V	153	-2.96	41.36
7	7311.00	58.4 PK	74.0	-15.6	1.89 V	138	12.73	45.67
8	7311.00	44.7 AV	54.0	-9.3	1.89 V	138	-0.97	45.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*2452.00	105.7 PK			1.04 H	251	73.61	32.09
2	*2452.00	94.6 AV			1.04 H	251	62.51	32.09
3	2483.50	70.1 PK	74.0	-3.9	1.03 H	238	37.91	32.19
4	2483.50	53.5 AV	54.0	-0.5	1.03 H	238	21.31	32.19
5	4904.00	46.8 PK	74.0	-27.2	1.25 H	79	5.36	41.44
6	4904.00	36.4 AV	54.0	-17.6	1.25 H	79	-5.04	41.44
7	7356.00	55.7 PK	74.0	-18.3	1.53 H	255	9.89	45.81
8	7356.00	43.1 AV	54.0	-10.9	1.53 H	255	-2.71	45.81
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*2452.00	94.1 PK			1.00 V	85	62.01	32.09
2	*2452.00	82.9 AV			1.00 V	85	50.81	32.09
3	2483.50	60.1 PK	74.0	-13.9	1.00 V	85	27.91	32.19
4	2483.50	46.5 AV	54.0	-7.5	1.00 V	85	14.31	32.19
5	4904.00	48.7 PK	74.0	-25.3	1.67 V	147	7.26	41.44
6	4904.00	37.9 AV	54.0	-16.1	1.67 V	147	-3.54	41.44
7	7356.00	56.1 PK	74.0	-17.9	1.83 V	119	10.29	45.81
8	7356.00	43.0 AV	54.0	-11.0	1.83 V	119	-2.81	45.81

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 16, 2012


4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	10.57	10.96	0.5	PASS
6	2437	10.96	10.80	0.5	PASS
11	2462	10.72	10.82	0.5	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	16.56	16.52	0.5	PASS
6	2437	16.60	16.45	0.5	PASS
11	2462	16.48	16.55	0.5	PASS

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.74	17.84	0.5	PASS
6	2437	17.78	17.82	0.5	PASS
11	2462	17.75	17.83	0.5	PASS



A D T

802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	37.07	36.36	0.5	PASS
6	2437	36.59	36.47	0.5	PASS
9	2452	36.80	36.71	0.5	PASS

4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Peak Power Meter	ML2495A	0824006	May 04, 2011	May 03, 2012
Power Sensor	MA2411B	0738172	May 03, 2011	May 02, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 16, 2012


4.4.3 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

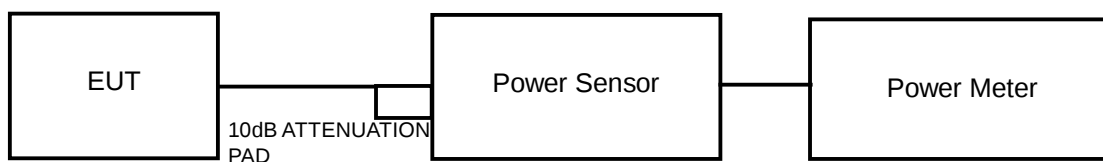

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

802.11b

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	20.2	19.4	191.8	22.8	29.99	PASS
6	2437	19.5	19.1	170.4	22.3	29.99	PASS
11	2462	19.5	19.0	168.6	22.3	29.99	PASS

Note: Directional gain = gain of antenna element + 10 log (# of TX antenna elements)

Effective Legacy Gain (dBi) = 6.01

The effective legacy gain is 6.01dBi, therefore the limit needs to reduce.

802.11g

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	23.0	22.8	390.1	25.9	29.99	PASS
6	2437	24.7	24.3	564.3	27.5	29.99	PASS
11	2462	24.4	24.2	538.5	27.3	29.99	PASS

Note: Directional gain = gain of antenna element + 10 log (# of TX antenna elements)

Effective Legacy Gain (dBi) = 6.01

The effective legacy gain is 6.01dBi, therefore the limit needs to reduce.

802.11n (20MHz)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	21.3	21.4	272.9	24.4	30	PASS
6	2437	26.3	25.8	806.8	29.1	30	PASS
11	2462	24.1	23.9	502.5	27.0	30	PASS

802.11n (40MHz)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
3	2422	18.7	19.0	153.6	21.9	30	PASS
6	2437	22.8	23.0	390.1	25.9	30	PASS
9	2452	20.3	20.2	211.9	23.3	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 16, 2012


4.5.3 TEST PROCEDURE

1. Set the RBW = 100 kHz, VBW =300 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3 \text{ kHz}/100\text{kHz})$

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.5.7 TEST RESULTS

802.11b

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	6.9	-8.4	3.0	-5.4	7.99	PASS
	6	2437	6.3	-8.9	3.0	-5.9	7.99	PASS
	11	2462	6.9	-8.4	3.0	-5.4	7.99	PASS
1	1	2412	7.9	-7.3	3.0	-4.3	7.99	PASS
	6	2437	6.9	-8.3	3.0	-5.3	7.99	PASS
	11	2462	7.1	-8.1	3.0	-5.1	7.99	PASS

Note: Directional gain = gain of antenna element + 10 log (# of TX antenna elements)
Effective Legacy Gain (dBi) = 6.01
The effective legacy gain is 6.01dBi, therefore the limit needs to reduce.

802.11g

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-0.4	-15.7	3.0	-12.7	7.99	PASS
	6	2437	3.6	-11.6	3.0	-8.6	7.99	PASS
	11	2462	1.0	-14.2	3.0	-11.2	7.99	PASS
1	1	2412	0.8	-14.4	3.0	-11.4	7.99	PASS
	6	2437	3.6	-11.6	3.0	-8.6	7.99	PASS
	11	2462	1.9	-13.3	3.0	-10.3	7.99	PASS

Note: Directional gain = gain of antenna element + 10 log (# of TX antenna elements)
Effective Legacy Gain (dBi) = 6.01
The effective legacy gain is 6.01dBi, therefore the limit needs to reduce.

802.11n (20MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-2.0	-17.2	3.0	-14.2	8	PASS
	6	2437	3.3	-11.9	3.0	-8.9	8	PASS
	11	2462	0.3	-14.9	3.0	-11.9	8	PASS
1	1	2412	-1.7	-16.9	3.0	-13.9	8	PASS
	6	2437	2.6	-12.6	3.0	-9.6	8	PASS
	11	2462	0.9	-14.3	3.0	-11.3	8	PASS

802.11n (40MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	3	2422	-8.2	-23.4	3.0	-20.4	8	PASS
	6	2437	-4.0	-19.3	3.0	-16.3	8	PASS
	9	2452	-6.4	-21.7	3.0	-18.7	8	PASS
1	3	2422	-6.0	-21.3	3.0	-18.3	8	PASS
	6	2437	-2.7	-17.9	3.0	-14.9	8	PASS
	9	2452	-5.7	-20.9	3.0	-17.9	8	PASS



A D T

4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 16, 2012

4.6.3 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP



4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.7 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit. Only worst data of each operating mode is presented.


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11b


CH 1

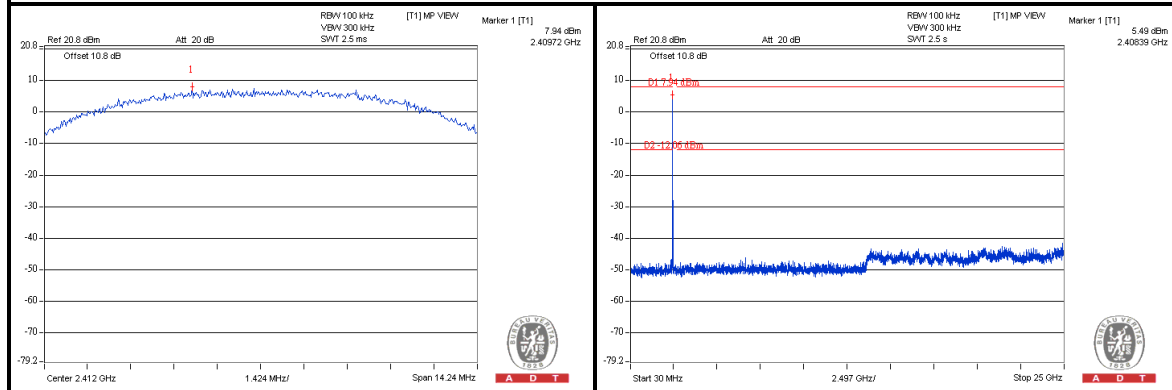

CH 6

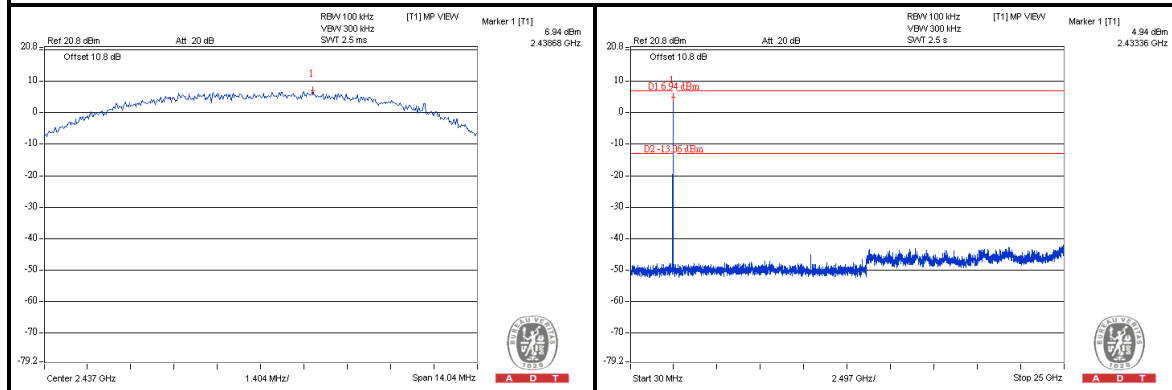

CH 11

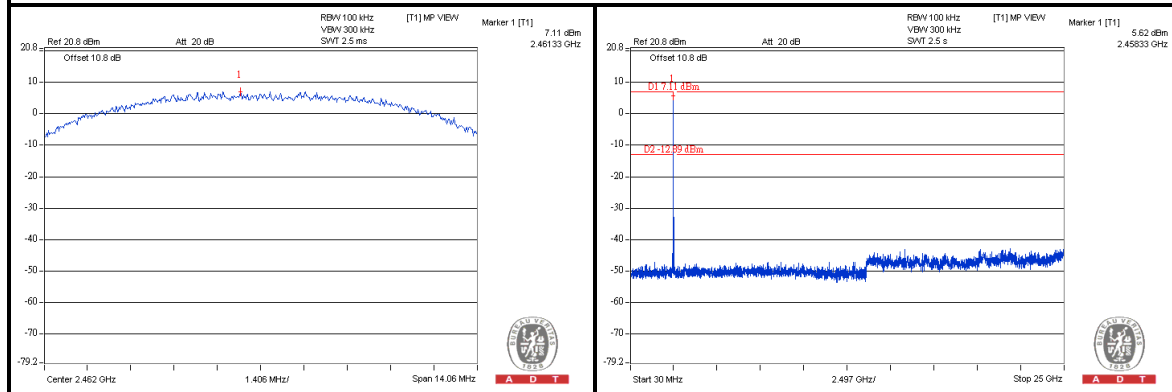





A D T

802.11g


CH 1

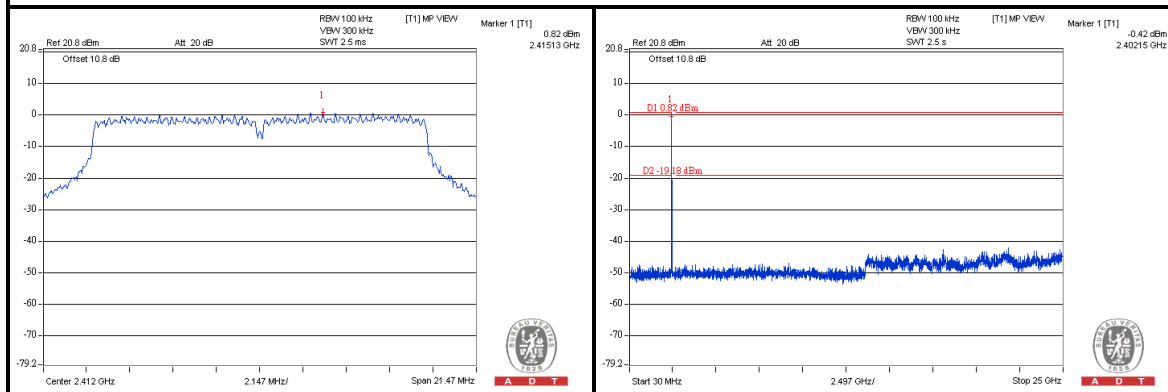

CH 6

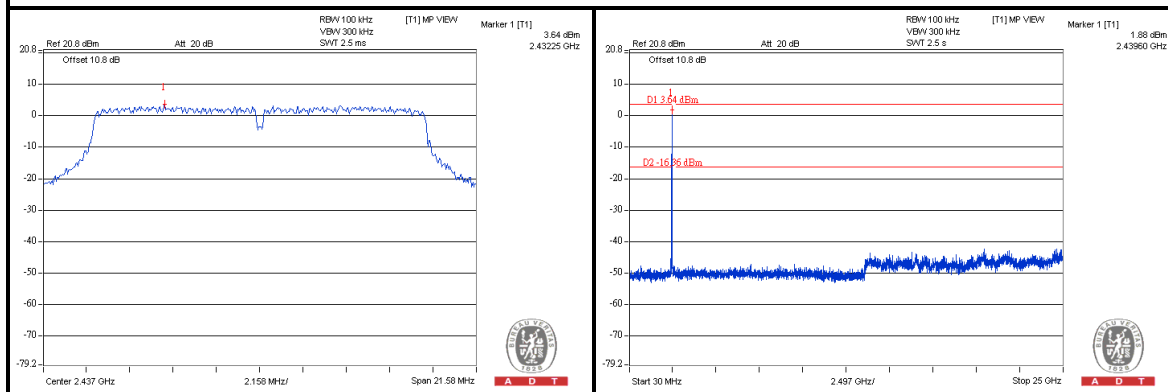

CH 11


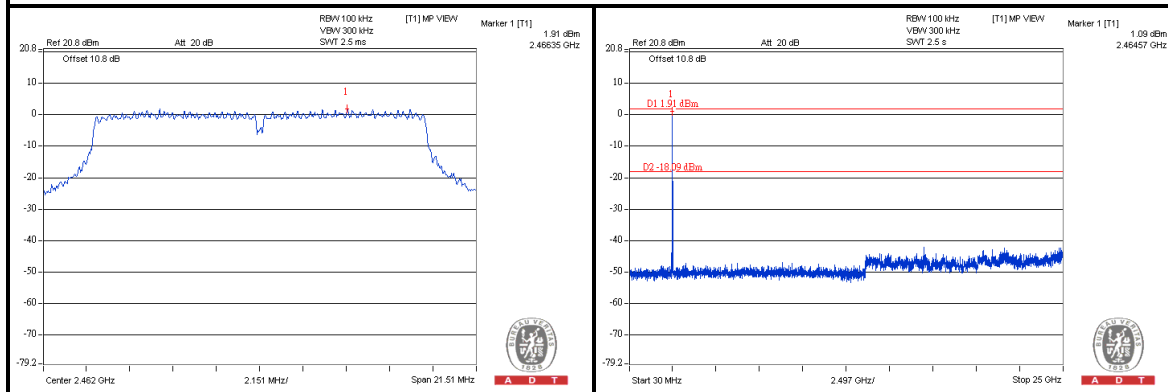






A D T

802.11n (20MHz)



CH 1

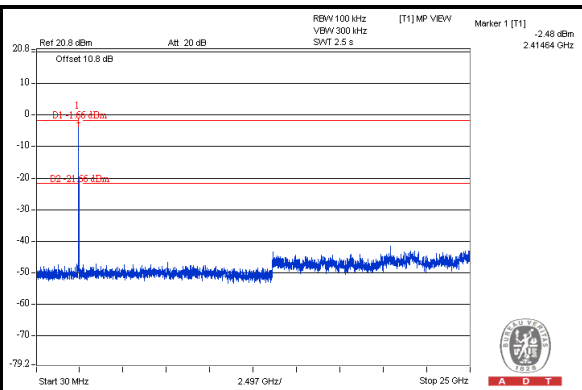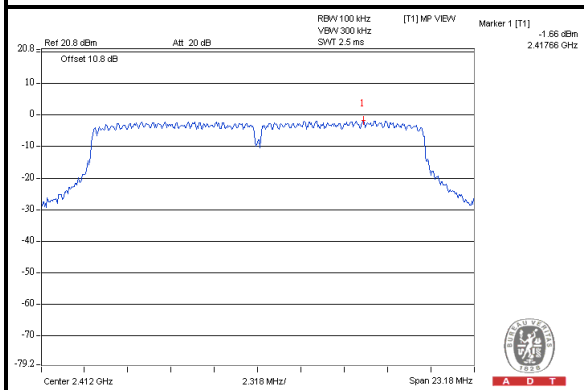

CH 6

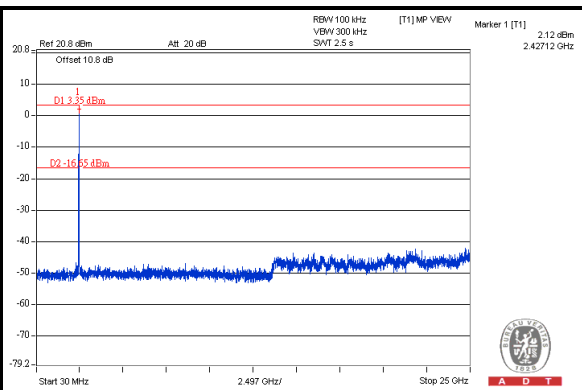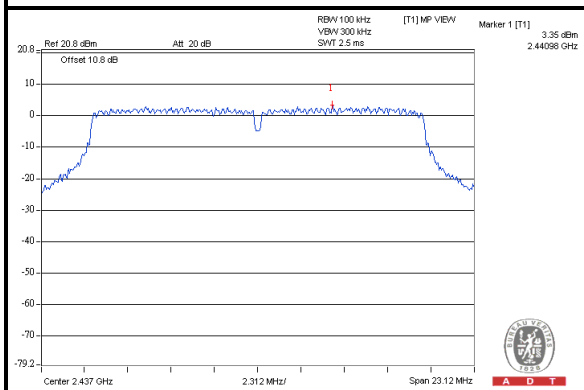

CH 11

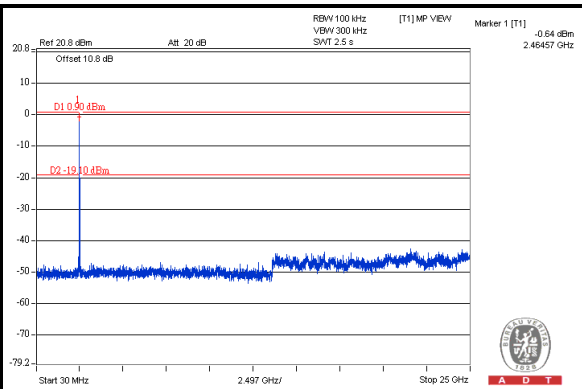
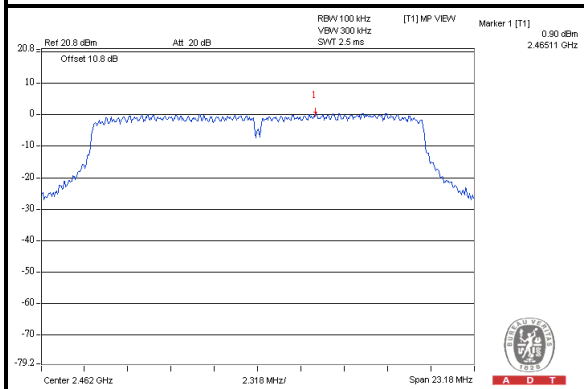






A D T

802.11n (40MHz)



CH 3

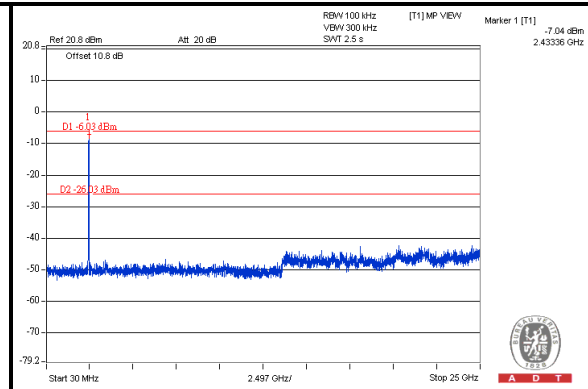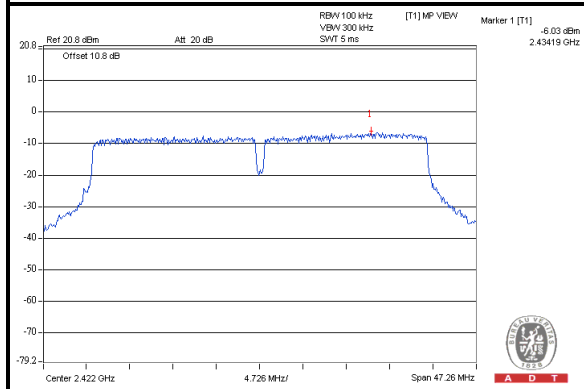

CH 6

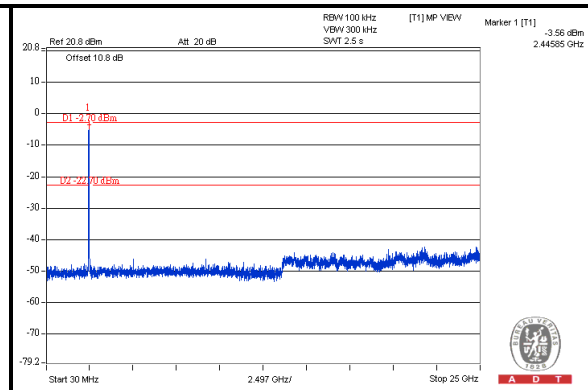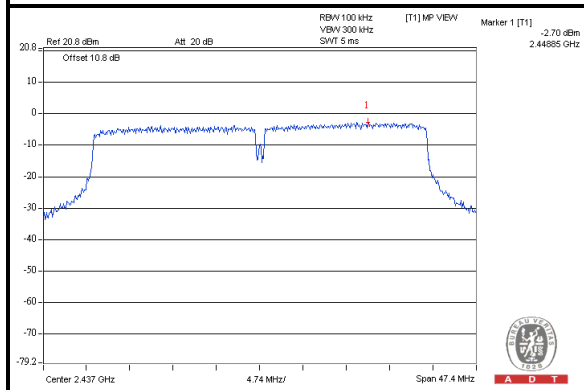

CH 9

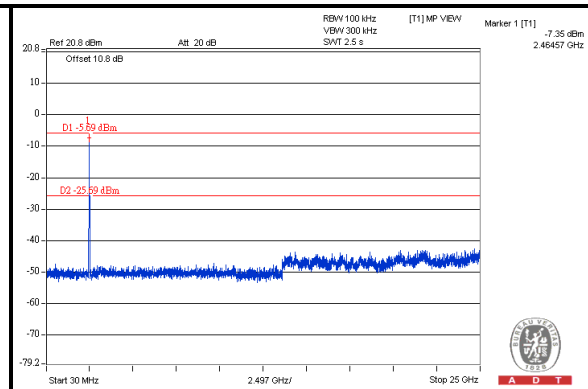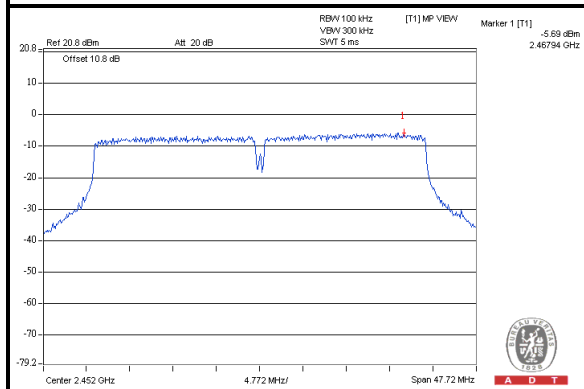

5. TEST TYPES AND RESULTS (802.11a, 5725~5850MHz Band)

5.1 CONDUCTED EMISSION MEASUREMENT

5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 09, 2011	Mar. 08, 2012
Line-Impedance Stabilization Network (for EUT)	NSLK8127	8127-522	Sep. 07, 2011	Sep. 06, 2012
Line-Impedance Stabilization Network (for Peripheral)	ESH3-Z5	848773/004	Nov. 01, 2011	Oct. 31, 2012
RF Cable (JYEBAO)	5DFB	COCCAB-002	Aug. 29, 2011	Aug. 28, 2012
50 ohms Terminator	50	3	Nov. 02, 2011	Nov. 01, 2012
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Feb. 17, 2012



A D T


5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) were not recorded.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation

5.1.5 TEST SETUP

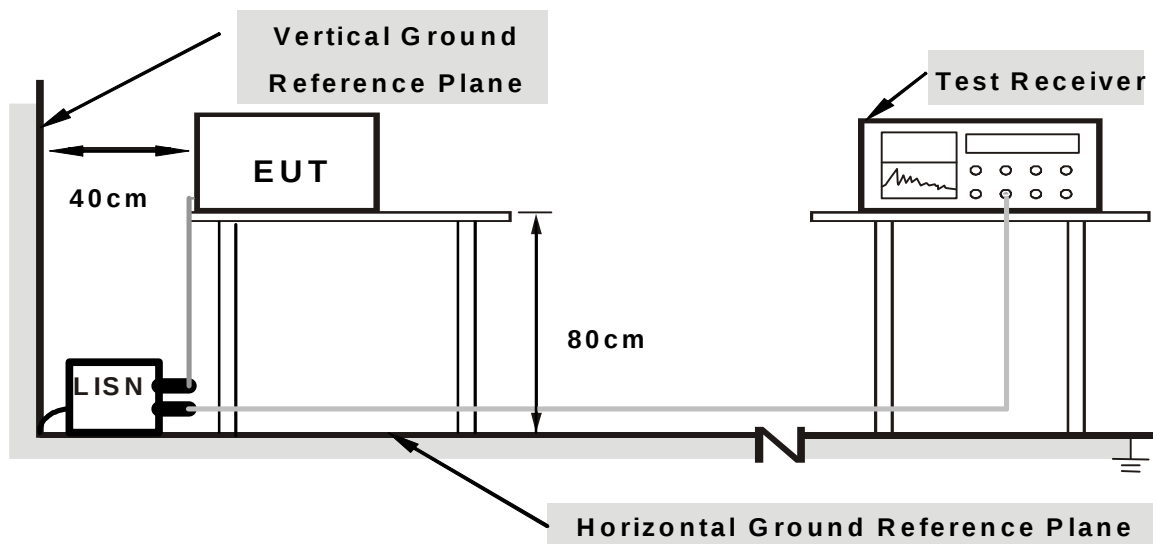

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.1.6 EUT OPERATING CONDITIONS


Same as the 4.1.6

5.1.7 TEST RESULTS

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15188	0.09	44.69	35.38	44.78	35.47	65.90	55.90	-21.12	-20.43
2	0.17985	0.10	44.85	35.81	44.95	35.91	64.49	54.49	-19.54	-18.58
3	0.35452	0.13	35.49	28.52	35.62	28.65	58.86	48.86	-23.23	-20.20
4	0.87320	0.18	31.39	24.36	31.57	24.54	56.00	46.00	-24.43	-21.46
5	5.29289	0.47	30.41	22.72	30.88	23.19	60.00	50.00	-29.12	-26.81
6	9.83291	0.71	28.45	22.46	29.16	23.17	60.00	50.00	-30.84	-26.83


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

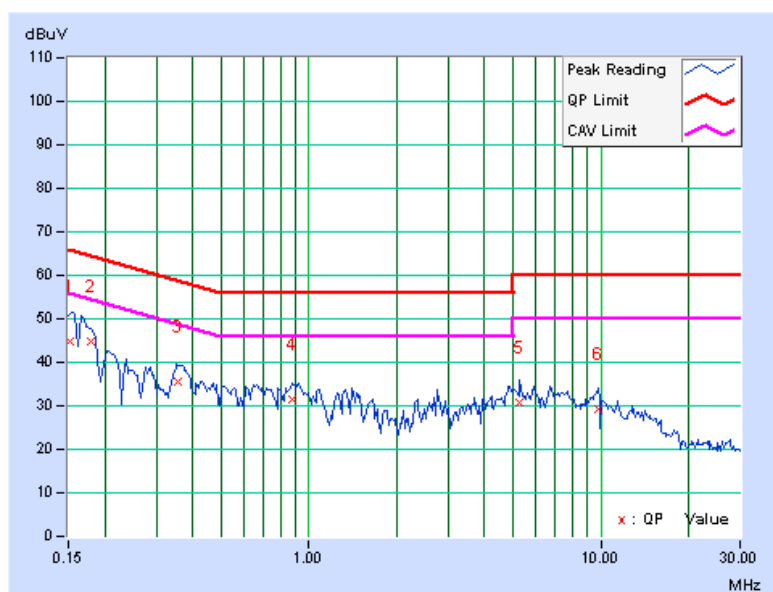

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15802	0.08	44.32	36.54	44.40	36.62	65.57	55.57	-21.17	-18.95
2	0.17795	0.09	44.61	35.32	44.70	35.41	64.58	54.58	-19.88	-19.17
3	0.35749	0.12	36.87	29.68	36.99	29.80	58.79	48.79	-21.79	-18.98
4	2.78568	0.24	31.33	24.42	31.57	24.66	56.00	46.00	-24.43	-21.34
5	3.82829	0.30	31.45	24.56	31.75	24.86	56.00	46.00	-24.25	-21.14
6	8.43769	0.52	28.63	22.58	29.15	23.10	60.00	50.00	-30.85	-26.90

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

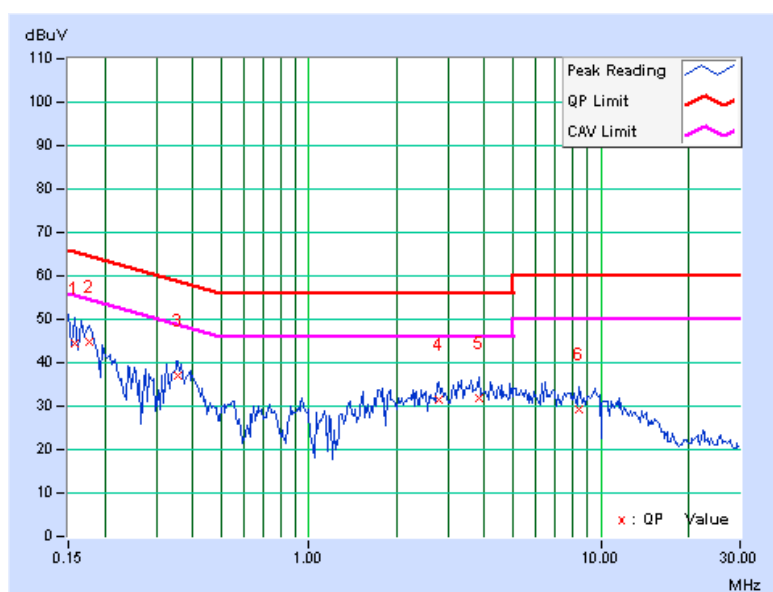

5.2 RADIATED AND BANDEDGE EMISSION MEASUREMENT

5.2.1 LIMITS OF RADIATED AND BANDEDGE EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

5.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012
Agilent Pre-Selector	N9039A	MY46520311	July 12, 2011	July 11, 2012
Agilent Signal Generator	N5181A	MY49060517	July 12, 2011	July 11, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-03	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02578	July 04, 2011	July 03, 2012
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-360	Apr. 14, 2011	Apr. 13, 2012
AISI Horn Antenna	AIH.8018	0000320091110	Nov. 14, 2011	Nov. 13, 2012
SCHWARZBECK Horn Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF CABLE	NA	RF104-201 RF104-203 RF104-204	Dec. 26, 2011	Dec. 25, 2012
RF Cable	NA	CHGCAB_001	Oct. 07, 2011	Oct. 06, 2012
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in 966 Chamber No. G.

4. The FCC Site Registration No. is 966073.

5. The VCCI Site Registration No. is G-137.

6. The CANADA Site Registration No. is IC 7450H-2.

7. Tested Date: Feb. 15 to 17, 2012

5.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation

5.2.5 TEST SETUP

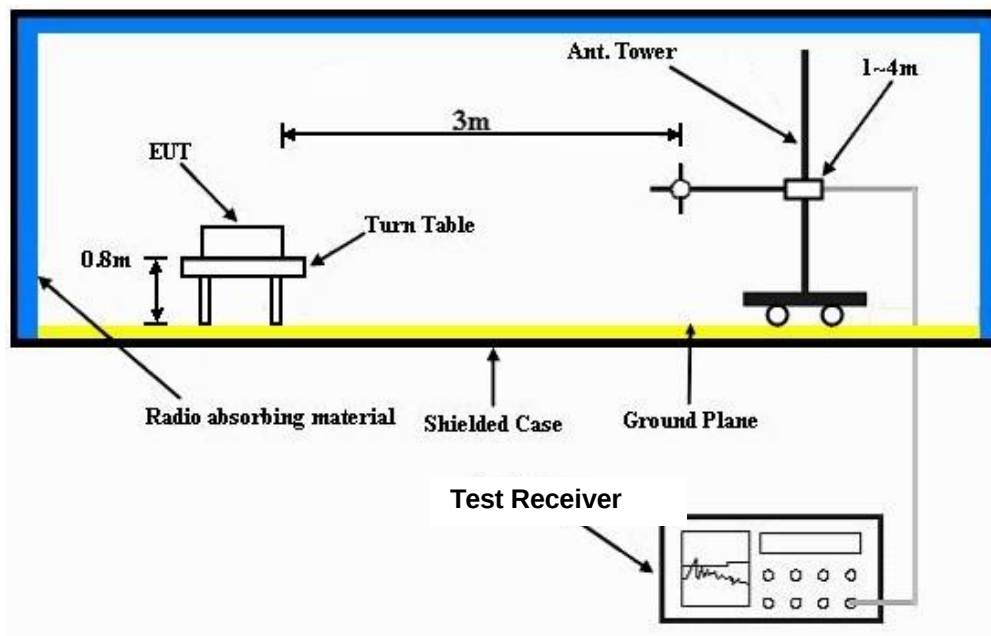

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.2.6 EUT OPERATING CONDITIONS

Same as the 4.2.6

5.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

802.11n (20MHz)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	69.08	26.0 QP	40.0	-14.0	1.50 H	71	13.36	12.63
2	250.03	34.6 QP	46.0	-11.4	1.50 H	81	21.25	13.35
3	360.04	35.6 QP	46.0	-10.4	1.00 H	122	18.72	16.89
4	480.01	38.6 QP	46.0	-7.5	2.00 H	95	18.71	19.84
5	599.97	32.5 QP	46.0	-13.6	1.50 H	173	9.87	22.58
6	720.05	36.1 QP	46.0	-10.0	1.00 H	168	12.45	23.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	37.58	34.5 QP	40.0	-5.5	1.00 V	159	20.76	13.72
2	124.97	30.7 QP	43.5	-12.8	1.00 V	354	17.73	12.99
3	250.03	30.8 QP	46.0	-15.3	1.00 V	120	17.40	13.35
4	480.01	30.4 QP	46.0	-15.6	1.50 V	116	10.53	19.84
5	599.97	28.9 QP	46.0	-17.1	1.00 V	360	6.32	22.58
6	720.05	31.8 QP	46.0	-14.2	1.50 V	312	8.17	23.60

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

ABOVE 1GHz DATA

802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	5000.00	62.4 PK	74.0	-11.6	1.00 H	110	22.43	39.97
2	5000.00	53.4 AV	54.0	-0.6	1.00 H	110	13.43	39.97
3	5440.00	60.3 PK	74.0	-13.7	1.00 H	116	19.22	41.08
4	5440.00	52.6 AV	54.0	-1.4	1.00 H	116	11.52	41.08
5	*5745.00	116.6 PK			1.68 H	123	74.57	42.03
6	*5745.00	105.6 AV			1.68 H	123	63.57	42.03
7	11490.00	57.6 PK	74.0	-16.4	1.00 H	59	9.42	48.18
8	11490.00	47.3 AV	54.0	-6.7	1.00 H	59	-0.88	48.18
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*5745.00	105.0 PK			1.00 V	245	62.97	42.03
2	*5745.00	95.7 AV			1.00 V	245	53.67	42.03
3	11490.00	57.2 PK	74.0	-16.8	1.00 V	126	9.02	48.18
4	11490.00	46.8 AV	54.0	-7.2	1.00 V	126	-1.38	48.18

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.
 6. The limit value is defined as per 15.247.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	5000.00	62.3 PK	74.0	-11.7	1.00 H	97	22.33	39.97
2	5000.00	53.3 AV	54.0	-0.7	1.00 H	97	13.33	39.97
3	5440.00	60.4 PK	74.0	-13.6	1.00 H	117	19.32	41.08
4	5440.00	52.3 AV	54.0	-1.7	1.00 H	117	11.22	41.08
5	*5785.00	116.7 PK			1.63 H	109	74.53	42.17
6	*5785.00	105.8 AV			1.63 H	109	63.63	42.17
7	11570.00	57.8 PK	74.0	-16.2	1.00 H	62	9.61	48.19
8	11570.00	47.6 AV	54.0	-6.4	1.00 H	62	-0.59	48.19
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*5785.00	104.3 PK			1.00 V	236	62.13	42.17
2	*5785.00	95.2 AV			1.00 V	236	53.03	42.17
3	11570.00	56.9 PK	74.0	-17.1	1.00 V	124	8.71	48.19
4	11570.00	46.7 AV	54.0	-7.3	1.00 V	124	-1.49	48.19

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	5000.00	62.0 PK	74.0	-12.0	1.00 H	99	22.03	39.97
2	5000.00	53.5 AV	54.0	-0.5	1.00 H	99	13.53	39.97
3	5440.00	60.5 PK	74.0	-13.5	1.00 H	129	19.42	41.08
4	5440.00	52.0 AV	54.0	-2.0	1.00 H	129	10.92	41.08
5	*5825.00	117.0 PK			1.62 H	95	74.75	42.25
6	*5825.00	106.0 AV			1.62 H	95	63.75	42.25
7	11650.00	57.4 PK	74.0	-16.6	1.00 H	59	9.09	48.31
8	11650.00	47.5 AV	54.0	-6.5	1.00 H	59	-0.81	48.31
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	5400.00	56.7 PK	74.0	-17.3	1.45 V	233	15.71	40.99
2	5400.00	47.5 AV	54.0	-6.5	1.45 V	233	6.51	40.99
3	*5825.00	102.1 PK			1.45 V	227	59.85	42.25
4	*5825.00	93.7 AV			1.45 V	227	51.45	42.25
5	11650.00	56.3 PK	74.0	-17.7	1.00 V	122	7.99	48.31
6	11650.00	46.4 AV	54.0	-7.6	1.00 V	122	-1.91	48.31

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.
 6. The limit value is defined as per 15.247.

802.11n (20MHz)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	5000.00	62.6 PK	74.0	-11.4	1.00 H	89	22.63	39.97
2	5000.00	53.4 AV	54.0	-0.6	1.00 H	89	13.43	39.97
3	5440.00	60.9 PK	74.0	-13.1	1.00 H	62	19.82	41.08
4	5440.00	52.3 AV	54.0	-1.7	1.00 H	62	11.22	41.08
5	*5745.00	113.2 PK			1.47 H	95	71.17	42.03
6	*5745.00	103.6 AV			1.47 H	95	61.57	42.03
7	11490.00	57.1 PK	74.0	-16.9	1.00 H	62	8.92	48.18
8	11490.00	47.3 AV	54.0	-6.7	1.00 H	62	-0.88	48.18
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*5745.00	107.9 PK			1.00 V	241	65.87	42.03
2	*5745.00	97.9 AV			1.00 V	241	55.87	42.03
3	11490.00	57.1 PK	74.0	-16.9	1.04 V	111	8.92	48.18
4	11490.00	46.9 AV	54.0	-7.1	1.04 V	111	-1.28	48.18

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	5000.00	62.7 PK	74.0	-11.3	1.00 H	73	22.73	39.97
2	5000.00	53.2 AV	54.0	-0.8	1.00 H	73	13.23	39.97
3	5440.00	61.0 PK	74.0	-13.0	1.00 H	65	19.92	41.08
4	5440.00	52.6 AV	54.0	-1.4	1.00 H	65	11.52	41.08
5	*5785.00	113.6 PK			1.46 H	100	71.43	42.17
6	*5785.00	104.0 AV			1.46 H	100	61.83	42.17
7	11570.00	57.3 PK	74.0	-16.7	1.00 H	64	9.11	48.19
8	11570.00	47.6 AV	54.0	-6.4	1.00 H	64	-0.59	48.19
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*5785.00	107.6 PK			1.02 V	249	65.43	42.17
2	*5785.00	97.6 AV			1.02 V	249	55.43	42.17
3	11570.00	57.4 PK	74.0	-16.6	1.03 V	102	9.21	48.19
4	11570.00	46.9 AV	54.0	-7.1	1.03 V	102	-1.29	48.19

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.
 6. The limit value is defined as per 15.247.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	5000.00	62.6 PK	74.0	-11.4	1.00 H	64	22.63	39.97
2	5000.00	53.4 AV	54.0	-0.6	1.00 H	64	13.43	39.97
3	5440.00	61.2 PK	74.0	-12.8	1.00 H	73	20.12	41.08
4	5440.00	52.9 AV	54.0	-1.1	1.00 H	73	11.82	41.08
5	*5825.00	113.2 PK			1.45 H	104	70.95	42.25
6	*5825.00	103.5 AV			1.45 H	104	61.25	42.25
7	11650.00	57.4 PK	74.0	-16.6	1.00 H	59	9.09	48.31
8	11650.00	47.7 AV	54.0	-6.3	1.00 H	59	-0.61	48.31
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*5825.00	107.5 PK			1.00 V	253	65.25	42.25
2	*5825.00	97.7 AV			1.00 V	253	55.45	42.25
3	11650.00	57.0 PK	74.0	-17.0	1.06 V	99	8.69	48.31
4	11650.00	46.7 AV	54.0	-7.3	1.06 V	99	-1.61	48.31

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.

802.11n (40MHz)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	5000.00	62.7 PK	74.0	-11.3	1.00 H	61	22.73	39.97
2	5000.00	53.1 AV	54.0	-0.9	1.00 H	61	13.13	39.97
3	5440.00	61.3 PK	74.0	-12.7	1.00 H	64	20.22	41.08
4	5440.00	52.8 AV	54.0	-1.2	1.00 H	64	11.72	41.08
5	*5755.00	112.1 PK			1.52 H	284	70.04	42.06
6	*5755.00	101.2 AV			1.52 H	284	59.14	42.06
7	11510.00	57.6 PK	74.0	-16.4	1.00 H	62	9.42	48.18
8	11510.00	47.6 AV	54.0	-6.4	1.00 H	62	-0.58	48.18
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*5755.00	105.1 PK			1.58 V	205	63.04	42.06
2	*5755.00	94.6 AV			1.58 V	205	52.54	42.06
3	11510.00	56.9 PK	74.0	-17.1	1.02 V	101	8.72	48.18
4	11510.00	46.5 AV	54.0	-7.5	1.02 V	101	-1.68	48.18

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	5000.00	62.4 PK	74.0	-11.6	1.00 H	55	22.43	39.97
2	5000.00	53.2 AV	54.0	-0.8	1.00 H	55	13.23	39.97
3	5440.00	61.6 PK	74.0	-12.4	1.00 H	59	20.52	41.08
4	5440.00	52.7 AV	54.0	-1.3	1.00 H	59	11.62	41.08
5	*5795.00	112.4 PK			1.49 H	293	70.20	42.20
6	*5795.00	101.5 AV			1.49 H	293	59.30	42.20
7	11590.00	57.2 PK	74.0	-16.8	1.00 H	59	9.00	48.20
8	11590.00	47.1 AV	54.0	-6.9	1.00 H	59	-1.10	48.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*5795.00	104.8 PK			1.64 V	192	62.60	42.20
2	*5795.00	94.2 AV			1.64 V	192	52.00	42.20
3	11590.00	56.6 PK	74.0	-17.4	1.08 V	97	8.40	48.20
4	11590.00	46.6 AV	54.0	-7.4	1.08 V	97	-1.60	48.20

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

5.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 16, 2012


5.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

5.3.4 DEVIATION FROM TEST STANDARD

No deviation

5.3.5 TEST SETUP



5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

5.3.7 TEST RESULTS

802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
149	5745	16.61	16.69	16.56	0.5	PASS
157	5785	16.62	16.64	16.56	0.5	PASS
165	5825	16.59	16.64	16.54	0.5	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
149	5745	17.78	17.90	17.85	0.5	PASS
157	5785	17.79	17.92	17.89	0.5	PASS
165	5825	17.77	17.87	17.90	0.5	PASS

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
151	5755	37.17	37.02	36.72	0.5	PASS
159	5795	37.46	37.17	36.75	0.5	PASS

5.4 CONDUCTED OUTPUT POWER

5.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 5725 –5850 MHz band: 1 Watt (30dBm)

5.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Peak Power Meter	ML2495A	0824006	May 04, 2011	May 03, 2012
Power Sensor	MA2411B	0738172	May 03, 2011	May 02, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 16, 2012


5.4.3 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

5.4.4 DEVIATION FROM TEST STANDARD

No deviation

5.4.5 TEST SETUP

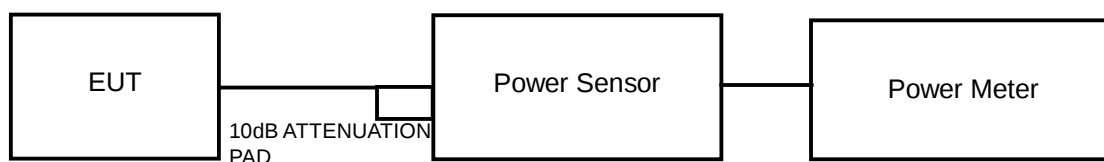

5.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

5.4.7 TEST RESULTS

802.11a

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
149	5745	19.9	19.6	20.1	291.3	24.6	26.23	PASS
157	5785	20.2	18.9	19.4	269.4	24.3	26.23	PASS
165	5825	20.6	19.1	19.5	285.2	24.6	26.23	PASS

Note: Directional gain = gain of antenna element + 10 log (# of TX antenna elements)

Effective Legacy Gain (dBi) = 9.77

The effective legacy gain is 9.77dBi, therefore the limit needs to reduce.

802.11n (20MHz)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
149	5745	22.8	22.6	22.8	563.1	27.5	30	PASS
157	5785	23.1	22.3	22.5	551.8	27.4	30	PASS
165	5825	23.2	22.0	22.2	533.4	27.3	30	PASS

802.11n (40MHz)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
151	5755	22.9	22.6	22.9	571.9	27.6	30	PASS
159	5795	23.2	22.3	22.3	548.6	27.4	30	PASS

5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 16, 2012


5.5.3 TEST PROCEDURE

1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3 \text{ kHz}/100\text{kHz})$

5.5.4 DEVIATION FROM TEST STANDARD

No deviation

5.5.5 TEST SETUP



5.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6

5.5.7 TEST RESULTS

802.11a

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	-1.6	-16.8	4.8	-12.0	4.23	PASS
	157	5785	-1.5	-16.7	4.8	-11.9	4.23	PASS
	165	5825	-0.6	-15.8	4.8	-11.0	4.23	PASS
1	149	5745	-2.3	-17.5	4.8	-12.7	4.23	PASS
	157	5785	-3.5	-18.8	4.8	-14.0	4.23	PASS
	165	5825	-3.6	-18.8	4.8	-14.0	4.23	PASS
2	149	5745	-1.0	-16.2	4.8	-11.4	4.23	PASS
	157	5785	-2.2	-17.4	4.8	-12.6	4.23	PASS
	165	5825	-2.1	-17.3	4.8	-12.5	4.23	PASS

Note: Directional gain = gain of antenna element + 10 log (# of TX antenna elements)

Effective Legacy Gain (dBi) = 9.77

The effective legacy gain is 9.77dBi, therefore the limit needs to reduce.

802.11n (20MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	0.1	-15.1	4.8	-10.3	8.00	PASS
	157	5785	0.8	-14.4	4.8	-9.6	8.00	PASS
	165	5825	0.6	-14.6	4.8	-9.8	8.00	PASS
1	149	5745	-0.5	-15.7	4.8	-10.9	8.00	PASS
	157	5785	-1.6	-16.8	4.8	-12.0	8.00	PASS
	165	5825	-2.1	-17.4	4.8	-12.6	8.00	PASS
2	149	5745	0.6	-14.6	4.8	-9.8	8.00	PASS
	157	5785	0.0	-15.2	4.8	-10.4	8.00	PASS
	165	5825	-1.2	-16.5	4.8	-11.7	8.00	PASS



A D T

802.11n (40MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	151	5755	-3.0	-18.2	4.8	-13.4	8	PASS
	159	5795	-2.4	-17.7	4.8	-12.9	8	PASS
1	151	5755	-3.6	-18.9	4.8	-14.1	8	PASS
	159	5795	-4.5	-19.7	4.8	-14.9	8	PASS
2	151	5755	-1.8	-17.1	4.8	-12.3	8	PASS
	159	5795	-3.6	-18.8	4.8	-14.0	8	PASS



A D T

5.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

5.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 16, 2012

5.6.3 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

5.6.4 DEVIATION FROM TEST STANDARD

No deviation

5.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

5.6.6 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit. Only worst data of each operating mode is presented.


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11a


CH 149

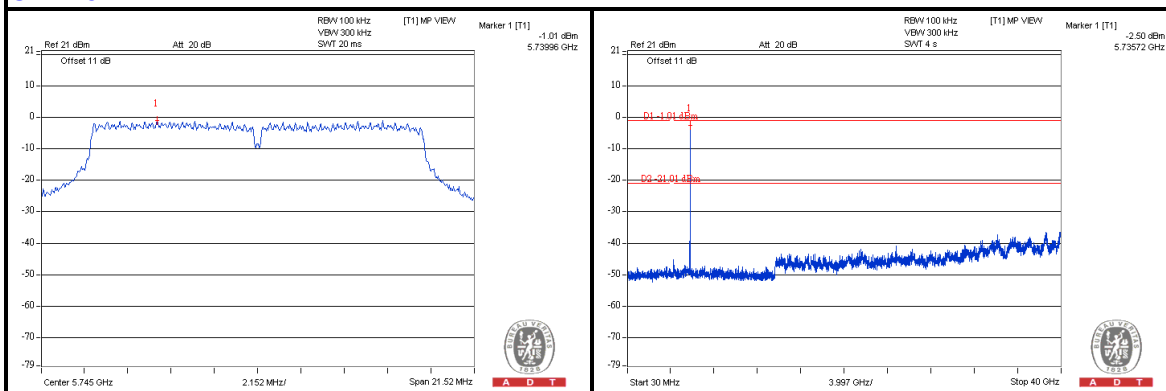

CH 157

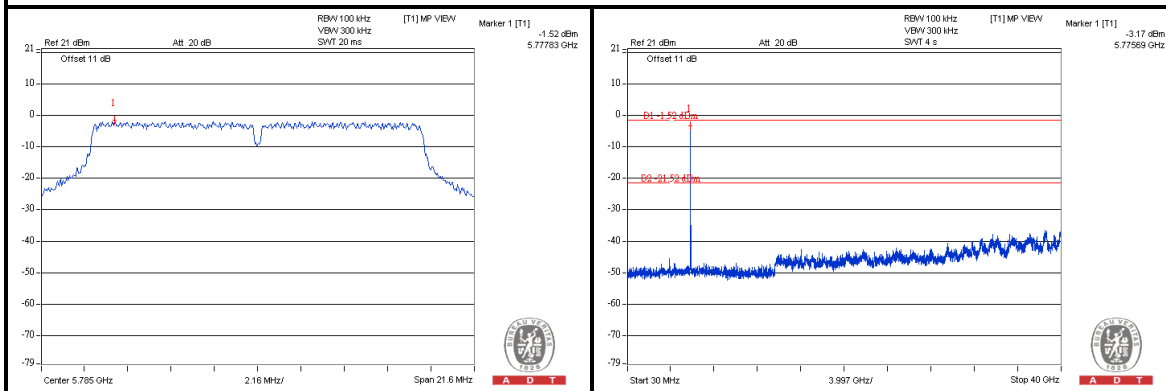

CH 165

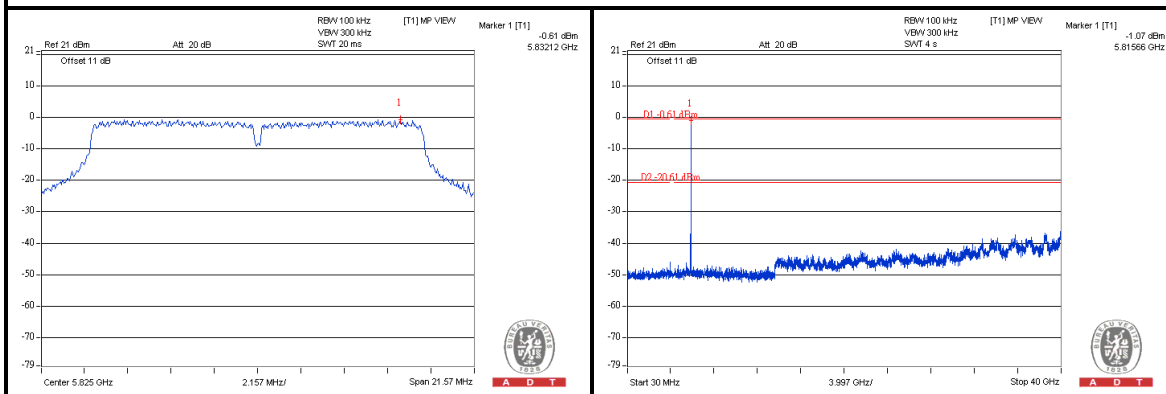





A D T

802.11n (20MHz)


CH 149

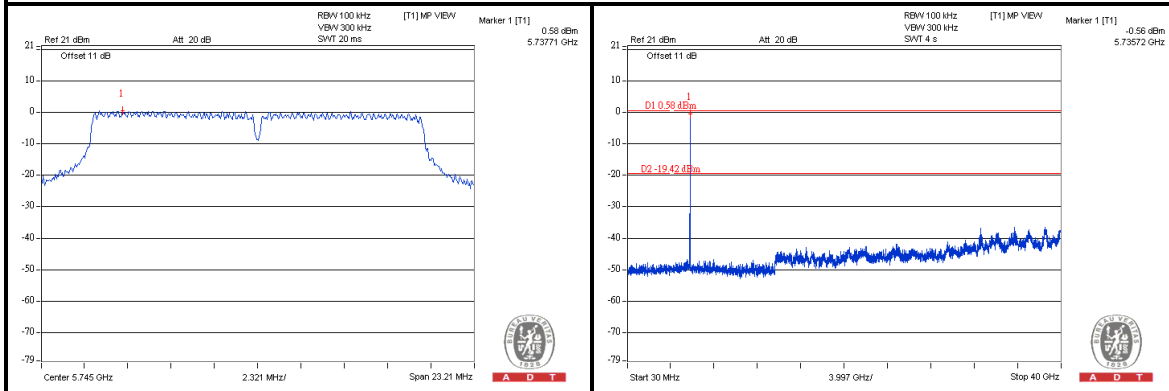

CH 157

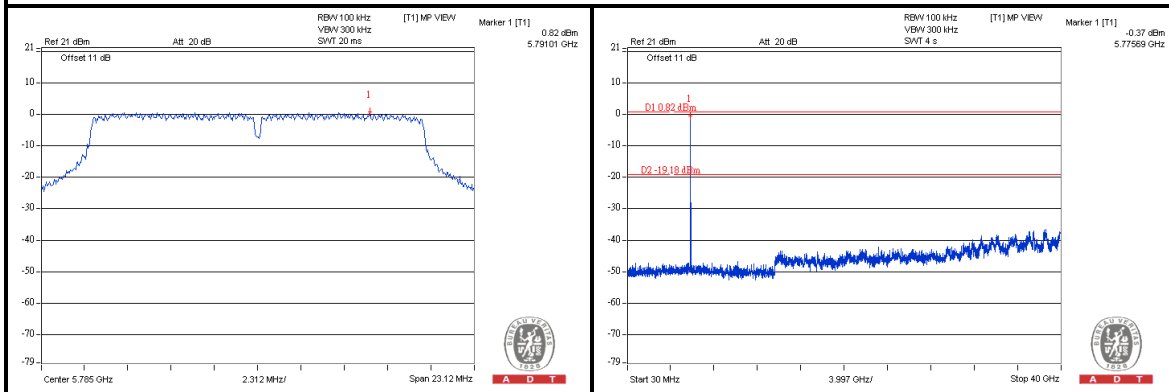

CH 165

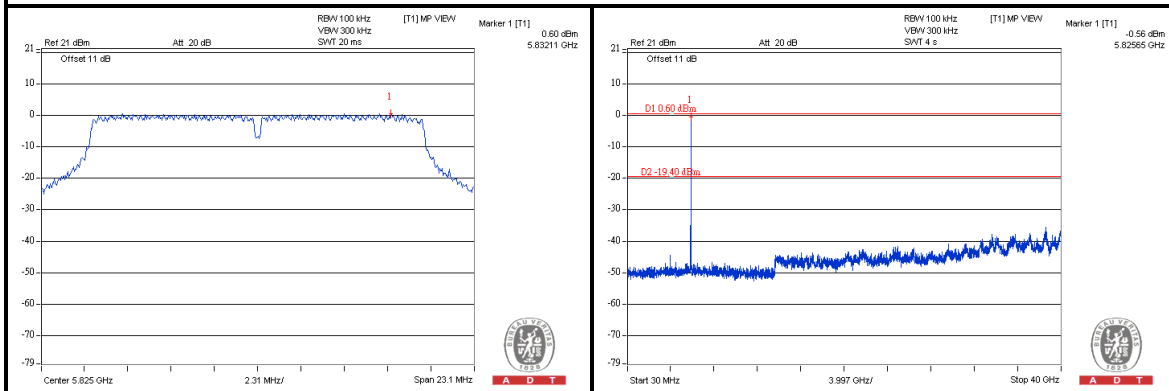





A D T

802.11n (40MHz)

CH 151

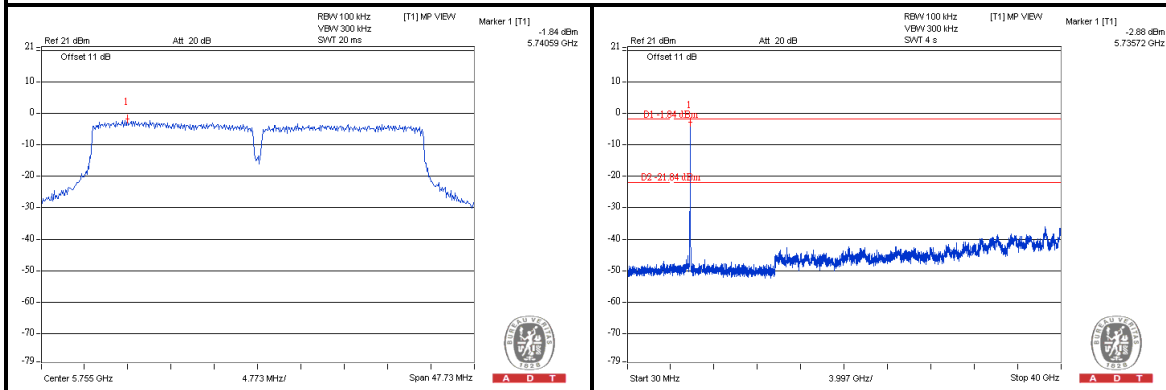

CH 159

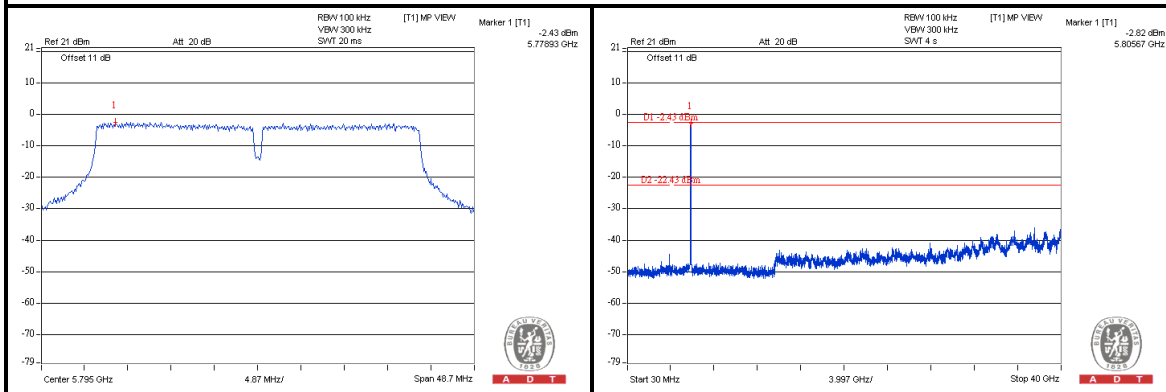

6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation and authorization certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5.phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

8. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---