

FCC TEST REPORT (15.247)

REPORT NO.: RF120322E03

MODEL NO.: F2F

FCC ID: RRK-F2F

RECEIVED: Mar. 22, 2012

TESTED: Mar. 30 to Apr. 05, 2012

ISSUED: Apr. 23, 2012

APPLICANT: Alpha Networks Inc.

ADDRESS: No.8 Li-shing 7th Rd., Science-based
Industrial Park, Hsinchu, Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

This test report consists of 95 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

RELEASE CONTROL RECORD	5
1. CERTIFICATION	6
2. SUMMARY OF TEST RESULTS	7
2.1 MEASUREMENT UNCERTAINTY	8
3. GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	13
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	14
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	17
3.4 DESCRIPTION OF SUPPORT UNITS.....	18
3.5 CONFIGURATION OF SYSTEM UNDER TEST	20
4. TEST TYPES AND RESULTS (802.11b & g, 2400 ~ 2483.5MHz Band)	22
4.1 CONDUCTED EMISSION MEASUREMENT	22
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	22
4.1.2 TEST INSTRUMENTS.....	22
4.1.3 TEST PROCEDURES	23
4.1.4 DEVIATION FROM TEST STANDARD	23
4.1.5 TEST SETUP	24
4.1.6 EUT OPERATING CONDITIONS	24
4.1.7 TEST RESULTS	25
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT	27
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	27
4.2.2 TEST INSTRUMENTS.....	28
4.2.3 TEST PROCEDURES	30
4.2.4 DEVIATION FROM TEST STANDARD	30
4.2.5 TEST SETUP	31
4.2.6 EUT OPERATING CONDITIONS	31
4.2.7 TEST RESULTS	32
4.3 6dB BANDWIDTH MEASUREMENT	45
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	45
4.3.2 TEST INSTRUMENTS.....	45
4.3.3 TEST PROCEDURE.....	45
4.3.4 DEVIATION FROM TEST STANDARD	45
4.3.5 TEST SETUP	45
4.3.6 EUT OPERATING CONDITIONS	46
4.3.7 TEST RESULTS	47
4.4 CONDUCTED OUTPUT POWER.....	49
4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	49
4.4.2 INSTRUMENTS.....	49
4.4.3 TEST PROCEDURES	49



4.4.4	DEVIATION FROM TEST STANDARD	49
4.4.5	TEST SETUP	49
4.4.6	EUT OPERATING CONDITIONS	49
4.4.7	TEST RESULTS	50
4.5	POWER SPECTRAL DENSITY MEASUREMENT	52
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	52
4.5.2	TEST INSTRUMENTS.....	52
4.5.3	TEST PROCEDURE.....	52
4.5.4	DEVIATION FROM TEST STANDARD	52
4.5.5	TEST SETUP	52
4.5.6	EUT OPERATING CONDITION.....	53
4.5.7	TEST RESULTS	54
4.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT	56
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	56
4.6.2	TEST INSTRUMENTS.....	56
4.6.3	TEST PROCEDURE.....	56
4.6.4	DEVIATION FROM TEST STANDARD	57
4.6.5	TEST SETUP	57
4.6.6	EUT OPERATING CONDITION.....	57
4.6.7	TEST RESULTS	57
5.	TEST TYPES AND RESULTS (802.11a, 5725~5850MHz Band).....	62
5.1	CONDUCTED EMISSION MEASUREMENT	62
5.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	62
5.1.2	TEST INSTRUMENTS.....	62
5.1.3	TEST PROCEDURES	63
5.1.4	DEVIATION FROM TEST STANDARD	63
5.1.5	TEST SETUP	64
5.1.6	EUT OPERATING CONDITIONS	64
5.1.7	TEST RESULTS	65
5.2	RADIATED AND BANDEDGE EMISSION MEASUREMENT	67
5.2.1	LIMITS OF RADIATED AND BANDEDGE EMISSION MEASUREMENT	67
5.2.2	TEST INSTRUMENTS.....	68
5.2.3	TEST PROCEDURES	70
5.2.4	DEVIATION FROM TEST STANDARD	70
5.2.5	TEST SETUP	71
5.2.6	EUT OPERATING CONDITIONS	71
5.2.7	TEST RESULTS	72
5.3	6dB BANDWIDTH MEASUREMENT	81
5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	81
5.3.2	TEST INSTRUMENTS.....	81
5.3.3	TEST PROCEDURE.....	81
5.3.4	DEVIATION FROM TEST STANDARD	81



A D T

5.3.5	TEST SETUP	81
5.3.6	EUT OPERATING CONDITIONS	82
5.3.7	TEST RESULTS	83
5.4	CONDUCTED OUTPUT POWER.....	84
5.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	84
5.4.2	INSTRUMENTS.....	84
5.4.3	TEST PROCEDURES	84
5.4.4	DEVIATION FROM TEST STANDARD	84
5.4.5	TEST SETUP	84
5.4.6	EUT OPERATING CONDITIONS	84
5.4.7	TEST RESULTS	85
5.5	POWER SPECTRAL DENSITY MEASUREMENT.....	86
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	86
5.5.2	TEST INSTRUMENTS.....	86
5.5.3	TEST PROCEDURE.....	86
5.5.4	DEVIATION FROM TEST STANDARD	86
5.5.5	TEST SETUP	86
5.5.6	EUT OPERATING CONDITION	86
5.5.7	TEST RESULTS	87
5.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT	88
5.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	88
5.6.2	TEST INSTRUMENTS.....	88
5.6.3	TEST PROCEDURE.....	88
5.6.4	DEVIATION FROM TEST STANDARD	89
5.6.5	EUT OPERATING CONDITION	89
5.6.6	TEST RESULTS	89
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	93
7.	INFORMATION ON THE TESTING LABORATORIES	94
8.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	95



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120322E03	Original release	Apr. 23, 2012




A D T

1. CERTIFICATION

PRODUCT: MY NET N900
BRAND NAME: WD
MODEL NO.: F2F
TEST SAMPLE: ENGINEERING SAMPLE
APPLICANT: Alpha Networks Inc.
TESTED: Mar. 30 to Apr. 05, 2012
STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.10-2009

The above equipment (Model: F2F) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE:** Apr. 23, 2012
(Elsie Hsu, Specialist)

APPROVED BY :  , **DATE:** Apr. 23, 2012
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For 2.4GHz, 2412~2462MHz Band

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -11.09dB at 0.40391MHz
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.50dB at 2390.00MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is MHF not a standard connector.

For 5GHz, 5745~5825MHz Band

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -11.07dB at 0.40391MHz
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -1.00dB at 5360.00MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is MHF not a standard connector.

NOTE: The EUT was operating in 2400 ~ 2483.5MHz, 5.15~5.25GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 2400 ~ 2483.5MHz and 5.725~5.850GHz. For the 5.15~5.25GHz RF parameters was recorded in another test report.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)	3.89 dB
Radiated emissions (1GHz -18GHz)	2.19 dB
Radiated emissions (18GHz -40GHz)	2.56 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	MY NET N900
MODEL NO.	F2F
POWER SUPPLY	DC 12V from external power adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: up to 11Mbps 802.11a / g: up to 54Mbps 802.11n: up to 450Mbps
OPERATING FREQUENCY	For 15.407 802.11a: 5.18 ~ 5.24GHz
	For 15.247 802.11b/g: 2.412 ~ 2.462GHz 802.11a: 5.745 ~ 5.825GHz
NUMBER OF CHANNEL	For 15.407 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
	For 15.247 (2.4GHz) 11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz) For 15.247 (5GHz) 5 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)

MAXIMUM OUTPUT POWER	For 15.407 802.11a: 13.853mW 802.11n (20MHz): 31.186mW 802.11n (40MHz): 44.915mW For 15.247 (2.4GHz) 802.11b: 142.801mW 802.11g: 407.830mW 802.11n (20MHz): 595.531mW 802.11n (40MHz): 427.052mW For 15.247 (5GHz) 802.11a: 187.046mW 802.11n (20MHz): 663.281mW 802.11n (40MHz): 636.976mW
ANTENNA TYPE	Please see note
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	Adapter x 1

NOTE:

1. The antennas provided to the EUT, please refer to the following table:

For 2.4GHz									
Transmitter Circuit	Brand	Model	Gain (dBi) (Exclu de cable loss)	Cable Loss (dB)	Net Gain (dBi) (Include cable loss)	Cable Length (mm)	Antenna Type	Freq. range (MHz to MHz)	Connector Type
Chain (0)	WHA-YU	C037-511164-A	3.3	0.9	2.4	292	PCB	2400 to 2500	MHF
Chain (1)	WHA-YU	C037-511165-A	3.4	0.64	2.76	272			
Chain (2)	WHA-YU	C037-511166-A	3.5	0.26	3.24	70			
For 5GHz									
Transmitter Circuit	Brand	Model	Gain (dBi) (Exclu de cable loss)	Cable Loss (dB)	Net Gain (dBi) (Include cable loss)	Cable Length (mm)	Antenna Type	Freq. range (MHz to MHz)	Connector Type
Chain (0)	WHA-YU	C037-511168-A	5.4	0.21	5.19	57	PCB	4900 to 5850	MHF
Chain (1)	WHA-YU	C037-511169-A	4.7	0.54	4.16	151			
Chain (2)	WHA-YU	C037-511167-A	3.9	0.66	3.24	186			

2. The EUT must be supplied with a power adapter and following two different models could be chosen as following table:

No	Brand	Model No.	Spec.
1	APD	WA-36A12U	Input: 100-240V, 50-60Hz, 0.9A Output: 12V, 3A DC output cable (unshielded, with one core, 1.8m)
2	APD	WA-36A12	Input: 100-240V, 50-60Hz, 0.9A Output: 12V, 3A DC output cable (unshielded, with one core, 1.8m)
1. The Adapters 1 - 2 are as same as Adapter 1; except for plug shape is different. 2. From the above adapters, adapter 1 was selected for testing.			

3. The EUT incorporates a MIMO function. Physically, the EUT provides three completed transmitters and three receivers.

MODULATION MODE	TX/RX FUNCTION
802.11b	3Tx/3Rx
802.11g	3Tx/3Rx
802.11a	3Tx/3Rx
802.11n (20MHz) for 2.4GHz	3Tx/3Rx
802.11n (40MHz) for 2.4GHz	3Tx/3Rx
802.11n (20MHz) for 5GHz	3Tx/3Rx
802.11n (40MHz) for 5GHz	3Tx/3Rx

4. Spurious emission of the simultaneous operation (2.4GHz & 5GHz) has been evaluated and no non-compliance was found.
5. The EUT is 3 * 3 spatial MIMO (3Tx & 3Rx) without beam forming function.
6. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 23.
7. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

Eleven channels are provided for 802.11b, 802.11g, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

Operated in 5725 ~ 5850MHz band:

Five channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

Two channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY
151	5755 MHz
159	5795 MHz

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ³ 1G	APCM	OB	
-	√	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ³ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

NOTE:

The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **X-plane**.

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
For 2.4 GHz 802.11n (20MHz)	1 to 11	6	OFDM	BPSK	6.5
For 5 GHz 802.11n (20MHz)	149 to 165	149	OFDM	BPSK	6.5

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
For 2.4 GHz 802.11n (20MHz)	1 to 11	6	OFDM	BPSK	6.5
For 5 GHz 802.11n (20MHz)	149 to 165	149	OFDM	BPSK	6.5

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
For 2.4 GHz 802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
For 5 GHz 802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
For 5 GHz 802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
For 2.4 GHz 802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
For 5 GHz 802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
For 5 GHz 802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	13.5

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
For 2.4 GHz 802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
For 5 GHz 802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
For 5 GHz 802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	13.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	26deg. C, 52%RH	120Vac, 60Hz	Jyunchun Lin
RE<1G	19deg. C, 62%RH	120Vac, 60Hz	Evan Huang
RE ³ 1G	23deg. C, 69%RH 24deg. C, 71%RH	120Vac, 60Hz	Evan Huang / Robert Cheng
APCM	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang
OB	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

For Conducted emission test					
NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	FSLB32S	FCC DoC
2	NOTEBOOK COMPUTER	DELL	PP27L	7YLB32S	FCC DoC
3	HDD	WD	WDBACW0010H BK-SESN	WCAV5R657325	FCC DoC
4	HDD	WD	WDBACW0020H BK-SESN	WMAZA6684355	FCC DoC
5	SWITCH	Alpha	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	UTP cable, 10m
2	UTP cable, 10m
3	USB cable, 1.2m
4	USB cable, 1.2m
5	UTP cable, 10m



A D T


For Other test items					
NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	FSLB32S	FCC DoC
2	NOTEBOOK COMPUTER	DELL	PP32LA	GSLB32S	FCC DoC
3	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC
4	HDD	WD	WDBACW0010H BK-SESN	WCAV5R657325	FCC DoC
5	HDD	WD	WDBACW0020H BK-SESN	WMAZA6684355	FCC DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	UTP cable, 10m
2	UTP cable, 10m
3	UTP cable, 10m
4	USB cable, 0.5m
5	USB cable, 0.5m


NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

For Conducted emission test:

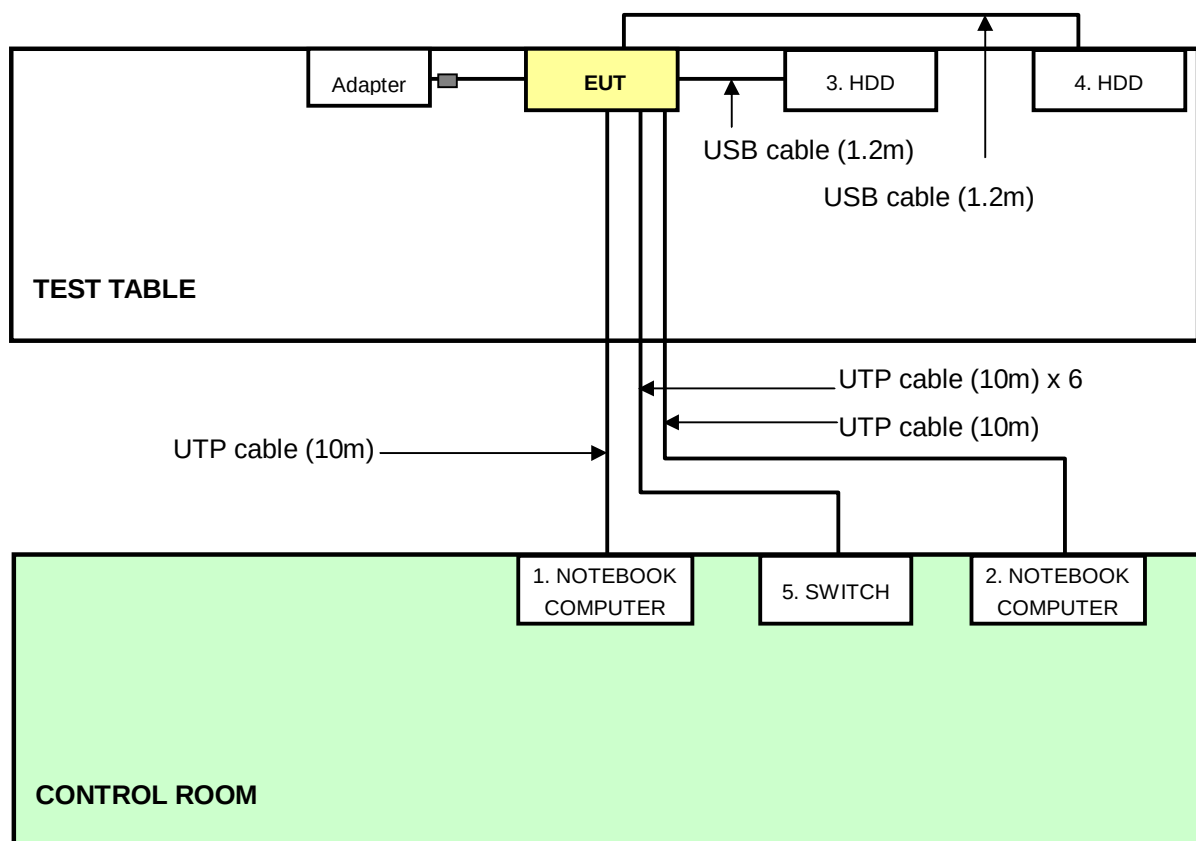

For Other test items

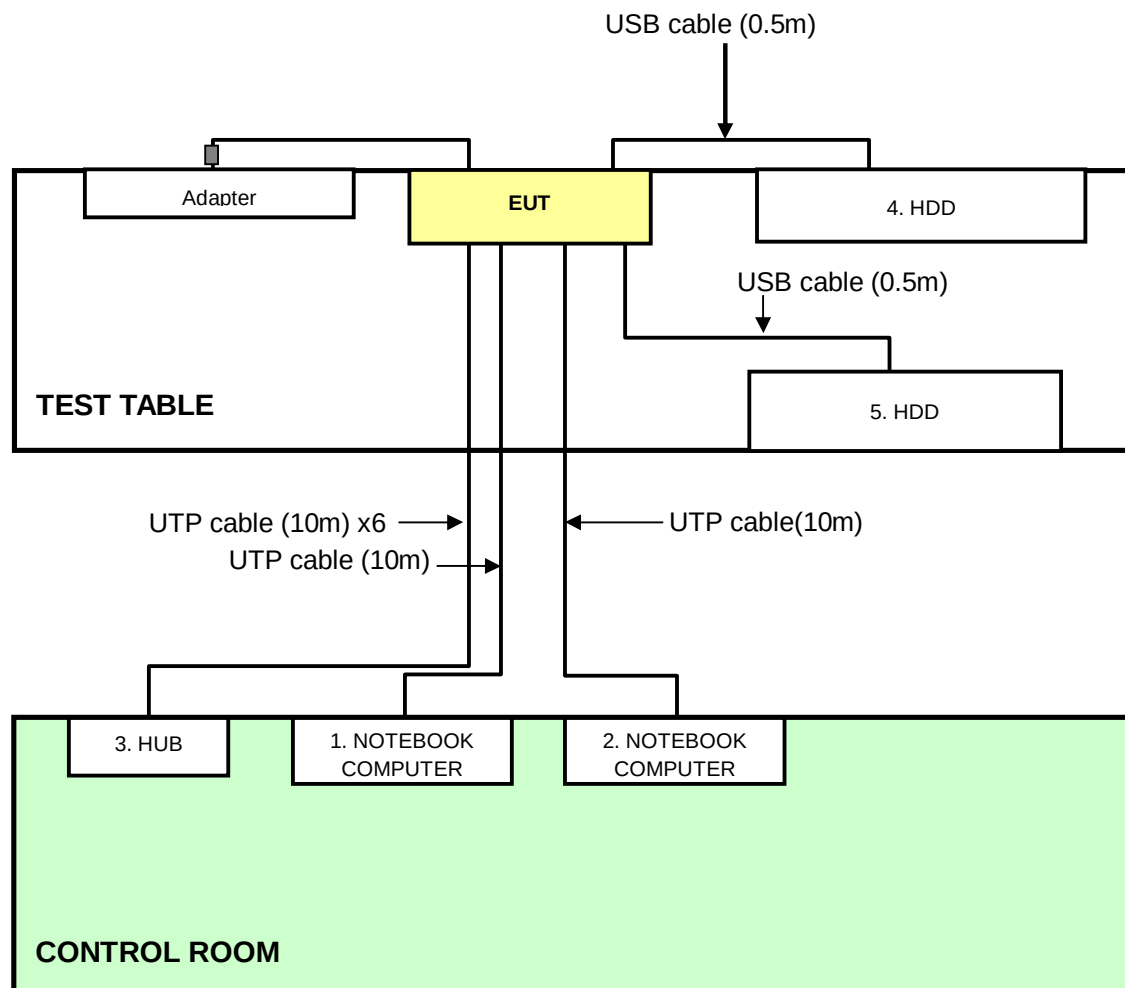

4. TEST TYPES AND RESULTS (802.11b & g, 2400 ~ 2483.5MHz Band)

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100287	Feb. 29, 2012	Feb. 28, 2013
Line-Impedance Stabilization Network (for EUT)	NSLK 8127	8127-523	Sep. 20, 2011	Sep. 19, 2012
Line-Impedance Stabilization Network (for Peripheral)	ENV-216	100072	June 10, 2011	June 09, 2012
RF Cable (JYEBAO)	5DFB	COACAB-002	Aug. 06, 2011	Aug. 05, 2012
50 ohms Terminator	50	3	Nov. 02, 2011	Nov. 01, 2012
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. Tested Date: Apr. 03, 2012


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

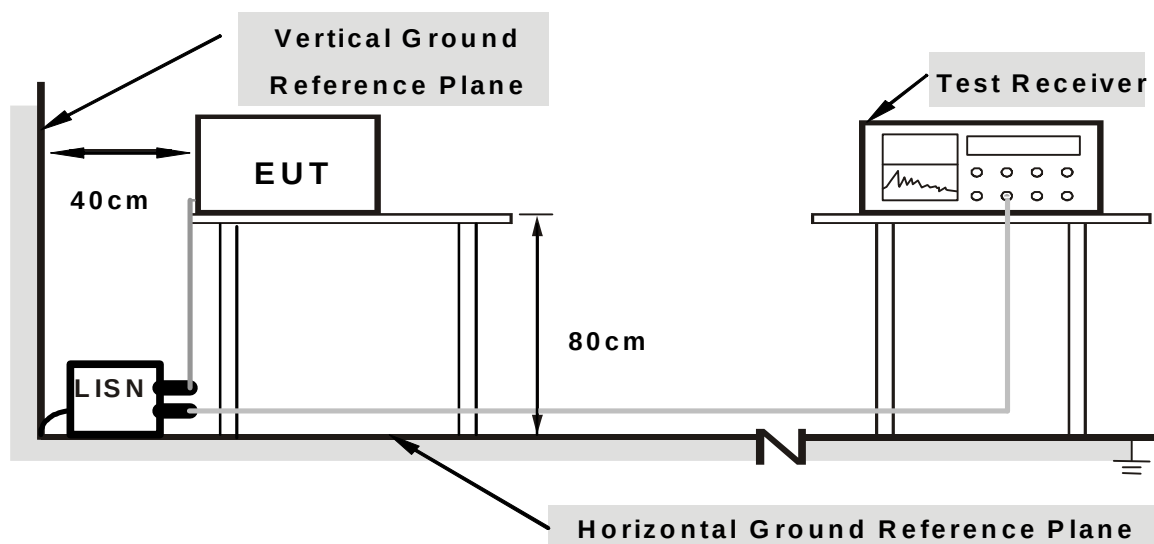

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Placed the EUT on testing table.
2. Prepared other computer system (support unit 1) to act as communication partners and placed them outside of testing area.
3. The communication partners ran test program “artgui.exe” to enable EUT under transmission/receiving condition continuously via one UTP cable transmission.


4.1.7 TEST RESULTS

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	0.06	48.53	40.53	48.59	40.59	65.58	55.58	-16.99	-14.99
2	0.20078	0.06	40.65	32.81	40.71	32.87	63.58	53.58	-22.87	-20.71
3	0.27109	0.07	32.14	23.72	32.21	23.79	61.08	51.08	-28.88	-27.30
4	0.40313	0.08	26.70	23.09	26.78	23.17	57.79	47.79	-31.01	-24.62
5	16.39844	0.85	35.26	28.34	36.11	29.19	60.00	50.00	-23.89	-20.81
6	23.12891	1.07	33.46	31.71	34.53	32.78	60.00	50.00	-25.47	-17.22

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

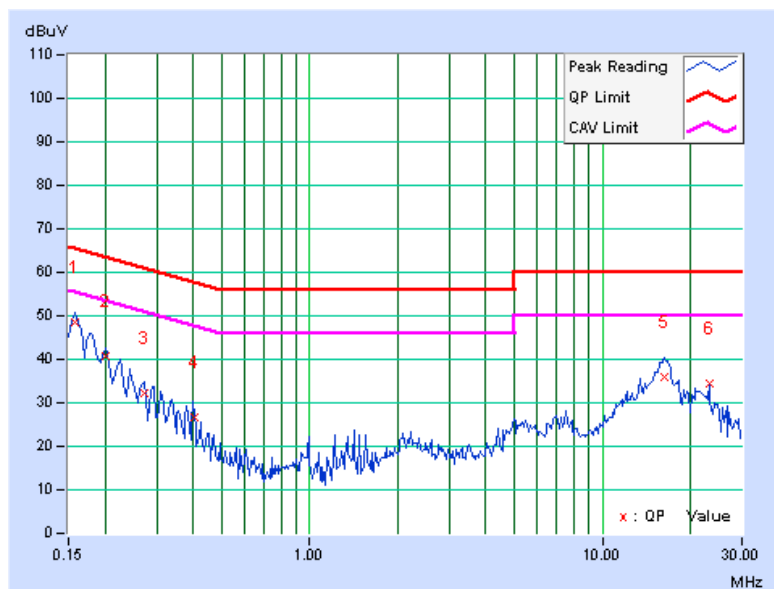


PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	0.07	48.76	41.12	48.83	41.19	65.58	55.58	-16.75	-14.39
2	0.22422	0.08	38.85	32.10	38.93	32.18	62.66	52.66	-23.73	-20.48
3	0.31406	0.09	35.71	31.90	35.80	31.99	59.86	49.86	-24.07	-17.88
4	0.40391	0.09	37.44	36.59	37.53	36.68	57.77	47.77	-20.24	-11.09
5	16.53516	0.85	35.94	29.55	36.79	30.40	60.00	50.00	-23.21	-19.60
6	23.12891	1.07	33.52	31.77	34.59	32.84	60.00	50.00	-25.41	-17.16

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

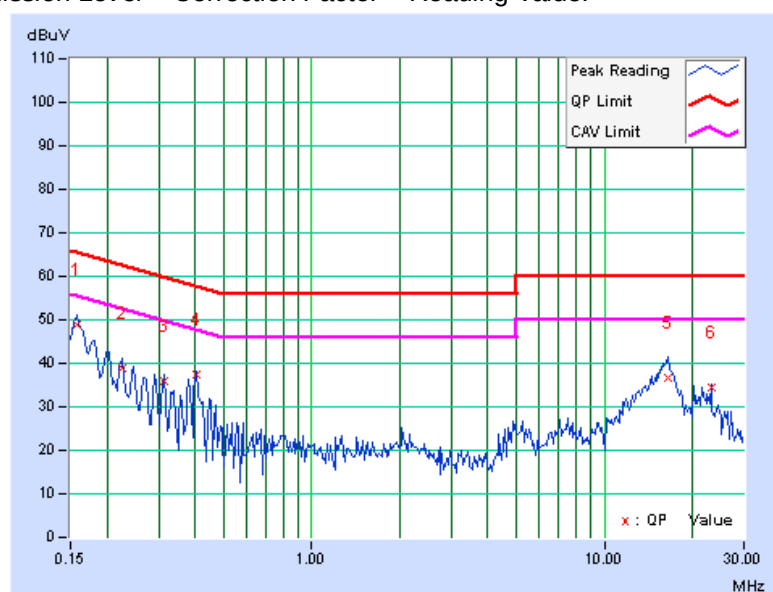

4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

For below 1GHz

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250253	Aug. 29, 2011	Aug. 28, 2012
Agilent Pre-Selector	N9039A	MY46520310	Aug. 29, 2011	Aug. 28, 2012
Agilent Signal Generator	N5181A	MY49060347	July 25, 2011	July 24, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-04	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02465	Feb. 27, 2012	Feb. 26, 2013
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-361	Apr. 14, 2011	Apr. 13, 2012
AISI Horn_Antenna	AIH.8018	0000220091110	Nov. 23, 2011	Nov. 22, 2012
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF CABLE	NA	RF104-205 RF104-207 RF104-202	Dec. 27, 2011	Dec. 26, 2012
RF Cable	NA	CHHCAB_001	Oct. 08, 2011	Oct. 07, 2012
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
5. The CANADA Site Registration No. is IC 7450H-3.
6. Tested Date: Mar. 30, 2012

**A D T****For above 1GHz**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012
Agilent Pre-Selector	N9039A	MY46520311	July 12, 2011	July 11, 2012
Agilent Signal Generator	N5181A	MY49060517	July 12, 2011	July 11, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-03	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02578	July 04, 2011	July 03, 2012
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-360	Apr. 14, 2011	Apr. 13, 2012
AISI Horn_Antenna	AIH.8018	0000320091110	Nov. 14, 2011	Nov. 13, 2012
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF CABLE	NA	RF104-201 RF104-203 RF104-204	Dec. 26, 2011	Dec. 25, 2012
RF Cable	NA	CHGCAB_001	Oct. 07, 2011	Oct. 06, 2012
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
5. The VCCI Site Registration No. is G-137.
6. The CANADA Site Registration No. is IC 7450H-2.
7. Tested Date: Mar. 30, 2012

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

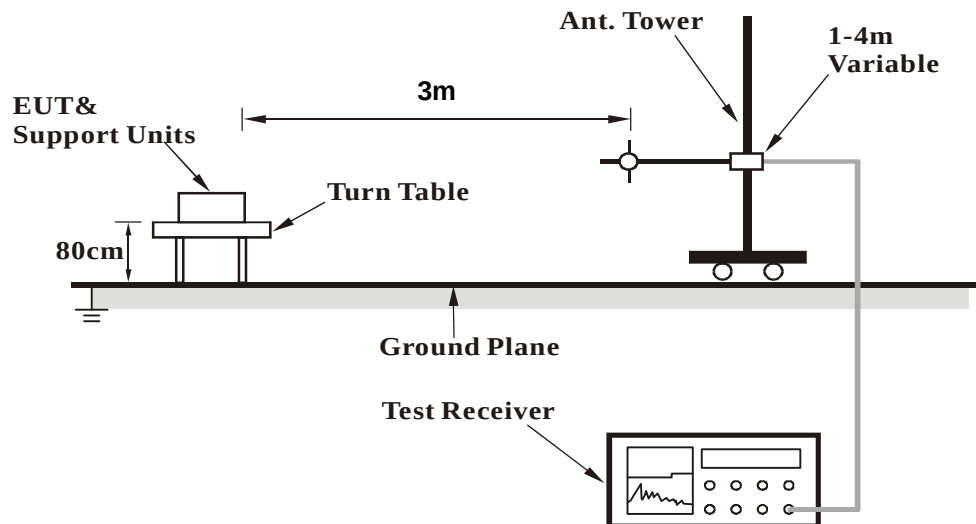

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

802.11n (20MHz)

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	94.90	33.1 QP	43.5	-10.4	2.00 H	304	24.18	8.92
2	250.03	34.2 QP	46.0	-11.9	1.50 H	297	20.87	13.28
3	374.97	38.0 QP	46.0	-8.0	1.00 H	190	20.92	17.10
4	557.10	38.3 QP	46.0	-7.7	1.50 H	166	17.02	21.31
5	642.84	34.8 QP	46.0	-11.2	1.00 H	110	12.24	22.55
6	799.98	37.8 QP	46.0	-8.2	1.00 H	360	12.27	25.57
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	56.53	35.3 QP	40.0	-4.7	1.00 V	285	21.43	13.88
2	66.36	36.8 QP	40.0	-3.2	1.00 V	327	24.09	12.69
3	98.45	35.0 QP	43.5	-8.5	1.50 V	0	25.72	9.30
4	374.97	35.4 QP	46.0	-10.7	1.00 V	332	18.25	17.10
5	500.02	34.3 QP	46.0	-11.7	1.00 V	258	14.22	20.06
6	532.94	33.1 QP	46.0	-12.9	1.00 V	339	12.32	20.78

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2325.00	60.3 PK	74.0	-13.7	1.00 H	264	28.86	31.44
2	2325.00	53.1 AV	54.0	-0.9	1.00 H	264	21.66	31.44
3	*2412.00	110.0 PK			1.00 H	106	78.27	31.73
4	*2412.00	107.3 AV			1.00 H	106	75.57	31.73
5	4824.00	51.8 PK	74.0	-22.2	1.65 H	93	12.83	38.97
6	4824.00	46.8 AV	54.0	-7.2	1.65 H	93	7.83	38.97
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2325.00	68.8 PK	74.0	-5.2	1.70 V	21	37.36	31.44
2	2325.00	47.5 AV	54.0	-6.5	1.70 V	21	16.06	31.44
3	*2412.00	103.5 PK			1.71 V	17	71.77	31.73
4	*2412.00	101.1 AV			1.71 V	17	69.37	31.73
5	4824.00	53.8 PK	74.0	-20.2	1.00 V	113	14.83	38.97
6	4824.00	48.3 AV	54.0	-5.7	1.00 V	113	9.33	38.97

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2350.00	60.7 PK	74.0	-13.3	1.00 H	277	29.17	31.53
2	2350.00	53.3 AV	54.0	-0.7	1.00 H	277	21.77	31.53
3	*2437.00	112.3 PK			1.00 H	112	80.49	31.81
4	*2437.00	109.9 AV			1.00 H	112	78.09	31.81
5	4874.00	49.8 PK	74.0	-24.2	1.63 H	91	10.66	39.14
6	4874.00	42.7 AV	54.0	-11.3	1.63 H	91	3.56	39.14
7	7311.00	53.2 PK	74.0	-20.8	1.00 H	70	6.57	46.63
8	7311.00	41.2 AV	54.0	-12.8	1.00 H	70	-5.43	46.63
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2350.00	58.2 PK	74.0	-15.8	1.69 V	18	26.67	31.53
2	2350.00	46.8 AV	54.0	-7.2	1.69 V	18	15.27	31.53
3	*2437.00	104.6 PK			1.69 V	18	72.79	31.81
4	*2437.00	102.5 AV			1.69 V	18	70.69	31.81
5	4874.00	52.9 PK	74.0	-21.1	1.00 V	117	13.76	39.14
6	4874.00	46.8 AV	54.0	-7.2	1.00 V	117	7.66	39.14
7	7311.00	52.7 PK	74.0	-21.3	1.23 V	122	6.07	46.63
8	7311.00	40.9 AV	54.0	-13.1	1.23 V	122	-5.73	46.63

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2375.00	59.9 PK	74.0	-14.1	1.06 H	248	28.29	31.61
2	2375.00	53.0 AV	54.0	-1.0	1.06 H	248	21.39	31.61
3	*2462.00	111.5 PK			1.00 H	114	79.61	31.89
4	*2462.00	109.2 AV			1.00 H	114	77.31	31.89
5	2483.50	58.8 PK	74.0	-15.2	1.00 H	69	26.83	31.97
6	2483.50	48.5 AV	54.0	-5.5	1.00 H	69	16.53	31.97
7	4924.00	47.0 PK	74.0	-27.0	1.00 H	67	7.69	39.31
8	4924.00	36.5 AV	54.0	-17.5	1.00 H	67	-2.81	39.31
9	7386.00	55.5 PK	74.0	-18.5	1.00 H	68	8.90	46.60
10	7386.00	42.2 AV	54.0	-11.8	1.00 H	68	-4.40	46.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2375.00	57.6 PK	74.0	-16.4	1.71 V	38	25.99	31.61
2	2375.00	45.2 AV	54.0	-8.8	1.71 V	38	13.59	31.61
3	*2462.00	102.5 PK			1.71 V	38	70.61	31.89
4	*2462.00	99.9 AV			1.71 V	38	68.01	31.89
5	2483.50	57.0 PK	74.0	-17.0	1.70 V	36	25.03	31.97
6	2483.50	47.3 AV	54.0	-6.7	1.70 V	36	15.33	31.97
7	4924.00	52.0 PK	74.0	-22.0	1.00 V	115	12.69	39.31
8	4924.00	45.5 AV	54.0	-8.5	1.00 V	115	6.19	39.31
9	7386.00	53.5 PK	74.0	-20.5	1.25 V	123	6.90	46.60
10	7386.00	41.4 AV	54.0	-12.6	1.25 V	123	-5.20	46.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.7 PK	74.0	-2.3	1.00 H	112	40.04	31.66
2	2390.00	51.6 AV	54.0	-2.4	1.00 H	112	19.94	31.66
3	*2412.00	112.9 PK			1.00 H	112	81.17	31.73
4	*2412.00	101.5 AV			1.00 H	112	69.77	31.73
5	4824.00	47.8 PK	74.0	-26.2	1.67 H	92	8.83	38.97
6	4824.00	36.3 AV	54.0	-17.7	1.67 H	92	-2.67	38.97
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.7 PK	74.0	-8.3	1.69 V	28	34.04	31.66
2	2390.00	49.2 AV	54.0	-4.8	1.69 V	28	17.54	31.66
3	*2412.00	105.9 PK			1.69 V	28	74.17	31.73
4	*2412.00	94.5 AV			1.69 V	28	62.77	31.73
5	4824.00	48.1 PK	74.0	-25.9	1.00 V	128	9.13	38.97
6	4824.00	35.8 AV	54.0	-18.2	1.00 V	128	-3.17	38.97

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	114.9 PK			1.00 H	120	83.09	31.81
2	*2437.00	103.3 AV			1.00 H	120	71.49	31.81
3	4874.00	48.6 PK	74.0	-25.4	1.61 H	97	9.46	39.14
4	4874.00	36.8 AV	54.0	-17.2	1.61 H	97	-2.34	39.14
5	7311.00	52.1 PK	74.0	-21.9	1.00 H	73	5.47	46.63
6	7311.00	40.8 AV	54.0	-13.2	1.00 H	73	-5.83	46.63
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.6 PK			1.68 V	31	73.82	31.81
2	*2437.00	94.6 AV			1.68 V	31	62.79	31.81
3	4874.00	47.9 PK	74.0	-26.1	1.00 V	127	8.76	39.14
4	4874.00	35.8 AV	54.0	-18.2	1.00 V	127	-3.34	39.14
5	7311.00	53.6 PK	74.0	-20.4	1.22 V	133	6.97	46.63
6	7311.00	40.8 AV	54.0	-13.2	1.22 V	133	-5.83	46.63

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	115.1 PK			1.00 H	112	83.21	31.89
2	*2462.00	103.4 AV			1.00 H	112	71.51	31.89
3	2483.50	73.0 PK	74.0	-1.0	1.00 H	113	41.03	31.97
4	2483.50	50.5 AV	54.0	-3.5	1.00 H	113	18.53	31.97
5	4924.00	48.6 PK	74.0	-25.4	1.65 H	90	9.29	39.31
6	4924.00	36.7 AV	54.0	-17.3	1.65 H	90	-2.61	39.31
7	7386.00	52.0 PK	74.0	-22.0	1.00 H	71	5.40	46.60
8	7386.00	40.8 AV	54.0	-13.2	1.00 H	71	-5.80	46.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.2 PK			1.64 V	27	74.31	31.89
2	*2462.00	95.7 AV			1.64 V	27	63.81	31.89
3	2483.50	61.8 PK	74.0	-12.2	1.64 V	27	29.83	31.97
4	2483.50	45.2 AV	54.0	-8.8	1.64 V	27	13.23	31.97
5	4924.00	47.9 PK	74.0	-26.1	1.00 V	119	8.59	39.31
6	4924.00	35.8 AV	54.0	-18.2	1.00 V	119	-3.51	39.31
7	7386.00	53.8 PK	74.0	-20.2	1.22 V	126	7.20	46.60
8	7386.00	41.0 AV	54.0	-13.0	1.22 V	126	-5.60	46.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.2 PK	74.0	-2.8	1.00 H	112	39.54	31.66
2	2390.00	53.4 AV	54.0	-0.6	1.00 H	112	21.74	31.66
3	*2412.00	113.4 PK			1.00 H	112	81.67	31.73
4	*2412.00	102.0 AV			1.00 H	112	70.27	31.73
5	4824.00	50.0 PK	74.0	-24.0	1.65 H	85	11.03	38.97
6	4824.00	37.3 AV	54.0	-16.7	1.65 H	85	-1.67	38.97
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.1 PK	74.0	-9.9	1.68 V	19	32.44	31.66
2	2390.00	48.5 AV	54.0	-5.5	1.68 V	19	16.84	31.66
3	*2412.00	104.9 PK			1.68 V	27	73.17	31.73
4	*2412.00	93.7 AV			1.68 V	27	61.97	31.73
5	4824.00	52.0 PK	74.0	-22.0	1.00 V	117	13.03	38.97
6	4824.00	39.6 AV	54.0	-14.4	1.00 V	117	0.63	38.97

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2350.00	62.0 PK	74.0	-12.0	1.00 H	262	30.47	31.53
2	2350.00	50.7 AV	54.0	-3.3	1.00 H	262	19.17	31.53
3	*2437.00	116.9 PK			1.12 H	221	85.09	31.81
4	*2437.00	104.7 AV			1.12 H	221	72.89	31.81
5	2483.50	72.0 PK	74.0	-2.0	1.00 H	111	40.03	31.97
6	2483.50	48.5 AV	54.0	-5.5	1.00 H	111	16.53	31.97
7	4874.00	50.0 PK	74.0	-24.0	1.62 H	94	10.86	39.14
8	4874.00	37.5 AV	54.0	-16.5	1.62 H	94	-1.64	39.14
9	7311.00	53.2 PK	74.0	-20.8	1.00 H	77	6.57	46.63
10	7311.00	40.9 AV	54.0	-13.1	1.00 H	77	-5.73	46.63

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2350.00	61.3 PK	74.0	-12.7	1.67 V	28	29.77	31.53
2	2350.00	46.9 AV	54.0	-7.1	1.67 V	28	15.37	31.53
3	*2437.00	110.8 PK			1.67 V	22	78.99	31.81
4	*2437.00	99.3 AV			1.67 V	22	67.49	31.81
5	2483.50	62.1 PK	74.0	-11.9	1.65 V	31	30.13	31.97
6	2483.50	47.2 AV	54.0	-6.8	1.65 V	31	15.23	31.97
7	4874.00	51.7 PK	74.0	-22.3	1.00 V	118	12.56	39.14
8	4874.00	39.4 AV	54.0	-14.6	1.00 V	118	0.26	39.14
9	7311.00	52.2 PK	74.0	-21.8	1.22 V	130	5.57	46.63
10	7311.00	41.1 AV	54.0	-12.9	1.22 V	130	-5.53	46.63

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2375.00	60.7 PK	74.0	-13.3	1.00 H	256	29.09	31.61
2	2375.00	49.5 AV	54.0	-4.5	1.00 H	256	17.89	31.61
3	*2462.00	113.5 PK			1.00 H	112	81.61	31.89
4	*2462.00	102.2 AV			1.00 H	112	70.31	31.89
5	2483.50	71.5 PK	74.0	-2.5	1.00 H	73	39.53	31.97
6	2483.50	50.4 AV	54.0	-3.6	1.00 H	73	18.43	31.97
7	4924.00	50.6 PK	74.0	-23.4	1.61 H	105	11.29	39.31
8	4924.00	37.9 AV	54.0	-16.1	1.61 H	105	-1.41	39.31
9	7386.00	53.2 PK	74.0	-20.8	1.04 H	67	6.60	46.60
10	7386.00	40.7 AV	54.0	-13.3	1.04 H	67	-5.90	46.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2375.00	57.2 PK	74.0	-16.8	1.67 V	36	25.59	31.61
2	2375.00	48.2 AV	54.0	-5.8	1.67 V	36	16.60	31.61
3	*2462.00	105.6 PK			1.67 V	27	73.71	31.89
4	*2462.00	95.2 AV			1.67 V	27	63.31	31.89
5	2483.50	65.2 PK	74.0	-8.8	1.67 V	27	33.23	31.97
6	2483.50	46.2 AV	54.0	-7.8	1.67 V	27	14.23	31.97
7	4924.00	51.7 PK	74.0	-22.3	1.05 V	106	12.39	39.31
8	4924.00	39.4 AV	54.0	-14.6	1.05 V	106	0.09	39.31
9	7386.00	52.0 PK	74.0	-22.0	1.25 V	125	5.40	46.60
10	7386.00	41.1 AV	54.0	-12.9	1.25 V	125	-5.50	46.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

802.11n (40MHz)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.6 PK	74.0	-3.4	1.00 H	108	38.94	31.66
2	2390.00	53.5 AV	54.0	-0.5	1.00 H	108	21.84	31.66
3	*2422.00	107.8 PK			1.00 H	112	76.04	31.76
4	*2422.00	95.8 AV			1.00 H	112	64.04	31.76
5	4844.00	48.4 PK	74.0	-25.6	1.69 H	96	9.36	39.04
6	4844.00	36.5 AV	54.0	-17.5	1.69 H	96	-2.54	39.04
7	7266.00	52.3 PK	74.0	-21.7	1.01 H	70	5.63	46.67
8	7266.00	41.1 AV	54.0	-12.9	1.01 H	70	-5.57	46.67
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.8 PK	74.0	-13.2	1.69 V	28	29.14	31.66
2	2390.00	49.2 AV	54.0	-4.8	1.69 V	28	17.54	31.66
3	*2422.00	98.9 PK			1.69 V	28	67.14	31.76
4	*2422.00	86.8 AV			1.69 V	28	55.04	31.76
5	4844.00	48.9 PK	74.0	-25.1	1.05 V	115	9.86	39.04
6	4844.00	47.0 AV	54.0	-7.0	1.05 V	115	7.96	39.04
7	7266.00	53.1 PK	74.0	-20.9	1.23 V	138	6.43	46.67
8	7266.00	41.2 AV	54.0	-12.8	1.23 V	138	-5.47	46.67

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.2 PK	74.0	-2.8	1.01 H	115	39.54	31.66
2	2390.00	52.8 AV	54.0	-1.2	1.01 H	115	21.14	31.66
3	*2437.00	109.8 PK			1.00 H	109	77.99	31.81
4	*2437.00	98.4 AV			1.00 H	109	66.59	31.81
5	2483.50	69.4 PK	74.0	-4.6	1.00 H	71	37.43	31.97
6	2483.50	49.1 AV	54.0	-4.9	1.00 H	71	17.13	31.97
7	4874.00	48.1 PK	74.0	-25.9	1.66 H	95	8.96	39.14
8	4874.00	36.1 AV	54.0	-17.9	1.66 H	95	-3.04	39.14
9	7311.00	51.9 PK	74.0	-22.1	1.00 H	80	5.27	46.63
10	7311.00	40.8 AV	54.0	-13.2	1.00 H	80	-5.83	46.63

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.2 PK	74.0	-8.8	1.64 V	30	33.54	31.66
2	2390.00	46.3 AV	54.0	-7.7	1.64 V	30	14.64	31.66
3	*2437.00	102.6 PK			1.64 V	27	70.79	31.81
4	*2437.00	91.7 AV			1.64 V	27	59.89	31.81
5	2483.50	65.3 PK	74.0	-8.7	1.62 V	14	33.33	31.97
6	2483.50	48.2 AV	54.0	-5.8	1.62 V	14	16.23	31.97
7	4874.00	48.3 PK	74.0	-25.7	1.06 V	109	9.16	39.14
8	4874.00	36.8 AV	54.0	-17.2	1.06 V	109	-2.34	39.14
9	7311.00	52.9 PK	74.0	-21.1	1.23 V	127	6.27	46.63
10	7311.00	40.8 AV	54.0	-13.2	1.23 V	127	-5.83	46.63

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	108.8 PK			1.00 H	109	76.94	31.86
2	*2452.00	96.7 AV			1.00 H	109	64.84	31.86
3	2483.50	73.2 PK	74.0	-0.8	1.00 H	111	41.23	31.97
4	2483.50	53.1 AV	54.0	-0.9	1.00 H	111	21.13	31.97
5	4904.00	48.5 PK	74.0	-25.5	1.67 H	89	9.26	39.24
6	4904.00	36.5 AV	54.0	-17.5	1.67 H	89	-2.74	39.24
7	7356.00	51.4 PK	74.0	-22.6	1.05 H	64	4.79	46.61
8	7356.00	40.5 AV	54.0	-13.5	1.05 H	64	-6.11	46.61
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	100.8 PK			1.34 V	18	68.94	31.86
2	*2452.00	90.1 AV			1.34 V	18	58.24	31.86
3	2483.50	60.9 PK	74.0	-13.1	1.32 V	18	28.93	31.97
4	2483.50	46.4 AV	54.0	-7.6	1.32 V	18	14.43	31.97
5	4904.00	48.7 PK	74.0	-25.3	1.08 V	116	9.46	39.24
6	4904.00	37.2 AV	54.0	-16.8	1.08 V	116	-2.04	39.24
7	7356.00	52.9 PK	74.0	-21.1	1.27 V	132	6.29	46.61
8	7356.00	41.0 AV	54.0	-13.0	1.27 V	132	-5.61	46.61

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Apr. 05, 2012


4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
1	2412	10.70	10.56	10.65	0.5	PASS
6	2437	10.67	10.56	10.84	0.5	PASS
11	2462	10.40	11.01	11.12	0.5	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
1	2412	16.55	16.59	16.57	0.5	PASS
6	2437	16.63	16.62	16.59	0.5	PASS
11	2462	16.60	16.55	16.56	0.5	PASS

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
1	2412	17.70	17.81	17.87	0.5	PASS
6	2437	17.77	17.77	17.89	0.5	PASS
11	2462	17.82	17.82	17.81	0.5	PASS



A D T

802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
3	2422	37.23	36.96	36.75	0.5	PASS
6	2437	37.30	36.85	36.91	0.5	PASS
9	2452	37.31	36.94	36.74	0.5	PASS

4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Peak Power Meter	ML2495A	0824006	May 04, 2011	May 03, 2012
Power Sensor	MA2411B	0738172	May 03, 2011	May 02, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Apr. 05, 2012


4.4.3 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

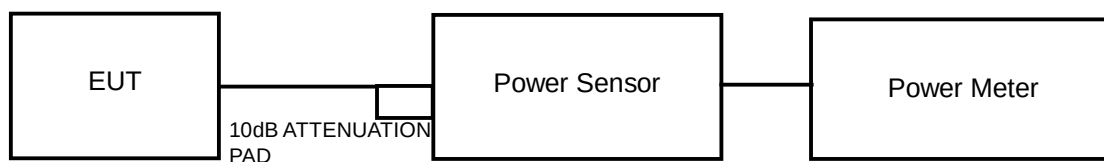

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

802.11b

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
1	2412	16.30	16.20	16.10	125.083	20.97	28.42	PASS
6	2437	16.40	16.80	17.10	142.801	21.55	28.42	PASS
11	2462	15.30	16.20	16.90	124.549	20.95	28.42	PASS

Note: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^3 / 3]$

Effective Legacy Gain (dBi) = 7.58

The effective legacy gain is 7.58dBi, therefore the limit needs to reduce.

802.11g

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
1	2412	21.30	21.20	21.30	401.618	26.04	28.42	PASS
6	2437	21.40	21.30	21.30	407.830	26.10	28.42	PASS
11	2462	20.90	21.40	21.50	402.319	26.05	28.42	PASS

Note: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^3 / 3]$

Effective Legacy Gain (dBi) = 7.58

The effective legacy gain is 7.58dBi, therefore the limit needs to reduce.

802.11n (20MHz)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
1	2412	21.10	20.30	21.10	364.802	25.62	30	PASS
6	2437	22.70	23.40	22.80	595.531	27.75	30	PASS
11	2462	20.80	21.50	21.60	406.024	26.09	30	PASS



A D T

802.11n (40MHz)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
3	2422	17.50	17.90	17.80	178.150	22.51	30	PASS
6	2437	21.50	21.60	21.50	427.052	26.30	30	PASS
9	2452	19.70	19.80	20.00	288.824	24.61	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Apr. 05, 2012


4.5.3 TEST PROCEDURE

1. Set the RBW = 100 kHz, VBW =300 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3 \text{ kHz}/100\text{kHz})$

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.5.7 TEST RESULTS

802.11b

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	4.45	-10.78	4.77	-6.01	6.42	PASS
	6	2437	4.79	-10.44	4.77	-5.67	6.42	PASS
	11	2462	3.70	-11.53	4.77	-6.76	6.42	PASS
1	1	2412	4.99	-10.24	4.77	-5.47	6.42	PASS
	6	2437	5.49	-9.74	4.77	-4.97	6.42	PASS
	11	2462	5.10	-10.13	4.77	-5.36	6.42	PASS
2	1	2412	4.77	-10.46	4.77	-5.69	6.42	PASS
	6	2437	5.82	-9.41	4.77	-4.64	6.42	PASS
	11	2462	5.12	-10.11	4.77	-5.34	6.42	PASS

Note: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^3 / 3]$

Effective Legacy Gain (dBi) = 7.58

The effective legacy gain is 7.58dBi, therefore the limit needs to reduce.

802.11g

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	0.07	-15.16	4.77	-10.39	6.42	PASS
	6	2437	-0.23	-15.46	4.77	-10.69	6.42	PASS
	11	2462	-0.75	-15.98	4.77	-11.21	6.42	PASS
1	1	2412	0.90	-14.33	4.77	-9.56	6.42	PASS
	6	2437	1.05	-14.18	4.77	-9.41	6.42	PASS
	11	2462	0.87	-14.36	4.77	-9.59	6.42	PASS
2	1	2412	1.04	-14.19	4.77	-9.42	6.42	PASS
	6	2437	1.10	-14.13	4.77	-9.36	6.42	PASS
	11	2462	1.05	-14.18	4.77	-9.41	6.42	PASS

Note: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^3 / 3]$

Effective Legacy Gain (dBi) = 7.58

The effective legacy gain is 7.58dBi, therefore the limit needs to reduce.

802.11n (20MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-0.88	-16.11	4.77	-11.34	8.00	PASS
	6	2437	3.69	-11.54	4.77	-6.77	8.00	PASS
	11	2462	-0.78	-16.01	4.77	-11.24	8.00	PASS
1	1	2412	-0.01	-15.24	4.77	-10.47	8.00	PASS
	6	2437	4.02	-11.21	4.77	-6.44	8.00	PASS
	11	2462	0.53	-14.70	4.77	-9.93	8.00	PASS
2	1	2412	0.44	-14.79	4.77	-10.02	8.00	PASS
	6	2437	5.11	-10.12	4.77	-5.35	8.00	PASS
	11	2462	0.58	-14.65	4.77	-9.88	8.00	PASS

802.11n (40MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	3	2422	-5.84	-21.07	4.77	-16.30	8.00	PASS
	6	2437	-2.36	-17.59	4.77	-12.82	8.00	PASS
	9	2452	-4.37	-19.60	4.77	-14.83	8.00	PASS
1	3	2422	-5.46	-20.69	4.77	-15.92	8.00	PASS
	6	2437	-1.25	-16.48	4.77	-11.71	8.00	PASS
	9	2452	-3.46	-18.69	4.77	-13.92	8.00	PASS
2	3	2422	-5.81	-21.04	4.77	-16.27	8.00	PASS
	6	2437	-1.34	-16.57	4.77	-11.80	8.00	PASS
	9	2452	-2.94	-18.17	4.77	-13.40	8.00	PASS



A D T

4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Apr. 05, 2012

4.6.3 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP



4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.7 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit. Only worst data of each operating mode is presented.


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11b


CH 1

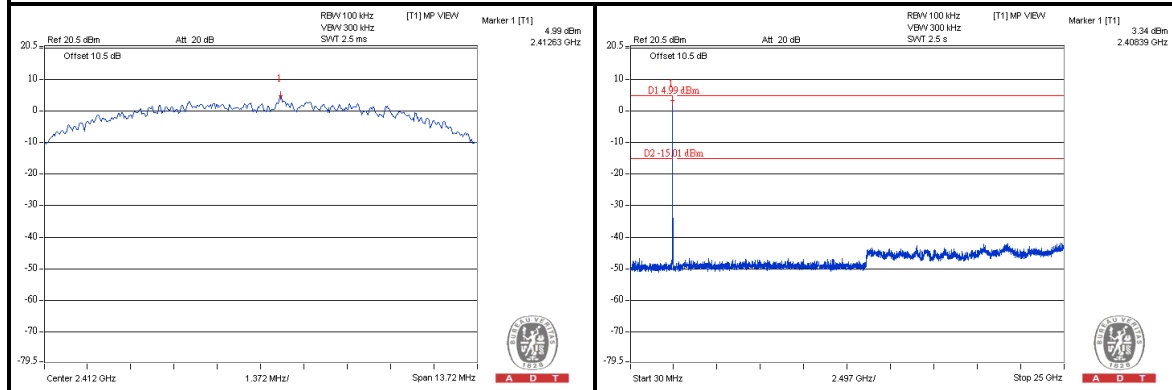

CH 6

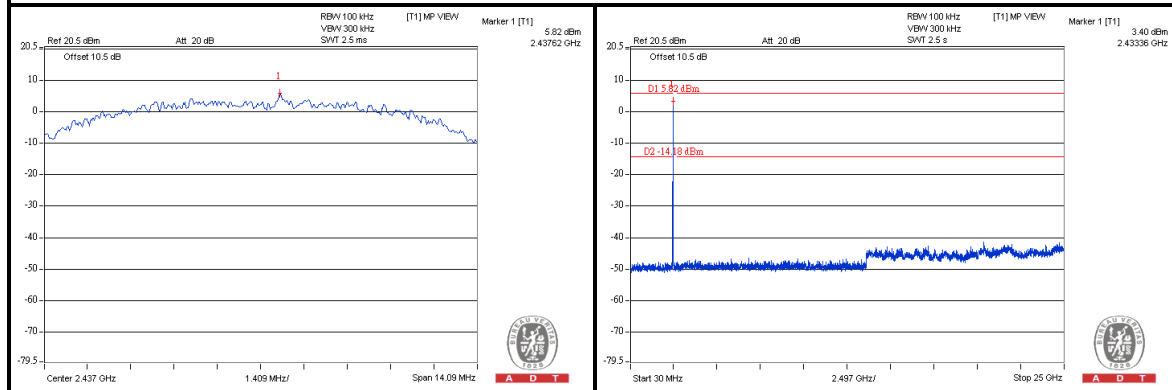

CH 11

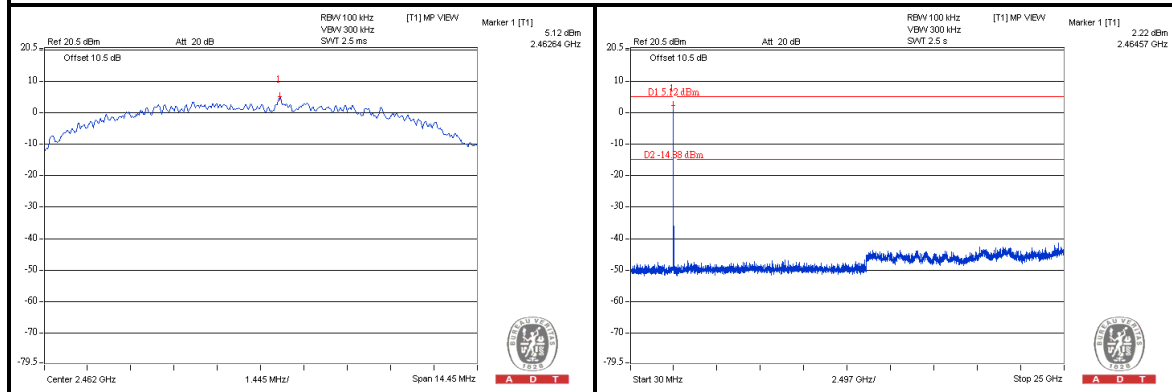





A D T

802.11g


CH 1

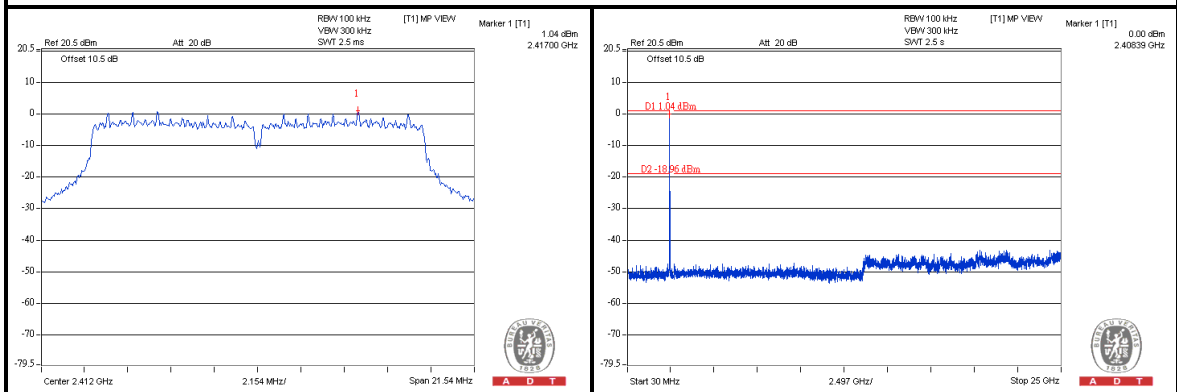

CH 6

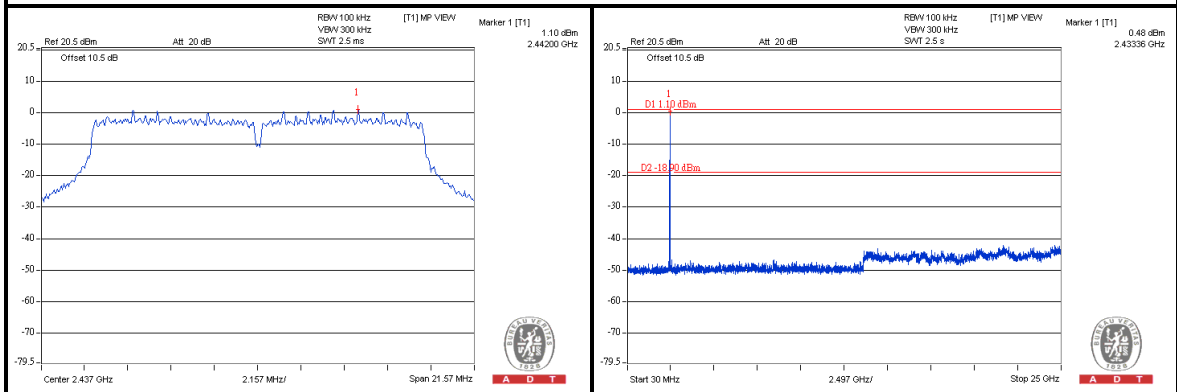

CH 11


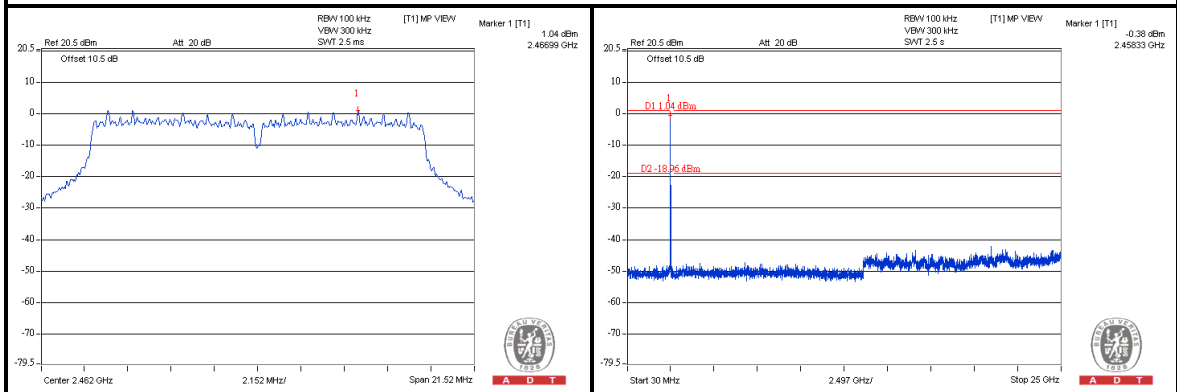






A D T

802.11n (20MHz)



CH 1

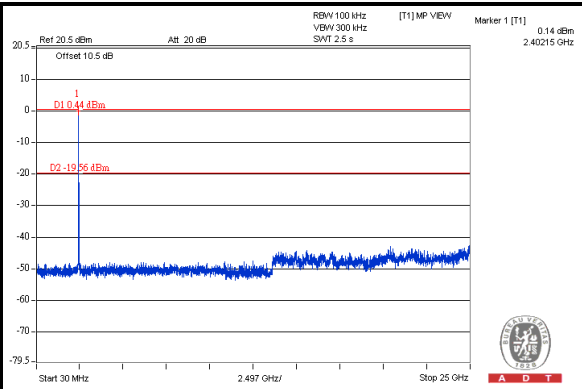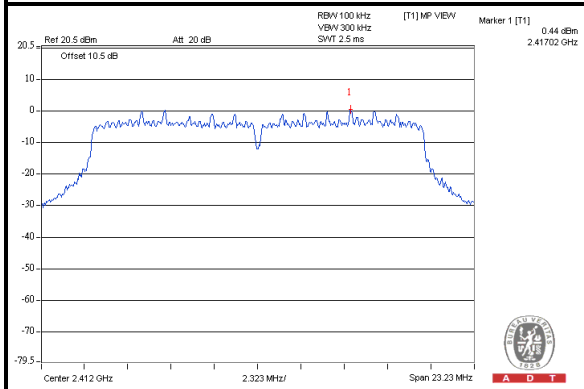

CH 6

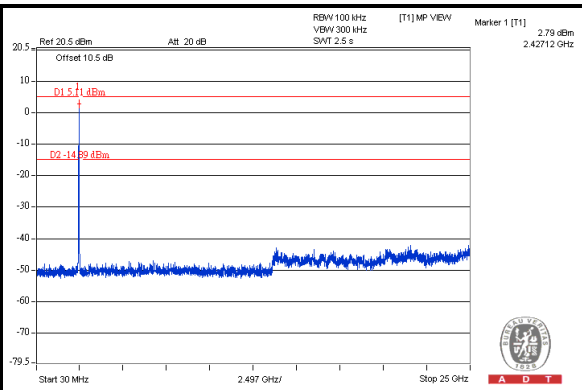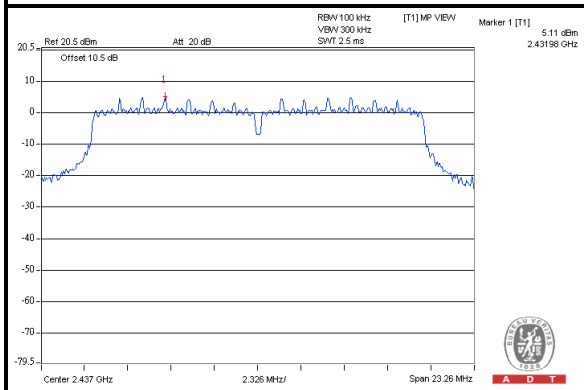


CH 11

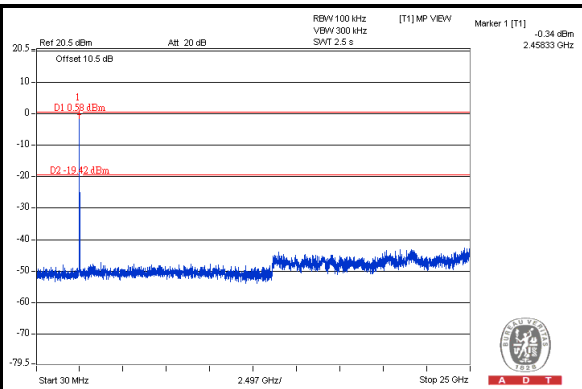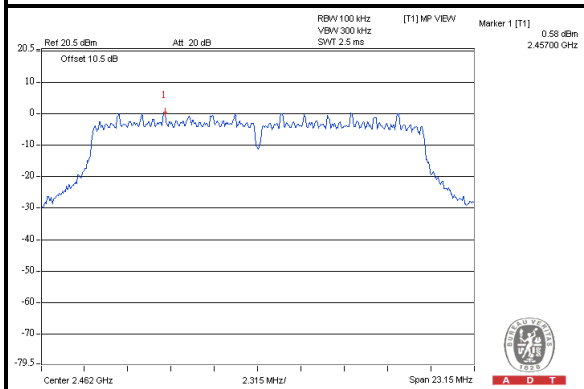


802.11n (40MHz)


CH 3

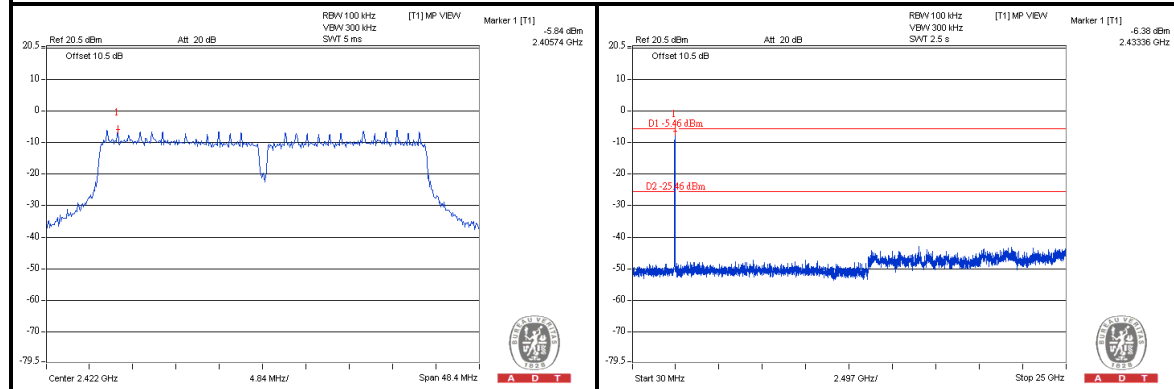

CH 6

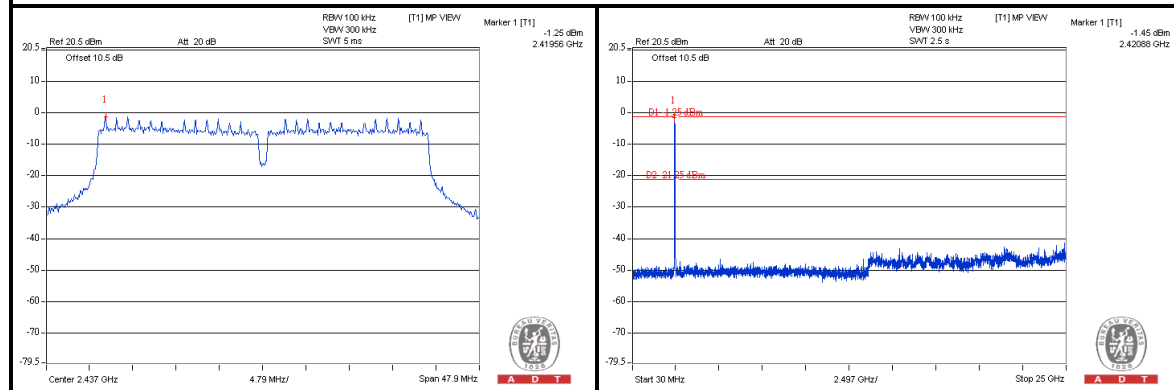

CH 9

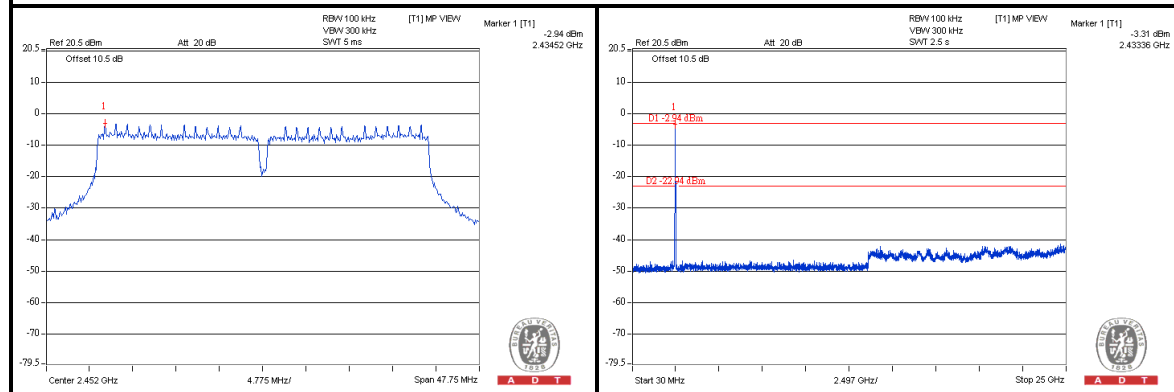

5. TEST TYPES AND RESULTS (802.11a, 5725~5850MHz Band)

5.1 CONDUCTED EMISSION MEASUREMENT

5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100287	Feb. 29, 2012	Feb. 28, 2013
Line-Impedance Stabilization Network (for EUT)	NSLK 8127	8127-523	Sep. 20, 2011	Sep. 19, 2012
Line-Impedance Stabilization Network (for Peripheral)	ENV-216	100072	June 10, 2011	June 09, 2012
RF Cable (JYEBAO)	5DFB	COACAB-002	Aug. 06, 2011	Aug. 05, 2012
50 ohms Terminator	50	3	Nov. 02, 2011	Nov. 01, 2012
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. Tested Date: Apr. 03, 2012


5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) were not recorded.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation

5.1.5 TEST SETUP

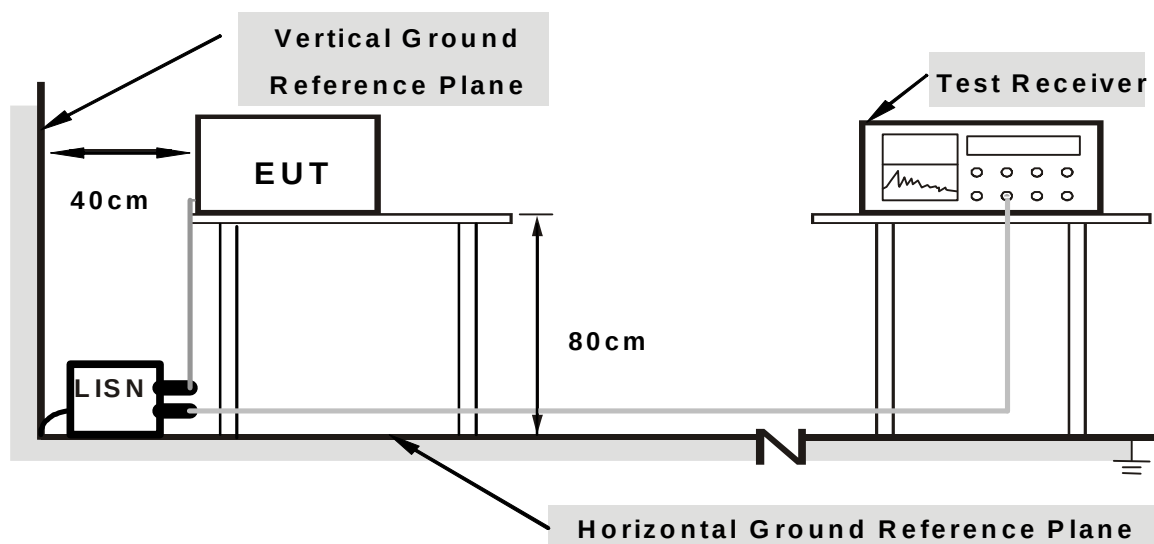

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.1.6 EUT OPERATING CONDITIONS

Same as the 4.1.6


5.1.7 TEST RESULTS

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	0.06	48.37	40.31	48.43	40.37	65.58	55.58	-17.15	-15.21
2	0.22422	0.06	36.82	28.84	36.88	28.90	62.66	52.66	-25.78	-23.76
3	0.29063	0.07	31.83	24.00	31.90	24.07	60.51	50.51	-28.61	-26.44
4	0.40350	0.08	26.80	22.97	26.88	23.05	57.78	47.78	-30.90	-24.73
5	16.08984	0.84	35.43	28.73	36.27	29.57	60.00	50.00	-23.73	-20.43
6	21.66478	1.03	32.75	29.76	33.78	30.79	60.00	50.00	-26.22	-19.21

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

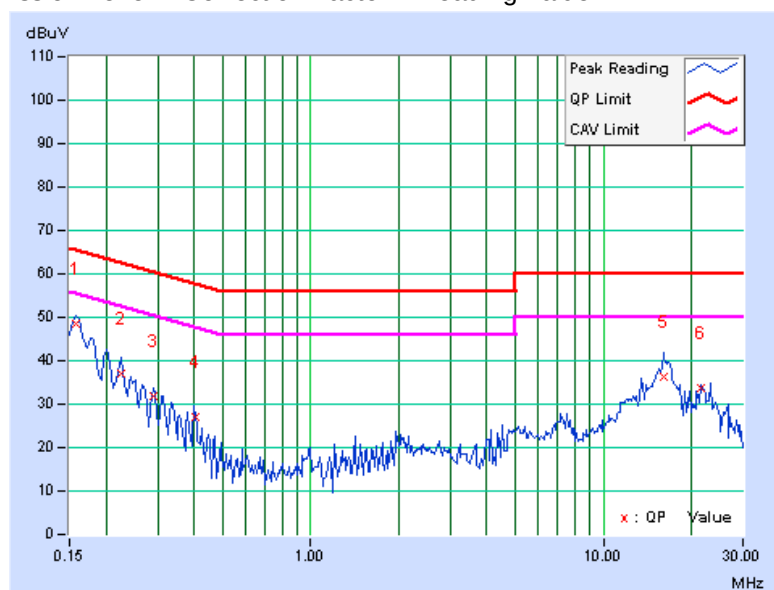


PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	0.07	48.74	41.14	48.81	41.21	65.58	55.58	-16.77	-14.37
2	0.24766	0.08	37.16	31.94	37.24	32.02	61.84	51.84	-24.59	-19.81
3	0.31406	0.09	35.69	31.86	35.78	31.95	59.86	49.86	-24.09	-17.92
4	0.40391	0.09	37.14	36.61	37.23	36.70	57.77	47.77	-20.54	-11.07
5	16.20313	0.84	36.30	29.79	37.14	30.63	60.00	50.00	-22.86	-19.37
6	21.90625	1.04	31.35	28.14	32.39	29.18	60.00	50.00	-27.61	-20.82

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

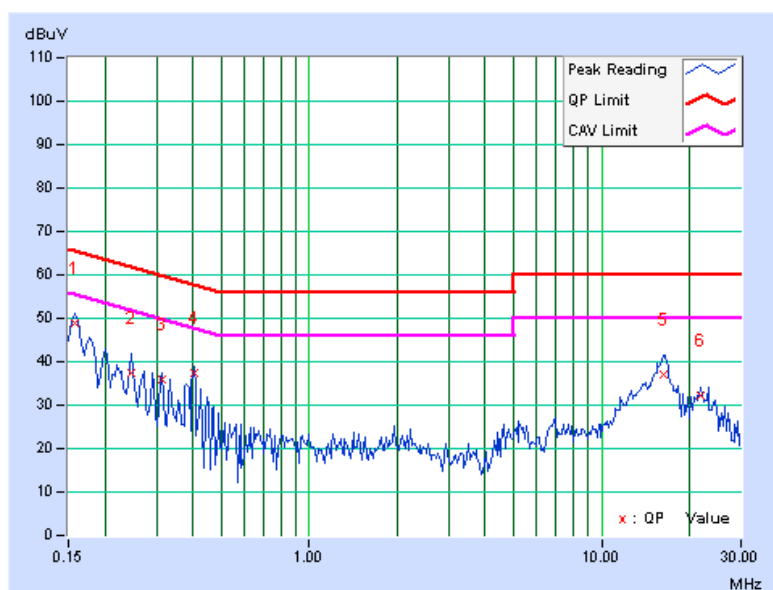

5.2 RADIATED AND BANDEDGE EMISSION MEASUREMENT

5.2.1 LIMITS OF RADIATED AND BANDEDGE EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

5.2.2 TEST INSTRUMENTS

For below 1GHz

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250253	Aug. 29, 2011	Aug. 28, 2012
Agilent Pre-Selector	N9039A	MY46520310	Aug. 29, 2011	Aug. 28, 2012
Agilent Signal Generator	N5181A	MY49060347	July 25, 2011	July 24, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-04	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02465	Feb. 27, 2012	Feb. 26, 2013
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-361	Apr. 14, 2011	Apr. 13, 2012
AISI Horn_Antenna	AIH.8018	0000220091110	Nov. 23, 2011	Nov. 22, 2012
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF CABLE	NA	RF104-205 RF104-207 RF104-202	Dec. 27, 2011	Dec. 26, 2012
RF Cable	NA	CHHCAB_001	Oct. 08, 2011	Oct. 07, 2012
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in 966 Chamber No. H.

4. The FCC Site Registration No. is 797305.

5. The CANADA Site Registration No. is IC 7450H-3.

6. Tested Date: Mar. 30, 2012

**A D T****For above 1GHz**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012
Agilent Pre-Selector	N9039A	MY46520311	July 12, 2011	July 11, 2012
Agilent Signal Generator	N5181A	MY49060517	July 12, 2011	July 11, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-03	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02578	July 04, 2011	July 03, 2012
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-360	Apr. 14, 2011	Apr. 13, 2012
AISI Horn_Antenna	AIH.8018	0000320091110	Nov. 14, 2011	Nov. 13, 2012
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF CABLE	NA	RF104-201 RF104-203 RF104-204	Dec. 26, 2011	Dec. 25, 2012
RF Cable	NA	CHGCAB_001	Oct. 07, 2011	Oct. 06, 2012
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
5. The VCCI Site Registration No. is G-137.
6. The CANADA Site Registration No. is IC 7450H-2.
7. Tested Date: Mar. 30, 2012

5.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation

5.2.5 TEST SETUP

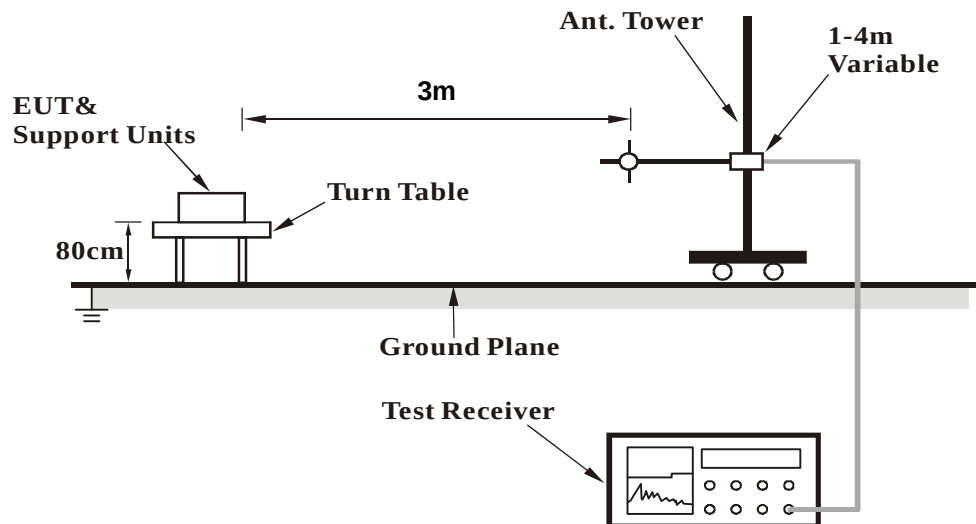

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

5.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

802.11n (20MHz)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	94.40	33.1 QP	43.5	-10.4	1.99 H	302	24.27	8.87
2	250.00	33.9 QP	46.0	-12.1	1.49 H	295	20.63	13.28
3	374.70	38.0 QP	46.0	-8.0	1.01 H	187	20.88	17.10
4	557.10	38.3 QP	46.0	-7.7	1.50 H	164	17.01	21.31
5	642.84	34.7 QP	46.0	-11.3	1.02 H	109	12.17	22.55
6	799.98	37.6 QP	46.0	-8.4	1.01 H	360	12.04	25.57
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	56.24	35.2 QP	40.0	-4.8	1.00 V	285	21.28	13.90
2	66.20	36.7 QP	40.0	-3.3	1.00 V	327	23.98	12.71
3	98.45	34.9 QP	43.5	-8.6	1.50 V	2	25.63	9.30
4	374.98	35.2 QP	46.0	-10.8	1.00 V	334	18.10	17.10
5	500.02	35.1 QP	46.0	-10.9	1.00 V	256	15.06	20.06
6	532.94	33.6 QP	46.0	-12.4	1.00 V	339	12.80	20.78

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

ABOVE 1GHz DATA

802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5360.00	59.8 PK	74.0	-14.2	1.32 H	71	19.30	40.50
2	5360.00	47.5 AV	54.0	-6.5	1.32 H	71	7.00	40.50
3	*5745.00	103.3 PK			1.45 H	61	61.75	41.55
4	*5745.00	93.1 AV			1.45 H	61	51.55	41.55
5	11490.00	56.8 PK	74.0	-17.2	1.45 H	155	9.09	47.71
6	11490.00	43.2 AV	54.0	-10.8	1.45 H	155	-4.51	47.71
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5360.00	63.1 PK	74.0	-10.9	1.09 V	114	22.60	40.50
2	5360.00	51.8 AV	54.0	-2.2	1.09 V	114	11.30	40.50
3	*5745.00	108.1 PK			1.45 V	113	66.55	41.55
4	*5745.00	97.7 AV			1.45 V	113	56.15	41.55
5	11490.00	57.2 PK	74.0	-16.8	1.20 V	154	9.49	47.71
6	11490.00	44.3 AV	54.0	-9.7	1.20 V	154	-3.41	47.71

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5360.00	59.6 PK	74.0	-14.4	1.28 H	75	19.10	40.50
2	5360.00	47.6 AV	54.0	-6.4	1.28 H	75	7.10	40.50
3	*5785.00	103.5 PK			1.37 H	76	61.82	41.68
4	*5785.00	93.2 AV			1.37 H	76	51.52	41.68
5	11570.00	56.3 PK	74.0	-17.7	1.43 H	130	8.55	47.75
6	11570.00	42.8 AV	54.0	-11.2	1.43 H	130	-4.95	47.75
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5360.00	59.5 PK	74.0	-14.5	1.35 V	149	19.00	40.50
2	5360.00	48.1 AV	54.0	-5.9	1.35 V	149	7.60	40.50
3	*5785.00	111.4 PK			1.00 V	135	69.72	41.68
4	*5785.00	100.0 AV			1.00 V	135	58.32	41.68
5	11570.00	57.8 PK	74.0	-16.2	1.20 V	153	10.05	47.75
6	11570.00	45.5 AV	54.0	-8.5	1.20 V	153	-2.25	47.75

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5360.00	59.5 PK	74.0	-14.5	1.23 H	86	19.00	40.50
2	5360.00	47.5 AV	54.0	-6.5	1.23 H	86	7.00	40.50
3	*5825.00	101.9 PK			1.35 H	81	60.12	41.78
4	*5825.00	91.8 AV			1.35 H	81	50.02	41.78
5	11650.00	55.7 PK	74.0	-18.3	1.36 H	135	7.87	47.83
6	11650.00	42.4 AV	54.0	-11.6	1.36 H	135	-5.43	47.83
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5360.00	60.9 PK	74.0	-13.1	1.48 V	111	20.40	40.50
2	5360.00	47.7 AV	54.0	-6.3	1.48 V	111	7.20	40.50
3	*5825.00	110.2 PK			1.00 V	151	68.42	41.78
4	*5825.00	99.2 AV			1.00 V	151	57.42	41.78
5	11650.00	58.1 PK	74.0	-15.9	1.19 V	151	10.27	47.83
6	11650.00	45.8 AV	54.0	-8.2	1.19 V	151	-2.03	47.83

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.

802.11n (20MHz)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5360.00	59.0 PK	74.0	-15.0	1.19 H	91	18.50	40.50
2	5360.00	47.2 AV	54.0	-6.8	1.19 H	91	6.70	40.50
3	*5745.00	111.2 PK			1.23 H	73	69.65	41.55
4	*5745.00	100.5 AV			1.23 H	73	58.95	41.55
5	11490.00	56.9 PK	74.0	-17.1	1.20 H	31	9.19	47.71
6	11490.00	46.9 AV	54.0	-7.1	1.20 H	31	-0.81	47.71
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5360.00	65.4 PK	74.0	-8.6	1.09 V	114	24.90	40.50
2	5360.00	52.1 AV	54.0	-1.9	1.09 V	114	11.60	40.50
3	*5745.00	117.1 PK			1.44 V	113	75.55	41.55
4	*5745.00	106.1 AV			1.44 V	113	64.55	41.55
5	11490.00	60.0 PK	74.0	-14.0	1.20 V	153	12.29	47.71
6	11490.00	48.7 AV	54.0	-5.3	1.20 V	153	0.99	47.71

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5360.00	58.0 PK	74.0	-16.0	1.19 H	89	17.50	40.50
2	5360.00	46.3 AV	54.0	-7.7	1.19 H	89	5.80	40.50
3	*5785.00	111.6 PK			1.10 H	77	69.92	41.68
4	*5785.00	100.5 AV			1.10 H	77	58.82	41.68
5	11570.00	57.1 PK	74.0	-16.9	1.21 H	61	9.35	47.75
6	11570.00	47.3 AV	54.0	-6.7	1.21 H	61	-0.45	47.75
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5360.00	65.6 PK	74.0	-8.4	1.11 V	101	25.10	40.50
2	5360.00	53.0 AV	54.0	-1.0	1.11 V	101	12.50	40.50
3	*5785.00	118.1 PK			1.43 V	113	76.42	41.68
4	*5785.00	106.8 AV			1.43 V	113	65.12	41.68
5	11570.00	61.7 PK	74.0	-12.3	1.31 V	155	13.95	47.75
6	11570.00	49.7 AV	54.0	-4.3	1.31 V	155	1.95	47.75

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5360.00	57.3 PK	74.0	-16.7	1.14 H	81	16.80	40.50
2	5360.00	45.9 AV	54.0	-8.1	1.14 H	81	5.40	40.50
3	*5825.00	111.4 PK			1.24 H	77	69.62	41.78
4	*5825.00	100.6 AV			1.24 H	77	58.82	41.78
5	11650.00	56.9 PK	74.0	-17.1	1.21 H	69	9.07	47.83
6	11650.00	47.2 AV	54.0	-6.8	1.21 H	69	-0.63	47.83
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5360.00	63.6 PK	74.0	-10.4	1.34 V	143	23.10	40.50
2	5360.00	50.5 AV	54.0	-3.5	1.34 V	143	10.00	40.50
3	*5825.00	119.7 PK			1.00 V	145	77.92	41.78
4	*5825.00	108.2 AV			1.00 V	145	66.42	41.78
5	11650.00	61.3 PK	74.0	-12.7	1.28 V	153	13.47	47.83
6	11650.00	50.3 AV	54.0	-3.7	1.28 V	153	2.47	47.83

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.

802.11n (40MHz)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5360.00	57.3 PK	74.0	-16.7	1.09 H	90	16.80	40.50
2	5360.00	45.8 AV	54.0	-8.2	1.09 H	90	5.30	40.50
3	*5755.00	107.8 PK			1.05 H	237	66.21	41.59
4	*5755.00	96.9 AV			1.05 H	237	55.31	41.59
5	11510.00	56.2 PK	74.0	-17.8	1.25 H	80	8.48	47.72
6	11510.00	45.2 AV	54.0	-8.8	1.25 H	80	-2.52	47.72
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5360.00	63.2 PK	74.0	-10.8	1.00 V	109	22.70	40.50
2	5360.00	52.5 AV	54.0	-1.5	1.00 V	109	12.00	40.50
3	*5755.00	115.9 PK			1.00 V	135	74.31	41.59
4	*5755.00	104.4 AV			1.00 V	135	62.81	41.59
5	11510.00	59.4 PK	74.0	-14.6	1.24 V	146	11.68	47.72
6	11510.00	47.5 AV	54.0	-6.5	1.24 V	146	-0.22	47.72

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5360.00	56.4 PK	74.0	-17.6	1.08 H	100	15.90	40.50
2	5360.00	45.6 AV	54.0	-8.4	1.08 H	100	5.10	40.50
3	*5795.00	108.6 PK			1.13 H	251	66.90	41.70
4	*5795.00	97.1 AV			1.13 H	251	55.40	41.70
5	11590.00	55.9 PK	74.0	-18.1	1.19 H	78	8.14	47.76
6	11590.00	46.2 AV	54.0	-7.8	1.19 H	78	-1.56	47.76
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5360.00	62.9 PK	74.0	-11.1	1.00 V	108	22.40	40.50
2	5360.00	52.3 AV	54.0	-1.7	1.00 V	108	11.80	40.50
3	*5795.00	117.5 PK			1.00 V	141	75.80	41.70
4	*5795.00	105.9 AV			1.00 V	141	64.20	41.70
5	11590.00	60.1 PK	74.0	-13.9	1.29 V	153	12.34	47.76
6	11590.00	47.9 AV	54.0	-6.1	1.29 V	153	0.14	47.76

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.

5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

5.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Apr. 05, 2012


5.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

5.3.4 DEVIATION FROM TEST STANDARD

No deviation

5.3.5 TEST SETUP



5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

5.3.7 TEST RESULTS

802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
149	5745	16.63	16.67	16.56	0.5	PASS
157	5785	16.65	16.66	16.63	0.5	PASS
165	5825	16.60	16.65	16.55	0.5	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
149	5745	17.84	17.87	17.82	0.5	PASS
157	5785	17.88	17.91	17.89	0.5	PASS
165	5825	17.86	17.86	17.89	0.5	PASS

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
151	5755	37.35	37.12	36.61	0.5	PASS
159	5795	37.46	37.12	37.15	0.5	PASS

5.4 CONDUCTED OUTPUT POWER

5.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 5725 –5850 MHz band: 1 Watt (30dBm)

5.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Peak Power Meter	ML2495A	0824006	May 04, 2011	May 03, 2012
Power Sensor	MA2411B	0738172	May 03, 2011	May 02, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Apr. 05, 2012


5.4.3 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

5.4.4 DEVIATION FROM TEST STANDARD

No deviation

5.4.5 TEST SETUP

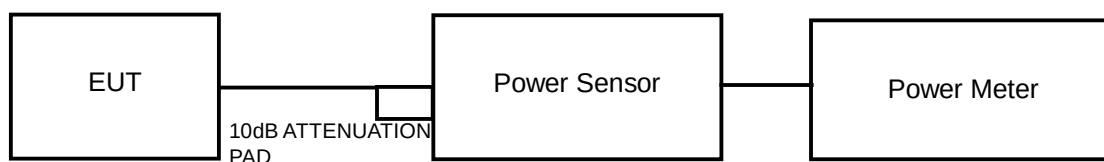

5.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

5.4.7 TEST RESULTS

802.11a

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
149	5745	17.50	17.40	18.80	187.046	22.72	27.00	PASS
157	5785	17.10	16.80	19.30	184.263	22.65	27.00	PASS
165	5825	17.10	16.90	18.50	171.059	22.33	27.00	PASS

Note: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^3 / 3]$

Effective Legacy Gain (dBi) = 9

The effective legacy gain is 9dBi, therefore the limit needs to reduce.

802.11n (20MHz)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
149	5745	23.50	23.00	23.80	663.281	28.22	30	PASS
157	5785	22.10	23.10	23.40	585.131	27.67	30	PASS
165	5825	21.40	22.70	23.10	528.421	27.23	30	PASS

802.11n (40MHz)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
151	5755	23.20	23.10	23.50	636.976	28.04	30	PASS
159	5795	21.90	22.90	23.30	563.662	27.51	30	PASS

5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Apr. 05, 2012


5.5.3 TEST PROCEDURE

1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3 \text{ kHz}/100\text{kHz})$

5.5.4 DEVIATION FROM TEST STANDARD

No deviation

5.5.5 TEST SETUP



5.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6

5.5.7 TEST RESULTS

802.11a

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	-2.67	-17.90	4.77	-13.13	5	PASS
	157	5785	-3.02	-18.25	4.77	-13.48	5	PASS
	165	5825	-3.50	-18.73	4.77	-13.96	5	PASS
1	149	5745	-3.06	-18.29	4.77	-13.52	5	PASS
	157	5785	-3.31	-18.54	4.77	-13.77	5	PASS
	165	5825	-4.50	-19.73	4.77	-14.96	5	PASS
2	149	5745	-1.69	-16.92	4.77	-12.15	5	PASS
	157	5785	-1.19	-16.42	4.77	-11.65	5	PASS
	165	5825	-1.41	-16.64	4.77	-11.87	5	PASS

Note: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^3 / 3]$

Effective Legacy Gain (dBi) = 9

The effective legacy gain is 9dBi, therefore the limit needs to reduce.

802.11n (20MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	6.72	-8.51	4.77	-3.74	8	PASS
	157	5785	7.37	-7.86	4.77	-3.09	8	PASS
	165	5825	7.15	-8.08	4.77	-3.31	8	PASS
1	149	5745	6.68	-8.55	4.77	-3.78	8	PASS
	157	5785	6.99	-8.24	4.77	-3.47	8	PASS
	165	5825	6.91	-8.32	4.77	-3.55	8	PASS
2	149	5745	7.83	-7.40	4.77	-2.63	8	PASS
	157	5785	9.43	-5.80	4.77	-1.03	8	PASS
	165	5825	10.30	-4.93	4.77	-0.16	8	PASS

802.11n (40MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	151	5755	3.80	-11.43	4.77	-6.66	8	PASS
	159	5795	4.62	-10.61	4.77	-5.84	8	PASS
1	151	5755	3.90	-11.33	4.77	-6.56	8	PASS
	159	5795	4.18	-11.05	4.77	-6.28	8	PASS
2	151	5755	5.60	-9.63	4.77	-4.86	8	PASS
	159	5795	6.67	-8.56	4.77	-3.79	8	PASS

5.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

5.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Apr. 05, 2012

5.6.3 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

5.6.4 DEVIATION FROM TEST STANDARD

No deviation

5.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

5.6.6 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit. Only worst data of each operating mode is presented.


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11a


CH 149

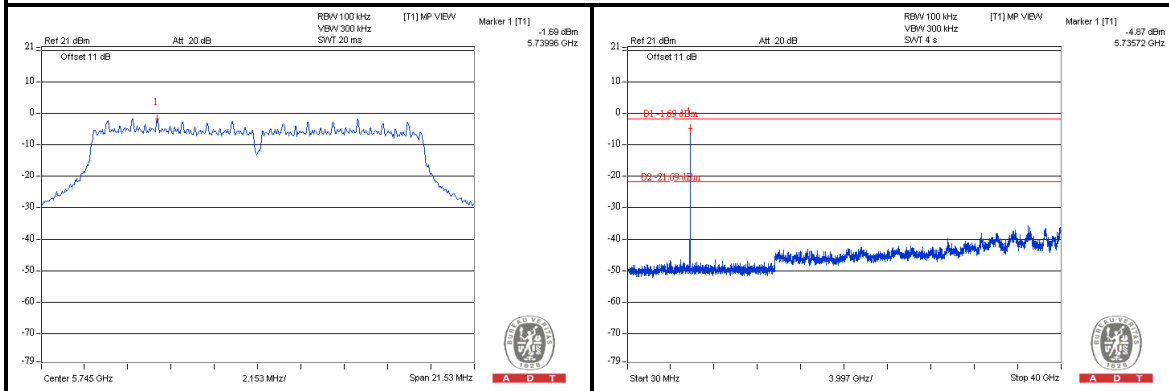

CH 157

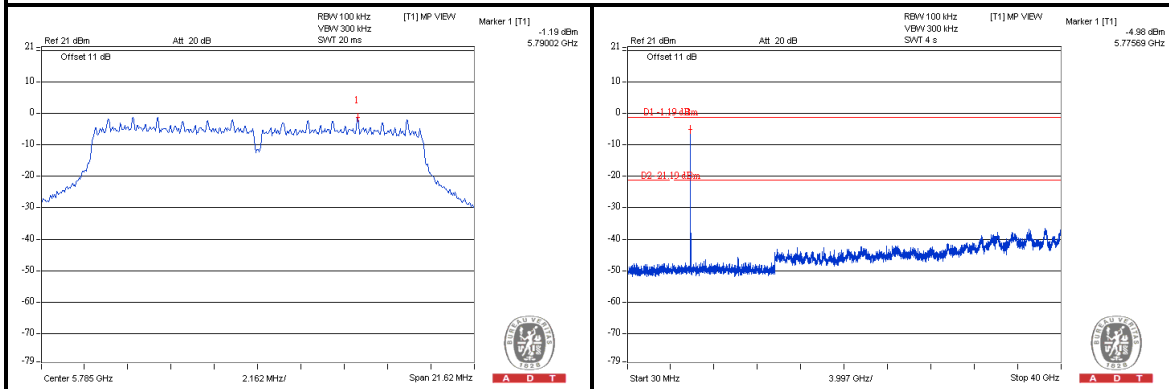

CH 165

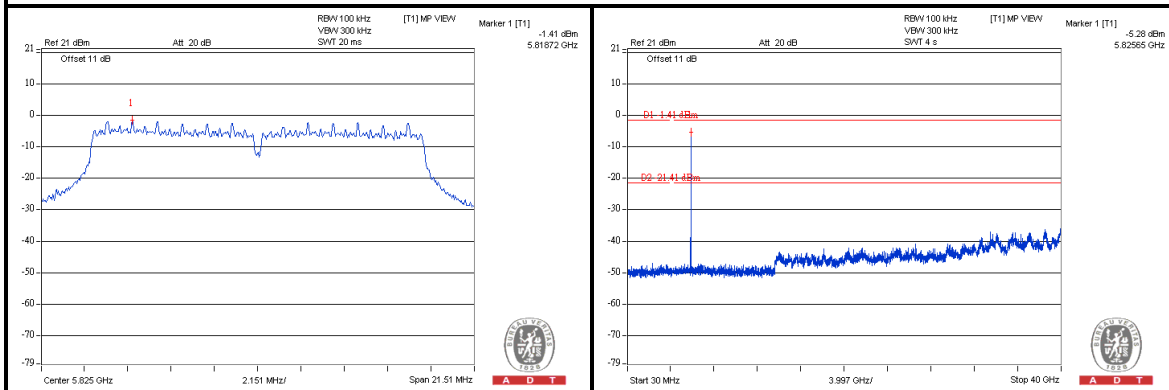





A D T

802.11n (20MHz)


CH 149

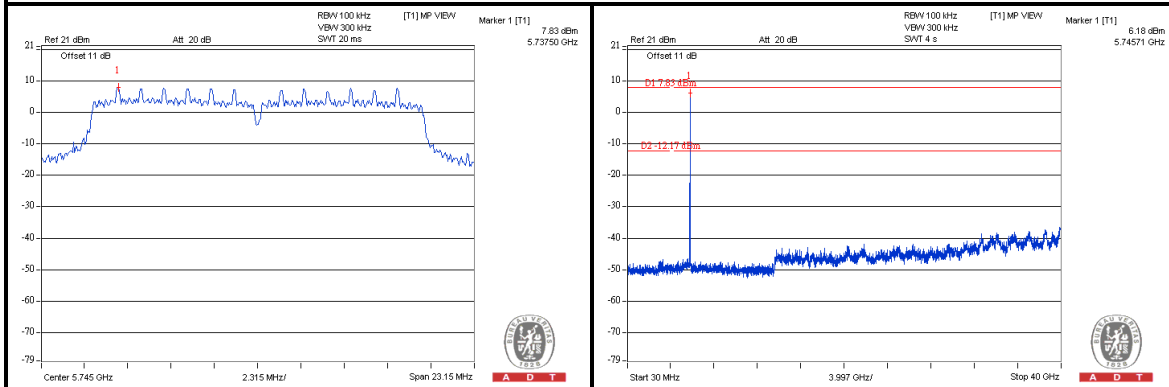

CH 157

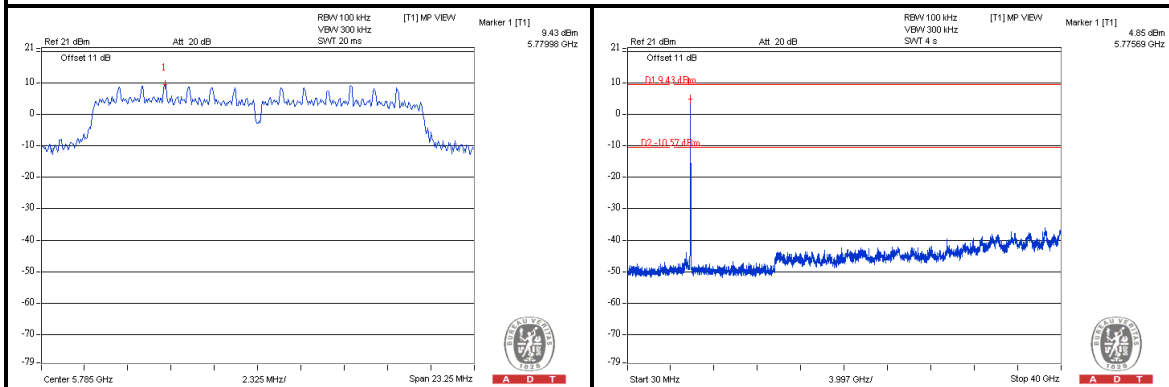

CH 165

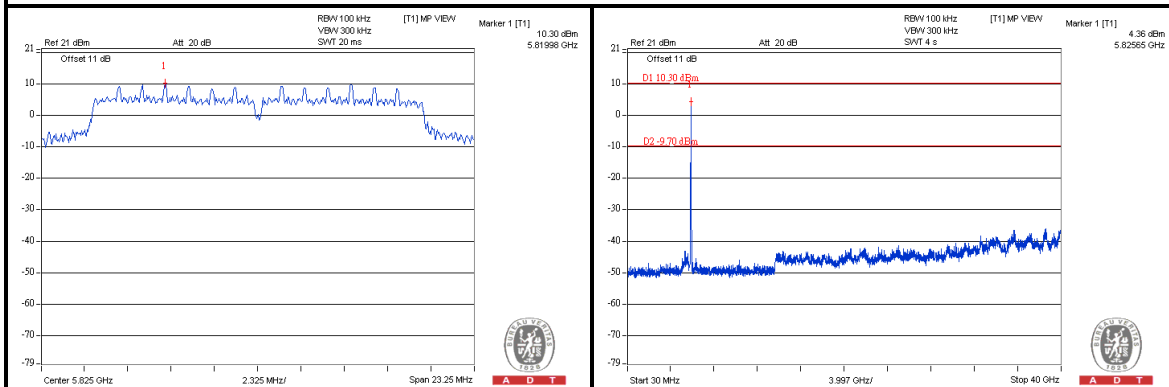





A D T

802.11n (40MHz)

CH 151

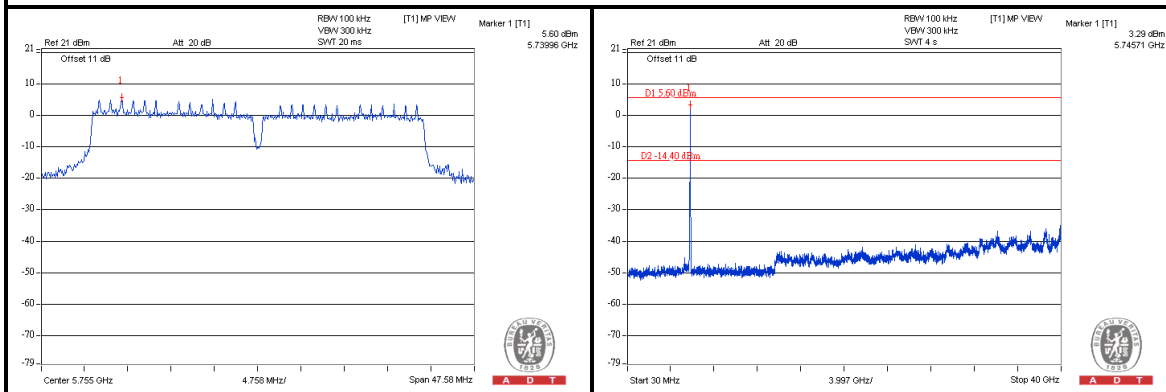

CH 159

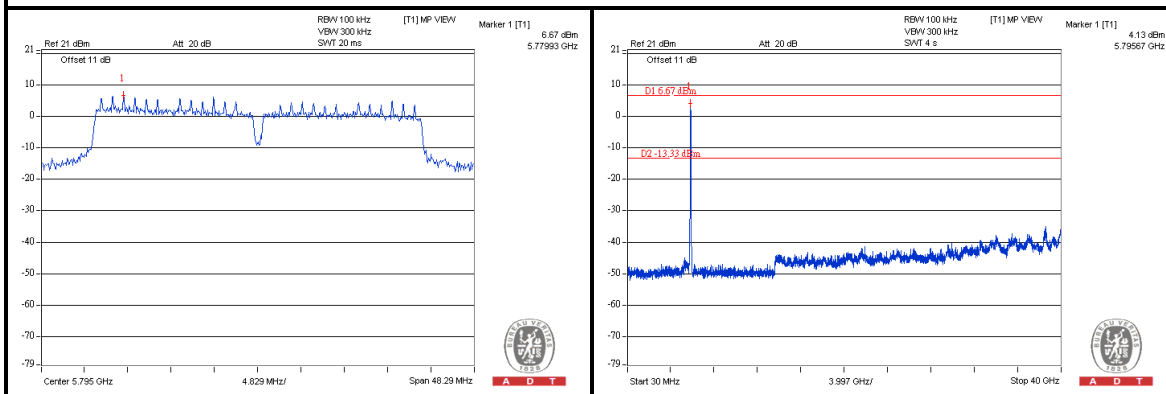

6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation and authorization certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5.phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

8. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---