

FCC TEST REPORT (15.407)

REPORT NO.: RF960427H02

MODEL NO.: NP01LM

RECEIVED: April 27, 2007

TESTED: May 02 to June 07, 2007

ISSUED: June 11, 2007

APPLICANT: Alpha Networks Inc.

ADDRESS: No.8 Li-shing 7th Rd., Science-based
Industrial Park, Hsinchu, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

TEST LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung
Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 75 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



No. 2177-01

Table of Contents

1.	CERTIFICATION.....	4
2.	SUMMARY OF TEST RESULTS.....	5
2.1	MEASUREMENT UNCERTAINTY.....	6
3.	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES.....	9
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:.....	10
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	12
3.4	DESCRIPTION OF SUPPORT UNITS	13
3.5	CONFIGURATION OF SYSTEM UNDER TEST	13
4.	TEST TYPES AND RESULTS	14
4.1	CONDUCTED EMISSION MEASUREMENT	14
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	14
4.1.2	TEST INSTRUMENTS	14
4.1.3	TEST PROCEDURES.....	15
4.1.4	DEVIATION FROM TEST STANDARD.....	15
4.1.5	TEST SETUP	16
4.1.6	EUT OPERATING CONDITIONS.....	16
4.1.7	TEST RESULTS.....	17
4.2	RADIATED EMISSION MEASUREMENT	19
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	19
4.2.2	LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS.....	20
4.2.3	TEST INSTRUMENTS	21
4.2.4	TEST PROCEDURES.....	22
4.2.5	DEVIATION FROM TEST STANDARD.....	22
4.2.6	TEST SETUP	23
4.2.7	EUT OPERATING CONDITION	23
4.2.8	TEST RESULTS.....	24
4.3	PEAK TRANSMIT POWER MEASUREMENT.....	38
4.3.1	LIMITS OF PEAK TRANSMIT POWER MEASUREMENT	38
4.3.2	TEST INSTRUMENTS	38
4.3.3	TEST PROCEDURE.....	39
4.3.4	DEVIATION FROM TEST STANDARD.....	39
4.3.5	TEST SETUP	39

4.3.6	EUT OPERATING CONDITIONS.....	39
4.3.7	TEST RESULTS.....	40
4.4	PEAK POWER EXCURSION MEASUREMENT.....	49
4.4.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT.....	49
4.4.2	TEST INSTRUMENTS	49
4.4.3	TEST PROCEDURE.....	50
4.4.4	DEVIATION FROM TEST STANDARD.....	50
4.4.5	TEST SETUP	50
4.4.6	EUT OPERATING CONDITIONS.....	50
4.4.7	TEST RESULTS.....	51
4.5	PEAK POWER SPECTRAL DENSITY MEASUREMENT.....	55
4.5.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	55
4.5.2	TEST INSTRUMENTS	55
4.5.3	TEST PROCEDURES.....	56
4.5.4	DEVIATION FROM TEST STANDARD.....	56
4.5.5	TEST SETUP	56
4.5.6	EUT OPERATING CONDITIONS.....	56
4.5.7	TEST RESULTS.....	57
4.6	FREQUENCY STABILITY	61
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	61
4.6.2	TEST INSTRUMENTS	61
4.6.3	TEST PROCEDURE.....	61
4.6.4	DEVIATION FROM TEST STANDARD.....	62
4.6.5	TEST SETUP	62
4.6.6	EUT OPERATING CONDITION	62
4.6.7	TEST RESULTS.....	63
4.7	BAND EDGES MEASUREMENT.....	64
4.7.1	TEST INSTRUMENTS	64
4.7.2	TEST PROCEDURE.....	64
4.7.3	EUT OPERATING CONDITION	64
4.7.4	TEST RESULTS.....	65
4.8	ANTENNA REQUIREMENT	73
4.8.1	STANDARD APPLICABLE.....	73
4.8.2	ANTENNA CONNECTED CONSTRUCTION.....	73
5.	INFORMATION ON THE TESTING LABORATORIES.....	74
	APPENDIX-A	A-1

1. CERTIFICATION

PRODUCT: USB Wireless LAN unit
BRAND NAME: Alpha Networks Inc.
MODEL NO.: NP01LM
TEST SAMPLE: MASS-PRODUCTION
TESTED: May 02 to June 07, 2007
APPLICANT: Alpha Networks Inc.
STANDARDS: FCC Part 15, Subpart E (Section 15.407)
ANSI C63.4-2003

The above equipment (Model: NP01LM) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Carol Liao , **DATE:** June 11, 2007
(Carol Liao, Specialist)

TECHNICAL ACCEPTANCE : Hank Chung , **DATE:** June 11, 2007
Responsible for RF (Hank Chung, Deputy Manager)

APPROVED BY : May Chen , **DATE:** June 11, 2007
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart E (Section 15.407)			
Standard Section	Test Type	Result	Remark
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.43dB at 0.1500MHz
15.407(b/1/2/3) (b)(5)	Electric Field Strength Spurious Emissions, 30MHz ~ 40000MHz	PASS	Meet the requirement of limit. Minimum passing margin is -0.52dB at 4560.00MHz
15.407(a/1/2/3)	Peak Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a/1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.

NOTE:

1. The EUT was operating in 2.412 ~ 2.462GHz, 5.15~5.35GHz, 5.47~5.725GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 5.15~5.35GHz and 5.47~5.725GHz. For the 2.412 ~ 2.462GHz and 5.725 ~ 5.850GHz RF parameters was recorded in another test report.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.41 dB
Radiated emissions (30MHz-1GHz)	3.89 dB
Radiated emissions (1GHz -18GHz)	2.21 dB
Radiated emissions (18GHz -40GHz)	1.88 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	USB Wireless LAN unit
MODEL NO.	NP01LM
FCC ID	RRK-NECNP01LM
POWER SUPPLY	DC 5 +/-10% from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11a: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	For 15.407 802.11a: 5.18 ~ 5.32GHz and 5.50 ~ 5.70GHz
	For 15.247 802.11b & 802.11g: 2412 ~ 2462MHz 802.11a: 5.745 ~ 5.825GHz
NUMBER OF CHANNEL	For 15.407 802.11a (5.15 ~ 5.35GHz): 8 802.11a (5.47 ~ 5.725GHz): 11
	For 15.247 802.11b & 802.11g: 11 802.11a (5.725 ~ 5.850GHz): 5
CHANNEL SPACING	802.11b & 802.11g: 5MHz 802.11a: 20MHz
OUTPUT POWER	For 802.11b: 81.658mW For 802.11g: 79.433mW For 802.11a (FCC15.247): 26.915mW For 802.11a (FCC15.407): 30.832mW
DATA CABLE	NA
ANTENNA TYPE	Please see note 3 (on next page)
INTERFACE	USB
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11b, 802.11g technology.
2. The EUT was manufactured by following manufacturers:

Manufacturer	Manufacturer Address
Alpha Networks Inc. (Taiwan)	No.8 Li-shing 7th Rd., Science-based Industrial Park, Hsinchu, Taiwan, R.O.C.
Alpha Networks Inc. (China)	523850 Jie Kuo Zhuan Chang District, Chang An Dongguan City,Guangdong Province, China

3. There are two antennas provided to this EUT, please refer to the following table:

For 2.4GHz				
Brand Name	Model No.	Gain (dBi)	Antenna Type	Connector
Advanced Ceramic X corp.	AT5020-B2R8HAA__	0	Multilayer Chip Antenna	N/A
For 5GHz				
Brand Name	Model No.	Gain (dBi)	Antenna Type	Connector
Advanced Ceramic X corp.	AT3216-B5R5HAA__	2	Multilayer Chip Antenna	N/A

4. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 5150MHz ~ 5350MHz bands:

Eight channels are provided to this EUT.

Channel	Frequency
1	5180 MHz
2	5200 MHz
3	5220 MHz
4	5240 MHz
5	5260 MHz
6	5280 MHz
7	5300 MHz
8	5320 MHz

Operated in 5470MHz ~ 5725MHz bands:

Eleven channels are provided to this EUT.

Channel	Frequency
9	5500 MHz
10	5520 MHz
11	5540 MHz
12	5560 MHz
13	5580 MHz
14	5600 MHz
15	5620 MHz
16	5640 MHz
17	5660 MHz
18	5680 MHz
19	5700 MHz

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE ³ 1G	APCM	
-	√	√	√	√	NA

Where PLC: Power Line Conducted Emission

RE³1G: Radiated Emission above 1GHz

RE<1G RE: Radiated Emission below 1GHz

APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	1 to 19	1	OFDM	BPSK	6

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	1 to 19	1	OFDM	BPSK	6

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	1 to 19	1, 4, 5, 8, 9, 14, 19	OFDM	BPSK	6

Bandedge Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	1 to 19	1, 8, 9, 19	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	1 to 19	1, 4, 5, 8, 9, 14, 19	OFDM	BPSK	6

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an USB Wireless LAN unit and USB Wireless LAN unit. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP21L	CN-0GD366-70166-5B3-09ZX	QDS-BRCM1016
2	iPod (for conducted test only)	Apple	A1137	6U6078CDUPR	DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m shielded wire, w/o core.

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

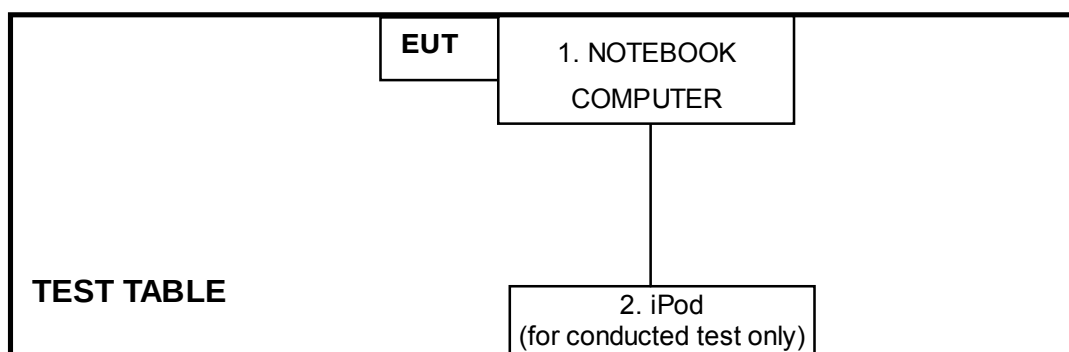

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver	ESCS 30	847124/029	Mar. 01, 2008
Line-Impedance Stabilization Network(for EUT)	ENV-216	100071	Nov. 26, 2007
Line-Impedance Stabilization Network(for Peripheral)	ESH3-Z5	848773/004	Oct. 26, 2007
RF Cable (JETBAO)	RG233/U	Cable_CB_01	Dec. 09, 2007
Terminator	50	2	Oct. 30, 2007
Software	ADT_Cond_V7.3.2	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in ADT Shielded Room No. B.
 3. The VCCI Con B Registration No. is C-2193.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs
- b. provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission level under (Limit – 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

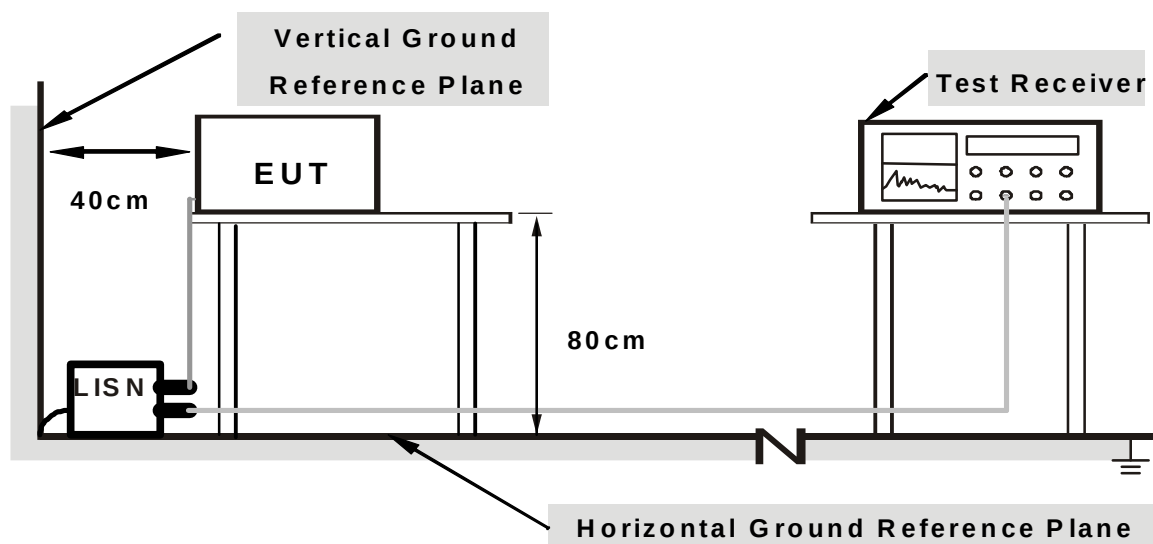

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Plug the EUT into the support unit 1 (Notebook computer) which placed on a testing table.
- b. The support unit 1 (Notebook computer) ran a test program “Ralink QA test QAU2571W” to enable EUT under transmission condition continuously.


4.1.7 TEST RESULTS

Conducted Worst-Case Data

MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TRANSFER RATE	6Mbps
ENVIRONMENTAL CONDITIONS	22deg. C, 56%RH, 960hPa	PHASE	Line (L)
TESTED BY	Eric Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.40	52.17	-	52.57	-	66.00	56.00	-13.43	-
2	0.209	0.40	41.66	-	42.06	-	63.26	53.26	-21.20	-
3	0.291	0.40	38.82	-	39.22	-	60.51	50.51	-21.29	-
4	0.826	0.40	25.12	-	25.52	-	56.00	46.00	-30.48	-
5	3.695	0.58	25.34	-	25.92	-	56.00	46.00	-30.08	-
6	18.480	1.03	22.09	-	23.12	-	60.00	50.00	-36.88	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

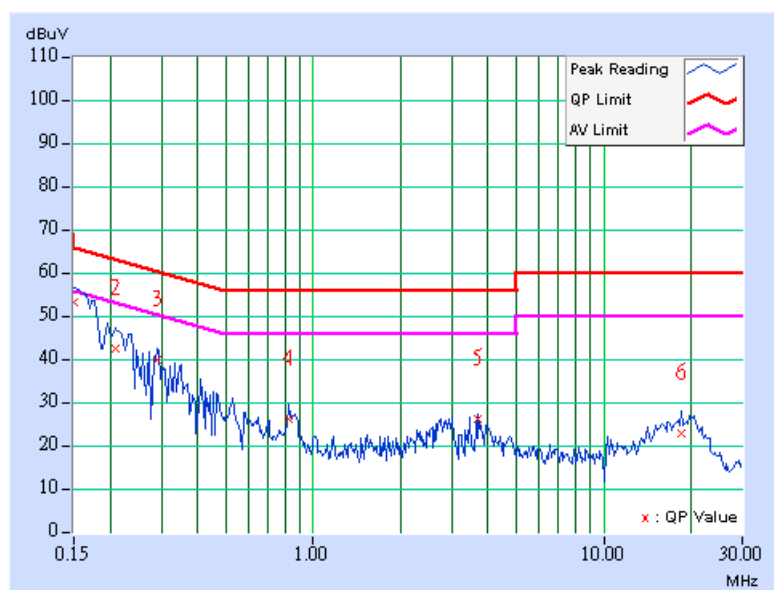

MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TRANSFER RATE	6Mbps
ENVIRONMENTAL CONDITIONS	22deg. C, 56%RH, 960hPa	PHASE	Neutral (N)
TESTED BY	Eric Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.20	50.54	-	50.74	-	65.58	55.58	-14.84	-
2	0.209	0.20	41.82	-	42.02	-	63.26	53.26	-21.24	-
3	0.236	0.20	44.36	-	44.56	-	62.24	52.24	-17.68	-
4	0.349	0.20	36.73	-	36.93	-	58.98	48.98	-22.05	-
5	0.822	0.27	28.08	-	28.35	-	56.00	46.00	-27.65	-
6	19.773	1.30	22.26	-	23.56	-	60.00	50.00	-36.44	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

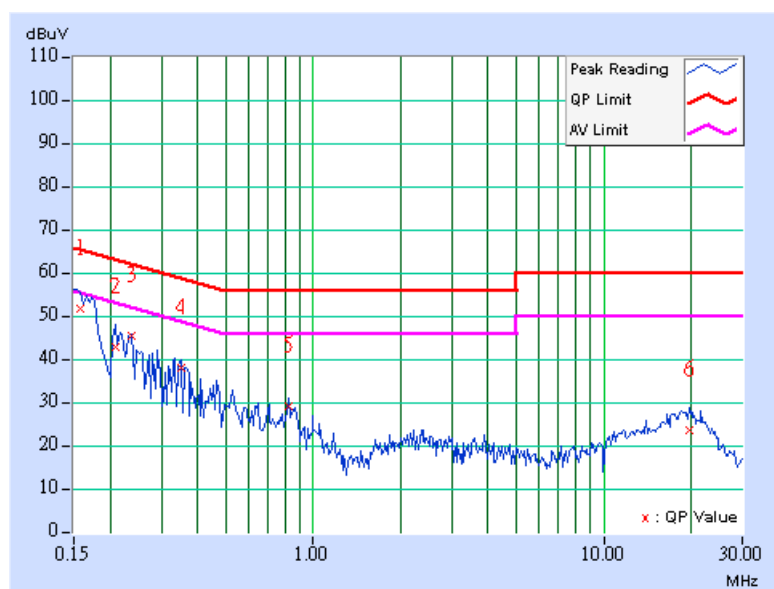

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m) *note 3
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27 *note 1	68.3
	-17 *note 2	78.3

NOTE:

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

4.2.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 03, 2007
HP Pre_Amplifier	8449B	3008A01922	Sep. 18, 2007
ROHDE & SCHWARZ Test Receiver	ESCS30	100375	Sep. 20, 2007
CHASE Broadband Antenna	VULB9168	138	Dec. 10, 2007
Schwarzbeck Horn_Antenna	BBHA9120	D124	Jan. 01, 2008
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 04, 2008
SCHWARZBECK Biconical Antenna	VHBA9123	459	Jun. 08, 2009
SCHWARZBECK Periodic Antenna	UPA6108	1148	Jun. 08, 2009
RF Switches (ARNITSU)	CS-201	1565157	NA
RF CABLE (Chaintek)	SF102	22054-2	Nov. 14, 2007
RF Cable(RICHTEC)	9913-30M N-N Cable	STCCAB-30M-1 GHz	Jul. 15, 2007
Software	ADT_Radiated_V 7.6.15.7	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

- Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Biconical and Periodic Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: R3271A) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 4824A-3.

4.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.5 DEVIATION FROM TEST STANDARD

No deviation

4.2.6 TEST SETUP

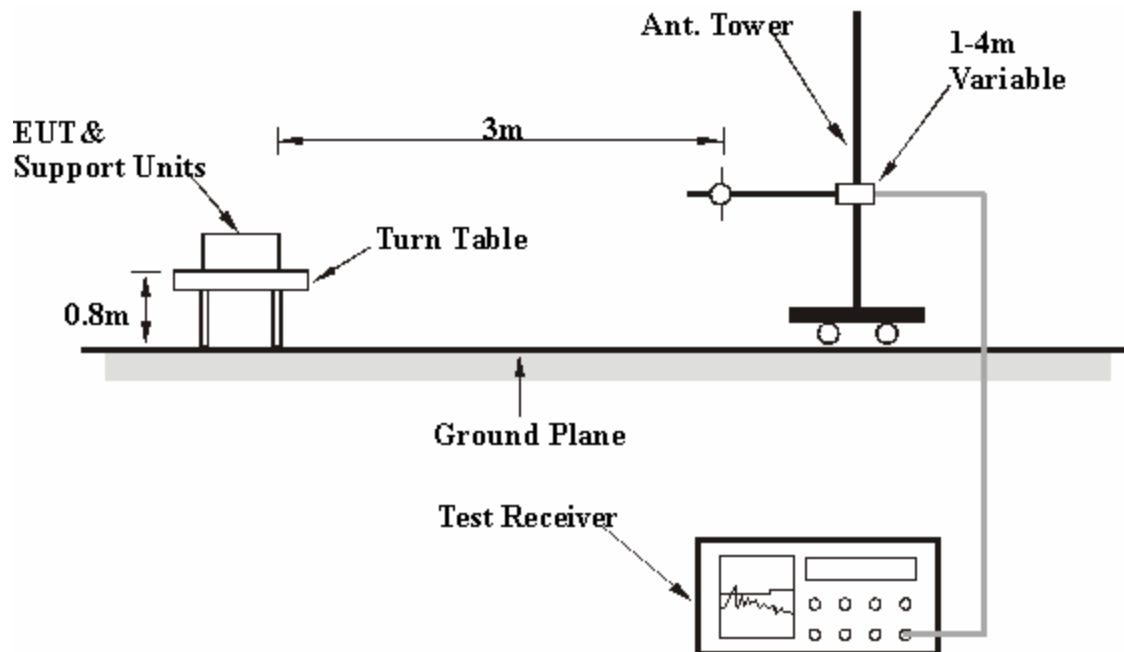

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.7 EUT OPERATING CONDITION

Same as 4.1.6

4.2.8 TEST RESULTS

Below 1GHz Worst-Case Data

MODE	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH, 960hPa	TESTED BY	Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	120.00	26.30 QP	43.50	-17.20	1.06 H	135	14.48	11.82
2	168.02	29.25 QP	43.50	-14.25	1.05 H	132	15.58	13.67
3	335.50	31.02 QP	46.00	-14.98	1.00 H	333	13.80	17.22
4	600.00	39.05 QP	46.00	-6.95	1.33 H	241	14.57	24.48
5	749.90	33.14 QP	46.00	-12.86	1.35 H	281	5.79	27.35
6	840.00	39.11 QP	46.00	-6.89	1.00 H	341	10.88	28.23
7	960.00	41.12 QP	46.00	-4.88	1.00 H	333	11.23	29.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	40.12	25.12 QP	40.00	-14.88	1.00 V	154	10.81	14.31
2	120.00	25.77 QP	43.50	-17.73	1.00 V	147	13.95	11.82
3	168.01	30.88 QP	43.50	-12.62	1.00 V	116	17.20	13.68
4	499.59	36.66 QP	46.00	-9.34	1.12 V	185	14.91	21.75
5	566.77	31.21 QP	46.00	-14.79	1.00 V	79	7.55	23.66
6	749.25	39.87 QP	46.00	-6.13	1.66 V	164	12.54	27.33
7	960.00	38.14 QP	46.00	-7.86	1.46 V	127	8.25	29.89

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value

802.11a OFDM modulation

MODE	Channel 1	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH, 960hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#4144.00	48.89 PK	74.00	-25.11	2.10 H	303	14.49	34.40
2	#4144.00	40.80 AV	54.00	-13.20	2.10 H	303	6.40	34.40
3	#5128.00	59.18 PK	74.00	-14.82	1.98 H	323	22.65	36.53
4	#5128.00	47.50 AV	54.00	-6.50	1.98 H	323	10.97	36.53
5	#5150.00	58.65 PK	74.00	-15.35	1.98 H	323	22.09	36.56
6	#5150.00	46.13 AV	54.00	-7.87	1.98 H	323	9.57	36.56
7	*5180.00	108.77 PK			1.70 H	14	72.17	36.60
8	*5180.00	98.50 AV			1.70 H	14	61.90	36.60
9	#8288.00	56.22 PK	74.00	-17.78	1.82 H	54	12.00	44.22
10	#8288.00	42.89 AV	54.00	-11.11	1.82 H	54	-1.33	44.22
11	10360.00	59.58 PK	88.30	-28.72	1.65 H	320	13.68	45.90
12	10360.00	45.70 AV	68.30	-22.60	1.65 H	320	-0.20	45.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#4144.00	47.67 PK	74.00	-26.33	1.33 V	170	13.27	34.40
2	#4144.00	39.40 AV	54.00	-14.60	1.33 V	170	5.00	34.40
3	#5128.00	58.72 PK	74.00	-15.28	1.34 V	333	22.19	36.53
4	#5128.00	46.34 AV	54.00	-7.66	1.34 V	333	9.81	36.53
5	#5150.00	57.87 PK	74.00	-16.13	1.34 V	333	21.31	36.56
6	#5150.00	45.66 AV	54.00	-8.34	1.34 V	333	9.10	36.56
7	*5180.00	108.36 PK			1.35 V	346	71.76	36.60
8	*5180.00	98.07 AV			1.35 V	346	61.47	36.60
9	#8288.00	55.65 PK	74.00	-18.35	1.22 V	0	11.43	44.22
10	#8288.00	43.49 AV	54.00	-10.51	1.22 V	0	-0.73	44.22
11	10360.00	58.06 PK	88.30	-30.24	1.34 V	49	12.16	45.90
12	10360.00	43.71 AV	68.30	-24.59	1.34 V	49	-2.19	45.90

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. “*” : Fundamental frequency
 6. “#”The radiated frequency falling in the restricted band.

MODE	Channel 4	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH, 960hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#4192.00	48.10 PK	74.00	-25.90	2.13 H	351	13.59	34.51
2	#4192.00	40.26 AV	54.00	-13.74	2.13 H	351	5.75	34.51
3	*5240.00	109.16 PK			1.81 H	321	72.48	36.68
4	*5240.00	98.98 AV			1.81 H	321	62.30	36.68
5	#8384.00	54.92 PK	74.00	-19.08	1.81 H	33	10.75	44.17
6	#8384.00	42.02 AV	54.00	-11.98	1.81 H	33	-2.15	44.17
7	10480.00	57.81 PK	88.30	-30.49	1.65 H	322	11.70	46.11
8	10480.00	43.97 AV	68.30	-24.33	1.65 H	322	-2.14	46.11

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#4192.00	47.71 PK	74.00	-26.29	1.12 V	169	13.20	34.51
2	#4192.00	39.18 AV	54.00	-14.82	1.12 V	169	4.67	34.51
3	*5240.00	108.42 PK			1.57 V	180	71.74	36.68
4	*5240.00	98.18 AV			1.57 V	180	61.50	36.68
5	#8384.00	55.33 PK	74.00	-18.67	1.13 V	355	11.16	44.17
6	#8384.00	42.98 AV	54.00	-11.02	1.13 V	355	-1.19	44.17
7	10480.00	58.19 PK	88.30	-30.11	1.46 V	49	12.08	46.11
8	10480.00	44.17 AV	68.30	-24.13	1.46 V	49	-1.94	46.11

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#": The radiated frequency falling in the restricted band.

MODE	Channel 5	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH, 960hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#4208.00	47.08 PK	74.00	-26.92	2.11 H	15	12.53	34.55
2	#4208.00	39.42 AV	54.00	-14.58	2.11 H	15	4.87	34.55
3	*5260.00	109.96 PK			1.81 H	21	73.25	36.71
4	*5260.00	98.73 AV			1.81 H	21	62.02	36.71
5	#8416.00	54.77 PK	74.00	-19.23	1.71 H	56	10.62	44.15
6	#8416.00	42.13 AV	54.00	-11.87	1.71 H	56	-2.02	44.15
7	10520.00	59.54 PK	88.30	-28.76	1.49 H	320	13.37	46.17
8	10520.00	45.90 AV	68.30	-22.40	1.49 H	320	-0.27	46.17

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#4208.00	48.27 PK	74.00	-25.73	1.14 V	171	13.72	34.55
2	#4208.00	40.27 AV	54.00	-13.73	1.14 V	171	5.72	34.55
3	*5260.00	109.66 PK			1.28 V	196	72.95	36.71
4	*5260.00	98.79 AV			1.28 V	196	62.08	36.71
5	#8416.00	55.62 PK	74.00	-18.38	1.09 V	0	11.47	44.15
6	#8416.00	42.94 AV	54.00	-11.06	1.09 V	0	-1.21	44.15
7	10520.00	56.61 PK	88.30	-31.69	1.47 V	49	10.44	46.17
8	10520.00	44.27 AV	68.30	-24.03	1.47 V	49	-1.90	46.17

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#" The radiated frequency falling in the restricted band.

MODE	Channel 8	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH, 960hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#4256.00	49.00 PK	74.00	-25.00	2.10 H	16	14.34	34.66
2	#4256.00	41.78 AV	54.00	-12.22	2.10 H	16	7.12	34.66
3	*5320.00	110.51 PK			1.52 H	16	73.72	36.79
4	*5320.00	100.11 AV			1.52 H	16	63.32	36.79
5	#5350.00	60.95 PK	74.00	-13.05	1.73 H	14	24.12	36.83
6	#5350.00	47.25 AV	54.00	-6.75	1.73 H	14	10.42	36.83
7	#5372.00	59.54 PK	74.00	-14.46	1.73 H	14	22.68	36.86
8	#5372.00	46.45 AV	54.00	-7.55	1.73 H	14	9.59	36.86
9	8512.00	55.04 PK	88.30	-33.26	1.68 H	57	10.92	44.12
10	8512.00	41.63 AV	68.30	-26.67	1.68 H	57	-2.49	44.12
11	#10640.00	59.09 PK	74.00	-14.91	1.48 H	318	12.80	46.29
12	#10640.00	45.12 AV	54.00	-8.88	1.48 H	318	-1.17	46.29

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#4256.00	49.79 PK	74.00	-24.21	1.14 V	174	15.13	34.66
2	#4256.00	42.61 AV	54.00	-11.39	1.14 V	174	7.95	34.66
3	*5320.00	109.74 PK			1.28 V	197	72.95	36.79
4	*5320.00	99.25 AV			1.28 V	197	62.46	36.79
5	#5350.00	60.84 PK	74.00	-13.16	1.25 V	195	24.01	36.83
6	#5350.00	46.99 AV	54.00	-7.01	1.25 V	195	10.16	36.83
7	#5372.00	59.60 PK	74.00	-14.40	1.25 V	195	22.74	36.86
8	#5372.00	46.46 AV	54.00	-7.54	1.25 V	195	9.60	36.86
9	8512.00	55.78 PK	88.30	-32.52	1.36 V	0	11.66	44.12
10	8512.00	42.12 AV	68.30	-26.18	1.36 V	0	-2.00	44.12
11	#10640.00	57.79 PK	74.00	-16.21	1.47 V	49	11.50	46.29
12	#10640.00	43.98 AV	54.00	-10.02	1.47 V	49	-2.31	46.29

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.

MODE	Channel 9	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH, 960hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#4400.00	54.40 PK	74.00	-19.60	2.14 H	290	19.39	35.01
2	#4400.00	51.57 AV	54.00	-2.43	2.14 H	290	16.56	35.01
3	#5448.00	59.20 PK	74.00	-14.80	1.84 H	7	22.24	36.96
4	#5448.00	46.54 AV	54.00	-7.46	1.84 H	7	9.58	36.96
5	#5460.00	59.05 PK	74.00	-14.95	1.84 H	7	22.07	36.98
6	#5460.00	45.49 AV	54.00	-8.51	1.84 H	7	8.51	36.98
7	*5500.00	109.47 PK			1.46 H	15	72.44	37.03
8	*5500.00	98.92 AV			1.46 H	15	61.89	37.03
9	8800.00	54.68 PK	88.30	-33.62	1.71 H	60	10.24	44.44
10	8800.00	41.09 AV	68.30	-27.21	1.71 H	60	-3.35	44.44
11	#11000.00	57.46 PK	74.00	-16.54	1.50 H	330	10.81	46.65
12	#11000.00	43.92 AV	54.00	-10.08	1.50 H	330	-2.73	46.65

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#4400.00	52.68 PK	74.00	-21.32	1.39 V	354	17.67	35.01
2	#4400.00	49.70 AV	54.00	-4.30	1.39 V	354	14.69	35.01
3	#5448.00	60.43 PK	74.00	-13.57	1.38 V	177	23.47	36.96
4	#5448.00	47.48 AV	54.00	-6.52	1.38 V	177	10.52	36.96
5	#5460.00	58.62 PK	74.00	-15.38	1.38 V	177	21.64	36.98
6	#5460.00	45.94 AV	54.00	-8.06	1.38 V	177	8.96	36.98
7	*5500.00	109.10 PK			1.35 V	179	72.07	37.03
8	*5500.00	98.57 AV			1.35 V	179	61.54	37.03
9	8800.00	54.78 PK	88.30	-33.52	1.56 V	0	10.34	44.44
10	8800.00	41.20 AV	68.30	-27.10	1.56 V	0	-3.24	44.44
11	#11000.00	57.96 PK	74.00	-16.04	1.47 V	56	11.31	46.65
12	#11000.00	43.82 AV	54.00	-10.18	1.47 V	56	-2.83	46.65

NOTE:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value
5. “*” : Fundamental frequency
6. “#”The radiated frequency falling in the restricted band.

MODE	Channel 14	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH, 960hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4480.00	54.28 PK	88.30	-34.02	1.65 H	59	19.08	35.20
2	4480.00	41.82 AV	68.30	-26.48	1.65 H	59	6.62	35.20
3	*5600.00	109.45 PK			1.58 H	14	72.17	37.28
4	*5600.00	99.30 AV			1.58 H	14	62.02	37.28
5	8960.00	55.23 PK	88.30	-33.07	1.65 H	59	10.61	44.62
6	8960.00	41.82 AV	68.30	-26.48	1.65 H	59	-2.80	44.62
7	#11200.00	58.92 PK	74.00	-15.08	1.49 H	328	12.12	46.80
8	#11200.00	44.58 AV	54.00	-9.42	1.49 H	328	-2.22	46.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4480.00	54.52 PK	88.30	-33.78	1.38 V	173	19.32	35.20
2	4480.00	51.14 AV	68.30	-17.16	1.38 V	173	15.94	35.20
3	*5600.00	108.94 PK			1.09 V	180	71.66	37.28
4	*5600.00	98.43 AV			1.09 V	180	61.15	37.28
5	8960.00	55.26 PK	88.30	-33.04	1.47 V	0	10.64	44.62
6	8960.00	41.74 AV	68.30	-26.56	1.47 V	0	-2.88	44.62
7	#11200.00	58.64 PK	74.00	-15.36	1.47 V	51	11.84	46.80
8	#11200.00	44.25 AV	54.00	-9.75	1.47 V	51	-2.55	46.80

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.

MODE	Channel 19	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH, 960hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#4560.00	55.77 PK	74.00	-18.23	1.81 H	291	20.39	35.38
2	#4560.00	53.48 AV	54.00	-0.52	1.81 H	291	18.10	35.38
3	*5700.00	110.13 PK			1.85 H	14	72.60	37.53
4	*5700.00	99.56 AV			1.85 H	14	62.03	37.53
5	5725.00	65.03 PK	88.30	-23.27	1.77 H	14	27.44	37.59
6	5725.00	54.96 AV	68.30	-13.34	1.77 H	14	17.37	37.59
7	#9120.00	56.11 PK	74.00	-17.89	1.80 H	51	11.37	44.74
8	#9120.00	42.74 AV	54.00	-11.26	1.80 H	51	-2.00	44.74
9	#11400.00	58.31 PK	74.00	-15.69	1.54 H	334	11.36	46.95
10	#11400.00	45.01 AV	54.00	-8.99	1.54 H	334	-1.94	46.95

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M



No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#4560.00	55.95 PK	74.00	-18.05	1.37 V	347	20.57	35.38
2	#4560.00	53.24 AV	54.00	-0.76	1.37 V	347	17.86	35.38
3	*5700.00	107.59 PK			1.18 V	178	70.06	37.53
4	*5700.00	96.95 AV			1.18 V	178	59.42	37.53
5	5725.00	62.28 PK	88.30	-26.02	1.07 V	179	24.69	37.59
6	5725.00	51.92 AV	68.30	-16.38	1.07 V	179	14.33	37.59
7	#9120.00	55.42 PK	74.00	-18.58	1.31 V	354	10.68	44.74
8	#9120.00	43.23 AV	54.00	-10.77	1.31 V	354	-1.51	44.74
9	#11400.00	59.02 PK	74.00	-14.98	1.49 V	56	12.07	46.95
10	#11400.00	44.78 AV	54.00	-9.22	1.49 V	56	-2.17	46.95

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. “*” : Fundamental frequency
 6. “#”The radiated frequency falling in the restricted band.



RESTRICTED BANDEDGE (802.11a MODE, CH1, HORIZONTAL)

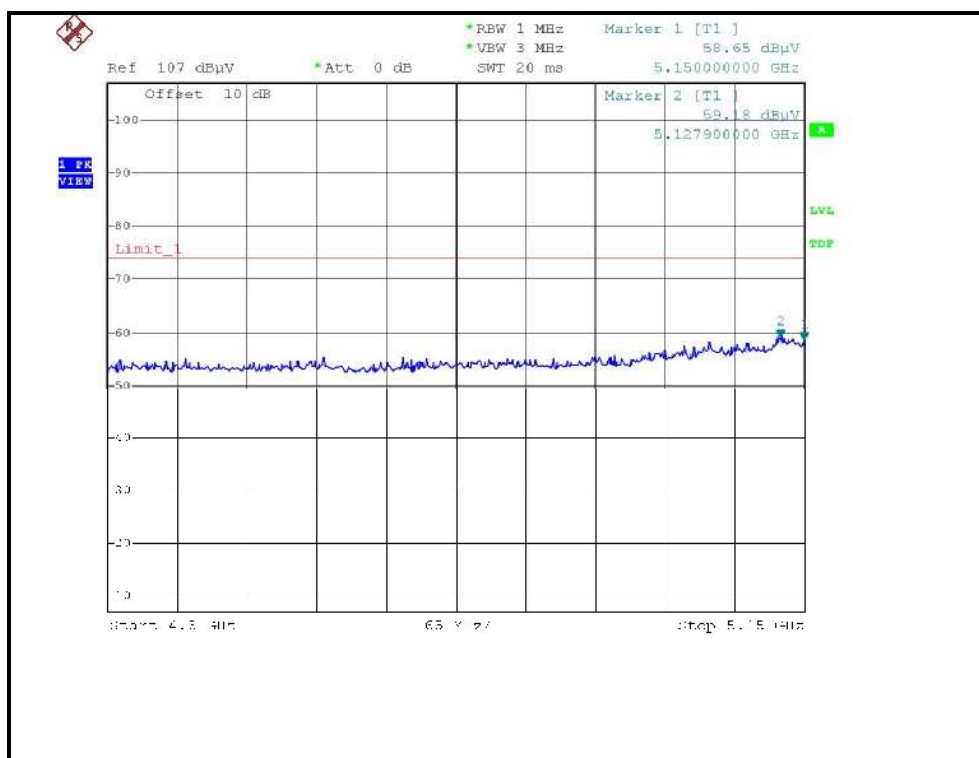



RESTRICTED BANDEDGE (802.11a MODE, CH8, HORIZONTAL)

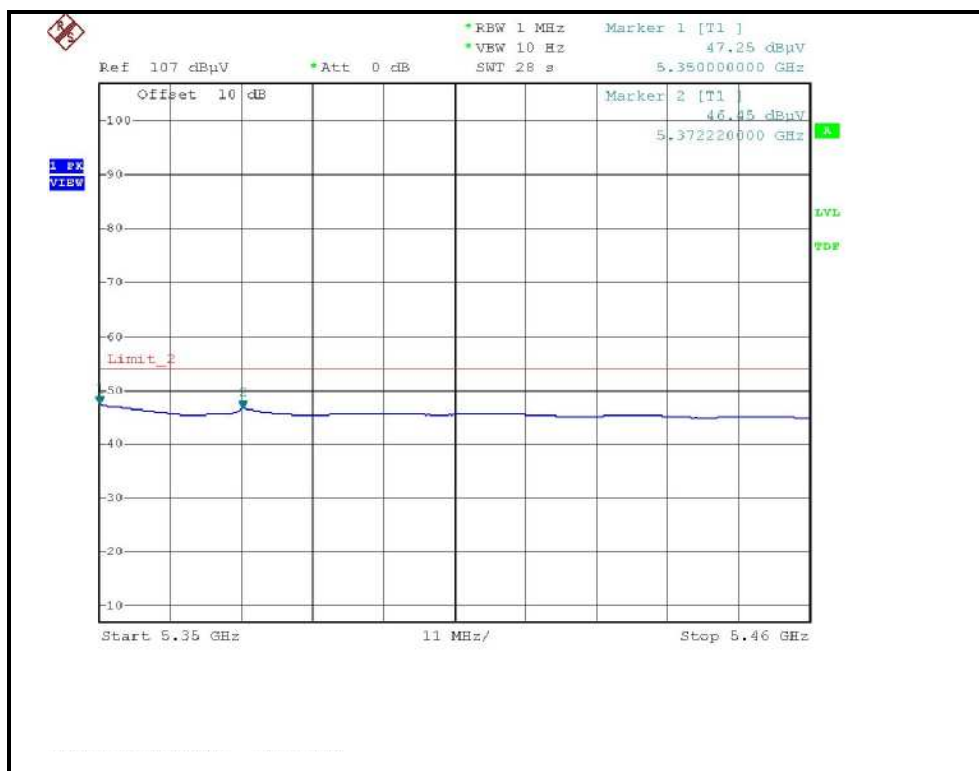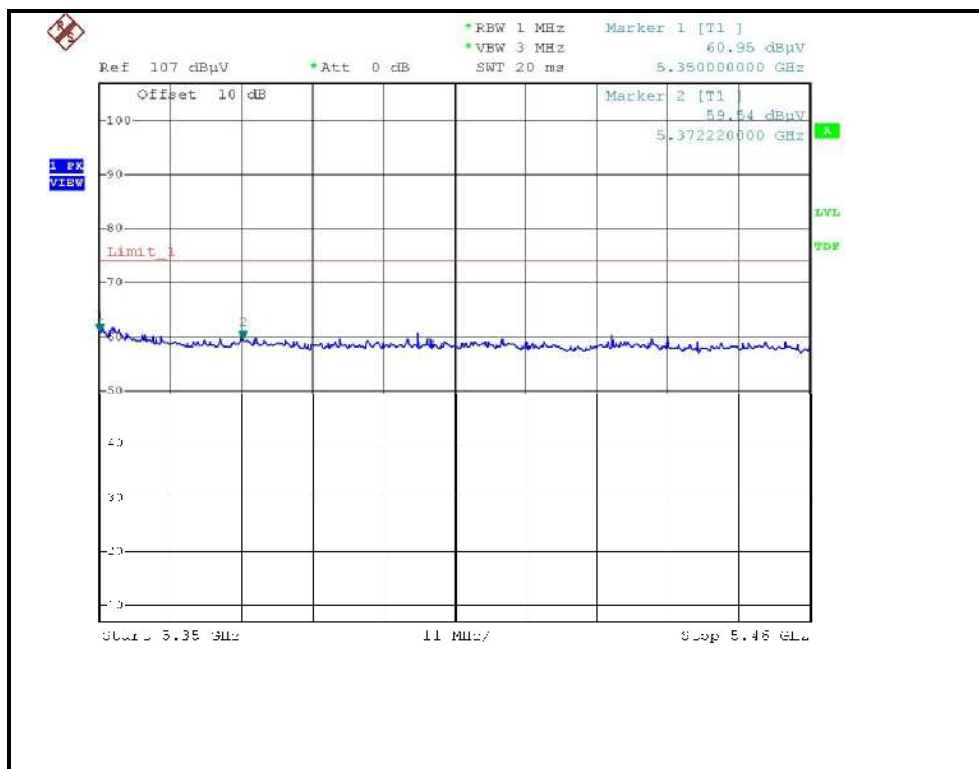



RESTRICTED BANDEDGE (802.11a MODE, CH8, VERTICAL)

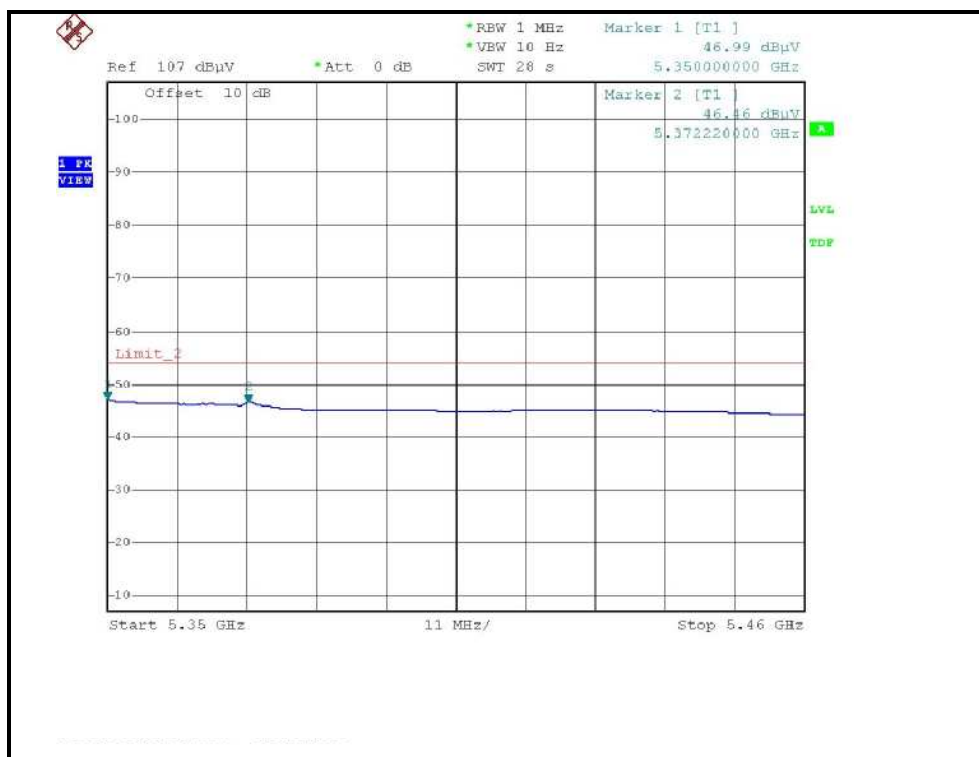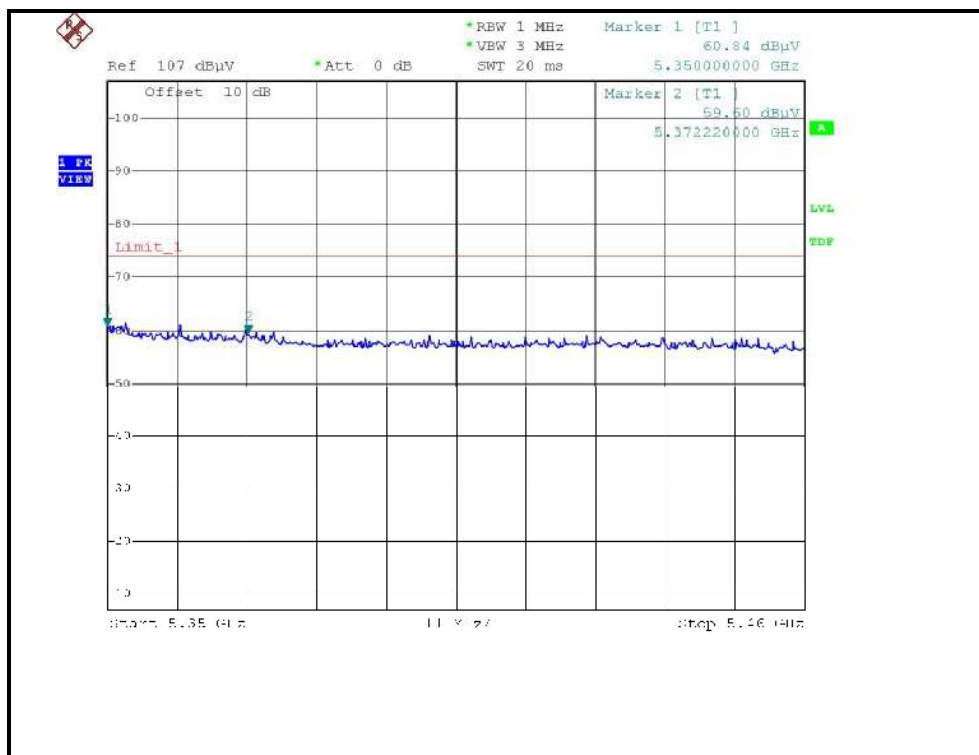

RESTRICTED BANDEDGE (802.11a MODE, CH9, HORIZONTAL)

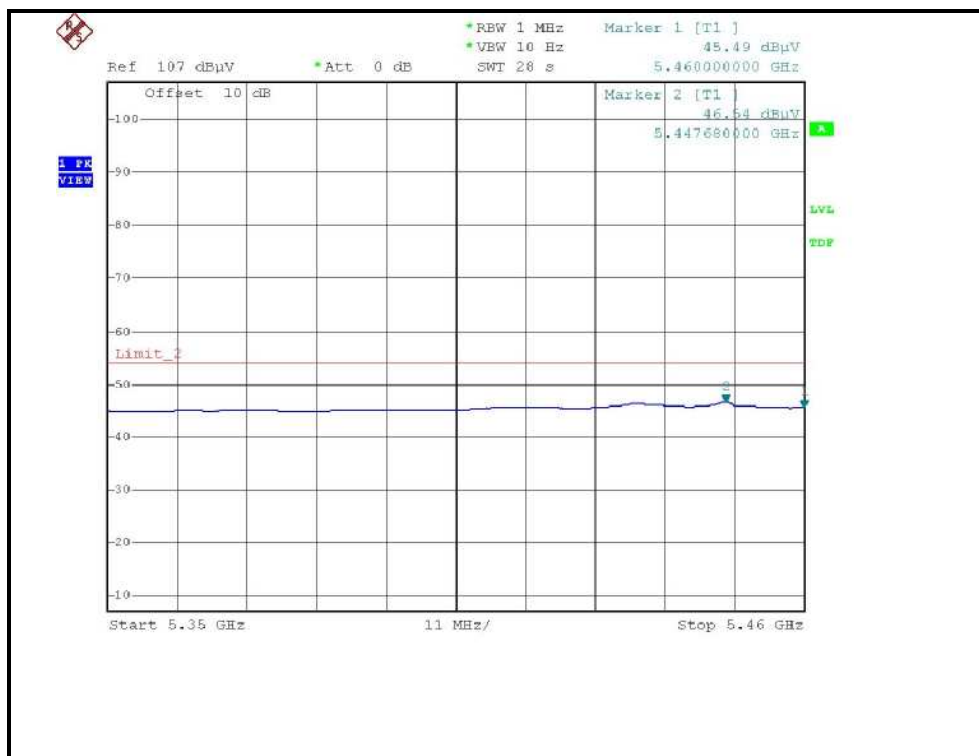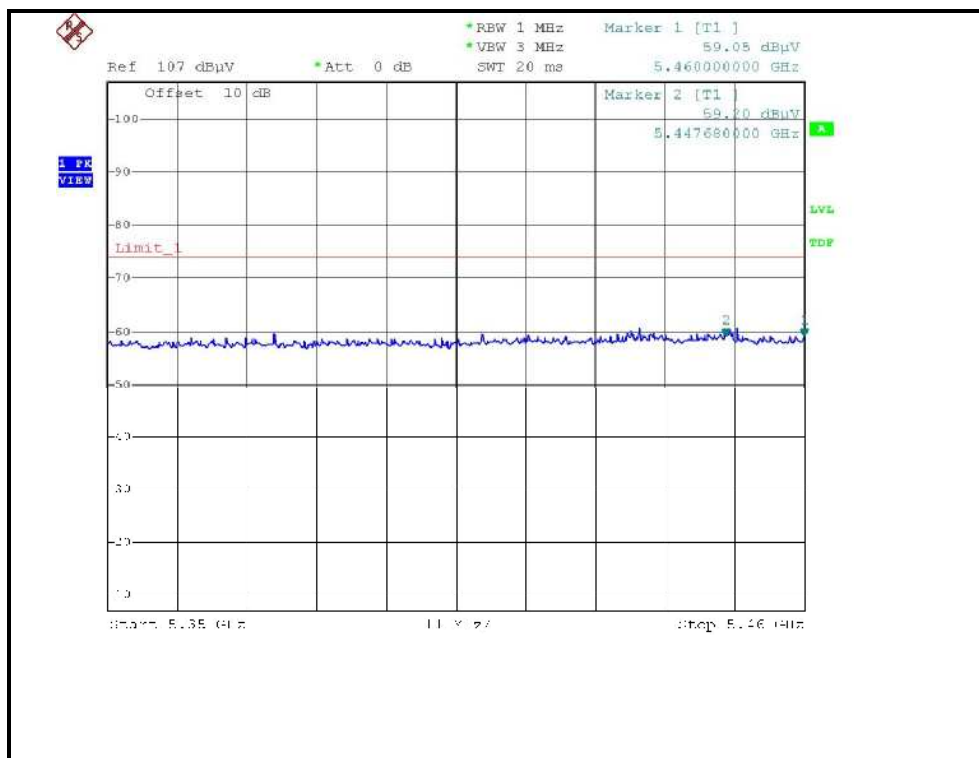

RESTRICTED BANDEDGE (802.11a MODE, CH9, VERTICAL)

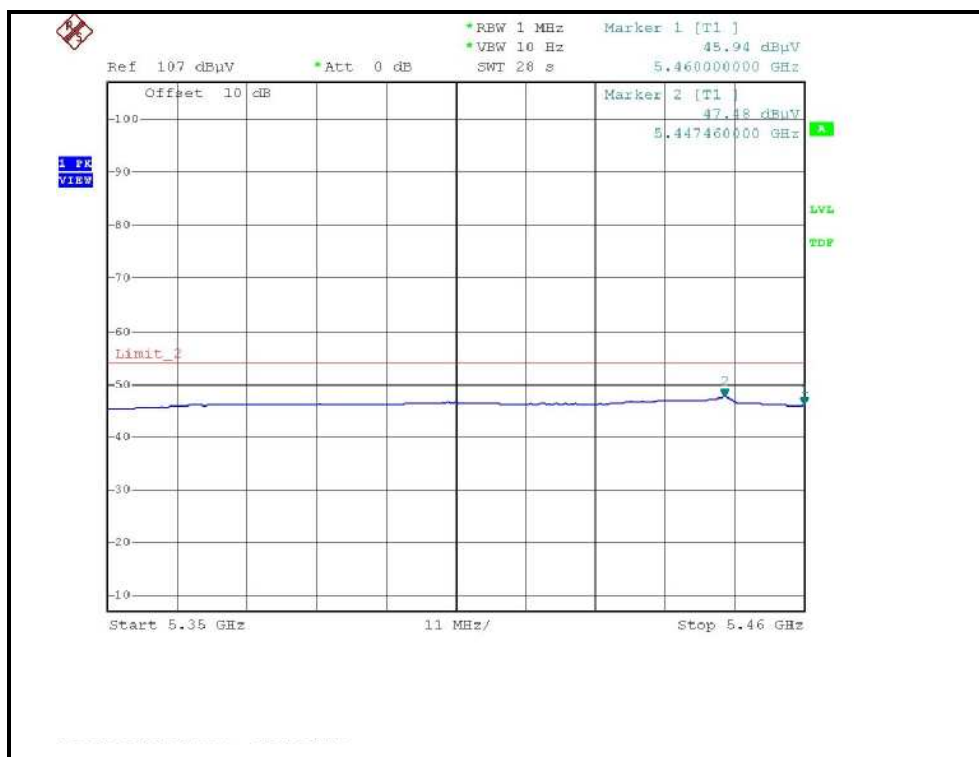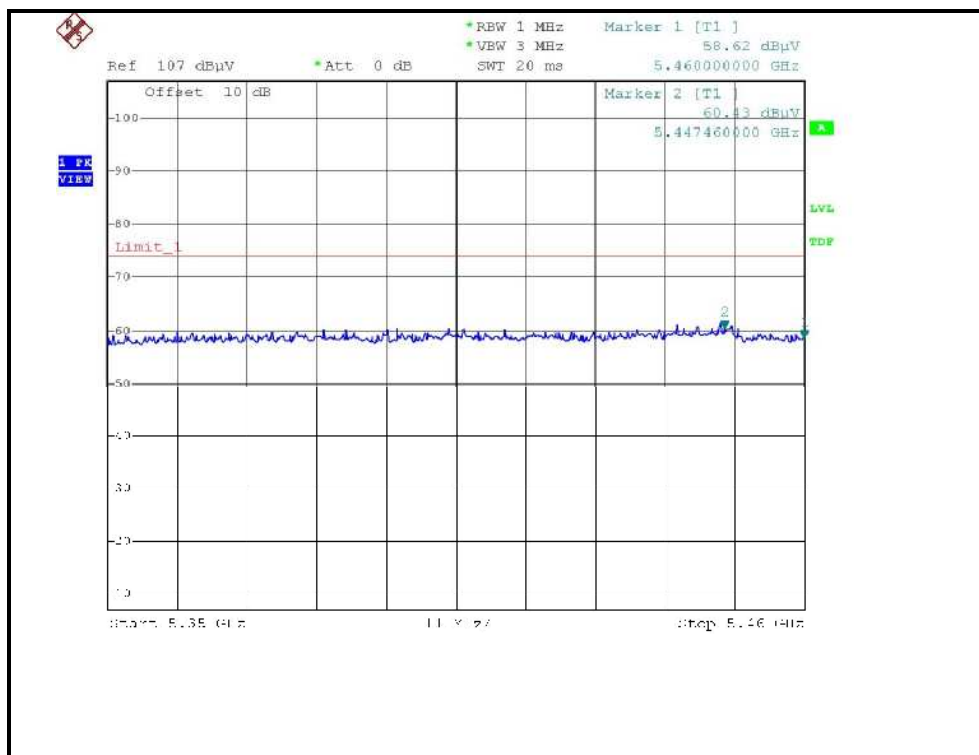

4.3 PEAK TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

Frequency Band	Limit
5.15 – 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.25 – 5.35GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.47 – 5.725GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.725 – 5.825GHz	The lesser of 1W (30dBm) or 17dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ADVANTEST SPECTRUM ANALYZER	U3772	160100280	April. 10.2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set span to encompass the entire emission bandwidth of the signal.
3. Set RBW to 1MHz, VBW to 300kHz.
4. Using the spectrum analyzer's channel power measurement function to measure the output power.

NOTE:


The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.3.7 TEST RESULTS

802.11a OFDM modulation

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	19deg.C, 60%RH, 960hPa
TESTED BY	Wen Yu		


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER OUTPUT (mW)	PEAK POWER LIMIT (dBm)	26dBc Occupied Bandwidth (MHz)	PASS/FAIL
1	5180	14.89	30.832	17	25.66	PASS
4	5240	14.53	28.379	17	21.11	PASS
5	5260	14.64	29.107	24	23.03	PASS
8	5320	14.49	28.119	24	23.2	PASS
9	5500	14.72	29.648	24	25.06	PASS
14	5600	14.50	28.184	24	25.27	PASS
19	5700	14.20	26.303	24	21.14	PASS

NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following pages.

Peak Power Output:
CH1




CH4

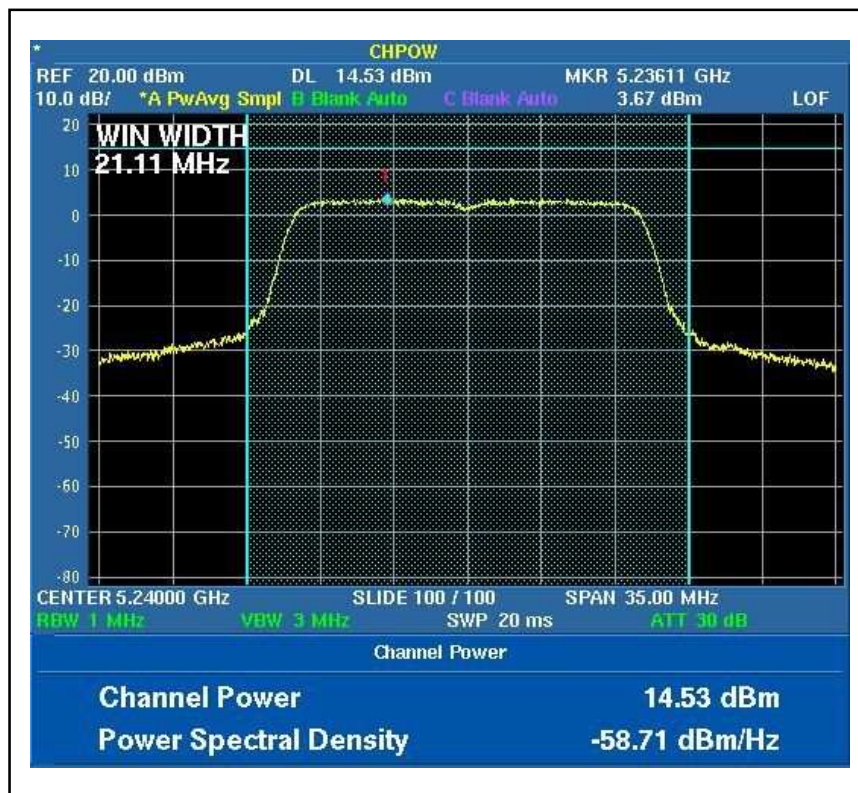

CH5




CH8

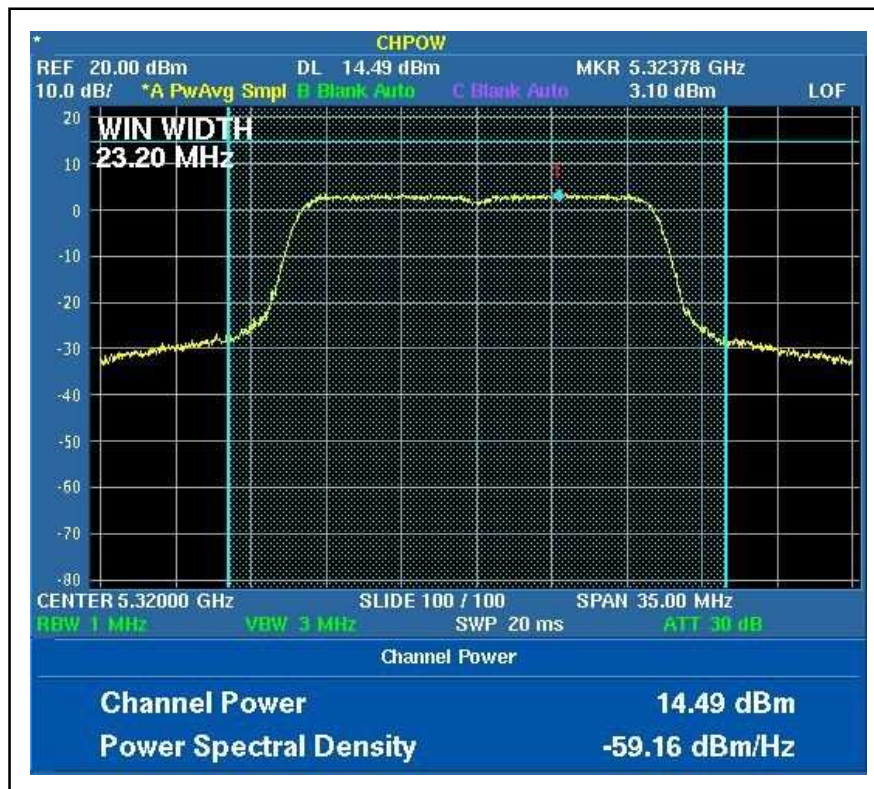


CH9




CH14

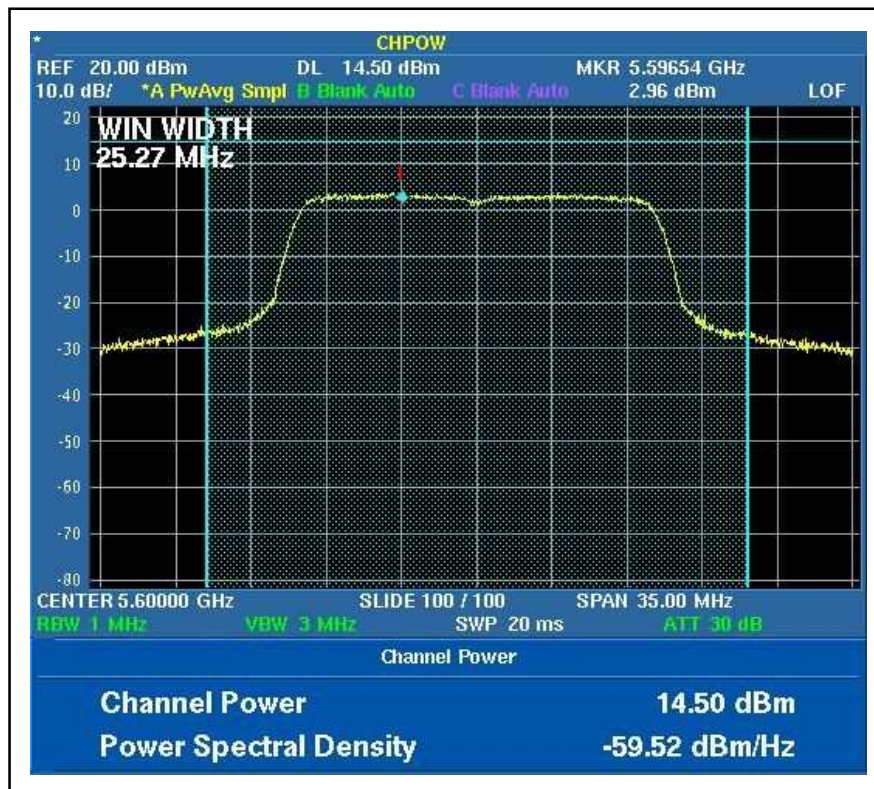


CH19

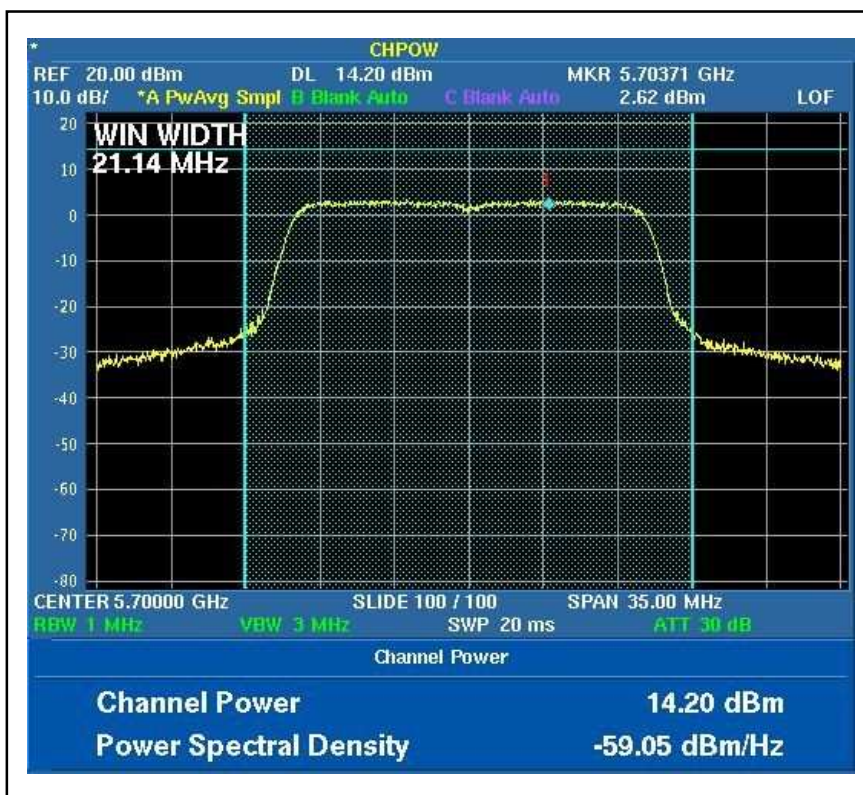


26dB Occupied Bandwidth:
CH1

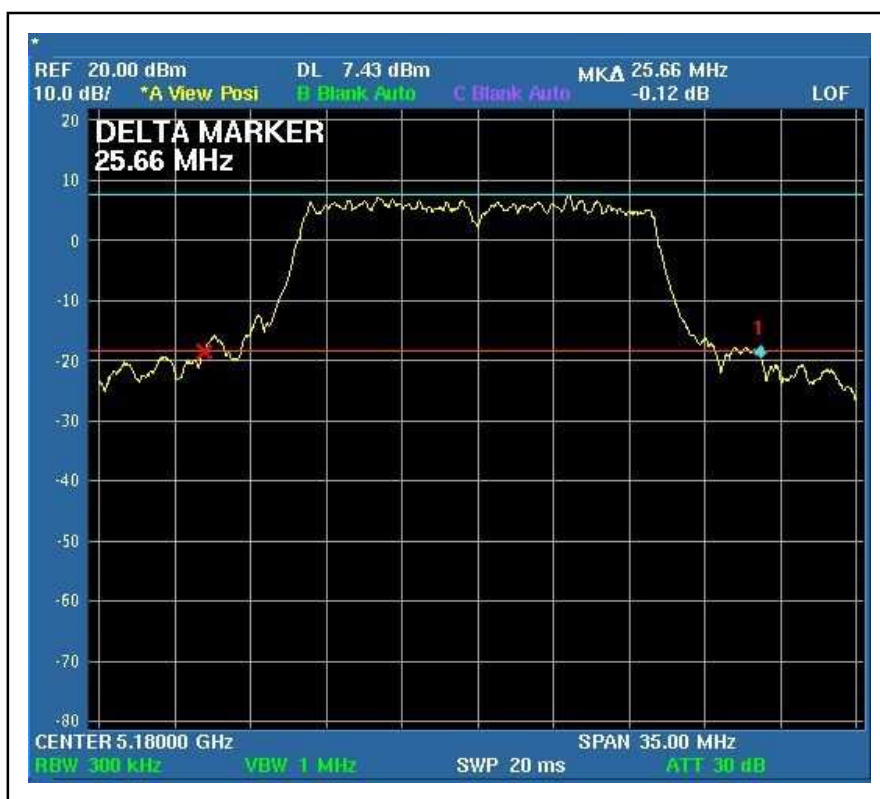


CH4

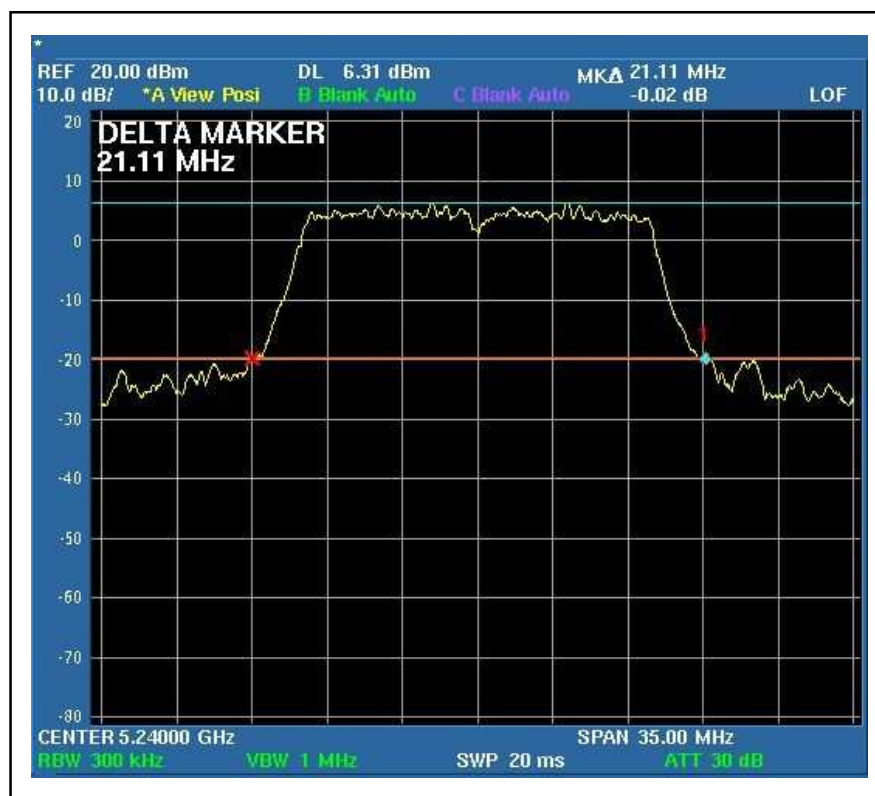


CH5

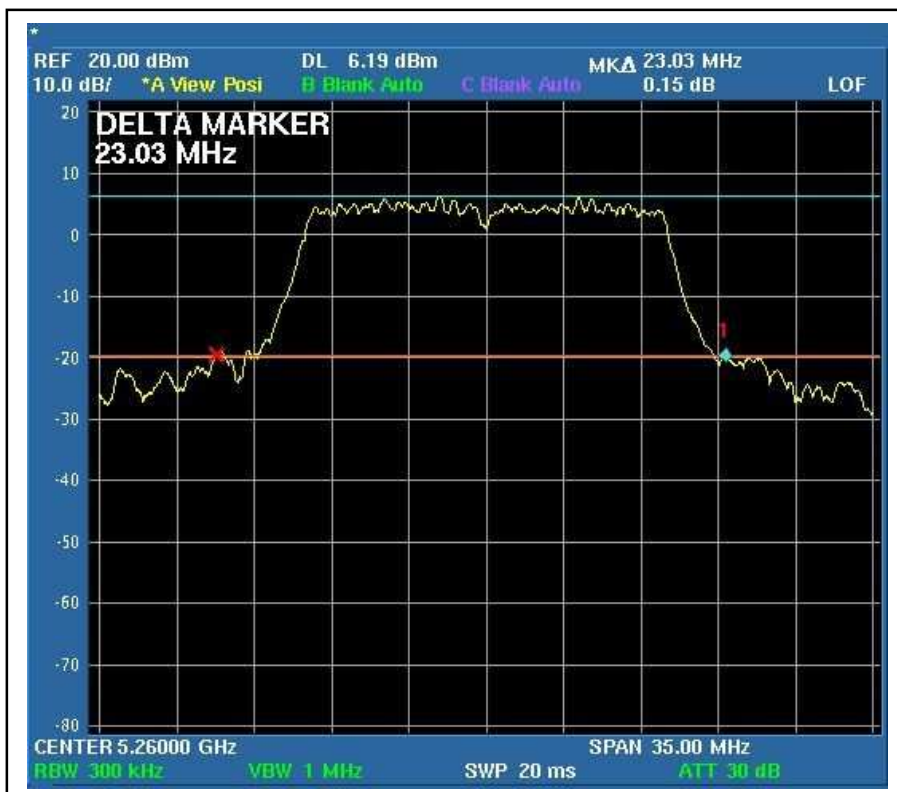


CH8

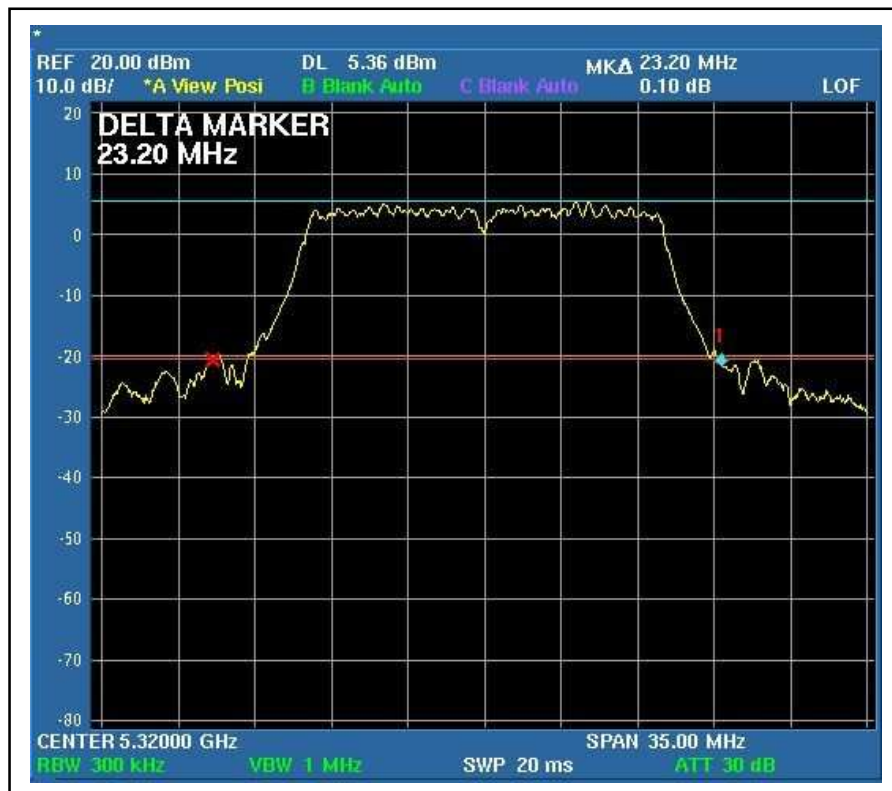


CH9

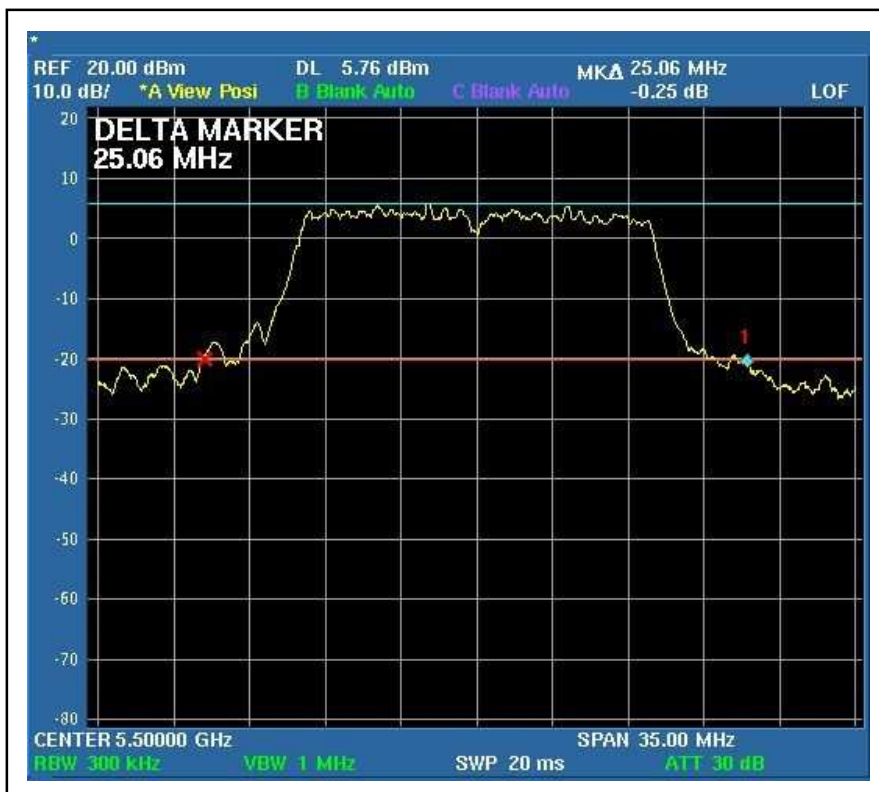

CH14

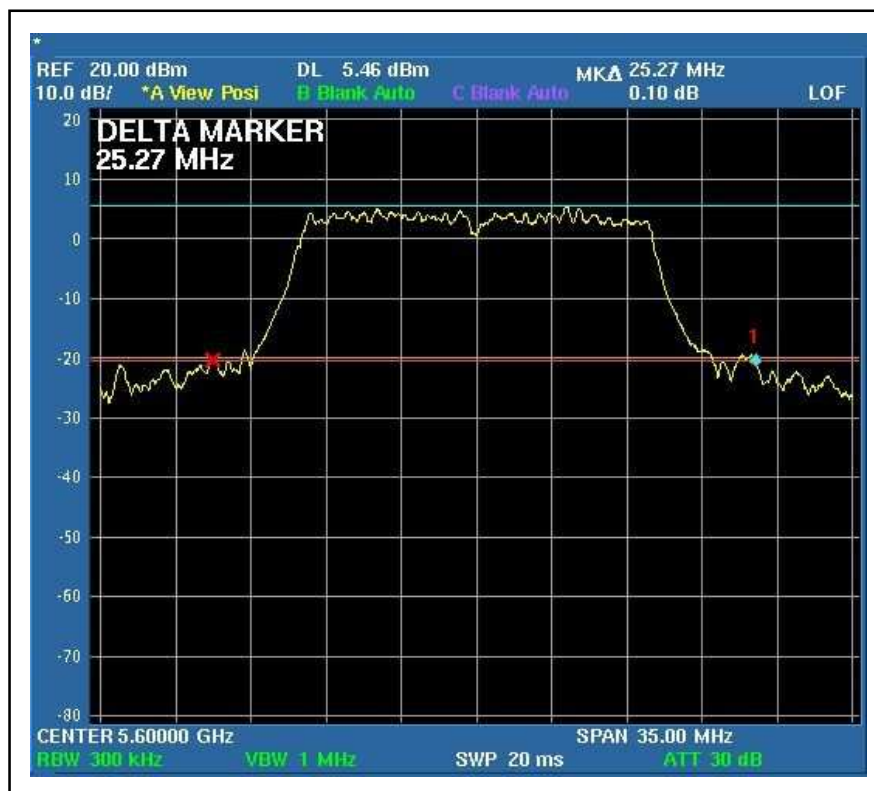

CH19

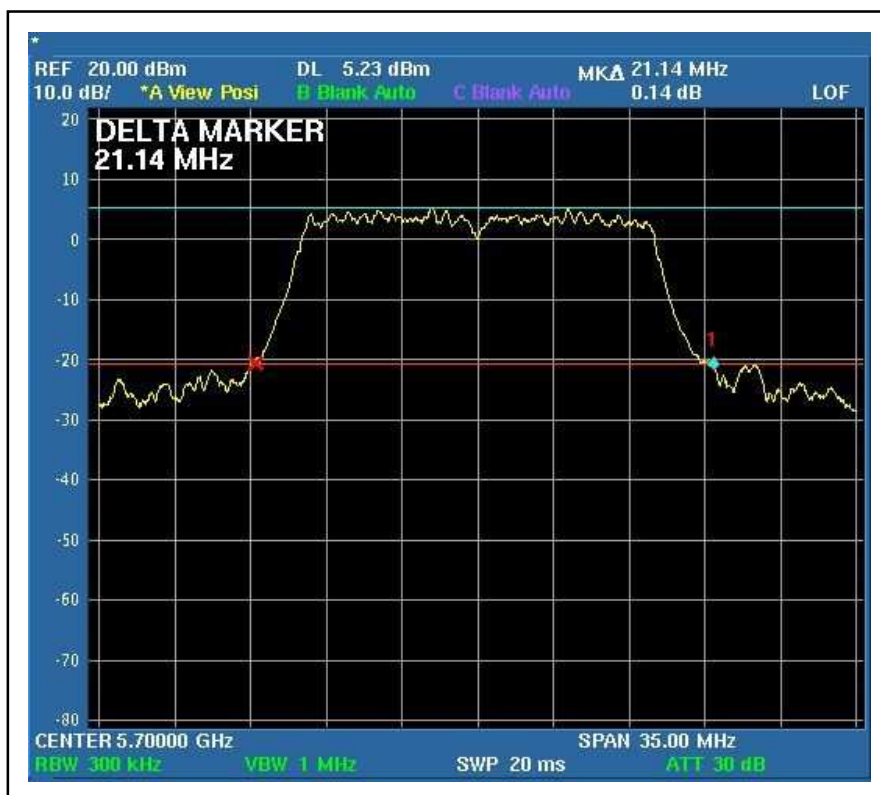

4.4 PEAK POWER EXCURSION MEASUREMENT

4.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Frequency Band	Limit
5.15 – 5.25 GHz	13dB
5.25 – 5.35 GHz	13dB
5.47 – 5.725GHz	13dB
5.725 – 5.825 GHz	13dB

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ADVANTEST SPECTRUM ANALYZER	U3772	160100280	April. 10.2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set the spectrum bandwidth span to view the entire spectrum.
3. Using peak detector and Max-hold function for Trace 1 (RB=1MHz, VB=3MHz) and 2 (RB=1MHz, VB=300KHz).
4. The largest difference between Trace 1 and Trace 2 in any 1MHz band on any frequency was recorded.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.4.7 TEST RESULTS

802.11a OFDM modulation


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	19deg.C, 60%RH, 960hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
1	5180	8.46	13	PASS
4	5240	8.42	13	PASS
5	5260	7.46	13	PASS
8	5320	8.19	13	PASS
9	5500	8.44	13	PASS
14	5600	8.63	13	PASS
19	5700	8.12	13	PASS


CH1




CH4

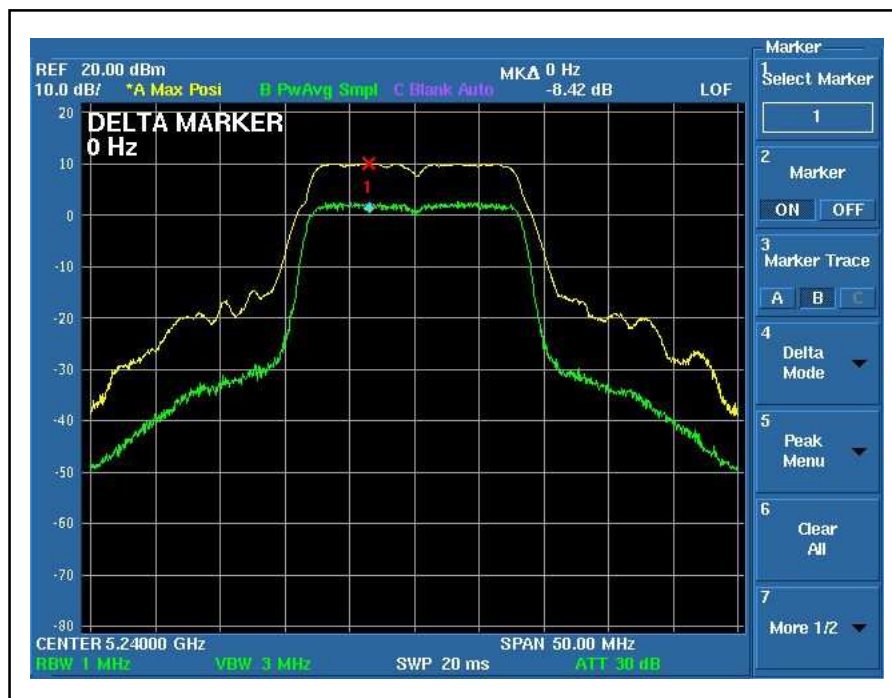


CH5

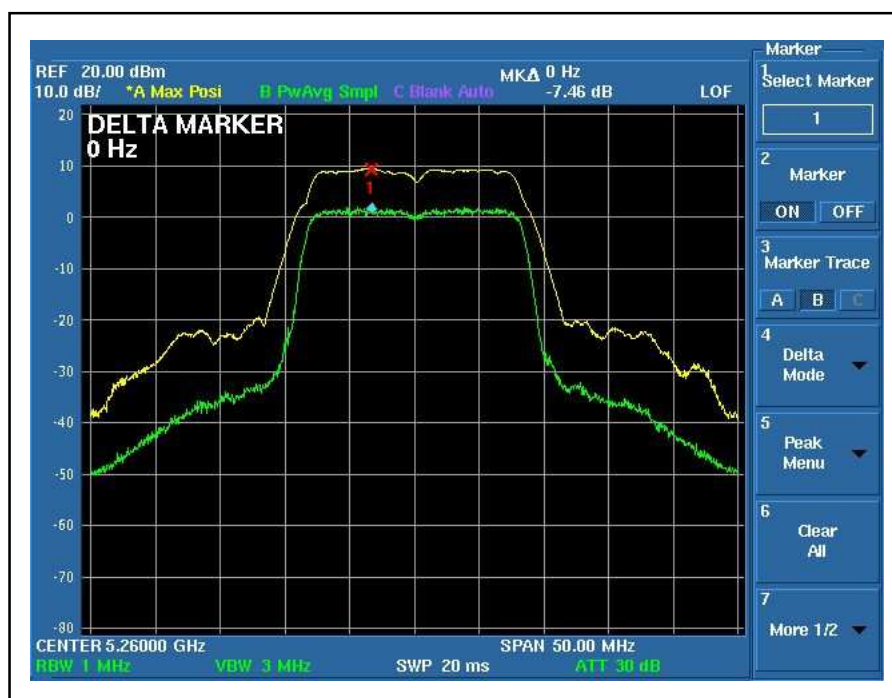


CH8

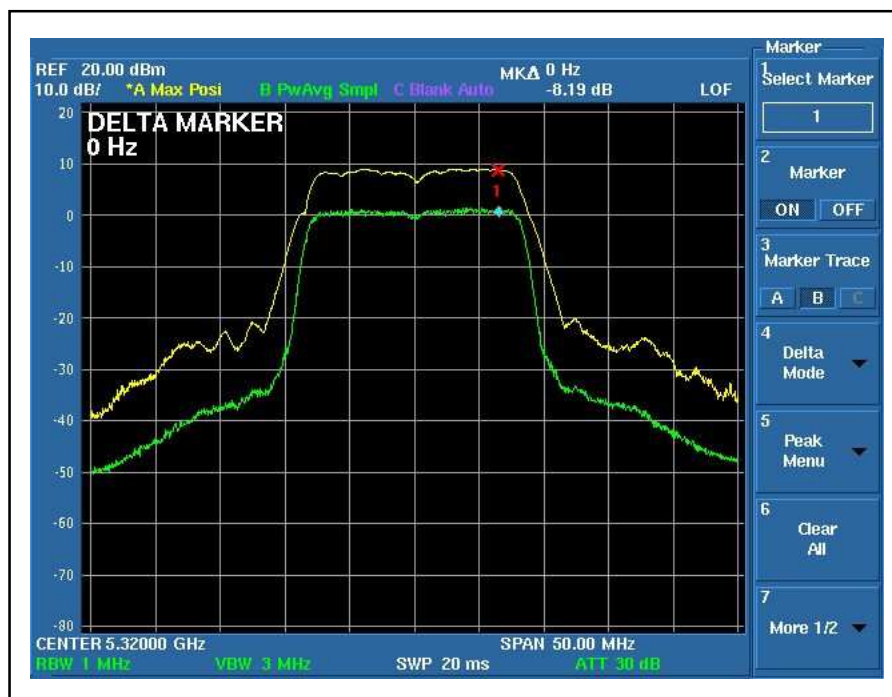


CH9

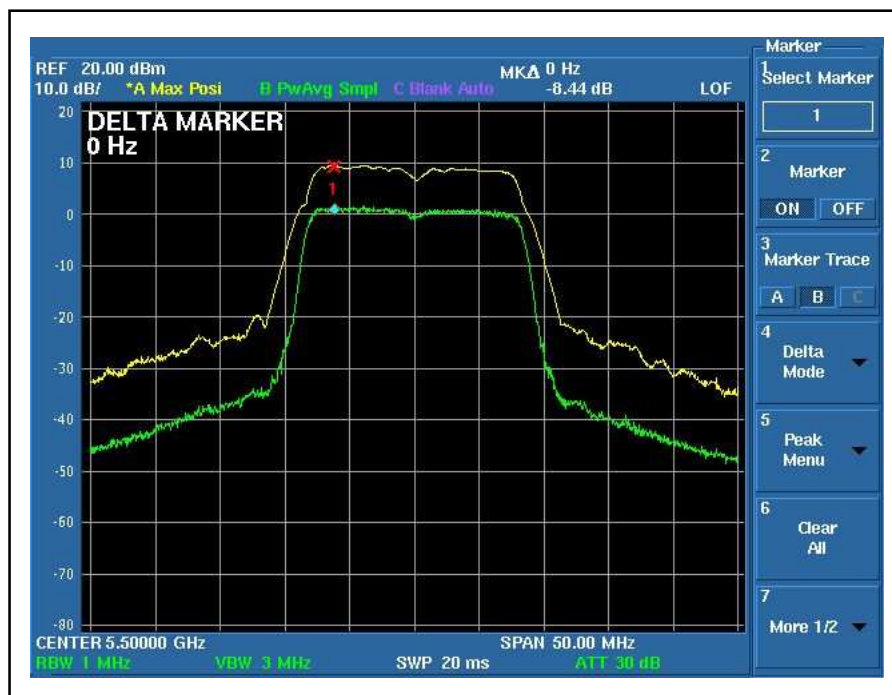

CH14

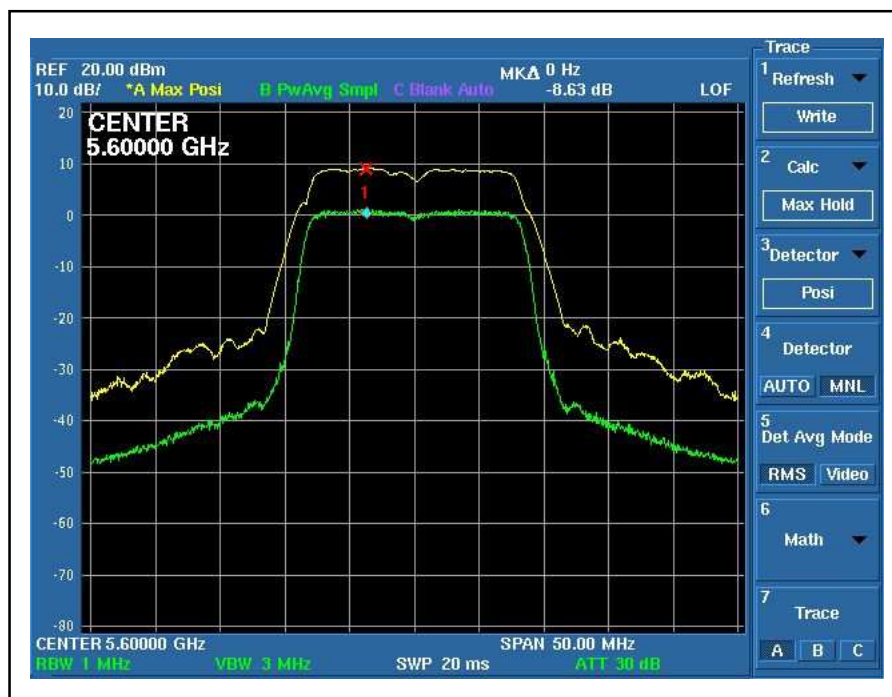

CH19

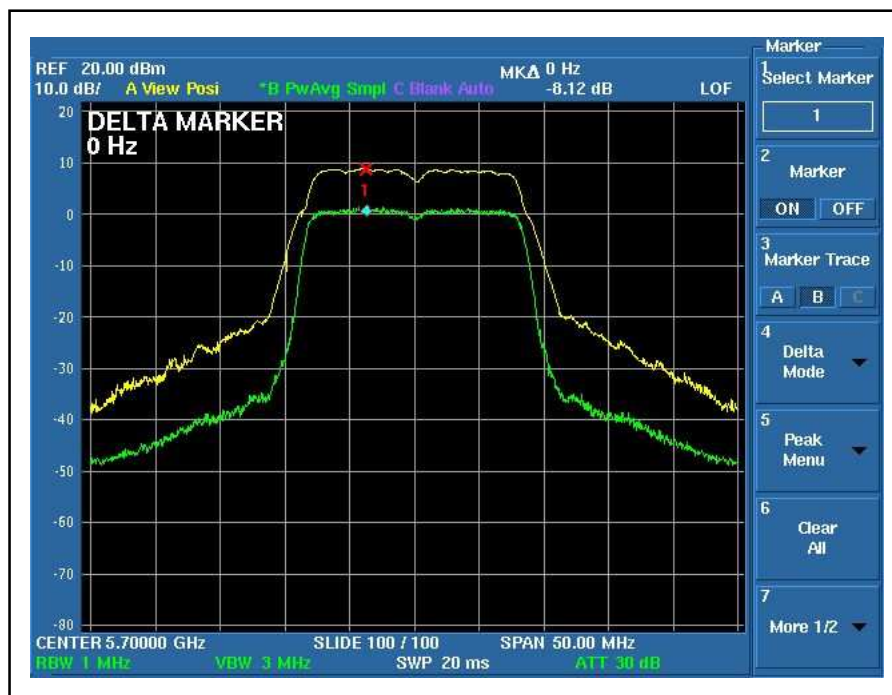

4.5 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Frequency Band	Limit
5.15 ~ 5.25GHz	4dBm
5.25 ~ 5.35GHz	11dBm
5.47 ~ 5.725GHz	11dBm
5.725 ~ 5.825GHz	17dBm

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ADVANTEST SPECTRUM ANALYZER	U3772	160100280	April. 10.2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURES

1. The transmitter output was connected to the spectrum analyzer.
2. Set RBW=1MHz, VBW=3MHz. The PPSD is the highest level found across the emission in any 1MHz band.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6


4.5.7 TEST RESULTS

802.11a OFDM modulation


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	19deg.C, 60%RH, 960hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	5180	2.97	4	PASS
4	5240	2.77	4	PASS
5	5260	2.26	11	PASS
8	5320	1.12	11	PASS
9	5500	2.84	11	PASS
14	5600	2.11	11	PASS
19	5700	2.17	11	PASS


CH1

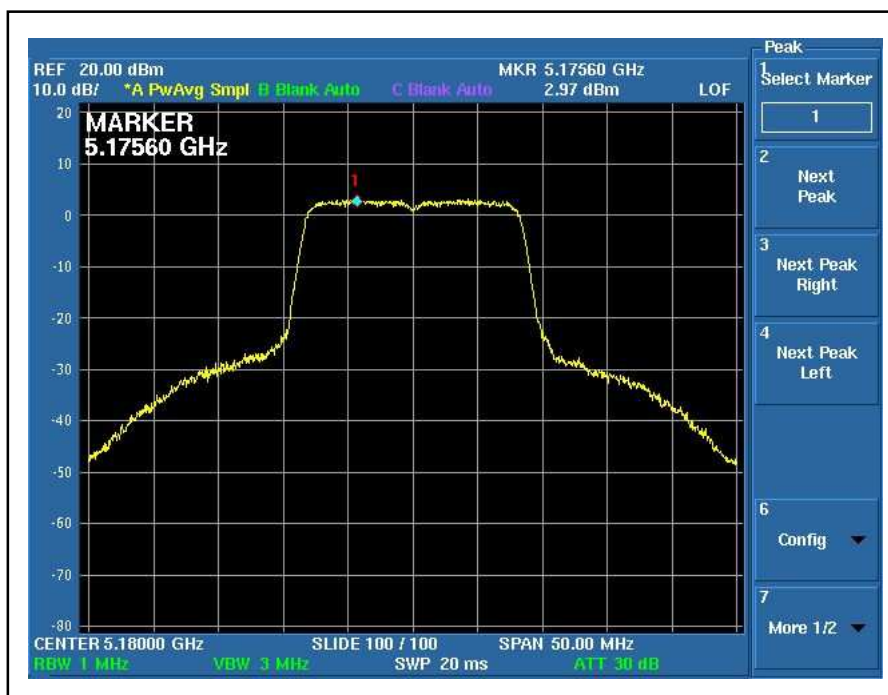


CH4

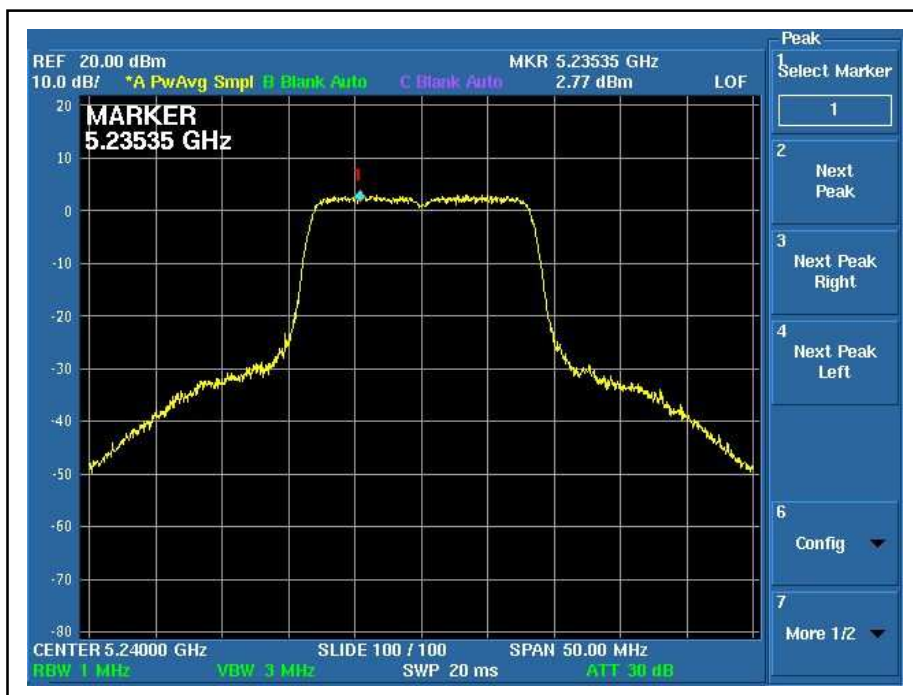


CH5

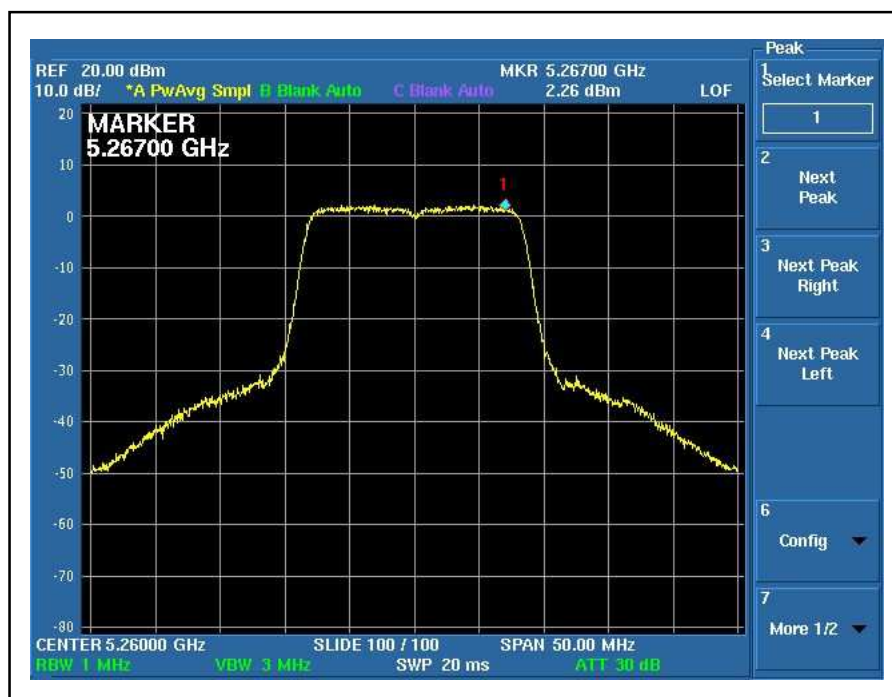


CH8

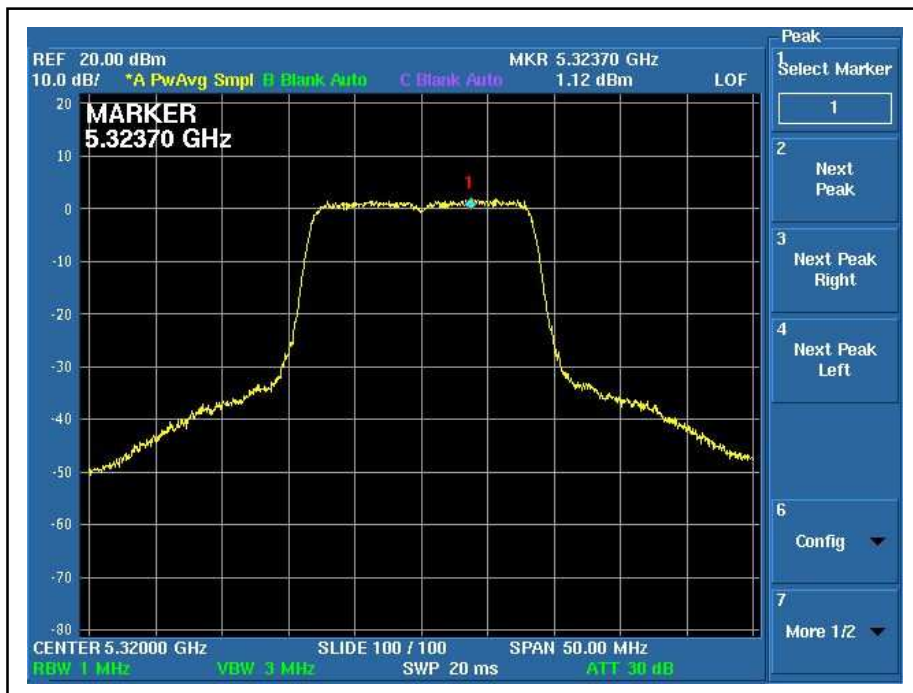


CH9

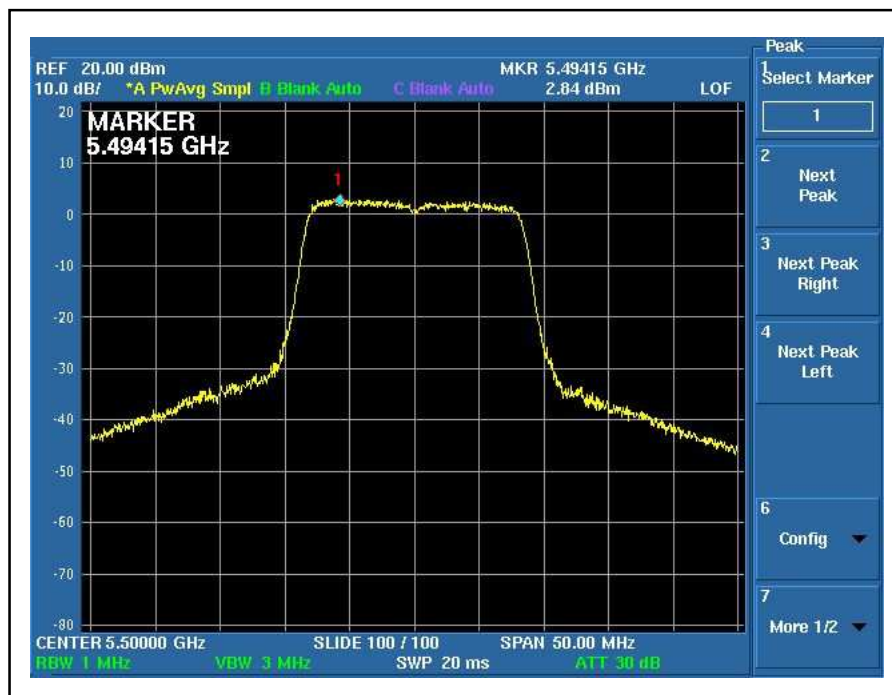

CH14

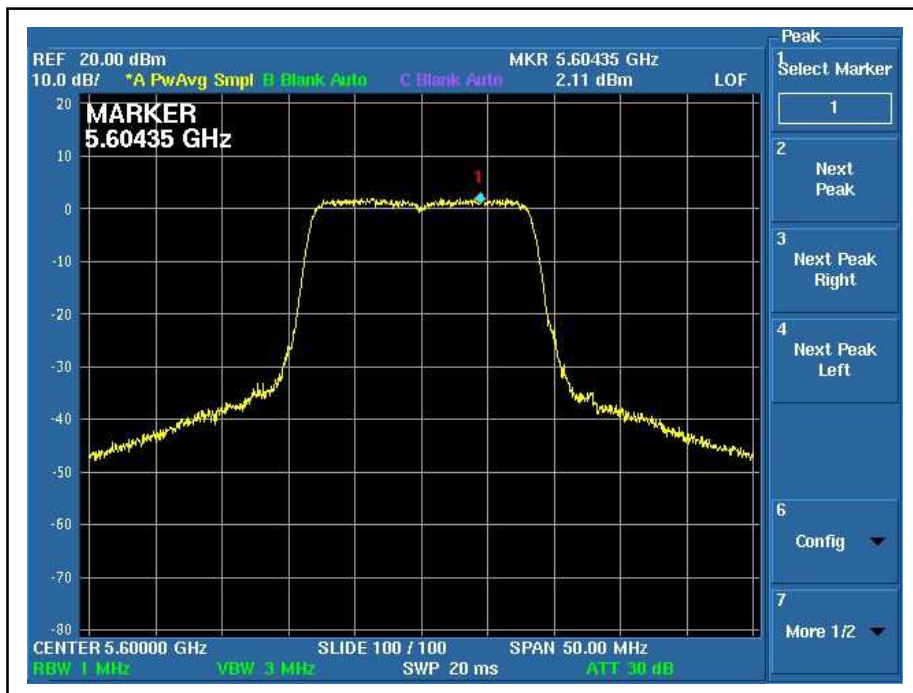

CH19

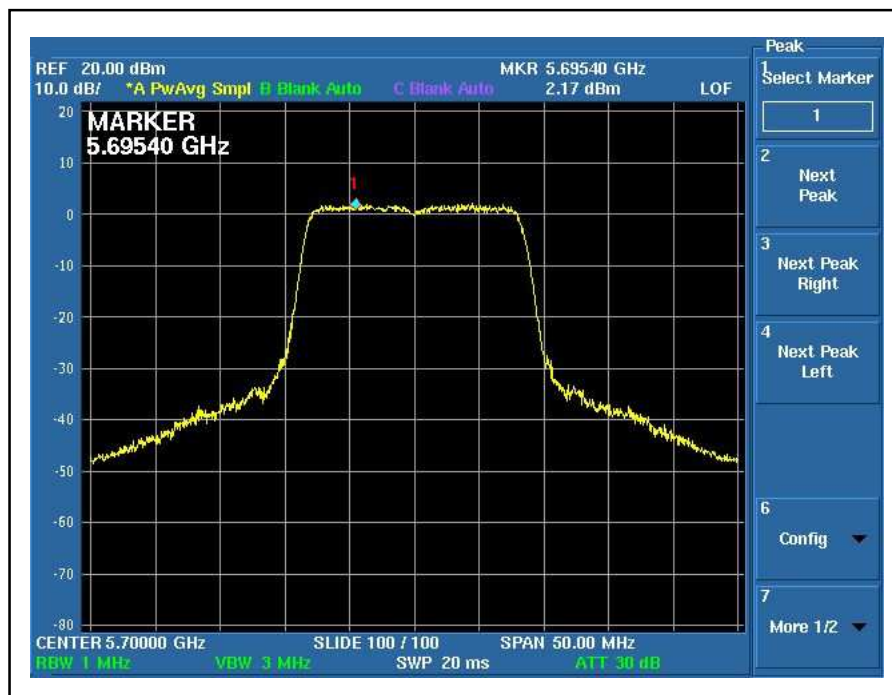

4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within +/- 0.02% of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 15, 2008

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

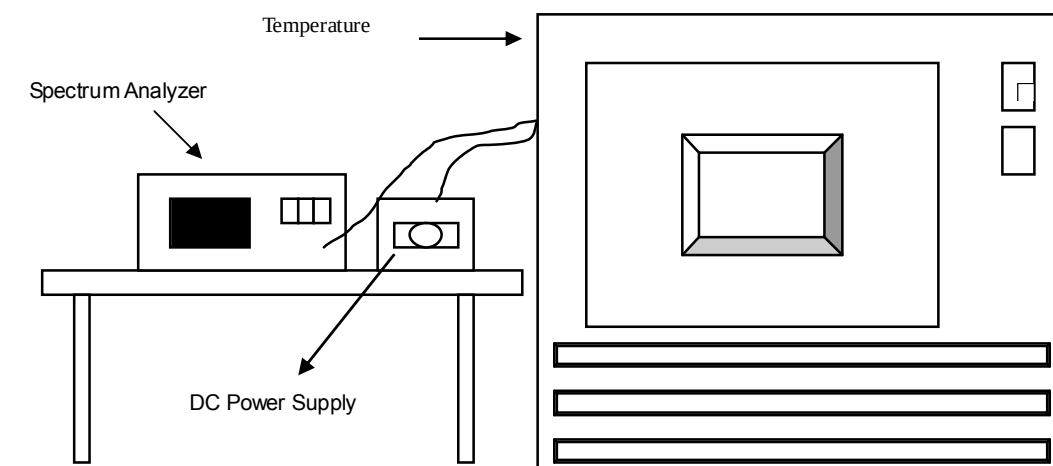

4.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.6.7 TEST RESULTS

Operating frequency: 5320MHz				Limit : $\pm 0.01\%$			
Temp. (°C)	Power supply (VAC)	2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
50	126.5	5320.0285	0.000536	5320.0264	0.000496	5320.0244	0.000459
	110	5320.0269	0.000506	5320.0250	0.000470	5320.0216	0.000406
	93.5	5320.0265	0.000498	5320.0254	0.000477	5320.0224	0.000421
40	126.5	5320.0347	0.000652	5320.0336	0.000632	5320.0328	0.000617
	110	5320.0335	0.000630	5320.034	0.000639	5320.0356	0.000669
	93.5	5320.0339	0.000637	5320.0338	0.000635	5320.0350	0.000658
30	126.5	5320.0147	0.000276	5320.0136	0.000256	5320.0121	0.000227
	110	5320.0135	0.000254	5320.0126	0.000237	5320.0115	0.000216
	93.5	5320.0143	0.000269	5320.0132	0.000248	5320.0118	0.000222
20	126.5	5319.9883	0.000220	5319.99	0.000188	5319.9906	0.000177
	110	5319.9893	0.000201	5319.99	0.000188	5319.9914	0.000162
	93.5	5319.9927	0.000137	5319.9938	0.000117	5319.9945	0.000103
10	126.5	5320.0258	0.000485	5320.0232	0.000436	5320.0196	0.000368
	110	5320.0244	0.000459	5320.0255	0.000479	5320.0246	0.000462
	93.5	5320.0252	0.000474	5320.0232	0.000436	5320.0200	0.000376
0	126.5	5320.0329	0.000618	5320.0313	0.000588	5320.0289	0.000543
	110	5320.0329	0.000618	5320.0315	0.000592	5320.0304	0.000571
	93.5	5320.0305	0.000573	5320.0294	0.000553	5320.0280	0.000526
-10	126.5	5319.9953	0.000088	5319.994	0.000113	5319.9926	0.000139
	110	5319.9965	0.000066	5319.995	0.000094	5319.9940	0.000113
	93.5	5319.9947	0.000100	5319.9945	0.000103	5319.9958	0.000079
-20	126.5	5320.0139	0.000261	5320.0125	0.000235	5320.0117	0.000220
	110	5320.0137	0.000258	5320.0126	0.000237	5320.0115	0.000216
	93.5	5320.0145	0.000273	5320.0145	0.000273	5320.0150	0.000282
-30	126.5	5320.0116	0.000218	5320.0116	0.000218	5320.0130	0.000244
	110	5320.0093	0.000175	5320.0096	0.000180	5320.0110	0.000207
	93.5	5320.0097	0.000182	5320.0102	0.000192	5320.0108	0.000203

4.7 BAND EDGES MEASUREMENT

4.7.1 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 15, 2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.2 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 1MHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.7.3 EUT OPERATING CONDITION



The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.7.4 TEST RESULTS



For signals in the restricted bands above and below the 5.15 to 5.35GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was applied to the average and peak field strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

The spectrum plots (Peak RBW=1MHz, VBW=3MHz; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

802.11a OFDM modulation(CH 1: 5180MHz)

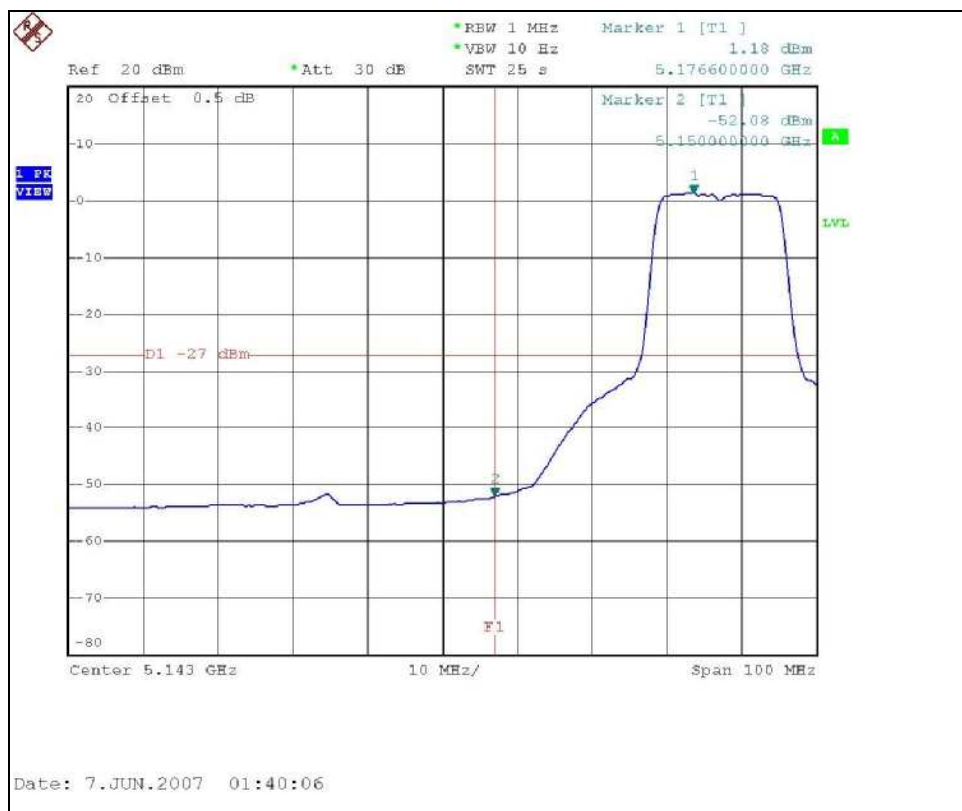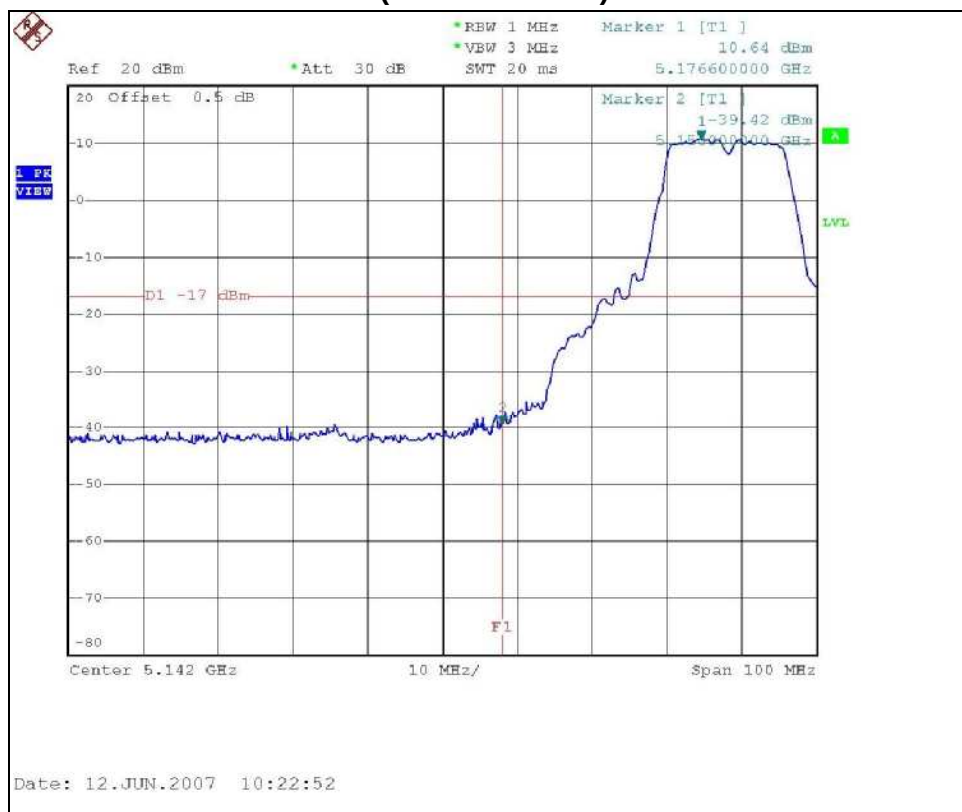


802.11a OFDM modulation (CH 8: 5320MHz)

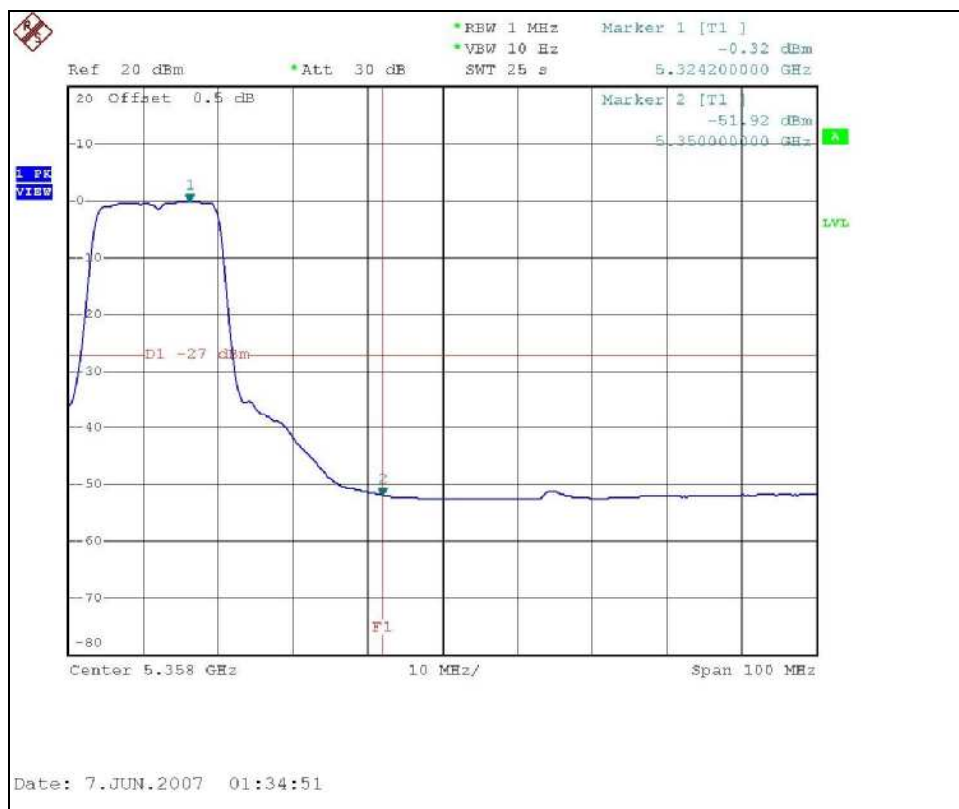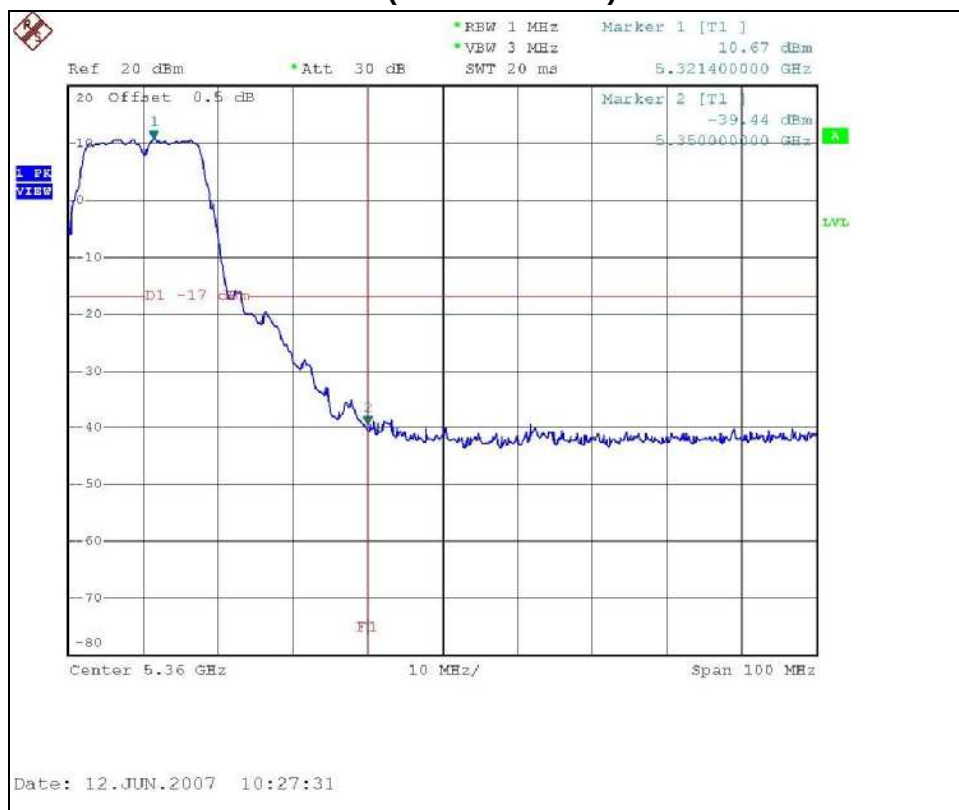


802.11a 10th conducted Harmonic

CH 1

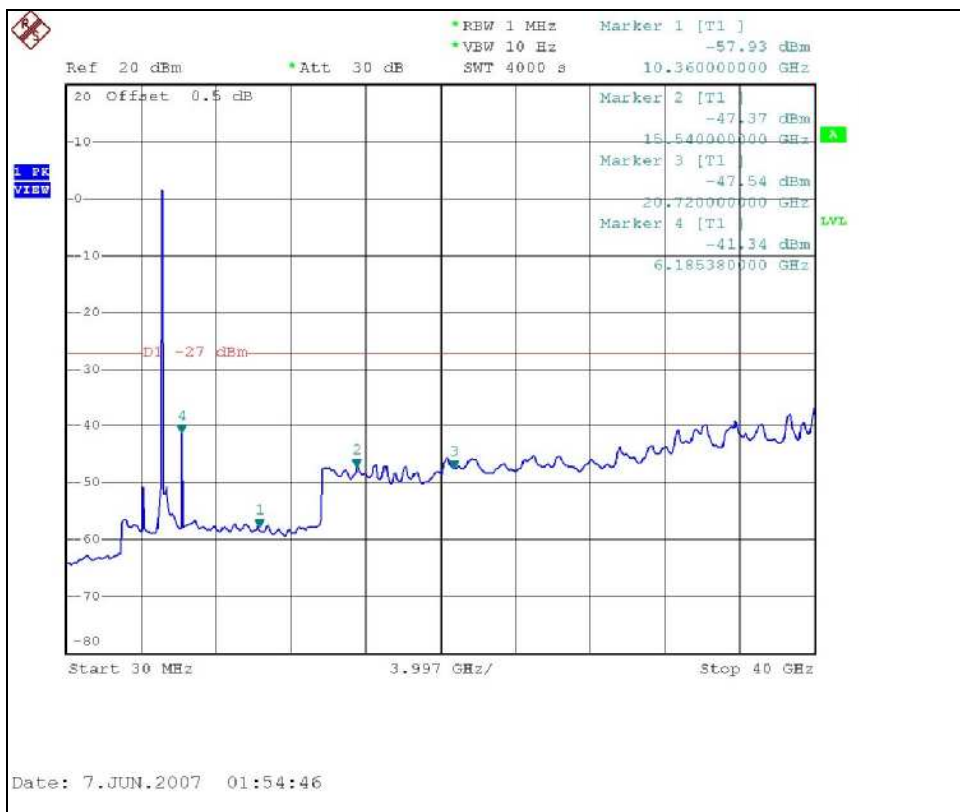



CH 8

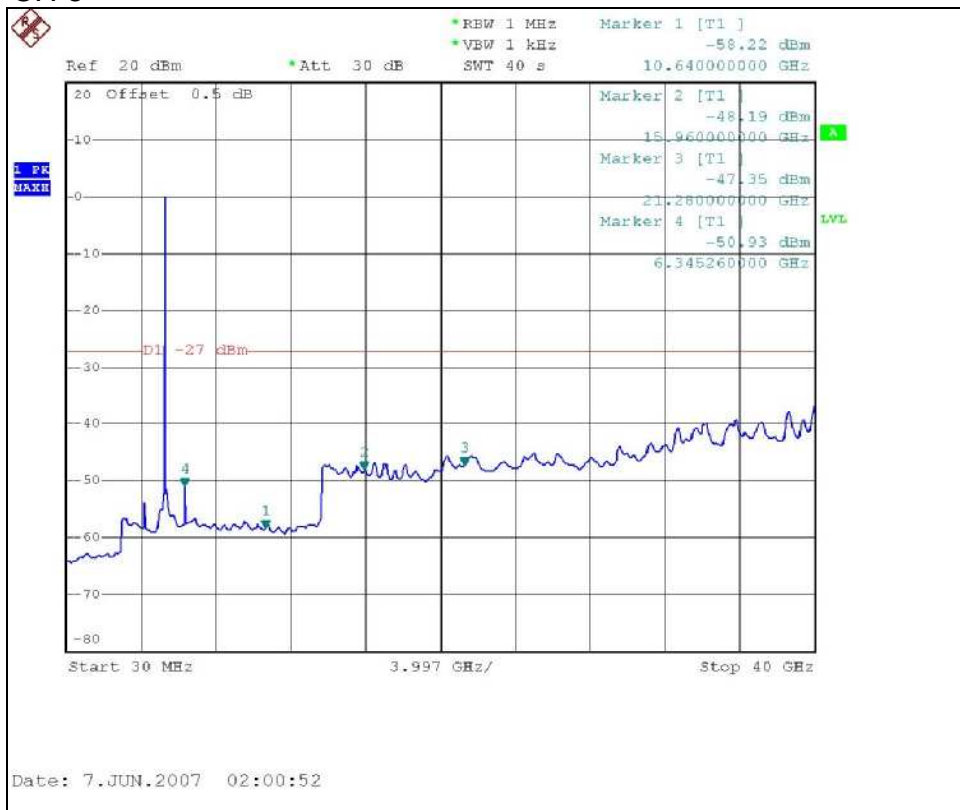



For signals in the restricted bands above and below the 5.47 to 5.725GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was applied to the average and peak field strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

The spectrum plots (Peak RBW=1MHz, VBW=3MHz; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

802.11a OFDM modulation(CH 9: 5500MHz)

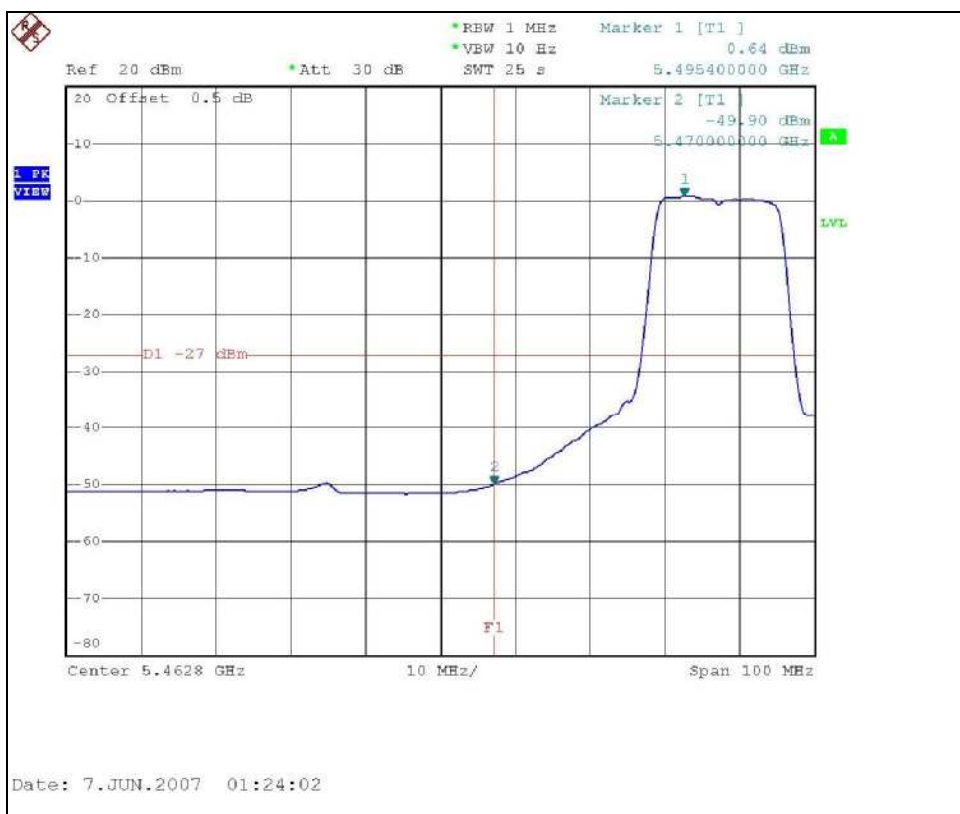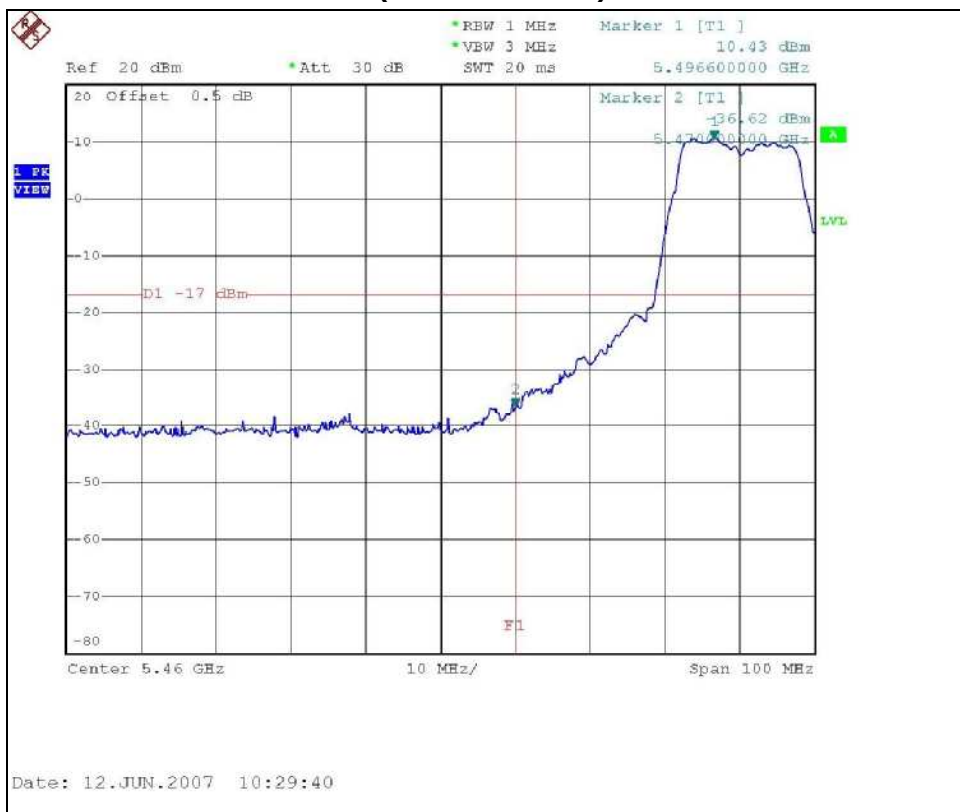

802.11a OFDM modulation (CH 19: 5700MHz)

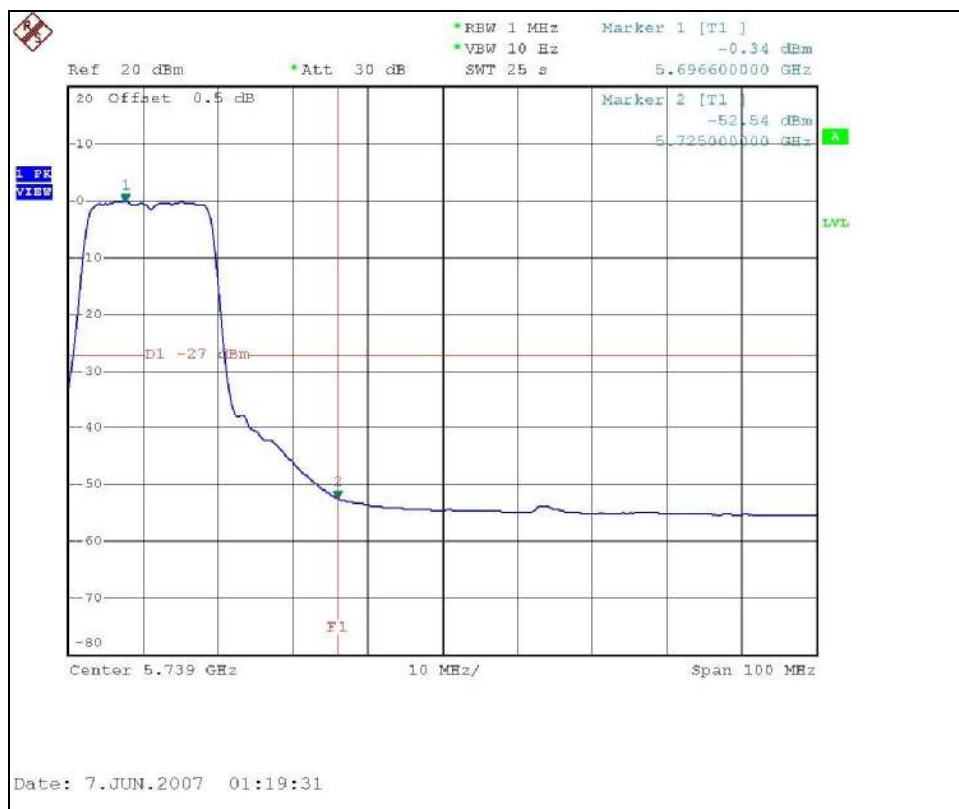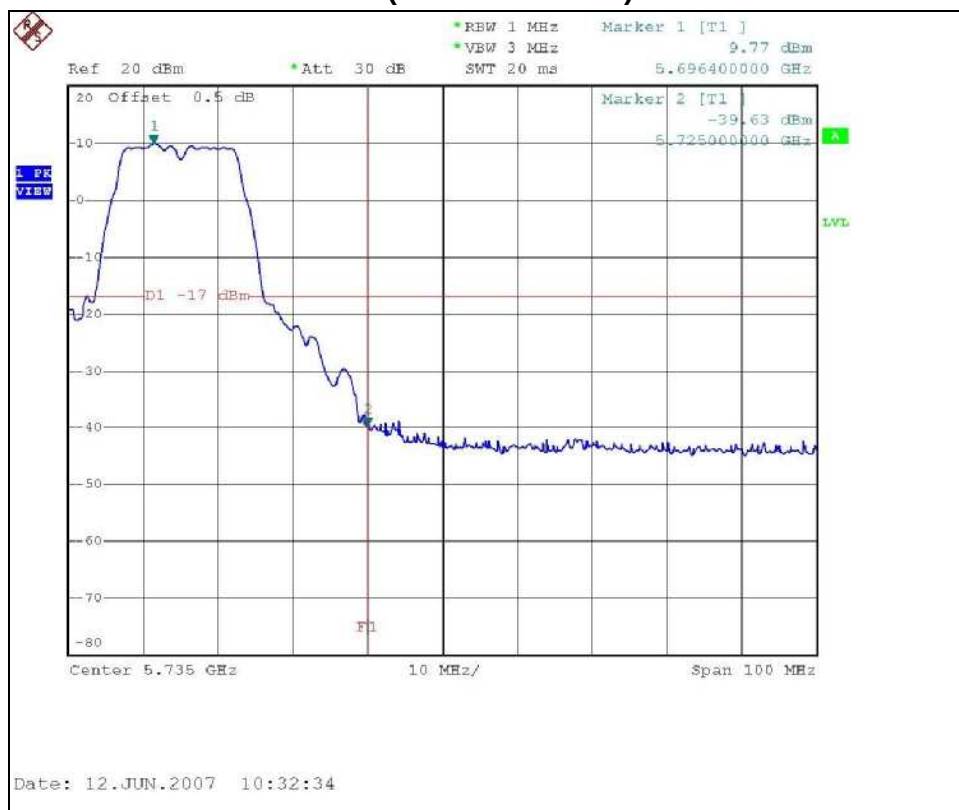


802.11a 10th conducted Harmonic

CH 9



CH 19

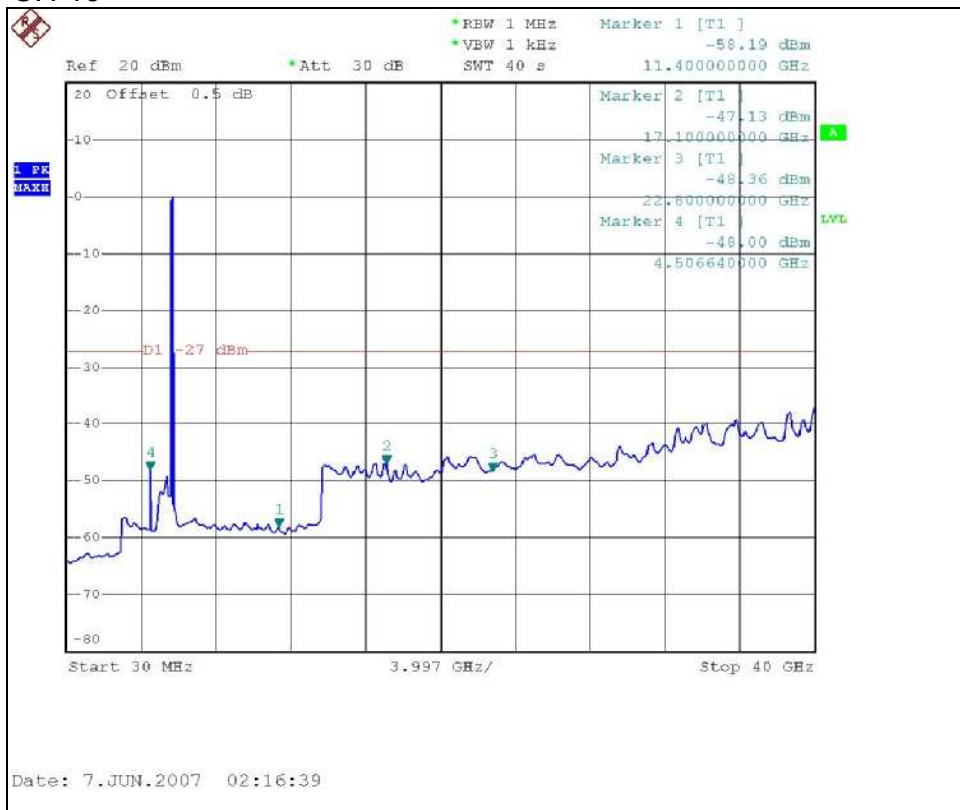

4.8 ANTENNA REQUIREMENT

4.8.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.8.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is one Multilayer Chip Antenna without connector. The maximum Gain of the antenna is 2dBi.

5. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, NCC
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also

APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.