



LABEL LOCATION

The label will be permanently affixed at a conspicuous location on the device.


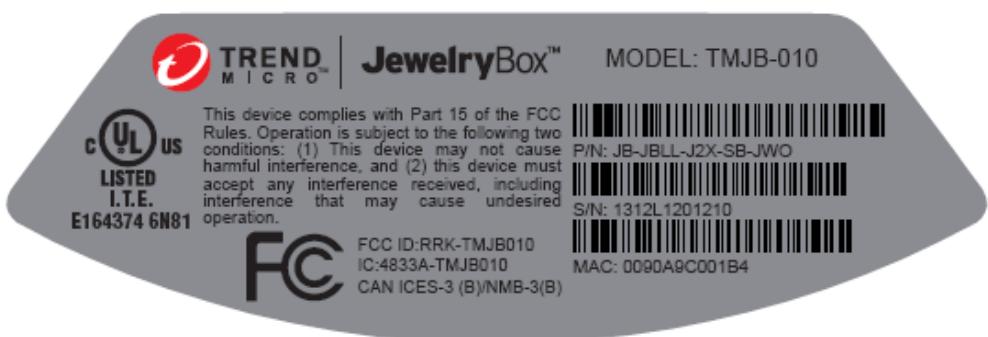


FCC ID : **RRK-TMJB010**

外印印刷稿
for printing using

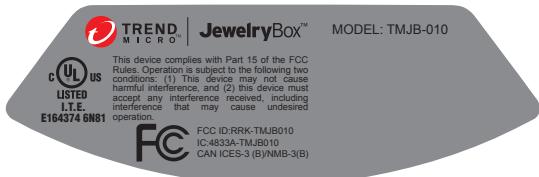

廠內碳帶加印稿
for additional printing using

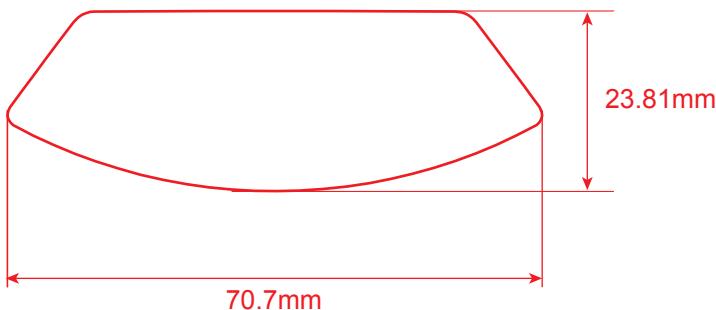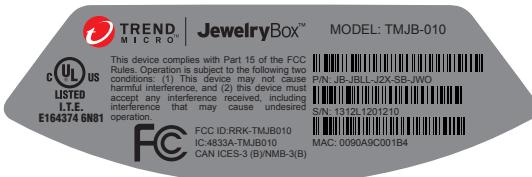

NOTICE :

1. Outline and aperture Cut Tooling Tolerance: +0.15mm
2. Please refer to the material construction.

Colors:

1. Background: Pantone 877 C
2. LOGO: ■ M100 Y100
□ White
3. Texts and Graphics: K100

Material Construction

#25 PET 霧膜/ Matte transparent PET film for Laminating
#50 白色特多龍/ Glossy White Polyester Label

Doc/No.	REV.DATE	ISSUED DATE	Material	Drawn ID: 2330 Date 2013/4/24 Joan Huang	Date 2013/4/24 Jenny Chang	Title TMJB-010 DeviceLabel Part No. 970000001TMG Rev. 1	TOL ±						
							RANGE	M1	M2	M3	I1	I2	B
			Heat Treatment				6 以下	0.1	0.1	.15	0.2	0.3	
							6~30	0.1	0.2	.15	.25	0.3	
							30~80	.15	.25	0.2	0.3	0.4	
							80~180	.15	0.3	.25	.45	0.5	
							180~315	0.2	0.5	0.4	0.5	0.6	
							315~800	0.3	0.6	0.6	0.6	0.8	
PAGE/OF		Version	Surface Treatment				Q'TY	Scale 1:1					
								Sheet of					