



FCC TEST REPORT

REPORT NO.: RF930112R02

MODEL NO.: WMP-G02V

RECEIVED: January 5, 2004

TESTED: January 5 ~ January 19, 2004

APPLICANT: Alpha Networks Inc.

ADDRESS: No. 8, Li-shing 7th Rd, Science-based
Industrial Park, Hsinchu, Taiwan.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 76 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA

Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
3.5	CONFIGURATION OF SYSTEM UNDER TEST	8
4	TEST TYPES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.1.2	TEST INSTRUMENTS	9
4.1.3	TEST PROCEDURES	10
4.1.4	DEVIATION FROM TEST STANDARD	10
4.1.5	TEST SETUP	11
4.1.6	EUT OPERATING CONDITIONS	11
4.1.7	TEST RESULTS	12
4.2	RADIATED EMISSION MEASUREMENT	18
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	18
4.2.2	TEST INSTRUMENTS	19
4.2.3	TEST PROCEDURES	20
4.2.4	DEVIATION FROM TEST STANDARD	20
4.2.5	TEST SETUP	21
4.2.6	EUT OPERATING CONDITIONS	21
4.2.7	TEST RESULTS	22
4.2.8	TEST RESULTS (A)	26
4.2.9	TEST RESULTS (B)	32
4.3	6dB BANDWIDTH MEASUREMENT.....	38
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	38
4.3.2	TEST INSTRUMENTS	38
4.3.3	TEST PROCEDURE	39
4.3.4	DEVIATION FROM TEST STANDARD	39
4.3.5	TEST SETUP	39
4.3.6	EUT OPERATING CONDITIONS	39



4.3.7	TEST RESULTS (A)	40
4.3.8	TEST RESULTS (B)	44
4.4	MAXIMUM PEAK OUTPUT POWER	48
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	48
4.4.2	TEST INSTRUMENTS	48
4.4.3	TEST PROCEDURES	49
4.4.4	DEVIATION FROM TEST STANDARD	49
4.4.5	TEST SETUP	49
4.4.6	EUT OPERATING CONDITIONS	49
4.4.7	TEST RESULTS (A)	50
4.4.8	TEST RESULTS (B)	51
4.5	POWER SPECTRAL DENSITY MEASUREMENT	52
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	52
4.5.2	TEST INSTRUMENTS	52
4.5.3	TEST PROCEDURE	53
4.5.4	DEVIATION FROM TEST STANDARD	53
4.5.5	TEST SETUP	53
4.5.6	EUT OPERATING CONDITIONS	53
4.5.7	TEST RESULTS (A)	54
4.5.8	TEST RESULTS (B)	58
4.6	BAND EDGES MEASUREMENT	62
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	62
4.6.2	TEST INSTRUMENTS	62
4.6.3	TEST PROCEDURE	62
4.6.4	DEVIATION FROM TEST STANDARD	62
4.6.5	EUT OPERATING CONDITION	62
4.6.6	TEST RESULTS (A)	63
4.6.7	TEST RESULTS (B)	66
4.7	ANTENNA REQUIREMENT	69
4.7.1	STANDARD APPLICABLE	69
4.7.2	ANTENNA CONNECTED CONSTRUCTION	69
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	70
6	INFORMATION ON THE TESTING LABORATORIES	76



1 CERTIFICATION

PRODUCT : High-Speed 2.4GHz WLAN Mini PCI Card
MODEL NO.: WMP-G02V
BRAND: Gateway
APPLICANT : Alpha Networks Inc.
TEST ITEM: ENGINEERING SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from January 5 to January 19, 2004. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

PREPARED BY: Windy Chou, **DATE:** January 27, 2004

Windy Chou

APPROVED BY: Ellis Wu, **DATE:** January 27, 2004

Ellis Wu, Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -15.31dB at 0.174MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -0.3dB at 2688.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

NOTE: The information of measurement uncertainty is available upon the customer's request.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	High-Speed 2.4GHz WLAN Mini PCI Card
MODEL NO.	WMP-G02V
POWER SUPPLY	3.3Vdc from host equipment
MODULATION TYPE	BPSK, QPSK, CCK, 16QAM, 64QAM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11, 5.5, 2, 1 Mbps 802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
MAXIMUM OUTPUT POWER	17.98dBm
ANTENNA TYPE	PIFA antenna with -3dBi antenna gain Dipole antenna with 2dBi antenna gain
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. There are two antenna types provided to this EUT. One is PIFA antenna with -3dBi gain, and another is Dipole antenna with 2dBi gain.
2. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
3. The EUT complies with IEEE 802.11g draft standards, and backwards compatible with IEEE 802.11b products.
4. For a more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1GHz, the channel 1, 6, and 11 were tested individually.
3. Transfer rate, 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst cases, were chosen for final test.
4. Two test results were presented in the following sections, the test result A was for CCK technique and the test result B was for OFDM technique.
5. In the test report, both PIFA and Dipole antennas were chosen for radiated emission measurement.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a High-Speed 2.4GHz WLAN Mini PCI Card. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)
ANSI C63.4 : 1992

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	Dell	PP01L	TW-09C748-12800-16M-5064	FCC DoC Approved
2	MODEM	ACEEX	1414	980020536	IFAXDM1414
3	PRINTER	EPSON	LQ-300+	DCGY017096	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
3	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

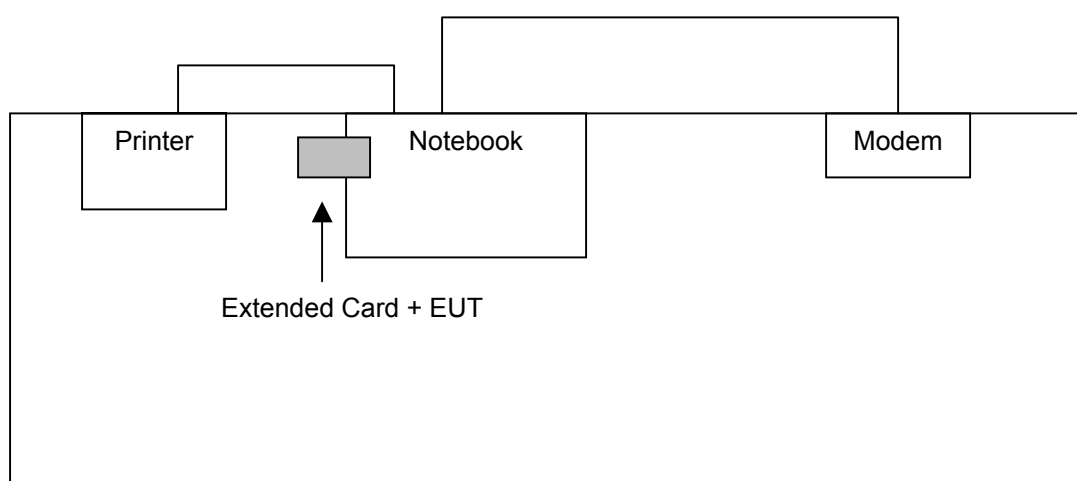

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS 30	828765/002	July 15, 2004
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	835239/001	Apr. 28, 2004
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	835239/002	Apr. 28, 2004
ROHDE & SCHWARZ 4-wire ISN	ENY41	935154/007	Apr. 30, 2004
ROHDE & SCHWARZ 2-wire ISN	ENY22	833823/026	Apr. 30, 2004
Software	Cond-V2M3	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C09.01	May 23, 2004
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010789	Jun. 04, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. “*”: These equipment are used for conducted telecom port test only (if tested).
 3. The test was performed in ADT Shielded Room No. 9.
 4. The VCCI Site Registration No. is C-1312.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

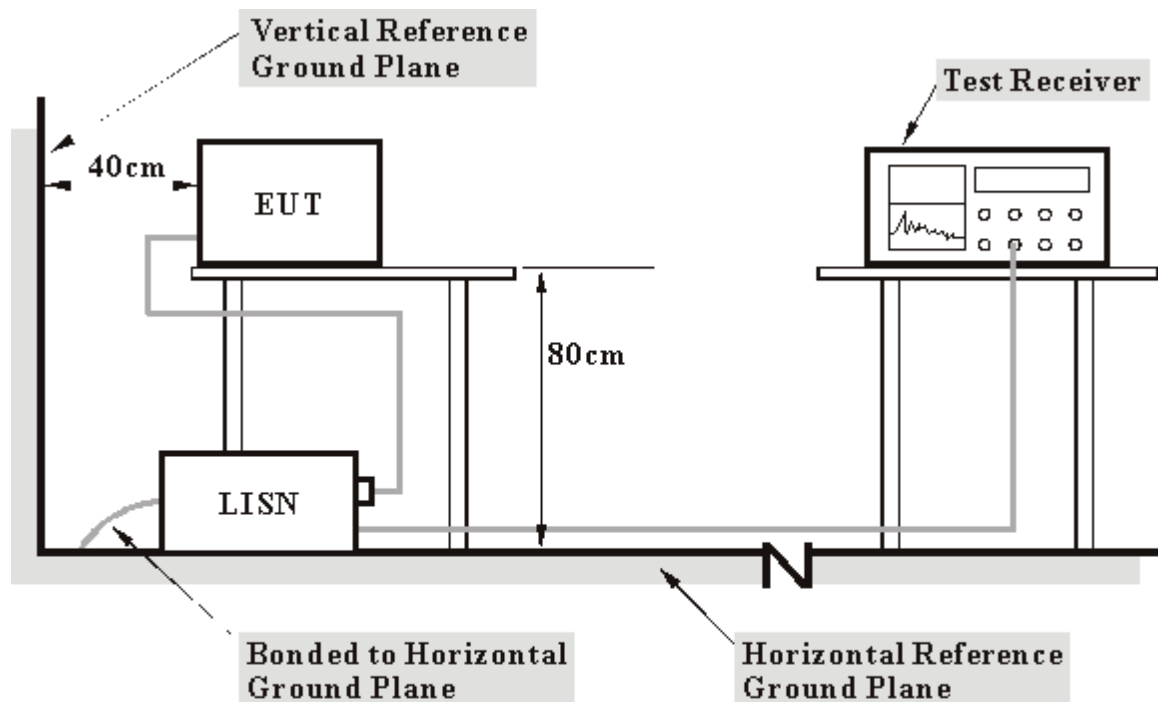

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


- a. Plug the EUT a notebook computer system placed on a testing table.
- b. The computer system ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system sent "H" messages to its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to printer, and the printer prints them on paper.
- f. Steps c-e are repeated.

4.1.7 TEST RESULTS

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
MODE	Channel 1	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg. C, 75%RH, 991 hPa	TESTED BY: Jun Wu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.174	0.10	49.34	-	49.44	-	64.75	54.75	-15.31	-
2	0.234	0.12	42.34	-	42.46	-	62.31	52.31	-19.85	-
3	3.263	0.26	27.91	-	28.17	-	56.00	46.00	-27.83	-
4	3.784	0.29	32.12	-	32.41	-	56.00	46.00	-23.59	-
5	20.075	1.10	25.86	-	26.96	-	60.00	50.00	-33.04	-
6	25.949	1.32	26.39	-	27.71	-	60.00	50.00	-32.29	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

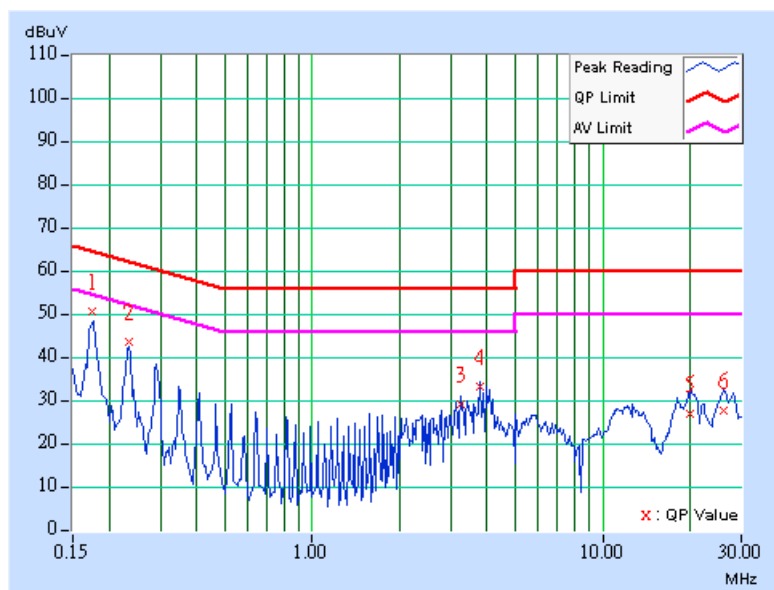

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 75%RH, 991 hPa	TESTED BY: Jun Wu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.174	0.10	48.74	-	48.84	-	64.77	54.77	-15.93	-
2	0.234	0.12	40.53	-	40.65	-	62.31	52.31	-21.66	-
3	0.813	0.20	25.25	-	25.45	-	56.00	46.00	-30.55	-
4	4.013	0.20	34.65	-	34.85	-	56.00	46.00	-21.15	-
5	20.492	0.91	24.66	-	25.57	-	60.00	50.00	-34.43	-
6	25.892	1.02	25.74	-	26.76	-	60.00	50.00	-33.24	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

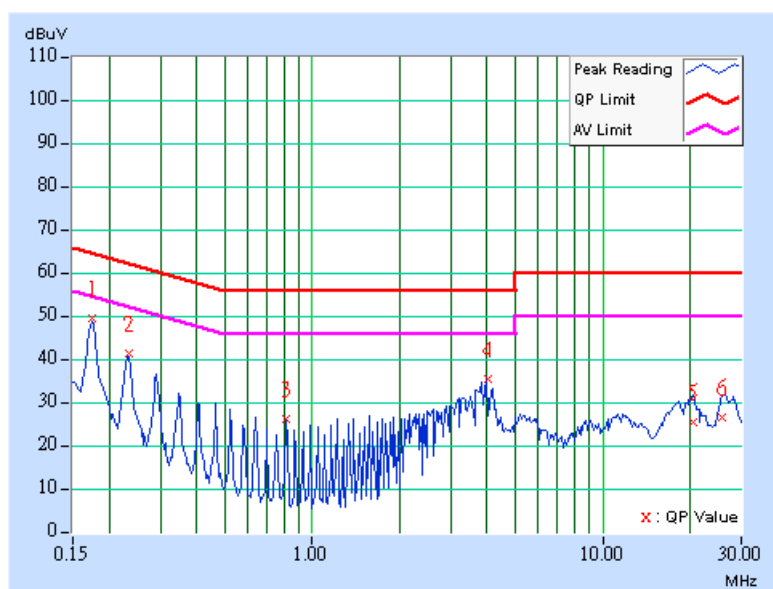

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg. C, 75%RH, 991 hPa	TESTED BY: Jun Wu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.174	0.10	49.10	-	49.20	-	64.77	54.77	-15.57	-
2	0.234	0.12	42.24	-	42.36	-	62.29	52.29	-19.93	-
3	2.332	0.22	25.94	-	26.16	-	56.00	46.00	-29.84	-
4	4.021	0.30	34.21	-	34.51	-	56.00	46.00	-21.49	-
5	20.453	1.12	26.48	-	27.60	-	60.00	50.00	-32.40	-
6	27.965	1.36	26.83	-	28.19	-	60.00	50.00	-31.81	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

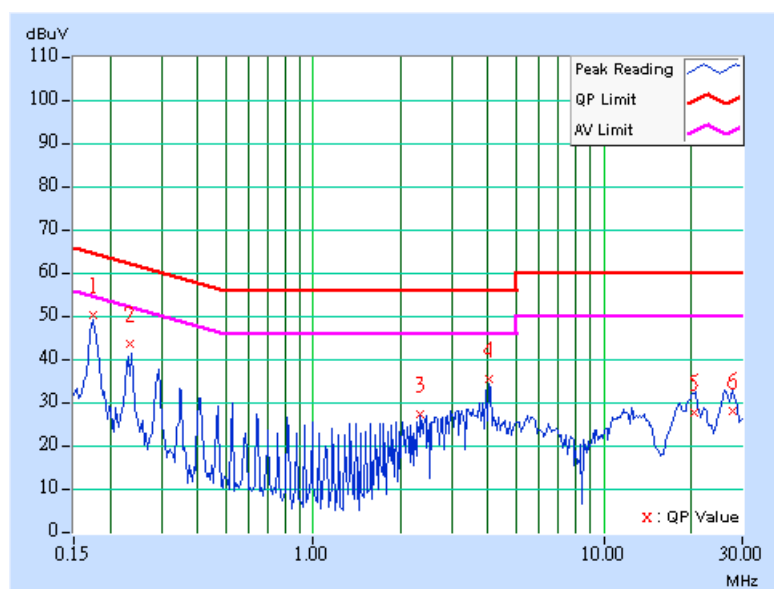

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 75%RH, 991 hPa	TESTED BY: Jun Wu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.174	0.10	48.22	-	48.32	-	64.77	54.77	-16.45	-
2	0.234	0.12	40.83	-	40.95	-	62.31	52.31	-21.36	-
3	1.984	0.20	25.13	-	25.33	-	56.00	46.00	-30.67	-
4	3.793	0.20	32.82	-	33.02	-	56.00	46.00	-22.98	-
5	19.856	0.90	24.82	-	25.72	-	60.00	50.00	-34.28	-
6	25.742	1.01	25.58	-	26.59	-	60.00	50.00	-33.41	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

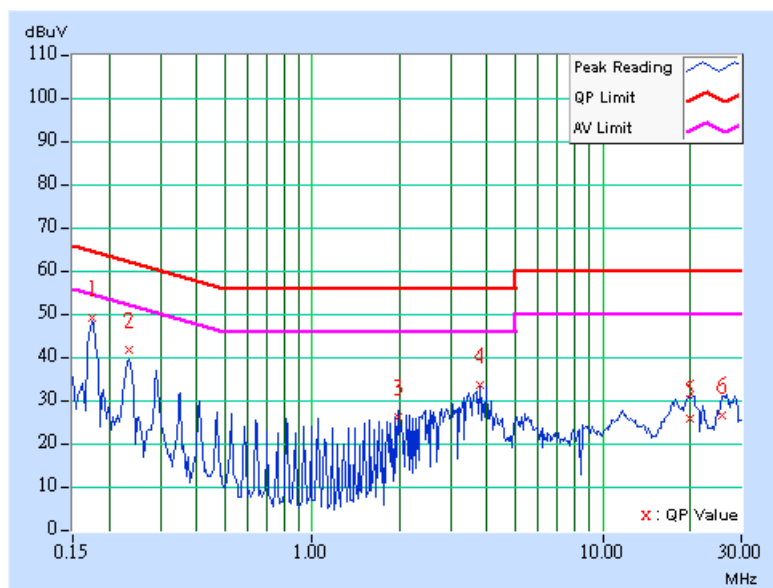

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg. C, 75%RH, 991 hPa	TESTED BY: Jun Wu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.174	0.10	48.68	-	48.78	-	64.77	54.77	-15.99	-
2	0.234	0.12	42.44	-	42.56	-	62.31	52.31	-19.75	-
3	3.388	0.27	28.90	-	29.17	-	56.00	46.00	-26.83	-
4	4.090	0.30	31.66	-	31.96	-	56.00	46.00	-24.04	-
5	20.327	1.11	27.87	-	28.98	-	60.00	50.00	-31.02	-
6	26.282	1.33	27.75	-	29.08	-	60.00	50.00	-30.92	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

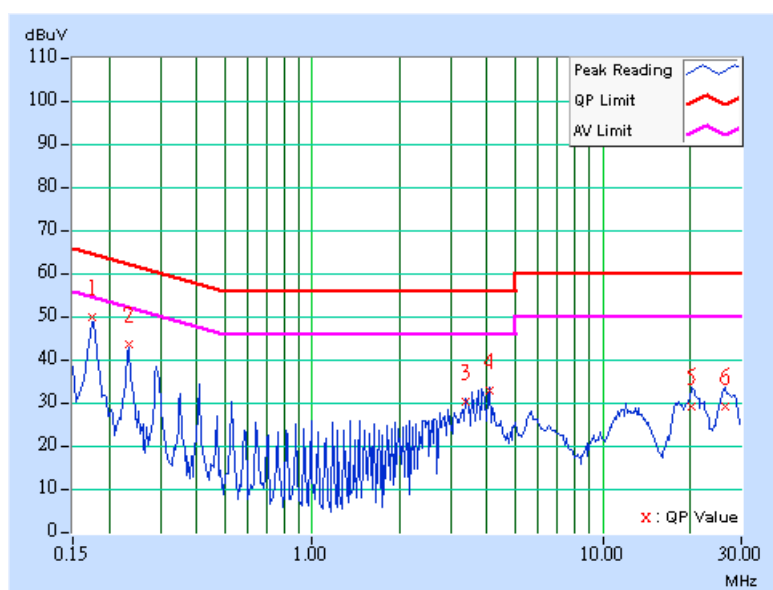

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 75%RH, 991 hPa	TESTED BY: Jun Wu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.174	0.10	48.14	-	48.24	-	64.77	54.77	-16.53	-
2	0.234	0.12	41.01	-	41.13	-	62.31	52.31	-21.18	-
3	2.686	0.20	26.61	-	26.81	-	56.00	46.00	-29.19	-
4	3.853	0.20	32.34	-	32.54	-	56.00	46.00	-23.46	-
5	20.540	0.91	25.80	-	26.71	-	60.00	50.00	-33.29	-
6	26.153	1.02	26.70	-	27.72	-	60.00	50.00	-32.28	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

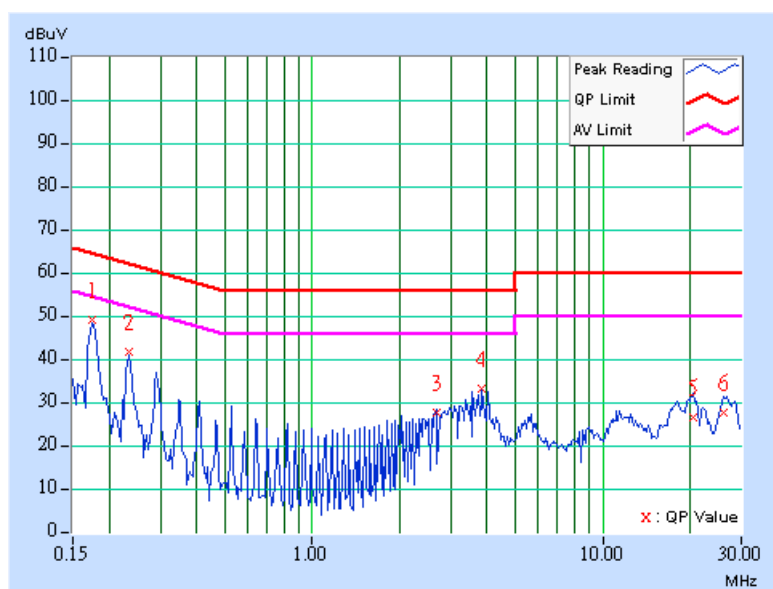

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
*HP Spectrum Analyzer	8593E	3911A07465	Jul. 07, 2004
*HP Preamplifier	8447D	2944A10386	Aug. 12, 2004
*HP Preamplifier	8449B	3008A01201	Nov. 11, 2004
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Jun. 26, 2004
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
*SCHAFFNER TEST RECEIVER	SCR 3501	409	Nov. 06, 2004
* SCHAFFNER BILOG Antenna	CBL6111C	2727	Jul. 15, 2004
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	Jun. 30, 2004
* ADT. Turn Table	TT100	0201	NA
* ADT. Tower	AT100	0201	NA
* Software	ADT_Radiated_V5.14	NA	NA
* ANRITSU RF Switches	MP59B	6100237246	Oct. 17, 2004
* TIMES RF cable	LMR-600	CABLE-ST10-01	Oct. 17, 2004

- NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. "*" = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 10.
5. The VCCI Site Registration No. is R-1625.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

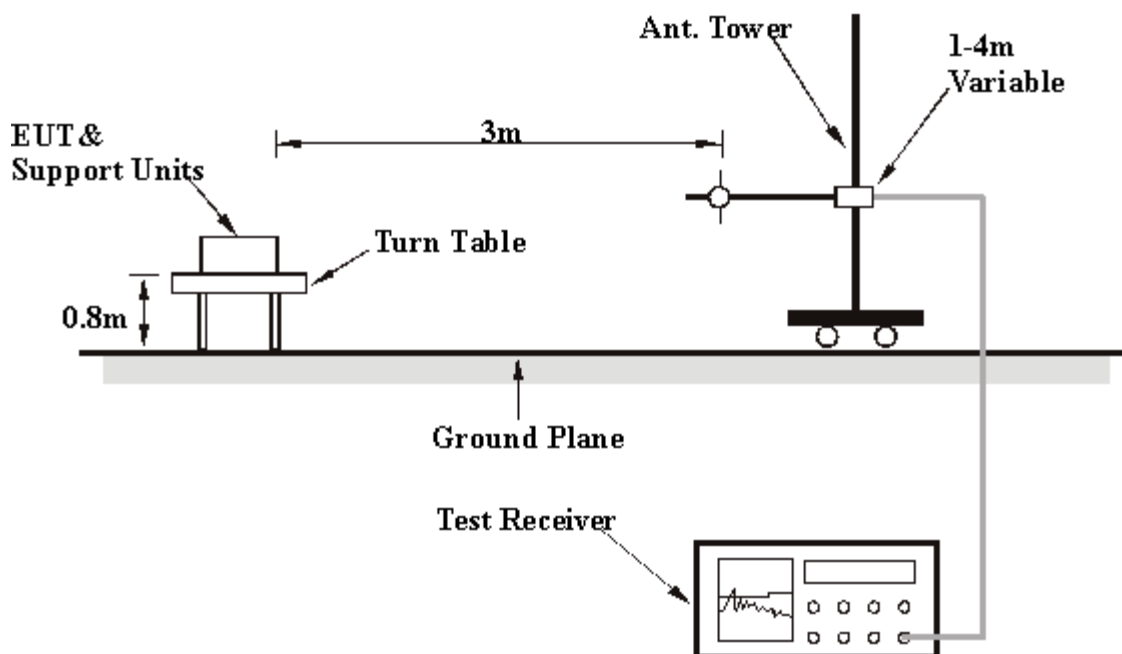

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7. TEST RESULTS

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
MODE	Channel 11	FREQUENCY RANGE	Below 1000 MHz
ANTENNA TYPE	Dipole antenna	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20 deg. C, 65 % RH, 991 hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY: Jun Wu			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.74	37.05 QP	40.00	-2.95	2.37 H	151	30.94	6.11
2	133.35	38.25 QP	43.50	-5.25	2.22 H	190	25.76	12.49
3	167.28	34.46 QP	43.50	-9.04	2.24 H	0	23.95	10.51
4	200.97	41.18 QP	43.50	-2.32	1.88 H	193	30.64	10.54
5	233.68	39.16 QP	46.00	-6.84	1.52 H	226	26.37	12.79
6	267.80	34.20 QP	46.00	-11.80	1.41 H	228	18.94	15.26
7	333.00	32.17 QP	46.00	-13.83	1.00 H	190	15.23	16.94
8	378.00	36.21 QP	46.00	-9.79	1.00 H	166	17.74	18.47
9	400.00	35.94 QP	46.00	-10.06	1.00 H	139	16.52	19.42

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
MODE	Channel 11	FREQUENCY RANGE	Below 1000 MHz
ANTENNA TYPE	Dipole antenna	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	23 deg. C, 70 % RH, 991 hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY: Jun Wu			

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.70	29.99 QP	40.00	-10.01	1.00 V	113	23.88	6.11
2	119.98	28.23 QP	43.50	-15.27	1.00 V	240	15.78	12.45
3	133.88	30.85 QP	43.50	-12.65	1.00 V	4	18.36	12.49
4	153.80	29.21 QP	43.50	-14.29	1.00 V	136	17.91	11.30
5	160.00	27.46 QP	43.50	-16.04	1.00 V	316	16.70	10.76
6	167.40	29.82 QP	43.50	-13.68	1.00 V	359	19.31	10.51
7	200.15	34.63 QP	43.50	-8.87	1.00 V	160	24.15	10.48
8	239.98	31.22 QP	46.00	-14.78	1.00 V	264	17.99	13.23
9	381.00	31.97 QP	46.00	-14.03	1.64 V	103	13.37	18.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
MODE	Channel 11	FREQUENCY RANGE	Below 1000 MHz
ANTENNA TYPE	PIFA antenna	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20 deg. C, 65 % RH, 991 hPa	DETECTOR FUNCTION	Quasi-Peak

TESTED BY: Jun Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
2	66.77	35.61 QP	40.00	-4.39	2.46 H	238	29.50	6.11
3	133.89	38.25 QP	43.50	-5.25	2.19 H	253	25.76	12.49
4	156.20	29.03 QP	43.50	-14.47	2.19 H	344	17.94	11.09
5	167.40	37.05 QP	43.50	-6.45	2.10 H	13	26.54	10.51
6	200.97	41.03 QP	43.50	-2.47	1.97 H	189	30.49	10.54
7	234.38	41.64 QP	46.00	-4.36	1.53 H	170	28.80	12.84
8	266.27	36.30 QP	46.00	-9.70	1.53 H	109	20.99	15.31
9	302.00	36.66 QP	46.00	-9.34	1.00 H	217	20.33	16.33
10	334.00	36.71 QP	46.00	-9.29	1.00 H	259	19.75	16.96
11	379.00	37.28 QP	46.00	-8.72	1.00 H	297	18.76	18.52
12	401.00	38.11 QP	46.00	-7.89	1.00 H	324	18.67	19.44

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
MODE	Channel 11	FREQUENCY RANGE	Below 1000 MHz
ANTENNA TYPE	PIFA antenna	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20 deg. C, 65 % RH, 991 hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY: Jun Wu			

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.85	32.96 QP	40.00	-7.04	1.00 V	0	26.84	6.12
2	120.00	27.74 QP	43.50	-15.76	1.00 V	271	15.29	12.45
3	133.63	31.75 QP	43.50	-11.75	1.00 V	357	19.26	12.49
4	166.85	31.12 QP	43.50	-12.38	1.00 V	24	20.59	10.53
5	200.28	32.11 QP	43.50	-11.39	1.00 V	317	21.62	10.49
6	233.50	33.69 QP	46.00	-12.31	1.00 V	184	20.91	12.78
7	239.80	30.84 QP	46.00	-15.16	1.00 V	142	17.62	13.22
8	380.00	31.60 QP	46.00	-14.40	1.75 V	114	13.04	18.56
9	400.00	30.25 QP	46.00	-15.75	1.88 V	145	10.83	19.42

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

4.2.8. TEST RESULTS (A)

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
ANTENNA TYPE	Dipole antenna	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	27 deg. C, 58 % RH, 991 hPa	DETECTOR FUNCTION	Peak (PK) Average (AV)
TESTED BY: Tony Chen			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.00	38.30 PK	74.00	-35.70	1.20 H	101	7.90	30.40
2	2390.00	49.40 PK	74.00	-24.60	1.24 H	269	18.90	30.40
3	*2412.00	100.80 PK			1.23 H	37	70.20	30.50
3	*2412.00	95.50 AV			1.23 H	37	65.00	30.50
4	2688.00	46.90 PK	74.00	-27.10	1.03 H	37	15.60	31.30
5	4824.00	41.40 PK	74.00	-32.60	1.49 H	209	5.20	36.20
6	7236.00	46.60 PK	74.00	-27.40	1.18 H	155	4.90	41.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.00	45.60 PK	74.00	-28.40	1.23 V	23	15.20	30.40
2	2390.00	58.40 PK	74.00	-15.60	1.24 V	57	28.00	30.40
2	2390.00	51.80 AV	54.00	-2.20	1.24 V	57	21.40	30.40
3	*2412.00	110.80 PK			1.14 V	1	80.30	30.50
3	*2412.00	105.00 AV			1.14 V	1	74.50	30.50
4	2688.00	52.10 PK	74.00	-21.90	1.27 V	253	20.90	31.30
4	2688.00	51.70 AV	54.00	-2.30	1.27 V	253	20.40	31.30
5	4824.00	48.40 PK	74.00	-25.60	1.43 V	262	12.10	36.20
6	7236.00	46.00 PK	74.00	-28.00	1.26 V	336	4.30	41.70

- REMARKS:**
1. Emission level (dBuV/m)=Raw Value (dBuV) + Correction Factor (dB)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
ANTENNA TYPE	Dipole antenna	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	27 deg. C, 58% RH, 991 hPa	DETECTOR FUNCTION	Peak (PK) Average (AV)
TESTED BY: Tony Chen			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2356.00	47.20 PK	74.00	-26.80	1.00 H	129	16.90	30.30
2	*2437.00	103.20 PK			1.20 H	34	72.60	30.70
2	*2437.00	96.60 AV			1.20 H	34	65.90	30.70
3	2485.00	37.40 PK	74.00	-36.60	1.02 H	84	6.40	30.90
4	2688.00	45.40 PK	74.00	-28.60	1.30 H	355	14.10	31.30
5	4874.00	40.80 PK	74.00	-33.20	1.43 H	71	4.30	36.50
6	7311.00	46.70 PK	74.00	-27.30	1.48 H	51	4.90	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2350.00	54.90 PK	74.00	-19.10	1.45 V	50	24.60	30.30
1	2350.00	44.40 AV	54.00	-9.60	1.45 V	50	14.10	30.30
2	*2437.00	114.10 PK			1.09 V	360	83.40	30.70
2	*2437.00	107.30 AV			1.09 V	360	76.60	30.70
3	2484.00	52.30 PK	74.00	-21.70	1.07 V	359	21.40	31.00
3	2484.00	41.30 AV	54.00	-12.70	1.07 V	359	10.30	31.00
4	2688.00	54.10 PK	74.00	-19.90	1.04 V	307	22.80	31.30
4	2688.00	53.10 AV	54.00	-0.90	1.04 V	307	21.80	31.30
5	4874.00	46.40 PK	74.00	-27.60	1.20 V	261	10.00	36.50
6	7311.00	48.00 PK	74.00	-26.00	1.29 V	232	6.30	41.80

- REMARKS:**
1. Emission level (dBuV/m)=Raw Value (dBuV) + Correction Factor (dB)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
ANTENNA TYPE	Dipole antenna	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	27 deg. C, 58 % RH, 991 hPa	DETECTOR FUNCTION	Peak (PK) Average (AV)
TESTED BY: Tony Chen			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.50 PK			1.18 H	30	71.70	30.80
1	*2462.00	95.60 AV			1.18 H	30	64.80	30.80
2	2483.50	50.40 PK	74.00	-23.60	1.24 H	235	19.40	31.00
3	2487.00	39.00 PK	74.00	-35.00	1.20 H	221	8.00	30.90
4	2688.00	52.30 PK	74.00	-21.70	1.04 H	32	21.10	31.30
4	2688.00	51.60 AV	54.00	-2.40	1.04 H	32	20.30	31.30
5	4924.00	41.10 PK	74.00	-32.90	1.10 H	80	4.40	36.70
6	7386.00	46.30 PK	74.00	-27.70	1.15 H	51	4.50	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.10 PK			1.10 V	360	81.30	30.80
1	*2462.00	105.10 AV			1.10 V	360	74.20	30.80
2	2483.50	58.60 PK	74.00	-15.40	1.02 V	254	27.70	31.00
2	2483.50	50.50 AV	54.00	-3.50	1.02 V	254	19.60	31.00
3	2487.00	41.90 PK	74.00	-32.10	1.14 V	20	11.00	30.90
4	2688.00	54.50 PK	74.00	-19.50	1.24 V	252	23.20	31.30
4	2688.00	53.60 AV	54.00	-0.40	1.24 V	252	22.30	31.30
5	4924.00	46.50 PK	74.00	-27.50	1.29 V	128	9.80	36.70
6	7386.00	49.80 PK	74.00	-24.20	1.72 V	12	7.90	41.80

- REMARKS:**
1. Emission level (dBuV/m)=Raw Value (dBuV) + Correction Factor (dB)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
ANTENNA TYPE	PIFA antenna	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20 deg. C, 65 % RH, 991 hPa	DETECTOR FUNCTION	Peak (PK) Average (AV)
TESTED BY: Jun Wu			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	50.11 PK	74.00	-23.89	1.00 H	237	19.81	30.30
2	*2412.00	104.87 PK			1.00 H	237	74.63	30.24
2	*2412.00	97.86 AV			1.00 H	237	67.62	30.24
3	4824.00	44.72 PK	74.00	-29.28	1.18 H	68	8.20	36.53

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	48.76 PK	74.00	-25.24	1.00 V	234	18.46	30.30
2	*2412.00	103.52 PK			1.00 V	234	73.28	30.24
2	*2412.00	95.80 AV			1.00 V	234	65.56	30.24
3	4824.00	43.15 PK	74.00	-30.85	1.12 V	265	6.63	36.53

- REMARKS:**
1. Emission level (dBuV/m)=Raw Value (dBuV) + Correction Factor (dB)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
ANTENNA TYPE	PIFA antenna	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20 deg. C, 65% RH, 991 hPa	DETECTOR FUNCTION	Peak (PK) Average (AV)
TESTED BY: Jun Wu			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	102.65 PK			1.00 H	325	72.34	30.31
1	*2437.00	95.22 AV			1.00 H	325	64.91	30.31
2	4874.00	43.53 PK	74.00	-30.47	1.33 H	145	6.84	36.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	102.69 PK			1.00 V	241	72.38	30.31
1	*2437.00	95.24 AV			1.00 V	241	64.93	30.31
2	4874.00	43.66 PK	74.00	-30.34	1.14 V	196	6.97	36.69

- REMARKS:**
1. Emission level (dBuV/m)=Raw Value (dBuV) + Correction Factor (dB)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.



EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
ANTENNA TYPE	PIFA antenna	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20 deg. C, 65 % RH, 991 hPa	DETECTOR FUNCTION	Peak (PK) Average (AV)
TESTED BY: Jun Wu			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.37 PK			1.00 H	321	68.00	30.37
1	*2462.00	90.81 AV			1.00 H	321	60.44	30.37
2	2483.50	41.53 PK	74.00	-32.47	1.00 H	321	11.10	30.43
3	4924.00	43.63 PK	74.00	-30.37	1.31 H	256	6.78	36.85

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.81 PK			1.00 V	325	68.44	30.37
1	*2462.00	91.07 AV			1.00 V	325	60.70	30.37
2	2483.50	41.97 PK	74.00	-32.03	1.00 V	325	11.54	30.43
3	4924.00	43.79 PK	74.00	-30.21	1.09 V	220	6.94	36.85

- REMARKS:**
1. Emission level (dBuV/m)=Raw Value (dBuV) + Correction Factor (dB)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

4.2.9. TEST RESULTS (B)

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
ANTENNA TYPE	Dipole antenna	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	27 deg. C, 58 % RH, 991 hPa	DETECTOR FUNCTION	Peak (PK) Average (AV)
TESTED BY: Tony Chen			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	48.40 PK	74.00	-25.60	1.24 H	321	17.90	30.40
2	*2412.00	95.60 PK			1.00 H	315	65.10	30.50
2	*2412.00	87.90 AV			1.00 H	315	57.30	30.50
3	2688.00	48.40 PK	74.00	-25.60	1.10 H	320	17.10	31.30
4	4824.00	42.40 PK	74.00	-31.60	1.13 H	99	6.20	36.20
5	7236.00	47.90 PK	74.00	-26.10	1.02 H	292	6.20	41.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.40 PK	74.00	-16.60	1.07 V	235	26.90	30.40
1	2390.00	49.60 AV	54.00	-4.40	1.07 V	235	19.20	30.40
2	*2412.00	104.80 PK			1.02 V	216	74.20	30.50
2	*2412.00	97.80 AV			1.02 V	216	67.20	30.50
3	2688.00	54.10 PK	74.00	-19.90	1.08 V	333	22.80	31.30
3	2688.00	53.00 AV	54.00	-1.00	1.08 V	333	21.70	31.30
4	3096.00	41.60 PK	74.00	-32.40	1.69 V	175	9.30	32.40
5	4824.00	40.40 PK	74.00	-33.60	1.00 V	33	4.20	36.20
6	7236.00	47.90 PK	74.00	-26.10	1.09 V	173	6.20	41.70

REMARKS:

1. Emission level (dBuV/m)=Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
ANTENNA TYPE	Dipole antenna	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	27 deg. C, 58% RH, 991 hPa	DETECTOR FUNCTION	Peak (PK) Average (AV)
TESTED BY: Tony Chen			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2355.00	42.10 PK	74.00	-31.90	1.22 H	30	11.80	30.30
2	*2437.00	94.60 PK			1.22 H	63	63.90	30.70
2	*2437.00	88.60 AV			1.22 H	63	57.90	30.70
3	2490.00	38.20 PK	74.00	-35.80	1.47 H	68	7.30	30.90
4	2688.00	43.40 PK	74.00	-30.60	1.24 H	60	12.10	31.30
5	4874.00	39.80 PK	74.00	-34.20	1.19 H	65	3.40	36.50
6	7311.00	47.70 PK	74.00	-26.30	1.35 H	59	5.90	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	51.90 PK	74.00	-22.10	1.16 V	350	21.60	30.30
1	2360.00	42.70 AV	54.00	-11.30	1.16 V	350	12.40	30.30
2	*2437.00	103.90 PK			1.02 V	65	73.20	30.70
2	*2437.00	96.40 AV			1.02 V	65	65.70	30.70
3	2483.50	41.90 PK	74.00	-32.10	1.14 V	68	11.00	31.00
4	2688.00	52.10 PK	74.00	-21.90	1.53 V	251	20.90	31.30
4	2688.00	50.90 AV	54.00	-3.10	1.53 V	251	19.70	31.30
5	4874.00	42.50 PK	74.00	-31.50	1.06 V	141	6.10	36.50
6	7311.00	47.40 PK	74.00	-26.60	1.35 V	44	5.70	41.80

- REMARKS:**
1. Emission level (dBuV/m)=Raw Value (dBuV) + Correction Factor (dB)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
ANTENNA TYPE	Dipole antenna	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	27 deg. C, 58 % RH, 991 hPa	DETECTOR FUNCTION	Peak (PK) Average (AV)
TESTED BY: Tony Chen			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	100.30 PK			1.45 H	331	69.50	30.80
1	*2462.00	93.60 AV			1.45 H	331	62.70	30.80
2	2483.50	55.30 PK	74.00	-18.70	1.27 H	201	24.40	31.00
2	2483.50	47.10 AV	54.00	-6.90	1.27 H	201	16.20	31.00
3	2688.00	47.00 PK	74.00	-27.00	1.00 H	311	15.70	31.30
4	4924.00	42.40 PK	74.00	-31.60	1.28 H	184	5.70	36.70
5	7386.00	47.80 PK	74.00	-26.20	1.37 H	178	5.90	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.70 PK			1.18 V	329	76.90	30.80
1	*2462.00	98.00 AV			1.18 V	329	67.20	30.80
2	2483.50	60.40 PK	74.00	-13.60	1.18 V	324	29.40	31.00
2	2483.50	53.30 AV	54.00	-0.70	1.18 V	324	22.40	31.00
3	2688.00	55.10 PK	74.00	-18.90	1.17 V	351	23.90	31.30
3	2688.00	53.70 AV	54.00	-0.30	1.17 V	351	22.40	31.30
4	4924.00	41.50 PK	74.00	-32.50	1.24 V	143	4.80	36.70
5	7386.00	48.00 PK	74.00	-26.00	1.16 V	316	6.20	41.80

- REMARKS:**
1. Emission level (dBuV/m)=Raw Value (dBuV) + Correction Factor (dB)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
ANTENNA TYPE	PIFA antenna	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20 deg. C, 65 % RH, 991 hPa	DETECTOR FUNCTION	Peak (PK) Average (AV)
TESTED BY: Jun Wu			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	50.24 PK	74.00	-23.76	1.00 H	239	19.94	30.30
2	*2412.00	96.43 PK			1.00 H	239	66.19	30.24
2	*2412.00	87.47 AV			1.00 H	239	57.23	30.24
3	4824.00	42.39 PK	74.00	-31.61	1.25 H	296	5.87	36.53

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	50.24 PK	74.00	-23.76	1.00 V	239	19.94	30.30
2	*2412.00	96.43 PK			1.00 V	239	66.19	30.24
2	*2412.00	87.47 AV			1.00 V	239	57.23	30.24
3	4824.00	42.39 PK	74.00	-31.61	1.25 V	296	5.87	36.53

- REMARKS:**
1. Emission level (dBuV/m)=Raw Value (dBuV) + Correction Factor (dB)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
ANTENNA TYPE	PIFA antenna	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20 deg. C, 65% RH, 991 hPa	DETECTOR FUNCTION	Peak (PK) Average (AV)
TESTED BY: Jun Wu			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	98.78 PK			1.00 H	326	68.47	30.31
1	*2437.00	88.83 AV			1.00 H	326	58.52	30.31
2	4874.00	43.47 PK	74.00	-30.53	1.23 H	300	6.78	36.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	99.81 PK			1.00 V	235	69.50	30.31
1	*2437.00	90.95 AV			1.00 V	235	60.64	30.31
2	4874.00	44.57 PK	74.00	-29.43	1.12 V	196	7.88	36.69

- REMARKS:**
1. Emission level (dBuV/m)=Raw Value (dBuV) + Correction Factor (dB)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
ANTENNA TYPE	PIFA antenna	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20 deg. C, 65 % RH, 991 hPa	DETECTOR FUNCTION	Peak (PK) Average (AV)
TESTED BY: Jun Wu			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	95.90 PK			1.00 H	324	65.53	30.37
1	*2462.00	88.03 AV			1.00 H	324	57.66	30.37
2	2483.50	48.81 PK	74.00	-25.19	1.00 H	324	18.38	30.43
3	4924.00	44.04 PK	74.00	-29.96	1.37 H	321	7.19	36.85

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.34 PK			1.00 V	237	67.97	30.37
1	*2462.00	88.85 AV			1.00 V	237	58.48	30.37
2	2483.50	51.25 PK	74.00	-22.75	1.00 V	237	20.82	30.43
2	2483.50	41.76 AV	54.00	-12.24	1.00 V	237	11.33	30.43
3	4924.00	44.69 PK	74.00	-29.31	1.30 V	201	7.84	36.85

- REMARKS:**
1. Emission level (dBuV/m)=Raw Value (dBuV) + Correction Factor (dB)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS (A)


EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	22deg. C, 64%RH, 991 hPa
TESTED BY: Ansen Lei			

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.70	0.5	PASS
6	2437	12.15	0.5	PASS
11	2462	11.90	0.5	PASS


CH1

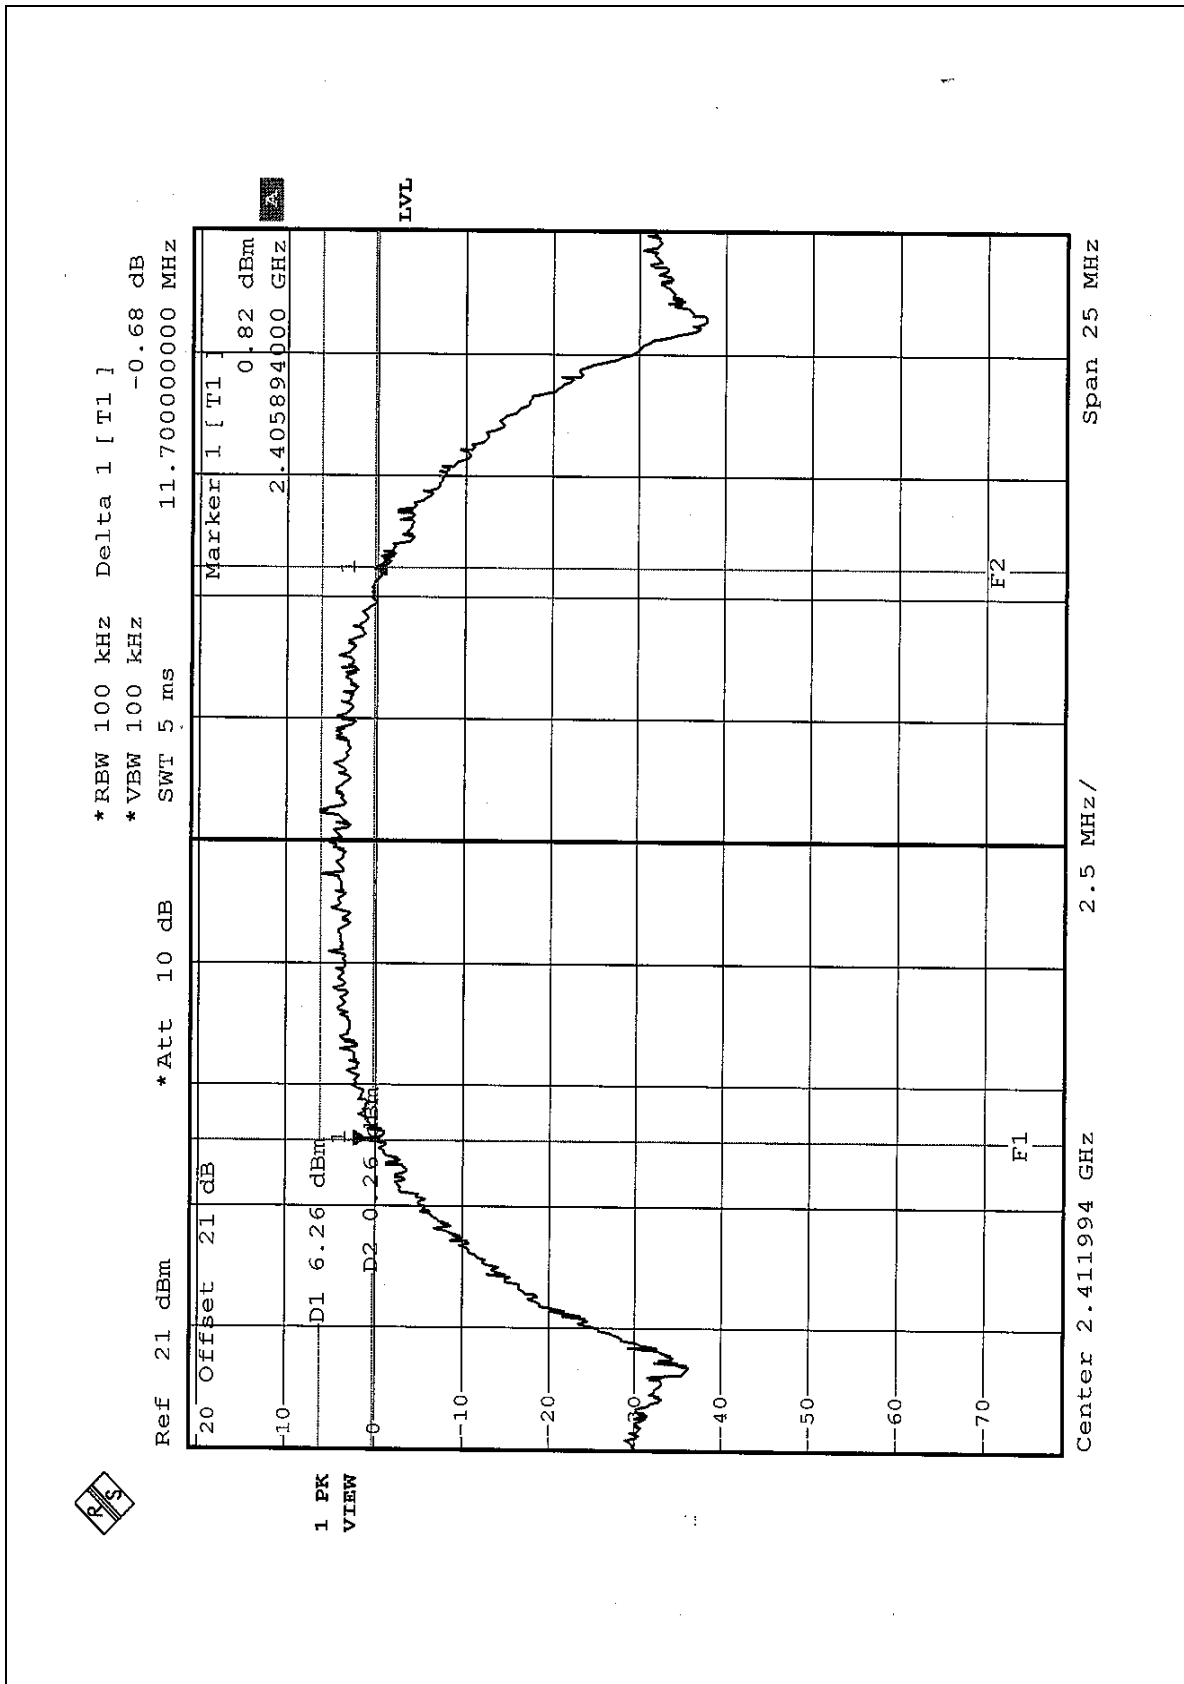

CH6

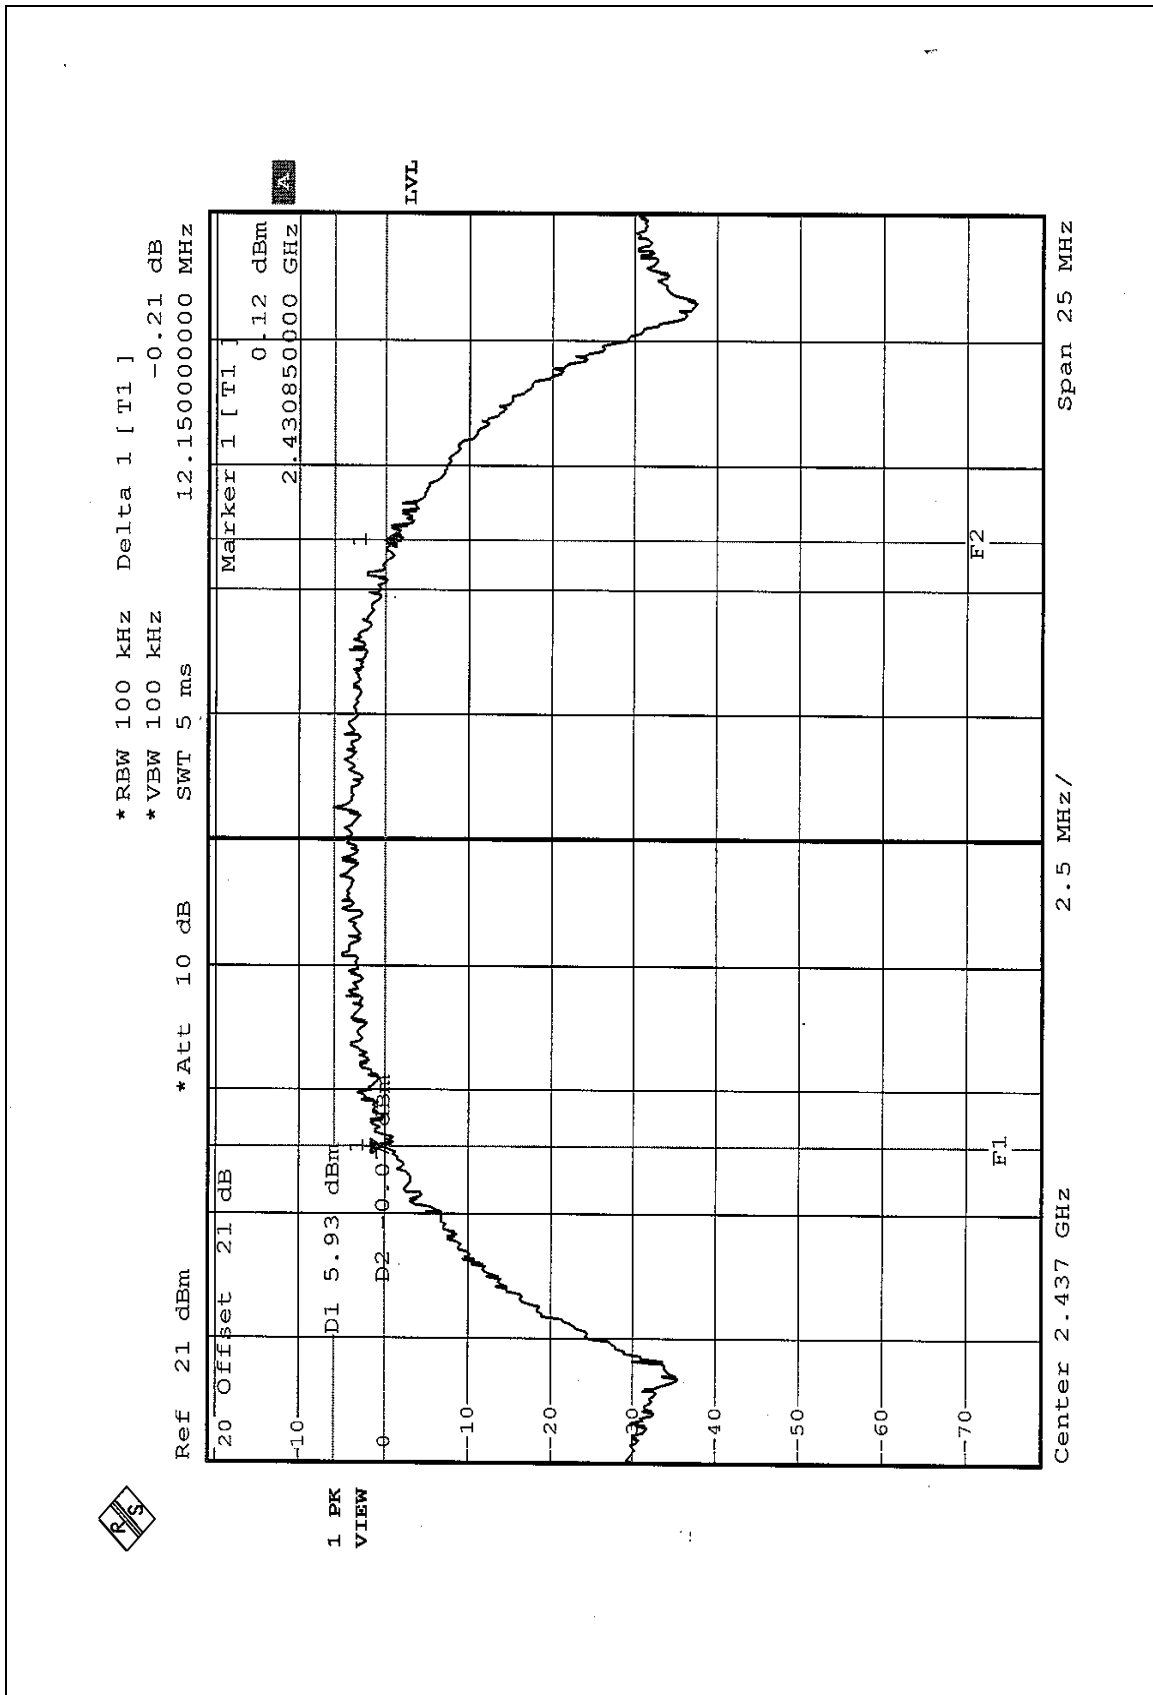

CH11

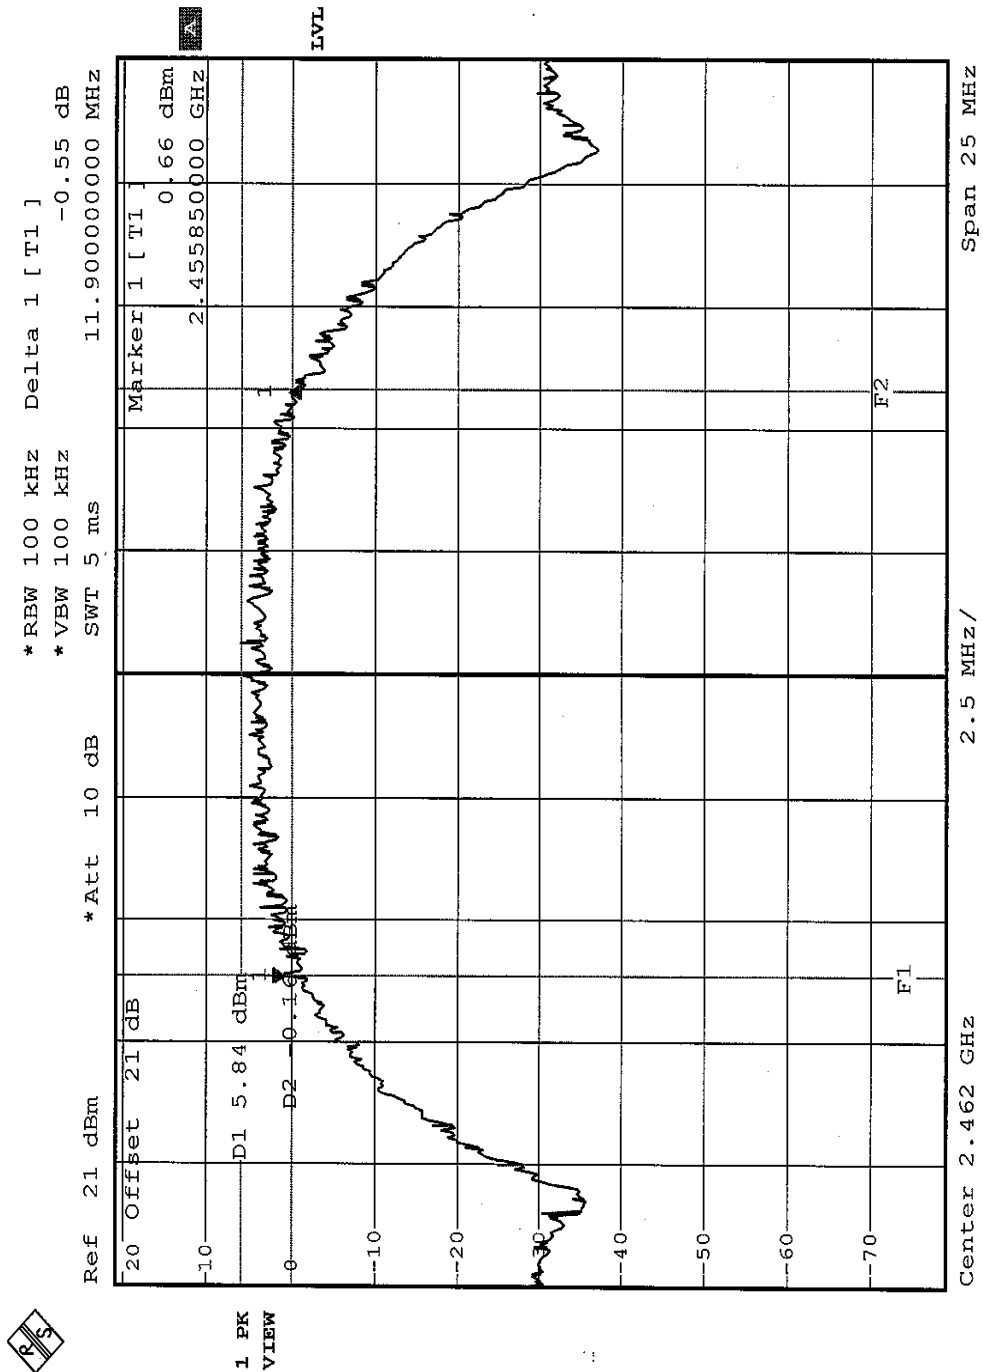


4.3.8 TEST RESULTS (B)


EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	22deg. C, 64%RH, 991 hPa
TESTED BY: Ansen Lei			

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.55	0.5	PASS
6	2437	16.65	0.5	PASS
11	2462	16.60	0.5	PASS


CH1

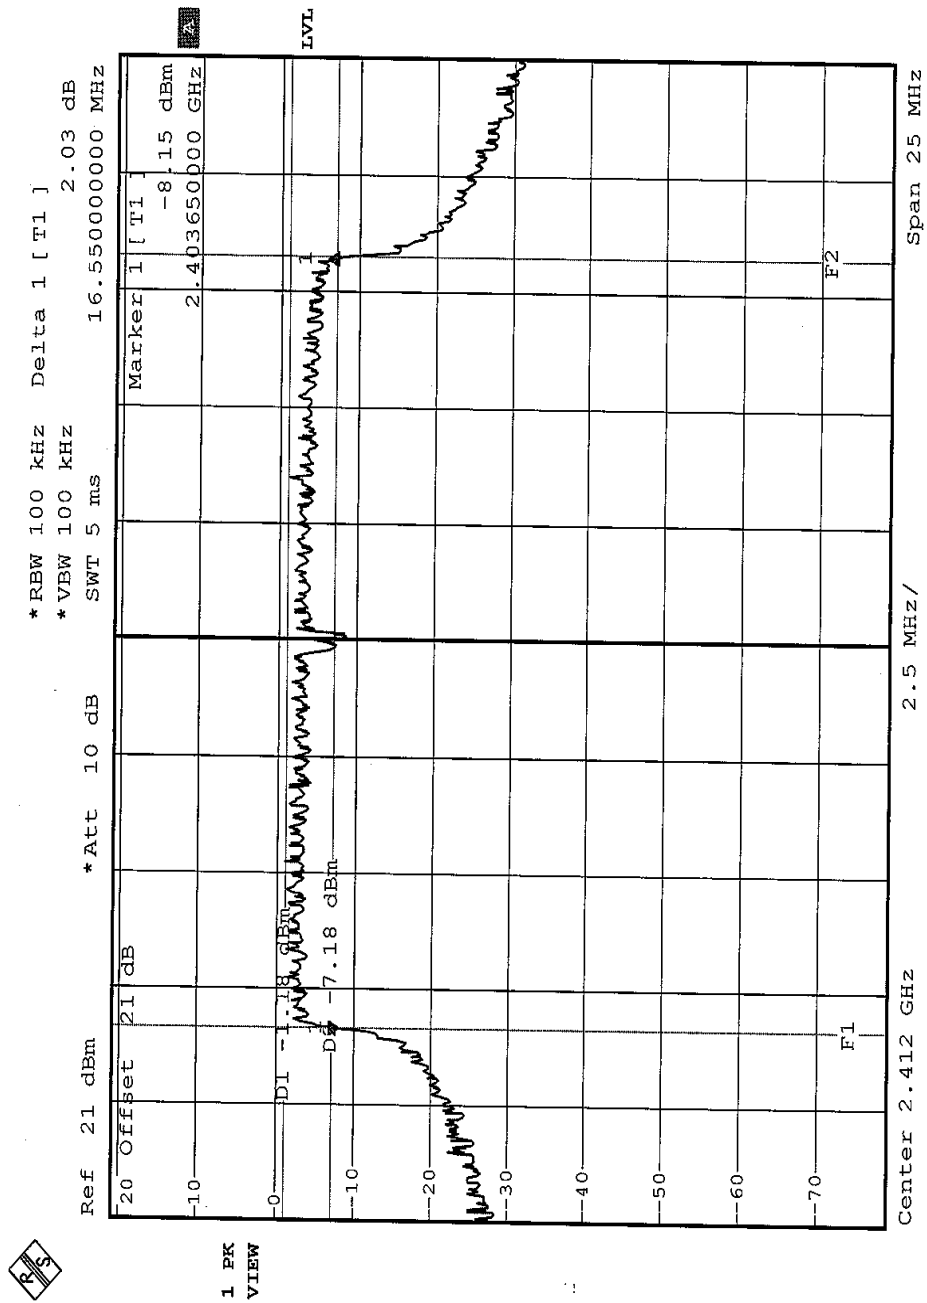

CH6

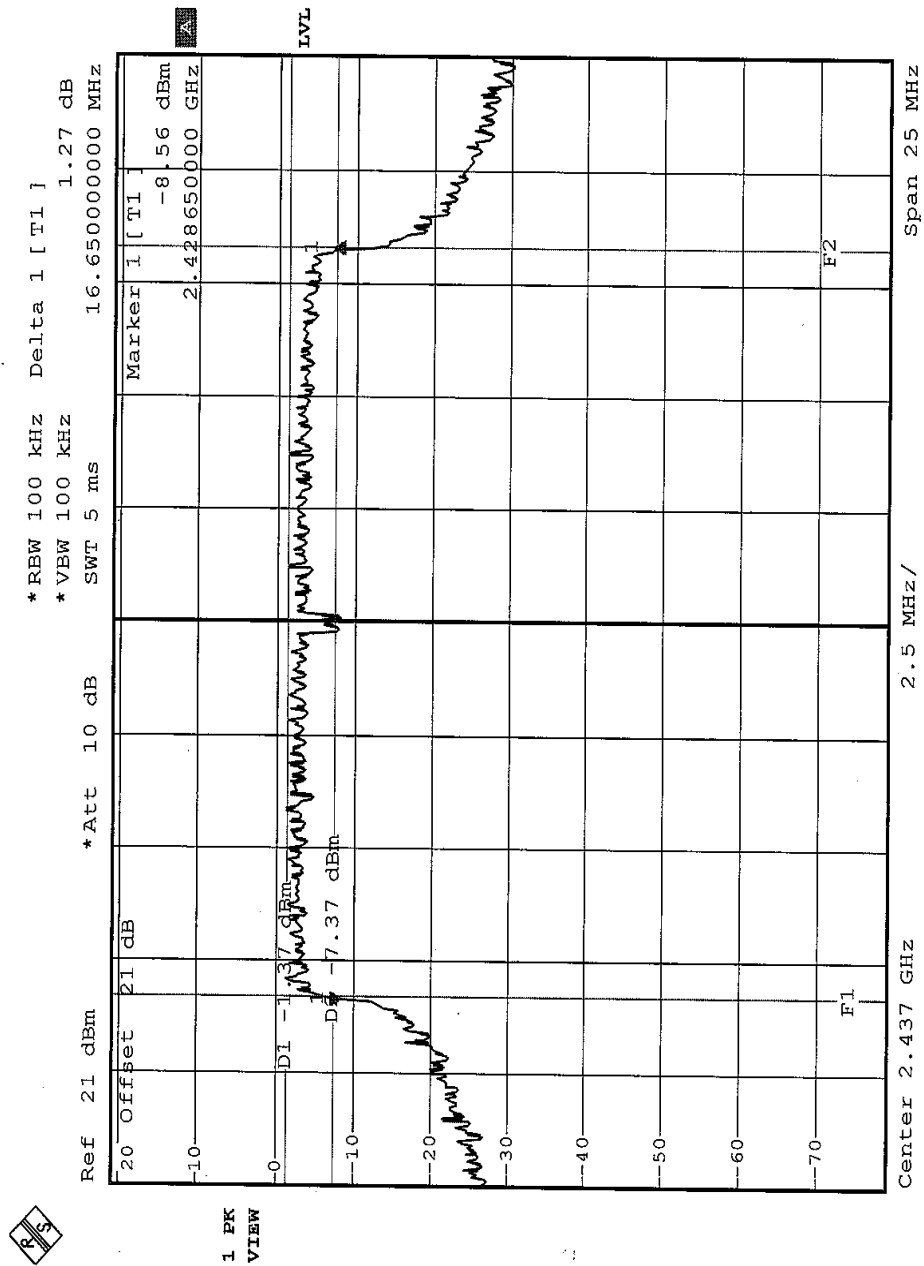

CH11

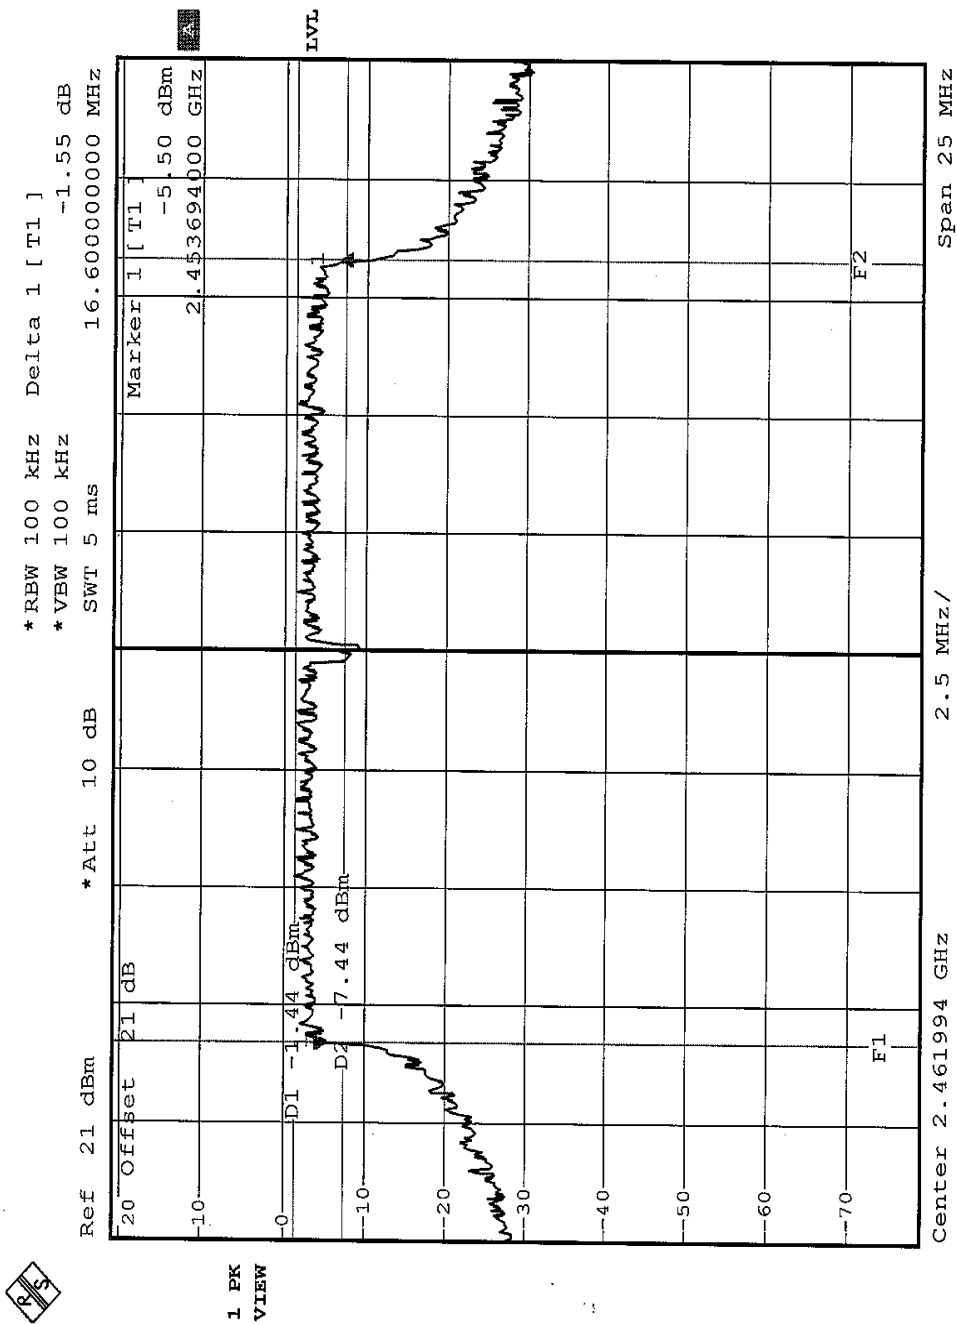

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004
R&S SIGNAL GENERATOR	SMP04	100011	May 28, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	B048470	Mar. 05, 2004
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA..

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.7 TEST RESULTS (A)

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
ENVIRONMENTAL CONDITIONS	22deg. C, 64%RH, 991 hPa	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST BY: Ansen Lei			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	17.85	30	PASS
6	2437	17.94	30	PASS
11	2462	17.98	30	PASS

4.4.8 TEST RESULTS (B)

EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
ENVIRONMENTAL CONDITIONS	22deg. C, 64%RH, 991 hPa	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST BY: Ansen Lei			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	17.84	30	PASS
6	2437	17.82	30	PASS
11	2462	17.95	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6




4.5.7 TEST RESULTS (A)


EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	22deg. C, 64%RH, 991 hPa
TESTED BY: Ansen Lei			

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-3.43	8	PASS
6	2437	-4.11	8	PASS
11	2462	-4.54	8	PASS

CH1

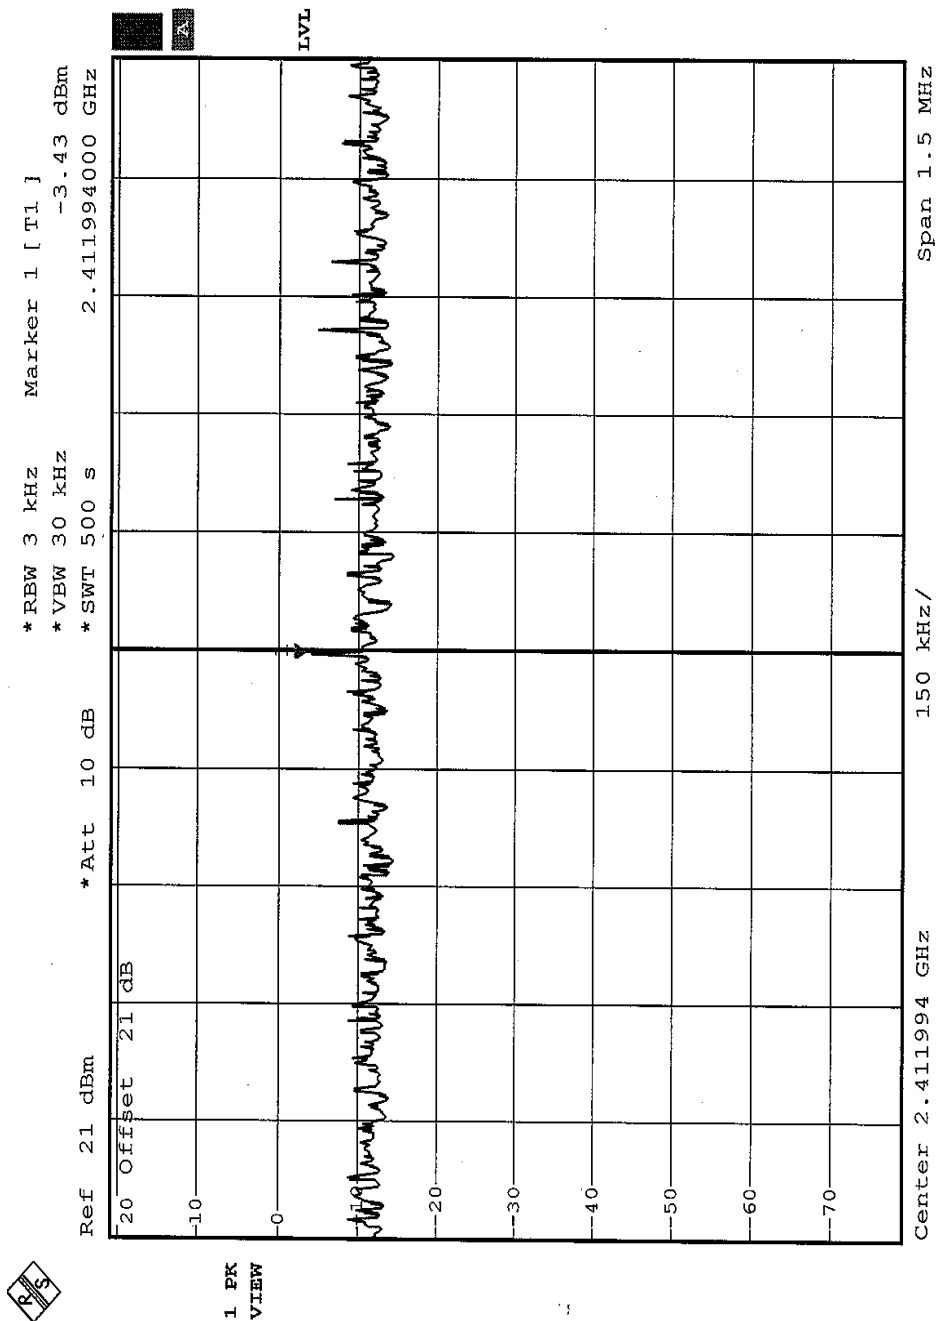

CH6

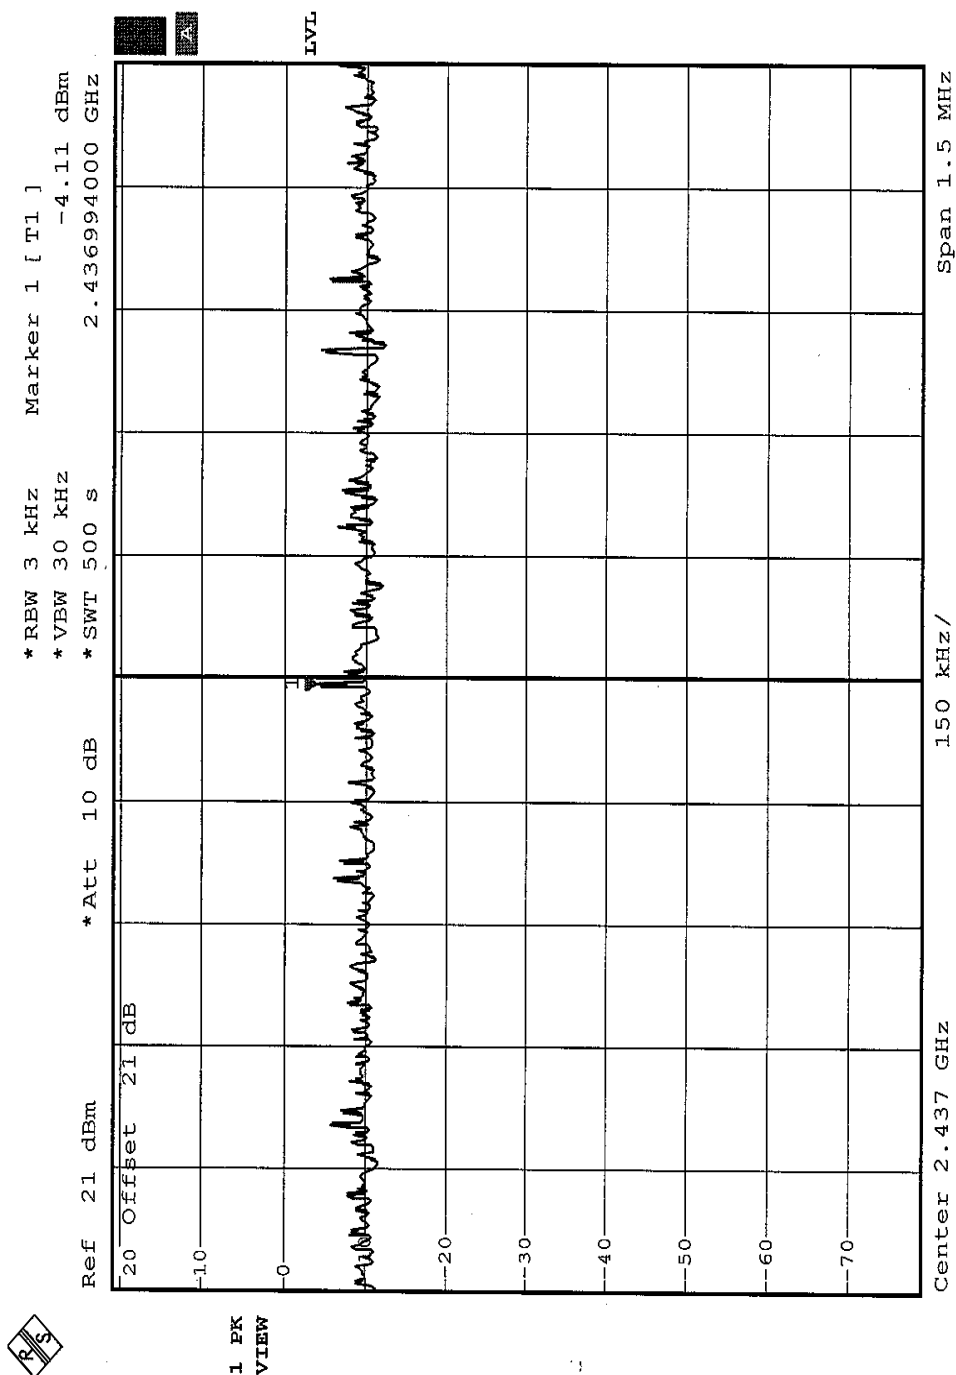

1 PK
VIEW

Ref 21 dBm
Offset 21 dB

*RBW 3 kHz
*VBW 30 kHz
*SWT 500 s

*Att 10 dB

Marker 1 [T1]
-4.54 dBm
2.461994000 GHz

Center 2.461994 GHz
Span 1.5 MHz


150 kHz/

4.5.8 TEST RESULTS (B)


EUT	High-Speed 2.4GHz WLAN Mini PCI Card	MODEL	WMP-G02V
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	22deg. C, 64%RH, 991 hPa
TESTED BY: Ansen Lei			

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-10.87	8	PASS
6	2437	-10.75	8	PASS
11	2462	-11.30	8	PASS


CH1

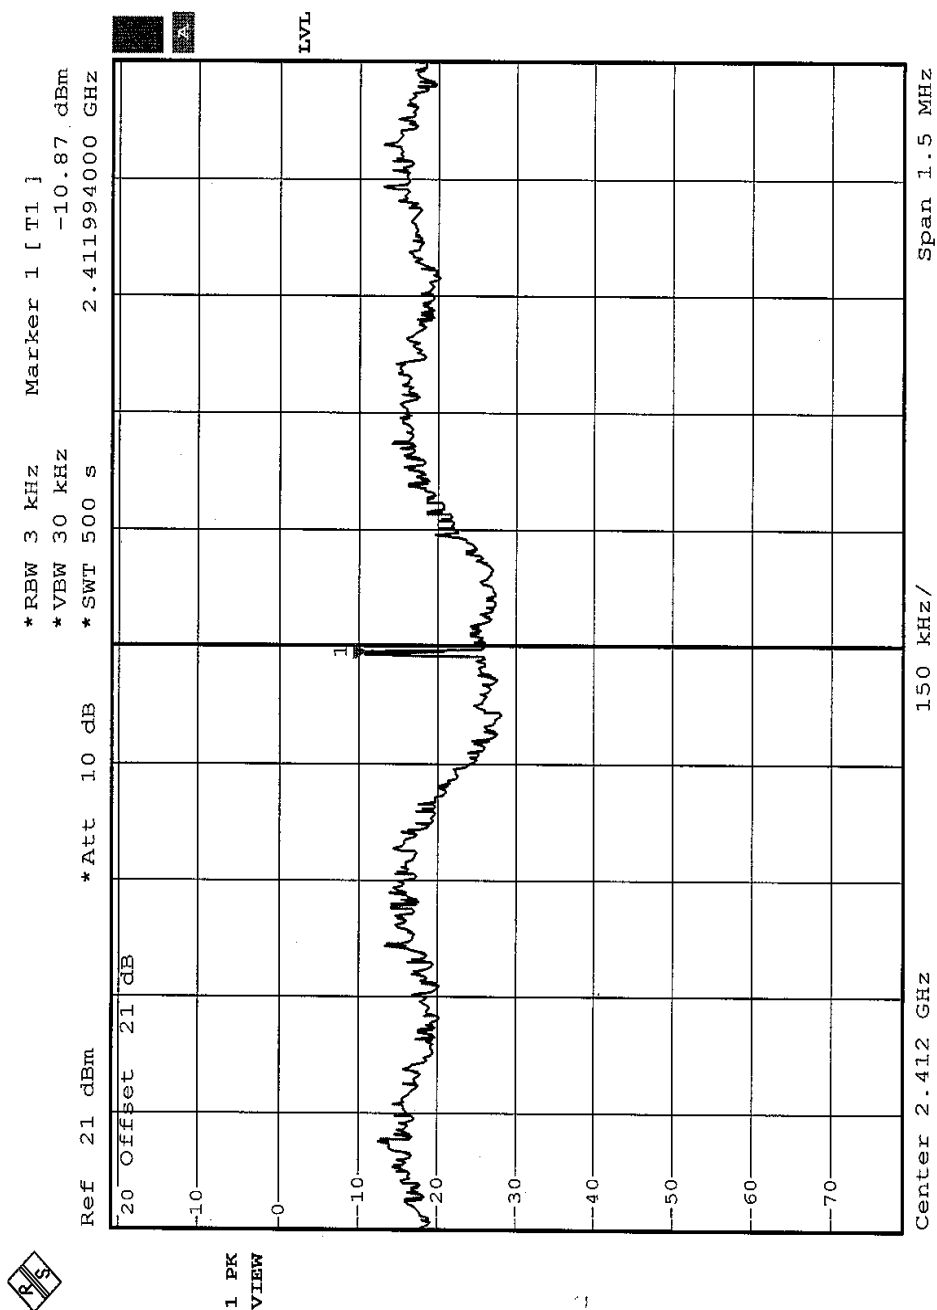

CH6

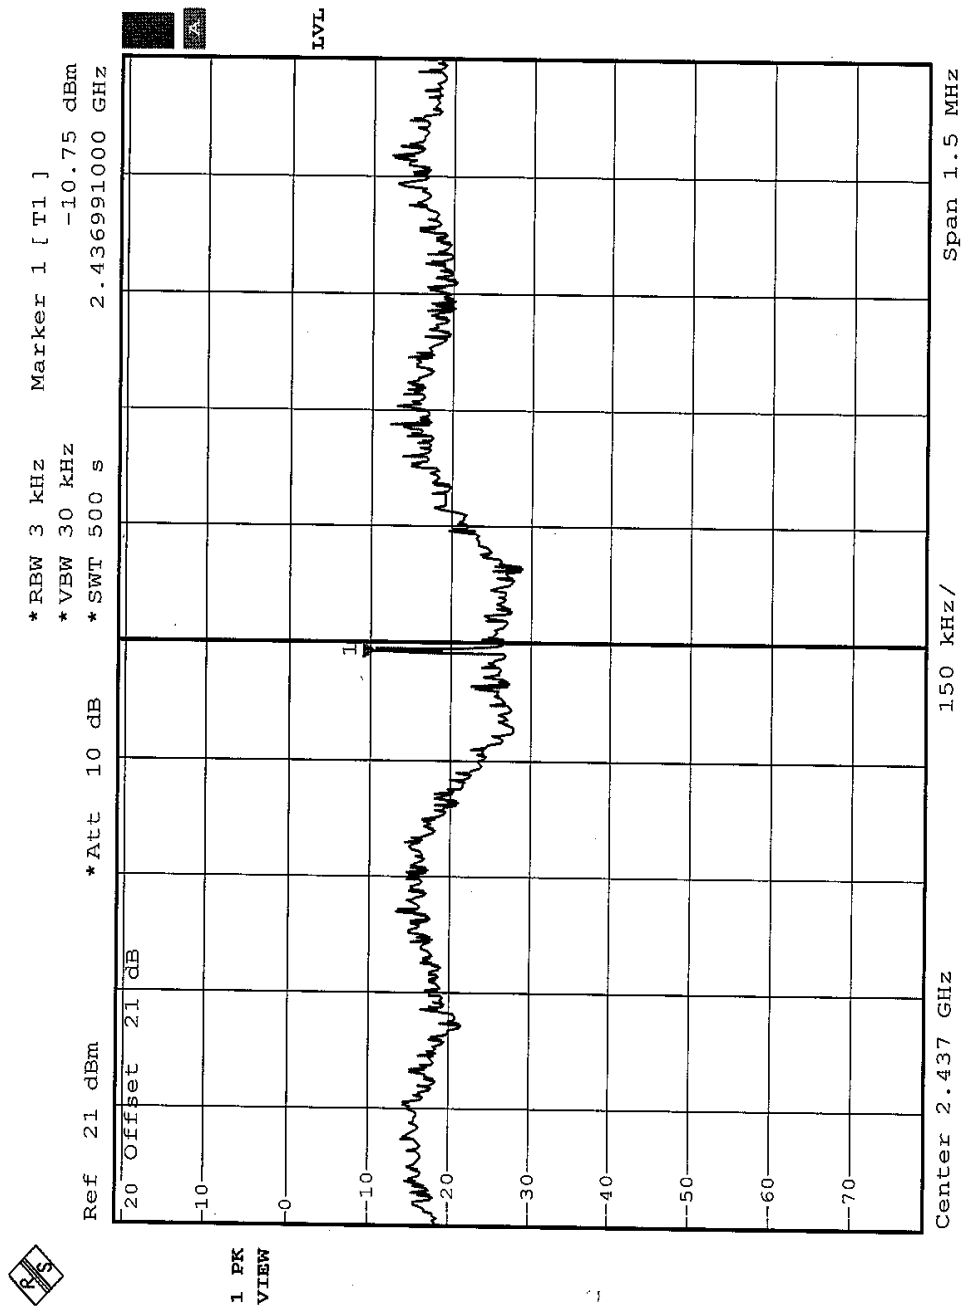

CH11

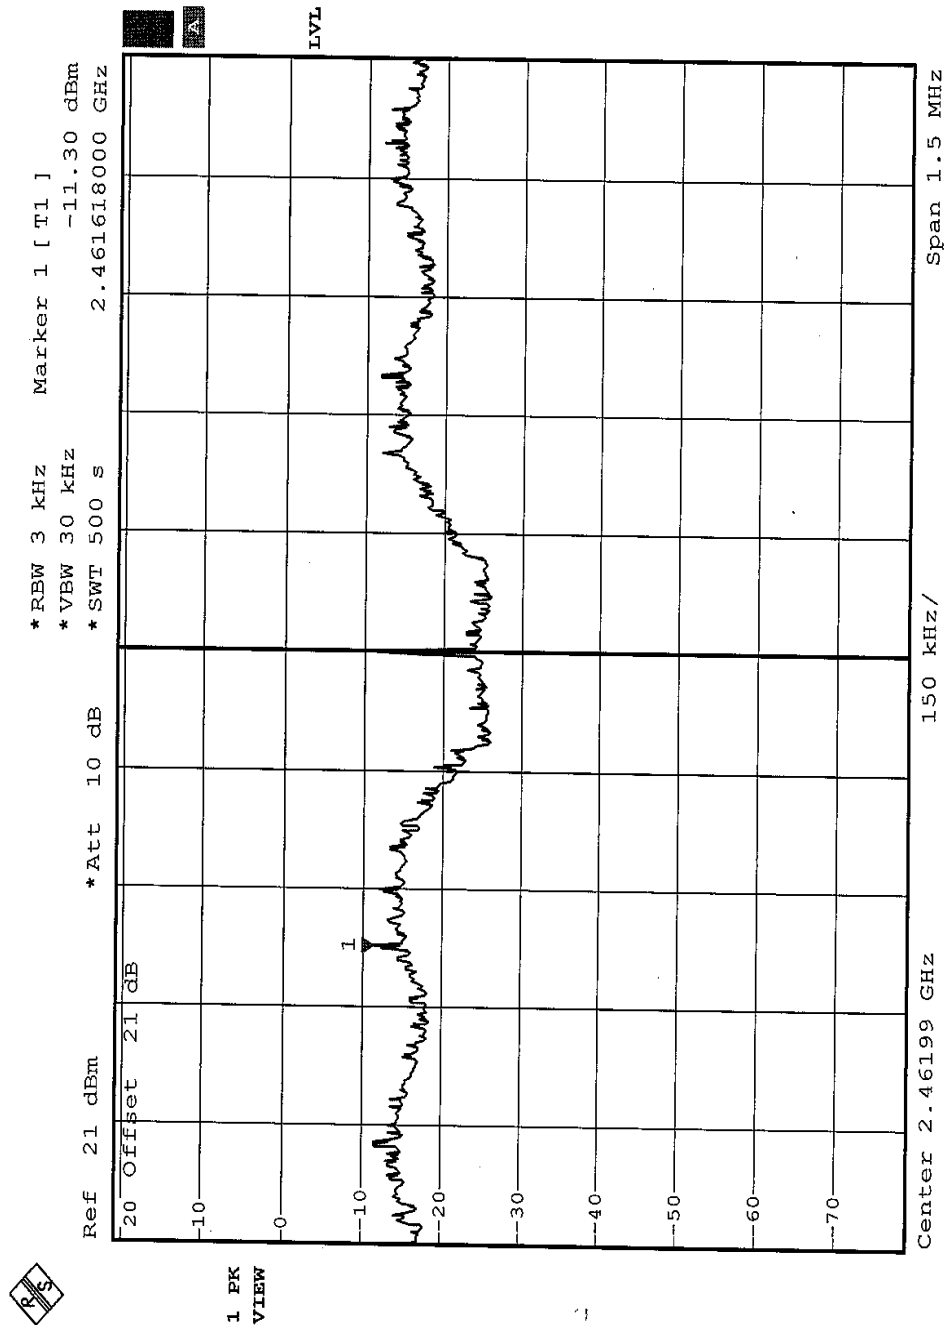

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 1MHz and 3000Hz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6



4.6.6 TEST RESULTS (A)


The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).


NOTE:

The band edge emission plot on the following first page shows 51.54dB delta between carrier maximum power and local maximum emission in restrict band (2.3868GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.8 is 105.00dBuV/m, so the maximum field strength in restrict band is $105.00 - 51.54 = 53.46\text{dBuV/m}$ which is under 54 dBuV/m limit.

NOTE:

The band edge emission plot on the following second page shows 51.66dB delta between carrier maximum power and local maximum emission in restrict band (2.4872GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 is 105.1dBuV/m, so the maximum field strength in restrict band is $105.1 - 51.66 = 53.44\text{dBuV/m}$ which is under 54 dBuV/m limit.

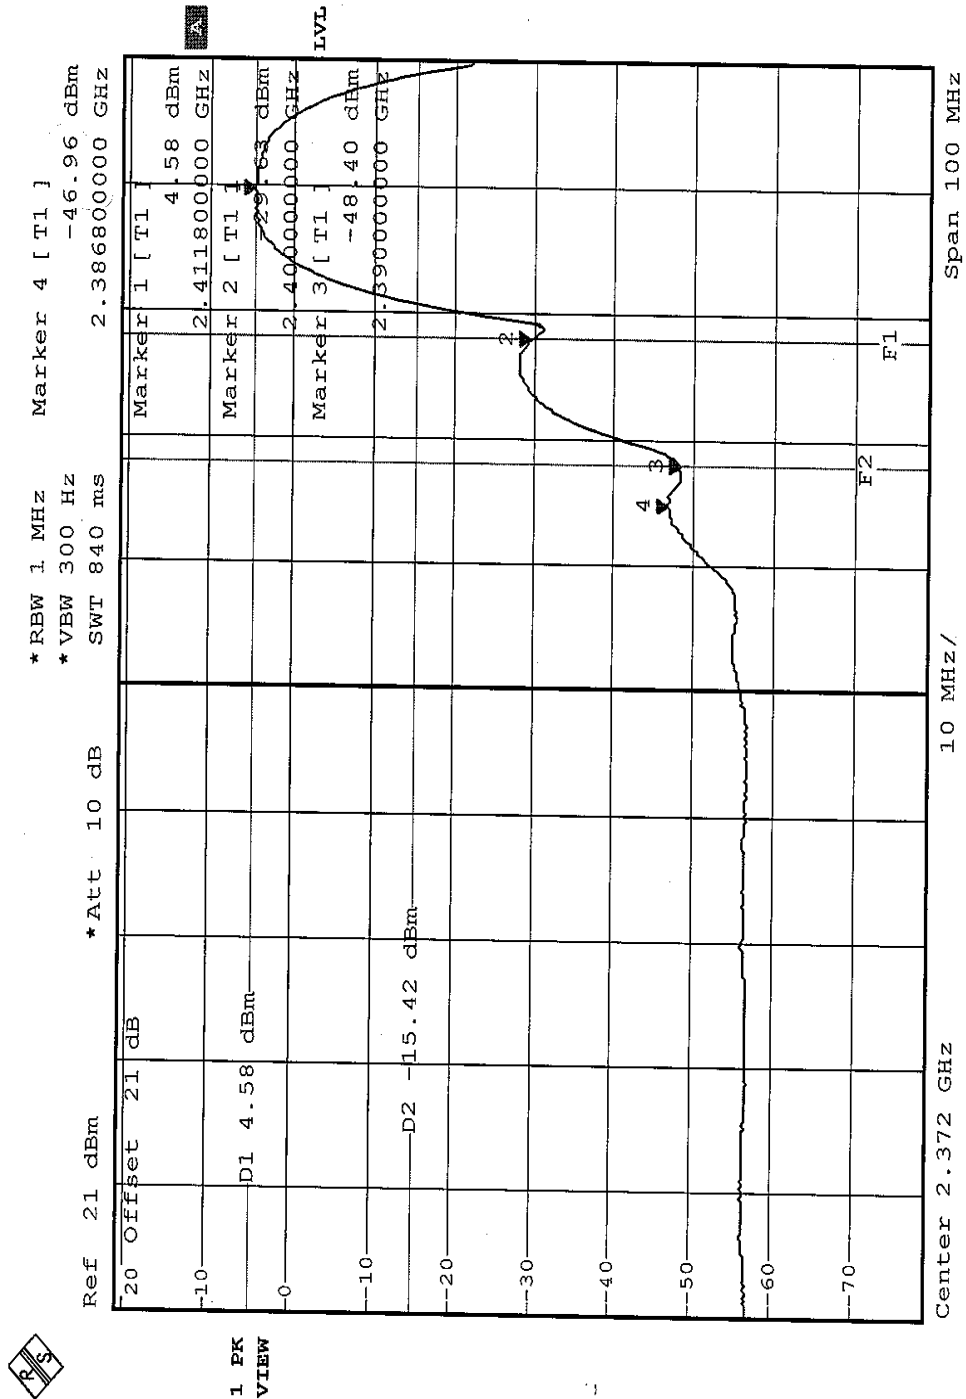

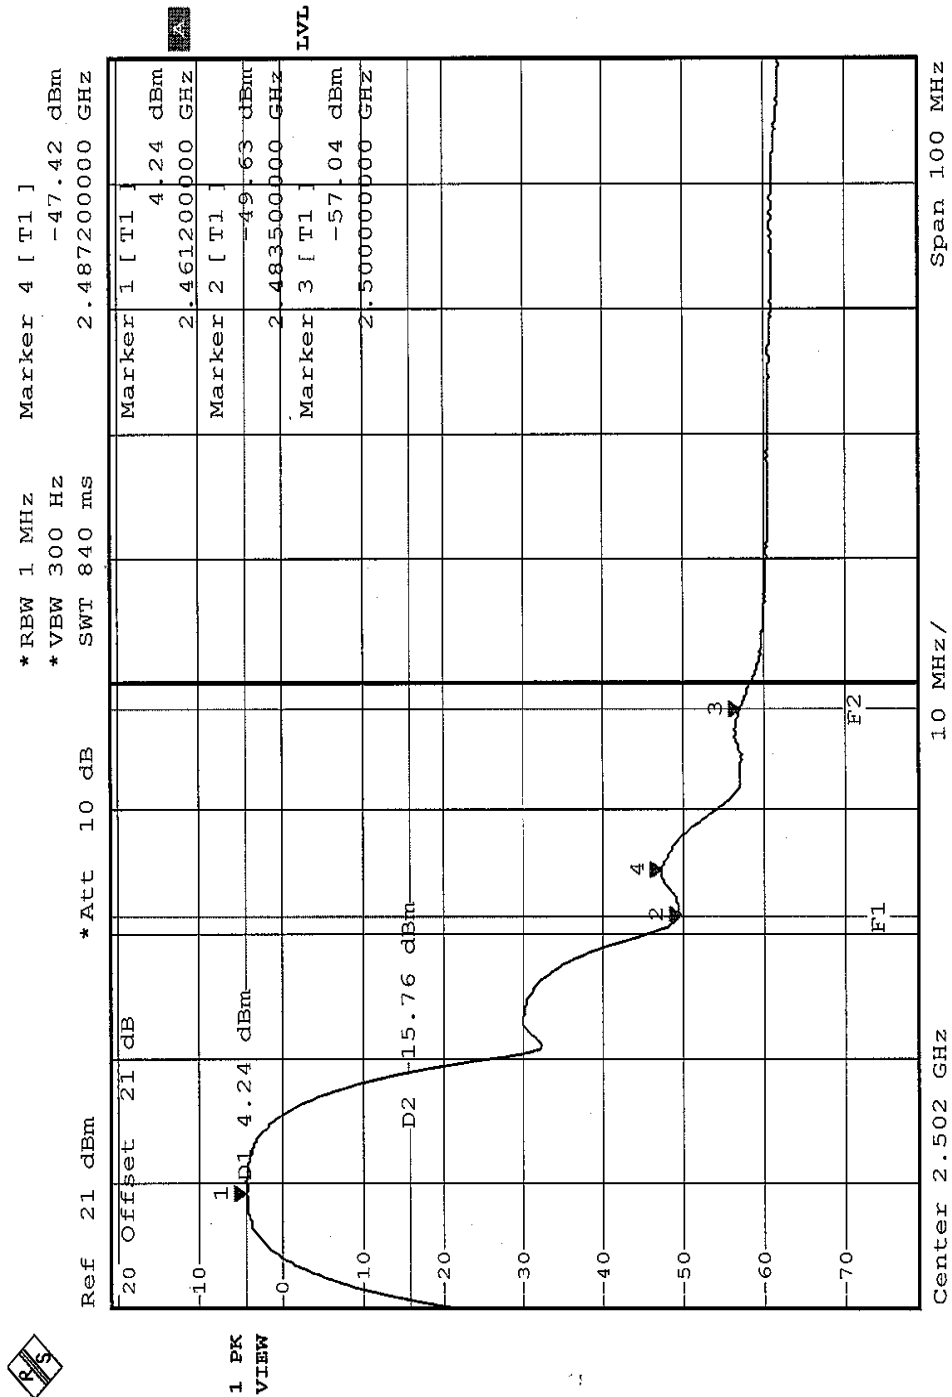



4.6.7 TEST RESULTS (B)


The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).


NOTE:

The band edge emission plot on the following first page shows 44.17dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.9 is 97.80dBuV/m, so the maximum field strength in restrict band is $97.80 - 44.17 = 53.63\text{dBuV/m}$ which is under 54 dBuV/m limit.

NOTE:

The band edge emission plot on the following second page shows 44.50dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.9 is 98.00dBuV/m, so the maximum field strength in restrict band is $98.00 - 44.50 = 53.50\text{dBuV/m}$ which is under 54 dBuV/m limit.

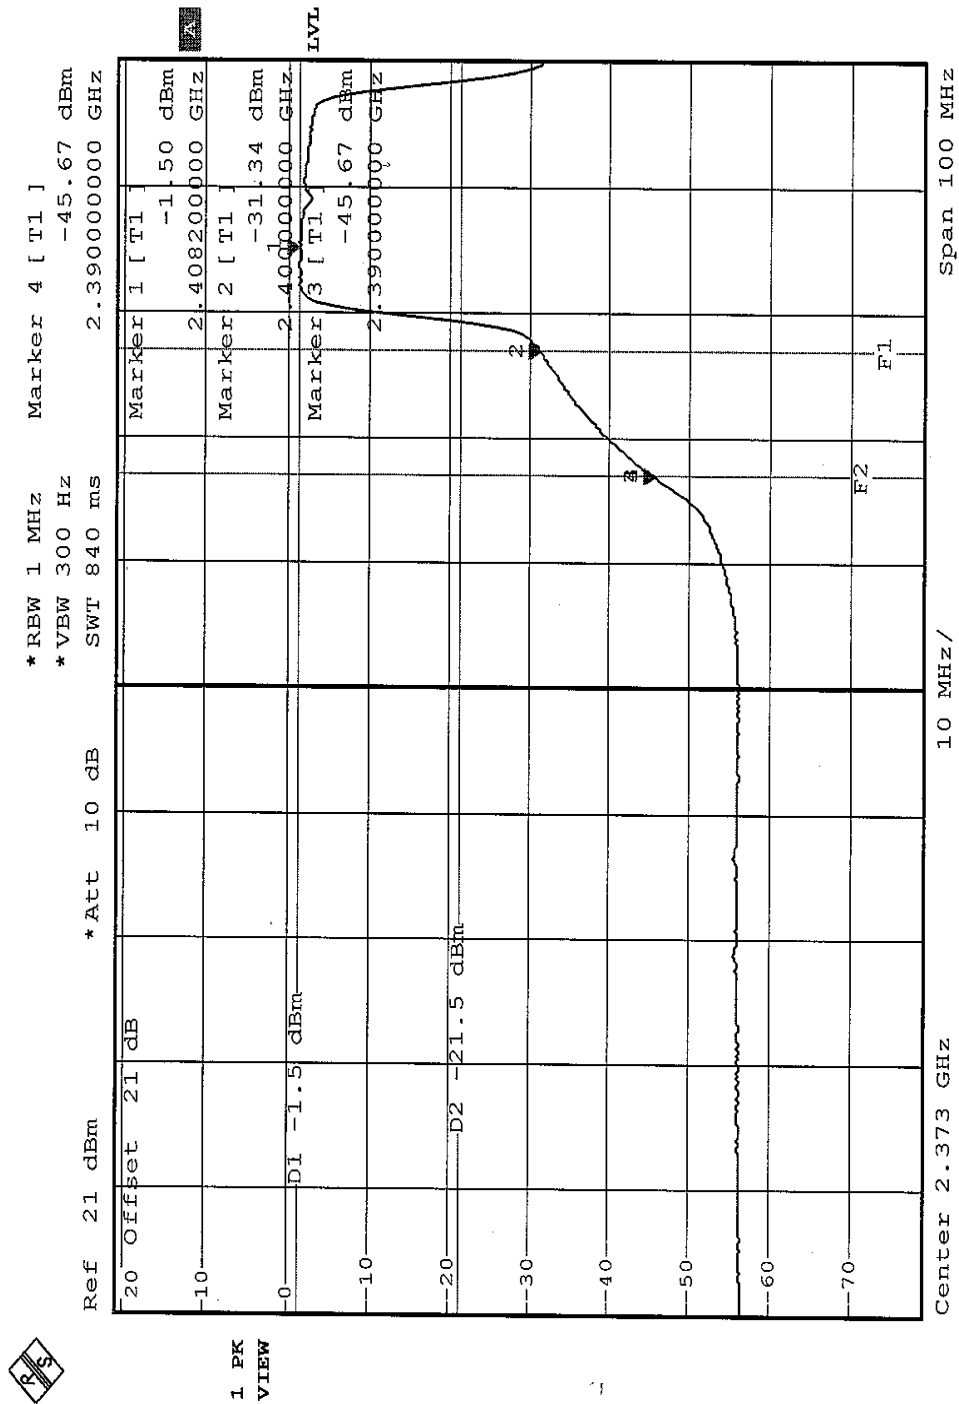

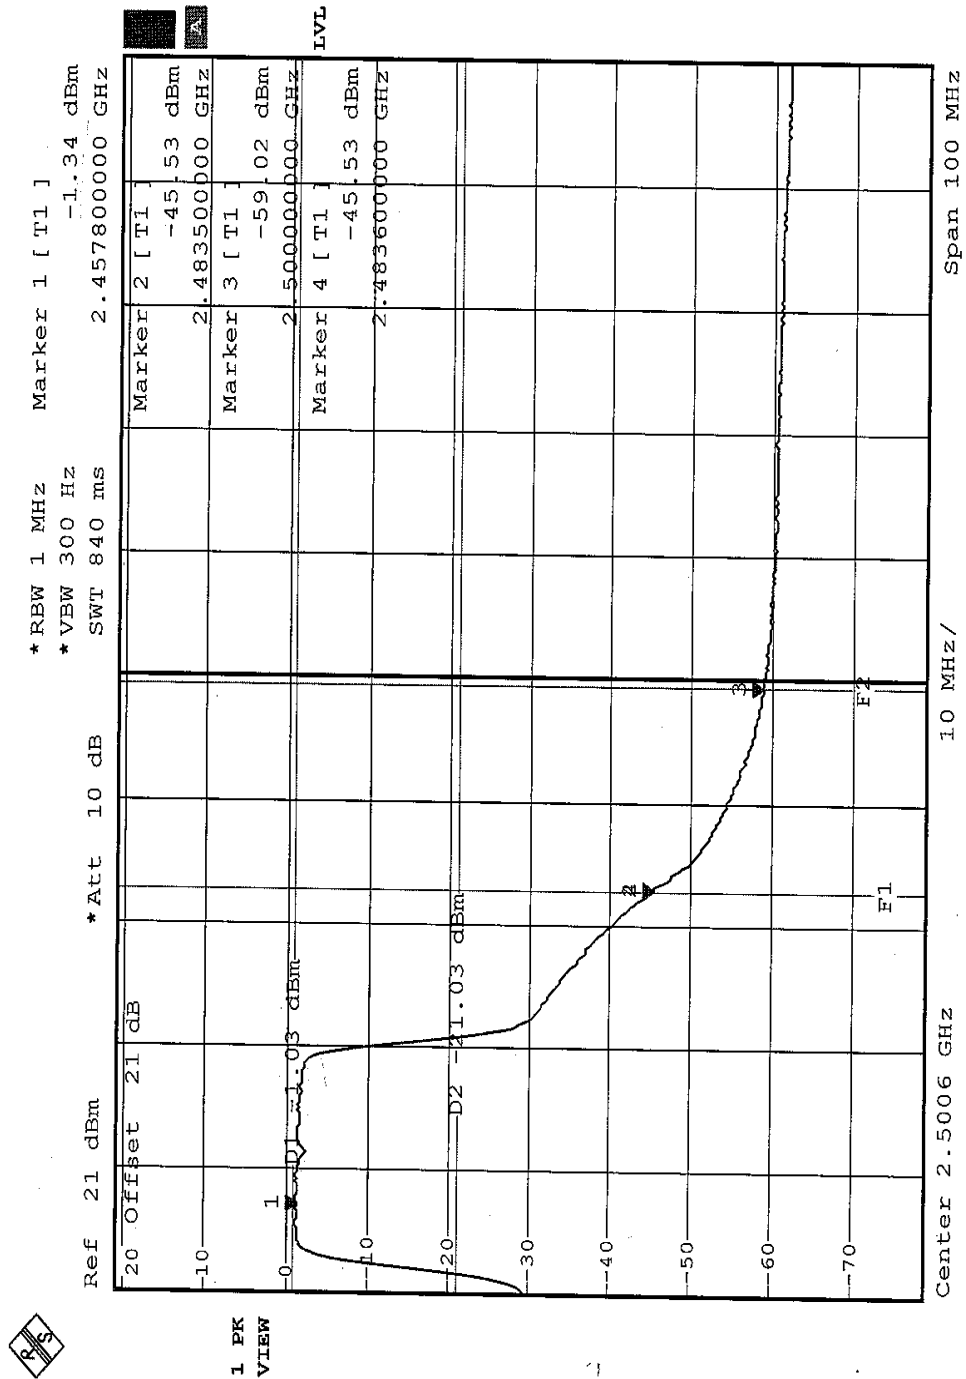



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


4.7.2 ANTENNA CONNECTED CONSTRUCTION

The maximum Gain antennas used in this product are PIFA antenna and Dipole antenna with UFL antenna connector. And the maximum Gain of these antennas is 2dBi.

There are three ways to install the antenna. 1. With two PIFA antenna. 2. With two Dipole antenna. 3. One PIFA antenna and one dipole antenna.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST (For Dipole antenna)

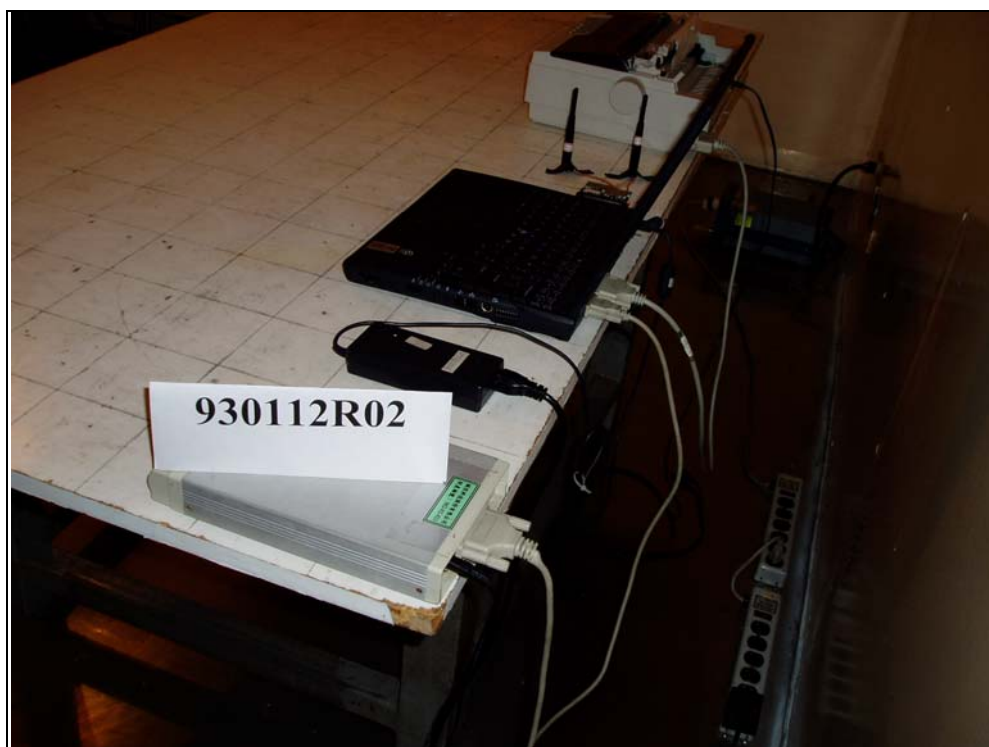

(For PIFA antenna)



RADIATED EMISSION TEST (For Dipole antenna)





(For PIFA antenna)







6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.