



FCC TEST REPORT

REPORT NO.: RF930101R04

MODEL NO.: WMP-G03

RECEIVED: Jan. 1, 2004

TESTED: Jan. 8, 2004 ~ Jan. 20, 2004

APPLICANT: Alpha Networks Inc.

ADDRESS: NO.8, Li-shing 7th Rd., Science-based Industrial
Park, Hsinchu, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 81 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA

Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
3.5	CONFIGURATION OF SYSTEM UNDER TEST.....	9
4	TEST TYPES AND RESULTS	10
4.1	CONDUCTED EMISSION MEASUREMENT.....	10
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	10
4.1.2	TEST INSTRUMENTS.....	10
4.1.3	TEST PROCEDURES	11
4.1.4	DEVIATION FROM TEST STANDARD.....	11
4.1.5	TEST SETUP	12
4.1.6	EUT OPERATING CONDITIONS	12
4.1.7	TEST RESULTS	13
4.2	RADIATED EMISSION MEASUREMENT	19
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	19
4.2.2	TEST INSTRUMENTS.....	20
4.2.3	TEST PROCEDURES	21
4.2.4	DEVIATION FROM TEST STANDARD.....	21
4.2.5	TEST SETUP	22
4.2.6	EUT OPERATING CONDITIONS	22
4.2.7	TEST RESULTS	23
4.2.8	TEST RESULTS (A).....	27
4.2.9	TEST RESULTS (B).....	33
4.3	6dB BANDWIDTH MEASUREMENT	39
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT.....	39
4.3.2	TEST INSTRUMENTS.....	39
4.3.3	TEST PROCEDURE.....	40
4.3.4	DEVIATION FROM TEST STANDARD.....	40
4.3.5	TEST SETUP	40
4.3.6	EUT OPERATING CONDITIONS	40
4.3.7	TEST RESULTS (A).....	41



4.3.8	TEST RESULTS (B).....	45
4.4	MAXIMUM PEAK OUTPUT POWER.....	49
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	49
4.4.2	TEST INSTRUMENTS.....	49
4.4.3	TEST PROCEDURES	50
4.4.4	DEVIATION FROM TEST STANDARD.....	50
4.4.5	TEST SETUP.....	50
4.4.6	EUT OPERATING CONDITIONS	50
4.4.7	TEST RESULTS (A).....	51
4.4.8	TEST RESULTS (B).....	51
4.5	POWER SPECTRAL DENSITY MEASUREMENT	52
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	52
4.5.2	TEST INSTRUMENTS.....	52
4.5.3	TEST PROCEDURE.....	53
4.5.4	DEVIATION FROM TEST STANDARD.....	53
4.5.5	TEST SETUP.....	53
4.5.6	EUT OPERATING CONDITIONS	53
4.5.7	TEST RESULTS (A).....	54
4.5.8	TEST RESULTS (B).....	58
4.6	BAND EDGES MEASUREMENT.....	62
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	62
4.6.2	TEST INSTRUMENTS.....	62
4.6.3	TEST PROCEDURE.....	62
4.6.4	DEVIATION FROM TEST STANDARD.....	62
4.6.5	EUT OPERATING CONDITION.....	63
4.6.6	TEST RESULTS (A).....	63
4.6.7	TEST RESULTS (B).....	68
4.7	ANTENNA REQUIREMENT	73
4.7.1	STANDARD APPLICABLE.....	73
4.7.2	ANTENNA CONNECTED CONSTRUCTION	73
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	74
6	INFORMATION ON THE TESTING LABORATORIES.....	81



1 CERTIFICATION

PRODUCT : IEEE 802.11g Mini PCI Card
MODEL NO.: WMP-G03
BRAND: Toshiba America Information Systems Inc.
APPLICANT : Alpha Networks Inc.
TEST ITEM: ENGINEERING SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Jan. 8, 2004 to Jan. 20, 2004. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

PREPARED BY: Wendy Liao, **DATE:** Jan. 27, 2004
Wendy Liao

APPROVED BY: Ellis Wu, **DATE:** Jan. 27, 2004
Ellis Wu / Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -13.66dB at 0.175MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -1.76dB at 132.25 MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

NOTE: The information of measurement uncertainty is available upon the customer's request.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	IEEE 802.11g Mini PCI Card
MODEL NO.	WMP-G03
POWER SUPPLY	3.3Vdc from host equipment
MODULATION TYPE	BPSK, QPSK, CCK, 16QAM, 64QAM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	54/48/36/24/18/12/11/9/6/5.5/2/1Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
MAXIMUM OUTPUT POWER	16.55dBm
ANTENNA TYPE	Dipole antenna with 2.0dBi gain and PIFA antenna with 0.7dBi gain
DATA CABLE	NA
I/O PORTS	PCMCIA
ASSOCIATED DEVICES	NA

NOTE:

- 1.The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
- 2.The EUT complies with IEEE 802.11g draft standards, and backwards compatible with IEEE 802.11b products.
- 3.For a more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1GHz, the channel 1, 6, and 11 were tested individually.
3. Transfer rate, 11Mbps with CCK technique and 6Mbps with OFDM technique, worst cases, were chosen for final test.
4. Two test results were presented in the following sections, the test result A was for CCK technique, the test result B was for OFDM technique.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a IEEE 802.11g Mini PCI Card. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)
ANSI C63.4-1992

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	Compaq	N800C	470048-515	FCC DoC Approved
2	PRINTER	EPSON	LQ-300+	DCGY046023	FCC DoC Approved
3	600 Ω Load	NA	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
3	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

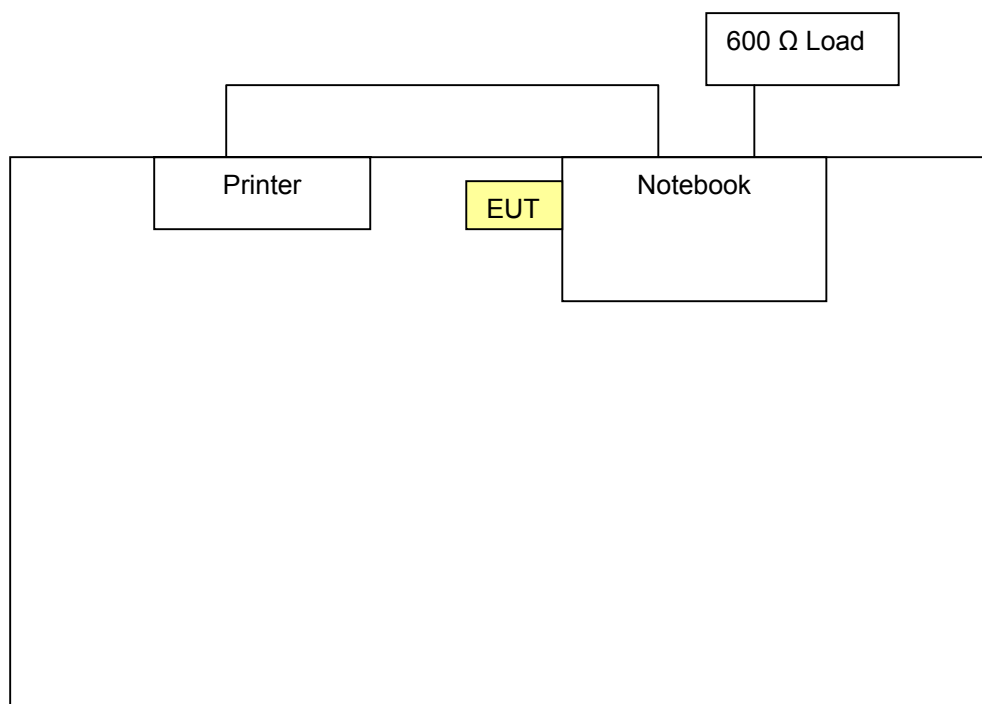

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	838251/021	Jan. 19, 2005
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100218	Dec. 09, 2004
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100219	Dec. 09, 2004
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100220	Dec. 09, 2004
*ROHDE & SCHWARZ 4-wire ISN	ENY41	837032/016	Nov. 19, 2004
*ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Nov. 19, 2004
Software	Cond-V2M3	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	May 01, 2004
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010770	Mar. 24, 2004
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010773	Apr. 06, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. “*”: These equipment are used for conducted telecom port test only (if tested).
 3. The test was performed in ADT Shielded Room No. 10.
 4. The VCCI Site Registration No. is C-1312.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under Limit - 20dB was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

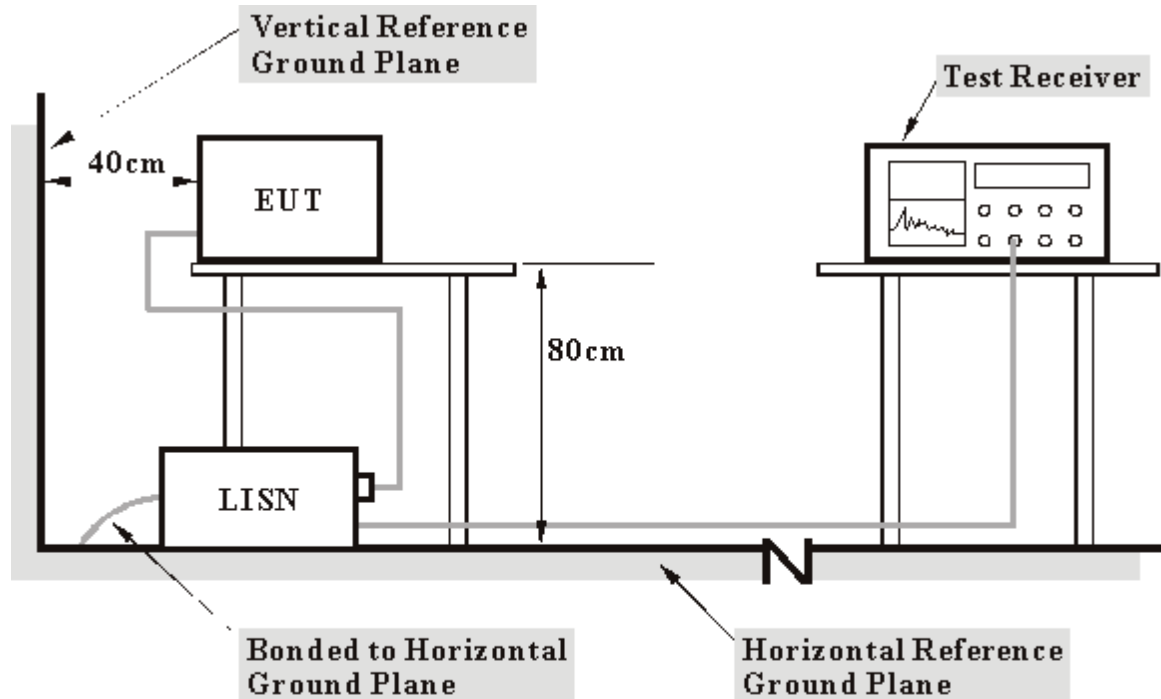

- Note:** 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


- Plug the EUT a notebook system placed on a testing table.
- The notebook system ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- The notebook system show "H" messages on its screen.
- The notebook system sent "H" messages to printer, and the printer prints them on paper.
- Repeated c ~d.

4.1.7 TEST RESULTS

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
MODE	Channel 1	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	TESTED BY: Jamison Chan	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.10	47.68	-	47.78	-	65.18	55.18	-17.40	-
2	0.177	0.10	50.49	-	50.59	-	64.61	54.61	-14.02	-
3	0.228	0.10	45.83	-	45.93	-	62.52	52.52	-16.59	-
4	0.603	0.13	36.92	-	37.05	-	56.00	46.00	-18.95	-
5	17.117	0.84	29.92	-	30.76	-	60.00	50.00	-29.24	-
6	20.641	0.94	27.66	-	28.60	-	60.00	50.00	-31.40	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

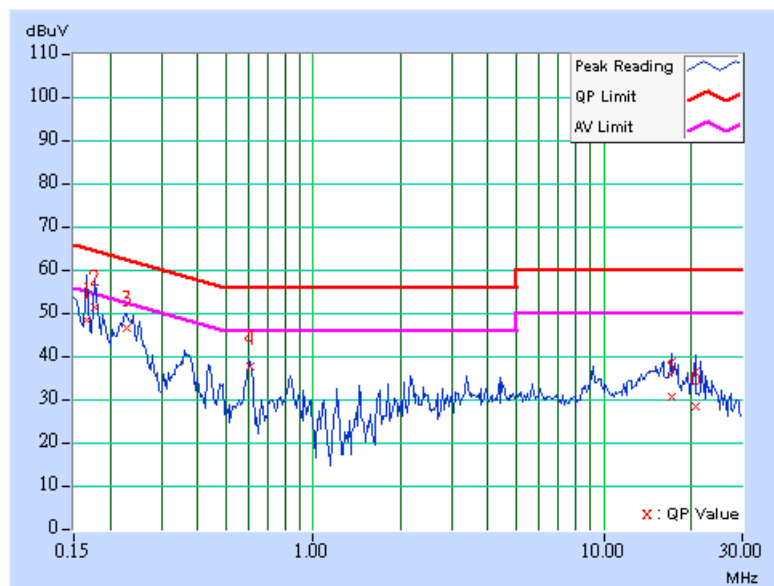

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
MODE	Channel 1	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	TESTED BY: Jamison Chan	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.10	49.85	-	49.95	-	64.79	54.79	-14.84	-
2	0.220	0.10	44.64	-	44.74	-	62.81	52.81	-18.07	-
3	0.388	0.10	35.05	-	35.15	-	58.10	48.10	-22.95	-
4	0.603	0.13	36.21	-	36.34	-	56.00	46.00	-19.66	-
5	9.477	0.48	31.47	-	31.95	-	60.00	50.00	-28.05	-
6	17.602	0.75	28.87	-	29.62	-	60.00	50.00	-30.38	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

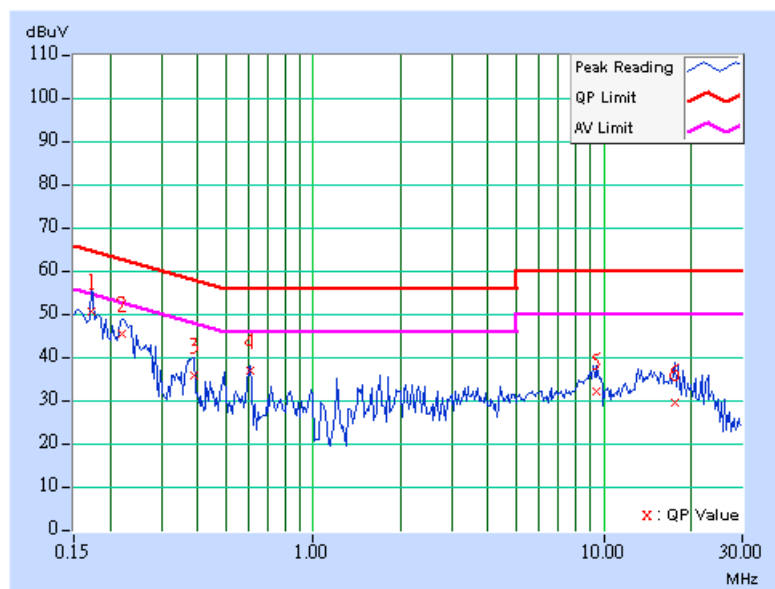

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
MODE	Channel 6	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	TESTED BY: Jamison Chan	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.10	49.57	-	49.67	-	65.18	55.18	-15.51	-
2	0.216	0.10	47.19	-	47.29	-	62.96	52.96	-15.67	-
3	0.271	0.10	37.15	-	37.25	-	61.08	51.08	-23.83	-
4	0.392	0.10	38.01	-	38.11	-	58.02	48.02	-19.91	-
5	0.611	0.14	36.56	-	36.70	-	56.00	46.00	-19.30	-
6	14.289	0.77	31.45	-	32.22	-	60.00	50.00	-27.78	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

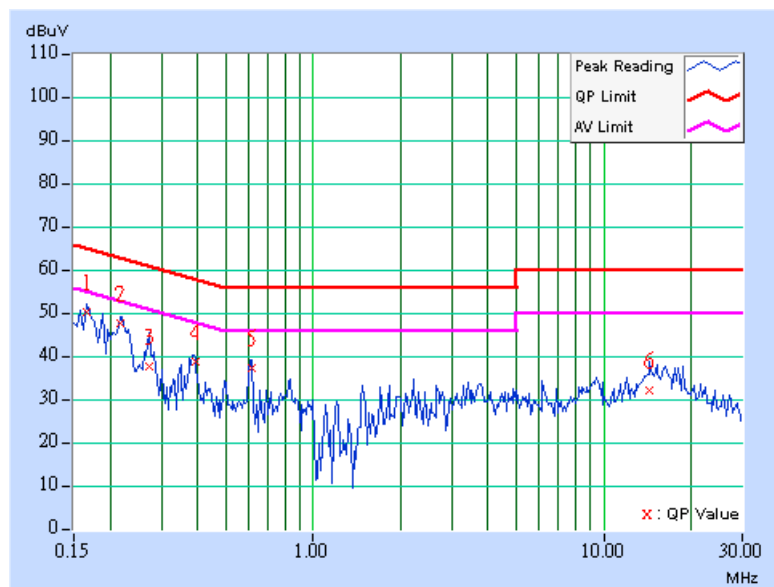

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
MODE	Channel 6	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	TESTED BY: Jamison Chan	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.10	47.73	-	47.83	-	64.43	54.43	-16.60	-
2	0.220	0.10	46.73	-	46.83	-	62.81	52.81	-15.98	-
3	0.607	0.13	36.07	-	36.20	-	56.00	46.00	-19.80	-
4	3.859	0.29	25.41	-	25.70	-	56.00	46.00	-30.30	-
5	9.422	0.48	31.69	-	32.17	-	60.00	50.00	-27.83	-
6	17.199	0.74	29.38	-	30.12	-	60.00	50.00	-29.88	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

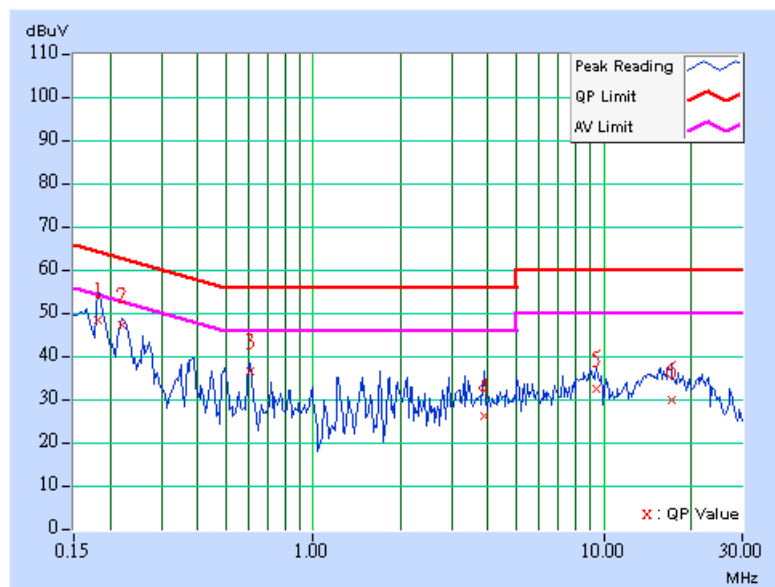

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
MODE	Channel 11	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	TESTED BY: Jamison Chan	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.175	0.10	50.97	-	51.07	-	64.73	54.73	-13.66	-
2	0.198	0.10	48.29	-	48.39	-	63.68	53.68	-15.29	-
3	0.278	0.10	32.69	-	32.79	-	60.89	50.89	-28.10	-
4	0.607	0.13	37.81	-	37.94	-	56.00	46.00	-18.06	-
5	9.563	0.58	29.66	-	30.24	-	60.00	50.00	-29.76	-
6	21.855	1.01	26.40	-	27.41	-	60.00	50.00	-32.59	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

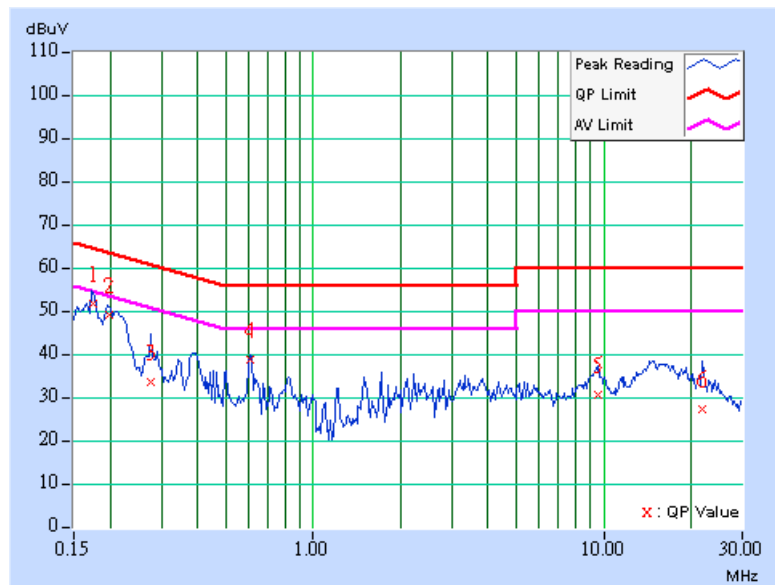

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
MODE	Channel 11	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	TESTED BY:	Jamison Chan

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	0.10	41.81	-	41.91	-	63.91	53.91	-22.00	-
2	0.435	0.11	38.76	-	38.87	-	57.15	47.15	-18.29	-
3	0.607	0.13	27.05	-	27.18	-	56.00	46.00	-28.82	-
4	1.594	0.20	36.48	-	36.68	-	56.00	46.00	-19.32	-
5	14.281	0.67	30.42	-	31.09	-	60.00	50.00	-28.91	-
6	19.211	0.78	26.91	-	27.69	-	60.00	50.00	-32.31	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

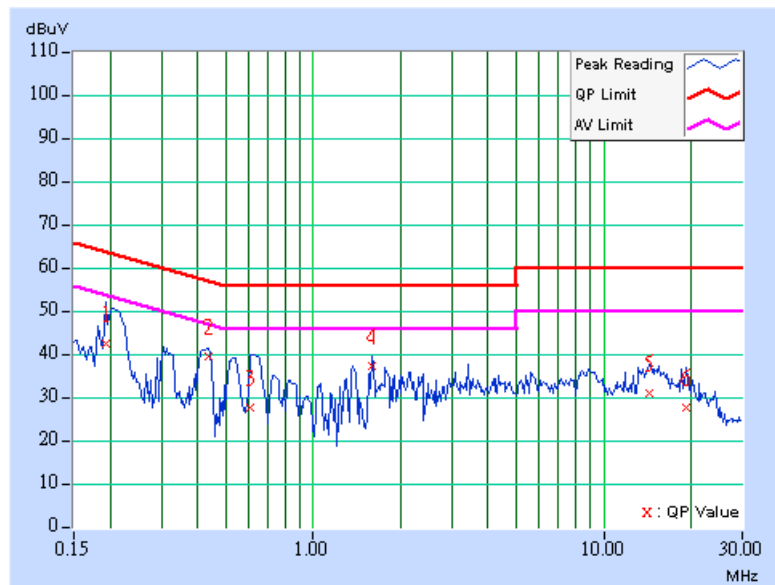

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	$2400/F(\text{kHz})$	300
0.490-1.705	$24000/F(\text{kHz})$	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 \log$ Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
*HP Spectrum Analyzer	8593E	3911A07465	Jul. 07, 2004
*HP Preamplifier	8447D	2944A10386	Aug. 12, 2004
* HP Preamplifier	8449B	3008A01292	Aug. 11, 2004
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Jun. 26, 2004
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
*SCHAFFNER TEST RECEIVER	SCR 3501	409	Jan. 26, 2004
* SCHAFFNER BILOG Antenna	CBL6111C	2727	Jul. 15, 2004
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	Jun. 30, 2004
* ADT. Turn Table	TT100	0201	NA
* ADT. Tower	AT100	0201	NA
* Software	ADT_Radiated_V 5.14	NA	NA
* ANRITSU RF Switches	MP59B	6100237246	Oct. 17, 2004
* TIMES RF cable	LMR-600	CABLE-ST10-01	Oct. 17, 2004

- NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. "*" = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 10.
5. The VCCI Site Registration No. is R-1625.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

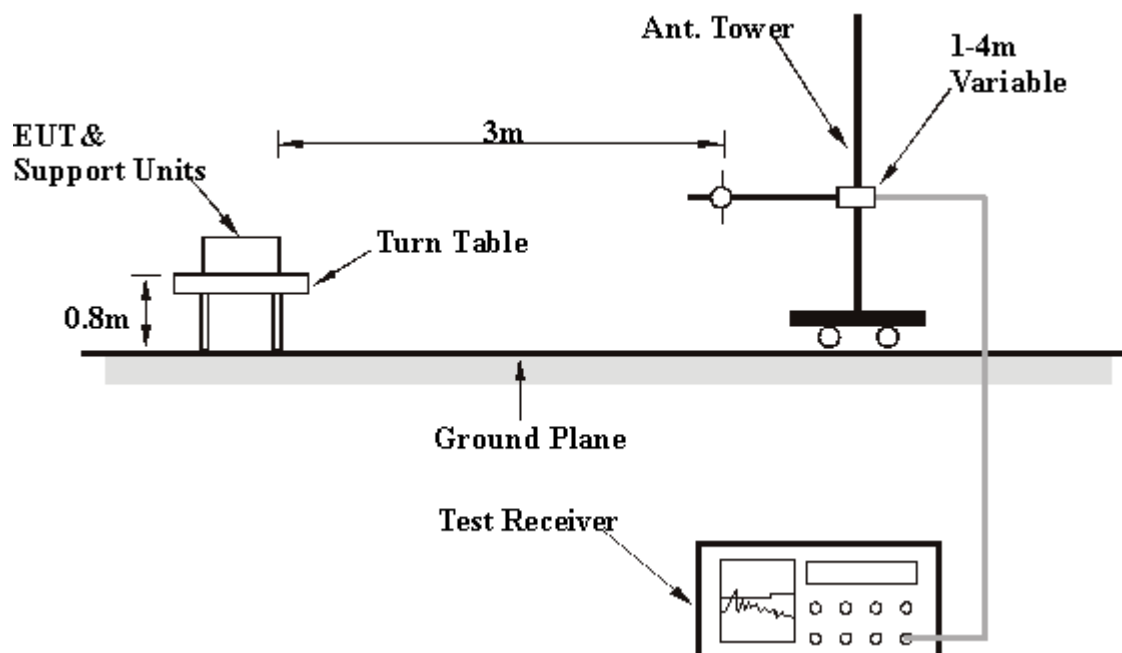

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7. TEST RESULTS

For Dipole Antenna

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
MODE	Channel 11	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20 deg. C, 70 % RH, 991hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.72	36.24 QP	40.00	-3.76	1.00 H	185	24.42	11.82
2	132.25	38.52 QP	43.50	-4.98	1.00 H	200	25.75	12.77
3	166.63	38.41 QP	43.50	-5.09	1.25 H	210	25.30	13.11
4	199.63	37.41 QP	43.50	-6.09	2.00 H	241	26.94	10.47
5	220.00	36.63 QP	46.00	-9.37	1.50 H	220	25.18	11.45
6	240.15	32.32 QP	46.00	-13.68	1.00 H	156	19.85	12.47
7	300.00	34.25 QP	46.00	-11.75	1.26 H	241	19.92	14.33
8	352.00	34.24 QP	46.00	-11.76	1.52 H	150	18.54	15.70
9	400.00	32.85 QP	46.00	-13.15	1.85 H	162	15.91	16.94
10	480.00	34.62 QP	46.00	-11.38	1.66 H	301	15.81	18.81

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
MODE	Channel 11	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20 deg. C, 70 % RH, 991hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	67.25	37.58 QP	40.00	-2.42	1.22 V	247	25.81	11.77
2	132.25	41.74 QP	43.50	-1.76	1.47 V	274	28.97	12.77
3	166.63	41.00 QP	43.50	-2.50	1.47 V	274	27.89	13.11
4	199.13	40.32 QP	43.50	-3.18	1.96 V	220	29.82	10.50
5	220.00	34.52 QP	46.00	-11.48	1.02 V	360	23.07	11.45
6	232.98	39.62 QP	46.00	-6.38	1.63 V	100	27.51	12.11
7	300.00	42.32 QP	46.00	-3.68	1.85 V	120	27.99	14.33
8	352.00	41.32 QP	46.00	-4.68	1.52 V	114	25.62	15.70
9	366.00	41.32 QP	46.00	-4.68	1.20 V	4	25.26	16.06
10	400.00	36.65 QP	46.00	-9.35	1.00 V	263	19.71	16.94
11	480.00	36.96 QP	46.00	-9.04	1.00 V	185	18.15	18.81
12	533.63	36.24 QP	46.00	-9.76	1.20 V	105	16.39	19.85
13	899.60	37.84 QP	46.00	-8.16	1.20 V	254	11.95	25.89

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

For PIFA Antenna

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
MODE	Channel 11	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24 deg. C, 70 % RH, 991hPa	TESTED BY: Jun Wu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	67.00	37.45 QP	40.00	-2.55	2.19 H	106	31.33	6.12
2	132.57	41.37 QP	43.50	-2.13	2.32 H	180	28.88	12.49
3	166.63	39.78 QP	43.50	-3.72	2.34 H	163	29.25	10.53
4	199.13	38.50 QP	43.50	-5.00	2.34 H	107	28.05	10.45
5	221.38	31.56 QP	46.00	-14.44	2.10 H	355	19.61	11.95
6	232.98	37.01 QP	46.00	-8.99	1.50 H	99	24.26	12.75
7	239.98	40.98 QP	46.00	-5.02	1.50 H	124	27.75	13.23
8	300.00	38.50 QP	46.00	-7.50	1.11 H	316	22.21	16.29
9	351.00	39.44 QP	46.00	-6.56	1.11 H	354	22.13	17.31
10	366.00	39.54 QP	46.00	-6.46	1.19 H	4	21.58	17.96
11	400.00	33.07 QP	46.00	-12.93	1.00 H	248	13.65	19.42
12	481.00	32.28 QP	46.00	-13.72	1.00 H	162	10.96	21.32
13	533.00	32.47 QP	46.00	-13.53	1.00 H	108	9.63	22.84
14	899.50	34.54 QP	46.00	-11.46	1.00 H	246	5.40	29.14

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
MODE	Channel 11	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24 deg. C, 70 % RH, 991hPa	TESTED BY: Jun Wu	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.72	36.00 QP	40.00	-4.00	1.00 V	67	29.89	6.11
2	132.80	38.33 QP	43.50	-5.17	1.00 V	254	25.84	12.49
3	165.88	36.28 QP	43.50	-7.22	1.00 V	38	25.72	10.56
4	199.63	30.27 QP	43.50	-13.23	1.00 V	0	19.81	10.46
5	240.15	29.71 QP	46.00	-16.29	1.00 V	149	16.47	13.24
6	351.00	31.52 QP	46.00	-14.48	1.00 V	329	14.21	17.31
7	399.00	32.89 QP	46.00	-13.11	1.00 V	304	13.51	19.38
8	896.50	33.77 QP	46.00	-12.23	1.00 V	68	4.62	29.15

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

4.2.8. TEST RESULTS (A)

For Dipole Antenna

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60 % RH, 991hPa	TESTED BY	Steven Lu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	42.47 PK	74.00	-31.53	1.06 H	205	12.17	30.30
1	2390.00	34.60 AV	54.00	-19.40	1.06 H	205	4.30	30.30
2	*2412.00	102.05 PK			1.06 H	205	71.81	30.24
2	*2412.00	94.18 AV			1.06 H	205	63.94	30.24
3	4824.00	55.22 PK	74.00	-18.78	1.04 H	197	18.69	36.53
3	4824.00	42.16 AV	54.00	-11.84	1.04 H	197	5.63	36.53

NTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	48.53 PK	74.00	-25.47	1.00 V	257	18.23	30.30
1	2390.00	40.46 AV	54.00	-13.54	1.00 V	257	10.16	30.30
2	*2412.00	108.11 PK			1.00 V	257	77.87	30.24
2	*2412.00	100.04 AV			1.00 V	257	69.80	30.24
3	4824.00	56.91 PK	74.00	-17.09	1.05 V	250	20.38	36.53
3	4824.00	42.88 AV	54.00	-11.12	1.05 V	250	6.35	36.53

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60 % RH, 991hPa	TESTED BY	Steven Lu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	101.75 PK			1.03 H	206	71.44	30.31
1	*2437.00	93.70 AV			1.03 H	206	63.39	30.31
2	4874.00	56.05 PK	74.00	-17.95	1.03 H	250	19.36	36.69
2	4874.00	42.45 AV	54.00	-11.55	1.03 H	250	5.76	36.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.61 PK			1.41 V	250	79.30	30.31
1	*2437.00	101.38 AV			1.41 V	250	71.07	30.31
2	4874.00	56.84 PK	74.00	-17.16	1.41 V	203	20.15	36.69
2	4874.00	43.42 AV	54.00	-10.58	1.41 V	203	6.73	36.69

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60 % RH, 991hPa	TESTED BY	Steven Lu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	99.32 PK			1.00 H	328	68.95	30.37
1	*2462.00	91.67 AV			1.00 H	328	61.30	30.37
2	4283.50	40.15 PK	74.00	-33.85	1.00 H	328	4.11	36.04
2	4283.50	32.50 AV	54.00	-21.50	1.00 H	328	-3.54	36.04
3	4924.00	56.20 PK	74.00	-17.80	1.47 H	164	19.35	36.85
3	4924.00	42.57 AV	54.00	-11.43	1.47 H	164	5.72	36.85

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.96 PK			1.34 V	252	79.59	30.37
1	*2462.00	101.75 AV			1.34 V	252	71.38	30.37
2	2483.50	50.79 PK	74.00	-23.21	1.34 V	252	20.36	30.43
2	2483.50	42.58 AV	54.00	-11.42	1.34 V	252	12.15	30.43
3	4924.00	54.57 PK	74.00	-19.43	1.24 V	215	17.72	36.85
3	4924.00	41.88 AV	54.00	-12.12	1.24 V	215	5.03	36.85

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

For PIFA Antenna

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60 % RH, 991hPa	TESTED BY	Steven Lu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.12 PK	74.00	-19.88	1.15 H	87	23.82	30.30
1	2390.00	46.18 AV	54.00	-7.82	1.15 H	87	15.88	30.30
2	*2412.00	103.64 PK			1.15 H	87	73.40	30.24
2	*2412.00	95.70 AV			1.15 H	87	65.46	30.24
3	4824.00	56.65 PK	74.00	-17.35	1.44 H	242	20.12	36.53
3	4824.00	42.21 AV	54.00	-11.79	1.44 H	242	5.68	36.53

NTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	41.09 PK	74.00	-32.91	1.00 V	205	10.79	30.30
1	2390.00	33.06 AV	54.00	-20.94	1.00 V	205	2.76	30.30
2	*2412.00	100.89 PK			1.00 V	205	70.65	30.24
2	*2412.00	92.86 AV			1.00 V	205	62.62	30.24
3	4824.00	56.36 PK	74.00	-17.64	1.47 V	216	19.83	36.53
3	4824.00	42.44 AV	54.00	-11.56	1.47 V	216	5.91	36.53

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60 % RH, 991hPa	TESTED BY	Steven Lu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	103.01 PK			1.32 H	82	72.70	30.31
1	*2437.00	95.16 AV			1.32 H	82	64.85	30.31
2	4874.00	55.86 PK	74.00	-18.14	1.44 H	211	19.17	36.69
2	4874.00	42.55 AV	54.00	-11.45	1.44 H	211	5.86	36.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	100.47 PK			1.00 V	206	70.16	30.31
1	*2437.00	92.30 AV			1.00 V	206	61.99	30.31
2	4874.00	56.93 PK	74.00	-17.07	1.45 V	210	20.24	36.69
2	4874.00	43.57 AV	54.00	-10.43	1.45 V	210	6.88	36.69

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60 % RH, 991hPa	TESTED BY	Steven Lu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.26 PK			1.41 H	150	67.89	30.37
1	*2462.00	90.30 AV			1.41 H	150	59.93	30.37
2	2483.50	39.16 PK	74.00	-34.84	1.41 H	150	8.73	30.43
2	2483.50	31.14 AV	54.00	-22.86	1.41 H	150	0.71	30.43
3	4924.00	56.06 PK	74.00	-17.94	1.44 H	210	19.21	36.85
3	4924.00	42.73 AV	54.00	-11.27	1.44 H	210	5.88	36.85

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.62 PK			1.00 V	210	71.25	30.37
1	*2462.00	93.46 AV			1.00 V	210	63.09	30.37
2	2483.50	42.46 PK	74.00	-31.54	1.00 V	210	12.03	30.43
2	2483.50	34.30 AV	54.00	-19.70	1.00 V	210	3.87	30.43
3	4924.00	56.49 PK	74.00	-17.51	1.50 V	209	19.64	36.85
3	4924.00	43.64 AV	54.00	-10.36	1.50 V	209	6.79	36.85

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

4.2.9. TEST RESULTS (B)

For Dipole Antenna

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60 % RH, 991hPa	TESTED BY	Steven Lu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.30 PK	74.00	-21.70	1.08 H	207	22.00	30.30
1	2390.00	43.19 AV	54.00	-10.81	1.08 H	207	12.89	30.30
2	*2412.00	98.75 PK			1.08 H	207	68.51	30.24
2	*2412.00	89.64 AV			1.08 H	207	59.40	30.24
3	4824.00	55.51 PK	74.00	-18.49	1.02 H	210	18.98	36.53
3	4824.00	42.34 AV	54.00	-11.66	1.02 H	210	5.81	36.53

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.66 PK	74.00	-12.34	1.44 V	251	31.36	30.30
1	2390.00	51.99 AV	54.00	-2.01	1.44 V	251	21.69	30.30
2	*2412.00	108.11 PK			1.44 V	251	77.87	30.24
2	*2412.00	98.44 AV			1.44 V	251	68.20	30.24
3	4824.00	56.13 PK	74.00	-17.87	1.84 V	206	19.60	36.53
3	4824.00	43.15 AV	54.00	-10.85	1.84 V	206	6.62	36.53

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60 % RH, 991hPa	TESTED BY	Steven Lu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	98.45 PK			1.04 H	206	68.14	30.31
1	*2437.00	89.04 AV			1.04 H	206	58.73	30.31
2	4874.00	55.77 PK	74.00	-18.23	1.02 H	200	19.08	36.69
2	4874.00	42.40 AV	54.00	-11.60	1.02 H	200	5.71	36.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	106.70 PK			1.40 V	250	76.39	30.31
1	*2437.00	97.03 AV			1.40 V	250	66.72	30.31
2	4874.00	56.27 PK	74.00	-17.73	1.44 V	207	19.58	36.69
2	4874.00	43.47 AV	54.00	-10.53	1.44 V	207	6.78	36.69

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.



EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60 % RH, 991hPa	TESTED BY	Steven Lu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	96.84 PK			1.06 H	205	66.47	30.37
1	*2462.00	87.23 AV			1.06 H	205	56.86	30.37
2	2483.50	50.39 PK	74.00	-23.61	1.06 H	205	19.96	30.43
2	2483.50	40.76 AV	54.00	-13.24	1.06 H	205	10.33	30.43
3	4924.00	56.26 PK	74.00	-17.74	1.16 H	268	19.41	36.85
3	4924.00	42.77 AV	54.00	-11.23	1.16 H	268	5.92	36.85

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.27 PK			1.37 V	251	76.90	30.37
1	*2462.00	97.63 AV			1.37 V	251	67.26	30.37
2	2483.50	60.80 PK	74.00	-13.20	1.37 V	251	30.37	30.43
2	2483.50	51.16 AV	54.00	-2.84	1.37 V	251	20.73	30.43
3	4924.00	55.49 PK	74.00	-18.51	1.59 V	211	18.64	36.85
3	4924.00	41.97 AV	54.00	-12.03	1.59 V	211	5.12	36.85

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

For PIFA Antenna

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60 % RH, 991hPa	TESTED BY	Steven Lu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	51.13 PK	74.00	-22.87	1.13 H	85	20.83	30.30
1	2390.00	41.53 AV	54.00	-12.47	1.13 H	85	11.23	30.30
2	*2412.00	100.65 PK			1.13 H	85	70.41	30.24
2	*2412.00	91.05 AV			1.13 H	85	60.81	30.24
3	4824.00	55.92 PK	74.00	-18.08	1.48 H	175	19.39	36.53
3	4824.00	42.25 AV	54.00	-11.75	1.48 H	175	5.72	36.53

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	48.99 PK	74.00	-25.01	1.24 V	212	18.69	30.30
1	2390.00	39.37 AV	54.00	-14.63	1.24 V	212	9.07	30.30
2	*2412.00	98.51 PK			1.24 V	212	68.27	30.24
2	*2412.00	88.89 AV			1.24 V	212	58.65	30.24
3	4824.00	55.89 PK	74.00	-18.11	1.48 V	210	19.36	36.53
3	4824.00	42.86 AV	54.00	-11.14	1.48 V	210	6.33	36.53

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60 % RH, 991hPa	TESTED BY	Steven Lu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	100.11 PK			1.17 H	90	69.80	30.31
1	*2437.00	90.66 AV			1.17 H	90	60.35	30.31
2	4874.00	55.72 PK	74.00	-18.28	1.46 H	134	19.03	36.69
2	4874.00	42.50 AV	54.00	-11.50	1.46 H	134	5.81	36.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	96.88 PK			1.71 V	226	66.57	30.31
1	*2437.00	87.76 AV			1.71 V	226	57.45	30.31
2	4874.00	55.88 PK	74.00	-18.12	1.45 V	208	19.19	36.69
2	4874.00	43.46 AV	54.00	-10.54	1.45 V	208	6.77	36.69

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60 % RH, 991hPa	TESTED BY	Steven Lu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	99.62 PK			1.18 H	76	69.25	30.37
1	*2462.00	89.95 AV			1.18 H	76	59.58	30.37
2	2483.50	50.59 PK	74.00	-23.41	1.18 H	76	20.16	30.43
2	2483.50	40.92 AV	54.00	-13.08	1.18 H	76	10.49	30.43
3	4924.00	55.47 PK	74.00	-18.53	1.43 H	210	18.62	36.85
3	4924.00	42.78 AV	54.00	-11.22	1.43 H	210	5.93	36.85

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	97.73 PK			1.70 V	224	67.36	30.37
1	*2462.00	88.09 AV			1.70 V	224	57.72	30.37
2	2483.50	48.70 PK	74.00	-25.30	1.70 V	224	18.27	30.43
2	2483.50	39.06 AV	54.00	-14.94	1.70 V	224	8.63	30.43
3	4924.00	56.40 PK	74.00	-17.60	1.63 V	210	19.55	36.85
3	4924.00	43.56 AV	54.00	-10.44	1.63 V	210	6.71	36.85

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS (A)

For Dipole & PIFA Antennas


EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY:	Ansen Lei		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.60	0.5	PASS
6	2437	11.56	0.5	PASS
11	2462	11.56	0.5	PASS


CH1

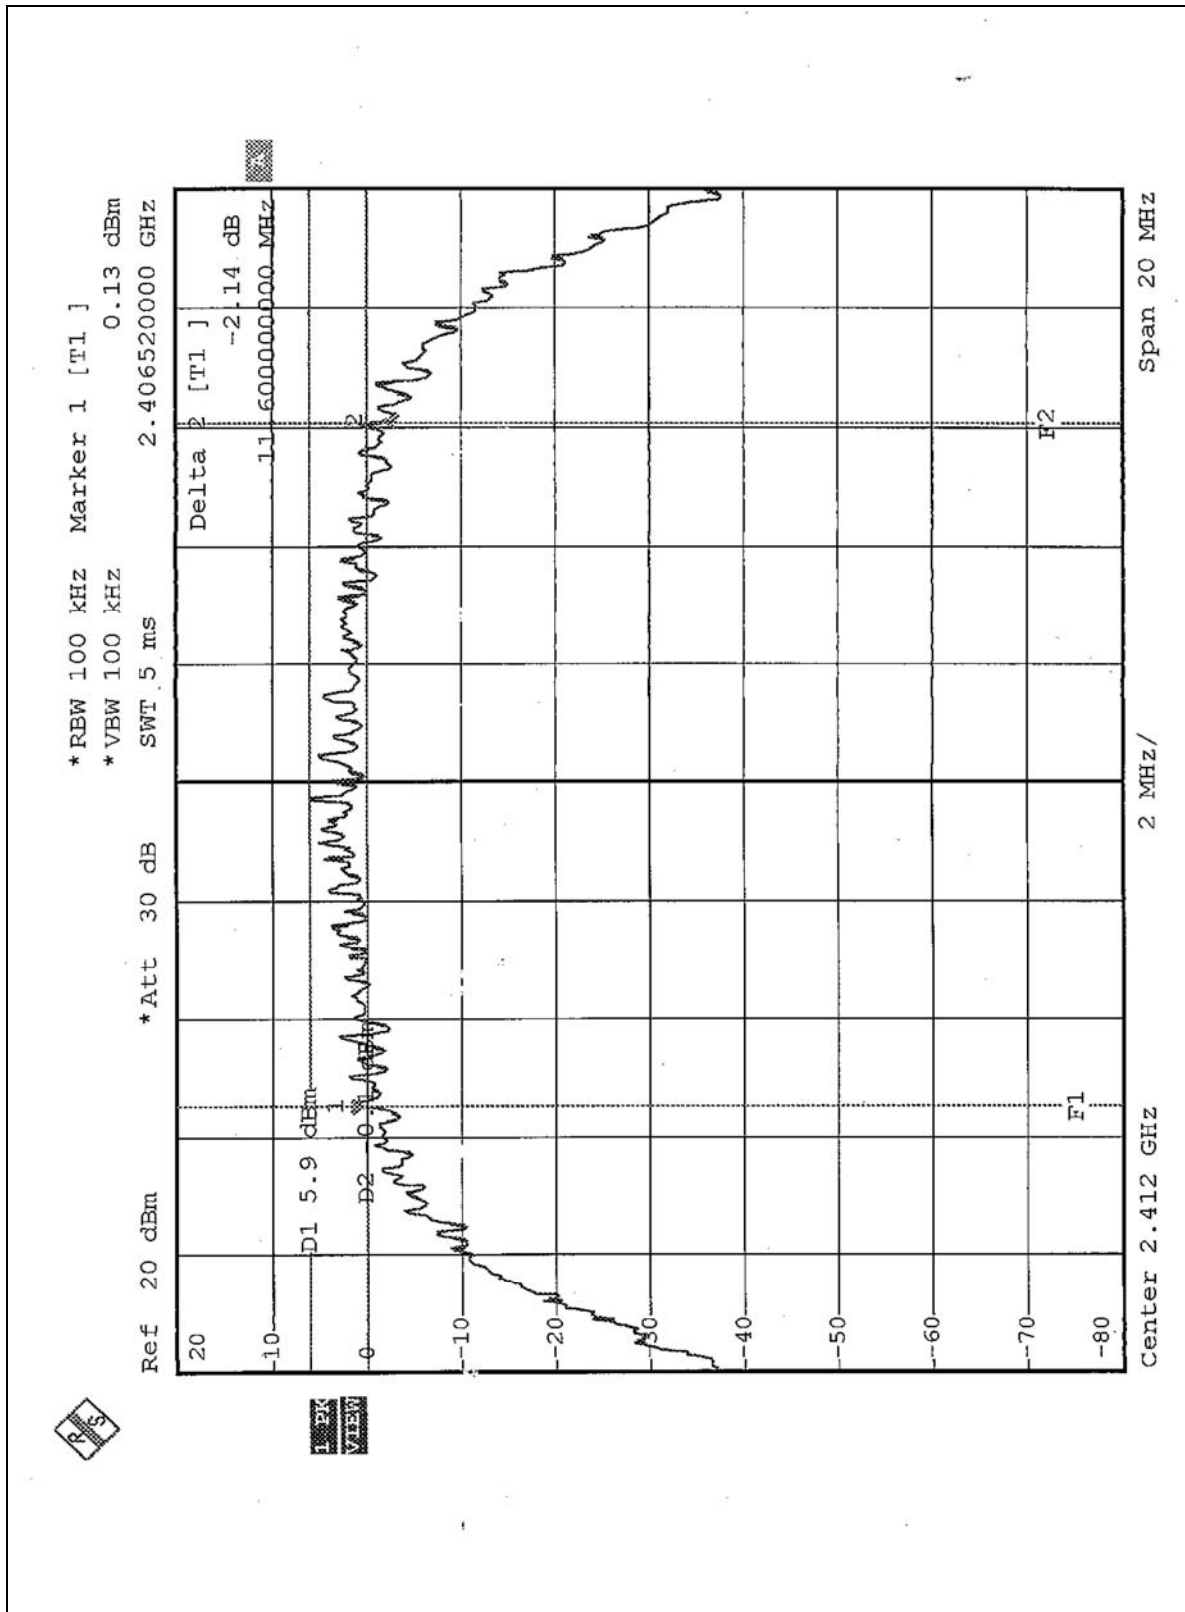

CH6

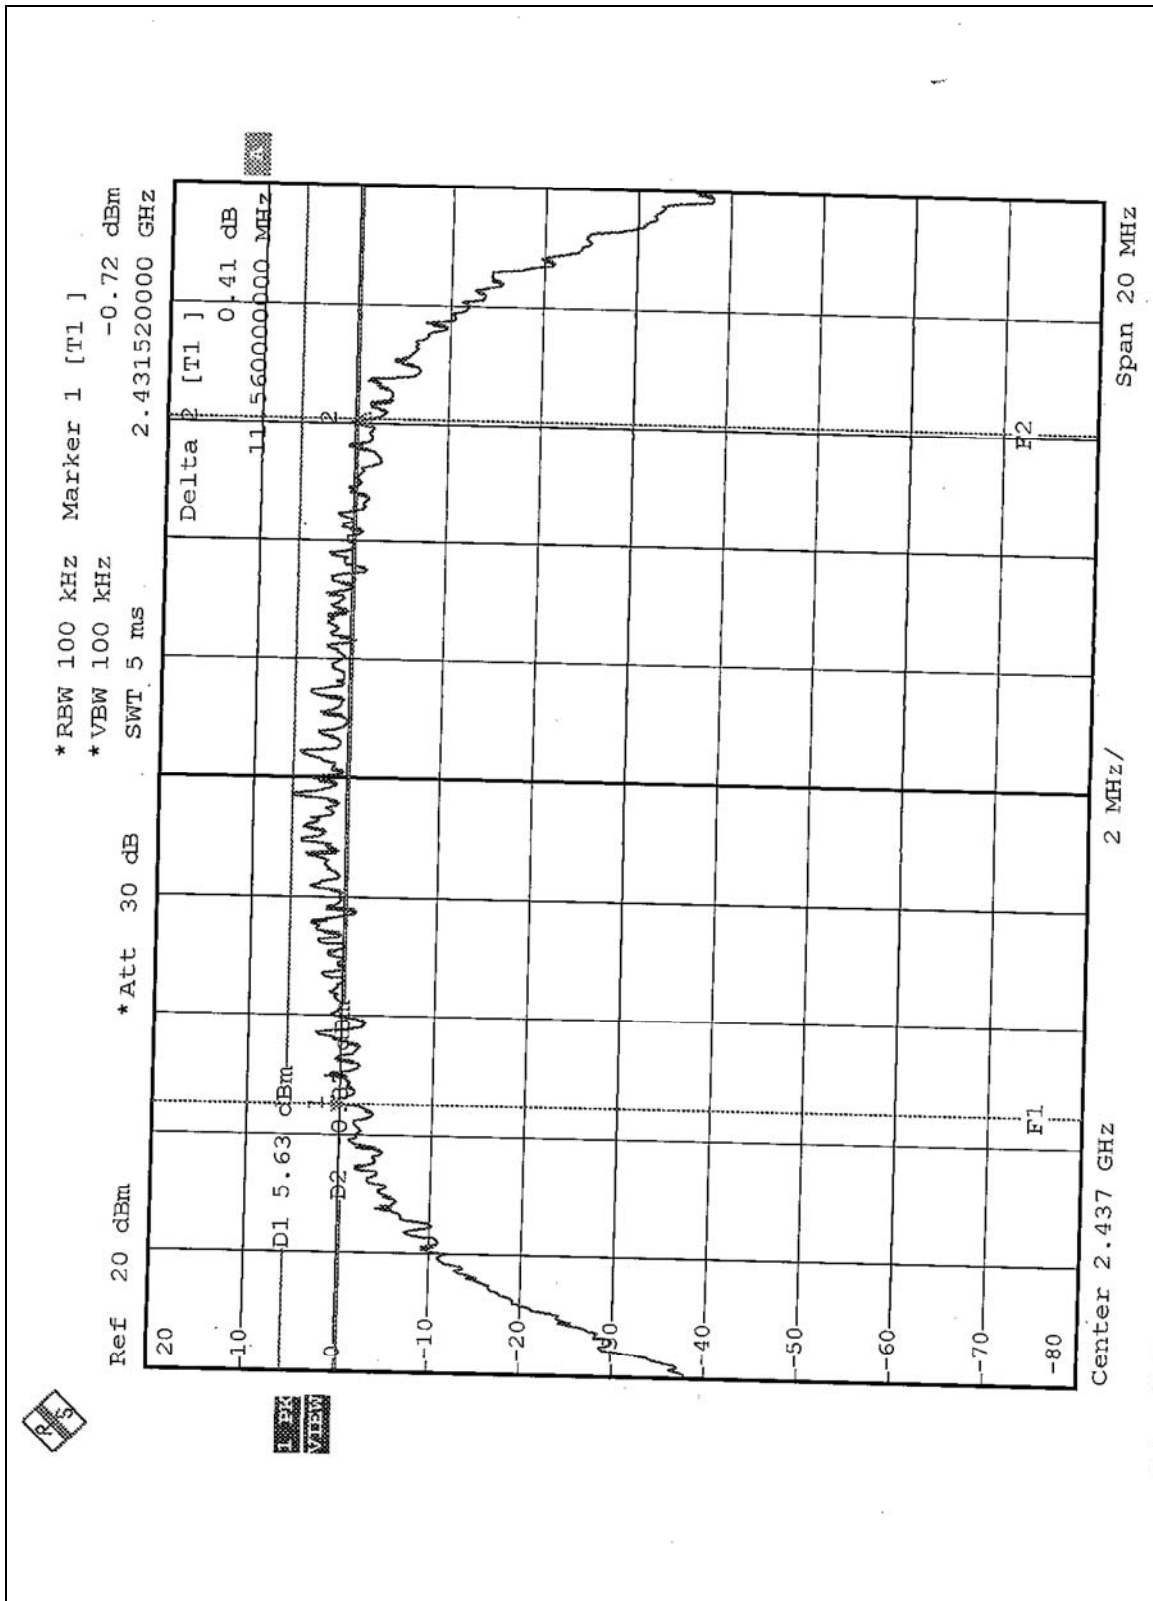

CH11

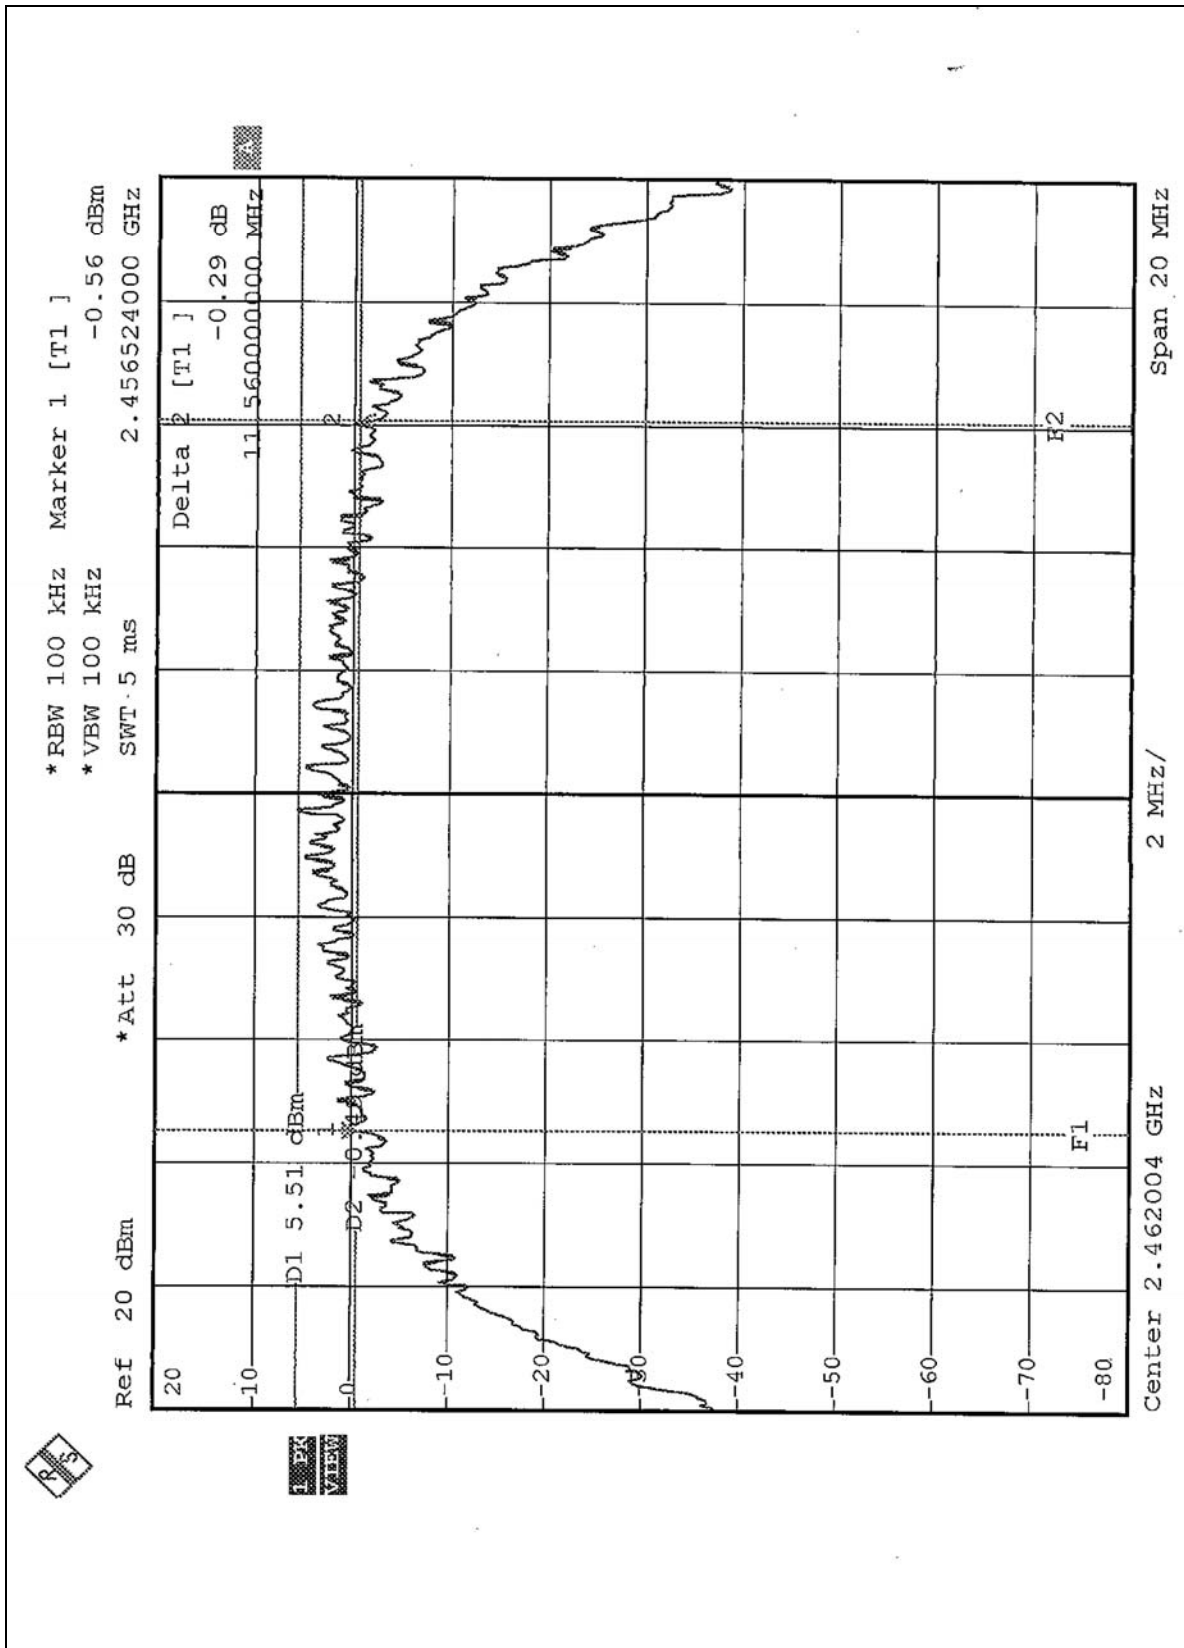


4.3.8 TEST RESULTS (B)

For Dipole & PIFA Antennas


EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY:	Ansen Lei		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.40	0.5	PASS
6	2437	16.40	0.5	PASS
11	2462	16.40	0.5	PASS


CH1

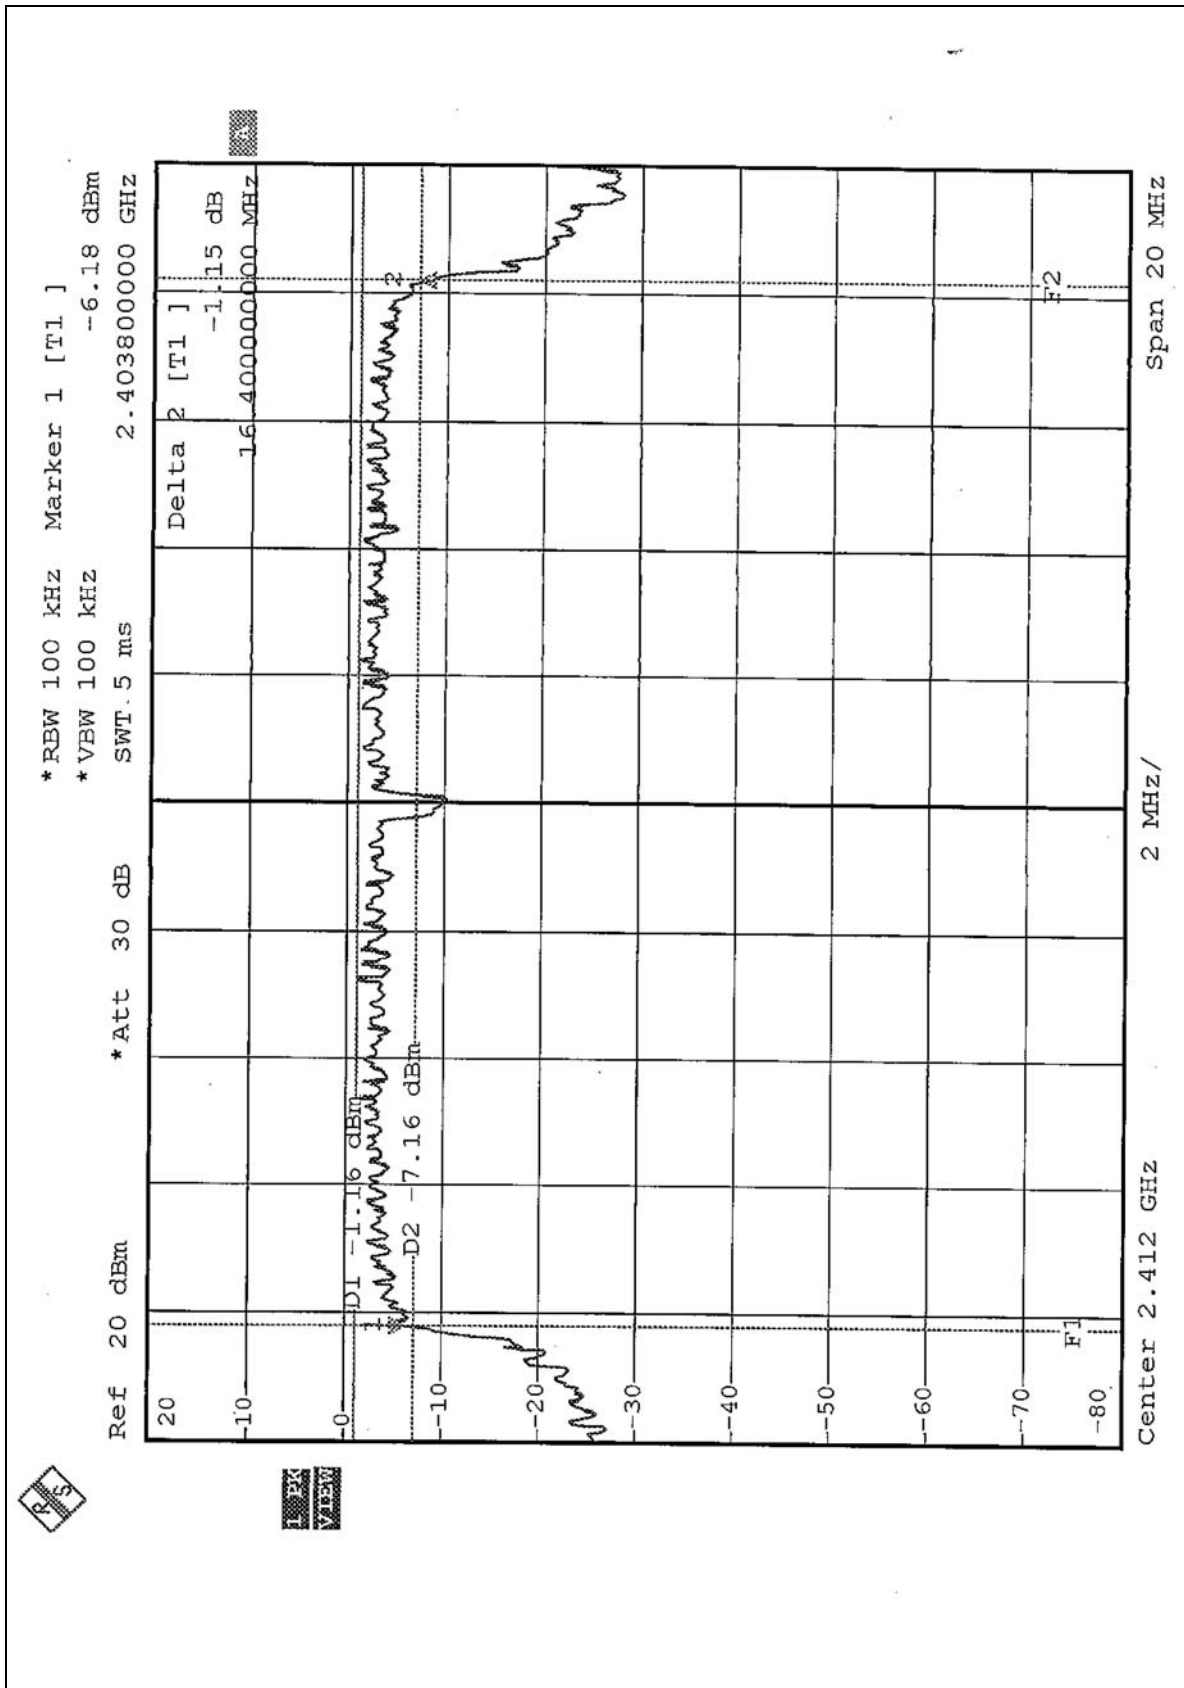

CH6

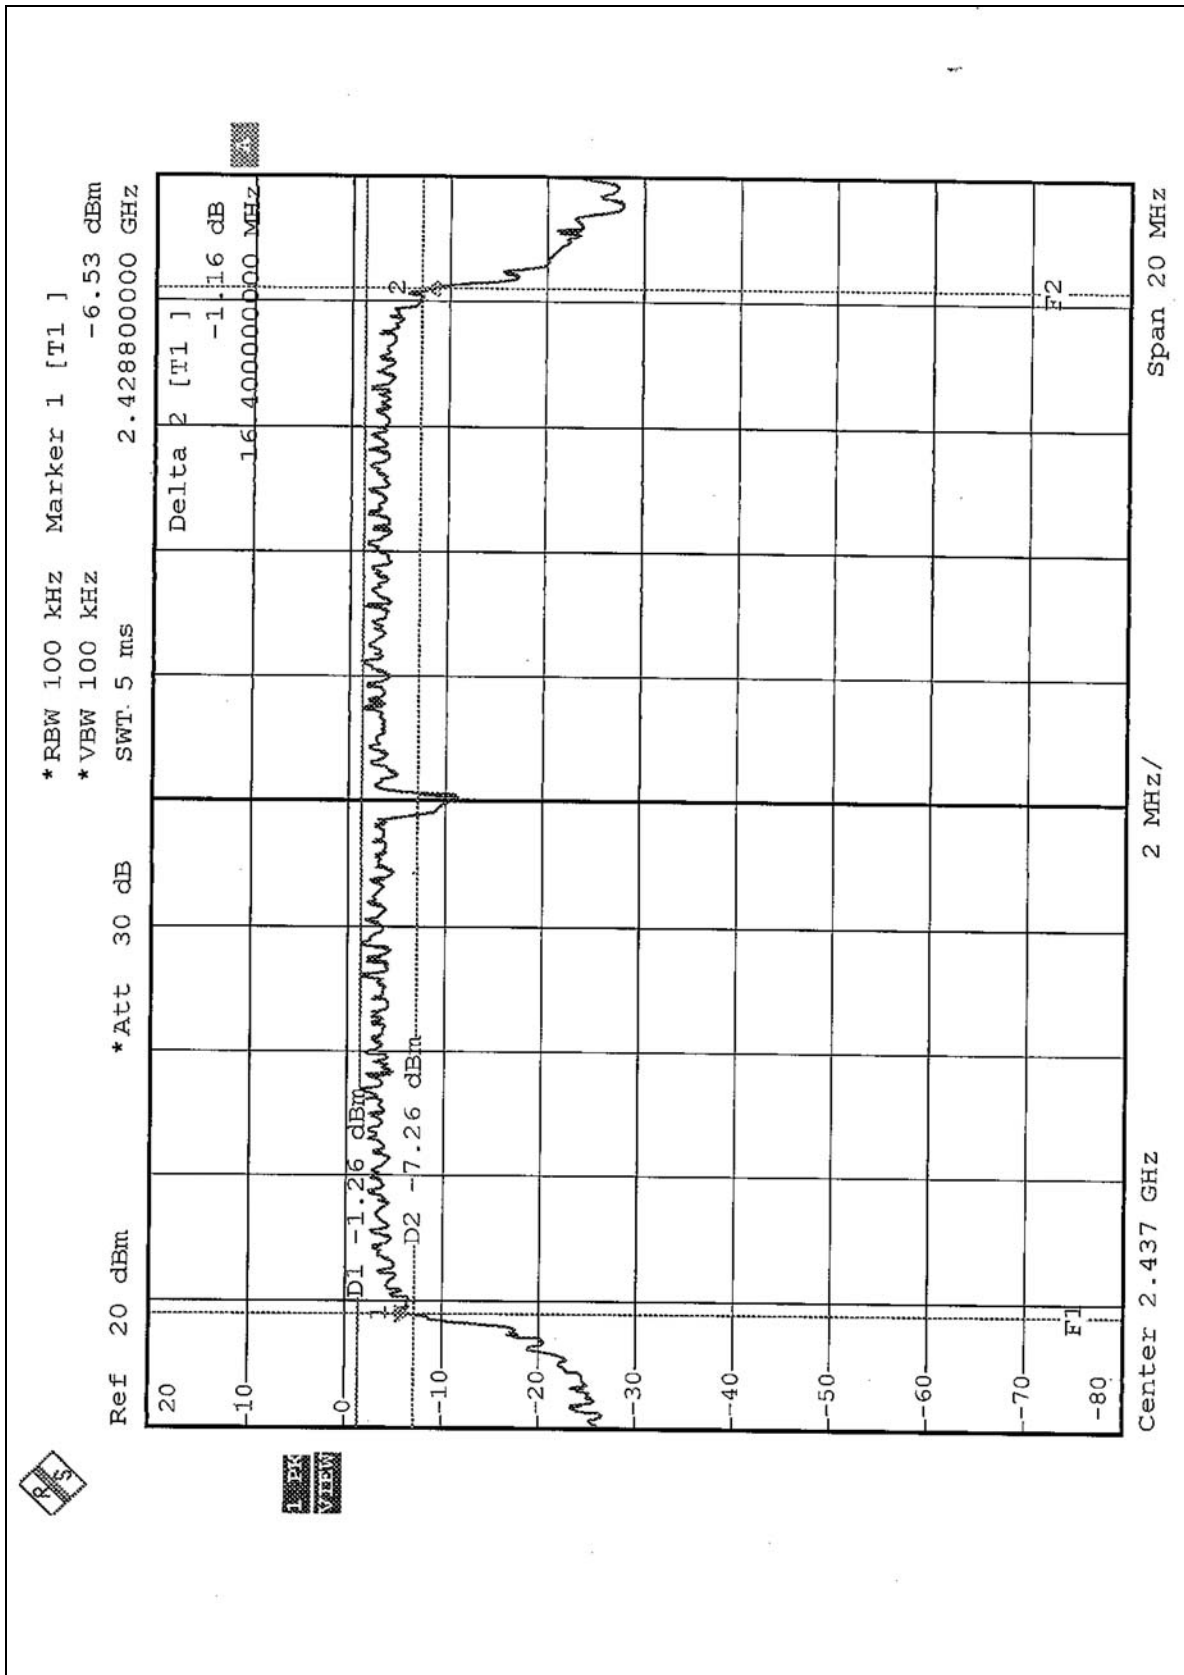

CH11

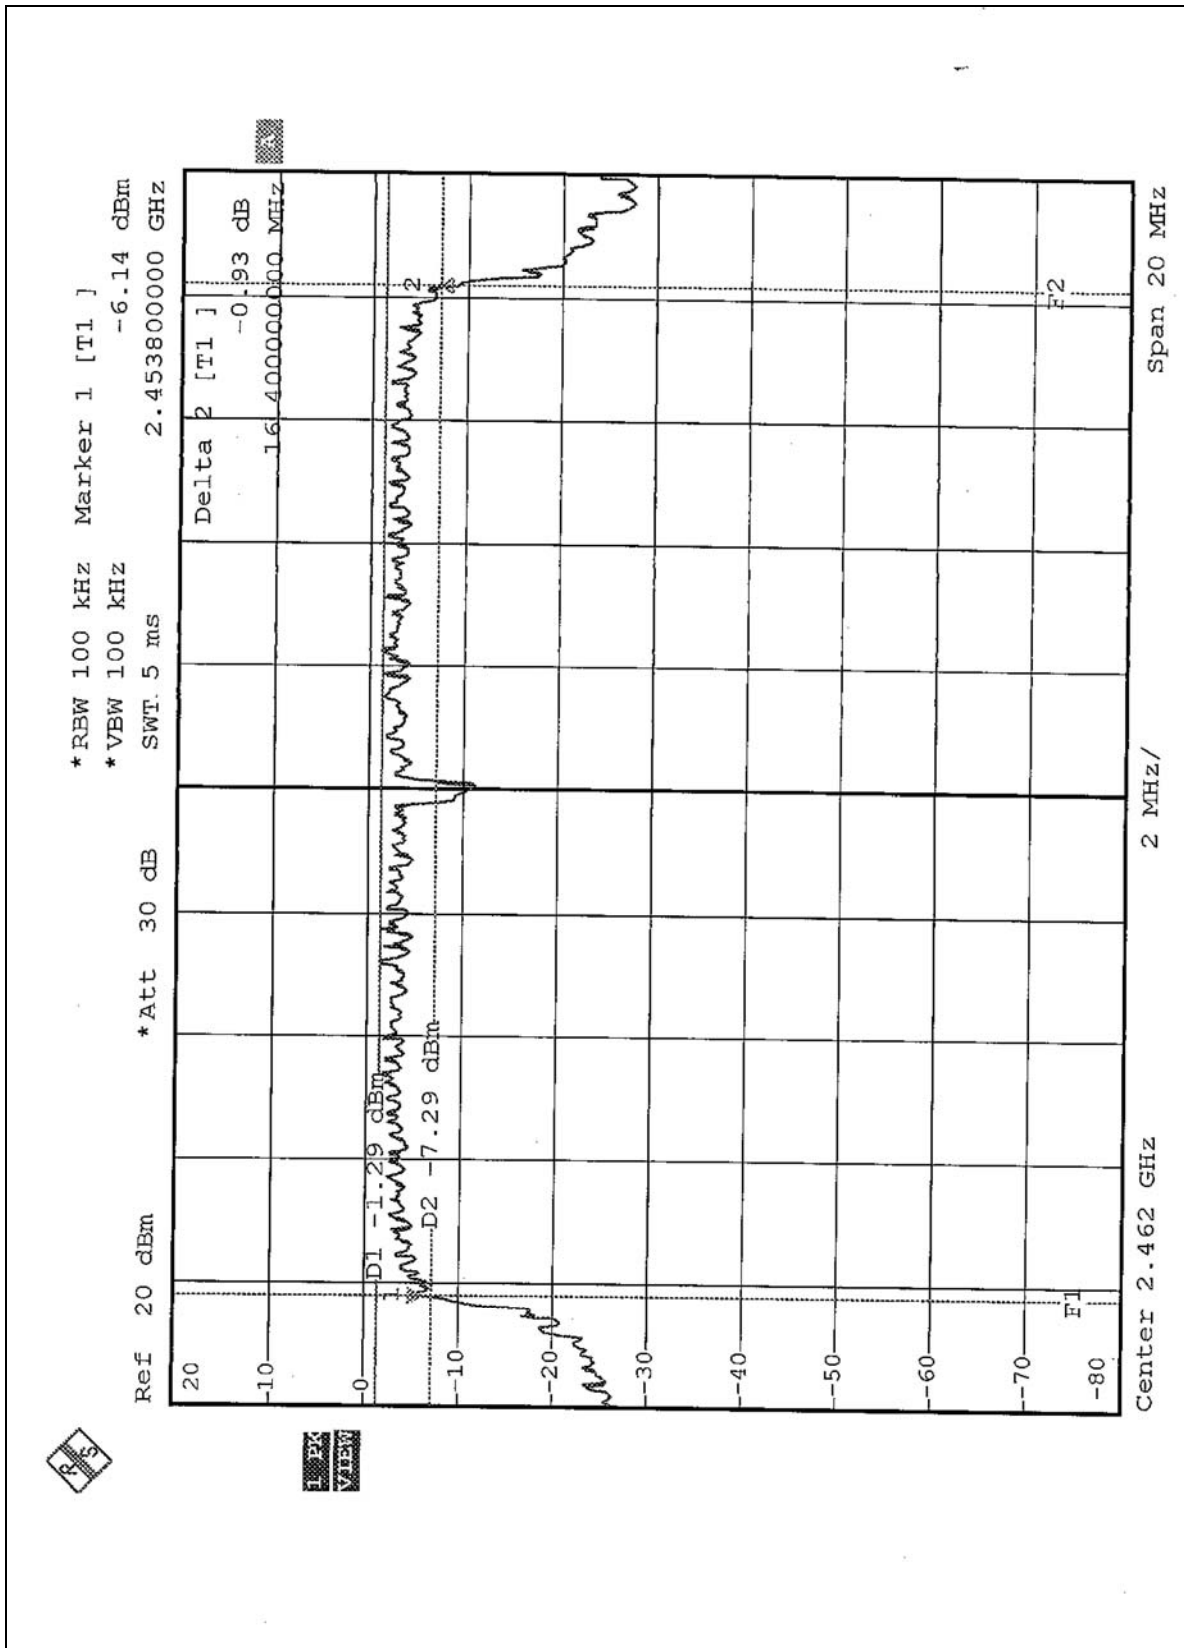

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004
R&S SIGNAL GENERATOR	SMP04	100011	May 28, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	B048470	Mar. 05, 2004
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to peak the response of the detector.
2. Replaced the EUT by the signal generator . The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS (A)

For Dipole & PIFA Antennas

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY:	Ansen Lei		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.21	30	PASS
6	2437	16.55	30	PASS
11	2462	16.35	30	PASS

4.4.8 TEST RESULTS (B)

For Dipole & PIFA Antennas

EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
INPUT POWER (SYSTEM)	120Vac, 60 Hz	MODE	OFDM
TESTED BY:	Ansen Lei	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.21	30	PASS
6	2437	16.43	30	PASS
11	2462	16.28	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6


4.5.7 TEST RESULTS (A)

For Dipole & PIFA Antennas


EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY:	Ansen Lei		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-10.03	8	PASS
6	2437	-10.16	8	PASS
11	2462	-10.00	8	PASS


CH1

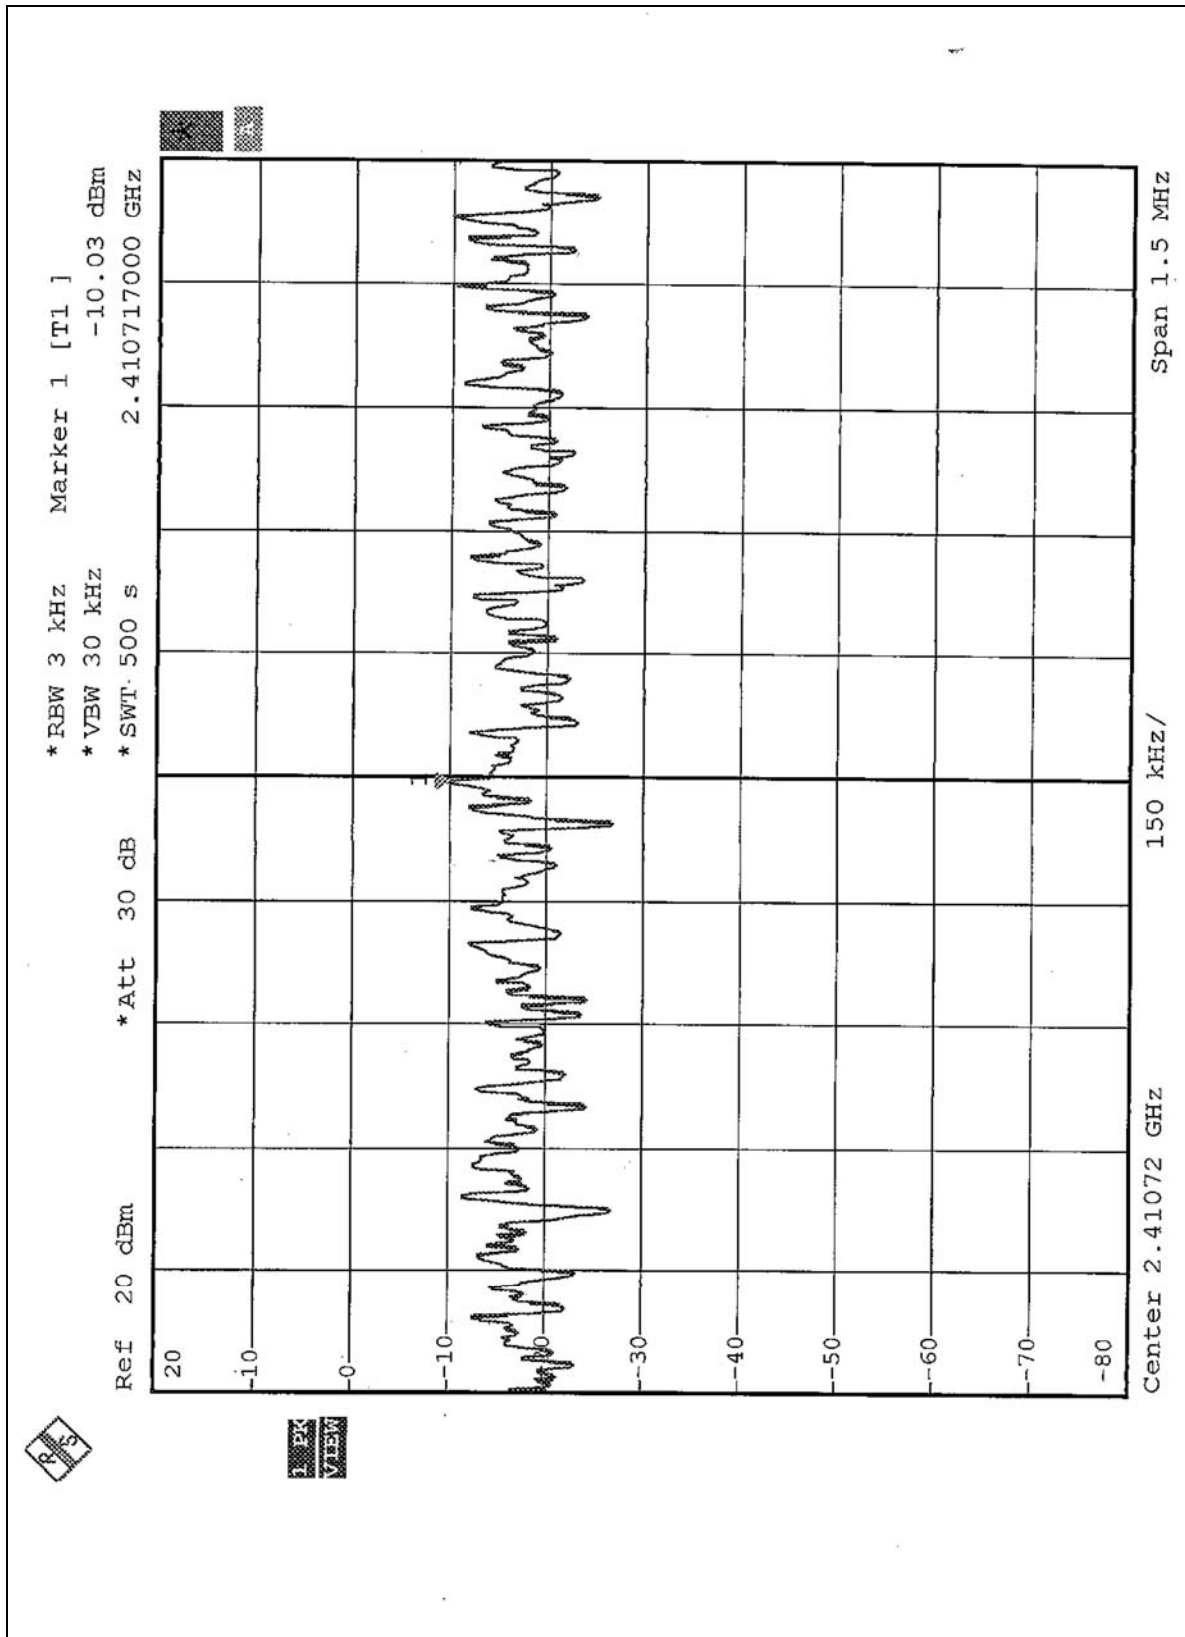

CH6

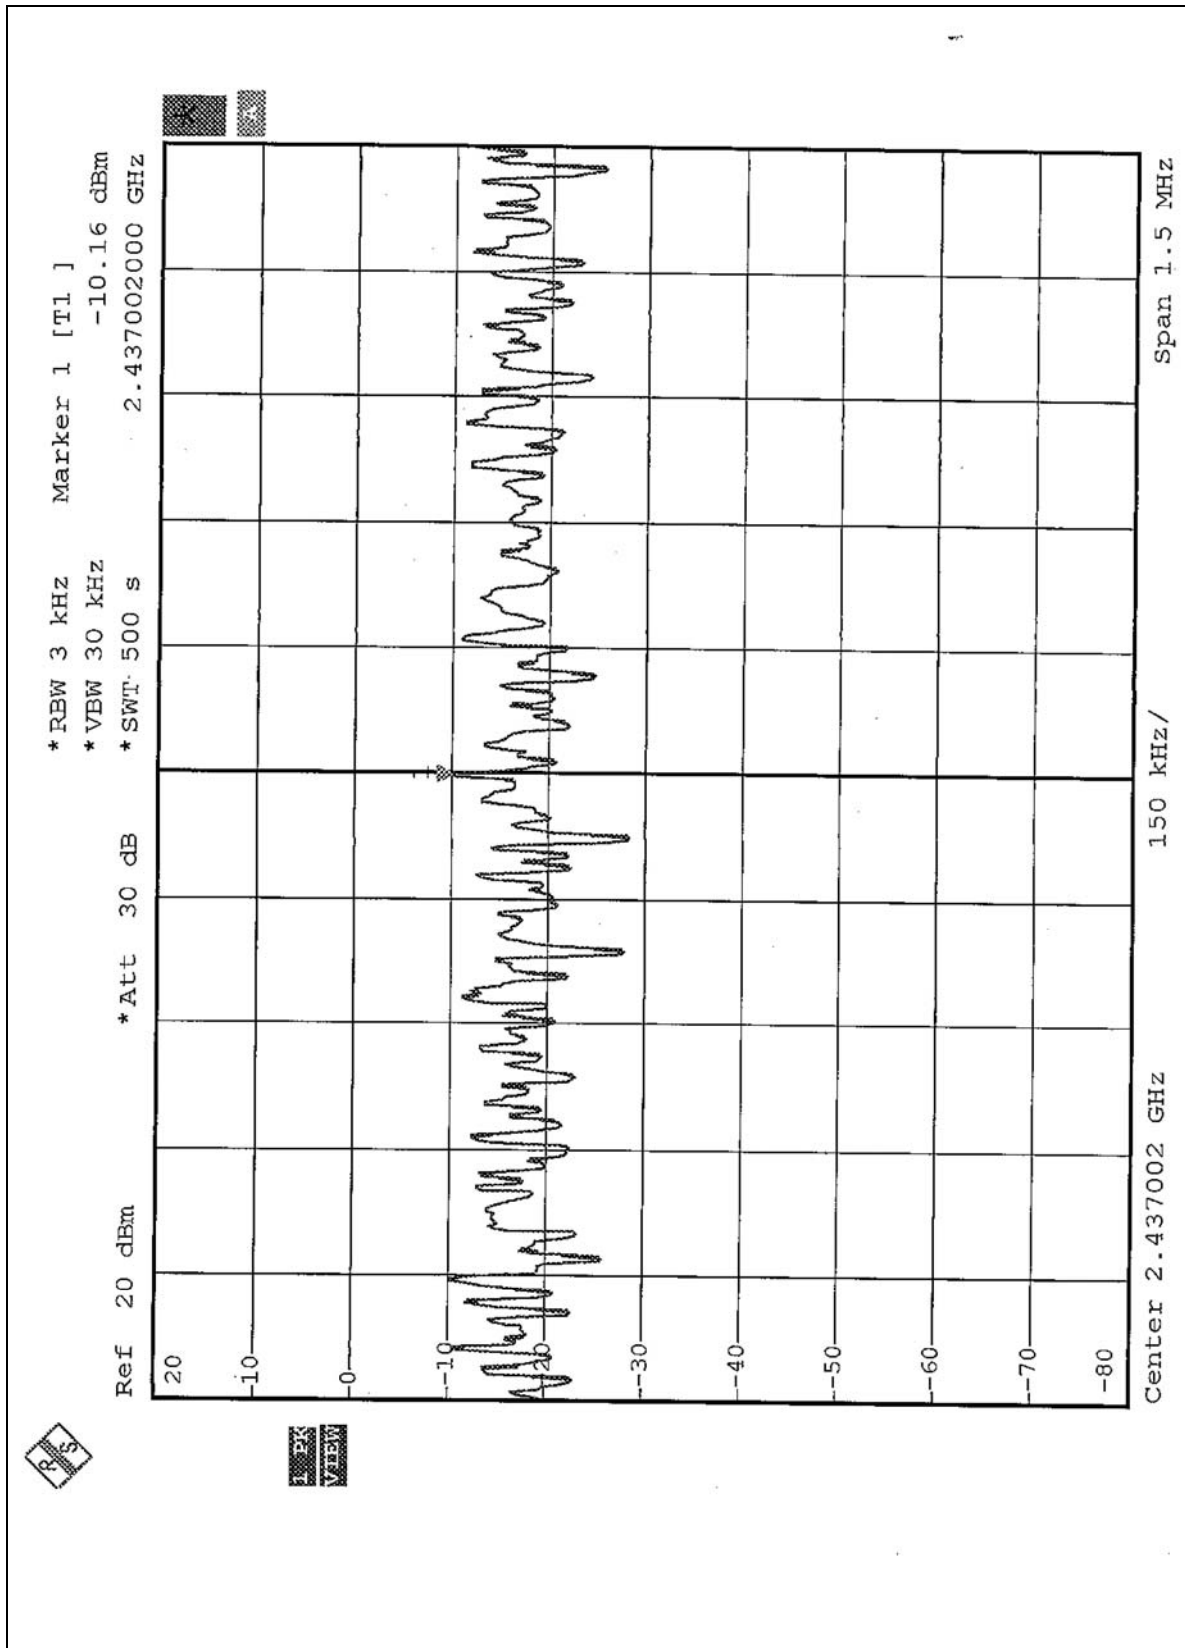

CH11

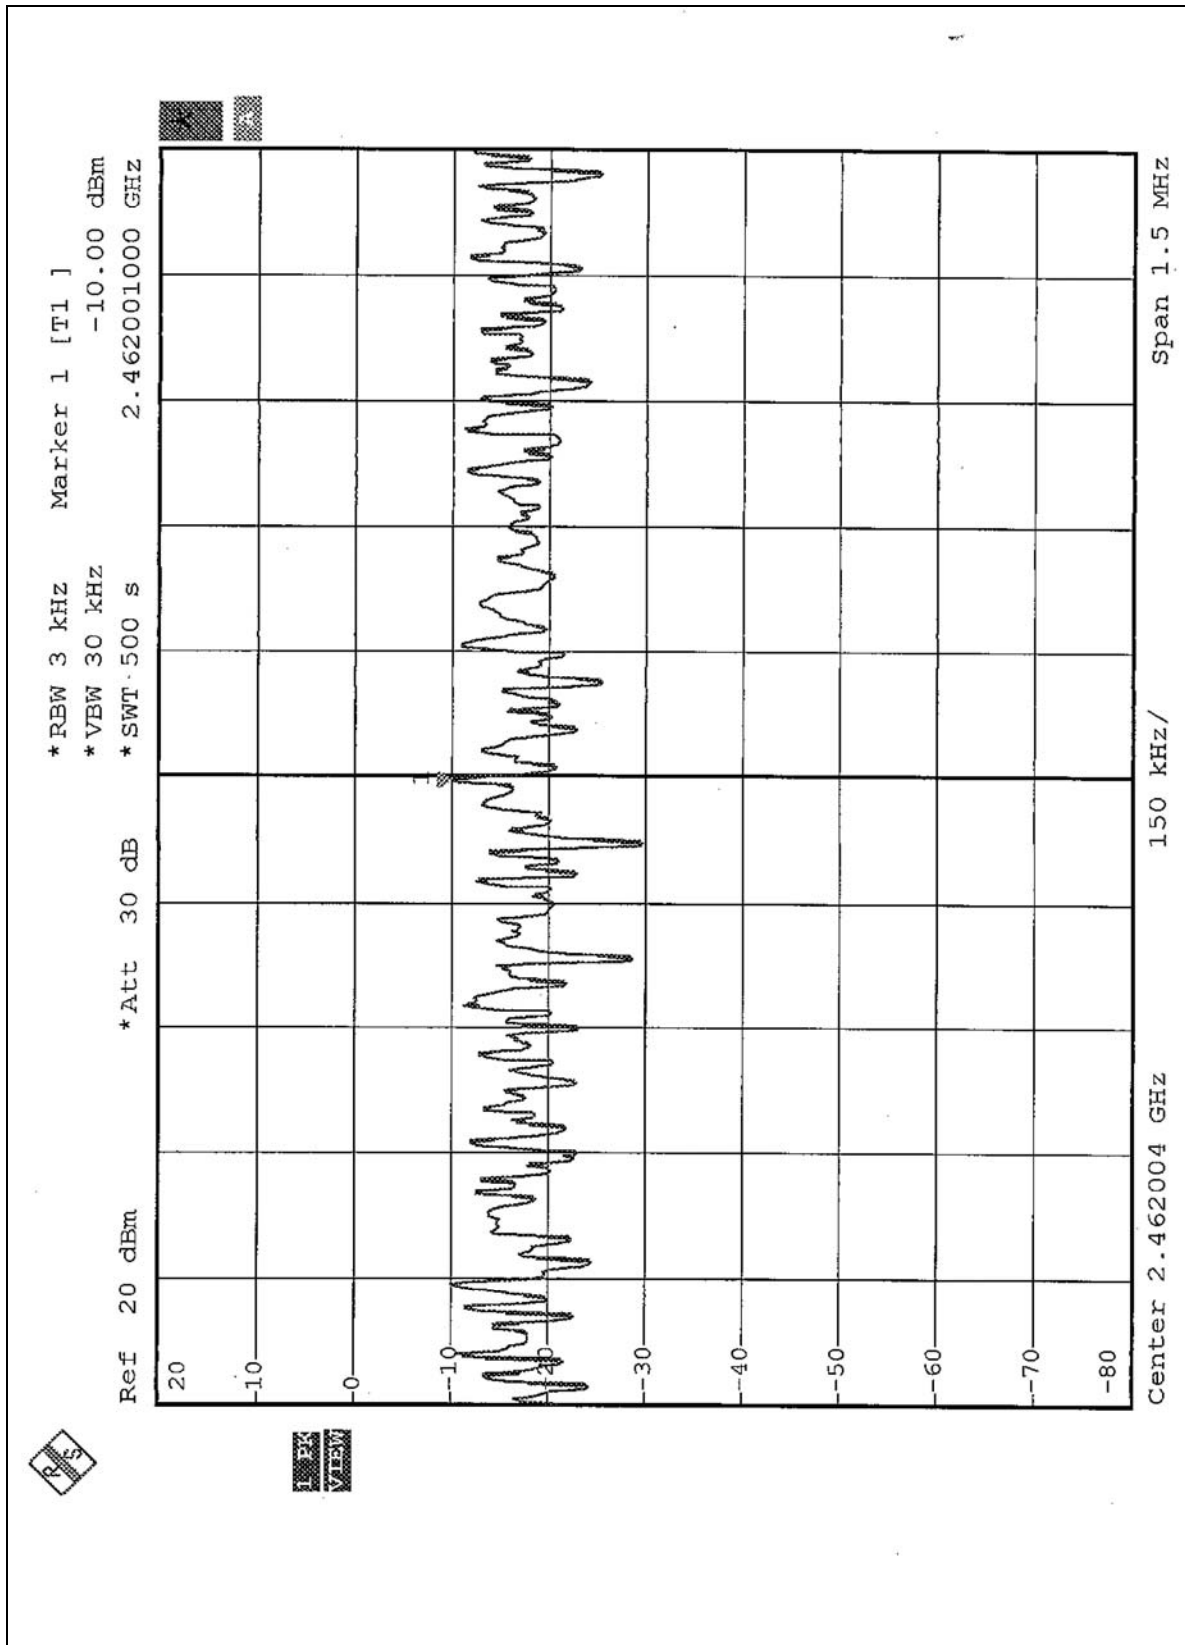


4.5.8 TEST RESULTS (B)

For Dipole & PIFA Antennas


EUT	IEEE 802.11g Mini PCI Card	MODEL	WMP-G03
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY:	Ansen Lei		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-14.52	8	PASS
6	2437	-14.85	8	PASS
11	2462	-15.09	8	PASS


CH1

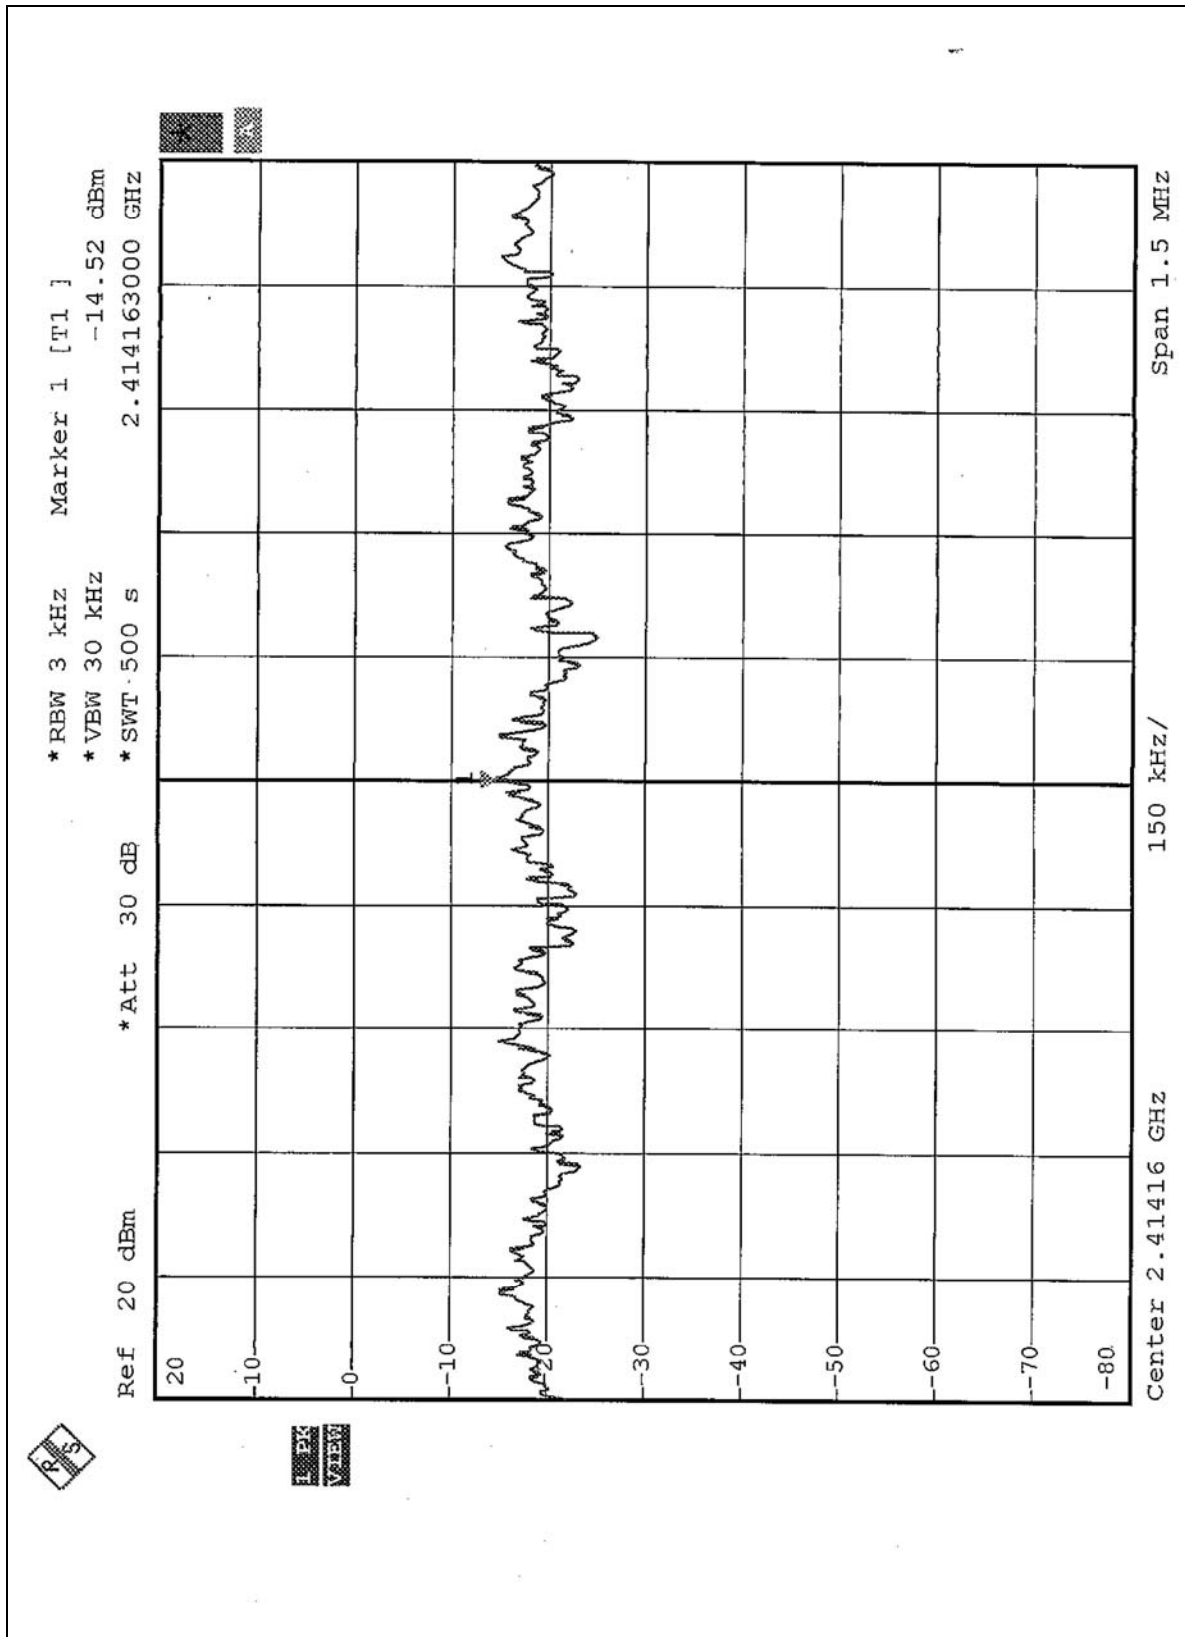

CH6

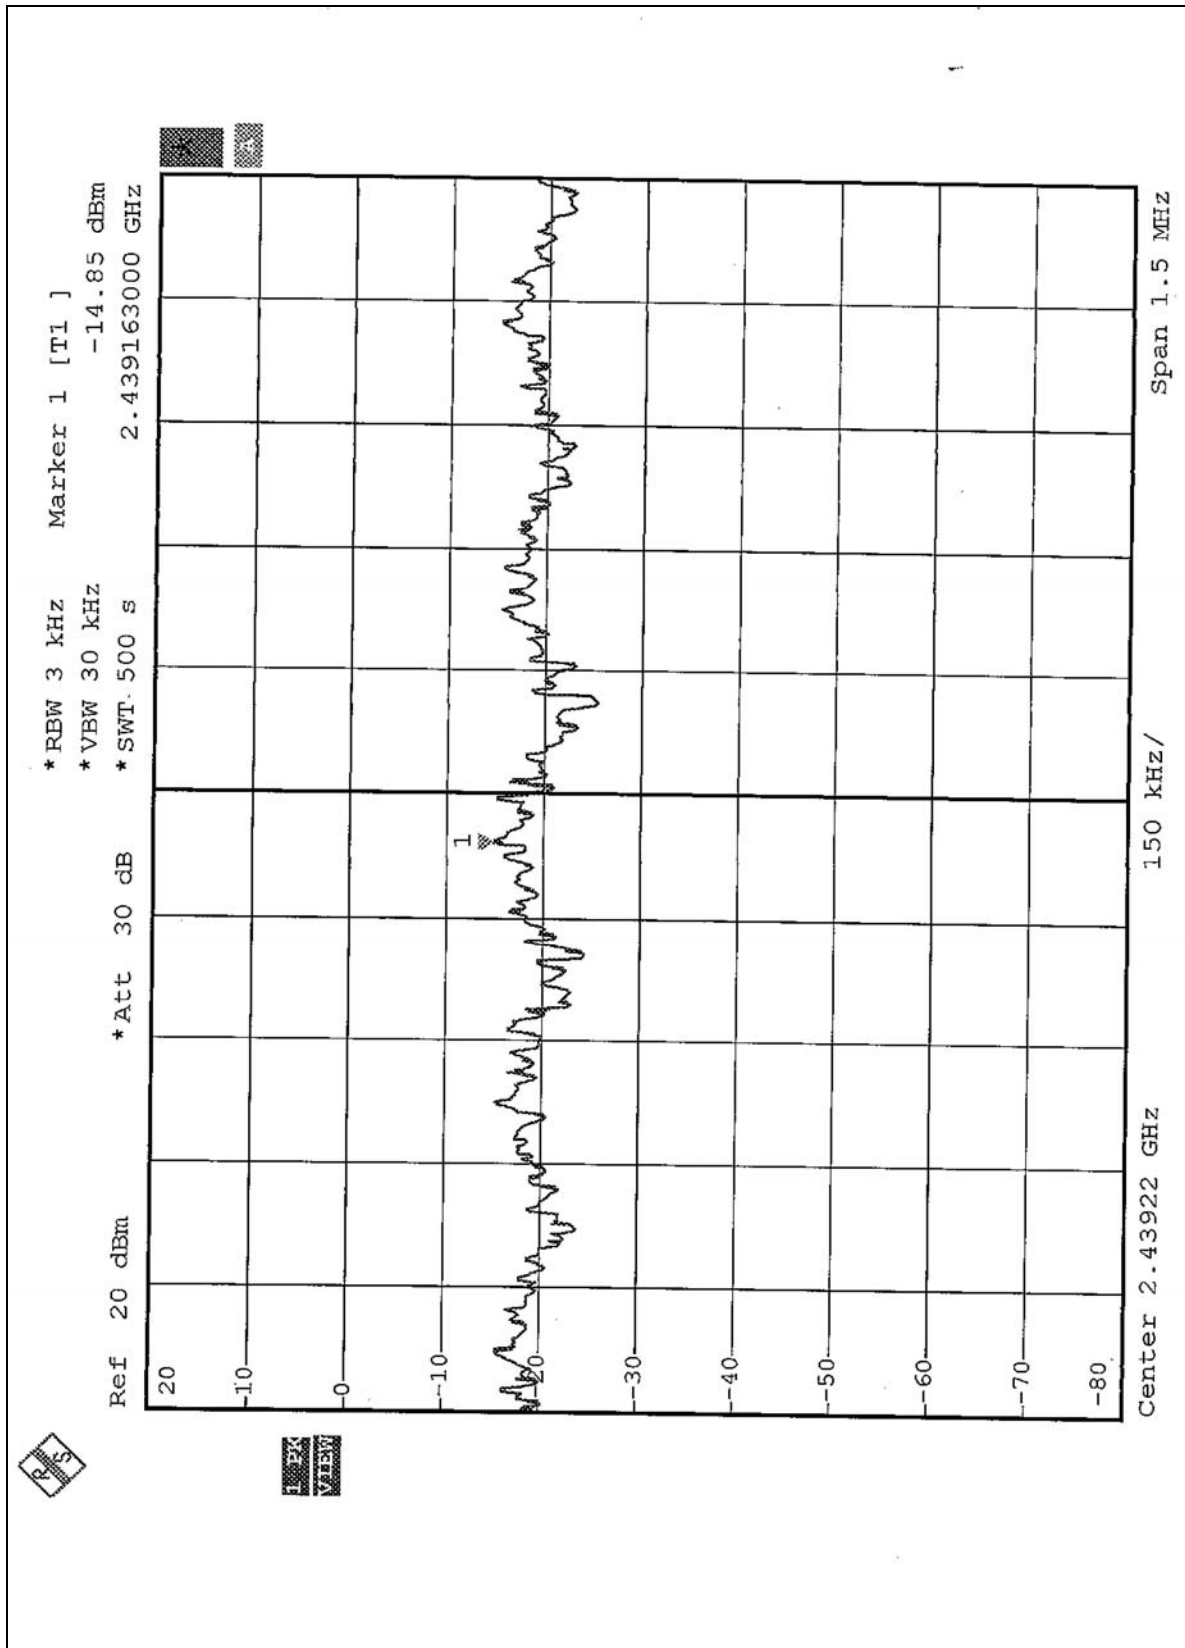

CH11

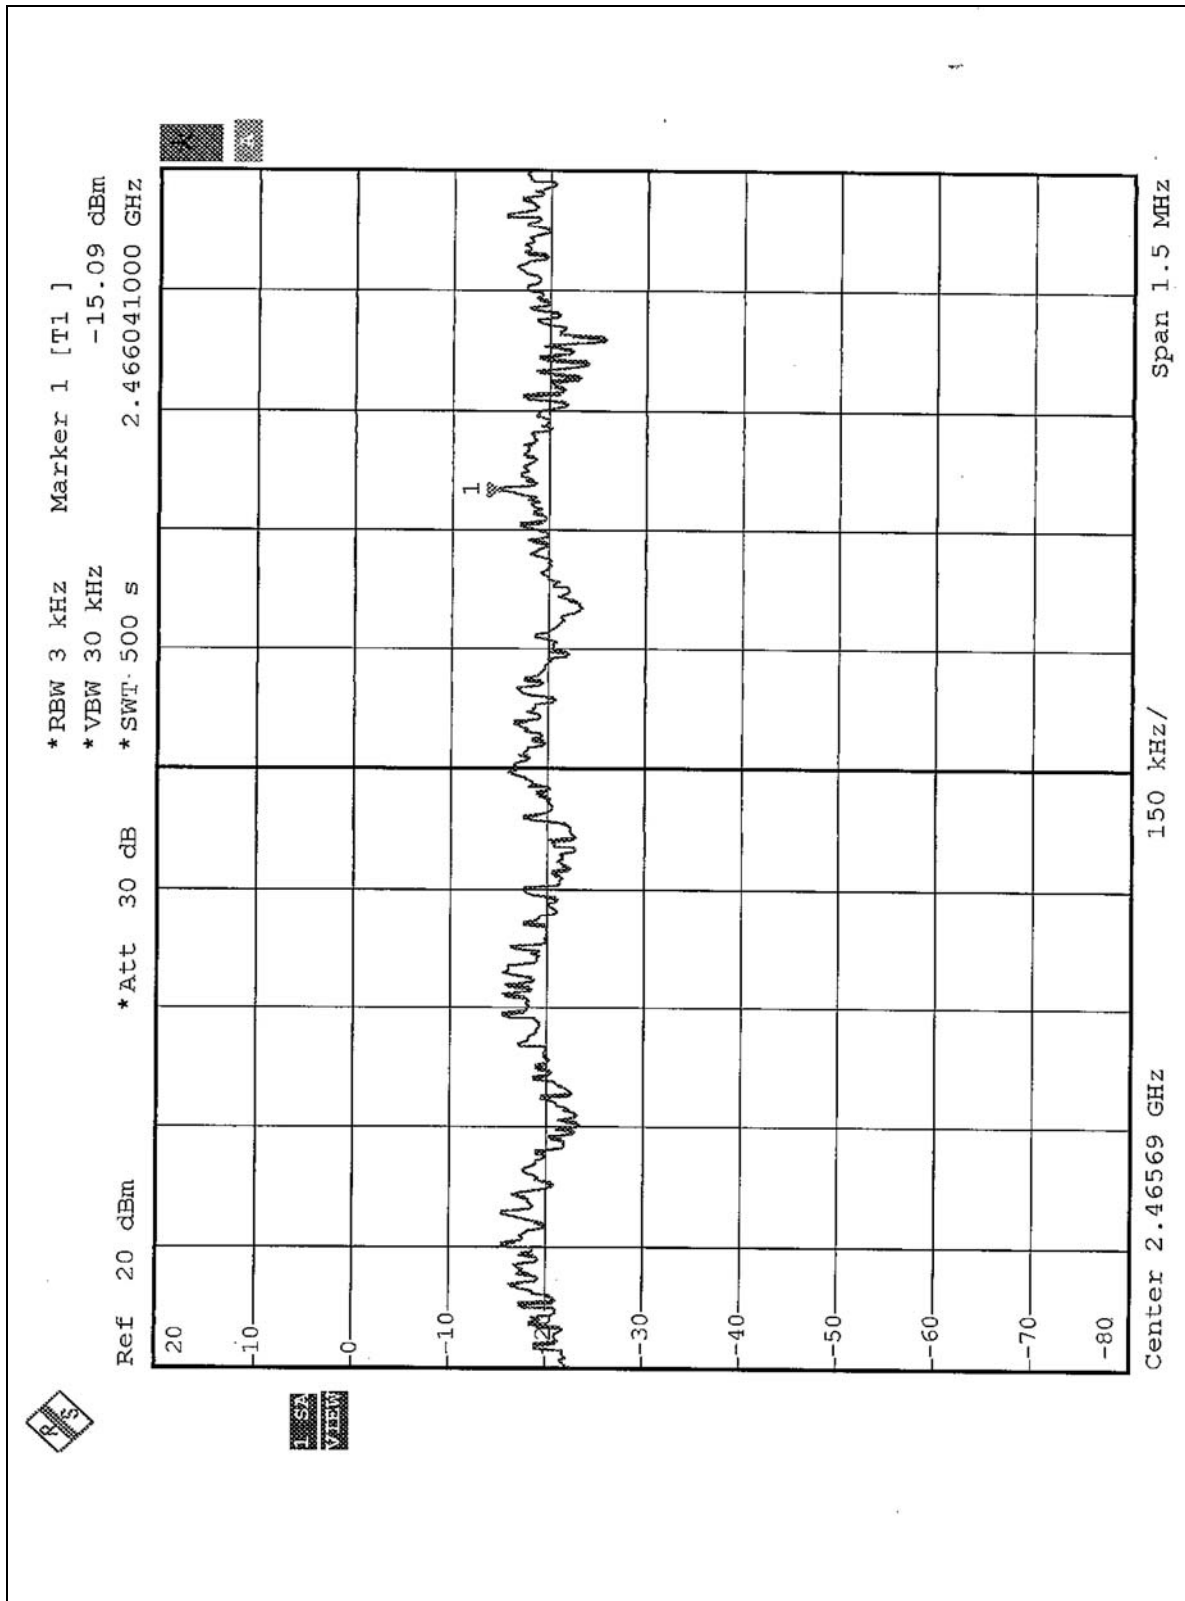



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation



4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS (A)

The spectrum plots are attached on the following 4 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

For Dipole Antenna

NOTE 1:

The band edge emission on the following first pages shows 53.99dB delta between carrier maximum power and local maximum emission in restrict band (2.3831GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.8 is 100.04dBuV/m, so the maximum field strength in restrict band is $100.04 - 53.99 = 46.05$ dBuV/m which is under 54dBuV/m limit.

NOTE 2:

The band edge emission on the following second pages shows 53.94dB delta between carrier maximum power and local maximum emission in restrict band (2.4854GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 is 101.75dBuV/m, so the maximum field strength in restrict band is $101.75 - 53.94 = 47.81$ dBuV/m which is under 54 dBuV/m limit.


For PIFA Antennas


NOTE 1:


The band edge emission on the following first pages shows 53.99dB delta between carrier maximum power and local maximum emission in restrict band (2.3831GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.8 is 95.70dBuV/m, so the maximum field strength in restrict band is $95.70 - 53.99 = 41.71$ dBuV/m which is under 54dBuV/m limit.


NOTE 2:

The band edge emission on the following second pages shows 53.94dB delta between carrier maximum power and local maximum emission in restrict band (2.4854GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 is 93.46dBuV/m, so the maximum field strength in restrict band is $93.46 - 53.94 = 39.52$ dBuV/m which is under 54 dBuV/m limit.

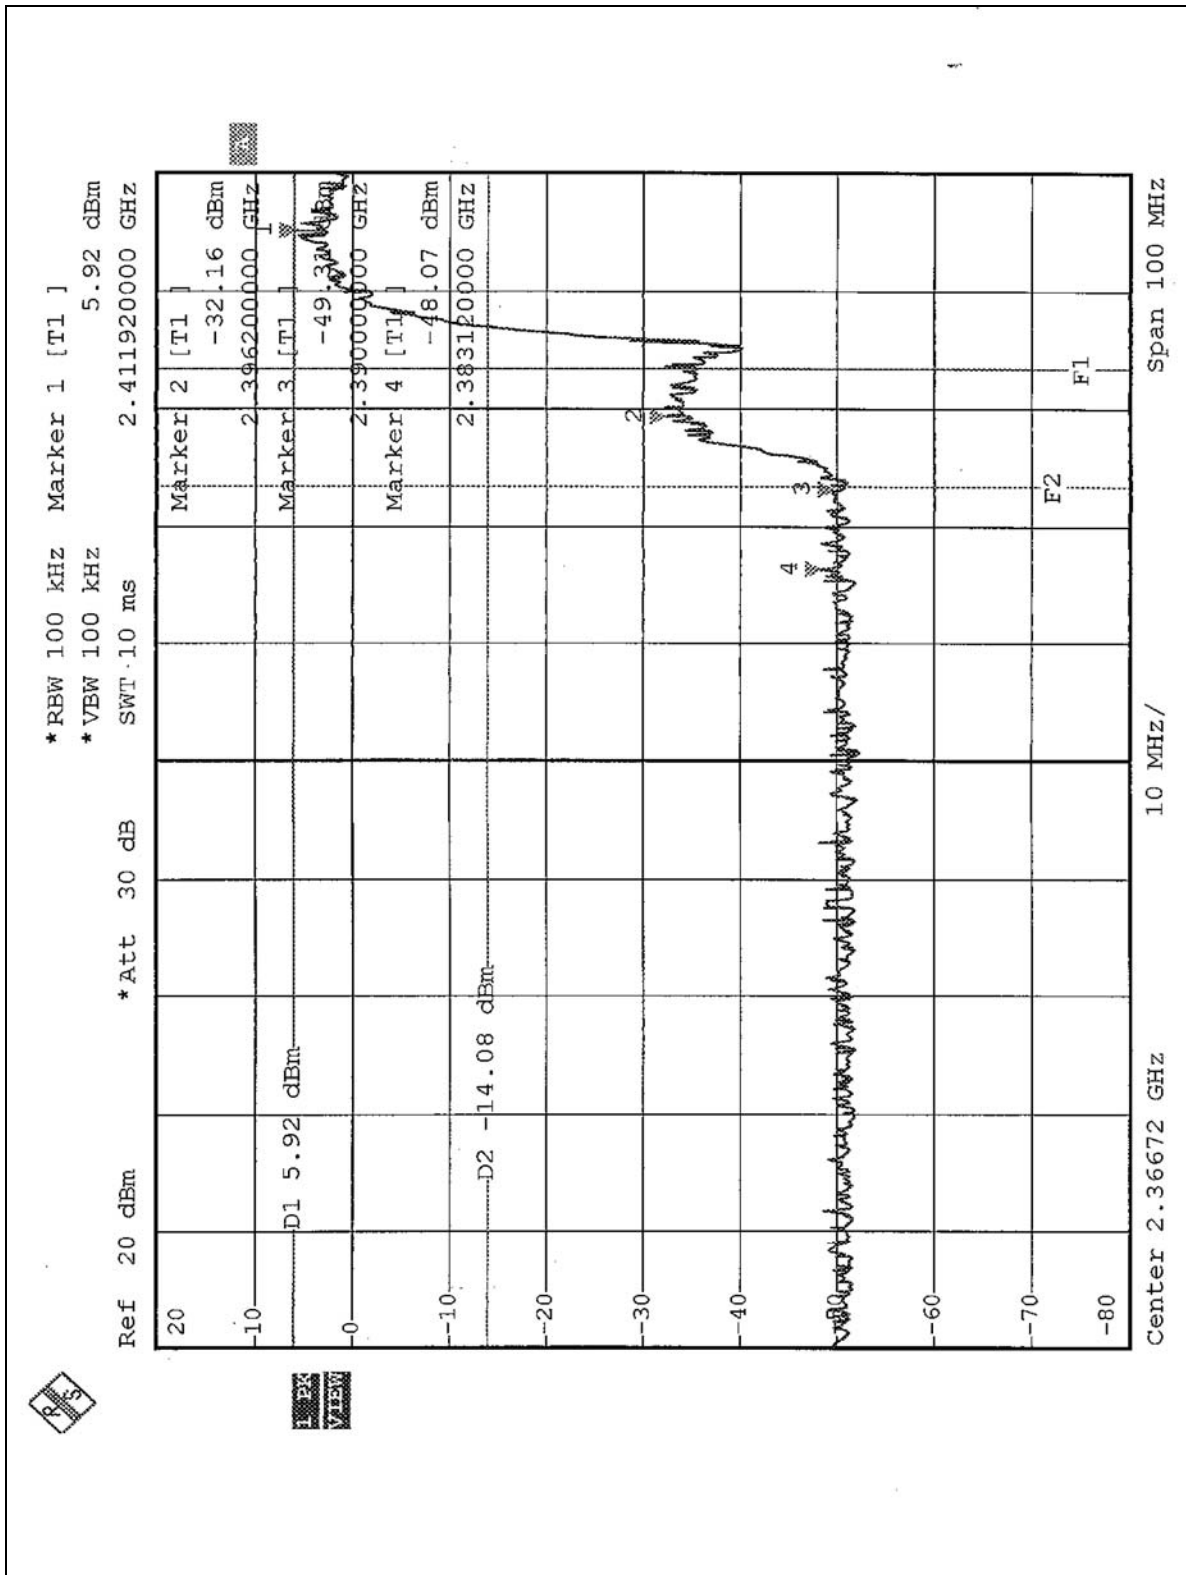



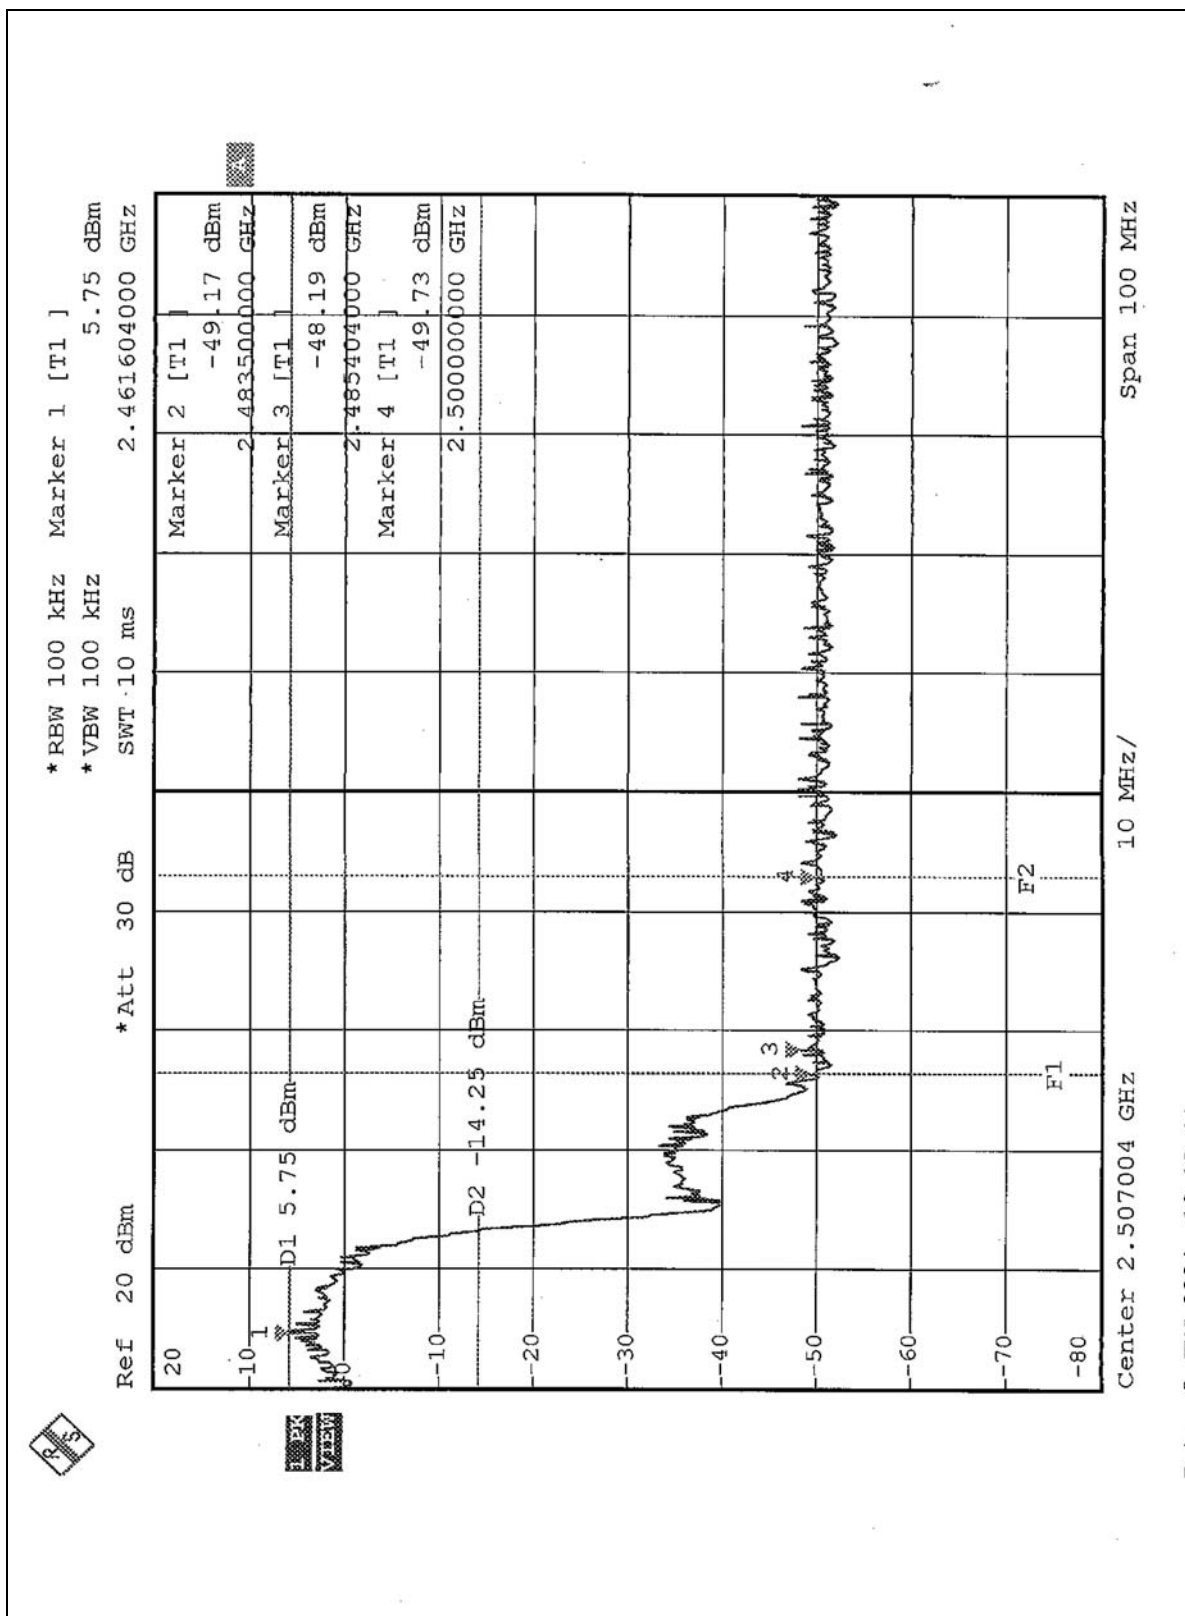

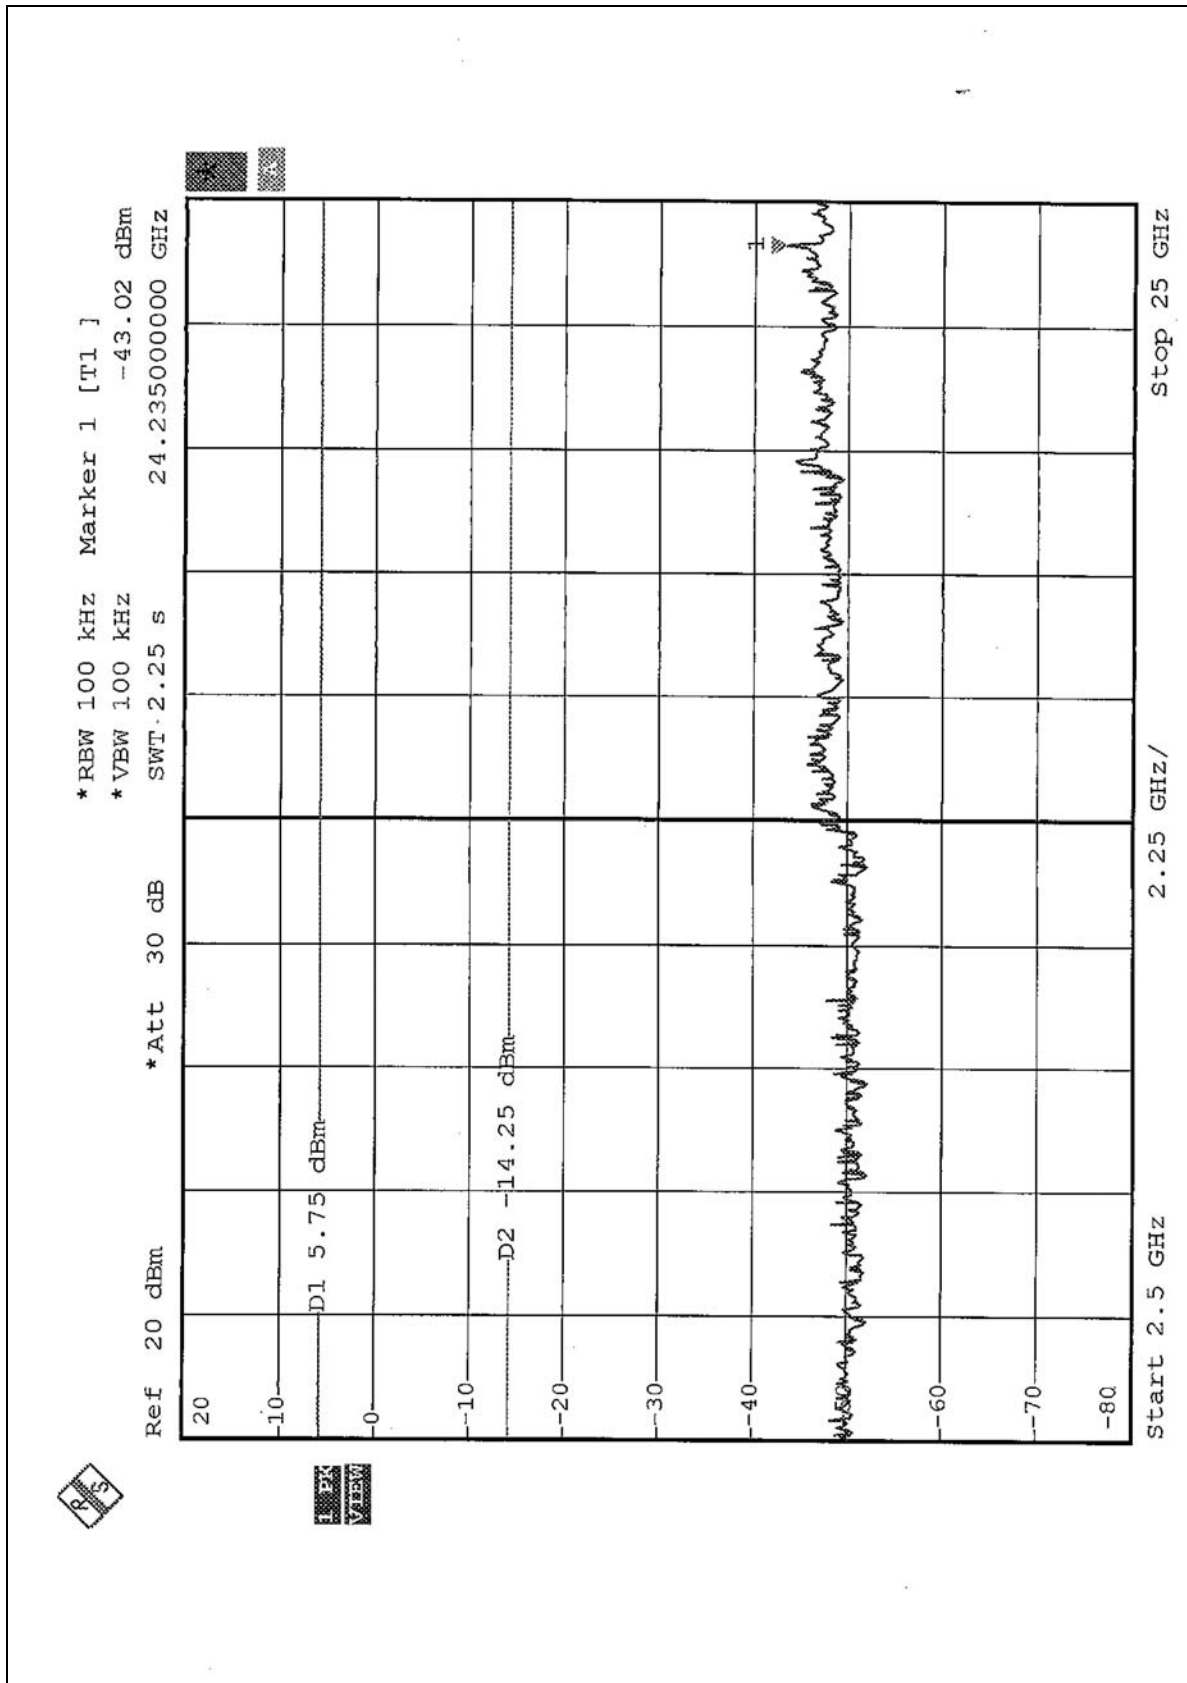



4.6.7 TEST RESULTS (B)

The spectrum plots are attached on the following 4 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

For Dipole Antenna

NOTE 1:

The band edge emission on the following first pages shows 46.77dB delta between carrier maximum power and local maximum emission in restrict band (2.3892GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.9 is 98.44dBuV/m, so the maximum field strength in restrict band is $98.44 - 46.77 = 51.67$ dBuV/m which is under 54dBuV/m limit.

NOTE 2:

The band edge emission on the following second pages shows 44.84dB delta between carrier maximum power and local maximum emission in restrict band (2.4839GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.9 is 97.63dBuV/m, so the maximum field strength in restrict band is $97.63 - 44.84 = 52.79$ dBuV/m which is under 54dBuV/m limit.


For PIFA Antenna


NOTE 1:


The band edge emission on the following first pages shows 46.77dB delta between carrier maximum power and local maximum emission in restrict band (2.3892GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.9 is 91.05dBuV/m, so the maximum field strength in restrict band is $91.05 - 46.77 = 44.28$ dBuV/m which is under 54dBuV/m limit.

NOTE 2:

The band edge emission on the following second pages shows 44.84dB delta between carrier maximum power and local maximum emission in restrict band (2.4839GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.9 is 89.95dBuV/m, so the maximum field strength in restrict band is $89.95 - 44.84 = 45.11$ dBuV/m which is under 54dBuV/m limit.

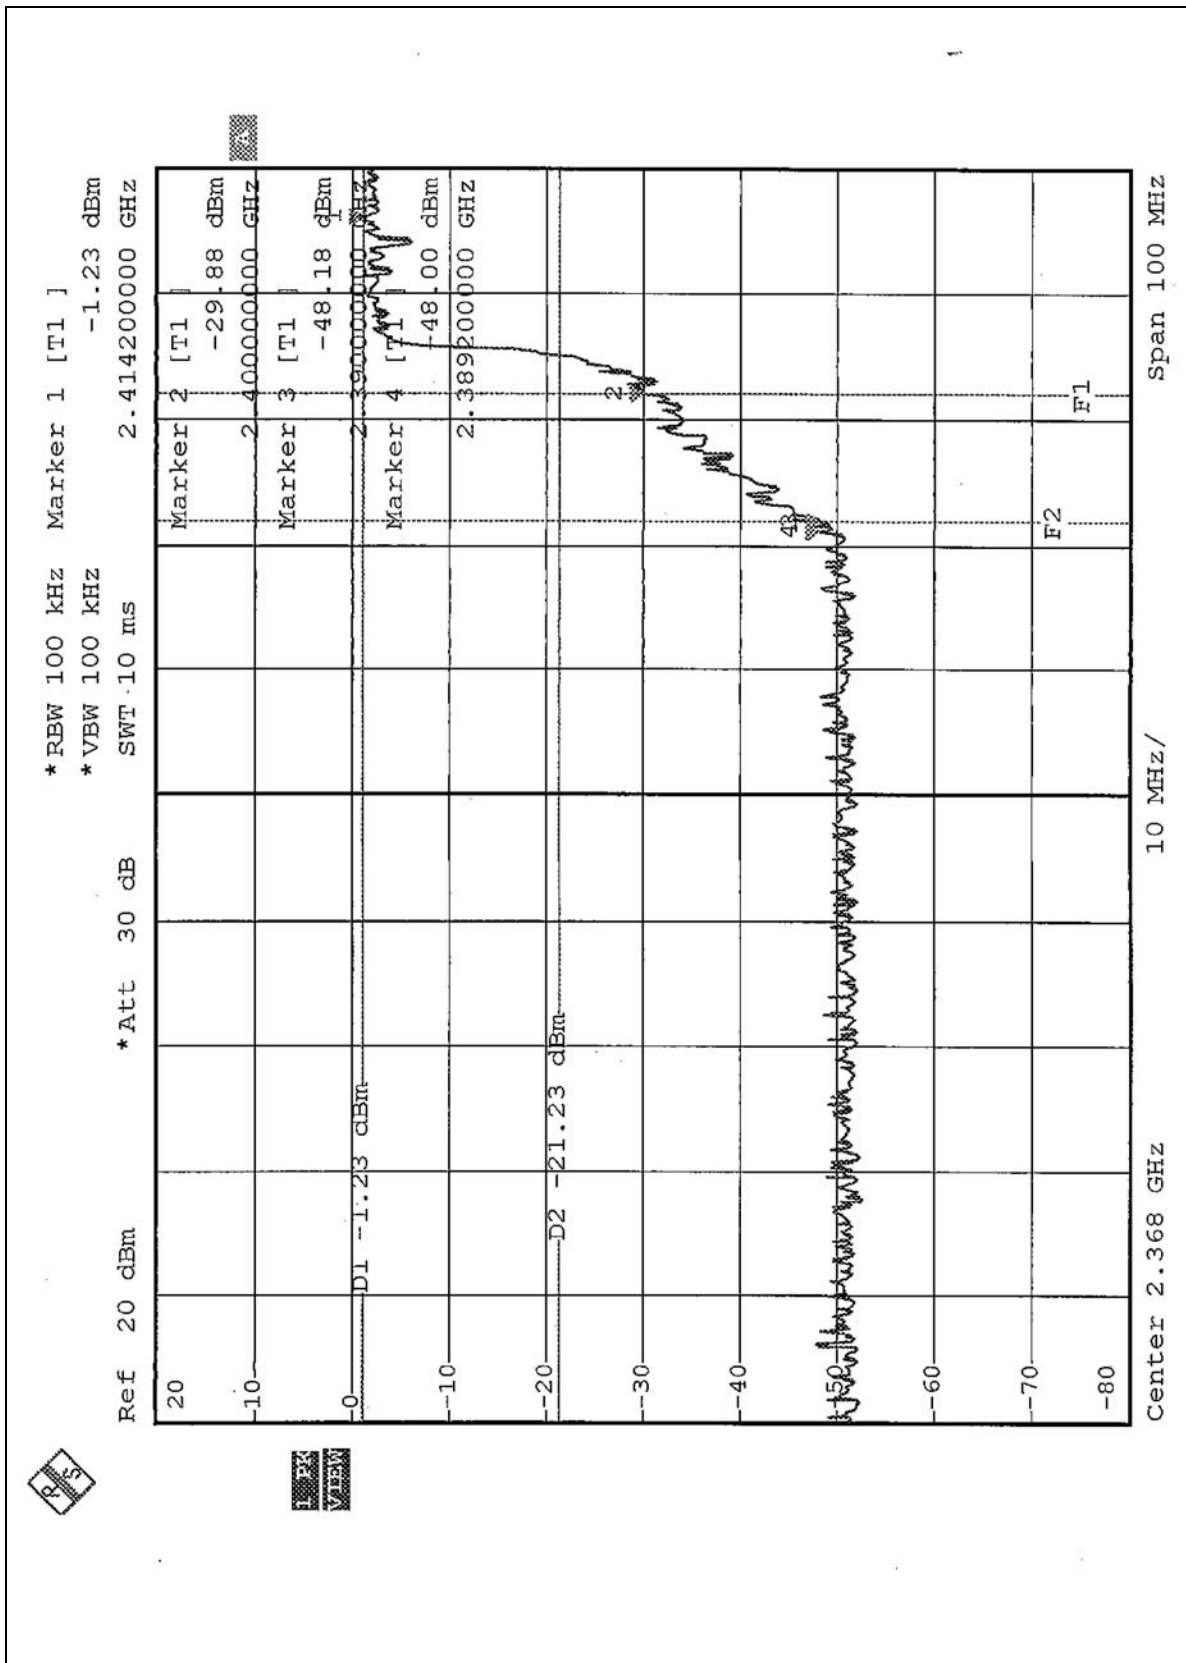

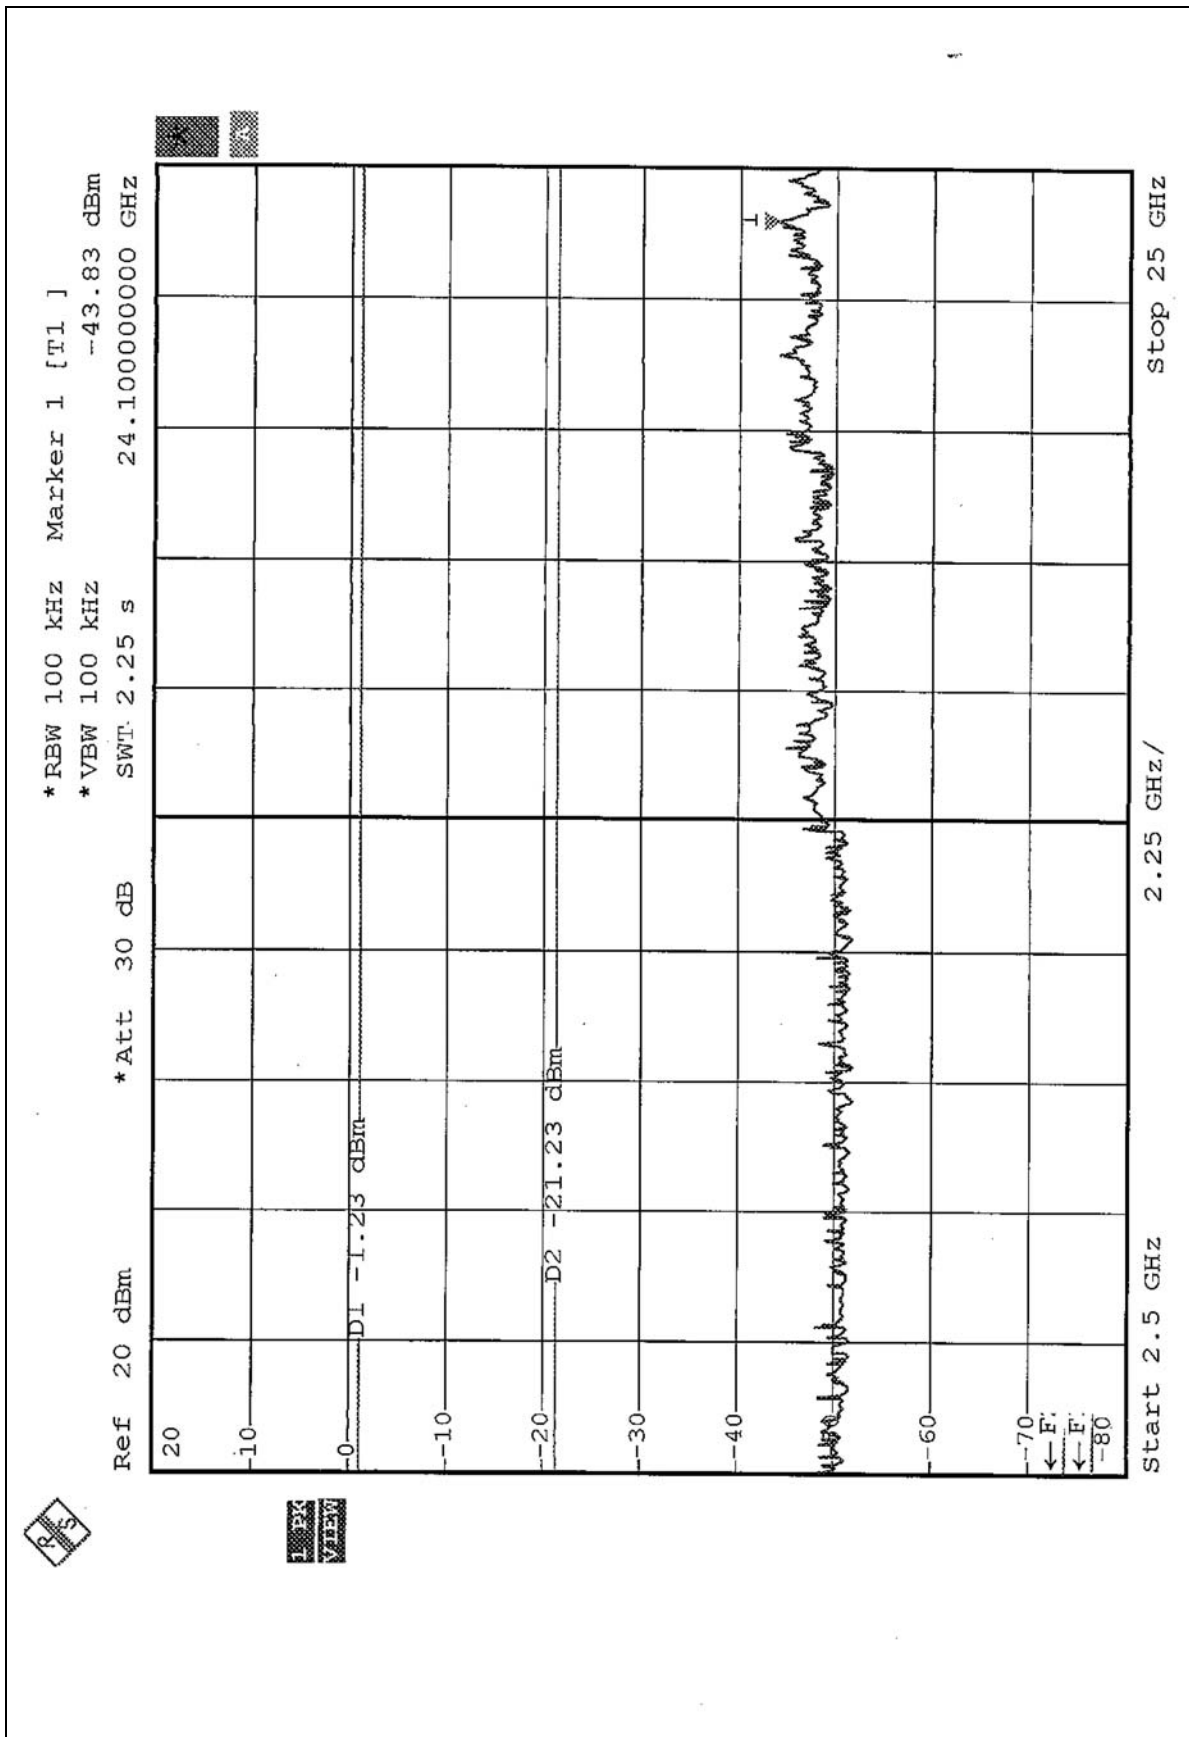

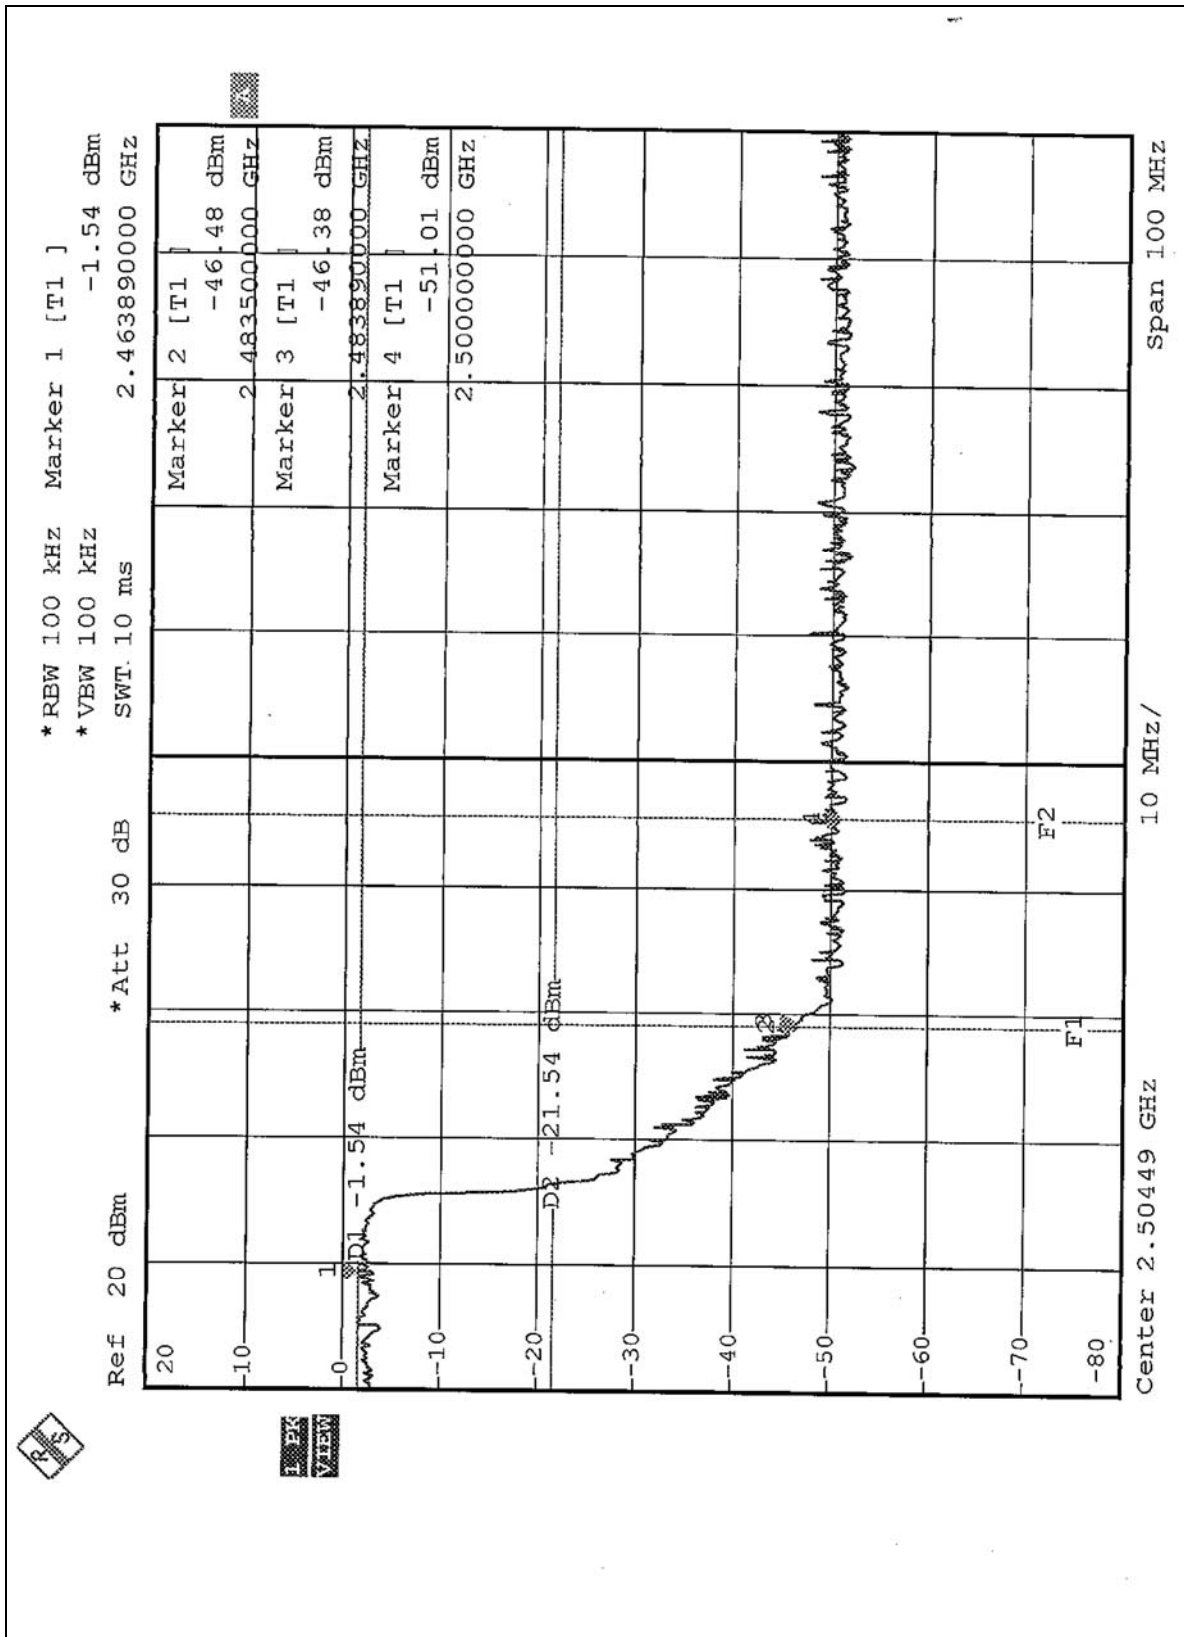





4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna types used in this product are dipole and PIFA antenna with UFL antenna connector. The maximum Gain of this antenna is only 2.0dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST (For Dipole antenna)







(For PIFA antenna)





RADIATED EMISSION TEST
(For Dipole antenna)

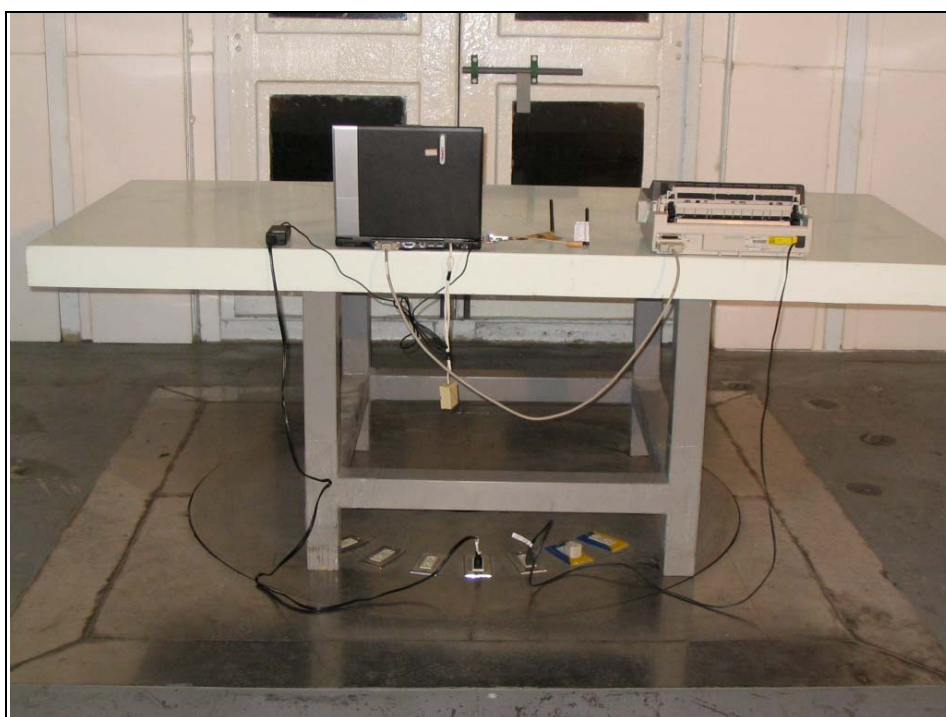

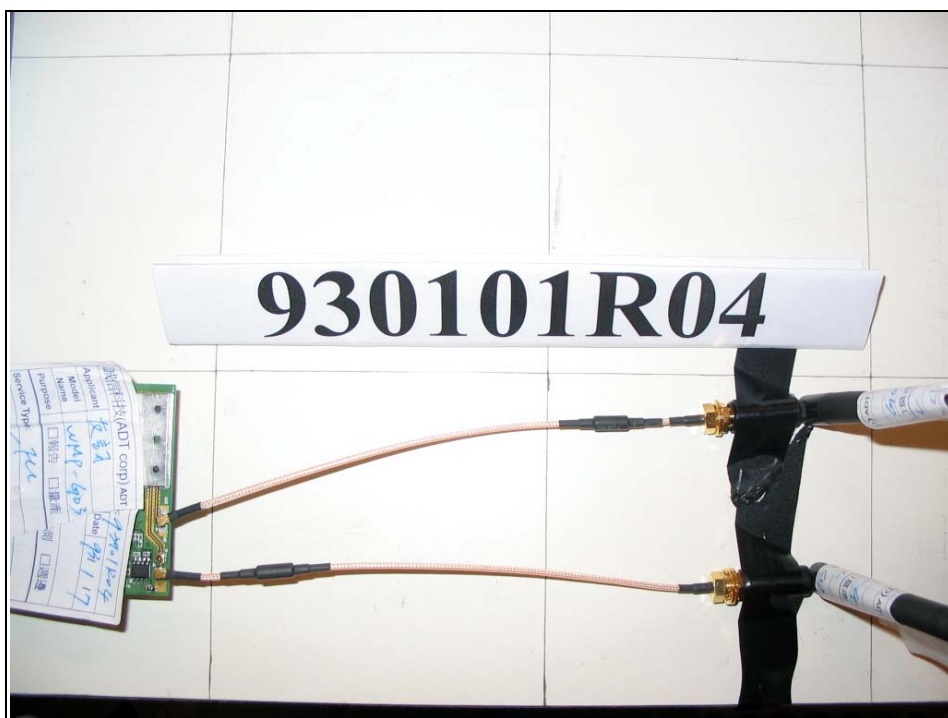

(For PIFA antenna)







6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.