



FCC TEST REPORT

REPORT NO.: RF930831H01

MODEL NO.: WMP-G06

RECEIVED: Aug. 31, 2004

TESTED: Sep. 07 to 10, 2004

APPLICANT: Alpha Networks Inc.

ADDRESS: No. 8, Li-shing Road VII, Science-based Industrial Park, Hsinchu Taiwan.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen, Chung Lin Hsiang, Hsin Chu Hsien, Taiwan, R.O.C.

This test report consists of 75 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



0536
ILAC MRA



No. 2177-01



Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS.....	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS.....	8
3.5	CONFIGURATION OF SYSTEM UNDER TEST	8
4	TEST TYPES AND RESULTS.....	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.1.2	TEST INSTRUMENTS	9
4.1.3	TEST SETUP	10
4.1.4	EUT OPERATING CONDITIONS.....	11
4.1.5	TEST RESULTS.....	12
4.2	Radiated Emission Measurement	14
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	14
4.2.2	TEST INSTRUMENTS	15
4.2.3	TEST PROCEDURES.....	16
4.2.4	TEST SETUP	17
4.2.5	EUT OPERATING CONDITIONS.....	17
4.2.6	TEST RESULTS.....	18
4.2.7	TEST RESULTS – Antenna 1, DSSS	21
4.2.8	TEST RESULTS – Antenna 3, DSSS	24
4.2.9	TEST RESULTS - Antenna 1, OFDM	27
4.2.10	TEST RESULTS - Antenna 3, OFDM	30
4.3	6dB BANDWIDTH MEASUREMENT	33
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	33
4.3.2	TEST INSTRUMENTS	33
4.3.3	TEST PROCEDURE	34
4.3.4	TEST SETUP	34
4.3.5	EUT OPERATING CONDITIONS.....	34
4.3.6	TEST RESULTS-DSSS.....	35
4.3.7	TEST RESULTS-OFDM	39
4.4	MAXIMUM PEAK OUTPUT POWER	43



4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	43
4.4.2	TEST INSTRUMENTS	43
4.4.3	TEST PROCEDURES.....	44
4.4.4	TEST SETUP	44
4.4.5	EUT OPERATING CONDITIONS.....	44
4.4.6	TEST RESULTS- DSSS.....	45
4.4.7	TEST RESULTS- OFDM	46
4.5	POWER SPECTRAL DENSITY MEASUREMENT	47
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	47
4.5.2	TEST INSTRUMENTS	47
4.5.3	TEST PROCEDURE	48
4.5.4	TEST SETUP	48
4.5.5	EUT OPERATING CONDITIONS.....	48
4.5.6	TEST RESULTS-DSSS.....	49
4.5.7	TEST RESULTS-OFDM	53
4.6	BAND EDGES MEASUREMENT	57
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	57
4.6.2	TEST INSTRUMENTS	57
4.6.3	TEST PROCEDURE	57
4.6.4	EUT OPERATING CONDITION	57
4.6.5	TEST RESULTS – Antenna 1, DSSS.....	58
4.6.6	TEST RESULTS –Antenna 3, DSSS.....	61
4.6.7	TEST RESULTS- Antenna 1, OFDM	64
4.6.8	TEST RESULTS- Antenna 3, OFDM	67
4.7	ANTENNA REQUIREMENT.....	70
4.7.1	STANDARD APPLICABLE	70
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	70
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	71
6	INFORMATION ON THE TESTING LABORATORIES	75



1 CERTIFICATION

PRODUCT : 802.11g/2.4GHz Wireless Mini-PCI Adapter
BRAND NAME : ALPHA
MODEL NO. : WMP-G06
TESTED: Sep. 07 to 10, 2004
APPLICANT : Alpha Networks Inc.
TEST ITEM: ENGINEERING SAMPLE
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-2001

The above equipment (Model: WMP-G06) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Carol Liao **DATE:** Sep. 14, 2004
(Carol Liao)

TECHNICAL
ACCEPTANCE : Hank Chung **DATE:** Sep. 14, 2004
Responsible for RF (Hank Chung)

APPROVED BY : Eric Lin **DATE:** Sep. 14, 2004
(Eric Lin, Manager)



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission Limit:	PASS	Meet the requirement of limit Minimum passing margin is -15.23 dBuV at 0.177 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -0.50 dBuV at 2063.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	802.11g/2.4GHz Wireless Mini-PCI Adapter
MODEL NO.	WMP-G06
POWER SUPPLY	3.3Vdc from host equipment
MODULATION TYPE	CCK, OFDM, DBPSK, DQPSK
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	1/2/5.5/6/9/11/12/18/24/36/48/54Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	15.62dBm
ANTENNA TYPE	Please see note 3
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
2. The EUT complies with IEEE 802.11g draft standards, and backwards compatible with IEEE 802.11b products.
3. There are three antennas provided to this EUT, please refer to the following table:

No.	Gain (dBi)	Antenna Type	Antenna Connector
1	2.0 dBi	$1/4 \lambda$ Monopole Antenna	MHF connector
2	2.0 dBi	$1/4 \lambda$ Dipole sleeve Antenna	R-SMA connector
3	5.0 dBi	Tri-Band Flying Lead Stand Antenna	R-SMA connector

From the above antennas, **antenna 1** and **3** were selected as representative antennas for the test and their data were recorded in this report.

4. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
3. Transfer rate, 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst case, were chosen for final test.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a 802.11g/2.4GHz Wireless Mini-PCI Adapter . According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 2001

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of 47 CFR Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook Computer	DELL	PP01L	TW-09c748-12800-165-3171	FCC DoC
2	PRINTER	HP	C2642A	MY79F1C3MZ	B94C2642X
3	MODEM	ACEEX	1414	0206026776	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.8m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
3	1.0 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

NOTE: All power cords of the above support units are non-shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

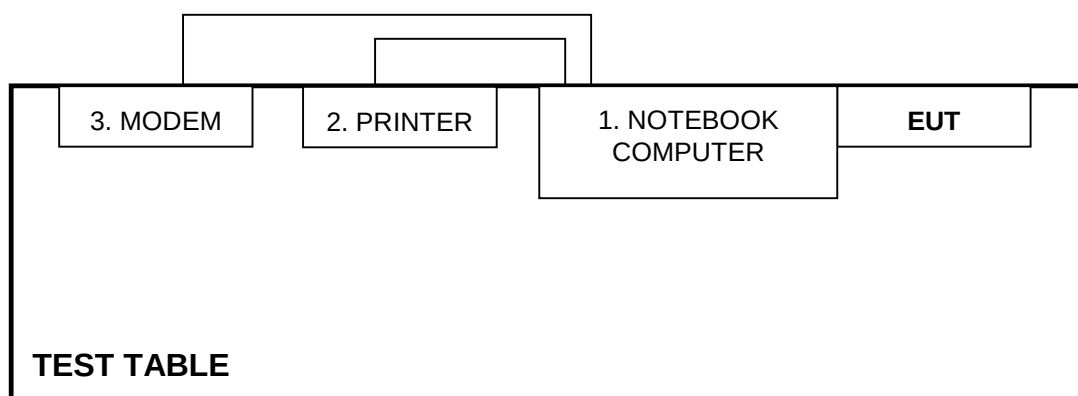

NOTE: 1. Please refer to the photos of test configuration in Item 5 also.

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	847124/029	Dec. 04, 2004
ROHDE & SCHWARZ LISN (for EUT)	ESHS-Z5	848773/004	Nov. 04, 2004
KYORITSU LISN (for peripheral)	KNW-407	8/1395/12	Jul. 23, 2005
RF Cable (JETBAO)	RG233/U	Cable_CA_01	Jul. 02, 2005
Terminator(for KYORITSU)	50	3	May 10, 2005
Software	Cond-V2e	NA	NA


NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. * = These equipment are used for the final measurement.
5. The measurement uncertainty is 2.53 dB, which is calculated as per the document CISPR 16-4

2. TEST PROCEDURES

- The EUT/HOST was placed 0.4 meters from the conducting wall of the shielded room with EUT/HOST being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT/HOST were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.3 TEST SETUP

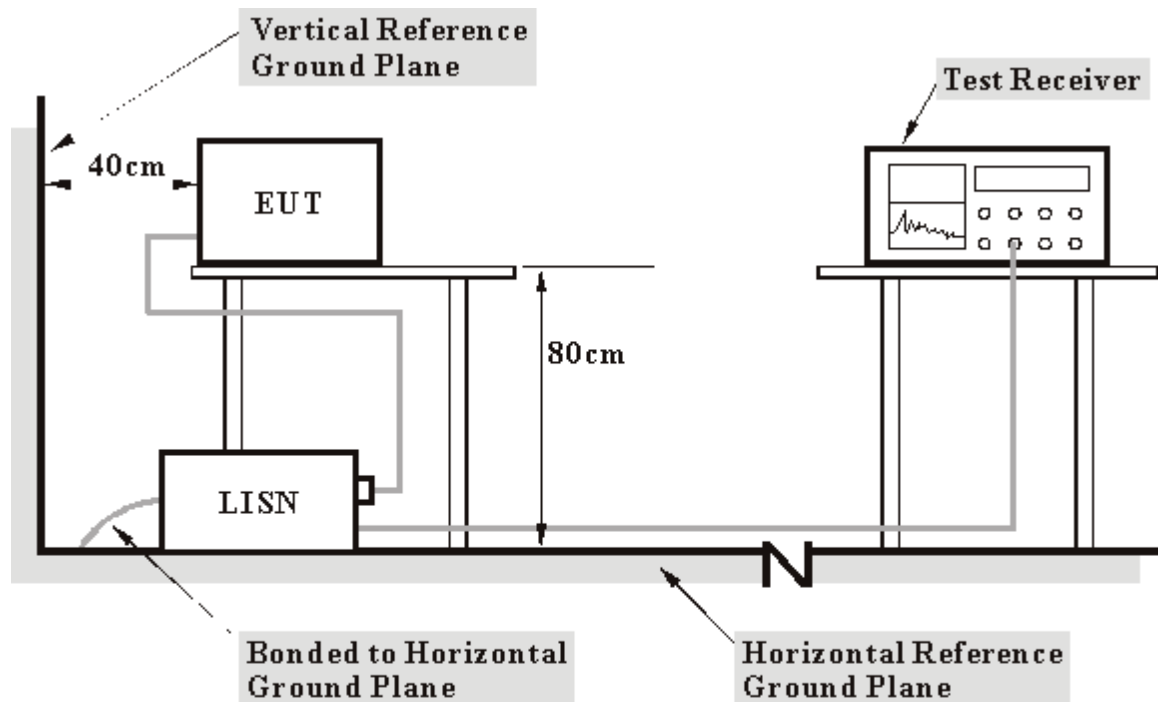

- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.4 EUT OPERATING CONDITIONS


- a. Plug the EUT into support unit 1 (Notebook computer) which placed on a testing table.
- b. The support unit 1 (Notebook computer) ran a test program "RT2500. exe" to enable EUT under transmission condition continuously at specific channel frequency.
- c. Notebook computer sends "H" messages to modem.
- d. Notebook computer sends "H" messages to printer, and the printer prints them on paper.

4.1.5 TEST RESULTS

EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter	MODEL	WMP-G06
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	27 deg. C, 63%RH, 970 hPa	TESTED BY	Tony Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.21	44.68	-	44.89	-	65.78	55.78	-20.89	-
2	0.177	0.25	48.80	-	49.05	-	64.61	54.61	-15.55	-
3	0.529	0.22	38.44	-	38.66	-	56.00	46.00	-17.34	-
4	2.384	0.32	33.18	-	33.50	-	56.00	46.00	-22.50	-
5	7.328	0.62	38.80	-	39.42	-	60.00	50.00	-20.58	-
6	14.961	1.20	34.18	-	35.38	-	60.00	50.00	-24.62	-


- NOTES:** (1) "*": Undetectable
(2) Q.P. and AV. are abbreviations of quasi-peak and average.
(3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
(4) The emission levels of other frequencies were very low against the limit.
(5) Correction Factor = Insertion loss + Cable loss
(6) Margin value = Emission level - Limit value

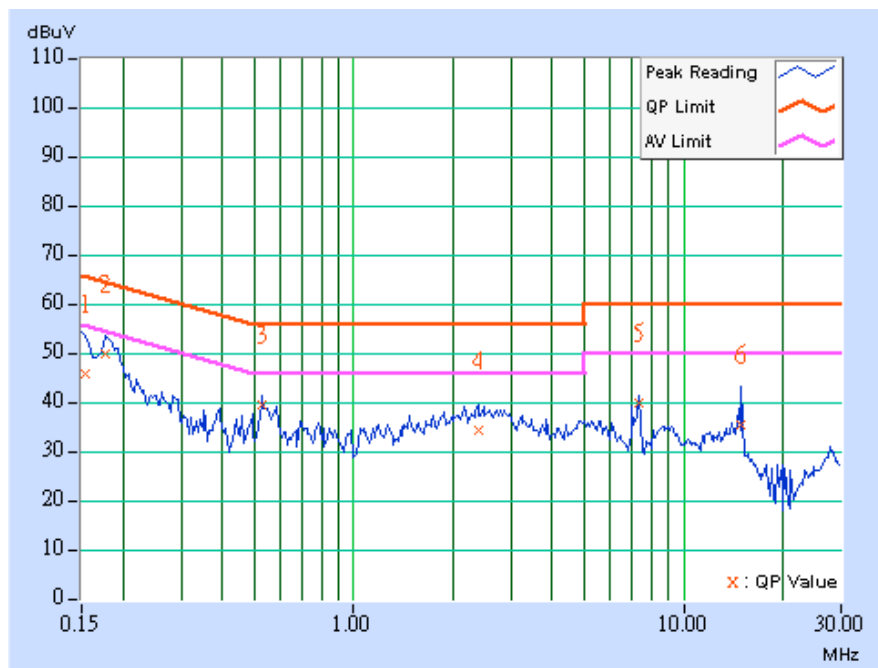

EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter	MODEL	WMP-G06
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	27 deg. C, 63%RH, 970 hPa	TESTED BY	Tony Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.25	49.12	-	49.37	-	64.61	54.61	-15.23	-
2	0.193	0.29	48.30	-	48.59	-	63.91	53.91	-15.32	-
3	0.525	0.22	37.90	-	38.12	-	56.00	46.00	-17.88	-
4	2.170	0.31	36.49	-	36.80	-	56.00	46.00	-19.20	-
5	7.469	0.57	42.69	-	43.26	-	60.00	50.00	-16.74	-
6	14.621	1.07	34.18	-	35.25	-	60.00	50.00	-24.75	-

- NOTES:** (1) "*": Undetectable
(2) Q.P. and AV. are abbreviations of quasi-peak and average.
(3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
(4) The emission levels of other frequencies were very low against the limit.
(5) Correction Factor = Insertion loss + Cable loss
(6) Margin value = Emission level - Limit value

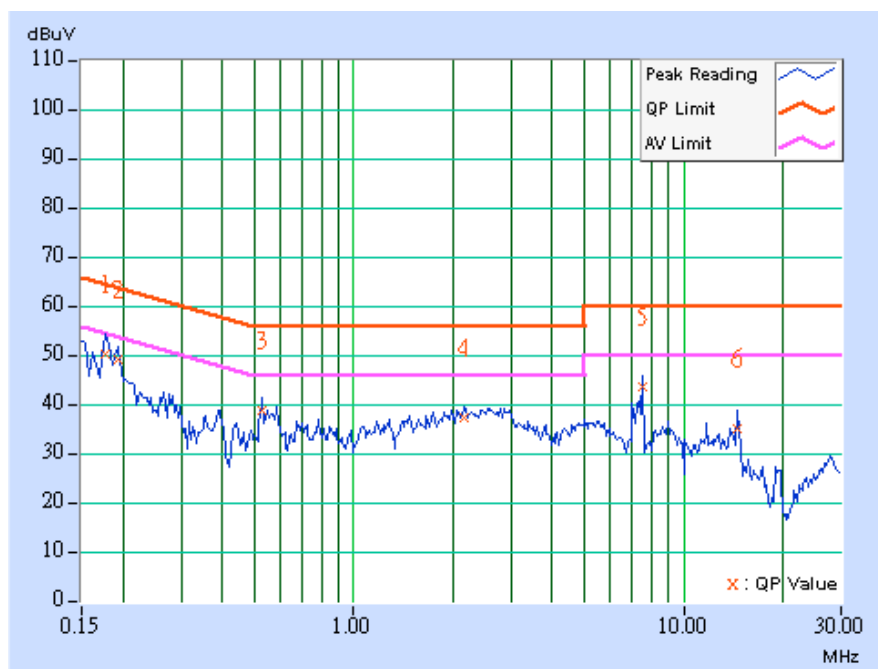



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8594ER	3829U04676	Sep 01, 2005
ADVANTEST Spectrum Analyzer	R3271A	85060311	Jun. 16, 2005
CHASE RF Pre_Amplifier	CPA9232	1057	May. 10, 2005
HP Pre_Amplifier	8449B	3008A01922	Oct. 13, 2004
ROHDE & SCHWARZ Test Receiver	ESVS 10	849231 /019	Sep. 30, 2004
CHASE Broadband Antenna	VULB9168	138	May.22, 2005
Schwarzbeck Horn_Antenna	3115	5619	Jun 16, 2005
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170192	Feb. 16, 2005
SCHWARZBECK Tunable Dipole Antenna	UHAP	897	Mar. 07, 2005
SCHWARZBECK Tunable Dipole Antenna	VHAP	880	Mar. 07, 2005
RF Switches (ARNITSU)	CS-201	1565157	Dec. 01, 2004
RF CABLE (Chaintek) 1GHz-20GHz	SF102	22054-2	Feb. 10. 2005
RF Cable(RICHTEC)	9913-30M	STCCAB-30M-1GHz-021	Dec. 01, 2004
Software	AS60P8	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Tunable Dipole Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.

2. * = These equipment are used for the final measurement.

3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

4. The test was performed in ADT Open Site No. C.

5. The FCC Site Registration No. is 656396.

6. The VCCI Site Registration No. is R-1626.

7. The CANADA Site Registration No. is IC 4824-3.

8. The measurement uncertainty is 3.56 dB, which is calculated as per the document CISPR 16-4




4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

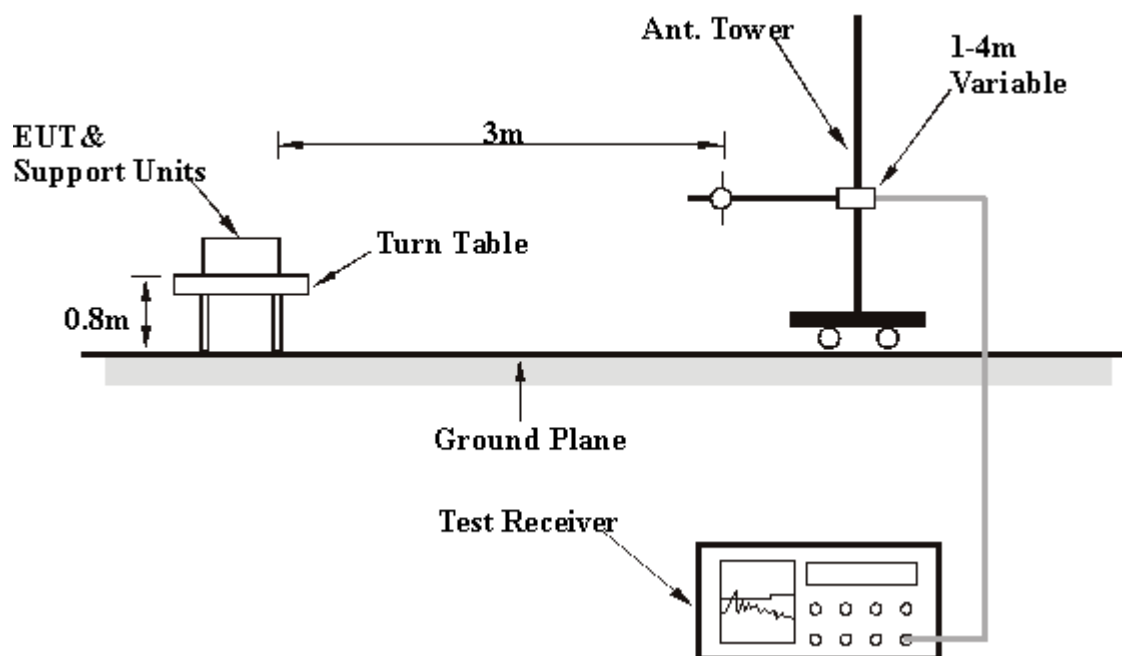

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5.

4.2.6 TEST RESULTS

EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter	MODEL	WMP-G06
TEST MODE	Antenna 1, Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	28 deg. C, 65%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.73	39.30 QP	43.50	-4.20	2.41 H	73	26.60	12.60
2	167.24	36.40 QP	43.50	-7.10	2.05 H	73	25.70	10.70
3	200.40	38.60 QP	43.50	-4.90	1.59 H	78	29.00	9.50
4	234.00	38.80 QP	46.00	-7.20	1.20 H	81	26.80	12.00
5	267.26	37.90 QP	46.00	-8.10	1.00 H	81	23.20	14.70
6	300.57	36.60 QP	46.00	-9.40	1.00 H	53	21.40	15.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.49	30.70 QP	43.50	-12.80	1.00 V	12	18.00	12.60
2	167.24	25.50 QP	43.50	-18.00	1.00 V	21	14.80	10.70
3	200.25	27.30 QP	43.50	-16.20	1.00 V	22	17.80	9.60
4	234.00	27.00 QP	46.00	-19.00	1.41 V	17	15.00	12.00
5	240.00	19.40 QP	46.00	-26.60	1.01 V	3	6.60	12.80
6	267.27	30.00 QP	46.00	-16.00	2.26 V	43	15.30	14.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter	MODEL	WMP-G06
TEST MODE	Antenna 2, Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	28 deg. C, 65%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	132.60	42.40 QP	43.50	-1.10	2.15 H	3	29.80	12.60
2	166.54	42.30 QP	43.50	-1.20	1.51 H	3	31.60	10.80
3	199.90	29.30 QP	43.50	-14.20	1.51 H	337	19.70	9.60
4	233.22	30.90 QP	46.00	-15.10	1.85 H	200	19.00	11.90
5	266.62	27.50 QP	46.00	-18.50	1.59 H	199	12.70	14.80
6	299.77	32.30 QP	46.00	-13.70	1.33 H	210	17.10	15.20
7	599.99	31.20 QP	46.00	-14.80	1.28 H	337	8.90	22.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.49	34.40 QP	43.50	-9.10	2.18 V	30	21.80	12.60
2	166.12	39.30 QP	43.50	-4.20	1.90 V	61	28.50	10.80
3	200.00	26.30 QP	43.50	-17.20	1.08 V	107	16.70	9.60
4	233.49	26.90 QP	46.00	-19.10	1.12 V	265	15.00	11.90
5	267.27	29.40 QP	46.00	-16.60	2.59 V	15	14.70	14.70
6	299.81	27.40 QP	46.00	-18.60	2.33 V	189	12.20	15.20
7	600.00	30.30 QP	46.00	-15.70	1.04 V	260	8.00	22.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter	MODEL	WMP-G06
TEST MODE	Antenna 3, Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	28 deg. C, 65%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.73	39.40 QP	43.50	-4.10	2.44 H	88	26.80	12.60
2	167.24	40.50 QP	43.50	-3.00	2.10 H	258	29.80	10.70
3	200.50	42.40 QP	43.50	-1.10	1.56 H	81	32.90	9.50
4	233.71	38.70 QP	46.00	-7.30	1.29 H	103	26.80	11.90
5	267.26	35.10 QP	46.00	-10.90	1.00 H	100	20.40	14.70
6	300.32	36.20 QP	46.00	-9.80	1.09 H	64	20.90	15.20
7	326.63	39.20 QP	46.00	-6.80	1.00 H	98	23.20	16.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.49	35.10 QP	43.50	-8.40	1.00 V	352	22.50	12.60
2	167.24	29.50 QP	43.50	-14.00	1.74 V	215	18.80	10.70
3	200.40	30.20 QP	43.50	-13.30	1.74 V	162	20.60	9.50
4	234.10	27.10 QP	46.00	-18.90	1.41 V	23	15.10	12.00
5	267.27	29.70 QP	46.00	-16.30	2.29 V	39	15.00	14.70
6	299.99	28.30 QP	46.00	-17.70	2.20 V	282	13.10	15.20
7	324.63	32.90 QP	46.00	-13.10	2.02 V	289	16.90	16.00

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



4.2.7 TEST RESULTS – Antenna 1, DSSS

EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter	MODEL	WMP-G06
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 57%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	46.40 PK	74.00	-27.60	1.28 H	119	17.50	28.90
2	2387.00	46.50 PK	74.00	-27.50	1.46 H	252	13.70	32.90
3	2390.00	41.70 PK	74.00	-32.30	1.70 H	104	7.90	33.80
4	*2412.00	101.50 PK			1.70 H	104	71.60	29.90
4	*2412.00	95.20 AV			1.70 H	104	65.30	29.90
5	2788.00	55.20 PK	74.00	-18.80	1.46 H	252	24.10	31.10
5	2788.00	43.50 AV	54.00	-10.50	1.46 H	252	12.40	31.10
6	4824.00	55.10 PK	74.00	-18.90	1.35 H	291	18.90	36.20
6	4824.00	43.00 AV	54.00	-11.00	1.35 H	291	6.80	36.20
7	7236.00	52.20 PK	74.00	-21.80	1.62 H	300	10.60	41.70
7	7236.00	41.10 AV	54.00	-12.90	1.62 H	300	-0.50	41.70
8	9648.00	51.60 PK	74.00	-22.40	1.70 H	2	6.70	44.90
8	9648.00	41.60 AV	54.00	-12.40	1.70 H	2	-3.30	44.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	47.30 PK	74.00	-26.70	1.52 V	356	18.40	28.90
2	2387.00	50.80 PK	74.00	-23.20	1.00 V	0	17.90	32.90
3	2390.00	47.50 PK	74.00	-26.50	1.35 V	341	13.70	33.80
4	*2412.00	107.30 PK			1.35 V	341	77.40	29.90
4	*2412.00	100.40 AV			1.35 V	341	70.50	29.90
5	2788.00	63.70 PK	74.00	-10.30	1.27 V	15	32.60	31.10
5	2788.00	52.20 AV	54.00	-1.80	1.27 V	15	21.10	31.10
6	4824.00	57.50 PK	74.00	-16.50	1.35 V	354	21.30	36.20
6	4824.00	45.90 AV	54.00	-8.10	1.35 V	354	9.60	36.20
7	7236.00	53.70 PK	74.00	-20.30	1.35 V	70	12.00	41.70
7	7236.00	43.70 AV	54.00	-10.30	1.35 V	70	2.00	41.70
8	9648.00	53.40 PK	74.00	-20.60	1.70 V	64	8.50	44.90
8	9648.00	44.10 AV	54.00	-9.90	1.70 V	64	-0.80	44.90

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency



EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter	MODEL	WMP-G06
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 57%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	50.60 PK	74.00	-23.40	1.47 H	133	21.50	29.10
2	*2437.00	103.20 PK			1.45 H	242	73.20	30.00
2	*2437.00	96.60 AV			1.45 H	242	66.60	30.00
3	2494.00	45.60 PK	74.00	-28.40	1.20 H	342	11.70	33.90
4	2812.00	51.60 PK	74.00	-22.40	1.44 H	265	20.40	31.10
4	2812.00	39.80 AV	54.00	-14.20	1.44 H	265	8.70	31.10
5	4874.00	55.50 PK	74.00	-18.50	1.02 H	289	19.00	36.50
5	4874.00	43.90 AV	54.00	-10.10	1.02 H	289	7.50	36.50
6	7311.00	51.50 PK	74.00	-22.50	1.65 H	302	9.70	41.80
6	7311.00	40.70 AV	54.00	-13.30	1.65 H	302	-1.10	41.80
7	9748.00	52.50 PK	74.00	-21.50	1.76 H	3	7.80	44.60
7	9748.00	42.50 AV	54.00	-11.50	1.76 H	3	-2.10	44.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	54.50 PK	74.00	-19.50	1.53 V	349	25.50	29.10
1	2063.00	53.50 AV	54.00	-0.50	1.53 V	349	24.40	29.10
2	*2437.00	107.50 PK			1.30 V	335	77.50	30.00
2	*2437.00	101.00 AV			1.30 V	335	71.00	30.00
3	2494.00	55.00 PK	74.00	-19.00	1.26 V	84	21.20	33.90
3	2494.00	50.50 AV	54.00	-3.50	1.26 V	84	16.60	33.90
4	2812.00	62.50 PK	74.00	-11.50	1.12 V	45	31.30	31.10
4	2812.00	51.00 AV	54.00	-3.00	1.12 V	45	19.90	31.10
5	4874.00	59.40 PK	74.00	-14.60	1.07 V	3	22.90	36.50
5	4874.00	47.90 AV	54.00	-6.10	1.07 V	3	11.40	36.50
6	7311.00	53.80 PK	74.00	-20.20	1.53 V	62	12.00	41.80
6	7311.00	44.00 AV	54.00	-10.00	1.53 V	62	2.30	41.80
7	9748.00	52.70 PK	74.00	-21.30	1.86 V	53	8.10	44.60
7	9748.00	43.70 AV	54.00	-10.30	1.86 V	53	-0.90	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter	MODEL	WMP-G06
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 57%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	54.90 PK	79.80	-24.90	1.66 H	114	25.70	29.20
1	2088.00	54.40 AV	73.30	-18.90	1.66 H	114	25.20	29.20
2	*2462.00	99.80 PK			1.23 H	87	69.80	30.10
2	*2462.00	93.30 AV			1.23 H	87	63.20	30.10
3	2483.50	41.00 PK	74.00	-33.00	1.23 H	87	10.90	30.10
4	2487.00	39.40 PK	74.00	-34.60	1.20 H	303	9.30	30.10
5	2838.00	48.10 PK	74.00	-25.90	1.91 H	303	16.90	31.20
6	4924.00	56.70 PK	74.00	-17.30	1.00 H	292	20.00	36.70
6	4924.00	45.00 AV	54.00	-9.00	1.00 H	292	8.30	36.70
7	7386.00	50.70 PK	74.00	-23.30	1.64 H	295	8.90	41.80
8	9848.00	53.90 PK	74.00	-20.10	1.84 H	0	9.50	44.40
8	9848.00	45.60 AV	54.00	-8.40	1.84 H	0	1.20	44.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	56.30 PK	89.70	-33.40	1.37 V	270	27.10	29.20
1	2088.00	56.10 AV	82.50	-26.40	1.37 V	270	26.90	29.20
2	*2462.00	109.70 PK			1.30 V	92	79.70	30.10
2	*2462.00	102.50 AV			1.30 V	92	72.40	30.10
3	2483.50	50.90 PK	74.00	-23.10	1.30 V	92	20.80	30.10
4	2487.00	45.00 PK	74.00	-29.00	1.27 V	88	14.90	30.10
5	2838.00	61.30 PK	74.00	-12.70	1.39 V	102	30.10	31.20
5	2838.00	49.60 AV	54.00	-4.40	1.39 V	102	18.40	31.20
6	4924.00	58.60 PK	74.00	-15.40	1.33 V	331	21.90	36.70
6	4924.00	46.70 AV	54.00	-7.30	1.33 V	331	10.00	36.70
7	7386.00	55.00 PK	74.00	-19.00	1.96 V	58	13.20	41.80
7	7386.00	45.70 AV	54.00	-8.30	1.96 V	58	3.80	41.80
8	9848.00	55.20 PK	74.00	-18.80	1.97 V	90	10.90	44.40
8	9848.00	48.40 AV	54.00	-5.60	1.97 V	90	4.00	44.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



4.2.8 TEST RESULTS – Antenna 3, DSSS

EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter	MODEL	WMP-G06
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	28 deg. C, 65%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	46.40 PK	74.00	-27.60	1.60 H	0	17.50	28.90
2	2387.00	44.20 PK	74.00	-29.80	1.64 H	163	11.30	32.90
3	2390.00	37.30 PK	74.00	-36.70	1.09 H	11	3.50	33.80
4	*2412.00	97.10 PK			1.09 H	11	67.20	29.90
4	*2412.00	90.80 AV			1.09 H	11	60.90	29.90
5	2788.00	44.50 PK	74.00	-29.50	1.62 H	138	13.40	31.10
6	4824.00	54.60 PK	74.00	-19.40	1.96 H	282	18.30	36.20
6	4824.00	42.30 AV	54.00	-11.70	1.96 H	282	6.10	36.20
7	7236.00	49.70 PK	74.00	-24.30	1.49 H	5	8.00	41.70
8	9648.00	51.20 PK	74.00	-22.80	1.06 H	23	6.30	44.90
8	9648.00	39.90 AV	54.00	-14.10	1.06 H	23	-5.00	44.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	52.10 PK	74.00	-21.90	1.23 V	10	23.20	28.90
1	2038.00	51.20 AV	54.00	-2.80	1.23 V	10	22.30	28.90
2	2387.00	52.80 PK	74.00	-21.20	1.68 V	319	19.90	32.90
2	2387.00	42.00 AV	54.00	-12.00	1.68 V	319	9.10	32.90
3	2390.00	47.10 PK	74.00	-26.90	1.10 V	316	13.30	33.80
4	*2412.00	107.00 PK			1.10 V	316	77.10	29.90
4	*2412.00	100.30 AV			1.10 V	316	70.40	29.90
5	2788.00	54.60 PK	74.00	-19.40	1.43 V	325	23.50	31.10
5	2788.00	43.40 AV	54.00	-10.60	1.43 V	325	12.30	31.10
6	4824.00	55.90 PK	74.00	-18.10	1.47 V	155	19.60	36.20
6	4824.00	47.40 AV	54.00	-6.60	1.47 V	155	11.20	36.20
7	7236.00	53.20 PK	74.00	-20.80	1.81 V	18	11.50	41.70
7	7236.00	43.90 AV	54.00	-10.10	1.81 V	18	2.20	41.70
8	9648.00	51.20 PK	74.00	-22.80	1.29 V	50	6.30	44.90
8	9648.00	39.90 AV	54.00	-14.10	1.29 V	50	-5.00	44.90

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency



EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter	MODEL	WMP-G06
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	28 deg. C, 65%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	46.80 PK	74.00	-27.20	1.05 H	0	17.70	29.10
2	*2437.00	97.70 PK			1.91 H	222	67.70	30.00
2	*2437.00	91.10 AV			1.91 H	222	61.10	30.00
3	2494.00	47.80 PK	74.00	-26.20	1.33 H	123	13.90	33.90
4	2812.00	46.60 PK	74.00	-27.40	1.32 H	120	15.50	31.10
5	4874.00	51.10 PK	74.00	-22.90	1.89 H	26	14.60	36.50
5	4874.00	39.30 AV	54.00	-14.70	1.89 H	26	2.90	36.50
6	7311.00	53.00 PK	74.00	-21.00	1.65 H	352	11.20	41.80
6	7311.00	44.10 AV	54.00	-9.90	1.65 H	352	2.30	41.80
7	9748.00	50.60 PK	74.00	-23.40	1.67 H	120	6.00	44.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	52.00 PK	74.00	-22.00	1.31 V	315	22.90	29.10
1	2063.00	51.10 AV	54.00	-2.90	1.31 V	315	22.00	29.10
2	*2437.00	105.50 PK			1.32 V	40	75.50	30.00
2	*2437.00	98.70 AV			1.32 V	40	68.80	30.00
3	2494.00	55.00 PK	74.00	-19.00	1.54 V	336	21.10	33.90
3	2494.00	49.50 AV	54.00	-4.50	1.54 V	336	15.60	33.90
4	2812.00	55.40 PK	74.00	-18.60	1.34 V	251	24.30	31.10
4	2812.00	43.50 AV	54.00	-10.50	1.34 V	251	12.30	31.10
5	4874.00	55.50 PK	74.00	-18.50	1.79 V	157	19.10	36.50
5	4874.00	44.20 AV	54.00	-9.80	1.79 V	157	7.80	36.50
6	7311.00	54.60 PK	74.00	-19.40	1.78 V	28	12.80	41.80
6	7311.00	45.60 AV	54.00	-8.40	1.78 V	28	3.80	41.80
7	9748.00	50.50 PK	74.00	-23.50	1.27 V	285	5.90	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter	MODEL	WMP-G06
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	28 deg. C, 65%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	43.70 PK	74.00	-30.30	1.80 H	229	14.50	29.20
2	*2462.00	96.90 PK			1.33 H	298	66.90	30.10
2	*2462.00	90.30 AV			1.33 H	298	60.20	30.10
3	2483.50	38.10 PK	74.00	-35.90	1.33 H	298	8.00	30.10
4	2487.00	40.30 PK	74.00	-33.70	1.49 H	53	10.10	30.10
5	2838.00	46.70 PK	74.00	-27.30	1.48 H	298	15.50	31.20
6	4924.00	56.90 PK	74.00	-17.10	1.66 H	285	20.30	36.70
6	4924.00	46.30 AV	54.00	-7.70	1.66 H	285	9.70	36.70
7	7386.00	52.20 PK	74.00	-21.80	1.80 H	319	10.40	41.80
7	7386.00	42.40 AV	54.00	-11.60	1.80 H	319	0.60	41.80
8	9848.00	51.60 PK	74.00	-22.40	1.55 H	201	7.30	44.40
8	9848.00	40.20 AV	54.00	-13.80	1.55 H	201	-4.20	44.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	53.20 PK	74.00	-20.80	1.48 V	238	24.00	29.20
1	2088.00	52.30 AV	54.00	-1.70	1.48 V	238	23.10	29.20
2	*2462.00	106.40 PK			1.28 V	31	76.40	30.10
2	*2462.00	100.20 AV			1.28 V	31	70.10	30.10
3	2483.50	47.60 PK	74.00	-26.40	1.28 V	31	17.50	30.10
4	2487.00	45.50 PK	74.00	-28.50	1.53 V	134	15.40	30.10
5	2838.00	56.10 PK	74.00	-17.90	1.60 V	239	25.00	31.20
5	2838.00	44.80 AV	54.00	-9.20	1.60 V	239	13.60	31.20
6	4924.00	64.20 PK	74.00	-9.80	1.49 V	162	27.50	36.70
6	4924.00	52.70 AV	54.00	-1.30	1.49 V	162	16.00	36.70
7	7386.00	56.90 PK	74.00	-17.10	1.90 V	29	15.10	41.80
7	7386.00	47.90 AV	54.00	-6.10	1.90 V	29	6.00	41.80
8	9848.00	52.30 PK	74.00	-21.70	1.92 V	63	8.00	44.40
8	9848.00	40.80 AV	54.00	-13.20	1.92 V	63	-3.60	44.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

4.2.9 TEST RESULTS - Antenna 1, OFDM

EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter	MODEL	WMP-G06
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 57%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	46.40 PK	74.00	-27.60	1.65 H	108	17.50	28.90
2	2390.00	42.90 PK	74.00	-31.10	1.81 H	117	9.10	33.80
3	*2412.00	95.90 PK			1.81 H	117	66.00	29.90
3	*2412.00	88.20 AV			1.81 H	117	58.30	29.90
4	2788.00	46.60 PK	74.00	-27.40	1.12 H	318	15.50	31.10
5	4824.00	48.50 PK	74.00	-25.50	1.50 H	21	12.30	36.20
6	7236.00	48.50 PK	74.00	-25.50	1.34 H	254	6.80	41.70
7	9648.00	50.40 PK	74.00	-23.60	1.20 H	23	5.50	44.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	47.90 PK	74.00	-26.10	1.34 V	274	19.00	28.90
2	2390.00	50.30 PK	74.00	-23.70	1.23 V	150	16.50	33.80
3	*2412.00	103.40 PK			1.23 V	150	73.50	29.90
3	*2412.00	95.40 AV			1.23 V	150	65.50	29.90
4	2788.00	58.10 PK	74.00	-15.90	1.12 V	45	27.00	31.10
4	2788.00	46.00 AV	54.00	-8.00	1.12 V	45	14.90	31.10
5	4824.00	49.20 PK	74.00	-24.80	1.70 V	197	13.00	36.20
6	7236.00	49.40 PK	74.00	-24.60	1.64 V	63	7.80	41.70
7	9648.00	50.70 PK	74.00	-23.30	1.43 V	260	5.80	44.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter	MODEL	WMP-G06
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 57%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	52.60 PK	74.00	-21.40	1.67 H	112	23.60	29.10
1	2063.00	52.00 AV	54.00	-2.00	1.67 H	112	22.90	29.10
2	*2437.00	96.50 PK			1.72 H	115	66.60	30.00
2	*2437.00	88.50 AV			1.72 H	115	58.60	30.00
3	2494.00	48.10 PK	74.00	-25.90	1.38 H	238	14.20	33.90
4	2812.00	46.10 PK	74.00	-27.90	1.25 H	337	15.00	31.10
5	4874.00	49.80 PK	74.00	-24.20	1.43 H	298	13.30	36.50
6	7311.00	48.30 PK	74.00	-25.70	1.43 H	309	6.50	41.80
7	9748.00	50.50 PK	74.00	-23.50	1.46 H	84	5.90	44.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	53.80 PK	74.00	-20.20	1.53 V	348	24.70	29.10
1	2063.00	52.90 AV	54.00	-1.10	1.53 V	348	23.80	29.10
2	*2437.00	103.10 PK			1.46 V	148	73.20	30.00
2	*2437.00	95.50 AV			1.46 V	148	65.50	30.00
3	2494.00	53.60 PK	74.00	-20.40	1.22 V	0	19.70	33.90
3	2494.00	49.10 AV	54.00	-4.90	1.22 V	0	15.30	33.90
4	2812.00	54.60 PK	74.00	-19.40	1.25 V	14	23.50	31.10
4	2812.00	43.80 AV	54.00	-10.20	1.25 V	14	12.70	31.10
5	4874.00	51.90 PK	74.00	-22.10	1.30 V	3	15.40	36.50
5	4874.00	40.20 AV	54.00	-13.80	1.30 V	3	3.70	36.50
6	7311.00	51.50 PK	74.00	-22.50	1.52 V	61	9.80	41.80
6	7311.00	39.80 AV	54.00	-14.20	1.52 V	61	-2.00	41.80
7	9748.00	50.00 PK	74.00	-24.00	1.34 V	8	5.40	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter	MODEL	WMP-G06
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 57%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	52.30 PK	73.80	-21.50	1.86 H	91	23.10	29.20
1	2088.00	51.30 AV	66.20	-14.90	1.86 H	91	22.10	29.20
2	*2462.00	93.80 PK			1.25 H	86	63.70	30.10
2	*2462.00	86.20 AV			1.25 H	86	56.10	30.10
3	2483.50	42.00 PK	74.00	-32.00	1.25 H	86	11.80	30.10
4	2838.00	45.40 PK	74.00	-28.60	1.40 H	249	14.20	31.20
5	4924.00	50.30 PK	74.00	-23.70	1.29 H	300	13.70	36.70
6	7386.00	49.00 PK	74.00	-25.00	1.27 H	274	7.20	41.80
7	9848.00	51.60 PK	74.00	-22.40	1.09 H	180	7.20	44.40
7	9848.00	39.90 AV	54.00	-14.10	1.09 H	180	-4.50	44.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	57.60 PK	84.50	-26.90	1.00 V	0	28.40	29.20
1	2088.00	57.20 AV	76.50	-19.30	1.00 V	0	28.00	29.20
2	*2462.00	104.50 PK			1.31 V	91	74.40	30.10
2	*2462.00	96.40 AV			1.31 V	91	66.30	30.10
3	2483.50	52.70 PK	74.00	-21.30	1.31 V	91	22.60	30.10
3	2483.50	44.60 AV	54.00	-9.40	1.31 V	91	14.50	30.10
4	2838.00	56.20 PK	74.00	-17.80	1.41 V	102	25.00	31.20
4	2838.00	44.40 AV	54.00	-9.60	1.41 V	102	13.20	31.20
5	4924.00	50.20 PK	74.00	-23.80	1.52 V	17	13.50	36.70
6	7386.00	51.50 PK	74.00	-22.50	1.16 V	64	9.60	41.80
6	7386.00	39.40 AV	54.00	-14.60	1.16 V	64	-2.50	41.80
7	9848.00	51.20 PK	74.00	-22.80	1.26 V	113	6.80	44.40
7	9848.00	39.90 AV	54.00	-14.10	1.26 V	113	-4.50	44.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

4.2.10 TEST RESULTS - Antenna 3, OFDM

EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter	MODEL	WMP-G06
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	28 deg. C, 65%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	49.90 PK	73.60	-23.70	1.03 H	336	21.00	28.90
2	2390.00	40.50 PK	66.00	-25.50	1.76 H	81	6.70	33.80
3	*2412.00	93.60 PK			1.76 H	81	63.70	29.90
3	*2412.00	86.00 AV			1.76 H	81	56.10	29.90
4	2788.00	40.90 PK	74.00	-33.10	1.48 H	60	9.80	31.10
5	4824.00	48.90 PK	74.00	-25.10	1.75 H	285	12.60	36.20
6	7236.00	48.60 PK	74.00	-25.40	1.52 H	54	6.90	41.70
7	9648.00	50.30 PK	74.00	-23.70	1.31 H	306	5.40	44.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	55.30 PK	81.70	-26.40	1.00 V	23	26.40	28.90
1	2038.00	53.80 AV	74.10	-20.30	1.00 V	23	24.90	28.90
2	2390.00	48.60 PK	74.00	-25.40	1.68 V	124	14.80	33.80
3	*2412.00	101.70 PK			1.68 V	124	71.80	29.90
3	*2412.00	94.10 AV			1.68 V	124	64.20	29.90
4	2788.00	50.30 PK	74.00	-23.70	1.47 V	265	19.20	31.10
5	4824.00	55.00 PK	74.00	-19.00	1.47 V	169	18.80	36.20
5	4824.00	43.10 AV	54.00	-10.90	1.47 V	169	6.80	36.20
6	7236.00	50.30 PK	74.00	-23.70	1.67 V	10	8.70	41.70
7	9648.00	50.20 PK	74.00	-23.80	1.53 V	244	5.30	44.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter	MODEL	WMP-G06
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	28 deg. C, 65%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	50.50 PK	74.00	-23.50	1.06 H	337	21.50	29.10
2	*2437.00	90.60 PK			1.65 H	125	60.70	30.00
2	*2437.00	83.70 AV			1.65 H	125	53.80	30.00
3	2494.00	45.40 PK	74.00	-28.60	1.06 H	12	11.50	33.90
4	2812.00	40.50 PK	74.00	-33.50	1.40 H	33	9.30	31.10
5	4874.00	51.00 PK	74.00	-23.00	1.96 H	61	14.50	36.50
5	4874.00	38.90 AV	54.00	-15.10	1.96 H	61	2.50	36.50
6	7311.00	48.40 PK	74.00	-25.60	1.54 H	10	6.70	41.80
7	9748.00	50.80 PK	74.00	-23.20	1.33 H	300	6.10	44.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	52.90 PK	74.00	-21.10	1.00 V	246	23.80	29.10
1	2063.00	52.00 AV	54.00	-2.00	1.00 V	246	22.90	29.10
2	*2437.00	101.50 PK			1.64 V	123	71.50	30.00
2	*2437.00	93.50 AV			1.64 V	123	63.50	30.00
3	2494.00	52.40 PK	74.00	-21.60	1.30 V	310	18.50	33.90
3	2494.00	48.20 AV	54.00	-5.80	1.30 V	310	14.30	33.90
4	2812.00	48.40 PK	74.00	-25.60	1.32 V	23	17.20	31.10
5	4874.00	58.00 PK	74.00	-16.00	1.48 V	161	21.50	36.50
5	4874.00	46.30 AV	54.00	-7.70	1.48 V	161	9.90	36.50
6	7311.00	51.60 PK	74.00	-22.40	1.54 V	39	9.90	41.80
6	7311.00	40.10 AV	54.00	-13.90	1.54 V	39	-1.60	41.80
7	9748.00	51.30 PK	74.00	-22.70	1.50 V	249	6.60	44.60
7	9748.00	39.40 AV	54.00	-14.60	1.50 V	249	-5.20	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter	MODEL	WMP-G06
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	28 deg. C, 65%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	50.90 PK	74.10	-23.20	1.05 H	335	21.70	29.20
2	*2462.00	94.10 PK			1.75 H	93	64.10	30.10
2	*2462.00	86.30 AV			1.75 H	93	56.30	30.10
3	2483.50	42.40 PK	74.00	-31.60	1.75 H	93	12.20	30.10
4	2838.00	41.90 PK	74.00	-32.10	1.44 H	105	10.70	31.20
5	4924.00	49.70 PK	74.00	-24.30	1.90 H	95	13.00	36.70
6	7386.00	48.70 PK	74.00	-25.30	1.33 H	46	6.90	41.80
7	9848.00	50.20 PK	74.00	-23.80	1.17 H	307	5.80	44.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	54.50 PK	79.80	-25.30	1.00 V	55	25.30	29.20
1	2088.00	53.60 AV	72.70	-19.10	1.00 V	55	24.40	29.20
2	*2462.00	99.80 PK			1.66 V	269	69.80	30.10
2	*2462.00	92.70 AV			1.66 V	269	62.60	30.10
3	2483.50	48.10 PK	74.00	-25.90	1.66 V	269	17.90	30.10
4	2838.00	50.80 PK	74.00	-23.20	1.39 V	265	19.60	31.20
5	4924.00	53.00 PK	74.00	-21.00	1.30 V	41	16.30	36.70
5	4924.00	41.40 AV	54.00	-12.60	1.30 V	41	4.70	36.70
6	7386.00	52.70 PK	74.00	-21.30	1.67 V	43	10.80	41.80
6	7386.00	40.60 AV	54.00	-13.40	1.67 V	43	-1.30	41.80
7	9848.00	52.90 PK	74.00	-21.10	1.55 V	58	8.50	44.40
7	9848.00	40.40 AV	54.00	-13.60	1.55 V	58	-4.00	44.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 27, 2004

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.6 TEST RESULTS-DSSS


EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter		
MODEL	WMP-G06	ENVIRONMENTAL CONDITIONS	24 deg. C, 64%RH, 970 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Wen Yu

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	12.30	0.5	PASS
6	2437	12.20	0.5	PASS
11	2462	12.45	0.5	PASS


CH1

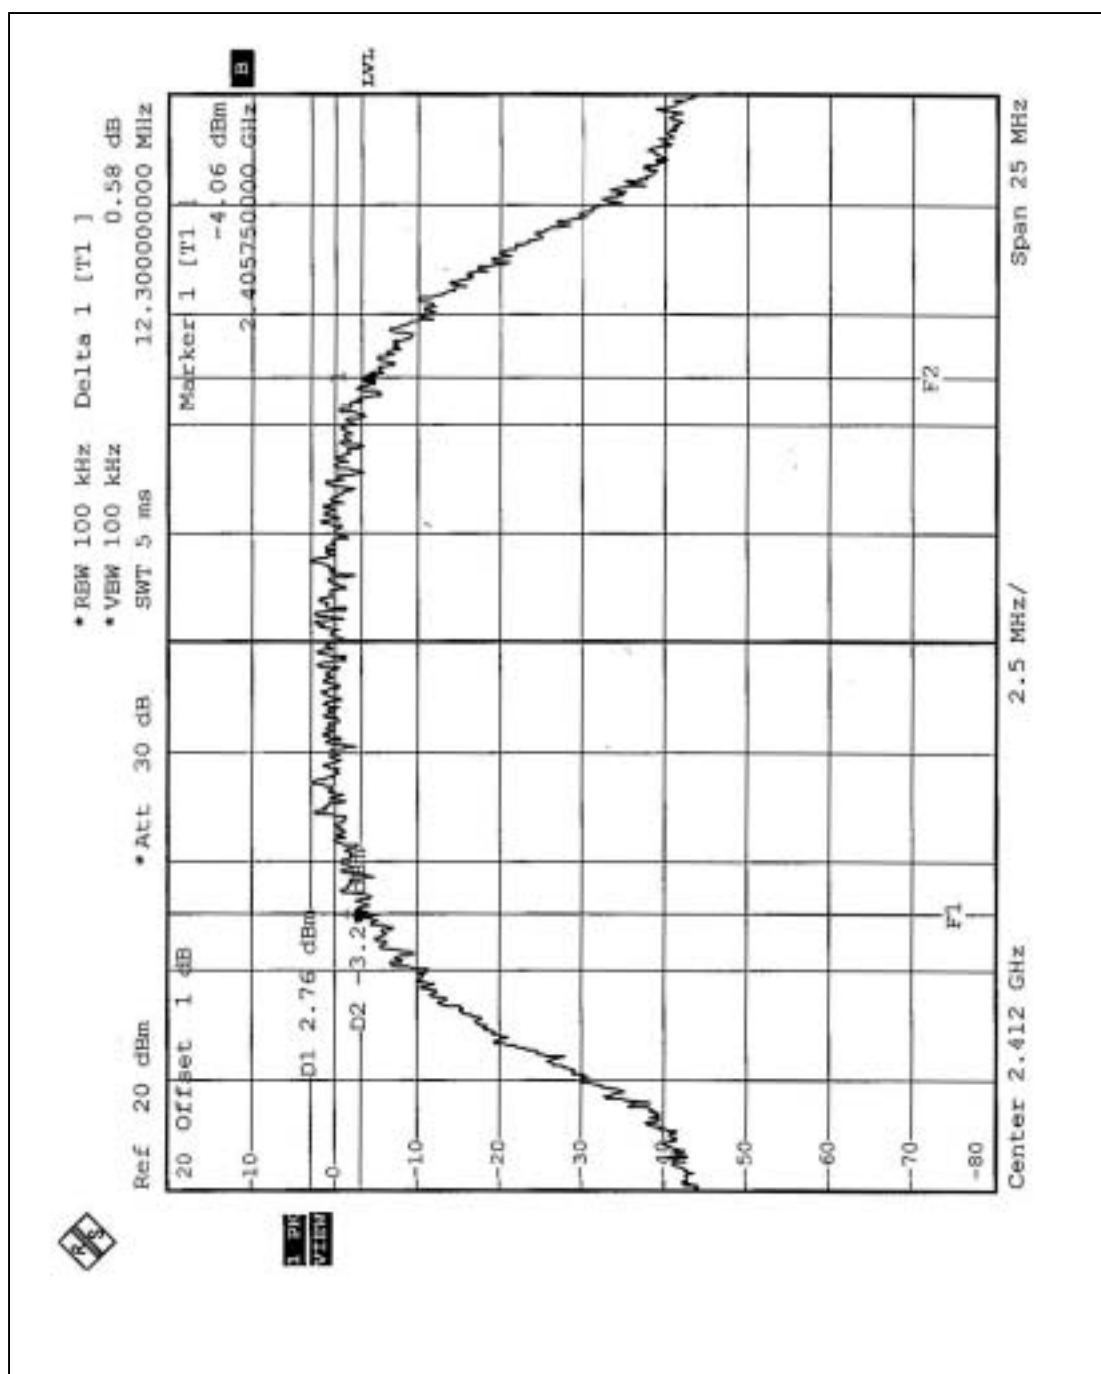

CH6

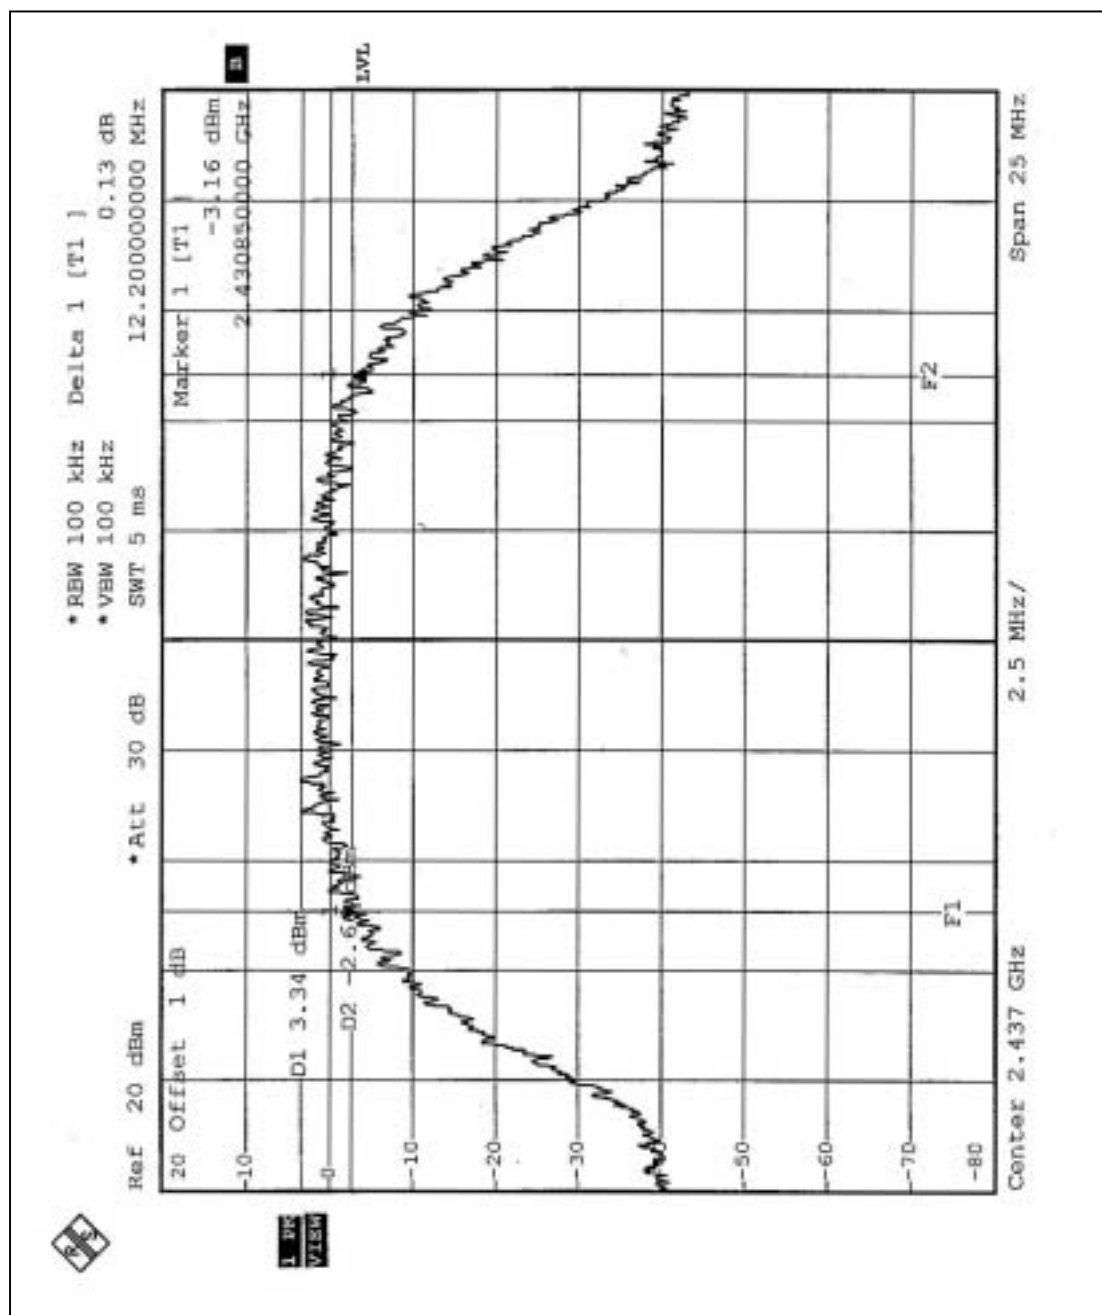

CH11

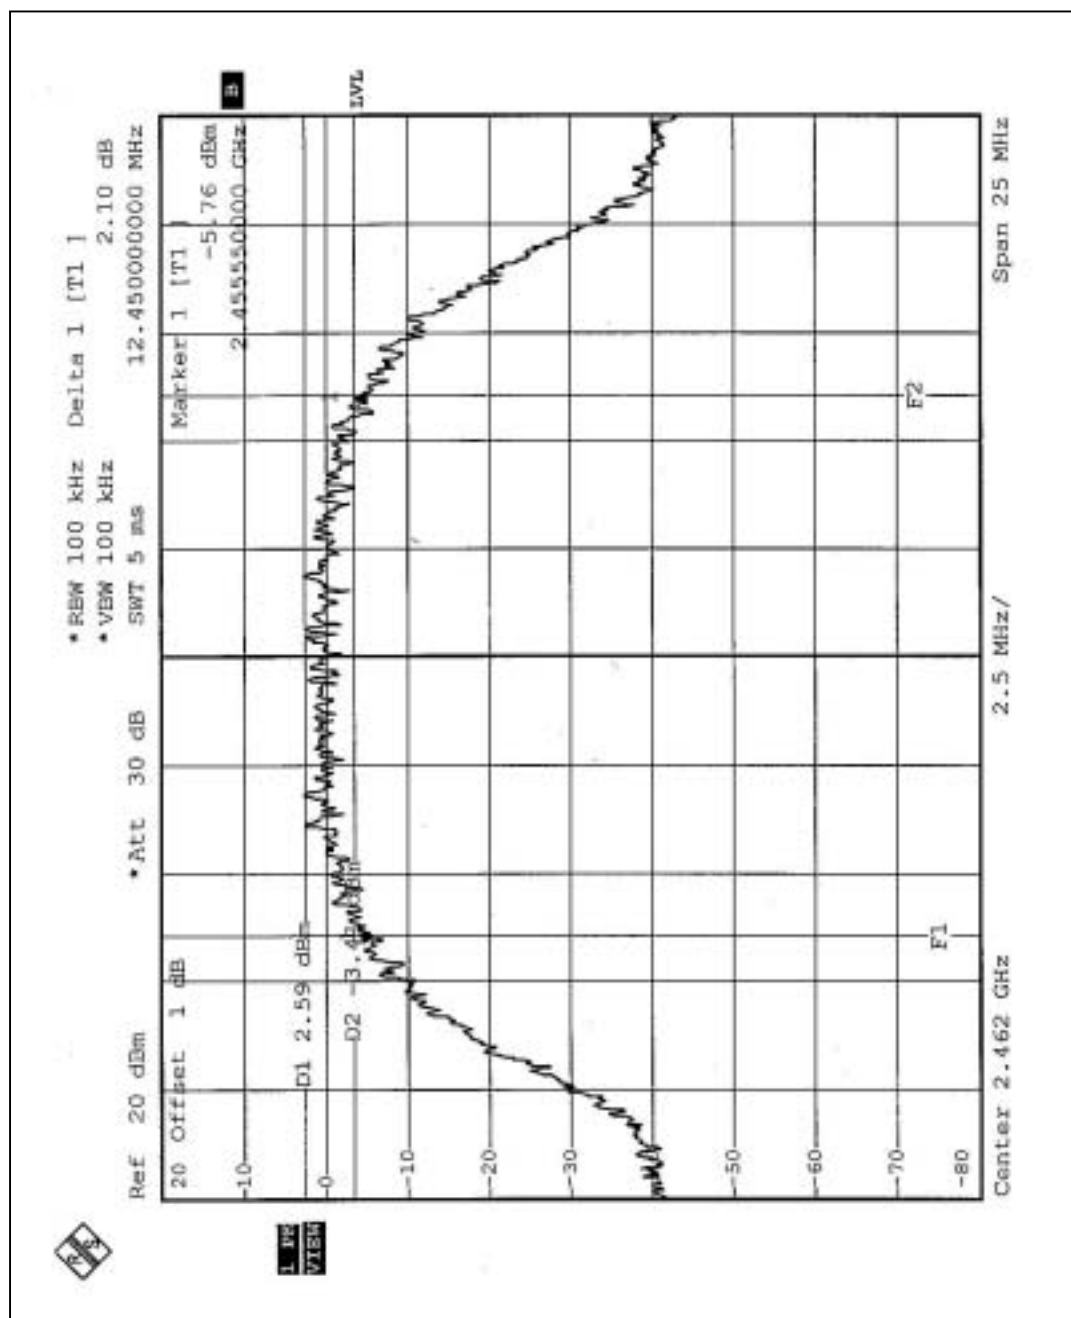


4.3.7 TEST RESULTS-OFDM


EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter		
MODEL	WMP-G06	ENVIRONMENTAL CONDITIONS	24 deg. C, 64%RH, 970 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Wen Yu

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.55	0.5	PASS
6	2437	16.55	0.5	PASS
11	2462	16.60	0.5	PASS


CH1

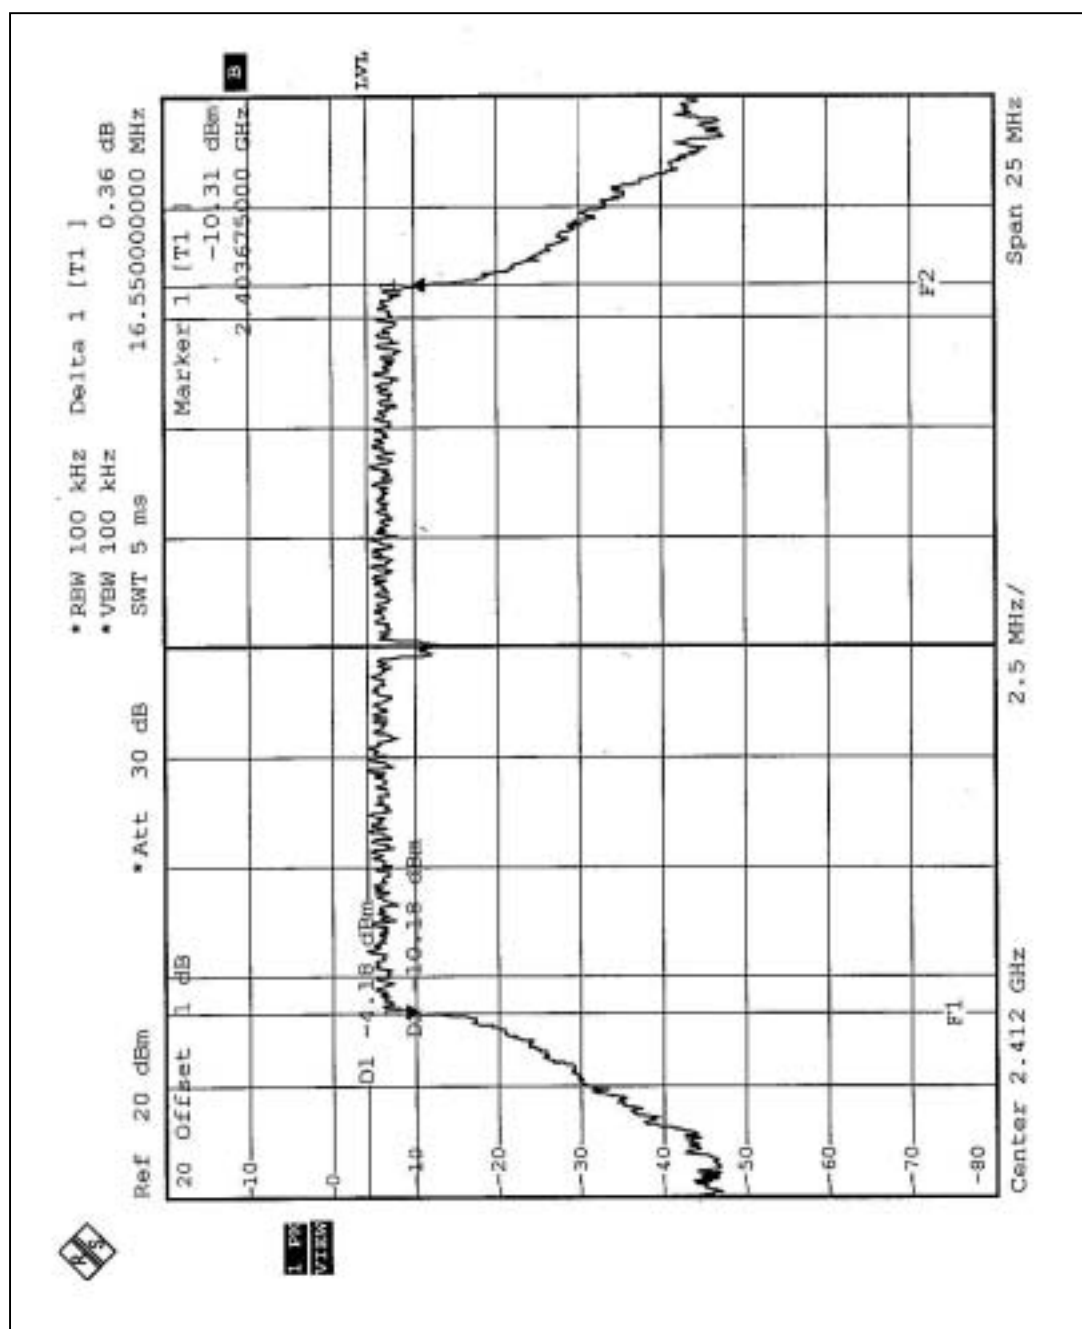

CH6

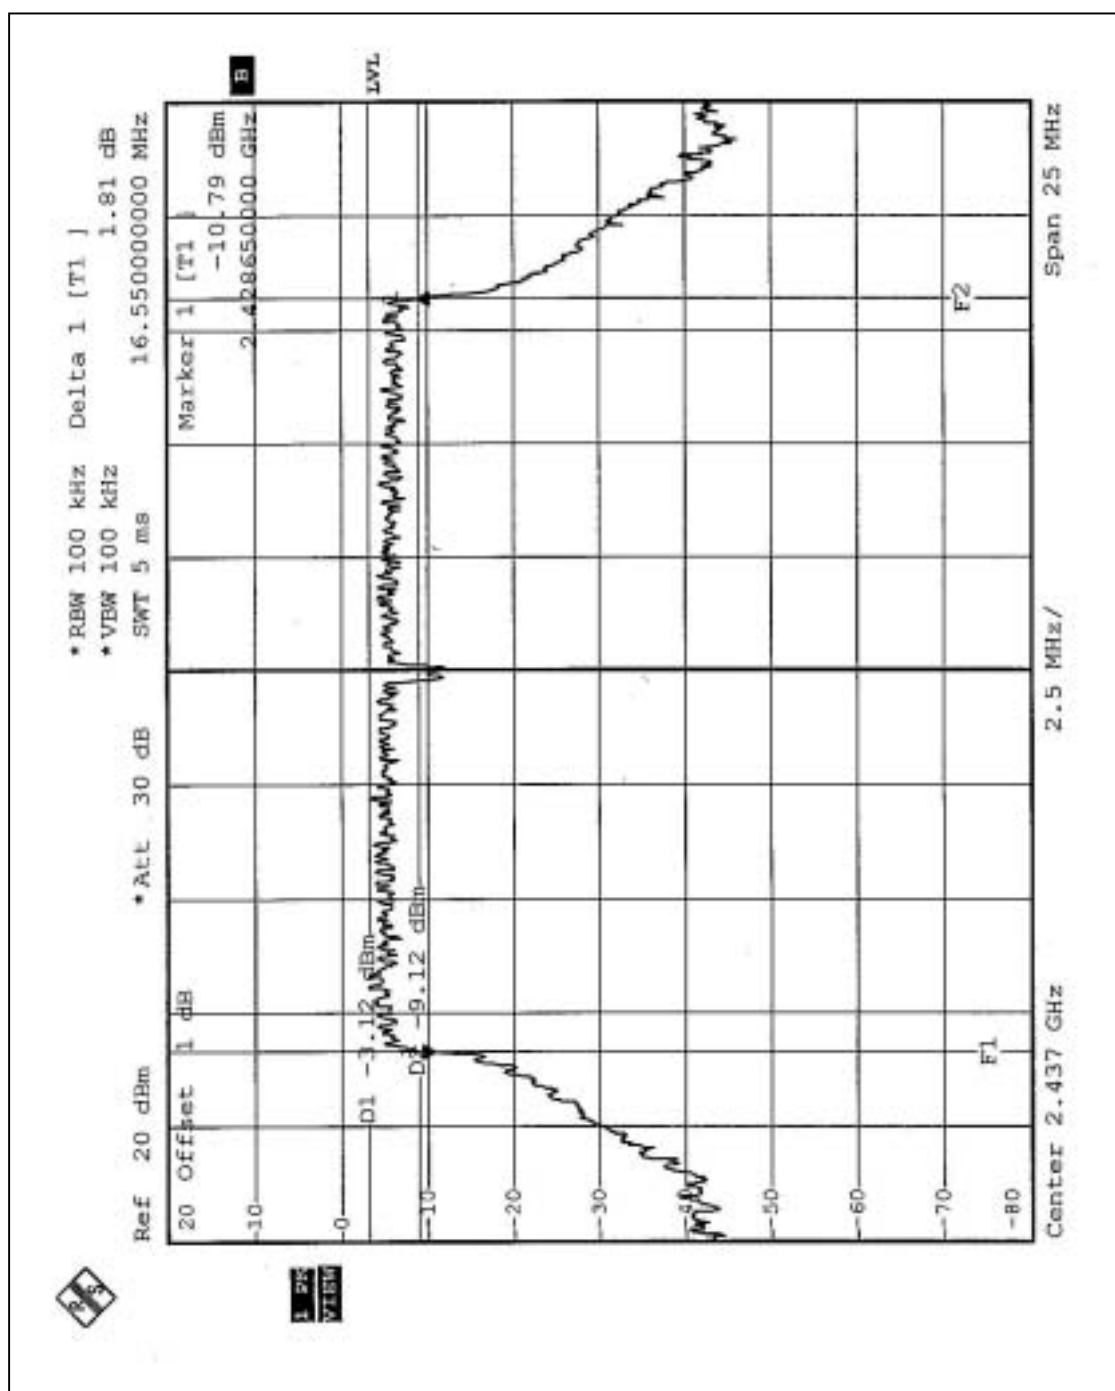

CH11

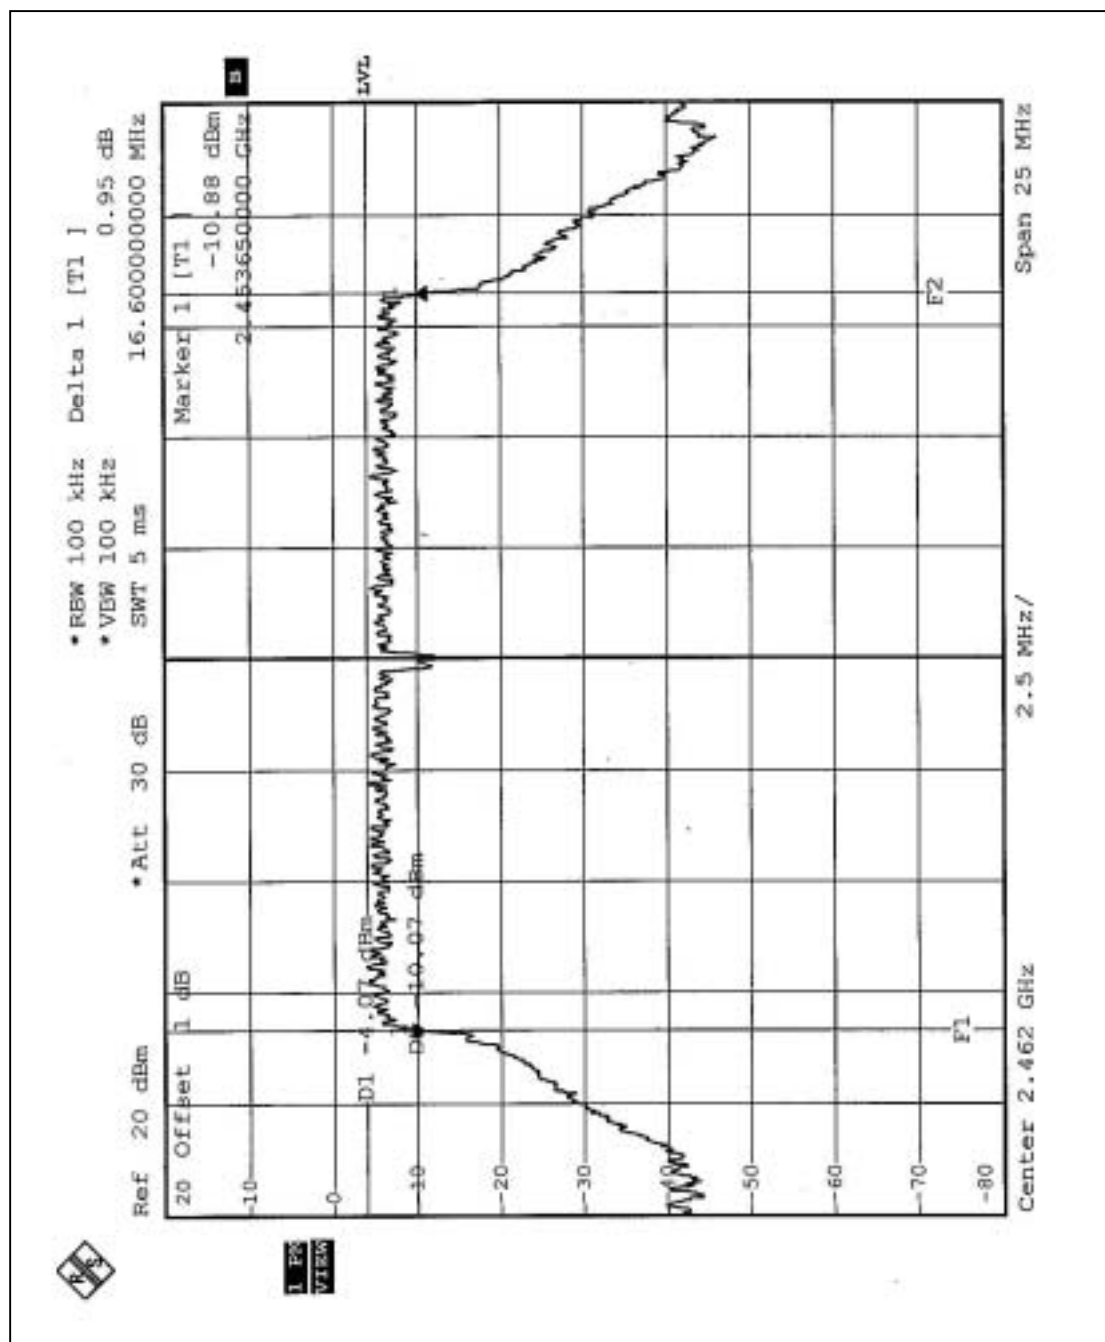

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 27, 2004
Agilent SIGNAL GENERATOR	E8257C	MY43320668	Jan. 1, 2005
TEKTRONIX OSCILLOSCOPE	TDS 220	B027241	Jun. 30, 2005
NARDA DETECTOR	4503A	FSCM99899	NA


NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the peak response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5

4.4.6 TEST RESULTS- DSSS

EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter		
MODEL	WMP-G06	ENVIRONMENTAL CONDITIONS	24 deg. C, 64%RH, 970 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Wen Yu

Antenna 1 (Gain 2.0dBi)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	15.52	30	PASS
6	2437	15.62	30	PASS
11	2462	15.35	30	PASS

Antenna 3 (Gain 5.0dBi)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	15.52	30	PASS
6	2437	15.62	30	PASS
11	2462	15.35	30	PASS

4.4.7 TEST RESULTS- OFDM

EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter		
MODEL	WMP-G06	ENVIRONMENTAL CONDITIONS	24 deg. C, 64%RH, 970 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Wen Yu

Antenna 1 (Gain 2.0dBi)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	15.03	30	PASS
6	2437	15.32	30	PASS
11	2462	15.08	30	PASS

Antenna 3 (Gain 5.0dBi)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	15.03	30	PASS
6	2437	15.32	30	PASS
11	2462	15.08	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 27, 2004


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 TEST SETUP



4.5.5 EUT OPERATING CONDITIONS

Same as 4.3.5




4.5.6 TEST RESULTS-DSSS


EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter		
MODEL	WMP-G06	ENVIRONMENTAL CONDITIONS	24 deg. C, 64%RH, 970 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Wen Yu

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-9.96	8	PASS
6	2437	-9.46	8	PASS
11	2462	-10.10	8	PASS


CH1

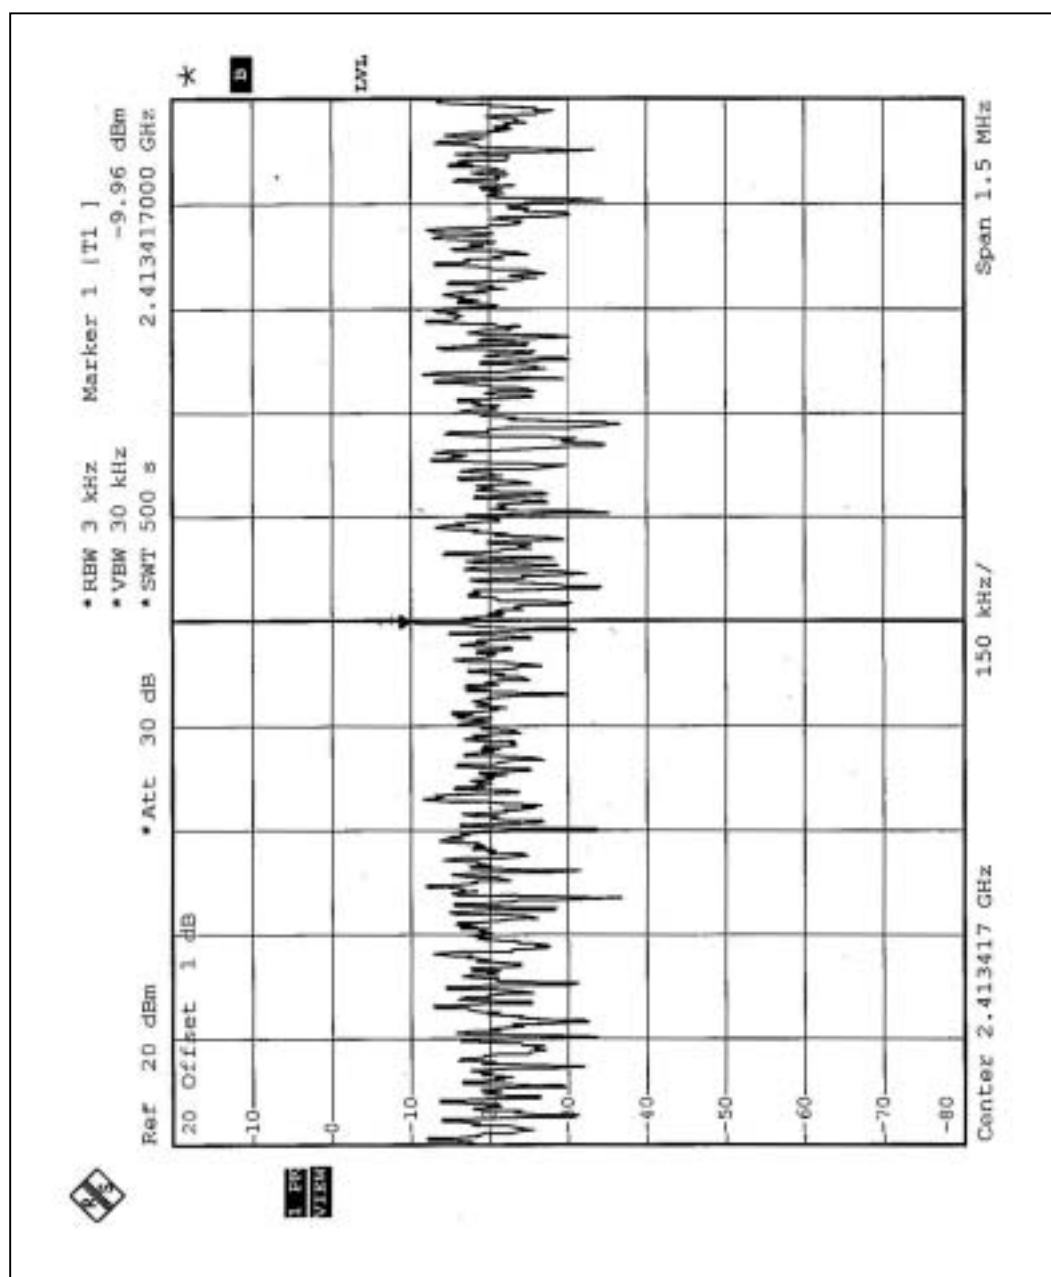

CH6

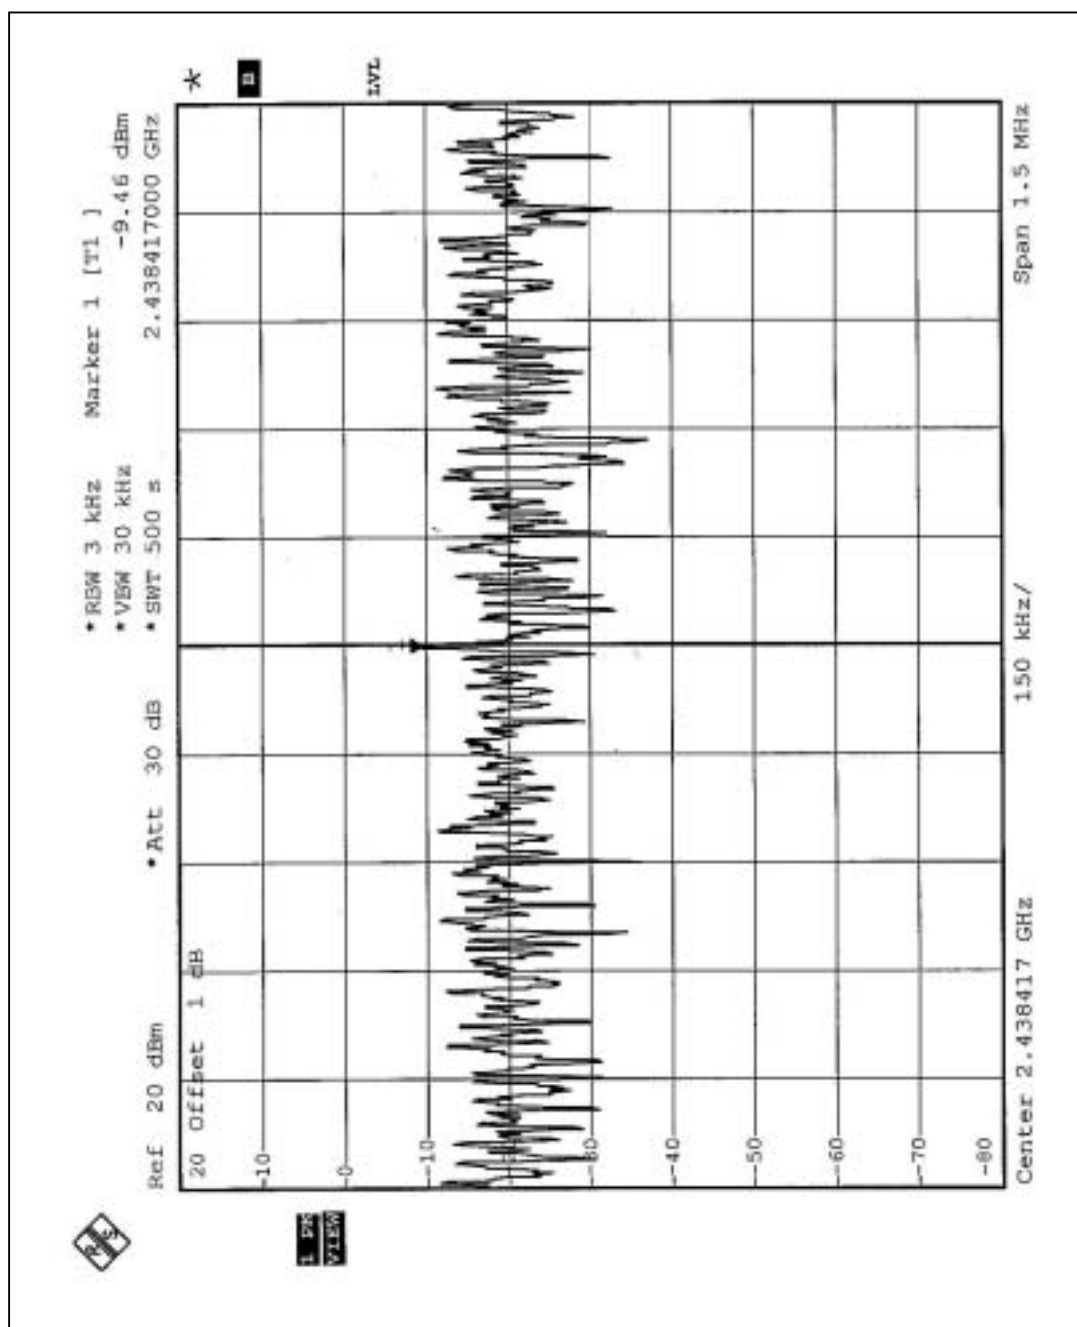

CH11

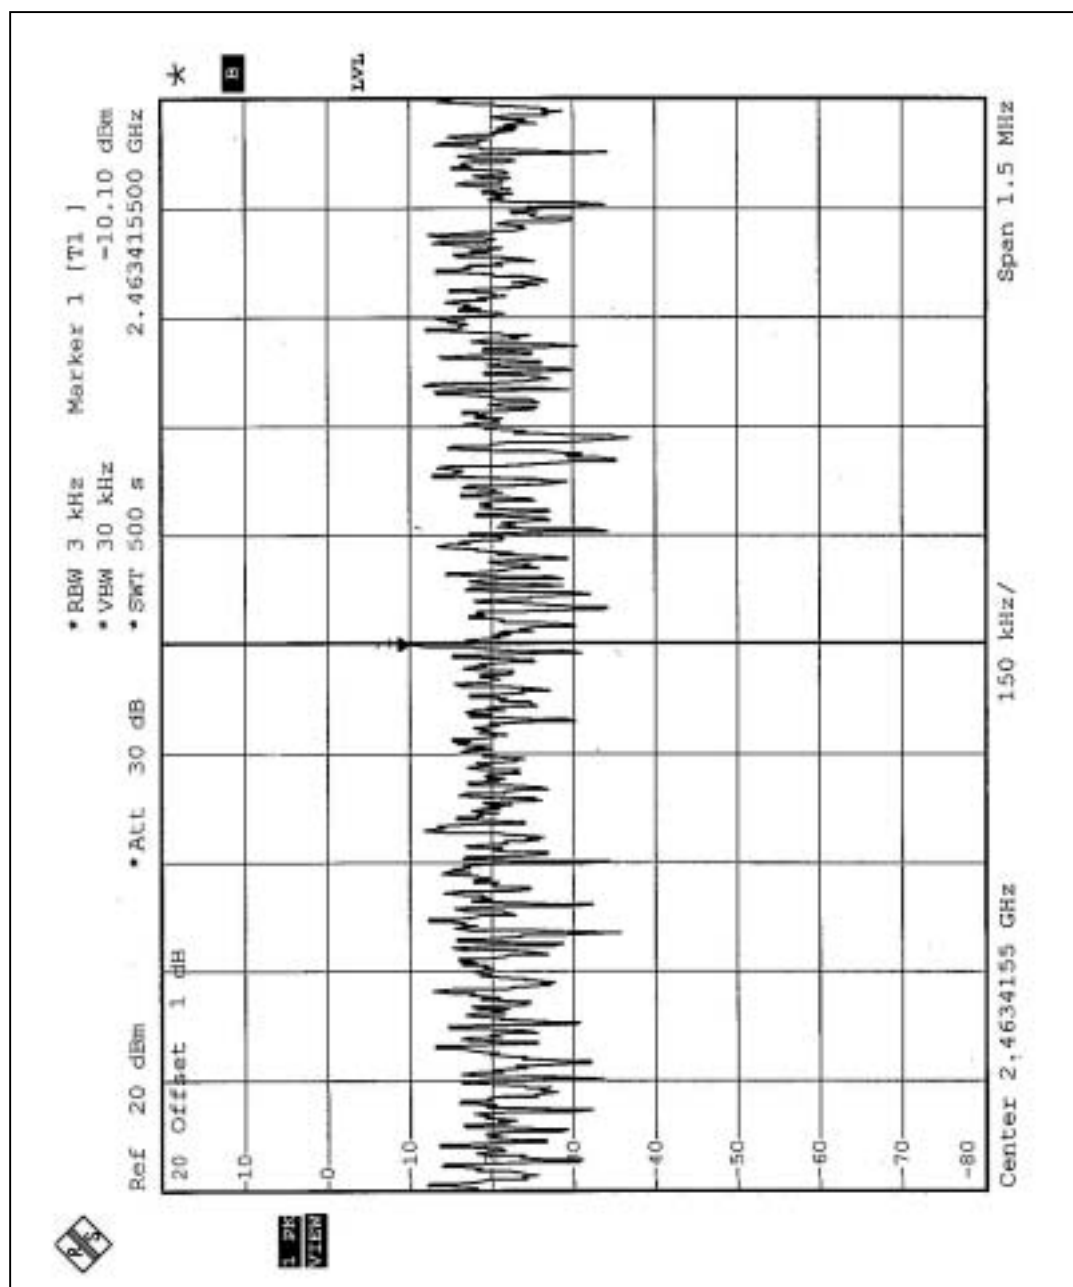




4.5.7 TEST RESULTS-OFDM


EUT	802.11g/2.4GHz Wireless Mini-PCI Adapter		
MODEL	WMP-G06	ENVIRONMENTAL CONDITIONS	24 deg. C, 64%RH, 970 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Wen Yu

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-17.01	8	PASS
6	2437	-16.34	8	PASS
11	2462	-16.99	8	PASS


CH1

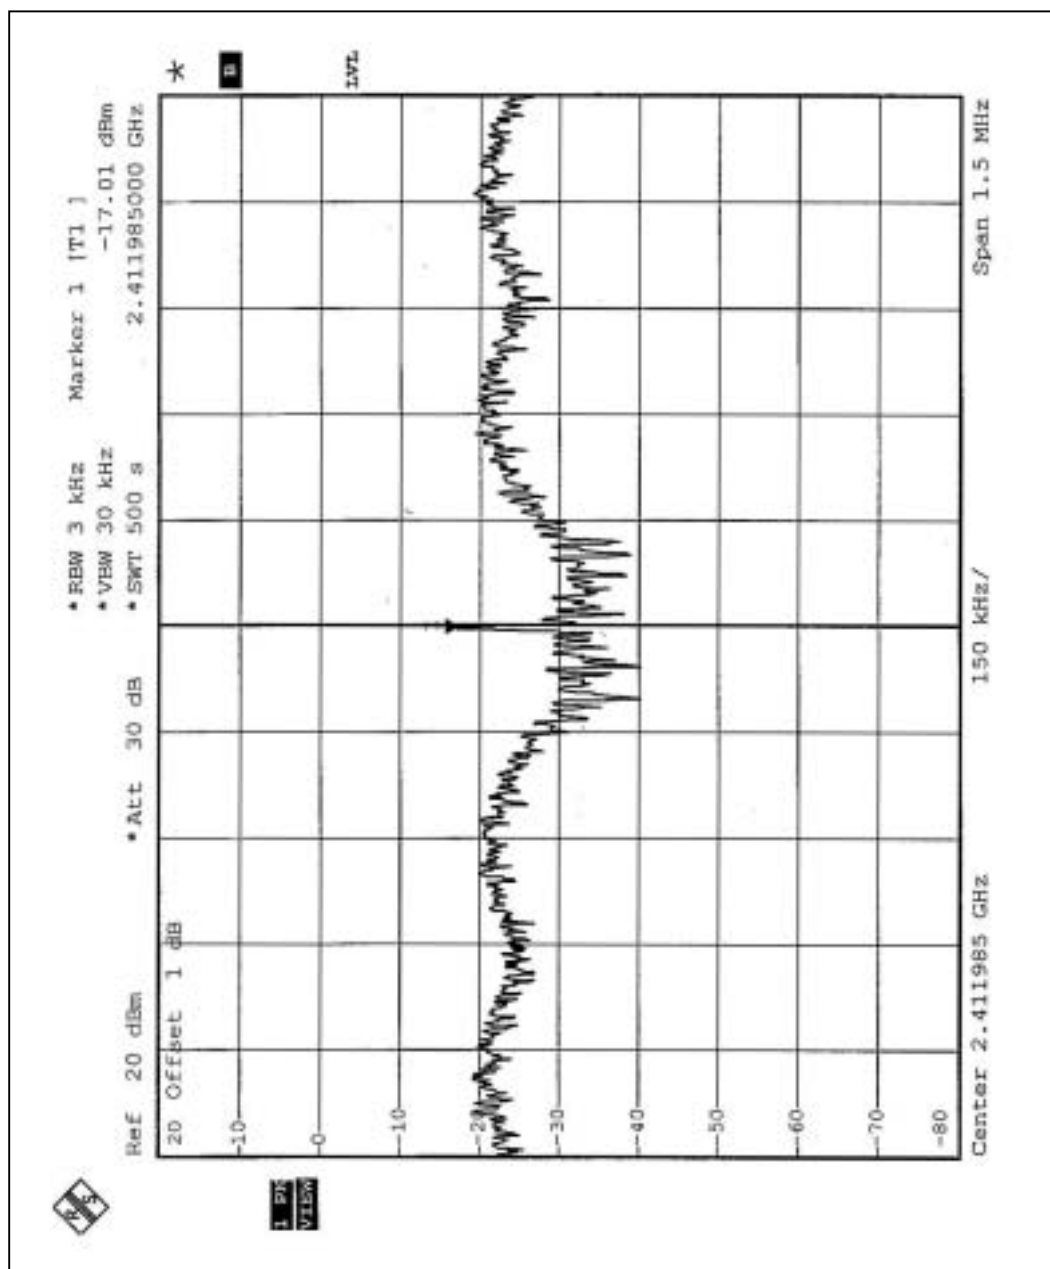

CH6

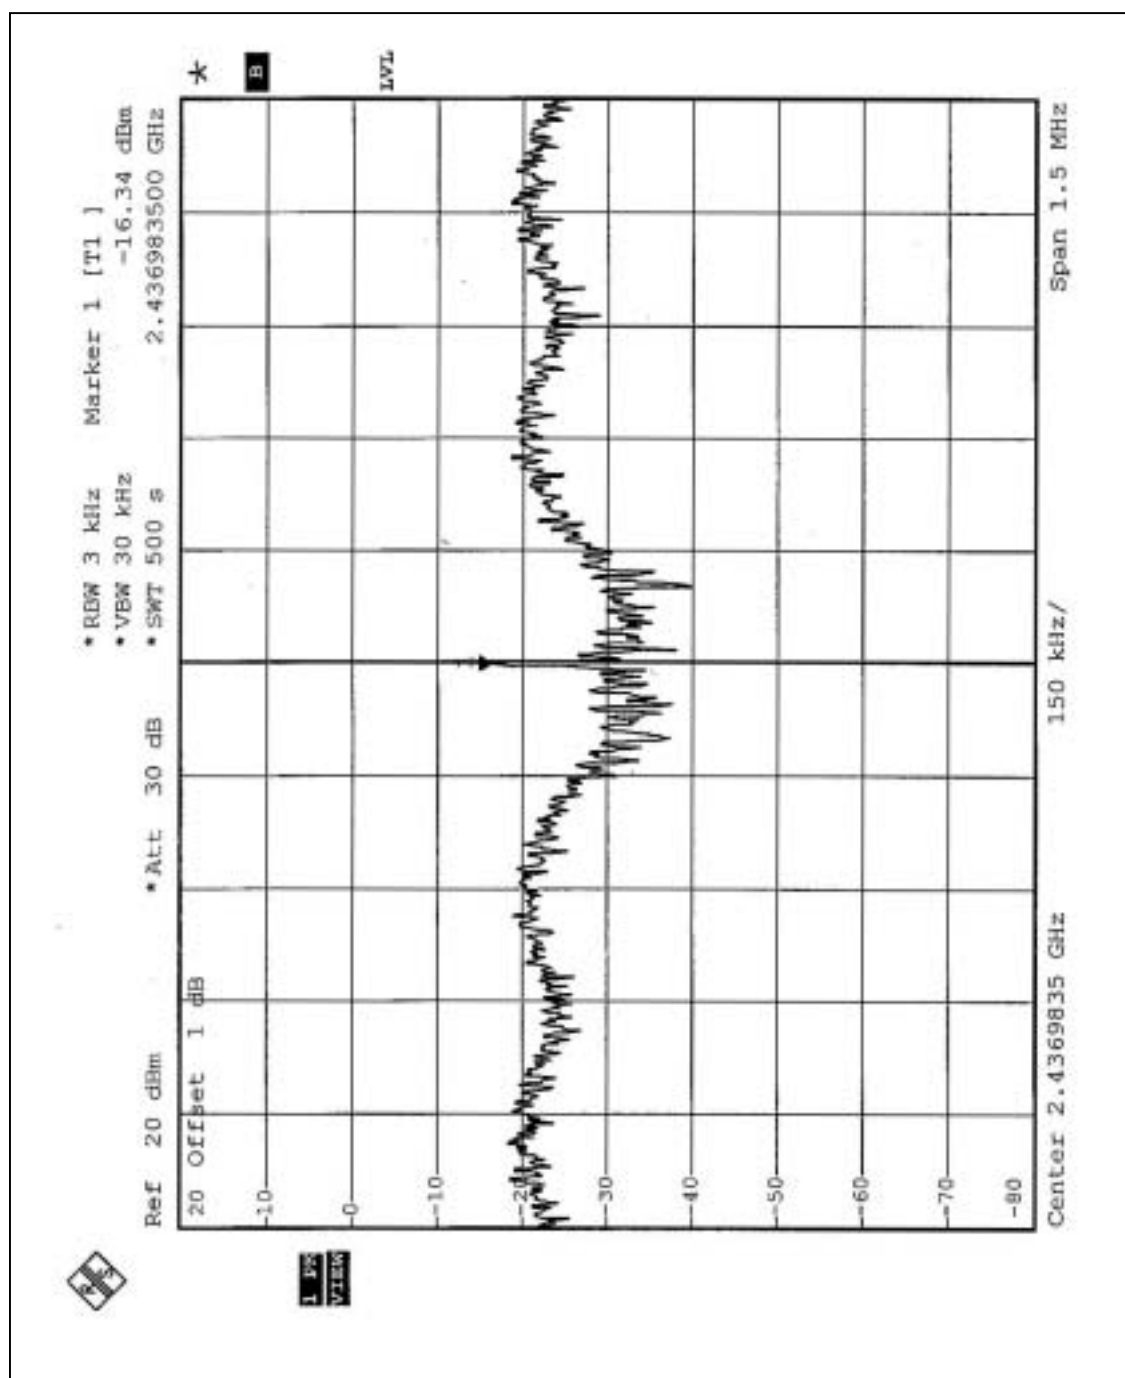

CH11

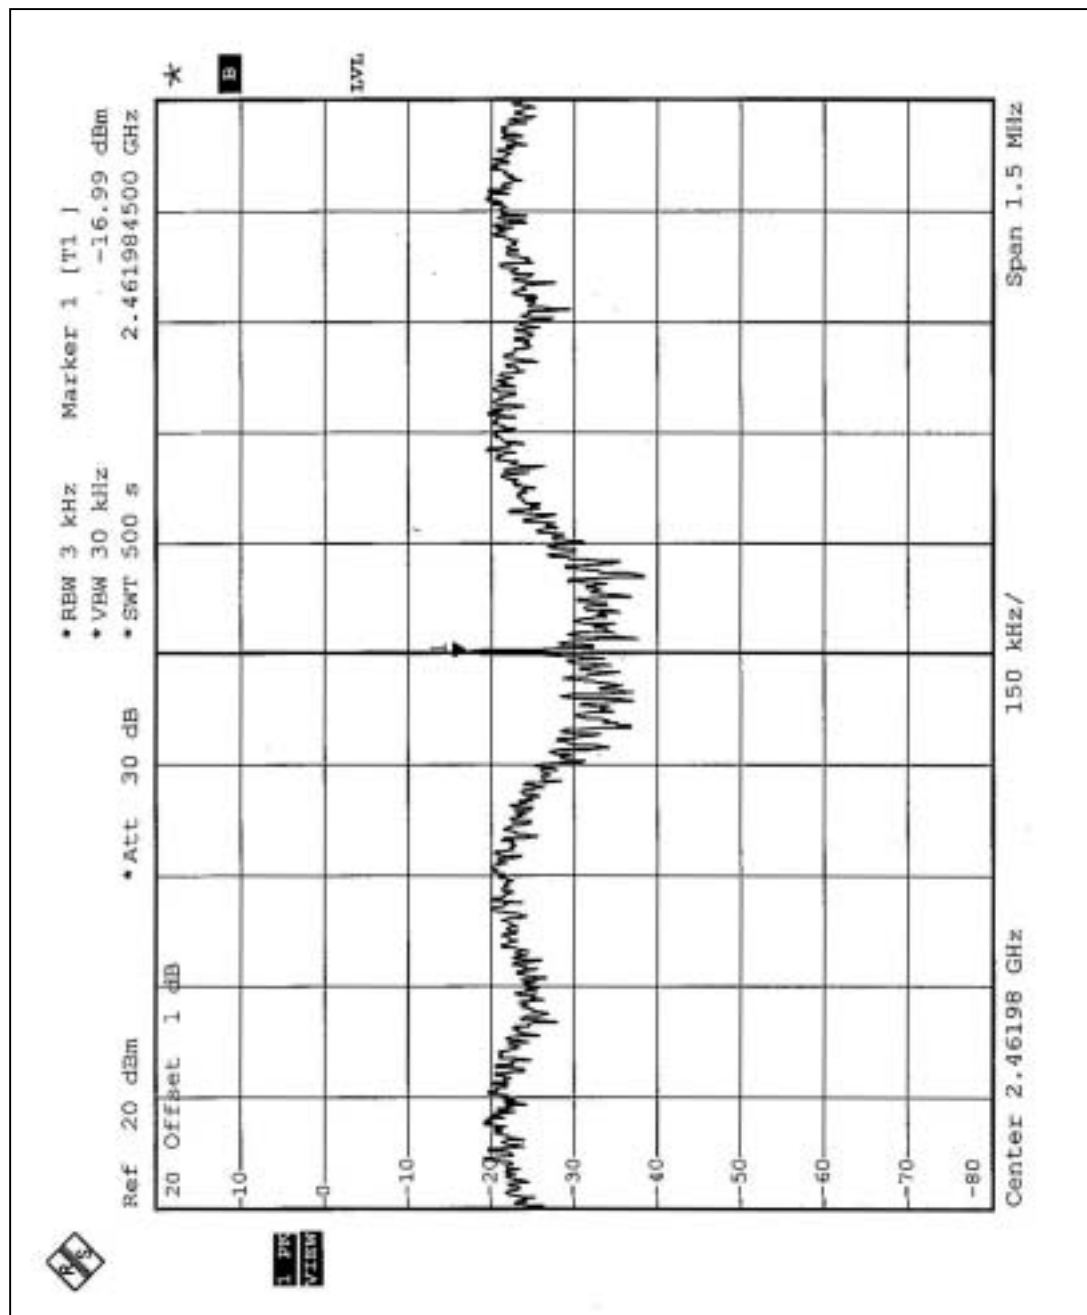



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 1 MHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 27, 2004

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set RBW spectrum analyzer to 1 MHz and set VBW spectrum analyzer to 10 Hz with suitable frequency span including 1 MHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 EUT OPERATING CONDITION

Same as Item 4.3.5




4.6.5 TEST RESULTS – Antenna 1, DSSS


The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (1): The band edge emission plot on the following first page shows 59.99dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 100.40dBuV/m, so the maximum field strength in restrict band is $100.40 - 59.99 = 40.41$ dBuV/m which is under 54 dBuV/m limit.

NOTE (2): The band edge emission plot on the following second page shows 59.17dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2. is 102.50dBuV/m, so the maximum field strength in restrict band is $102.50 - 59.17 = 43.33$ dBuV/m which is under 54 dBuV/m limit.

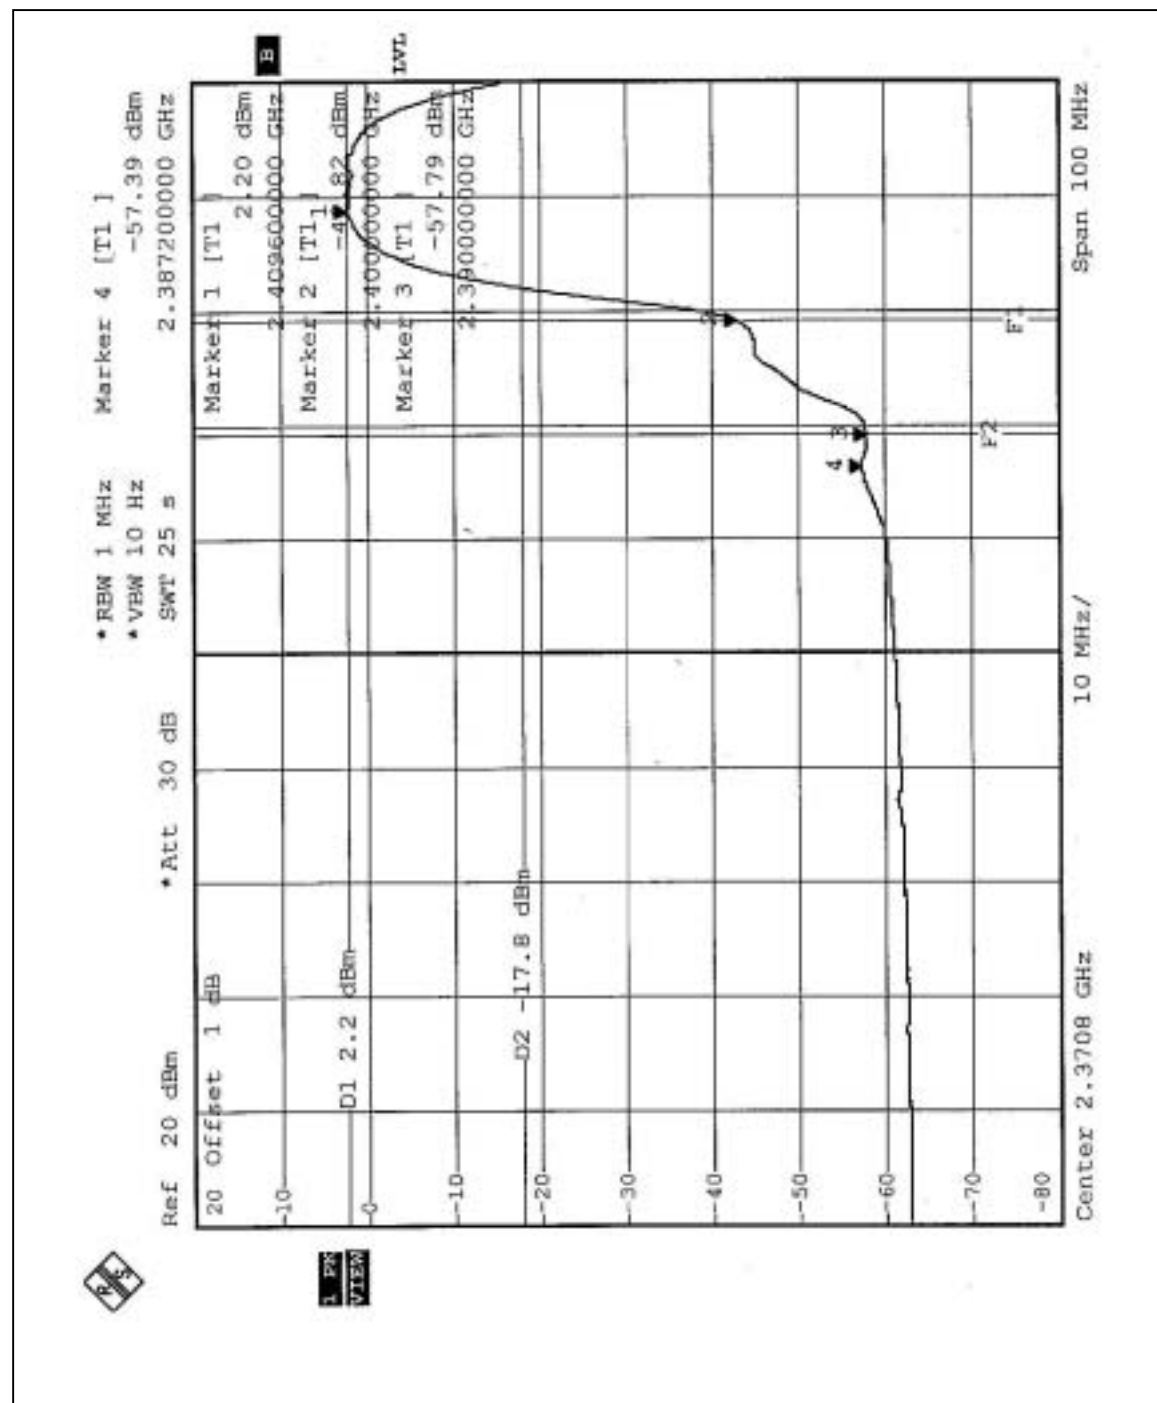

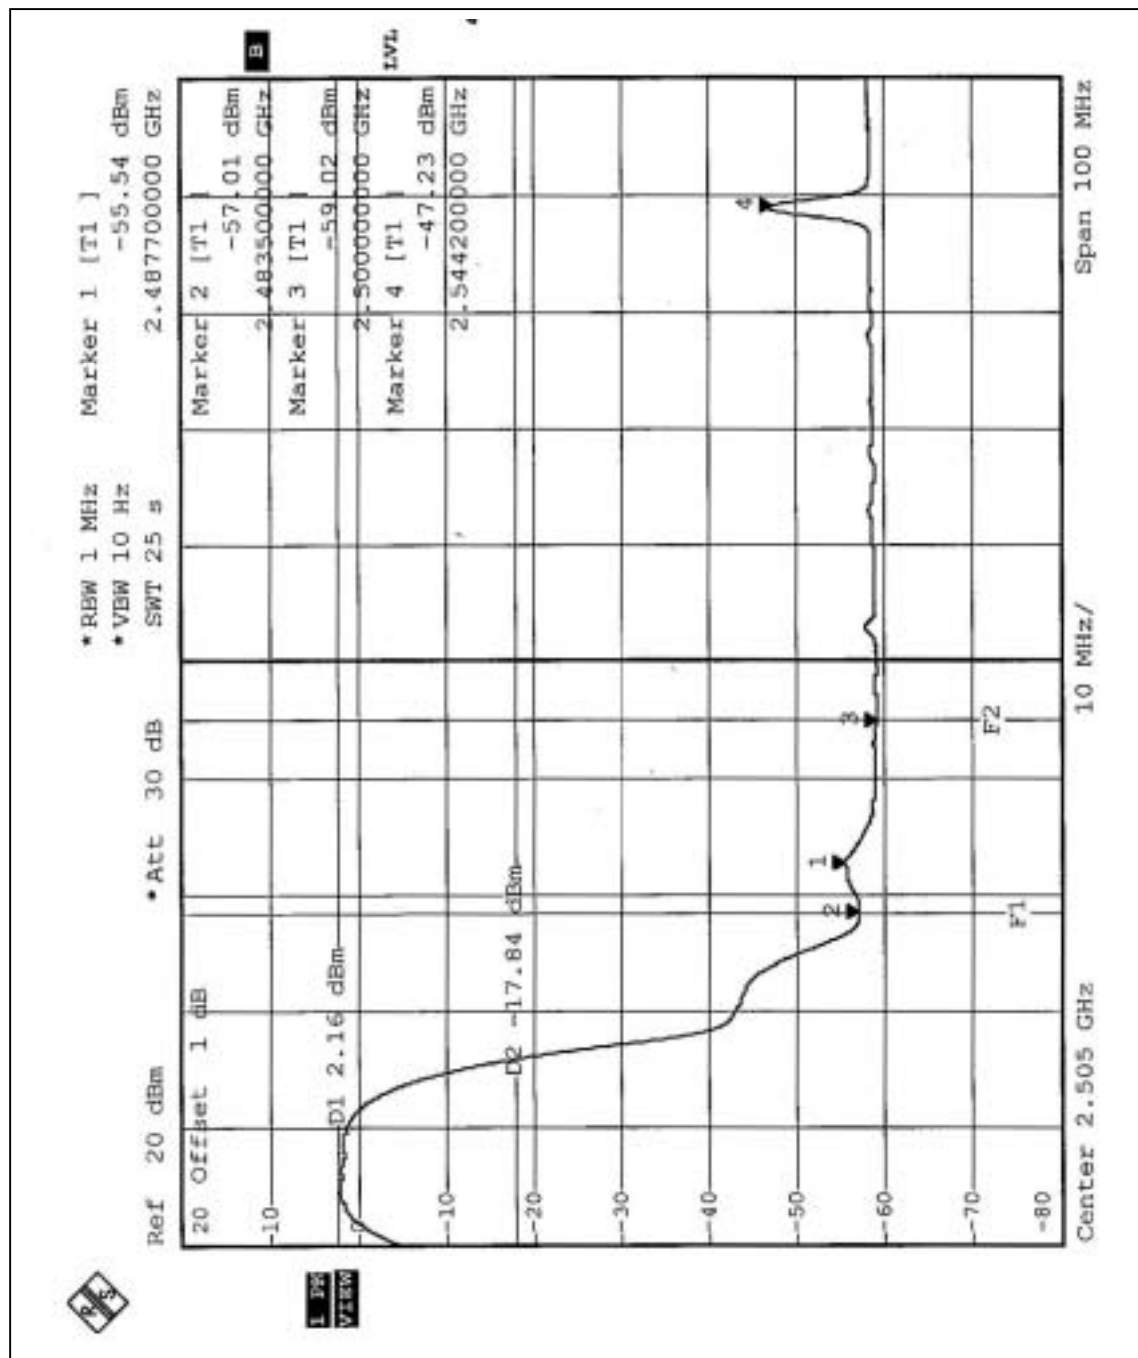




4.6.6 TEST RESULTS –Antenna 3, DSSS


The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (1): The band edge emission plot on the following first page shows 59.99dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 100.30dBuV/m, so the maximum field strength in restrict band is $100.30 - 59.99 = 40.31$ dBuV/m which is under 54 dBuV/m limit.

NOTE (2): The band edge emission plot on the following second page shows 59.17dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2. is 100.20dBuV/m, so the maximum field strength in restrict band is $100.20 - 59.17 = 41.03$ dBuV/m which is under 54 dBuV/m limit.

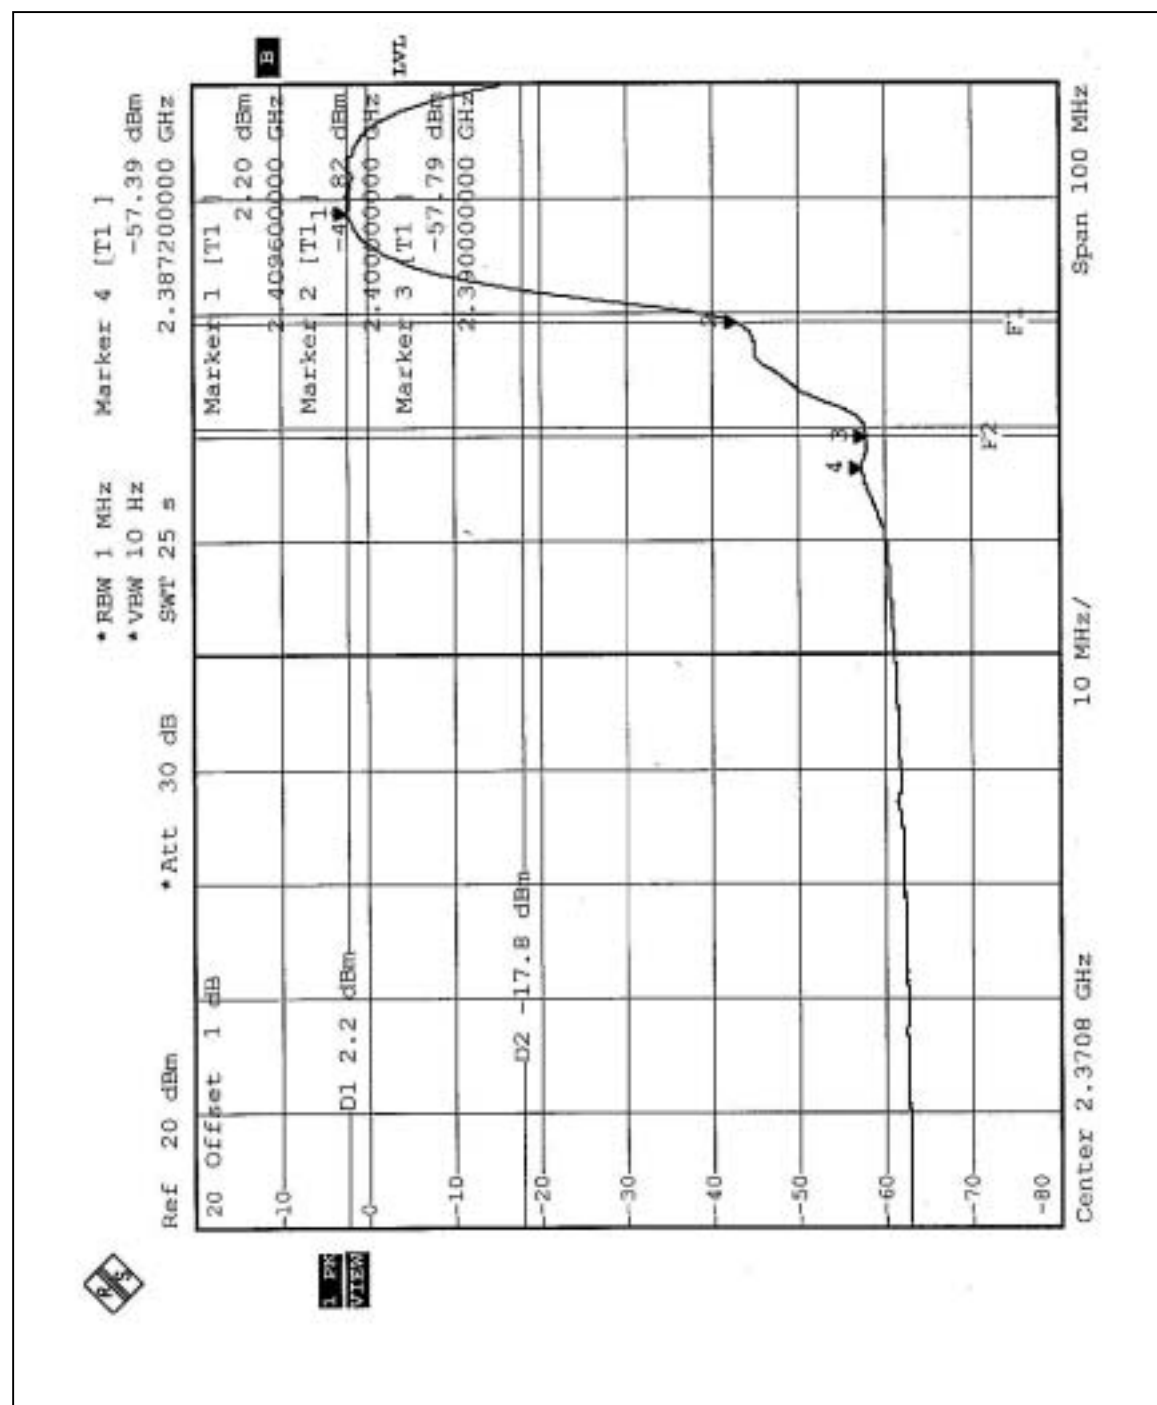

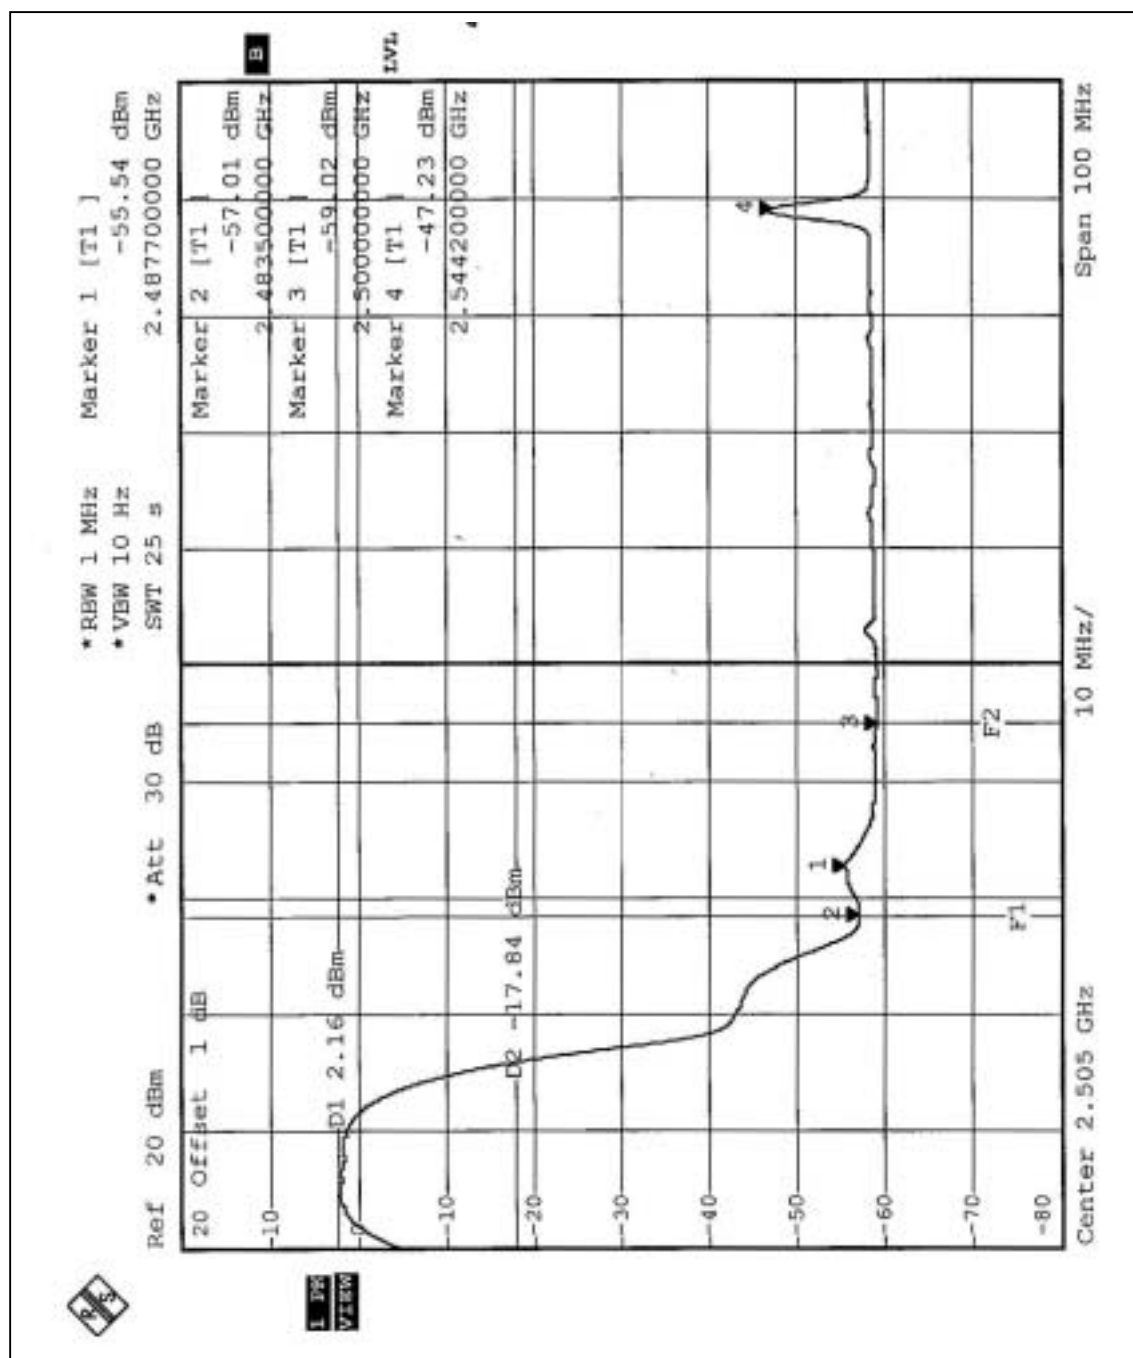




4.6.7 TEST RESULTS- Antenna 1, OFDM


The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (1): The band edge emission plot on the following first page shows 53.40dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2. is 95.40dBuV/m, so the maximum field strength in restrict band is $95.40 - 53.40 = 42.00$ dBuV/m which is under 54 dBuV/m limit.

NOTE (2): The band edge emission plot on the following second page shows 52.39dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2. is 96.40dBuV/m, so the maximum field strength in restrict band is $96.40 - 52.39 = 44.01$ dBuV/m which is under 54 dBuV/m limit.

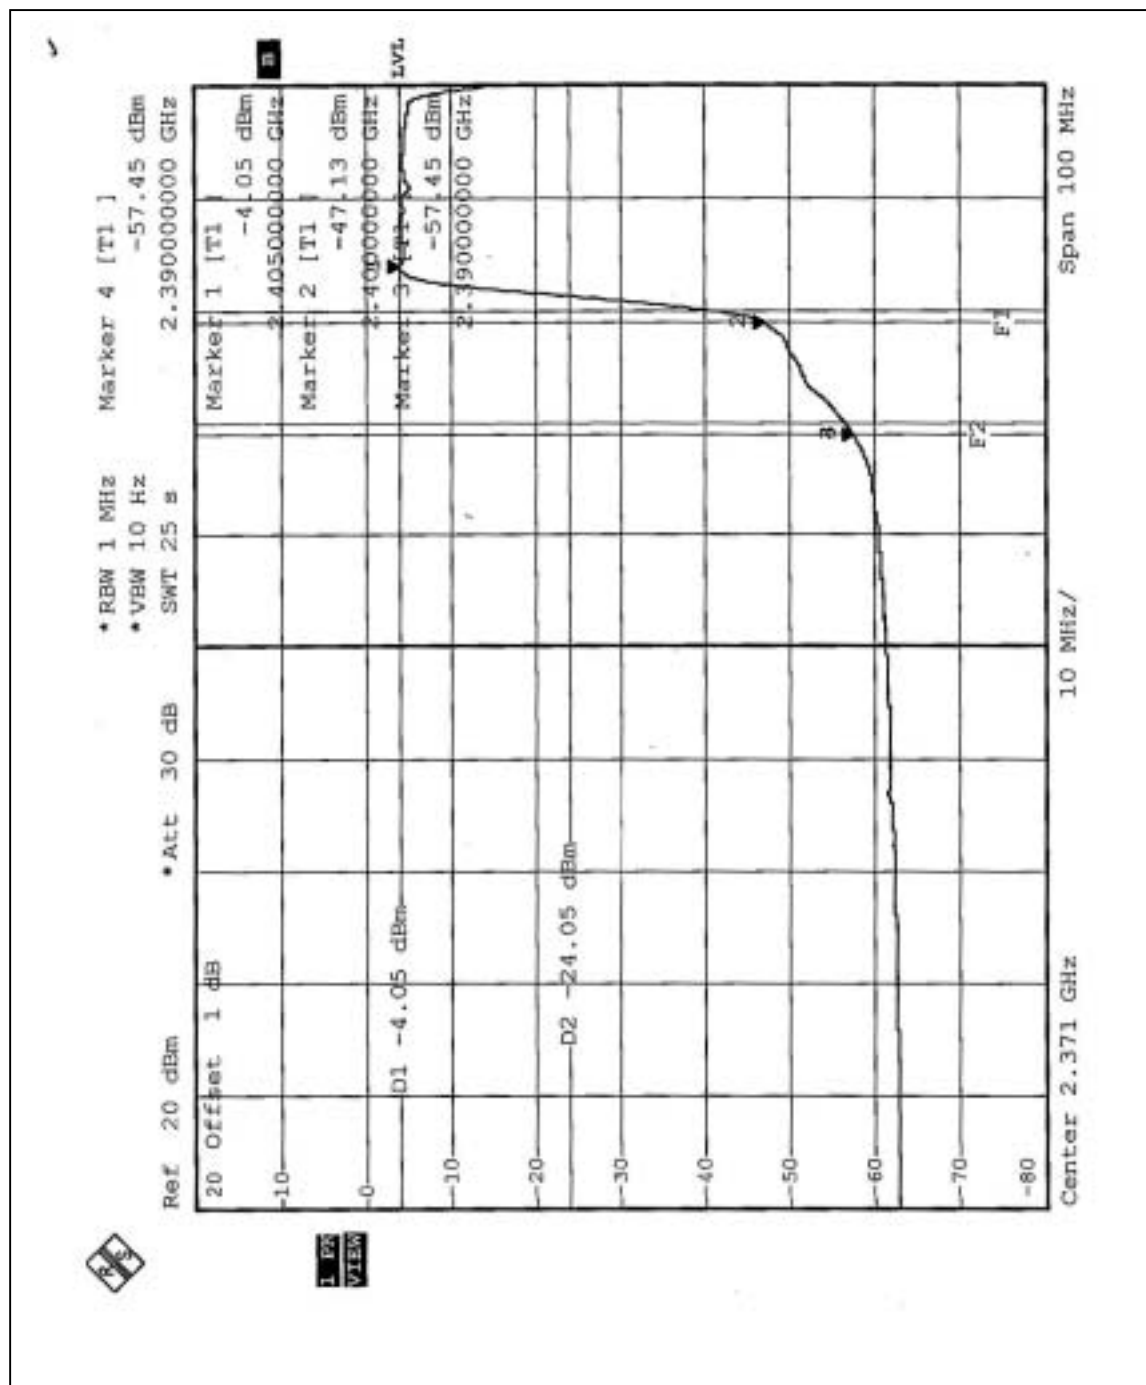

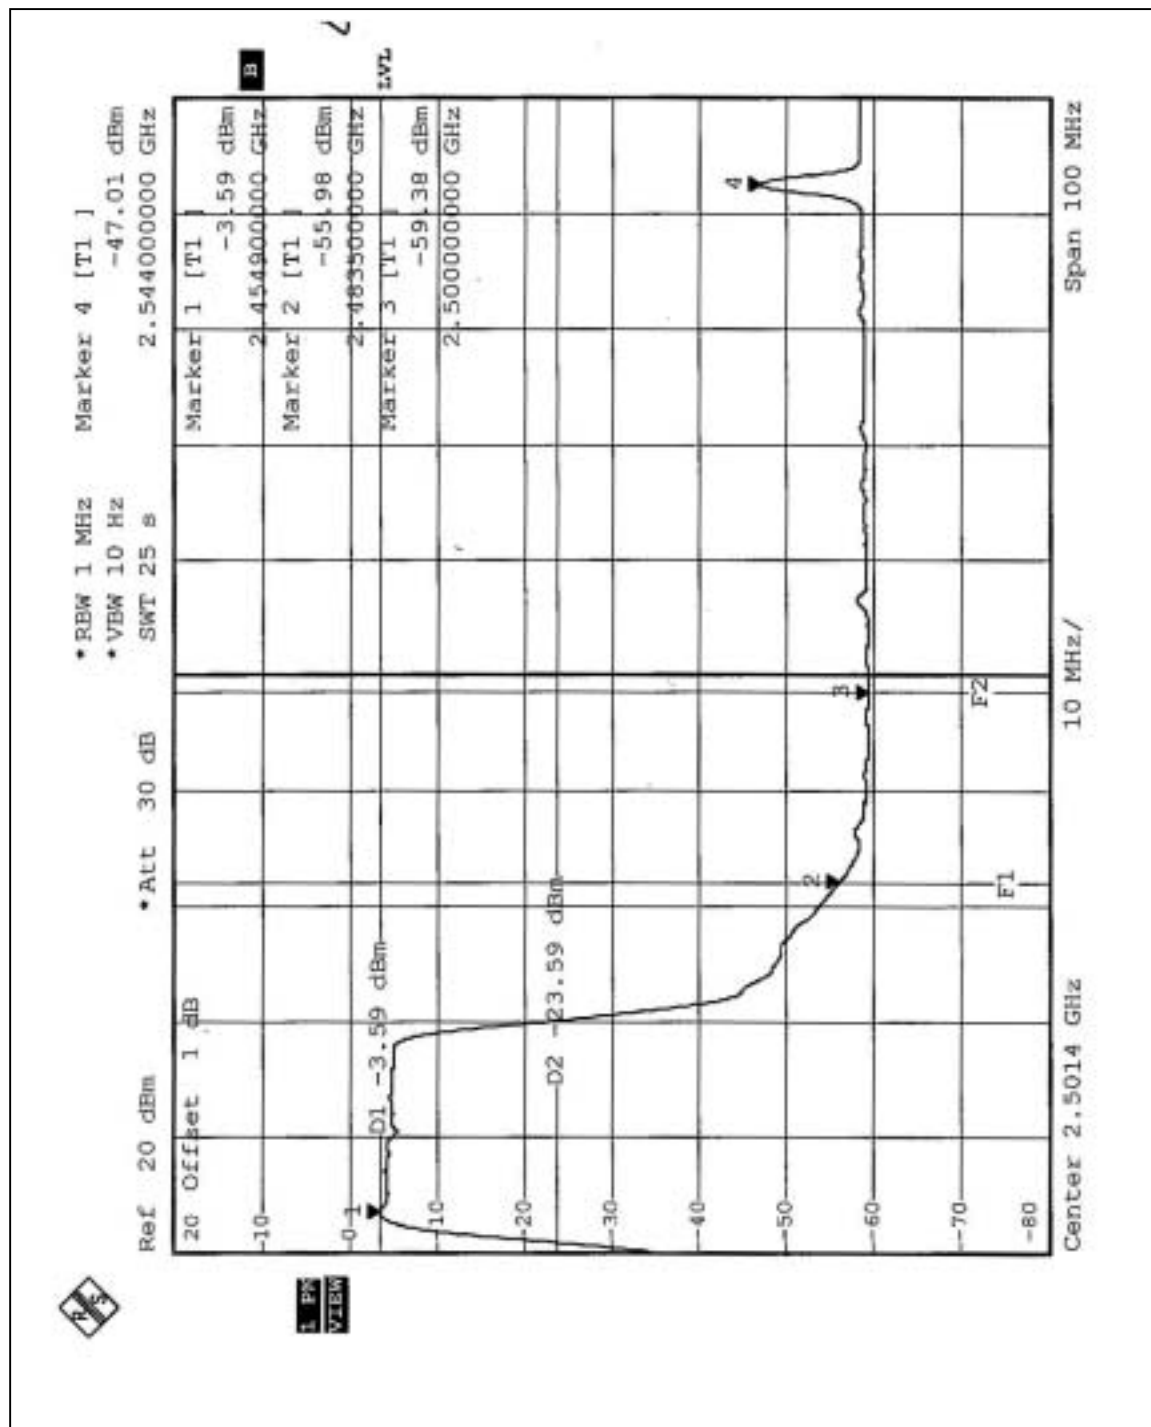




4.6.8 TEST RESULTS- Antenna 3, OFDM


The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (1): The band edge emission plot on the following first page shows 53.40dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2. is 94.10dBuV/m, so the maximum field strength in restrict band is $94.10 - 53.40 = 40.70$ dBuV/m which is under 54 dBuV/m limit.

NOTE (2): The band edge emission plot on the following second page shows 52.39dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2. is 92.70dBuV/m, so the maximum field strength in restrict band is $92.70 - 52.39 = 40.31$ dBuV/m which is under 54 dBuV/m limit.

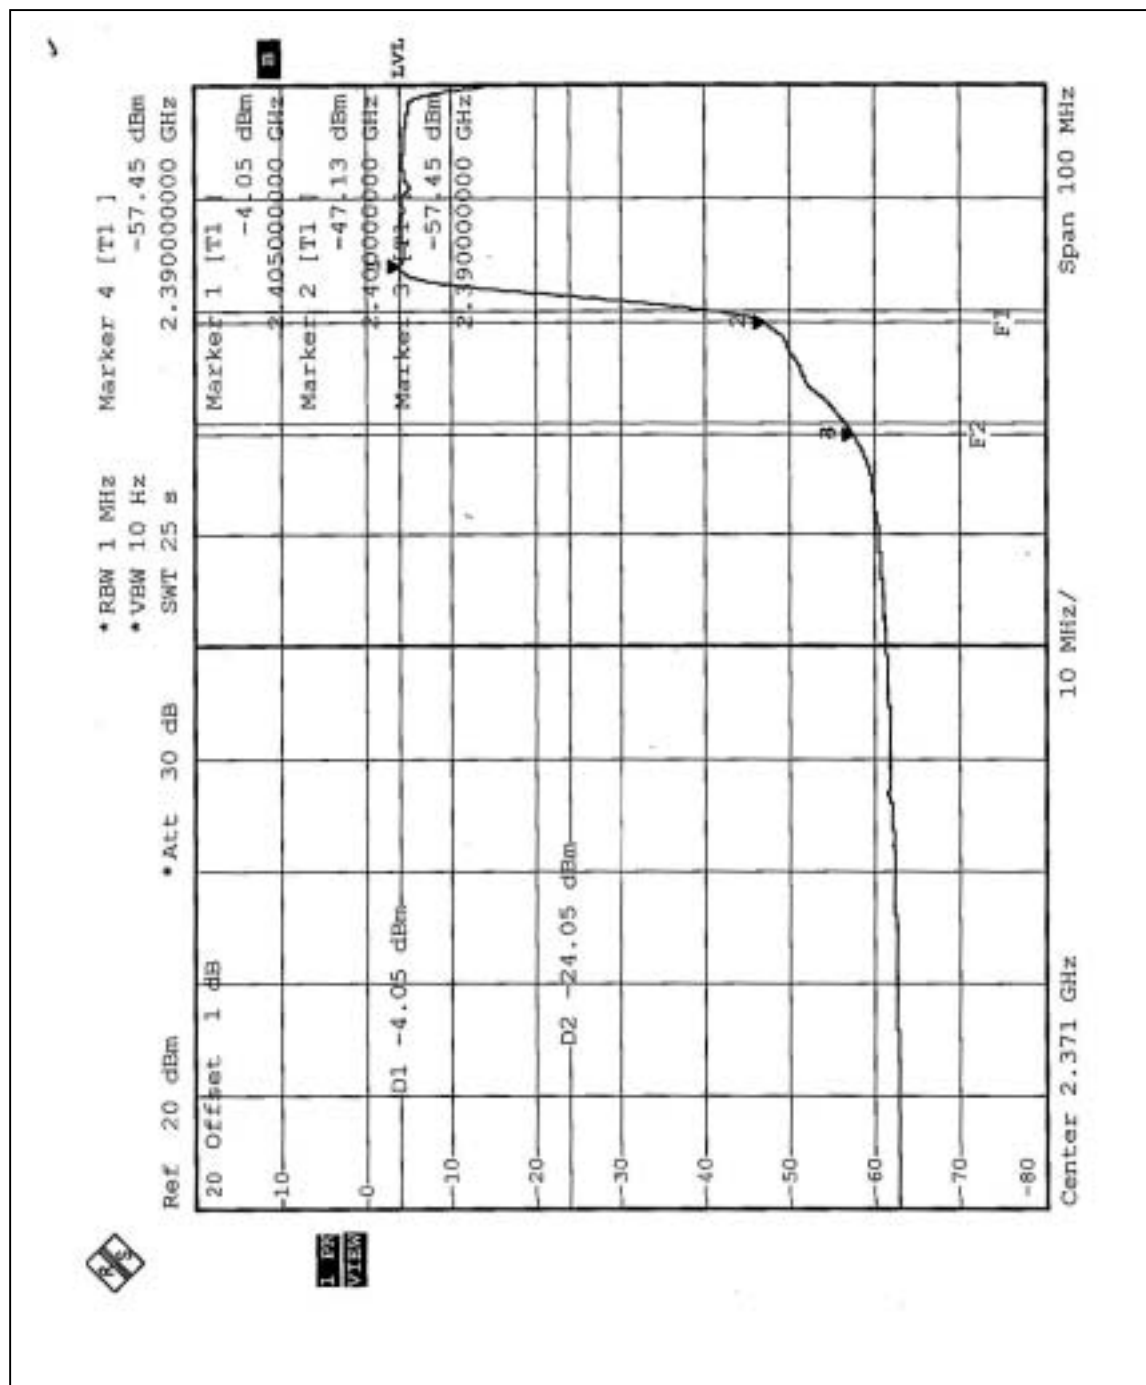

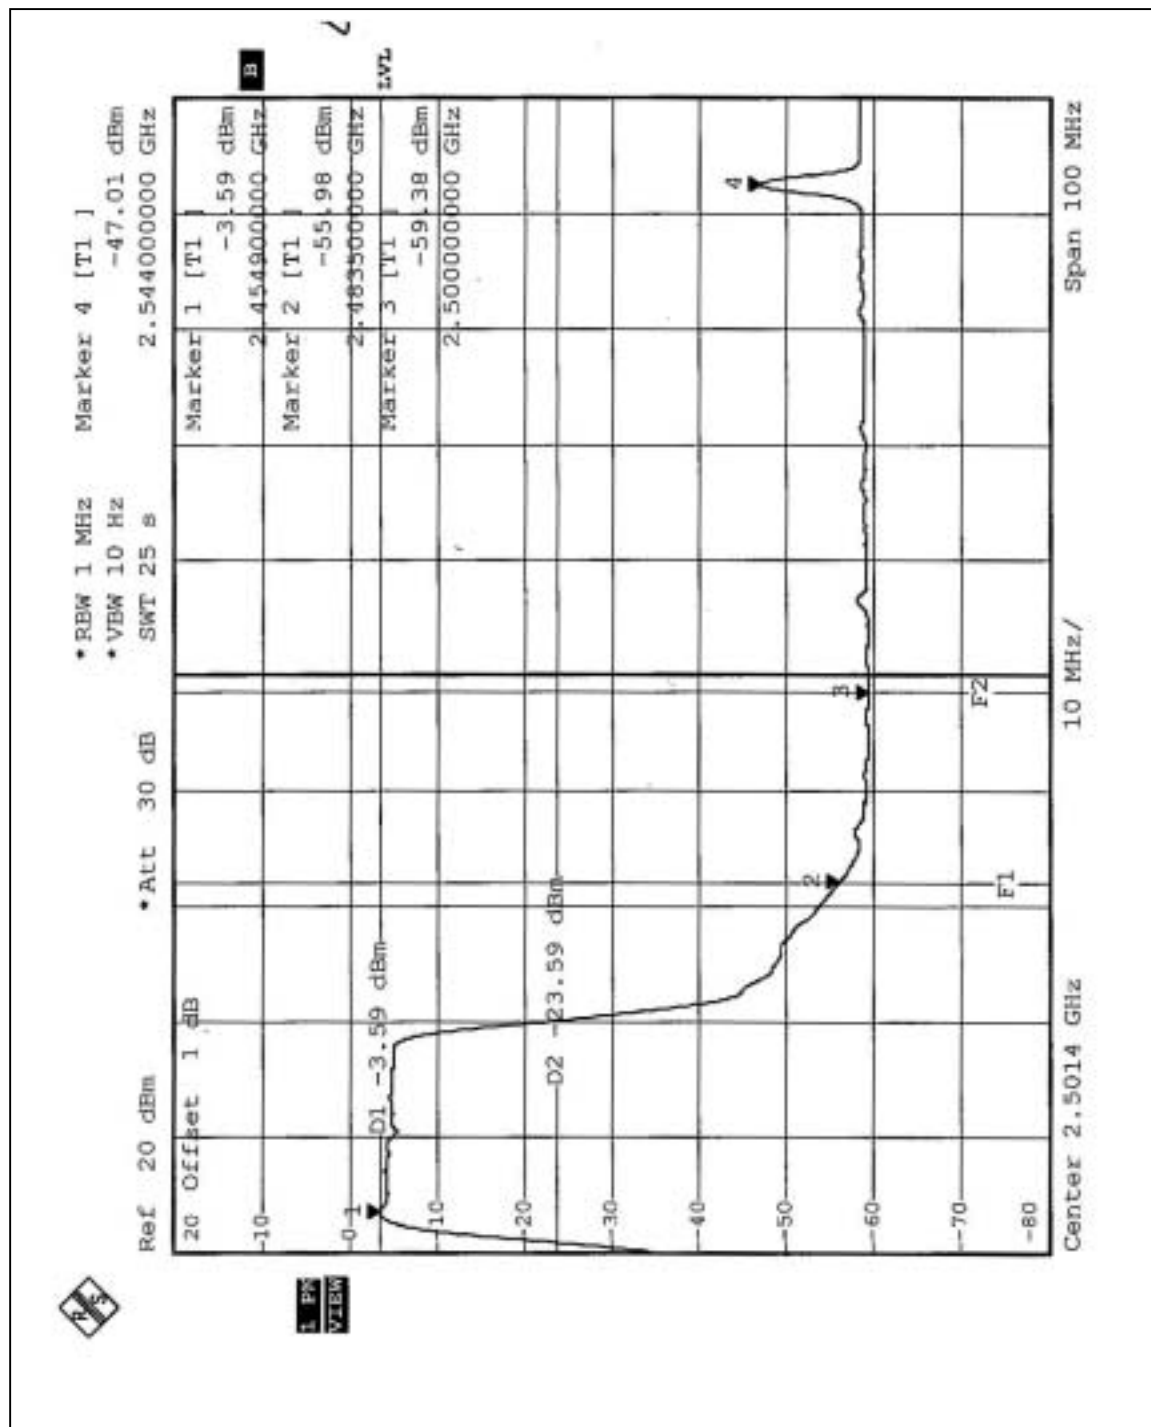



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antennas used in this product are $1/4 \lambda$ Monopole Antenna with MHF connector and $1/4 \lambda$ Dipole sleeve Antenna, Tri-Band Flying Lead Stand Antenna with R-SMA connectors.

Antenna 1 & 2: The maximum Gain of the antenna is 2.0dBi.

Antenna 3: The maximum Gain of the antenna is 5.0dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST



RADIATED EMISSION TEST (Antenna 1)



RADIATED EMISSION TEST (Antenna 2)



RADIATED EMISSION TEST (Antenna 3)





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Linko RF Lab.
Tel: 886-3-3270910
Fax: 886-3-3270892

Email: service@mail.adt.com.tw
Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

Report Format Version 1.3