

FCC TEST REPORT

REPORT NO.: RF930518L04D

MODEL NO.: CG-WLAPGMN

RECEIVED: March 13, 2006

TESTED: March 20 to 22, 2006

APPLICANT: Alpha Networks Inc.

ADDRESS: NO.8,Li Hsing Rd VII ,SCIENCE-BASED
INDUSTRIAL PARK,HSINCHU,TAIWAN,R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 92 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	8
3.3	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	9
3.4	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	11
3.5	DESCRIPTION OF SUPPORT UNITS	12
3.6	CONFIGURATION OF SYSTEM UNDER TEST	13
4	TEST TYPES AND RESULTS	14
4.1	CONDUCTED EMISSION MEASUREMENT	14
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	14
4.1.2	TEST INSTRUMENTS.....	14
4.1.3	TEST SETUP	15
4.1.4	EUT OPERATING CONDITIONS	16
4.1.5	TEST RESULTS	17
4.2	RADIATED EMISSION MEASUREMENT	19
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	19
4.2.2	TEST INSTRUMENTS.....	20
4.2.3	TEST PROCEDURES	21
4.2.4	TEST SETUP	22
4.2.5	EUT OPERATING CONDITIONS	22
4.2.6	TEST RESULTS	23
4.2.7	TEST RESULTS – ANTENNA 1, DSSS.....	24
4.2.8	TEST RESULTS – ANTENNA 2, DSSS.....	27
4.2.9	TEST RESULTS - ANTENNA 1, OFDM.....	30
4.2.10	TEST RESULTS - ANTENNA 2, OFDM.....	35
4.3	6dB BANDWIDTH MEASUREMENT.....	40
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	40
4.3.2	TEST INSTRUMENTS.....	40
4.3.3	TEST PROCEDURE.....	41
4.3.4	TEST SETUP	41
4.3.5	EUT OPERATING CONDITIONS	41
4.3.6	TEST RESULTS-DSSS	42
4.3.7	TEST RESULTS-OFDM	46

4.4	MAXIMUM PEAK OUTPUT POWER	51
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	51
4.4.2	TEST INSTRUMENTS.....	51
4.4.3	TEST PROCEDURES	52
4.4.4	TEST SETUP	52
4.4.5	EUT OPERATING CONDITIONS	52
4.4.6	TEST RESULTS- DSSS	53
4.4.7	TEST RESULTS- OFDM	54
4.5	POWER SPECTRAL DENSITY MEASUREMENT	55
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	55
4.5.2	TEST INSTRUMENTS.....	55
4.5.3	TEST PROCEDURE.....	56
4.5.4	TEST SETUP	56
4.5.5	EUT OPERATING CONDITIONS	56
4.5.6	TEST RESULTS-DSSS	57
4.5.7	TEST RESULTS-OFDM	61
4.6	BAND EDGES MEASUREMENT	66
4.6.1	LIMITS OF BAND EDGES MEASUREMENT.....	66
4.6.2	TEST INSTRUMENTS.....	66
4.6.3	TEST PROCEDURE.....	66
4.6.4	EUT OPERATING CONDITION.....	66
4.6.5	TEST RESULTS – ANTENNA 1, DSSS.....	67
4.6.6	TEST RESULTS –ANTENNA 2, DSSS.....	71
4.6.7	TEST RESULTS- ANTENNA 1, OFDM.....	71
4.6.8	TEST RESULTS- ANTENNA 2, OFDM.....	82
4.7	ANTENNA REQUIREMENT	89
4.7.1	STANDARD APPLICABLE	89
4.7.2	ANTENNA CONNECTED CONSTRUCTION	89
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	90
6	INFORMATION ON THE TESTING LABORATORIES	92

1 CERTIFICATION

PRODUCT : 802.11b/g Wireless Access Point
BRAND NAME : corega
MODEL NO. : CG-WLAPGMN
TESTED: March 20 to 22, 2006
APPLICANT : Alpha Networks Inc.
TEST ITEM: ENGINEERING SAMPLE
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: CG-WLAPGMN) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Carol Liao , **DATE:** March 25, 2006
(Carol Liao)

TECHNICAL
ACCEPTANCE : Hank Chung , **DATE:** March 25, 2006
Responsible for RF (Hank Chung)

APPROVED BY : May Chen , **DATE:** March 25, 2006
(May Chen, Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -7.66 dB at 2.041 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -1.20 dB at 2483.50 MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	802.11b/g Wireless Access Point
MODEL NO.	CG-WLAPGMN
FCC ID	RRKWLAPGMNA1
POWER SUPPLY	5Vdc from Power Adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps (Turbo mode: up to 108Mbps *see Note 2)
FREQUENCY RANGE	802.11b & 802.11g: 2412 ~ 2462MHz
NUMBER OF CHANNEL	802.11b & 802.11g: 11 (1 for 802.11g Turbo mode)
CHANNEL SPACING	802.11b & 802.11g: 5MHz
OUTPUT POWER	802.11b: 100mW 802.11g: 100mW
ANTENNA TYPE	Dipole antenna and Printed antenna
DATA CABLE	NA
I/O PORTS	RJ45 port x 1
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT operates in both the 2.4GHz Bands and compatibility with 802.11b, 802.11g technology.
2. The EUT is capable of providing data rates of up to 108 Mbps in 802.11g Turbo mode depending upon reception quality.
3. There are two antennas provided to this EUT, please refer to the following table:

No.	Gain (dBi)	Antenna Type	Antenna Connector
1	2.0 dBi	Dipole antenna	R-SMA connector
2	0 dBi	Printed antenna	NA

4. The EUT was powered by the following adapter:

Brand:	UNIFIVE
Model No.:	UL110-0520
Input power :	AC 100-120V 50/60Hz 0.3A
Output power :	+5.0V===2.0A

5. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

For 802.11b/g normal mode: Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

For 802.11g turbo mode: One channel is provided to this EUT

Channel	Frequency
6	2437 MHz

3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	√	√	√	√	NA

Where PLC: Power Line Conducted Emission

RE<1G RE: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11g turbo	6	6	OFDM	BPSK	12

Bandedge Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	11
802.11g	1 to 11	1, 11	OFDM	BPSK	6
802.11g turbo	6	6	OFDM	BPSK	12

Antenna Port Conducted Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11g turbo	6	6	OFDM	BPSK	12

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an 802.11b/g Wireless Access Point. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 2003

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of 47 CFR Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.5 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook Computer	DELL	C600	6DRV601	FCC DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE: All power cords of the above support units are non-shielded (1.8m).

3.6 CONFIGURATION OF SYSTEM UNDER TEST

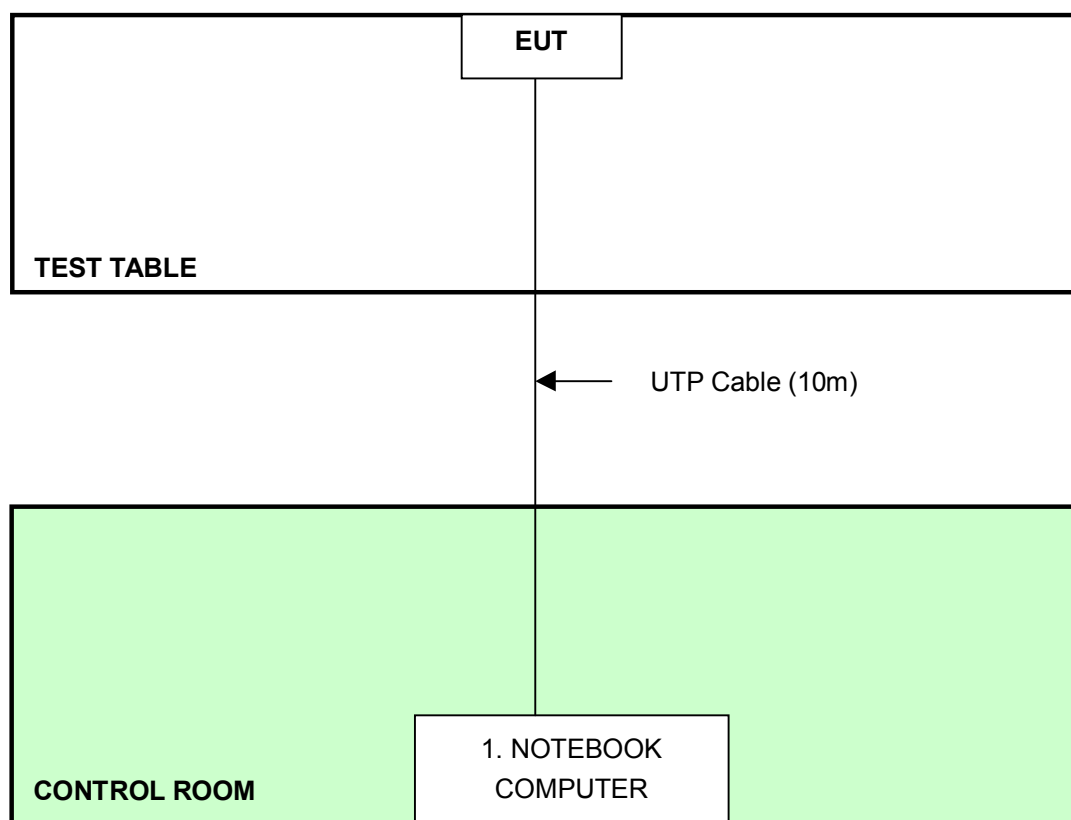

NOTE: 1. Support unit 1 was kept in the control room during the test.
2. Please refer to the photos of test configuration in Item 5 also.

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Sep. 19, 2006
Line-Impedance Stabilization Network(for EUT)	ENV-216	100071	Nov. 10, 2006
ROHDE & SCHWARZ LISN	KNW-407	8/1395/12	Jul. 19, 2006
RF Signal Cable	RG233/U	Cable_CA_02	Dec. 10, 2006
Terminator(for KYORITSU)	50	2	Oct. 08, 2006
Software	ADT_Conc_V7.3.2	NA	NA

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. B.
3. The VCCI Con B Registration No. is C-2193.

4. TEST PROCEDURES

- The EUT/HOST was placed 0.4 meters from the conducting wall of the shielded room with EUT/HOST being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT/HOST were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20dB) were not recorded.

4.1.3 TEST SETUP

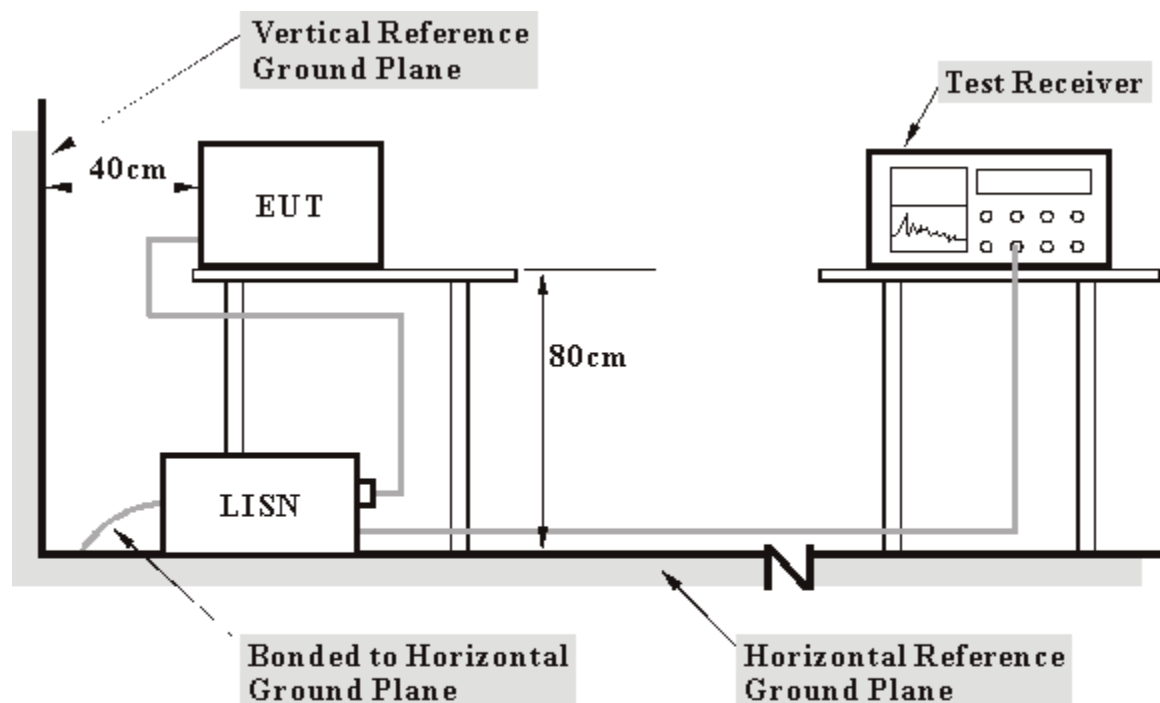

- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.4 EUT OPERATING CONDITIONS


- a. Placed the EUT on the testing table.
- b. Prepared another computer system to act as a communication partner and placed it outside of testing area.
- c. The communication partner run “Art 48b5” test program to enable EUT under transmission/receiving condition continuously at specific channel frequency via UTP cable and wireless.

4.1.5 TEST RESULTS

EUT	802.11b/g Wireless Access Point	MODEL	CG-WLAPGMN
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60%RH, 970 hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.271	9.60	36.31	-	45.91	-	61.08	51.08	-15.17	-
2	0.408	9.60	29.40	-	39.00	-	57.69	47.69	-18.69	-
3	0.683	9.60	32.59	-	42.19	-	56.00	46.00	-13.81	-
4	1.767	9.68	33.10	-	42.78	-	56.00	46.00	-13.22	-
5	1.904	9.69	33.41	-	43.10	-	56.00	46.00	-12.90	-
6	2.314	9.70	31.95	-	41.65	-	56.00	46.00	-14.35	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

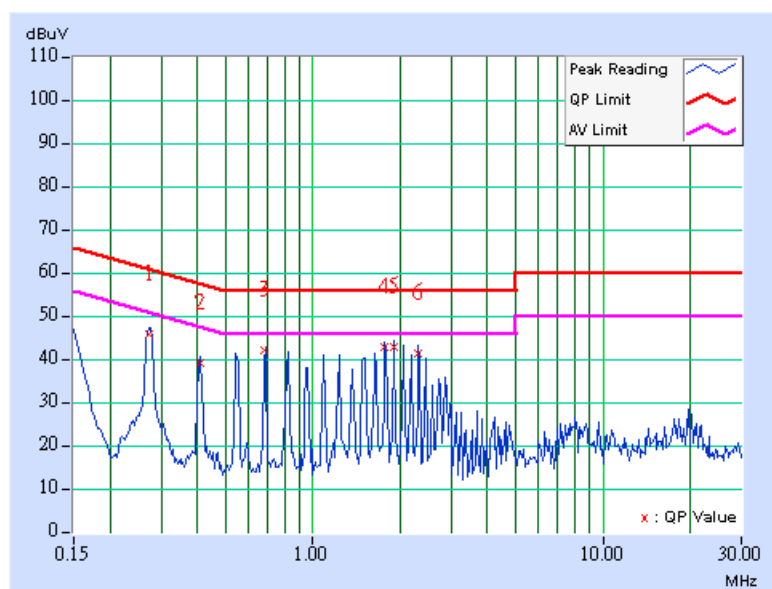

EUT	802.11b/g Wireless Access Point	MODEL	CG-WLAPGMN
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60%RH, 970 hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.275	9.60	39.55	-	49.15	-	60.97	50.97	-11.82	-
2	0.817	9.60	32.28	-	41.88	-	56.00	46.00	-14.12	-
3	1.767	9.68	36.68	26.81	46.36	36.49	56.00	46.00	-9.64	-9.51
4	1.906	9.69	38.05	27.94	47.74	37.63	56.00	46.00	-8.26	-8.37
5	2.041	9.70	38.64	27.30	48.34	37.00	56.00	46.00	-7.66	-9.00
6	2.177	9.70	36.65	24.19	46.35	33.89	56.00	46.00	-9.65	-12.11

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

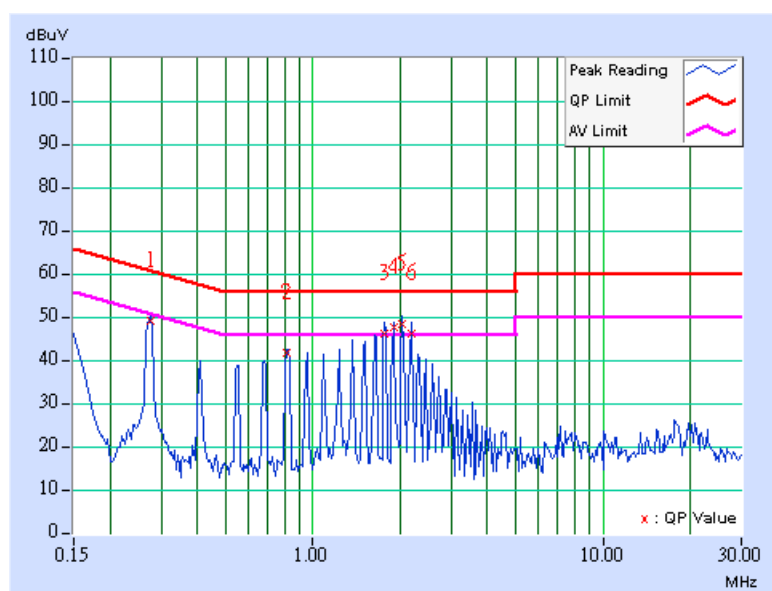

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 07, 2006
HP Pre_Amplifier	8449B	3008A01922	Oct. 02, 2006
ROHDE & SCHWARZ Test Receiver	ESCS30	100287	Dec. 08, 2006
CHASE Broadband Antenna	VULB9168	138	Dec. 21, 2006
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 11, 2006
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 05, 2007
SCHWARZBECK Biconical Antenna	VHBA9123	459	Jun. 26, 2006
SCHWARZBECK Periodic Antenna	UPA6108	1148	Jun. 26, 2006
RF Switches (ARNITSU)	CS-201	1565157	NA
RF CABLE (Chaintek) 1GHz-20GHz	SF102	22054-2	Nov. 16, 2006
RF Cable(RICHTEC)	9913-30M	STCCAB-30M-1GHz-021	Jul. 16, 2006
Software	ADT_Radiated_V 5.14	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Periodic Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 4824-3.
7. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Radiated emissions (30MHz-1GHz)	2.98 dB
Radiated emissions (1GHz ~18GHz)	2.21 dB
Radiated emissions (18GHz ~20GHz)	1.88 dB


4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

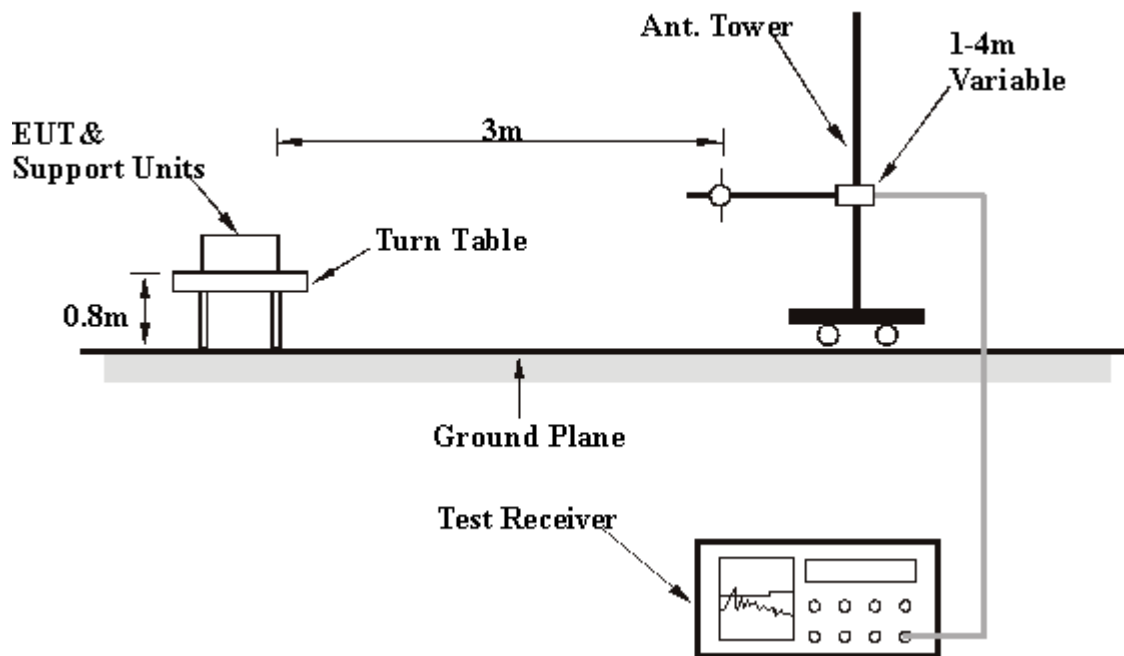

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5.

4.2.6 TEST RESULTS

EUT	802.11b/g Wireless Access Point	MODEL	CG-WLAPGMN
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 70%RH, 970 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.04	21.20 QP	43.50	-22.30	2.18 H	70	9.40	11.90
2	199.99	24.70 QP	43.50	-18.80	2.17 H	257	13.50	11.20
3	249.99	30.90 QP	46.00	-15.10	2.13 H	300	17.60	13.30
4	312.49	28.60 QP	46.00	-17.40	2.08 H	117	12.20	16.40
5	450.00	32.30 QP	46.00	-13.70	1.00 H	56	12.60	19.70
6	499.98	31.10 QP	46.00	-14.90	1.24 H	26	10.30	20.90
7	624.97	34.80 QP	46.00	-11.20	1.84 H	147	11.00	23.80
8	750.04	37.30 QP	46.00	-8.70	1.54 H	346	10.90	26.40
9	900.01	43.00 QP	46.00	-3.00	1.08 H	90	15.20	27.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.00	23.50 QP	43.50	-20.00	1.00 V	15	11.60	11.90
2	200.00	27.40 QP	43.50	-16.10	1.00 V	182	16.30	11.20
3	250.00	28.20 QP	46.00	-17.80	1.00 V	255	14.90	13.30
4	312.49	28.80 QP	46.00	-17.20	1.00 V	69	12.40	16.40
5	450.00	36.70 QP	46.00	-9.30	1.00 V	27	17.00	19.70
6	499.98	31.70 QP	46.00	-14.30	1.00 V	132	10.80	20.90
7	625.00	34.40 QP	46.00	-11.60	2.16 V	306	10.60	23.80
8	750.00	37.00 QP	46.00	-9.00	1.78 V	290	10.60	26.40
9	900.00	43.70 QP	46.00	-2.30	1.47 V	246	15.80	27.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2.7 TEST RESULTS – Antenna 1, DSSS

EUT	802.11b/g Wireless Access Point	MODEL	CG-WLAPGMN
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	28 deg. C, 55%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	45.90 PK	74.00	-28.10	1.21 H	3	15.30	30.60
2	2390.00	48.80 PK	74.00	-25.20	1.48 H	219	15.00	33.80
3	*2412.00	104.80 PK			1.47 H	218	74.90	29.90
3	*2412.00	98.30 AV			1.47 H	218	68.40	29.90
4	2688.00	43.60 PK	74.00	-30.40	1.23 H	10	12.70	30.90
5	4824.00	45.70 PK	74.00	-28.30	1.48 H	301	9.50	36.20
6	7236.00	50.40 PK	74.00	-23.60	1.76 H	305	8.80	41.70
7	9648.00	50.00 PK	74.00	-24.00	1.18 H	295	5.10	44.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	56.70 PK	74.00	-17.30	1.24 V	2	26.00	30.60
1	2360.00	48.10 AV	54.00	-5.90	1.24 V	2	17.50	30.60
2	2390.00	59.60 PK	74.00	-14.40	1.01 V	330	25.80	33.80
2	2390.00	51.80 AV	54.00	-2.20	1.01 V	330	18.00	33.80
3	*2412.00	114.90 PK			1.00 V	329	85.00	29.90
3	*2412.00	107.80 AV			1.00 V	329	77.90	29.90
4	2688.00	53.30 PK	74.00	-20.70	1.27 V	348	22.40	30.90
4	2688.00	50.30 AV	54.00	-3.70	1.27 V	348	19.40	30.90
5	4824.00	50.10 PK	74.00	-23.90	1.49 V	326	13.80	36.20
6	7236.00	49.50 PK	74.00	-24.50	1.17 V	318	7.80	41.70
7	9648.00	49.70 PK	74.00	-24.30	1.18 V	41	4.80	44.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11b/g Wireless Access Point	MODEL	CG-WLAPGMN
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	28 deg. C, 55%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	51.30 PK	74.00	-22.70	1.76 H	116	20.70	30.60
1	2360.00	38.00 AV	54.00	-16.00	1.76 H	116	7.30	30.60
2	*2437.00	105.10 PK			1.44 H	213	75.20	30.00
2	*2437.00	98.10 AV			1.44 H	213	68.20	30.00
3	2688.00	45.70 PK	74.00	-28.30	1.42 H	251	14.80	30.90
4	4874.00	46.00 PK	74.00	-28.00	1.78 H	106	9.50	36.50
5	7311.00	49.40 PK	74.00	-24.60	1.62 H	307	7.70	41.80
6	9748.00	49.30 PK	74.00	-24.70	1.11 H	54	4.60	44.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	58.80 PK	74.00	-15.20	1.28 V	3	28.10	30.60
1	2360.00	47.10 AV	54.00	-6.90	1.28 V	3	16.40	30.60
2	*2437.00	114.90 PK			1.15 V	335	84.90	30.00
2	*2437.00	107.50 AV			1.15 V	335	77.50	30.00
3	2688.00	52.90 PK	74.00	-21.10	1.27 V	349	22.10	30.90
3	2688.00	49.90 AV	54.00	-4.10	1.27 V	349	19.10	30.90
4	4874.00	51.80 PK	74.00	-22.20	1.33 V	339	15.40	36.50
4	4874.00	40.60 AV	54.00	-13.40	1.33 V	339	4.10	36.50
5	7311.00	50.60 PK	74.00	-23.40	1.71 V	17	8.80	41.80
6	9748.00	49.10 PK	74.00	-24.90	1.40 V	43	4.50	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11b/g Wireless Access Point	MODEL	CG-WLAPGMN
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	28 deg. C, 55%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	52.30 PK	74.00	-21.70	1.47 H	134	21.70	30.60
1	2360.00	37.50 AV	54.00	-16.50	1.47 H	134	6.80	30.60
2	*2462.00	99.90 PK			1.43 H	215	69.80	30.10
2	*2462.00	93.50 AV			1.43 H	215	63.40	30.10
3	2483.50	45.40 PK	74.00	-28.60	1.44 H	216	15.30	30.10
4	2487.00	45.20 PK	74.00	-28.80	1.38 H	227	15.00	30.10
5	2688.00	44.70 PK	74.00	-29.30	1.26 H	125	13.90	30.90
6	4924.00	46.70 PK	74.00	-27.30	1.10 H	168	10.00	36.70
7	7386.00	49.90 PK	74.00	-24.10	1.53 H	320	8.10	41.80
8	9848.00	50.70 PK	74.00	-23.30	1.18 H	144	6.40	44.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	61.80 PK	74.00	-12.20	1.21 V	1	31.20	30.60
1	2360.00	48.30 AV	54.00	-5.70	1.21 V	1	17.60	30.60
2	*2462.00	114.90 PK			1.18 V	1	84.80	30.10
2	*2462.00	107.20 AV			1.18 V	1	77.10	30.10
3	2483.50	60.40 PK	74.00	-13.60	1.19 V	2	30.30	30.10
3	2483.50	52.80 AV	54.00	-1.20	1.19 V	2	22.60	30.10
4	2487.00	60.20 PK	74.00	-13.80	1.03 V	35	30.00	30.10
4	2487.00	52.50 AV	54.00	-1.50	1.03 V	35	22.30	30.10
5	2688.00	50.90 PK	74.00	-23.10	1.07 V	13	20.00	30.90
6	4924.00	52.20 PK	74.00	-21.80	1.33 V	327	15.50	36.70
6	4924.00	40.50 AV	54.00	-13.50	1.33 V	327	3.80	36.70
7	7386.00	51.50 PK	74.00	-22.50	1.04 V	160	9.70	41.80
7	7386.00	41.70 AV	54.00	-12.30	1.04 V	160	-0.10	41.80
8	9848.00	51.80 PK	74.00	-22.20	1.28 V	65	7.40	44.40
8	9848.00	39.60 AV	54.00	-14.40	1.28 V	65	-4.80	44.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

4.2.8 TEST RESULTS – Antenna 2, DSSS

EUT	802.11b/g Wireless Access Point	MODEL	CG-WLAPGMN
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 55%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	51.10 PK	74.00	-22.90	1.00 H	351	20.50	30.60
1	2360.00	43.70 AV	54.00	-10.30	1.00 H	351	13.10	30.60
2	2390.00	53.40 PK	74.00	-20.60	1.21 H	353	19.60	33.80
2	2390.00	46.50 AV	54.00	-7.50	1.21 H	353	12.70	33.80
3	*2412.00	109.50 PK			1.20 H	352	79.60	29.90
3	*2412.00	102.60 AV			1.20 H	352	72.70	29.90
4	4824.00	46.80 PK	74.00	-27.20	1.04 H	343	10.60	36.20
5	7236.00	48.00 PK	74.00	-26.00	1.00 H	9	6.30	41.70
6	9648.00	50.60 PK	74.00	-23.40	1.28 H	12	5.60	44.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	48.00 PK	74.00	-26.00	1.52 V	22	17.30	30.60
2	2390.00	45.80 PK	74.00	-28.20	1.47 V	357	12.00	33.80
3	*2412.00	101.90 PK			1.46 V	356	72.00	29.90
3	*2412.00	94.70 AV			1.46 V	356	64.80	29.90
4	4824.00	50.30 PK	74.00	-23.70	1.34 V	356	14.10	36.20
5	7236.00	50.80 PK	74.00	-23.20	1.69 V	316	9.10	41.70
6	9648.00	52.00 PK	74.00	-22.00	1.67 V	325	7.10	44.90
6	9648.00	40.90 AV	54.00	-13.10	1.67 V	325	-4.00	44.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11b/g Wireless Access Point	MODEL	CG-WLAPGMN
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 55%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	57.00 PK	74.00	-17.00	1.00 H	331	26.40	30.60
1	2360.00	44.10 AV	54.00	-9.90	1.00 H	331	13.40	30.60
2	*2437.00	108.70 PK			1.44 H	350	78.70	30.00
2	*2437.00	101.70 AV			1.44 H	350	71.80	30.00
3	4874.00	45.90 PK	74.00	-28.10	1.41 H	343	9.40	36.50
4	7311.00	48.80 PK	74.00	-25.20	1.10 H	296	7.00	41.80
5	9748.00	50.80 PK	74.00	-23.20	1.31 H	241	6.20	44.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	52.20 PK	74.00	-21.80	1.32 V	19	21.60	30.60
1	2360.00	39.20 AV	54.00	-14.80	1.32 V	19	8.60	30.60
2	*2437.00	103.60 PK			1.23 V	9	73.70	30.00
2	*2437.00	97.10 AV			1.23 V	9	67.10	30.00
3	4874.00	49.80 PK	74.00	-24.20	1.47 V	333	13.30	36.50
4	7311.00	48.90 PK	74.00	-25.10	1.00 V	306	7.10	41.80
5	9748.00	50.30 PK	74.00	-23.70	1.47 V	320	5.70	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11b/g Wireless Access Point	MODEL	CG-WLAPGMN
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 55%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	55.80 PK	74.00	-18.20	1.00 H	347	25.20	30.60
1	2360.00	43.30 AV	54.00	-10.70	1.00 H	347	12.70	30.60
2	*2462.00	108.50 PK			1.44 H	328	78.40	30.10
2	*2462.00	101.10 AV			1.44 H	328	71.10	30.10
3	2483.50	54.10 PK	74.00	-19.90	1.43 H	329	23.90	30.10
3	2483.50	46.70 AV	54.00	-7.30	1.43 H	329	16.50	30.10
4	2487.00	53.80 PK	74.00	-20.20	1.26 H	330	23.60	30.10
4	2487.00	46.40 AV	54.00	-7.60	1.26 H	330	16.30	30.10
5	4924.00	46.80 PK	74.00	-27.20	1.23 H	345	10.10	36.70
6	7386.00	49.80 PK	74.00	-24.20	1.12 H	359	8.00	41.80
7	9848.00	51.70 PK	74.00	-22.30	1.16 H	316	7.40	44.40
7	9848.00	40.00 AV	54.00	-14.00	1.16 H	316	-4.40	44.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	52.60 PK	74.00	-21.40	1.05 V	20	22.00	30.60
1	2360.00	39.10 AV	54.00	-14.90	1.05 V	20	8.50	30.60
2	*2462.00	102.20 PK			1.00 V	334	72.10	30.10
2	*2462.00	95.10 AV			1.00 V	334	65.00	30.10
3	2483.50	47.70 PK	74.00	-26.30	1.02 V	335	17.60	30.10
4	2487.00	47.40 PK	74.00	-26.60	1.15 V	318	17.30	30.10
5	4924.00	48.50 PK	74.00	-25.50	1.42 V	344	11.80	36.70
6	7386.00	48.70 PK	74.00	-25.30	1.06 V	295	6.90	41.80
7	9848.00	51.30 PK	74.00	-22.70	1.45 V	319	6.90	44.40
7	9848.00	42.30 AV	54.00	-11.70	1.45 V	319	-2.00	44.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

4.2.9 TEST RESULTS - Antenna 1, OFDM

EUT	802.11b/g Wireless Access Point	MODEL	CG-WLAPGMN
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	28 deg. C, 55%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	45.90 PK	74.00	-28.10	1.76 H	115	15.30	30.60
2	2390.00	47.60 PK	74.00	-26.40	1.24 H	203	13.80	33.80
3	*2412.00	96.80 PK			1.23 H	202	66.90	29.90
3	*2412.00	87.90 AV			1.23 H	202	58.00	29.90
4	2688.00	42.00 PK	74.00	-32.00	1.06 H	245	11.10	30.90
5	4824.00	43.40 PK	74.00	-30.60	1.20 H	344	7.20	36.20
6	7236.00	50.10 PK	74.00	-23.90	1.21 H	181	8.50	41.70
7	9648.00	50.00 PK	74.00	-24.00	1.12 H	49	5.10	44.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	55.80 PK	74.00	-18.20	1.21 V	335	25.20	30.60
1	2360.00	47.30 AV	54.00	-6.70	1.21 V	335	16.70	30.60
2	2390.00	60.40 PK	74.00	-13.60	1.24 V	333	26.60	33.80
2	2390.00	52.30 AV	54.00	-1.70	1.24 V	333	18.50	33.80
3	*2412.00	109.60 PK			1.23 V	332	79.80	29.90
3	*2412.00	101.50 AV			1.23 V	332	71.60	29.90
4	2688.00	47.80 PK	74.00	-26.20	1.26 V	348	16.90	30.90
5	4824.00	46.30 PK	74.00	-27.70	1.00 V	136	10.10	36.20
6	7236.00	52.70 PK	74.00	-21.30	1.00 V	144	11.00	41.70
6	7236.00	38.50 AV	54.00	-15.50	1.00 V	144	-3.10	41.70
7	9648.00	49.90 PK	74.00	-24.10	1.00 V	0	5.00	44.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

EUT	802.11b/g Wireless Access Point	MODEL	CG-WLAPGMN
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	28 deg. C, 55%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	45.80 PK	74.00	-28.20	1.42 H	227	15.10	30.60
2	*2437.00	100.40 PK			1.43 H	216	70.40	30.00
2	*2437.00	92.10 AV			1.43 H	216	62.10	30.00
3	2688.00	42.30 PK	74.00	-31.70	1.20 H	124	11.40	30.90
4	4874.00	43.90 PK	74.00	-30.10	1.10 H	115	7.50	36.50
5	7311.00	48.20 PK	74.00	-25.80	1.18 H	33	6.40	41.80
6	9748.00	49.00 PK	74.00	-25.00	1.00 H	35	4.40	44.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	55.10 PK	74.00	-18.90	1.22 V	4	24.40	30.60
1	2360.00	47.00 AV	54.00	-7.00	1.22 V	4	16.30	30.60
2	*2437.00	109.90 PK			1.51 V	154	79.90	30.00
2	*2437.00	101.60 AV			1.51 V	154	71.60	30.00
3	2688.00	47.70 PK	74.00	-26.30	1.28 V	348	16.90	30.90
4	4874.00	48.20 PK	74.00	-25.80	1.00 V	222	11.70	36.50
5	7311.00	50.40 PK	74.00	-23.60	1.47 V	148	8.60	41.80
6	9748.00	49.60 PK	74.00	-24.40	1.24 V	144	5.00	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

EUT	802.11b/g Wireless Access Point	MODEL	CG-WLAPGMN
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	28 deg. C, 55%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	45.60 PK	74.00	-28.40	1.22 H	2	14.90	30.60
2	*2462.00	99.80 PK			1.74 H	221	69.80	30.10
2	*2462.00	91.30 AV			1.74 H	221	61.20	30.10
3	2483.50	49.60 PK	74.00	-24.40	1.75 H	222	19.40	30.10
4	2688.00	42.30 PK	74.00	-31.70	1.33 H	124	11.40	30.90
5	4924.00	43.00 PK	74.00	-31.00	1.48 H	44	6.30	36.70
6	7386.00	49.30 PK	74.00	-24.70	1.41 H	297	7.50	41.80
7	9848.00	49.80 PK	74.00	-24.20	1.09 H	0	5.40	44.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	54.70 PK	74.00	-19.30	1.47 V	0	24.10	30.60
1	2360.00	45.80 AV	54.00	-8.20	1.47 V	0	15.10	30.60
2	*2462.00	110.70 PK			1.19 V	2	80.70	30.10
2	*2462.00	102.70 AV			1.19 V	2	72.60	30.10
3	2483.50	60.50 PK	74.00	-13.50	1.20 V	3	30.30	30.10
3	2483.50	52.40 AV	54.00	-1.60	1.20 V	3	22.30	30.10
4	2688.00	47.70 PK	74.00	-26.30	1.28 V	350	16.80	30.90
5	4924.00	45.10 PK	74.00	-28.90	1.40 V	346	8.40	36.70
6	7386.00	48.60 PK	74.00	-25.40	1.69 V	143	6.70	41.80
7	9848.00	49.70 PK	74.00	-24.30	1.20 V	79	5.30	44.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11b/g Wireless Access Point	MODEL	CG-WLAPGMN
MODE	Turbo Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	27 deg. C, 59%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	45.90 PK	74.00	-28.10	1.47 H	125	15.30	30.60
1	2360.00	38.40 AV	54.00	-15.60	1.47 H	125	7.80	30.60
2	2390.00	44.00 PK	74.00	-30.00	1.20 H	211	10.20	33.80
2	2390.00	36.80 AV	54.00	-17.20	1.20 H	211	3.00	33.80
3	*2437.00	93.60 PK			1.20 H	211	63.60	30.00
3	*2437.00	85.80 AV			1.20 H	211	55.80	30.00
4	2483.50	43.40 PK	74.00	-30.60	1.20 H	211	13.30	30.10
4	2483.50	34.50 AV	54.00	-19.50	1.20 H	211	4.40	30.10
5	2688.00	40.70 PK	74.00	-33.30	1.19 H	122	9.80	30.90
5	2688.00	33.30 AV	54.00	-20.70	1.19 H	122	2.40	30.90
6	4874.00	42.60 PK	74.00	-31.40	1.34 H	54	6.20	36.50
6	4874.00	32.00 AV	54.00	-22.00	1.34 H	54	-4.40	36.50
7	7311.00	49.00 PK	74.00	-25.00	1.47 H	355	7.20	41.80
7	7311.00	37.70 AV	54.00	-16.30	1.47 H	355	-4.10	41.80
8	9748.00	50.40 PK	74.00	-23.60	1.26 H	305	5.70	44.60
8	9748.00	39.30 AV	54.00	-14.70	1.26 H	305	-5.30	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11b/g Wireless Access Point	MODEL	CG-WLAPGMN
MODE	Turbo Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	27 deg. C, 59%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	52.30 PK	74.00	-21.70	1.00 V	326	21.60	30.60
1	2360.00	46.10 AV	54.00	-7.90	1.00 V	326	15.40	30.60
2	2390.00	53.60 PK	74.00	-20.40	1.46 V	14	19.80	33.80
2	2390.00	46.00 AV	54.00	-8.00	1.46 V	14	12.20	33.80
3	*2437.00	103.20 PK			1.46 V	14	73.20	30.00
3	*2437.00	95.00 AV			1.46 V	14	65.00	30.00
4	2483.50	53.00 PK	74.00	-21.00	1.46 V	14	22.90	30.10
4	2483.50	43.70 AV	54.00	-10.30	1.46 V	14	13.60	30.10
5	2688.00	43.30 PK	74.00	-30.70	1.07 V	20	12.40	30.90
5	2688.00	40.00 AV	54.00	-14.00	1.07 V	20	9.10	30.90
6	4824.00	42.60 PK	74.00	-31.40	1.00 V	335	6.30	36.20
6	4824.00	32.00 AV	54.00	-22.00	1.00 V	335	-4.30	36.20
7	7311.00	48.10 PK	74.00	-25.90	1.25 V	233	6.40	41.80
7	7311.00	37.70 AV	54.00	-16.30	1.25 V	233	-4.00	41.80
8	9748.00	49.40 PK	74.00	-24.60	1.13 V	267	4.80	44.60
8	9748.00	39.00 AV	54.00	-15.00	1.13 V	267	-5.60	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

4.2.10 TEST RESULTS - Antenna 2, OFDM

EUT	802.11b/g Wireless Access Point	MODEL	CG-WLAPGMN
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 55%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	52.40 PK	74.00	-21.60	1.00 H	333	21.80	30.60
1	2360.00	42.40 AV	54.00	-11.60	1.00 H	333	11.80	30.60
2	2390.00	55.00 PK	74.00	-19.00	1.21 H	332	21.20	33.80
2	2390.00	46.60 AV	54.00	-7.40	1.21 H	332	12.80	33.80
3	*2412.00	104.30 PK			1.20 H	331	74.40	29.90
3	*2412.00	95.80 AV			1.20 H	331	65.90	29.90
4	4824.00	42.70 PK	74.00	-31.30	1.39 H	10	6.50	36.20
5	7236.00	48.30 PK	74.00	-25.70	1.23 H	160	6.70	41.70
6	9648.00	51.00 PK	74.00	-23.00	1.11 H	228	6.10	44.90
6	9648.00	39.40 AV	54.00	-14.60	1.11 H	228	-5.50	44.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	43.00 PK	74.00	-31.00	1.95 V	27	12.30	30.60
2	2390.00	50.30 PK	74.00	-23.70	1.01 V	5	16.50	33.80
3	*2412.00	99.50 PK			1.00 V	4	69.60	29.90
3	*2412.00	91.00 AV			1.00 V	4	61.10	29.90
4	4824.00	44.90 PK	74.00	-29.10	1.08 V	202	8.70	36.20
5	7236.00	49.50 PK	74.00	-24.50	1.55 V	22	7.80	41.70
6	9648.00	50.10 PK	74.00	-23.90	1.25 V	291	5.20	44.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11b/g Wireless Access Point	MODEL	CG-WLAPGMN
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 55%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	53.00 PK	74.00	-21.00	1.00 H	336	22.40	30.60
1	2360.00	42.40 AV	54.00	-11.60	1.00 H	336	11.80	30.60
2	*2437.00	104.50 PK			1.00 H	325	74.50	30.00
2	*2437.00	95.60 AV			1.00 H	325	65.60	30.00
3	4874.00	42.60 PK	74.00	-31.40	1.29 H	39	6.10	36.50
4	7311.00	48.90 PK	74.00	-25.10	1.01 H	16	7.10	41.80
5	9748.00	50.30 PK	74.00	-23.70	1.27 H	139	5.70	44.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	52.00 PK	74.00	-22.00	1.28 V	16	21.30	30.60
1	2360.00	37.70 AV	54.00	-16.30	1.28 V	16	7.10	30.60
2	*2437.00	97.10 PK			1.35 V	326	67.20	30.00
2	*2437.00	89.00 AV			1.35 V	326	59.10	30.00
3	4874.00	43.80 PK	74.00	-30.20	1.47 V	335	7.40	36.50
4	7311.00	48.30 PK	74.00	-25.70	1.07 V	285	6.60	41.80
5	9748.00	50.30 PK	74.00	-23.70	1.22 V	215	5.60	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11b/g Wireless Access Point	MODEL	CG-WLAPGMN
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	30 deg. C, 55%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	49.90 PK	74.00	-24.10	1.00 H	336	19.30	30.60
2	*2462.00	103.10 PK			1.43 H	0	73.10	30.10
2	*2462.00	95.30 AV			1.43 H	0	65.20	30.10
3	2483.50	52.90 PK	74.00	-21.10	1.44 H	1	22.70	30.10
3	2483.50	45.00 AV	54.00	-9.00	1.44 H	1	14.90	30.10
4	4924.00	42.60 PK	74.00	-31.40	1.01 H	0	5.90	36.70
5	7386.00	48.80 PK	74.00	-25.20	1.14 H	46	7.00	41.80
6	9848.00	49.90 PK	74.00	-24.10	1.24 H	121	5.50	44.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	45.50 PK	74.00	-28.50	1.28 V	13	14.90	30.60
2	*2462.00	96.70 PK			1.31 V	326	66.60	30.10
2	*2462.00	88.20 AV			1.31 V	326	58.10	30.10
3	2483.50	46.50 PK	74.00	-27.50	1.32 V	327	16.30	30.10
4	4924.00	43.50 PK	74.00	-30.50	1.00 V	336	6.80	36.70
5	7386.00	48.70 PK	74.00	-25.30	1.53 V	254	6.90	41.80
6	9848.00	50.30 PK	74.00	-23.70	1.34 V	171	5.90	44.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11b/g Wireless Access Point	MODEL	CG-WLAPGMN
MODE	Turbo Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	27 deg. C, 59%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	48.20 PK	74.00	-25.80	1.20 H	316	17.60	30.60
1	2360.00	38.10 AV	54.00	-15.90	1.20 H	316	7.40	30.60
2	2390.00	48.60 PK	74.00	-25.40	1.26 H	147	14.80	33.80
2	2390.00	41.00 AV	54.00	-13.00	1.26 H	147	7.20	33.80
3	*2437.00	98.20 PK			1.26 H	147	68.20	30.00
3	*2437.00	90.00 AV			1.26 H	147	60.00	30.00
4	2483.50	48.00 PK	74.00	-26.00	1.26 H	147	17.90	30.10
4	2483.50	38.80 AV	54.00	-15.20	1.26 H	147	8.70	30.10
5	4824.00	41.60 PK	74.00	-32.40	1.08 H	305	5.30	36.20
5	4824.00	33.00 AV	54.00	-21.00	1.08 H	305	-3.30	36.20
6	7311.00	49.10 PK	74.00	-24.90	1.05 H	203	7.40	41.80
6	7311.00	38.70 AV	54.00	-15.30	1.05 H	203	-3.00	41.80
7	9748.00	47.90 PK	74.00	-26.10	1.23 H	67	3.30	44.60
7	9748.00	37.00 AV	54.00	-17.00	1.23 H	67	-7.60	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11b/g Wireless Access Point	MODEL	CG-WLAPGMN
MODE	Turbo Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	27 deg. C, 59%RH, 970 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2360.00	44.60 PK	74.00	-29.40	1.27 V	317	14.00	30.60
1	2360.00	37.40 AV	54.00	-16.60	1.27 V	317	6.70	30.60
2	2390.00	41.00 PK	74.00	-33.00	1.20 V	211	7.20	33.80
2	2390.00	33.80 AV	54.00	-20.20	1.20 V	211	0.00	33.80
3	*2437.00	90.60 PK			1.20 V	211	60.60	30.00
3	*2437.00	82.80 AV			1.20 V	211	52.80	30.00
4	2483.50	40.40 PK	74.00	-33.60	1.20 V	211	10.30	30.10
4	2483.50	31.50 AV	54.00	-22.50	1.20 V	211	1.40	30.10
5	4874.00	42.40 PK	74.00	-31.60	1.57 V	287	5.90	36.50
5	4874.00	32.40 AV	54.00	-21.60	1.57 V	287	-4.00	36.50
6	7311.00	45.00 PK	74.00	-29.00	1.17 V	105	3.20	41.80
6	7311.00	34.70 AV	54.00	-19.30	1.17 V	105	-7.10	41.80
7	9748.00	48.40 PK	74.00	-25.60	1.06 V	115	3.70	44.60
7	9748.00	37.50 AV	54.00	-16.50	1.06 V	115	-7.10	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.5 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.6 TEST RESULTS-DSSS


EUT	802.11b/g Wireless Access Point		
MODEL	CG-WLAPGMN	ENVIRONMENTAL CONDITIONS	24 deg. C, 64%RH, 970 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Wen Yu

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.69	0.5	PASS
6	2437	12.39	0.5	PASS
11	2462	11.69	0.5	PASS


CH1

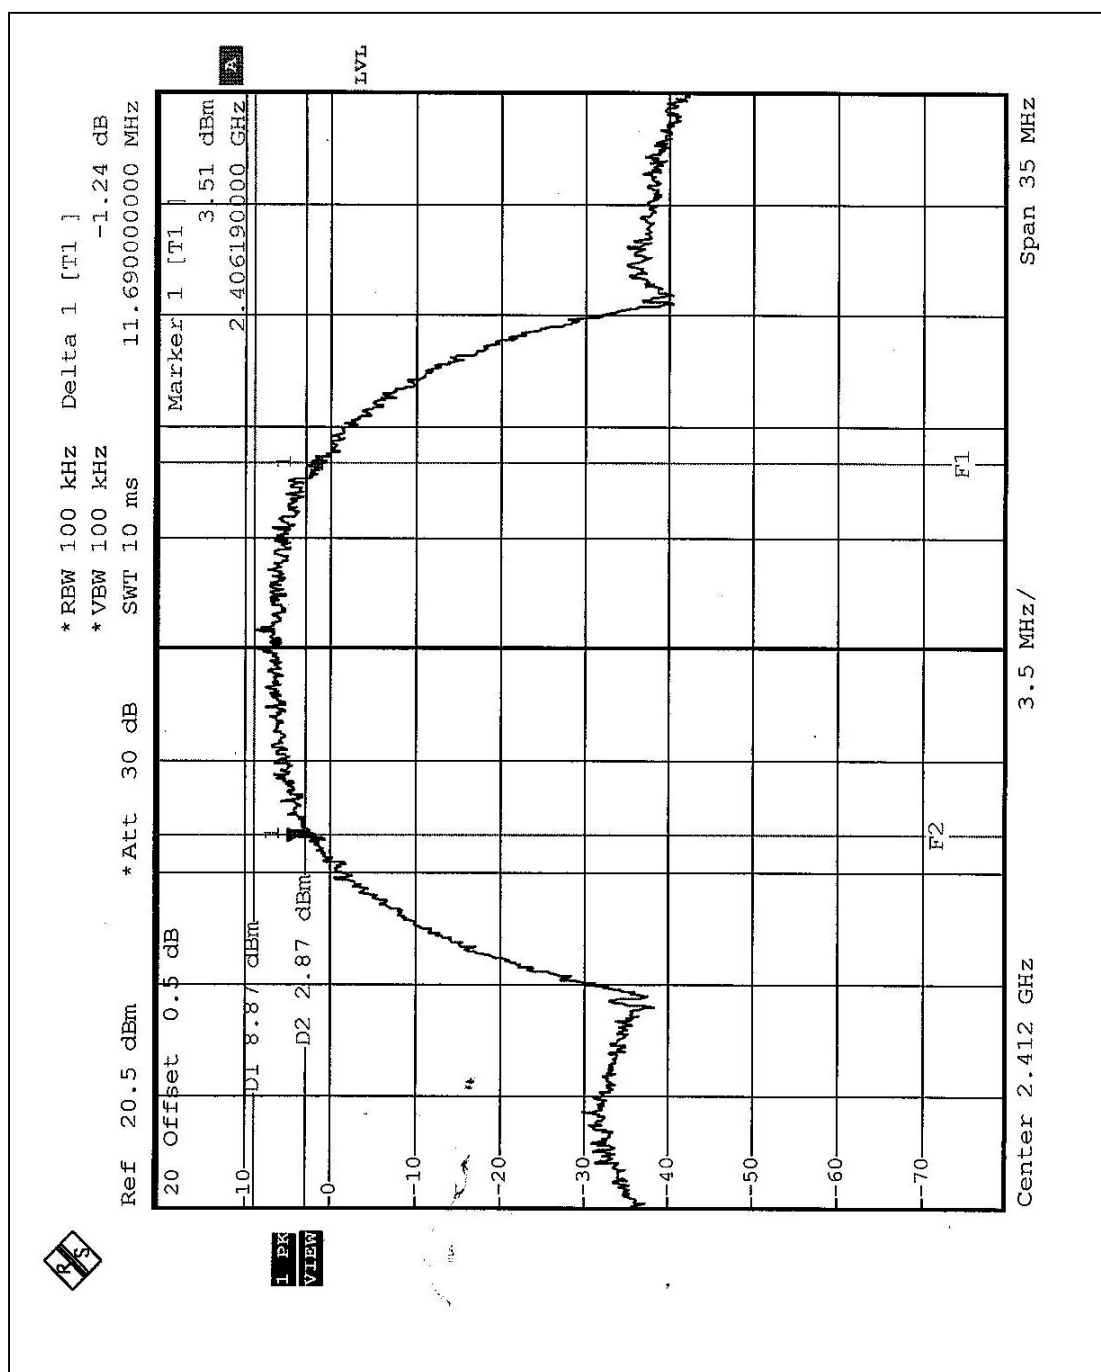

CH6

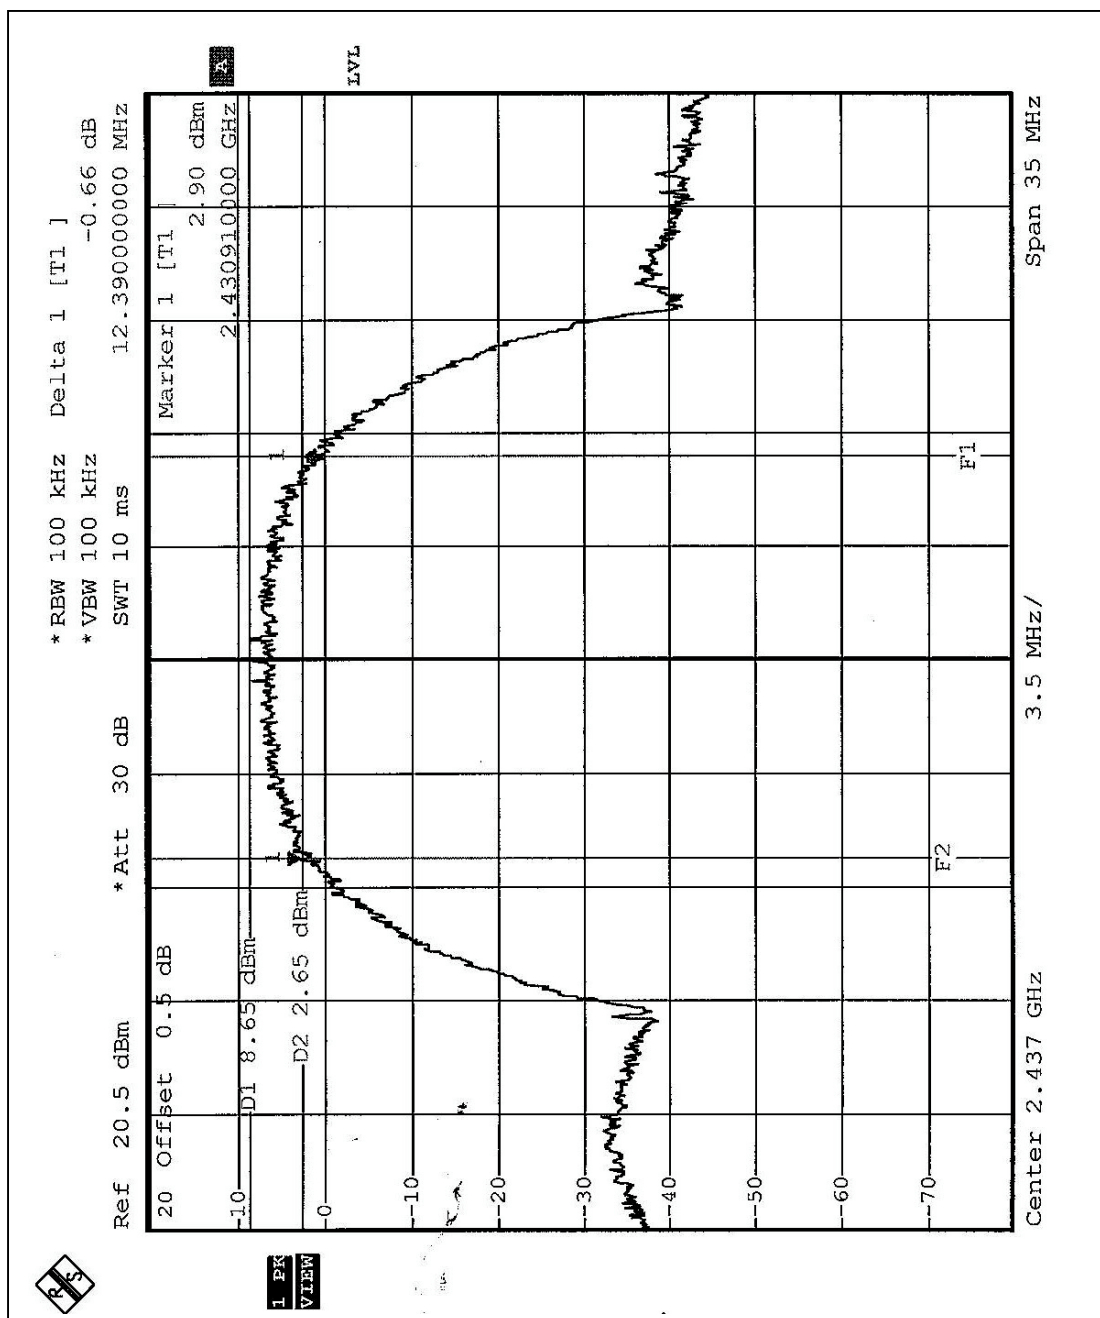

CH11

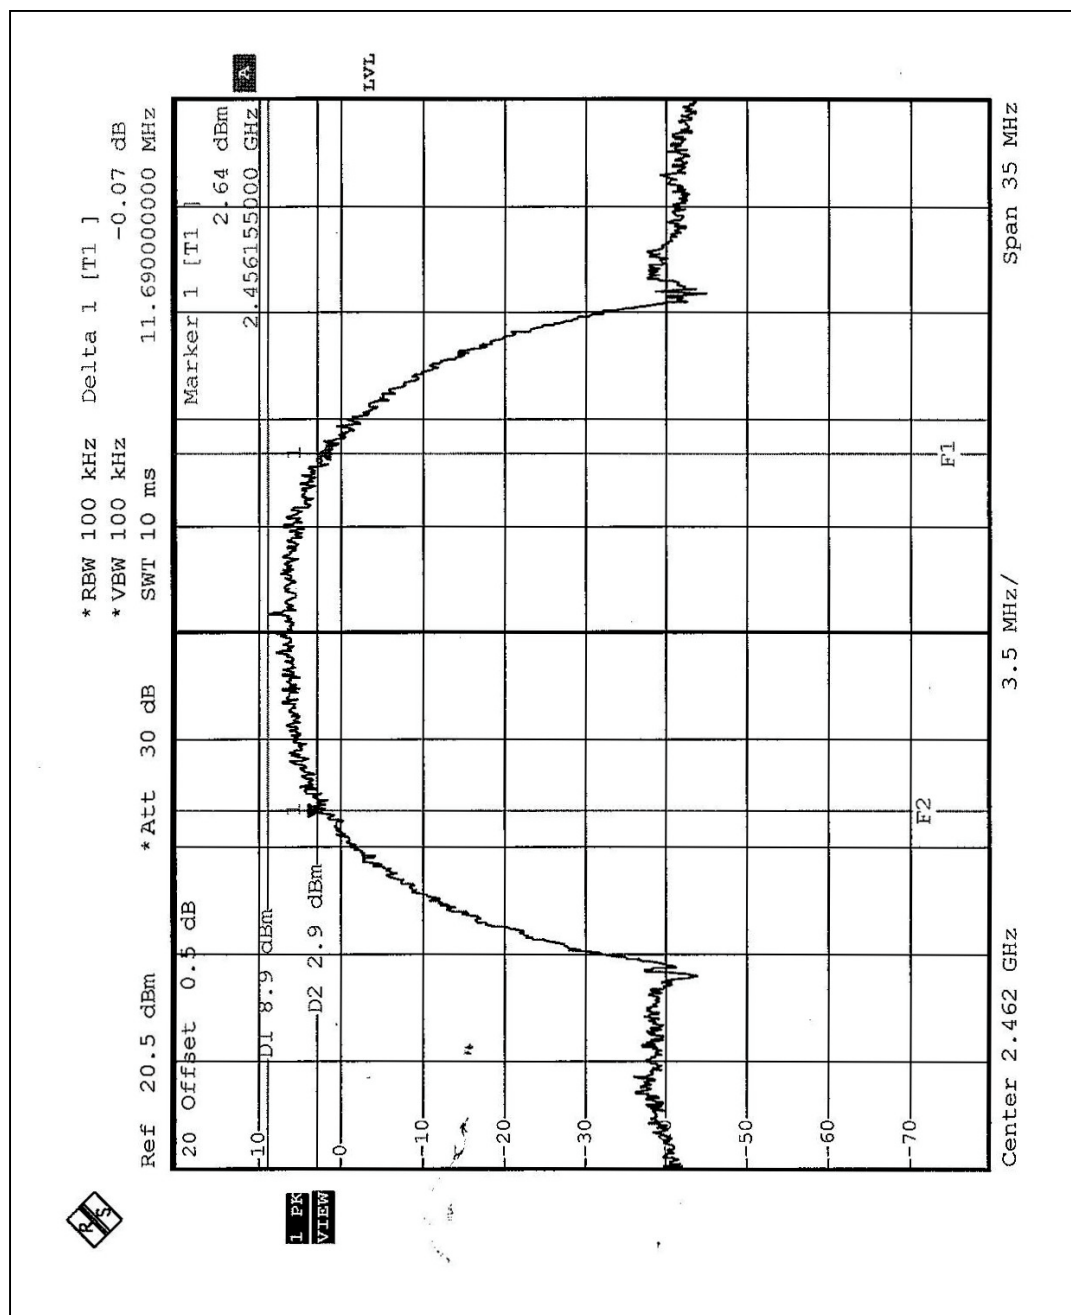


4.3.7 TEST RESULTS-OFDM


EUT	802.11b/g Wireless Access Point		
MODEL	CG-WLAPGMN	ENVIRONMENTAL CONDITIONS	24 deg. C, 64%RH, 970 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Wen Yu

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.45	0.5	PASS
6	2437	16.45	0.5	PASS
11	2462	16.38	0.5	PASS
Turbo 6	2437	33.12	0.5	PASS


CH1

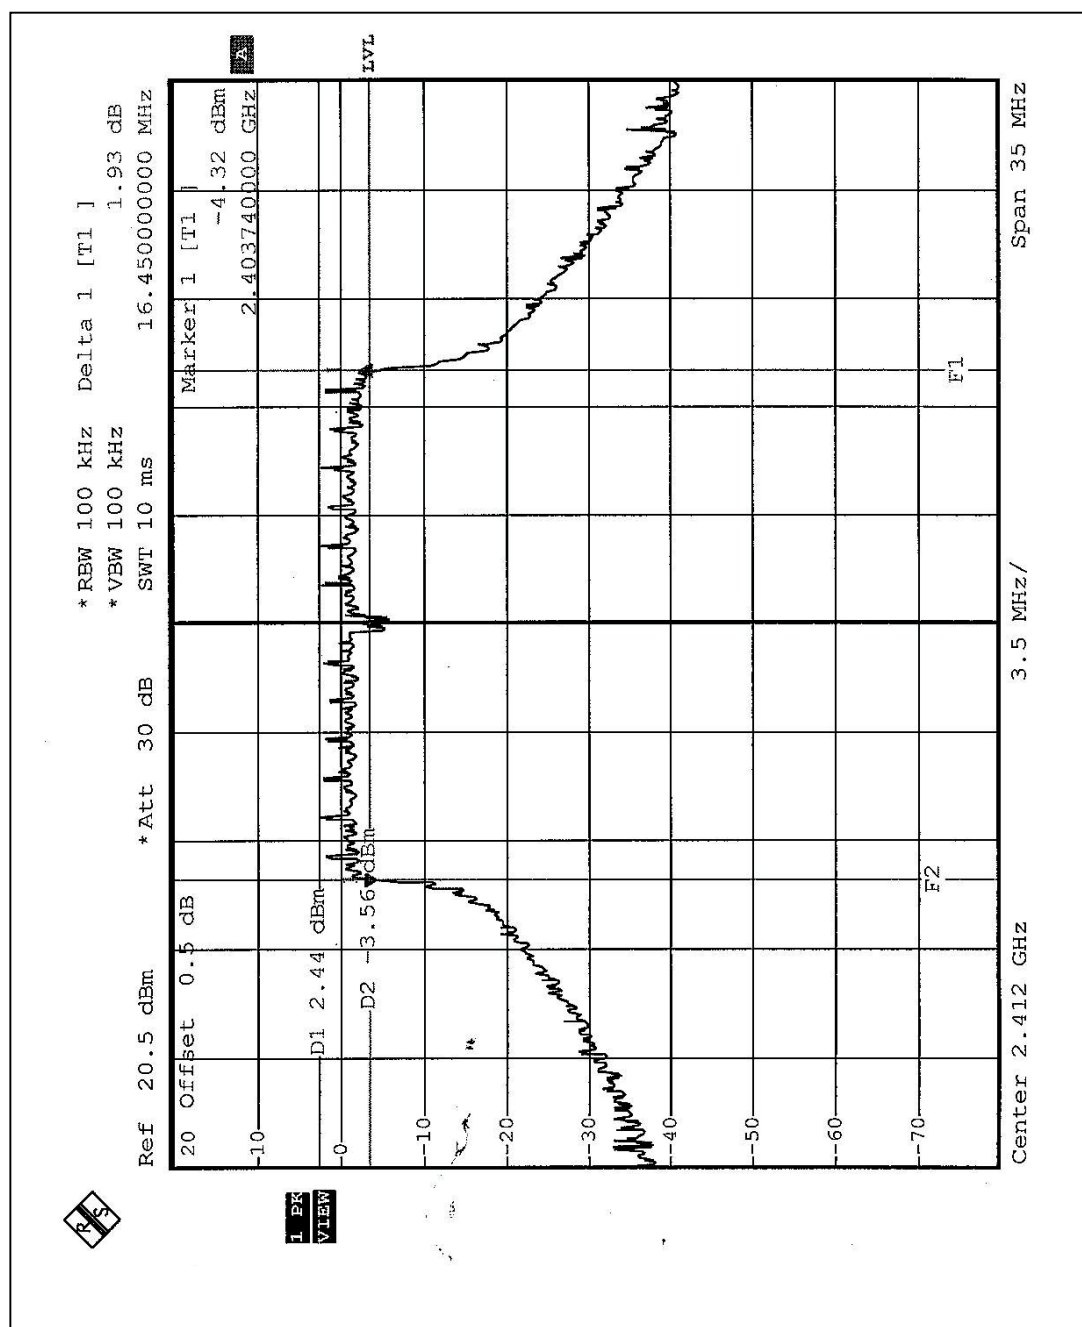


CH6

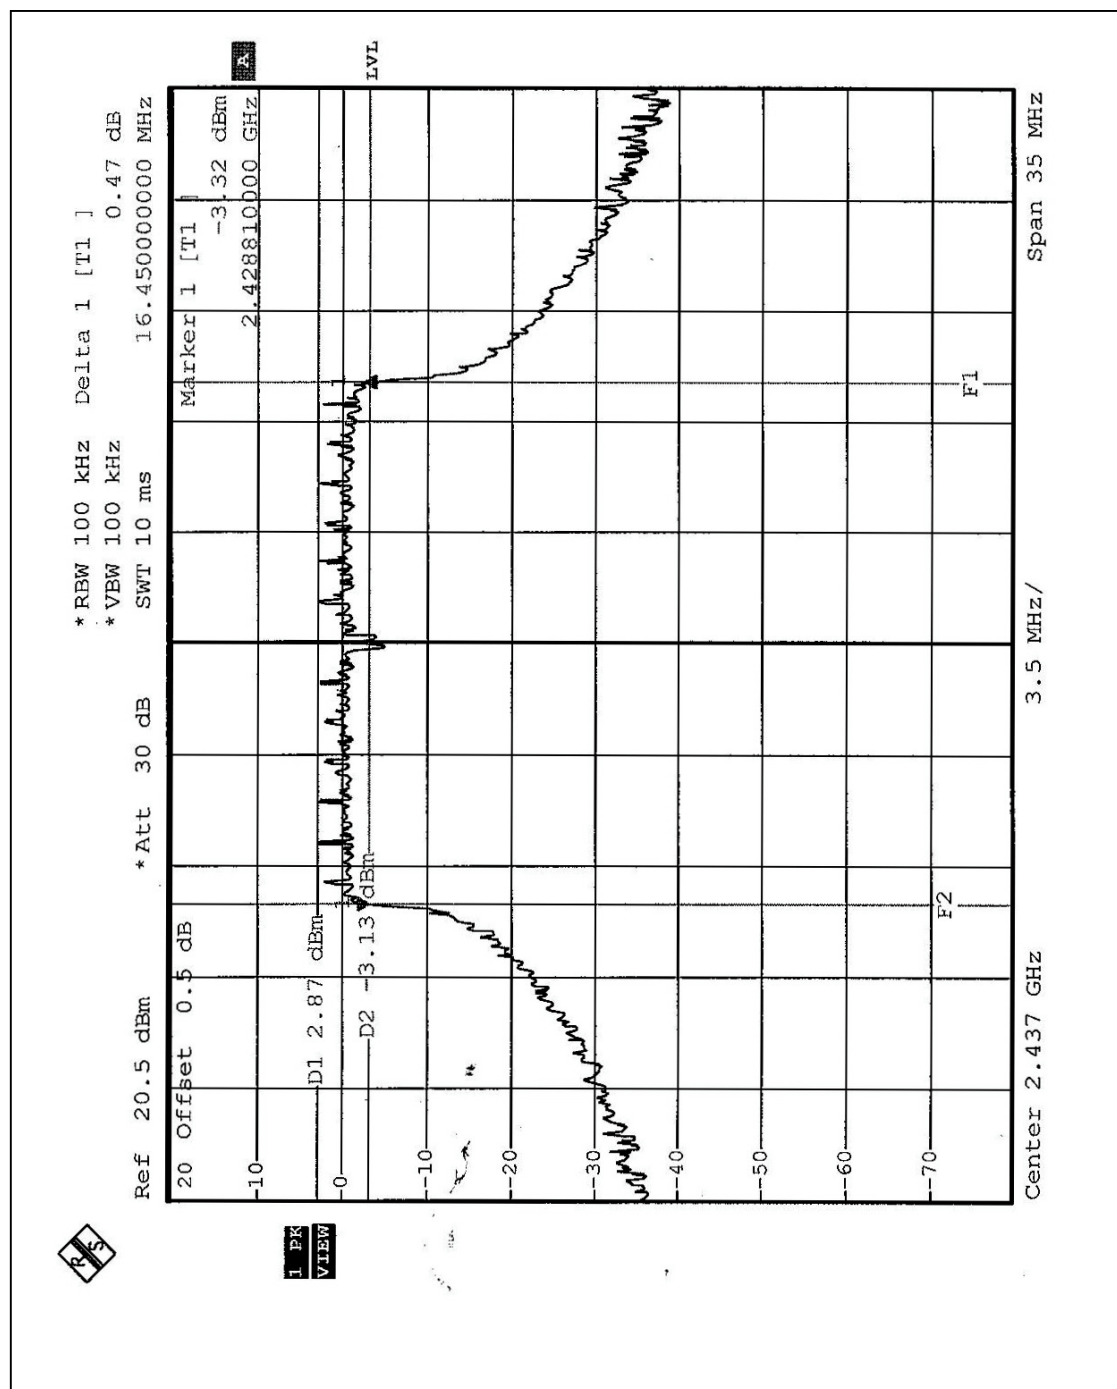

CH11

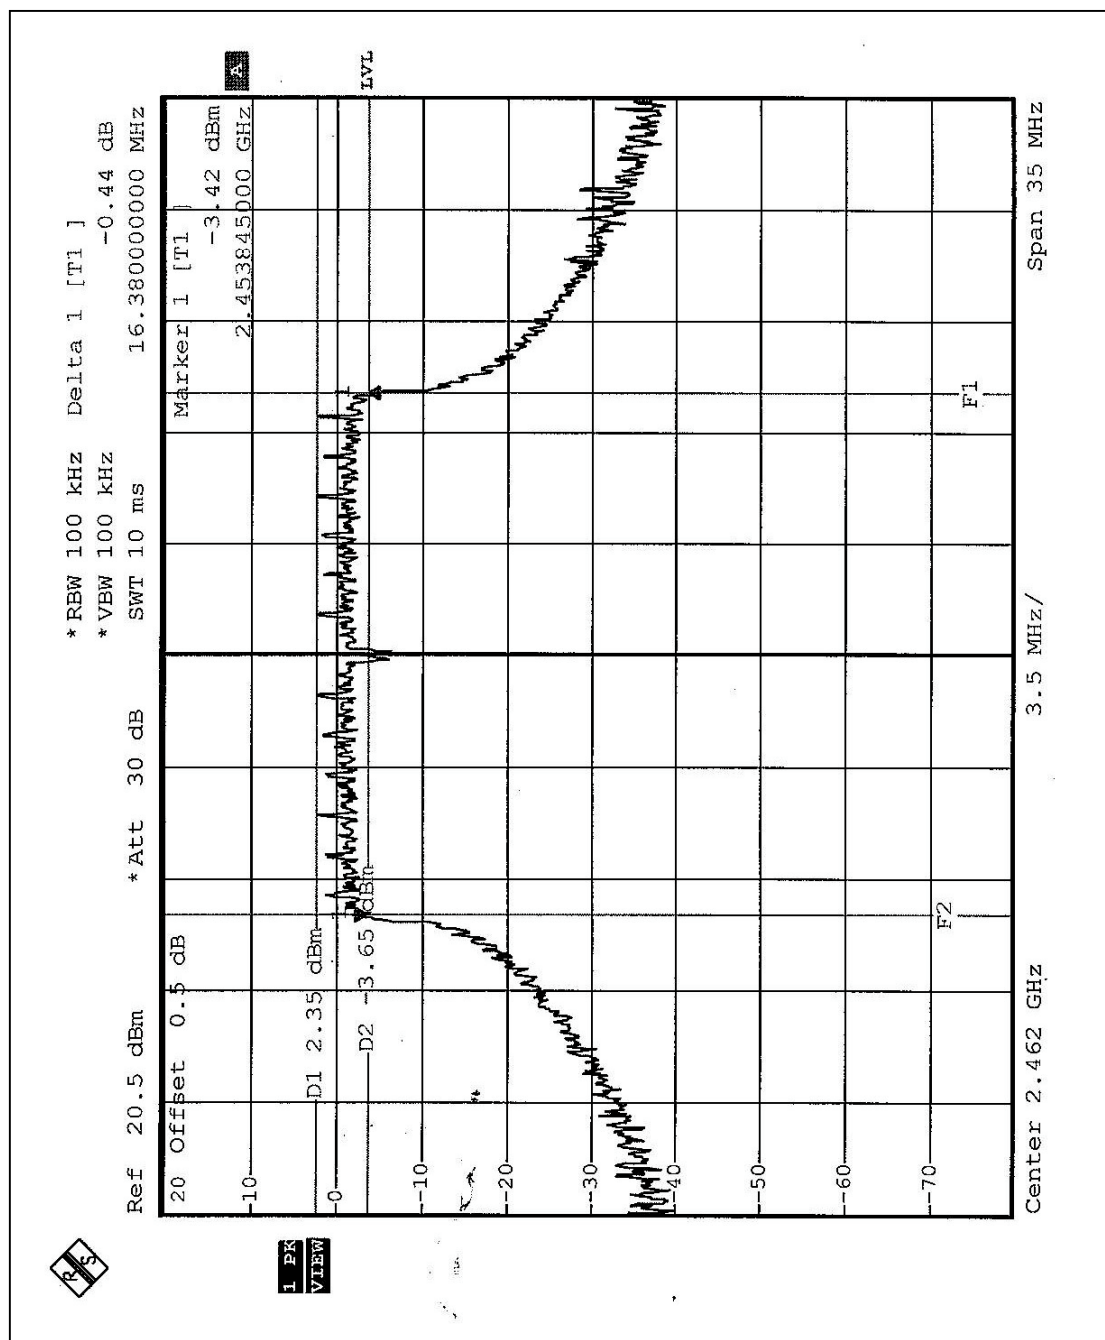

Turbo CH6

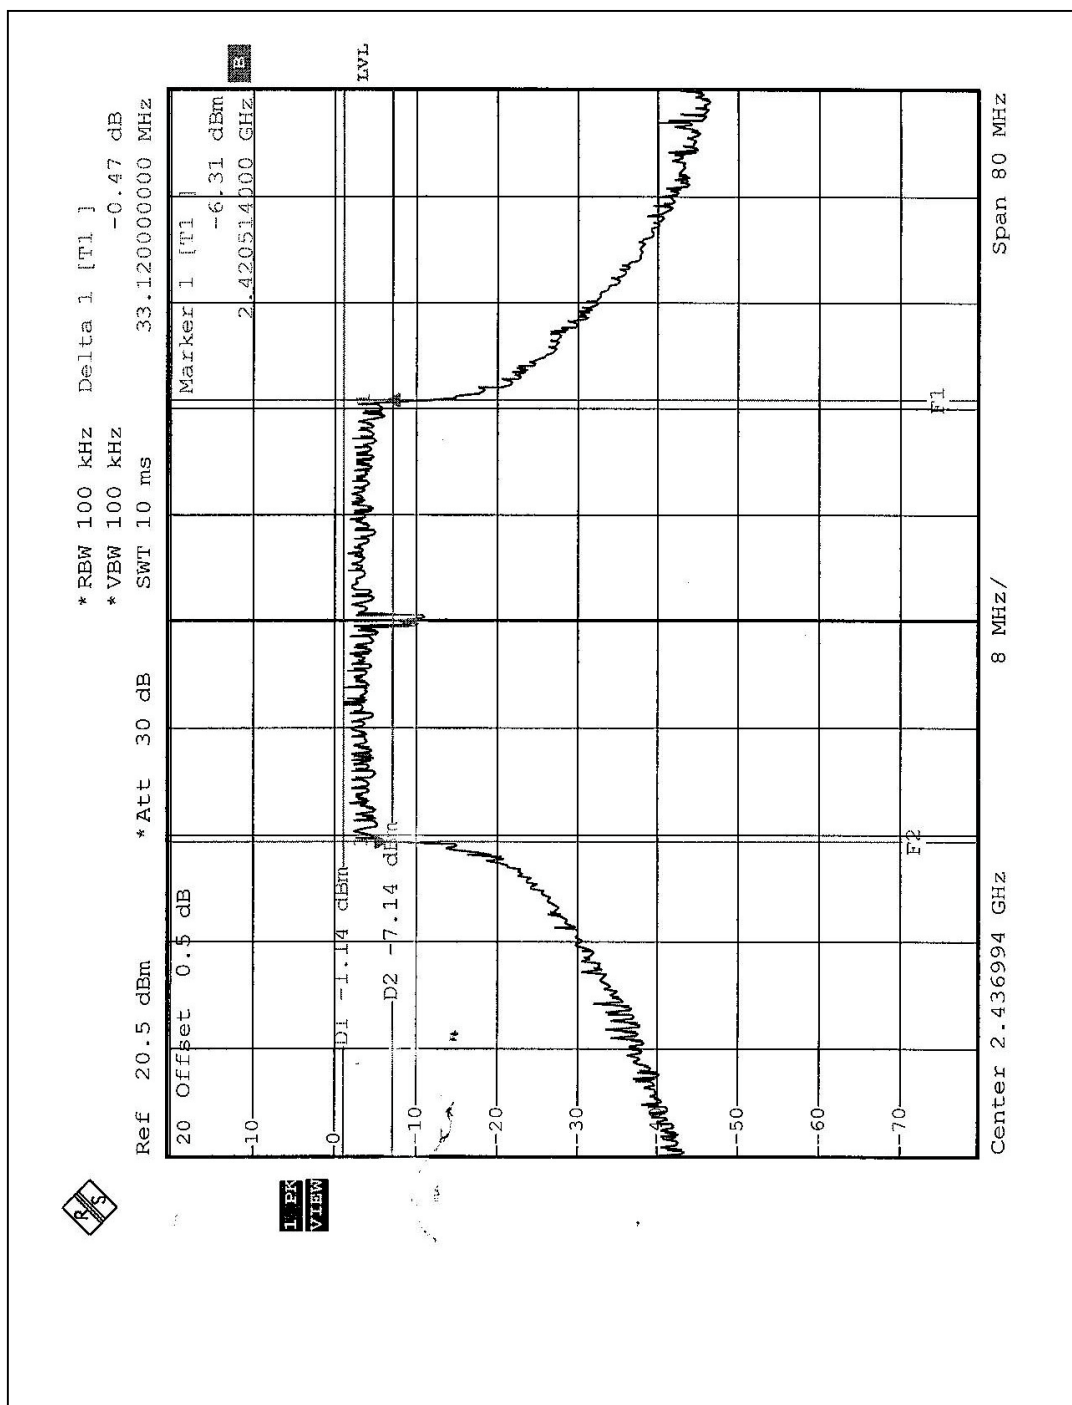

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006
Agilent SIGNAL GENERATOR	E8257C	MY43320668	Dec. 07, 2006
TEKTRONIX OSCILLOSCOPE	TDS380	B016335	Jun. 22, 2006
NARDA DETECTOR	4503A	FSCM99899	NA


NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the peak response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5

4.4.6 TEST RESULTS- DSSS

EUT	802.11b/g Wireless Access Point		
MODEL	CG-WLAPGMN	ENVIRONMENTAL CONDITIONS	24 deg. C, 64%RH, 970 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Wen Yu

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	100	20	30	PASS
6	2437	100	20	30	PASS
11	2462	100	20	30	PASS

4.4.7 TEST RESULTS- OFDM

EUT	802.11b/g Wireless Access Point		
MODEL	CG-WLAPGMN	ENVIRONMENTAL CONDITIONS	24 deg. C, 64%RH, 970 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Wen Yu

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	100	20	30	PASS
6	2437	100	20	30	PASS
11	2462	100	20	30	PASS
Turbo 6	2437	100	20	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 TEST SETUP



4.5.5 EUT OPERATING CONDITIONS


Same as 4.3.5

4.5.6 TEST RESULTS-DSSS


EUT	802.11b/g Wireless Access Point		
MODEL	CG-WLAPGMN	ENVIRONMENTAL CONDITIONS	24 deg. C, 64%RH, 970 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Wen Yu

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-1.04	8	PASS
6	2437	-1.22	8	PASS
11	2462	-0.62	8	PASS


CH1

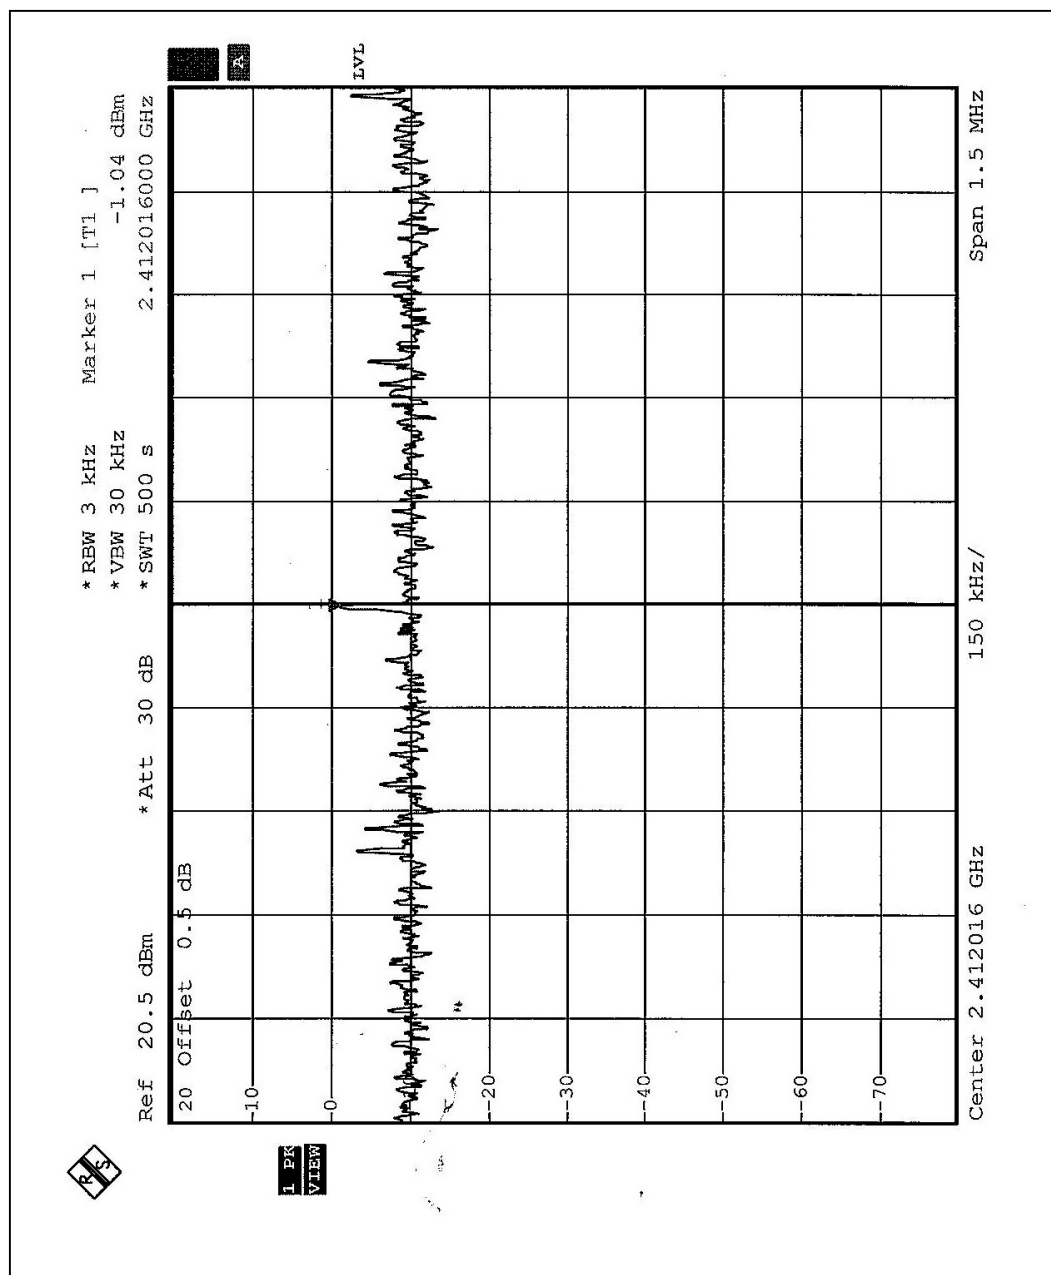

CH6

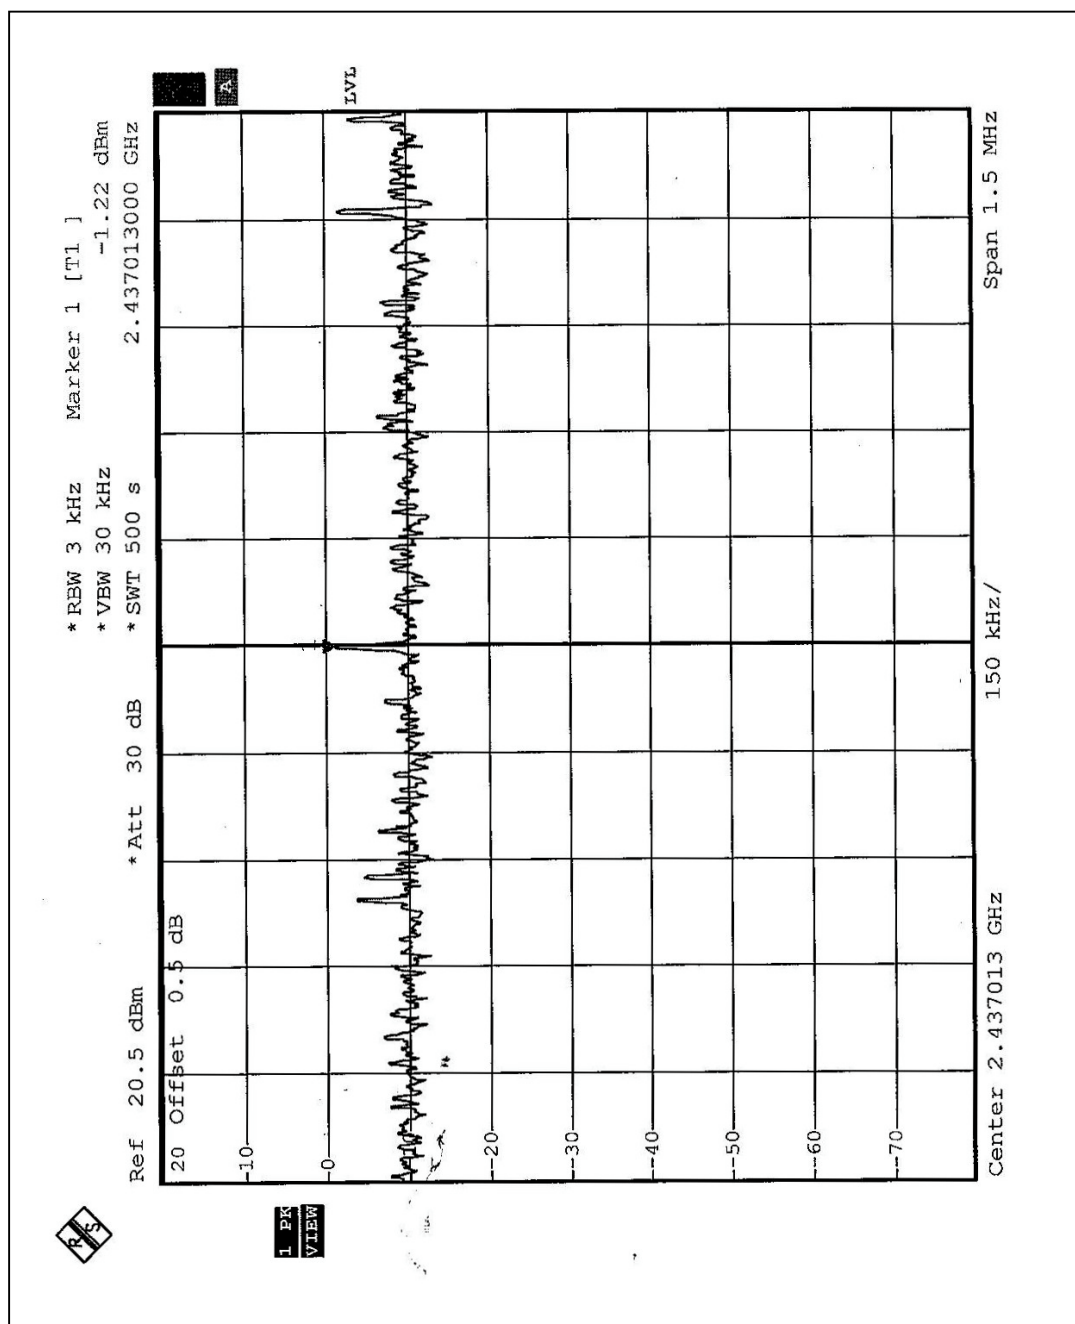

CH11

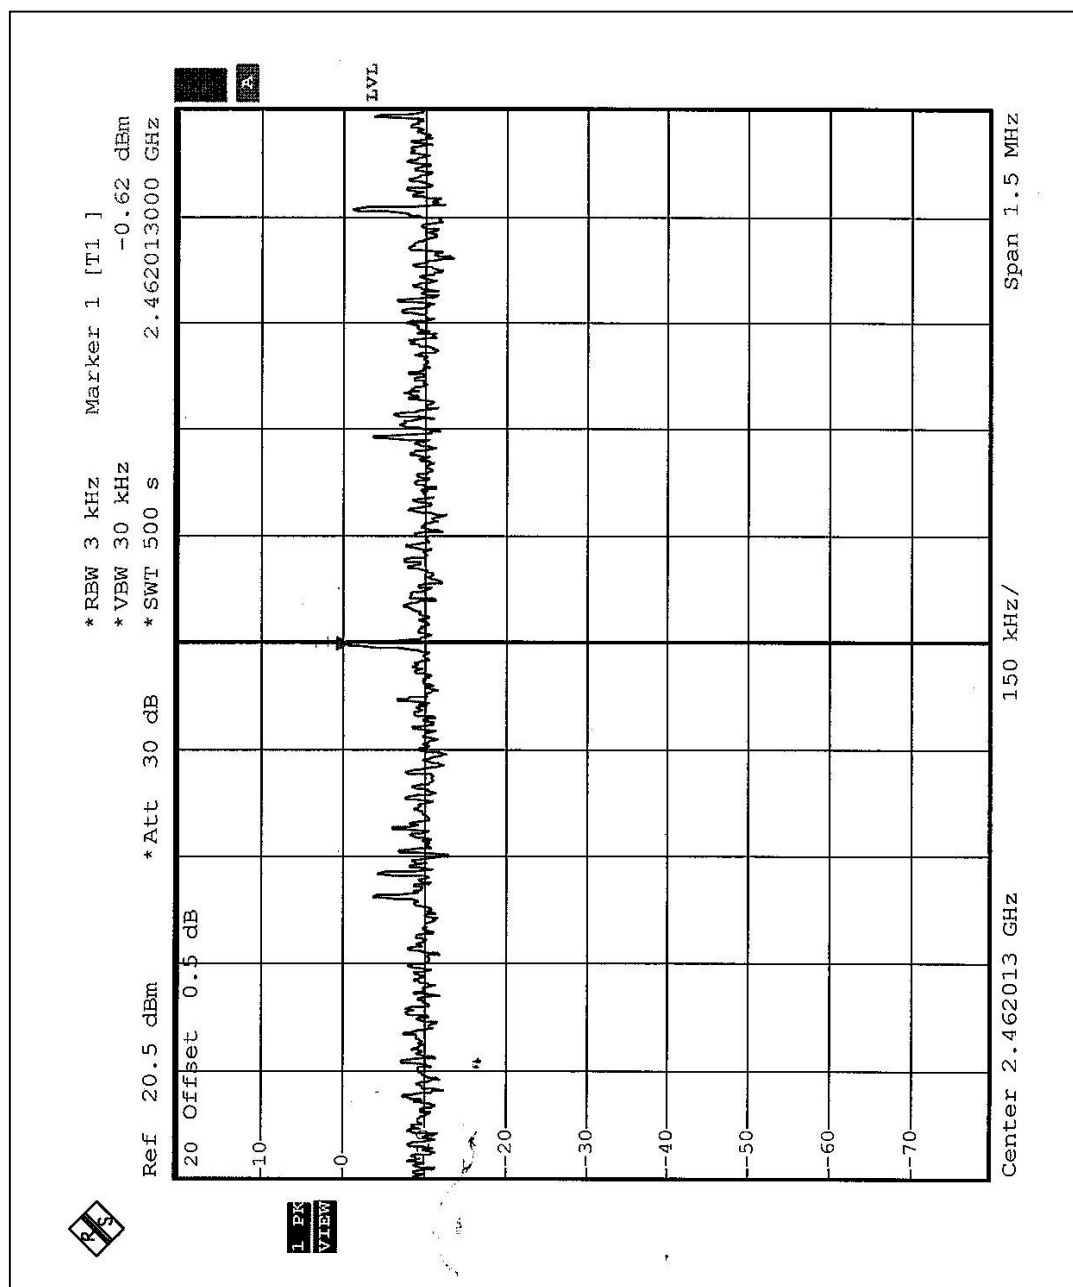


4.5.7 TEST RESULTS-OFDM


EUT	802.11b/g Wireless Access Point		
MODEL	CG-WLAPGMN	ENVIRONMENTAL CONDITIONS	24 deg. C, 64%RH, 970 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Wen Yu

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-4.27	8	PASS
6	2437	-5.51	8	PASS
11	2462	-6.20	8	PASS
Turbo 6	2437	-12.82	8	PASS


CH1

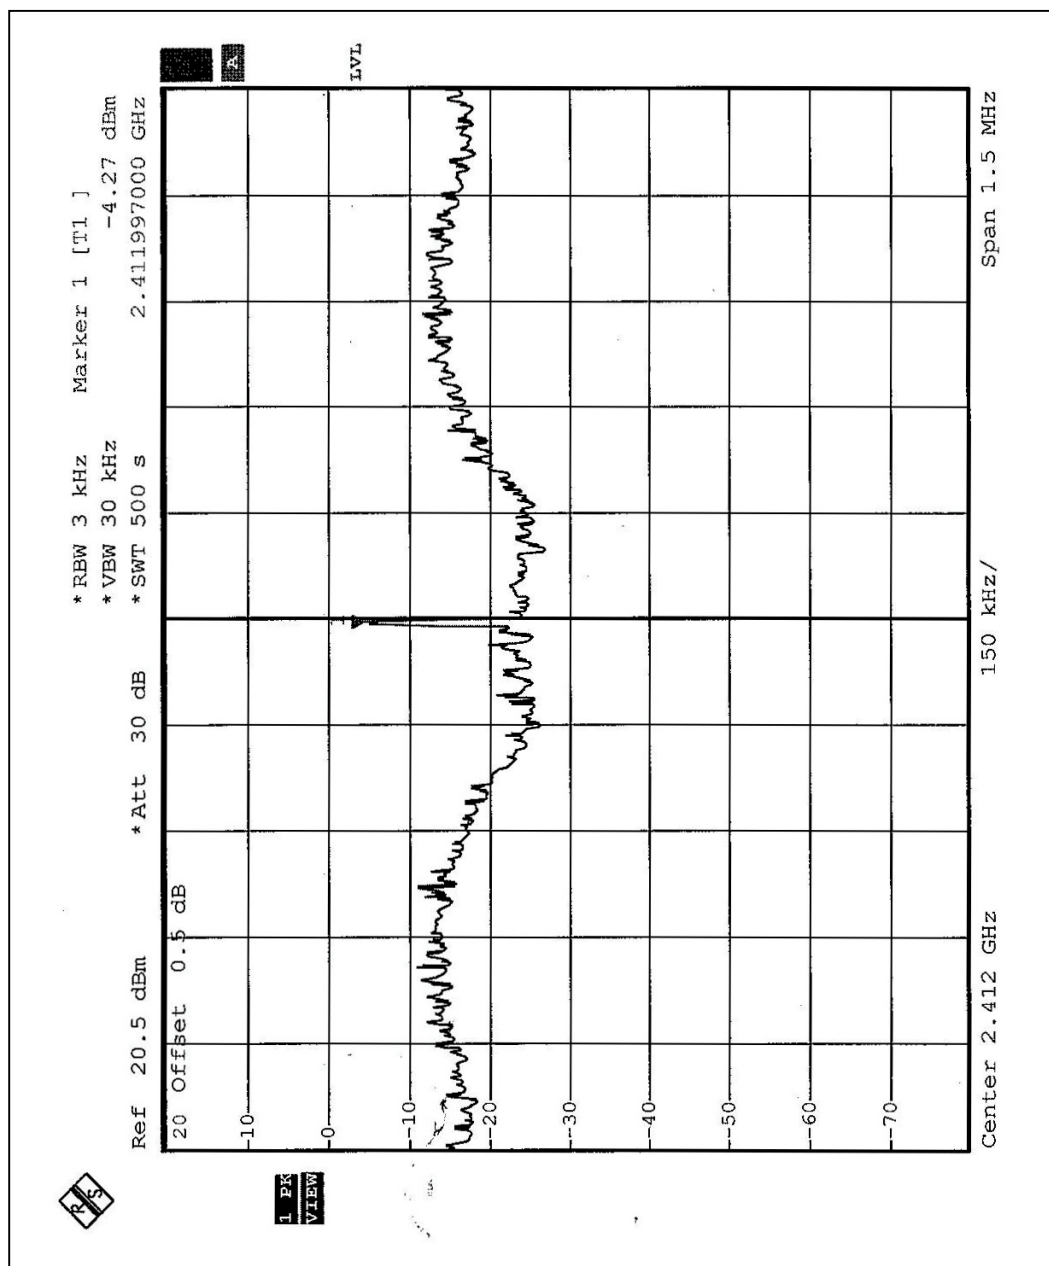

CH6

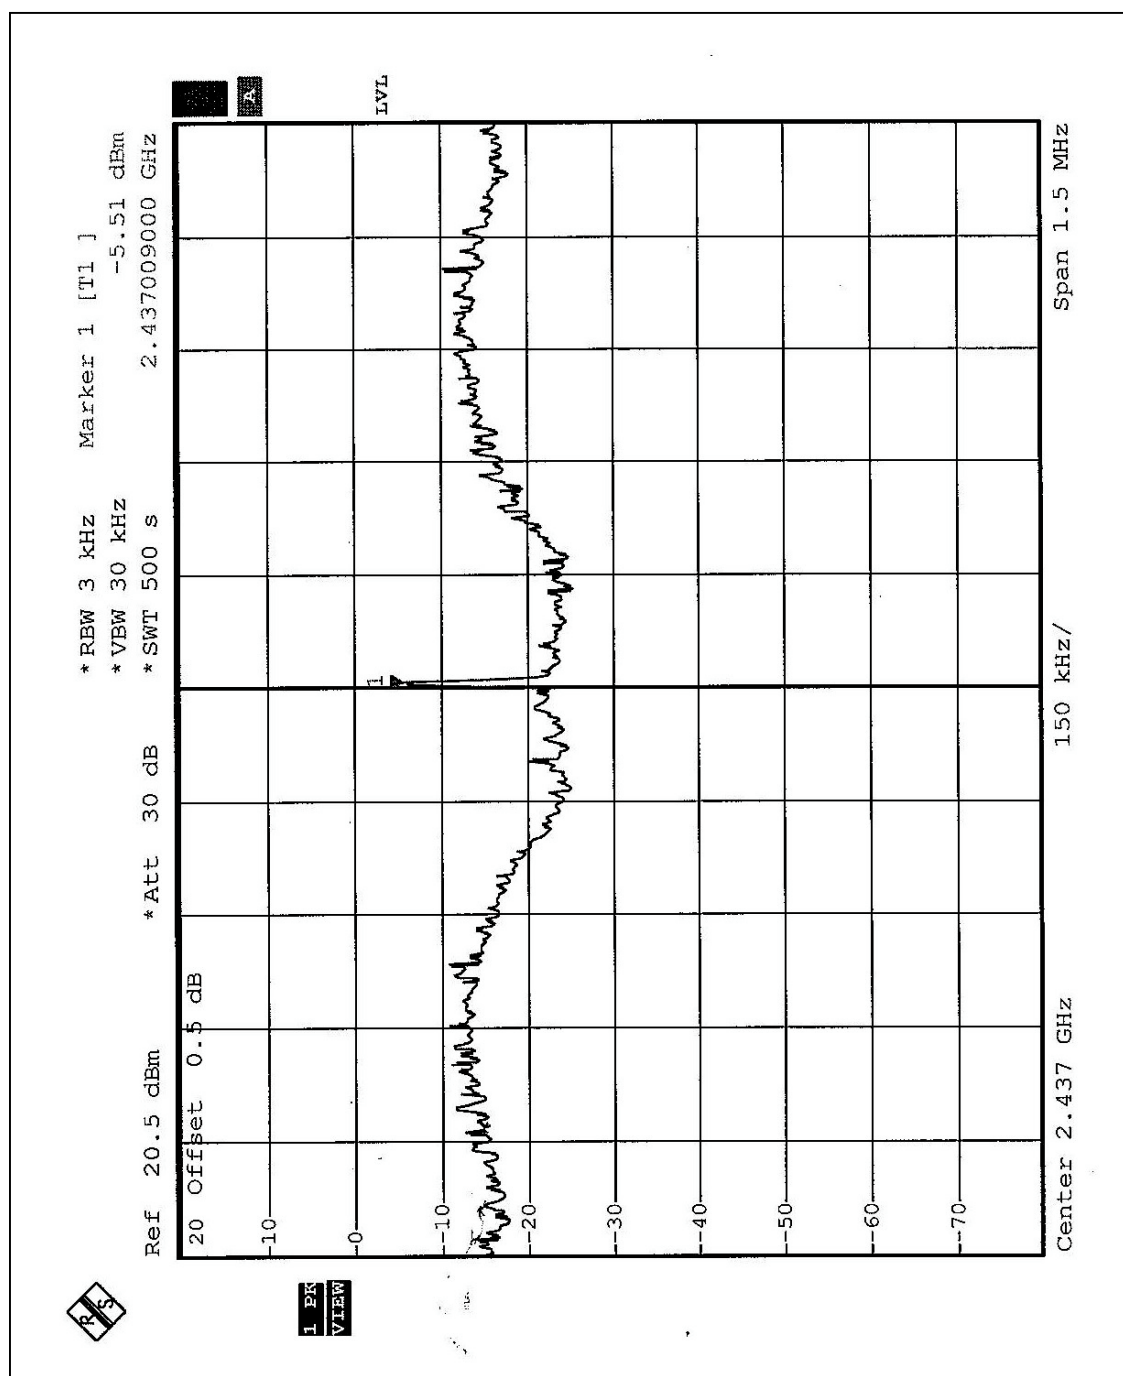

CH11

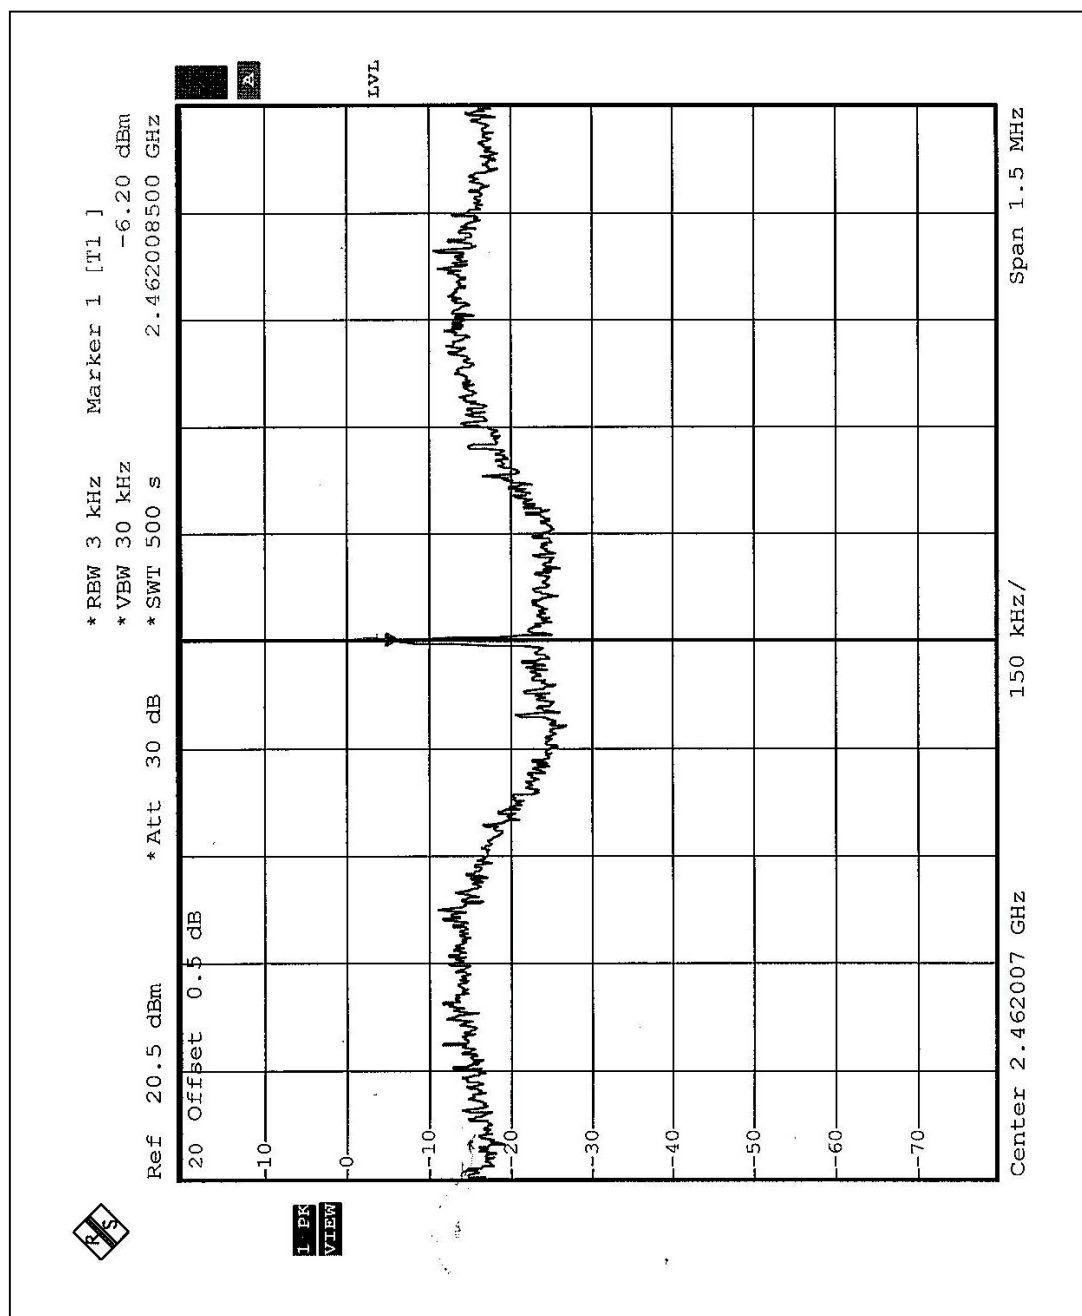

Turbo CH6

