



## DIGITAL EMC CO., LTD.

683-3, Yubang-Dong, Yongin-Si, Kyunggi-Do, Korea. 449-080

Tel: +82-31-321-2664 Fax: +82-31-321-1664

<http://www.digitalemc.com>

## CERTIFICATION OF COMPLIANCE

**Zenocom Co.,Ltd.**

#7201 Dongil Technotow<sup>th</sup>, 823,Kwanyang-2Dong,  
Dongan\_Ku, Anyang-City, Kyungki-Do, Korea 431-716

Dates of Tests: October 26 ~ November 01,2004

Test Report S/N: DR50110411M

Test Site : DIGITAL EMC CO., LTD.

FCC ID

**RRRBF0200**

APPLICANT

**Zenocom Co.,Ltd.**

**FCC Classification**

: FHSS Sequence Spread Spectrum (FHSS)

**Device name**

: Bluetooth MP3 Player

**Manufacturer**

: Zenocom Co., Ltd.

**FCC ID**

: RRRBF0200

**Model name**

: XM-SERIES

**Test Device Serial number**

: Identical prototype

**FCC Rule Part(s)**

: FCC Part 15.247 Subpart C; ANSI C-63.4-2001

**Frequency Range**

: 2402 ~ 2480 MHz

**Max. Output power**

: 1.26mW Conducted

**Data of issue**

: November 02, 2004

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



NVLAP LAB CODE 200559-0

## **TABLE OF CONTENTS**

1. GENERAL INFORMATION'S -----	3
2. INFORMATION'S ABOUT TEST ITEM -----	4
3. TEST REPORT -----	6
3.1 SUMMARY OF TESTS -----	6
3.2 TRANSMITTER REQUIREMENTS -----	7
3.2.1 CARRIER FREQUENCY SEPARATION -----	7
3.2.2 NUMBER OF HOPPING FREQUENCIES -----	9
3.2.3 20 dB BANDWIDTH -----	12
3.2.4 TIME OF OCCUPANCY (Dwell Time) -----	15
3.2.5 PEAK OUTPUT POWER -----	19
3.2.6 BAND - EDGE (at 20 dB blow) -----	22
3.2.7 OUT OF BAND EMISSION - RADIATED -----	29
3.2.8 AC CONDUCTED EMISSIONS -----	31
3.3 RECEIVER REQUIREMENTS -----	32
3.3.1 AC CONDUCTED EMISSIONS -----	32
3.3.2 OUT OF BAND EMISSION - RADIATED -----	36
ANNEX TEST EQUIPMENT USED FOR TESTS -----	38

## 1. General information's

This report contains the result of tests performed by:

DIGITAL EMC CO., LTD.

Address : 683-3, Yubang-Dong, Yongin-Si, Kyunggi-Do, Korea. 449-080

<http://www.digitalemc.com> E-mail : demc@unitel.co.kr

Tel: +82-31-321-2664 Fax: +82-31-321-1664

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the "General requirements for the competents of calibration and testing laboratory".

This laboratory is accredited by NVLAP for NVLAP Lab. Code : 200559-0.

**Test operator: engineer**



November 02, 2004	Won -Jong LEE
Data	Name

Signature

**Report Reviewed By: manager**



November 02, 2004	Dong -Min JUNG
Data	Name

Signature

**Ordering party:**

Company name	:	Zenocom Co., Ltd.
Address	:	#7201 Dongil Technotow <sup>th</sup> , 823,Kwanyang-2Dong, Dongan_Ku, Anyang-City,
Zip code	:	431-716
City/town	:	Kyungki-Do
Country	:	Korea
Date of order	:	October 26, 2004

## 2. Information's about test item

RRRBF0200

### 2.1 Equipment information

Equipment model name	XM-SERIES
Type of equipment	Bluetooth MP3 Player
Frequency band	2402 ~ 2480 MHz
Type of Modulation	GFSK
Channel Spacing	1.0 MHz
Type of antenna	Chip Antenna
Power	DC 1.5 V Battery 1EA

### 2.2 Model Description

Model no.	Memory size (MB)	Bluetooth function
XM-310	128	Yes
XM-320	256	Yes
XM-350	512	Yes
XM-390	1000	Yes
XM-210	128	No
XM-220	256	No
XM-250	512	No
XM-290	1000	No

### 2.3 Tested frequency

Frequency	TX	RX
Low frequency	2402MHz	2402MHz
Middle frequency	2441MHz	2441MHz
High frequency	2480MHz	2480MHz

## RRRBF0200

**2.4 Tested environment**

Temperature	: 15 ~ 35 (°C)
Relative humidity content	: 20 ~ 75 %
Air pressure	: 86 ~ 103 kPa
Details of power supply	: 1.5 VDC (powered by power supply)

**2.5 Ancillary Equipment**

Equipment	Model No.	Serial No.	Manufacturer
AC/DC Adaptor	UL305-0510	N/A	UNIFIVE
Notebook computer	PP02X	8K493A01	DELL

**2.6 EMI Suppression Device(s)/Modifications**

EMI suppression device(s) added and/or modifications made during testing

-> none

### 3. Test Report

#### 3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
<b>I. Transmit mode(Tx)</b>				
15.247(a)	Carrier Frequency Separation	> 25 kHz	Conducted	C
	Number of Hopping Frequencies	> 75 hops		C
	20 dB Bandwidth	< 1 MHz		C
	Dwell Time	0.4 seconds within a 30 second period per any frequency		C
15.247(b)	Transmitter Output Power	< 1 Watt	Conducted	C
15.247(c)	Band-edge (or Occupied BW for IC)	2400 < f < 2483.5 MHz		C
	Out of Band Emissions (Bandwidth at 20 dB blow)	The radiated emission to any 100 kHz of outband shall be at least 20dB below the highest inband spectral density.		C
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	< FCC 15.209 limits	Radiated	C
15.207	AC Conducted Emissions	EN 55022	Line Conducted	NA
<b>II. Receive mode(Rx)</b>				
15.207	AC Conducted Emissions	EN 55022	Line Conducted	C
15.209	Occupied Band Width Out-of-Band Emissions (Band Width at 20dB below)	< FCC 15.109 limits	Radiated	C
Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable				

The sample was tested according to the following specification:

FCC Parts 15.247; ANSI C-63.4-2001

## 3.2 Transmitter requirements

### 3.2.1 Carrier Frequency Separation

#### Procedure:

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 3 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 30 kHz (1% of the span or more)      Sweep = auto

VBW = 30 kHz      Detector function = peak

Trace = max hold

#### Measurement Data: **Complies**

Frequency of marker #1 (MHz)	Frequency of marker #2 (MHz)	Test Results	
		Carrier Frequency Separation (MHz)	Result
2441.053	2441.990	0.937	Complies

- See next pages for actual measured spectrum plots.

#### Minimum Standard:

The EUT shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

#### Measurement Setup


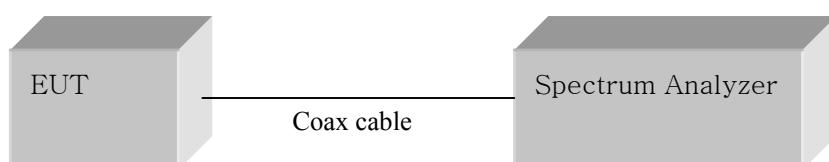


Figure 1: Measurement setup for the carrier frequency separation

TEST EQUIPMENT USED: 01.19.50

## Carrier Frequency Separation

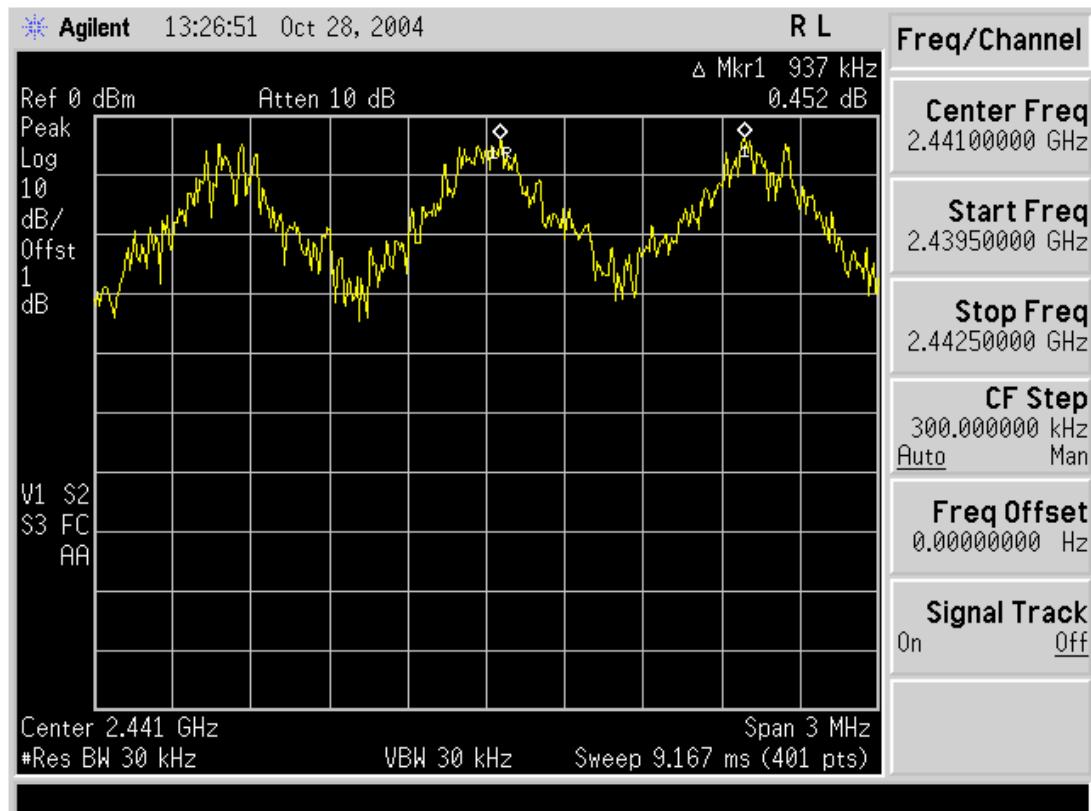

### 3.2.2 Number of Hopping Frequencies

#### Procedure:

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, four frequency ranges within the 2400 ~ 2483.5 MHz FH band were examined.

#### The spectrum analyzer is set to:

Frequency range 1: Start = 2389.5MHz, Stop = 2414.5 MHz

2: Start = 2414.5MHz, Stop = 2439.5 MHz

3: Start = 2439.5MHz, Stop = 2464.5 MHz

4: Start = 2464.5MHz, Stop = 2489.5 MHz

RBW = 300 kHz (1% of the span or more) Sweep = auto

VBW = 300 kHz (VBW  $\geq$  RBW) Detector function = peak

Trace = max hold Span = 25MHz

#### Measurement Data: **Complies**

<b>Total number of Hopping Channels</b>	79
---	----

- See next pages for actual measured spectrum plots.

#### Minimum Standard:



At least 75 hopes
-------------------

#### Measurement Setup



Same as the Chapter 3.2.1 (Figure 1)

TEST EQUIPMENT USED: 02\_19\_50

## Number of Hopping Frequencies

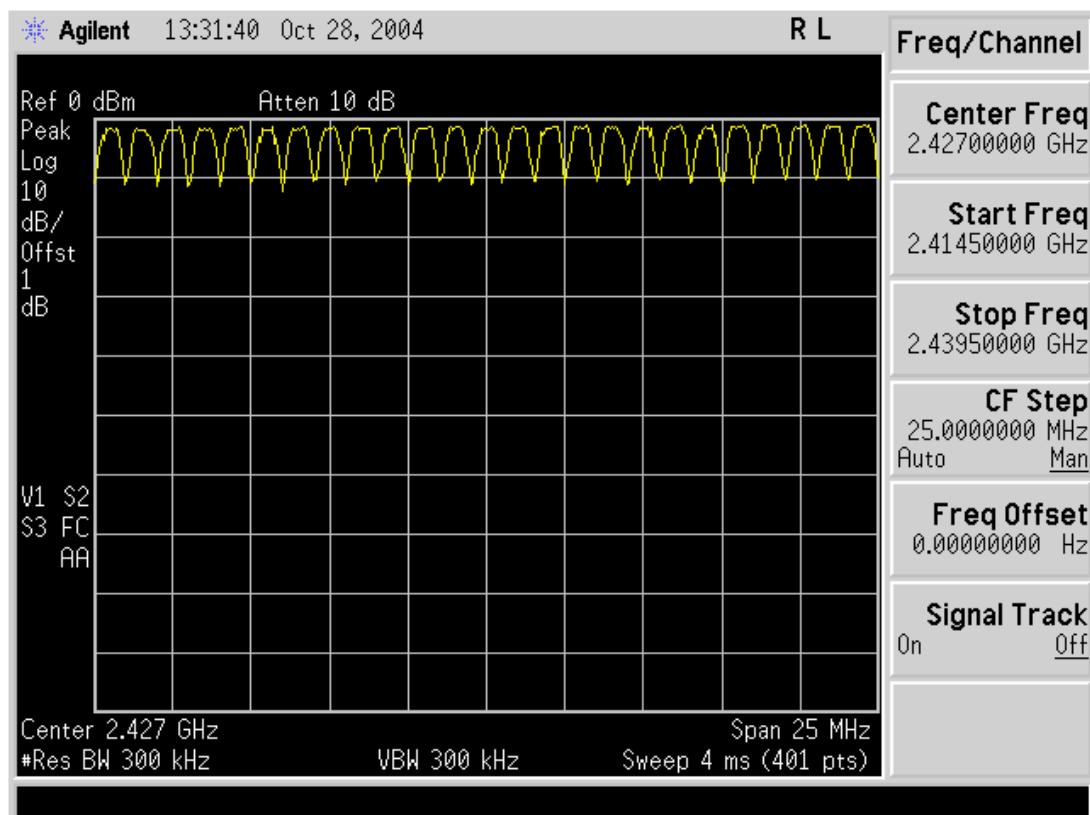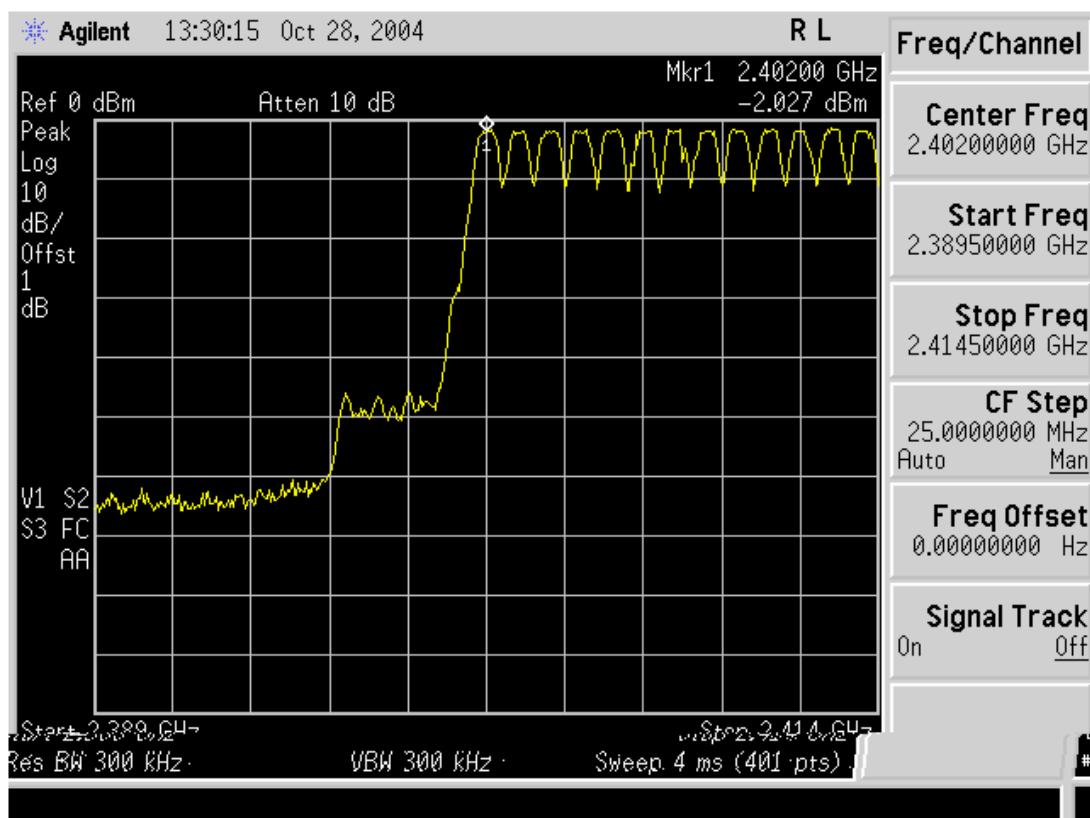

## Number of Hopping Frequencies

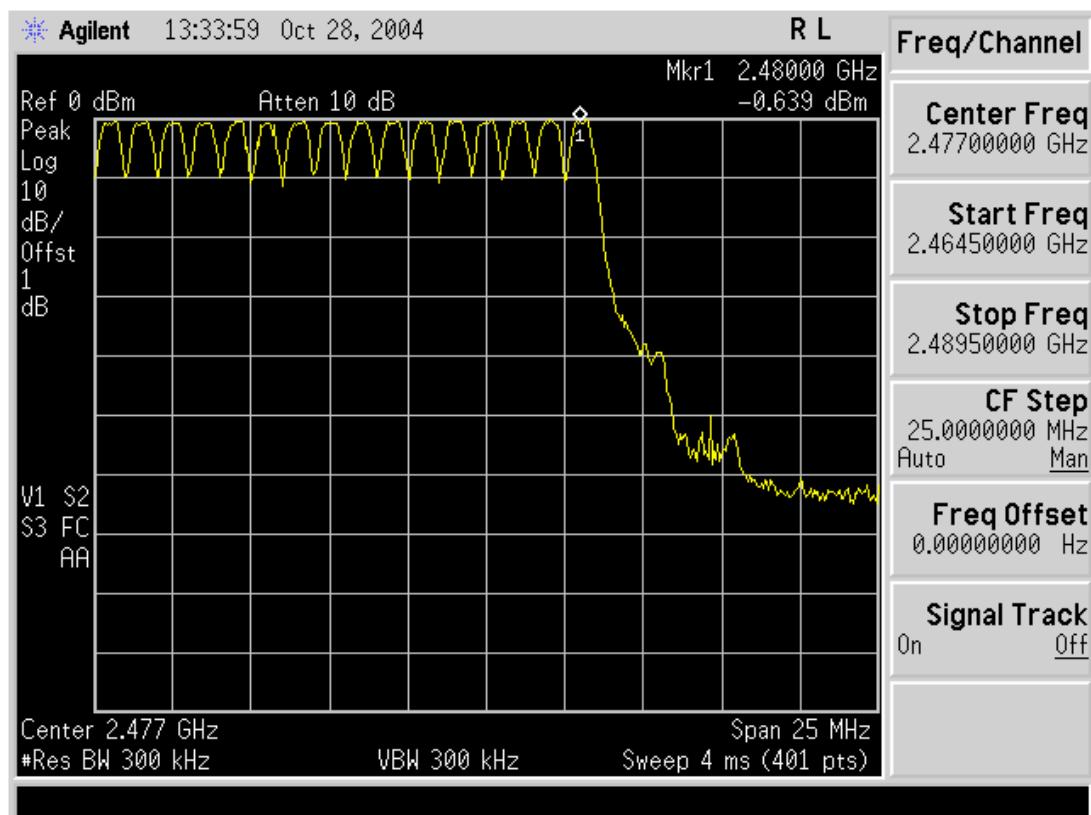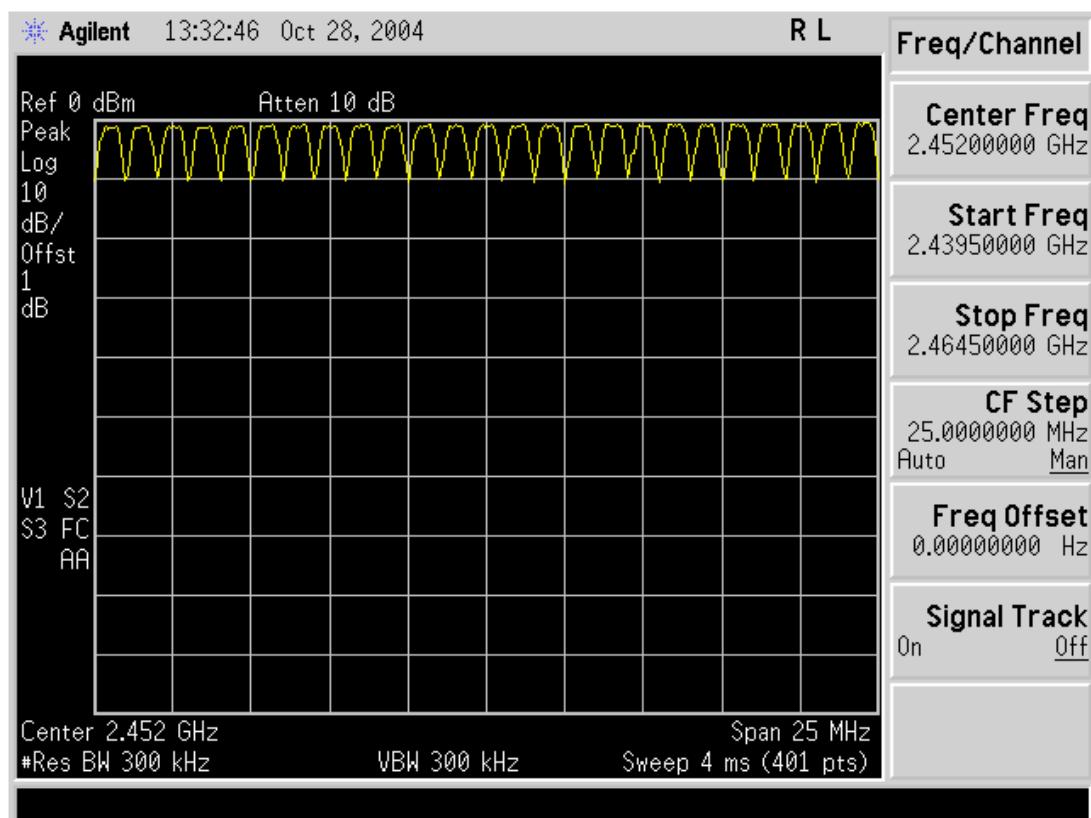

### 3.2.3 20 dB Bandwidth

#### Procedure:

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is ( as close as possible to ) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

#### The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 2 MHz (approximately 2 or 3 times of the 20 dB bandwidth)

RBW = 10 kHz (1% of the 20dB bandwidth or more) Sweep = auto

VBW = 30 kHz (VBW  $\geq$  RBW) Detector function = peak

Trace = max hold

#### Measurement Data: **Complies**

Frequency (MHz)	Channel No.	Test Results	
		Measured Bandwidth (MHz)	Result
2402	1	0.795	Complies
2441	40	0.790	Complies
2480	79	0.790	Complies

- See next pages for actual measured spectrum plots.

#### Minimum Standard:



The transmitter shall have a maximum 20dB bandwidth of 1 MHz.

#### Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

TEST EQUIPMENT USED: 01\_19\_50

## 20 dB Bandwidth

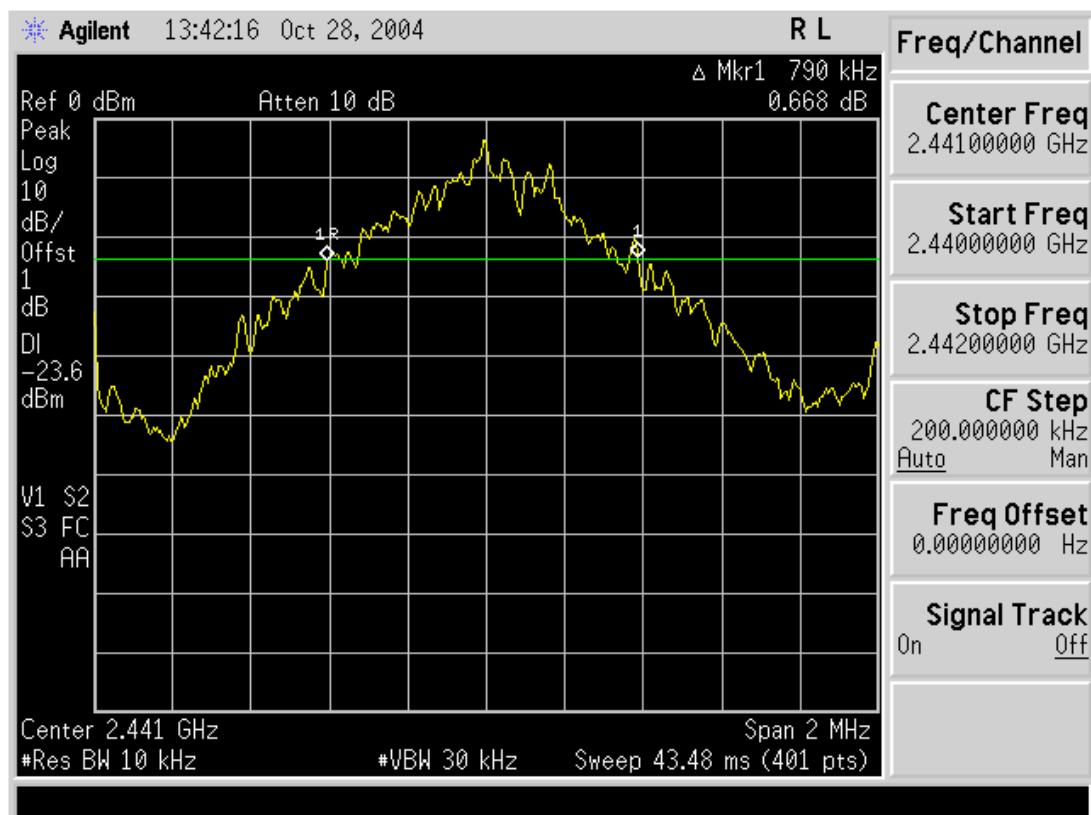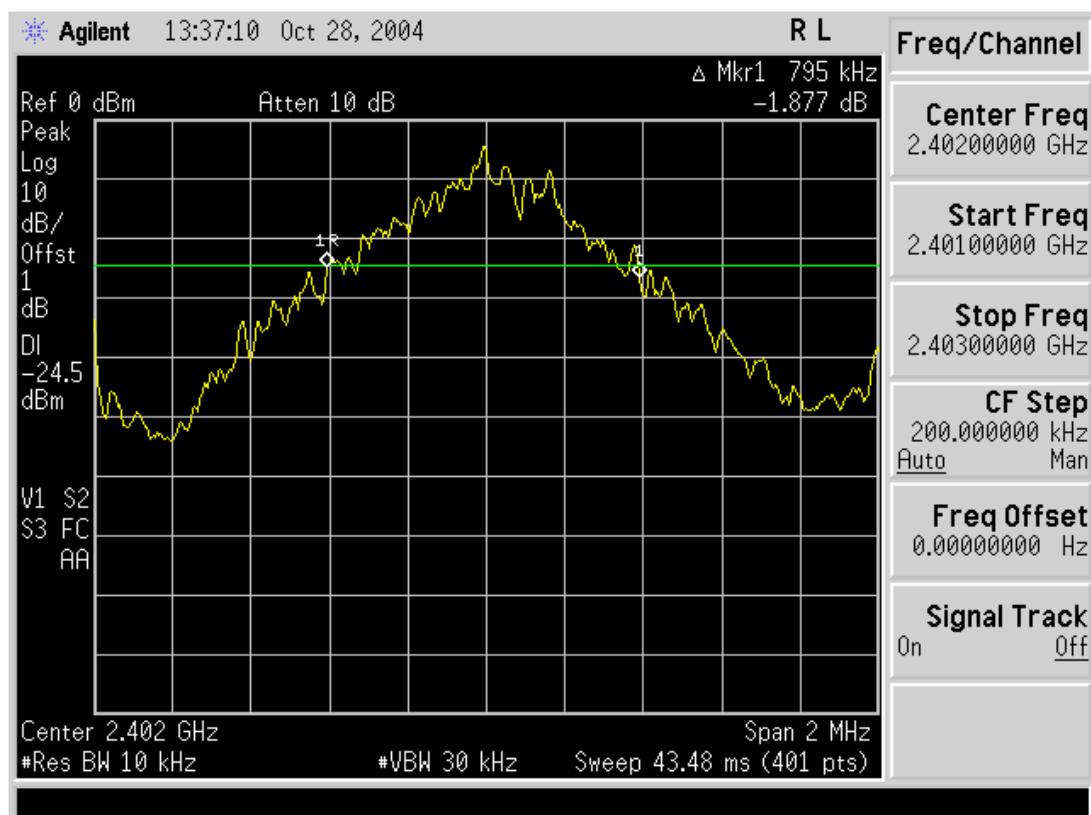

## 20 dB Bandwidth

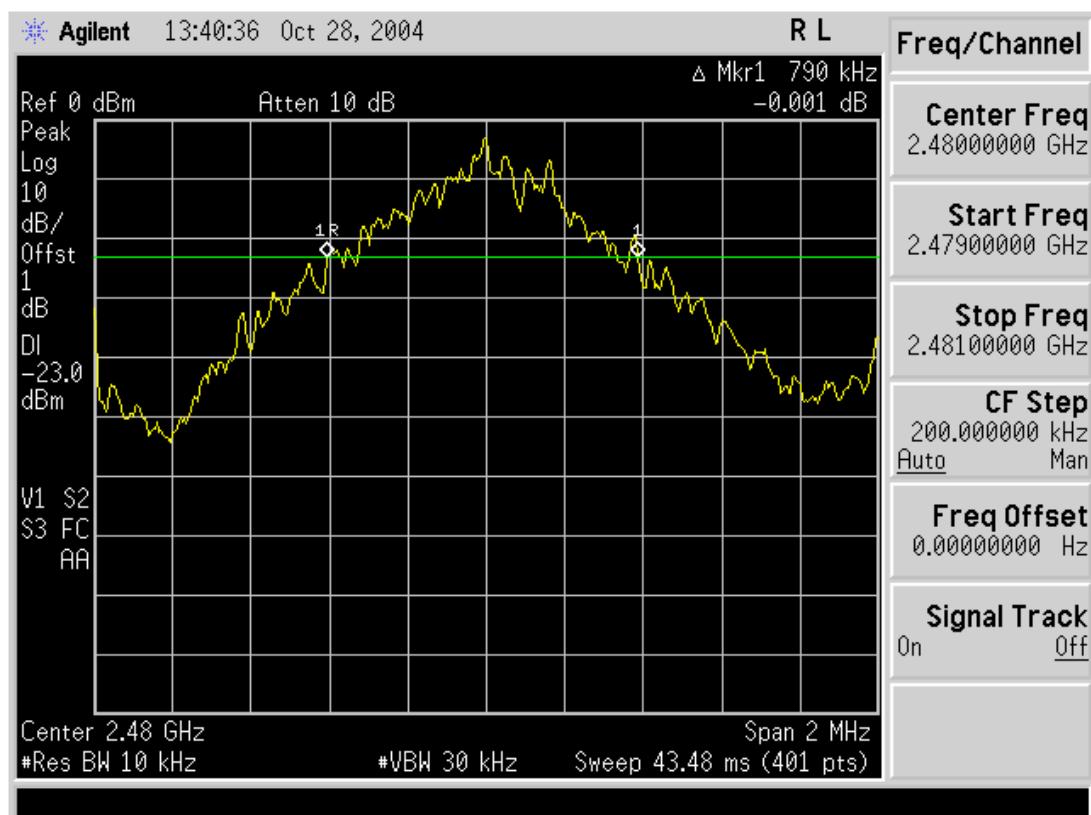

### 3.2.4 Time of Occupancy (Dwell Time)

#### Procedure:

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

Center frequency = 2441 MHz

Span = zero

RBW = 1 MHz

VBW = 1 MHz (VBW  $\geq$  RBW)

Trace = max hold

Detector function = peak

#### Measurement Data: **Complies**

Packet Type	Burst duration in one hop (us)	Test Results	
		Dwell Time (ms)	Result
DH 1	420	134.446	Complies
DH 3	1687	271.877	Complies
DH 5	2915	310.418	Complies

- See next pages for actual measured spectrum plots.

#### Minimum Standard:

0.4 seconds within a 30 second period per any frequency

#### Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


TEST EQUIPMENT USED: 01, 19, 50

### Time of Occupancy for PACKET Type DH 1

The system makes worst case 1600 hops per second or 1 time slot has a length of 625 us with 79 channels. A DH 1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case  $1600/2 = 800$  hops per second with 79 channels. So you have each channel  $800/79 = 10.13$  times per second and so for a period of  $0.4 \times 79 = 31.6$  seconds you have  $10.13 \times 31.6 = 320.11$  times of appearance.

Each Tx-time per appearance is 420 us

So we have  $320.11 \times 420 \text{ us} = 134.446 \text{ ms}$  per 31.6 seconds.

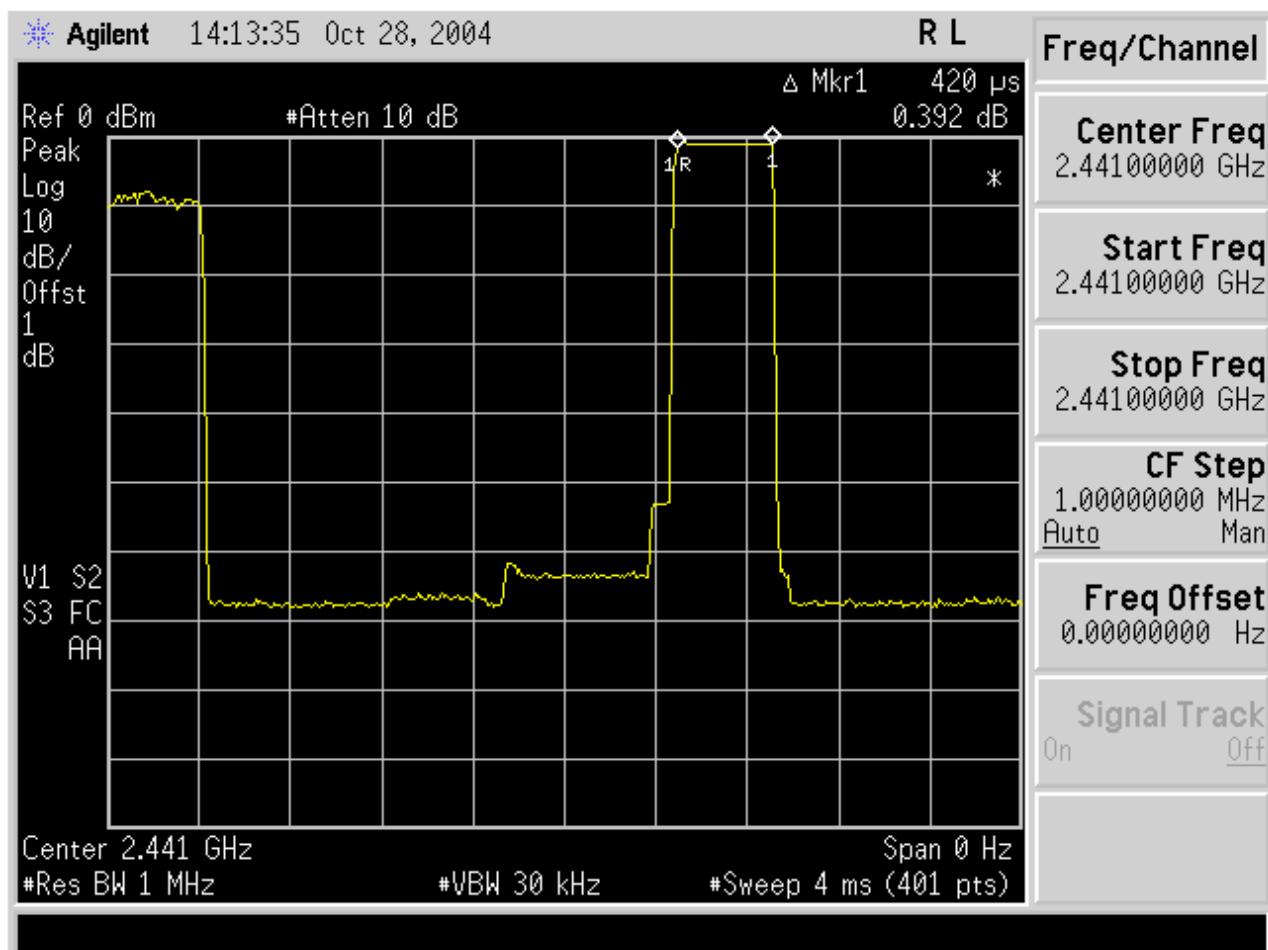


### Time of Occupancy for PACKET Type DH 3

The system makes worst case 1600 hops per second or 1 time slot has a length of 625 us with 79 channels. A DH 3 Packet need 3 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case  $1600/4 = 400$  hops per second with 79 channels. So you have each channel  $400/79 = 5.1$  times per second and so for a period of  $0.4 \times 79 = 31.6$  seconds you have  $5.1 \times 31.6 = 161.16$  times of appearance.

Each Tx-time per appearance is 1.687 ms

So we have  $161.16 \times 1.687 \text{ ms} = 271.877 \text{ ms}$  per 31.6 seconds.

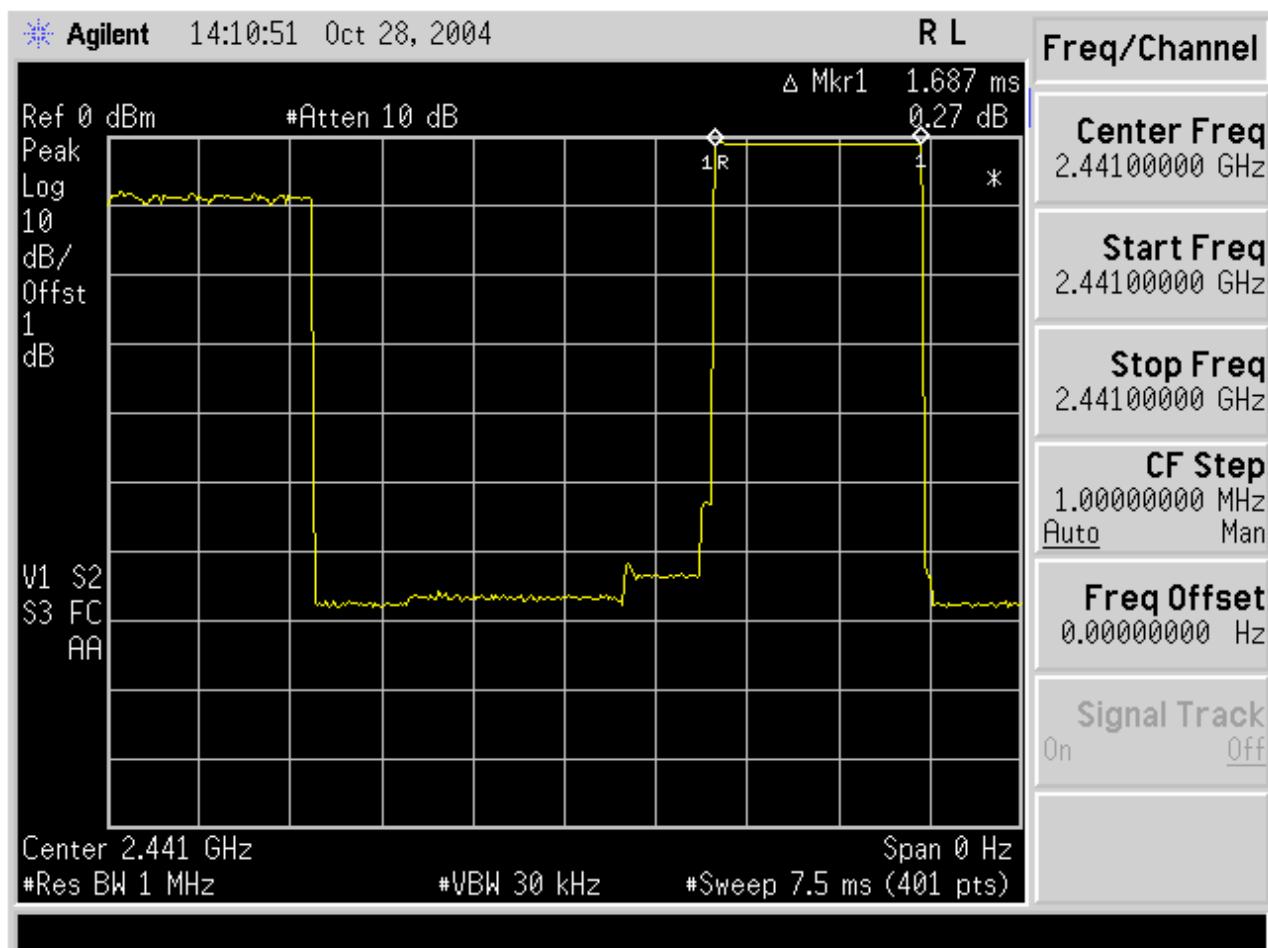


### Time of Occupancy for PACKET Type DH 5

The system makes worst case 1600 hops per second or 1 time slot has a length of 625 us with 79 channels. A DH 5 Packet need 5 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case  $1600/6 = 266.67$  hops per second with 79 channels. So you have each channel  $266.67/79 = 3.37$  times per second and so for a period of  $0.4 \times 79 = 31.6$  seconds you have  $3.37 \times 31.6 = 106.49$  times of appearance.

Each Tx-time per appearance is 2.915 ms

So we have  $106.49 \times 2.915 \text{ ms} = 310.418 \text{ ms}$  per 31.6 seconds.

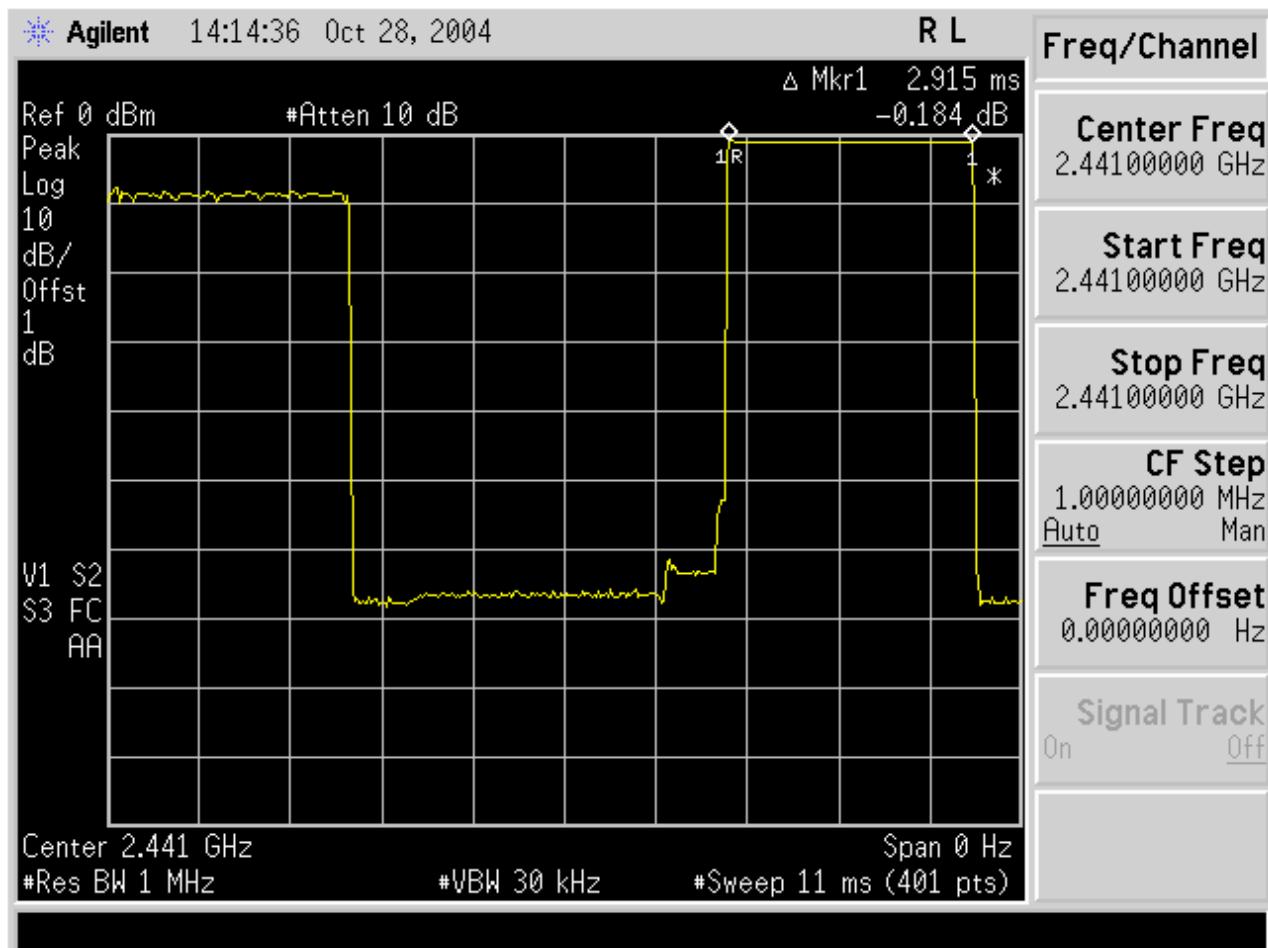

### 3.2.5 Peak Output Power

### Procedure:

The peak output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)

RBW = 1 MHz (greater than the 20dB bandwidth of the emission being measured)

VBW = 1 MHz (VBW  $\geq$  RBW)

Detector function = peak

Trace = max hold

Sweep = auto

### Measurement Data: Complies

Frequency (MHz)	Ch.	Test Results		
		dBm	mW	Result
2402	1	<b>-1.711</b>	<b>1.26</b>	Complies
2441	40	<b>-0.883</b>	<b>1.10</b>	Complies
2480	79	<b>-0.082</b>	<b>0.88</b>	Complies

- See next pages for actual measured spectrum plots.



<b>Minimum Standard:</b>	< 1W
--------------------------	------

## Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

TEST EQUIPMENT USED: 01, 19, 50

## Peak Output Power

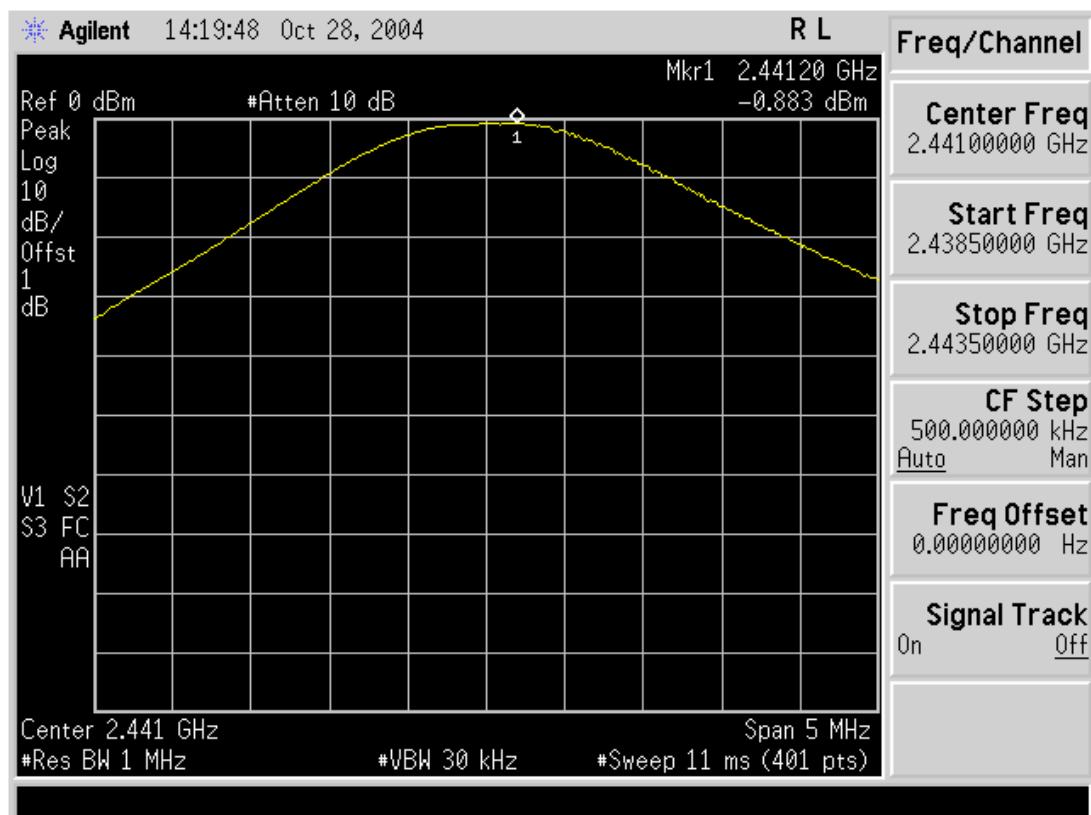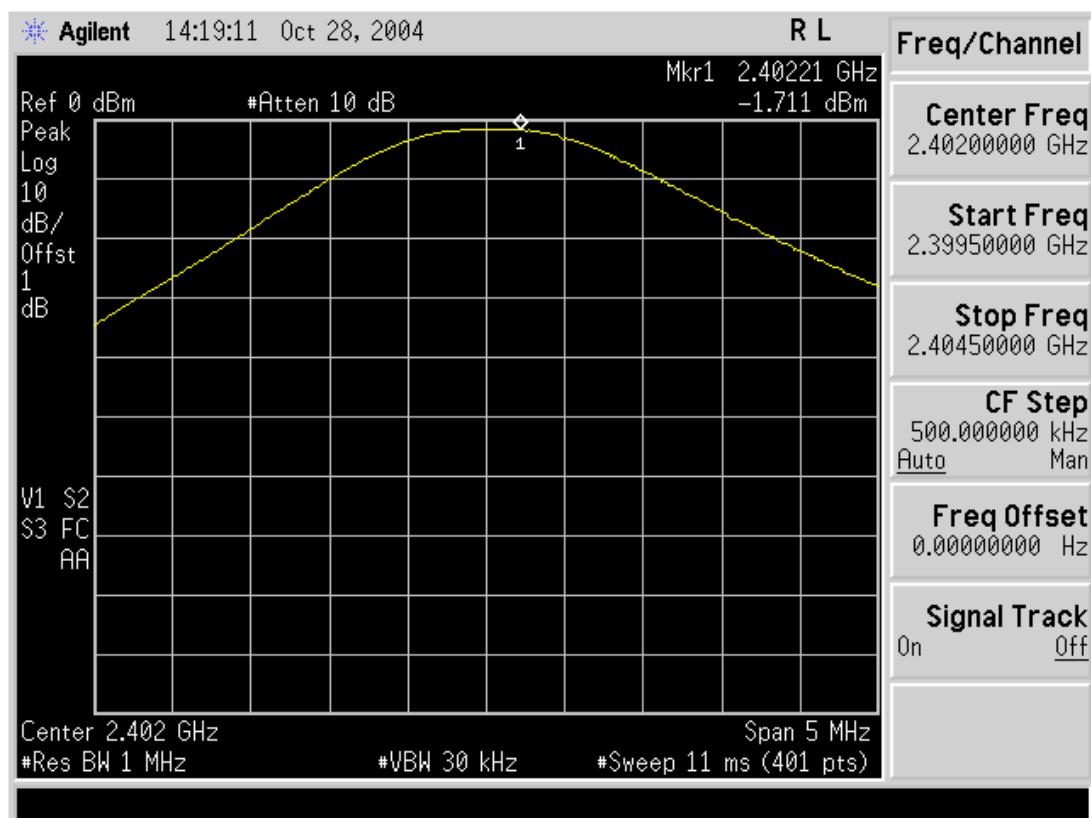

## Peak Output Power

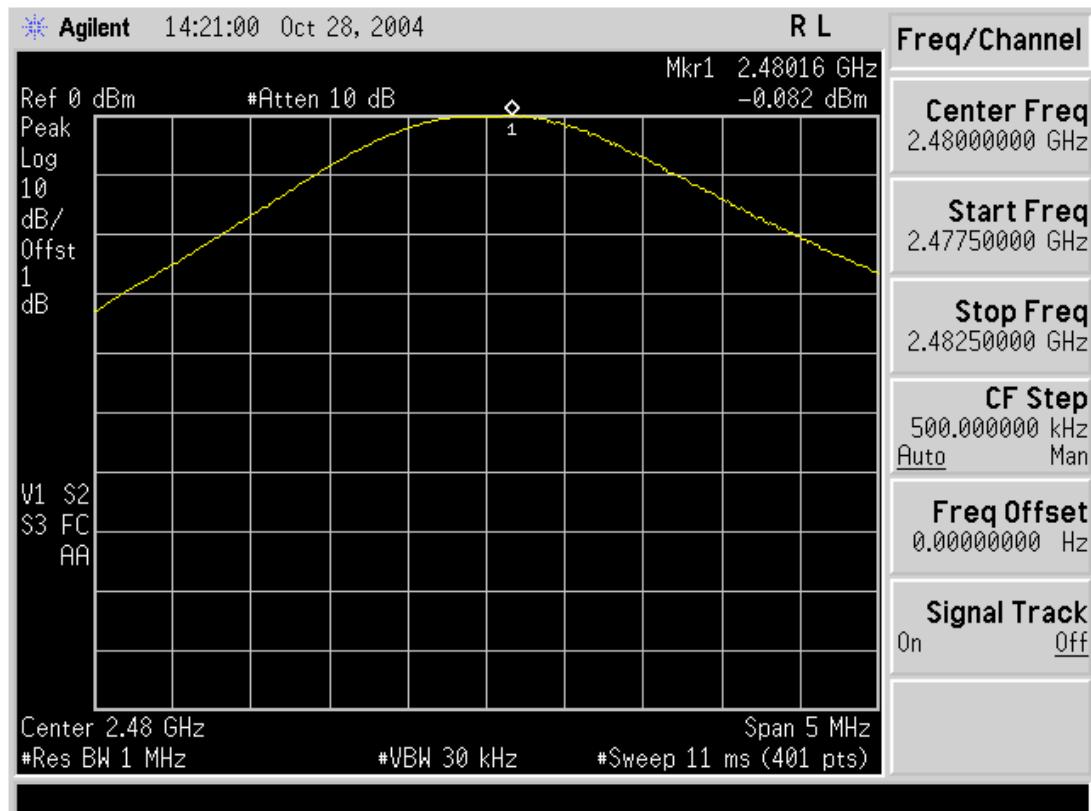

### 3.2.6 Band - edge (at 20 dB blow)

### Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz VBW = 100 kHz

VBW = 100 kHz

Span = 100 MHz

Detector function = peak

## Measurement Data: **Complies**

- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.



<b>Minimum Standard:</b>	> 20 dBc
--------------------------	----------

## Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

TEST EQUIPMENT USED: 01, 02, 19, 50



## Band - edge (at 20 dB blow)

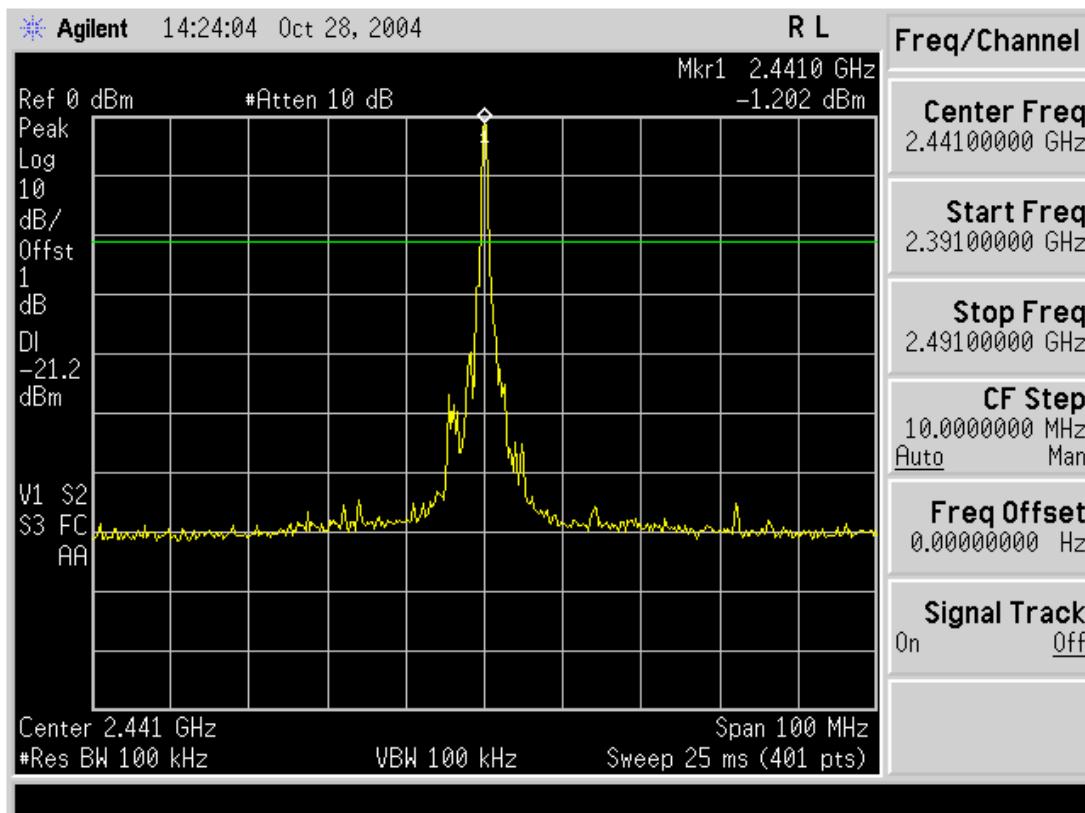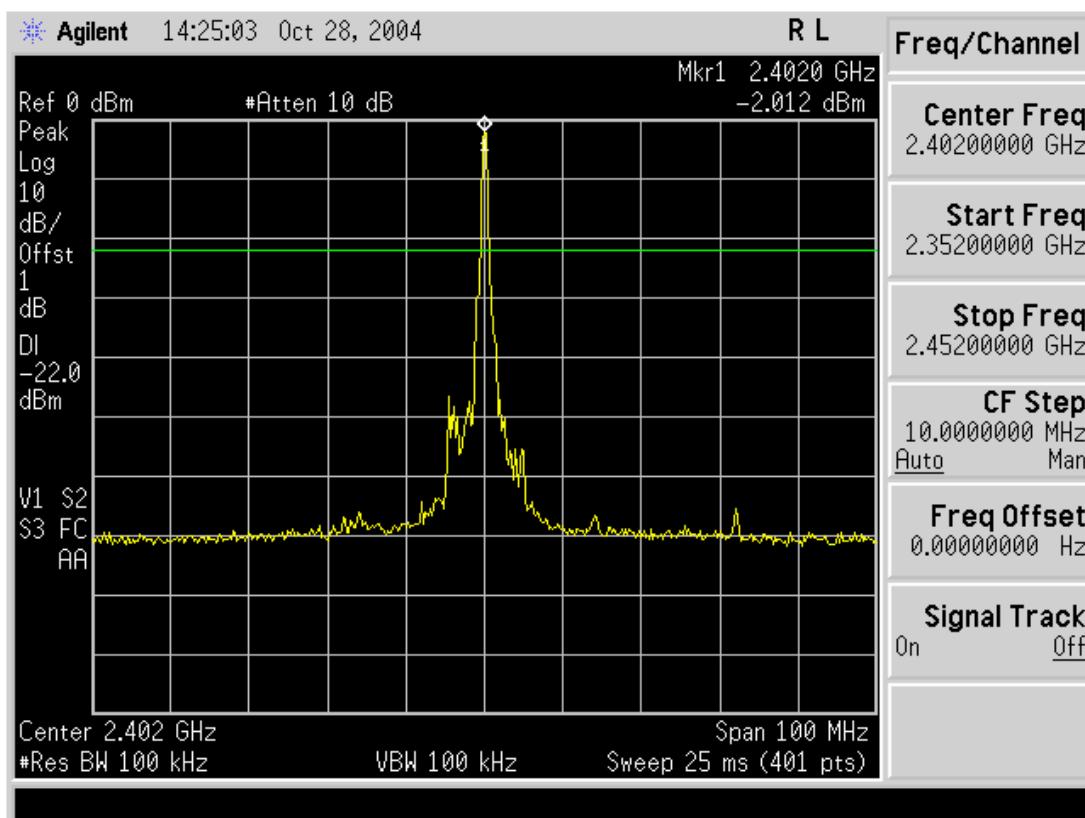



## Band - edge (at 20 dB blow)

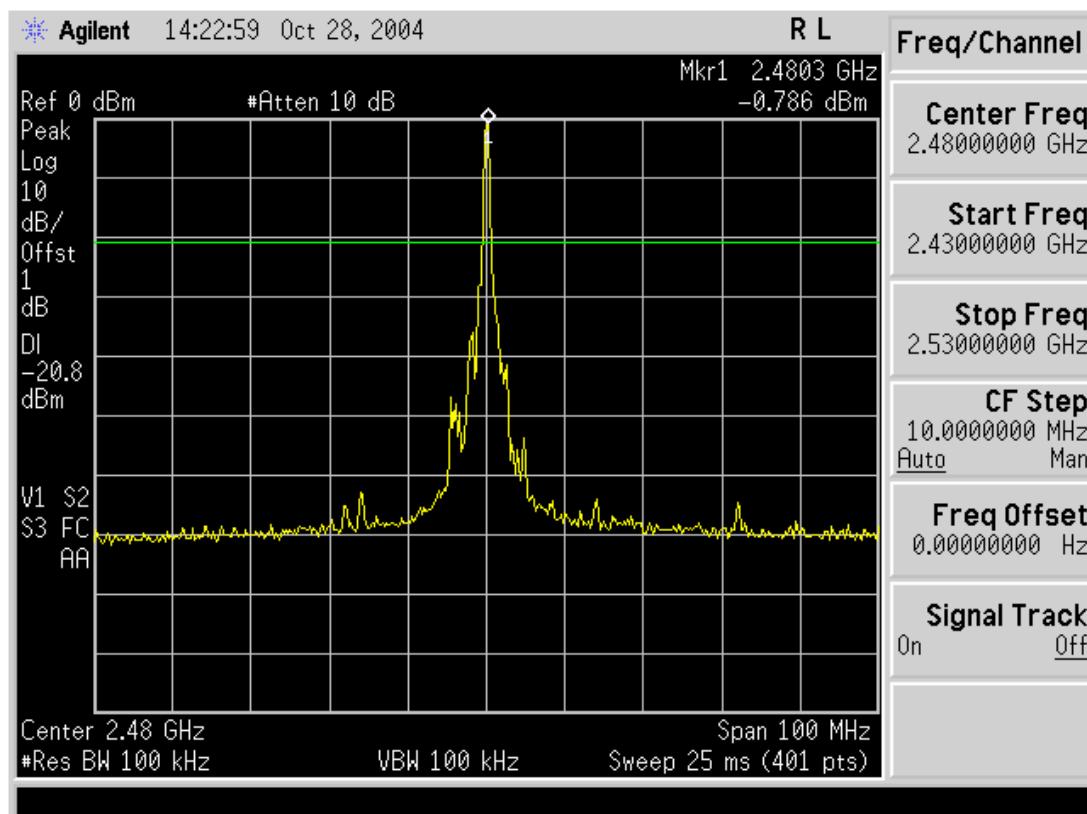



**Band - edge (at 20 dB blow)**  
**Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic.**

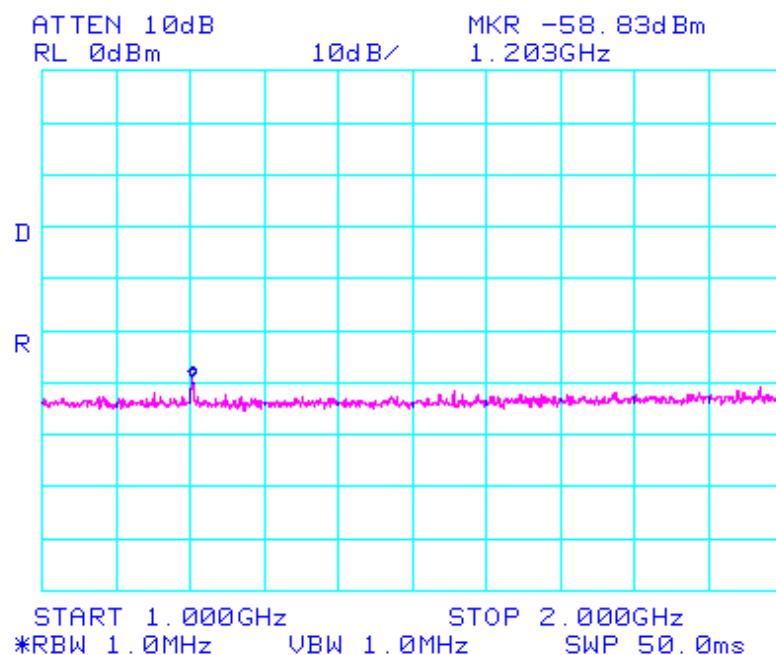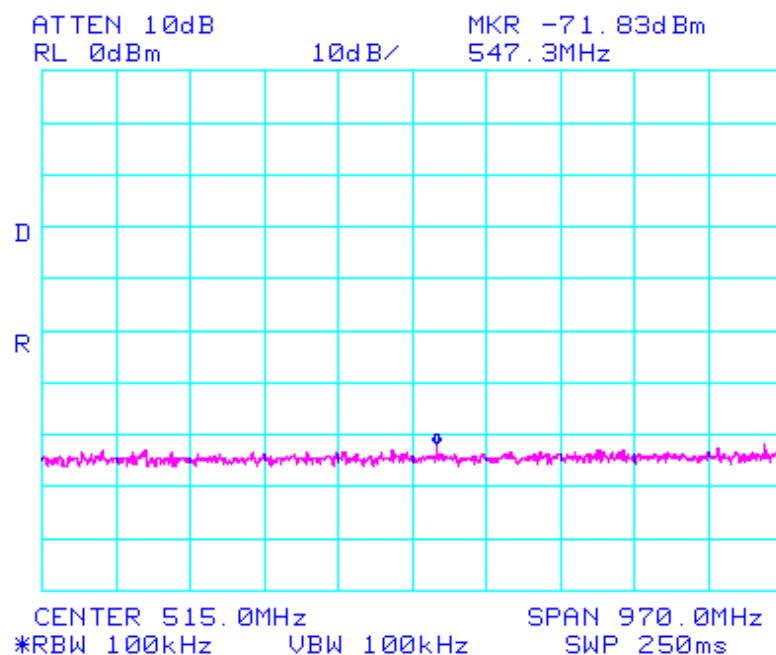



**Band - edge (at 20 dB blow)**  
**Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic.**

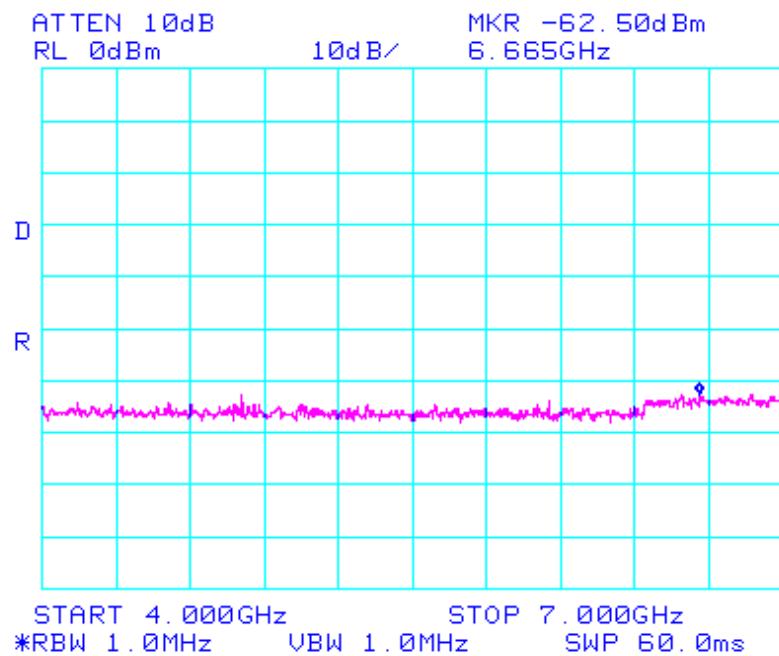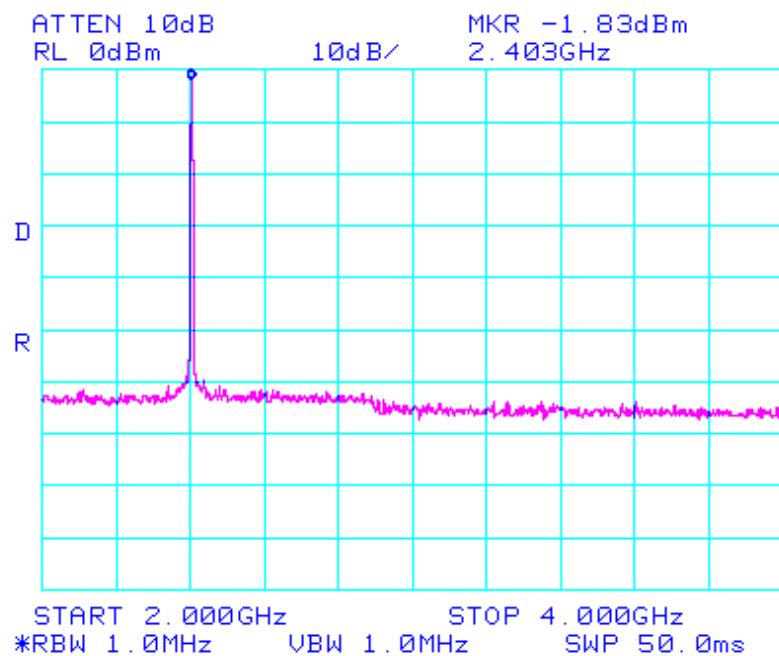

## Band - edge (at 20 dB blow)

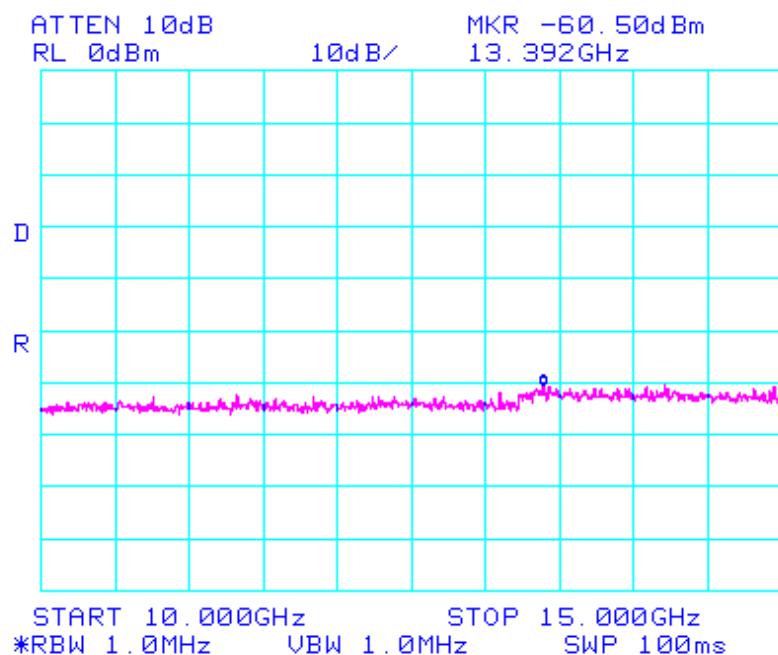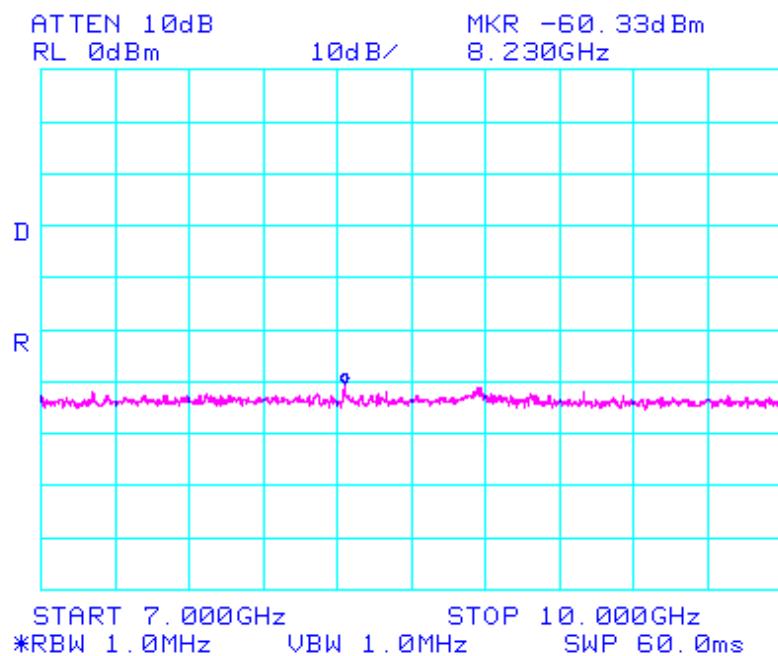Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic.

**Band - edge (at 20 dB blow)**  
**Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic.**

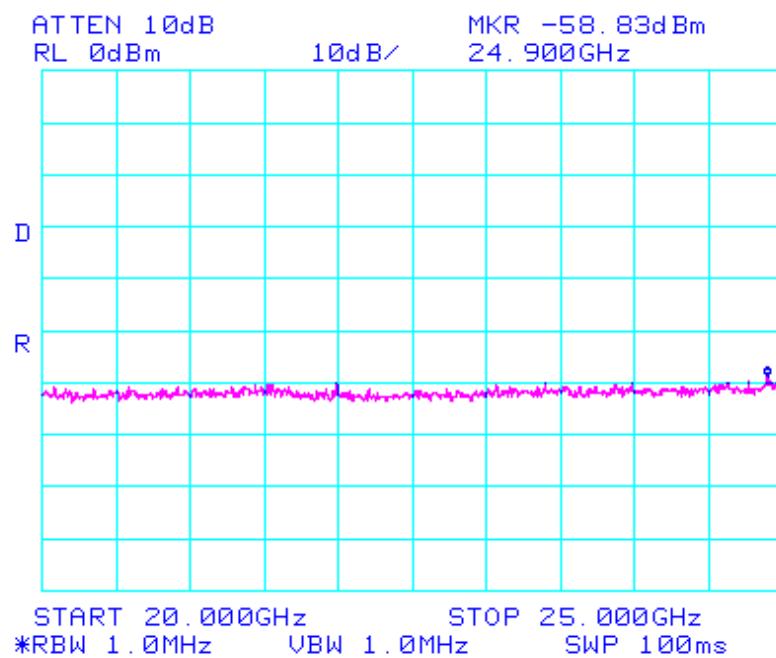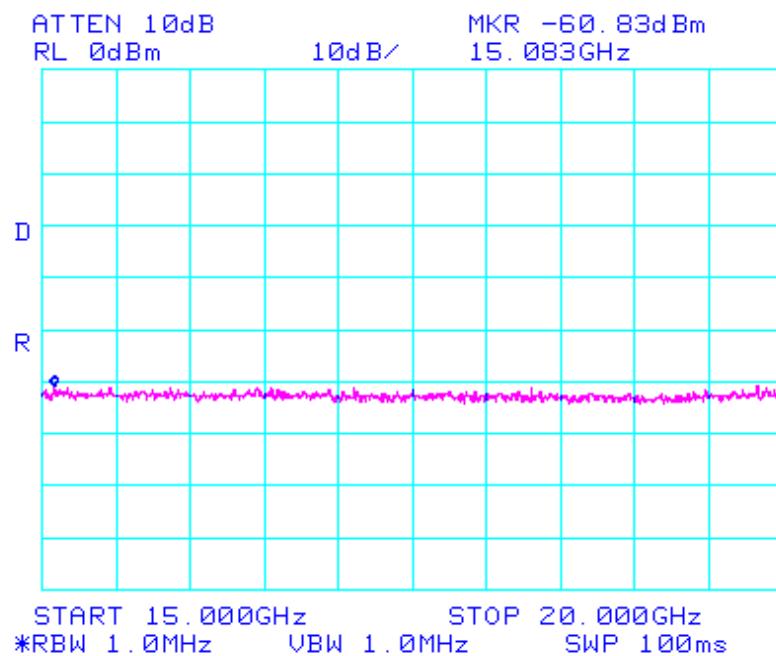

### 3.2.7 Out of band Emission - Radiated

### Procedure:

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic.

RBW = 120 kHz ( 30MHz ~ 1 GHz)

$$\text{VBW} \geq \text{RBW}$$

= 1 MHz (1 GHz  $\sim$  10<sup>th</sup> harmonic)

Span = 100 MHz

Detector function = peak

Trace = max hold

Sweep = auto

**Measurement Data: Complies**

- No emissions were detected at a level greater than 10dB below limit.
- Refer to the next page.

### **Minimum Standard: FCC Part 15.209(a)**

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

TEST EQUIPMENT USED: 02, 22, 30, 31, 33, 34, 39, 40, 41, 47, 49

## Out of Band Emissions

## Measurement Data



DIGITAL EMC Co., Ltd.  
683-2,Yubang-Dong, Yongin-Si,  
Kyunggi-Do,Korea. 463-080  
Tel:+82-31- 321 - 2664 Fax:+82-31- 321 - 1664  
demc@unitel.co.kr ,www.digitalemc.com

Tested by Mr.

Data#: 1572 File#: C:\Program Files\le3\DEMC-CSB.emi

Date: 10-30-2004 Time: 12:58:43

Site : DIGITAL EMC Co., Ltd.  
Condition : FCC CLASS-B 3m DEMC NEW 3(2003)  
EUT : XM-Series  
POWER :  
Memo : Air Link

Freq MHz	Remark	Read	Probe	Cable	Preamp	Factor	Factor	Level	Limit	Over
		Level	Factor	Loss	Factor				dBuV/m	dBuV/m
1 119.730	V	41.50	12.26	2.00	28.27	-14.01	27.49	43.50	-16.01	
2 192.480	h	40.00	16.13	2.00	27.93	-9.80	30.20	43.50	-13.30	
3 202.180	h	40.50	16.31	2.06	27.90	-9.53	30.97	43.50	-12.53	
4 211.880	h	42.01	16.54	2.30	27.90	-9.06	32.95	43.50	-10.55	
5 456.800	v	47.00	16.96	3.42	28.80	-8.42	38.58	46.00	-7.42	
6 468.930	v	48.00	17.19	3.50	28.86	-8.17	39.83	46.00	-6.17	

### 3.2.8 AC Conducted Emissions

#### Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

#### Measurement Data: Not Apply

#### Minimum Standard: FCC Part 15.207(a)/EN 55022

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency

#### Measurement Setup

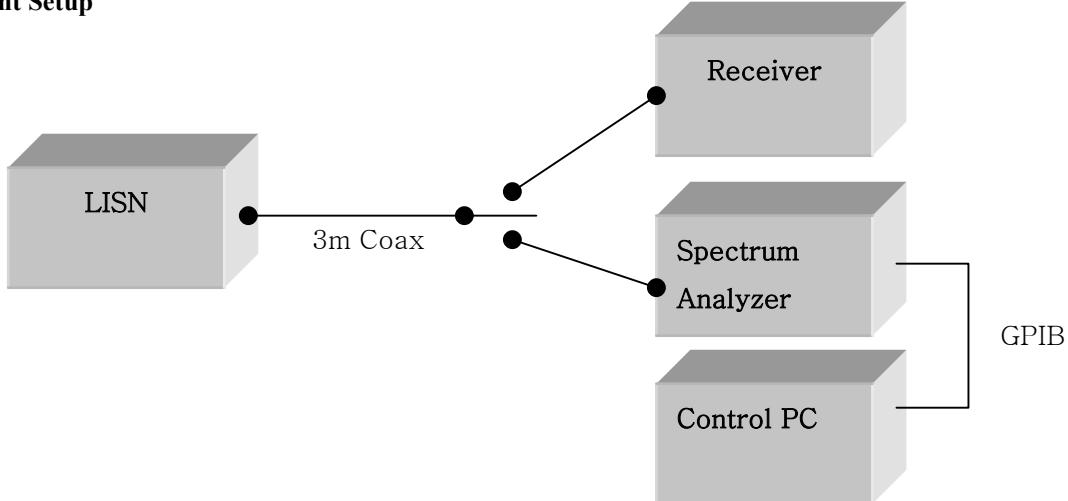


Figure 2: Measurement setup for AC Conducted Emission

TEST EQUIPMENT USED: 42, 43, 44, 45, 46, 48

### 3.3 Receiver requirements

#### 3.3.1 AC Conducted Emissions

##### Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its receiving function. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

##### Measurement Data: **Complies**

- See next pages for actual measured spectrum plots.
- No emissions were detected at a level greater than 10dB below limit.

##### Minimum Standard: FCC Part 15.107(a)/EN 55022

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50


\* Decreases with the logarithm of the frequency

##### Measurement Setup


Same as the Chapter 3.2.9 (Figure 2)

TEST EQUIPMENT USED: 42, 43, 44, 45, 46, 48

## AC Conducted Emissions (Line)

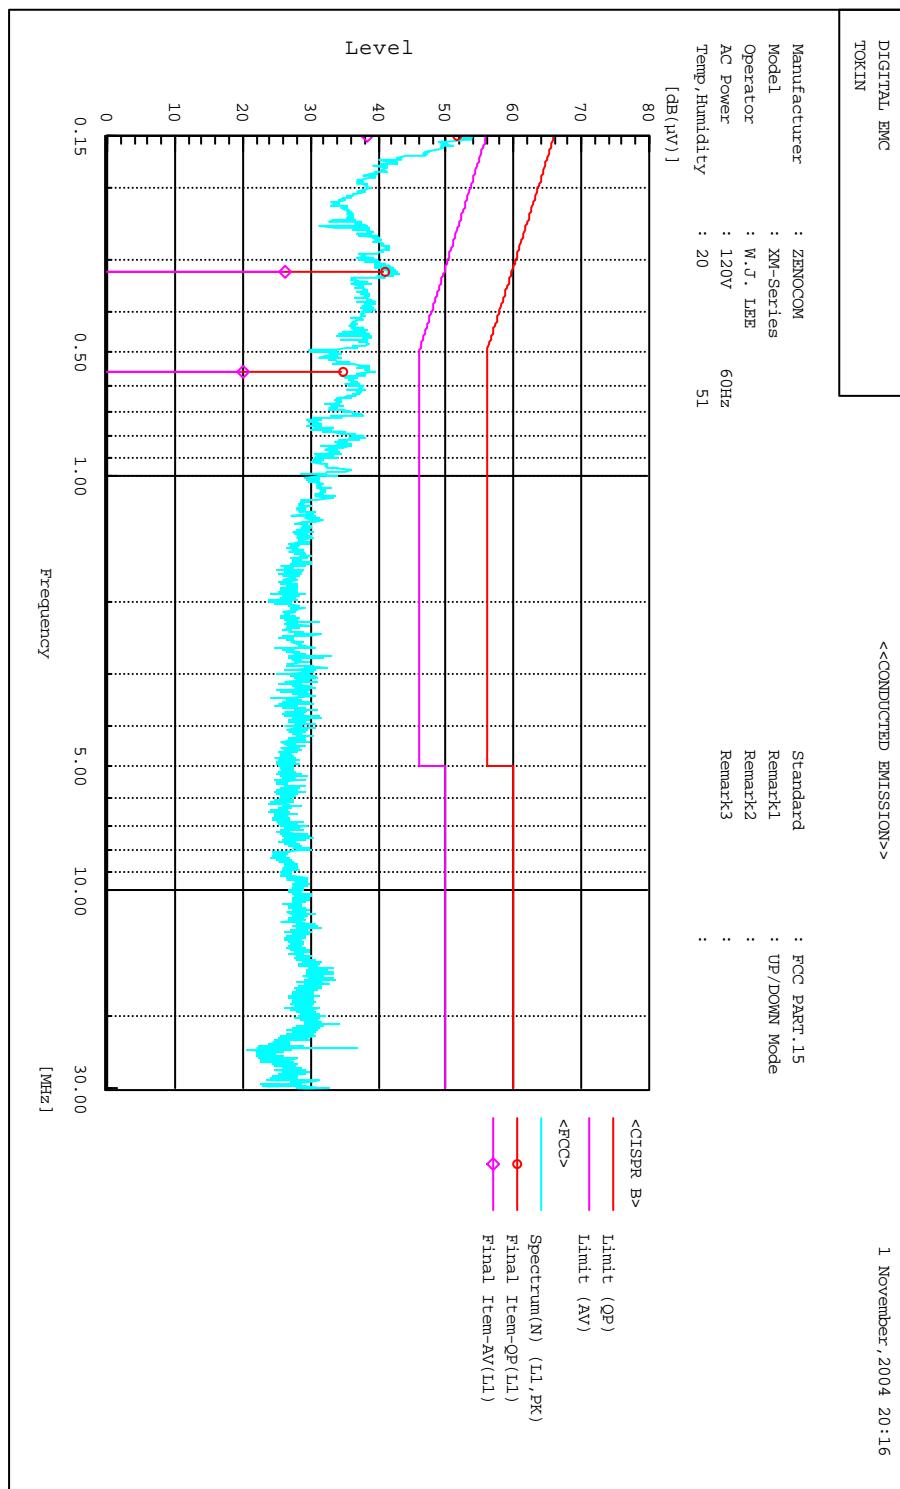

## AC Conducted Emissions (Neutral)

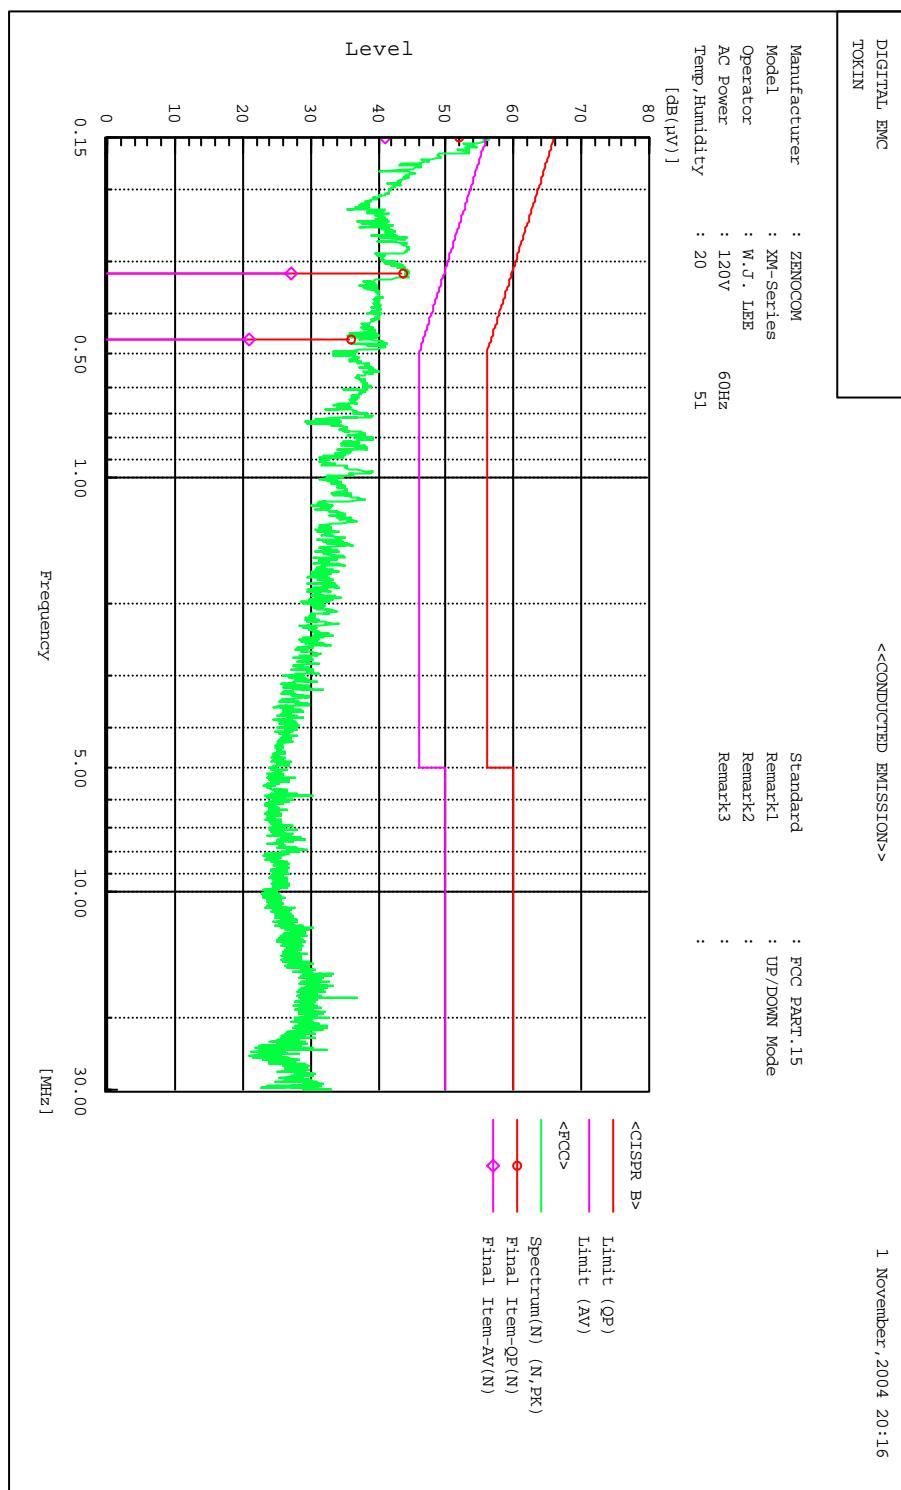

## AC Conducted Emissions (DATA)

\*\*\*\*\* DIGITAL EMC \*\*\*\*\*  
<<CONDUCTED EMISSION>>

1 November, 2004 20:16

Standard	:	FCC PART.15
Manufacturer	:	ZENOCOM
Model	:	XM-Series
Operator	:	W.J. LEE
AC Power	:	120V
Temp. Humidity	:	20 51
Remark1	:	UP/DOWN Mode
Remark2	:	
Remark3	:	

## Final Result

--- N Phase ---											
No.	Frequency	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin	
	[MHz]	[dB(µV)]	[dB(µV)]	[dB]	[dB(µV)]	[dB(µV)]	[dB(µV)]	[dB(µV)]	[dB]	[dB]	
1	0.150	50.2	39.2	1.8	52.0	41.0	65.0	56.0	14.0	15.0	
2	0.319	43.0	26.4	0.7	43.7	27.1	59.7	49.7	16.0	22.0	
3	0.464	35.7	20.8	0.3	36.0	21.1	56.6	46.6	20.6	25.0	
--- L1 Phase ---											
No.	Frequency	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin	
	[MHz]	[dB(µV)]	[dB(µV)]	[dB]	[dB(µV)]	[dB(µV)]	[dB(µV)]	[dB(µV)]	[dB]	[dB]	
1	0.150	49.8	36.6	1.8	51.6	38.4	65.0	56.0	14.4	17.0	
2	0.319	40.4	25.7	0.7	41.1	26.4	59.7	49.7	18.6	23.0	
3	0.557	34.4	19.8	0.3	34.7	20.1	56.0	46.0	21.3	25.0	

### 3.3.2 Out of Band Emissions

### **Procedure:**

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in a OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

The spectrum analyzer is set to:

Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic.

$$\text{RBW} = 120 \text{ kHz} \quad (30\text{MHz} \sim 1 \text{GHz}) \quad \text{VBW} \geq \text{RBW}$$

= 1 MHz (1 GHz  $\sim$  10<sup>th</sup> harmonic )

Detector function = peak

Trace = max hold

Sweep = auto

**Measurement Data: Complies**

- No emissions were detected at a level greater than 10dB below limit.
- Refer to the Tx Radiated emission.

### **Minimum Standard: FCC Part 15.109(a)**

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

TEST EQUIPMENT USED: 02, 22, 30, 31, 33, 34, 39, 40, 41, 47, 49

## Out of Band Emissions

## Measurement Data



DIGITAL EMC Co., Ltd.  
683-2,Yubang-Dong, Yongin-Si,  
Kyunggi-Do,Korea. 463-080  
Tel:+82-31- 321 - 2664 Fax:+82-31- 321 - 1664  
demc@unitel.co.kr ,www.digitalemc.com

Tested by Mr. 

Data#: 1573 File#: C:\Program Files\le3\DEMC-CSB.emi

Date: 10-30-2004 Time: 15:24:08

Site : DIGITAL EMC Co., Ltd.  
Condition : FCC CLASS-B 3m DEMC NEW 3(2003)  
EUT : XM-Series  
POWER :  
Memo : Up / Down mode

Freq MHz	Remark	Read	Probe	Cable	Preamp	Factor	Loss	Factor	Factor	Limit	Over
		Level	dB	dB	dB					dB	dB
1	37.270 V	39.50	15.70	1.75	28.32	-10.87	28.63	40.00	40.00	-11.37	
2	44.550 V	39.99	12.80	1.52	28.33	-14.01	25.98	40.00	40.00	-14.02	
3	122.150 H	43.01	12.57	2.00	28.26	-13.69	29.32	43.50	43.50	-14.18	
4	182.770 H	36.00	15.96	2.00	27.96	-10.00	26.00	43.50	43.50	-17.50	
5	267.650 H	37.01	18.14	2.80	27.90	-6.96	30.05	46.00	46.00	-15.95	
6	337.970 V	40.51	14.51	3.00	28.15	-10.64	29.87	46.00	46.00	-16.13	
7	384.050 H	49.51	15.51	3.50	28.42	-9.41	40.10	46.00	46.00	-5.90	
8	517.420 H	40.00	17.94	3.94	29.06	-7.18	32.82	46.00	46.00	-13.18	

## **APPENDIX**

### **TEST EQUIPMENT USED FOR TESTS**

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment.

	Type	Manufacturer	Model	Cal.Due.Date (dd/mm/yy)	S/N
01	Spectrum Analyzer	Agilent	E4404B	22/11/04	US41061134
02	Spectrum Analyzer	H.P	8563E	25/09/05	3551A04634
03	Power Meter	H.P	EPM-442A	15/07/05	GB37170413
04	Power Sensor	H.P	8481A	15/07/05	3318A96332
05	Frequency Counter	H.P	5342A	07/10/05	2119A04450
06	Multifunction Synthesizer	H.P	8904A	07/10/05	3633A08404
07	Signal Generator	H.P	8673D	26/09/05	2844A00753
08	Signal Generator	H.P	E4421A	15/07/05	US37230529
09	Signal Generator	H.P	8657A	26/05/05	3430U02049
10	Audio Analyzer	H.P	8903B	21/07/05	3011A0944B
11	Modulation Analyzer	H.P	8901B	15/07/05	3028A03029
12	Sensor Module	H.P	11722A	15/07/05	3111A04665
13	Oscilloscope	LeCroy	9314A	10/10/05	93144390
14	CDMA Mobile Station Test Set	H.P	8924C	07/10/05	US35360688
15	Power Splitter	WEINSCHEL	1593	07/10/05	332
16	BAND Reject Filter	Microwave circuits INC.	NO308372	07/10/05	3125-01DC0312
17	BAND Reject Filter	Wainwright	WRCG1750	07/10/05	SN2
18	AC Power supply	DAEKWANG	5KVA	03/04/05	N/A
19	DC Power Supply	H.P	6622A	24/03/05	465487
20	Attenuator (30dB)	H.P	8498A	07/10/05	50101
21	Attenuator (10dB)	WEINSCHEL	23-10-34	07/10/05	BP4387
22	HORN ANT	EMCO	3115	04/04/05	6419
23	HORN ANT	EMCO	3115	10/01/05	21097
24	HORN ANT	A.H.Systems	SAS-574	27/11/04	154
25	HORN ANT	A.H.Systems	SAS-574	14/11/04	155
26	Dipole Antenna	Schwarzbeck	VHA9103	29/10/05	2116

	Type	Manufacturer	Model	Cal.Due.Date (dd/mm/yy)	S/N
27	Dipole Antenna	Schwarzbeck	VHA9103	29/10/05	2117
28	Dipole Antenna	Schwarzbeck	UHA9105	29/10/05	2261
29	Dipole Antenna	Schwarzbeck	UHA9105	29/10/05	2262
30	RFI/FIELD Iintensity Meter	Kyorits	KNM-504D	25/07/05	SN-161-4
31	Frequency Converter	Kyorits	KCV-604C	25/07/05	4-230-3
32	TEMP & HUMIDITY Chamber	JISCO	J-RHC2	14/09/05	021031
33	Log Periodic Antenna	Schwarzbeck	UHALP9108A1	29/10/05	1098
34	Biconical Antenna	Schwarzbeck	VHA9103	29/10/05	VHA91031946
35	Digital Multimeter	H.P	34401A	07/04/05	3146A13475
36	Attenuator (10dB)	WEINSCHEL	23-10-34	07/10/05	BP4386
37	High-Pass Filter	ANRITSU	MP526	12/05/05	M27756
38	Attenuator (3dB)	Agilent	8491B	15/09/05	58177
39	Amplifier (25dB)	Agilent	8447D	08/10/05	2944A10144
40	Position Controller	TOKIN	5901T	N/A	14173
41	Driver	TOKIN	5902T2	N/A	14174
42	Spectrum Analyzer	H.P	8591E	23/05/05	3649A05889
43	RFI/FIELD Intensity Meter	Kyorits	KNW-2402	07/07/05	4N-170-3
44	LISN	Kyorits	KNW-407	16/08/05	8-317-8
45	LISN	Kyorits	KNW-242	16/08/05	8-654-15
46	CVCF	NF Electronic	4400	N/A	344536 4420064
47	Software	ToYo EMI	EP5/RE	N/A	Ver 2.0.800
48	Software	ToYo EMI	EP5/CE	N/A	Ver 2.0.801
49	Software	AUDIX	e3	N/A	Ver 3.0
50	Software	Agilent	Benchlink	N/A	A.01.09 021211