

PC Live mode

Tested By:Hong, Report No.:03102001


Scan Settings (1 Range)

Frequencies				Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV

Meas Time: 1 s
 Subranges: 16
 Acc Margin: 20dB

Transducer No.	Start	Stop	Name
22	9k	30M	EW0699

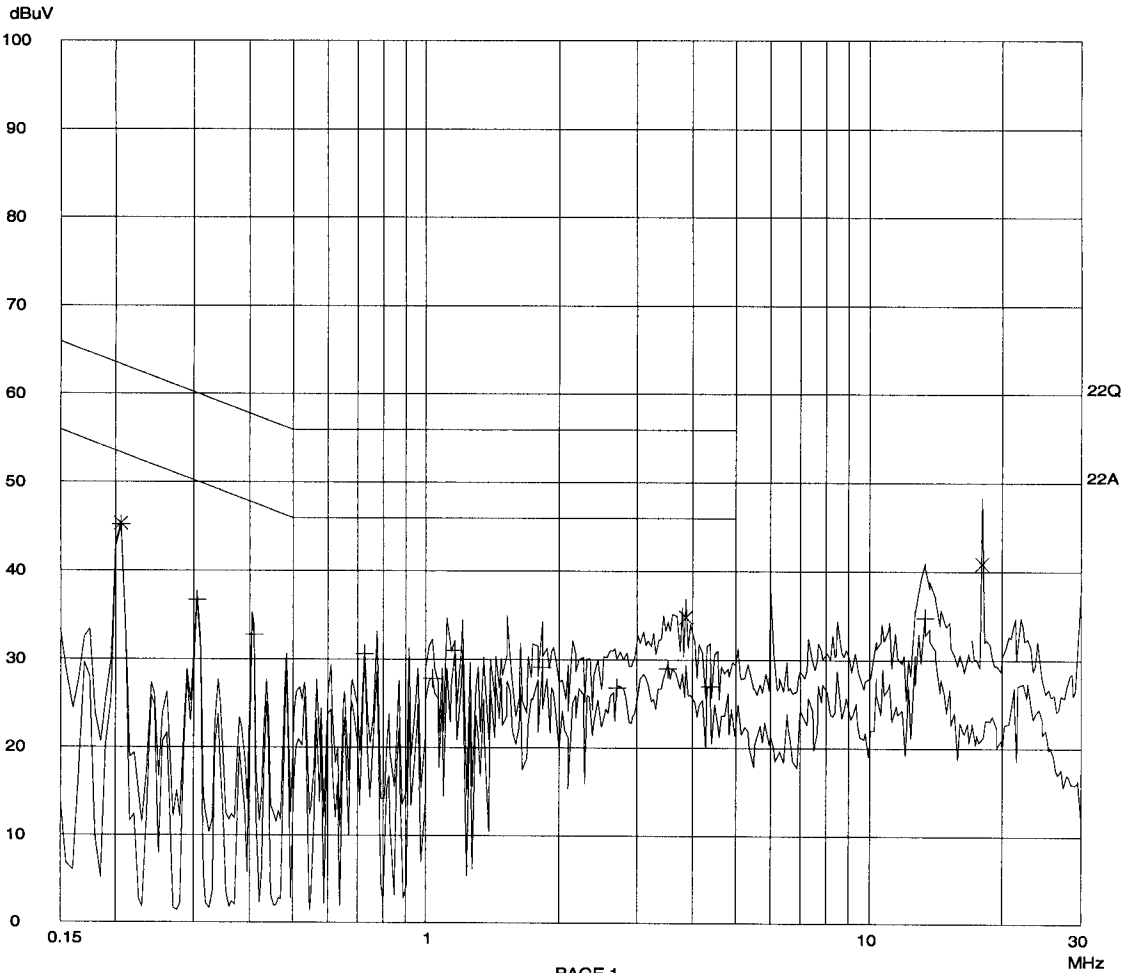

PC Live mode

Tested By: Hong, Report No.: 03102001

Scan Settings (1 Range)

|----- Frequencies -----|----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.20500	45.3	63.4
3.87000	34.7	56.0
18.00500	40.8	60.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

0.20500	45.1	53.4
0.30500	36.7	50.1
0.41000	32.7	47.7
0.72500	30.6	46.0
1.03000	27.8	46.0
1.16000	30.9	46.0
1.83000	29.1	46.0
2.70000	26.8	46.0
3.52500	28.9	46.0
4.39000	26.9	46.0
13.35000	34.7	50.0

* limit