

APPLICATION CERTIFICATION FCC Part 15C
On Behalf of
Interactive Toy Concepts Limited

R/C Vehicle
Model No.: 22029

FCC ID: RSD-22029TX

Prepared for : Interactive Toy Concepts Limited
Address : Unit 709, 7/F., Tower 2, Cheung Sha Wan Plaza No.
833 Cheung Sha Wan Rd. Kowloon, Hong Kong
Prepared by : ACCURATE TECHNOLOGY CO., LTD
Address : F1, Bldg. A, Chan Yuan New Material Port, Keyuan
Rd. Science & Industry Park, Nan Shan, Shenzhen,
Guangdong P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20141460
Date of Test : July 28-Aug 06, 2014
Date of Report : Aug 07, 2014

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION.....	4
1.1. Description of Device (EUT).....	4
1.2. Special Accessory and Auxiliary Equipment.....	4
1.3. Description of Test Facility	5
1.4. Measurement Uncertainty	5
2. MEASURING DEVICE AND TEST EQUIPMENT	6
3. OPERATION OF EUT DURING TESTING.....	7
3.1. Operating Mode	7
3.2. Configuration and peripherals	7
4. TEST PROCEDURES AND RESULTS	8
5. 20DB BANDWIDTH MEASUREMENT	9
5.1. Block Diagram of Test Setup.....	9
5.2. The Requirement For Section 15.215(c).....	9
5.3. Operating Condition of EUT	9
5.4. Test Procedure	9
5.5. Test Result	10
6. BAND EDGE COMPLIANCE TEST	12
6.1. Block Diagram of Test Setup.....	12
6.2. The Requirement For Section 15.249.....	12
6.3. EUT Configuration on Measurement	12
6.4. Operating Condition of EUT	13
6.5. Test Procedure	13
6.6. Test Result	13
7. RADIATED SPURIOUS EMISSION TEST	19
7.1. Block Diagram of Test Setup.....	19
7.2. The Limit For Section 15.249.....	20
7.3. Restricted bands of operation	20
7.4. Configuration of EUT on Measurement	21
7.5. Operating Condition of EUT	21
7.6. Test Procedure	21
7.7. The Field Strength of Radiation Emission Measurement Results	22
8. ANTENNA REQUIREMENT.....	35
8.1. The Requirement	35
8.2. Antenna Construction	35

Test Report Certification

Applicant& : Interactive Toy Concepts Limited
address : Unit 709, 7/F., Tower 2, Cheung Sha Wan Plaza No. 833
Cheung Sha Wan Rd.Kowloon,Hong Kong

Manufacturer& : Interactive Toy Concepts Limited
address : Unit 709, 7/F., Tower 2, Cheung Sha Wan Plaza No. 833
Cheung Sha Wan Rd.Kowloon,Hong Kong

Product : R/C Vehicle

Model No. : 22029

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.249
ANSI C63.4: 2009

The EUT was tested according to FCC 47CFR 15.249 for compliance to FCC 47CFR 15.249 requirements

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.249 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test :
Date of Report:

July 28-Aug 06,2014
Aug 07,2014

Prepared by :


(Eric, Engineer)

Approved & Authorized Signer :


(Sean Liu, Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : R/C Vehicle
Model Number : 22029

Power Supply : 3V DC (“AAA” batteries 2×)

Operate Frequency : 2405-2468MHz

Applicant : Interactive Toy Concepts Limited
Address : Unit 709, 7/F., Tower 2, Cheung Sha Wan Plaza No. 833
Cheung Sha Wan Rd.Kowloon,Hong Kong

Manufacturer : Interactive Toy Concepts Limited
Address : Unit 709, 7/F., Tower 2, Cheung Sha Wan Plaza No. 833
Cheung Sha Wan Rd.Kowloon,Hong Kong

Date of sample received : July 28, 2014

Date of Test : July 28-Aug 06,2014

1.2. Special Accessory and Auxiliary Equipment

N/A

1.3. Description of Test Facility

EMC Lab	: Accredited by TUV Rheinland Shenzhen Listed by FCC The Registration Number is 752051
	Listed by Industry Canada The Registration Number is 5077A-2
	Accredited by China National Accreditation Committee for Laboratories The Certificate Registration Number is L3193
Name of Firm	: ACCURATE TECHNOLOGY CO. LTD
Site Location	: F1, Bldg. A, Changyuan New Material Port, Keyuan Rd. Science & Industry Park, Nanshan, Shenzhen, Guangdong P.R. China

1.4. Measurement Uncertainty

Conducted Emission Expanded Uncertainty	= 2.23dB, k=2
Radiated emission expanded uncertainty (9kHz-30MHz)	= 3.08dB, k=2
Radiated emission expanded uncertainty (30MHz-1000MHz)	= 4.42dB, k=2
Radiated emission expanded uncertainty (Above 1GHz)	= 4.06dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 11, 2014	Jan. 10, 2015
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 11, 2014	Jan. 10, 2015
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 11, 2014	Jan. 10, 2015
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 11, 2014	Jan. 10, 2015
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 15, 2014	Jan. 14, 2015
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 15, 2014	Jan. 14, 2015
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 15, 2014	Jan. 14, 2015
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1067	Jan. 15, 2014	Jan. 14, 2015
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 11, 2014	Jan. 10, 2015
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 11, 2014	Jan. 10, 2015
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 11, 2014	Jan. 10, 2015
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 11, 2014	Jan. 10, 2015

3. OPERATION OF EUT DURING TESTING

3.1.Operating Mode

The mode is used: **Transmitting mode**

Low Channel: 2405MHz

Middle Channel: 2442MHz

High Channel: 2468MHz

3.2.Configuration and peripherals

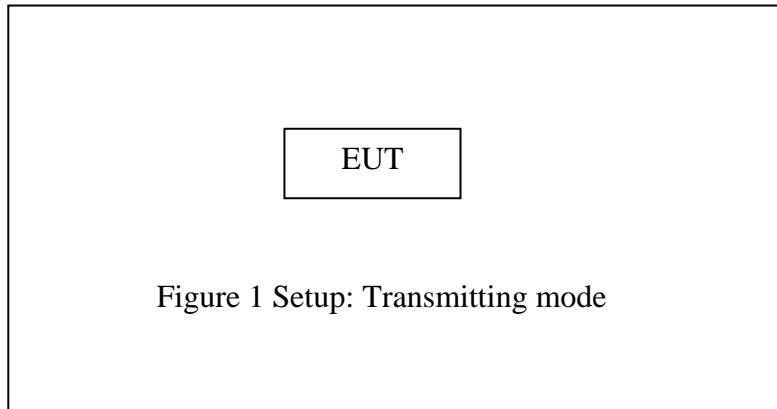



Figure 1 Setup: Transmitting mode

4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.215(c)	20dB Bandwidth	Compliant
Section 15.249(d)	Band Edge Compliance Test	Compliant
Section 15.205(a), Section 15.209(a), Section 15.249, Section 15.35	Radiated Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	N/A
Section 15.203	Antenna Requirement	Compliant

5. 20DB BANDWIDTH MEASUREMENT

5.1. Block Diagram of Test Setup

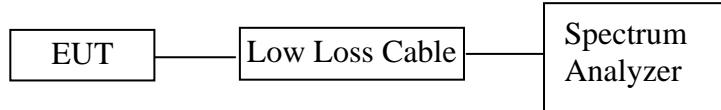

5.2. The Requirement For Section 15.215(c)

The bandwidth of a frequency hopping channel is the 20 dB emission bandwidth, measured with the hopping stopped. The system RF bandwidth is equal to the channel bandwidth multiplied by the number of channels in the hopset. The hopset shall be such that the near-term distribution of frequencies appears random, with sequential hops randomly distributed in both direction and magnitude of change in the hopset while the long-term distribution appears evenly distributed.

5.3. Operating Condition of EUT

5.3.1. Setup the EUT and simulator as shown as Section 5.1.

5.3.2. Turn on the power of all equipment.

5.3.3. Let the EUT work in TX modes measure it. The transmit frequency are 2405-2468 MHz. We select 2405MHz, 2442MHz, and 2468MHz TX frequency to transmit.

5.4. Test Procedure

5.4.1. Place the EUT on the table and set it in transmitting mode.

5.4.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

5.4.3. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz, Detector function=peak, Trace=max hold, Sweep=auto.


5.4.4. Set the measured low, middle and high frequency and test 20dB bandwidth with spectrum analyzer.

5.5. Test Result


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2405	0.276
Middle	2442	0.300
High	2468	0.296

The spectrum analyzer plots are attached as below.


Low channel

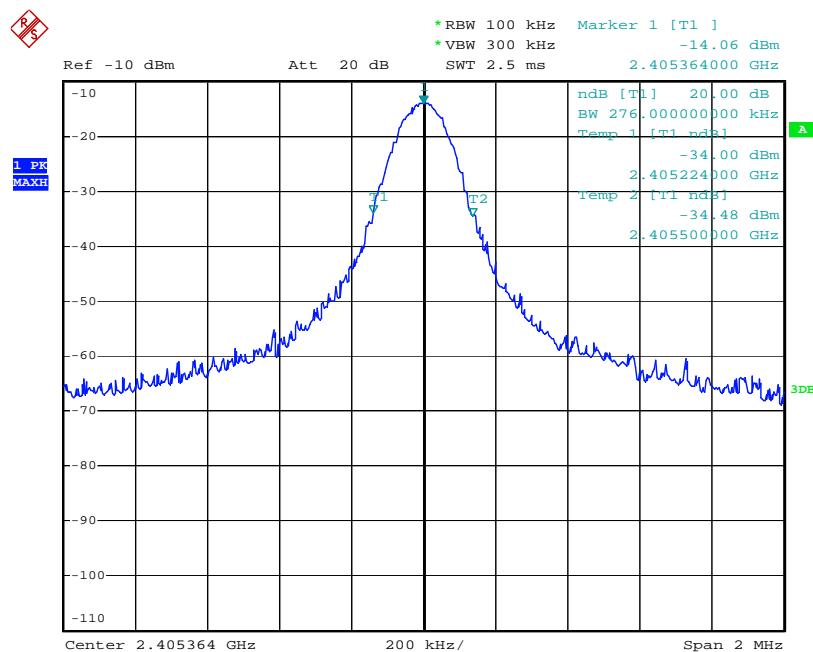

Middle channel

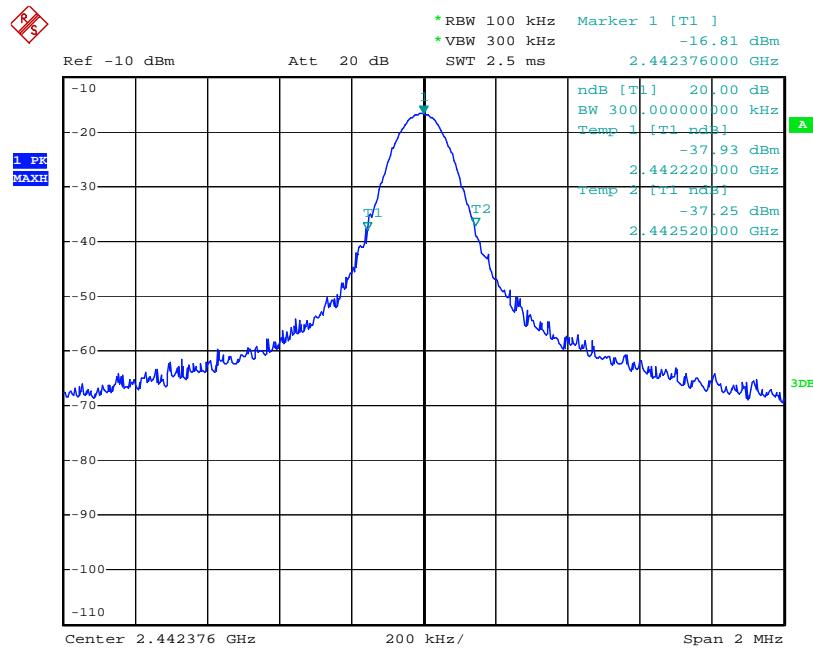


High channel

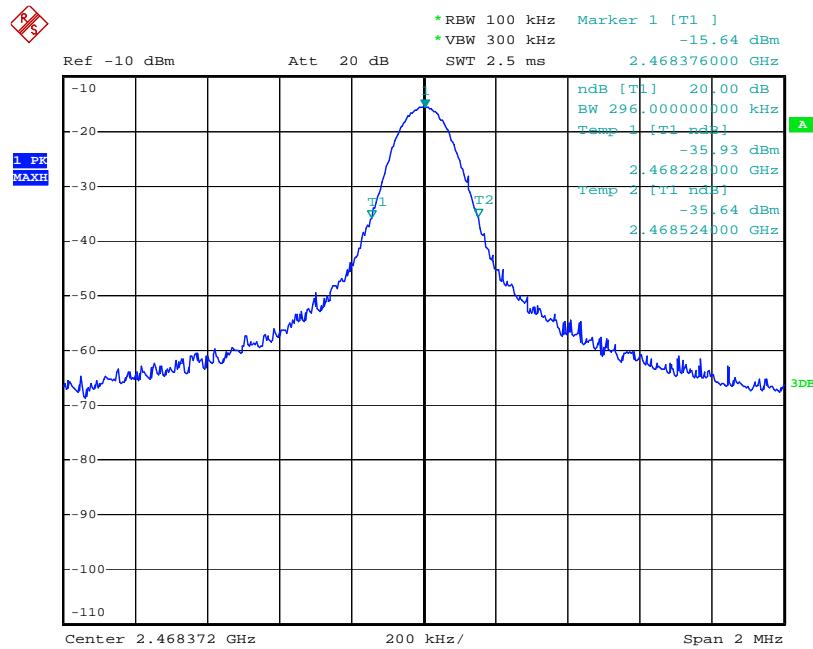

6. BAND EDGE COMPLIANCE TEST

6.1. Block Diagram of Test Setup

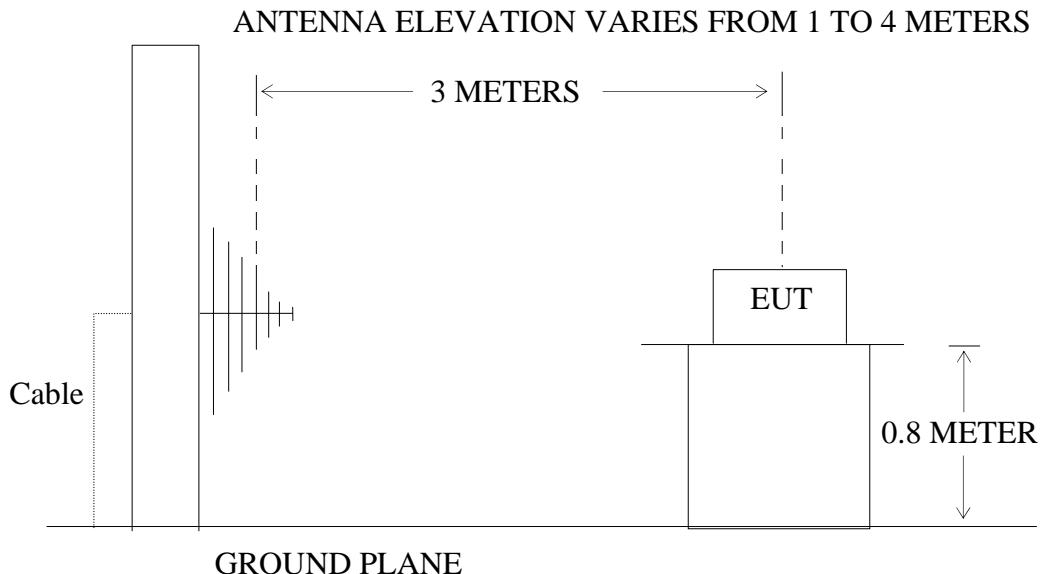

6.2. The Requirement For Section 15.249

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

6.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.4.Operating Condition of EUT

6.4.1.Setup the EUT and simulator as shown as Section 6.1.

6.4.2.Turn on the power of all equipment.

6.4.3.Let the EUT work in TX modes measure it. The transmit frequency are 2405-2468 MHz. We select 2405MHz, 2468MHz TX frequency to transmit.

6.5.Test Procedure

Radiate Band Edge:

6.5.1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.

6.5.2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

6.5.3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

6.5.4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

RBW=1MHz, VBW=1MHz

6.5.5.The band edges was measured and recorded.

6.6.Test Result

Radiated Band Edge Result

Date of Test:	Aug 06, 2014	Temperature:	25°C
EUT:	R/C Vehicle	Humidity:	50%
Model No.:	22029	Power Supply:	DC 3V
Test Mode:	TX (2405MHz) GFSK	Test Engineer:	Ricky

Frequency (MHz)	Reading(dB μ V/m)		Factor(dB) Corr.	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2381.415	40.68	45.78	-7.58	33.10	38.20	54.00	74.00	-20.90	-35.80	Vertical
2390.000	36.87	41.96	-7.53	29.34	34.43	54.00	74.00	-24.66	-39.57	Vertical
2381.285	41.01	46.16	-7.58	33.43	38.58	54.00	74.00	-20.57	-35.42	Horizontal
2390.000	36.64	41.86	-7.53	29.11	34.33	54.00	74.00	-24.89	-39.67	Horizontal

Date of Test:	Aug 06, 2014	Temperature:	25°C
EUT:	R/C Vehicle	Humidity:	50%
Model No.:	22029	Power Supply:	DC 3V
Test Mode:	TX (2468MHz) GFSK	Test Engineer:	Ricky

Frequency (MHz)	Reading(dB μ V/m)		Factor(dB) Corr.	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	36.37	41.63	-7.37	29.00	34.26	54.00	74.00	-25.00	-39.74	Vertical
2487.184	41.13	46.21	-7.38	33.75	38.83	54.00	74.00	-20.25	-35.17	Vertical
2483.500	36.49	41.40	-7.37	29.12	34.03	54.00	74.00	-24.88	-39.97	Horizontal
2487.345	40.98	46.07	-7.38	33.60	38.69	54.00	74.00	-20.40	-35.31	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.
4. The average measurement was not performed when peak measured data under the limit of average detection.

Job No.: RICKY #626

Polarization: Vertical

Standard: FCC PK

Power Source: DC 3V

Test item: Radiation Test

Date: 14/08/06/

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 10/09/13

EUT: R/C Vehicle

Engineer Signature:


Mode: TX 2405MHz

Distance: 3m

Model: 22029

Manufacturer: Interactive Toy Concepts (HK) Ltd.

Note: Report No.:ATE20141460

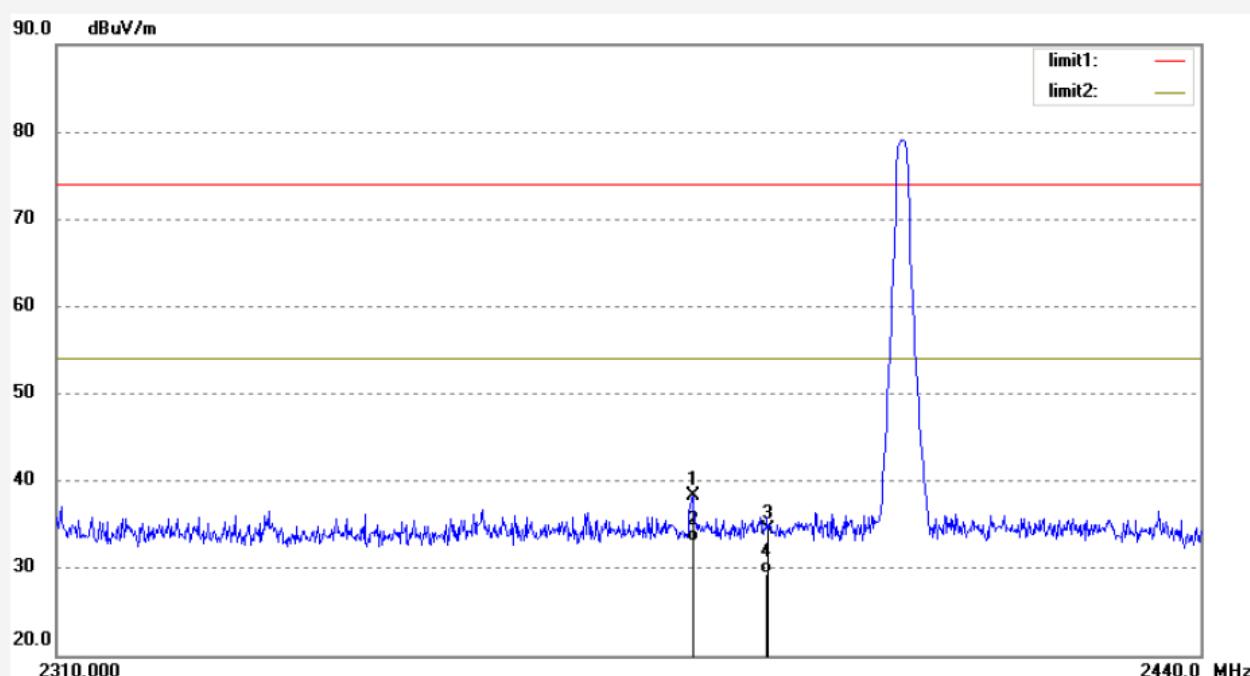

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2381.415	45.78	-7.58	38.20	74.00	-35.80	peak			
2	2381.415	40.68	-7.58	33.10	54.00	-20.90	AVG			
3	2390.000	41.96	-7.53	34.43	74.00	-39.57	peak			
4	2390.000	36.87	-7.53	29.34	54.00	-24.66	AVG			

Job No.: RICKY #627

Polarization: Horizontal

Standard: FCC PK

Power Source: DC 3V

Test item: Radiation Test

Date: 14/08/06/

Temp. (C)/Hum.(%) 23 C / 48 %

Time: 10/11/25

EUT: R/C Vehicle

Engineer Signature:


Mode: TX 2405MHz

Distance: 3m

Model: 22029

Manufacturer: Interactive Toy Concepts (HK) Ltd

Note: Report No.:ATE20141460

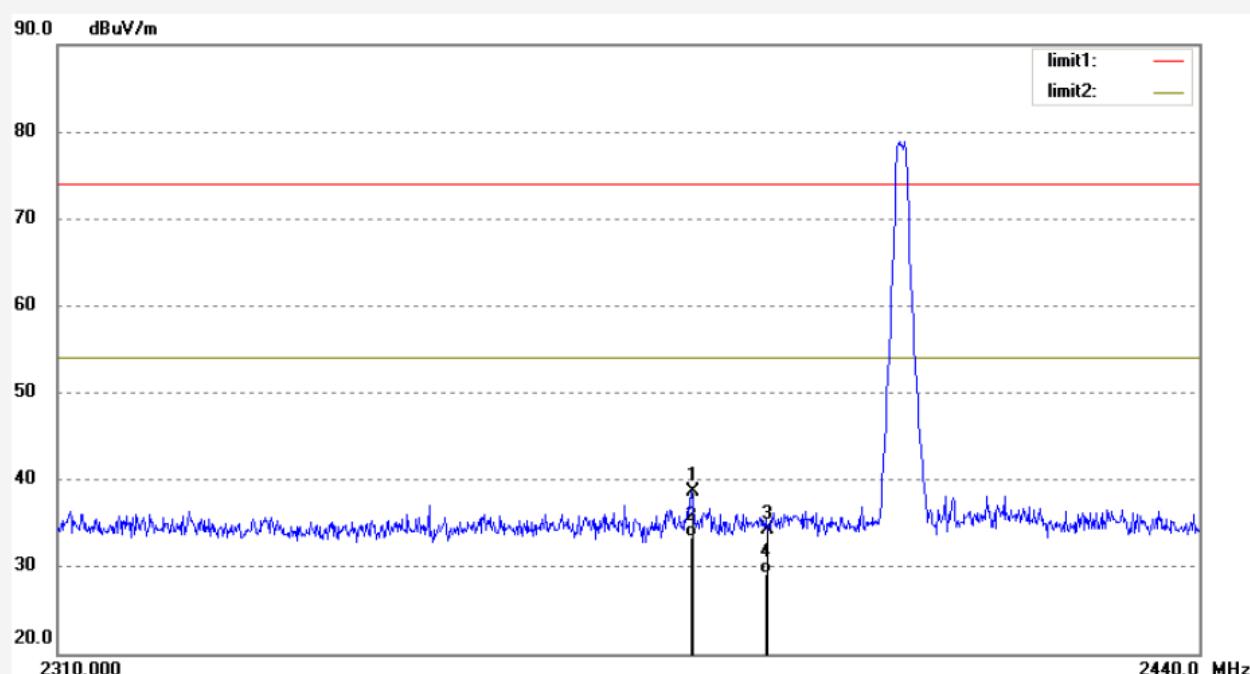

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2381.285	46.16	-7.58	38.58	74.00	-35.42	peak			
2	2381.285	41.01	-7.58	33.43	54.00	-20.57	AVG			
3	2390.000	41.86	-7.53	34.33	74.00	-39.67	peak			
4	2390.000	36.64	-7.53	29.11	54.00	-24.89	AVG			

Job No.: RICKY #628

Polarization: Vertical

Standard: FCC PK

Power Source: DC 3V

Test item: Radiation Test

Date: 14/08/06/

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 10/15/16

EUT: R/C Vehicle

Engineer Signature:


Mode: TX 2468MHz

Distance: 3m

Model: 22029


Manufacturer: Interactive Toy Concepts (HK) Ltd.

Note: Report No.:ATE20141460

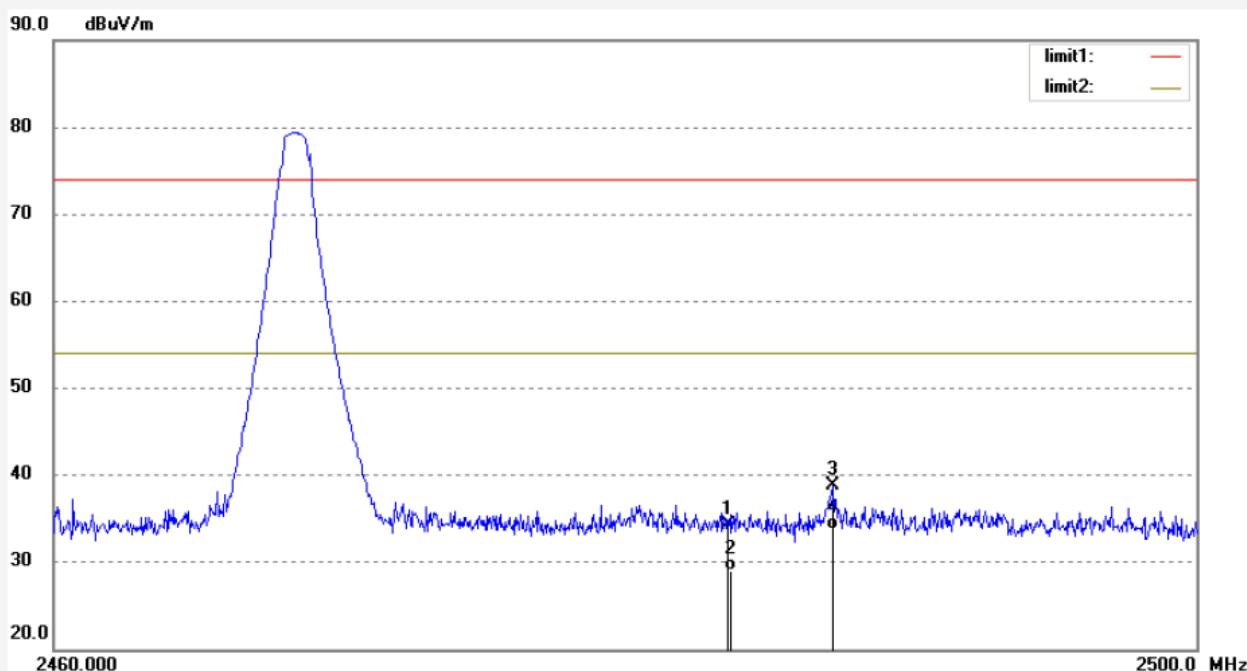

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	41.63	-7.37	34.26	74.00	-39.74	peak			
2	2483.500	36.37	-7.37	29.00	54.00	-25.00	AVG			
3	2487.184	46.21	-7.38	38.83	74.00	-35.17	peak			
4	2487.184	41.13	-7.38	33.75	54.00	-20.25	AVG			

Job No.: RICKY #629	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 3V
Test item: Radiation Test	Date: 14/08/06/
Temp.(C)/Hum.(%) 23 C / 48 %	Time: 10/17/57
EUT: R/C Vehicle	Engineer Signature:
Mode: TX 2468MHz	Distance: 3m
Model: 22029	
Manufacturer: Interactive Toy Concepts (HK) Ltd.	
Note: Report No.:ATE20141460	

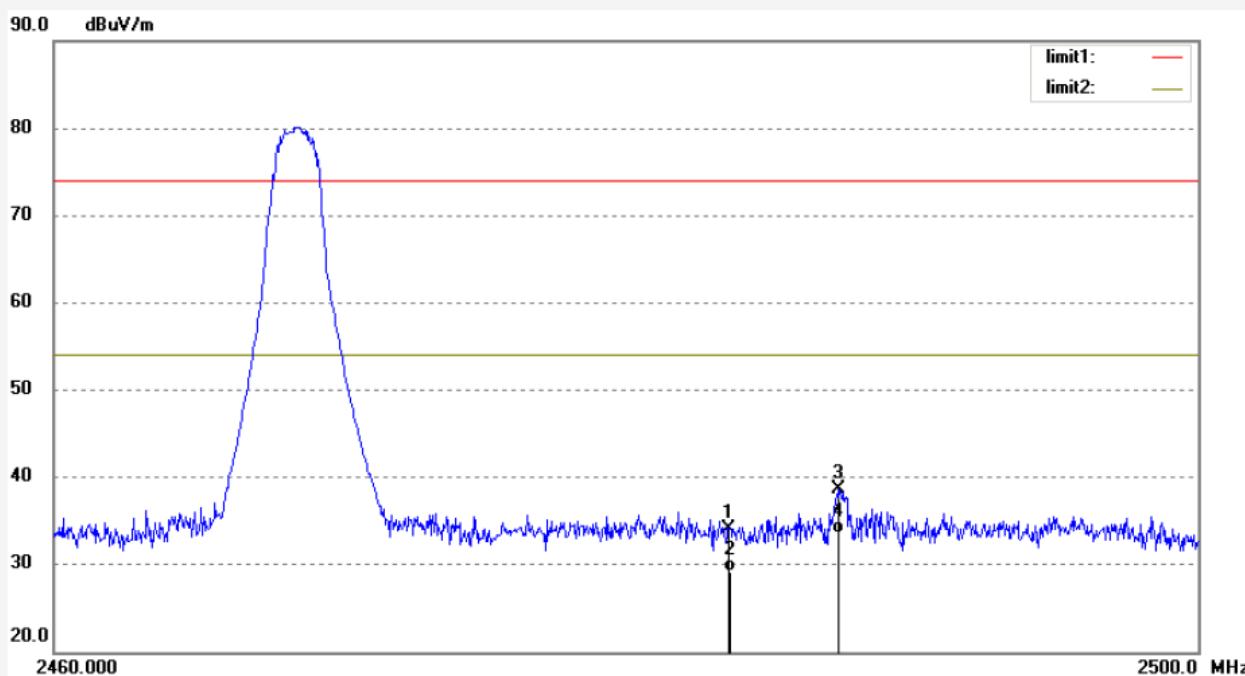

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	41.40	-7.37	34.03	74.00	-39.97	peak			
2	2483.500	36.49	-7.37	29.12	54.00	-24.88	AVG			
3	2487.345	46.07	-7.38	38.69	74.00	-35.31	peak			
4	2487.345	40.98	-7.38	33.60	54.00	-20.40	AVG			

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor


3. Display the measurement of peak values.

4. The average measurement was not performed when peak measured data under the limit of average detection.

7. RADIATED SPURIOUS EMISSION TEST

7.1. Block Diagram of Test Setup


7.1.1. Block diagram of connection between the EUT and peripherals

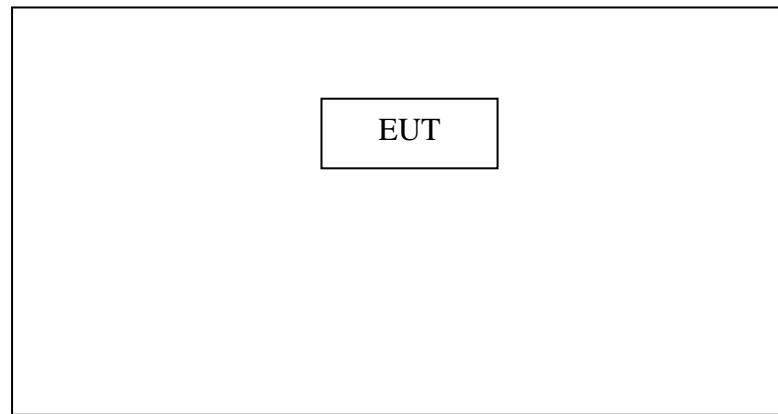

Setup: Transmitting mode

(EUT: 22029)

7.1.2. Semi-Anechoic Chamber Test Setup Diagram

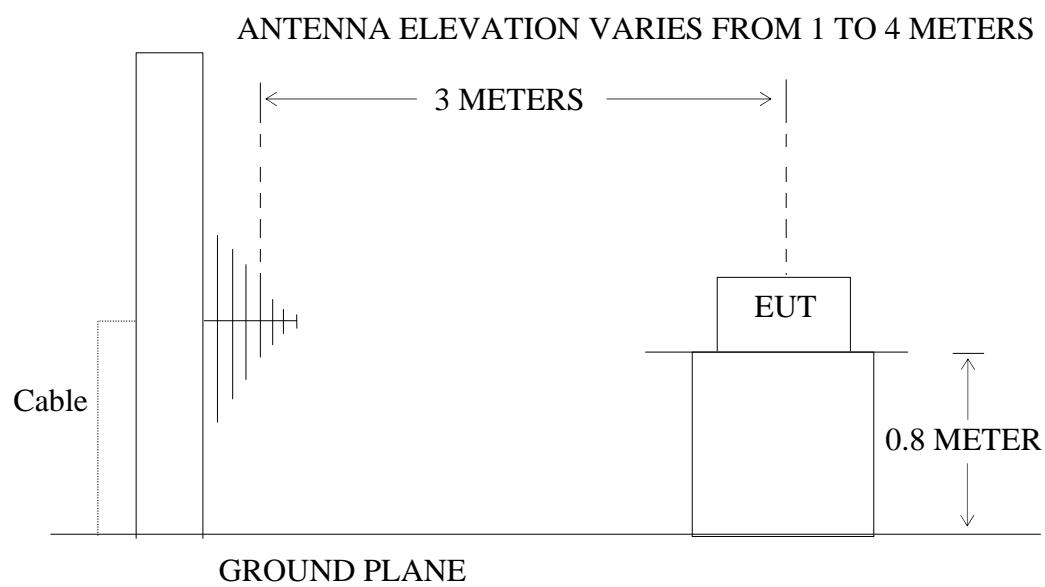

7.2.The Limit For Section 15.249

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph A8.4(4), the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

7.3.Restricted bands of operation

7.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

7.4. Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.5. Operating Condition of EUT

7.5.1. Setup the EUT and simulator as shown as Section 7.1.

7.5.2. Turn on the power of all equipment.

7.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 2405-2468 MHz. We select 2405MHz, 2442MHz, and 2468MHz TX frequency to transmit.

7.6. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2009 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

When average radiated emissions measurements are specified there is also a limit on the peak emissions level which is 20 dB above the applicable maximum permitted average emission limit

RBW (120 kHz), VBW (300 kHz) for QP detector below 1GHz

RBW (1 MHz), VBW (3MHz) for Peak detector above 1GHz

RBW (1 MHz), VBW (10Hz) for AV detector above 1GHz

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

7.7.The Field Strength of Radiation Emission Measurement Results
PASS.

Fundamental Radiated Emissions

Frequency (MHz)	Reading(dB μ V/m)		Factor(dB) Corr.	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2405.00	84.34	89.40	-6.75	76.89	81.95	94.00	114.00	-17.11	-32.05	Vertical
2405.00	84.23	89.50	-6.76	76.78	82.05	94.00	114.00	-17.22	-31.95	Horizontal
2442.00	84.13	89.37	-7.35	76.78	82.02	94.00	114.00	-17.22	-31.98	Vertical
2442.00	83.29	88.44	-7.35	75.94	81.09	94.00	114.00	-18.06	-32.91	Horizontal
2468.00	85.21	89.73	-7.35	77.86	82.38	94.00	114.00	-16.14	-31.62	Vertical
2468.00	84.11	89.31	-7.35	76.77	81.97	94.00	114.00	-17.23	-32.03	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3. The EUT is tested radiation emission at Low, Middle, High channel in three axes. The worst emissions are reported in all channels.

4. The radiation emissions from 18-25GHz are not reported, because the test values lower than the limits of 20dB.

5. The average measurement was not performed when peak measured data under the limit of average detection.

Below 1G




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.ChinaSite: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ricky #2110
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp. (C)/Hum.(%) 25 C / 55 %
 EUT: R/C Vehicle
 Mode: TX 2405MHz
 Model: 22029
 Manufacturer: Interactive Toy Concepts (HK) Ltd.

Polarization: Horizontal
 Power Source: DC 3V
 Date: 2014/08/01
 Time: 15:42:20
 Engineer Signature:
 Distance: 3m

Note: Report No.:ATE20141460

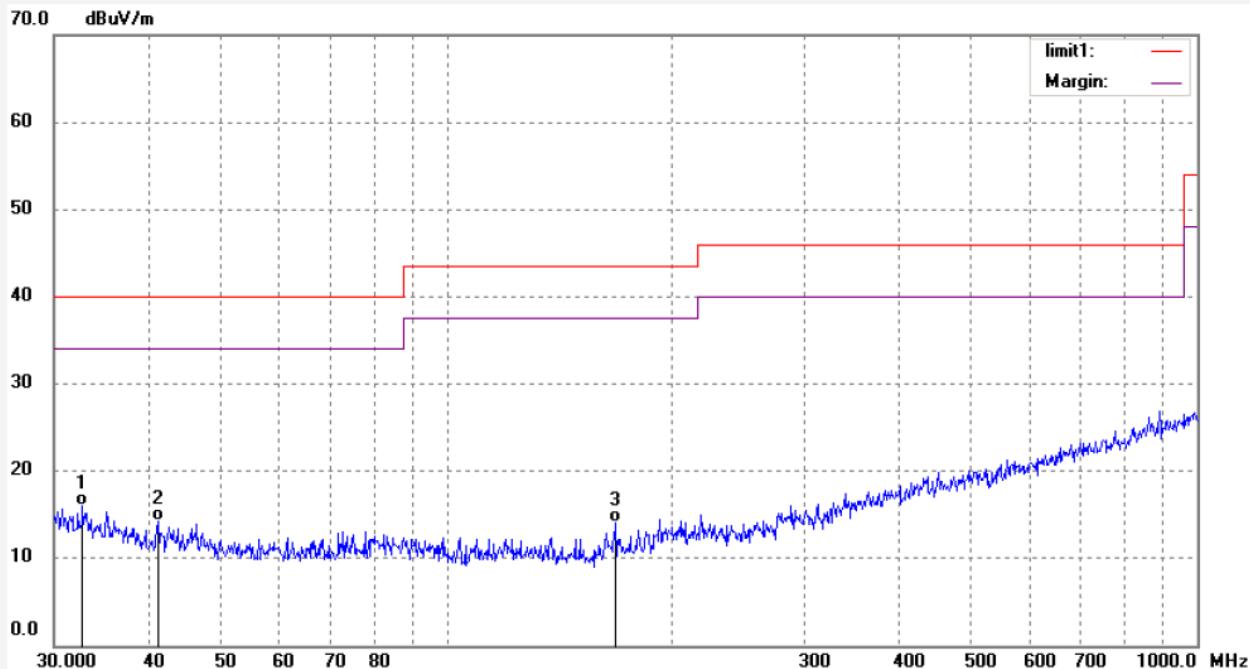

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	32.7486	27.03	-11.01	16.02	40.00	-23.98	QP			
2	41.2764	27.14	-12.87	14.27	40.00	-25.73	QP			
3	167.8242	29.16	-15.13	14.03	43.50	-29.47	QP			

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ricky #2111

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: DC 3V

Test item: Radiation Test

Date: 2014/08/01

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 15:44:29

EUT: R/C Vehicle

Engineer Signature:


Mode: TX 2405MHz

Distance: 3m

Model: 22029

Manufacturer: Interactive Toy Concepts (HK) Ltd.

Note: Report No.:ATE20141460

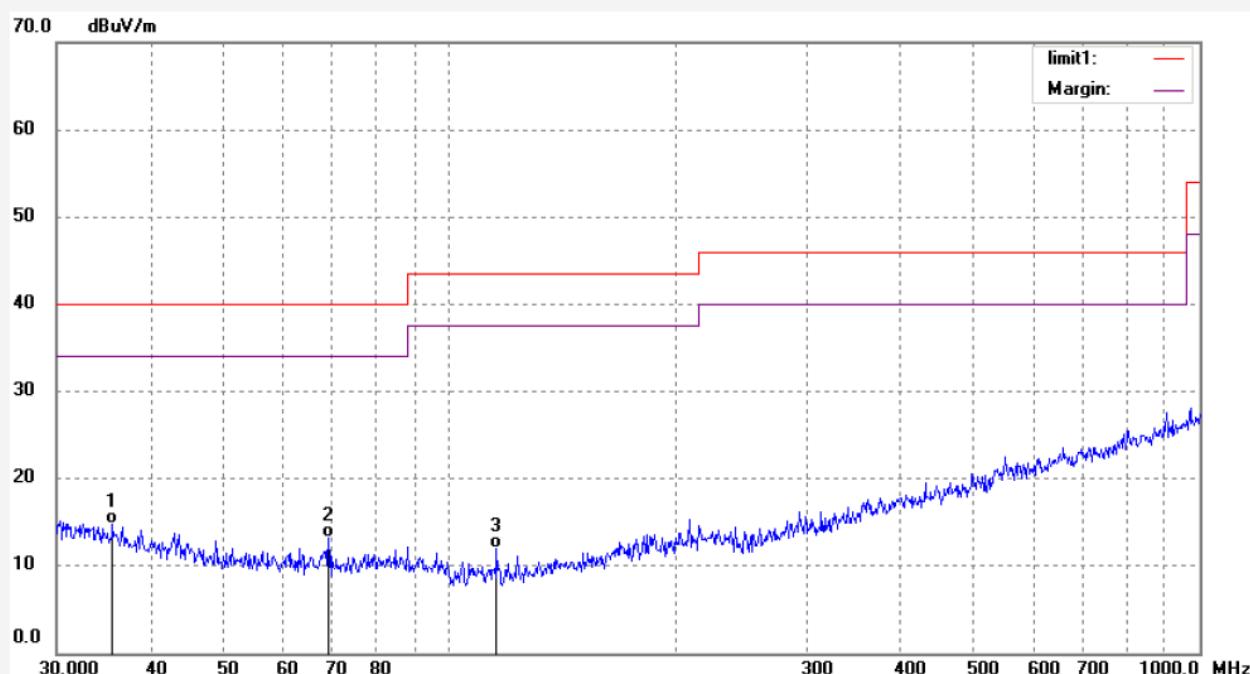

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.6240	26.37	-11.50	14.87	40.00	-25.13	QP			
2	69.1140	27.97	-14.82	13.15	40.00	-26.85	QP			
3	115.7256	27.55	-15.63	11.92	43.50	-31.58	QP			

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ricky #2112

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: DC 3V

Test item: Radiation Test

Date: 2014/08/01

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 15:46:30

EUT: R/C Vehicle

Engineer Signature:


Mode: TX 2442MHz

Distance: 3m

Model: 22029

Manufacturer: Interactive Toy Concepts (HK) Ltd.

Note: Report No.:ATE20141460

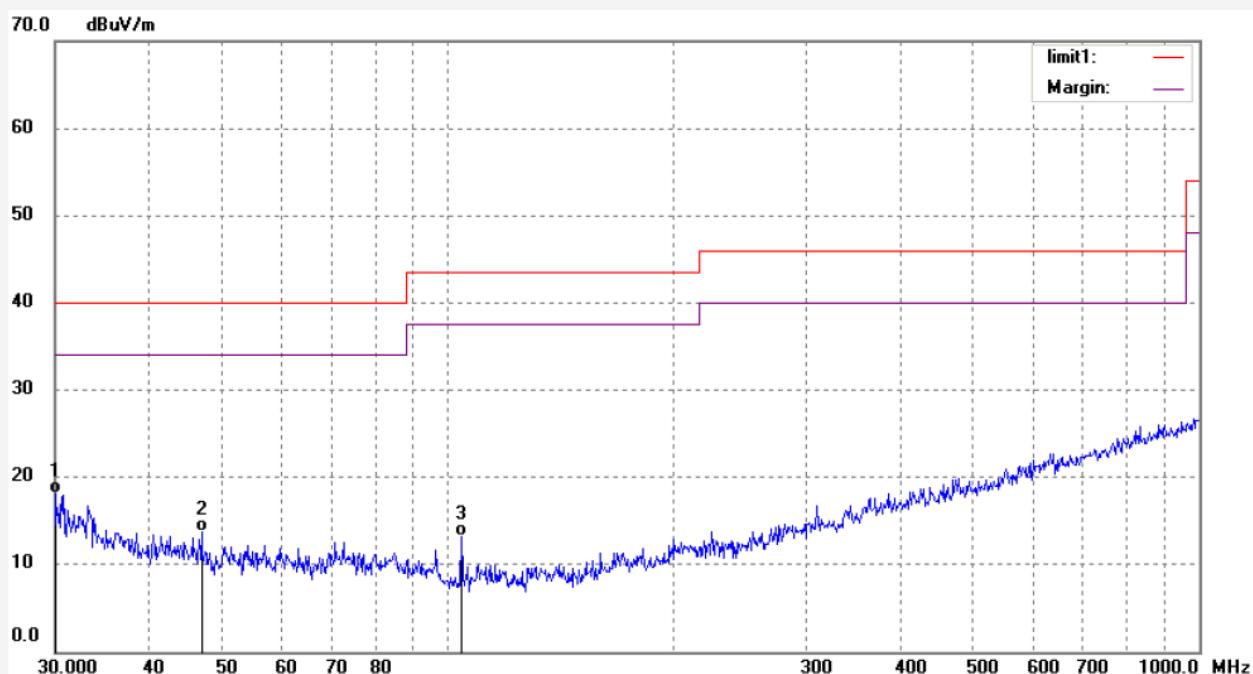

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	30.0000	28.68	-10.63	18.05	40.00	-21.95	QP			
2	46.9947	27.35	-13.55	13.80	40.00	-26.20	QP			
3	104.1701	29.40	-16.19	13.21	43.50	-30.29	QP			

Job No.: Ricky #2113

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: DC 3V

Test item: Radiation Test

Date: 2014/08/01

Temp. (C)/Hum.(%) 25 C / 55 %

Time: 15:48:19

EUT: R/C Vehicle

Engineer Signature:


Mode: TX 2442MHz

Distance: 3m

Model: 22029


Manufacturer: Interactive Toy Concepts (HK) Ltd.

Note: Report No.:ATE20141460

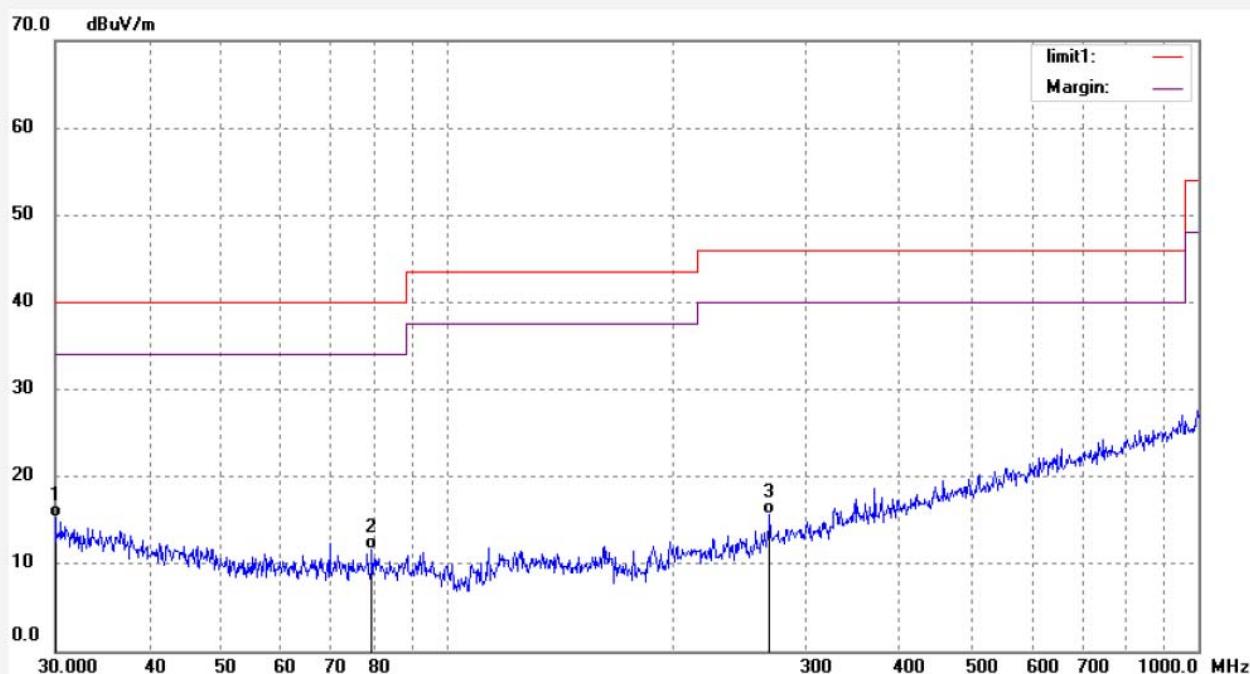

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	30.0000	25.92	-10.63	15.29	40.00	-24.71	QP			
2	79.2426	26.59	-14.89	11.70	40.00	-28.30	QP			
3	268.4853	27.04	-11.45	15.59	46.00	-30.41	QP			

Job No.: Ricky #2114	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 2014/08/01
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 15:49:09
EUT: R/C Vehicle	Engineer Signature:
Mode: TX 2468MHz	Distance: 3m
Model: 22029	
Manufacturer: Interactive Toy Concepts (HK) Ltd.	
Note: Report No.:ATE20141460	

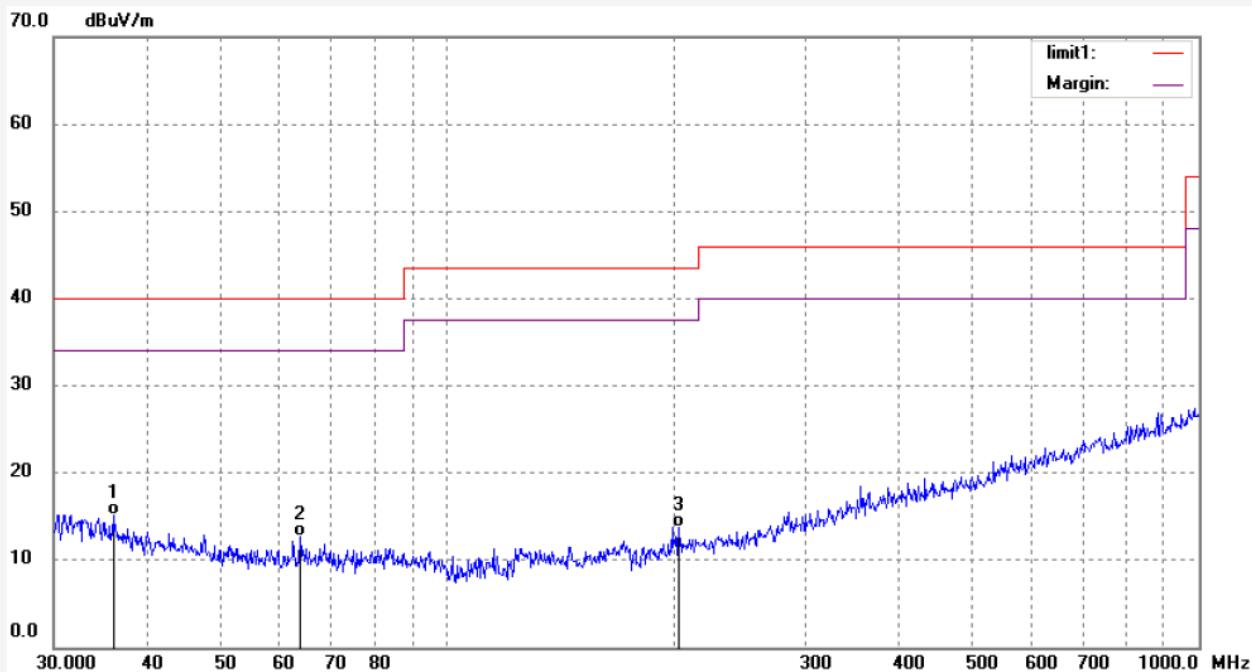

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	36.0007	26.78	-11.62	15.16	40.00	-24.84	QP			
2	63.7588	27.37	-14.68	12.69	40.00	-27.31	QP			
3	203.5228	26.83	-13.07	13.76	43.50	-29.74	QP			

Job No.: Ricky #2115

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: DC 3V

Test item: Radiation Test

Date: 2014/08/01

Temp. (C)/Hum.(%) 25 C / 55 %

Time: 15:50:12

EUT: R/C Vehicle

Engineer Signature:


Mode: TX 2468MHz

Distance: 3m

Model: 22029

Manufacturer: Interactive Toy Concepts (HK) Ltd.

Note: Report No.:ATE20141460

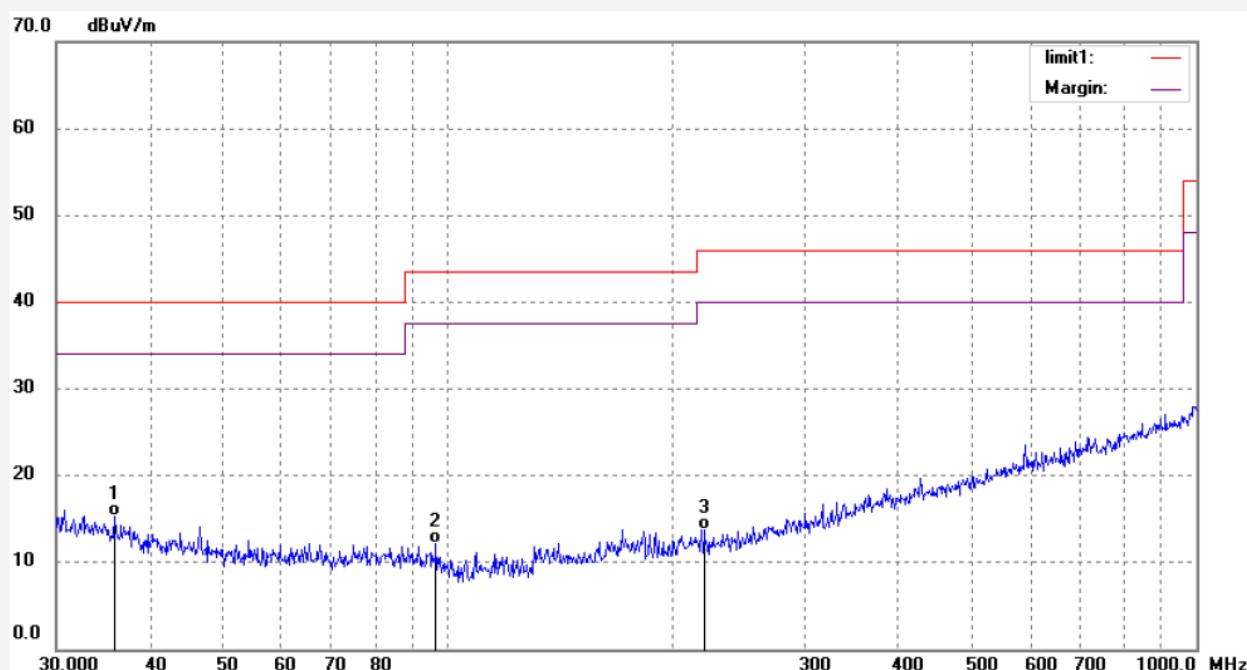

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.8746	26.85	-11.58	15.27	40.00	-24.73	QP			
2	96.4362	27.61	-15.48	12.13	43.50	-31.37	QP			
3	219.8449	26.65	-12.83	13.82	46.00	-32.18	QP			

Above 1G



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ricky #608

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: DC 3V

Test item: Radiation Test

Date: 14/08/04/

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 8/51/18

EUT: R/C Vehicle

Engineer Signature:


Mode: TX 2405MHz

Distance: 3m

Model: 22029

Manufacturer: Interactive Toy Concepts (HK) Ltd.

Note: Report No.:ATE20141460

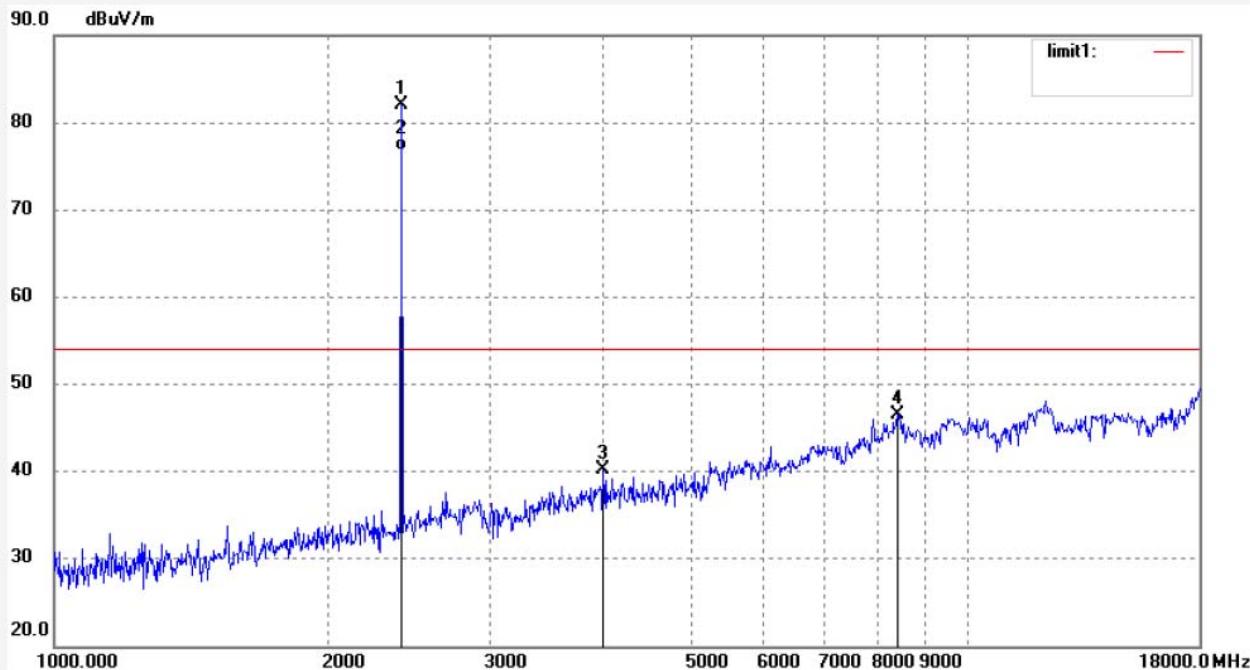

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2405.000	89.50	-7.45	82.05	54.00	28.05	peak			
2	2405.000	84.23	-7.45	76.78	54.00	22.78	AVG			
3	3996.886	41.91	-1.62	40.29	54.00	-13.71	peak			
4	8420.480	38.49	8.06	46.55	54.00	-7.45	peak			

Job No.: Ricky #609

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: DC 3V

Test item: Radiation Test

Date: 14/08/04/

Temp. (C)/Hum.(%) 23 C / 48 %

Time: 8/53/41

EUT: R/C Vehicle

Engineer Signature:


Mode: TX 2405MHz

Distance: 3m

Model: 22029


Manufacturer: Interactive Toy Concepts (HK) Ltd.

Note: Report No.:ATE20141460

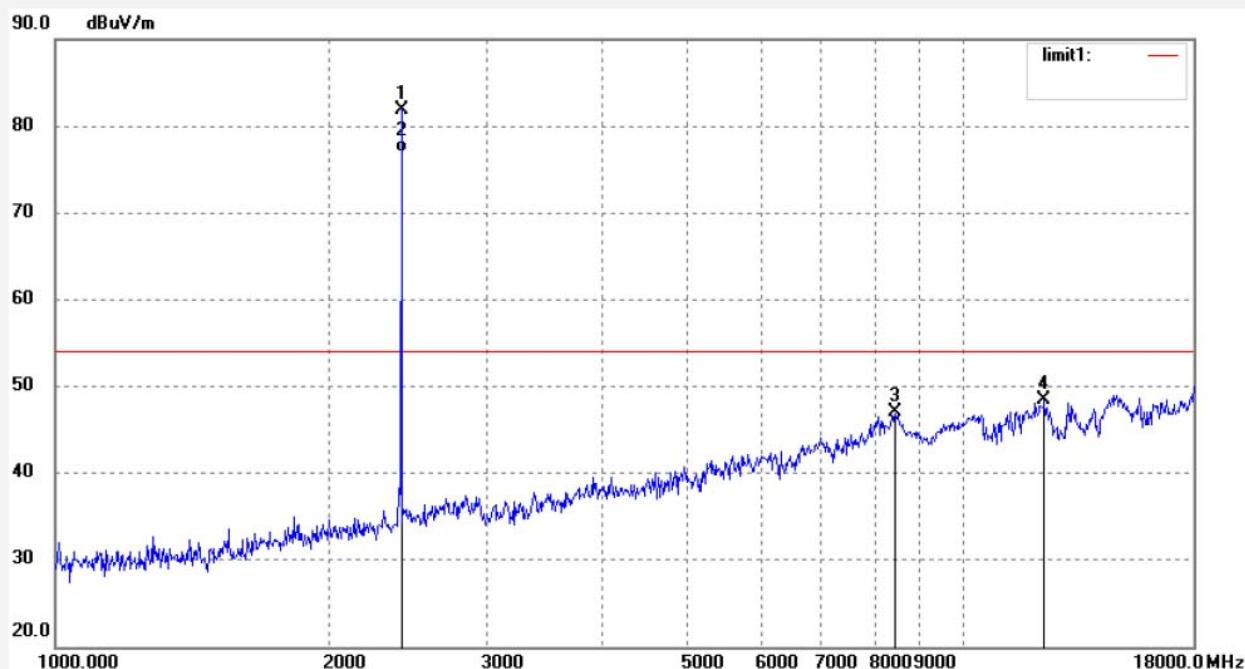

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2405.000	89.40	-7.45	81.95	54.00	27.95	peak			
2	2405.000	84.34	-7.45	76.89	54.00	22.89	AVG			
3	8445.025	38.95	8.00	46.95	54.00	-7.05	peak			
4	12329.252	10.14	38.23	48.37	54.00	-5.63	peak			

Job No.: Ricky #610	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 14/08/04/
Temp.(C)/Hum.(%) 23 C / 48 %	Time: 8/55/03
EUT: R/C Vehicle	Engineer Signature:
Mode: TX 2442MHz	Distance: 3m
Model: 22029	
Manufacturer: Interactive Toy Concepts (HK) Ltd.	
Note: Report No.:ATE20141460	

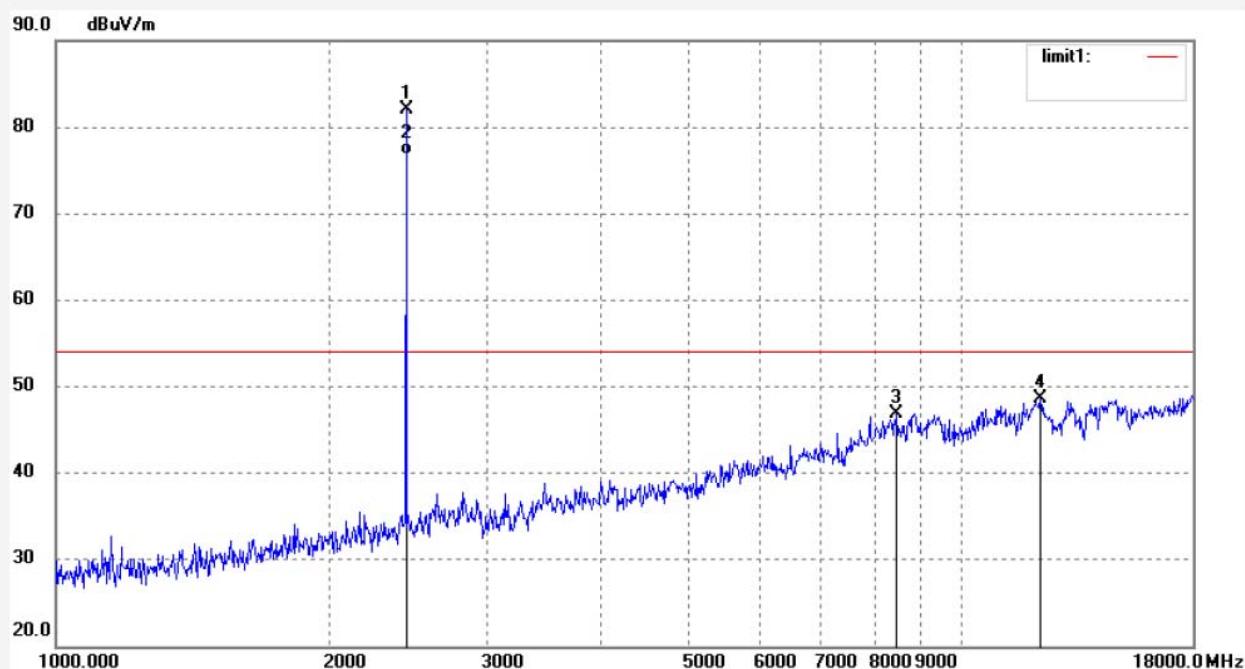

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2442.000	89.37	-7.35	82.02	54.00	28.02	peak			
2	2442.000	84.13	-7.35	76.78	54.00	22.78	AVG			
3	8469.642	38.90	7.96	46.86	54.00	-7.14	peak			
4	12222.059	10.53	38.12	48.65	54.00	-5.35	peak			

Job No.: Ricky #611

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: DC 3V

Test item: Radiation Test

Date: 14/08/04/

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 8/57/13

EUT: R/C Vehicle

Engineer Signature:


Mode: TX 2442MHz

Distance: 3m

Model: 22029

Manufacturer: Interactive Toy Concepts (HK) Ltd.

Note: Report No.:ATE20141460

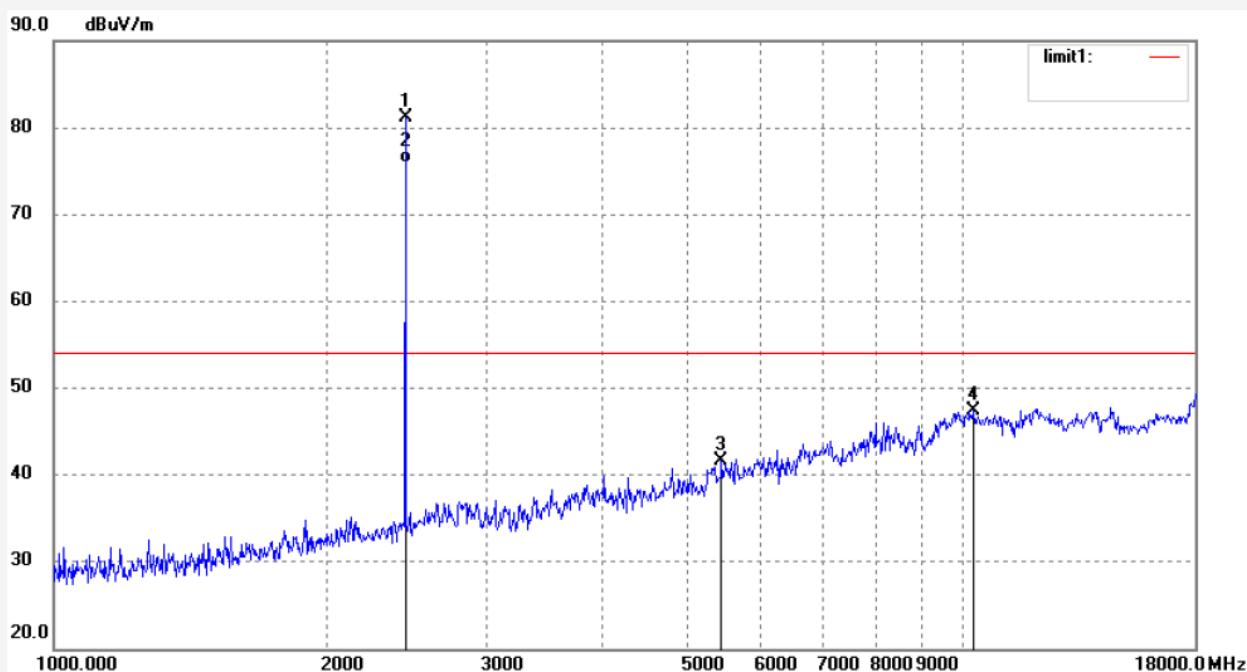

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2442.000	88.44	-7.35	81.09	54.00	27.09	peak			
2	2442.000	83.29	-7.35	75.94	54.00	21.94	AVG			
3	5425.684	40.81	0.81	41.62	54.00	-12.38	peak			
4	10293.456	38.31	9.13	47.44	54.00	-6.56	peak			

Job No.: Ricky #612

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: DC 3V

Test item: Radiation Test

Date: 14/08/04/

Temp. (C)/Hum.(%) 23 C / 48 %

Time: 8/59/22

EUT: R/C Vehicle

Engineer Signature:


Mode: TX 2468MHz

Distance: 3m

Model: 22029

Manufacturer: Interactive Toy Concepts (HK) Ltd.

Note: Report No.:ATE20141460

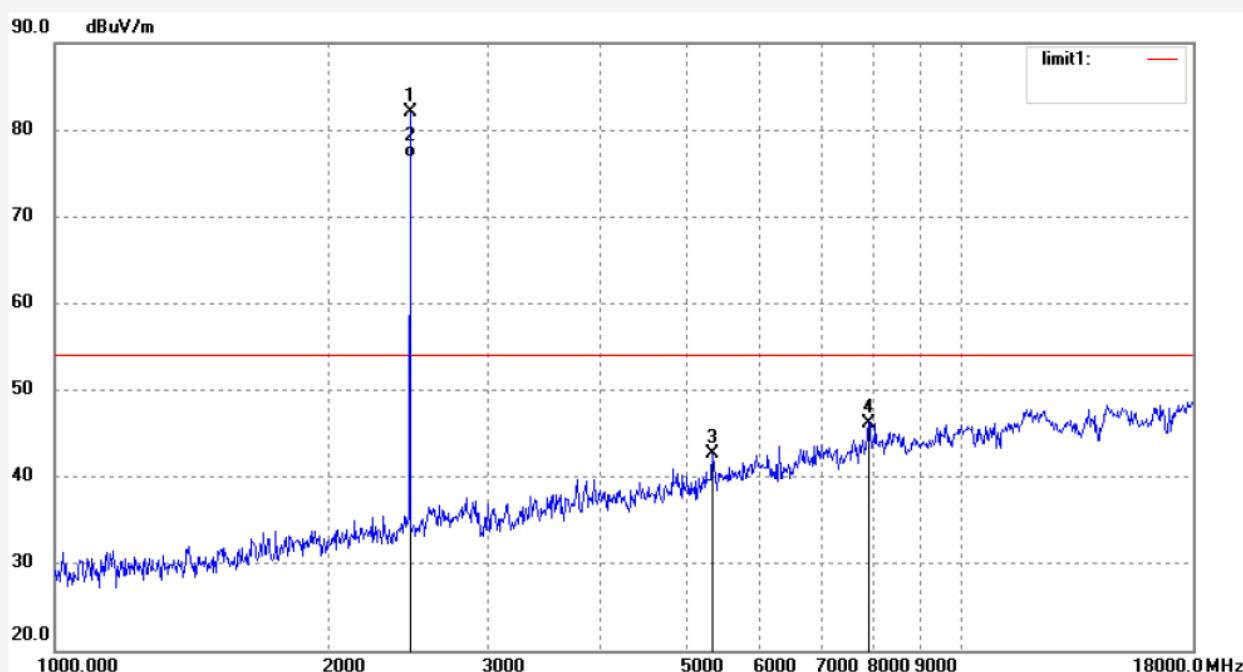

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2460.000	89.31	-7.34	81.97	54.00	27.97	peak			
2	2460.000	84.11	-7.34	76.77	54.00	22.77	AVG			
3	5316.253	41.76	0.96	42.72	54.00	-11.28	peak			
4	7898.164	39.96	6.29	46.25	54.00	-7.75	peak			

Job No.: Ricky #613

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: DC 3V

Test item: Radiation Test

Date: 14/08/04/

Temp.(C)/Hum.(%) 23 C / 48 %

Time: 9/01/03

EUT: R/C Vehicle

Engineer Signature:


Mode: TX 2468MHz

Distance: 3m

Model: 22029

Manufacturer: Interactive Toy Concepts (HK) Ltd.

Note: Report No.:ATE20141460

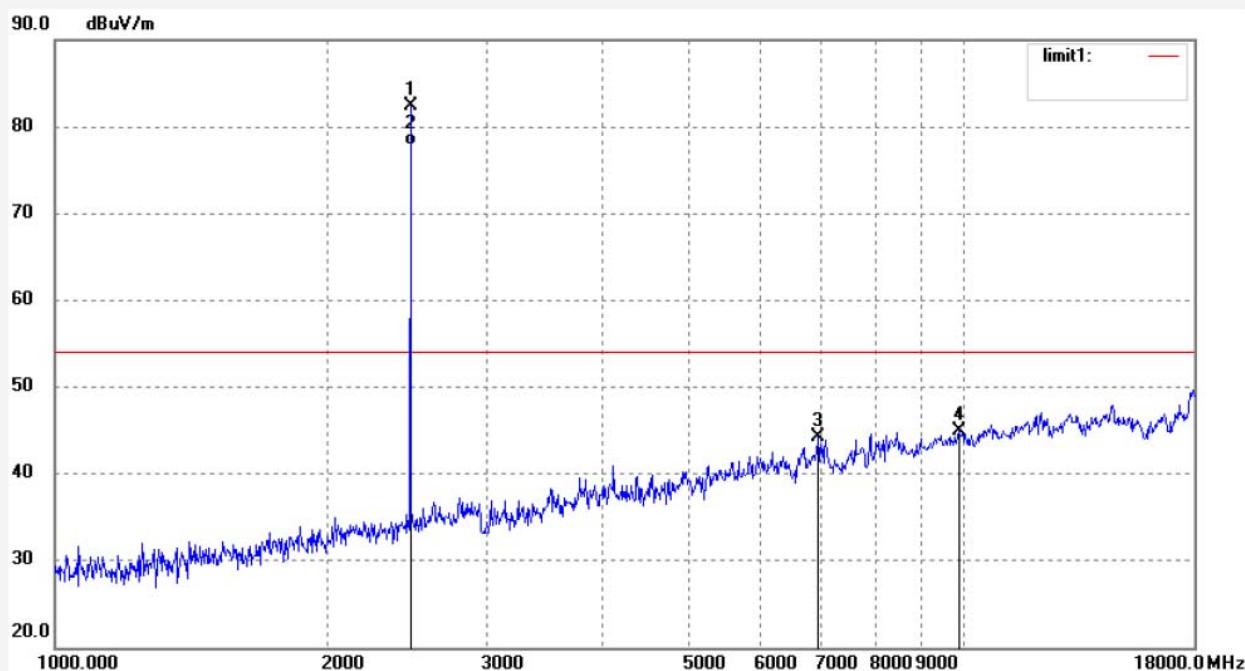

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2468.000	89.73	-7.35	82.38	54.00	28.38	peak			
2	2468.000	85.21	-7.35	77.86	54.00	23.86	AVG			
3	6928.524	40.43	3.78	44.21	54.00	-9.79	peak			
4	9911.232	35.33	9.63	44.96	54.00	-9.04	peak			

8. ANTENNA REQUIREMENT

8.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2. Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

