




Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, CH106(ANT A+ANT B) + CH122(ANT C+ANT D)	:	

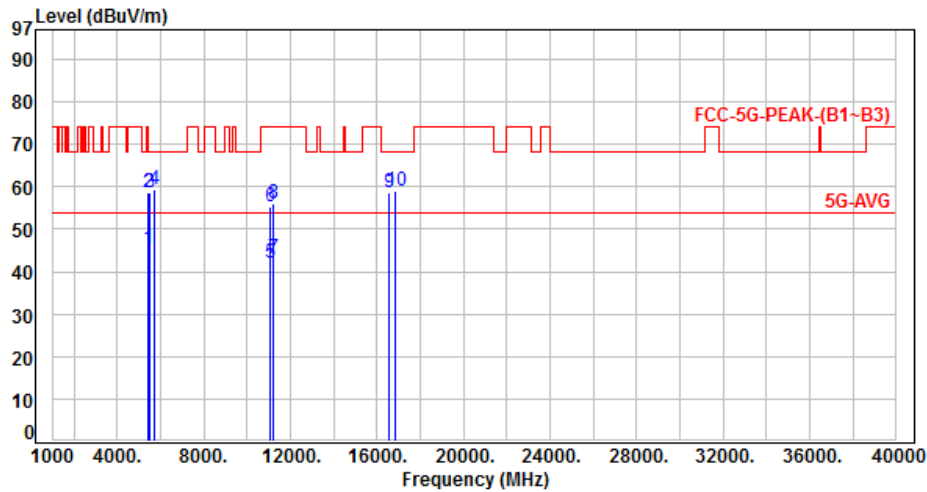

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.20	45.40	54.00	-8.60	Average	100	325	P
2	5460.00	6.20	52.28	58.48	74.00	-15.52	Peak	100	325	P
3	5470.00	6.21	52.45	58.66	68.20	-9.54	Peak	100	325	P
4	5725.00	6.19	53.34	59.53	68.20	-8.67	Peak	118	301	P
5	11060.00	13.77	28.17	41.94	54.00	-12.06	Average	100	303	P
6	11060.00	13.77	41.43	55.20	74.00	-18.80	Peak	100	303	P
7	11220.00	13.98	29.16	43.14	54.00	-10.86	Average	127	289	P
8	11220.00	13.98	41.99	55.97	74.00	-18.03	Peak	127	289	P
9	16590.00	16.42	42.09	58.51	68.20	-9.69	Peak	100	341	P
10	16830.00	18.00	41.13	59.13	68.20	-9.07	Peak	141	321	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, CH106(ANT A+ANT B) + CH122(ANT C+ANT D)		

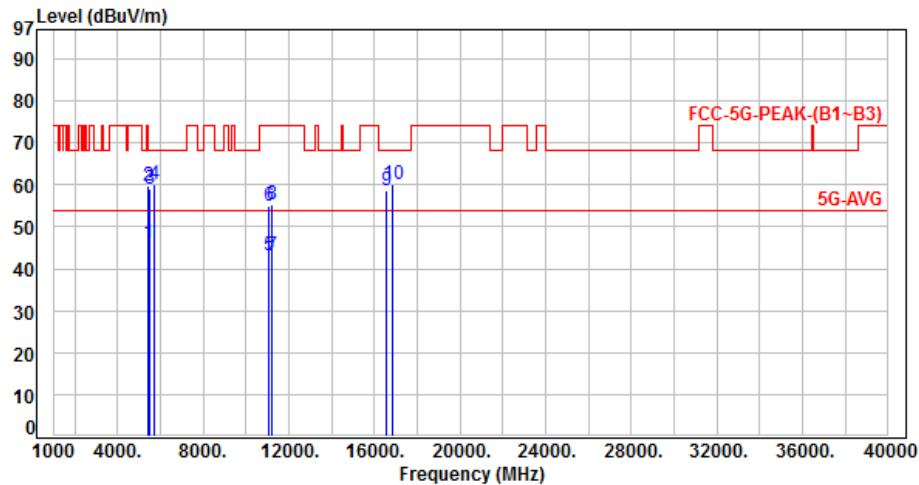

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	40.08	46.28	54.00	-7.72	Average	127	72	P
2	5460.00	6.20	53.41	59.61	74.00	-14.39	Peak	127	72	P
3	5470.00	6.21	52.66	58.87	68.20	-9.33	Peak	127	72	P
4	5725.00	6.19	53.84	60.03	68.20	-8.17	Peak	313	54	P
5	11060.00	13.77	29.46	43.23	54.00	-10.77	Average	138	99	P
6	11060.00	13.77	41.31	55.08	74.00	-18.92	Peak	138	99	P
7	11220.00	13.98	29.31	43.29	54.00	-10.71	Average	301	67	P
8	11220.00	13.98	41.48	55.46	74.00	-18.54	Peak	301	67	P
9	16590.00	16.42	42.13	58.55	68.20	-9.65	Peak	143	54	P
10	16830.00	18.00	42.03	60.03	68.20	-8.17	Peak	324	33	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, CH106(ANT A+ANT B) + CH155(ANT C+ANT D)	:	

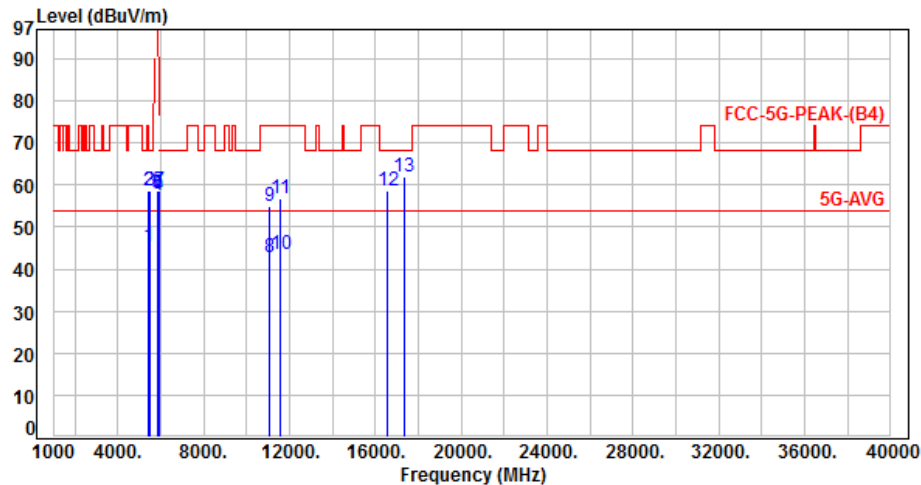

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.15	45.35	54.00	-8.65	Average	100	321	P
2	5460.00	6.20	52.33	58.53	74.00	-15.47	Peak	100	321	P
3	5470.00	6.21	52.48	58.69	68.20	-9.51	Peak	100	321	P
4	5850.00	6.28	51.12	57.40	122.20	-64.80	Peak	100	76	P
5	5855.00	6.30	51.43	57.73	110.80	-53.07	Peak	100	76	P
6	5875.00	6.39	52.23	58.62	105.20	-46.58	Peak	100	76	P
7	5925.00	6.57	52.17	58.74	68.20	-9.46	Peak	100	76	P
8	11060.00	13.77	29.17	42.94	54.00	-11.06	Average	100	307	P
9	11060.00	13.77	41.33	55.10	74.00	-18.90	Peak	100	307	P
10	11550.00	14.64	29.03	43.67	54.00	-10.33	Average	100	89	P
11	11550.00	14.64	42.16	56.80	74.00	-17.20	Peak	100	89	P
12	16590.00	16.42	42.13	58.55	68.20	-9.65	Peak	100	342	P
13	17325.00	20.51	41.35	61.86	68.20	-6.34	Peak	100	61	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, CH106(ANT A+ANT B) + CH155(ANT C+ANT D)		

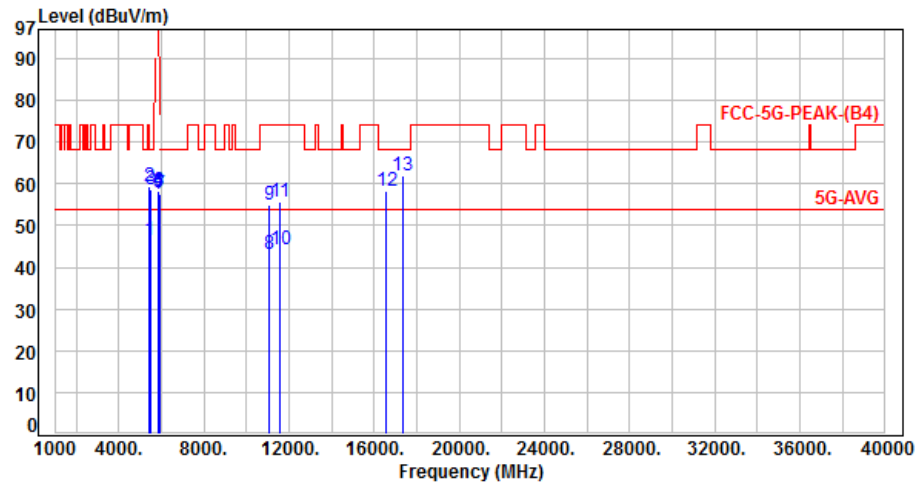

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	40.15	46.35	54.00	-7.65	Average	124	68	P
2	5460.00	6.20	53.30	59.50	74.00	-14.50	Peak	124	68	P
3	5470.00	6.21	52.50	58.71	68.20	-9.49	Peak	124	68	P
4	5850.00	6.28	52.14	58.42	122.20	-63.78	Peak	263	64	P
5	5855.00	6.30	51.50	57.80	110.80	-53.00	Peak	263	64	P
6	5875.00	6.39	51.77	58.16	105.20	-47.04	Peak	263	64	P
7	5925.00	6.57	50.86	57.43	68.20	-10.77	Peak	263	64	P
8	11060.00	13.77	29.46	43.23	54.00	-10.77	Average	134	89	P
9	11060.00	13.77	41.31	55.08	74.00	-18.92	Peak	134	89	P
10	11550.00	14.64	29.46	44.10	54.00	-9.90	Average	278	43	P
11	11550.00	14.64	41.17	55.81	74.00	-18.19	Peak	278	43	P
12	16590.00	16.42	42.03	58.45	68.20	-9.75	Peak	148	98	P
13	17325.00	20.51	41.56	62.07	68.20	-6.13	Peak	241	79	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, CH122(ANT A+ANT B) + CH42(ANT C+ANT D)		

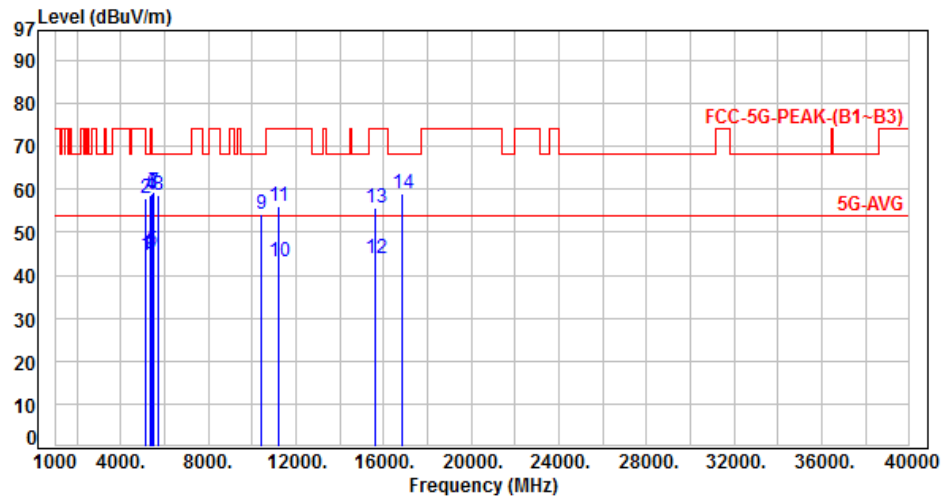

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.61	39.04	44.65	54.00	-9.35	Average	283	46	P
2	5150.00	5.61	52.14	57.75	74.00	-16.25	Peak	283	46	P
3	5350.00	5.99	38.98	44.97	54.00	-9.03	Average	283	46	P
4	5350.00	5.99	52.51	58.50	74.00	-15.50	Peak	283	46	P
5	5460.00	6.20	39.61	45.81	54.00	-8.19	Average	100	336	P
6	5460.00	6.20	52.66	58.86	74.00	-15.14	Peak	100	336	P
7	5470.00	6.21	53.20	59.41	68.20	-8.79	Peak	100	336	P
8	5725.00	6.19	52.45	58.64	68.20	-9.56	Peak	100	336	P
9	10420.00	12.79	41.39	54.18	68.20	-14.02	Peak	267	61	P
10	11220.00	13.98	29.16	43.14	54.00	-10.86	Average	100	321	P
11	11220.00	13.98	42.16	56.14	74.00	-17.86	Peak	100	321	P
12	15630.00	14.60	29.21	43.81	54.00	-10.19	Average	301	24	P
13	15630.00	14.60	41.13	55.73	74.00	-18.27	Peak	301	24	P
14	16830.00	18.00	41.13	59.13	68.20	-9.07	Peak	100	304	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, CH122(ANT A+ANT B) + CH42(ANT C+ANT D)		

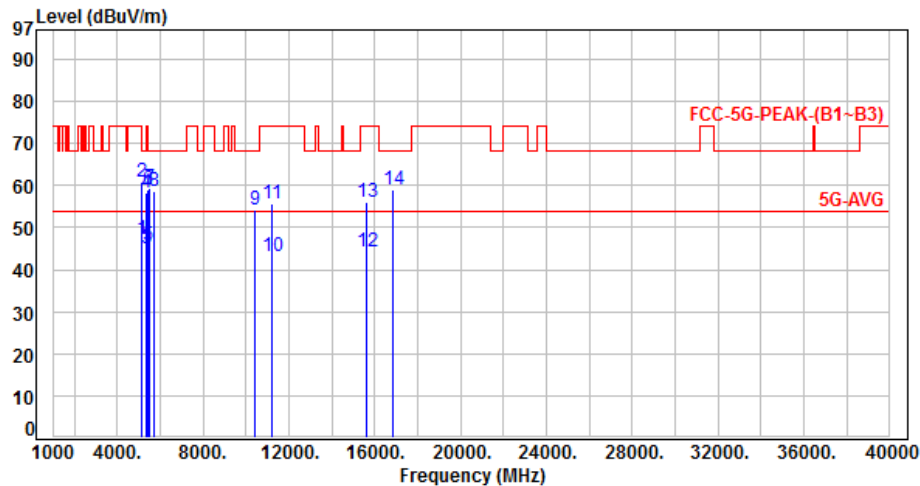

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.61	41.44	47.05	54.00	-6.95	Average	128	289	P
2	5150.00	5.61	55.17	60.78	74.00	-13.22	Peak	128	289	P
3	5350.00	5.99	39.13	45.12	54.00	-8.88	Average	128	289	P
4	5350.00	5.99	52.15	58.14	74.00	-15.86	Peak	128	289	P
5	5460.00	6.20	39.57	45.77	54.00	-8.23	Average	123	67	P
6	5460.00	6.20	52.81	59.01	74.00	-14.99	Peak	123	67	P
7	5470.00	6.21	53.22	59.43	68.20	-8.77	Peak	123	67	P
8	5725.00	6.19	52.48	58.67	68.20	-9.53	Peak	123	67	P
9	10420.00	12.79	41.31	54.10	68.20	-14.10	Peak	111	267	P
10	11220.00	13.98	29.34	43.32	54.00	-10.68	Average	108	86	P
11	11220.00	13.98	41.67	55.65	74.00	-18.35	Peak	108	86	P
12	15630.00	14.60	29.76	44.36	54.00	-9.64	Average	134	300	P
13	15630.00	14.60	41.35	55.95	74.00	-18.05	Peak	134	300	P
14	16830.00	18.00	41.13	59.13	68.20	-9.07	Peak	113	76	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, CH122(ANT A+ANT B) + CH58(ANT C+ANT D)		

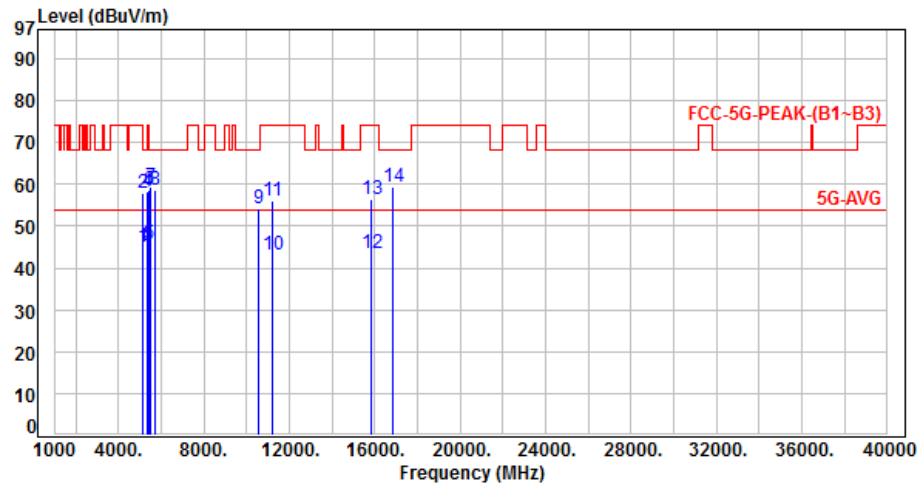

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.61	39.24	44.85	54.00	-9.15	Average	100	351	P
2	5150.00	5.61	52.24	57.85	74.00	-16.15	Peak	100	351	P
3	5350.00	5.99	39.19	45.18	54.00	-8.82	Average	100	351	P
4	5350.00	5.99	52.43	58.42	74.00	-15.58	Peak	100	351	P
5	5460.00	6.20	39.42	45.62	54.00	-8.38	Average	100	333	P
6	5460.00	6.20	52.52	58.72	74.00	-15.28	Peak	100	333	P
7	5470.00	6.21	53.10	59.31	68.20	-8.89	Peak	100	333	P
8	5725.00	6.19	52.34	58.53	68.20	-9.67	Peak	100	333	P
9	10580.00	13.16	41.13	54.29	68.20	-13.91	Peak	100	349	P
10	11220.00	13.98	29.21	43.19	54.00	-10.81	Average	100	324	P
11	11220.00	13.98	42.23	56.21	74.00	-17.79	Peak	100	324	P
12	15870.00	14.29	29.32	43.61	54.00	-10.39	Average	100	332	P
13	15870.00	14.29	42.18	56.47	74.00	-17.53	Peak	100	332	P
14	16830.00	18.00	41.24	59.24	68.20	-8.96	Peak	100	313	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, CH122(ANT A+ANT B) + CH58(ANT C+ANT D)		

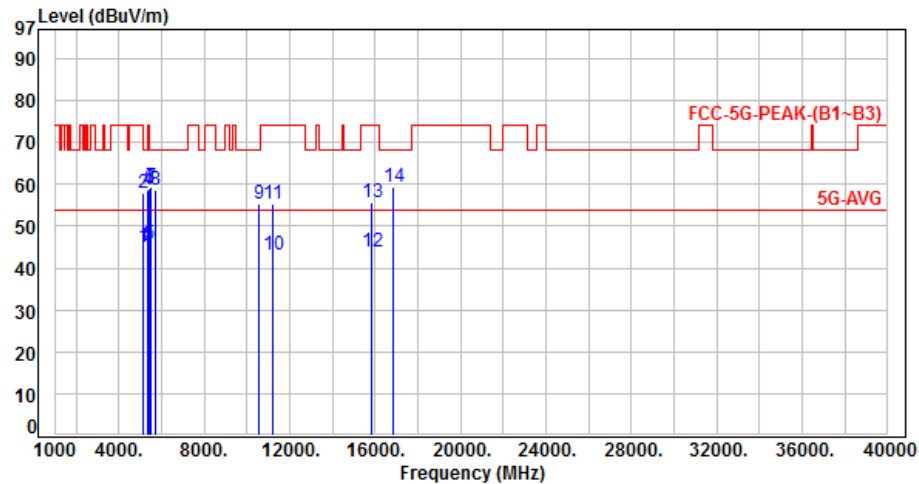

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.61	39.33	44.94	54.00	-9.06	Average	373	293	P
2	5150.00	5.61	52.44	58.05	74.00	-15.95	Peak	373	293	P
3	5350.00	5.99	39.44	45.43	54.00	-8.57	Average	373	293	P
4	5350.00	5.99	52.73	58.72	74.00	-15.28	Peak	373	293	P
5	5460.00	6.20	39.45	45.65	54.00	-8.35	Average	125	69	P
6	5460.00	6.20	52.72	58.92	74.00	-15.08	Peak	125	69	P
7	5470.00	6.21	53.12	59.33	68.20	-8.87	Peak	125	69	P
8	5725.00	6.19	52.34	58.53	68.20	-9.67	Peak	125	69	P
9	10580.00	13.16	42.06	55.22	68.20	-12.98	Peak	357	273	P
10	11220.00	13.98	29.23	43.21	54.00	-10.79	Average	104	76	P
11	11220.00	13.98	41.53	55.51	74.00	-18.49	Peak	104	76	P
12	15870.00	14.29	29.73	44.02	54.00	-9.98	Average	347	321	P
13	15870.00	14.29	41.23	55.52	74.00	-18.48	Peak	347	321	P
14	16830.00	18.00	41.23	59.23	68.20	-8.97	Peak	116	79	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, CH122(ANT A+ANT B) + CH106(ANT C+ANT D)		

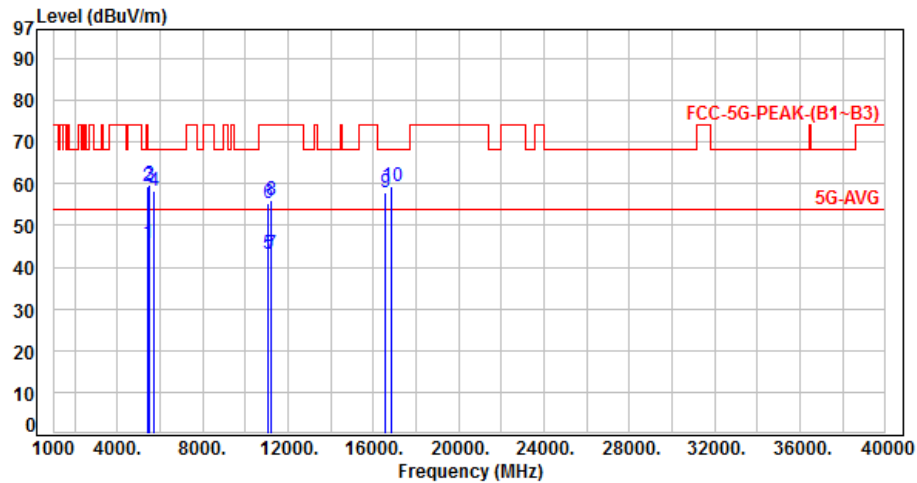

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.55	45.75	54.00	-8.25	Average	100	59	P
2	5460.00	6.20	53.30	59.50	74.00	-14.50	Peak	100	59	P
3	5470.00	6.21	53.42	59.63	68.20	-8.57	Peak	100	59	P
4	5725.00	6.19	52.24	58.43	68.20	-9.77	Peak	100	330	P
5	11060.00	13.77	29.43	43.20	54.00	-10.80	Average	100	71	P
6	11060.00	13.77	41.43	55.20	74.00	-18.80	Peak	100	71	P
7	11220.00	13.98	29.11	43.09	54.00	-10.91	Average	100	315	P
8	11220.00	13.98	42.16	56.14	74.00	-17.86	Peak	100	315	P
9	16590.00	16.42	41.31	57.73	68.20	-10.47	Peak	100	93	P
10	16830.00	18.00	41.34	59.34	68.20	-8.86	Peak	100	301	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, CH122(ANT A+ANT B) + CH106(ANT C+ANT D)		

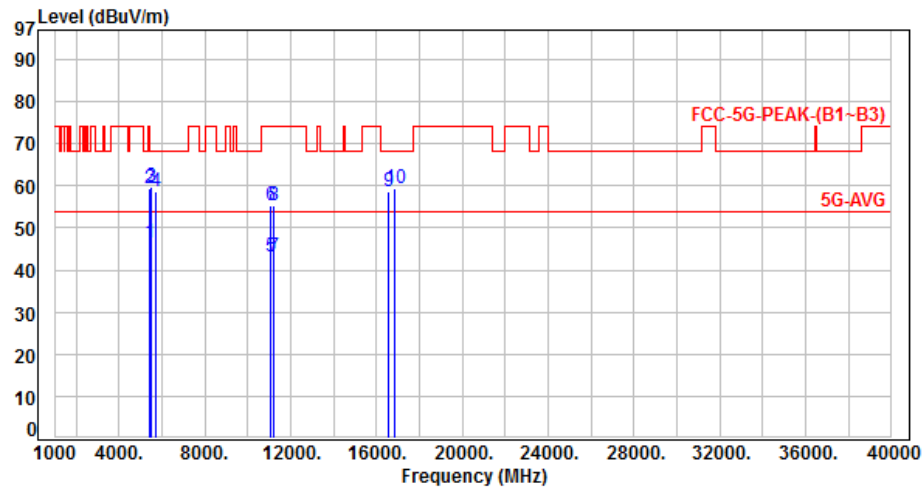

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	40.33	46.53	54.00	-7.47	Average	168	296	P
2	5460.00	6.20	53.11	59.31	74.00	-14.69	Peak	168	296	P
3	5470.00	6.21	53.42	59.63	68.20	-8.57	Peak	168	296	P
4	5725.00	6.19	52.44	58.63	68.20	-9.57	Peak	123	73	P
5	11060.00	13.77	29.31	43.08	54.00	-10.92	Average	173	316	P
6	11060.00	13.77	41.38	55.15	74.00	-18.85	Peak	173	316	P
7	11220.00	13.98	29.33	43.31	54.00	-10.69	Average	104	83	P
8	11220.00	13.98	41.45	55.43	74.00	-18.57	Peak	104	83	P
9	16590.00	16.42	42.13	58.55	68.20	-9.65	Peak	157	276	P
10	16830.00	18.00	41.36	59.36	68.20	-8.84	Peak	114	61	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, CH122(ANT A+ANT B) + CH155(ANT C+ANT D)	:	

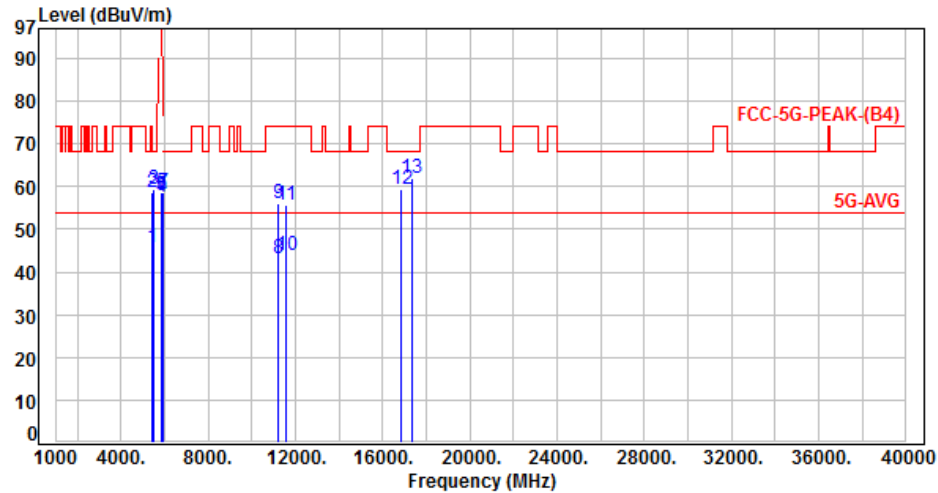

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.46	45.66	54.00	-8.34	Average	100	337	P
2	5460.00	6.20	52.62	58.82	74.00	-15.18	Peak	100	337	P
3	5470.00	6.21	53.17	59.38	68.20	-8.82	Peak	100	337	P
4	5850.00	6.28	51.23	57.51	122.20	-64.69	Peak	100	73	P
5	5855.00	6.30	51.51	57.81	110.80	-52.99	Peak	100	73	P
6	5875.00	6.39	52.19	58.58	105.20	-46.62	Peak	100	73	P
7	5925.00	6.57	52.22	58.79	68.20	-9.41	Peak	100	73	P
8	11220.00	13.98	29.28	43.26	54.00	-10.74	Average	100	329	P
9	11220.00	13.98	42.19	56.17	74.00	-17.83	Peak	100	329	P
10	11550.00	14.64	29.09	43.73	54.00	-10.27	Average	100	94	P
11	11550.00	14.64	41.20	55.84	74.00	-18.16	Peak	100	94	P
12	16830.00	18.00	41.27	59.27	68.20	-8.93	Peak	100	326	P
13	17325.00	20.51	41.48	61.99	68.20	-6.21	Peak	100	55	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, CH122(ANT A+ANT B) + CH155(ANT C+ANT D)		

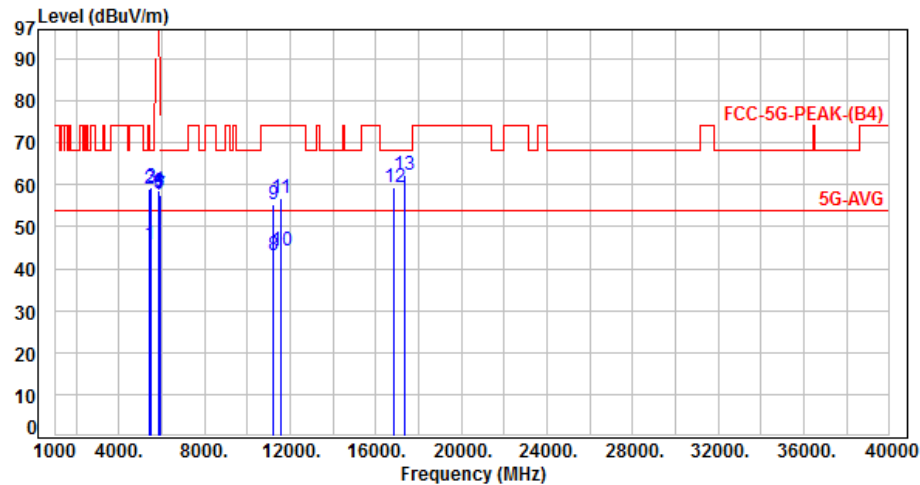

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.52	45.72	54.00	-8.28	Average	129	73	P
2	5460.00	6.20	52.82	59.02	74.00	-14.98	Peak	129	73	P
3	5470.00	6.21	53.18	59.39	68.20	-8.81	Peak	129	73	P
4	5850.00	6.28	52.19	58.47	122.20	-63.73	Peak	260	67	P
5	5855.00	6.30	51.53	57.83	110.80	-52.97	Peak	260	67	P
6	5875.00	6.39	51.79	58.18	105.20	-47.02	Peak	260	67	P
7	5925.00	6.57	50.84	57.41	68.20	-10.79	Peak	260	67	P
8	11220.00	13.98	29.26	43.24	54.00	-10.76	Average	113	93	P
9	11220.00	13.98	41.47	55.45	74.00	-18.55	Peak	113	93	P
10	11550.00	14.64	29.52	44.16	54.00	-9.84	Average	273	39	P
11	11550.00	14.64	42.13	56.77	74.00	-17.23	Peak	273	39	P
12	16830.00	18.00	41.33	59.33	68.20	-8.87	Peak	108	61	P
13	17325.00	20.51	41.64	62.15	68.20	-6.05	Peak	238	76	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, CH155(ANT A+ANT B) + CH58(ANT C+ANT D)		

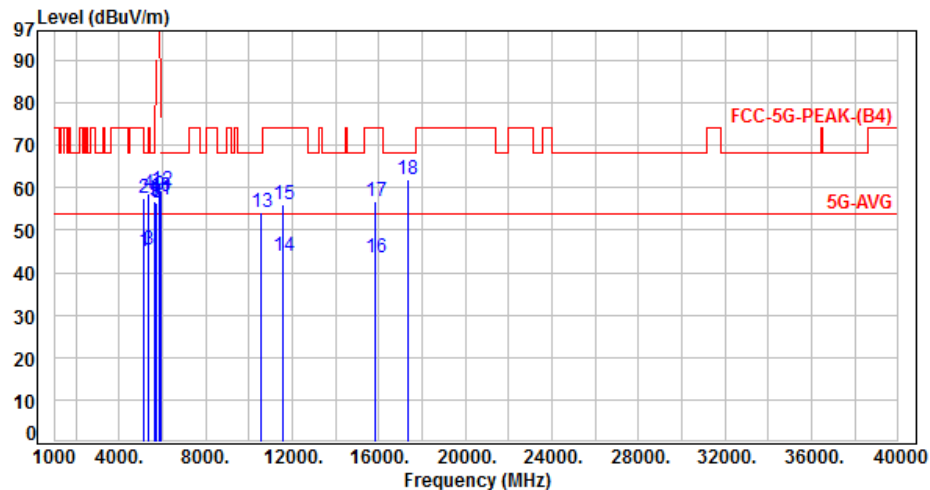

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.61	39.22	44.83	54.00	-9.17	Average	100	346	P
2	5150.00	5.61	52.10	57.71	74.00	-16.29	Peak	100	346	P
3	5350.00	5.99	39.25	45.24	54.00	-8.76	Average	100	346	P
4	5350.00	5.99	52.63	58.62	74.00	-15.38	Peak	100	346	P
5	5650.00	6.13	50.75	56.88	68.20	-11.32	Peak	400	302	P
6	5700.00	6.17	50.18	56.35	105.20	-48.85	Peak	400	302	P
7	5720.00	6.18	50.38	56.56	110.80	-54.24	Peak	400	302	P
8	5725.00	6.19	50.38	56.57	122.20	-65.63	Peak	400	302	P
9	5850.00	6.28	51.82	58.10	122.20	-64.10	Peak	400	302	P
10	5855.00	6.30	51.79	58.09	110.80	-52.71	Peak	400	302	P
11	5875.00	6.39	50.91	57.30	105.20	-47.90	Peak	400	302	P
12	5925.00	6.57	52.85	59.42	68.20	-8.78	Peak	400	302	P
13	10580.00	13.16	41.22	54.38	68.20	-13.82	Peak	100	339	P
14	11550.00	14.64	29.21	43.85	54.00	-10.15	Average	386	287	P
15	11550.00	14.64	41.48	56.12	74.00	-17.88	Peak	386	287	P
16	15870.00	14.29	29.32	43.61	54.00	-10.39	Average	100	339	P
17	15870.00	14.29	42.43	56.72	74.00	-17.28	Peak	100	338	P
18	17325.00	20.51	41.29	61.80	68.20	-6.40	Peak	357	315	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, CH155(ANT A+ANT B) + CH58(ANT C+ANT D)		

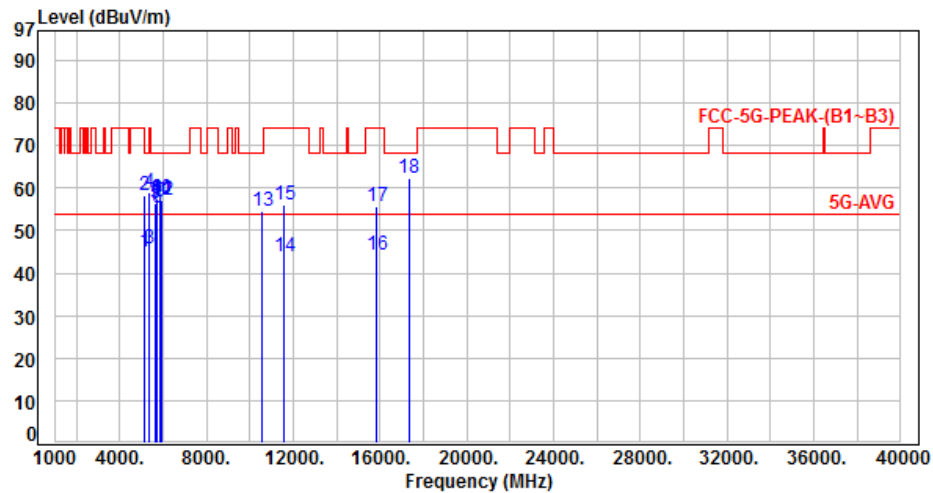

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.61	39.51	45.12	54.00	-8.88	Average	379	296	P
2	5150.00	5.61	52.52	58.13	74.00	-15.87	Peak	379	296	P
3	5350.00	5.99	39.63	45.62	54.00	-8.38	Average	379	296	P
4	5350.00	5.99	52.93	58.92	74.00	-15.08	Peak	379	296	P
5	5650.00	6.13	50.36	56.49	68.20	-11.71	Peak	100	291	P
6	5700.00	6.17	49.24	55.41	105.20	-49.79	Peak	100	291	P
7	5720.00	6.18	49.87	56.05	110.80	-54.75	Peak	100	291	P
8	5725.00	6.19	51.22	57.41	122.20	-64.79	Peak	100	291	P
9	5850.00	6.28	50.62	56.90	122.20	-65.30	Peak	100	291	P
10	5855.00	6.30	51.32	57.62	110.80	-53.18	Peak	100	291	P
11	5875.00	6.39	50.69	57.08	105.20	-48.12	Peak	100	291	P
12	5925.00	6.57	50.76	57.33	68.20	-10.87	Peak	100	291	P
13	10580.00	13.16	41.27	54.43	68.20	-13.77	Peak	349	273	P
14	11550.00	14.64	29.38	44.02	54.00	-9.98	Average	100	247	P
15	11550.00	14.64	41.44	56.08	74.00	-17.92	Peak	100	247	P
16	15870.00	14.29	29.85	44.14	54.00	-9.86	Average	363	302	P
17	15870.00	14.29	41.25	55.54	74.00	-18.46	Peak	363	302	P
18	17325.00	20.51	41.94	62.45	68.20	-5.75	Peak	100	252	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, CH155(ANT A+ANT B) + CH106(ANT C+ANT D)	:	

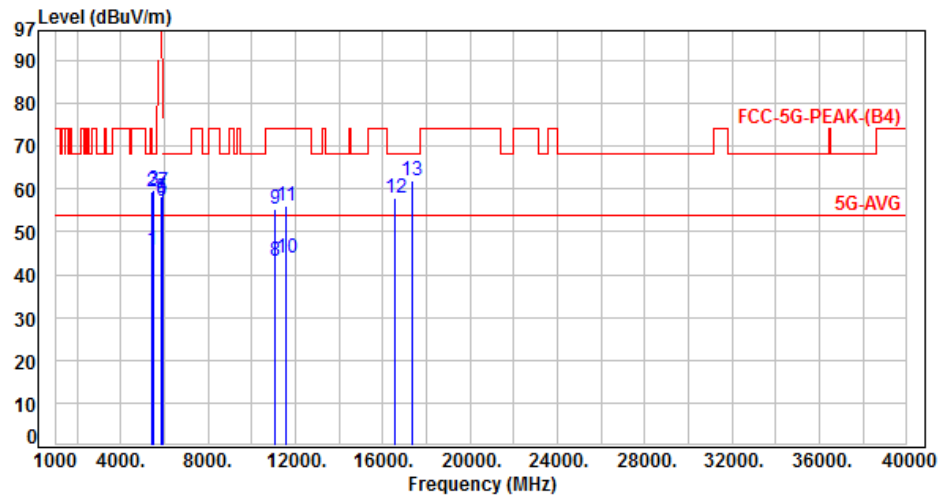

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.58	45.78	54.00	-8.22	Average	100	102	P
2	5460.00	6.20	53.33	59.53	74.00	-14.47	Peak	100	102	P
3	5470.00	6.21	53.52	59.73	68.20	-8.47	Peak	100	102	P
4	5850.00	6.28	51.90	58.18	122.20	-64.02	Peak	400	312	P
5	5855.00	6.30	51.72	58.02	110.80	-52.78	Peak	400	312	P
6	5875.00	6.39	50.84	57.23	105.20	-47.97	Peak	400	312	P
7	5925.00	6.57	52.88	59.45	68.20	-8.75	Peak	400	312	P
8	11060.00	13.77	29.31	43.08	54.00	-10.92	Average	100	82	P
9	11060.00	13.77	41.47	55.24	74.00	-18.76	Peak	100	82	P
10	11550.00	14.64	29.27	43.91	54.00	-10.09	Average	377	292	P
11	11550.00	14.64	41.52	56.16	74.00	-17.84	Peak	377	292	P
12	16590.00	16.42	41.38	57.80	68.20	-10.40	Peak	100	98	P
13	17325.00	20.51	41.34	61.85	68.20	-6.35	Peak	385	292	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, CH155(ANT A+ANT B) + CH106(ANT C+ANT D)		

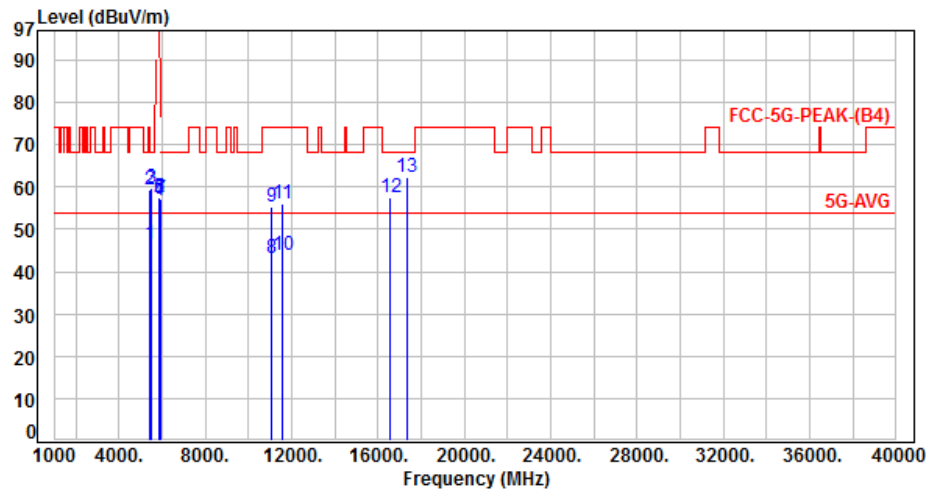

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	40.40	46.60	54.00	-7.40	Average	173	293	P
2	5460.00	6.20	53.23	59.43	74.00	-14.57	Peak	173	293	P
3	5470.00	6.21	53.53	59.74	68.20	-8.46	Peak	173	293	P
4	5850.00	6.28	50.62	56.90	122.20	-65.30	Peak	100	291	P
5	5855.00	6.30	51.32	57.62	110.80	-53.18	Peak	100	291	P
6	5875.00	6.39	50.69	57.08	105.20	-48.12	Peak	100	291	P
7	5925.00	6.57	50.76	57.33	68.20	-10.87	Peak	100	291	P
8	11060.00	13.77	29.39	43.16	54.00	-10.84	Average	178	309	P
9	11060.00	13.77	41.40	55.17	74.00	-18.83	Peak	178	309	P
10	11550.00	14.64	29.38	44.02	54.00	-9.98	Average	100	247	P
11	11550.00	14.64	41.44	56.08	74.00	-17.92	Peak	100	247	P
12	16590.00	16.42	41.23	57.65	68.20	-10.55	Peak	145	254	P
13	17325.00	20.51	41.94	62.45	68.20	-5.75	Peak	100	252	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, CH155(ANT A+ANT B) + CH122(ANT C+ANT D)		

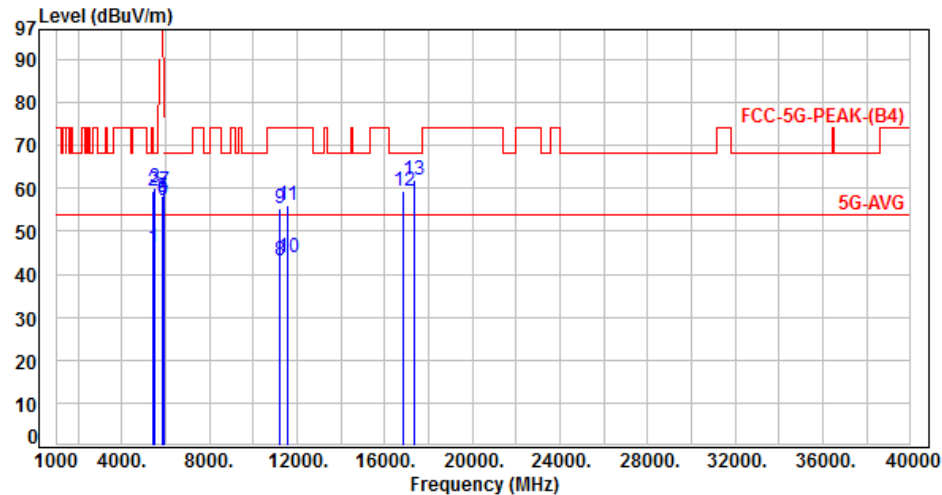

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.88	46.08	54.00	-7.92	Average	115	75	P
2	5460.00	6.20	53.22	59.42	74.00	-14.58	Peak	115	75	P
3	5470.00	6.21	53.78	59.99	68.20	-8.21	Peak	115	75	P
4	5850.00	6.28	51.85	58.13	122.20	-64.07	Peak	400	314	P
5	5855.00	6.30	51.75	58.05	110.80	-52.75	Peak	400	314	P
6	5875.00	6.39	50.87	57.26	105.20	-47.94	Peak	400	314	P
7	5925.00	6.57	52.94	59.51	68.20	-8.69	Peak	400	314	P
8	11220.00	13.98	29.13	43.11	54.00	-10.89	Average	134	96	P
9	11220.00	13.98	41.23	55.21	74.00	-18.79	Peak	134	96	P
10	11550.00	14.64	29.22	43.86	54.00	-10.14	Average	392	331	P
11	11550.00	14.64	41.58	56.22	74.00	-17.78	Peak	392	331	P
12	16830.00	18.00	41.23	59.23	68.20	-8.97	Peak	102	63	P
13	17325.00	20.51	41.43	61.94	68.20	-6.26	Peak	385	294	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, CH155(ANT A+ANT B) + CH122(ANT C+ANT D)		

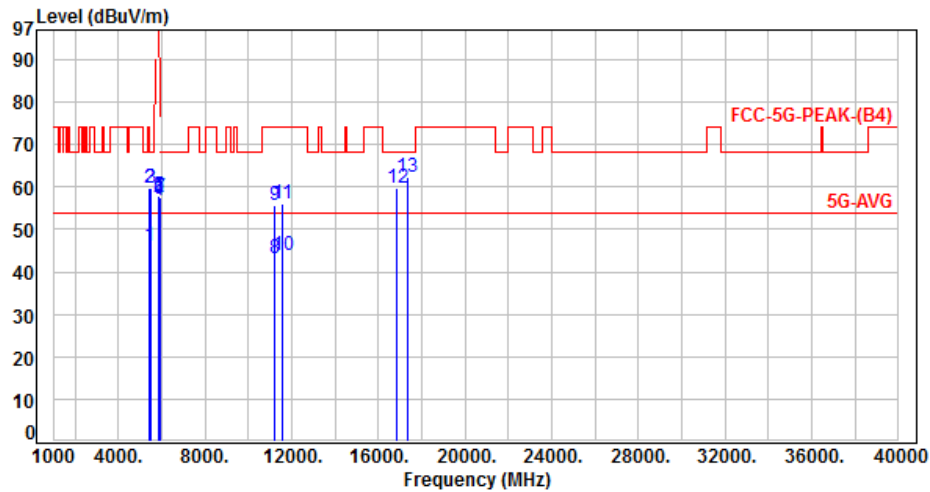

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.97	46.17	54.00	-7.83	Average	135	303	P
2	5460.00	6.20	53.66	59.86	74.00	-14.14	Peak	135	303	P
3	5470.00	6.21	53.45	59.66	68.20	-8.54	Peak	135	303	P
4	5850.00	6.28	50.69	56.97	122.20	-65.23	Peak	100	302	P
5	5855.00	6.30	51.43	57.73	110.80	-53.07	Peak	100	302	P
6	5875.00	6.39	50.75	57.14	105.20	-48.06	Peak	100	302	P
7	5925.00	6.57	50.84	57.41	68.20	-10.79	Peak	100	302	P
8	11220.00	13.98	29.16	43.14	54.00	-10.86	Average	121	279	P
9	11220.00	13.98	41.78	55.76	74.00	-18.24	Peak	121	279	P
10	11550.00	14.64	29.40	44.04	54.00	-9.96	Average	100	323	P
11	11550.00	14.64	41.38	56.02	74.00	-17.98	Peak	100	323	P
12	16830.00	18.00	41.87	59.87	68.20	-8.33	Peak	109	286	P
13	17325.00	20.51	41.86	62.37	68.20	-5.83	Peak	100	282	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, CH42(ANT A+ANT B) + CH138(ANT C+ANT D)	:	

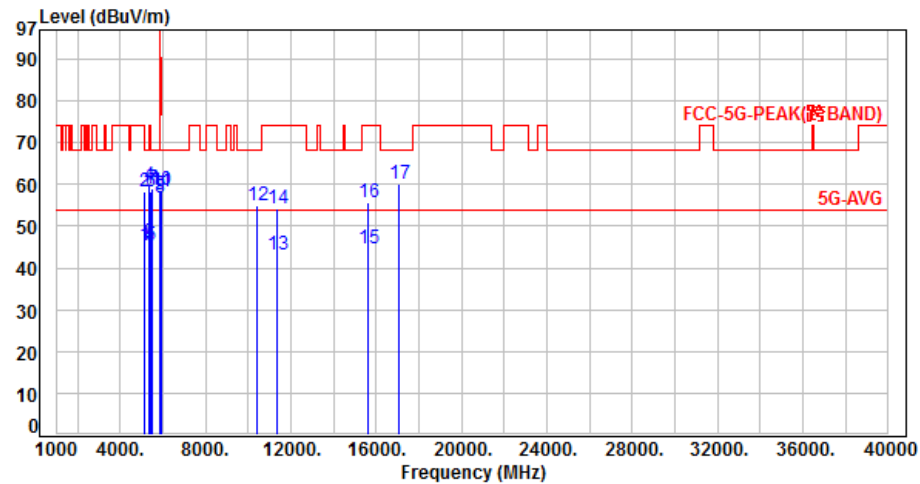

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.61	39.90	45.51	54.00	-8.49	Average	302	16	P
2	5150.00	5.61	52.51	58.12	74.00	-15.88	Peak	302	16	P
3	5350.00	5.99	40.02	46.01	54.00	-7.99	Average	302	16	P
4	5350.00	5.99	53.66	59.65	74.00	-14.35	Peak	302	16	P
5	5460.00	6.20	39.30	45.50	54.00	-8.50	Average	400	22	P
6	5460.00	6.20	52.10	58.30	74.00	-15.70	Peak	400	22	P
7	5470.00	6.21	52.74	58.95	68.20	-9.25	Peak	400	22	P
8	5850.00	6.28	50.33	56.61	122.20	-65.59	Peak	400	22	P
9	5855.00	6.30	51.31	57.61	110.80	-53.19	Peak	400	22	P
10	5875.00	6.39	52.23	58.62	105.20	-46.58	Peak	400	22	P
11	5925.00	6.57	51.61	58.18	68.20	-10.02	Peak	400	22	P
12	10420.00	12.79	42.13	54.92	68.20	-13.28	Peak	323	34	P
13	11380.00	14.13	29.13	43.26	54.00	-10.74	Average	374	49	P
14	11380.00	14.13	40.13	54.26	74.00	-19.74	Peak	374	49	P
15	15630.00	14.60	29.86	44.46	54.00	-9.54	Average	346	53	P
16	15630.00	14.60	41.21	55.81	74.00	-18.19	Peak	346	53	P
17	17070.00	19.17	41.13	60.30	68.20	-7.90	Peak	354	8	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, CH42(ANT A+ANT B) + CH138(ANT C+ANT D)		

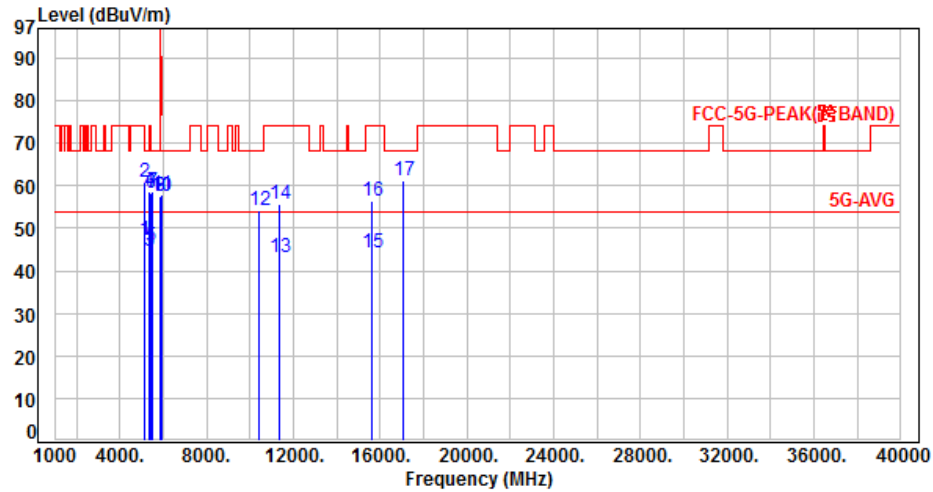

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.61	41.47	47.08	54.00	-6.92	Average	157	65	P
2	5150.00	5.61	55.22	60.83	74.00	-13.17	Peak	157	65	P
3	5350.00	5.99	38.64	44.63	54.00	-9.37	Average	157	65	P
4	5350.00	5.99	52.61	58.60	74.00	-15.40	Peak	157	65	P
5	5460.00	6.20	39.45	45.65	54.00	-8.35	Average	100	104	P
6	5460.00	6.20	52.15	58.35	74.00	-15.65	Peak	100	104	P
7	5470.00	6.21	52.33	58.54	68.20	-9.66	Peak	100	104	P
8	5850.00	6.28	51.12	57.40	122.20	-64.80	Peak	100	104	P
9	5855.00	6.30	51.36	57.66	110.80	-53.14	Peak	100	104	P
10	5875.00	6.39	51.13	57.52	105.20	-47.68	Peak	100	104	P
11	5925.00	6.57	51.52	58.09	68.20	-10.11	Peak	100	104	P
12	10420.00	12.79	41.46	54.25	68.20	-13.95	Peak	177	84	P
13	11380.00	14.13	29.03	43.16	54.00	-10.84	Average	100	133	P
14	11380.00	14.13	41.56	55.69	74.00	-18.31	Peak	100	133	P
15	15630.00	14.60	29.81	44.41	54.00	-9.59	Average	121	34	P
16	15630.00	14.60	41.78	56.38	74.00	-17.62	Peak	121	34	P
17	17070.00	19.17	42.06	61.23	68.20	-6.97	Peak	100	92	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, CH58(ANT A+ANT B) + CH138(ANT C+ANT D)		

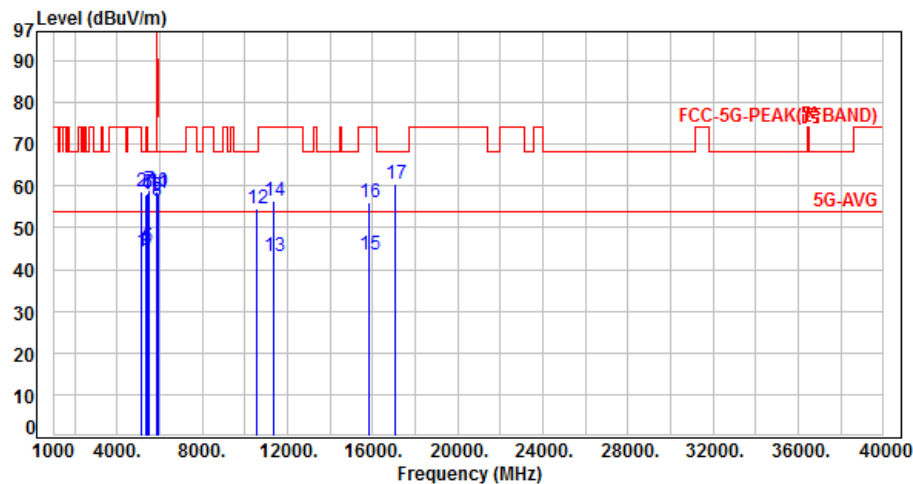

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.61	38.65	44.26	54.00	-9.74	Average	111	360	P
2	5150.00	5.61	53.12	58.73	74.00	-15.27	Peak	111	360	P
3	5350.00	5.99	38.65	44.64	54.00	-9.36	Average	111	360	P
4	5350.00	5.99	52.03	58.02	74.00	-15.98	Peak	111	360	P
5	5460.00	6.20	39.15	45.35	54.00	-8.65	Average	400	24	P
6	5460.00	6.20	52.10	58.30	74.00	-15.70	Peak	400	24	P
7	5470.00	6.21	52.73	58.94	68.20	-9.26	Peak	400	24	P
8	5850.00	6.28	50.30	56.58	122.20	-65.62	Peak	400	24	P
9	5855.00	6.30	51.20	57.50	110.80	-53.30	Peak	400	24	P
10	5875.00	6.39	52.24	58.63	105.20	-46.57	Peak	400	24	P
11	5925.00	6.57	51.80	58.37	68.20	-9.83	Peak	400	24	P
12	10580.00	13.16	41.34	54.50	68.20	-13.70	Peak	100	352	P
13	11380.00	14.13	29.16	43.29	54.00	-10.71	Average	387	67	P
14	11380.00	14.13	42.16	56.29	74.00	-17.71	Peak	387	67	P
15	15870.00	14.29	29.31	43.60	54.00	-10.40	Average	100	336	P
16	15870.00	14.29	41.67	55.96	74.00	-18.04	Peak	100	336	P
17	17070.00	19.17	41.15	60.32	68.20	-7.88	Peak	344	4	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, CH58(ANT A+ANT B) + CH138(ANT C+ANT D)		

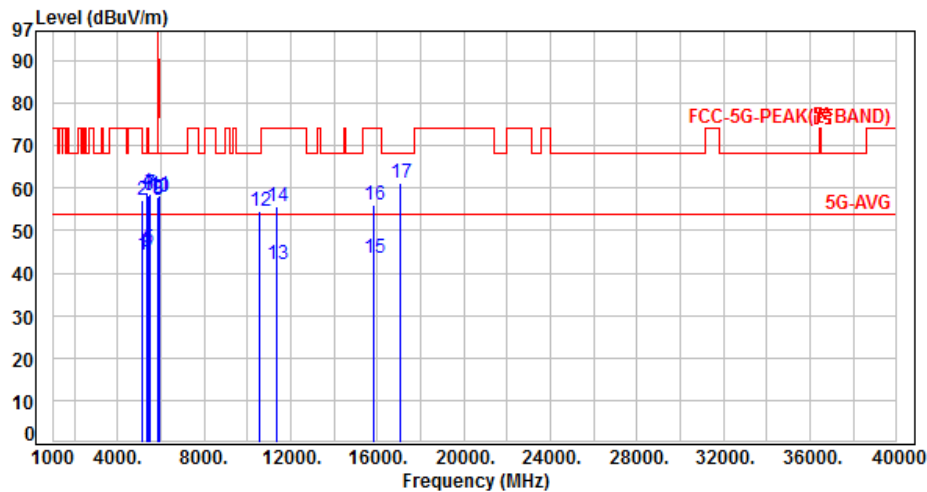

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.61	38.82	44.43	54.00	-9.57	Average	273	63	P
2	5150.00	5.61	51.47	57.08	74.00	-16.92	Peak	273	63	P
3	5350.00	5.99	39.05	45.04	54.00	-8.96	Average	273	63	P
4	5350.00	5.99	53.01	59.00	74.00	-15.00	Peak	273	63	P
5	5460.00	6.20	39.45	45.65	54.00	-8.35	Average	100	101	P
6	5460.00	6.20	52.22	58.42	74.00	-15.58	Peak	100	101	P
7	5470.00	6.21	52.26	58.47	68.20	-9.73	Peak	100	101	P
8	5850.00	6.28	51.03	57.31	122.20	-64.89	Peak	100	101	P
9	5855.00	6.30	51.29	57.59	110.80	-53.21	Peak	100	101	P
10	5875.00	6.39	51.38	57.77	105.20	-47.43	Peak	100	101	P
11	5925.00	6.57	51.62	58.19	68.20	-10.01	Peak	100	101	P
12	10580.00	13.16	41.34	54.50	68.20	-13.70	Peak	241	76	P
13	11380.00	14.13	28.03	42.16	54.00	-11.84	Average	100	133	P
14	11380.00	14.13	41.67	55.80	74.00	-18.20	Peak	100	133	P
15	15870.00	14.29	29.13	43.42	54.00	-10.58	Average	294	97	P
16	15870.00	14.29	41.76	56.05	74.00	-17.95	Peak	294	97	P
17	17070.00	19.17	42.19	61.36	68.20	-6.84	Peak	100	143	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, CH106(ANT A+ANT B) + CH138(ANT C+ANT D)		

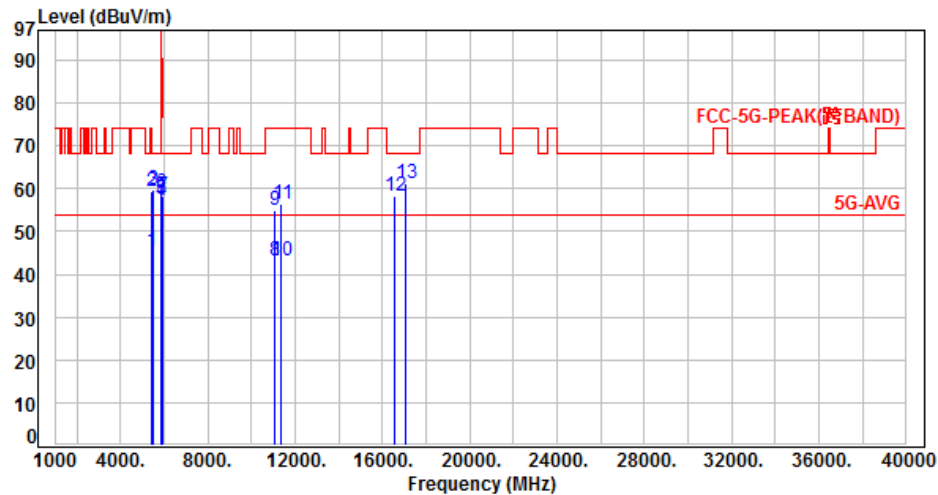

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.12	45.32	54.00	-8.68	Average	400	9	P
2	5460.00	6.20	53.15	59.35	74.00	-14.65	Peak	400	9	P
3	5470.00	6.21	53.40	59.61	68.20	-8.59	Peak	400	8	P
4	5850.00	6.28	50.75	57.03	122.20	-65.17	Peak	400	25	P
5	5855.00	6.30	51.34	57.64	110.80	-53.16	Peak	400	25	P
6	5875.00	6.39	52.67	59.06	105.20	-46.14	Peak	400	25	P
7	5925.00	6.57	51.68	58.25	68.20	-9.95	Peak	400	25	P
8	11060.00	13.77	29.52	43.29	54.00	-10.71	Average	391	21	P
9	11060.00	13.77	41.07	54.84	74.00	-19.16	Peak	391	21	P
10	11380.00	14.13	29.16	43.29	54.00	-10.71	Average	384	64	P
11	11380.00	14.13	42.34	56.47	74.00	-17.53	Peak	384	64	P
12	16590.00	16.42	42.01	58.43	68.20	-9.77	Peak	376	34	P
13	17070.00	19.17	42.16	61.33	68.20	-6.87	Peak	354	3	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, CH106(ANT A+ANT B) + CH138(ANT C+ANT D)		

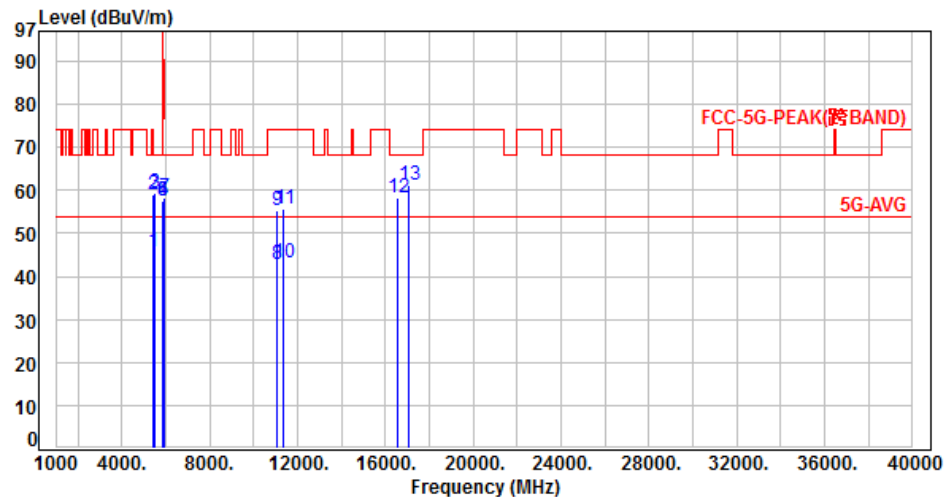

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.45	45.65	54.00	-8.35	Average	100	300	P
2	5460.00	6.20	52.96	59.16	74.00	-14.84	Peak	100	300	P
3	5470.00	6.21	53.20	59.41	68.20	-8.79	Peak	100	300	P
4	5850.00	6.28	51.10	57.38	122.20	-64.82	Peak	100	105	P
5	5855.00	6.30	51.19	57.49	110.80	-53.31	Peak	100	105	P
6	5875.00	6.39	51.24	57.63	105.20	-47.57	Peak	100	105	P
7	5925.00	6.57	51.54	58.11	68.20	-10.09	Peak	100	105	P
8	11060.00	13.77	29.13	42.90	54.00	-11.10	Average	100	289	P
9	11060.00	13.77	41.67	55.44	74.00	-18.56	Peak	100	289	P
10	11380.00	14.13	29.17	43.30	54.00	-10.70	Average	100	141	P
11	11380.00	14.13	41.46	55.59	74.00	-18.41	Peak	100	141	P
12	16590.00	16.42	42.04	58.46	68.20	-9.74	Peak	100	267	P
13	17070.00	19.17	42.09	61.26	68.20	-6.94	Peak	100	121	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, CH122(ANT A+ANT B) + CH138(ANT C+ANT D)		

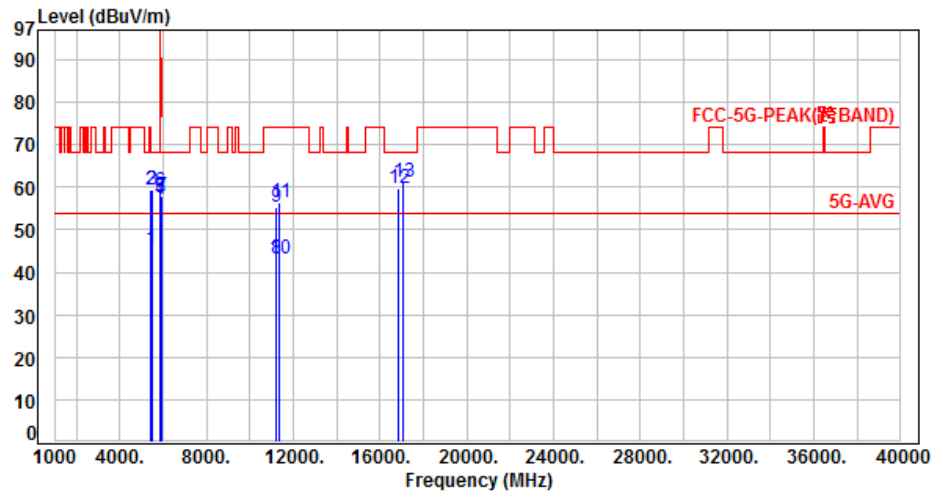

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.12	45.32	54.00	-8.68	Average	303	67	P
2	5460.00	6.20	53.30	59.50	74.00	-14.50	Peak	303	67	P
3	5470.00	6.21	53.08	59.29	68.20	-8.91	Peak	300	67	P
4	5850.00	6.28	50.75	57.03	122.20	-65.17	Peak	400	25	P
5	5855.00	6.30	51.37	57.67	110.80	-53.13	Peak	400	27	P
6	5875.00	6.39	52.67	59.06	105.20	-46.14	Peak	400	27	P
7	5925.00	6.57	51.52	58.09	68.20	-10.11	Peak	400	27	P
8	11220.00	13.98	29.26	43.24	54.00	-10.76	Average	324	79	P
9	11220.00	13.98	41.19	55.17	74.00	-18.83	Peak	324	79	P
10	11380.00	14.13	29.11	43.24	54.00	-10.76	Average	386	81	P
11	11380.00	14.13	42.16	56.29	74.00	-17.71	Peak	386	81	P
12	16830.00	18.00	41.71	59.71	68.20	-8.49	Peak	346	91	P
13	17070.00	19.17	42.09	61.26	68.20	-6.94	Peak	367	16	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, CH122(ANT A+ANT B) + CH138(ANT C+ANT D)		

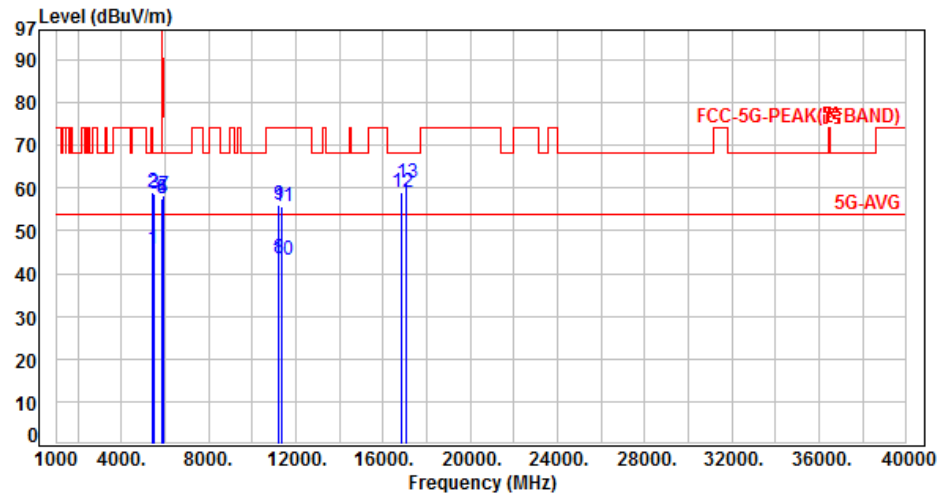

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.66	45.86	54.00	-8.14	Average	100	359	P
2	5460.00	6.20	52.80	59.00	74.00	-15.00	Peak	100	359	P
3	5470.00	6.21	52.55	58.76	68.20	-9.44	Peak	100	359	P
4	5850.00	6.28	51.21	57.49	122.20	-64.71	Peak	100	107	P
5	5855.00	6.30	51.24	57.54	110.80	-53.26	Peak	100	107	P
6	5875.00	6.39	51.31	57.70	105.20	-47.50	Peak	100	107	P
7	5925.00	6.57	51.62	58.19	68.20	-10.01	Peak	100	107	P
8	11220.00	13.98	29.53	43.51	54.00	-10.49	Average	100	341	P
9	11220.00	13.98	42.13	56.11	74.00	-17.89	Peak	100	341	P
10	11380.00	14.13	29.19	43.32	54.00	-10.68	Average	100	153	P
11	11380.00	14.13	41.43	55.56	74.00	-18.44	Peak	100	151	P
12	16830.00	18.00	41.15	59.15	68.20	-9.05	Peak	100	324	P
13	17070.00	19.17	42.13	61.30	68.20	-6.90	Peak	100	131	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, CH155(ANT A+ANT B) + CH138(ANT C+ANT D)		

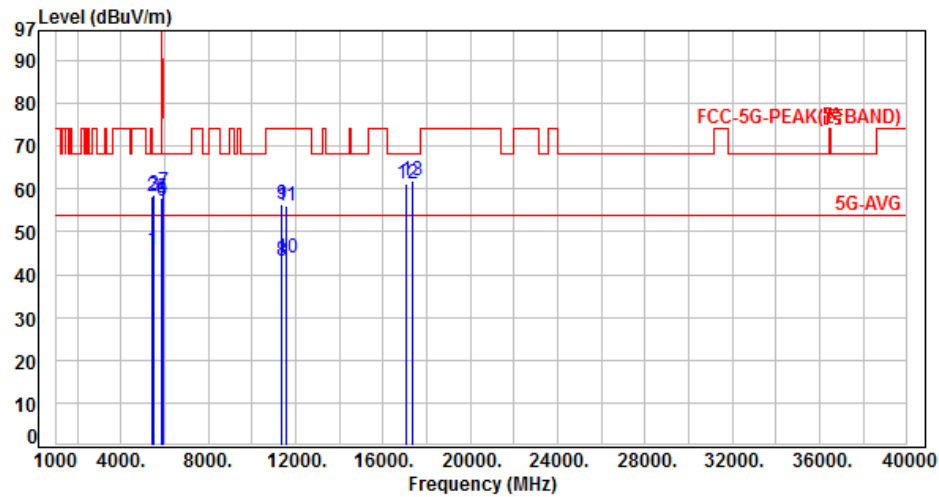

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.45	45.65	54.00	-8.35	Average	400	17	P
2	5460.00	6.20	52.12	58.32	74.00	-15.68	Peak	400	17	P
3	5470.00	6.21	52.60	58.81	68.20	-9.39	Peak	400	17	P
4	5850.00	6.28	51.73	58.01	122.20	-64.19	Peak	400	303	P
5	5855.00	6.30	51.78	58.08	110.80	-52.72	Peak	400	303	P
6	5875.00	6.39	50.91	57.30	105.20	-47.90	Peak	400	303	P
7	5925.00	6.57	52.91	59.48	68.20	-8.72	Peak	400	303	P
8	11380.00	14.13	29.17	43.30	54.00	-10.70	Average	387	42	P
9	11380.00	14.13	42.26	56.39	74.00	-17.61	Peak	387	42	P
10	11550.00	14.64	29.21	43.85	54.00	-10.15	Average	400	327	P
11	11550.00	14.64	41.49	56.13	74.00	-17.87	Peak	400	327	P
12	17070.00	19.17	42.12	61.29	68.20	-6.91	Peak	400	44	P
13	17325.00	20.51	41.57	62.08	68.20	-6.12	Peak	386	321	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, CH155(ANT A+ANT B) + CH138(ANT C+ANT D)		

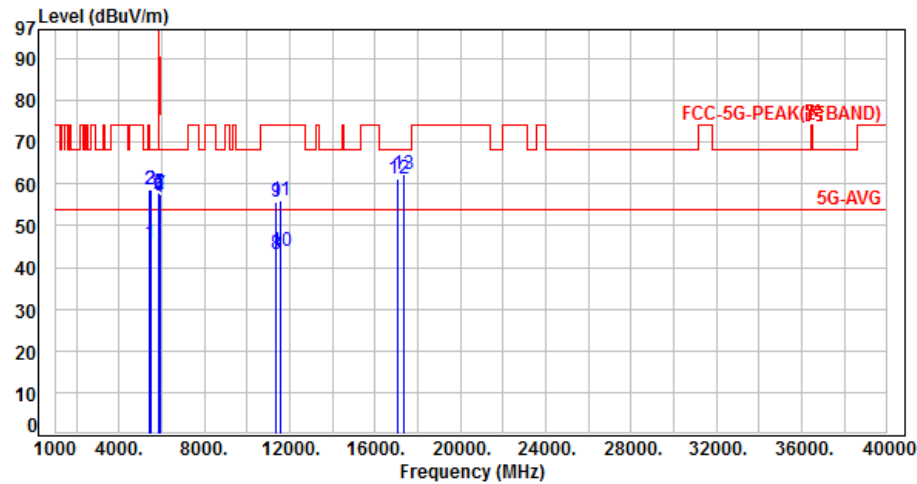

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.36	45.56	54.00	-8.44	Average	100	107	P
2	5460.00	6.20	52.35	58.55	74.00	-15.45	Peak	100	107	P
3	5470.00	6.21	52.34	58.55	68.20	-9.65	Peak	100	107	P
4	5850.00	6.28	50.60	56.88	122.20	-65.32	Peak	100	289	P
5	5855.00	6.30	51.43	57.73	110.80	-53.07	Peak	100	289	P
6	5875.00	6.39	50.61	57.00	105.20	-48.20	Peak	100	289	P
7	5925.00	6.57	50.80	57.37	68.20	-10.83	Peak	100	289	P
8	11380.00	14.13	29.14	43.27	54.00	-10.73	Average	100	136	P
9	11380.00	14.13	41.53	55.66	74.00	-18.34	Peak	100	136	P
10	11550.00	14.64	29.16	43.80	54.00	-10.20	Average	100	334	P
11	11550.00	14.64	41.46	56.10	74.00	-17.90	Peak	100	334	P
12	17070.00	19.17	42.07	61.24	68.20	-6.96	Peak	100	153	P
13	17325.00	20.51	41.90	62.41	68.20	-5.79	Peak	100	277	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, CH138(ANT A+ANT B) + CH42(ANT C+ANT D)		

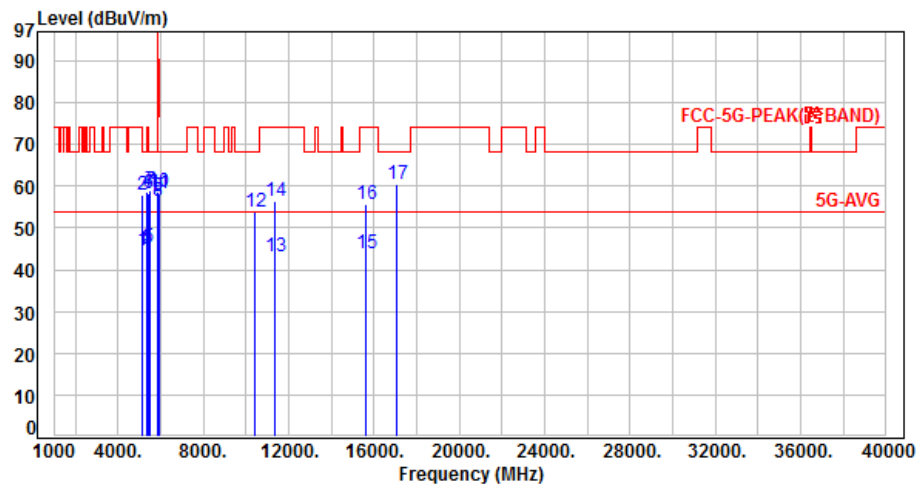

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.61	39.17	44.78	54.00	-9.22	Average	276	43	P
2	5150.00	5.61	52.24	57.85	74.00	-16.15	Peak	276	43	P
3	5350.00	5.99	39.13	45.12	54.00	-8.88	Average	276	43	P
4	5350.00	5.99	52.58	58.57	74.00	-15.43	Peak	276	43	P
5	5460.00	6.20	39.11	45.31	54.00	-8.69	Average	400	352	P
6	5460.00	6.20	52.10	58.30	74.00	-15.70	Peak	400	352	P
7	5470.00	6.21	52.77	58.98	68.20	-9.22	Peak	400	352	P
8	5850.00	6.28	50.19	56.47	122.20	-65.73	Peak	400	352	P
9	5855.00	6.30	51.13	57.43	110.80	-53.37	Peak	400	352	P
10	5875.00	6.39	52.13	58.52	105.20	-46.68	Peak	400	352	P
11	5925.00	6.57	51.77	58.34	68.20	-9.86	Peak	400	352	P
12	10420.00	12.79	41.13	53.92	68.20	-14.28	Peak	284	61	P
13	11380.00	14.13	29.16	43.29	54.00	-10.71	Average	364	313	P
14	11380.00	14.13	42.13	56.26	74.00	-17.74	Peak	364	313	P
15	15630.00	14.60	29.13	43.73	54.00	-10.27	Average	299	83	P
16	15630.00	14.60	41.23	55.83	74.00	-18.17	Peak	299	83	P
17	17070.00	19.17	41.24	60.41	68.20	-7.79	Peak	341	300	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, CH138(ANT A+ANT B) + CH42(ANT C+ANT D)		

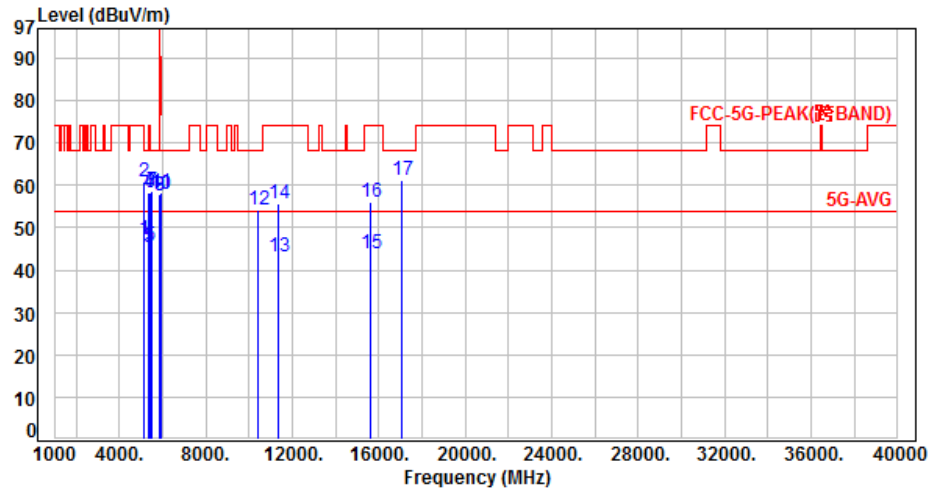

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.61	41.67	47.28	54.00	-6.72	Average	130	299	P
2	5150.00	5.61	55.33	60.94	74.00	-13.06	Peak	130	299	P
3	5350.00	5.99	39.37	45.36	54.00	-8.64	Average	130	299	P
4	5350.00	5.99	52.45	58.44	74.00	-15.56	Peak	130	299	P
5	5460.00	6.20	39.43	45.63	54.00	-8.37	Average	100	298	P
6	5460.00	6.20	52.12	58.32	74.00	-15.68	Peak	100	298	P
7	5470.00	6.21	52.28	58.49	68.20	-9.71	Peak	100	298	P
8	5850.00	6.28	51.12	57.40	122.20	-64.80	Peak	100	298	P
9	5855.00	6.30	51.34	57.64	110.80	-53.16	Peak	100	298	P
10	5875.00	6.39	51.41	57.80	105.20	-47.40	Peak	100	298	P
11	5925.00	6.57	51.77	58.34	68.20	-9.86	Peak	100	298	P
12	10420.00	12.79	41.34	54.13	68.20	-14.07	Peak	113	267	P
13	11380.00	14.13	29.16	43.29	54.00	-10.71	Average	100	313	P
14	11380.00	14.13	41.51	55.64	74.00	-18.36	Peak	100	313	P
15	15630.00	14.60	29.21	43.81	54.00	-10.19	Average	142	315	P
16	15630.00	14.60	41.38	55.98	74.00	-18.02	Peak	142	315	P
17	17070.00	19.17	42.03	61.20	68.20	-7.00	Peak	100	330	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, CH138(ANT A+ANT B) + CH58(ANT C+ANT D)		

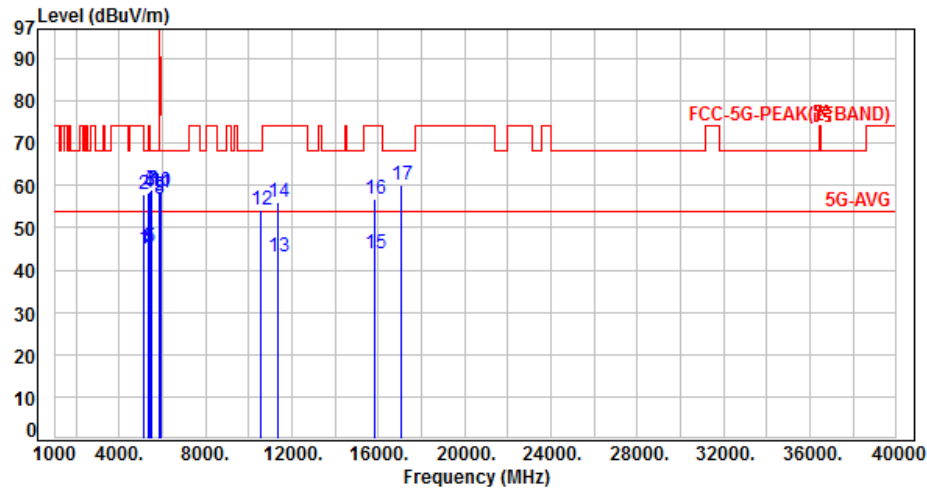

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.61	39.32	44.93	54.00	-9.07	Average	100	360	P
2	5150.00	5.61	52.32	57.93	74.00	-16.07	Peak	100	360	P
3	5350.00	5.99	39.27	45.26	54.00	-8.74	Average	100	360	P
4	5350.00	5.99	52.46	58.45	74.00	-15.55	Peak	100	360	P
5	5460.00	6.20	39.13	45.33	54.00	-8.67	Average	400	348	P
6	5460.00	6.20	52.33	58.53	74.00	-15.47	Peak	400	348	P
7	5470.00	6.21	52.63	58.84	68.20	-9.36	Peak	400	348	P
8	5850.00	6.28	50.33	56.61	122.20	-65.59	Peak	400	348	P
9	5855.00	6.30	51.21	57.51	110.80	-53.29	Peak	400	348	P
10	5875.00	6.39	52.27	58.66	105.20	-46.54	Peak	400	348	P
11	5925.00	6.57	51.82	58.39	68.20	-9.81	Peak	400	348	P
12	10580.00	13.16	41.16	54.32	68.20	-13.88	Peak	100	348	P
13	11380.00	14.13	29.19	43.32	54.00	-10.68	Average	388	336	P
14	11380.00	14.13	42.00	56.13	74.00	-17.87	Peak	388	336	P
15	15870.00	14.29	29.62	43.91	54.00	-10.09	Average	100	324	P
16	15870.00	14.29	42.41	56.70	74.00	-17.30	Peak	100	324	P
17	17070.00	19.17	41.04	60.21	68.20	-7.99	Peak	344	319	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, CH138(ANT A+ANT B) + CH58(ANT C+ANT D)		

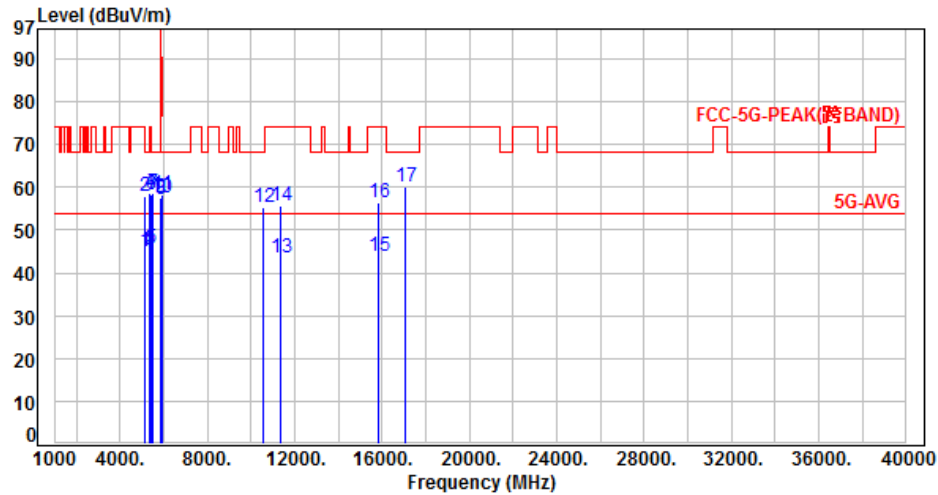

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.61	39.42	45.03	54.00	-8.97	Average	373	293	P
2	5150.00	5.61	52.42	58.03	74.00	-15.97	Peak	373	293	P
3	5350.00	5.99	39.46	45.45	54.00	-8.55	Average	373	293	P
4	5350.00	5.99	52.76	58.75	74.00	-15.25	Peak	373	293	P
5	5460.00	6.20	39.38	45.58	54.00	-8.42	Average	100	303	P
6	5460.00	6.20	52.00	58.20	74.00	-15.80	Peak	100	303	P
7	5470.00	6.21	52.26	58.47	68.20	-9.73	Peak	100	303	P
8	5850.00	6.28	51.05	57.33	122.20	-64.87	Peak	100	303	P
9	5855.00	6.30	51.13	57.43	110.80	-53.37	Peak	100	303	P
10	5875.00	6.39	51.31	57.70	105.20	-47.50	Peak	100	303	P
11	5925.00	6.57	51.66	58.23	68.20	-9.97	Peak	100	303	P
12	10580.00	13.16	42.01	55.17	68.20	-13.03	Peak	387	310	P
13	11380.00	14.13	29.24	43.37	54.00	-10.63	Average	100	326	P
14	11380.00	14.13	41.42	55.55	74.00	-18.45	Peak	100	326	P
15	15870.00	14.29	29.67	43.96	54.00	-10.04	Average	341	241	P
16	15870.00	14.29	42.02	56.31	74.00	-17.69	Peak	341	241	P
17	17070.00	19.17	41.13	60.30	68.20	-7.90	Peak	100	279	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, CH138(ANT A+ANT B) + CH106(ANT C+ANT D)		

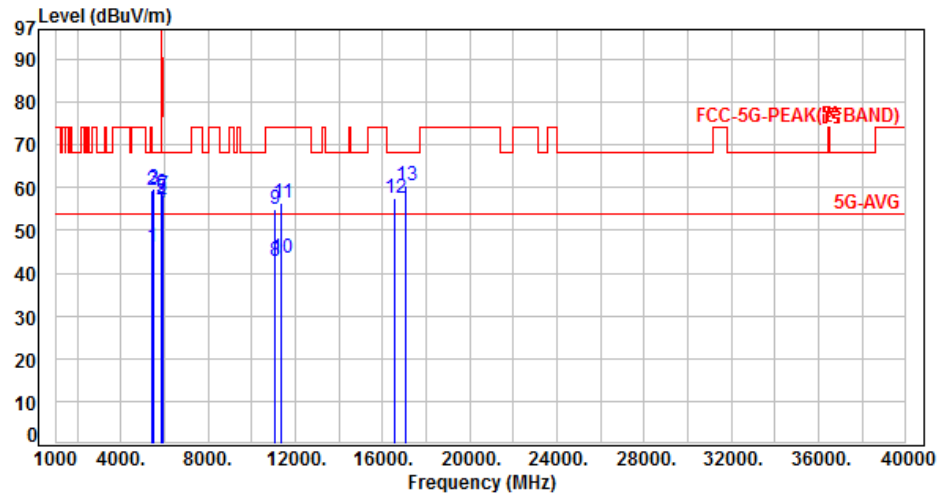

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.75	45.95	54.00	-8.05	Average	100	54	P
2	5460.00	6.20	53.12	59.32	74.00	-14.68	Peak	100	54	P
3	5470.00	6.21	53.40	59.61	68.20	-8.59	Peak	100	54	P
4	5850.00	6.28	50.32	56.60	122.20	-65.60	Peak	400	346	P
5	5855.00	6.30	51.31	57.61	110.80	-53.19	Peak	400	346	P
6	5875.00	6.39	52.31	58.70	105.20	-46.50	Peak	400	346	P
7	5925.00	6.57	51.84	58.41	68.20	-9.79	Peak	400	346	P
8	11060.00	13.77	29.16	42.93	54.00	-11.07	Average	100	79	P
9	11060.00	13.77	41.34	55.11	74.00	-18.89	Peak	100	79	P
10	11380.00	14.13	29.31	43.44	54.00	-10.56	Average	381	334	P
11	11380.00	14.13	42.13	56.26	74.00	-17.74	Peak	381	336	P
12	16590.00	16.42	41.26	57.68	68.20	-10.52	Peak	100	91	P
13	17070.00	19.17	41.16	60.33	68.20	-7.87	Peak	346	314	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, CH138(ANT A+ANT B) + CH106(ANT C+ANT D)		

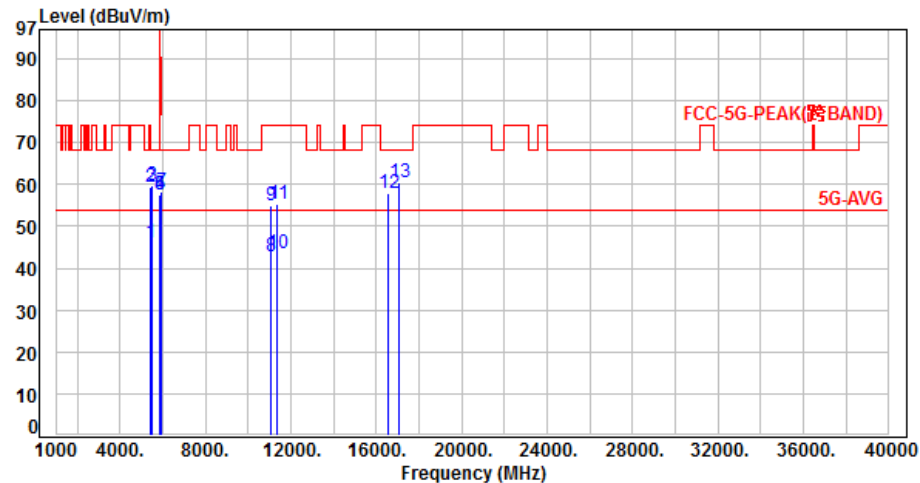

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.77	45.97	54.00	-8.03	Average	149	314	P
2	5460.00	6.20	53.33	59.53	74.00	-14.47	Peak	149	314	P
3	5470.00	6.21	53.50	59.71	68.20	-8.49	Peak	149	314	P
4	5850.00	6.28	51.19	57.47	122.20	-64.73	Peak	100	307	P
5	5855.00	6.30	51.21	57.51	110.80	-53.29	Peak	100	307	P
6	5875.00	6.39	51.12	57.51	105.20	-47.69	Peak	100	307	P
7	5925.00	6.57	51.77	58.34	68.20	-9.86	Peak	100	307	P
8	11060.00	13.77	29.14	42.91	54.00	-11.09	Average	167	301	P
9	11060.00	13.77	41.36	55.13	74.00	-18.87	Peak	167	301	P
10	11380.00	14.13	29.31	43.44	54.00	-10.56	Average	100	334	P
11	11380.00	14.13	41.13	55.26	74.00	-18.74	Peak	100	334	P
12	16590.00	16.42	41.34	57.76	68.20	-10.44	Peak	123	334	P
13	17070.00	19.17	41.31	60.48	68.20	-7.72	Peak	100	284	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, CH138(ANT A+ANT B) + CH122(ANT C+ANT D)		

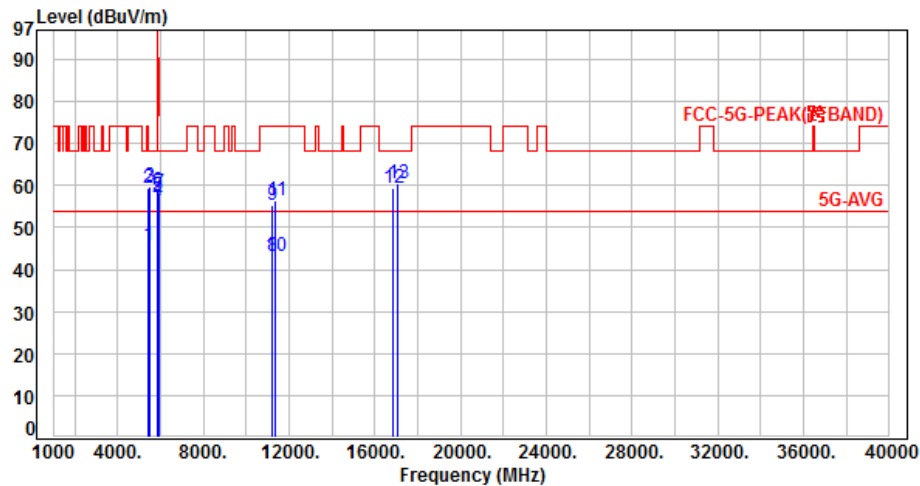

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.55	45.75	54.00	-8.25	Average	100	73	P
2	5460.00	6.20	53.18	59.38	74.00	-14.62	Peak	100	73	P
3	5470.00	6.21	53.55	59.76	68.20	-8.44	Peak	100	73	P
4	5850.00	6.28	50.17	56.45	122.20	-65.75	Peak	400	342	P
5	5855.00	6.30	51.16	57.46	110.80	-53.34	Peak	400	342	P
6	5875.00	6.39	52.18	58.57	105.20	-46.63	Peak	400	342	P
7	5925.00	6.57	51.69	58.26	68.20	-9.94	Peak	400	342	P
8	11220.00	13.98	29.28	43.26	54.00	-10.74	Average	100	101	P
9	11220.00	13.98	41.36	55.34	74.00	-18.66	Peak	100	101	P
10	11380.00	14.13	29.16	43.29	54.00	-10.71	Average	386	324	P
11	11380.00	14.13	42.22	56.35	74.00	-17.65	Peak	386	324	P
12	16830.00	18.00	41.30	59.30	68.20	-8.90	Peak	100	56	P
13	17070.00	19.17	41.34	60.51	68.20	-7.69	Peak	367	289	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, CH138(ANT A+ANT B) + CH122(ANT C+ANT D)		

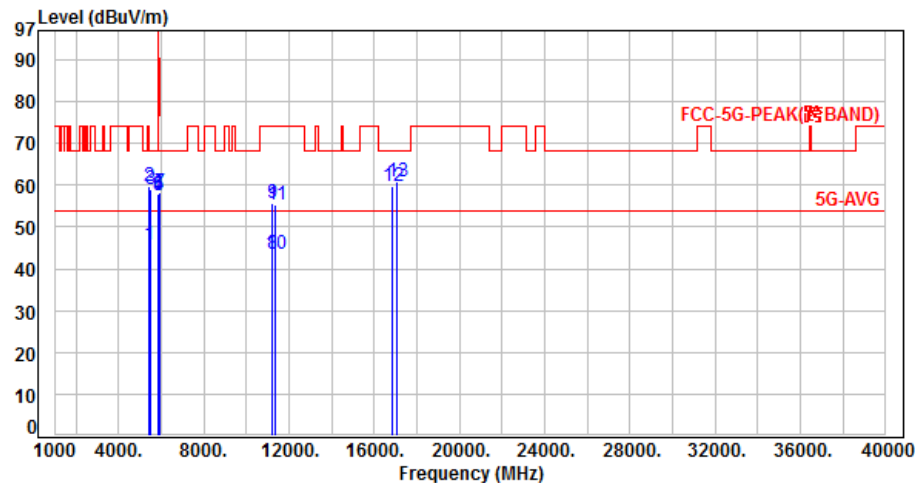

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.53	45.73	54.00	-8.27	Average	136	297	P
2	5460.00	6.20	53.45	59.65	74.00	-14.35	Peak	136	297	P
3	5470.00	6.21	52.96	59.17	68.20	-9.03	Peak	136	297	P
4	5850.00	6.28	51.21	57.49	122.20	-64.71	Peak	100	300	P
5	5855.00	6.30	51.16	57.46	110.80	-53.34	Peak	100	300	P
6	5875.00	6.39	51.34	57.73	105.20	-47.47	Peak	100	300	P
7	5925.00	6.57	51.66	58.23	68.20	-9.97	Peak	100	300	P
8	11220.00	13.98	29.38	43.36	54.00	-10.64	Average	124	264	P
9	11220.00	13.98	41.56	55.54	74.00	-18.46	Peak	124	264	P
10	11380.00	14.13	29.43	43.56	54.00	-10.44	Average	100	347	P
11	11380.00	14.13	41.24	55.37	74.00	-18.63	Peak	100	347	P
12	16830.00	18.00	41.76	59.76	68.20	-8.44	Peak	141	316	P
13	17070.00	19.17	41.67	60.84	68.20	-7.36	Peak	100	295	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, CH138(ANT A+ANT B) + CH155(ANT C+ANT D)		

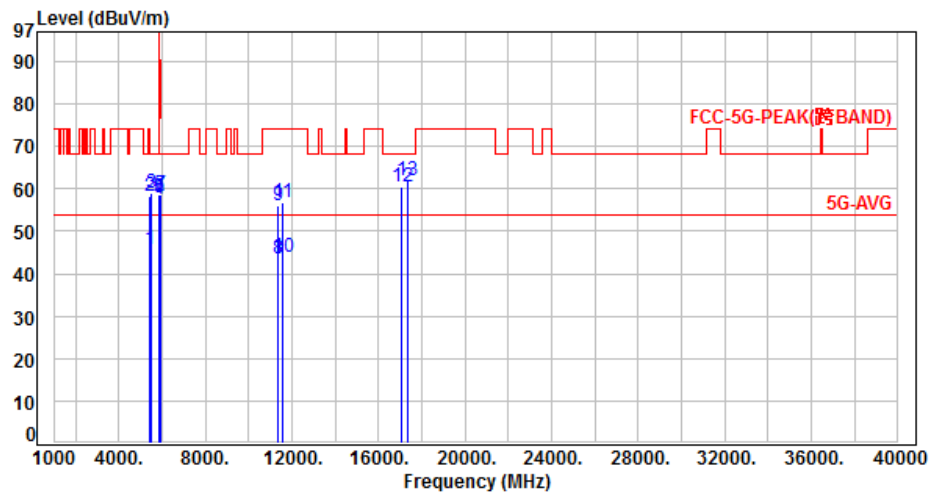

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.45	45.65	54.00	-8.35	Average	400	350	P
2	5460.00	6.20	52.08	58.28	74.00	-15.72	Peak	400	350	P
3	5470.00	6.21	52.70	58.91	68.20	-9.29	Peak	400	350	P
4	5850.00	6.28	51.15	57.43	122.20	-64.77	Peak	100	73	P
5	5855.00	6.30	51.68	57.98	110.80	-52.82	Peak	100	73	P
6	5875.00	6.39	52.13	58.52	105.20	-46.68	Peak	100	73	P
7	5925.00	6.57	52.17	58.74	68.20	-9.46	Peak	100	73	P
8	11380.00	14.13	29.34	43.47	54.00	-10.53	Average	388	336	P
9	11380.00	14.13	42.03	56.16	74.00	-17.84	Peak	388	336	P
10	11550.00	14.64	29.34	43.98	54.00	-10.02	Average	100	86	P
11	11550.00	14.64	42.03	56.67	74.00	-17.33	Peak	100	86	P
12	17070.00	19.17	41.15	60.32	68.20	-7.88	Peak	367	297	P
13	17325.00	20.51	41.32	61.83	68.20	-6.37	Peak	100	99	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, CH138(ANT A+ANT B) + CH155(ANT C+ANT D)		

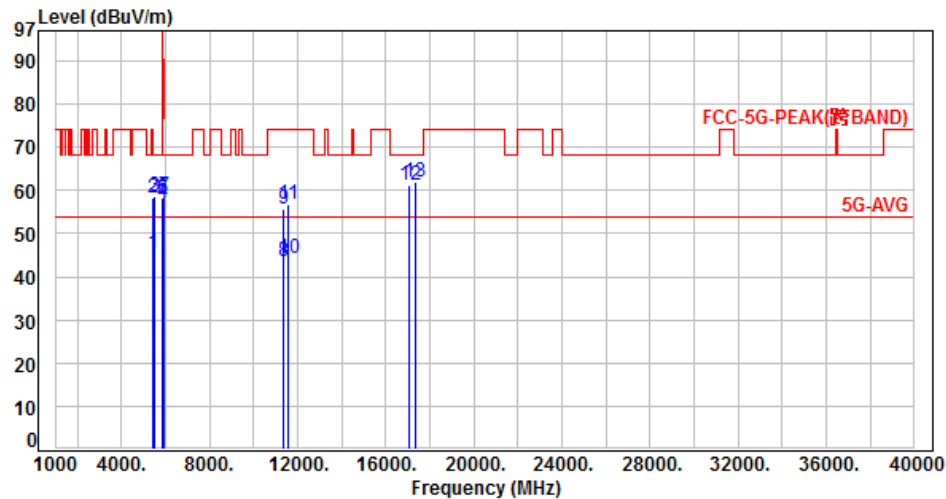

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.15	45.35	54.00	-8.65	Average	100	301	P
2	5460.00	6.20	52.20	58.40	74.00	-15.60	Peak	100	301	P
3	5470.00	6.21	52.35	58.56	68.20	-9.64	Peak	100	301	P
4	5850.00	6.28	51.05	57.33	122.20	-64.87	Peak	263	72	P
5	5855.00	6.30	51.43	57.73	110.80	-53.07	Peak	263	72	P
6	5875.00	6.39	52.03	58.42	105.20	-46.78	Peak	263	72	P
7	5925.00	6.57	52.17	58.74	68.20	-9.46	Peak	263	72	P
8	11380.00	14.13	29.23	43.36	54.00	-10.64	Average	100	336	P
9	11380.00	14.13	41.61	55.74	74.00	-18.26	Peak	100	336	P
10	11550.00	14.64	29.60	44.24	54.00	-9.76	Average	237	90	P
11	11550.00	14.64	42.01	56.65	74.00	-17.35	Peak	237	90	P
12	17070.00	19.17	42.01	61.18	68.20	-7.02	Peak	100	282	P
13	17325.00	20.51	41.35	61.86	68.20	-6.34	Peak	211	117	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, CH42(ANT A+ANT B) + CH138(ANT C+ANT D)	:	

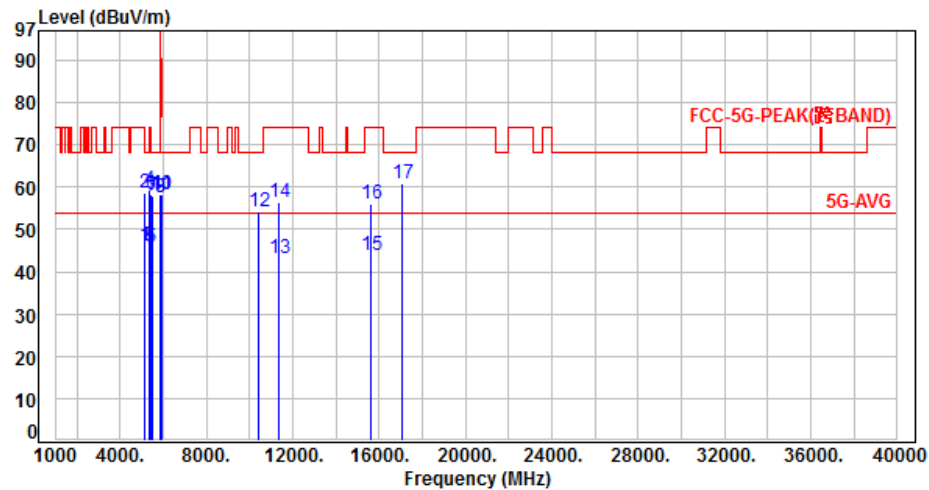

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.61	40.54	46.15	54.00	-7.85	Average	100	360	P
2	5150.00	5.61	53.17	58.78	74.00	-15.22	Peak	100	360	P
3	5350.00	5.99	40.16	46.15	54.00	-7.85	Average	100	360	P
4	5350.00	5.99	53.36	59.35	74.00	-14.65	Peak	100	360	P
5	5460.00	6.20	39.64	45.84	54.00	-8.16	Average	100	307	P
6	5460.00	6.20	52.02	58.22	74.00	-15.78	Peak	100	307	P
7	5470.00	6.21	51.83	58.04	68.20	-10.16	Peak	100	307	P
8	5850.00	6.28	51.23	57.51	122.20	-64.69	Peak	100	307	P
9	5855.00	6.30	51.41	57.71	110.80	-53.09	Peak	100	307	P
10	5875.00	6.39	51.80	58.19	105.20	-47.01	Peak	100	307	P
11	5925.00	6.57	51.74	58.31	68.20	-9.89	Peak	100	307	P
12	10420.00	12.79	41.31	54.10	68.20	-14.10	Peak	100	346	P
13	11380.00	14.13	29.18	43.31	54.00	-10.69	Average	100	291	P
14	11380.00	14.13	42.23	56.36	74.00	-17.64	Peak	100	291	P
15	15630.00	14.60	29.17	43.77	54.00	-10.23	Average	100	336	P
16	15630.00	14.60	41.43	56.03	74.00	-17.97	Peak	100	336	P
17	17070.00	19.17	41.79	60.96	68.20	-7.24	Peak	100	264	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, CH42(ANT A+ANT B) + CH138(ANT C+ANT D)		

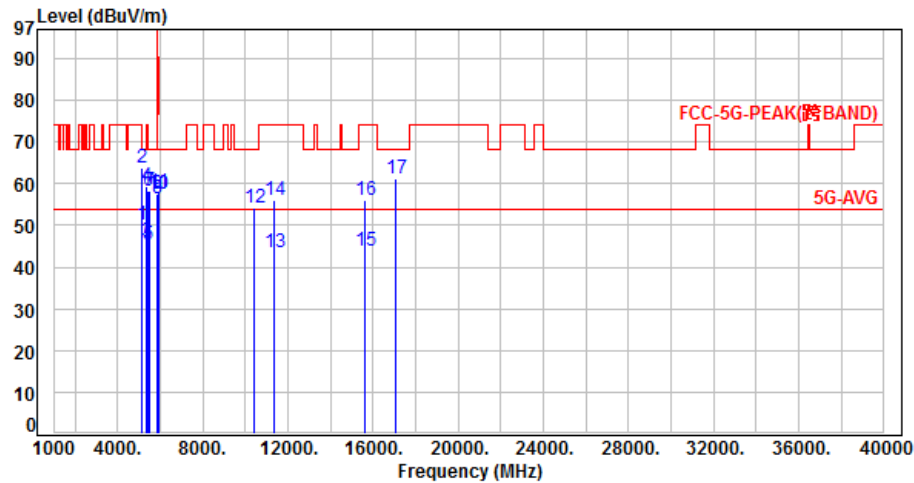

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.61	44.67	50.28	54.00	-3.72	Average	151	65	P
2	5150.00	5.61	58.32	63.93	74.00	-10.07	Peak	151	65	P
3	5350.00	5.99	40.13	46.12	54.00	-7.88	Average	151	65	P
4	5350.00	5.99	53.31	59.30	74.00	-14.70	Peak	151	65	P
5	5460.00	6.20	39.20	45.40	54.00	-8.60	Average	130	117	P
6	5460.00	6.20	52.22	58.42	74.00	-15.58	Peak	130	117	P
7	5470.00	6.21	52.13	58.34	68.20	-9.86	Peak	130	117	P
8	5850.00	6.28	50.23	56.51	122.20	-65.69	Peak	130	117	P
9	5855.00	6.30	51.28	57.58	110.80	-53.22	Peak	130	117	P
10	5875.00	6.39	51.32	57.71	105.20	-47.49	Peak	130	117	P
11	5925.00	6.57	51.37	57.94	68.20	-10.26	Peak	130	117	P
12	10420.00	12.79	41.31	54.10	68.20	-14.10	Peak	131	79	P
13	11380.00	14.13	29.24	43.37	54.00	-10.63	Average	100	134	P
14	11380.00	14.13	41.81	55.94	74.00	-18.06	Peak	100	134	P
15	15630.00	14.60	29.12	43.72	54.00	-10.28	Average	116	91	P
16	15630.00	14.60	41.34	55.94	74.00	-18.06	Peak	116	91	P
17	17070.00	19.17	42.07	61.24	68.20	-6.96	Peak	100	98	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, CH58(ANT A+ANT B) + CH138(ANT C+ANT D)		

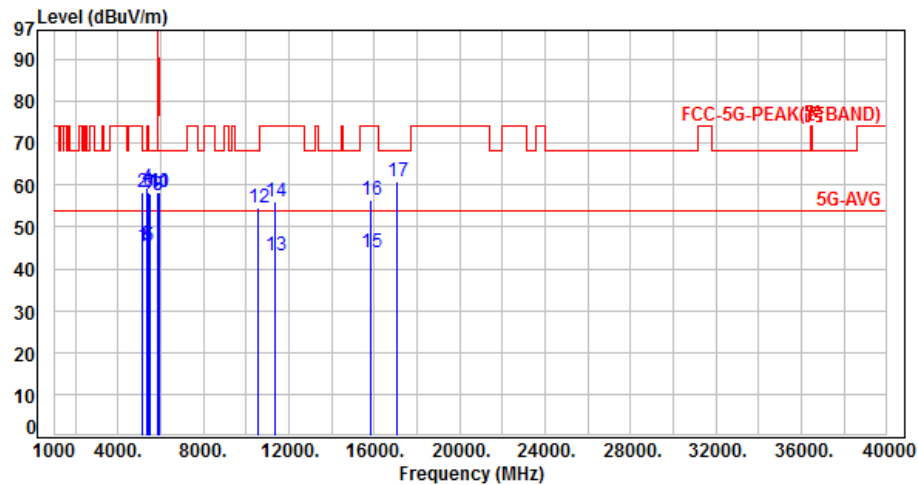

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.61	39.73	45.34	54.00	-8.66	Average	100	342	P
2	5150.00	5.61	52.67	58.28	74.00	-15.72	Peak	100	342	P
3	5350.00	5.99	39.89	45.88	54.00	-8.12	Average	100	342	P
4	5350.00	5.99	53.29	59.28	74.00	-14.72	Peak	100	342	P
5	5460.00	6.20	39.07	45.27	54.00	-8.73	Average	100	311	P
6	5460.00	6.20	52.12	58.32	74.00	-15.68	Peak	100	311	P
7	5470.00	6.21	51.75	57.96	68.20	-10.24	Peak	100	311	P
8	5850.00	6.28	51.12	57.40	122.20	-64.80	Peak	100	311	P
9	5855.00	6.30	51.31	57.61	110.80	-53.19	Peak	100	311	P
10	5875.00	6.39	51.76	58.15	105.20	-47.05	Peak	100	311	P
11	5925.00	6.57	51.70	58.27	68.20	-9.93	Peak	100	311	P
12	10580.00	13.16	41.57	54.73	68.20	-13.47	Peak	100	321	P
13	11380.00	14.13	29.10	43.23	54.00	-10.77	Average	100	267	P
14	11380.00	14.13	42.03	56.16	74.00	-17.84	Peak	100	267	P
15	15870.00	14.29	29.54	43.83	54.00	-10.17	Average	100	321	P
16	15870.00	14.29	42.15	56.44	74.00	-17.56	Peak	100	321	P
17	17070.00	19.17	41.67	60.84	68.20	-7.36	Peak	100	289	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, CH58(ANT A+ANT B) + CH138(ANT C+ANT D)		

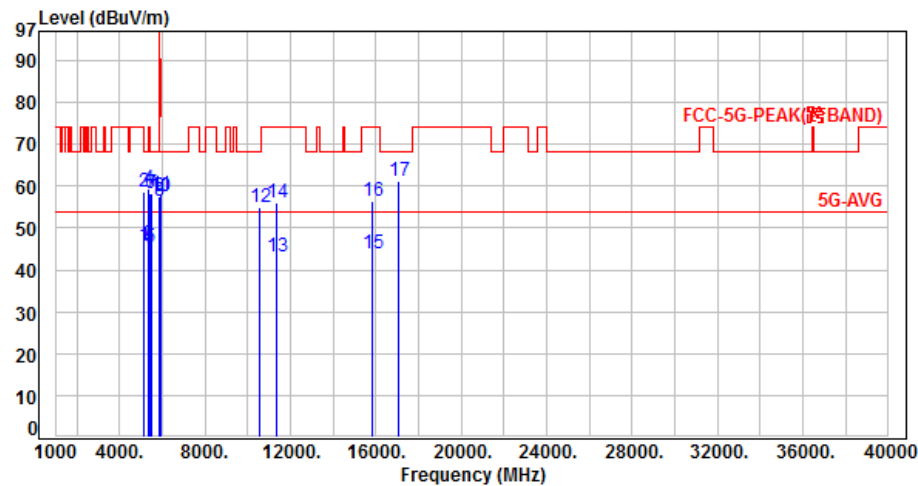

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.61	40.01	45.62	54.00	-8.38	Average	143	64	P
2	5150.00	5.61	53.11	58.72	74.00	-15.28	Peak	143	64	P
3	5350.00	5.99	40.23	46.22	54.00	-7.78	Average	143	64	P
4	5350.00	5.99	53.31	59.30	74.00	-14.70	Peak	143	64	P
5	5460.00	6.20	39.33	45.53	54.00	-8.47	Average	132	120	P
6	5460.00	6.20	52.12	58.32	74.00	-15.68	Peak	132	120	P
7	5470.00	6.21	52.02	58.23	68.20	-9.97	Peak	132	120	P
8	5850.00	6.28	50.12	56.40	122.20	-65.80	Peak	132	120	P
9	5855.00	6.30	51.21	57.51	110.80	-53.29	Peak	132	120	P
10	5875.00	6.39	51.16	57.55	105.20	-47.65	Peak	132	120	P
11	5925.00	6.57	51.30	57.87	68.20	-10.33	Peak	132	120	P
12	10580.00	13.16	41.96	55.12	68.20	-13.08	Peak	163	76	P
13	11380.00	14.13	29.19	43.32	54.00	-10.68	Average	100	146	P
14	11380.00	14.13	41.98	56.11	74.00	-17.89	Peak	100	146	P
15	15870.00	14.29	29.46	43.75	54.00	-10.25	Average	124	43	P
16	15870.00	14.29	42.16	56.45	74.00	-17.55	Peak	124	43	P
17	17070.00	19.17	42.03	61.20	68.20	-7.00	Peak	100	101	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, CH106(ANT A+ANT B) + CH138(ANT C+ANT D)	:	

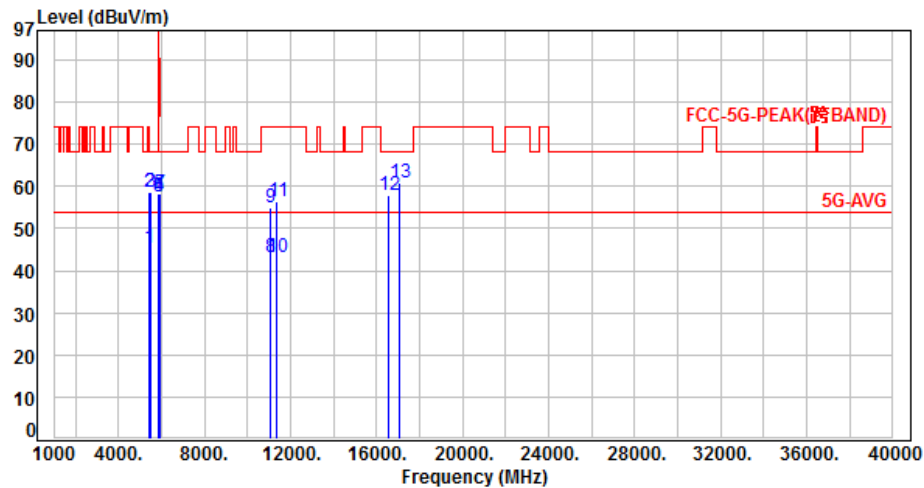

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.25	45.45	54.00	-8.55	Average	100	329	P
2	5460.00	6.20	52.30	58.50	74.00	-15.50	Peak	100	329	P
3	5470.00	6.21	52.50	58.71	68.20	-9.49	Peak	100	329	P
4	5850.00	6.28	51.21	57.49	122.20	-64.71	Peak	100	314	P
5	5855.00	6.30	51.36	57.66	110.80	-53.14	Peak	100	314	P
6	5875.00	6.39	51.84	58.23	105.20	-46.97	Peak	100	314	P
7	5925.00	6.57	51.62	58.19	68.20	-10.01	Peak	100	314	P
8	11060.00	13.77	29.48	43.25	54.00	-10.75	Average	100	349	P
9	11060.00	13.77	41.21	54.98	74.00	-19.02	Peak	100	349	P
10	11380.00	14.13	29.13	43.26	54.00	-10.74	Average	100	297	P
11	11380.00	14.13	42.21	56.34	74.00	-17.66	Peak	100	297	P
12	16590.00	16.42	41.34	57.76	68.20	-10.44	Peak	100	358	P
13	17070.00	19.17	41.51	60.68	68.20	-7.52	Peak	100	273	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, CH106(ANT A+ANT B) + CH138(ANT C+ANT D)		

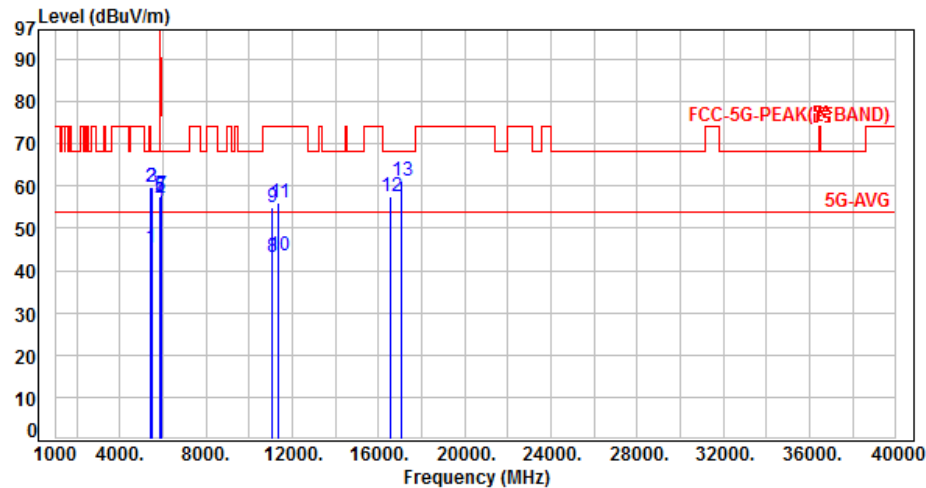

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.25	45.45	54.00	-8.55	Average	131	72	P
2	5460.00	6.20	53.38	59.58	74.00	-14.42	Peak	131	72	P
3	5470.00	6.21	53.53	59.74	68.20	-8.46	Peak	131	72	P
4	5850.00	6.28	50.23	56.51	122.20	-65.69	Peak	131	116	P
5	5855.00	6.30	51.36	57.66	110.80	-53.14	Peak	131	116	P
6	5875.00	6.39	51.21	57.60	105.20	-47.60	Peak	131	116	P
7	5925.00	6.57	51.35	57.92	68.20	-10.28	Peak	131	116	P
8	11060.00	13.77	29.43	43.20	54.00	-10.80	Average	116	98	P
9	11060.00	13.77	41.31	55.08	74.00	-18.92	Peak	116	98	P
10	11380.00	14.13	29.34	43.47	54.00	-10.53	Average	100	164	P
11	11380.00	14.13	42.06	56.19	74.00	-17.81	Peak	100	164	P
12	16590.00	16.42	41.11	57.53	68.20	-10.67	Peak	134	37	P
13	17070.00	19.17	41.97	61.14	68.20	-7.06	Peak	100	131	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, CH122(ANT A+ANT B) + CH138(ANT C+ANT D)		

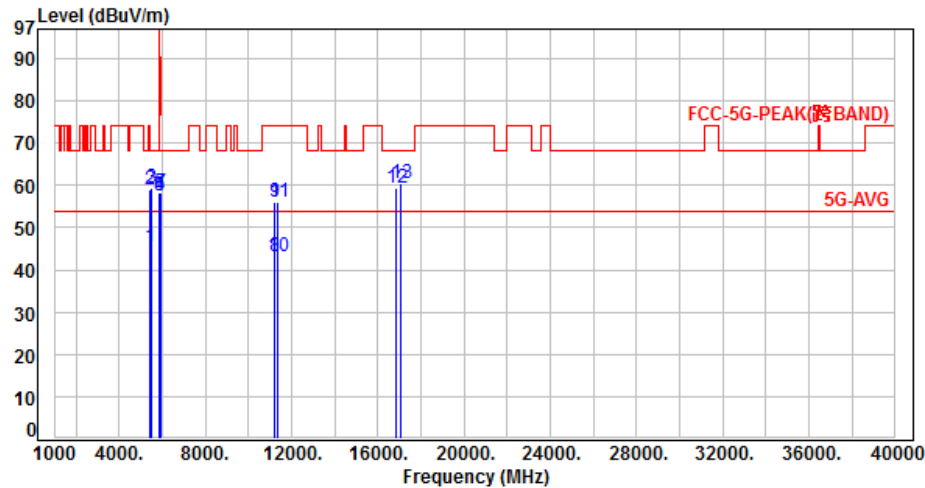

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.21	45.41	54.00	-8.59	Average	100	334	P
2	5460.00	6.20	52.66	58.86	74.00	-15.14	Peak	100	334	P
3	5470.00	6.21	53.32	59.53	68.20	-8.67	Peak	100	334	P
4	5850.00	6.28	51.25	57.53	122.20	-64.67	Peak	100	316	P
5	5855.00	6.30	51.33	57.63	110.80	-53.17	Peak	100	316	P
6	5875.00	6.39	51.81	58.20	105.20	-47.00	Peak	100	316	P
7	5925.00	6.57	51.58	58.15	68.20	-10.05	Peak	100	316	P
8	11220.00	13.98	29.31	43.29	54.00	-10.71	Average	100	318	P
9	11220.00	13.98	42.06	56.04	74.00	-17.96	Peak	100	318	P
10	11380.00	14.13	29.09	43.22	54.00	-10.78	Average	100	294	P
11	11380.00	14.13	42.03	56.16	74.00	-17.84	Peak	100	294	P
12	16830.00	18.00	41.32	59.32	68.20	-8.88	Peak	100	298	P
13	17070.00	19.17	41.32	60.49	68.20	-7.71	Peak	100	271	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, CH122(ANT A+ANT B) + CH138(ANT C+ANT D)		

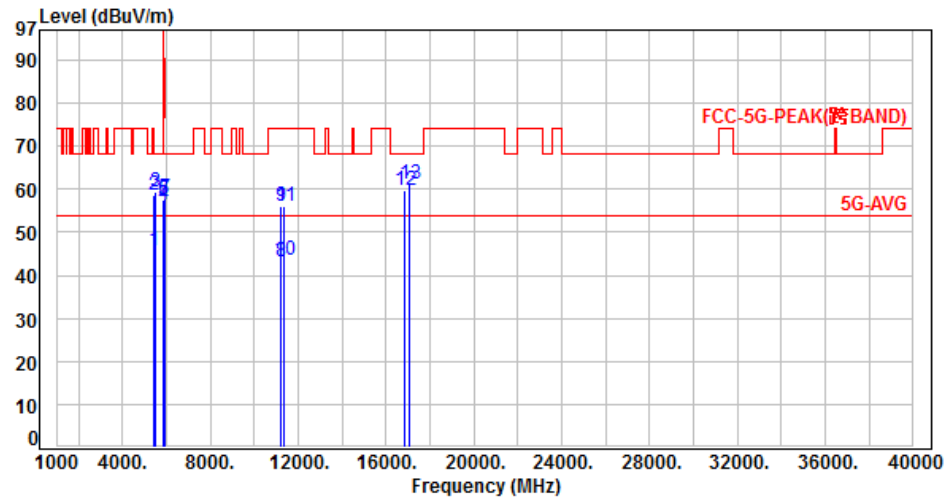

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.50	45.70	54.00	-8.30	Average	122	69	P
2	5460.00	6.20	52.60	58.80	74.00	-15.20	Peak	122	69	P
3	5470.00	6.21	53.12	59.33	68.20	-8.87	Peak	122	69	P
4	5850.00	6.28	50.25	56.53	122.20	-65.67	Peak	132	118	P
5	5855.00	6.30	51.41	57.71	110.80	-53.09	Peak	132	118	P
6	5875.00	6.39	51.24	57.63	105.20	-47.57	Peak	132	118	P
7	5925.00	6.57	51.37	57.94	68.20	-10.26	Peak	132	118	P
8	11200.00	13.96	29.35	43.31	54.00	-10.69	Average	100	44	P
9	11200.00	13.96	42.17	56.13	74.00	-17.87	Peak	100	44	P
10	11380.00	14.13	29.24	43.37	54.00	-10.63	Average	100	143	P
11	11380.00	14.13	42.02	56.15	74.00	-17.85	Peak	100	143	P
12	16830.00	18.00	41.64	59.64	68.20	-8.56	Peak	100	82	P
13	17070.00	19.17	41.93	61.10	68.20	-7.10	Peak	100	161	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, CH155(ANT A+ANT B) + CH138(ANT C+ANT D)		

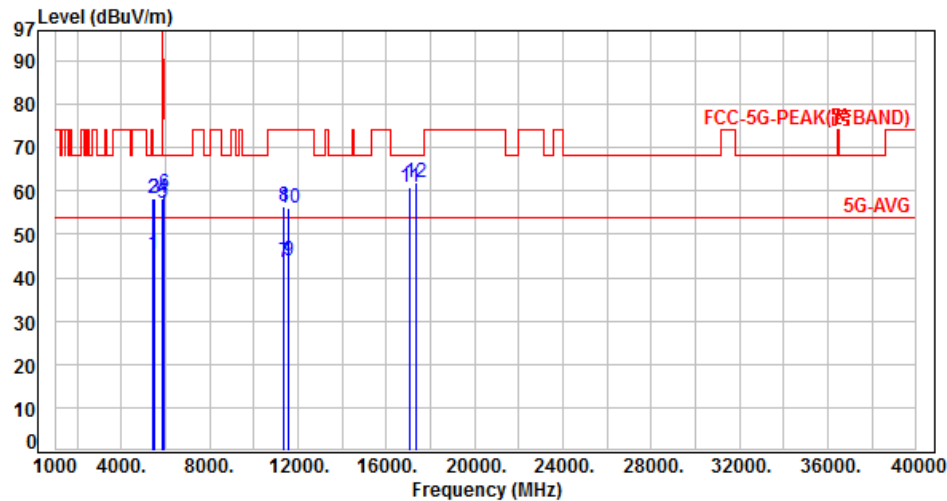

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.15	45.35	54.00	-8.65	Average	100	313	P
2	5460.00	6.20	52.18	58.38	74.00	-15.62	Peak	100	313	P
3	5470.00	6.21	51.90	58.11	68.20	-10.09	Peak	100	313	P
4	5855.00	6.30	51.89	58.19	110.80	-52.61	Peak	400	304	P
5	5875.00	6.39	50.93	57.32	105.20	-47.88	Peak	400	304	P
6	5925.00	6.57	52.87	59.44	68.20	-8.76	Peak	400	304	P
7	11380.00	14.13	29.21	43.34	54.00	-10.66	Average	100	294	P
8	11380.00	14.13	42.13	56.26	74.00	-17.74	Peak	100	294	P
9	11550.00	14.64	29.13	43.77	54.00	-10.23	Average	384	289	P
10	11550.00	14.64	41.34	55.98	74.00	-18.02	Peak	384	289	P
11	17070.00	19.17	41.83	61.00	68.20	-7.20	Peak	100	274	P
12	17325.00	20.51	41.47	61.98	68.20	-6.22	Peak	361	267	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, CH155(ANT A+ANT B) + CH138(ANT C+ANT D)		

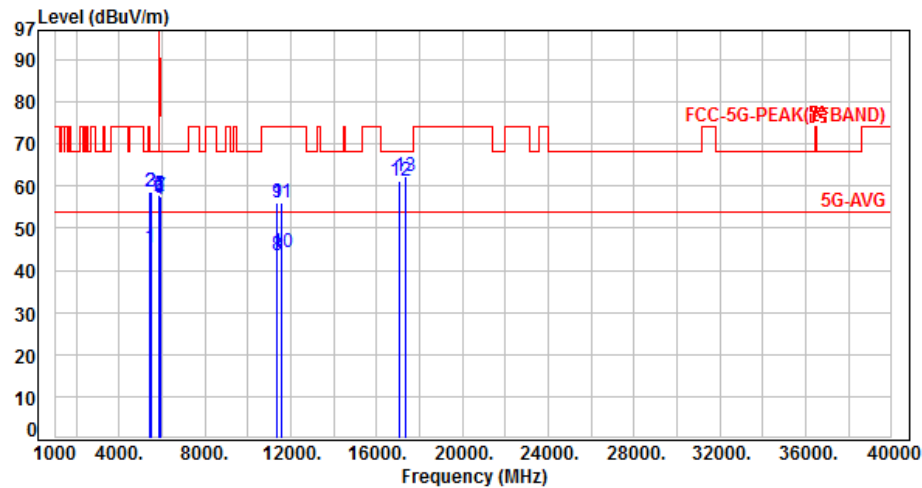

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.22	45.42	54.00	-8.58	Average	123	135	P
2	5460.00	6.20	52.32	58.52	74.00	-15.48	Peak	123	135	P
3	5470.00	6.21	52.26	58.47	68.20	-9.73	Peak	123	135	P
4	5850.00	6.28	50.60	56.88	122.20	-65.32	Peak	100	294	P
5	5855.00	6.30	51.43	57.73	110.80	-53.07	Peak	100	294	P
6	5875.00	6.39	50.73	57.12	105.20	-48.08	Peak	100	294	P
7	5925.00	6.57	50.80	57.37	68.20	-10.83	Peak	100	294	P
8	11380.00	14.13	29.36	43.49	54.00	-10.51	Average	100	146	P
9	11380.00	14.13	41.94	56.07	74.00	-17.93	Peak	100	146	P
10	11550.00	14.64	29.64	44.28	54.00	-9.72	Average	100	316	P
11	11550.00	14.64	41.34	55.98	74.00	-18.02	Peak	100	316	P
12	17070.00	19.17	42.11	61.28	68.20	-6.92	Peak	100	114	P
13	17325.00	20.51	41.97	62.48	68.20	-5.72	Peak	100	267	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, CH138(ANT A+ANT B) + CH42(ANT C+ANT D)		

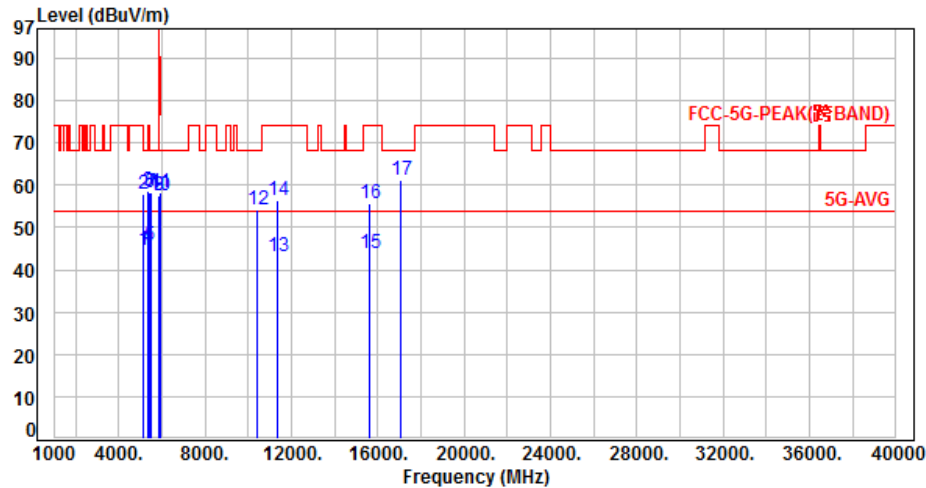

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.61	39.13	44.74	54.00	-9.26	Average	281	42	P
2	5150.00	5.61	52.32	57.93	74.00	-16.07	Peak	281	42	P
3	5350.00	5.99	52.56	58.55	74.00	-15.45	Peak	281	42	P
4	5350.00	5.99	39.21	45.20	74.00	-28.80	Peak	281	42	P
5	5460.00	6.20	39.42	45.62	54.00	-8.38	Average	100	13	P
6	5460.00	6.20	52.05	58.25	74.00	-15.75	Peak	100	13	P
7	5470.00	6.21	51.90	58.11	68.20	-10.09	Peak	100	16	P
8	5850.00	6.28	51.25	57.53	122.20	-64.67	Peak	100	16	P
9	5855.00	6.30	51.34	57.64	110.80	-53.16	Peak	100	16	P
10	5875.00	6.39	51.17	57.56	105.20	-47.64	Peak	100	16	P
11	5925.00	6.57	51.85	58.42	68.20	-9.78	Peak	100	16	P
12	10420.00	12.79	41.31	54.10	68.20	-14.10	Peak	299	61	P
13	11380.00	14.13	29.19	43.32	54.00	-10.68	Average	100	45	P
14	11380.00	14.13	42.31	56.44	74.00	-17.56	Peak	100	45	P
15	15630.00	14.60	29.31	43.91	54.00	-10.09	Average	299	83	P
16	15630.00	14.60	41.03	55.63	74.00	-18.37	Peak	299	83	P
17	17070.00	19.17	42.12	61.29	68.20	-6.91	Peak	100	67	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, CH138(ANT A+ANT B) + CH42(ANT C+ANT D)		

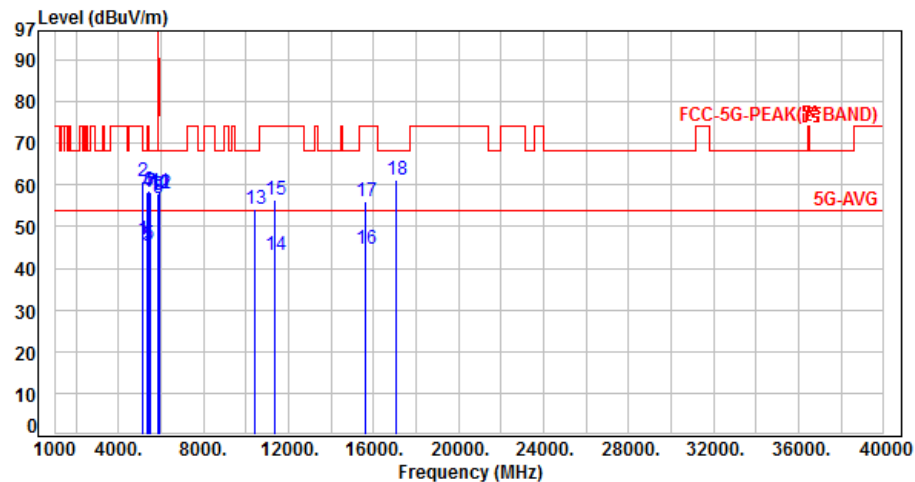

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.61	41.33	46.94	54.00	-7.06	Average	125	287	P
2	5150.00	5.61	55.24	60.85	74.00	-13.15	Peak	125	287	P
3	5350.00	5.99	39.33	45.32	54.00	-8.68	Average	125	287	P
4	5350.00	5.99	52.22	58.21	74.00	-15.79	Peak	125	287	P
5	5460.00	6.20	39.42	45.62	54.00	-8.38	Average	140	326	P
6	5460.00	6.20	52.35	58.55	74.00	-15.45	Peak	140	326	P
7	5470.00	6.21	52.23	58.44	68.20	-9.76	Peak	140	326	P
8	5850.00	6.28	50.39	56.67	122.20	-65.53	Peak	140	326	P
9	5855.00	6.30	51.34	57.64	110.80	-53.16	Peak	140	326	P
10	5875.00	6.39	51.35	57.74	105.20	-47.46	Peak	140	326	P
11	5925.00	6.57	51.62	58.19	68.20	-10.01	Peak	140	326	P
12	5925.00	6.57	51.47	58.04	68.20	-10.16	Peak	140	326	P
13	10420.00	12.79	41.54	54.33	68.20	-13.87	Peak	142	310	P
14	11380.00	14.13	29.16	43.29	54.00	-10.71	Average	124	346	P
15	11380.00	14.13	42.19	56.32	74.00	-17.68	Peak	124	346	P
16	15630.00	14.60	29.99	44.59	54.00	-9.41	Average	119	276	P
17	15630.00	14.60	41.46	56.06	74.00	-17.94	Peak	119	276	P
18	17070.00	19.17	42.13	61.30	68.20	-6.90	Peak	159	315	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, CH138(ANT A+ANT B) + CH58(ANT C+ANT D)		

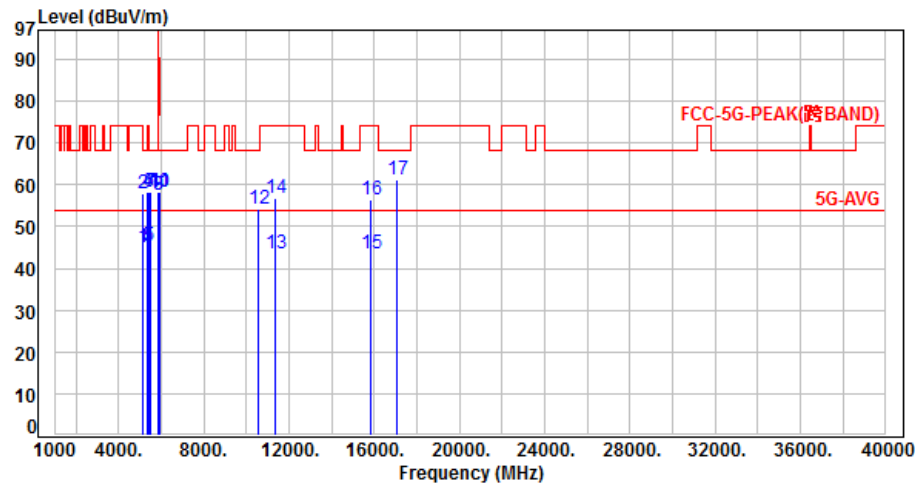

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.61	39.24	44.85	54.00	-9.15	Average	100	360	P
2	5150.00	5.61	52.33	57.94	74.00	-16.06	Peak	100	360	P
3	5350.00	5.99	39.29	45.28	54.00	-8.72	Average	100	360	P
4	5350.00	5.99	52.41	58.40	74.00	-15.60	Peak	100	360	P
5	5460.00	6.20	39.12	45.32	54.00	-8.68	Average	100	9	P
6	5460.00	6.20	52.17	58.37	74.00	-15.63	Peak	100	9	P
7	5470.00	6.21	51.90	58.11	68.20	-10.09	Peak	100	9	P
8	5850.00	6.28	51.23	57.51	122.20	-64.69	Peak	100	9	P
9	5855.00	6.30	51.21	57.51	110.80	-53.29	Peak	100	9	P
10	5875.00	6.39	51.84	58.23	105.20	-46.97	Peak	100	9	P
11	5925.00	6.57	51.88	58.45	68.20	-9.75	Peak	100	9	P
12	10580.00	13.16	41.16	54.32	68.20	-13.88	Peak	100	344	P
13	11380.00	14.13	29.32	43.45	54.00	-10.55	Average	100	31	P
14	11380.00	14.13	42.61	56.74	74.00	-17.26	Peak	100	31	P
15	15870.00	14.29	29.17	43.46	54.00	-10.54	Average	100	326	P
16	15870.00	14.29	42.19	56.48	74.00	-17.52	Peak	100	326	P
17	17070.00	19.17	42.09	61.26	68.20	-6.94	Peak	100	52	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, CH138(ANT A+ANT B) + CH58(ANT C+ANT D)		

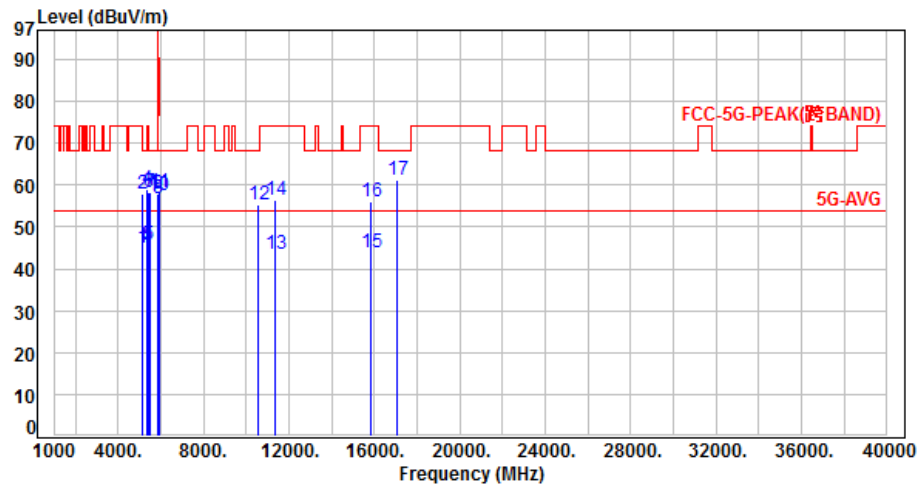

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	5.61	39.48	45.09	54.00	-8.91	Average	377	293	P
2	5150.00	5.61	52.35	57.96	74.00	-16.04	Peak	377	293	P
3	5350.00	5.99	39.67	45.66	54.00	-8.34	Average	377	293	P
4	5350.00	5.99	52.94	58.93	74.00	-15.07	Peak	377	293	P
5	5460.00	6.20	39.42	45.62	54.00	-8.38	Average	139	327	P
6	5460.00	6.20	52.11	58.31	74.00	-15.69	Peak	139	327	P
7	5470.00	6.21	52.23	58.44	68.20	-9.76	Peak	139	327	P
8	5850.00	6.28	50.42	56.70	122.20	-65.50	Peak	139	327	P
9	5855.00	6.30	51.43	57.73	110.80	-53.07	Peak	139	327	P
10	5875.00	6.39	51.24	57.63	105.20	-47.57	Peak	139	327	P
11	5925.00	6.57	51.57	58.14	68.20	-10.06	Peak	139	327	P
12	10580.00	13.16	42.15	55.31	68.20	-12.89	Peak	354	274	P
13	11380.00	14.13	29.43	43.56	54.00	-10.44	Average	100	349	P
14	11380.00	14.13	42.21	56.34	74.00	-17.66	Peak	100	349	P
15	15870.00	14.29	29.64	43.93	54.00	-10.07	Average	392	303	P
16	15870.00	14.29	41.61	55.90	74.00	-18.10	Peak	392	303	P
17	17070.00	19.17	42.21	61.38	68.20	-6.82	Peak	100	307	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, CH138(ANT A+ANT B) + CH106(ANT C+ANT D)		

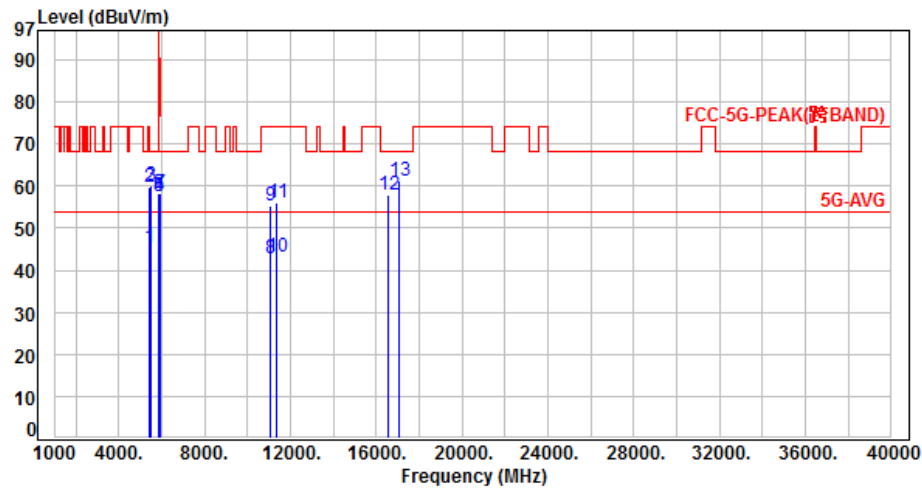

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.20	45.40	54.00	-8.60	Average	109	48	P
2	5460.00	6.20	53.70	59.90	74.00	-14.10	Peak	109	48	P
3	5470.00	6.21	53.96	60.17	68.20	-8.03	Peak	109	48	P
4	5850.00	6.28	51.30	57.58	122.20	-64.62	Peak	100	17	P
5	5855.00	6.30	51.16	57.46	110.80	-53.34	Peak	100	17	P
6	5875.00	6.39	51.91	58.30	105.20	-46.90	Peak	100	17	P
7	5925.00	6.57	51.85	58.42	68.20	-9.78	Peak	100	17	P
8	11060.00	13.77	29.16	42.93	54.00	-11.07	Average	100	21	P
9	11060.00	13.77	41.59	55.36	74.00	-18.64	Peak	100	21	P
10	11380.00	14.13	29.15	43.28	54.00	-10.72	Average	100	36	P
11	11380.00	14.13	42.11	56.24	74.00	-17.76	Peak	100	36	P
12	16590.00	16.42	41.41	57.83	68.20	-10.37	Peak	100	4	P
13	17070.00	19.17	42.16	61.33	68.20	-6.87	Peak	100	47	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, CH138(ANT A+ANT B) + CH106(ANT C+ANT D)		

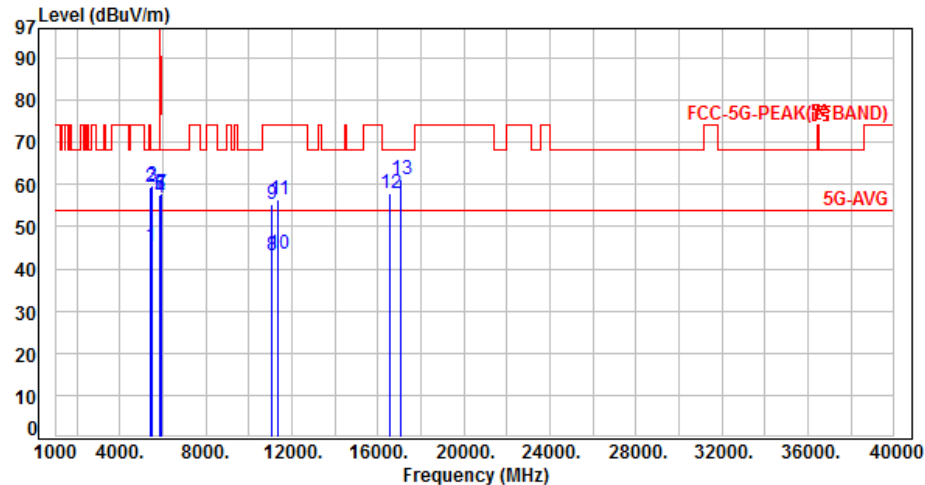

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.04	45.24	54.00	-8.76	Average	263	74	P
2	5460.00	6.20	53.33	59.53	74.00	-14.47	Peak	263	74	P
3	5470.00	6.21	53.50	59.71	68.20	-8.49	Peak	263	74	P
4	5850.00	6.28	50.46	56.74	122.20	-65.46	Peak	132	318	P
5	5855.00	6.30	51.41	57.71	110.80	-53.09	Peak	132	318	P
6	5875.00	6.39	51.23	57.62	105.20	-47.58	Peak	132	318	P
7	5925.00	6.57	51.47	58.04	68.20	-10.16	Peak	132	318	P
8	11060.00	13.77	29.31	43.08	54.00	-10.92	Average	287	93	P
9	11060.00	13.77	41.51	55.28	74.00	-18.72	Peak	287	93	P
10	11380.00	14.13	29.34	43.47	54.00	-10.53	Average	100	342	P
11	11380.00	14.13	42.23	56.36	74.00	-17.64	Peak	100	342	P
12	16590.00	16.42	41.35	57.77	68.20	-10.43	Peak	249	44	P
13	17070.00	19.17	42.01	61.18	68.20	-7.02	Peak	100	297	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, CH138(ANT A+ANT B) + CH122(ANT C+ANT D)		

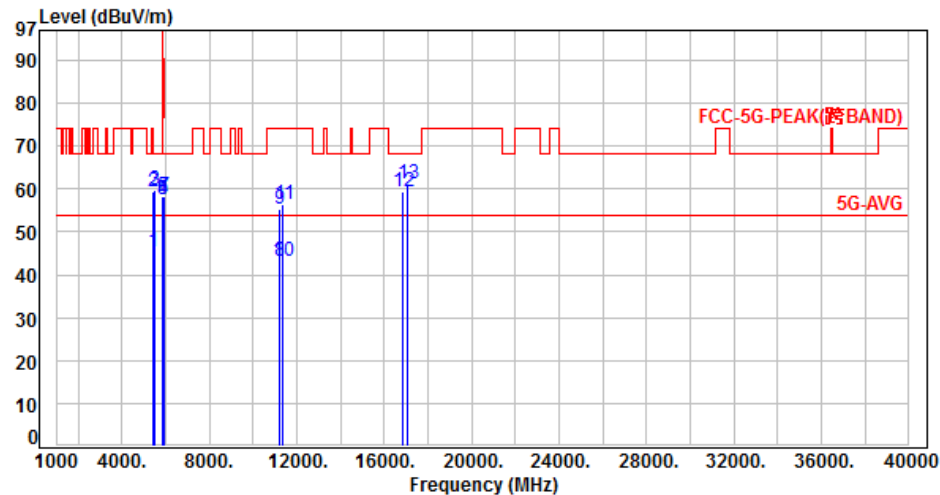

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.10	45.30	54.00	-8.70	Average	113	73	P
2	5460.00	6.20	53.08	59.28	74.00	-14.72	Peak	113	73	P
3	5470.00	6.21	53.58	59.79	68.20	-8.41	Peak	113	73	P
4	5850.00	6.28	51.21	57.49	122.20	-64.71	Peak	100	16	P
5	5855.00	6.30	51.16	57.46	110.80	-53.34	Peak	100	16	P
6	5875.00	6.39	51.93	58.32	105.20	-46.88	Peak	100	16	P
7	5925.00	6.57	51.85	58.42	68.20	-9.78	Peak	100	16	P
8	11220.00	13.98	29.33	43.31	54.00	-10.69	Average	132	86	P
9	11220.00	13.98	41.29	55.27	74.00	-18.73	Peak	132	86	P
10	11380.00	14.13	29.17	43.30	54.00	-10.70	Average	100	39	P
11	11380.00	14.13	42.16	56.29	74.00	-17.71	Peak	124	39	P
12	16830.00	18.00	41.31	59.31	68.20	-8.89	Peak	157	46	P
13	17070.00	19.17	42.07	61.24	68.20	-6.96	Peak	100	59	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 11, CH138(ANT A+ANT B) + CH122(ANT C+ANT D)		

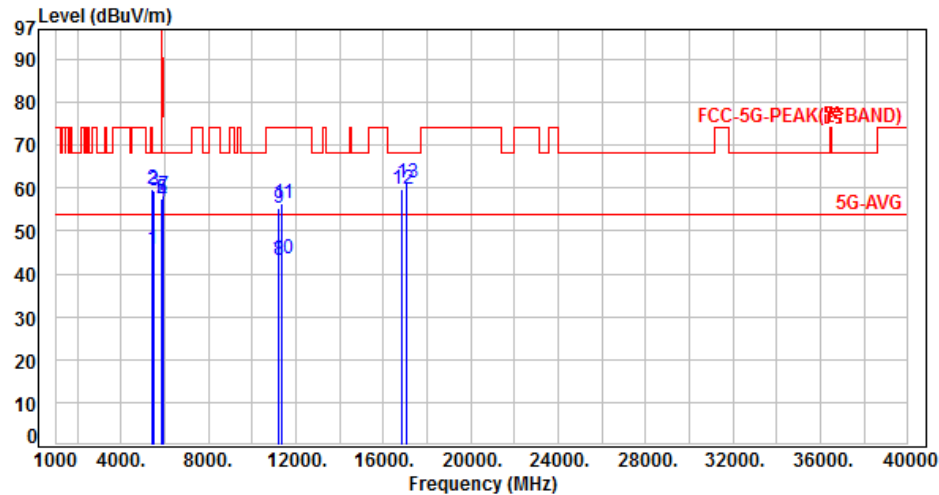

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.42	45.62	54.00	-8.38	Average	132	334	P
2	5460.00	6.20	53.52	59.72	74.00	-14.28	Peak	132	334	P
3	5470.00	6.21	53.33	59.54	68.20	-8.66	Peak	132	334	P
4	5850.00	6.28	50.34	56.62	122.20	-65.58	Peak	135	317	P
5	5855.00	6.30	51.34	57.64	110.80	-53.16	Peak	135	317	P
6	5875.00	6.39	51.19	57.58	105.20	-47.62	Peak	135	317	P
7	5925.00	6.57	51.54	58.11	68.20	-10.09	Peak	135	317	P
8	11220.00	13.98	29.12	43.10	54.00	-10.90	Average	151	351	P
9	11220.00	13.98	41.51	55.49	74.00	-18.51	Peak	151	351	P
10	11380.00	14.13	29.35	43.48	54.00	-10.52	Average	100	349	P
11	11380.00	14.13	42.16	56.29	74.00	-17.71	Peak	100	349	P
12	16830.00	18.00	41.59	59.59	68.20	-8.61	Peak	114	314	P
13	17070.00	19.17	41.97	61.14	68.20	-7.06	Peak	100	282	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 11, CH138(ANT A+ANT B) + CH155(ANT C+ANT D)		

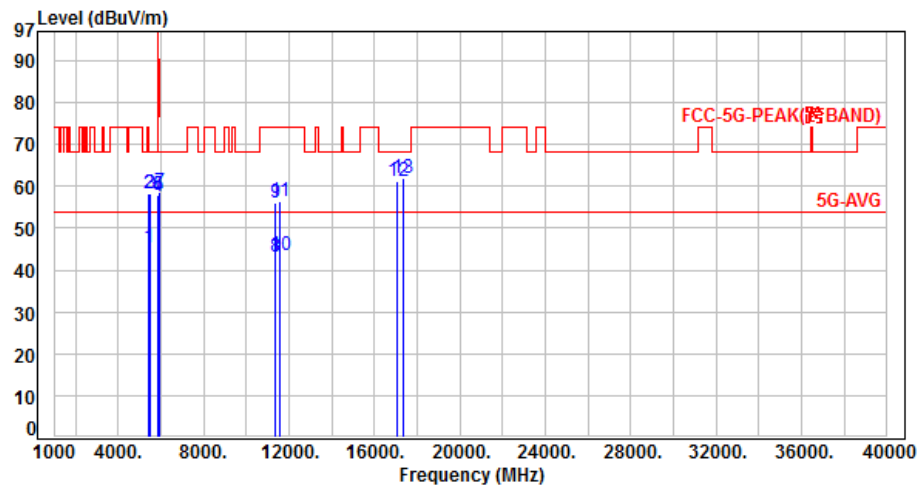


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.11	45.31	54.00	-8.69	Average	100	16	P
2	5460.00	6.20	52.11	58.31	74.00	-15.69	Peak	100	16	P
3	5470.00	6.21	51.90	58.11	68.20	-10.09	Peak	100	16	P
4	5850.00	6.28	51.12	57.40	122.20	-64.80	Peak	100	73	P
5	5855.00	6.30	51.67	57.97	110.80	-52.83	Peak	100	73	P
6	5875.00	6.39	51.34	57.73	105.20	-47.47	Peak	100	73	P
7	5925.00	6.57	52.14	58.71	68.20	-9.49	Peak	100	73	P
8	11380.00	14.13	29.16	43.29	54.00	-10.71	Average	100	34	P
9	11380.00	14.13	41.94	56.07	74.00	-17.93	Peak	100	34	P
10	11550.00	14.64	29.02	43.66	54.00	-10.34	Average	100	86	P
11	11550.00	14.64	41.93	56.57	74.00	-17.43	Peak	100	86	P
12	17070.00	19.17	42.16	61.33	68.20	-6.87	Peak	100	53	P
13	17325.00	20.51	41.44	61.95	68.20	-6.25	Peak	100	86	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Power	:	AC 120V / 60Hz	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 11, CH138(ANT A+ANT B) + CH155(ANT C+ANT D)		:	

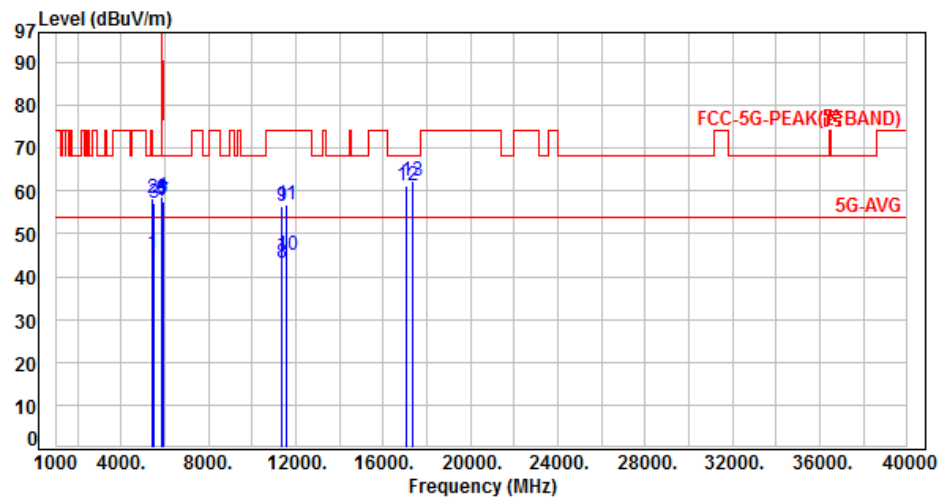

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	6.20	39.24	45.44	54.00	-8.56	Average	134	321	P
2	5460.00	6.20	52.15	58.35	74.00	-15.65	Peak	134	321	P
3	5470.00	6.21	50.77	56.98	68.20	-11.22	Peak	261	67	P
4	5850.00	6.28	52.19	58.47	122.20	-63.73	Peak	261	67	P
5	5855.00	6.30	51.59	57.89	110.80	-52.91	Peak	261	67	P
6	5875.00	6.39	51.76	58.15	105.20	-47.05	Peak	261	67	P
7	5925.00	6.57	50.99	57.56	68.20	-10.64	Peak	261	67	P
8	11380.00	14.13	29.16	43.29	54.00	-10.71	Average	100	349	P
9	11380.00	14.13	42.13	56.26	74.00	-17.74	Peak	100	349	P
10	11550.00	14.64	30.33	44.97	54.00	-9.03	Average	276	81	P
11	11550.00	14.64	42.03	56.67	74.00	-17.33	Peak	276	81	P
12	17070.00	19.17	42.02	61.19	68.20	-7.01	Peak	100	306	P
13	17325.00	20.51	41.68	62.19	68.20	-6.01	Peak	291	43	P

Note: Level=Reading+Factor

$$\text{Margin} = \text{Level} - \text{Limit}$$
$$\text{Factor} = \text{Antenna Factor} + \text{cable loss} - \text{Amplifier Factor}$$



6.7. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. On Time, Duty Cycle and Measurement methods


7.1. Test Limit

None; for reporting purposes only.

7.2. Test Procedure

KDB 789033 Zero-Span Spectrum Analyzer Method.

7.3. Test Setup Layout





7.4. Test Result and Data

Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
802.11a,6M	100.00	100.00	100.00%
802.11ac VHT20	100.00	100.00	100.00%
802.11ac VHT40	100.00	100.00	100.00%
802.11ac VHT80	100.00	100.00	100.00%
802.11ax HE20	4.86	5.08	95.67%
802.11ax HE40	2.46	2.68	91.94%
802.11ax HE80	1.20	1.43	84.09%
802.11ac VHT80+VHT80	100.00	100.00	100.00%
802.11ax HE80+HE80	0.63	0.83	75.95%

7.5. Measurement Methods


26 dB and 6dB Emission BW	KDB 789033 D02 v01, Section C
99% Occupied BW	KDB 789033 D02 v01, Section D
Conducted Output Power	KDB 789033 D02 v01, Section E.2.d and E.3.b (Method PM-G)
Power Spectral Density	KDB 789033 D02 v01, Section F
Unwanted emissions in restricted bands	KDB 789033 D02 v01, Sections G and H
Unwanted emissions in non-restricted bands	KDB 789033 D02 v01, Sections G and H



Modulation Type: 802.11a (6Mbps)



Modulation Type: 802.11ac VHT80 (29.3Mbps)

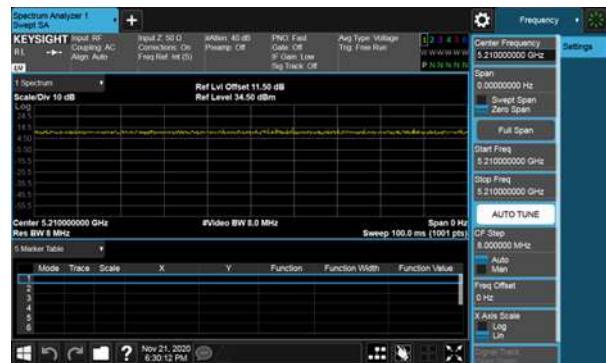

Modulation Type: 802.11ac VHT20 (6.5Mbps)



Modulation Type: 802.11ac VHT80 + VHT80 (29.3Mbps)



Modulation Type: 802.11ac VHT40 (13.5Mbps)







8. 26dB Bandwidth & 99% Occupied Bandwidth


8.1. Test Limit

None; for reporting purposes only.

8.2. Test Procedure

Reference to 789033 D02 General UNII Test Procedures New Rules v01: The transmitter output is connected to a spectrum analyzer with the RBW = approximately 1% of the emission bandwidth, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

8.3. Test Setup Layout





8.4. Test Result and Data (26dB Bandwidth)

In the 5.3G Band

Mode	Channel	Frequency (MHz)	26dB Bandwidth(MHz)			
			ANT A	ANT B	ANT C	ANT D
11a	52	5260	19.92	19.90	20.11	19.85
11a	60	5300	19.70	20.14	20.02	19.59
11a	64	5320	19.69	20.10	19.93	19.62
11ac VHT20	52	5260	20.41	20.56	20.32	20.28
11ac VHT20	60	5300	20.32	20.28	20.37	20.27
11ac VHT20	64	5320	20.44	20.45	20.37	20.25
11ac VHT40	54	5270	41.57	41.72	41.42	40.89
11ac VHT40	62	5310	41.45	42.00	41.41	41.04
11ac VHT80	58	5290	82.29	81.85	81.66	81.99
11ax HE20	52	5260	20.71	20.88	20.67	21.50
11ax HE20	60	5300	20.69	20.69	21.19	20.86
11ax HE20	64	5320	20.67	20.76	20.51	20.68
11ax HE40	54	5270	41.62	41.58	41.58	41.64
11ax HE40	62	5310	41.69	41.74	41.55	41.74
11ax HE80	58	5290	80.81	80.78	81.07	80.83



In the 5.5G Band

Mode	Channel	Frequency (MHz)	26dB Bandwidth(MHz)			
			ANT A	ANT B	ANT C	ANT D
11a	100	5500	19.69	20.00	19.90	19.70
11a	116	5580	19.72	19.97	19.72	19.61
11a	140	5700	19.71	19.97	19.85	19.69
11ac VHT20	100	5500	20.28	20.37	20.40	20.27
11ac VHT20	116	5580	20.19	20.20	20.17	20.24
11ac VHT20	140	5700	20.49	20.44	20.24	20.29
11ac VHT40	102	5510	41.49	41.64	41.54	40.90
11ac VHT40	110	5550	41.53	41.89	41.46	41.00
11ac VHT40	134	5670	41.83	41.56	41.51	40.97
11ac VHT80	106	5530	82.16	81.66	81.58	81.91
11ac VHT80	122	5610	82.14	81.81	81.81	82.04
11ax HE20	100	5500	20.68	20.70	20.77	20.72
11ax HE20	116	5580	20.68	20.99	20.69	20.69
11ax HE20	140	5700	20.62	20.92	20.60	20.68
11ax HE40	102	5510	41.52	41.50	41.46	41.40
11ax HE40	110	5550	41.44	45.88	41.67	41.54
11ax HE40	134	5670	41.39	41.45	41.44	41.66
11ax HE80	106	5530	80.83	80.79	81.01	80.83
11ax HE80	122	5610	81.01	80.95	80.86	80.89



UNII Emission Bandwidth Result (Within 5470-5725MHz band)

Modulation Type	Data Rate / MCS	Frequency (MHz)	26dB Bandwidth(MHz)			
			ANT A	ANT B	ANT C	ANT D
11a	6 Mbps	5720	15.06	15.03	14.89	15.00
11n HT20	MCS 0	5720	15.29	15.28	15.23	15.11
11n HT40	MCS 0	5710	35.82	35.82	35.68	35.52
11ac VHT20	NSS1-MCS0	5720	15.23	15.30	15.20	15.17
11ac VHT40	NSS1-MCS0	5710	35.68	35.88	35.73	35.52
11ac VHT80	NSS1-MCS0	5690	75.99	76.00	75.94	76.02
11ax HE20	NSS1-MCS0	5720	15.63	15.39	15.35	16.01
11ax HE40	NSS1-MCS0	5710	35.88	35.93	35.84	35.62
11ax HE80	NSS1-MCS0	5690	75.48	75.43	75.42	75.42



11ac VHT80 + VHT80

Mode	Channel	Frequency (MHz)	26dB Bandwidth(MHz)			
			ANT A	ANT B	ANT C	ANT D
11ac VHT80 + VHT80	42	5210	82.02	81.75	-	-
	58	5290	-	-	82.02	81.67
11ac VHT80 + VHT80	42	5210	82.06	81.63	-	-
	106	5530	-	-	81.94	81.65
11ac VHT80 + VHT80	42	5210	82.06	81.73	-	-
	122	5610	-	-	82.05	81.67
11ac VHT80 + VHT80	58	5290	82.05	81.72	-	-
	42	5210	-	-	82.05	81.58
11ac VHT80 + VHT80	58	5290	82.16	81.64	-	-
	106	5530	-	-	82.11	81.58
11ac VHT80 + VHT80	58	5290	82.09	81.64	-	-
	122	5610	-	-	81.99	81.64
11ac VHT80 + VHT80	58	5290	82.01	81.58	-	-
	155	5775	-	-	-	-
11ac VHT80 + VHT80	106	5530	82.02	81.67	-	-
	42	5210	-	-	81.97	81.73
11ac VHT80 + VHT80	106	5530	82.03	81.65	-	-
	58	5290	-	-	82.07	81.75
11ac VHT80 + VHT80	106	5530	114.20	99.62	-	-
	122	5610	-	-	159.40	146.00
11ac VHT80 + VHT80	106	5530	82.16	81.53	-	-
	155	5775	-	-	-	-
11ac VHT80 + VHT80	122	5610	82.03	81.63	-	-
	42	5210	-	-	82.08	81.63
11ac VHT80 + VHT80	122	5610	82.03	81.68	-	-
	58	5290	-	-	82.04	81.61
11ac VHT80 + VHT80	122	5610	159.30	159.20	-	-
	106	5530	-	-	131.20	82.56
11ac VHT80 + VHT80	122	5610	82.08	81.66	-	-
	155	5775	-	-	-	-
11ac VHT80 + VHT80	155	5775	-	-	-	-
	58	5290	-	-	82.10	81.62
11ac VHT80 + VHT80	155	5775	-	-	-	-
	106	5530	-	-	82.05	81.64
11ac VHT80 + VHT80	155	5775	-	-	-	-
	122	5610	-	-	82.00	81.62



11ax HE80 + HE80

Mode	Channel	Frequency (MHz)	26dB Bandwidth(MHz)			
			ANT A	ANT B	ANT C	ANT D
11ax HE80 + HE80	42	5210	80.65	80.79	-	-
	58	5290	-	-	80.94	80.90
11ax HE80 + HE80	42	5210	80.98	80.88	-	-
	106	5530	-	-	80.95	80.80
11ax HE80 + HE80	42	5210	80.84	80.97	-	-
	122	5610	-	-	80.81	80.81
11ax HE80 + HE80	58	5290	80.79	80.85	-	-
	42	5210	-	-	80.96	80.85
11ax HE80 + HE80	58	5290	80.89	80.90	-	-
	106	5530	-	-	80.87	80.84
11ax HE80 + HE80	58	5290	80.82	80.84	-	-
	122	5610	-	-	80.86	80.79
11ax HE80 + HE80	58	5290	80.89	80.92	-	-
	155	5775	-	-	-	-
11ax HE80 + HE80	106	5530	80.95	80.86	-	-
	42	5210	-	-	80.89	80.85
11ax HE80 + HE80	106	5530	80.88	80.85	-	-
	58	5290	-	-	80.90	80.98
11ax HE80 + HE80	106	5530	82.10	82.11	-	-
	122	5610	-	-	159.70	156.30
11ax HE80 + HE80	106	5530	80.94	80.96	-	-
	155	5775	-	-	-	-
11ax HE80 + HE80	122	5610	80.74	80.90	-	-
	42	5210	-	-	80.92	80.85
11ax HE80 + HE80	122	5610	80.74	80.90	-	-
	58	5290	-	-	80.86	80.86
11ax HE80 + HE80	122	5610	81.84	82.09	-	-
	106	5530			120.10	82.00
11ax HE80 + HE80	122	5610	80.77	80.90	-	-
	155	5775	-	-	-	-
11ax HE80 + HE80	155	5775	-	-	-	-
	58	5290	-	-	80.91	80.94
11ax HE80 + HE80	155	5775	-	-	-	-
	106	5530	-	-	80.83	80.81
11ax HE80 + HE80	155	5775	-	-	-	-
	122	5610	-	-	80.76	80.93



UNII Emission Bandwidth Result (Within 5470-5725MHz band)						
Modulation Type	Data Rate / MCS	Frequency (MHz)	26dB Bandwidth(MHz)			
			ANT A	ANT B	ANT C	ANT D
11ac VHT80 + VHT80	NSS1-MCS0	5210	82.02	81.73	-	-
		5690	-	-	75.96	75.88
11ac VHT80 + VHT80	NSS1-MCS0	5290	82.14	81.73	-	-
		5690	-	-	76.10	75.81
11ac VHT80 + VHT80	NSS1-MCS0	5530	82.06	81.61	-	-
		5690	-	-	76.12	75.88
11ac VHT80 + VHT80	NSS1-MCS0	5610	82.04	81.67	-	-
		5690	-	-	159.00	82.31
11ac VHT80 + VHT80	NSS1-MCS0	5690	76.05	75.93	-	-
		5210	-	-	82.12	81.56
11ac VHT80 + VHT80	NSS1-MCS0	5690	76.03	75.83	-	-
		5290	-	-	82.05	81.66
11ac VHT80 + VHT80	NSS1-MCS0	5690	76.12	75.93	-	-
		5530	-	-	81.99	81.62
11ac VHT80 + VHT80	NSS1-MCS0	5690	158.70	82.31	-	-
		5610	-	-	82.22	81.62
11ac VHT80 + VHT80	NSS1-MCS0	5690	76.13	75.82	-	-
		5775	-	-	-	-
11ac VHT80 + VHT80	NSS1-MCS0	5775	-	-	-	-
		5690	-	-	76.04	75.85



UNII Emission Bandwidth Result (Within 5470-5725MHz band)						
Modulation Type	Data Rate / MCS	Frequency (MHz)	26dB Bandwidth(MHz)			
			ANT A	ANT B	ANT C	ANT D
11ax HE80 + HE80	NSS1-MCS0	5210	80.88	80.89	-	-
		5690	-	-	75.41	75.41
11ax HE80 + HE80	NSS1-MCS0	5290	80.82	80.96	-	-
		5690	-	-	75.39	75.42
11ax HE80 + HE80	NSS1-MCS0	5530	80.95	80.96	-	-
		5690	-	-	75.42	75.42
11ax HE80 + HE80	NSS1-MCS0	5610	80.86	80.86	-	-
		5690	-	-	159.70	156.00
11ax HE80 + HE80	NSS1-MCS0	5690	75.47	75.50	-	-
		5210	-	-	80.99	80.98
11ax HE80 + HE80	NSS1-MCS0	5690	75.42	75.43	-	-
		5290	-	-	80.84	80.93
11ax HE80 + HE80	NSS1-MCS0	5690	75.45	75.44	-	-
		5530	-	-	80.98	80.93
11ax HE80 + HE80	NSS1-MCS0	5690	80.97	80.88	-	-
		5610	-	-	80.93	80.83
11ax HE80 + HE80	NSS1-MCS0	5690	75.43	75.55	-	-
		5775	-	-	-	-
11ax HE80 + HE80	NSS1-MCS0	5775	-	-	-	-
		5690	-	-	75.43	75.40



8.5. Test Result and Data (99% Occupied Bandwidth)

In the 5.3G Band

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth(MHz)			
			ANT A	ANT B	ANT C	ANT D
11a	52	5260	16.72	16.66	16.75	16.62
11a	60	5300	16.65	16.68	16.71	16.62
11a	64	5320	16.67	16.69	16.71	16.62
11ac VHT20	52	5260	17.71	17.68	17.71	17.68
11ac VHT20	60	5300	17.70	17.67	17.70	17.67
11ac VHT20	64	5320	17.69	17.67	17.71	17.67
11ac VHT40	54	5270	36.50	36.61	36.51	36.51
11ac VHT40	62	5310	36.45	36.58	36.47	36.50
11ac VHT80	58	5290	76.47	76.27	76.08	76.30
11ax HE20	52	5260	18.77	18.78	18.78	18.77
11ax HE20	60	5300	18.77	18.77	18.77	18.77
11ax HE20	64	5320	18.77	18.76	18.77	18.77
11ax HE40	54	5270	37.69	37.73	37.72	37.74
11ax HE40	62	5310	37.66	37.69	37.69	37.77
11ax HE80	58	5290	77.60	77.52	77.50	77.52



In the 5.5G Band

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth(MHz)			
			ANT A	ANT B	ANT C	ANT D
11a	100	5500	16.67	16.68	16.68	16.58
11a	116	5580	16.69	16.70	16.67	16.60
11a	140	5700	16.73	16.74	16.67	16.59
11ac VHT20	100	5500	17.69	17.66	17.67	17.66
11ac VHT20	116	5580	17.71	17.70	17.66	17.66
11ac VHT20	140	5700	17.73	17.73	17.66	17.65
11ac VHT40	102	5510	36.40	36.62	36.56	36.53
11ac VHT40	110	5550	36.50	36.58	36.53	36.61
11ac VHT40	134	5670	36.34	36.47	36.55	36.50
11ac VHT80	106	5530	76.38	76.27	76.22	76.25
11ac VHT80	122	5610	76.39	76.21	76.16	76.36
11ax HE20	100	5500	18.77	18.78	18.76	18.78
11ax HE20	116	5580	18.78	18.78	18.79	18.77
11ax HE20	140	5700	18.77	18.79	18.78	18.78
11ax HE40	102	5510	37.69	37.68	37.74	37.70
11ax HE40	110	5550	37.69	37.70	37.72	37.73
11ax HE40	134	5670	37.70	37.67	37.69	37.62
11ax HE80	106	5530	77.56	77.62	77.51	77.59
11ax HE80	122	5610	77.54	77.51	77.56	77.61



11ac VHT80 + VHT80

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth(MHz)			
			ANT A	ANT B	ANT C	ANT D
11ac VHT80 + VHT80	42	5210	76.21	76.14	-	-
	58	5290	-	-	76.32	76.09
11ac VHT80 + VHT80	42	5210	76.30	76.14	-	-
	106	5530	-	-	76.23	76.12
11ac VHT80 + VHT80	42	5210	76.20	76.10	-	-
	122	5610	-	-	76.32	76.12
11ac VHT80 + VHT80	58	5290	76.17	76.16	-	-
	42	5210	-	-	76.38	76.09
11ac VHT80 + VHT80	58	5290	76.25	76.08	-	-
	106	5530	-	-	76.35	76.09
11ac VHT80 + VHT80	58	5290	76.26	76.08	-	-
	122	5610	-	-	76.28	76.10
11ac VHT80 + VHT80	58	5290	76.20	76.12	-	-
	155	5775	-	-	76.35	76.11
11ac VHT80 + VHT80	106	5530	76.31	76.13	-	-
	42	5210	-	-	76.40	76.15
11ac VHT80 + VHT80	106	5530	76.25	76.17	-	-
	58	5290	-	-	76.31	75.96
11ac VHT80 + VHT80	106	5530	76.46	76.28	-	-
	122	5610	-	-	76.50	76.12
11ac VHT80 + VHT80	106	5530	76.37	76.17	-	-
	155	5775	-	-	76.24	76.12
11ac VHT80 + VHT80	122	5610	76.29	76.21	-	-
	42	5210	-	-	76.34	76.18
11ac VHT80 + VHT80	122	5610	76.27	76.12	-	-
	58	5290	-	-	76.25	75.99
11ac VHT80 + VHT80	122	5610	76.56	76.21	-	-
	106	5530	-	-	76.50	76.27
11ac VHT80 + VHT80	122	5610	76.33	76.08	-	-
	155	5775	-	-	76.33	76.14
11ac VHT80 + VHT80	155	5775	76.42	76.21	-	-
	58	5290	-	-	76.22	76.12
11ac VHT80 + VHT80	155	5775	76.42	76.13	-	-
	106	5530	-	-	76.35	76.05
11ac VHT80 + VHT80	155	5775	76.34	76.27	-	-
	122	5610	-	-	76.37	76.03



11ax HE80 + HE80

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth(MHz)			
			ANT A	ANT B	ANT C	ANT D
11ax HE80 + HE80	42	5210	77.69	77.61	-	-
	58	5290	-	-	77.58	77.56
11ax HE80 + HE80	42	5210	77.55	77.54	-	-
	106	5530	-	-	77.56	77.60
11ax HE80 + HE80	42	5210	77.46	77.53	-	-
	122	5610	-	-	77.68	77.56
11ax HE80 + HE80	58	5290	77.49	77.58	-	-
	42	5210	-	-	77.59	77.54
11ax HE80 + HE80	58	5290	77.61	77.65	-	-
	106	5530	-	-	77.49	77.68
11ax HE80 + HE80	58	5290	77.55	77.50	-	-
	122	5610	-	-	77.54	77.56
11ax HE80 + HE80	58	5290	77.48	77.58	-	-
	155	5775	-	-	77.66	77.56
11ax HE80 + HE80	106	5530	77.50	77.49	-	-
	42	5210	-	-	77.60	77.60
11ax HE80 + HE80	106	5530	77.59	77.53	-	-
	58	5290	-	-	77.57	77.55
11ax HE80 + HE80	106	5530	77.64	77.53	-	-
	122	5610	-	-	77.73	77.63
11ax HE80 + HE80	106	5530	77.55	77.61	-	-
	155	5775	-	-	77.61	77.60
11ax HE80 + HE80	122	5610	77.60	77.58	-	-
	42	5210	-	-	77.53	77.55
11ax HE80 + HE80	122	5610	77.62	77.56	-	-
	58	5290	-	-	77.58	77.58
11ax HE80 + HE80	122	5610	77.65	77.68	-	-
	106	5530	-	-	77.64	77.56
11ax HE80 + HE80	122	5610	77.59	77.58	-	-
	155	5775	-	-	77.56	77.54
11ax HE80 + HE80	155	5775	77.59	77.65	-	-
	58	5290	-	-	77.60	77.52
11ax HE80 + HE80	155	5775	77.57	77.65	-	-
	106	5530	-	-	77.60	77.54
11ax HE80 + HE80	155	5775	77.64	77.57	-	-
	122	5610	-	-	77.62	77.56



UNII Emission Bandwidth Result (Within 5470-5725MHz band)						
Modulation Type	Data Rate / MCS	Frequency (MHz)	99% Bandwidth(MHz)			
			ANT A	ANT B	ANT C	ANT D
11a	6 Mbps	5720	13.43	13.38	13.33	13.29
11n HT20	MCS 0	5720	13.89	13.91	13.85	13.81
11n HT40	MCS 0	5710	33.16	33.17	33.23	33.18
11ac VHT20	NSS1-MCS0	5720	13.91	13.91	13.83	13.84
11ac VHT40	NSS1-MCS0	5710	33.22	33.16	33.23	33.19
11ac VHT80	NSS1-MCS0	5690	72.92	72.85	72.78	72.88
11ax HE20	NSS1-MCS0	5720	14.38	14.36	14.36	14.37
11ax HE40	NSS1-MCS0	5710	33.77	33.79	33.78	33.79
11ax HE80	NSS1-MCS0	5690	73.49	73.43	73.41	73.47



UNII Emission Bandwidth Result (Within 5470-5725MHz band)						
Modulation Type	Data Rate / MCS	Frequency (MHz)	99% Bandwidth(MHz)			
			ANT A	ANT B	ANT C	ANT D
11ac VHT80 + VHT80	NSS1-MCS0	5210	76.23	76.05	-	-
		5690	-	-	72.84	72.78
11ac VHT80 + VHT80	NSS1-MCS0	5290	76.22	76.09	-	-
		5690	-	-	72.90	72.75
11ac VHT80 + VHT80	NSS1-MCS0	5530	76.20	76.07	-	-
		5690	-	-	72.88	72.80
11ac VHT80 + VHT80	NSS1-MCS0	5610	76.30	76.13	-	-
		5690	-	-	73.44	72.92
11ac VHT80 + VHT80	NSS1-MCS0	5690	72.87	72.79	-	-
		5210	-	-	76.29	76.19
11ac VHT80 + VHT80	NSS1-MCS0	5690	72.86	72.91	-	-
		5290	-	-	76.31	76.10
11ac VHT80 + VHT80	NSS1-MCS0	5690	72.86	72.78	-	-
		5530	-	-	76.34	76.03
11ac VHT80 + VHT80	NSS1-MCS0	5690	73.13	73.01	-	-
		5610	-	-	76.31	76.16
11ac VHT80 + VHT80	NSS1-MCS0	5690	72.83	72.74	-	-
		5775	-	-	-	-
11ac VHT80 + VHT80	NSS1-MCS0	5775	-	-	-	-
		5690	-	-	72.82	72.71



UNII Emission Bandwidth Result (Within 5470-5725MHz band)						
Modulation Type	Data Rate / MCS	Frequency (MHz)	99% Bandwidth(MHz)			
			ANT A	ANT B	ANT C	ANT D
11ax HE80 + HE80	NSS1-MCS0	5210	77.59	77.63	-	-
		5690	-	-	73.41	73.47
11ax HE80 + HE80	NSS1-MCS0	5290	77.54	77.57	-	-
		5690	-	-	73.49	73.43
11ax HE80 + HE80	NSS1-MCS0	5530	77.62	77.54	-	-
		5690	-	-	73.49	73.63
11ax HE80 + HE80	NSS1-MCS0	5610	77.49	77.65	-	-
		5690	-	-	73.89	73.68
11ax HE80 + HE80	NSS1-MCS0	5690	73.53	73.48	-	-
		5210	-	-	77.53	77.55
11ax HE80 + HE80	NSS1-MCS0	5690	73.37	73.47	-	-
		5290	-	-	77.64	77.63
11ax HE80 + HE80	NSS1-MCS0	5690	73.41	73.49	-	-
		5530	-	-	77.67	77.63
11ax HE80 + HE80	NSS1-MCS0	5690	73.59	73.52	-	-
		5610	-	-	77.65	77.56
11ax HE80 + HE80	NSS1-MCS0	5690	73.42	73.44	-	-
		5775	-	-	-	-
11ax HE80 + HE80	NSS1-MCS0	5775	-	-	-	-
		5690	-	-	73.39	73.42



26dB Bandwidth

ANT A

Modulation Type: 802.11a (6Mbps)

CH52



Modulation Type: 802.11ac, VHT20 (6.5Mbps)

CH52



CH60



CH60



CH64




CH64





26dB Bandwidth

ANT A

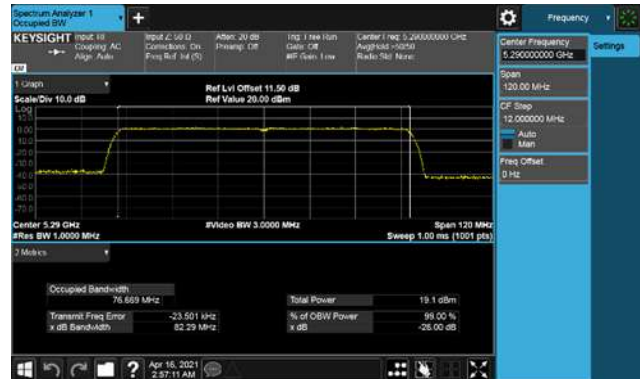Modulation Type: 802.11ac VHT40 (13.5Mbps)
CH54Modulation Type: 802.11ac VHT80 (29.3Mbps)
CH58

CH62





26dB Bandwidth

ANT A

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH52Modulation Type: 802.11ax HE40 (14.6Mbps)
CH54

CH60



CH62



CH64






26dB Bandwidth

ANT A

Modulation Type: 802.11ax HE80 (30.6Mbps)

CH58

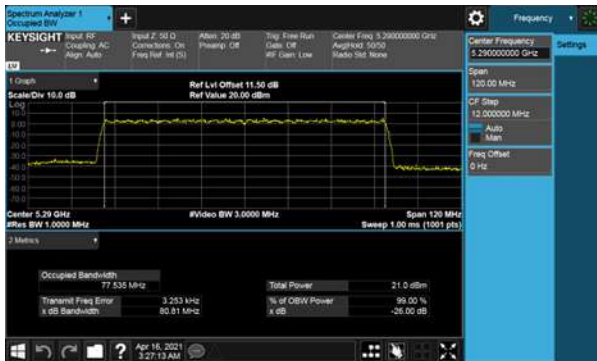



26dB Bandwidth
ANT B
Modulation Type: 802.11a (6Mbps)
CH52



Modulation Type: 802.11ac, VHT20 (6.5Mbps)
CH52



CH60



CH60



CH64




CH64





26dB Bandwidth

ANT B

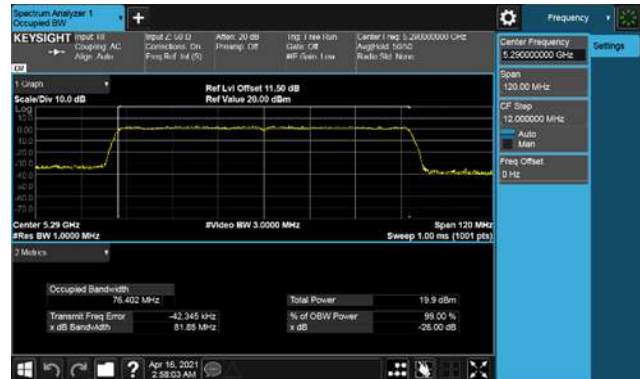Modulation Type: 802.11ac VHT40 (13.5Mbps)
CH54Modulation Type: 802.11ac VHT80 (29.3Mbps)
CH58

CH62





26dB Bandwidth

ANT B

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH52Modulation Type: 802.11ax HE40 (14.6Mbps)
CH54

CH60



CH62



CH64






26dB Bandwidth

ANT B

Modulation Type: 802.11ax HE80 (30.6Mbps)

CH58

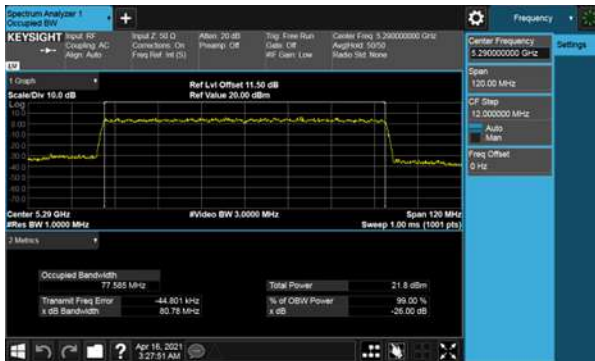



26dB Bandwidth

ANT C

Modulation Type: 802.11a (6Mbps)

CH52



Modulation Type: 802.11ac, VHT20 (6.5Mbps)

CH52



CH60



CH60



CH64



CH64





26dB Bandwidth

ANT C

Modulation Type: 802.11ac VHT40 (13.5Mbps)
CH54



Modulation Type: 802.11ac VHT80 (29.3Mbps)
CH58



CH62





26dB Bandwidth

ANT C

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH52Modulation Type: 802.11ax HE40 (14.6Mbps)
CH54

CH60



CH62



CH64






26dB Bandwidth

ANT C

Modulation Type: 802.11ax HE80 (30.6Mbps)

CH58

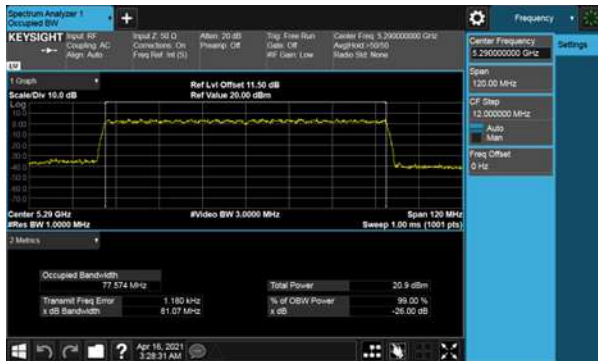



26dB Bandwidth
ANT D
Modulation Type: 802.11a (6Mbps)
CH52



Modulation Type: 802.11ac, VHT20 (6.5Mbps)
CH52



CH60



CH60



CH64



CH64





26dB Bandwidth

ANT D

Modulation Type: 802.11ac VHT40 (13.5Mbps)
CH54Modulation Type: 802.11ac VHT80 (29.3Mbps)
CH58

CH62





26dB Bandwidth

ANT D

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH52Modulation Type: 802.11ax HE40 (14.6Mbps)
CH54

CH60



CH62



CH64






26dB Bandwidth

ANT D

Modulation Type: 802.11ax HE80 (30.6Mbps)

CH58

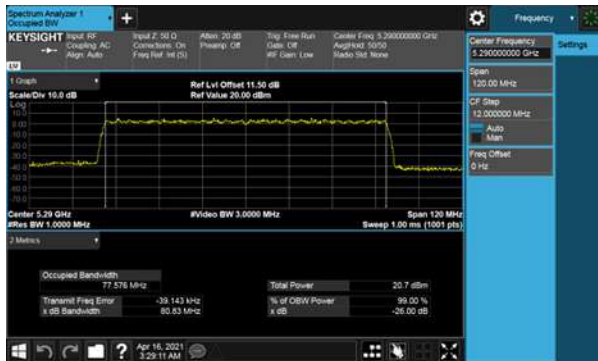



26dB Bandwidth

ANT A

Modulation Type: 802.11a (6Mbps)

CH100



Modulation Type: 802.11ac, VHT20 (6.5Mbps)

CH100



CH116



CH116



CH140



CH140





26dB Bandwidth

ANT A

Modulation Type: 802.11ac VHT40 (13.5Mbps)
CH102Modulation Type: 802.11ac VHT80 (29.3Mbps)
CH106

CH110



CH122



CH134





26dB Bandwidth

ANT A

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH100Modulation Type: 802.11ax HE40 (14.6Mbps)
CH102

CH116



CH110



CH140



CH134






26dB Bandwidth


ANT A

Modulation Type: 802.11ax HE80 (30.6Mbps)

CH106

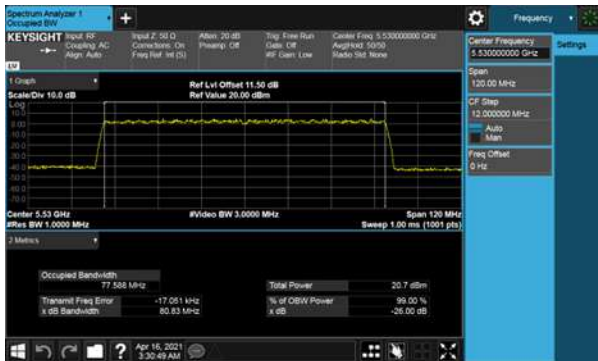

CH122

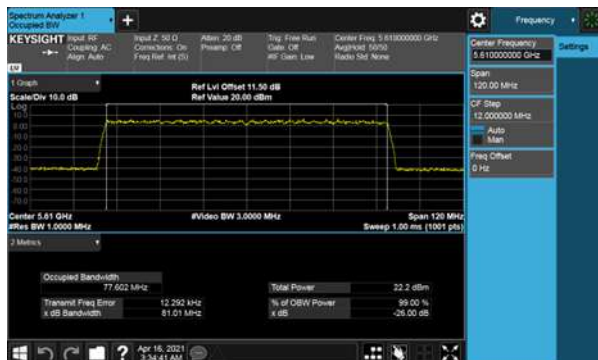



26dB Bandwidth
ANT B
Modulation Type: 802.11a (6Mbps)
CH100



Modulation Type: 802.11ac, VHT20 (6.5Mbps)
CH100



CH116



CH116



CH140



CH140





26dB Bandwidth

ANT B

Modulation Type: 802.11ac VHT40 (13.5Mbps)
CH102Modulation Type: 802.11ac VHT80 (29.3Mbps)
CH106

CH110



CH122



CH134

