



## Test Report

Prepared for: Cellphone-Mate Inc.

Model: Force-550

Description: 50db / 5 band

FCC ID: RSNFORCE-550

To

FCC Part 20

Date of Issue: August 21, 2014

On the behalf of the applicant:

Cellphone-Mate Inc.  
48346 Milmont Drive  
Fremont, CA 94538

To the attention of:

Hongtao Zhan, CEO  
Ph: (510) 770-0469  
Email: [hzhan@cellphone-mate.com](mailto:hzhan@cellphone-mate.com)

Prepared By  
Compliance Testing, LLC  
1724 S. Nevada Way  
Mesa, AZ 85204  
(480) 926-3100 phone / (480) 926-3598 fax  
[www.compliancetesting.com](http://www.compliancetesting.com)  
Project No: p1440011

Mike Graffeo  
Project Test Engineer

This report may not be reproduced, except in full, without written permission from Compliance Testing.  
All results contained herein relate only to the sample tested.





## Table of Contents

<u>Description</u>	<u>Page</u>
Standard Test Conditions and Engineering Practices	5
Test Result Summary	6
Authorized Frequency Band	7
Maximum Power and Gain	13
Intermodulation	15
Out-of-Band Emissions	21
Conducted Spurious Emissions	55
Noise Limits	82
Uplink Inactivity	94
Variable Gain	98
Occupied Bandwidth	101
Oscillation Detection	132
Radiated Spurious	150
Test Equipment Utilized	153



**ILAC / A2LA**

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer joint ISO-ILAC-IAF Communiqué dated January 2009).

The tests results contained within this test report all fall within our scope of accreditation, unless noted below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.

Testing Certificate Number: **2152.01**



**FCC Site Reg. #349717**

**IC Site Reg. #2044A-2**

**Non-accredited tests contained in this report:**

**N/A**



## Test and Measurement Data

Sub-part

2.1033(c)(14):

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Part 2, Subpart J and the following individual Parts: 20.21 in conjunction with latest version of KDB 935210.

## Standard Test Conditions and Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI/C63.4-2009, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104°F), unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Environmental Conditions		
Temp (°C)	Humidity (%)	Pressure (mbar)
24.9 – 31.0	33.5 – 63.0	985.5 - 943.0

Measurement results, unless otherwise noted, are worst-case measurements.

EUT Description

**Model:** Force-550

**Description:** 50db / 5 band

**Firmware:** N/A

**Software:** N/A

### Additional Information:

The EUT is a Mobile bi-directional amplifier for the boosting of cellular phone signals and data communication devices. The following frequency bands and emission types are utilized.

Frequency Band (MHz)					
Uplink	698 - 716	776 - 787	824 - 849	1850 - 1915	1710 - 1755
Downlink	728 - 746	746 - 757	869 - 894	1930 - 1995	2110 - 2155
Modulation Type	LTE		GSM, CDMA, EDGE, HSPA, EVDO, LTE		CDMA, HSPA, LTE, EDGE, EVDO

Emission Designators					
CDMA	HSPA	LTE	EVDO	EDGE	GSM
F9W	F9W	G7D	F9W	G7W	GXW

The modulation types and emission designators listed in the tables represent the modulations that the cell phone providers use for each frequency band. GSM, CDMA, and WCDMA represent all the modulation types (phase and amplitude or a combination thereof) utilized within the industry. EDGE, HSPA, LTE etc. are all protocols or multiplexing techniques using the base modulations.

## EUT Operation during Tests

The EUT was in a normal operating condition. Several customer units were utilized during testing.



## Test Result Summary

Specification	Test Name	Pass, Fail, N/A	Comments
20.21(e)(3)	Authorized Frequency Band	Pass	
20.21(e)(8)(i)(B) 20.21(e)(8)(i)(C) 20.21(e)(8)(i)(D)	Maximum Power and Gain	Pass	
20.21(e)(8)(i)(F)	Intermodulation	Pass	
20.21(e)(8)(i)(E)	Out-of-Band Emissions	Pass	
2.1051 22.917(a) 24.238(a) 27.53(f)	Conducted Spurious Emissions	Pass	
20.21(e)(8)(i)(A) 20.21(e)(8)(l)	Noise Limits	Pass	
20.21(e)(8)(i)(l)	Uplink Inactivity	Pass	
20.21(e)(8)(i)(C)(1) 20.21(e)(8)(i)(H) 20.21(e)(8)(i)(C)(2)(iii)	Variable Gain	Pass	
2.1049	Occupied Bandwidth	Pass	
20.21(e)(8)(ii)(A)	Oscillation Detection	Pass	
2.1053	Radiated Spurious	Pass	
20.21(e)(8)(i)(B)	Spectrum Block Filtering	N/A	This only applies to devices utilizing spectrum block filtering



**Authorized Frequency Band**


**Name of Test:** Authorized Frequency Band  
**Test Equipment Utilized:** i00379 and i00405

**Engineer:** Mike Graffeo  
**Test Date:** 6/10/14

**Test Procedure**

The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor as needed to ensure accurate readings. A signal generator was utilized to produce a CW input signal tuned to the center channel of the operational band. The RF input level was increased to a point just prior to the AGC being in control of the power. The Signal generator was set to sweep across 2X the operational band of the EUT while the spectrum analyzer was set to MAX HOLD. Two markers were placed at the edges of the operational band and a third marker was placed at the highest point within the band no closer than 2.5 MHz from the band edge.


**Test Setup**






## Uplink Test Results

### 698 - 716 MHz Band

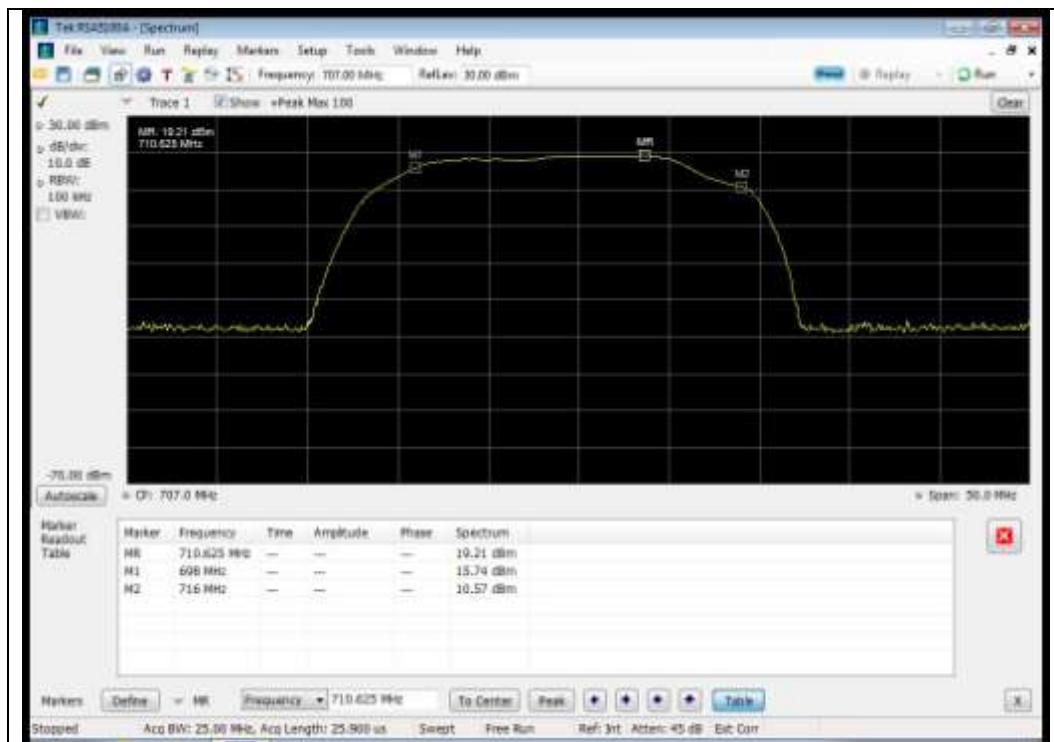


### 776 - 787 MHz Band

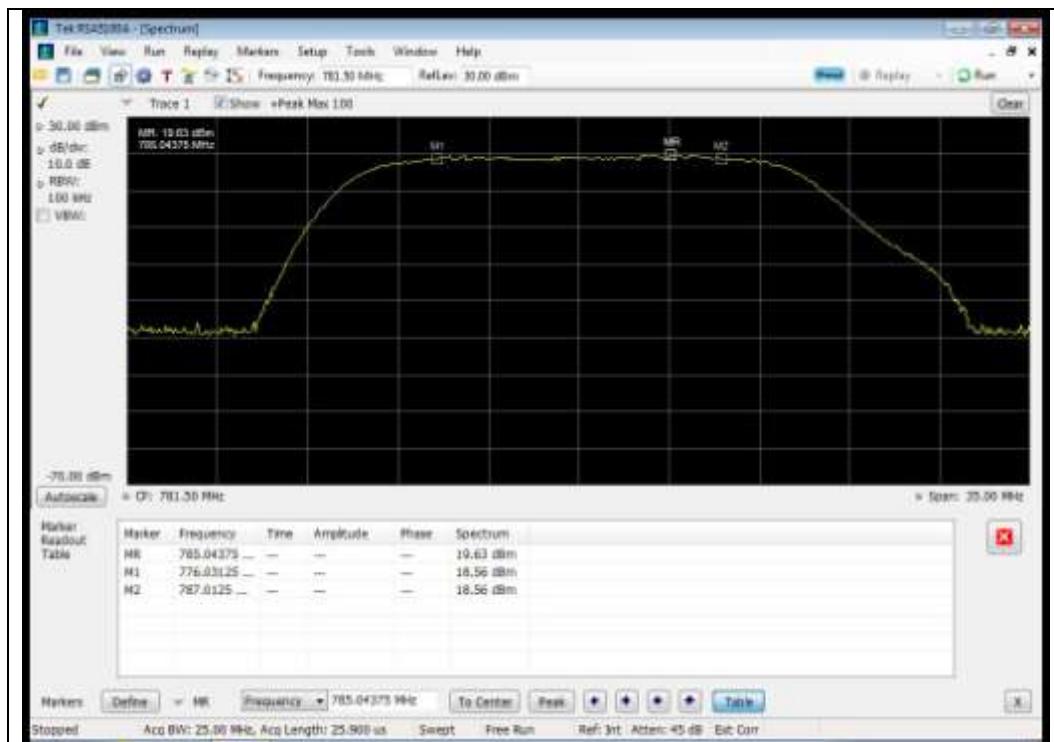




### 824 - 849 MHz Band

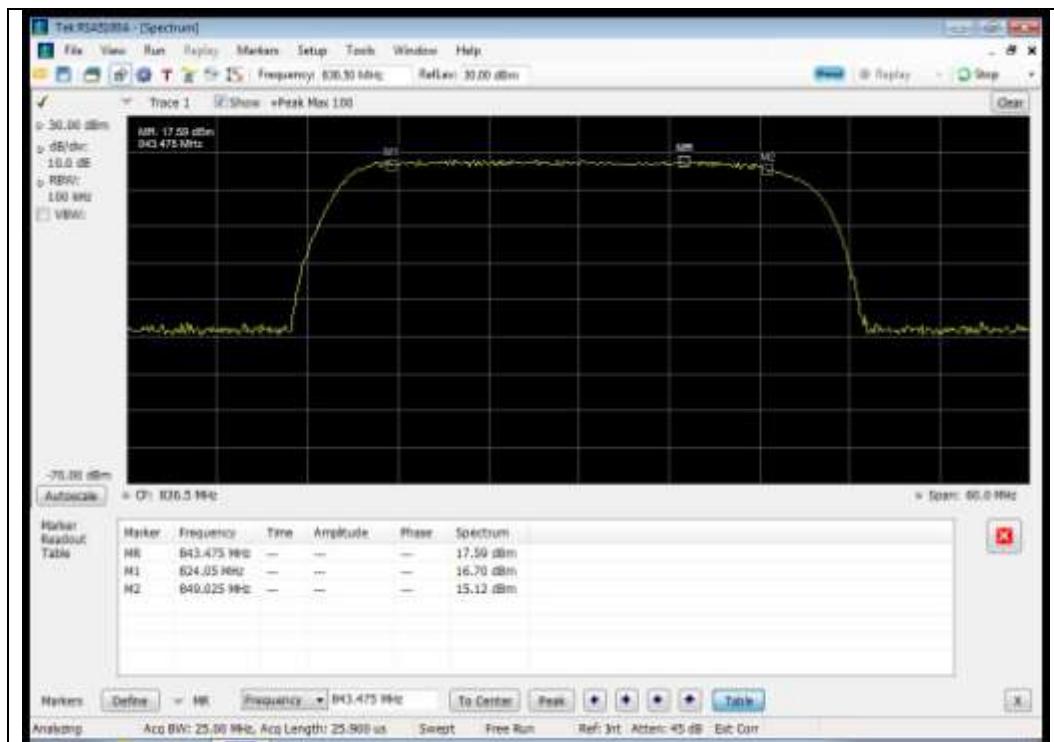


### 1710 - 1755 MHz Band

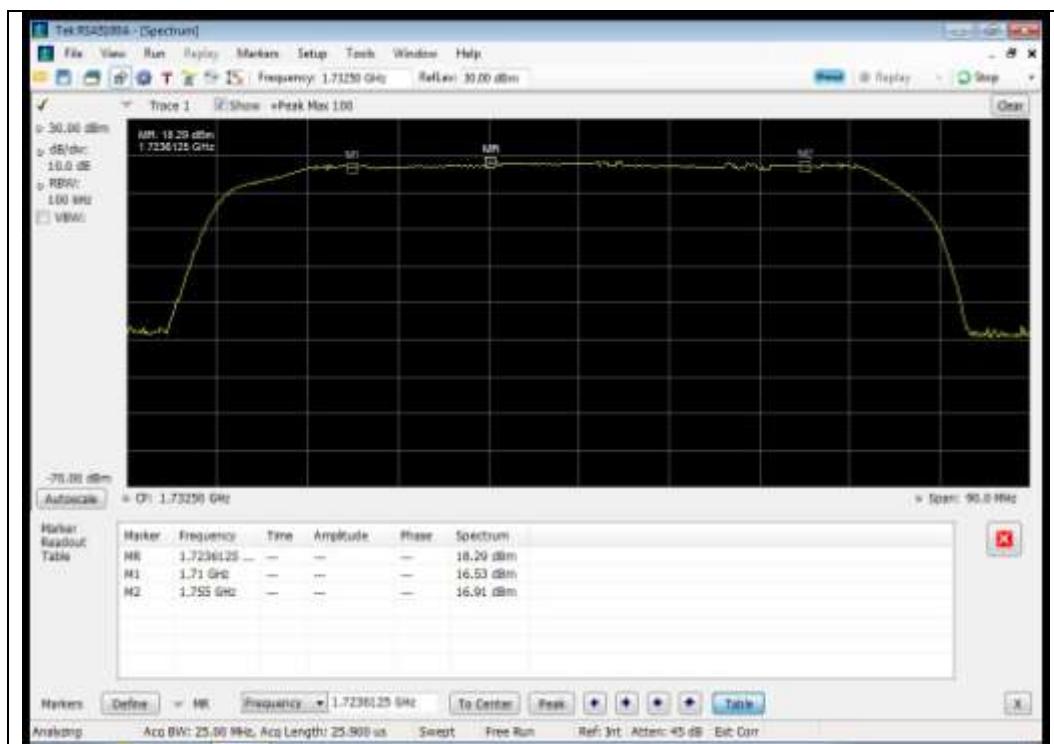



### 1850 - 1915 MHz Band

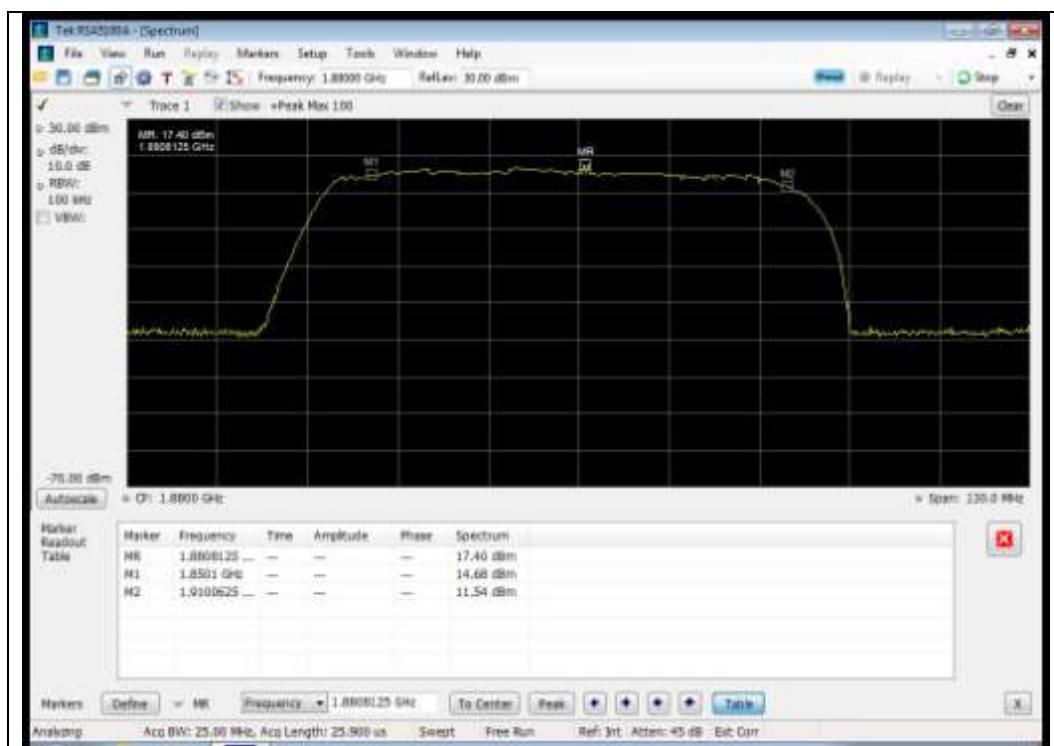




## Downlink Test Results

### 728 – 746 MHz & 746 – 757 MHz Bands

(Note: for frequency testing this band is considered one continuous band)




### 869 - 894 MHz Band

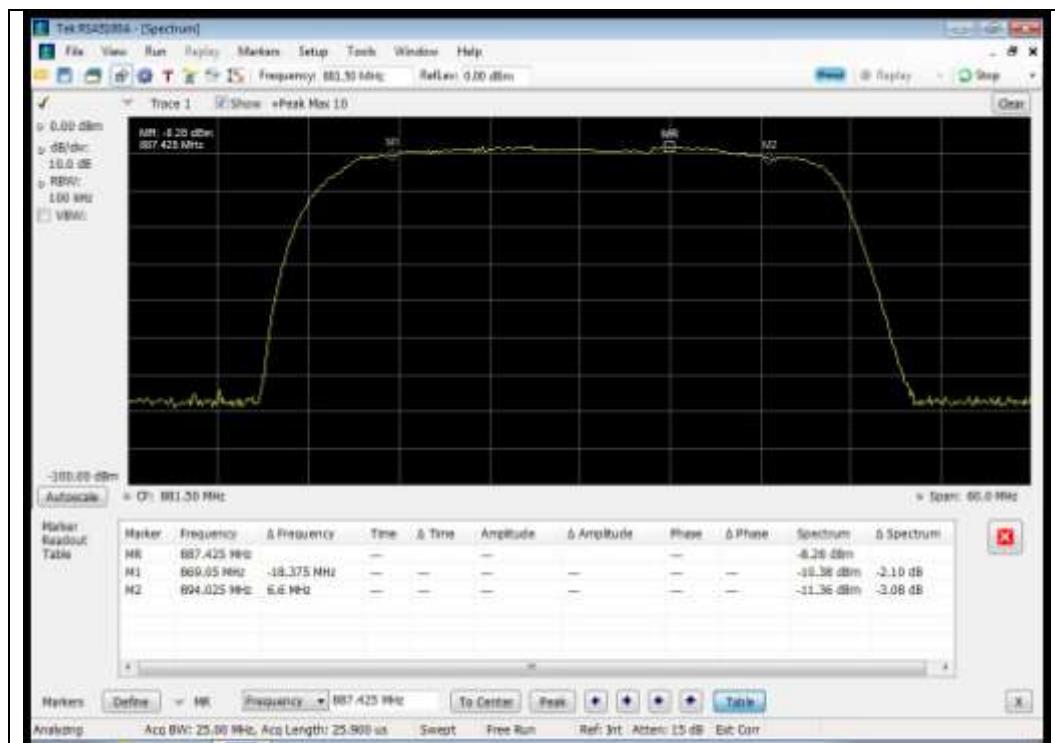




### 1930 - 1995 MHz Band

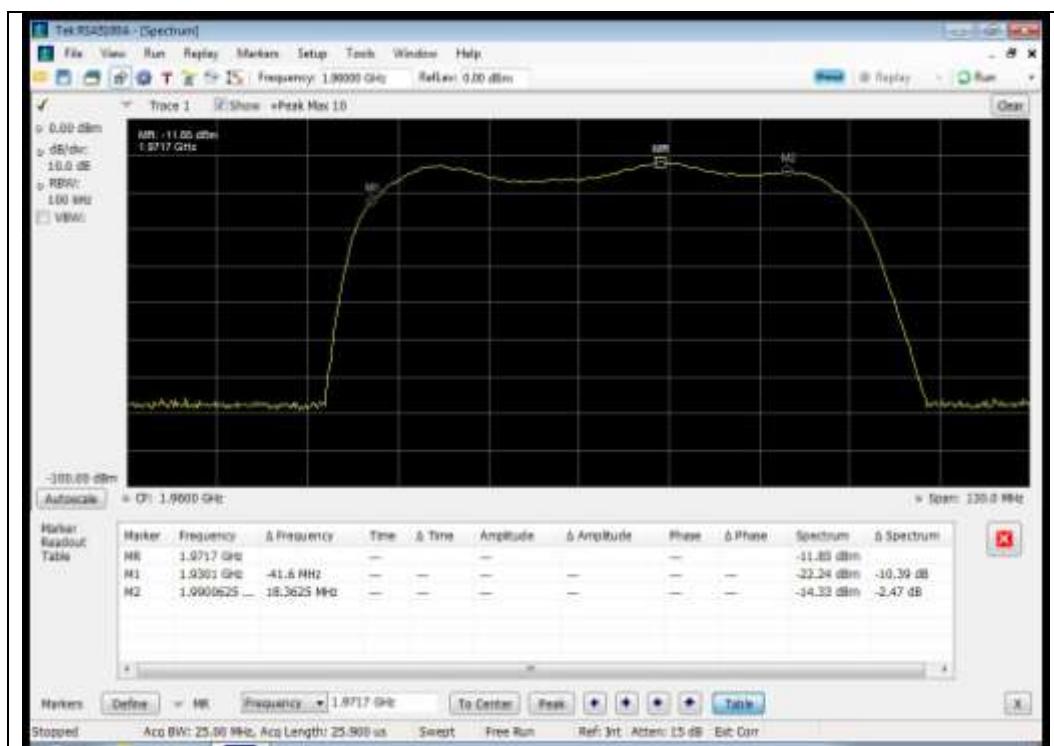

### 2110 - 2155 MHz Band

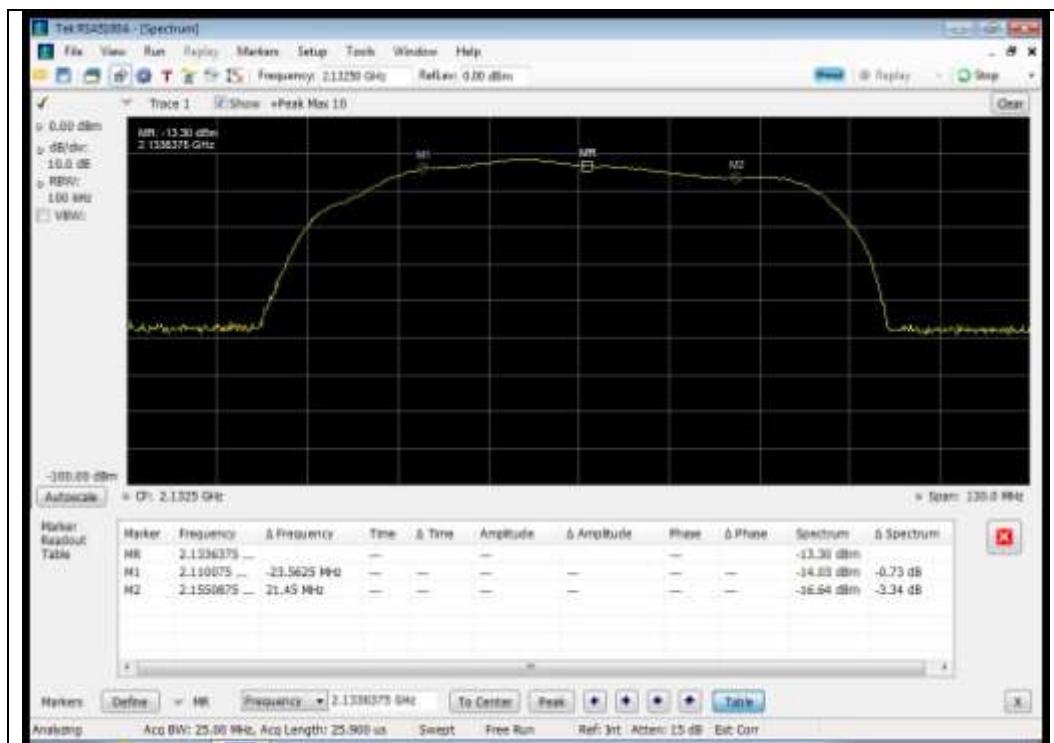



## Maximum Power and Gain

**Name of Test:** Maximum Power and Gain  
**Test Equipment Utilized:** I00405, i00424


**Engineer:** Mike Graffeo  
**Test Date:** 6/11/14

## Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor as needed to ensure accurate readings. The spectrum analyzer and signal generator were tuned to the frequency with the highest power level in the band, as determined by the Authorized Frequency Band test. The RF input level was increased to a point just prior to the AGC being in control of the power for both pulsed single time slot GSM modulation and 4.1 MHz AWGN modulation. The maximum power was measured and verified to meet the minimum and maximum levels allowed, with the maximum gain being computed from these values. The uplink and downlink gain under each condition were verified to be within 9 dB of each other.

For Mobile installations the gain is fixed at 50 dB.

## Test Setup



## Uplink Power Test Results

Frequency Band (MHz)	Input Level (dBm)	Output Power (dBm)	Lower Limit (dBm)	Upper Limit (dBm)	Result
698 - 716 MHz Pulsed GSM	-30.0	18.00	17	30	Pass
698 - 716 MHz AWGN	-27.5	19.13	17	30	Pass
776 - 787 MHz Pulsed GSM	-25.4	20.06	17	30	Pass
776 - 787 MHz AWGN	-25.9	19.71	17	30	Pass
824 - 849 MHz Pulsed GSM	-25.3	17.67	17	30	Pass
824 - 849 MHz AWGN	-26.0	17.49	17	30	Pass
1710 - 1755 MHz Pulsed GSM	-24.7	18.70	17	30	Pass
1710 - 1755 MHz AWGN	-24.6	19.27	17	30	Pass
1850 - 1915 MHz Pulsed GSM	-23.5	19.48	17	30	Pass
1850 - 1915 MHz AWGN	-23.9	19.05	17	30	Pass



### Downlink Power Test Results

Frequency Band (MHz)	Input Level (dBm)	Output Power (dBm)	Upper Limit (dBm)	Result
728 - 746 MHz Pulsed GSM	-57.1	-12.66	17	Pass
728 - 746 MHz AWGN	-58.9	-13.32	17	Pass
746 - 757 MHz Pulsed GSM	-55.9	-11.89	17	Pass
746 - 757 MHz AWGN	-57.9	-13.53	17	Pass
869 - 894 MHz Pulsed GSM	-52.7	-9.20	17	Pass
869 - 894 MHz AWGN	-54.0	-10.27	17	Pass
1930 – 1995 MHz Pulsed GSM	-50.8	-8.73	17	Pass
1930 – 1995 MHz AWGN	-52.1	-10.96	17	Pass
2110 - 2155 MHz Pulsed GSM	-52.6	-9.64	17	Pass
2110 - 2155 MHz AWGN	-53.9	-12.47	17	Pass

### Uplink and Downlink Gain Test Results

Modulation	Uplink Frequency (MHz)	Downlink Frequency (MHz)	Uplink Gain (dB)	Uplink Limit (dB)	Downlink Gain (dB)	Downlink Limit (dB)	Delta (dB)	Limit (dB)	Margin (dB)
Pulsed GSM	710.625	733.7	48.00	50	44.4	50	3.56	9	-5.44
AWGN	710.625	733.7	46.63	50	45.6	50	1.05	9	-7.95
Pulsed GSM	785.04	748	45.46	50	44.0	50	1.45	9	-7.55
AWGN	785.04	748	45.61	50	44.4	50	1.24	9	-7.76
Pulsed GSM	843.48	887.4	42.97	50	43.5	50	0.53	9	-8.47
AWGN	843.48	887.4	43.49	50	43.7	50	0.24	9	-8.76
Pulsed GSM	1723.60	2133.6	43.40	50	43.0	50	0.44	9	-8.56
AWGN	1723.60	2133.6	43.87	50	41.4	50	2.44	9	-6.56
Pulsed GSM	1880.81	1971.7	42.98	50	42.1	50	0.91	9	-8.09
AWGN	1880.81	1971.7	42.95	50	41.1	50	1.81	9	-7.19



## Intermodulation

**Name of Test:**

Intermodulation

**Engineer:** Mike Graffeo

**Test Equipment Utilized:**


i00379 and i00405

**Test Date:** 6/20/14

## Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator. Two signal generators were utilized to produce two CW signals 600 kHz apart and centered in the operational band. Attenuator and cable insertion loss correction factors were input to either the signal generator or the spectrum analyzer as required to ensure that accurate measurements were recorded. The input power was set at the maximum allowable power and the RMS intermodulation products were measured to ensure they were less than -19 dBm in a 3 kHz RBW. The uplink and downlink intermodulation products were plotted, with the levels being listed in the summary tables.

## Test Setup

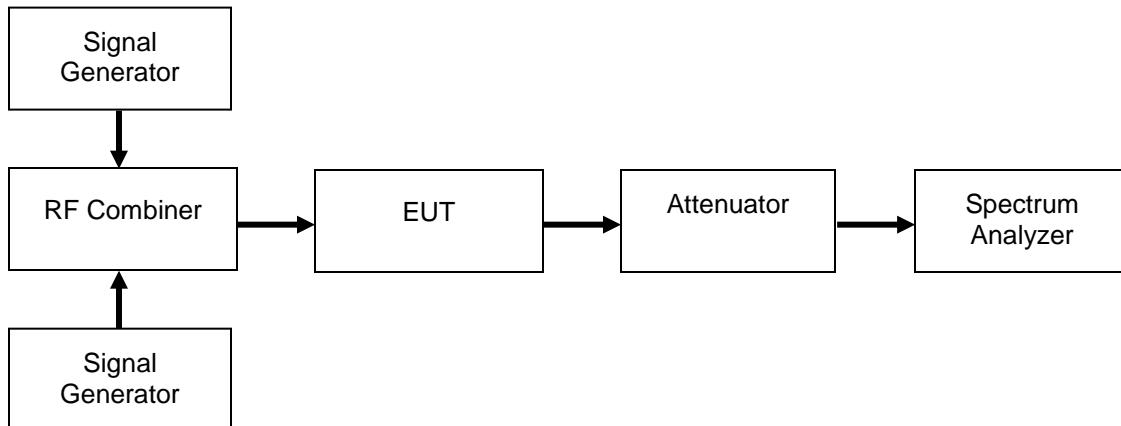

## Uplink Test Results

Frequency Band (MHz)	Intermodulation Level (dBm)	Limit (dBm)	Result
698 - 716 MHz	-28.88	-19	Pass
776 - 787 MHz	-25.89	-19	Pass
824 - 849 MHz	-25.51	-19	Pass
1710 - 1755 MHz	-32.31	-19	Pass
1850 - 1915 MHz	-35.23	-19	Pass


## Downlink Test Results

Frequency Band (MHz)	Intermodulation Level (dBm)	Limit (dBm)	Result
728 - 746 MHz	-69.24	-19	Pass
746 - 757 MHz	-69.99	-19	Pass
869 - 894 MHz	-69.69	-19	Pass
1930 - 1995 MHz	-70.68	-19	Pass
2110 - 2155 MHz	-70.46	-19	Pass




## Uplink Test Results

### 698 - 716 MHz Band

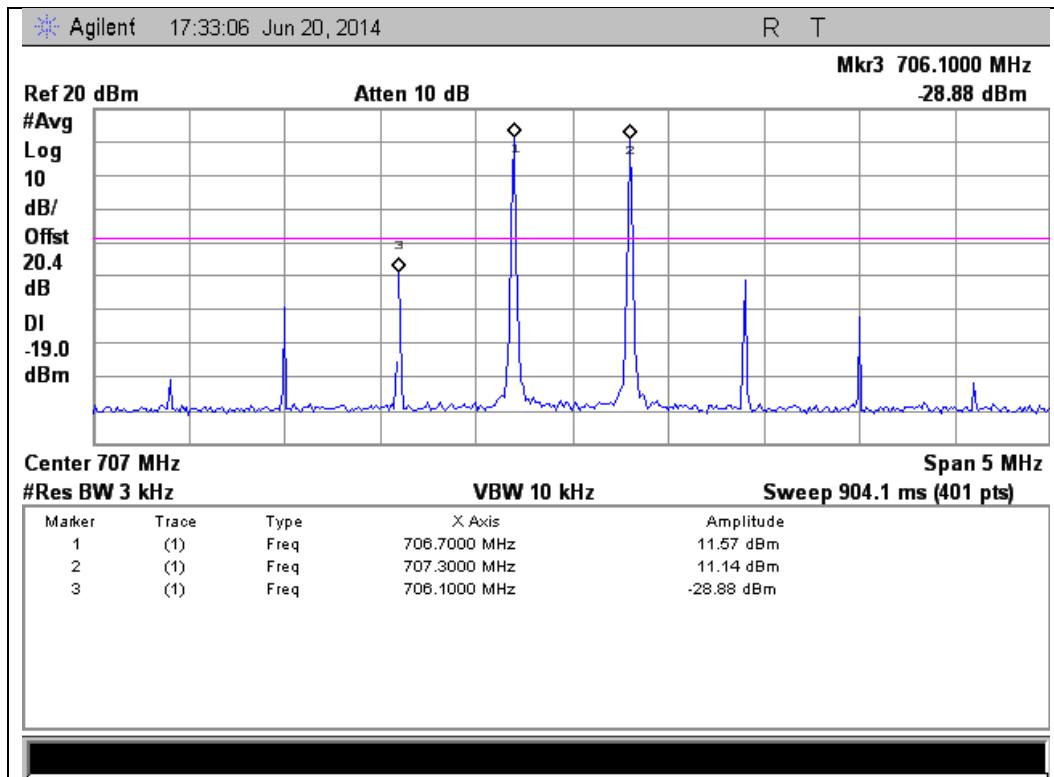


### 776 - 787 MHz Band

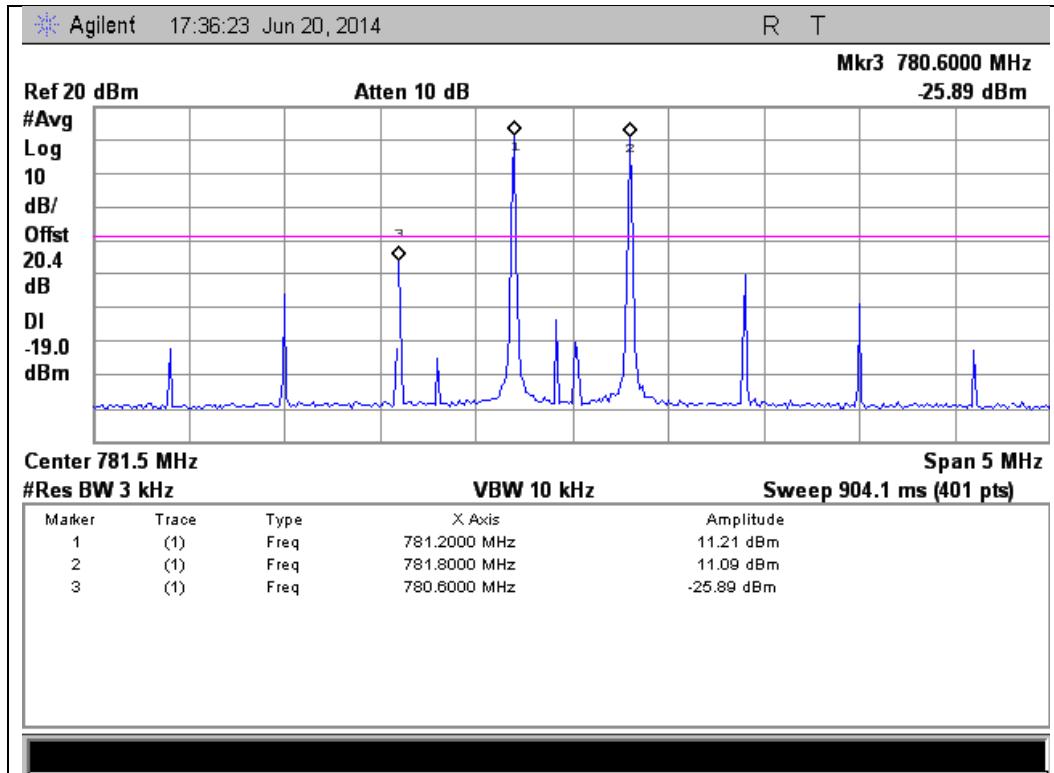




### 824 - 849 MHz Band

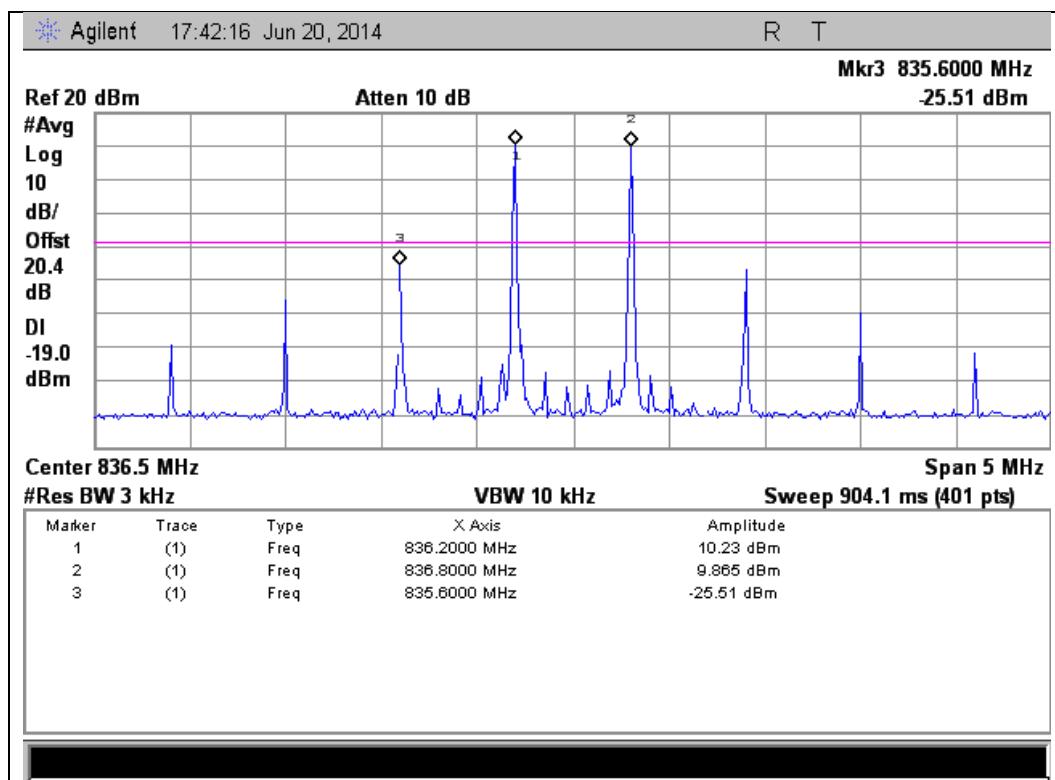


### 1710 - 1755 MHz Band

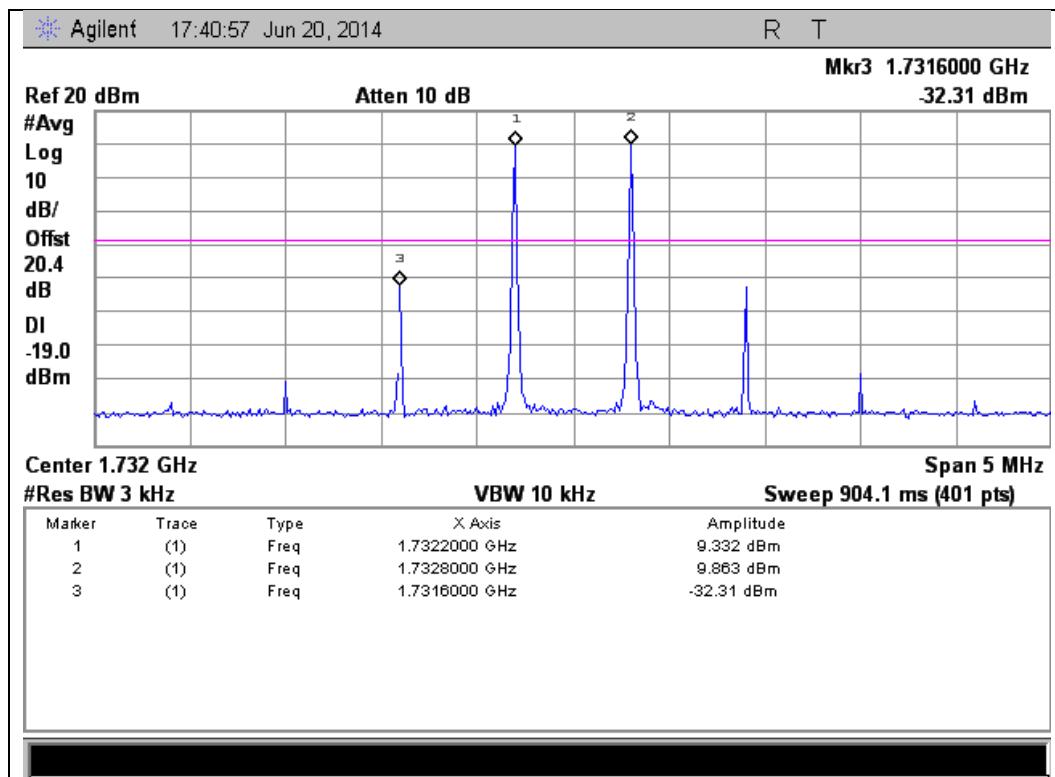




### 1850 - 1915 MHz Band

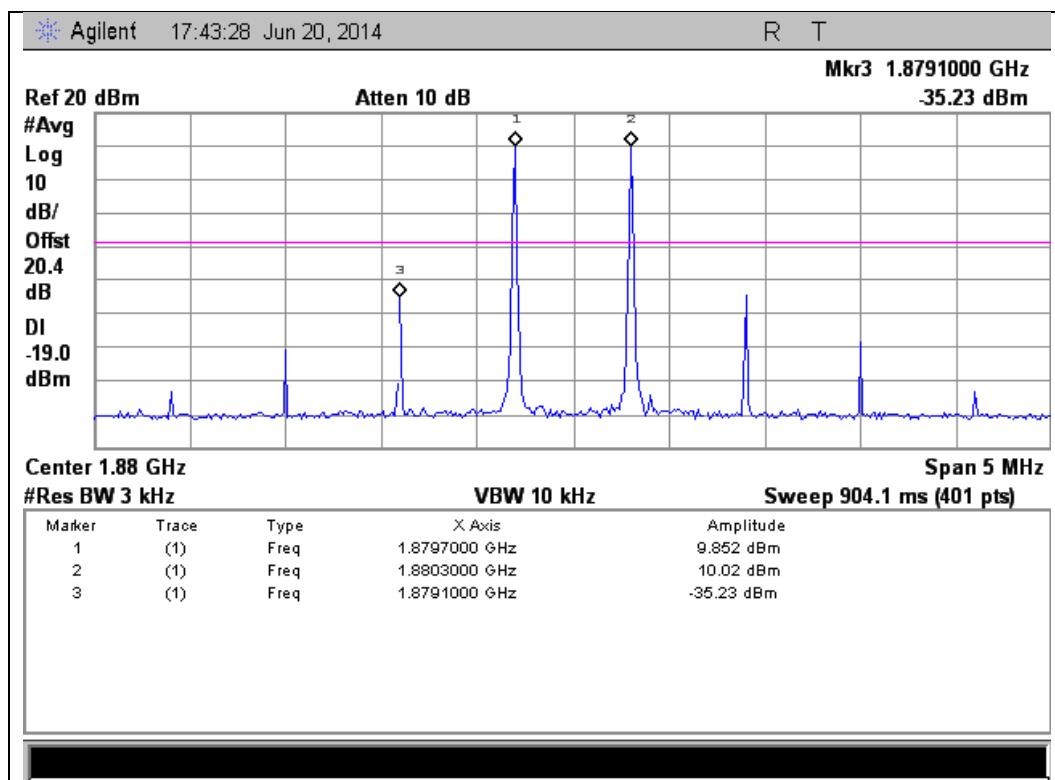


### Downlink Test Results

#### 728 - 746 MHz Band

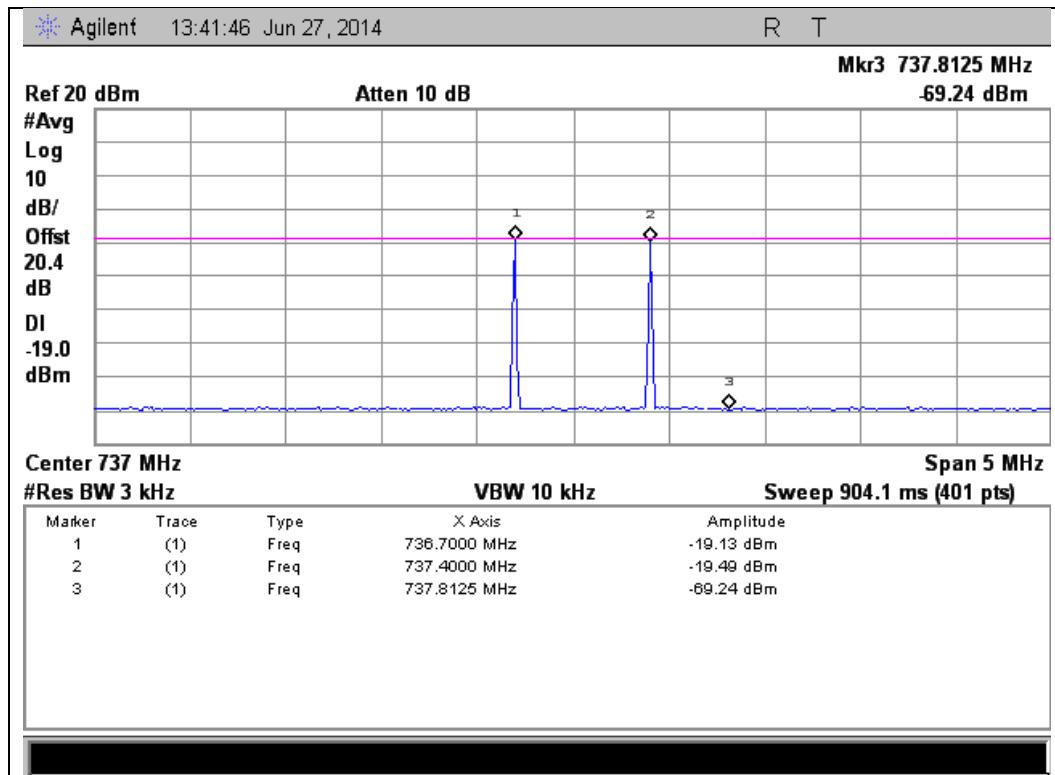




### 746 - 757 MHz Band

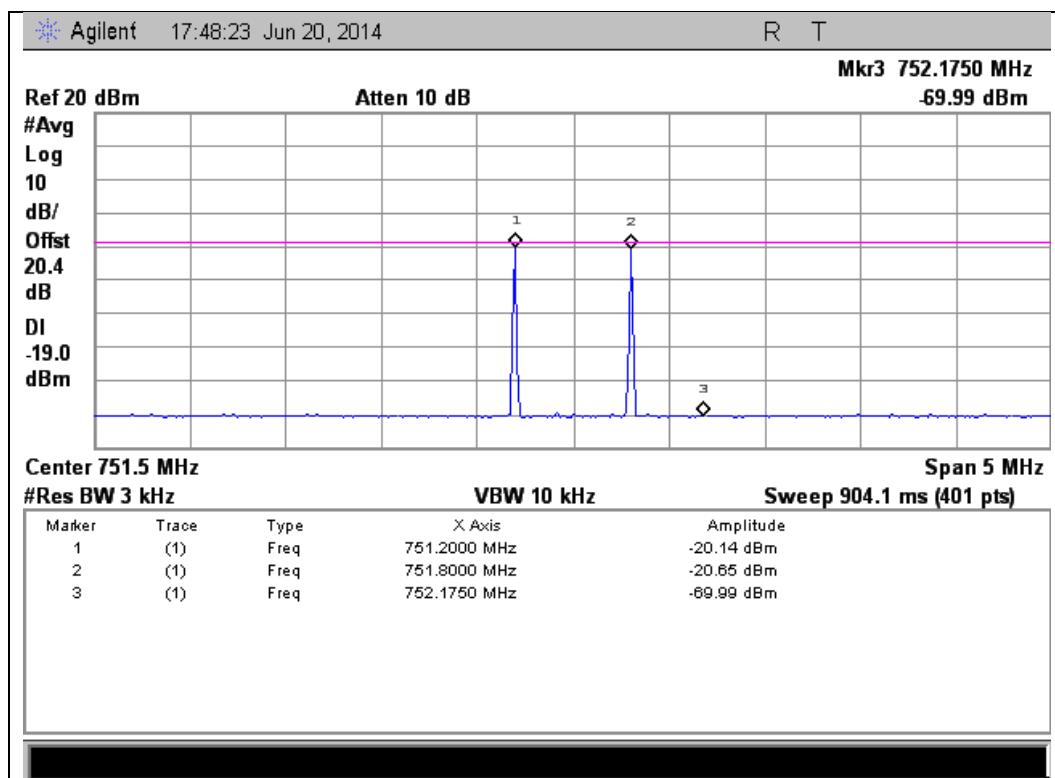


### 869 - 894 MHz Band

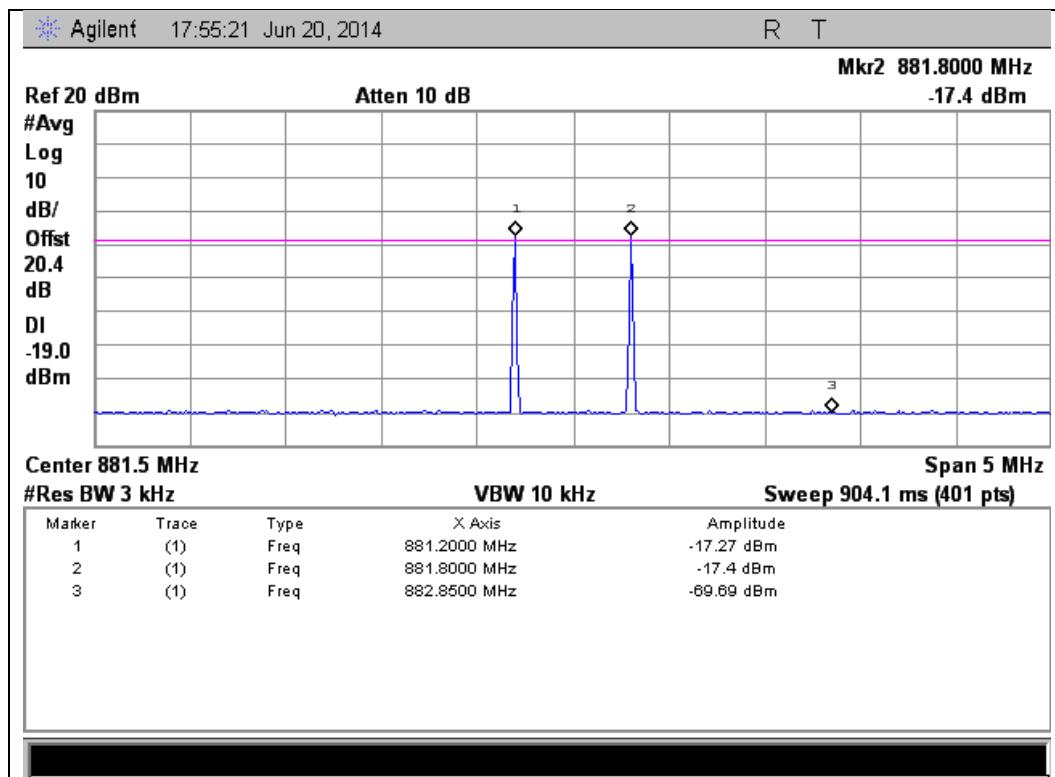




### 1930 - 1995 MHz Band

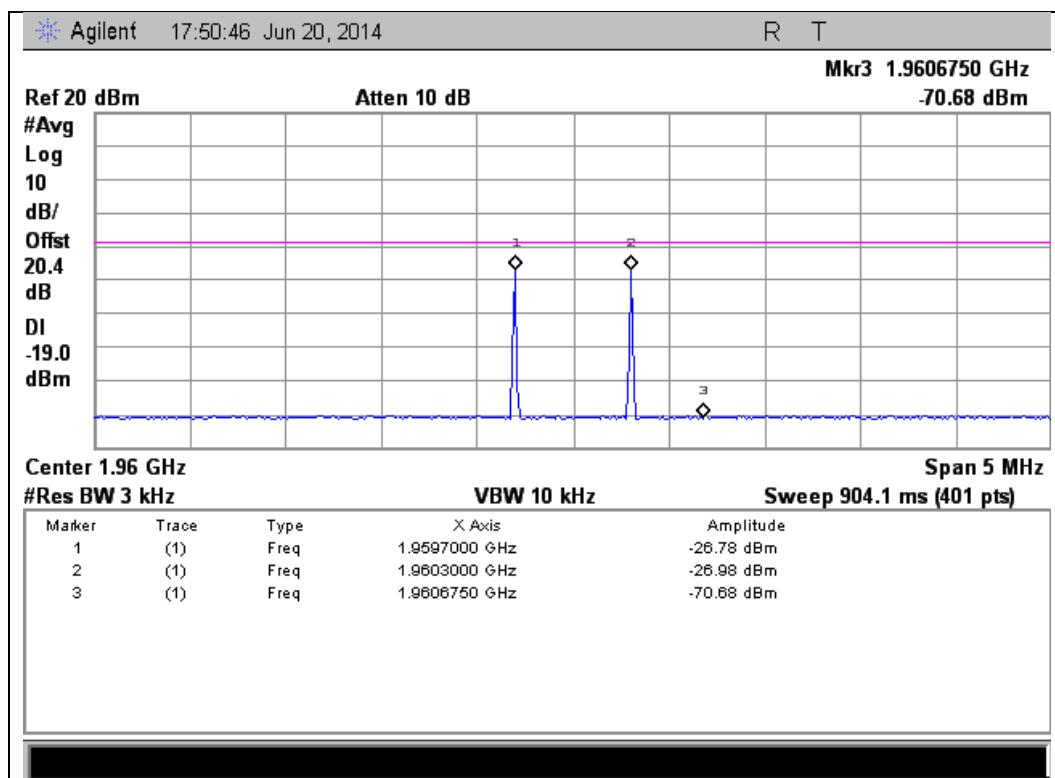

### 2110 - 2155 MHz Band

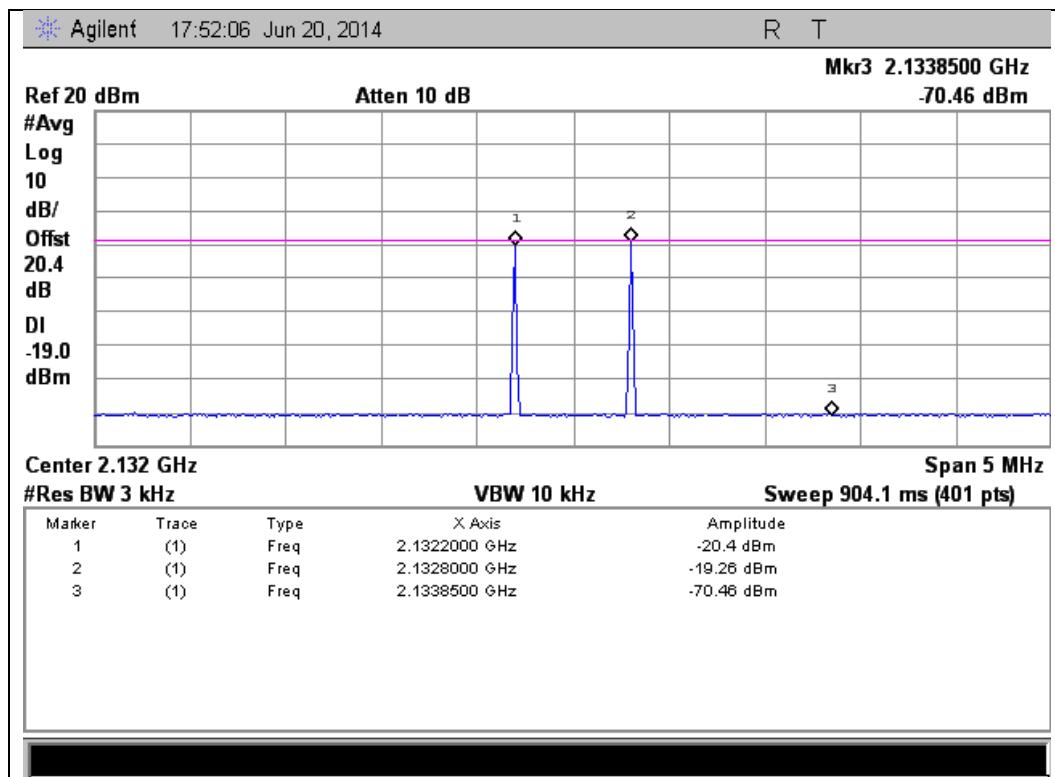



## Out-of-Band Emissions

**Name of Test:** Out-of-Band Emissions  
**Test Equipment Utilized:** i00379 and i00405

**Engineer:** Mike Graffeo  
**Test Date:** 6/20/14

### Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor in order to ensure accurate readings. A signal generator was utilized to produce the following signals: GSM, CDMA, and WCDMA. The signal generator was tuned to the lowest allowable upper and lower channel within the EUT operational band for each respective modulation type. The RF input level was increased to a point just prior to the AGC being in control of the power. For each modulation type the Out of Band Emissions were measured to ensure they met the limits.

The following formula was used for calculating the limits:

$$\text{Limit} = P1 - 6 - (43 + 10\log(P2)) = -19\text{dBm}$$

P1 = power in dBm

P2 = power in Watts

### Test Setup





### GSM Uplink Test Results

Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
698 - 716	Lower	-26.32	-19	Pass
698 - 716	Upper	-32.28	-19	Pass
776 - 787	Lower	-23.38	-19	Pass
776 - 787	Upper	-25.24	-19	Pass
824 - 849	Lower	-34.70	-19	Pass
824 - 849	Upper	-37.53	-19	Pass
1710 - 1755	Lower	-34.52	-19	Pass
1710 - 1755	Upper	-35.30	-19	Pass
1850 – 1915	Lower	-40.31	-19	Pass
1850 – 1915	Upper	-72.82	-19	Pass

### CDMA Uplink Test Results

Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
698 – 716	Lower	-56.37	-19	Pass
698 – 716	Upper	-58.10	-19	Pass
776 – 787	Lower	-39.26	-19	Pass
776 – 787	Upper	-39.59	-19	Pass
824 – 849	Lower	-39.36	-19	Pass
824 – 849	Upper	-37.93	-19	Pass
1710 – 1755	Lower	-43.15	-19	Pass
1710 – 1755	Upper	-46.00	-19	Pass
1850 – 1915	Lower	-53.22	-19	Pass
1850 – 1915	Upper	-65.00	-19	Pass



### WCDMA Uplink Test Results

Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
698 - 716	Lower	-57.94	-19	Pass
698 - 716	Upper	-55.88	-19	Pass
776 - 787	Lower	-40.90	-19	Pass
776 - 787	Upper	-41.24	-19	Pass
824 - 849	Lower	-37.49	-19	Pass
824 - 849	Upper	-37.38	-19	Pass
1710 - 1755	Lower	-37.22	-19	Pass
1710 - 1755	Upper	-37.78	-19	Pass
1850 - 1915	Lower	-43.36	-19	Pass
1850 - 1915	Upper	-59.25	-19	Pass

### GSM Downlink Test Results

Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
728 - 746	Lower	-56.86	-19	Pass
728 - 746	Upper	-52.67	-19	Pass
746 - 757	Lower	-52.68	-19	Pass
746 - 757	Upper	-56.56	-19	Pass
869 - 894	Lower	-71.86	-19	Pass
869 - 894	Upper	-72.65	-19	Pass
1930 - 1995	Lower	-68.93	-19	Pass
1930 - 1995	Upper	-71.53	-19	Pass
2110 - 2155	Lower	-65.38	-19	Pass
2110 - 2155	Upper	-68.33	-19	Pass



### CDMA Downlink Test Results

Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
728 - 746	Lower	-66.33	-19	Pass
728 - 746	Upper	-65.56	-19	Pass
746 - 757	Lower	-65.93	-19	Pass
746 - 757	Upper	-65.65	-19	Pass
869 - 894	Lower	-58.27	-19	Pass
869 - 894	Upper	-65.43	-19	Pass
1930 – 1995	Lower	-65.06	-19	Pass
1930 – 1995	Upper	-65.76	-19	Pass
2110 - 2155	Lower	-65.04	-19	Pass
2110 - 2155	Upper	-66.06	-19	Pass

### WCDMA Downlink Test Results


Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
728 - 746	Lower	-42.97	-19	Pass
728 - 746	Upper	-65.26	-19	Pass
746 - 757	Lower	-65.71	-19	Pass
746 - 757	Upper	-66.20	-19	Pass
869 - 894	Lower	-58.27	-19	Pass
869 - 894	Upper	-59.24	-19	Pass
1930 – 1995	Lower	-58.65	-19	Pass
1930 – 1995	Upper	-58.11	-19	Pass
2110 - 2155	Lower	-58.54	-19	Pass
2110 - 2155	Upper	-58.06	-19	Pass




### GSM Uplink Test Plots

698 - 716 MHz Band

Lower Band Edge

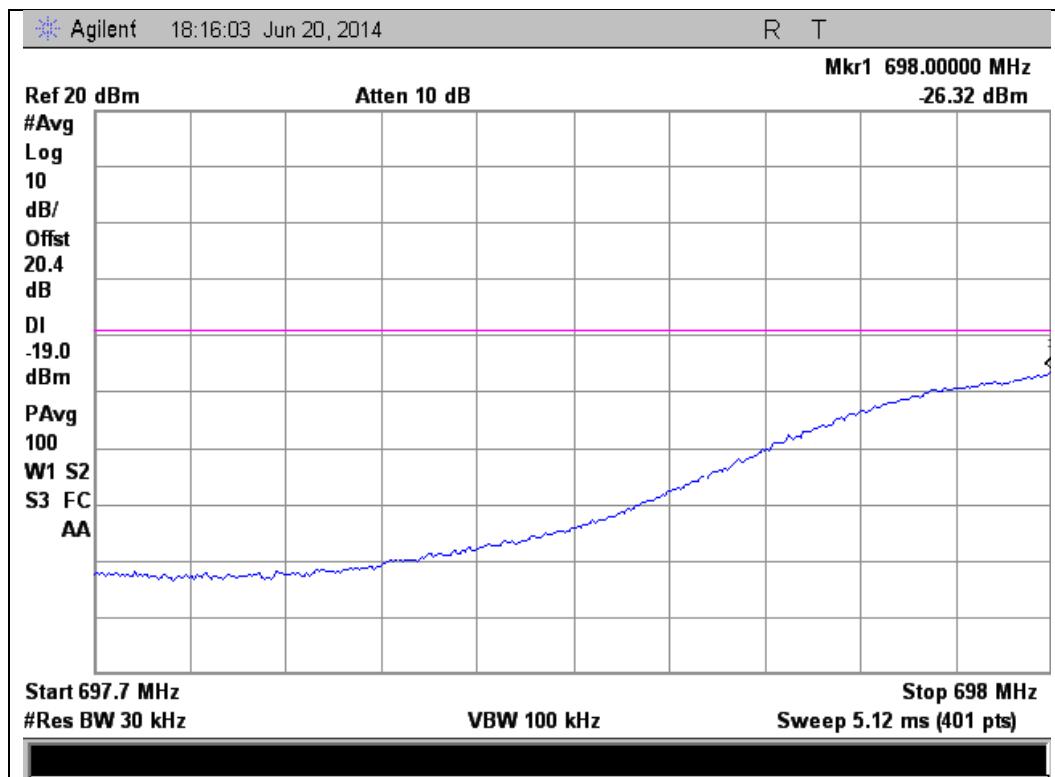


Upper Band Edge

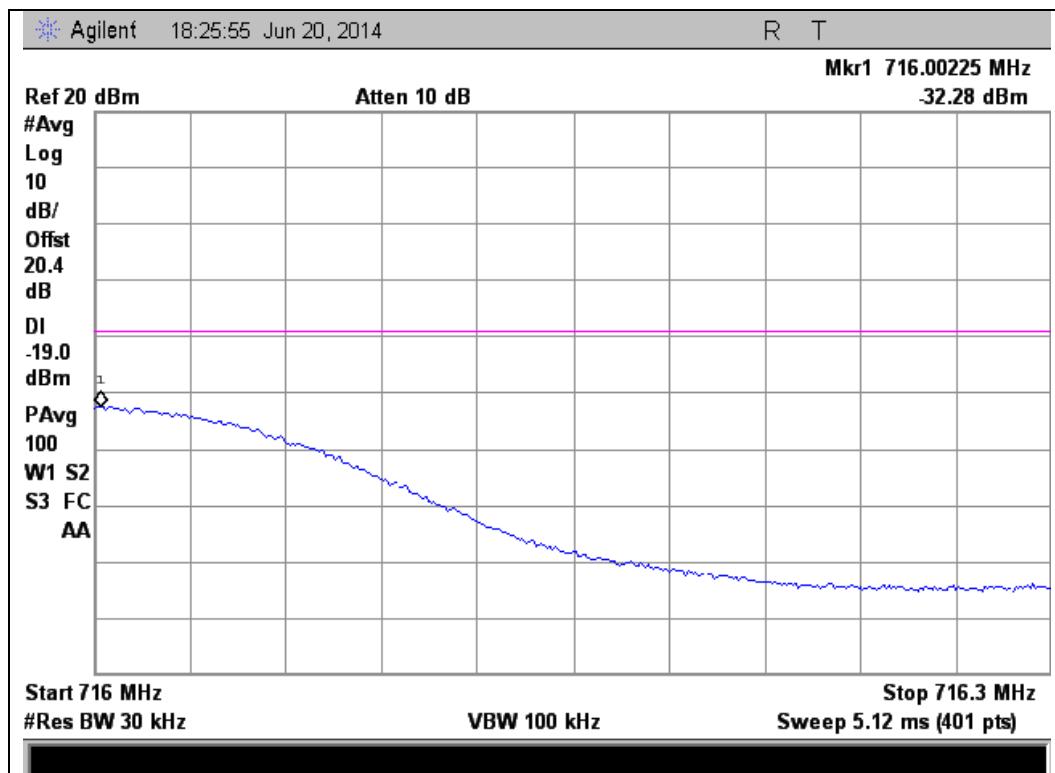




## 776 - 787 MHz Band

### Lower Band Edge

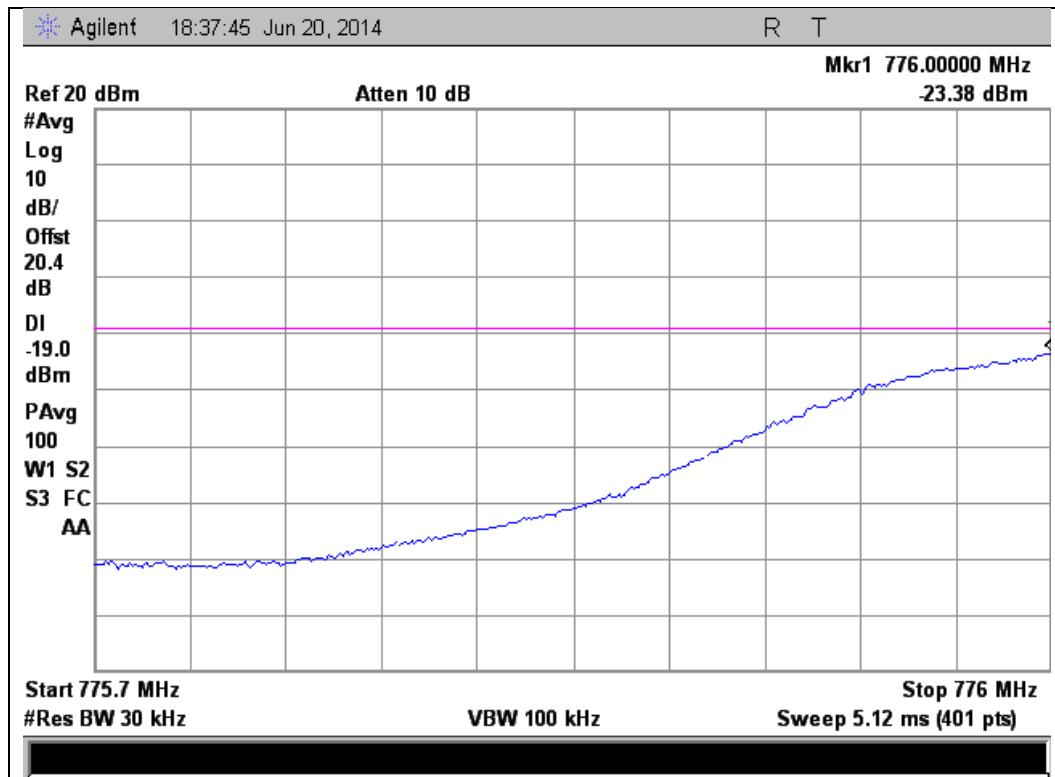


### Upper Band Edge

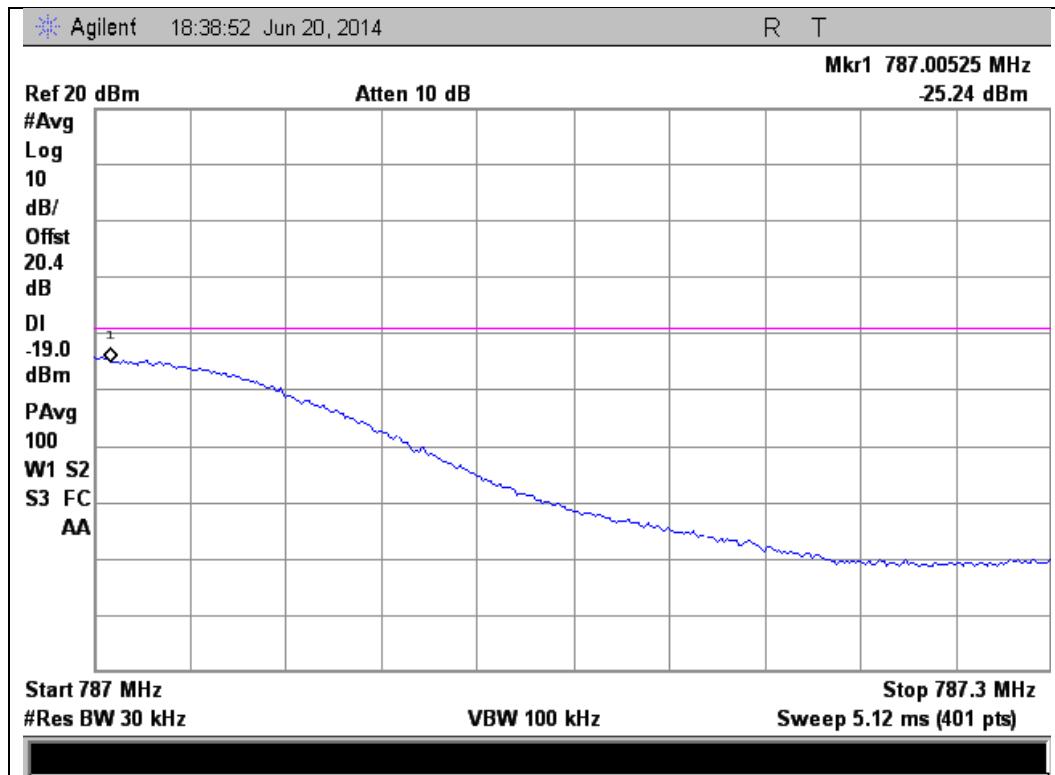



824 - 849 MHz Band

Lower Band Edge

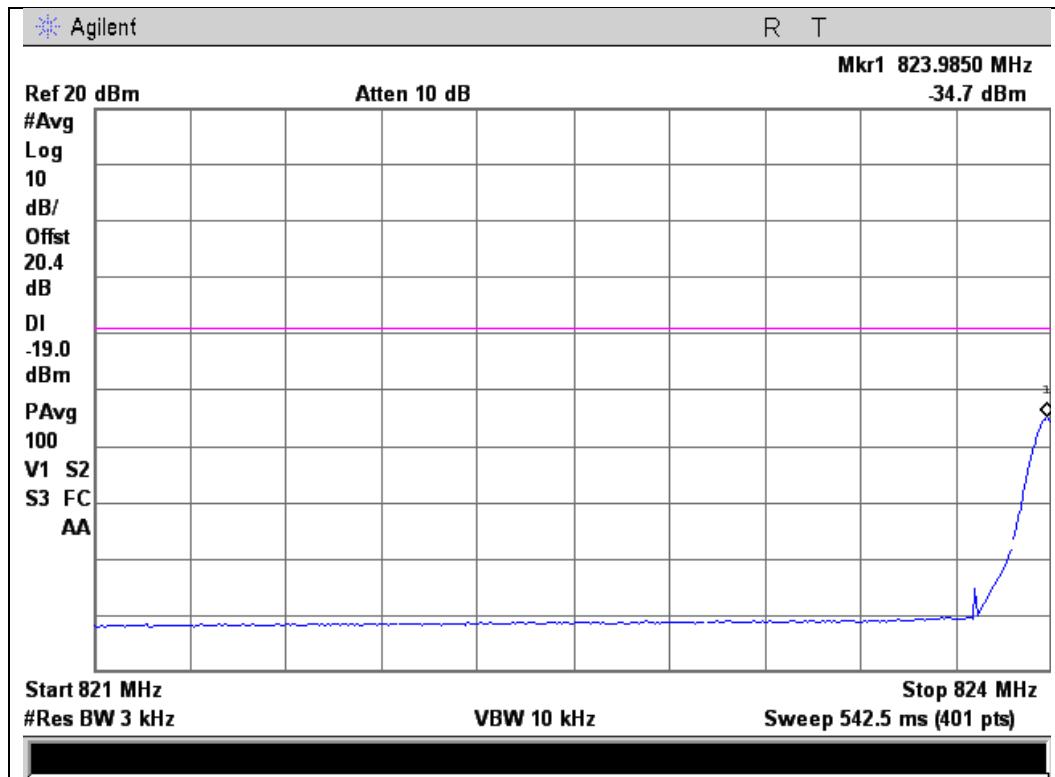


Upper Band Edge






### 1710 - 1755 MHz Band

#### Lower Band Edge

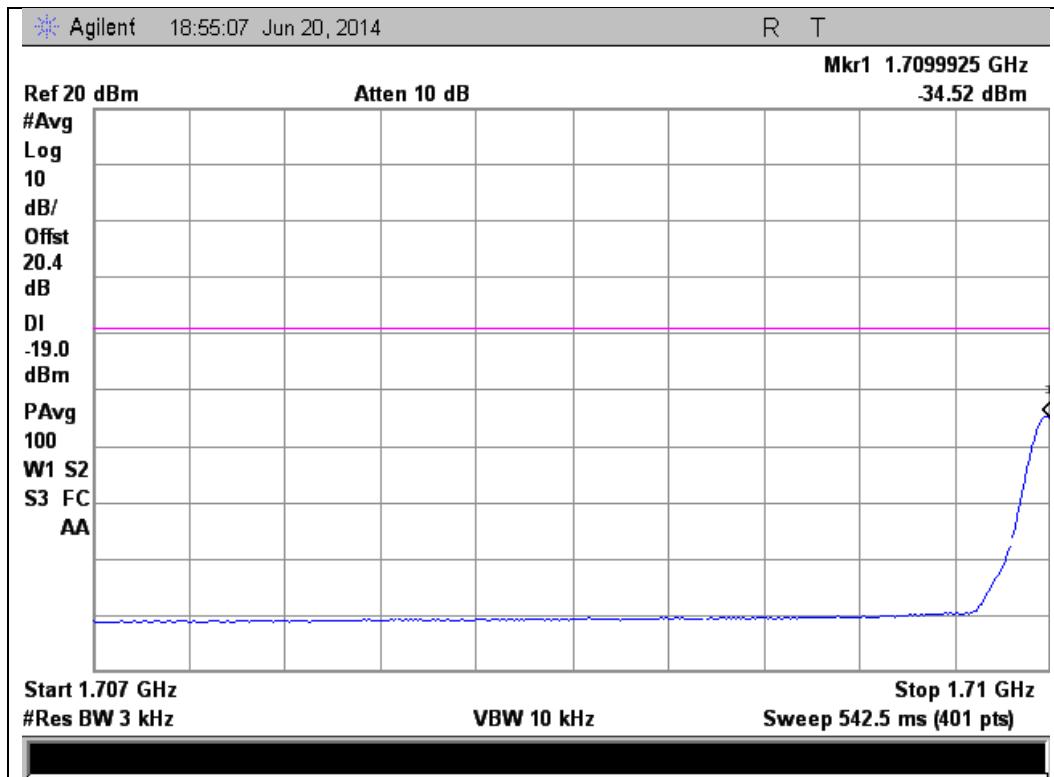


#### Upper Band Edge

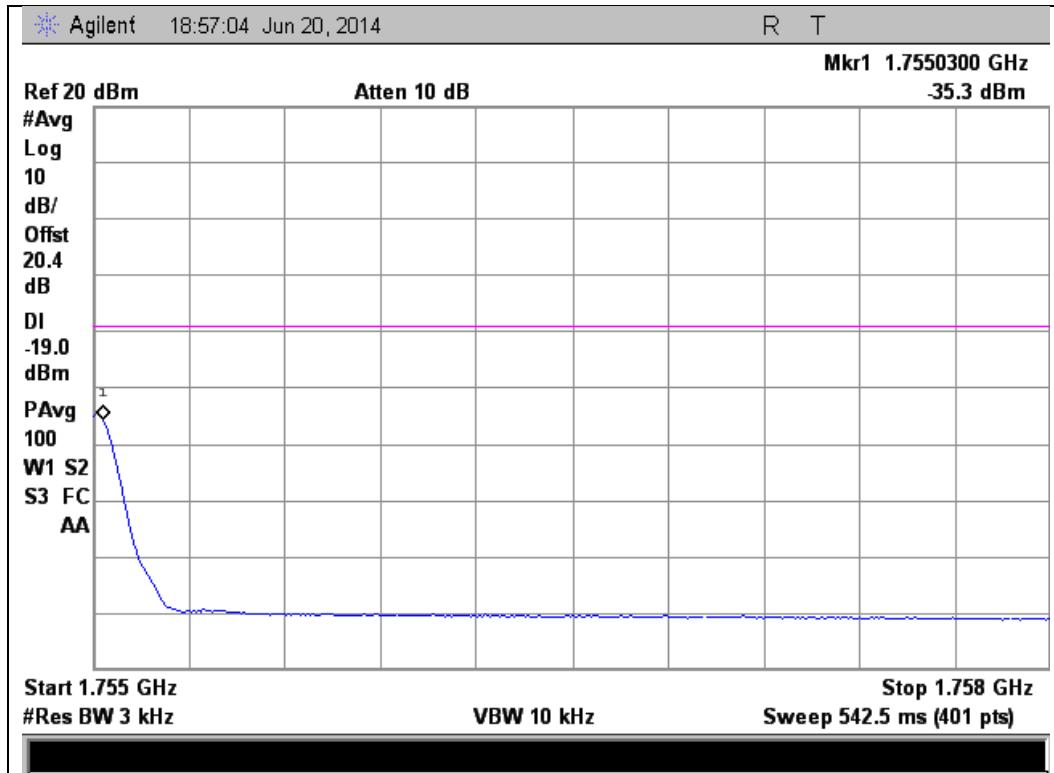




### 1850 - 1915 MHz Band

#### Lower Band Edge

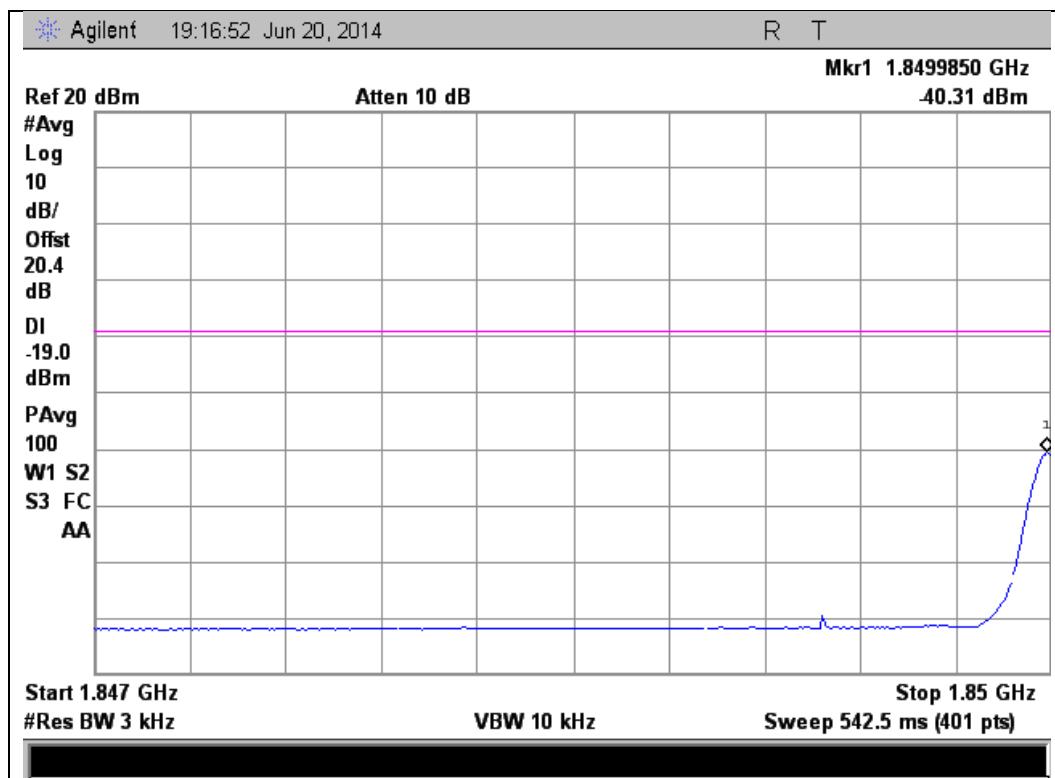

#### Upper Band Edge

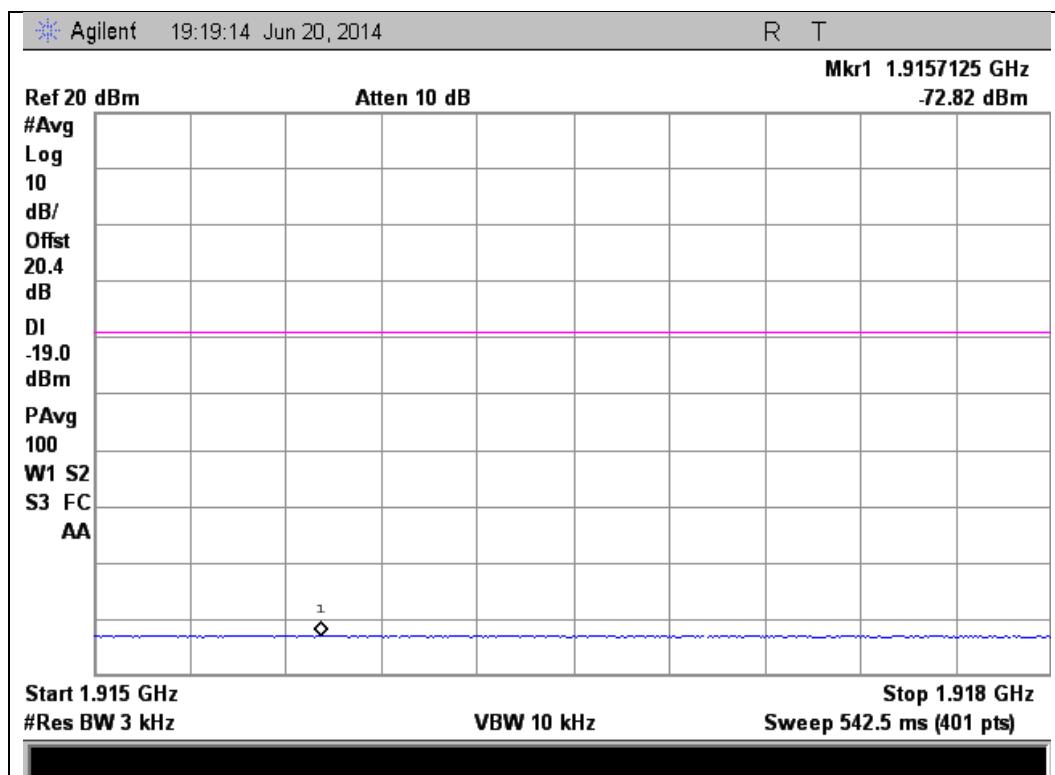





### CDMA Uplink Test Plots

698 - 716 MHz Band

Lower Band Edge

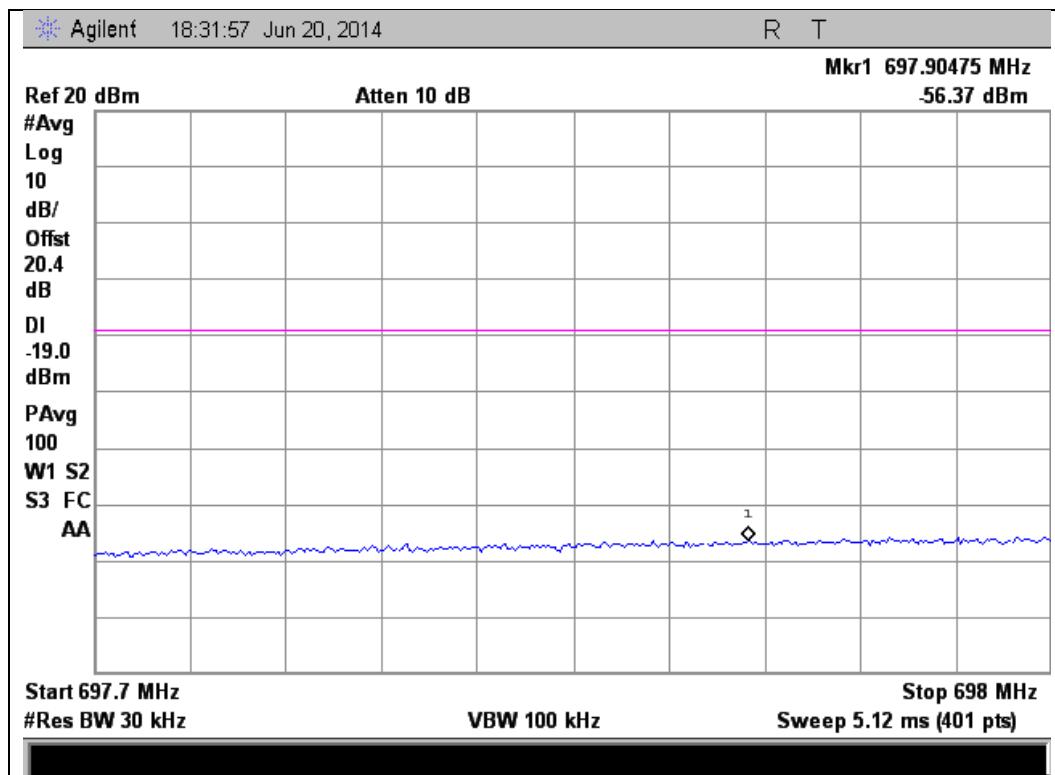


Upper Band Edge

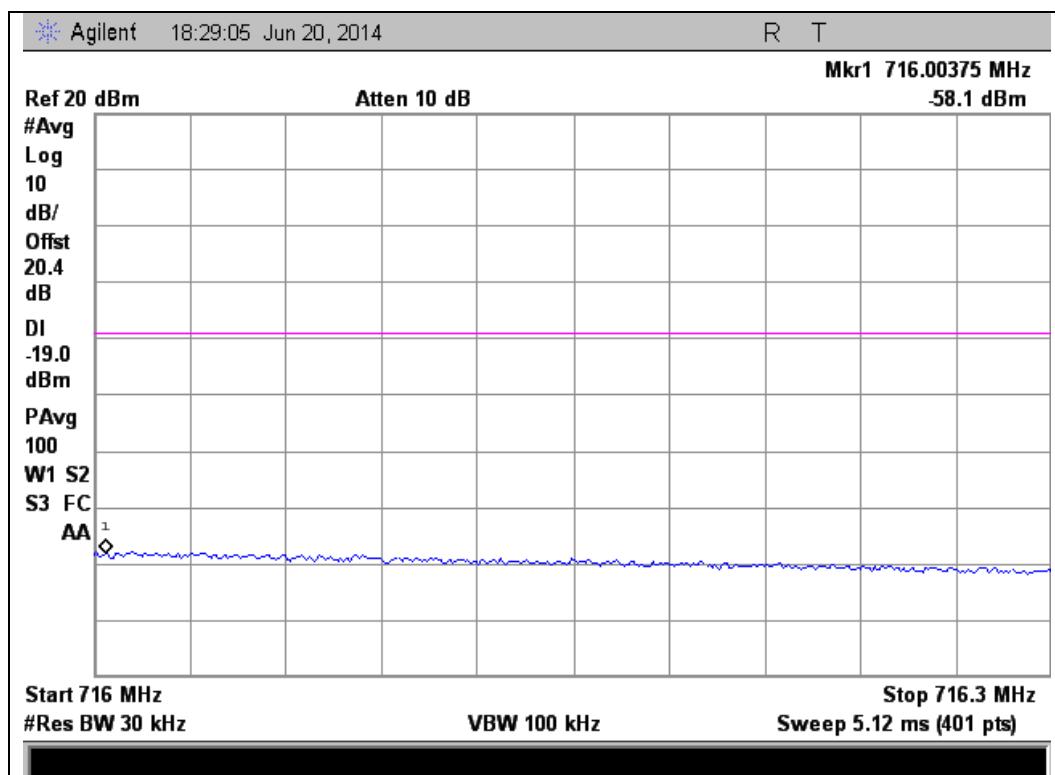




### 776 - 787 MHz Band

#### Lower Band Edge

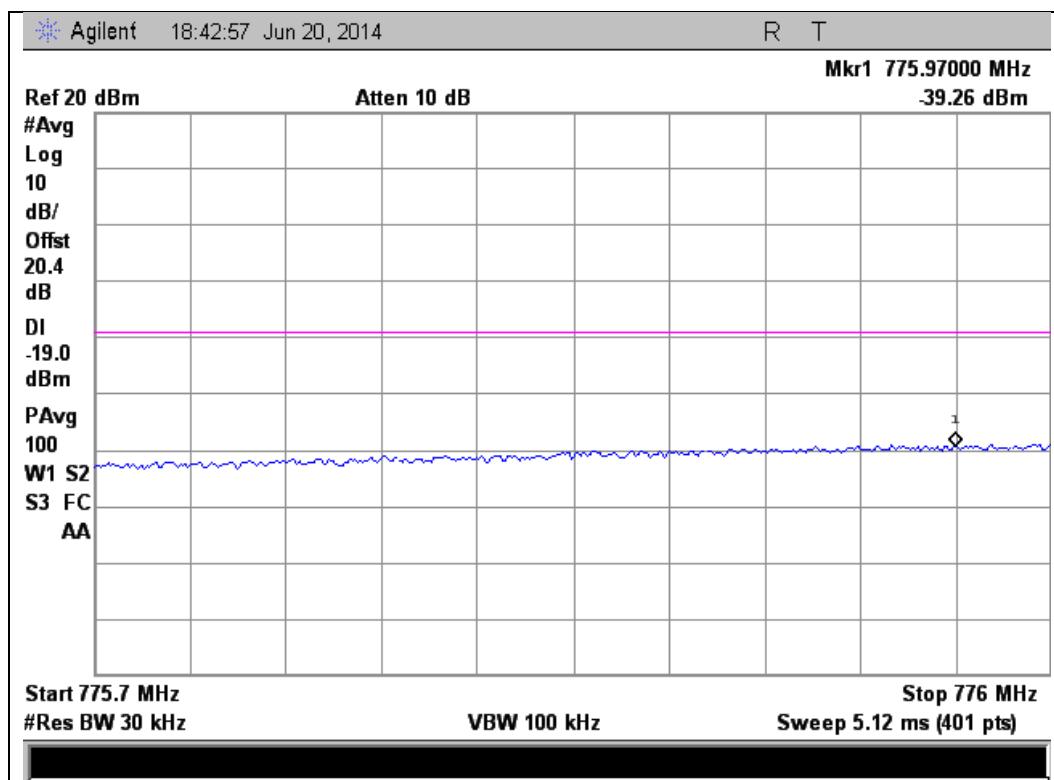


#### Upper Band Edge

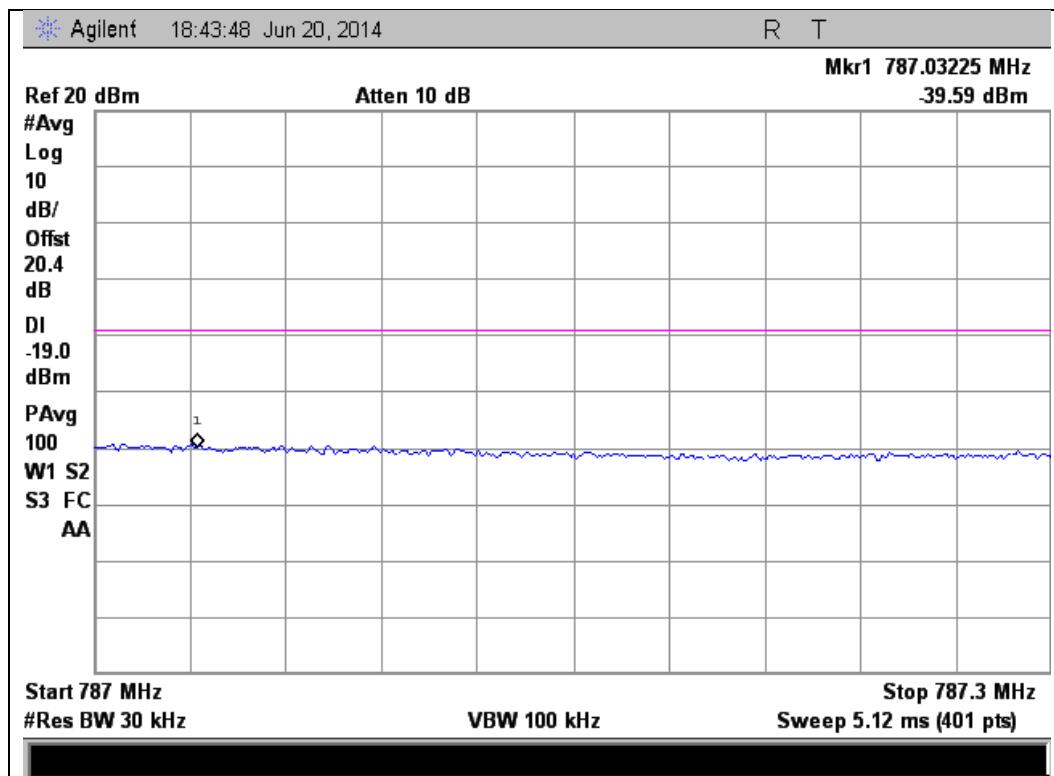




## 824 - 849 MHz Band

### Lower Band Edge

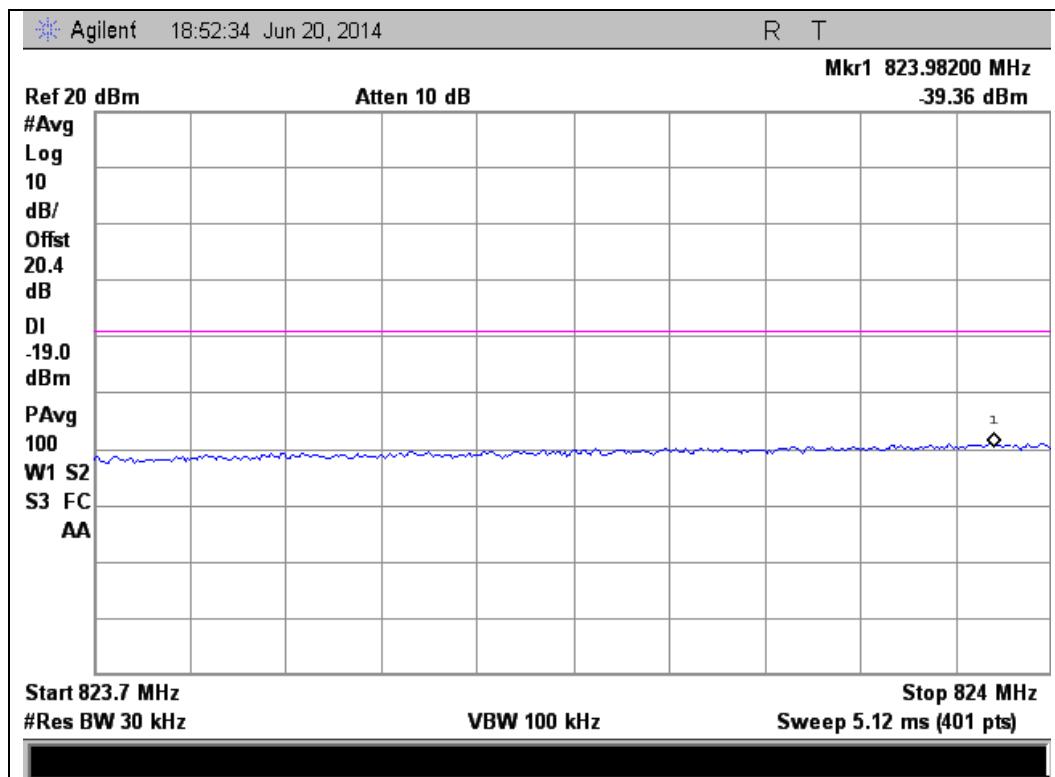


### Upper Band Edge

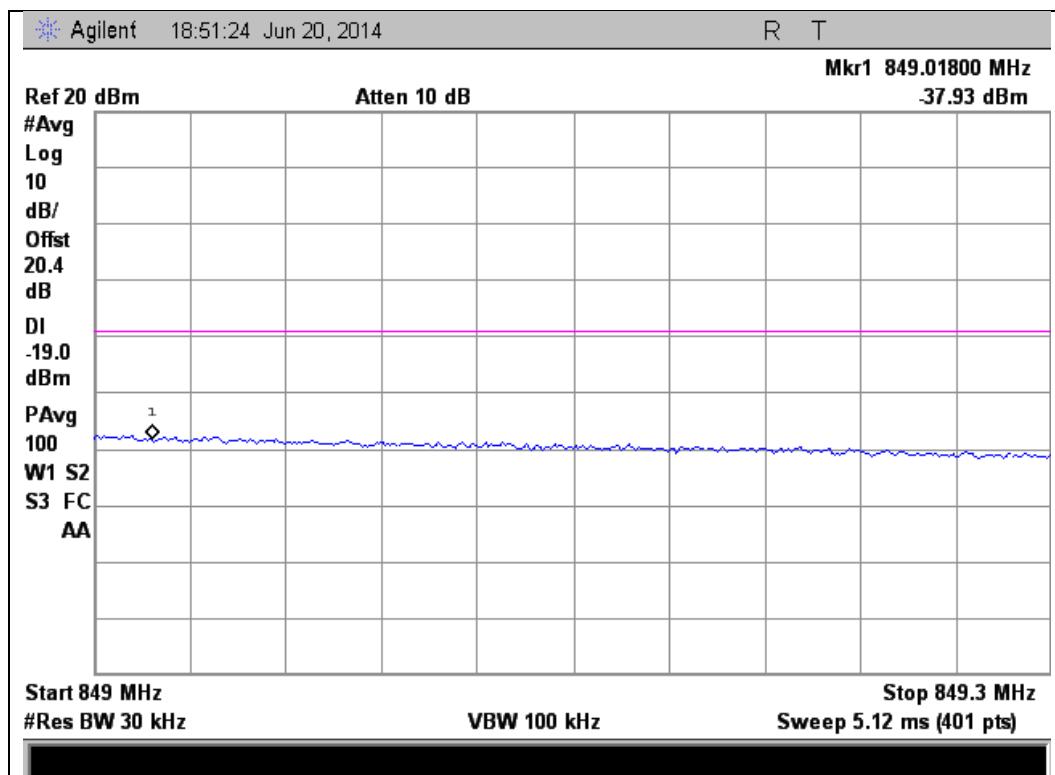




### 1710 - 1755 MHz Band

#### Lower Band Edge

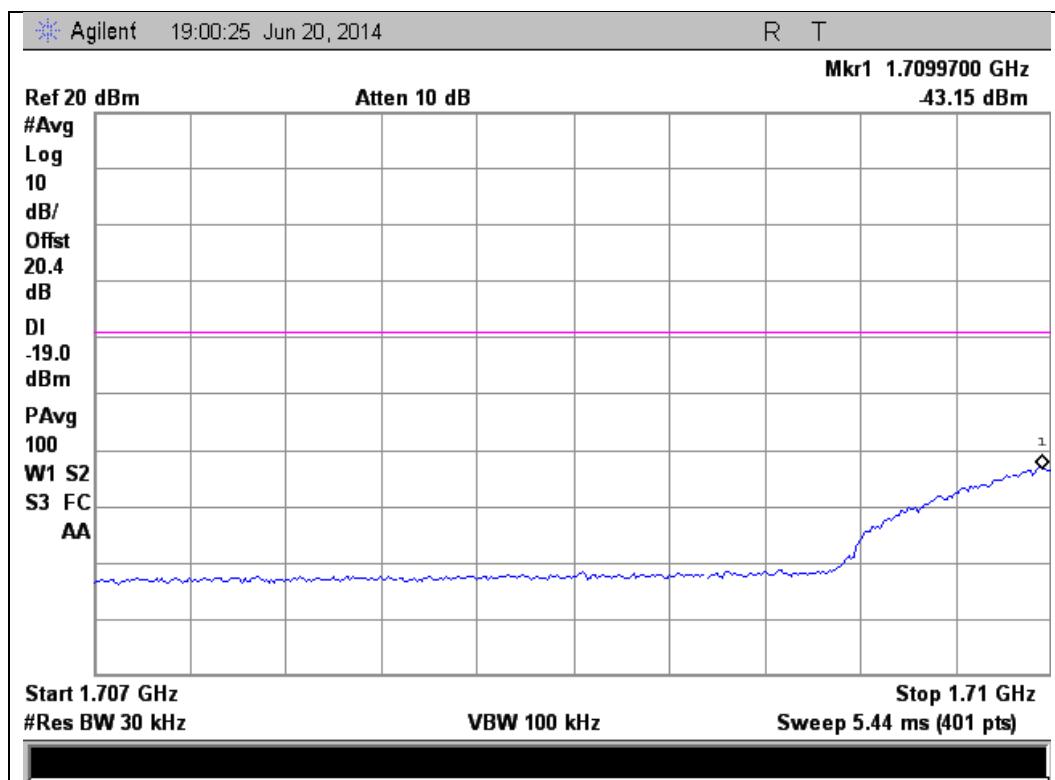


#### Upper Band Edge

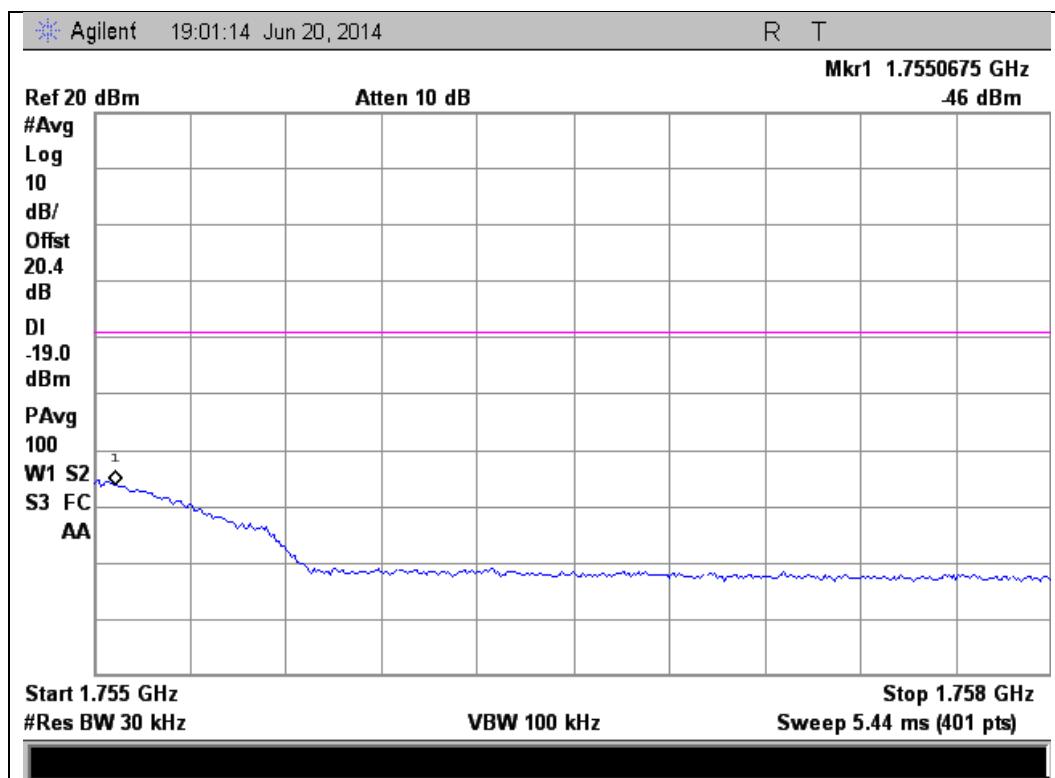




### 1850 - 1915 MHz Band

#### Lower Band Edge

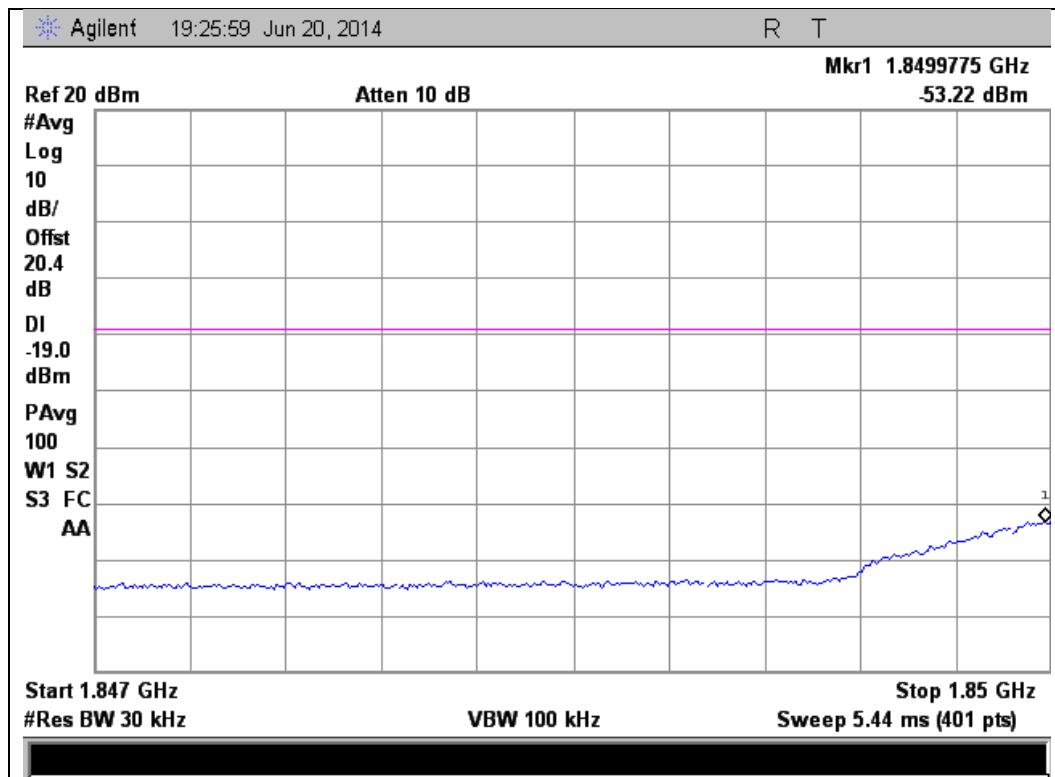


#### Upper Band Edge

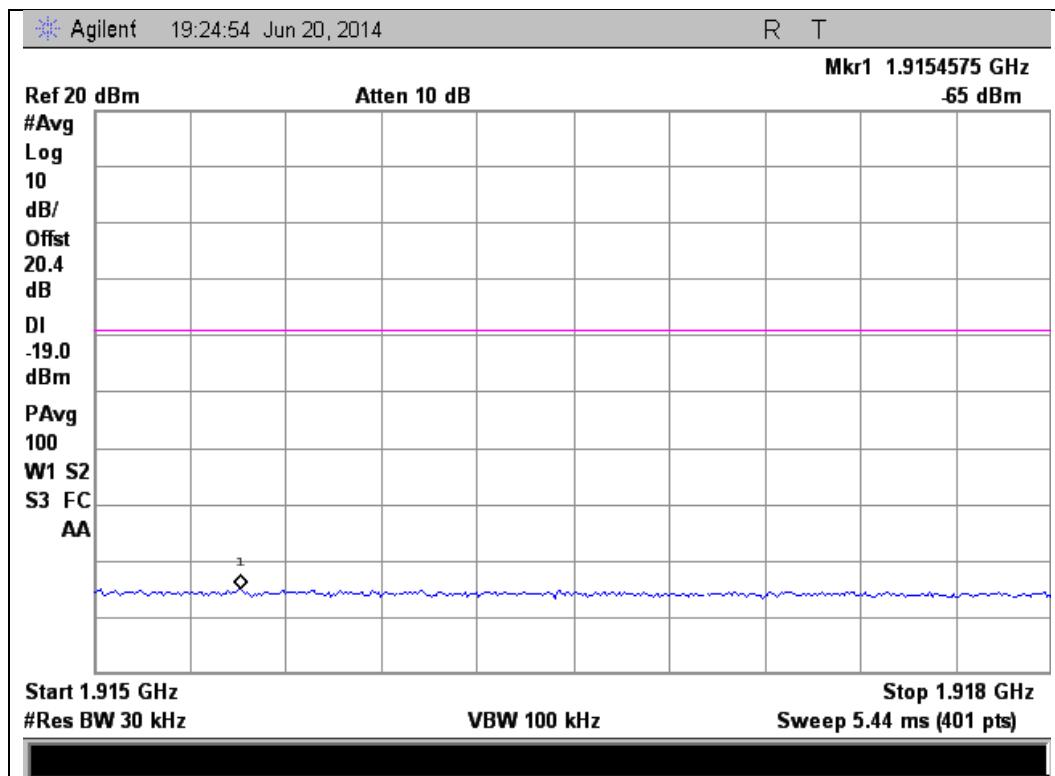




WCDMA Uplink Test Plots  
698 - 716 MHz Band  
Lower Band Edge

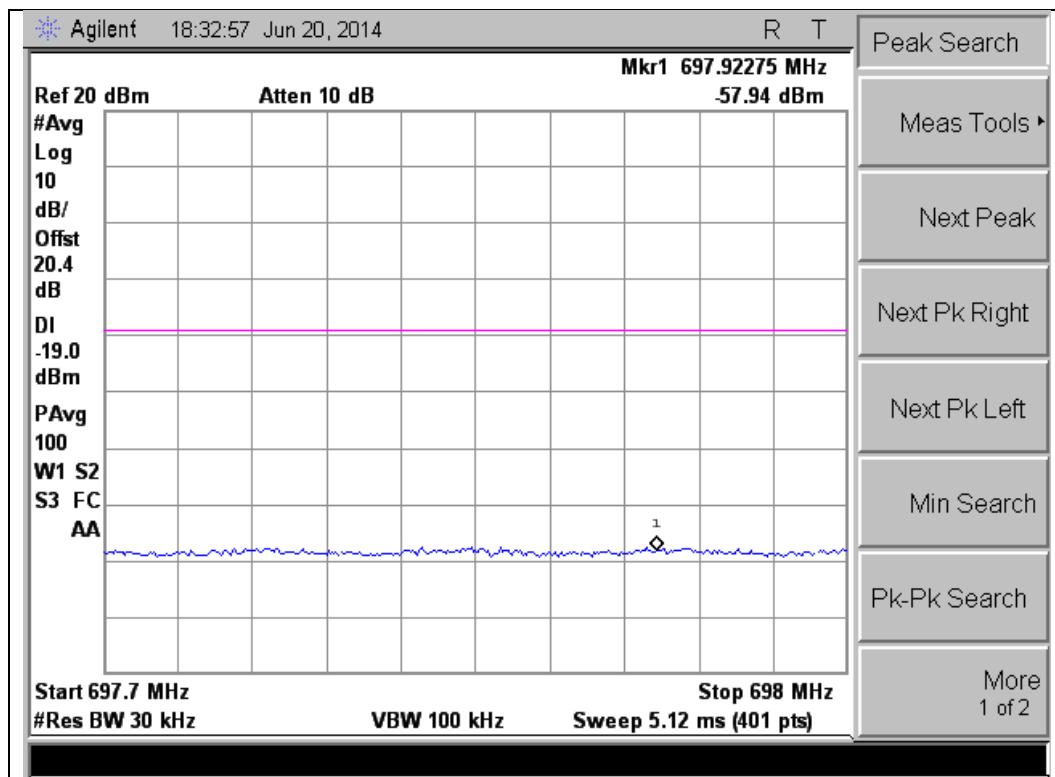


Upper Band Edge

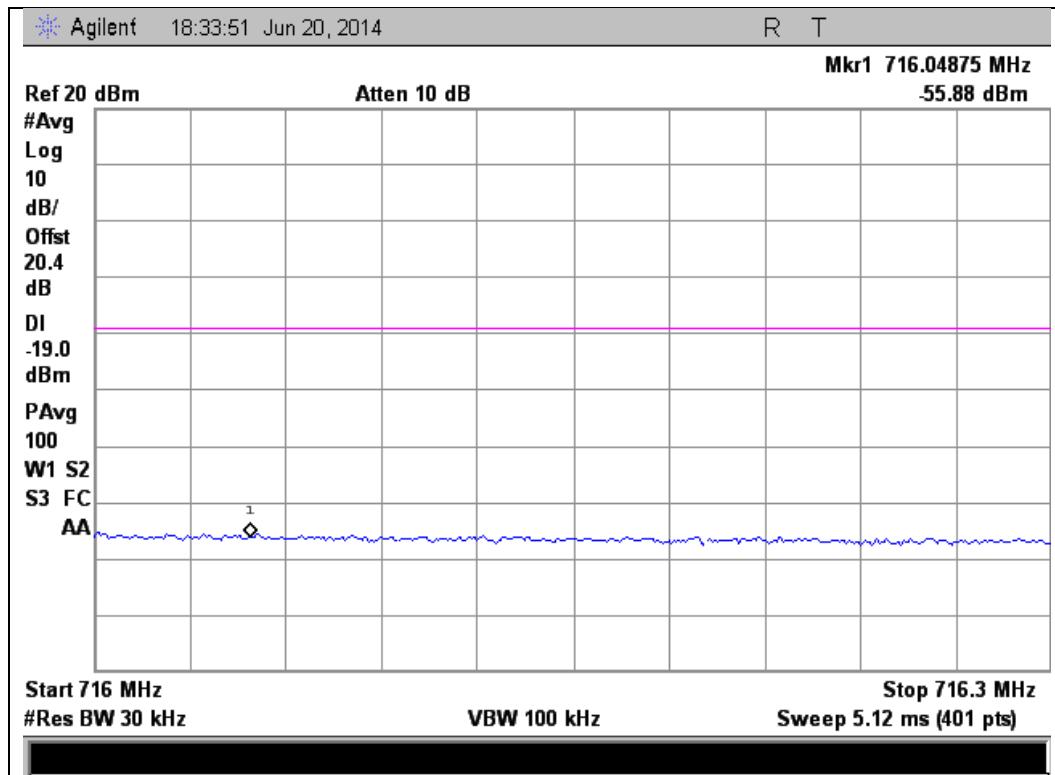




### 776 - 787 MHz Band

#### Lower Band Edge

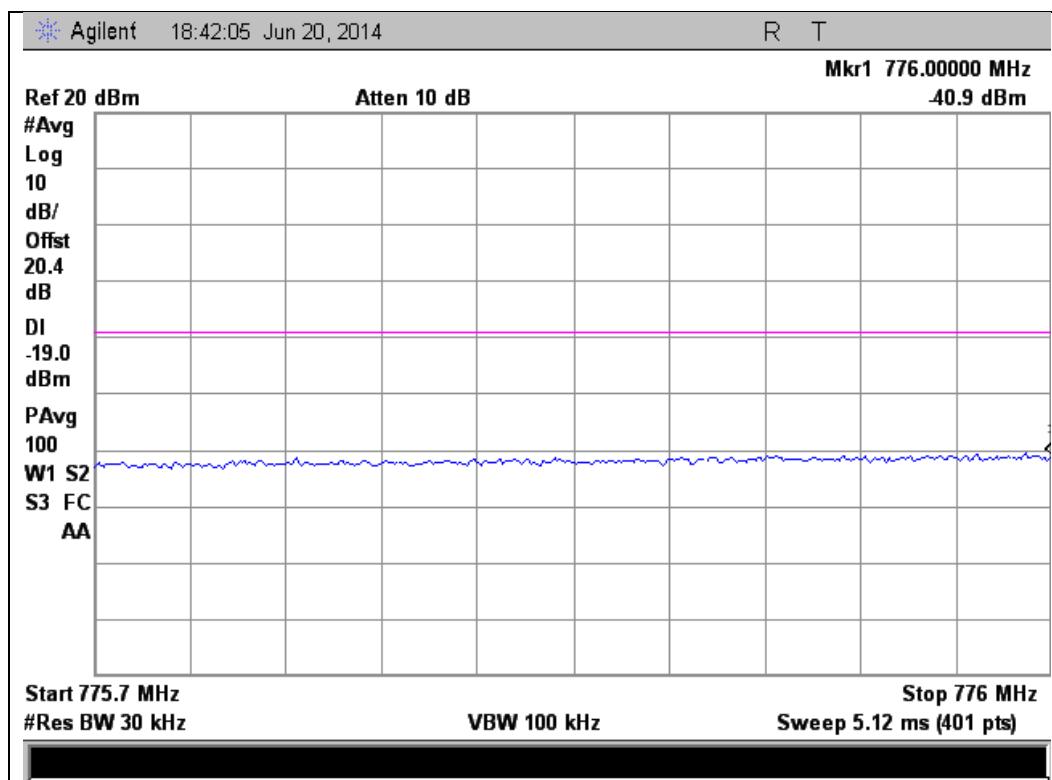


#### Upper Band Edge

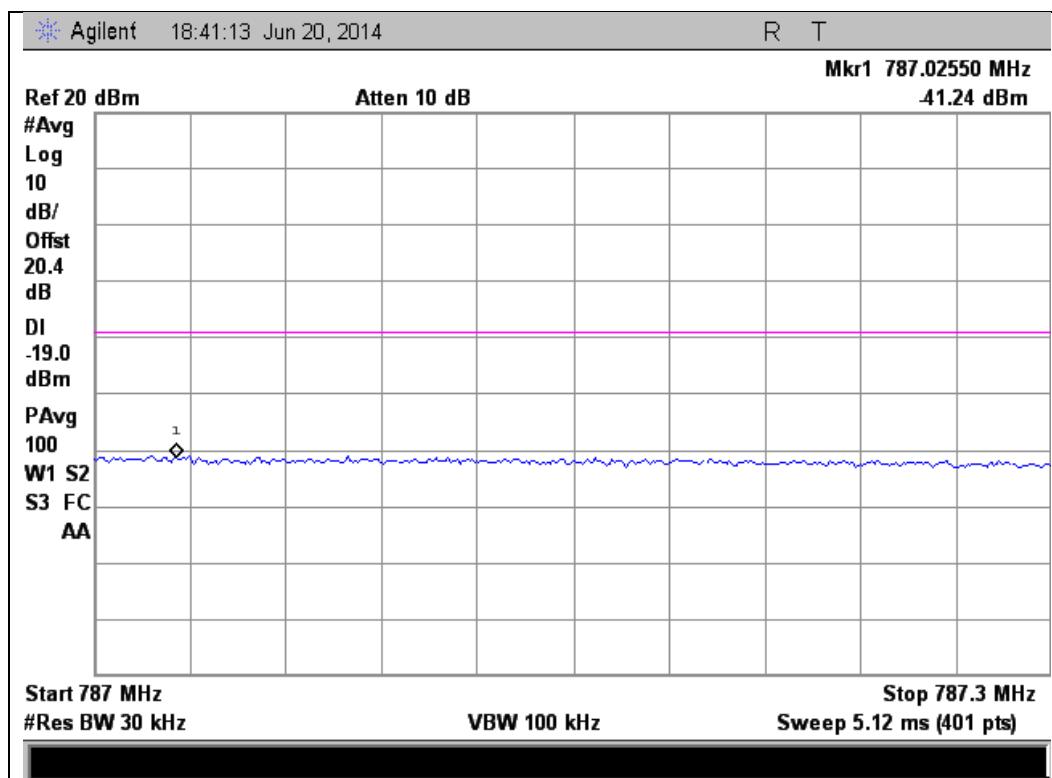




### 824 - 849 MHz Band

#### Lower Band Edge

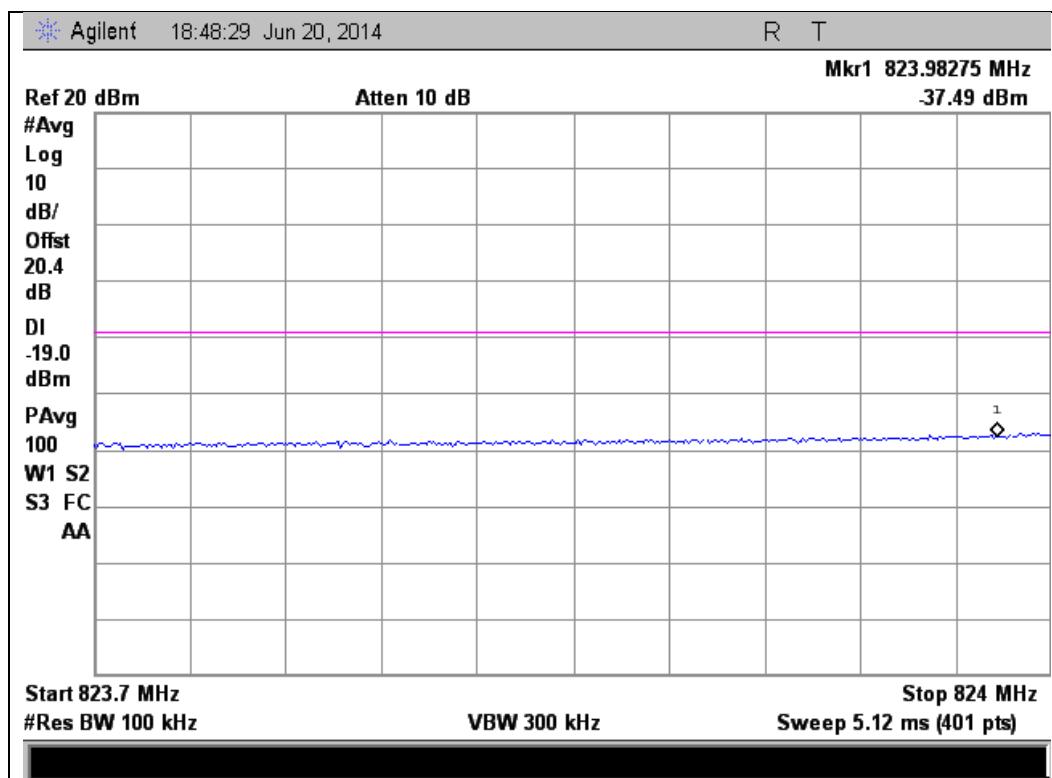


#### Upper Band Edge

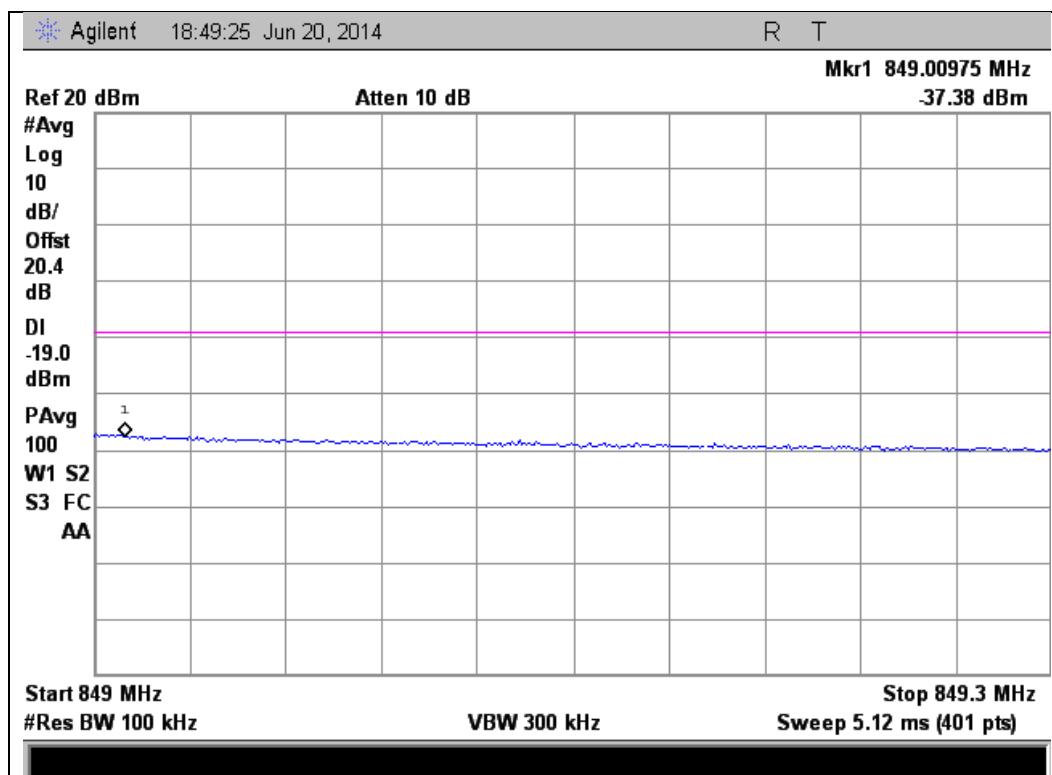




### 1710 - 1755 MHz Band

#### Lower Band Edge

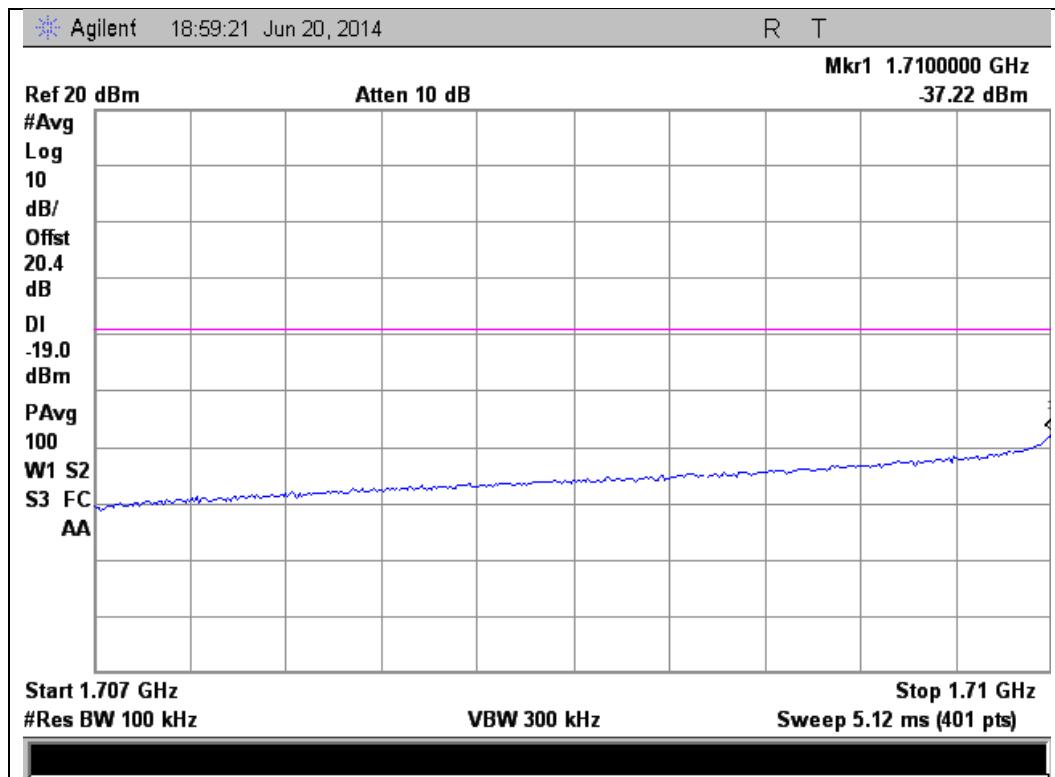


#### Upper Band Edge

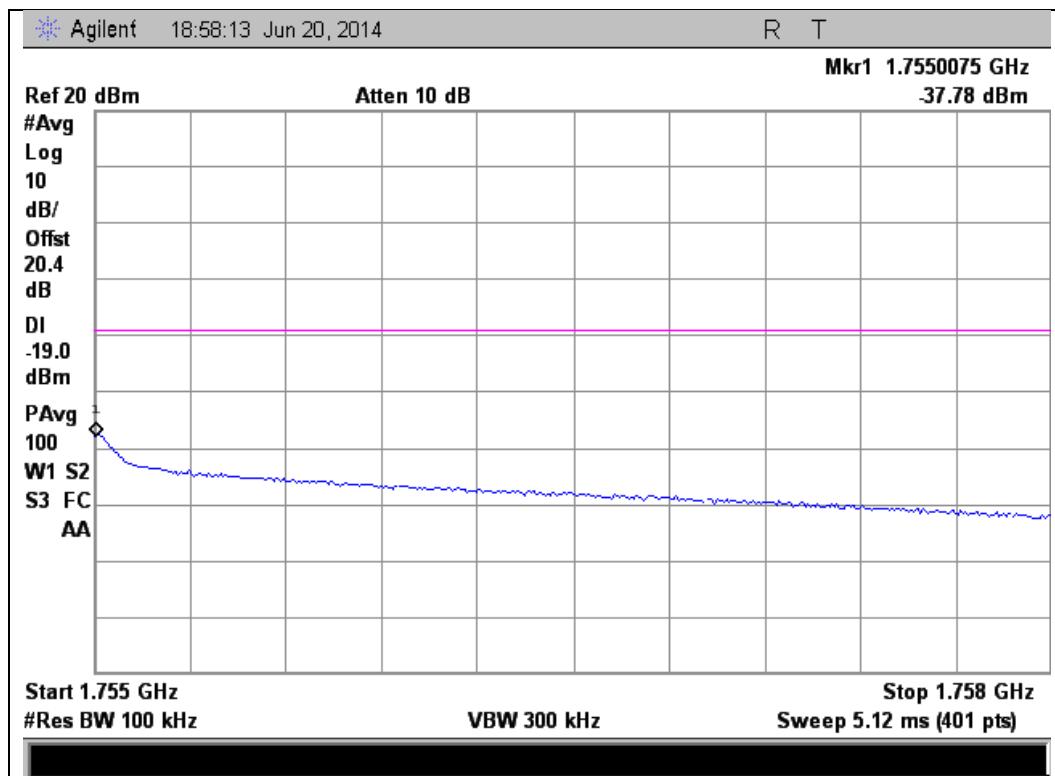




### 1850 - 1915 MHz Band

#### Lower Band Edge

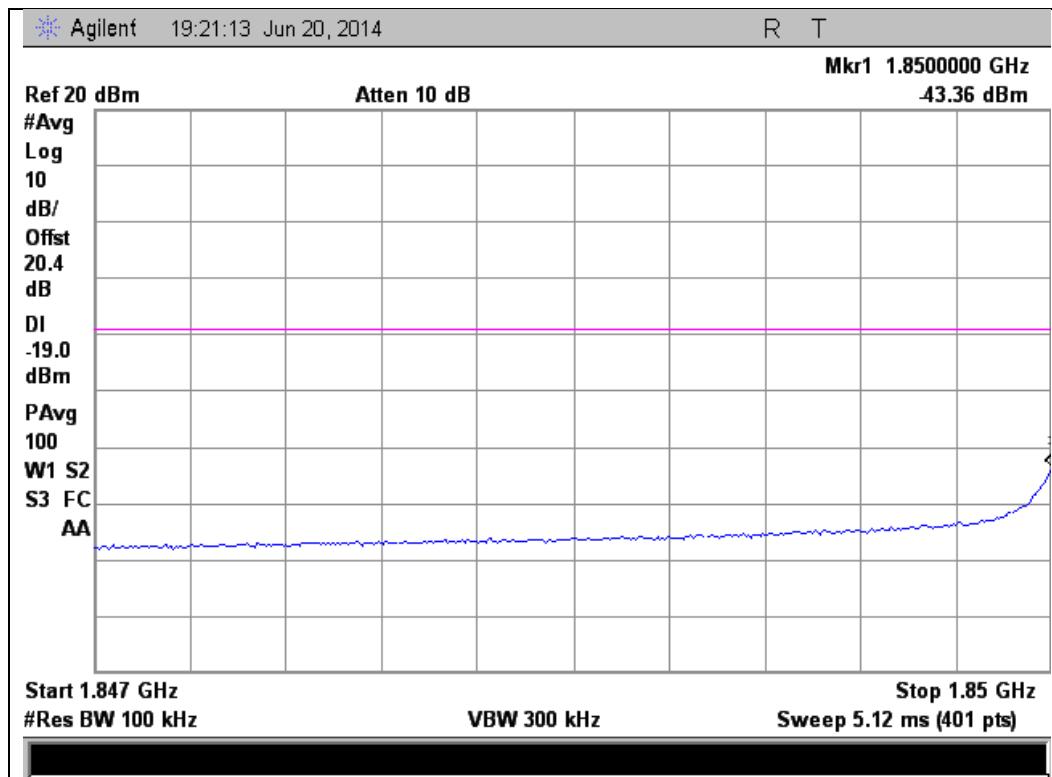


#### Upper Band Edge

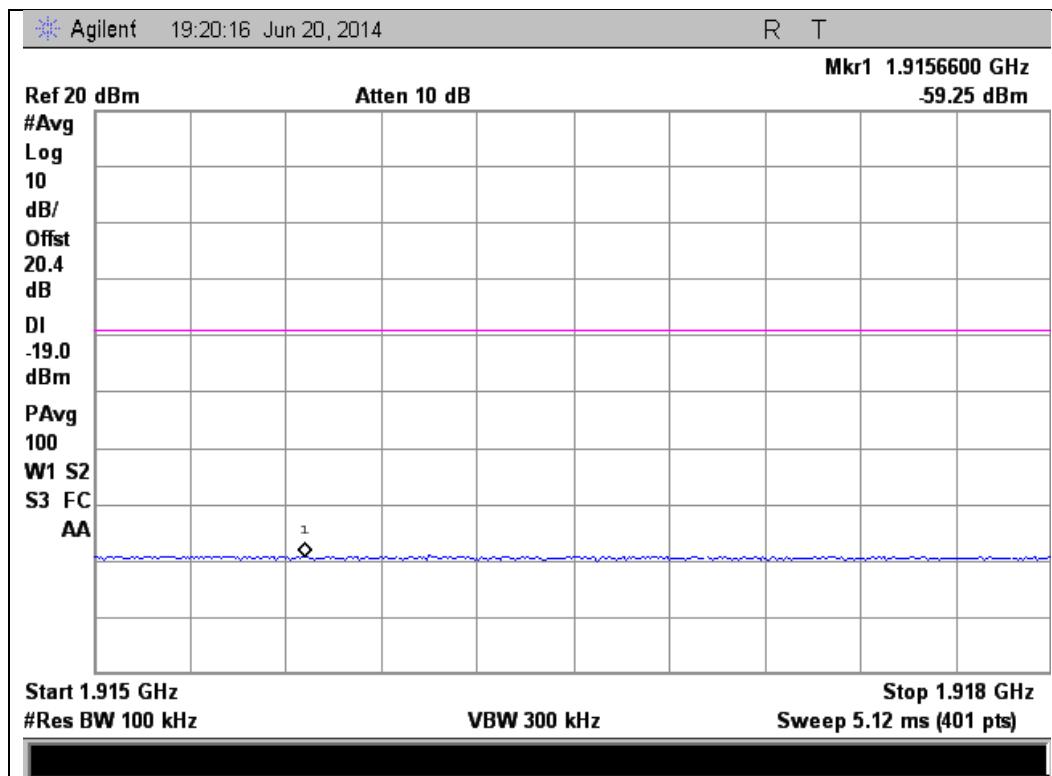




**GSM Downlink Test Plots**  
**728 - 746 MHz Band**  
**Lower Band Edge**

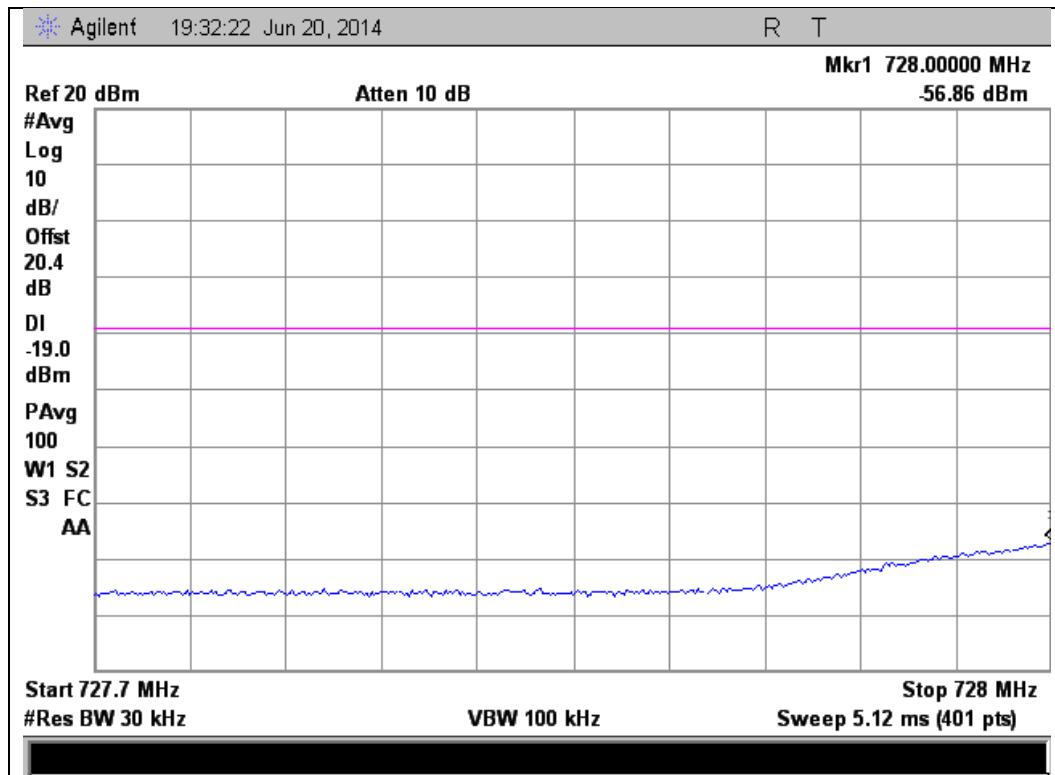


**Upper Band Edge**

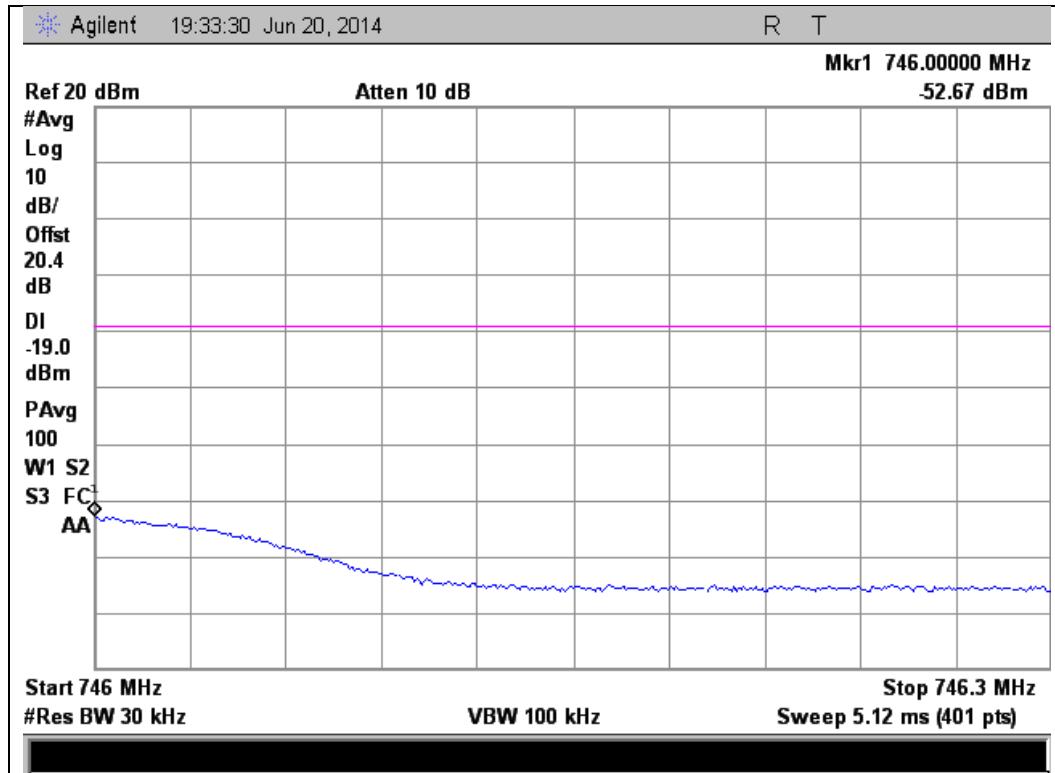




## 746 - 757 MHz Band

### Lower Band Edge

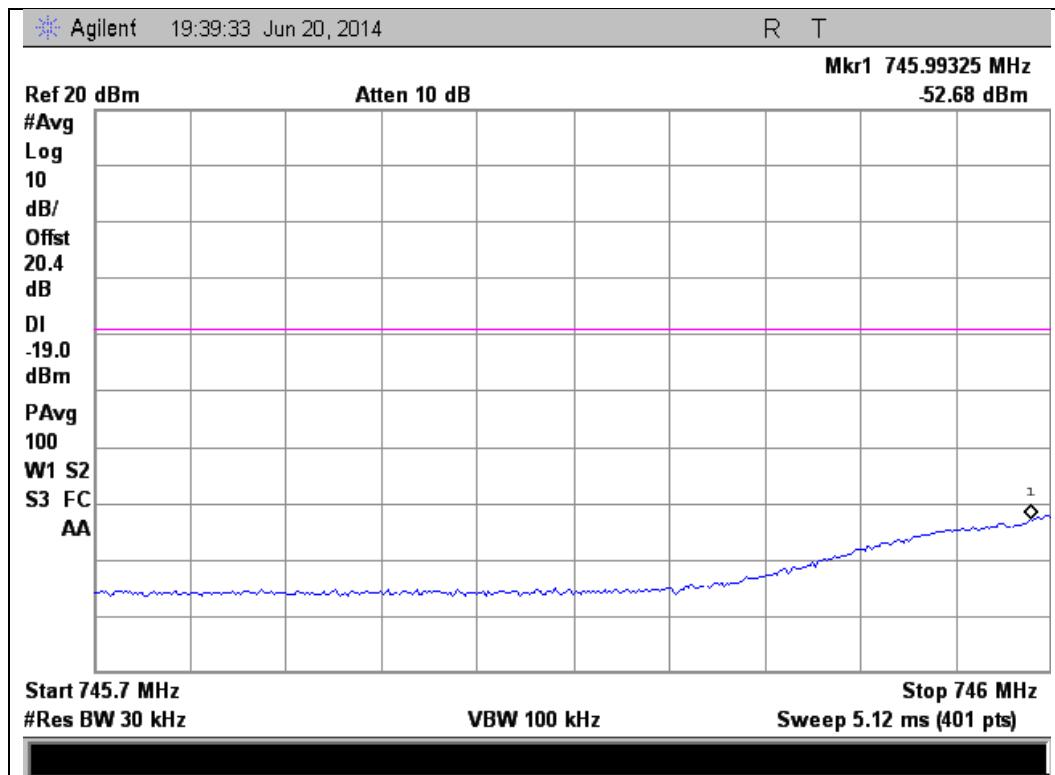


### Upper Band Edge

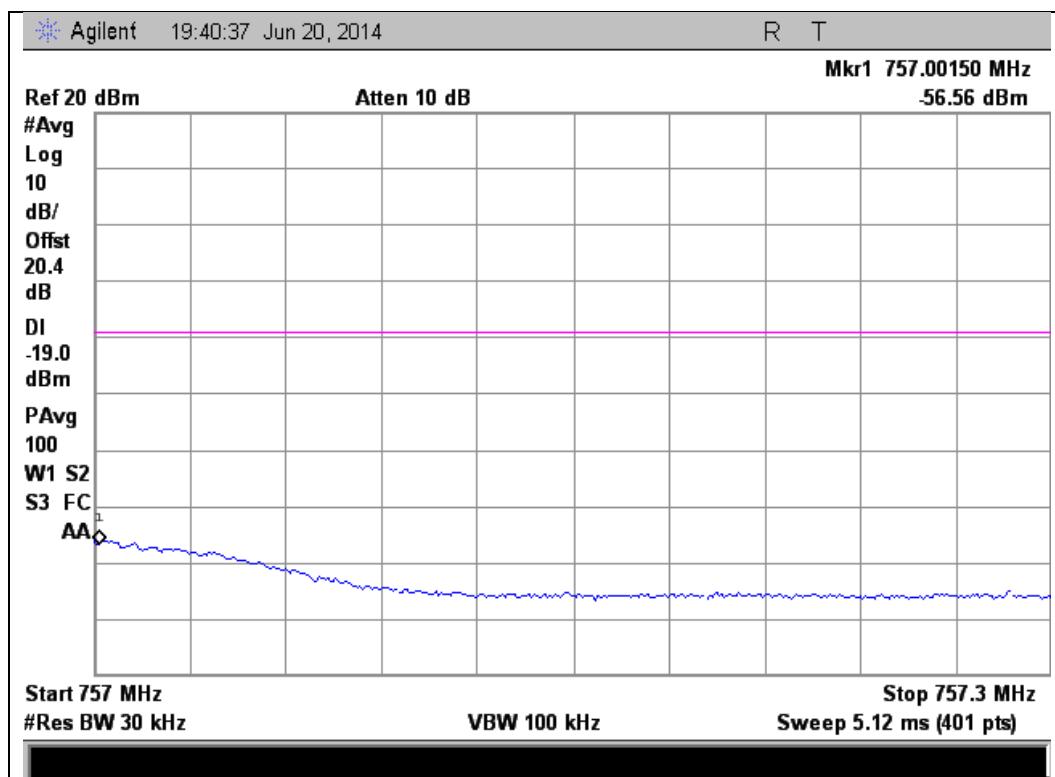




## 869 - 894 MHz Band

### Lower Band Edge

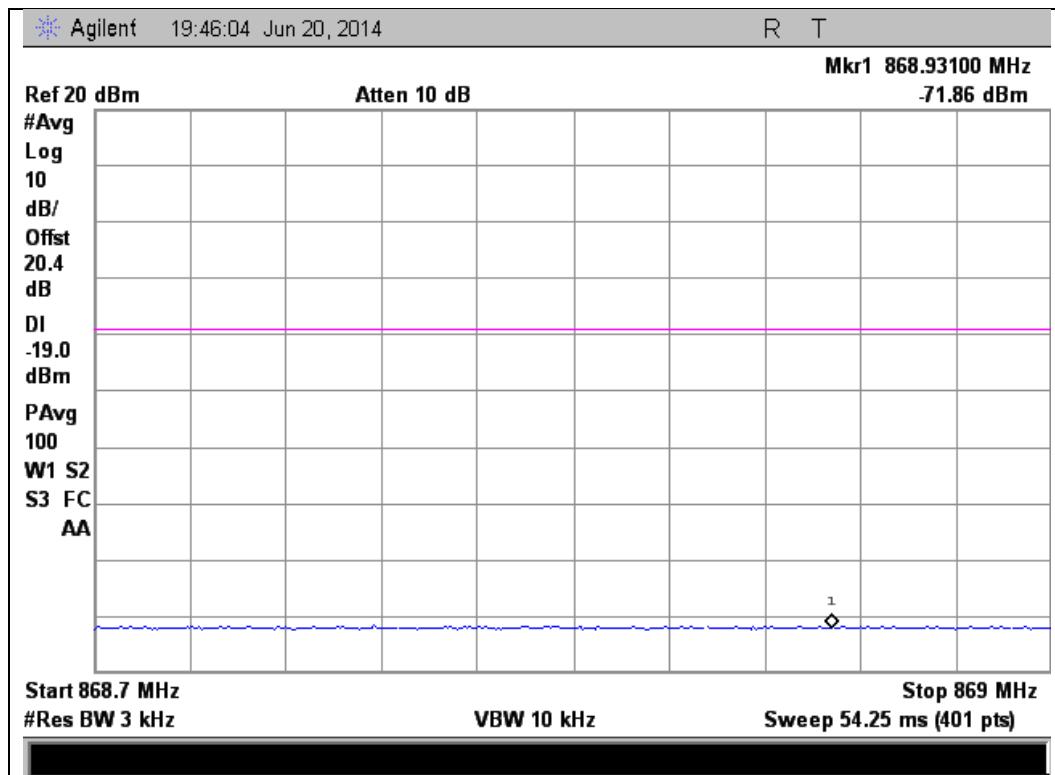


### Upper Band Edge

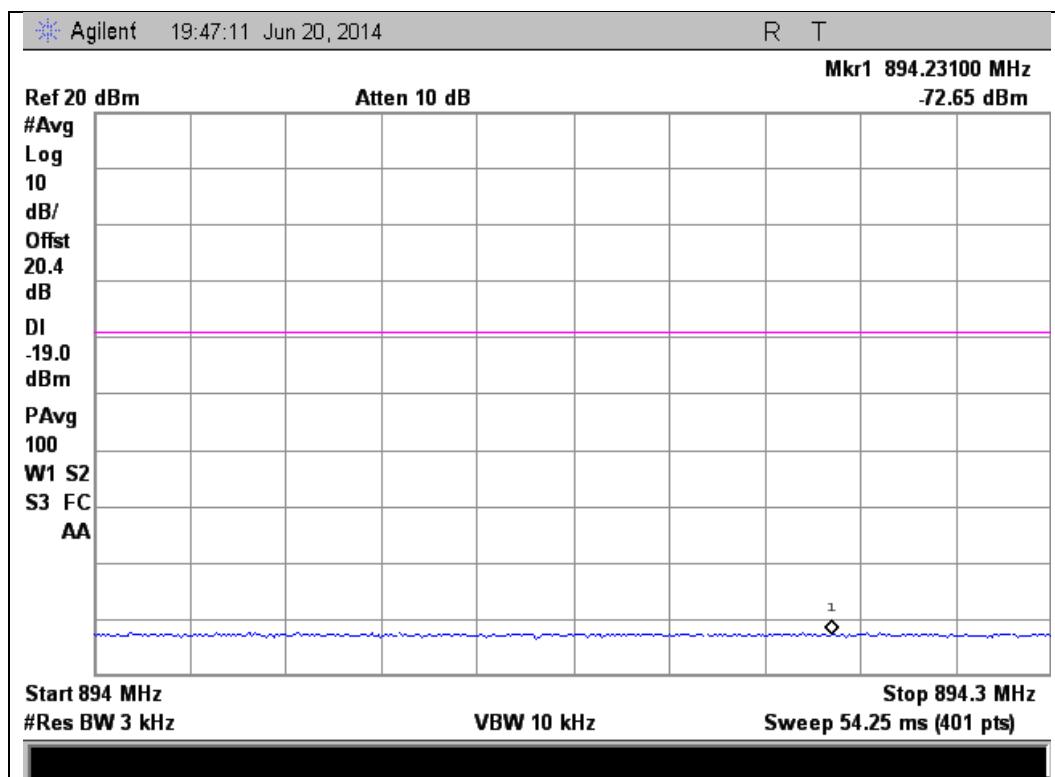




1930 - 1995 MHz Band

Lower Band Edge

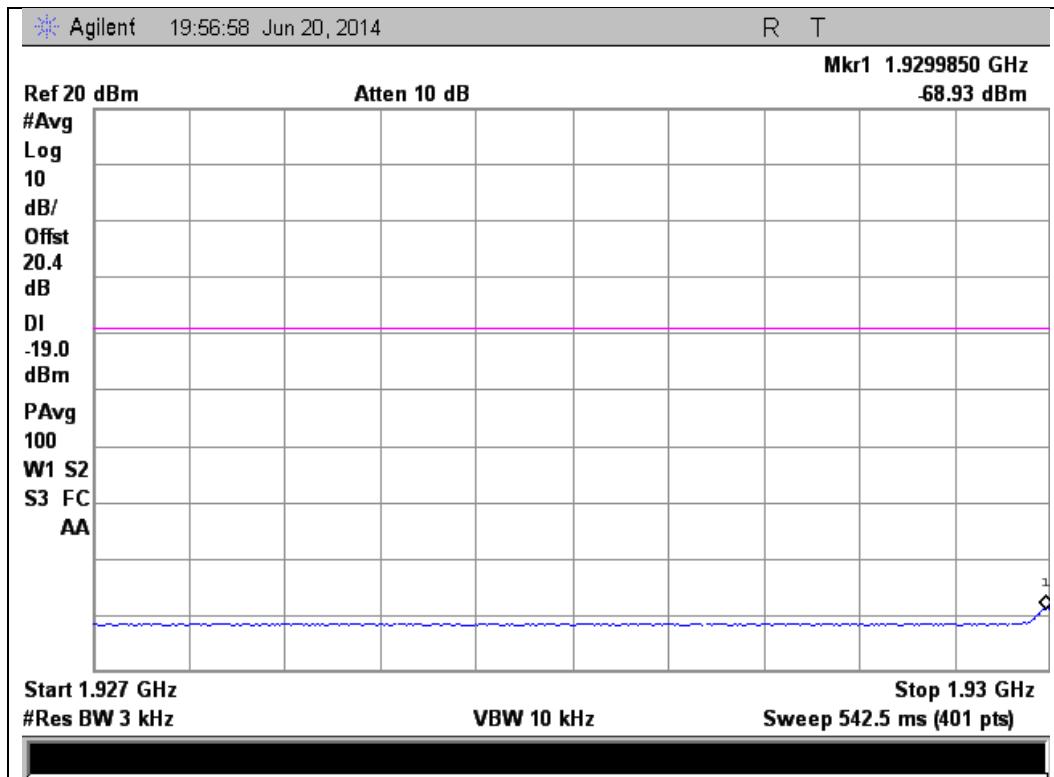


Upper Band Edge

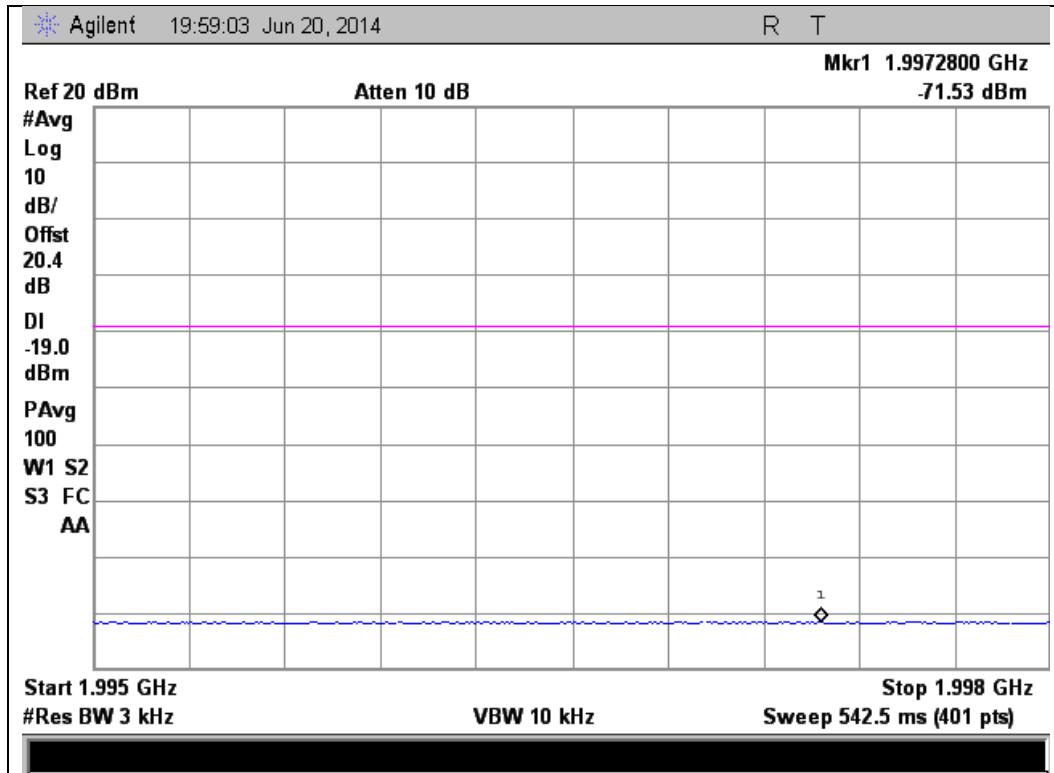




## 2110 - 2155 MHz Band

### Lower Band Edge

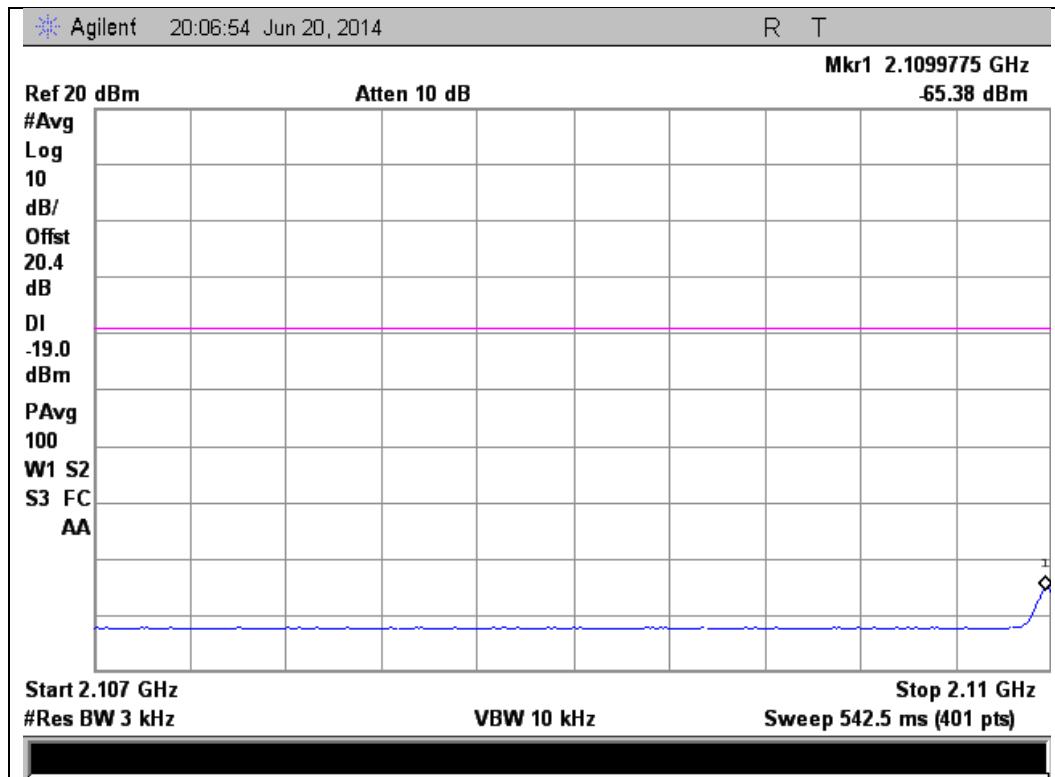

### Upper Band Edge

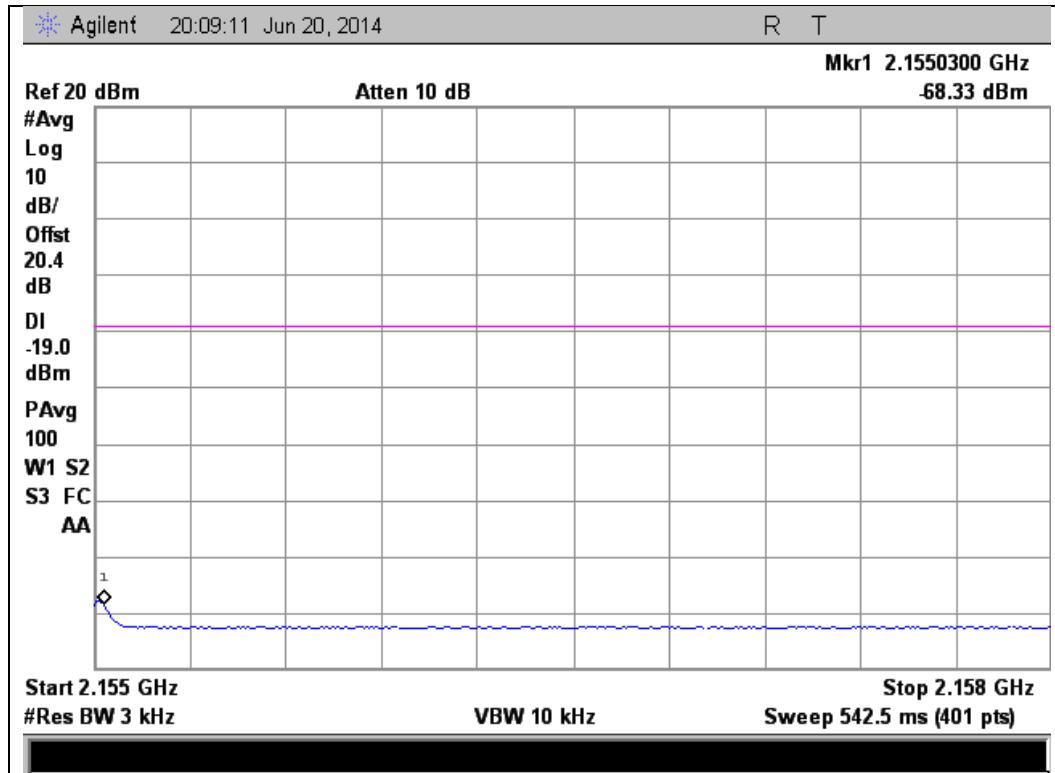





### CDMA Downlink Test Plots

728 - 746 MHz Band

Lower Band Edge

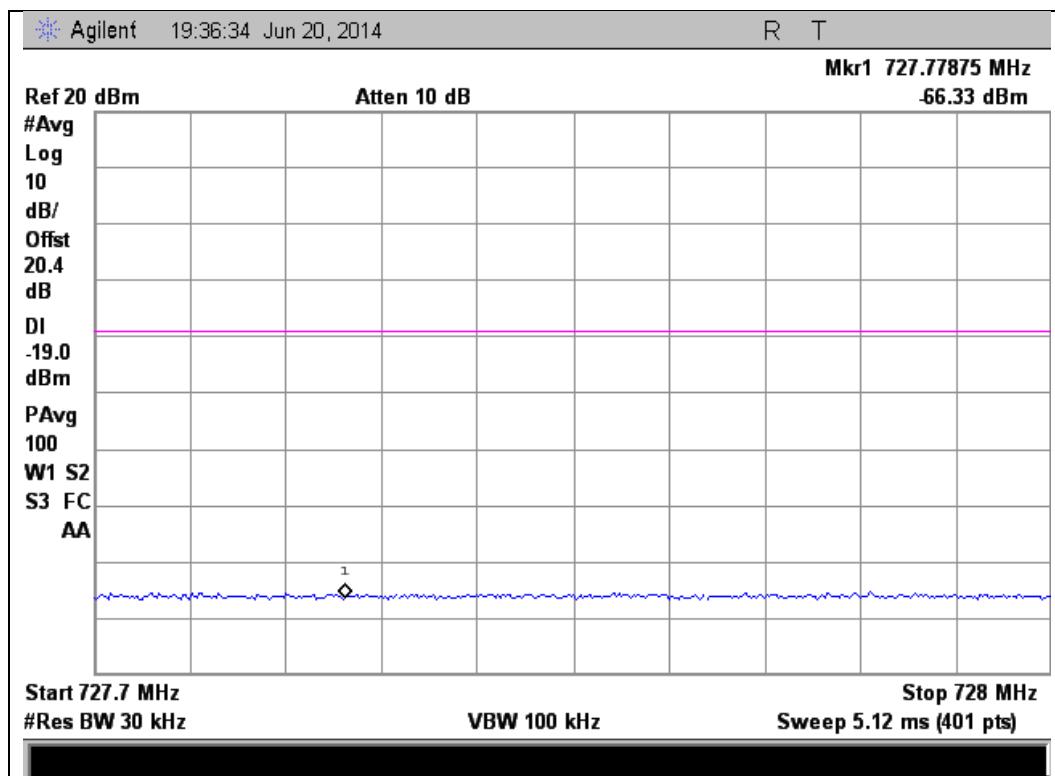


Upper Band Edge

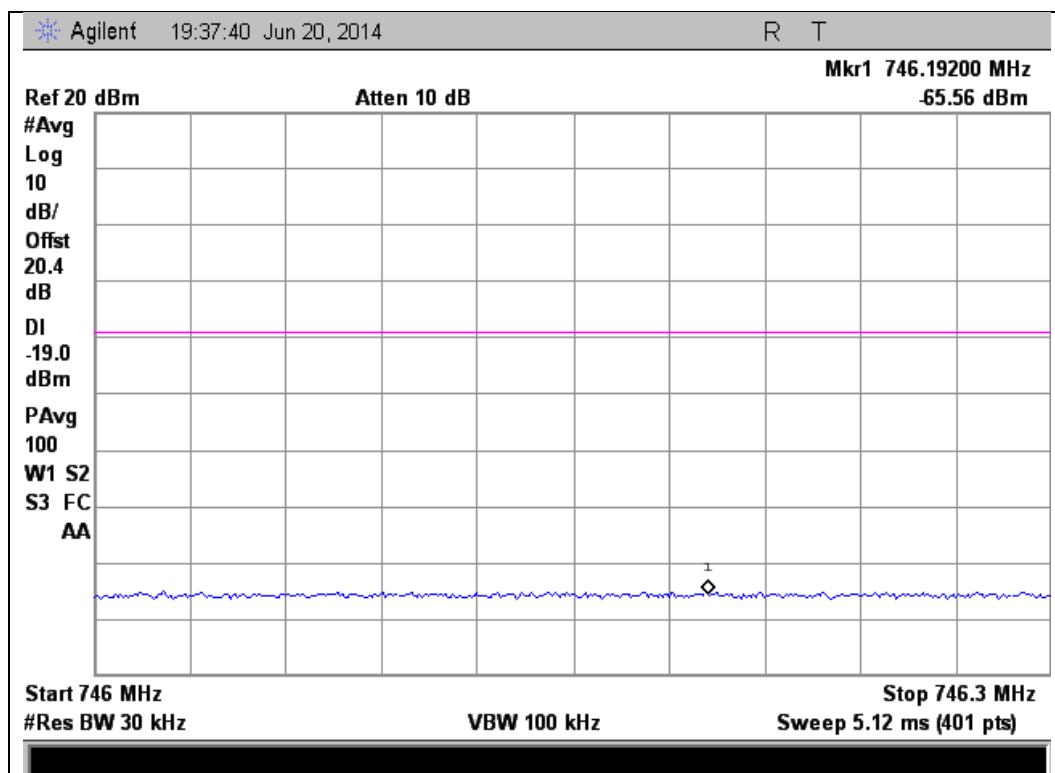




## 746 - 757 MHz Band

### Lower Band Edge

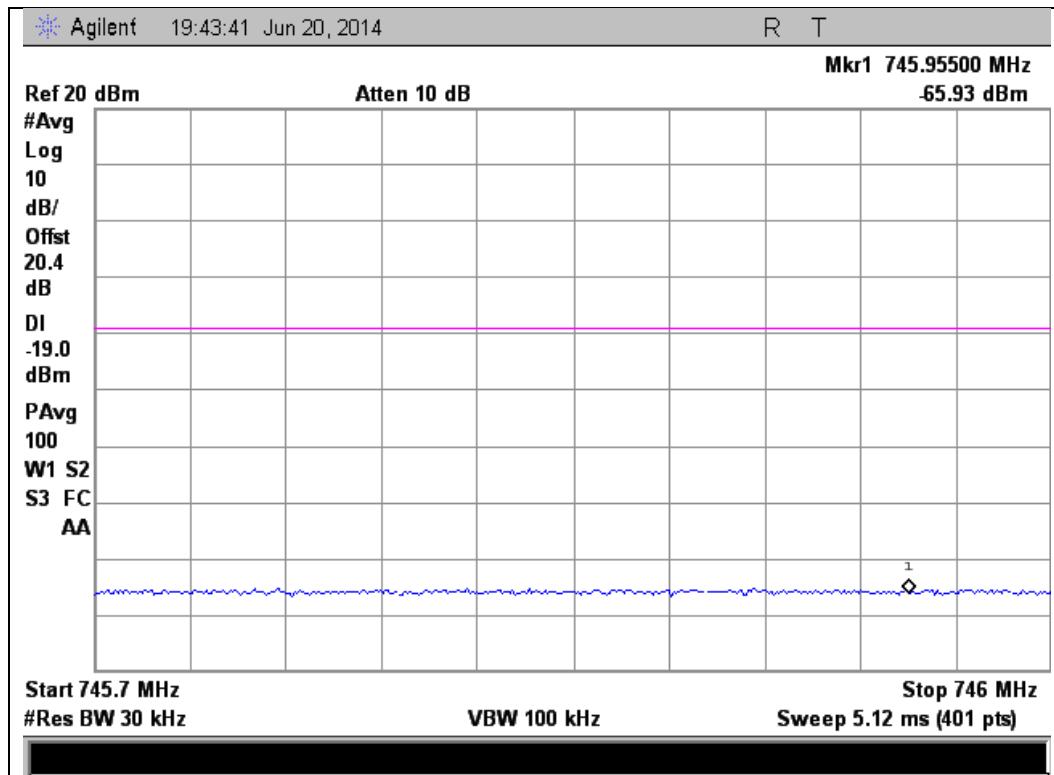


### Upper Band Edge

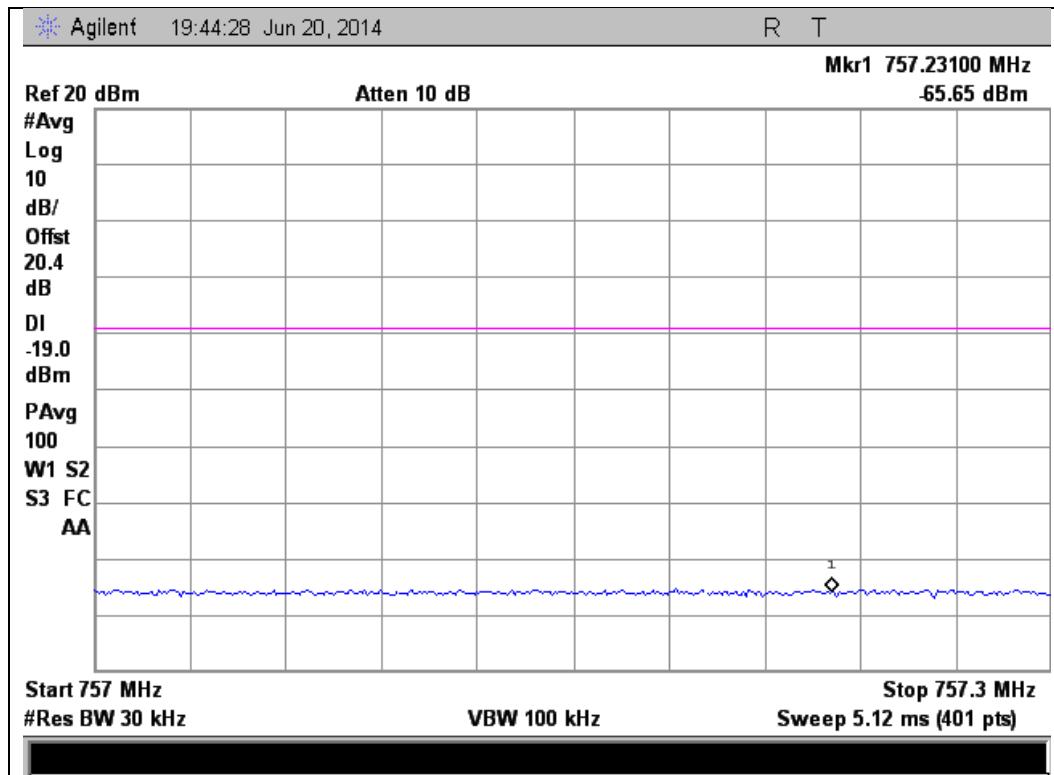




## 869 - 894 MHz Band

### Lower Band Edge

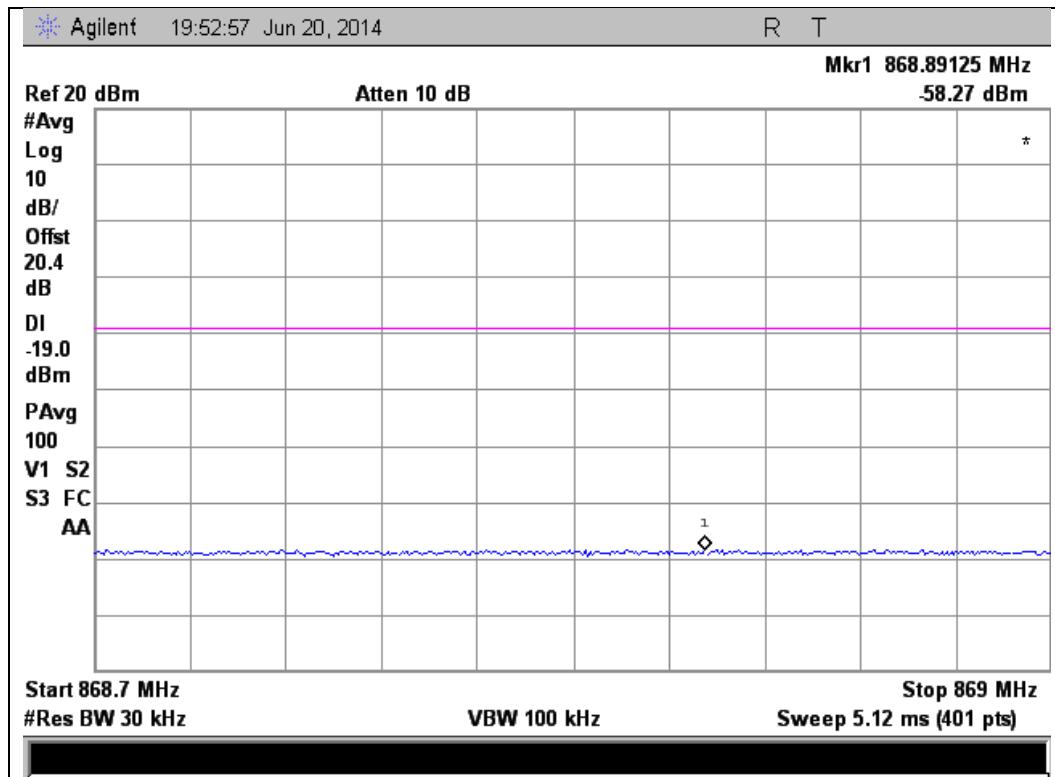


### Upper Band Edge

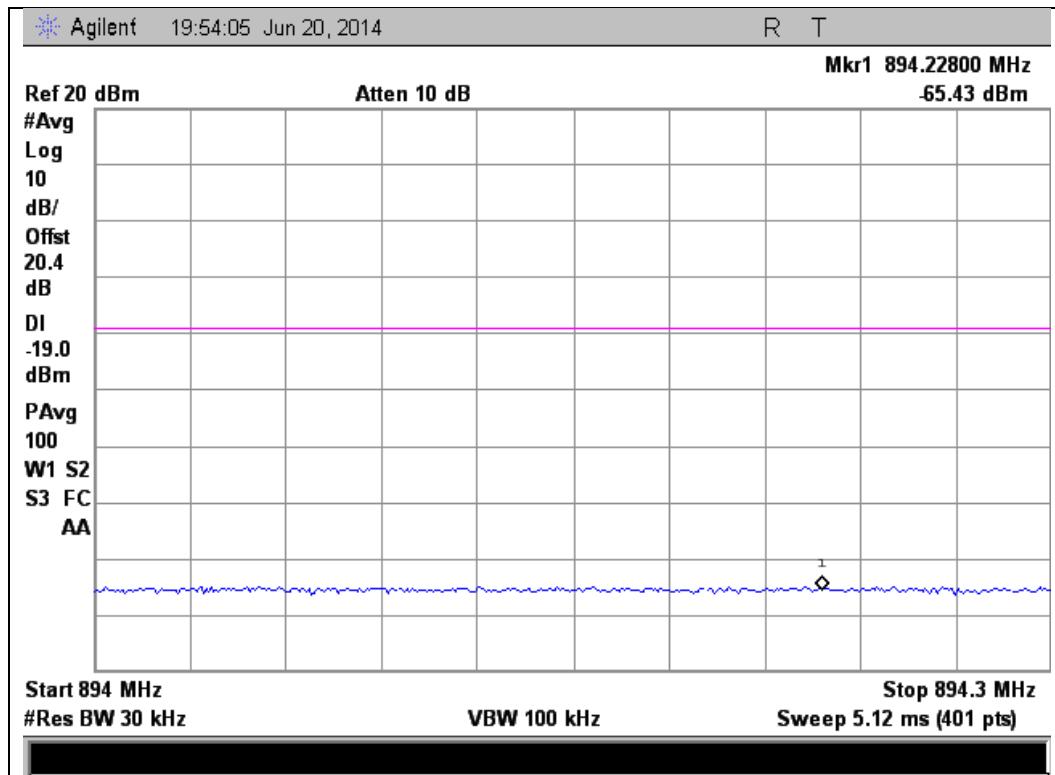




1930 - 1995 MHz Band

Lower Band Edge

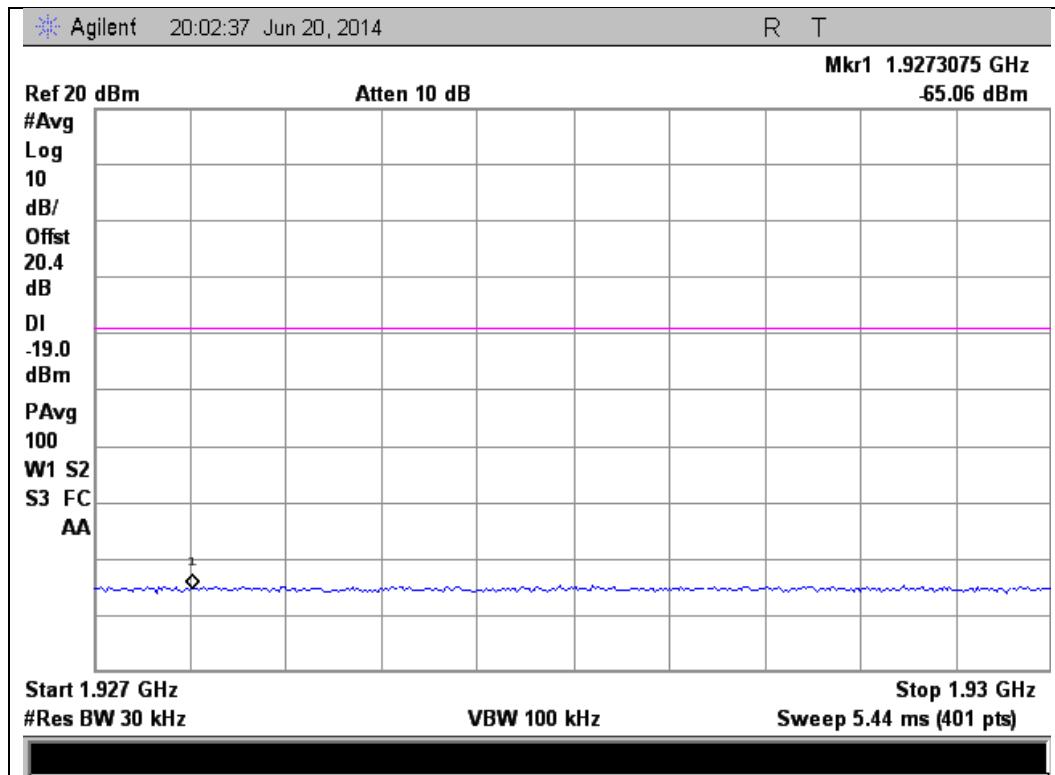


Upper Band Edge

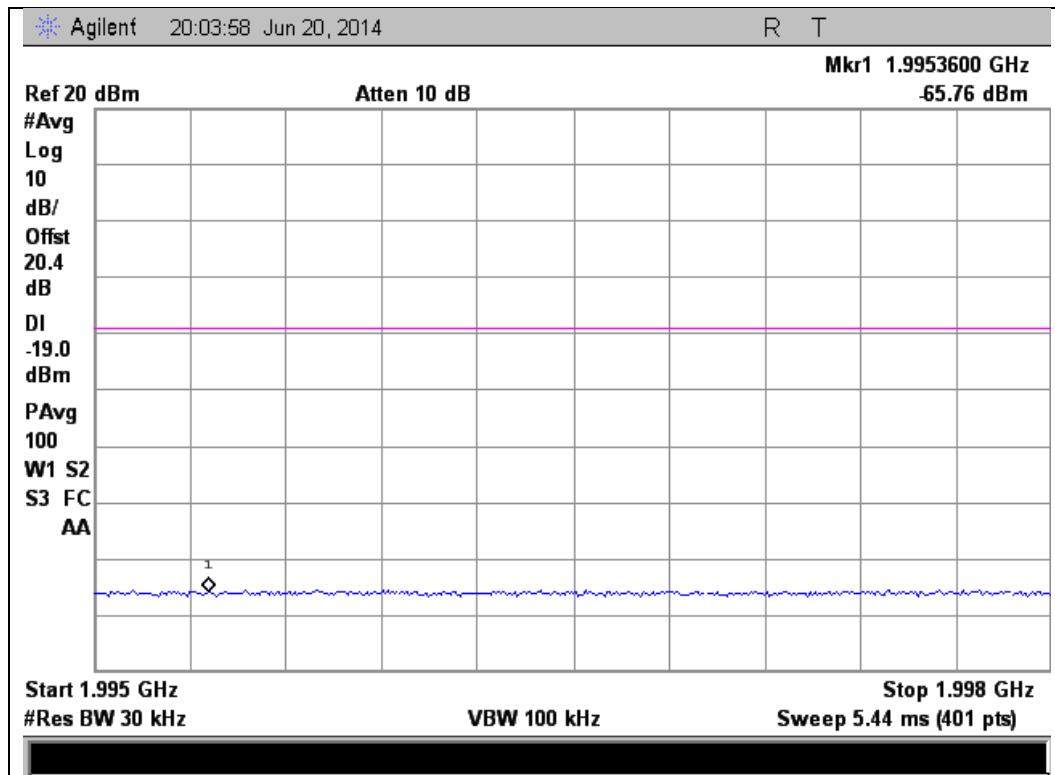




## 2110 - 2155 MHz Band

### Lower Band Edge

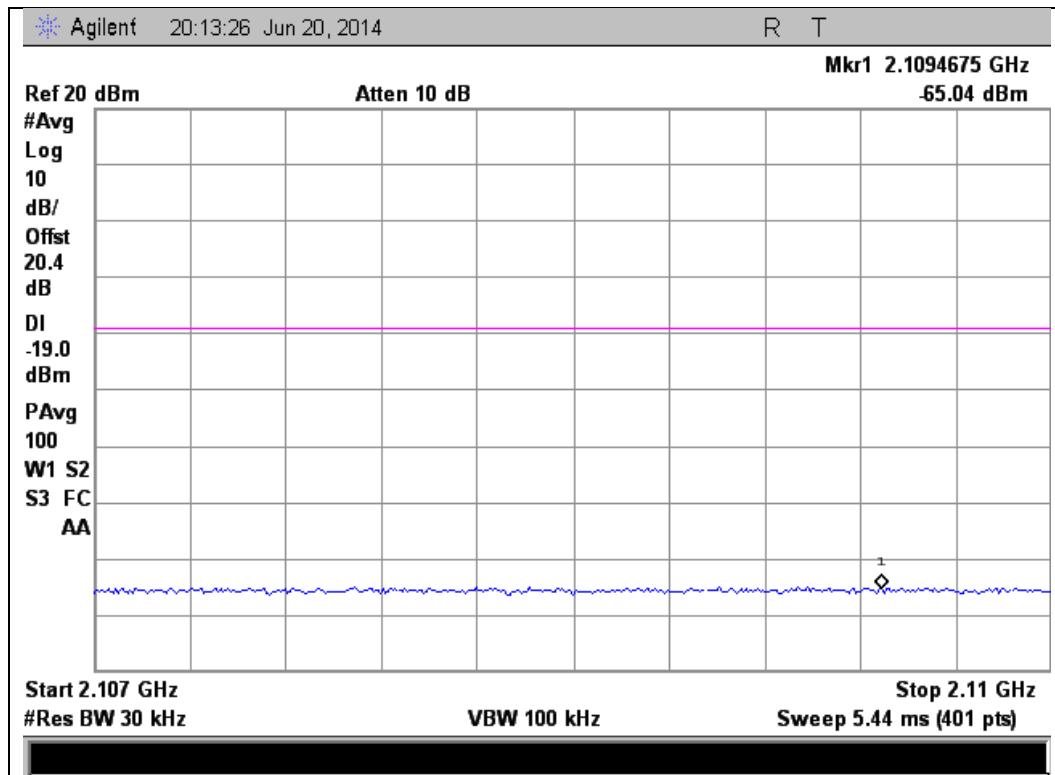

### Upper Band Edge

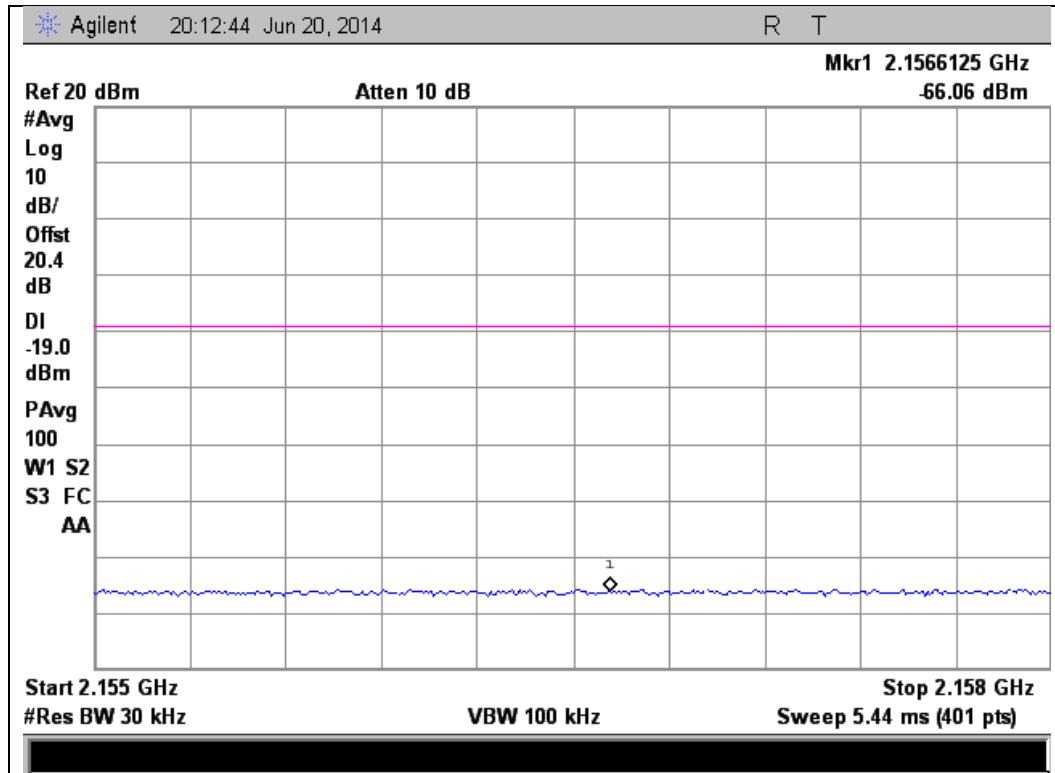





### WCDMA Downlink Test Plots

728 - 746 MHz Band

Lower Band Edge

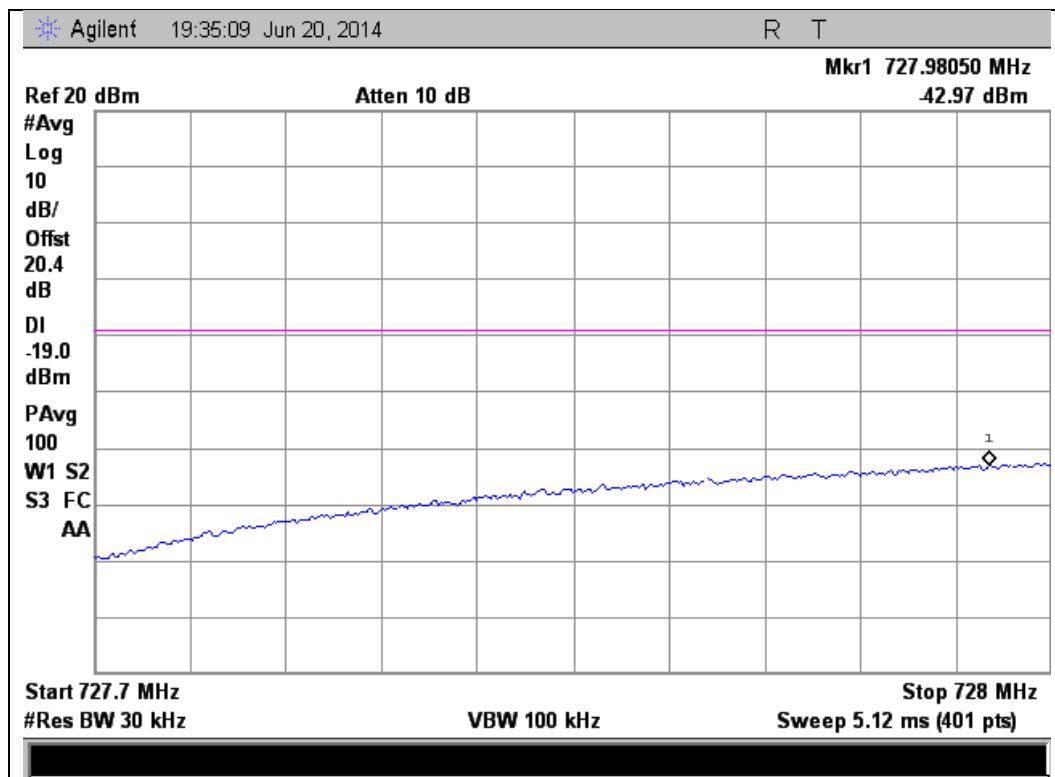


Upper Band Edge

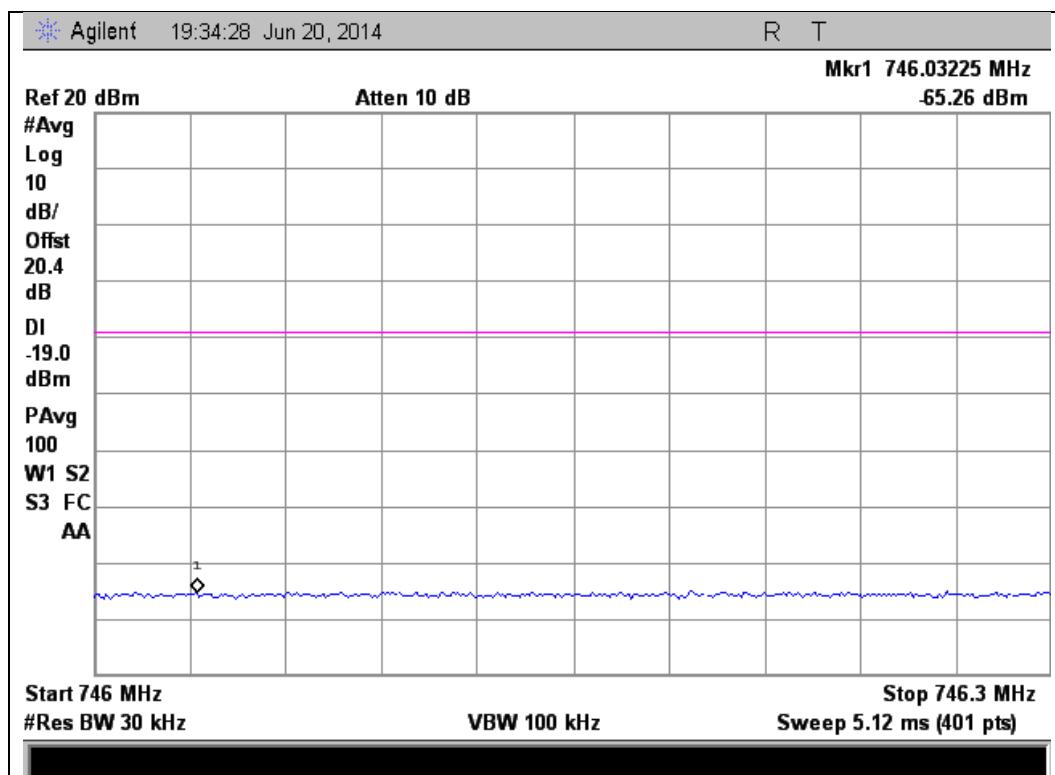




## 746 - 757 MHz Band

### Lower Band Edge

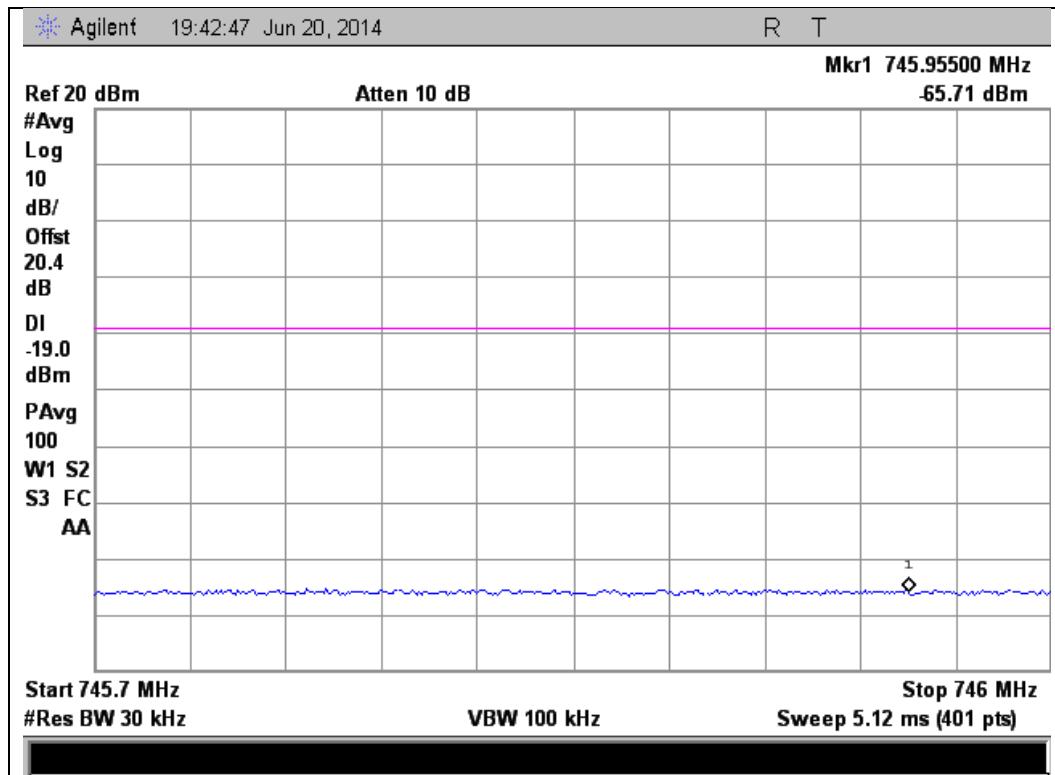


### Upper Band Edge

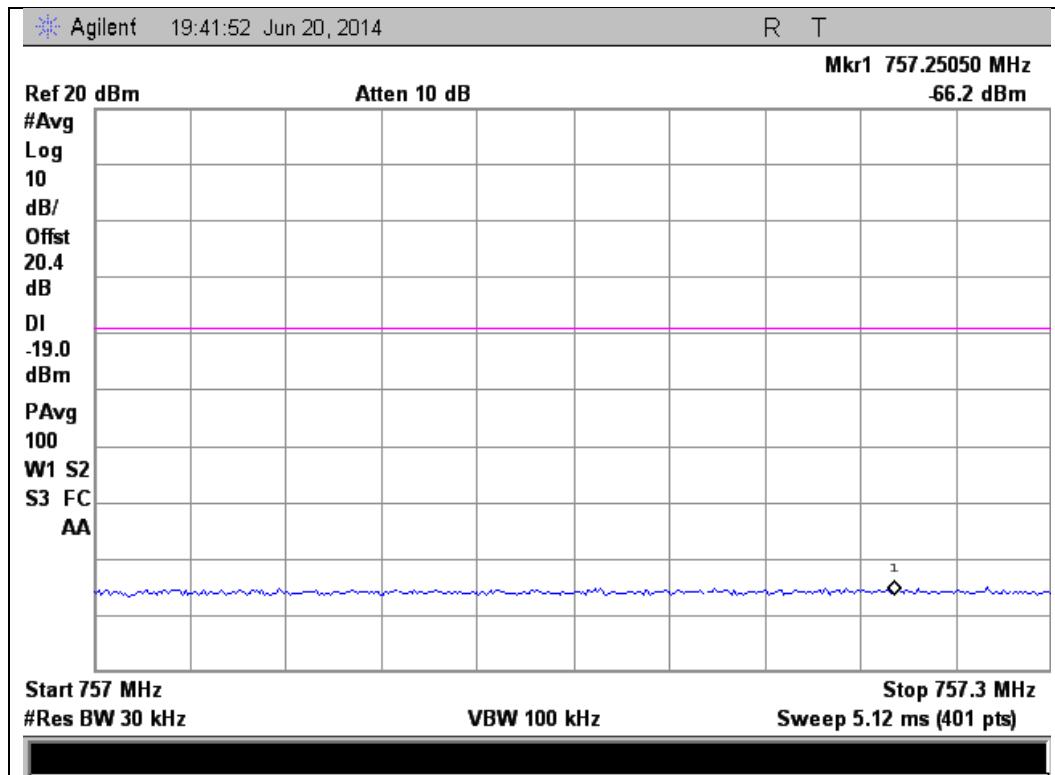




## 869 - 894 MHz Band

### Lower Band Edge

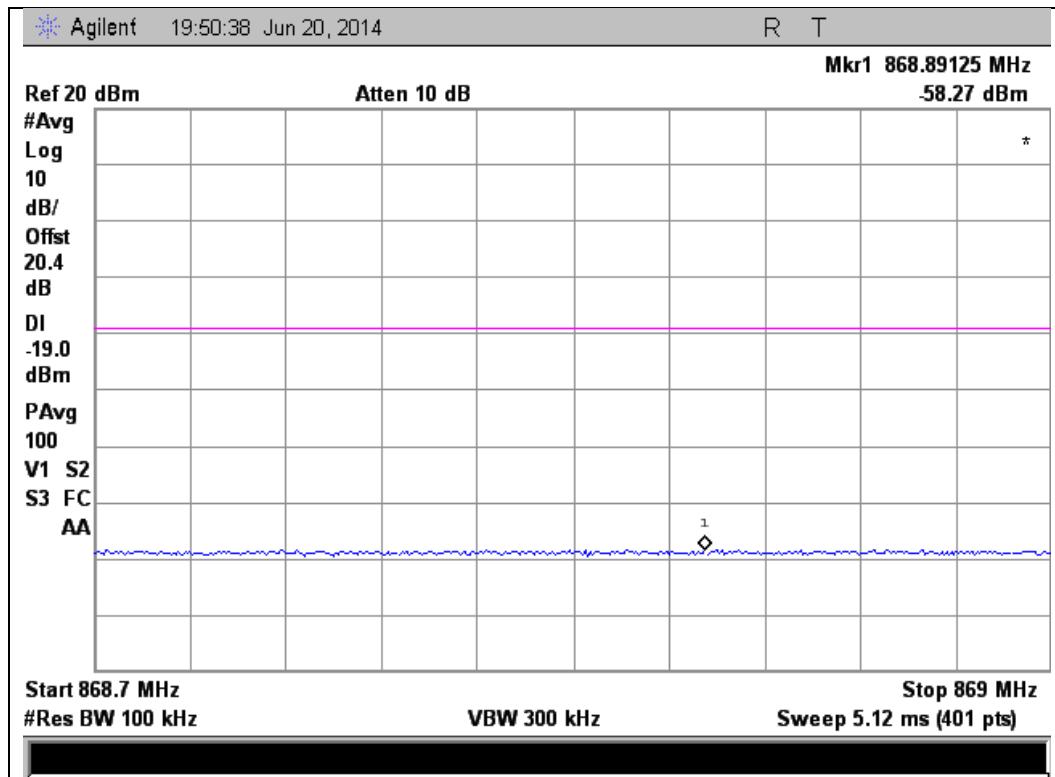


### Upper Band Edge

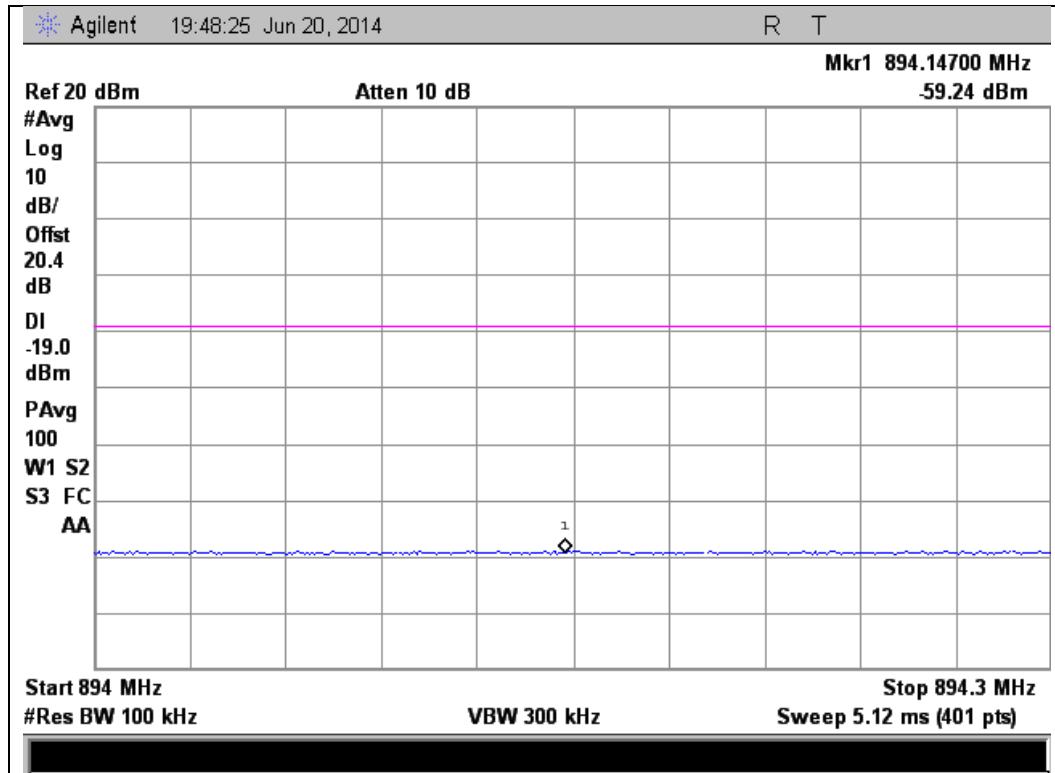




### 1930 - 1995 MHz Band

#### Lower Band Edge

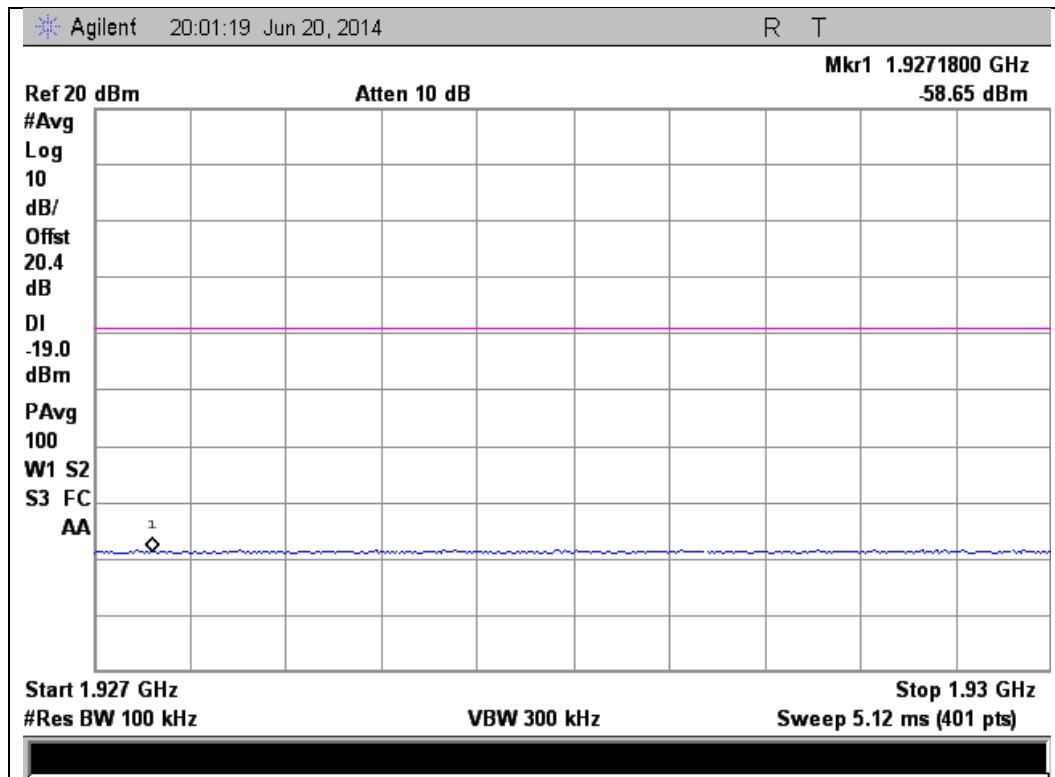


#### Upper Band Edge

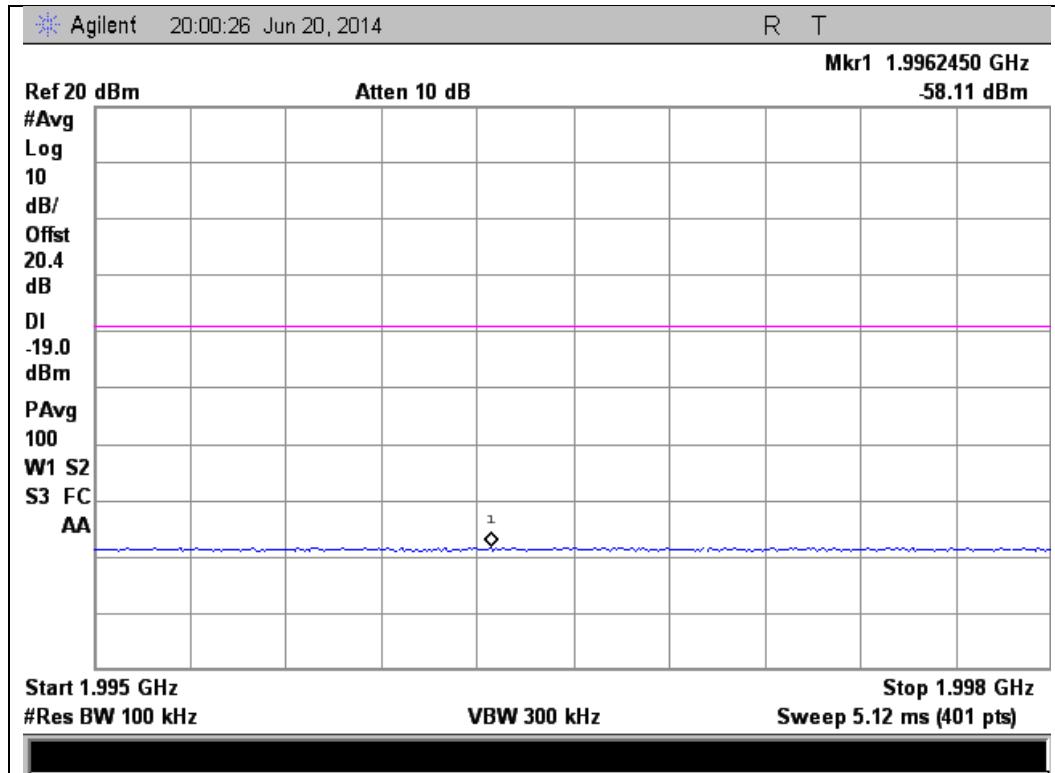




## 2110 - 2155 MHz Band

### Lower Band Edge

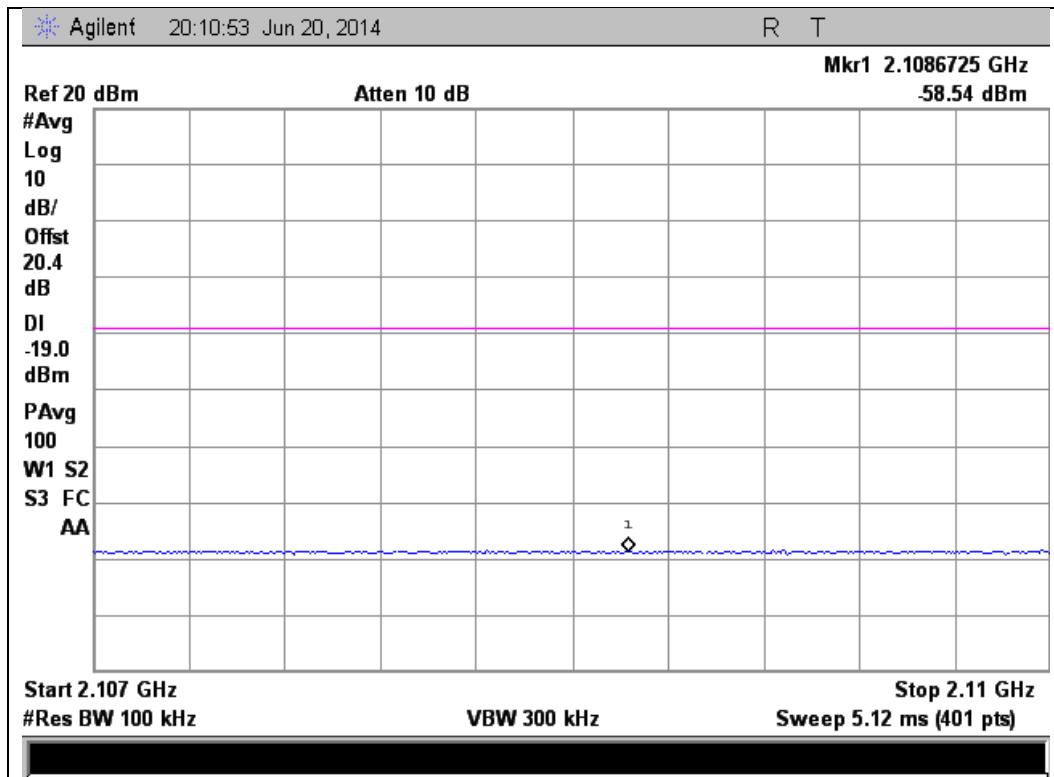

### Upper Band Edge

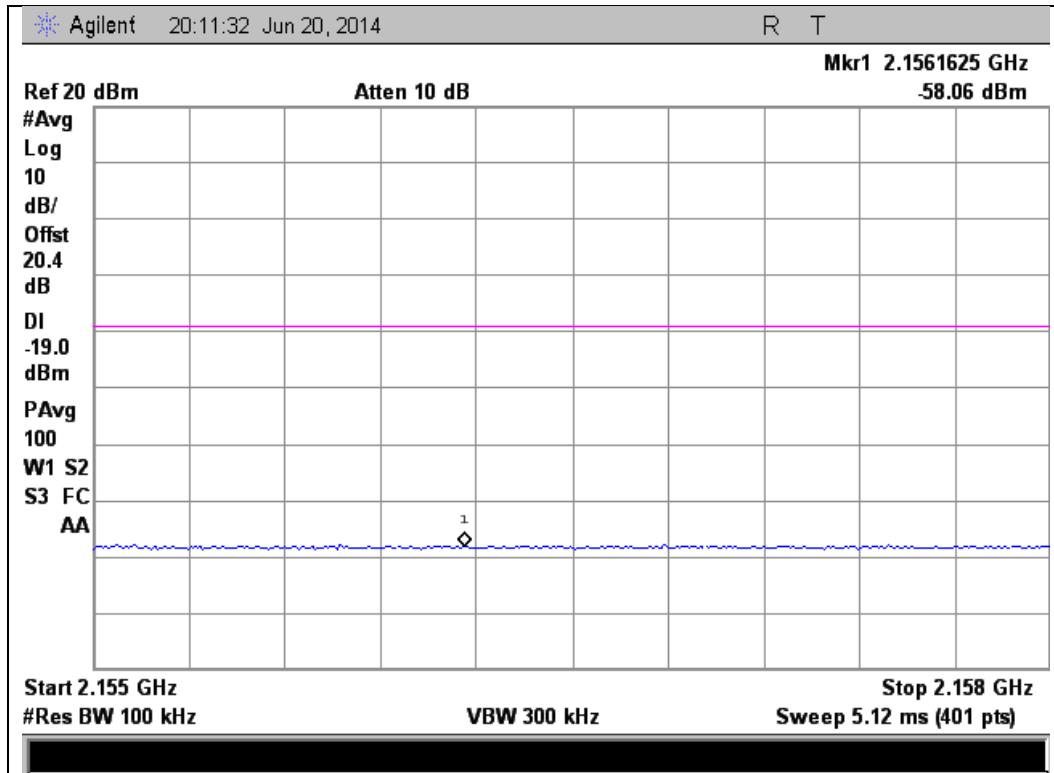



## Conducted Spurious Emissions

**Name of Test:** Conducted Spurious Emissions  
**Test Equipment Utilized:** i00379 and i00405

**Engineer:** Mike Graffeo  
**Test Date:** 6/20/14


### Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator, with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor as needed to ensure accurate readings. A signal generator was utilized to produce a 4.1 MHz AWGN signal operating at the maximum allowable power. The conducted spurious emissions from 9 kHz to 10 times the highest tunable frequency for each operational band were measured (excluding the band defined by the Out of band emissions test). The emissions were plotted and the highest level was recorded in the summary table.

The following formulas are used for calculating the limits.

Conducted Spurious Emissions Limit =  $P1 - (43 + 10\log(P2)) = -13 \text{ dBm}$   
P1 = power in dBm  
P2 = power in Watts

### Test Setup



### Uplink Test Results

Frequency Band (MHz)	Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
698 - 716	2986.1	-39.25	-13	Pass
776 - 787	2978.4	-39.53	-13	Pass
824 - 849	2992.9	-39.14	-13	Pass
1710 - 1755	2997.1	-40.69	-13	Pass
1850 – 1915	2996.7	-40.55	-13	Pass

### Downlink Test Results

Frequency Band (MHz)	Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
728 - 746	1968.3	-56.23	-13	Pass
746 - 757	1972.5	-55.95	-13	Pass
869 - 894	1942.5	-57.11	-13	Pass
1930 – 1995	2124.3	-57.46	-13	Pass
2110 - 2155	21931.1	-52.09	-13	Pass



For the 746 – 758 downlink and 776 – 788 Uplink bands of operation, the following additional spurious emissions requirements apply.

**FCC 27.53(c)**

*For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:*

(4) *On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations;*

The test is performed using a 10 kHz RBW. Since the limit is referenced to a 6.25 kHz BW, the following correction factor is applied to the measured data.

BW correction Factor =  $10 \log B1/B2$

BW correction Factor =  $10 \log 6.25 / 10 = -2.04$  dB

Final Value (dBm) = conducted measurement + BW correction factor

**776 – 787 MHz Uplink Band**

Spurious Frequency Range (MHz)	Measured Frequency (MHz)	Measured Value (dB)	Bandwidth Correction Factor (dB)	Final Value (dBm)	Limit (dBm)	Margin (dB)
763 – 775	774.98	-51.40	-2.04	-53.44	-35	-18.44
793 – 805	793.01	-68.72	-2.04	-70.76	-35	-35.76

**746 - 757 MHz Downlink Band**

Spurious Frequency Range (MHz)	Measured Frequency (MHz)	Measured Value (dB)	Bandwidth Correction Factor (dB)	Final Value (dBm)	Limit (dBm)	Margin (dB)
763 – 775	763.09	-101.40	-2.04	-103.44	-35	-68.44
793 – 805	801.39	-103.50	-2.04	-105.54	-35	-70.54



### FCC 27.53(e)

For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

Since the limit is referenced to EIRP, the final data is computed using the Conducted Spurious Emission data and adding the BW correction factor plus the final gain/loss data from the antenna kitting information supplied by the manufacturer.

For the Narrowband measurement, the test is performed using a 10 kHz RBW. Since the limit is referenced to a 700 Hz BW, the following correction factor is applied to the measured data.

BW correction Factor =  $10\log B1/B2$

BW correction Factor =  $10\log 700 / 10000 = -11.55 \text{ dB}$

Final Value (dBm) = conducted measurement +BW correction factor + final gain/loss from Antenna Kitting document

The Limit for discreet (narrowband) emissions is -80dBW (-50 dBm) in 700 MHz BW.

The Limit for (wideband Emissions) is -70 dBW (-40 dBm) in a 1 MHz BW.

#### 776 – 787 MHz Uplink Band

Spurious Frequency Range (MHz)	Measured Frequency (MHz)	Measured Value (dBm)	Bandwidth Correction Factor (dB)	Gain/Loss from Antenna Kitting Information (dB)	Final Value (dBm)	Limit (dBm)	Margin (dB)
1559 – 1610 (Wideband)	1572.1	-78.14	0	3.00	-75.14	-40	-35.14
1559 – 1610 (Narrowband)	1562.08	-50.92	-11.55	3.00	-59.47	-50	-9.47



#### 746 - 757 MHz Downlink Band

Spurious Frequency Range (MHz)	Measured Frequency (MHz)	Measured Value (dBm)	Bandwidth Correction Factor (dB)	Gain/Loss from Antenna Kitting information (dB)	Final Value (dBm)	Limit (dBm)	Margin (dB)
1559 – 1610 (Wideband)	1596.02	-78.13	0	7.00	-71.13	-40	-31.13
1559 – 1610 (Narrowband)	1591.83	-100.9	-11.55	7.00	-105.45	-50	-55.45




### Uplink Test Plots

#### 698 - 716 MHz Band

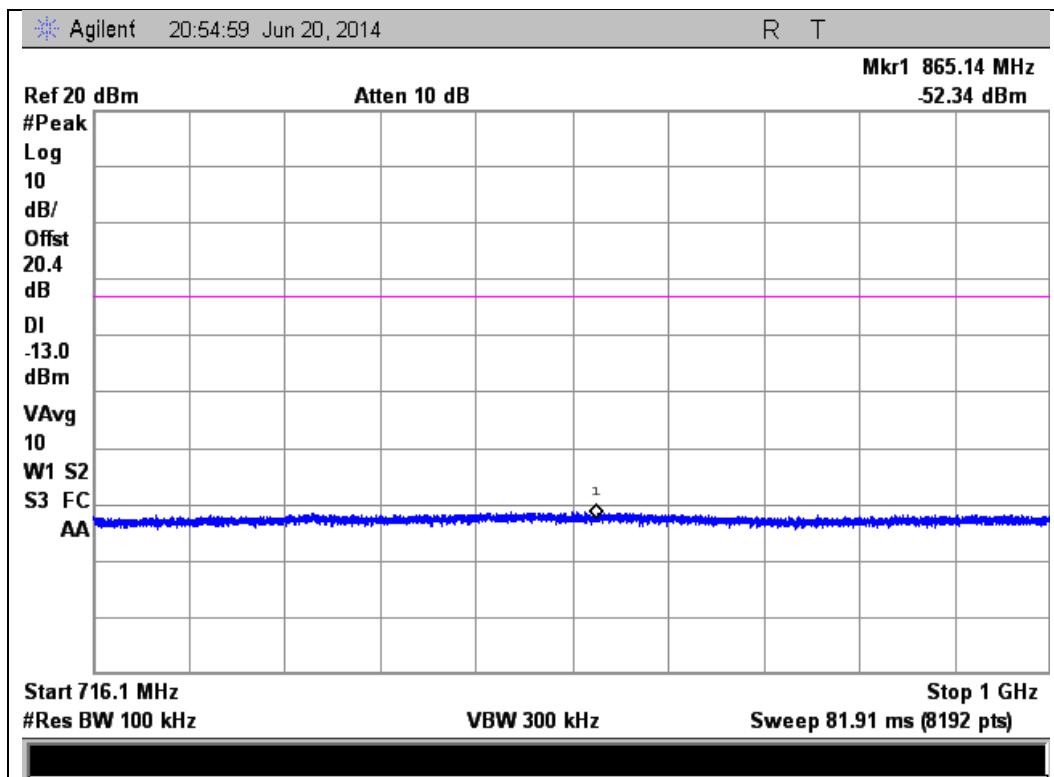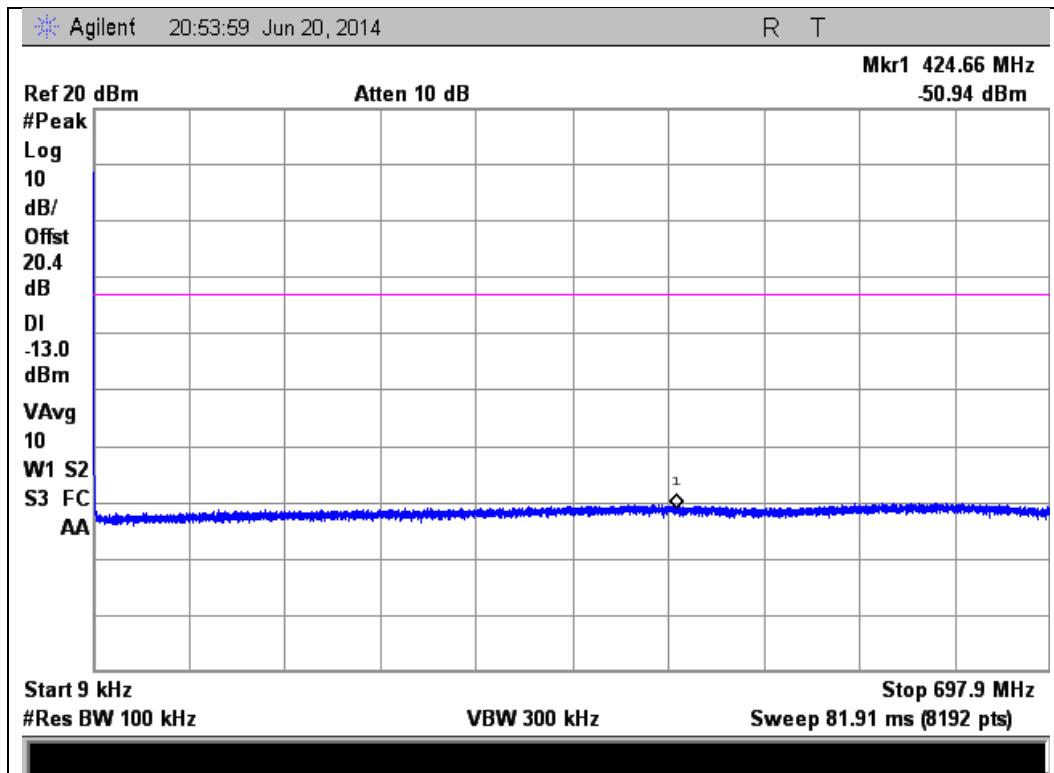




### 698 - 716 MHz Band (cont)


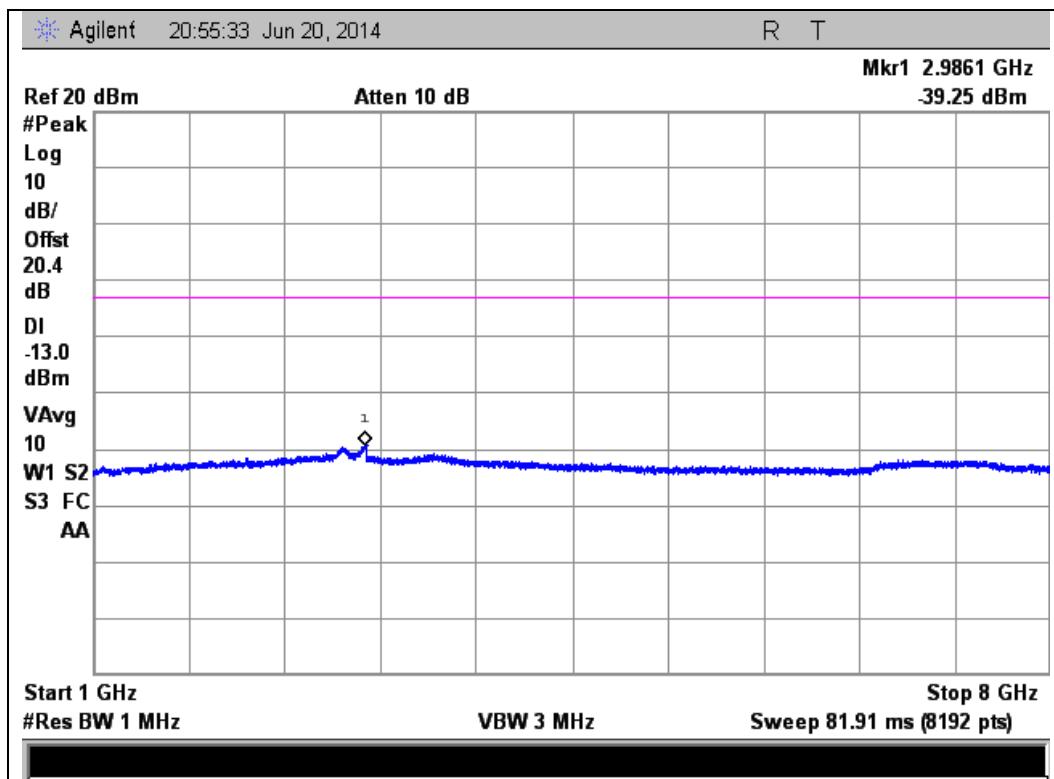


### 776 - 787 MHz Band

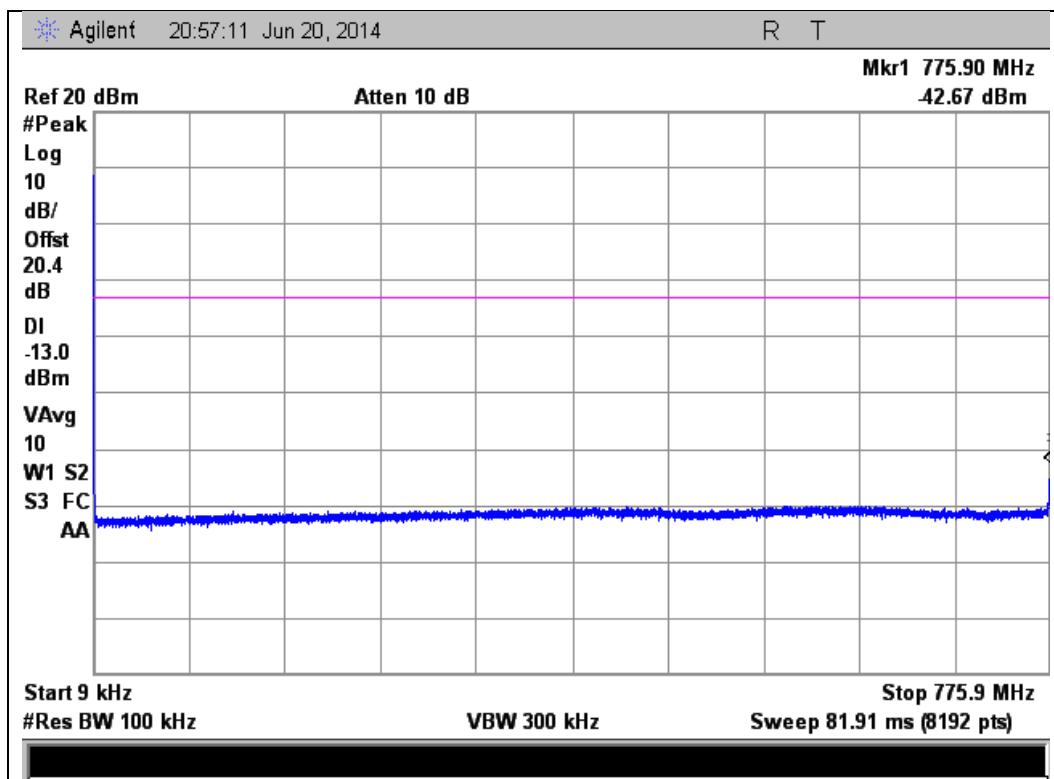





776 - 787 MHz Band (Cont)

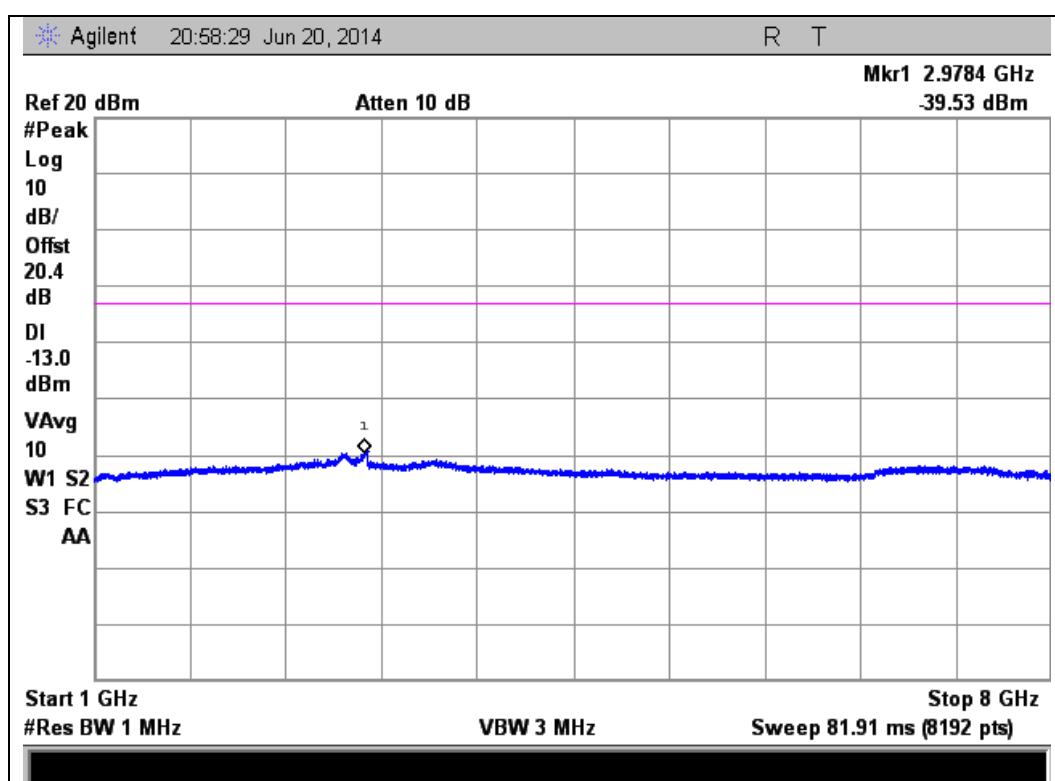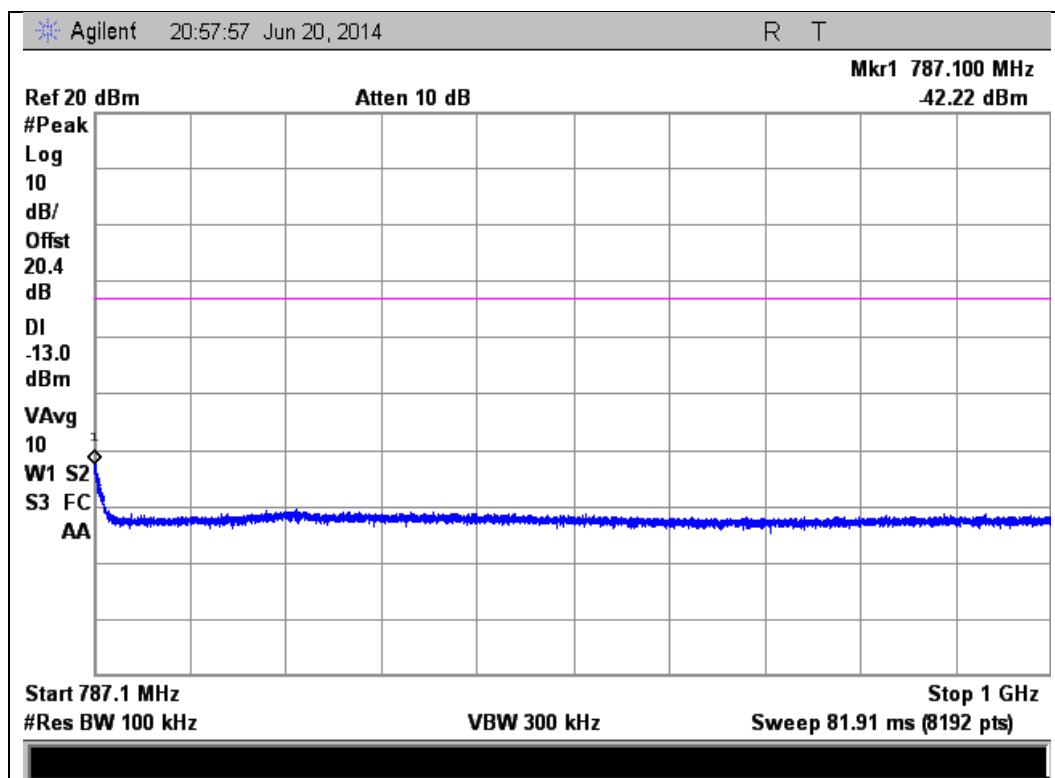





824 - 849 MHz Band

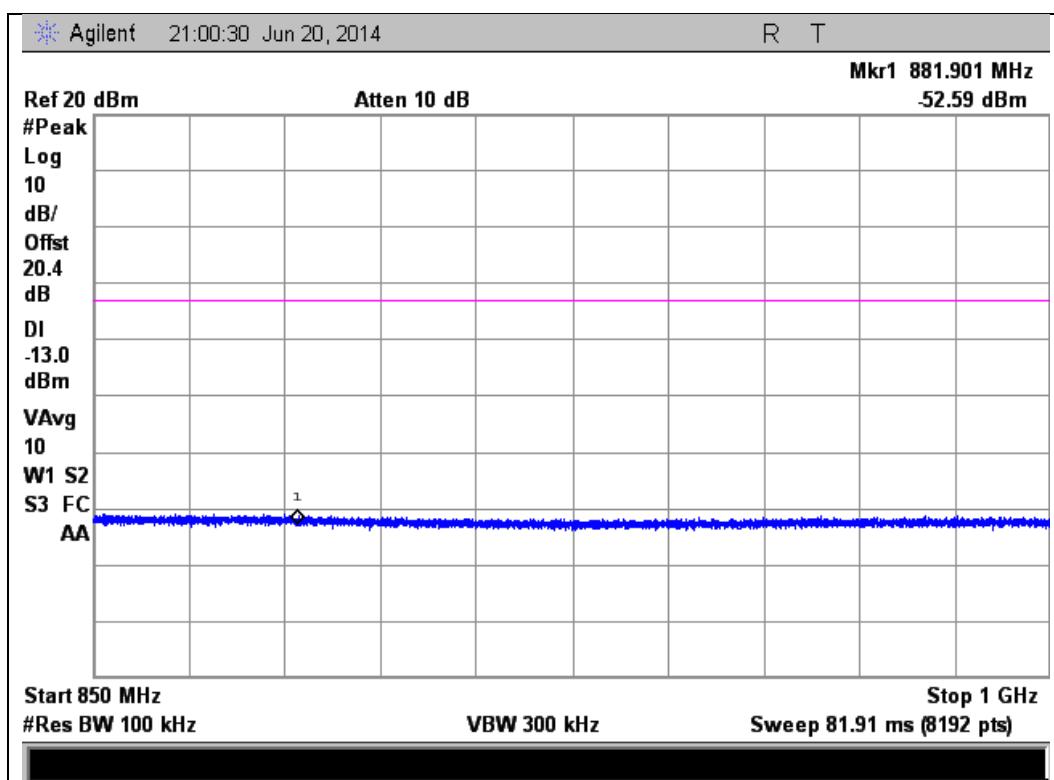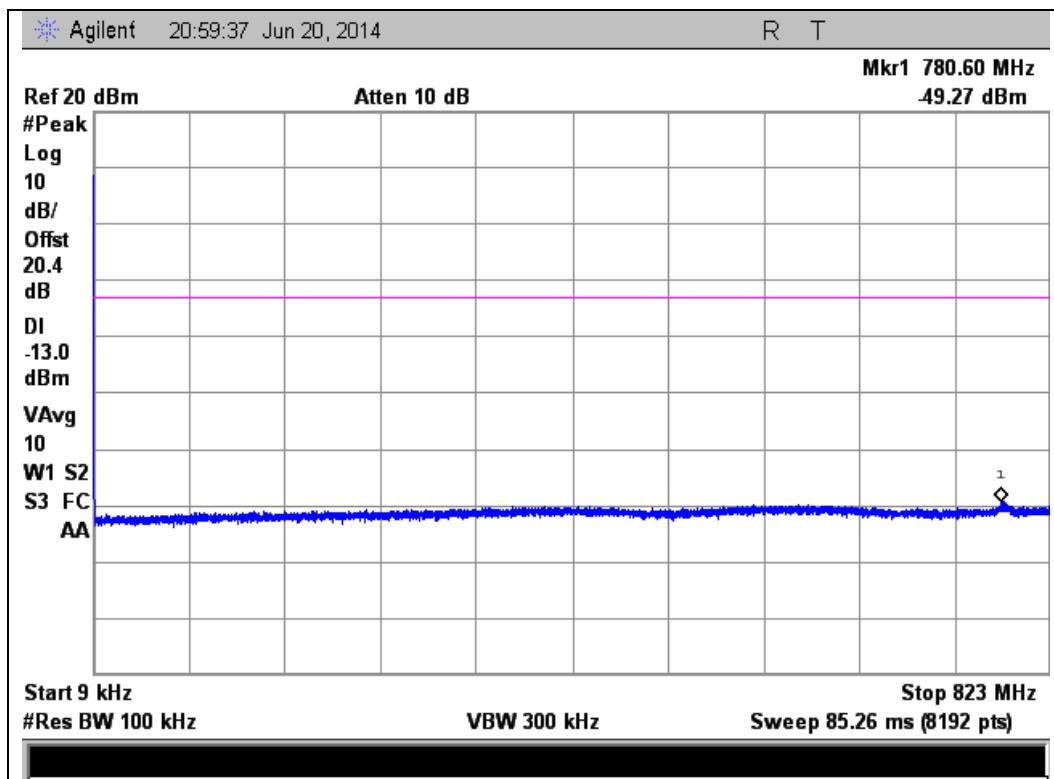





824 - 849 MHz Band (cont)

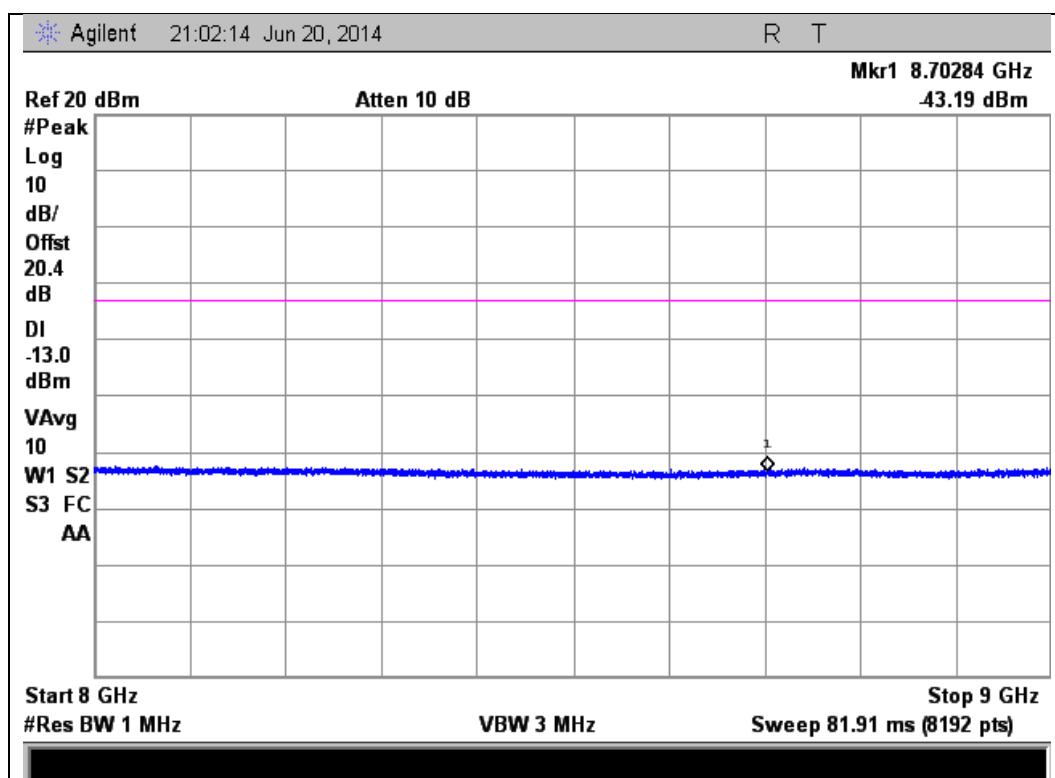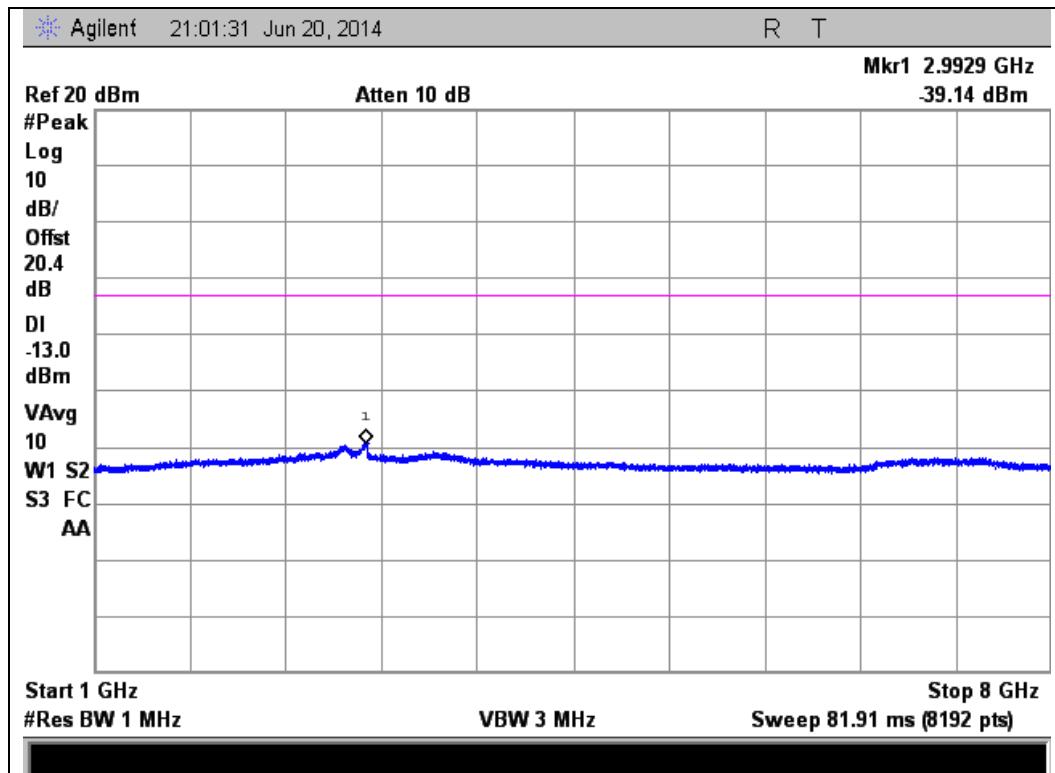





1710 - 1755 MHz Band

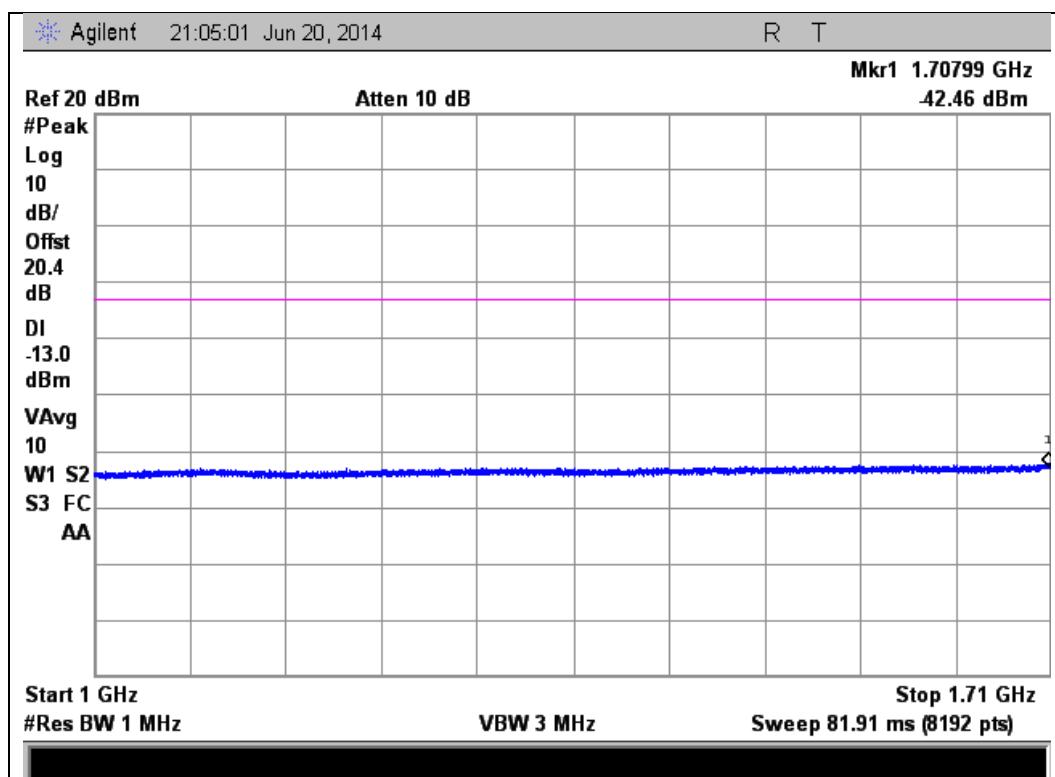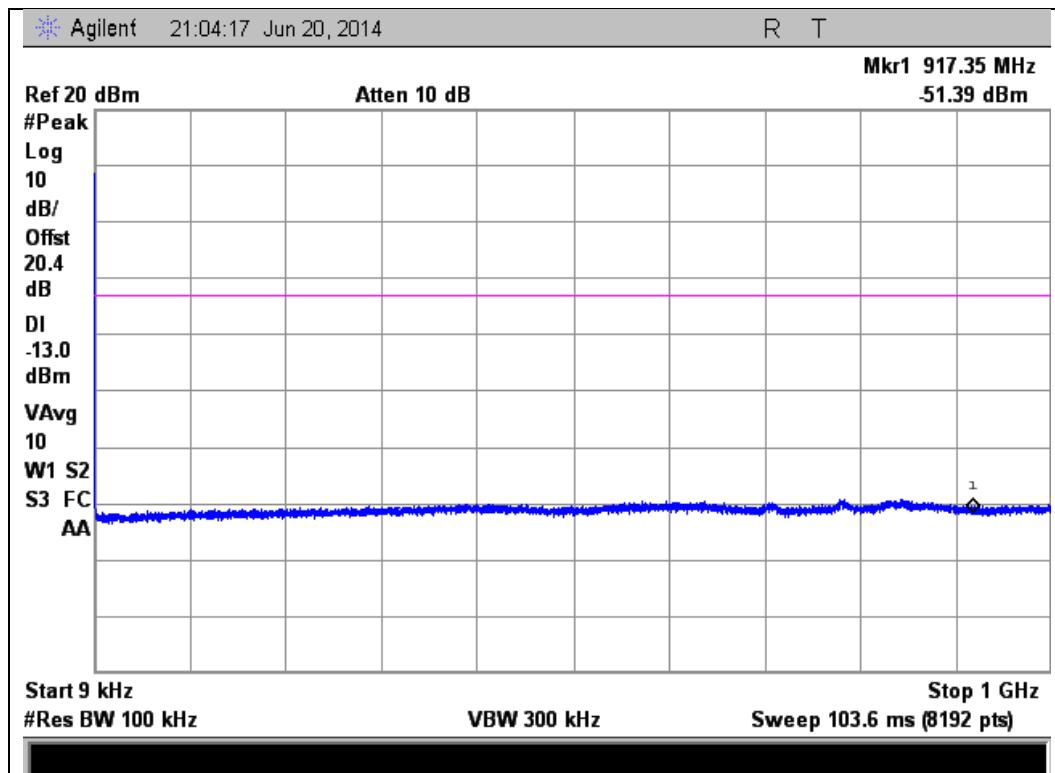




1710 - 1755 MHz Band (Cont)

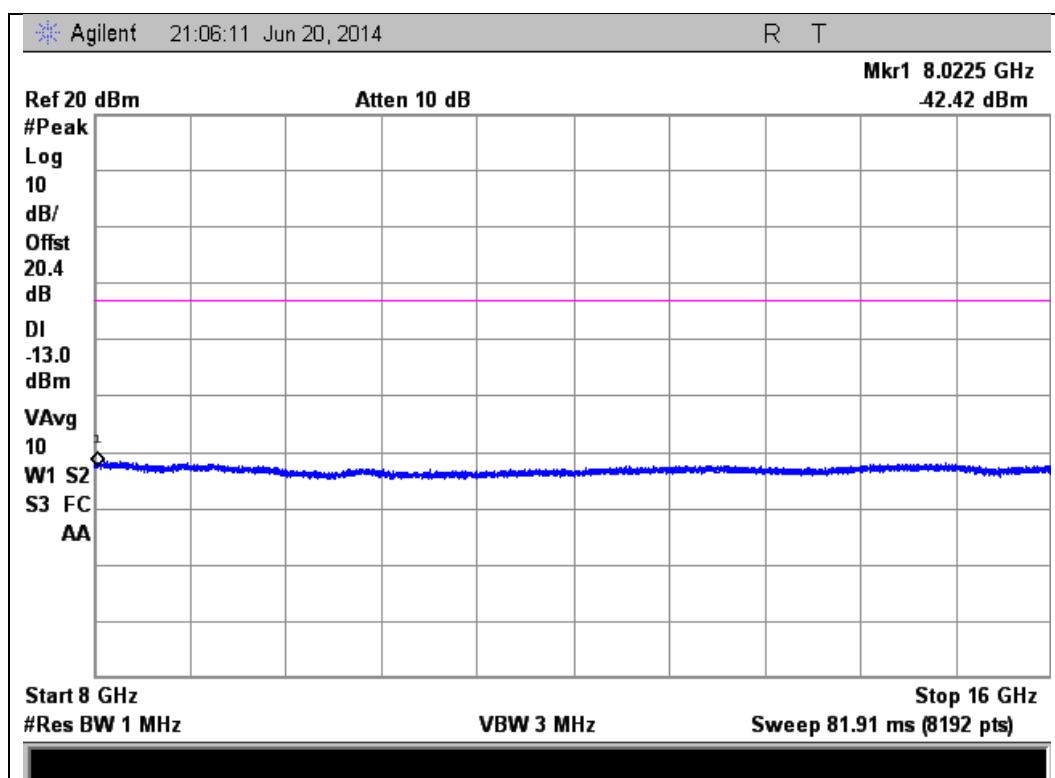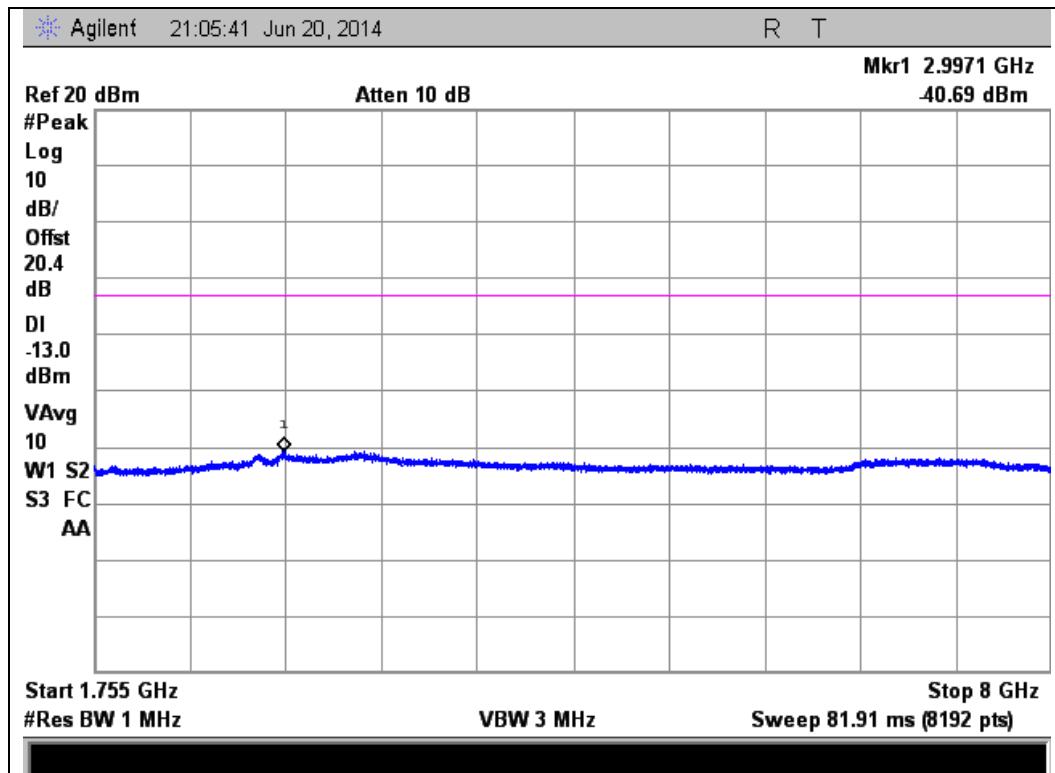




### 1710 - 1755 MHz Band (cont)


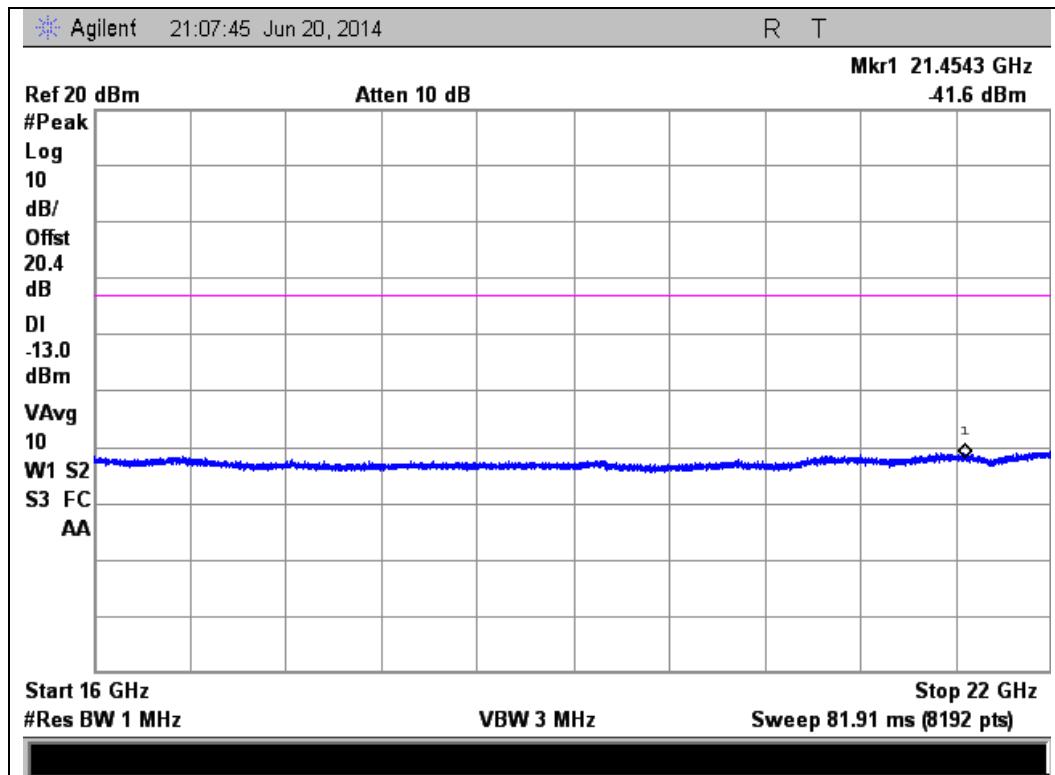


### 1850 - 1915 MHz Band

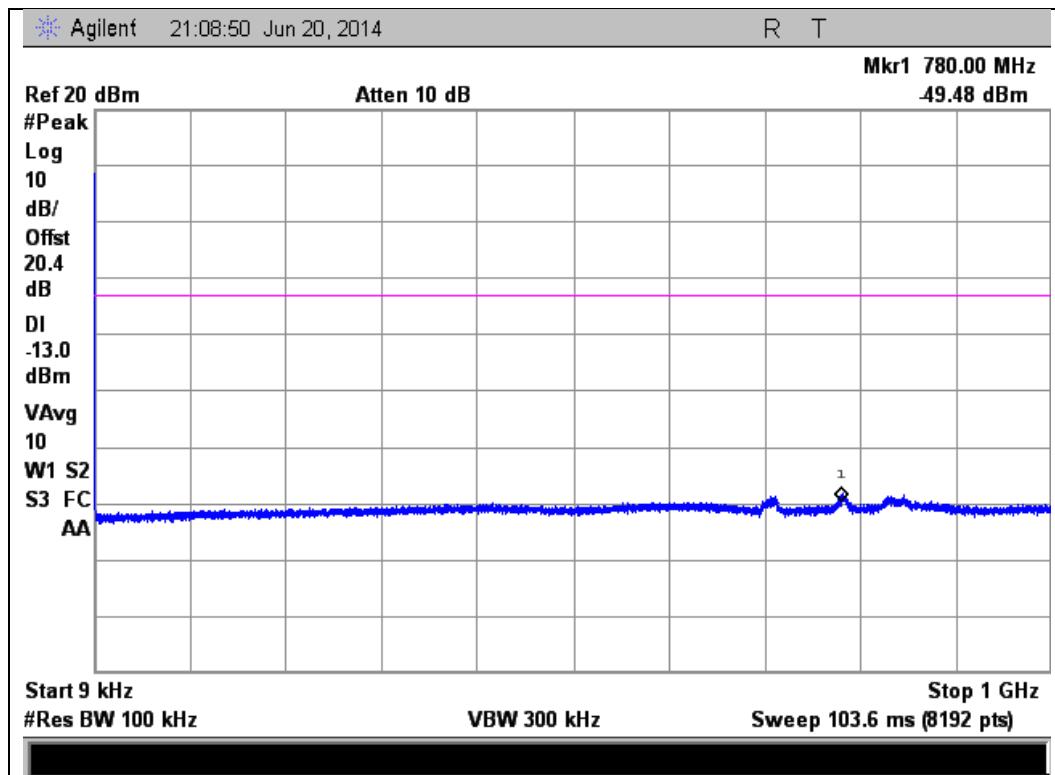





1850 - 1915 MHz Band (cont)

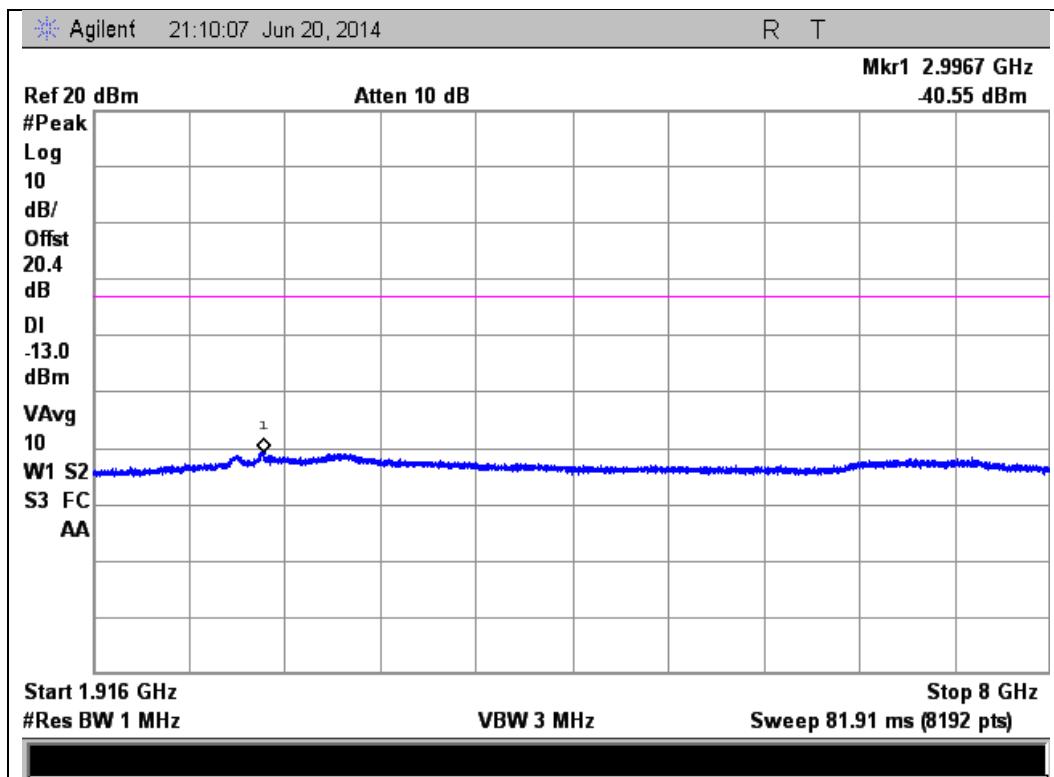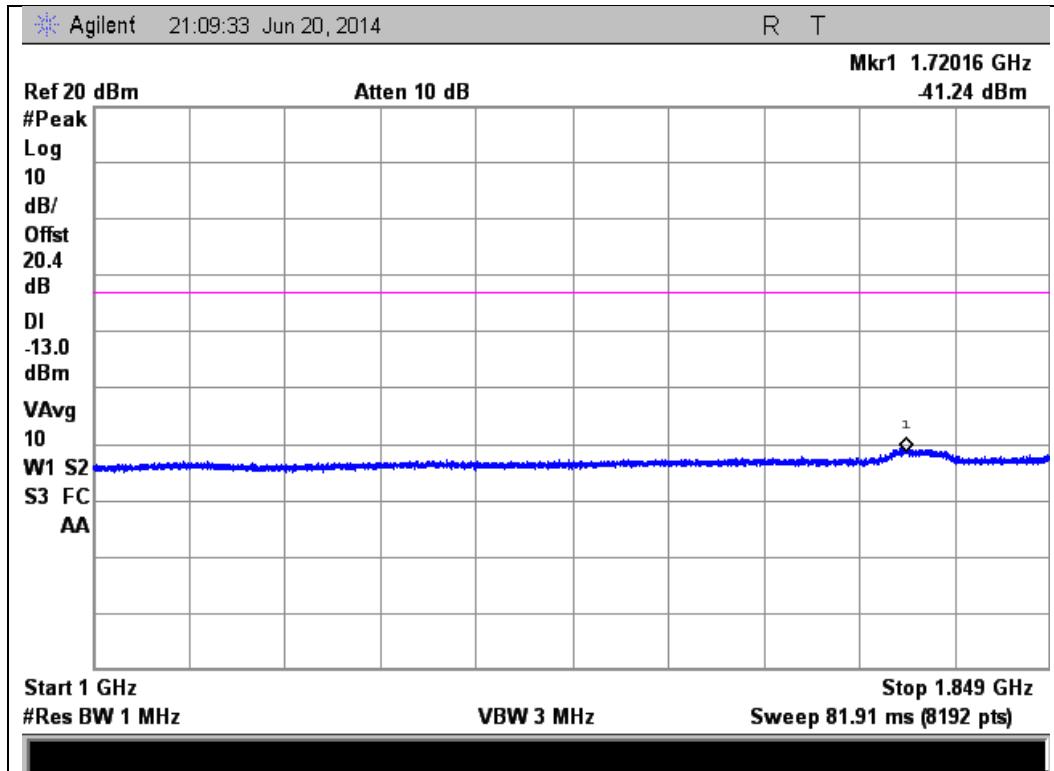





1850 - 1915 MHz Band (Cont)

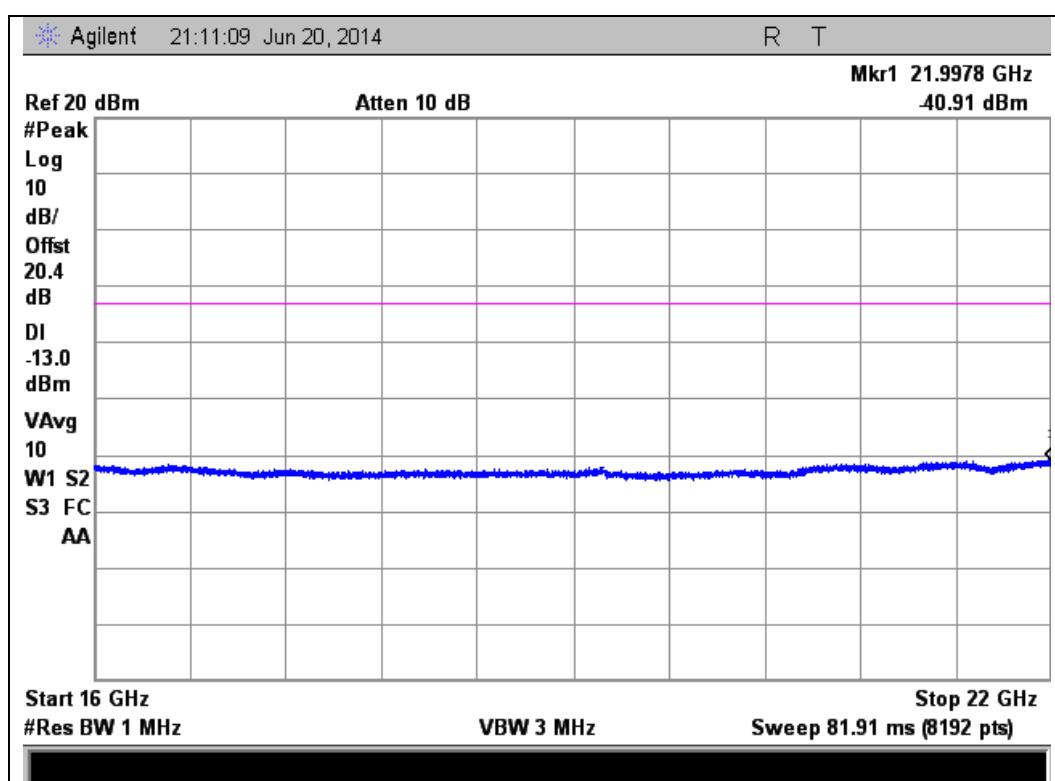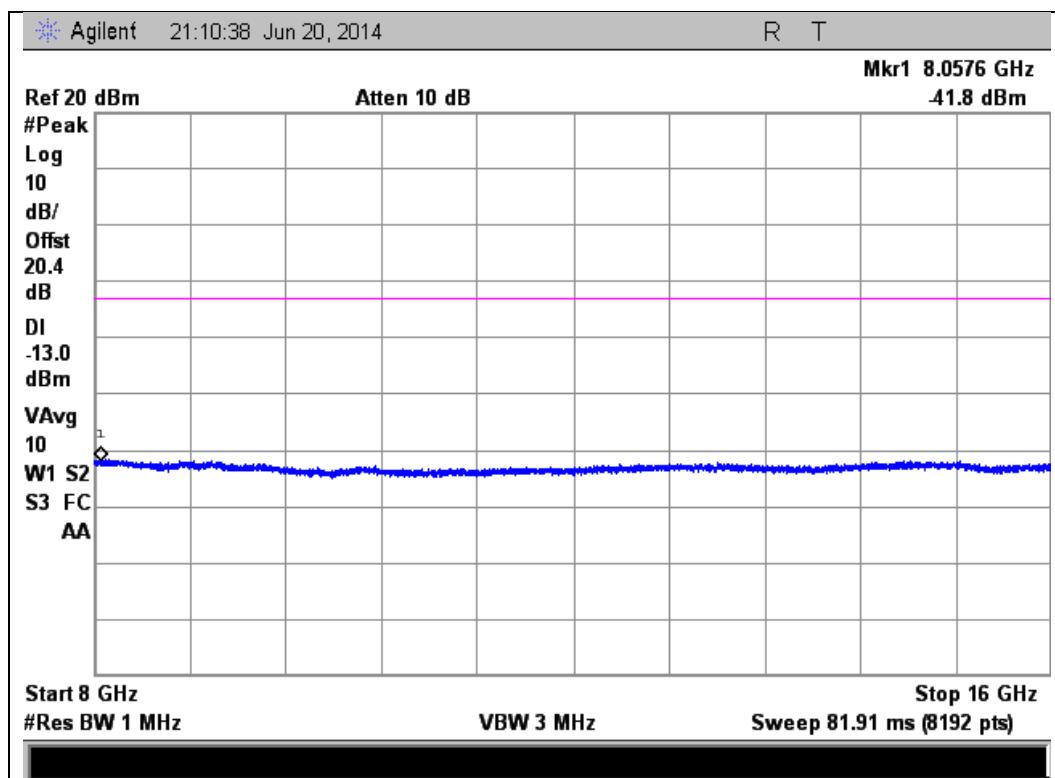




## Downlink Test Plots

### 728 - 746 MHz Band

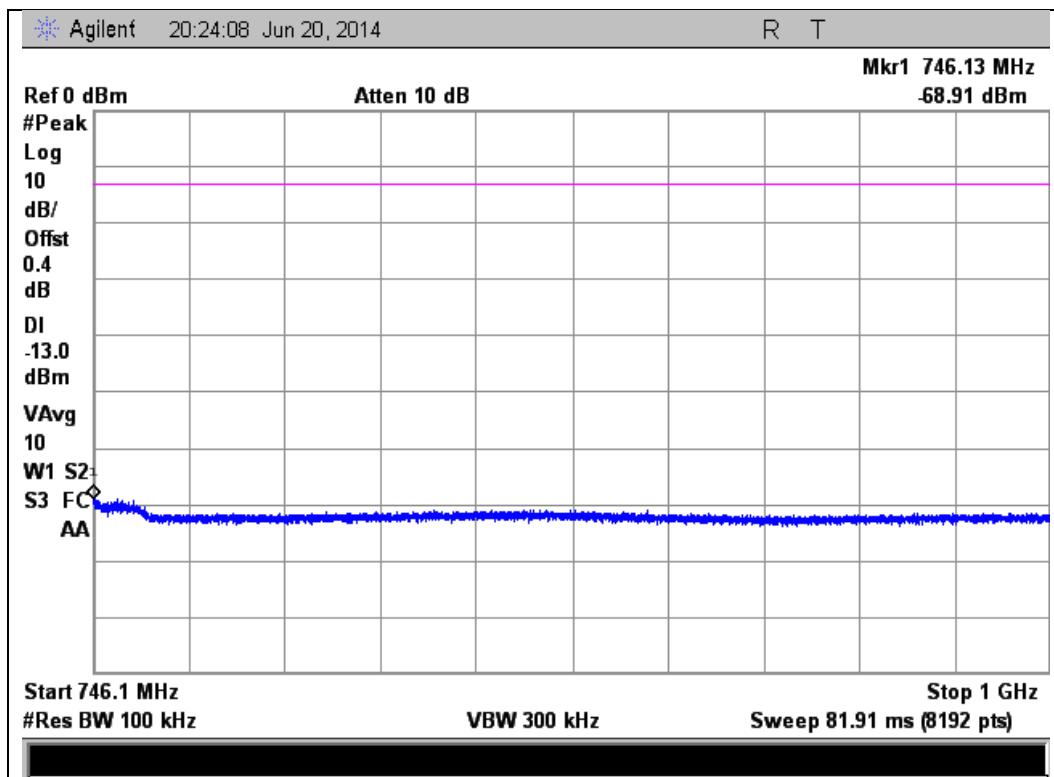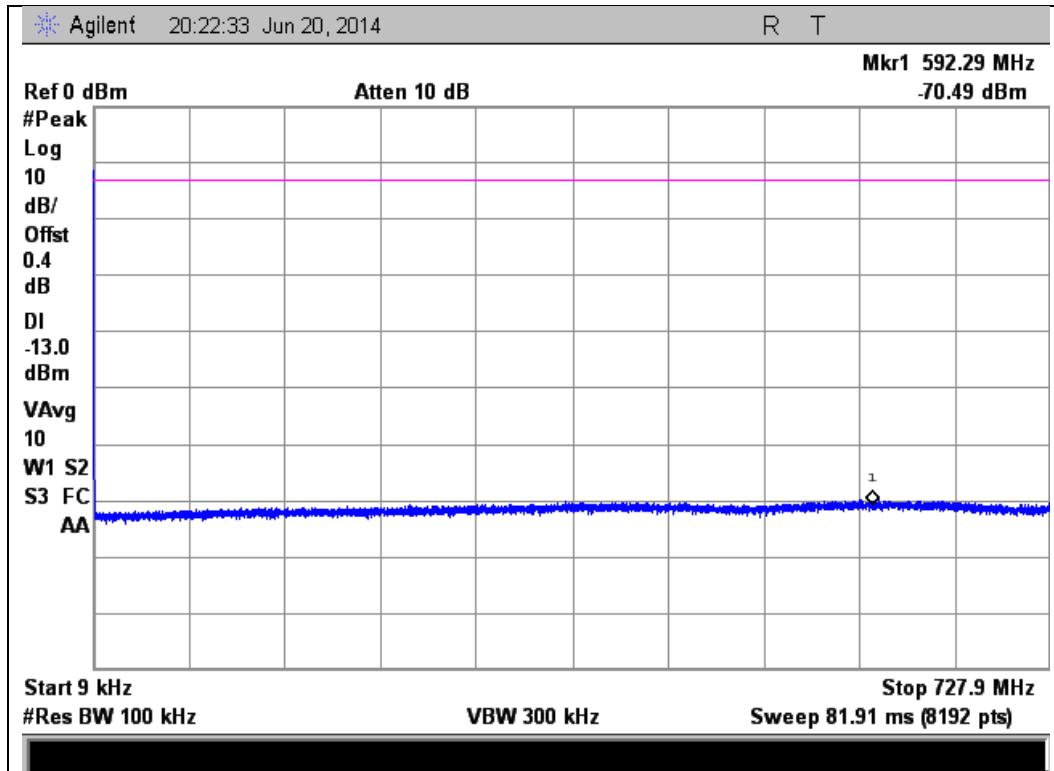




### 728 - 746 MHz Band (cont)


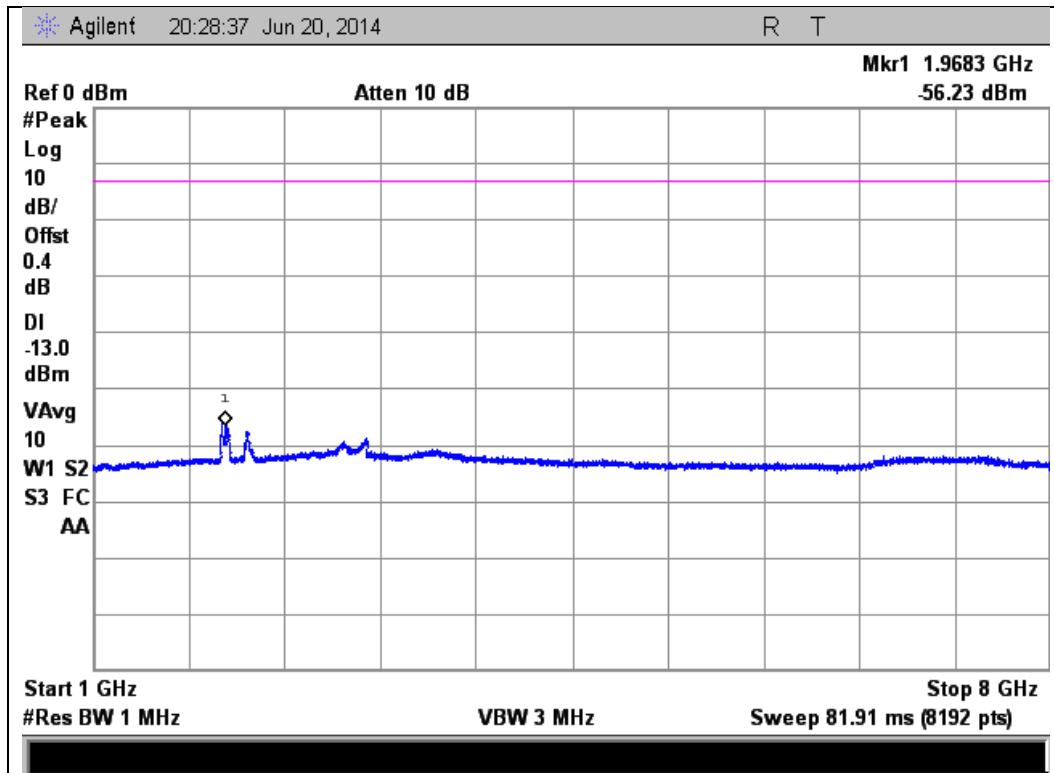


### 746 - 757 MHz Band

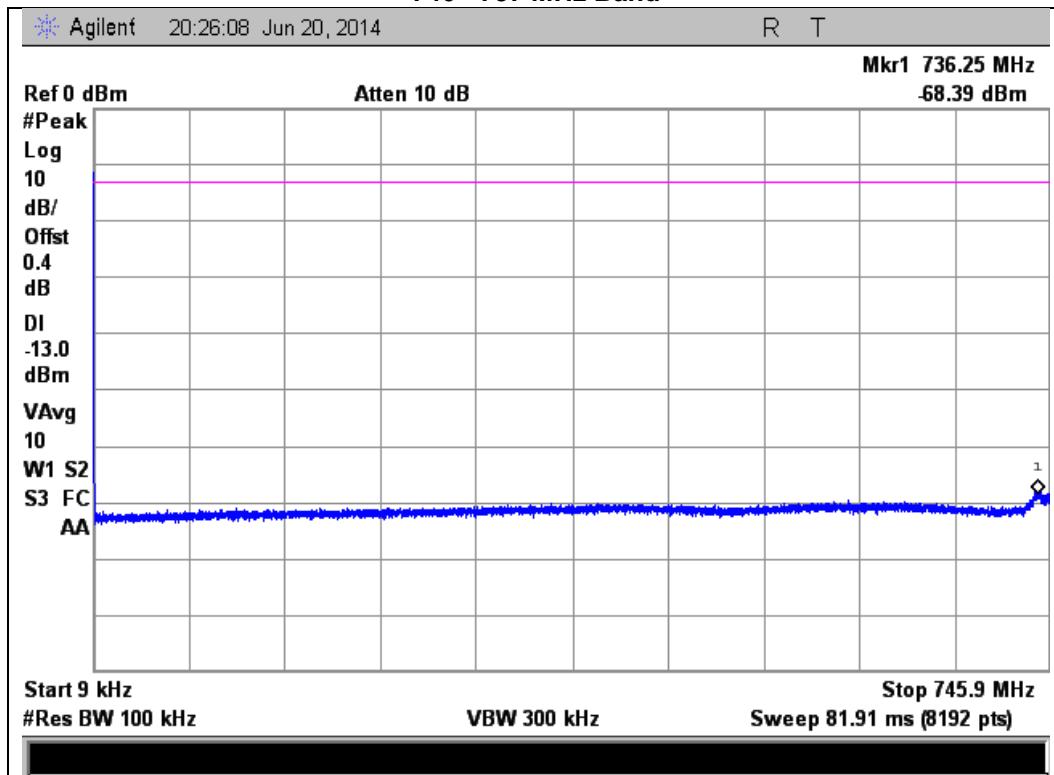





746 - 757 MHz Band (cont)

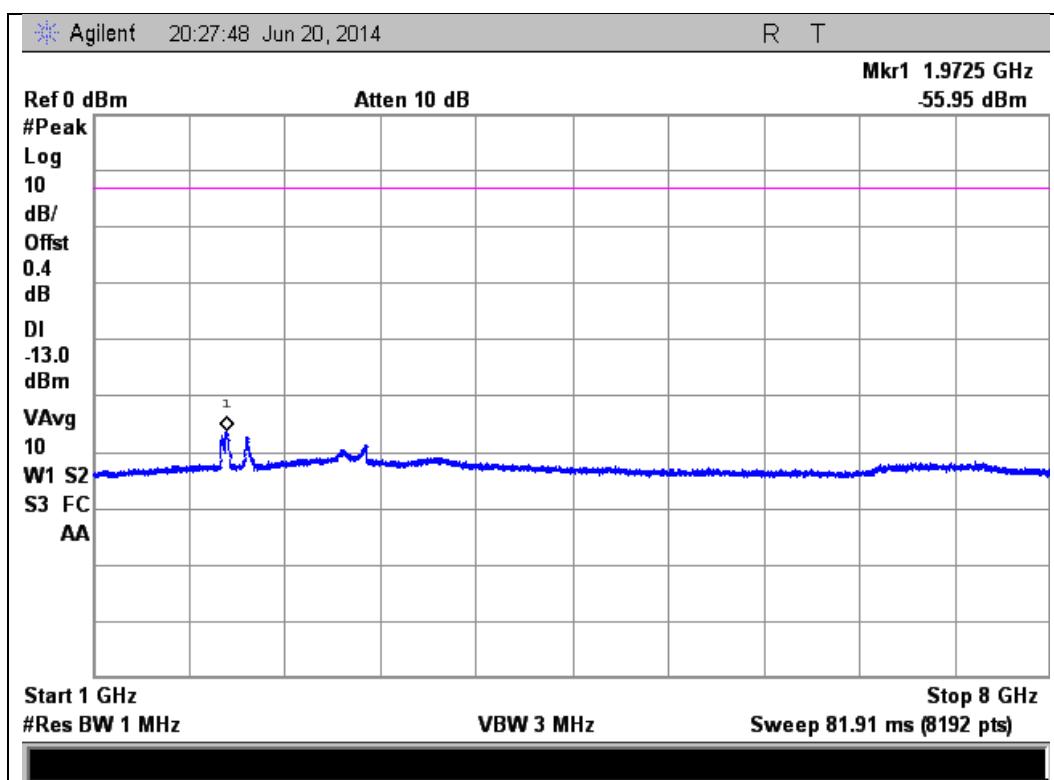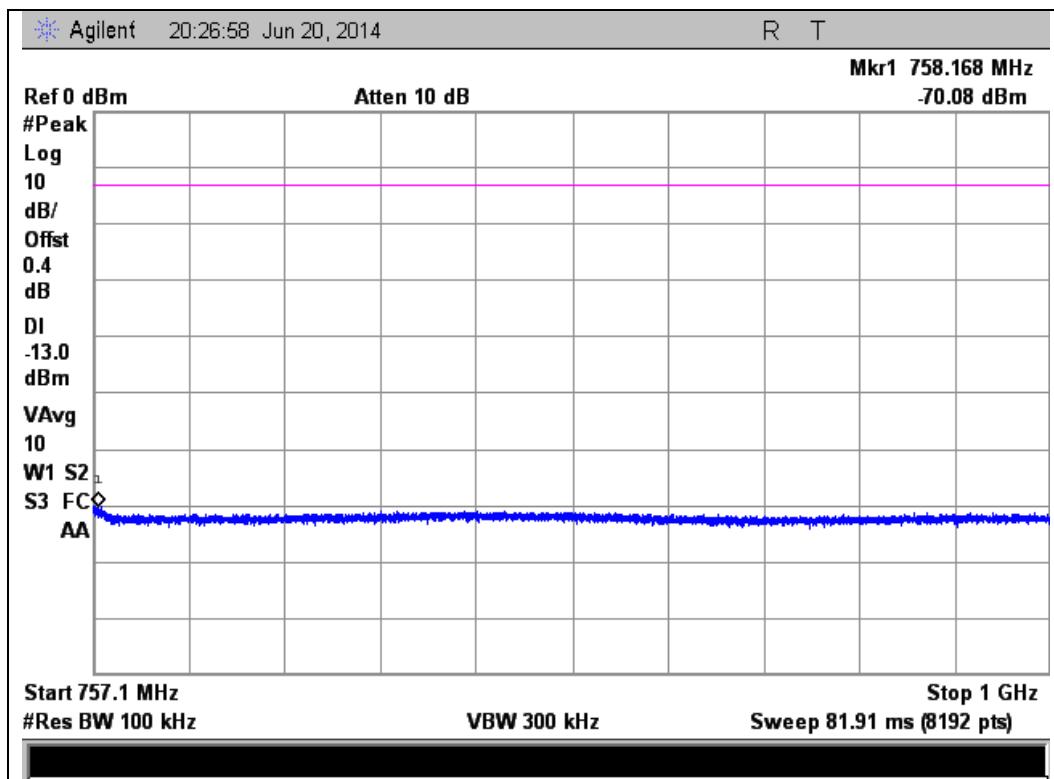




## 869 - 894 MHz Band

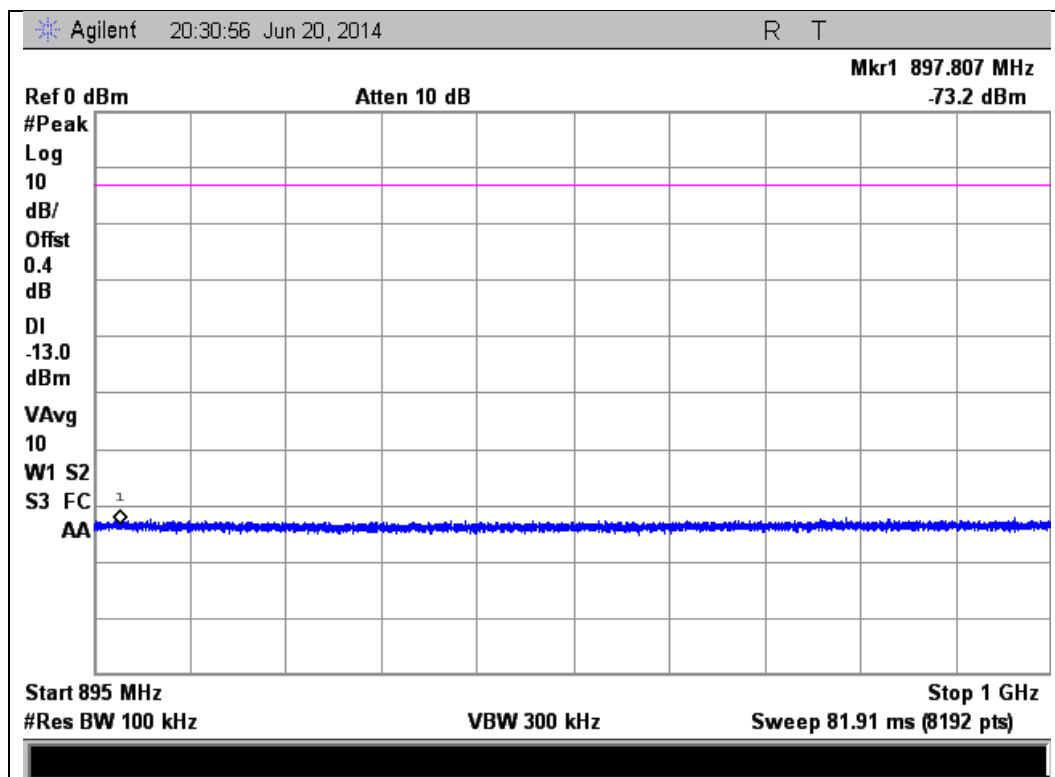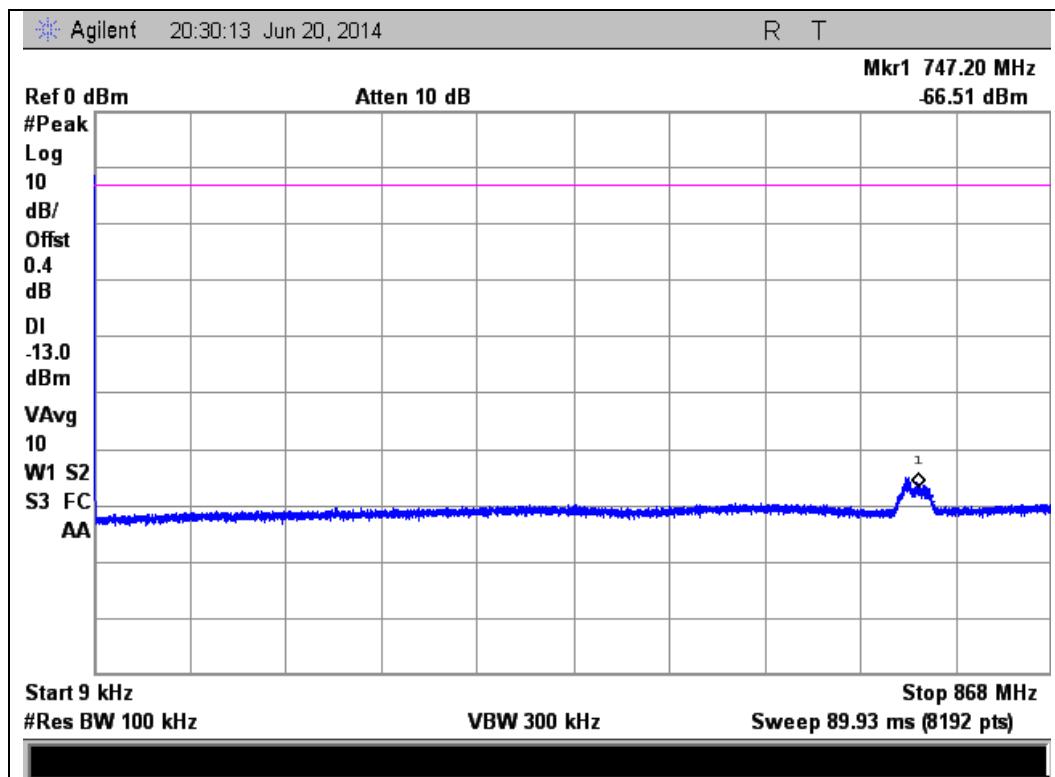




### 869 - 894 MHz Band (cont)


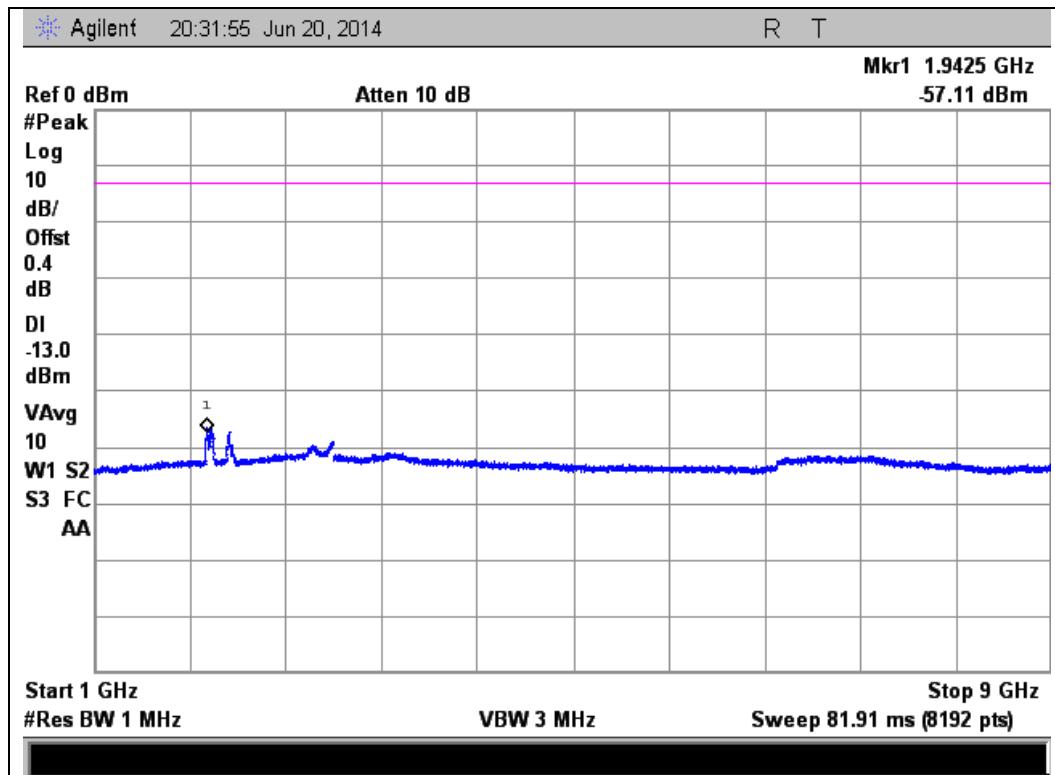


### 1930 - 1995 MHz Band

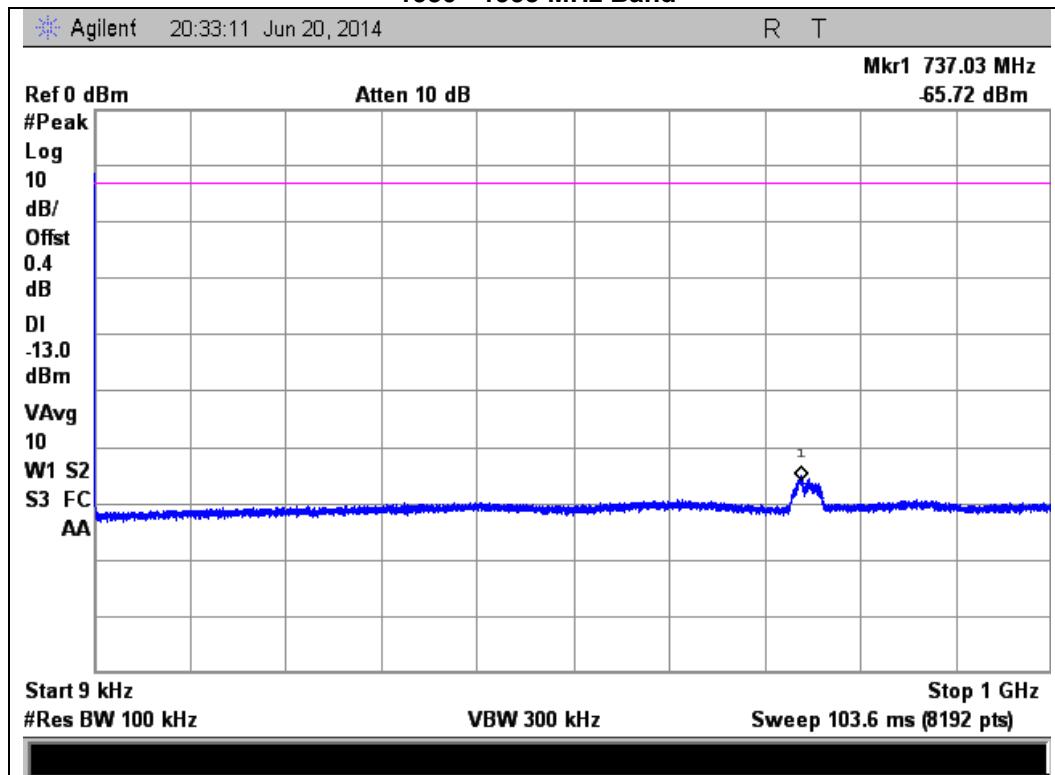





1930 - 1995 MHz Band (cont)

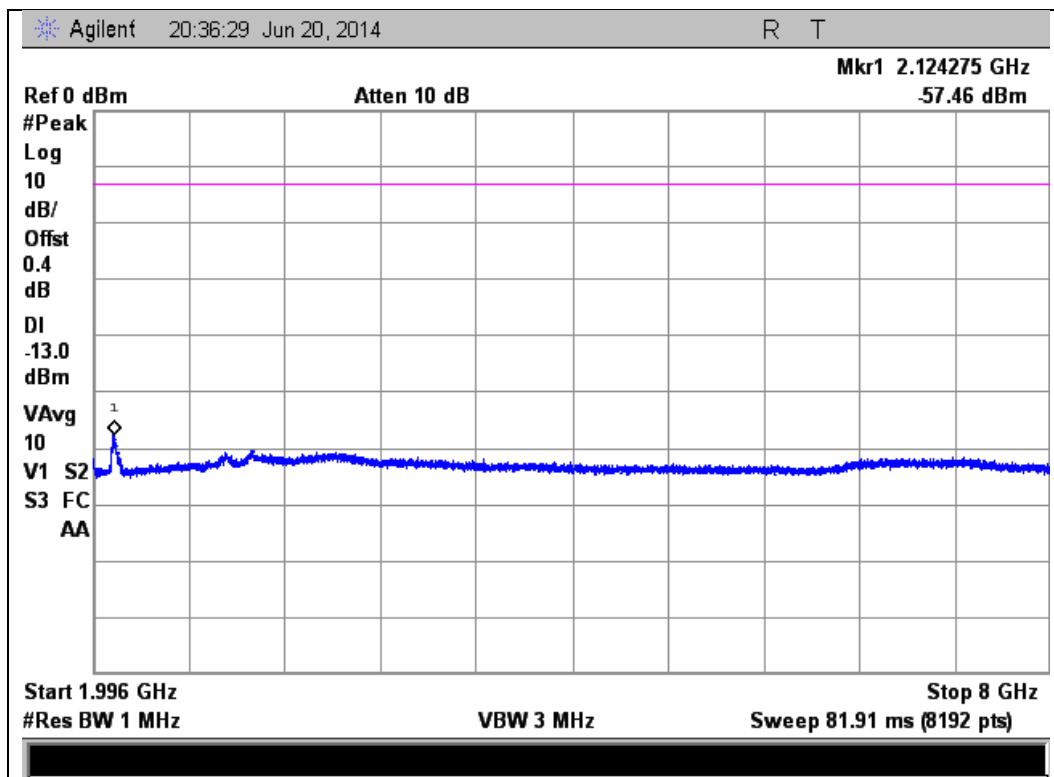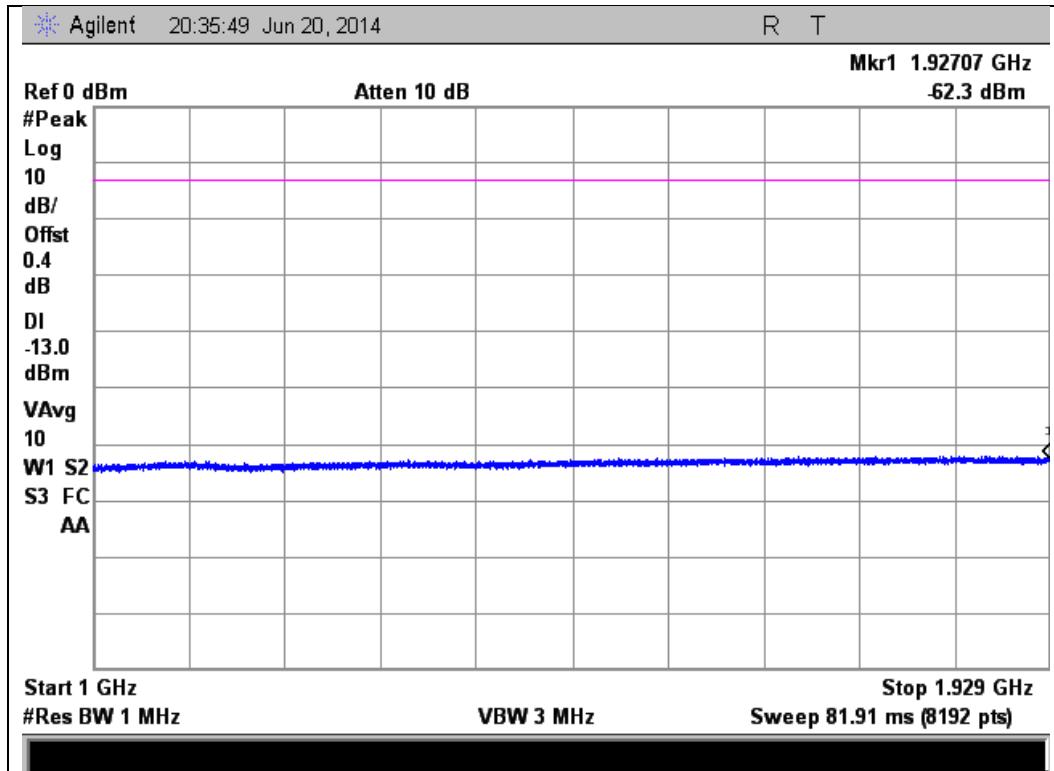





1930 - 1995 MHz Band (cont)

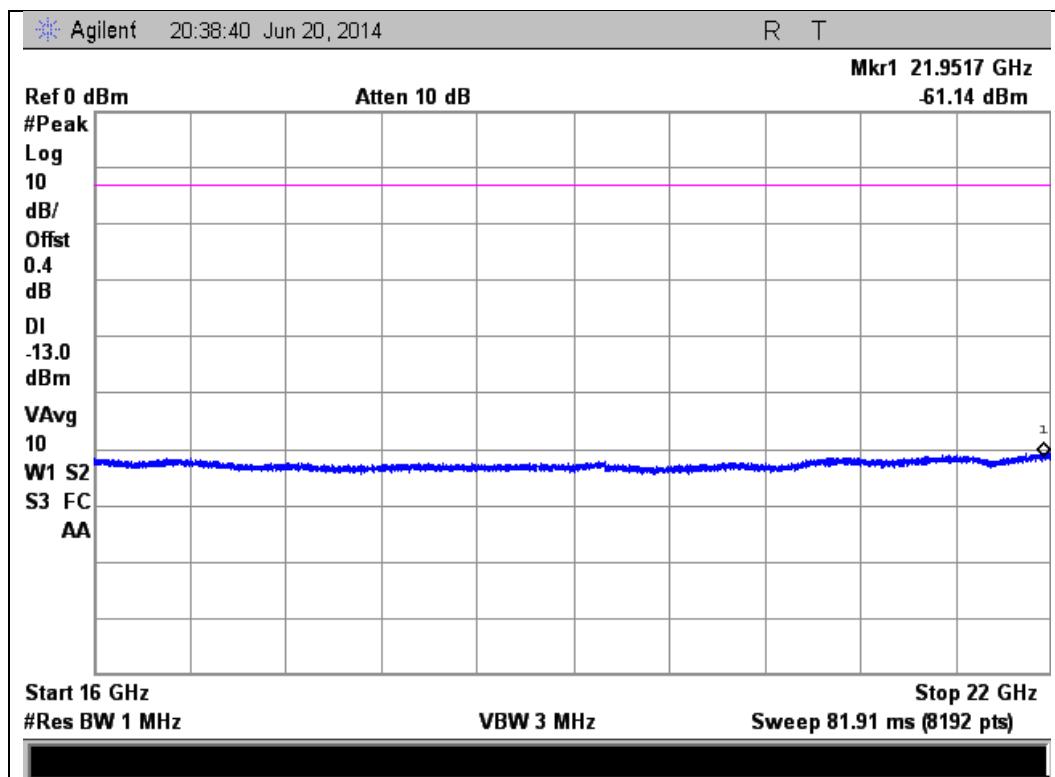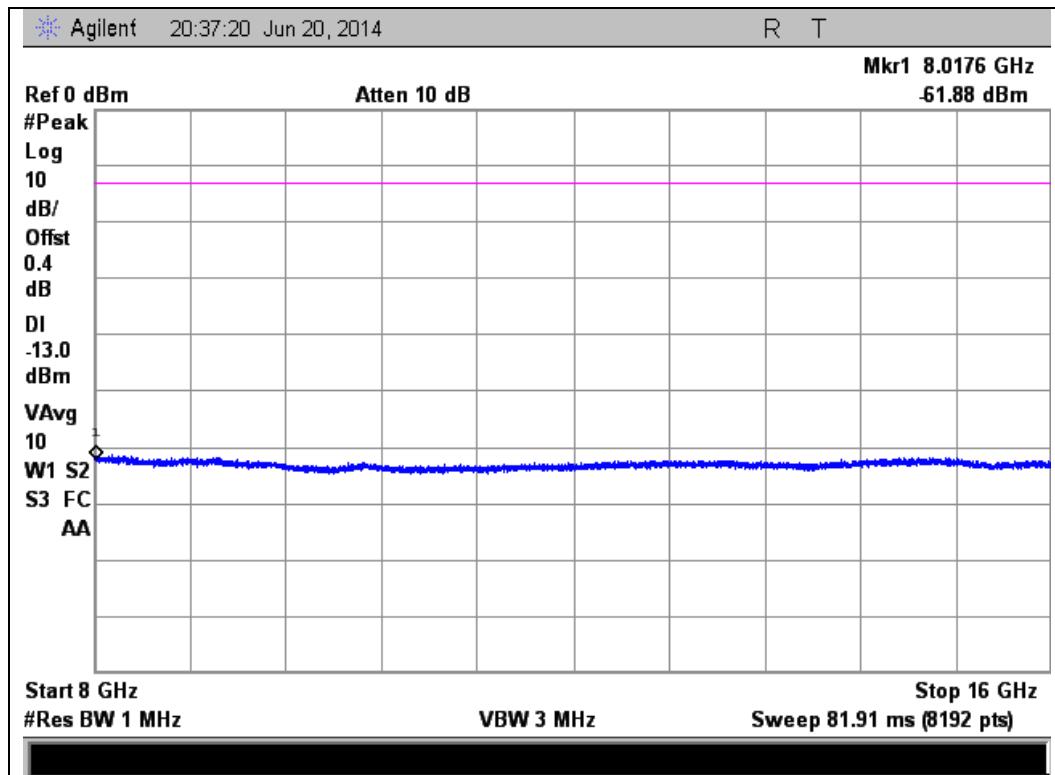





2110 - 2155 MHz Band

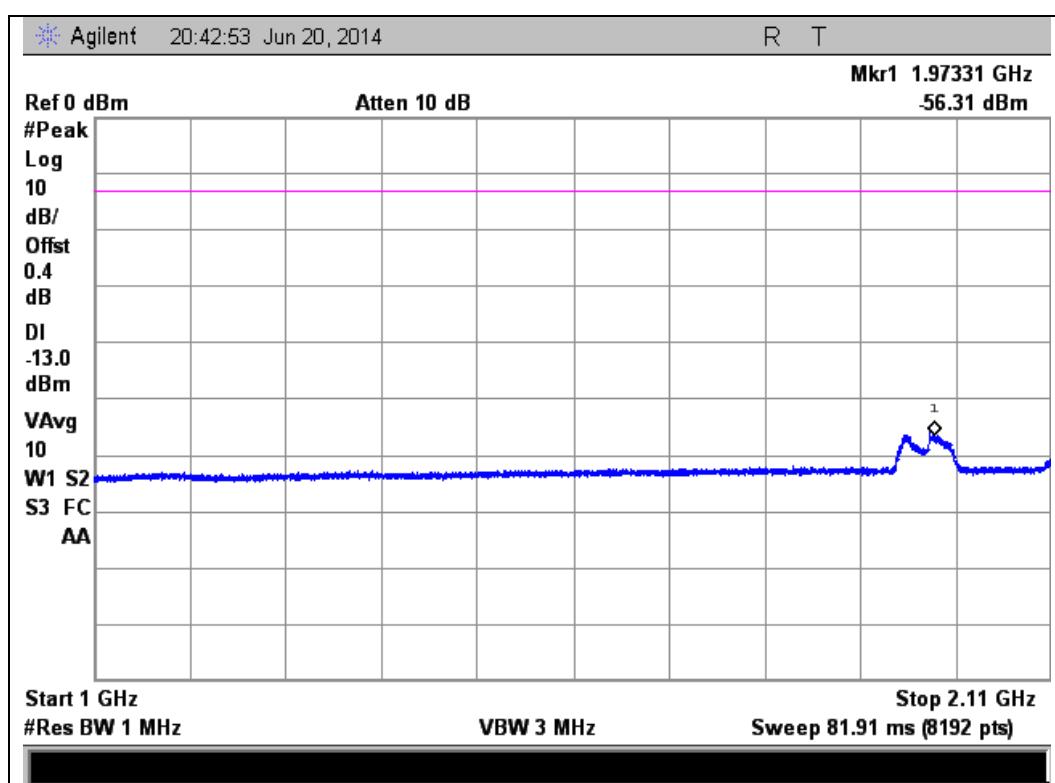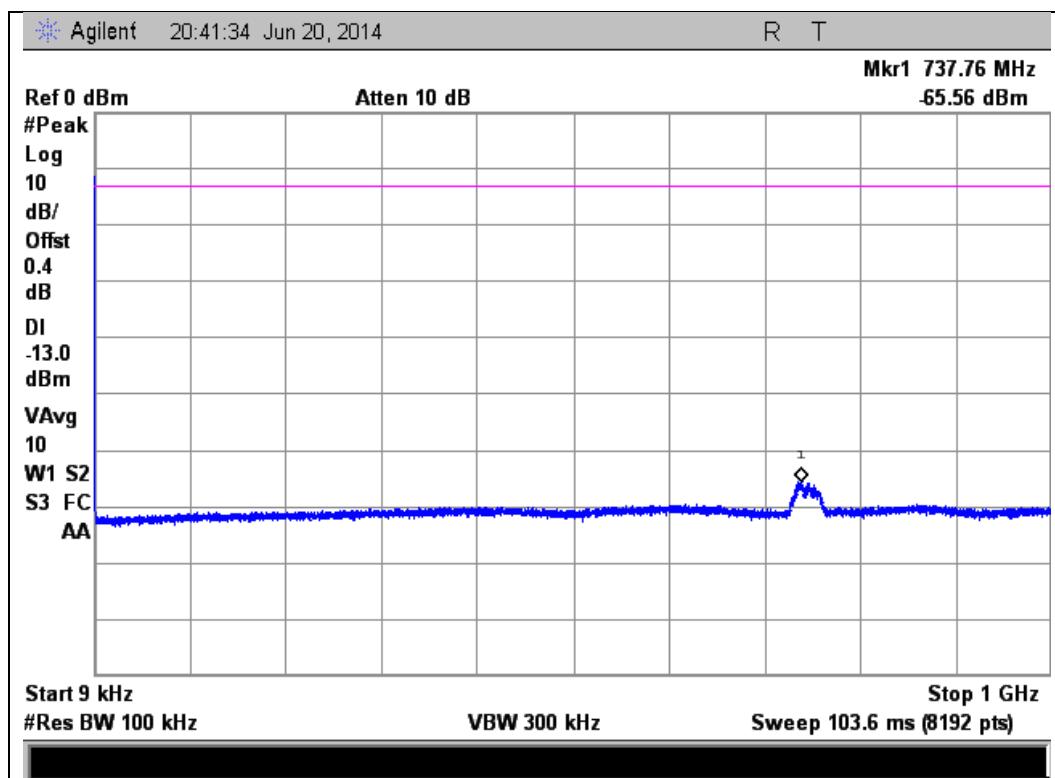




2110 - 2155 MHz Band (cont)

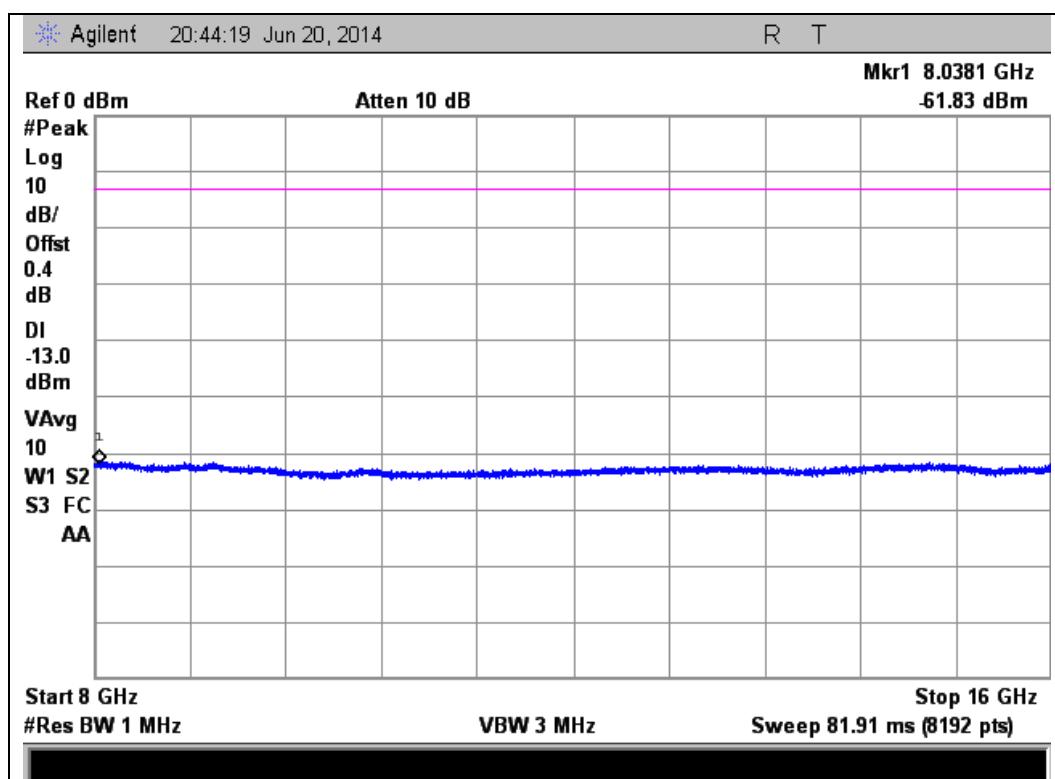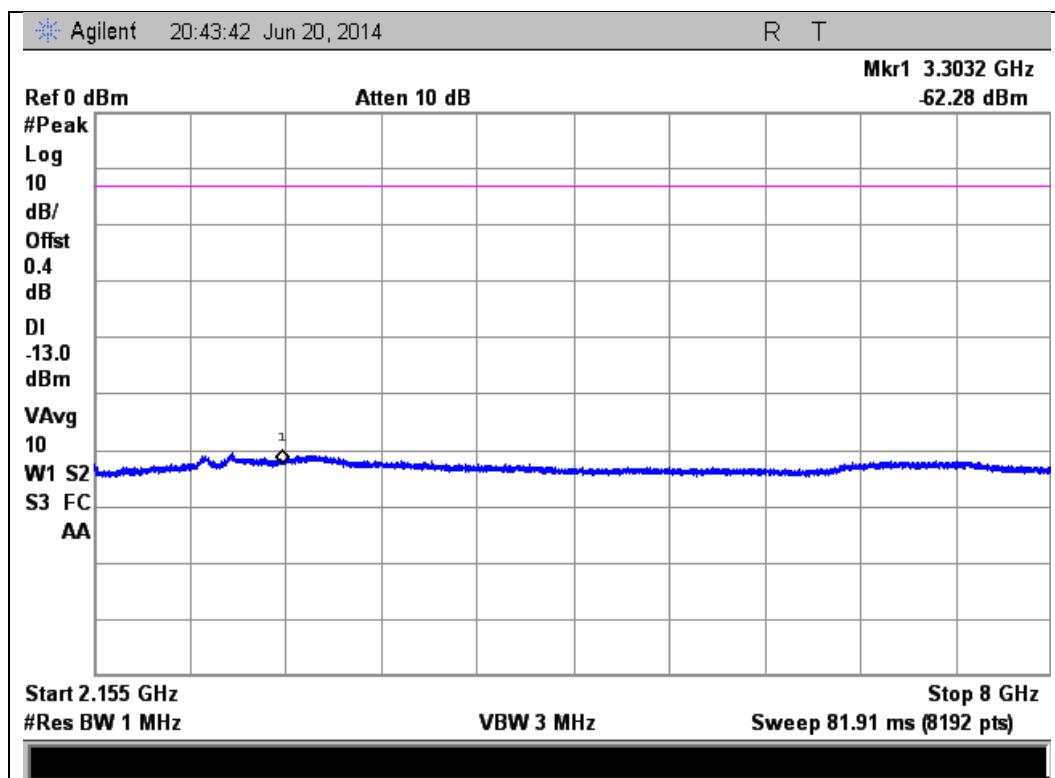




2110 - 2155 MHz Band (cont)

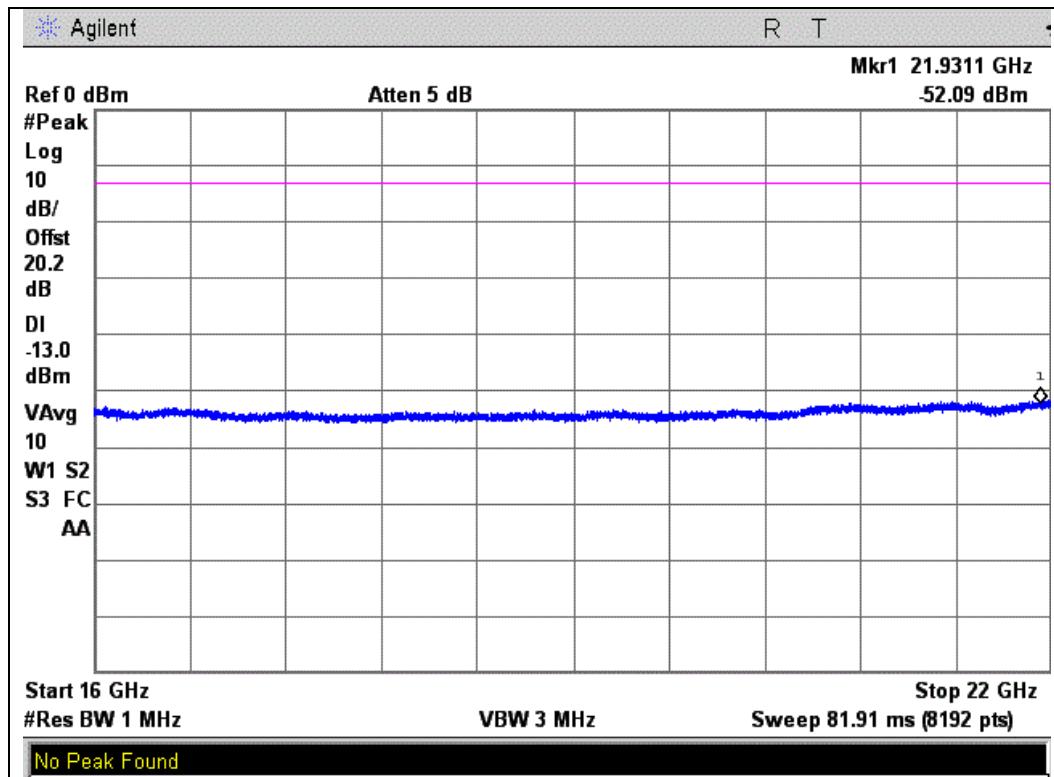




776 – 787 MHz Uplink Test Plots for the  
763 - 775 MHz Frequency Range

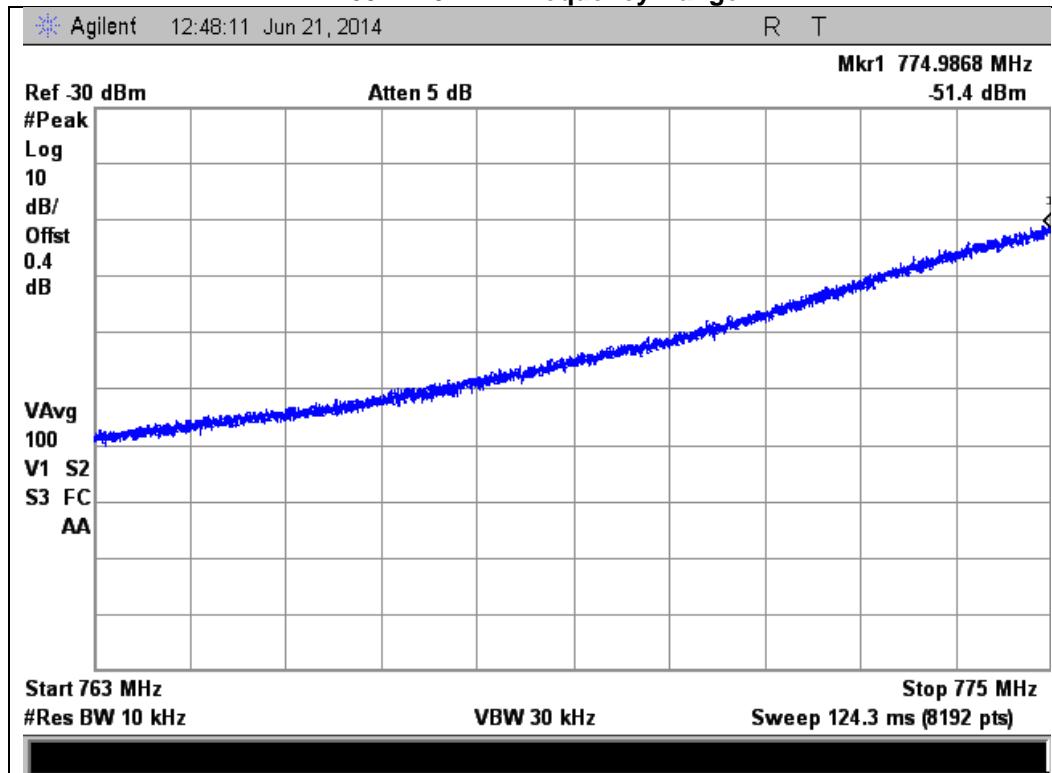


793 - 805 MHz Frequency Range

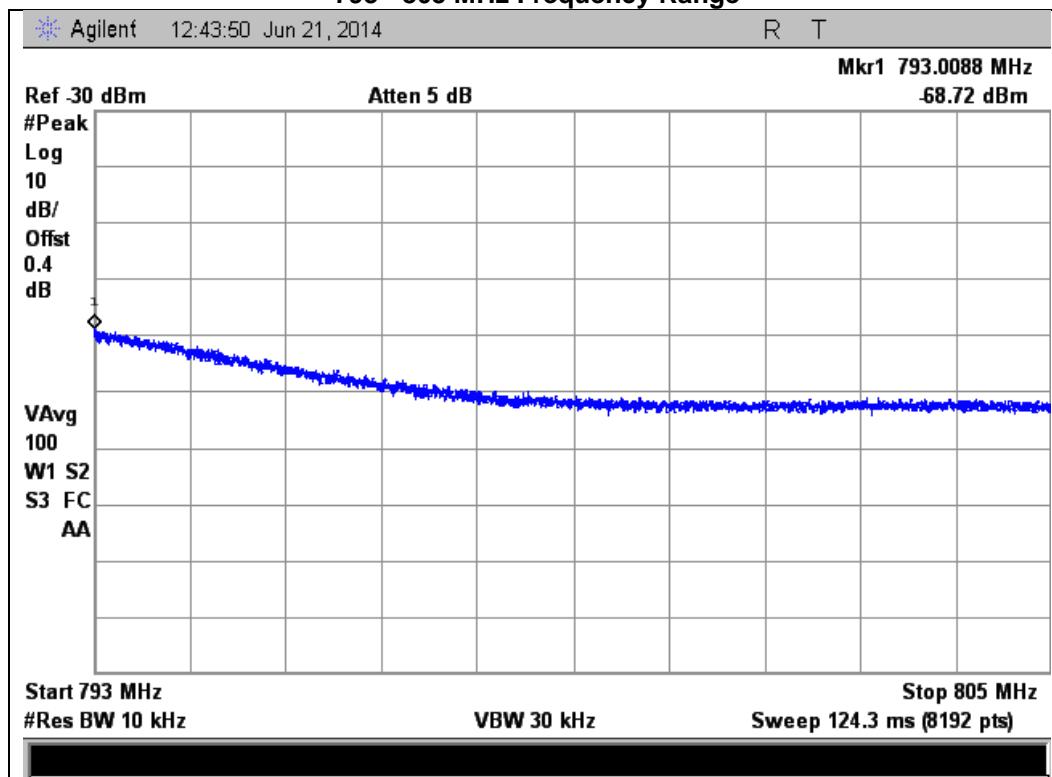




776 – 787 MHz Uplink Test Plots for the

1559 - 1610 MHz Frequency Range (Wideband)

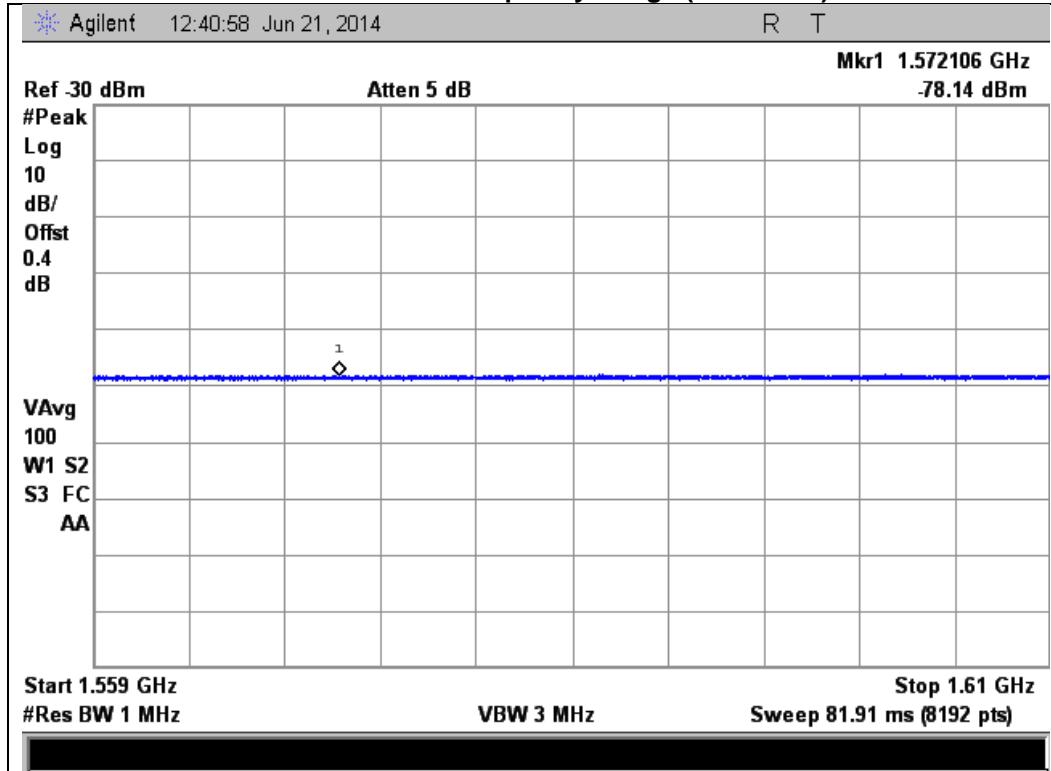


1559 - 1610 MHz Frequency Range (Narrowband)

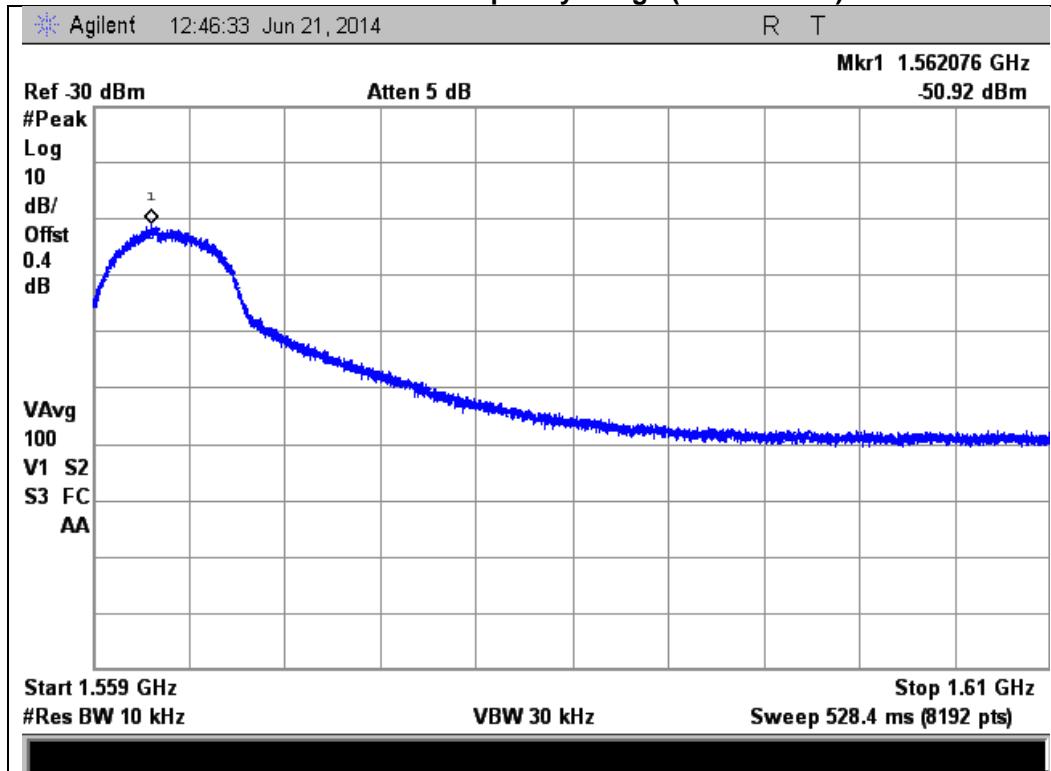




746 – 757 MHz Downlink Test Plots for the  
763 - 775 MHz Frequency Range

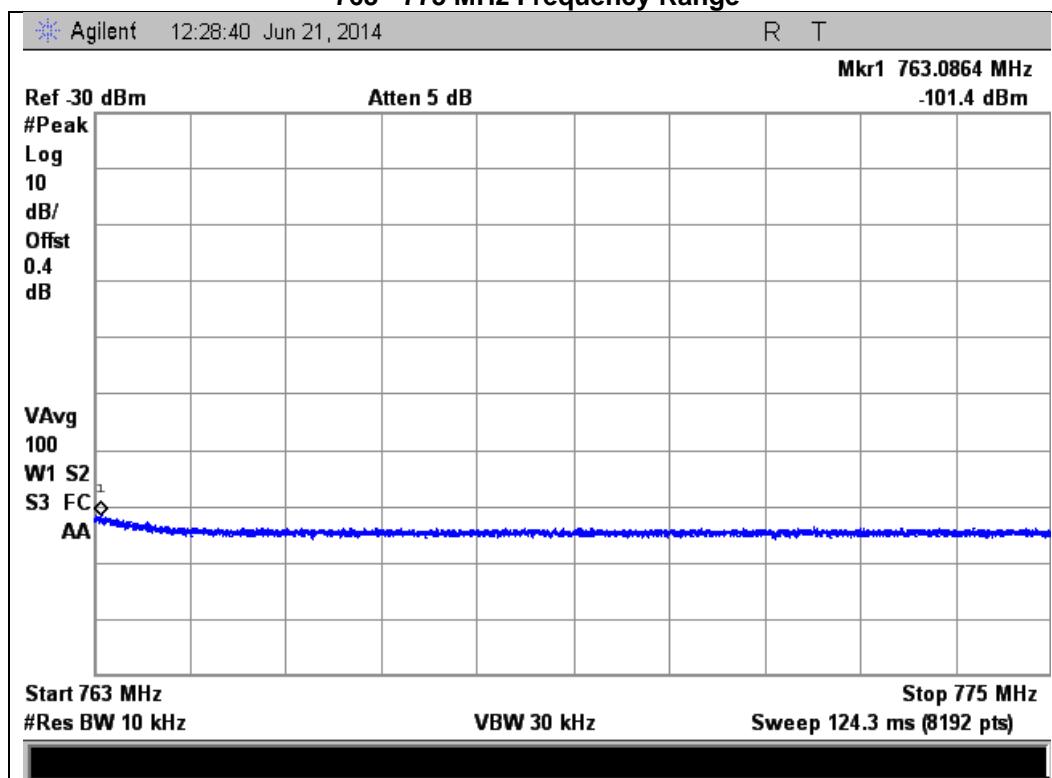


793 - 805 MHz Frequency Range

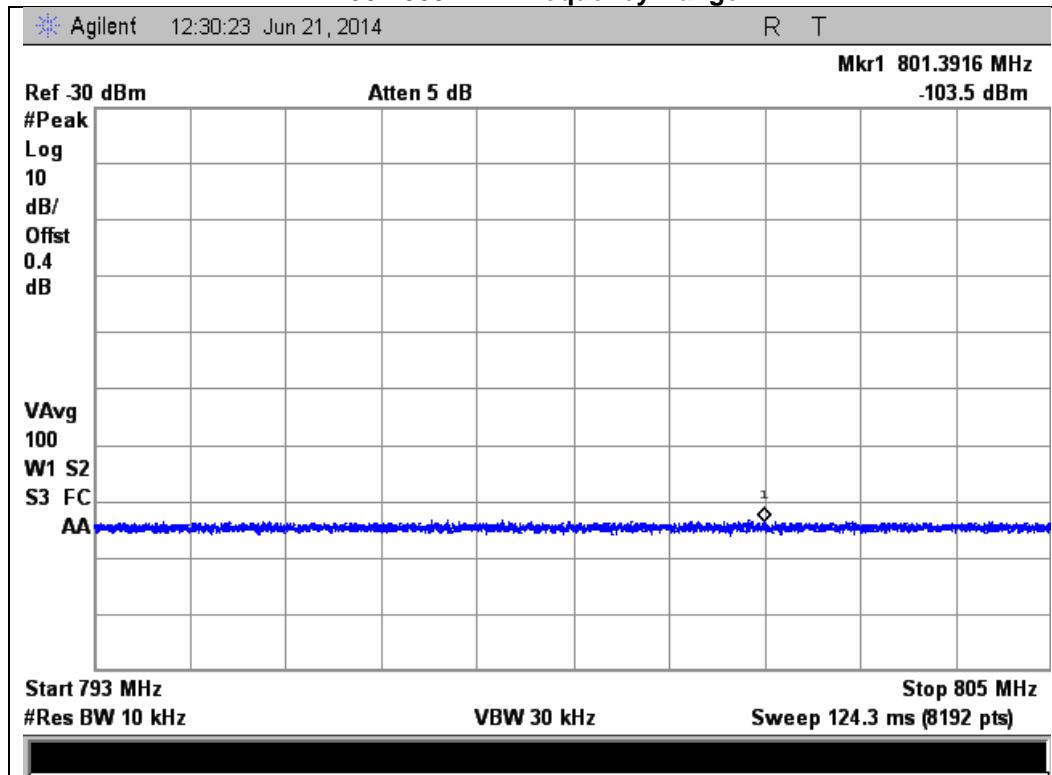




746 – 757 MHz Downlink Test Plots for the  
1559 - 1610 MHz Frequency Range (Wideband)

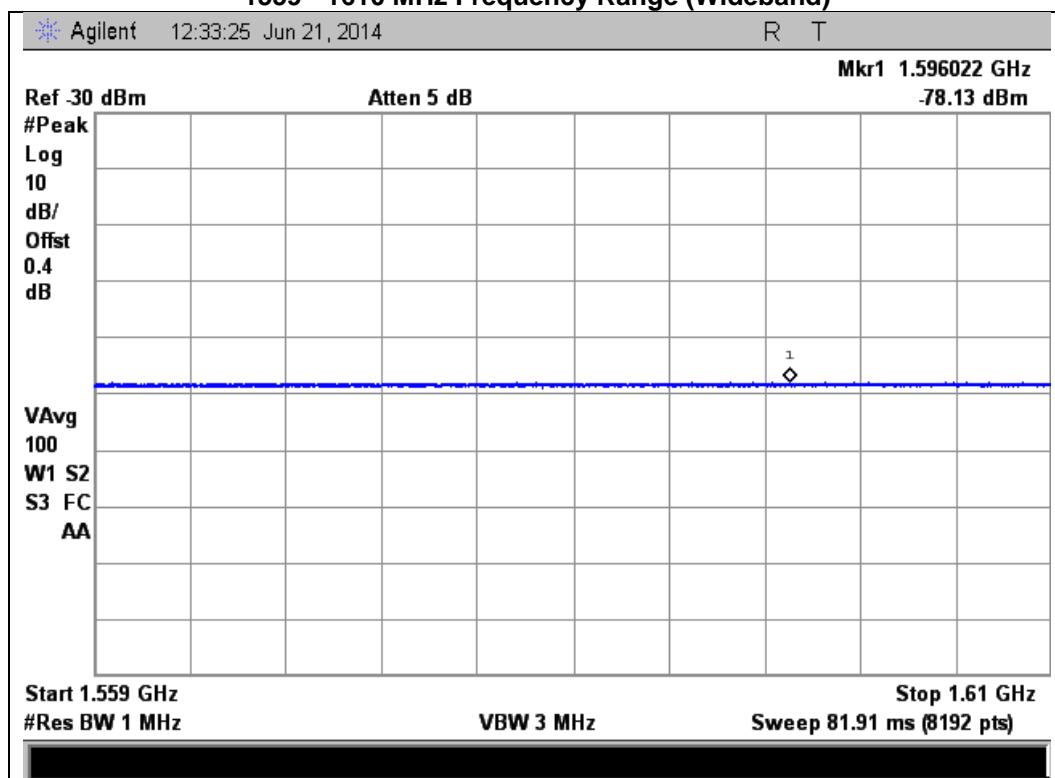

1559 - 1610 MHz Frequency Range (Narrowband)

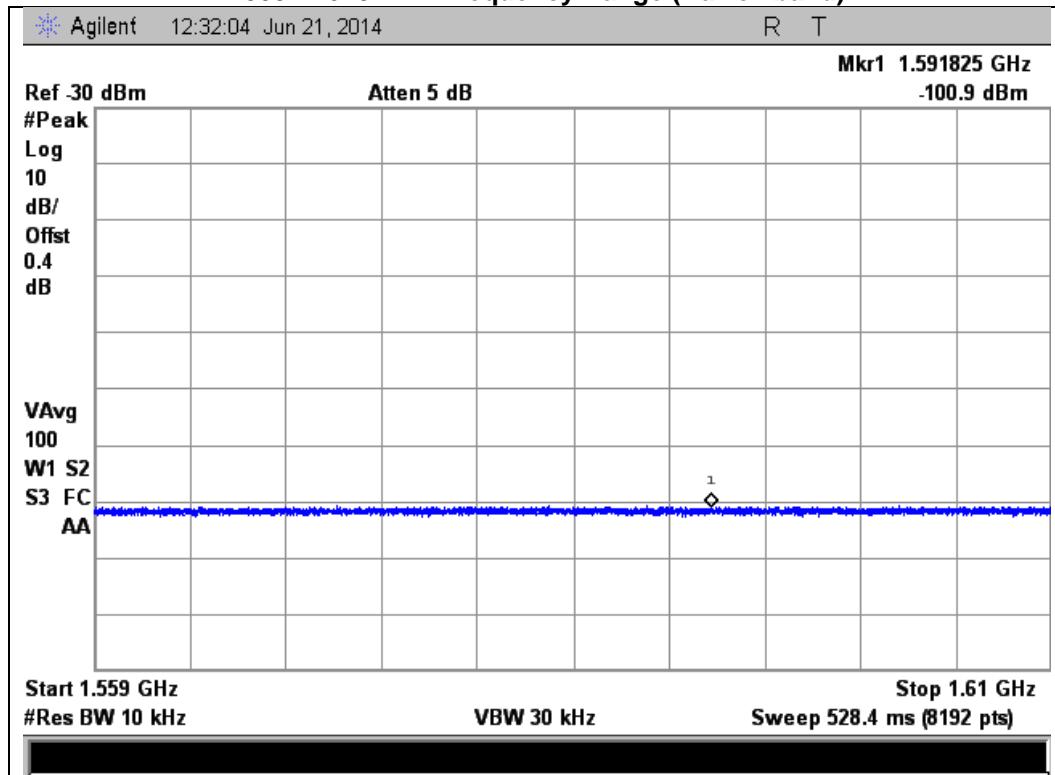



## Noise Limits

**Name of Test:** Noise Limits  
**Test Equipment Utilized:** i00379, i00405, i00412

**Engineer:** Mike Graffeo  
**Test Date:** 6/19/14

## Test Procedure


The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor as necessary to ensure that accurate readings were obtained. A series of three tests were performed: the maximum uplink and downlink noise, the variable noise for the uplink and downlink in the presence of a downlink signal, and the variable uplink noise timing. The detailed procedures from KDB 935210 D03 Wideband Consumer Signal Booster Measurement Guidance DR04-41516c were followed.

For Mobile installations the Noise limit is fixed at -59dBm


Variable Noise =-103 dBm/MHz-RSSI

## Test Setup

### Maximum Noise Power



### Variable Uplink Noise Power and Timing

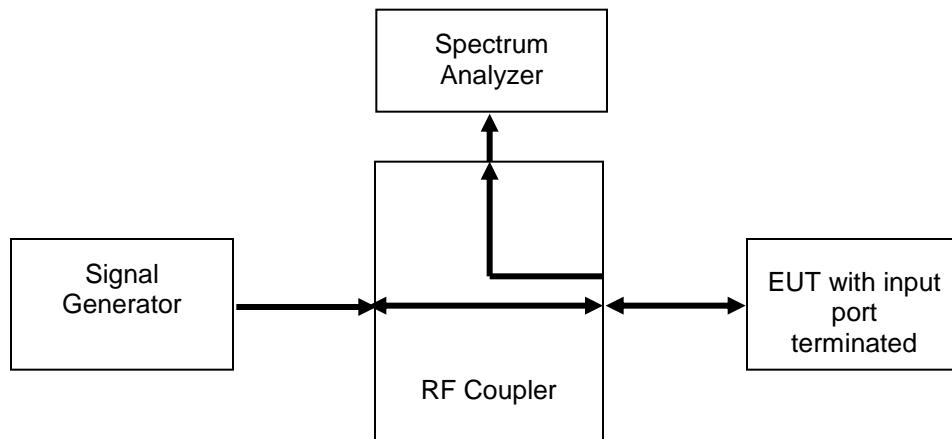

### Variable Downlink Noise Power and Timing





### Maximum Uplink Noise Test Results

Frequency Band (MHz)	Measured Noise (dBm)	Limit (dBm)	Margin (dB)	Result
698 - 716	-60.74	-59.0	-1.7	Pass
776 - 787	-60.54	-59.0	-1.5	Pass
824 - 849	-62.40	-59.0	-3.4	Pass
1710 - 1755	-62.97	-59.0	-4.0	Pass
1850 – 1915	-63.68	-59.0	-4.7	Pass

### Maximum Downlink Noise Test Results

Frequency Band (MHz)	Measured Noise (dBm)	Limit (dBm)	Margin (dB)	Result
728 - 746	-61.14	-59.0	-2.1	Pass
746 - 757	-61.12	-59.0	-2.1	Pass
869 - 894	-61.51	-59.0	-2.5	Pass
1930 – 1995	-63.50	-59.0	-4.5	Pass
2110 - 2155	-61.93	-59.0	-2.9	Pass

### Uplink Noise Timing Test Results

Frequency Band (MHz)	Measured Timing (mS)	Limit (Seconds)	Result
698 - 716	325.0	1.0	Pass
776 - 787	200.0	1.0	Pass
824 - 849	200.0	1.0	Pass
1710 - 1755	225.0	1.0	Pass
1850 – 1915	150.0	1.0	Pass



### Variable Uplink Noise Limit Test Results

#### 698 - 716 MHz

RSSI (dBm)	Noise Limit (dBm)	Measured Noise (dBm)	Margin (dB)
-44.0	-59.0	-77.0	-18.0
-43.0	-60.0	-77.0	-17.0
-63.0	-59.0	-66.0	-7.0
-64.0	-59.0	-65.3	-6.3
-65.0	-59.0	-64.0	-5.0
-66.0	-59.0	-63.5	-4.5

#### 776 - 787 MHz

RSSI (dBm)	Noise Limit (dBm)	Measured Noise (dBm)	Margin (dB)
-44.0	-59.0	-77.0	-18.0
-43.0	-60.0	-77.0	-17.0
-66.0	-59.0	-64.0	-5.0
-67.0	-59.0	-63.8	-4.8
-68.0	-59.0	-63.2	-4.2
-69.0	-59.0	-63.1	-4.1

#### 824 - 849 MHz

RSSI (dBm)	Noise Limit (dBm)	Measured Noise (dBm)	Margin (dB)
-44.0	-59.0	-77.0	-18.0
-43.0	-60.0	-77.0	-17.0
-55.0	-59.0	-70.1	-11.1
-56.0	-59.0	-70.0	-11.0
-57.0	-59.0	-68.5	-9.5
-58.0	-59.0	-68.0	-9.0

#### 1710 - 1755 MHz

RSSI (dBm)	Noise Limit (dBm)	Measured Noise (dBm)	Margin (dB)
-44.0	-59.0	-77.0	-18.0
-43.0	-60.0	-77.0	-17.0
-51.0	-59.0	-70.2	-11.2
-52.0	-59.0	-69.3	-10.3
-53.0	-59.0	-69.2	-10.2
-54.0	-59.0	-68.7	-9.7

#### 1850 - 1915 MHz

RSSI (dBm)	Noise Limit (dBm)	Measured Noise (dBm)	Margin (dB)
-44.0	-59.0	-78.0	-19.0
-43.0	-60.0	-78.0	-18.0
-54.0	-59.0	-70.1	-11.1
-55.0	-59.0	-69.5	-10.5
-56.0	-59.0	-69.2	-10.2
-57.0	-59.0	-69.0	-10.0



### Variable Downlink Noise Limit Test Results

#### 728 - 746 MHz

RSSI (dBm)	Noise Limit (dBm)	Measured Noise (dBm)	Margin (dB)
-44.0	-59.0	-83.0	-24.0
-43.0	-60.0	-83.0	-23.0
-65.0	-59.0	-66.5	-7.5
-63.0	-59.0	-66.2	-7.2
-66.0	-59.0	-66.2	-7.2
-64.0	-59.0	-66.0	-7.0

#### 746 - 757 MHz

RSSI (dBm)	Noise Limit (dBm)	Measured Noise (dBm)	Margin (dB)
-44.0	-59.0	-83.0	-24.0
-43.0	-60.0	-83.0	-23.0
-63.0	-59.0	-65.2	-6.2
-64.0	-59.0	-65.0	-6.0
-65.0	-59.0	-64.6	-5.6
-66.0	-59.0	-64.2	-5.2

#### 869 - 894 MHz

RSSI (dBm)	Noise Limit (dBm)	Measured Noise (dBm)	Margin (dB)
-44.0	-59.0	-83.0	-24.0
-43.0	-60.0	-83.0	-23.0
-61.0	-59.0	-63.5	-4.5
-62.0	-59.0	-63.2	-4.2
-63.0	-59.0	-63.1	-4.1
-64.0	-59.0	-63.0	-4.0

#### 1930 - 1995 MHz

RSSI (dBm)	Noise Limit (dBm)	Measured Noise (dBm)	Margin (dB)
-44.0	-59.0	-83.0	-24.0
-43.0	-60.0	-83.0	-23.0
-58.0	-59.0	-69.2	-10.2
-59.0	-59.0	-68.9	-9.9
-60.0	-59.0	-68.6	-9.6
-61.0	-59.0	-68.2	-9.2


#### 2110 - 2155 MHz

RSSI (dBm)	Noise Limit (dBm)	Measured Noise (dBm)	Margin (dB)
-44.0	-59.0	-83.0	-24.0
-43.0	-60.0	-83.0	-23.0
-56.0	-59.0	-71.6	-12.6
-57.0	-59.0	-71.0	-12.0
-58.0	-59.0	-70.2	-11.2
-59.0	-59.0	-70.0	-11.0




### Maximum Uplink Noise Test Plots

#### 698 - 716 MHz Band

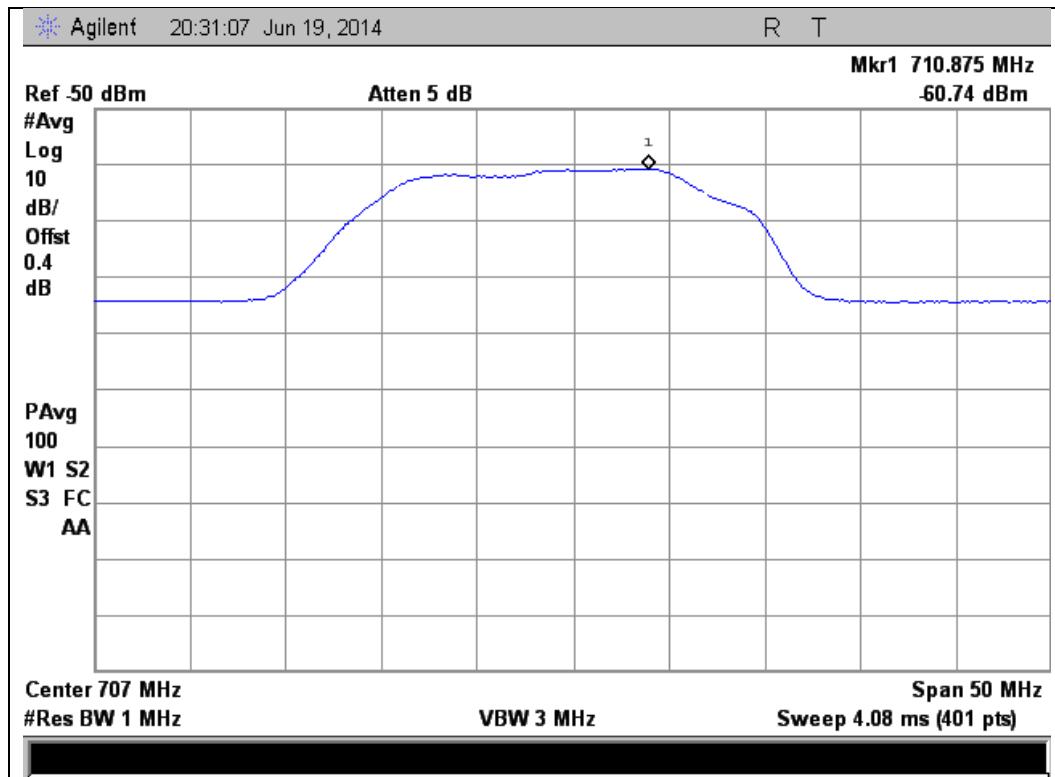


#### 776 - 787 MHz Band

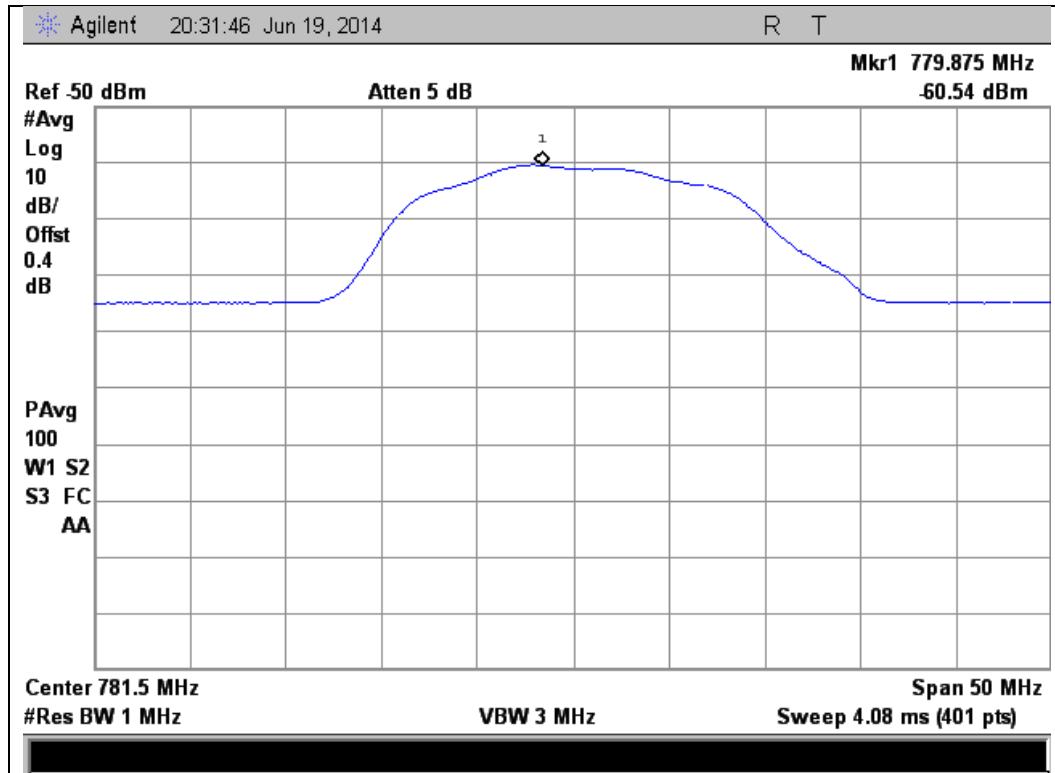




### 824 - 849 MHz Band

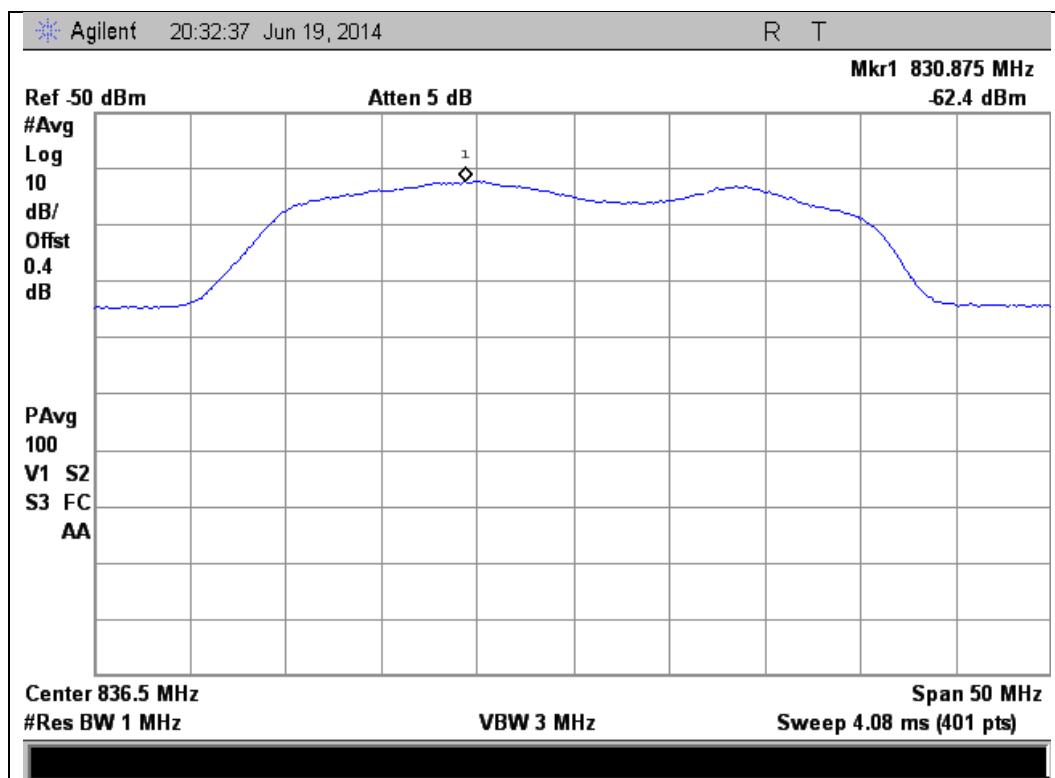


### 1710 - 1755 MHz Band

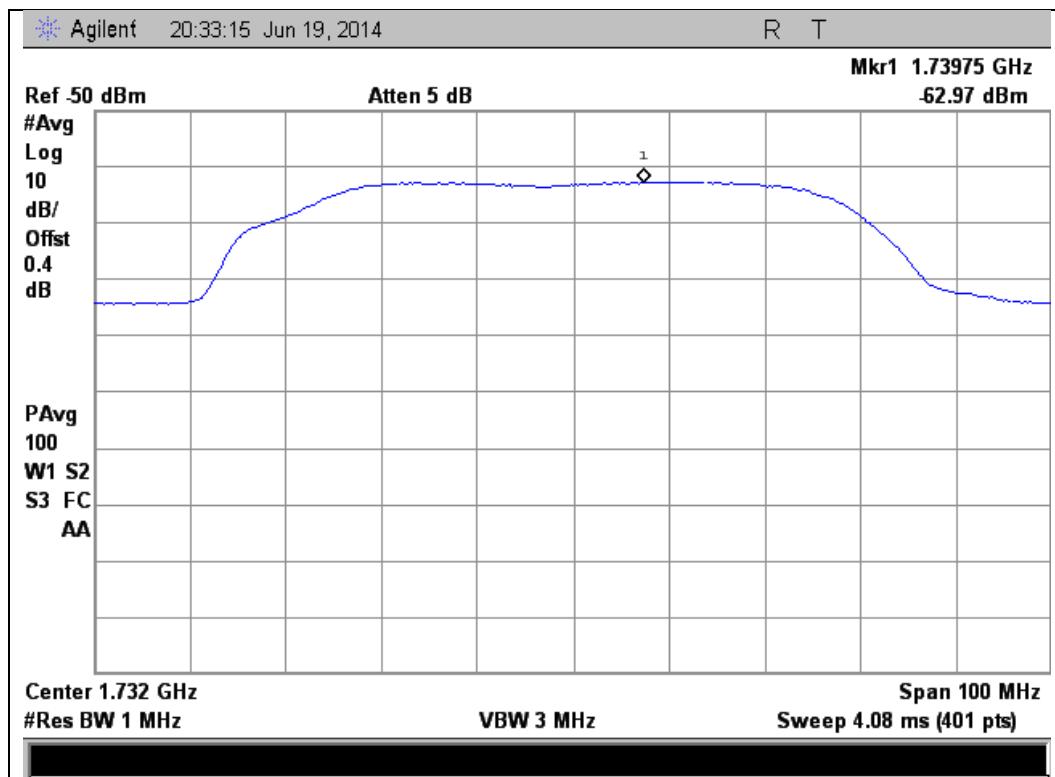




### 1850 - 1915 MHz Band

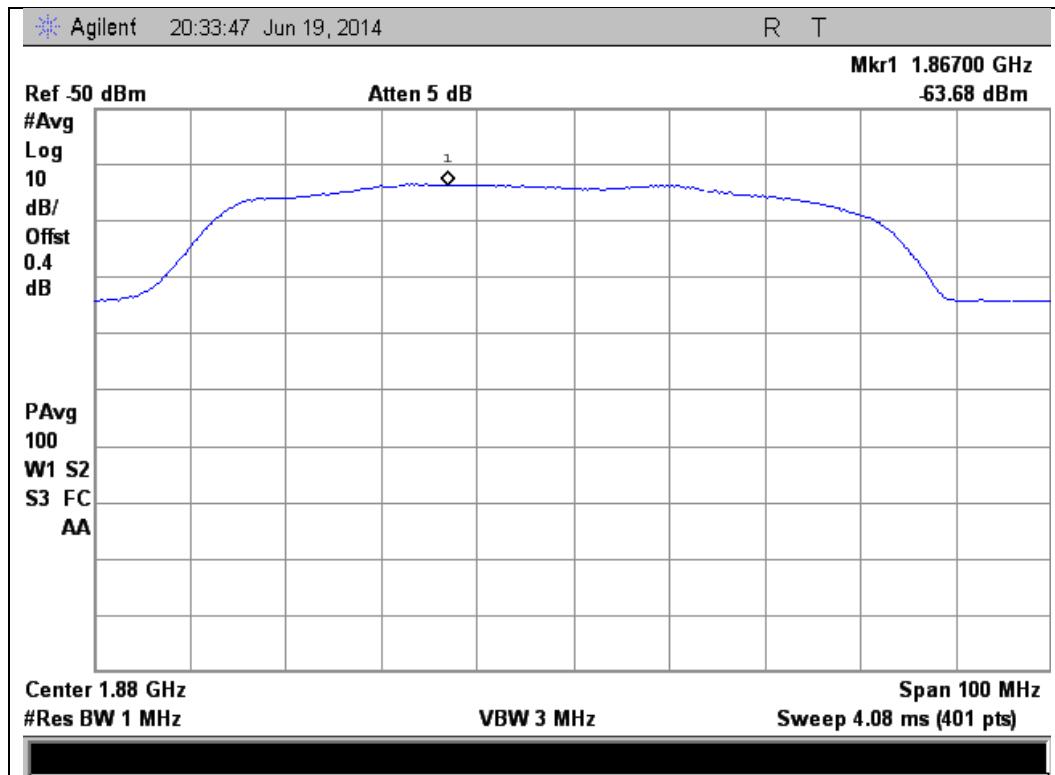


### Maximum Downlink Noise Test Plots

#### 728 - 746 MHz Band

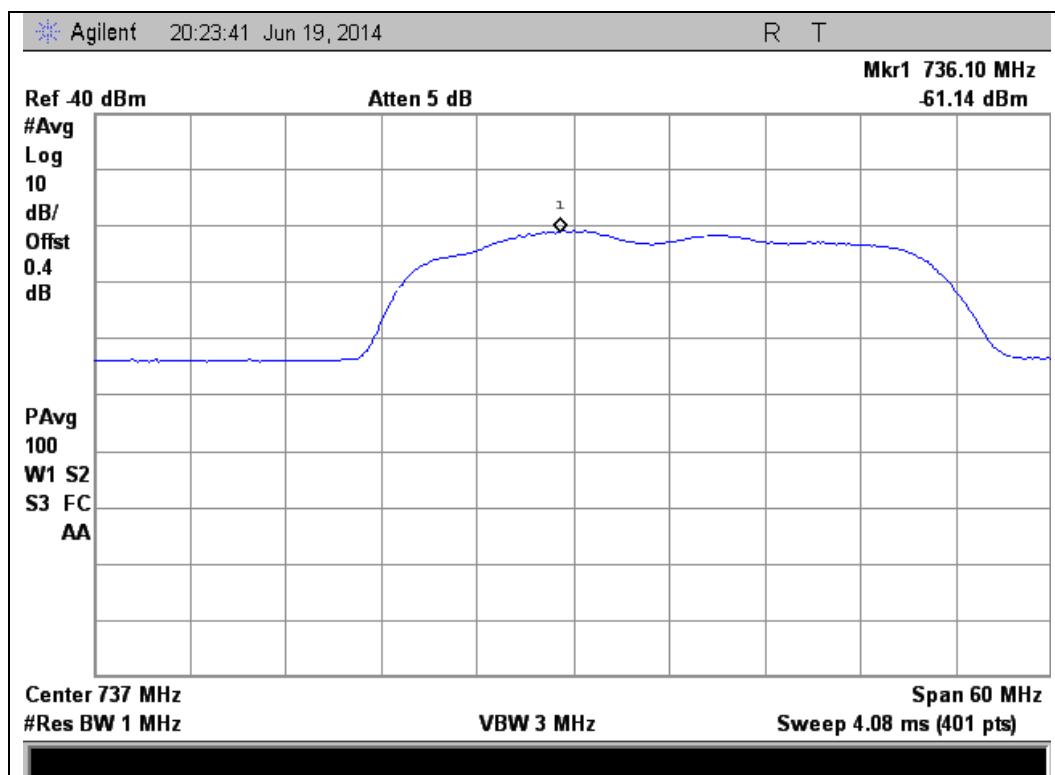




### 746 - 757 MHz Band

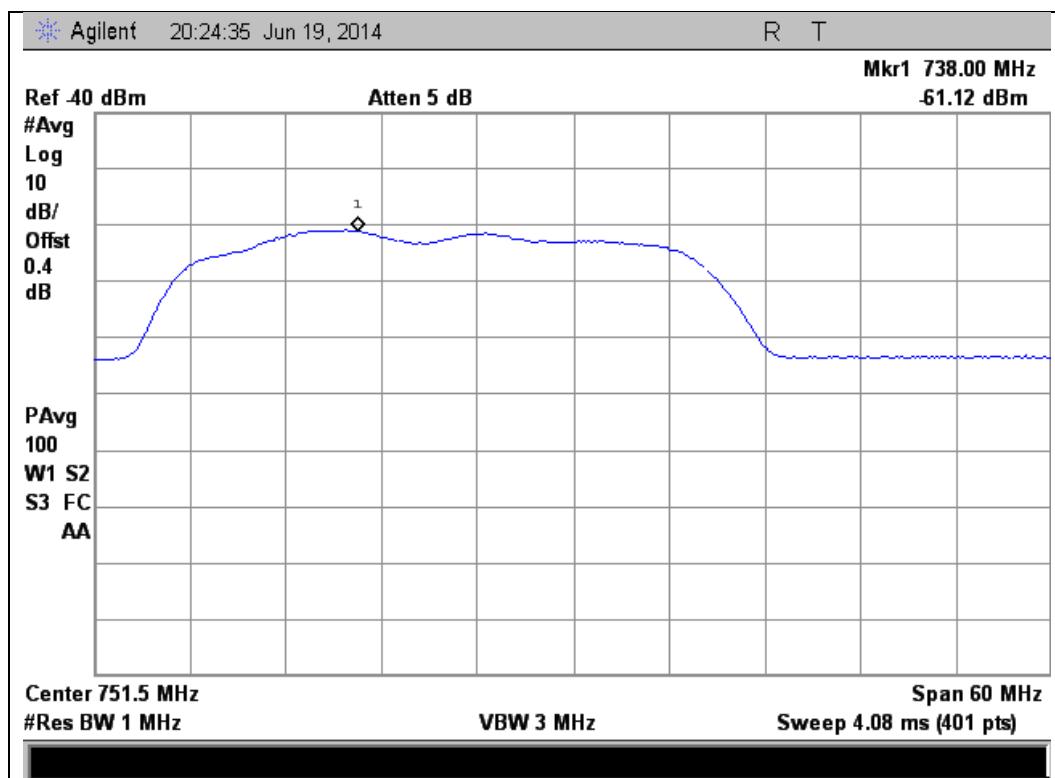


### 869 - 894 MHz Band

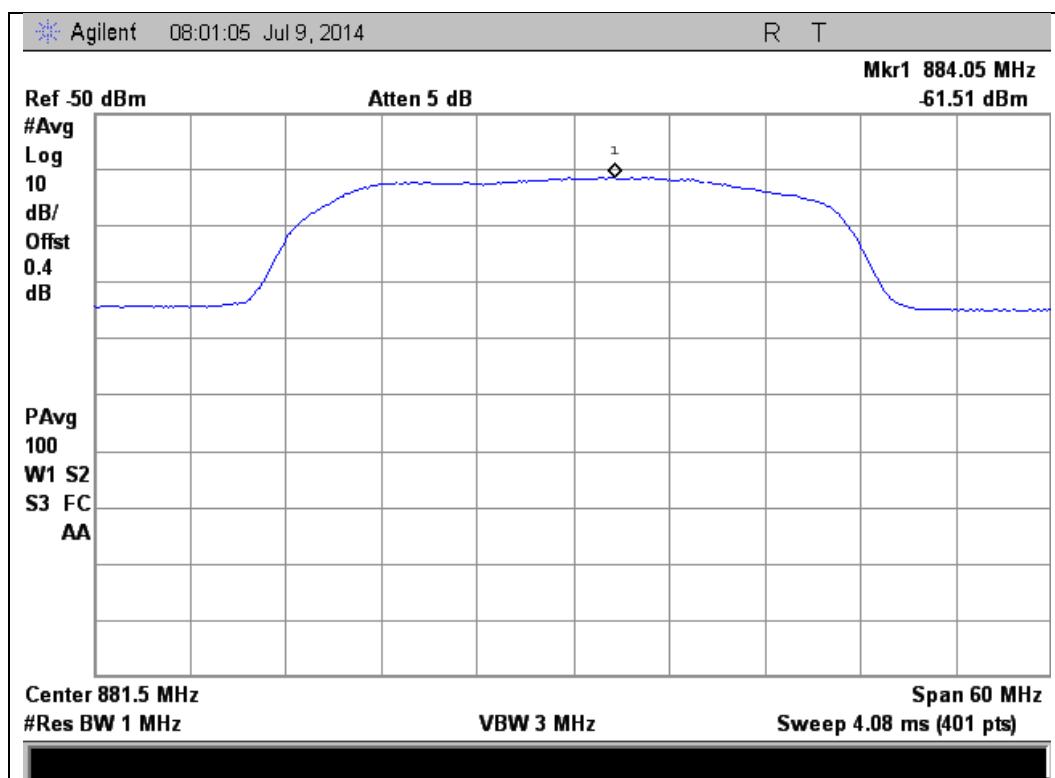




### 1930 - 1995 MHz Band

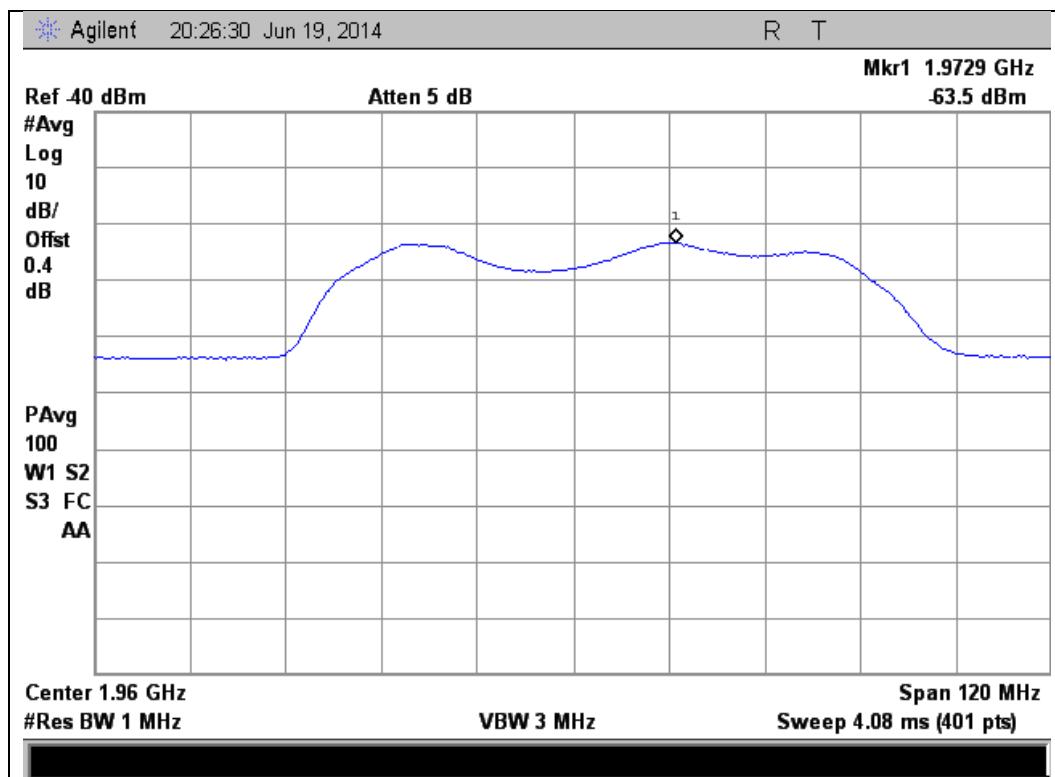


### 2110 - 2155 MHz Band

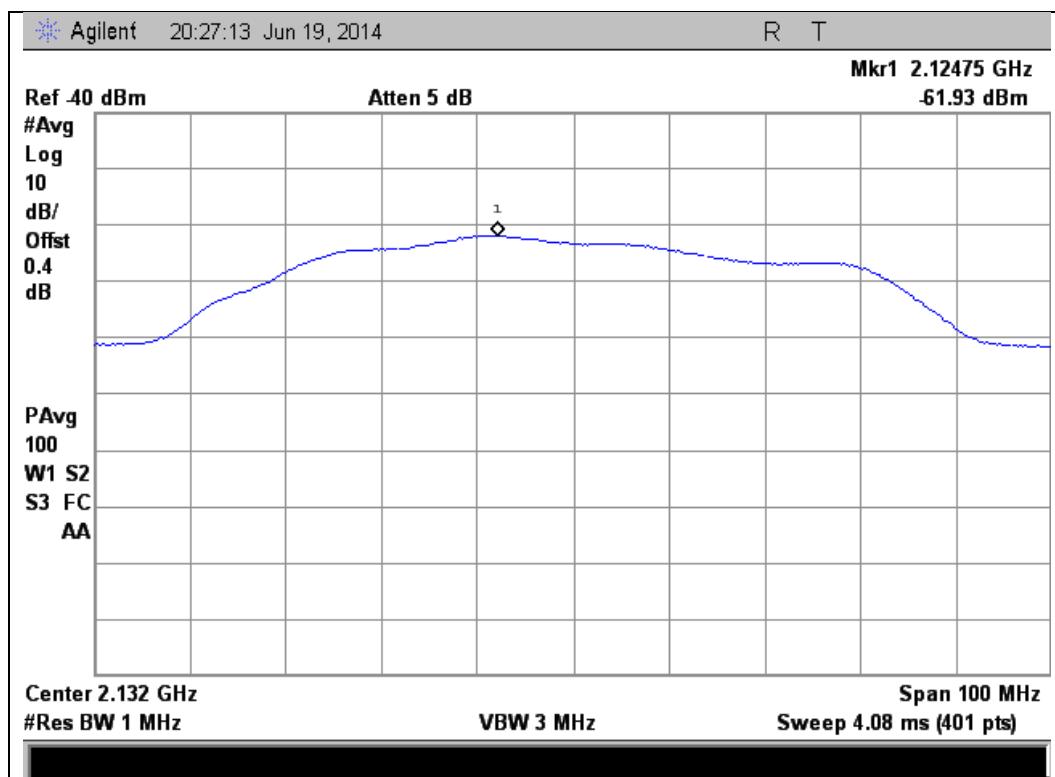




### Uplink Noise Timing Test Plots

#### 698 - 716 MHz Band

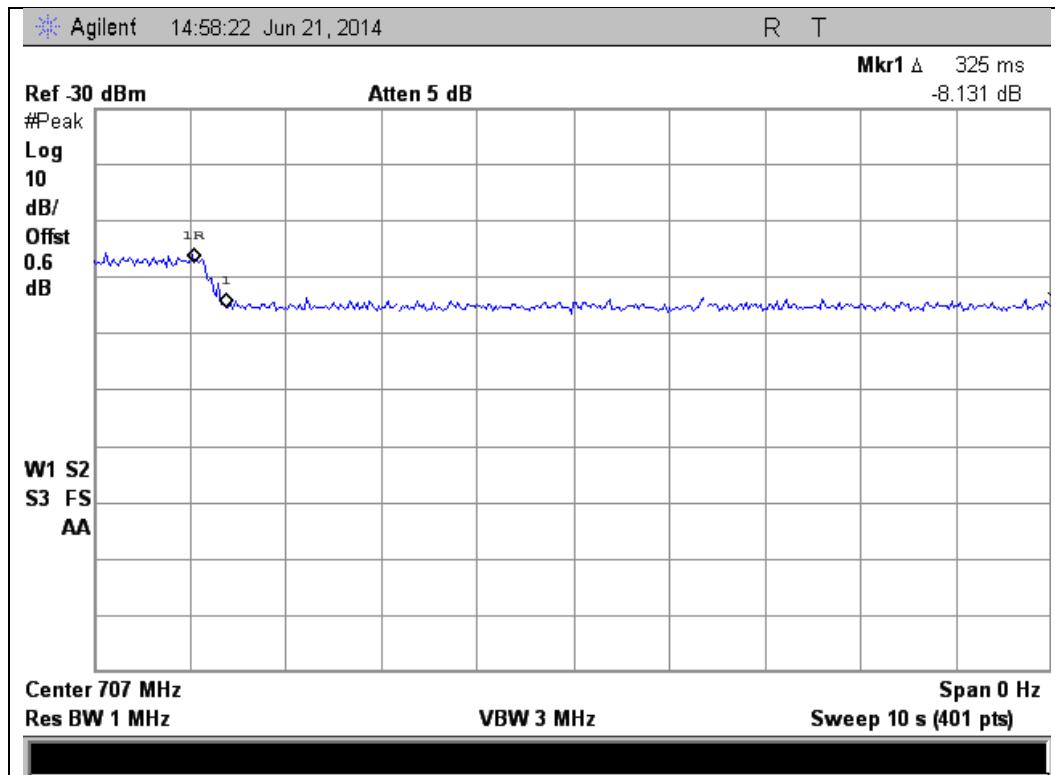


#### 776 - 787 MHz Band

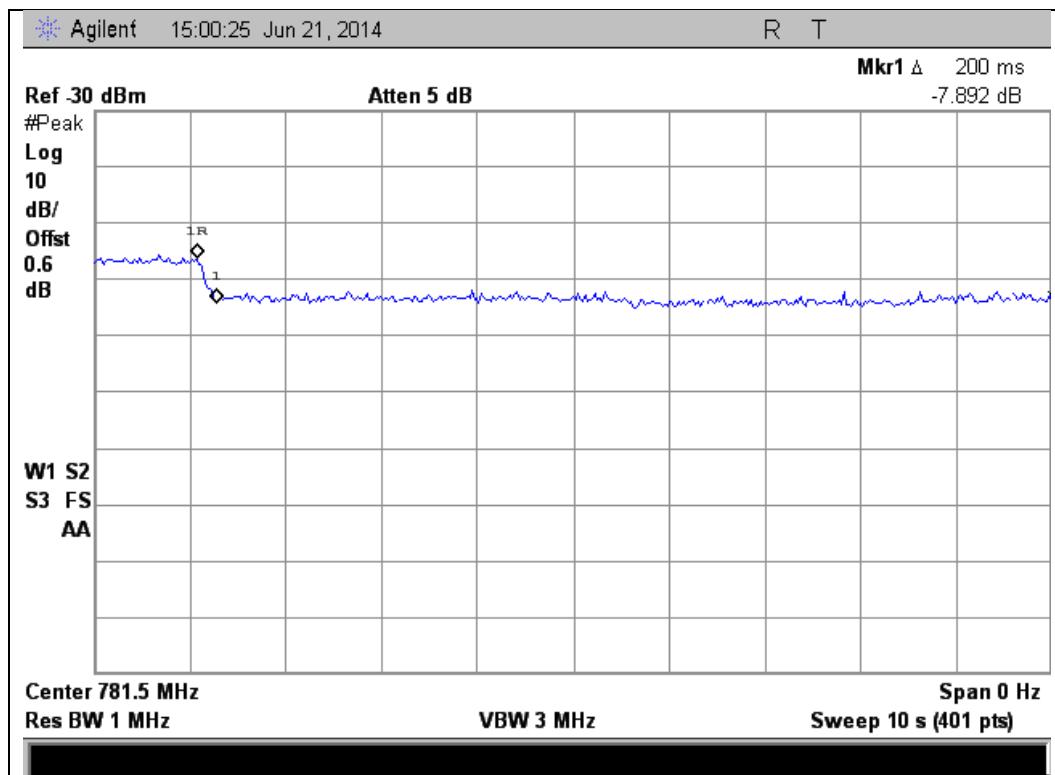




### 824 - 849 MHz Band

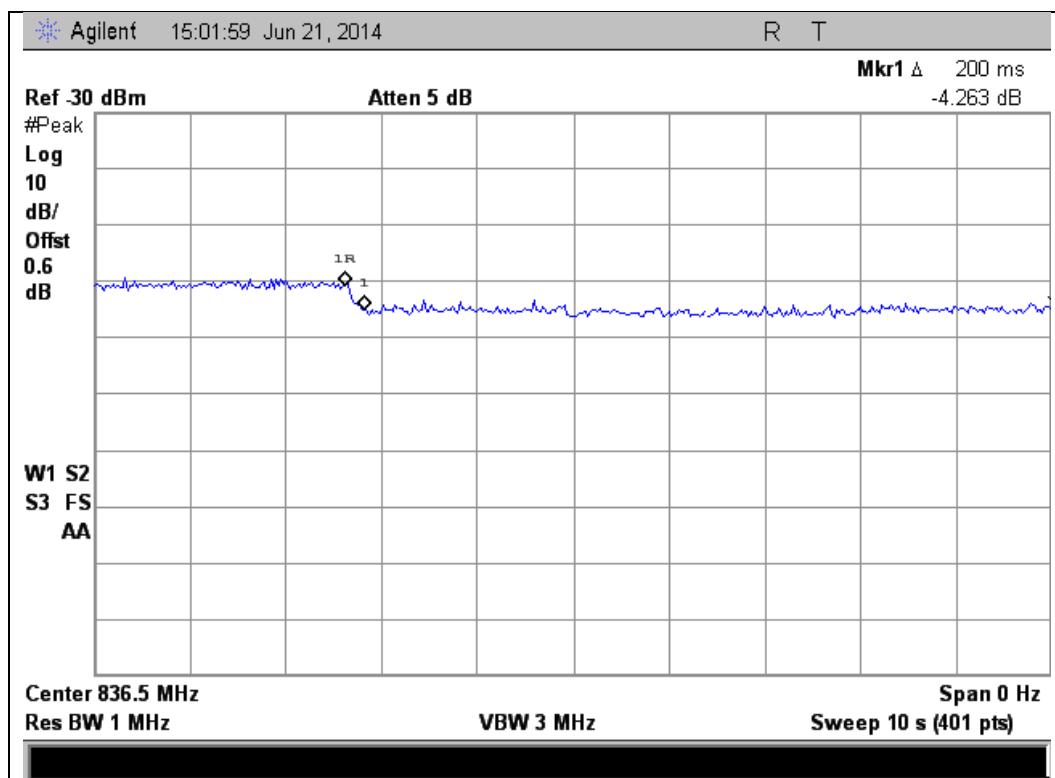


### 1710 - 1755 MHz Band

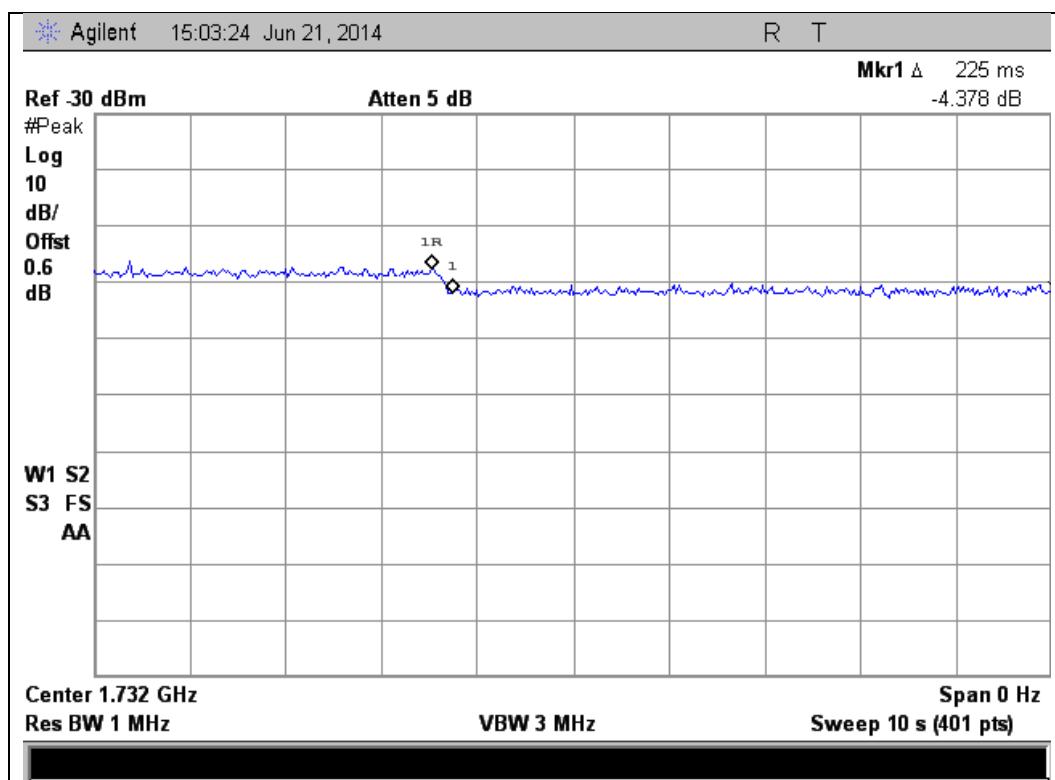



1850 - 1915 MHz Band

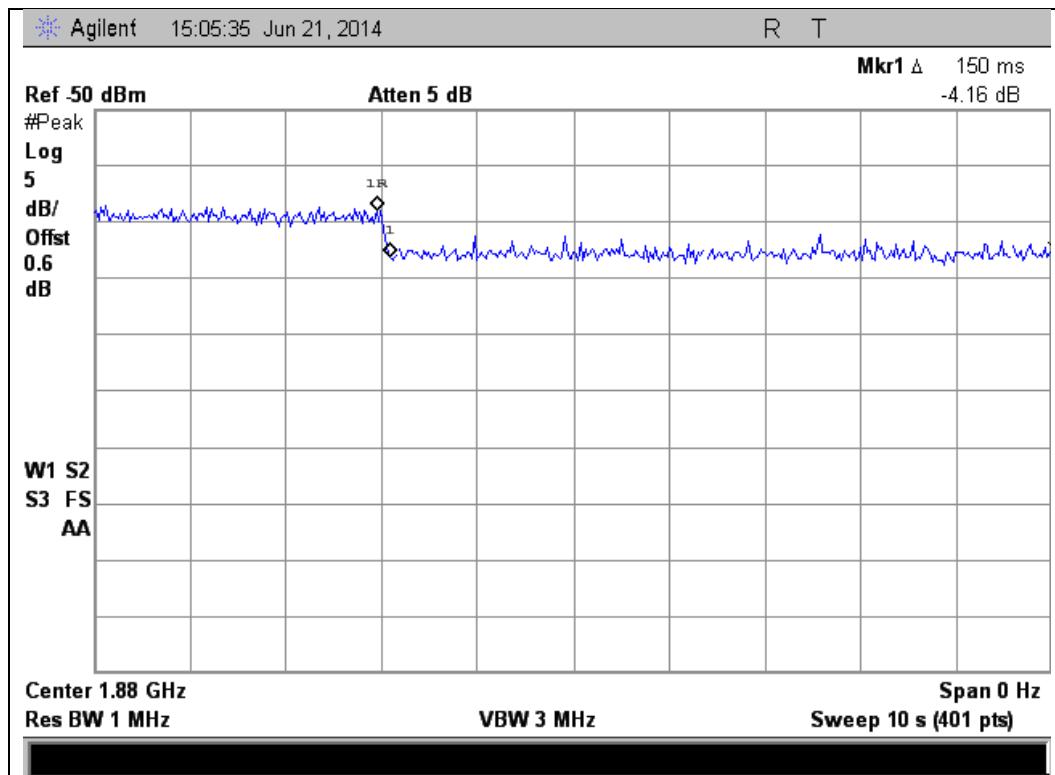



## Uplink Inactivity

**Name of Test:** Uplink Inactivity

**Test Equipment Utilized:** i00379


**Engineer:** Mike Graffeo

**Test Date:** 6/19/14

### Test Procedure

The EUT was connected directly to a spectrum analyzer set to operate in the center of the EUT operational uplink and downlink bands. The span was set to 0 Hz with a sweep time of 330 seconds and MAX HOLD operation. The EUT was powered on and the time for the uplink to return to an inactive state was measured using the DELTA MARKER method to ensure that it was less than 300 seconds. The noise level after the return to an inactive state was less than -70 dBm/MHz.

### Test Setup




### Uplink Test Results

Frequency Band (MHz)	Measured Time (Seconds)	Limit (Seconds)	Result
698 - 716	252.5	300	Pass
776 - 787	254.1	300	Pass
824 - 849	250.0	300	Pass
1710 - 1755	250.0	300	Pass
1850 – 1915	251.6	300	Pass




### Uplink Inactivity Test Results

698 - 716 MHz

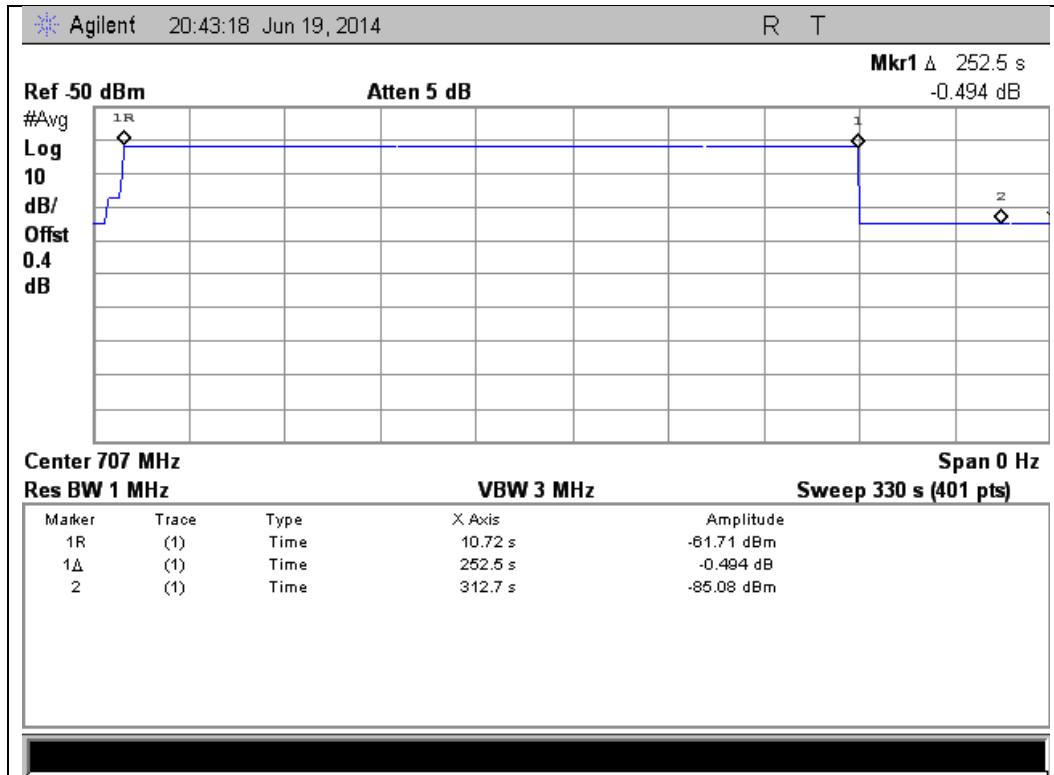


776 - 787 MHz

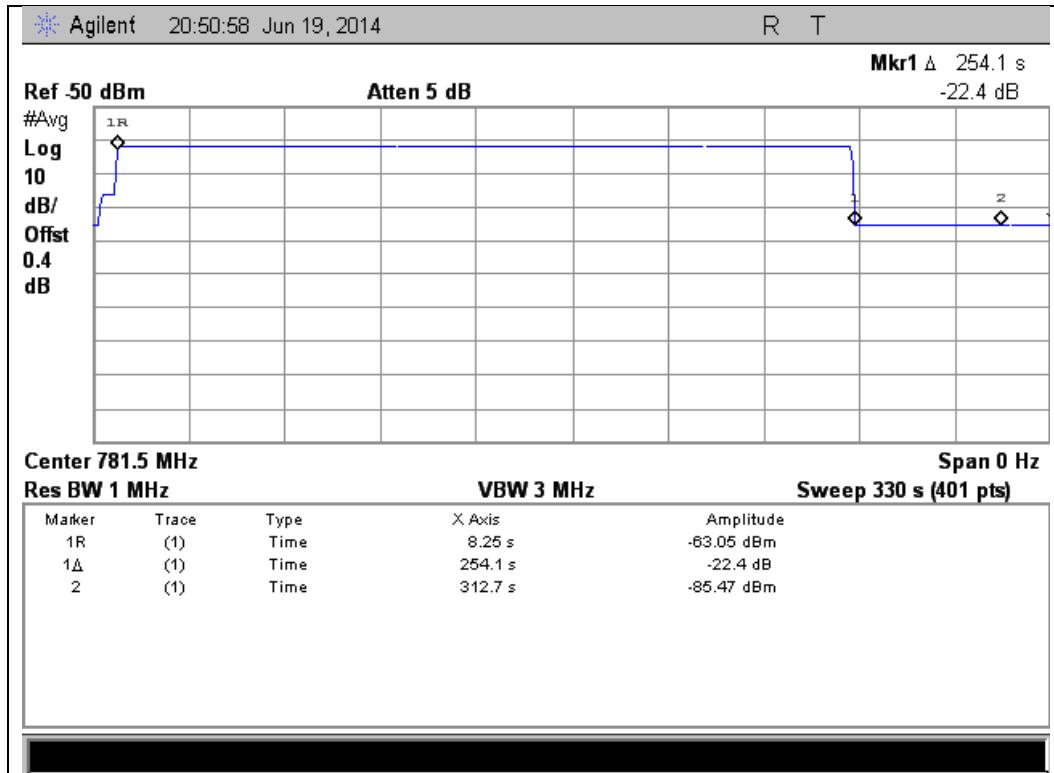




824 - 849 MHz

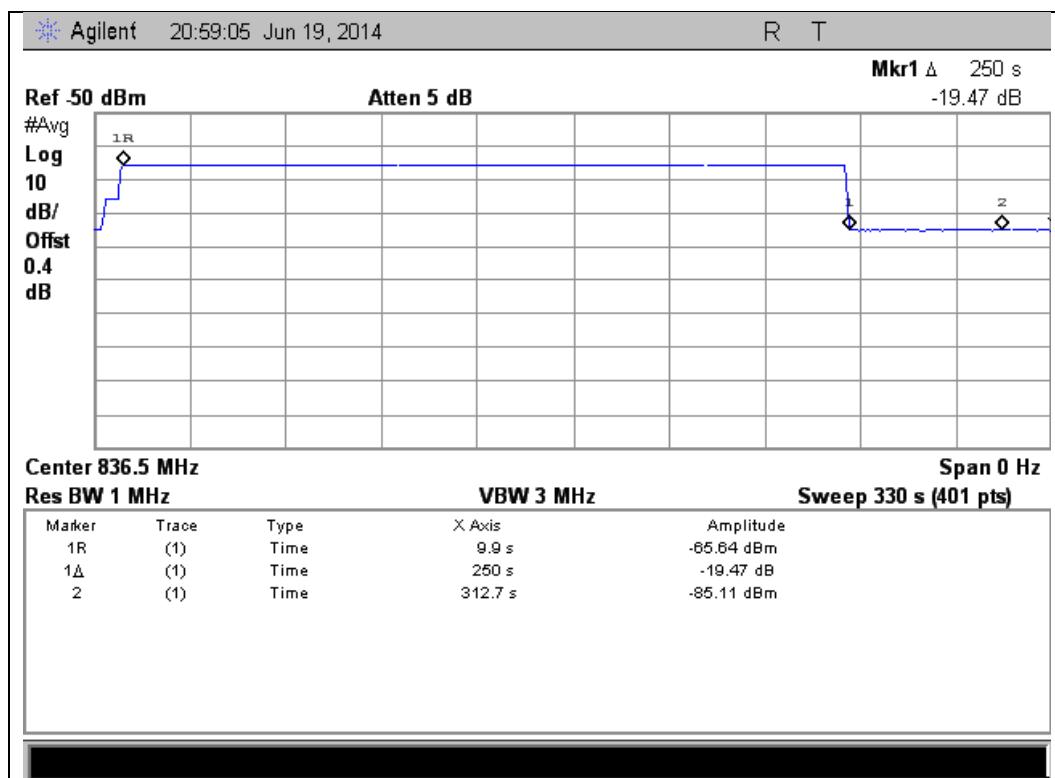


1710 - 1755 MHz

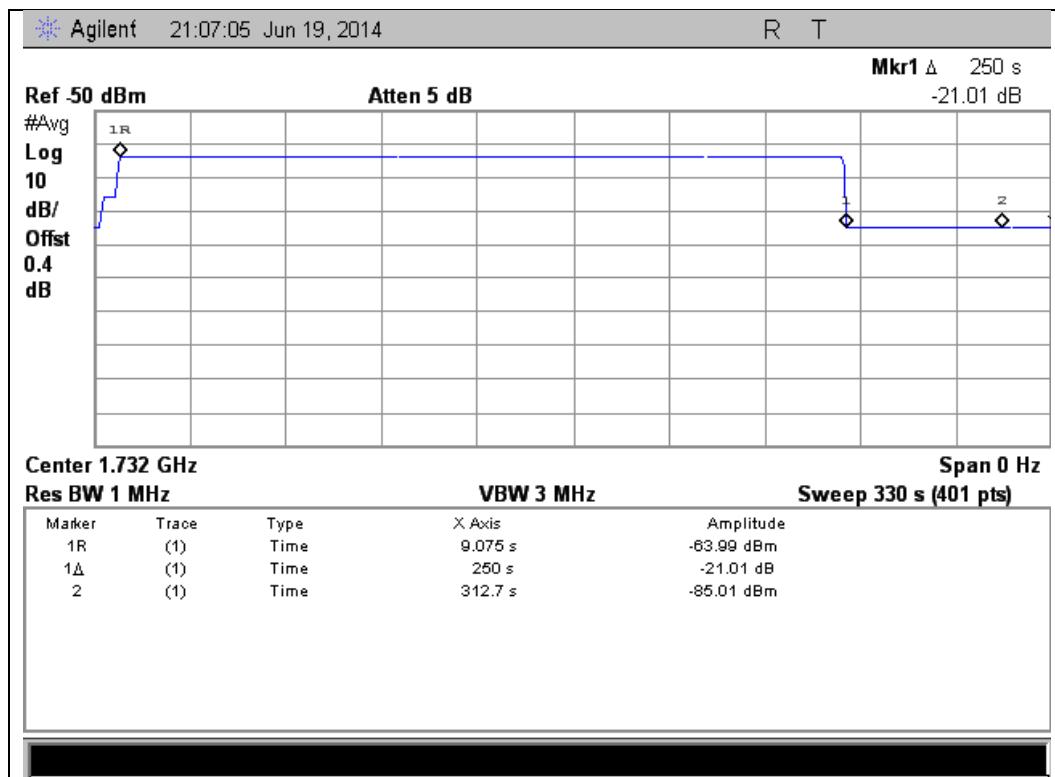



1850 – 1915 MHz

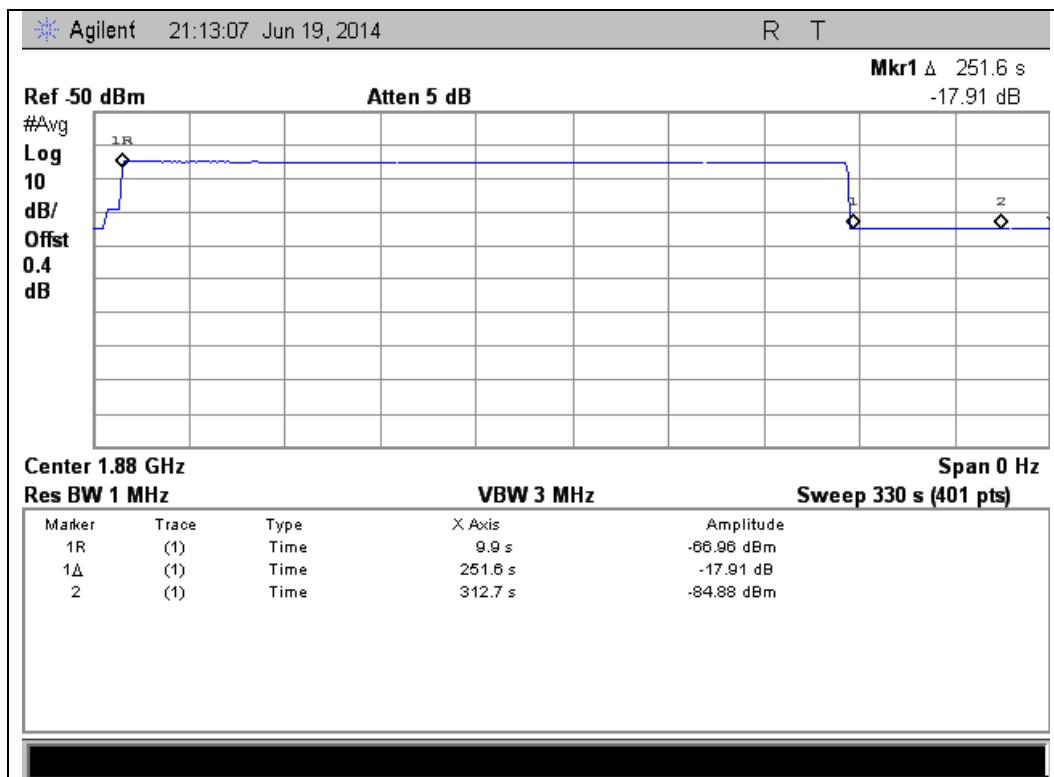



## Variable Gain

**Name of Test:**

Variable Gain

**Test Equipment Utilized:**

i00379, i00405, i00412

**Engineer:** Mike Graffeo

**Test Date:** 6/21/14


## Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor in order to ensure accurate readings were obtained. The uplink gain in the presence of a downlink signal was measured for each operational uplink band using the detailed procedures from KDB 935210 D03 Wideband Consumer Signal Booster Measurement Guidance DR04-41516.

The following formula is used for calculating the limits:

Variable Gain = -34 dB - RSSI +MSCL

## Test Setup

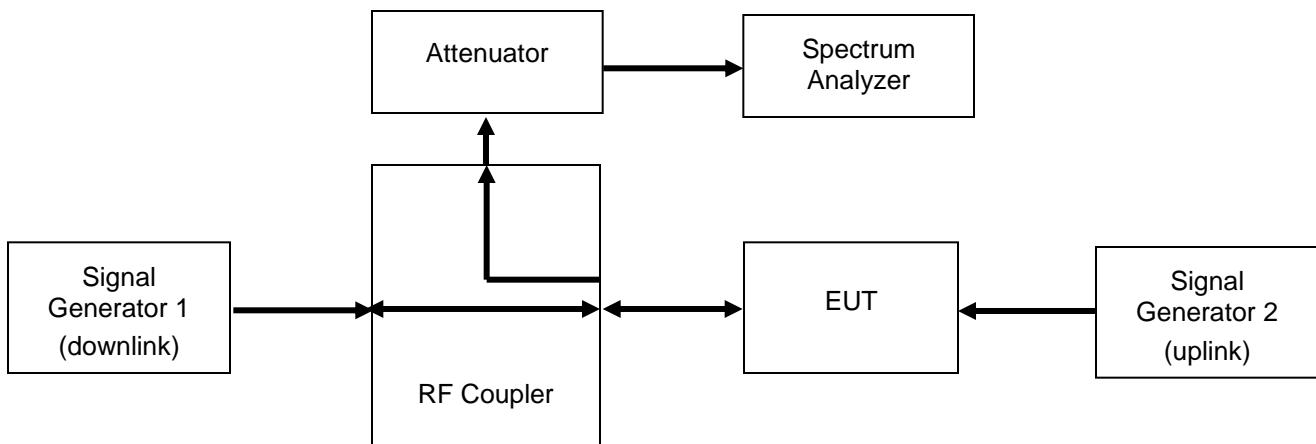



### Uplink Test Results

#### 698 - 716 MHz

RSSI (dBm)	MSCL (dB)	Gain Limit (dB)	P(in) (dBm)	P(out) (dBm)	Gain (dB)	Margin (dB)
-53.0	27.4	46.4	-32.5	7.0	39.5	-6.9
-52.0	27.4	45.4	-32.5	6.2	38.7	-6.7
-73.0	27.4	50.0	-32.5	16.9	49.4	-0.6
-72.0	27.4	50.0	-32.5	16.9	49.4	-0.6
-71.0	27.4	50.0	-32.5	16.9	49.4	-0.6
-70.0	27.4	50.0	-32.5	16.9	49.4	-0.6

#### 776 - 787 MHz

RSSI (dBm)	MSCL (dB)	Gain Limit (dB)	P(in) (dBm)	P(out) (dBm)	Gain (dB)	Margin (dB)
-54.0	28.3	48.3	-30.9	7.5	38.4	-9.9
-53.0	28.3	47.3	-30.9	6.5	37.4	-9.9
-68.0	28.3	50.0	-30.9	16.2	47.1	-2.9
-67.0	28.3	50.0	-30.9	16.2	47.1	-2.9
-66.0	28.3	50.0	-30.9	16.2	47.1	-2.9
-65.0	28.3	50.0	-30.9	16.2	47.1	-2.9

#### 824 - 849 MHz

RSSI (dBm)	MSCL (dB)	Gain Limit (dB)	P(in) (dBm)	P(out) (dBm)	Gain (dB)	Margin (dB)
-51.0	29.0	46.0	-31.0	6.5	37.5	-8.5
-50.0	29.0	45.0	-31.0	5.5	36.5	-8.5
-66.0	29.0	50.0	-31.0	14.8	45.8	-4.2
-65.0	29.0	50.0	-31.0	14.8	45.8	-4.2
-64.0	29.0	50.0	-31.0	14.8	45.8	-4.2
-63.0	29.0	50.0	-31.0	14.8	45.8	-4.2

#### 1710 - 1755 MHz

RSSI (dBm)	MSCL (dB)	Gain Limit (dB)	P(in) (dBm)	P(out) (dBm)	Gain (dB)	Margin (dB)
-47.0	33.5	46.5	-29.6	8.5	38.1	-8.4
-46.0	33.5	45.5	-29.6	8.0	37.6	-7.9
-62.0	33.5	50.0	-29.6	15.0	44.6	-5.4
-61.0	33.5	50.0	-29.6	15.0	44.6	-5.4
-60.0	33.5	50.0	-29.6	15.0	44.6	-5.4
-59.0	33.5	50.0	-29.6	14.5	44.1	-5.9

#### 1850 - 1915 MHz

RSSI (dBm)	MSCL (dB)	Gain Limit (dB)	P(in) (dBm)	P(out) (dBm)	Gain (dB)	Margin (dB)
-46.0	34.3	46.3	-28.9	10.7	39.6	-6.7
-45.0	34.3	45.3	-28.9	10.5	39.4	-5.9
-61.0	34.3	50.0	-28.9	15.2	44.1	-5.9
-60.0	34.3	50.0	-28.9	15.2	44.1	-5.9
-59.0	34.3	50.0	-28.9	15.2	44.1	-5.9
-58.0	34.3	50.0	-28.9	15.2	44.1	-5.9



### Uplink Gain Timing Test Results

Frequency Band (MHz)	Measured Timing (Seconds)	Limit (Seconds)	Result
698 - 716	0.325	1.0	Pass
776 - 787	0.275	1.0	Pass
824 - 849	0.275	1.0	Pass
1710 - 1755	0.550	1.0	Pass
1850 – 1915	0.550	1.0	Pass



## Occupied Bandwidth


**Name of Test:** Occupied Bandwidth  
**Test Equipment Utilized:** i00379, i00405

**Engineer:** Mike Graffeo  
**Test Date:** 6/19/14

## Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor as required to ensure that accurate readings were obtained. A signal generator was utilized to produce the following signals: GSM, CDMA, and WCDMA. The signal generator was tuned to the center channel of each of the EUT operational uplink and downlink bands with the RF level set at a point just prior to the AGC being in control of the power. For each modulation type, the input and output signal was measured and plotted to ensure that the signals were similar.

## Test Setup







### GSM Uplink Test Plots

698 - 716 MHz Band

#### Input

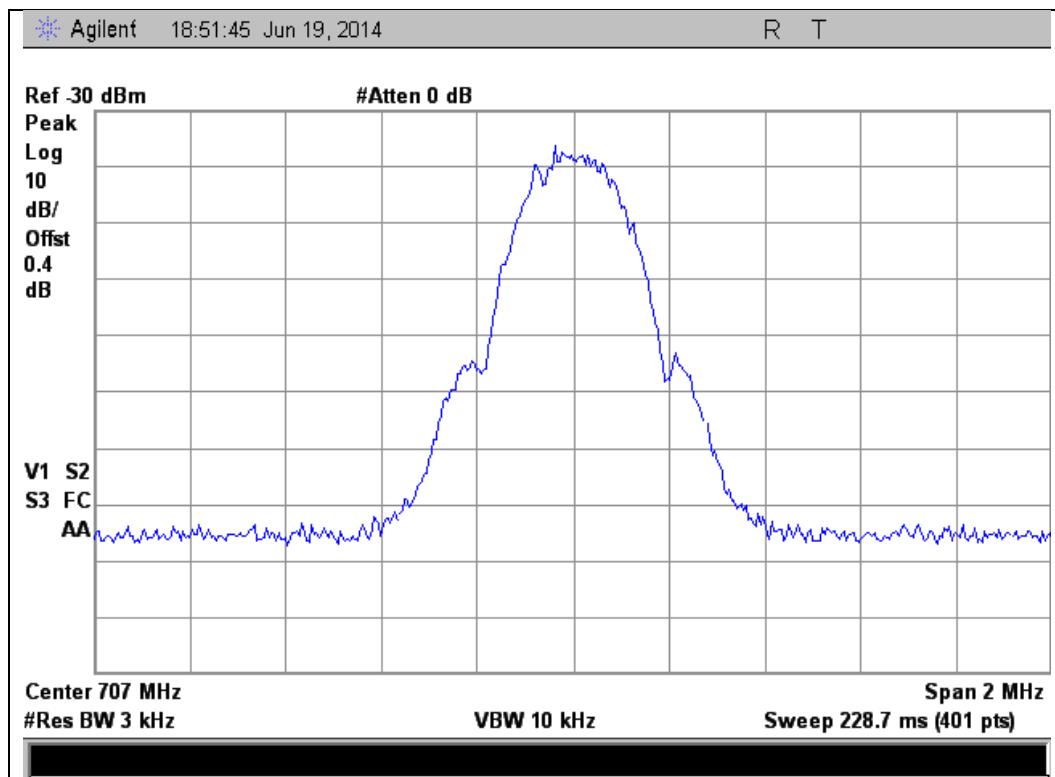


#### Output

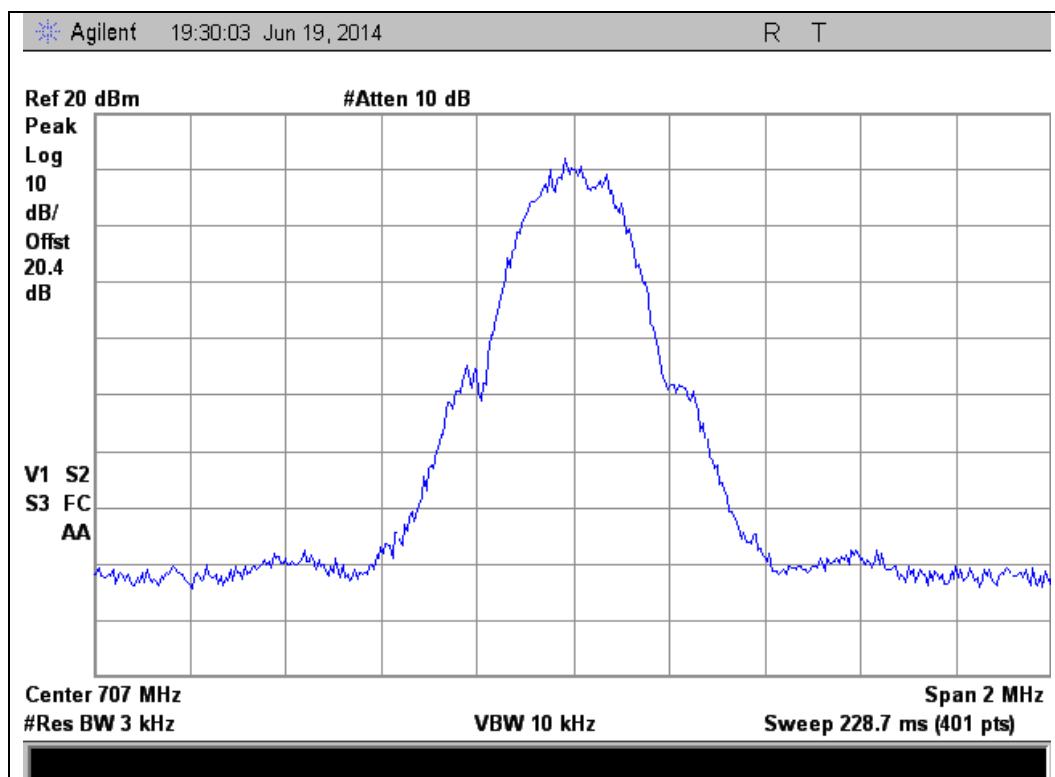




776 - 787 MHz Band

Input

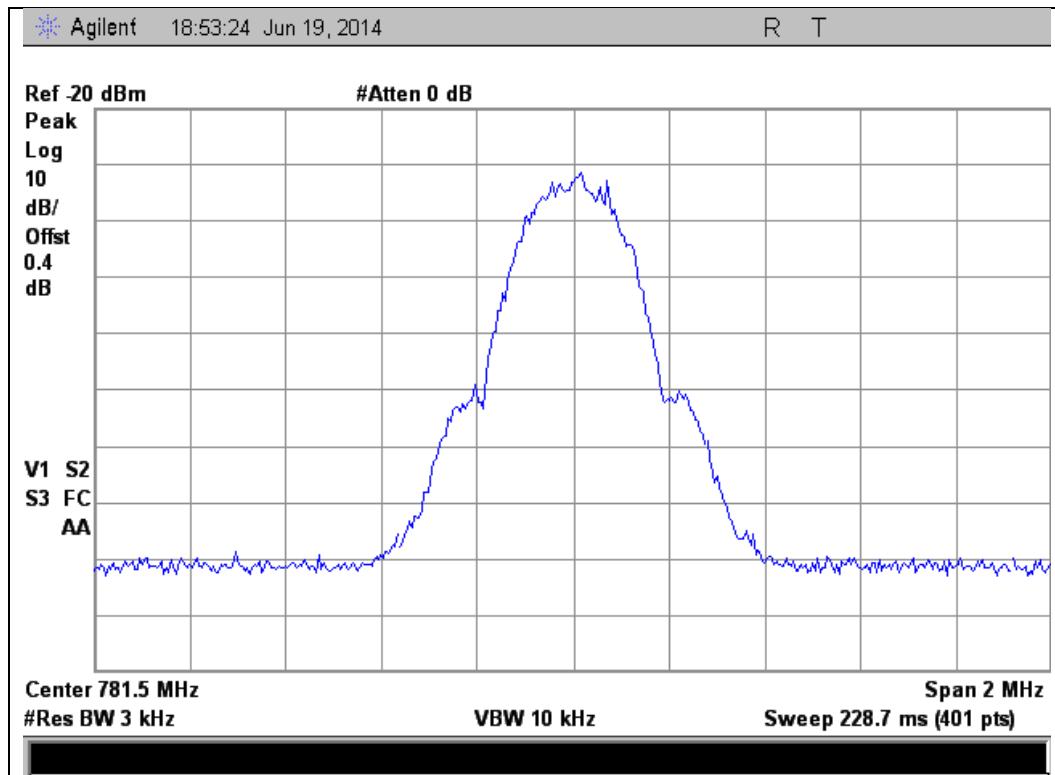


Output

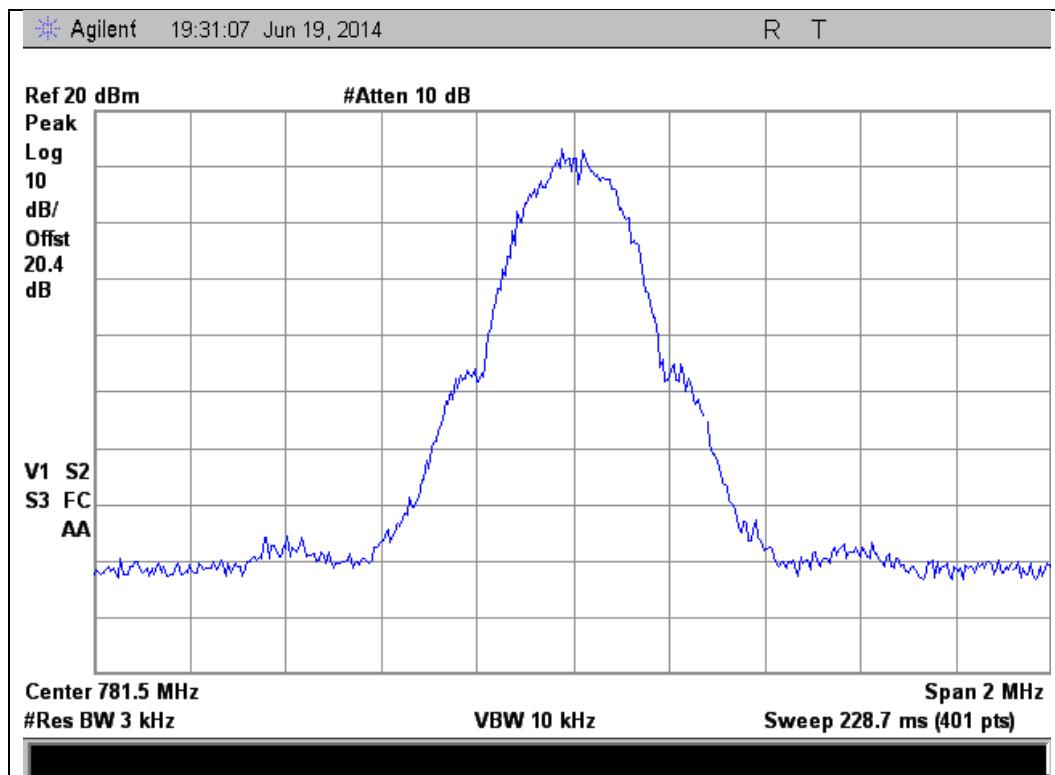




824 - 849 MHz Band

Input

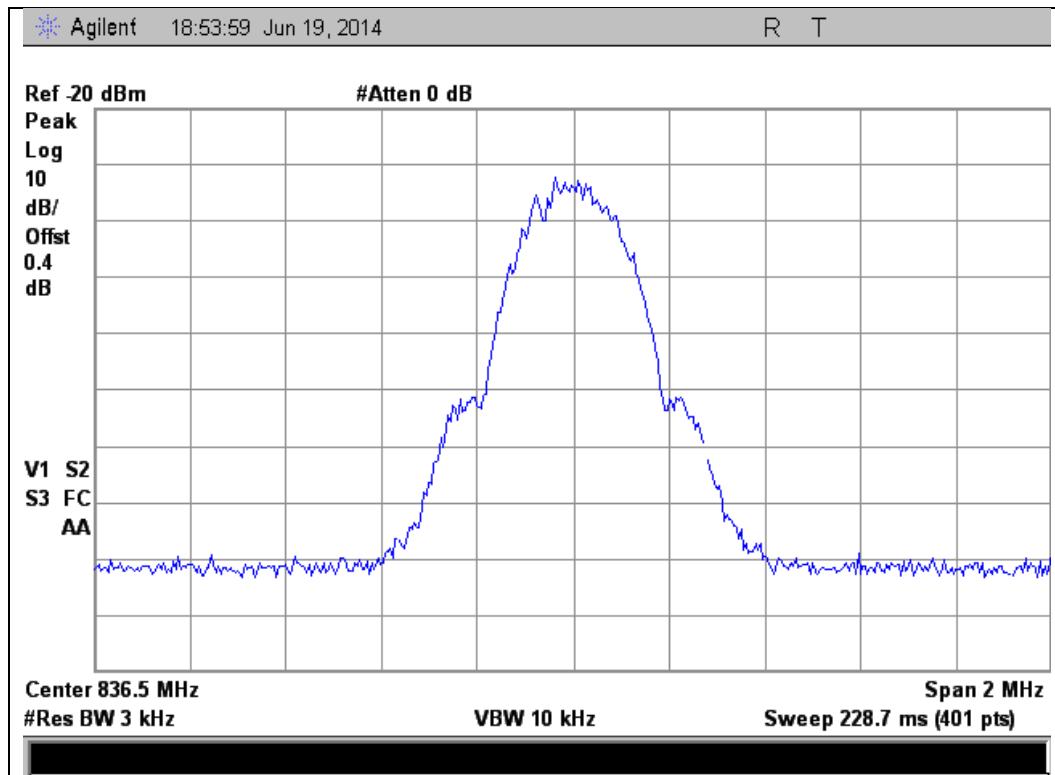


Output

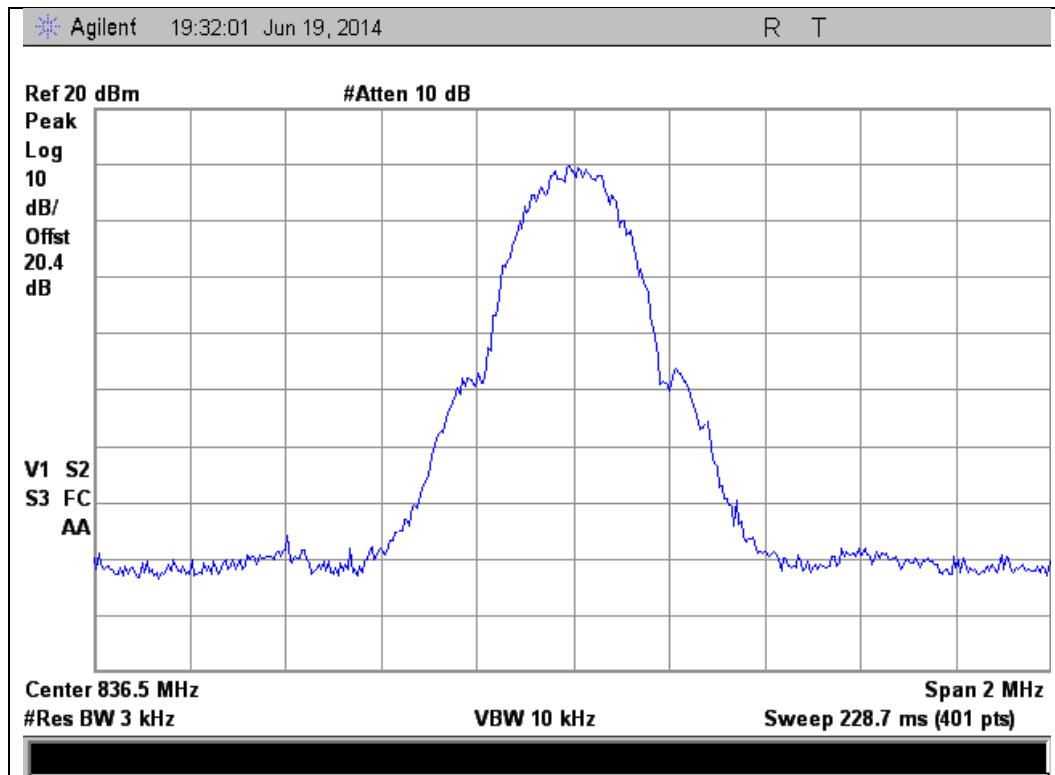




1710 - 1755 MHz Band

Input

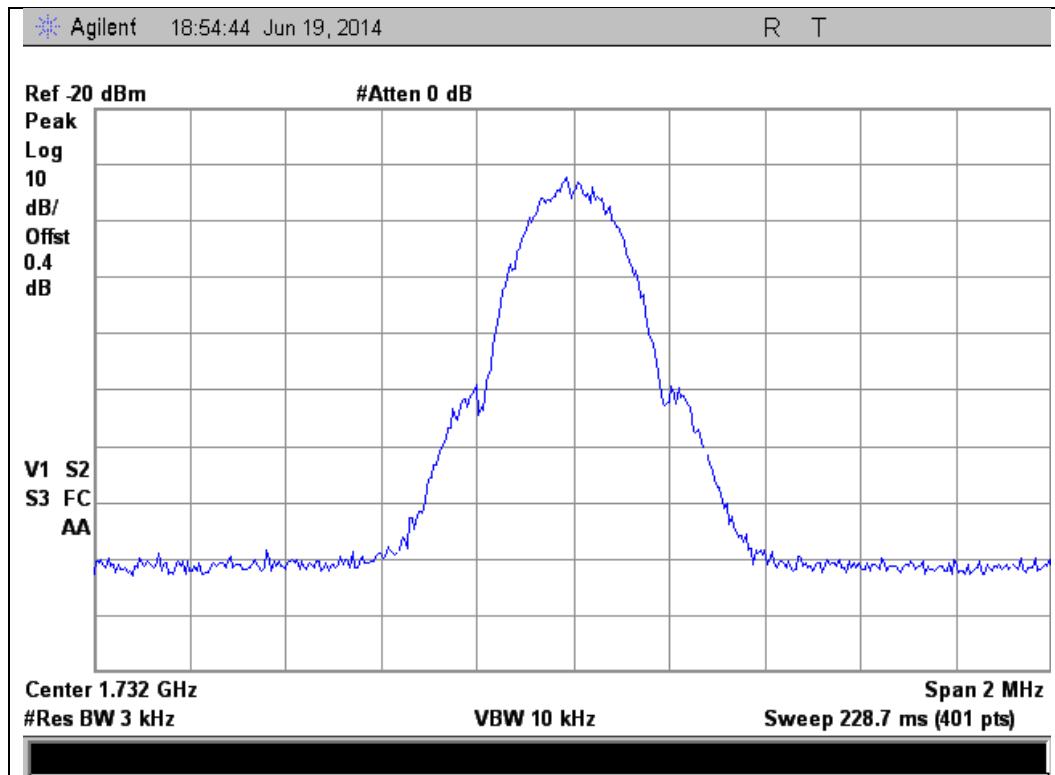


Output

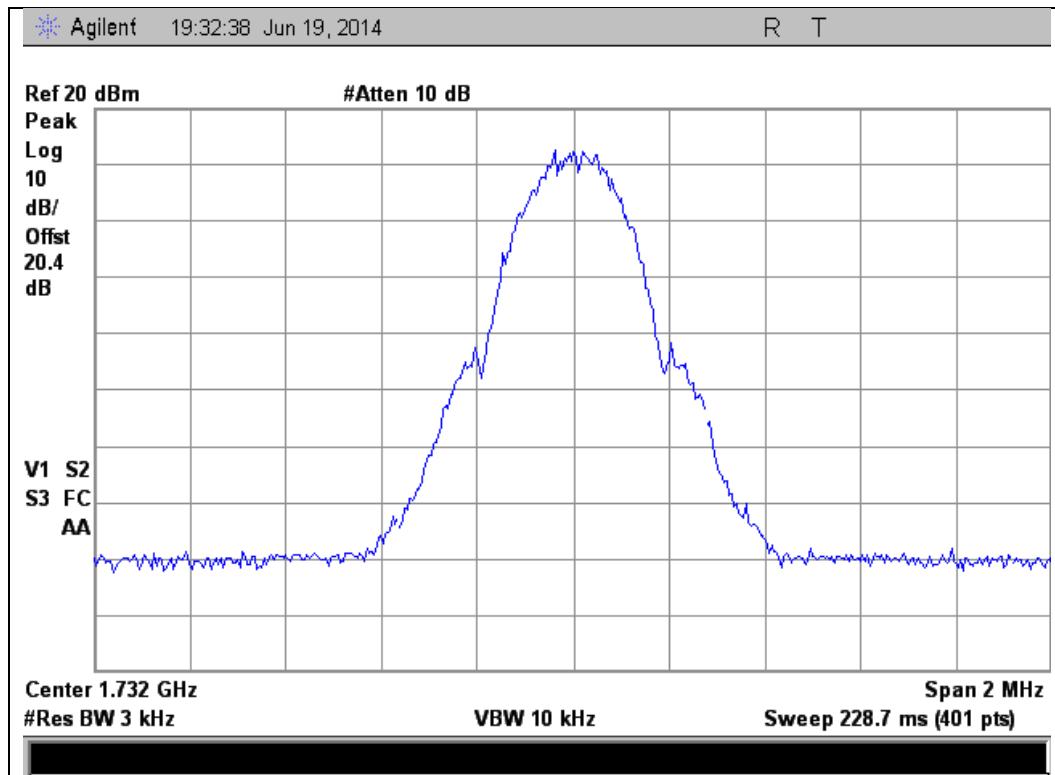




1850 - 1915 MHz Band

Input

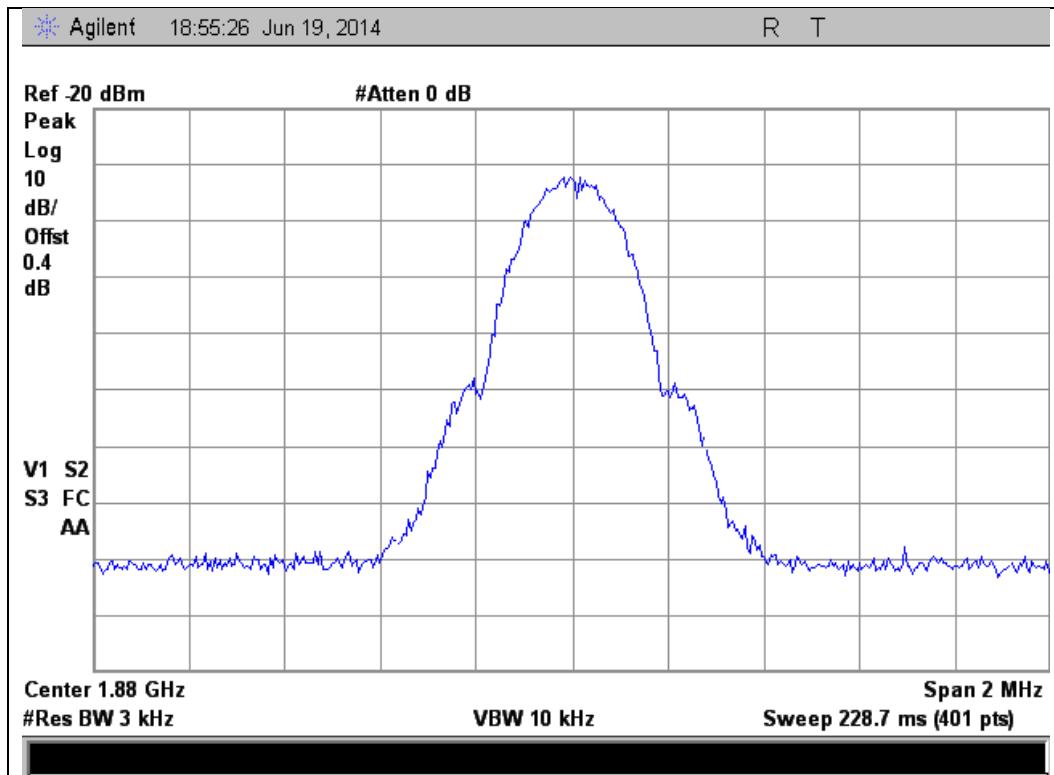

Output

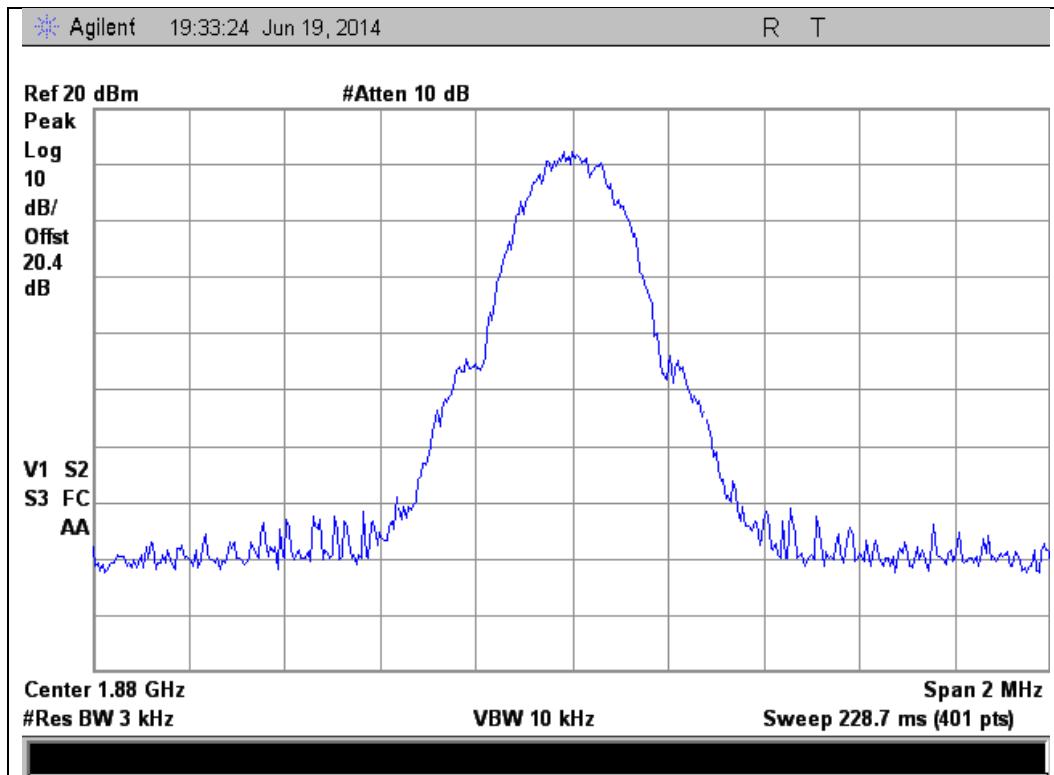





### GSM Downlink Test Plots

728 - 746 MHz Band

Input

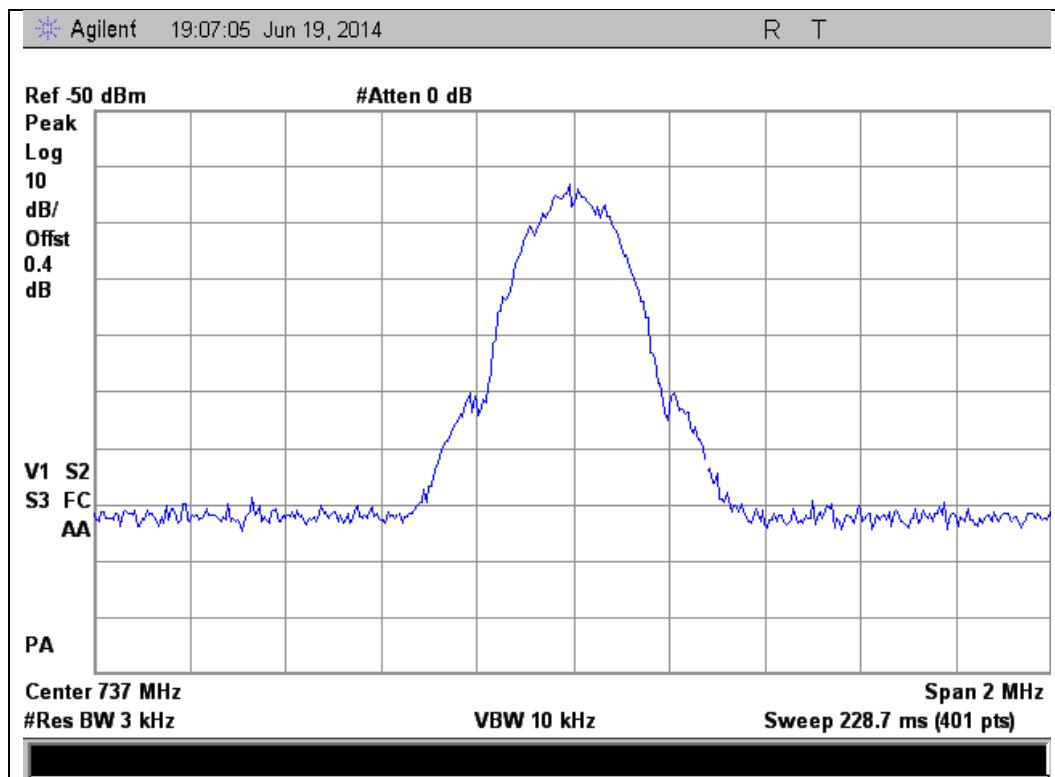


Output

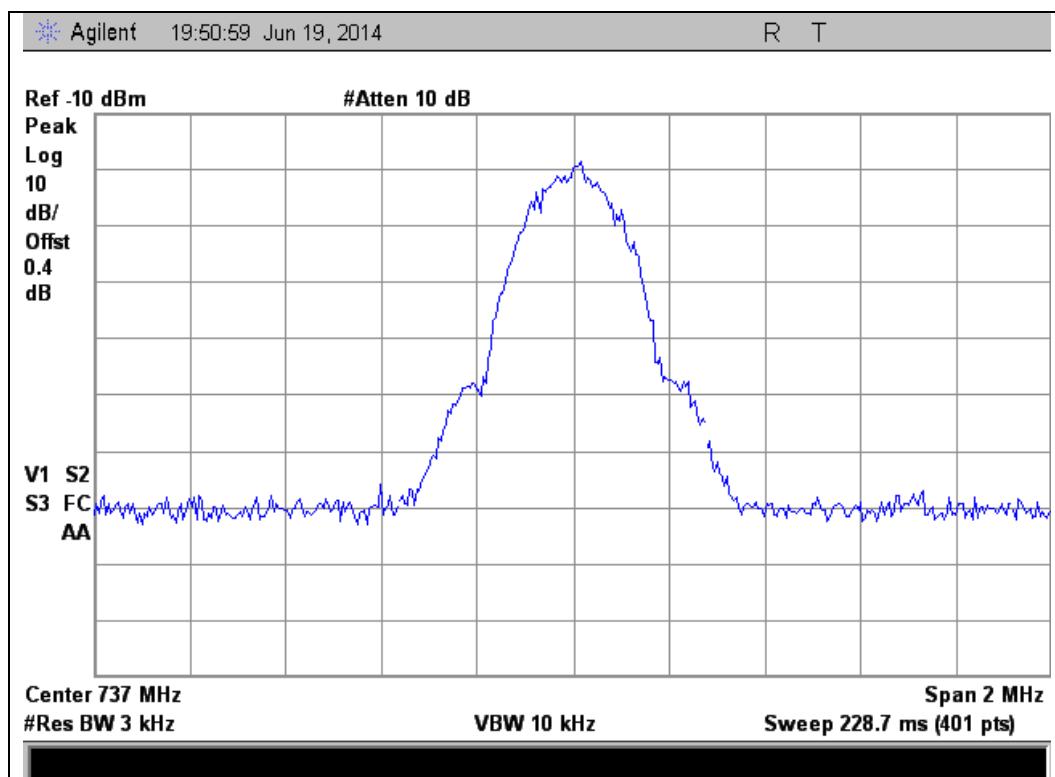




746 - 757 MHz Band

Input

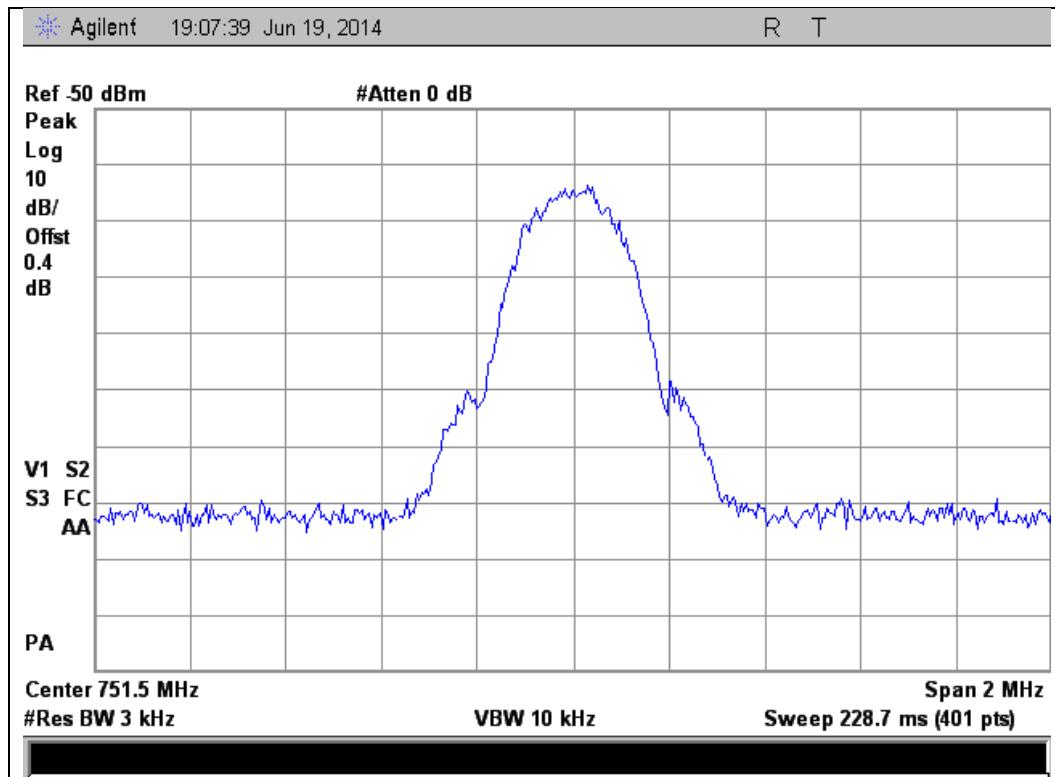


Output

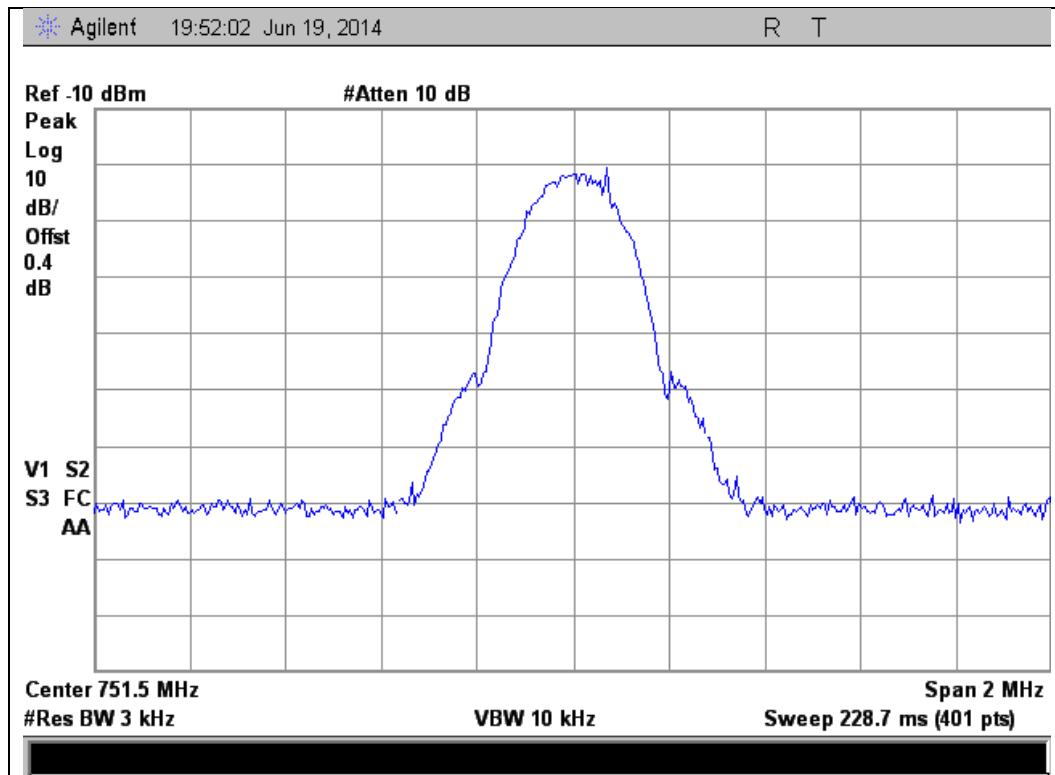




## 869 - 894 MHz Band

### Input

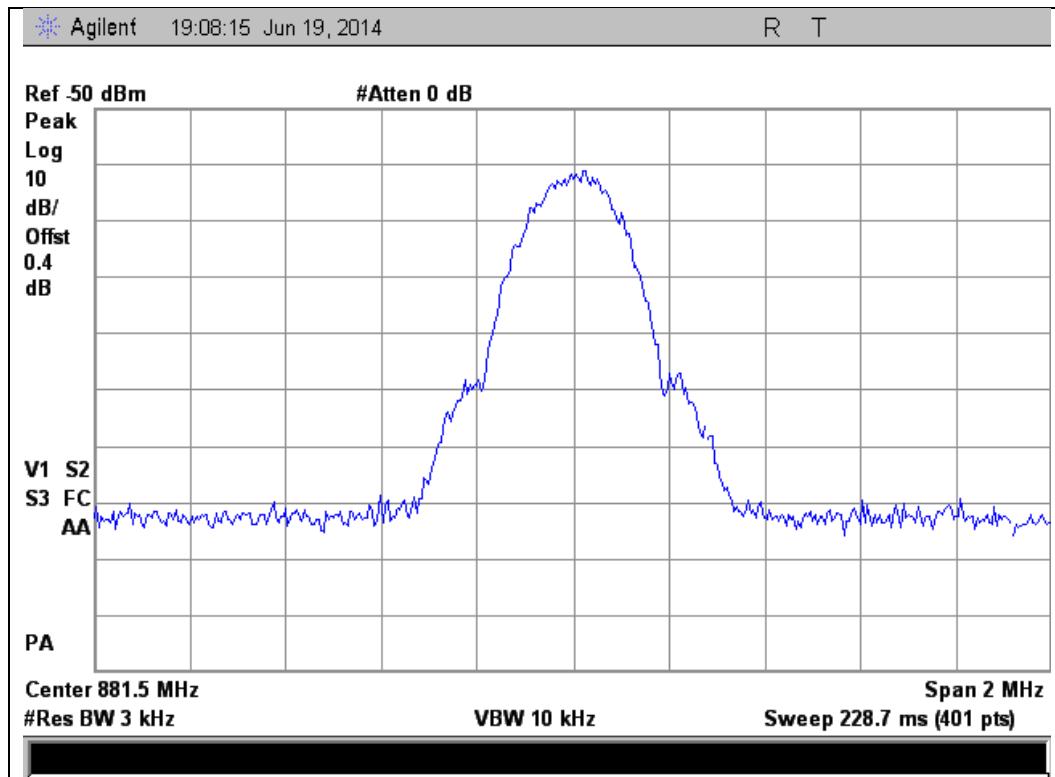


### Output

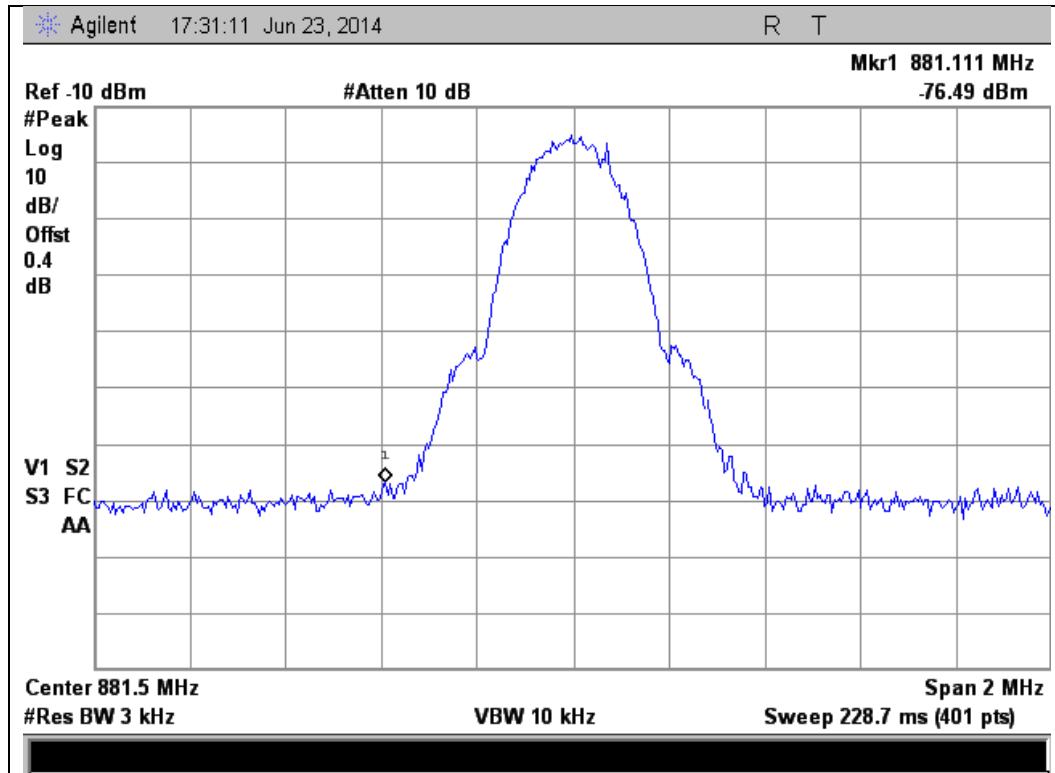




1930 - 1995 MHz Band

Input

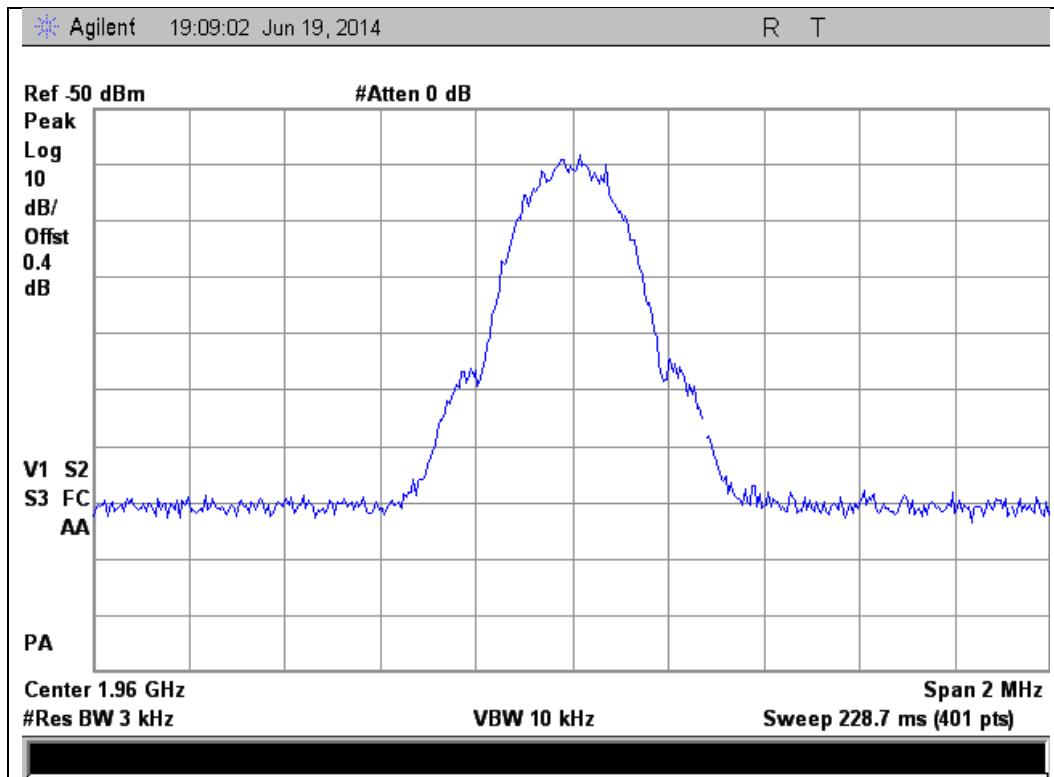


Output

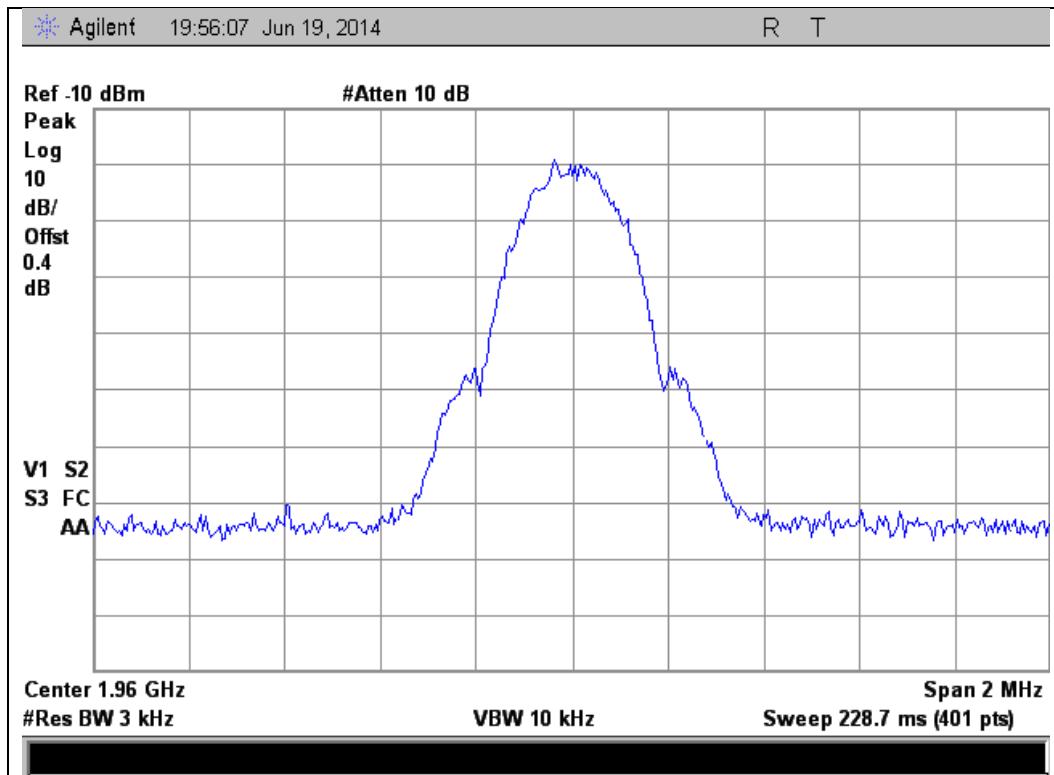




2110 - 2155 MHz Band

Input

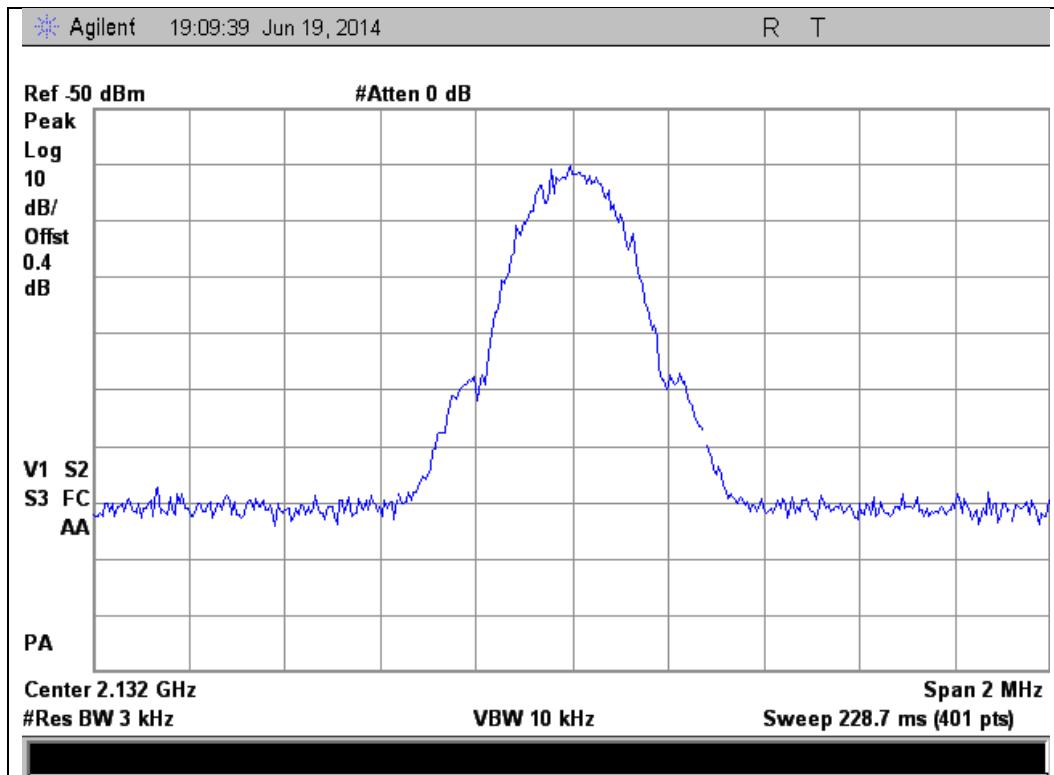

Output

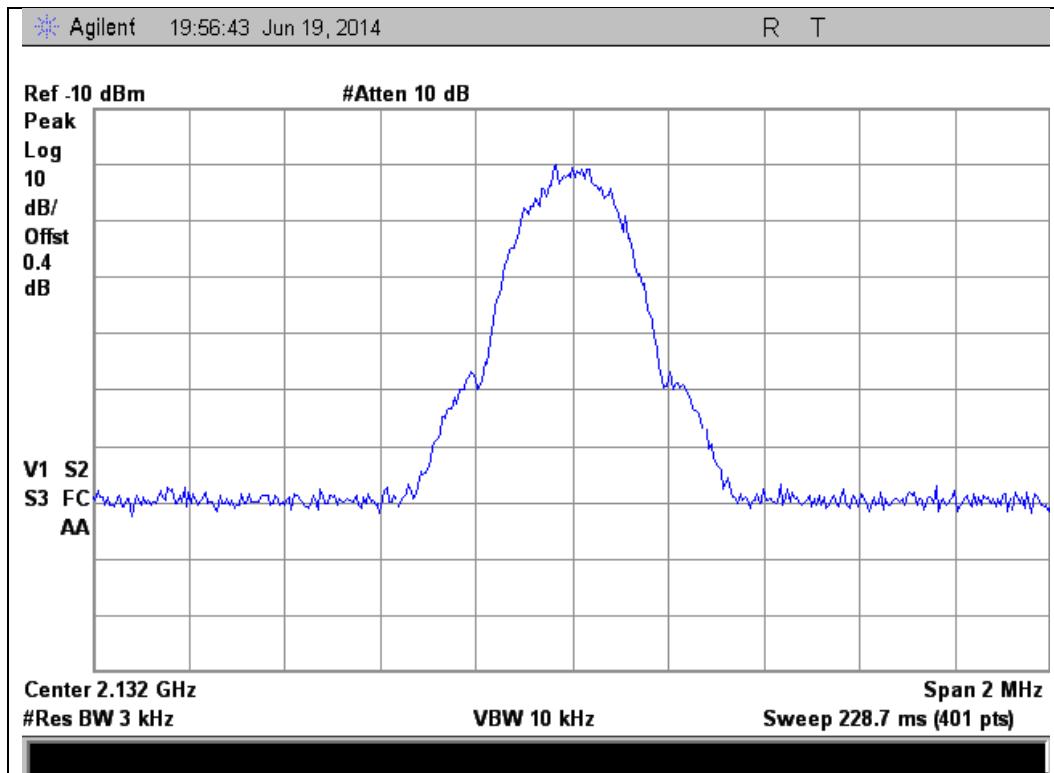





### CDMA Uplink Test Plots

698 - 716 MHz Band

Input

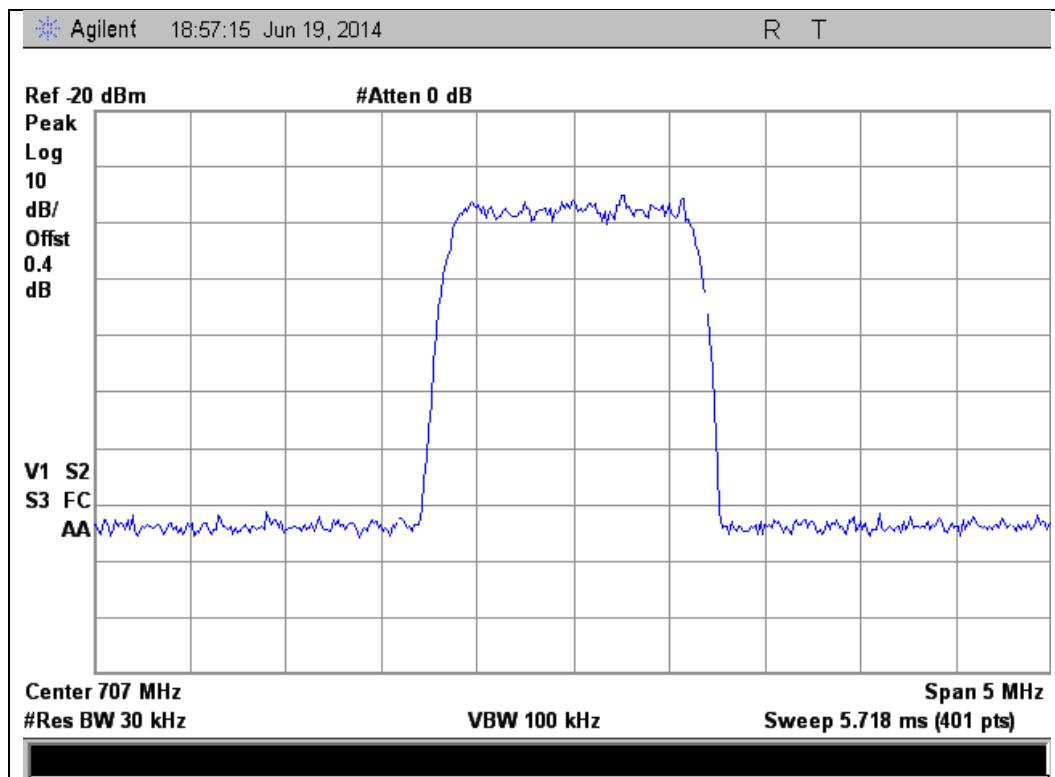


Output

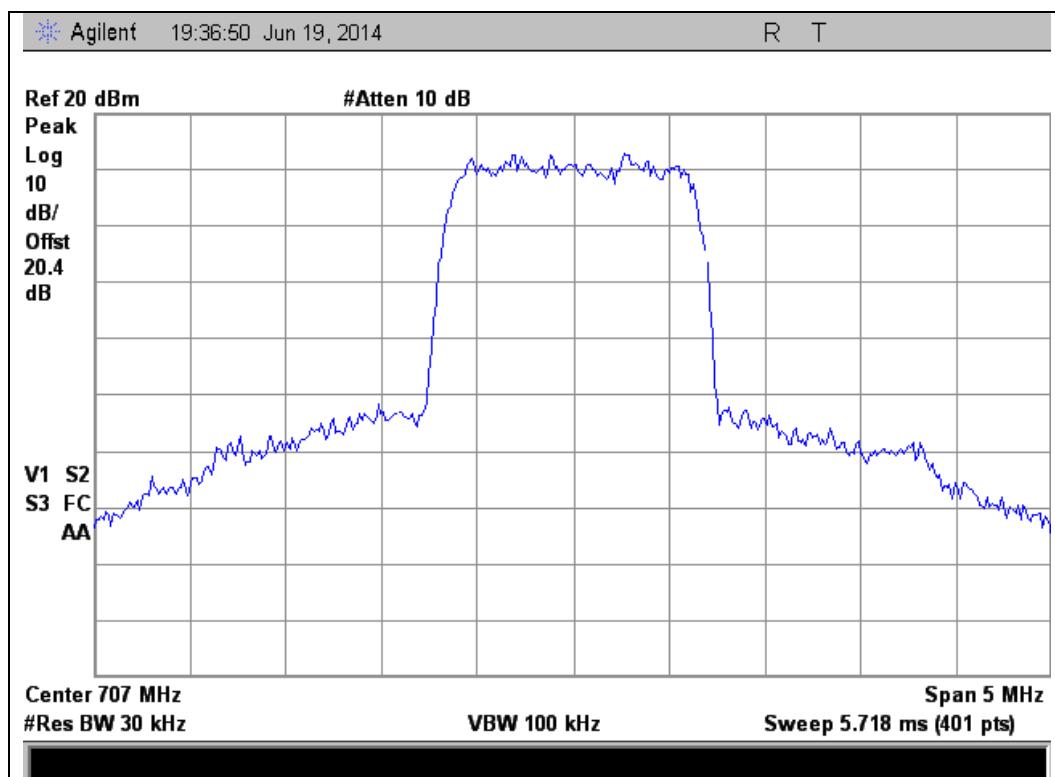




776 - 787 MHz Band

Input

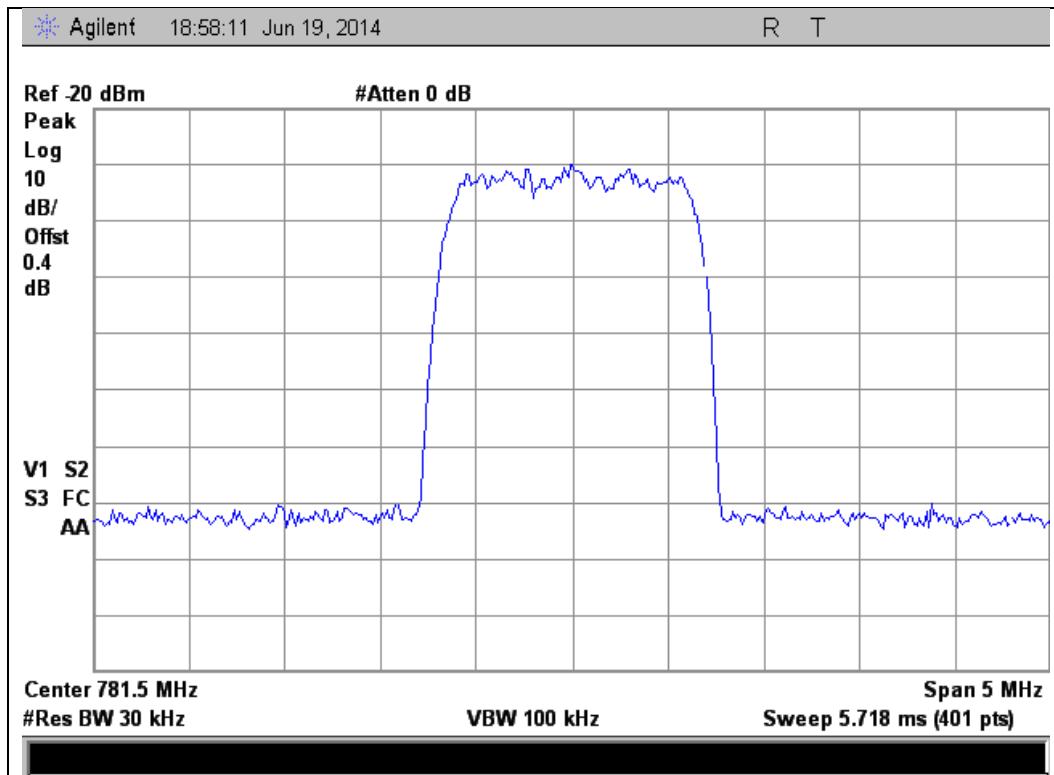


Output

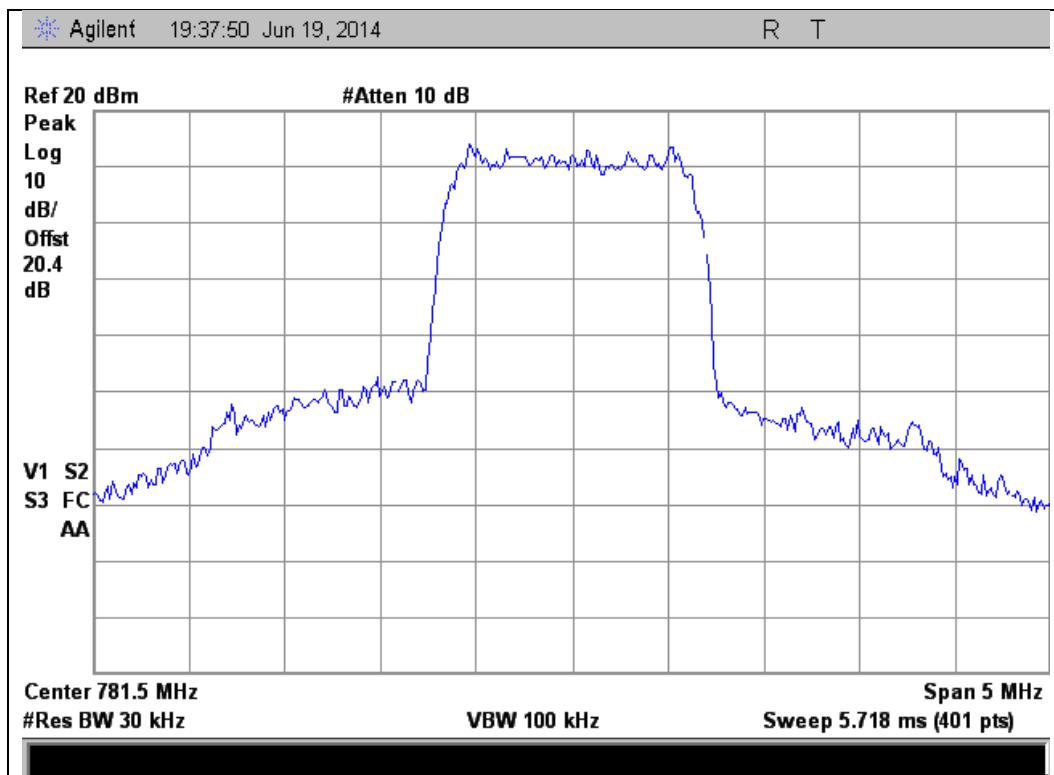




824 - 849 MHz Band

Input

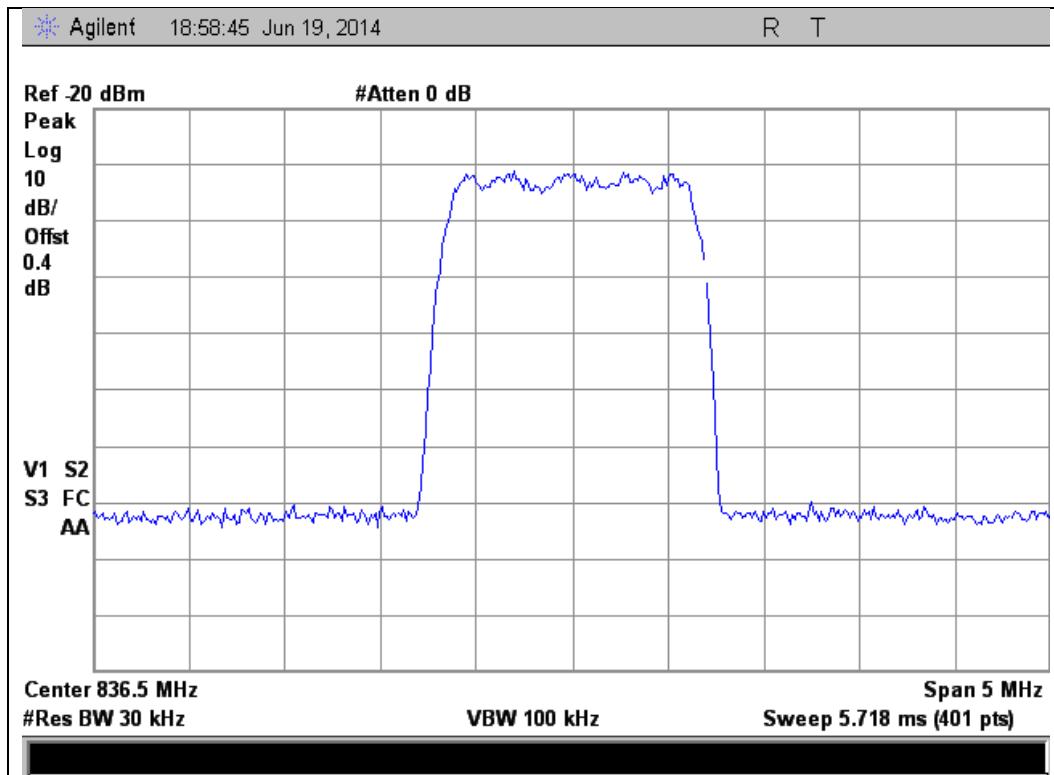


Output

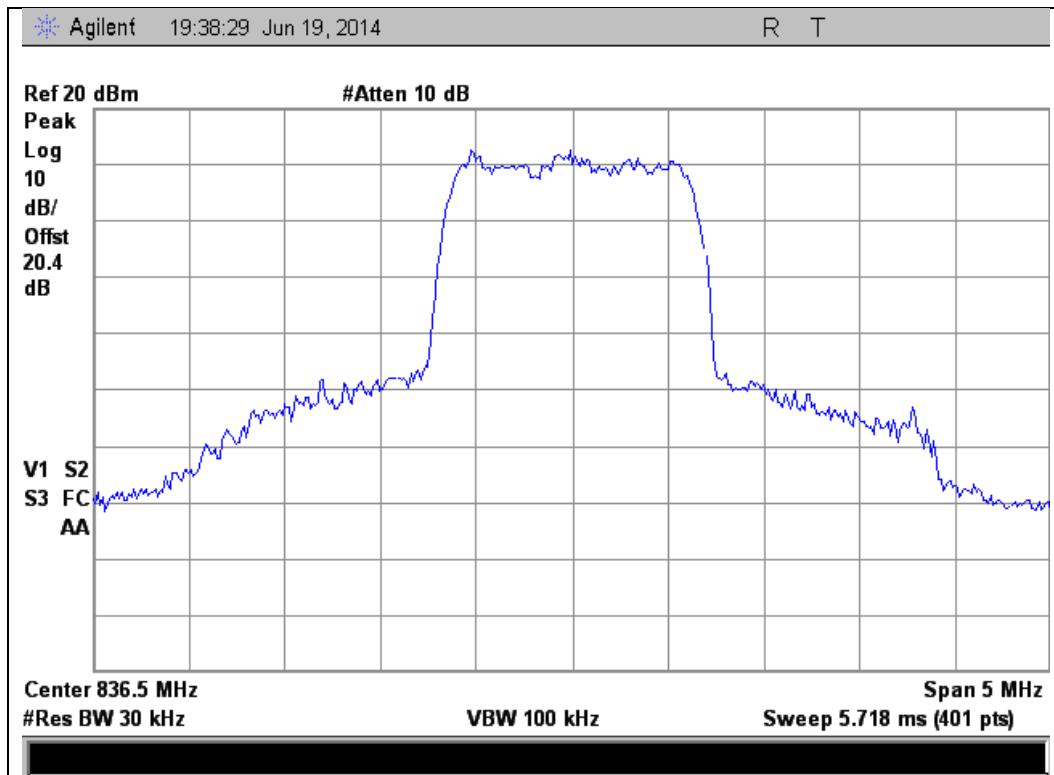




1710 - 1755 MHz Band

Input

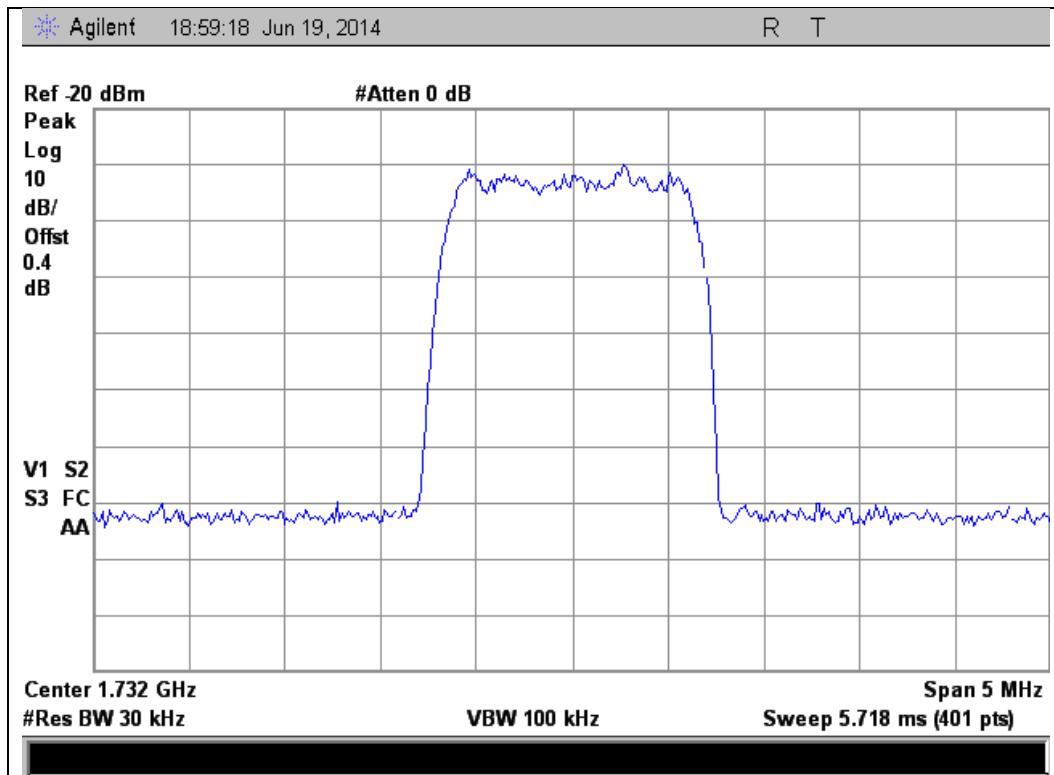


Output

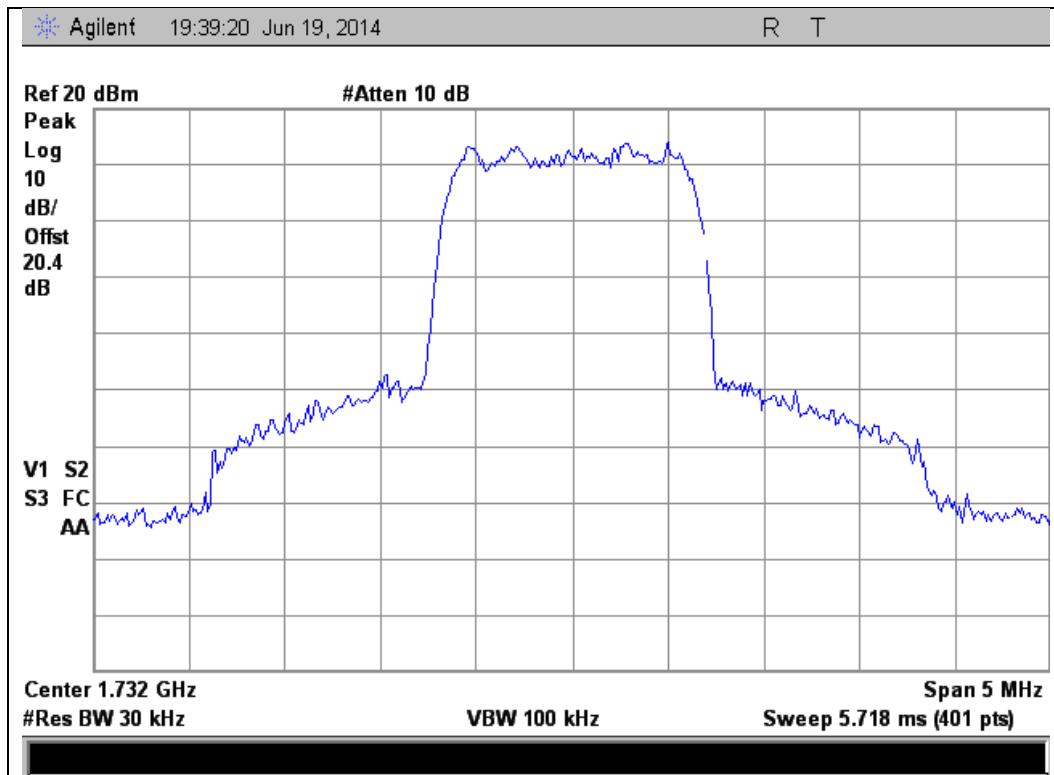




1850 - 1915 MHz Band

Input

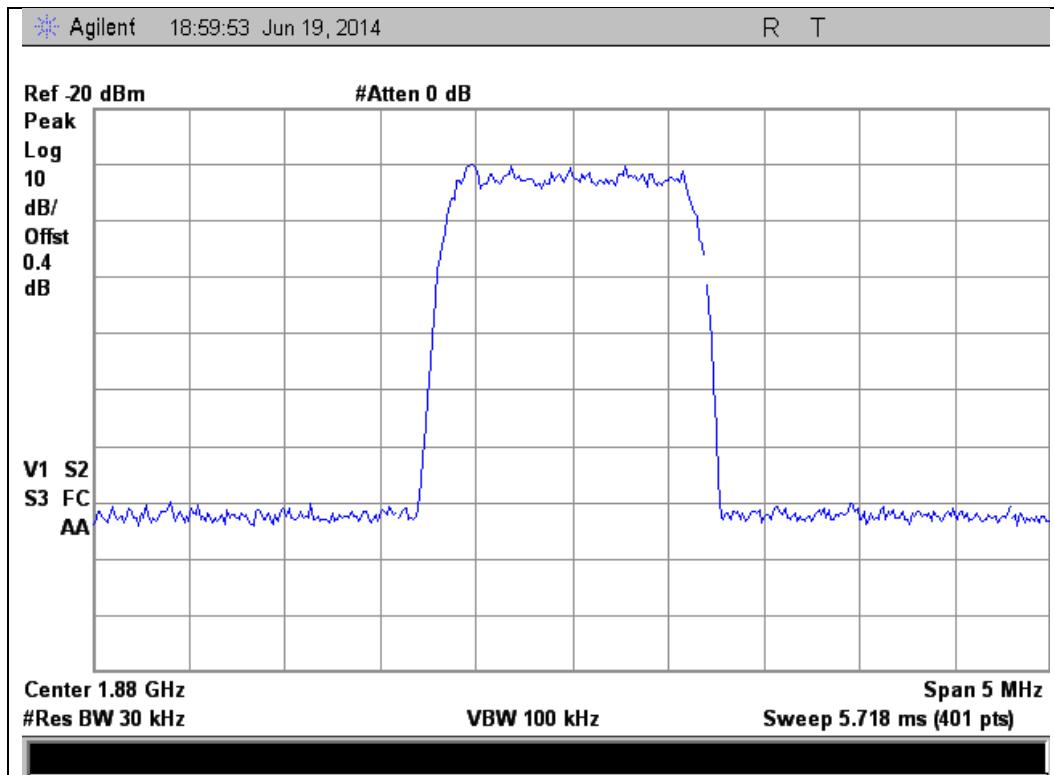

Output

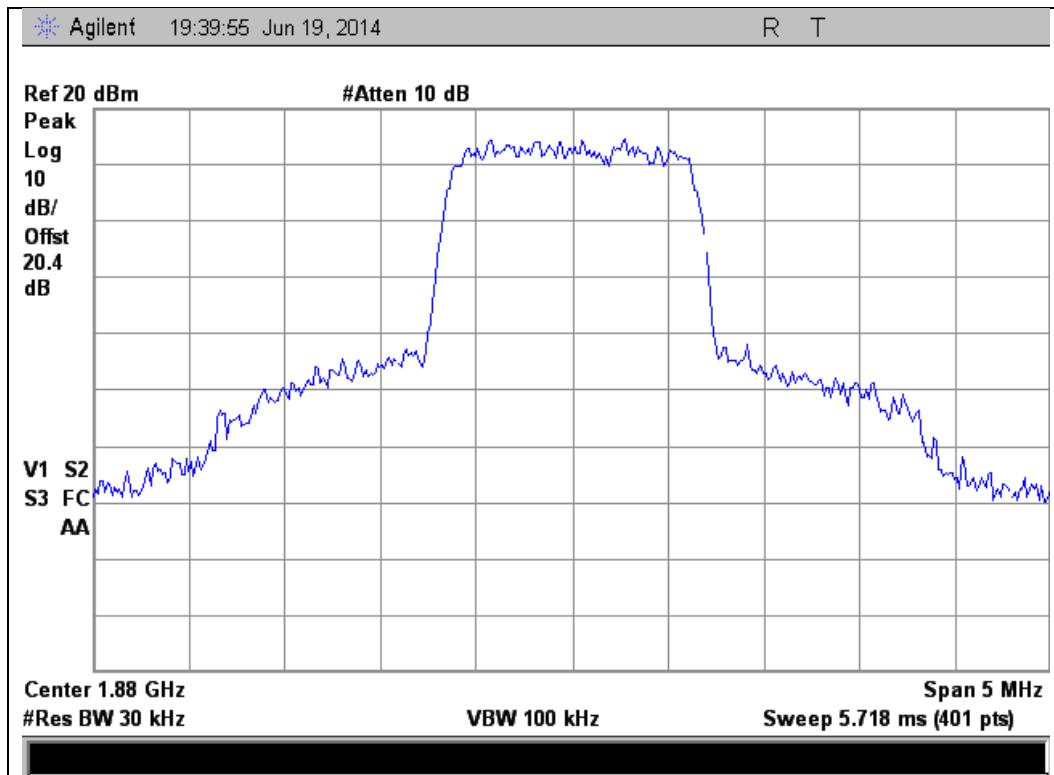





### CDMA Downlink Test Plots

728 - 746 MHz Band

Input

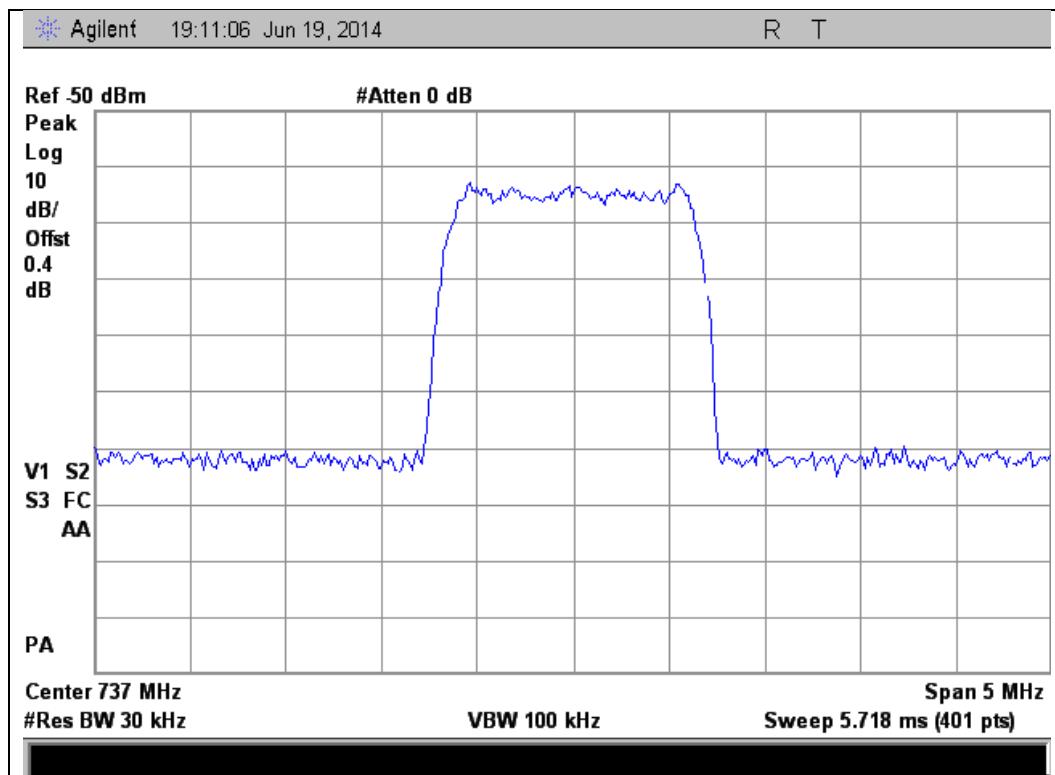


Output

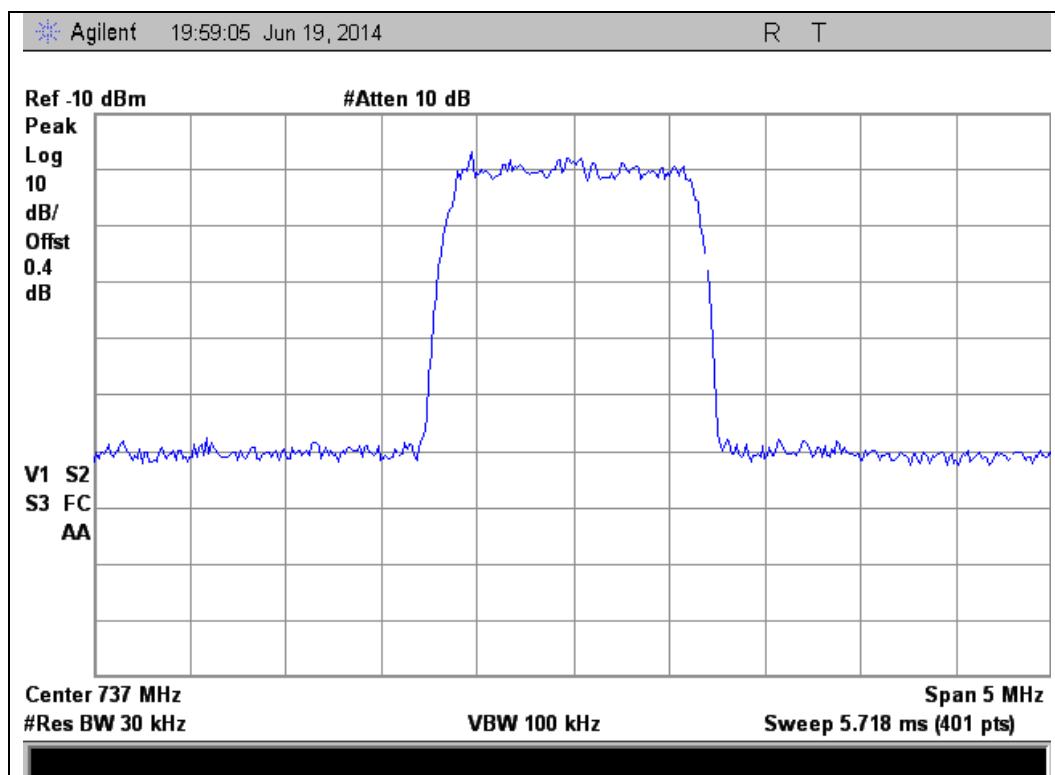




746 - 757 MHz Band

Input

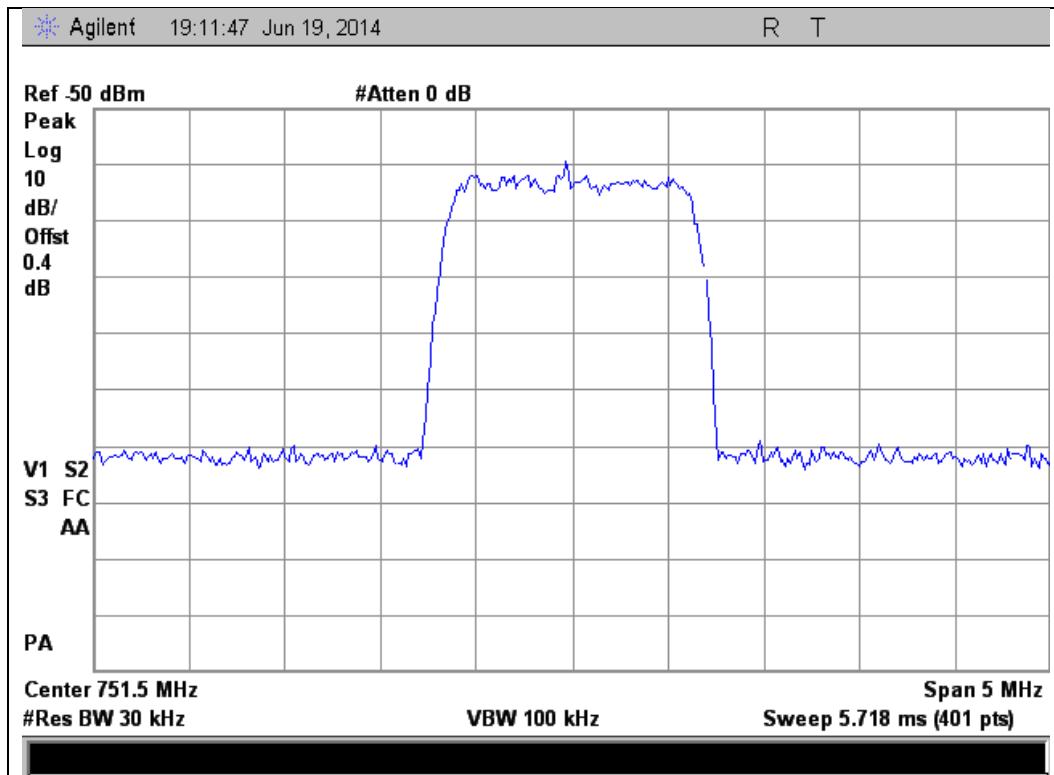


Output

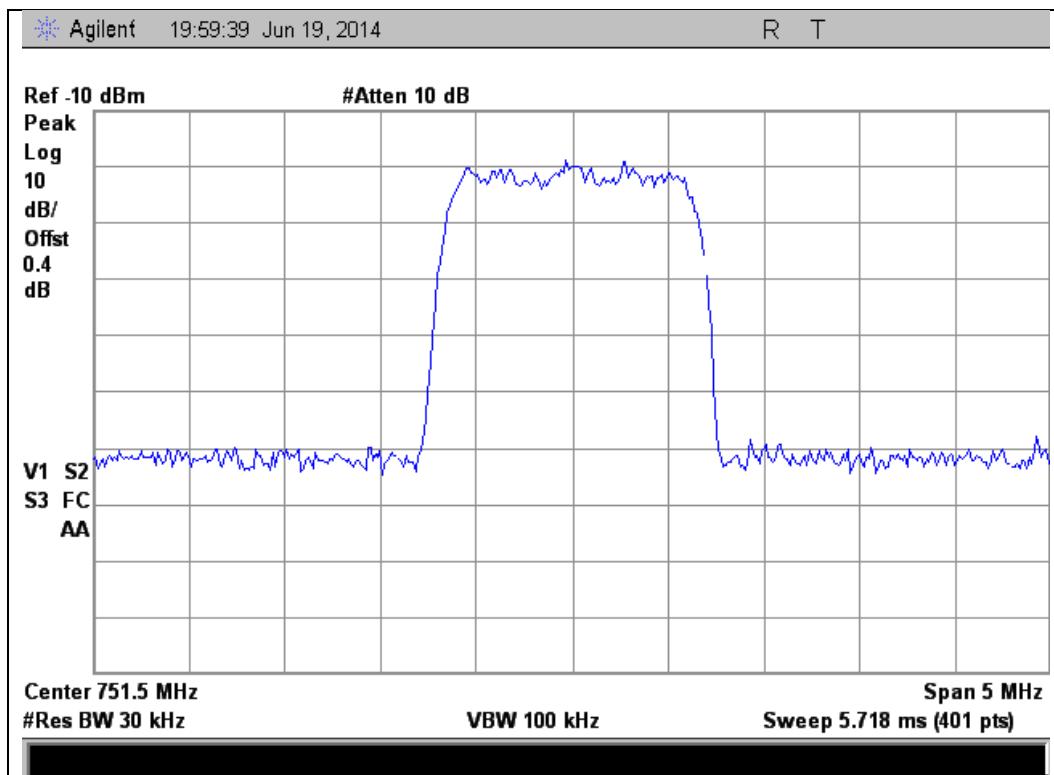




869 - 894 MHz Band

Input

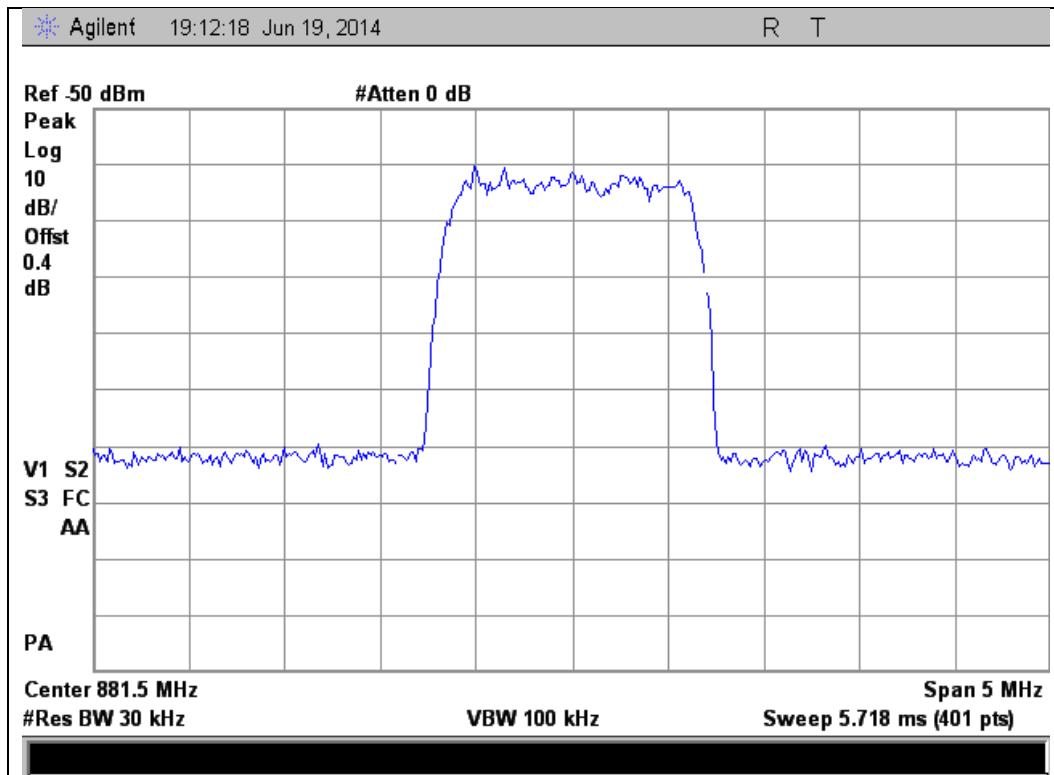


Output

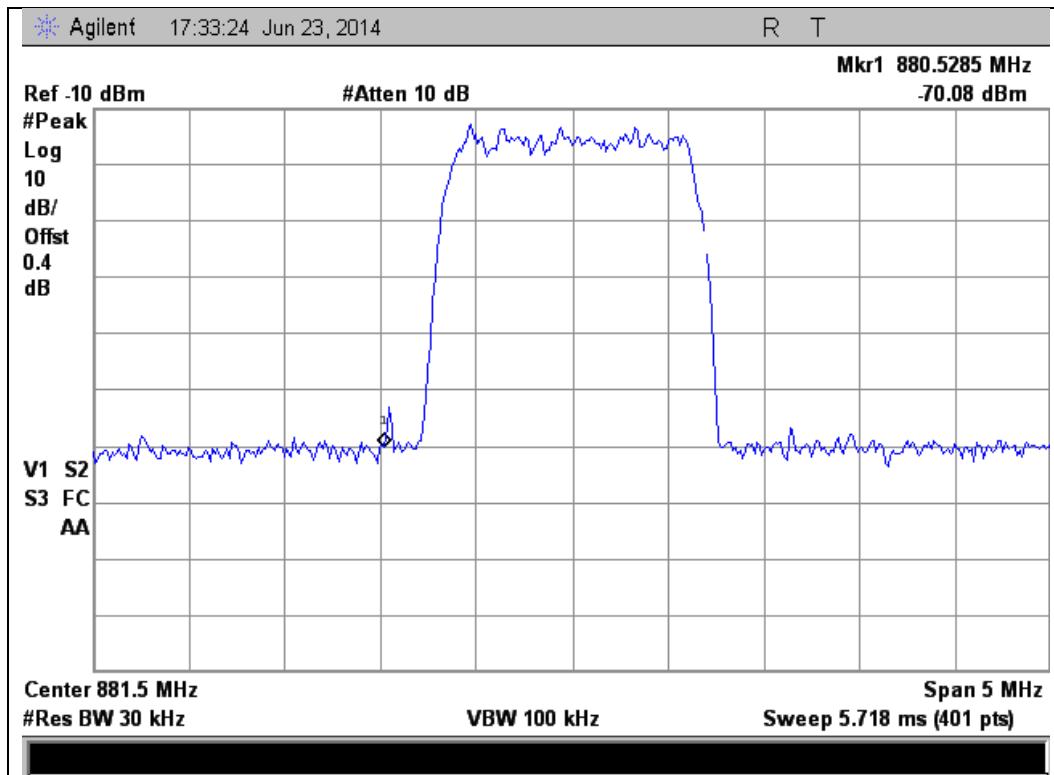




1930 - 1995 MHz Band

Input

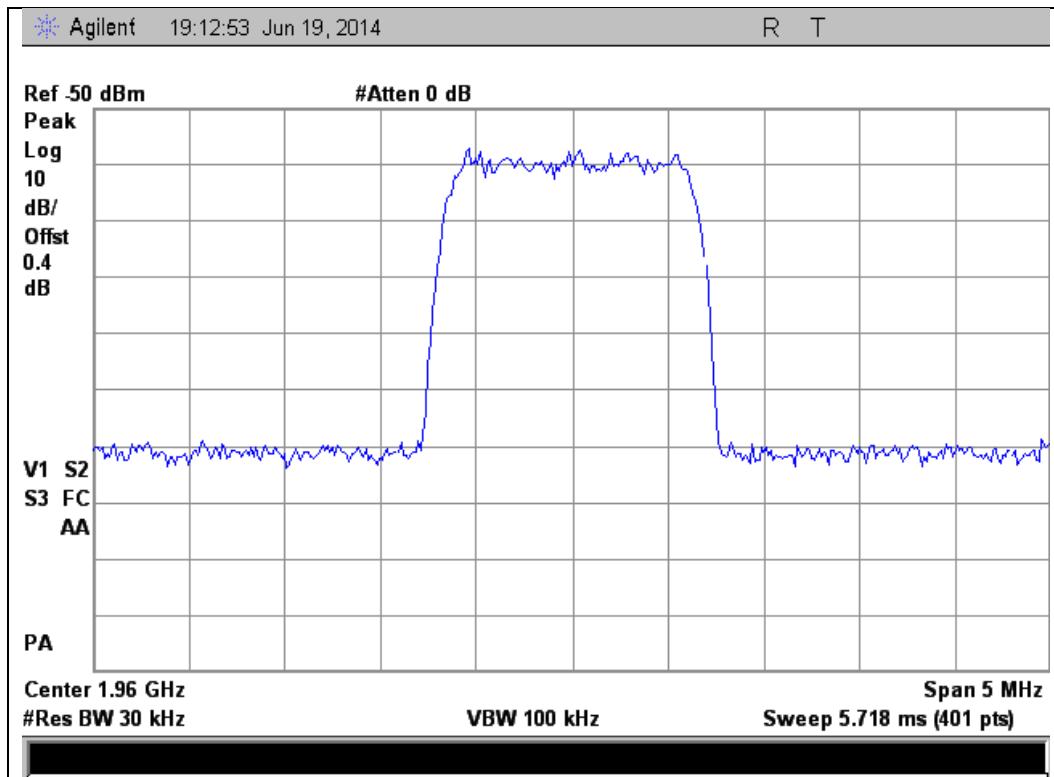


Output

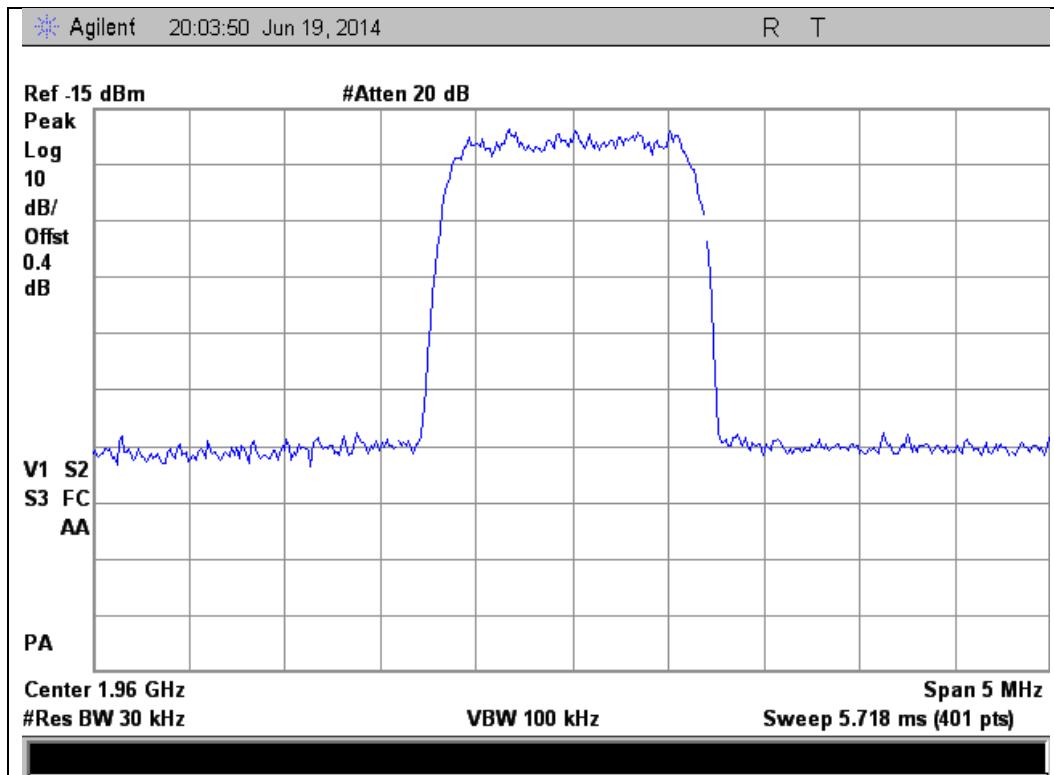




2110 - 2155 MHz Band

Input

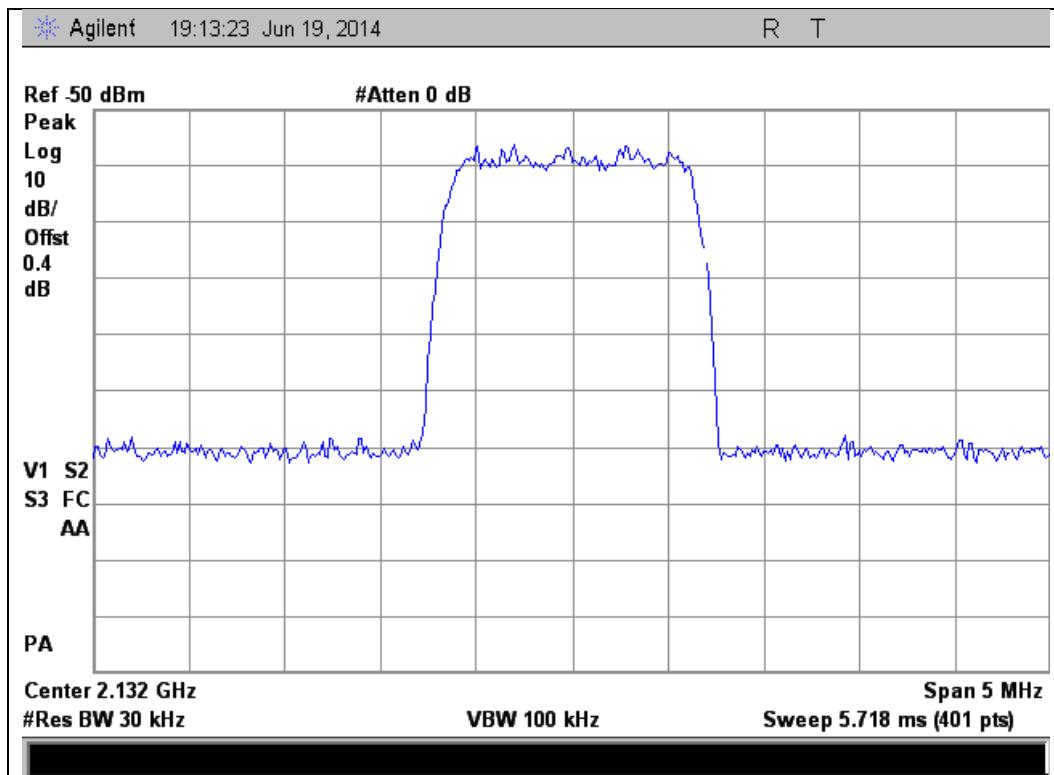

Output

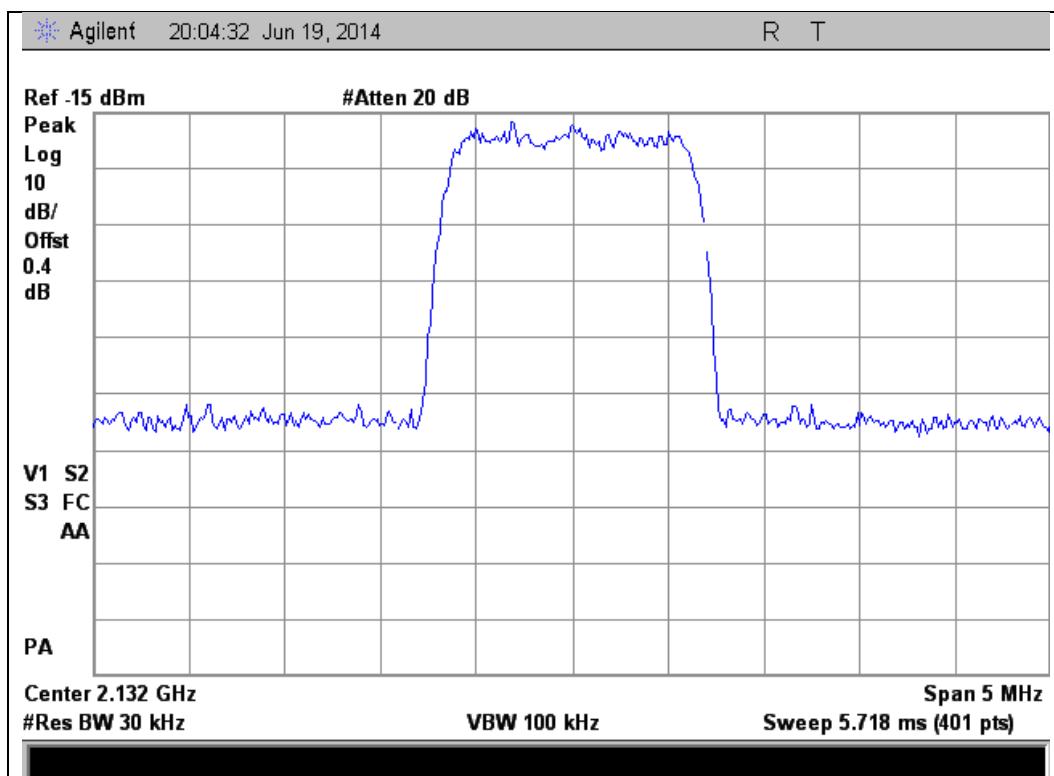





### WCDMA Uplink Test Plots

698 - 716 MHz Band

Input

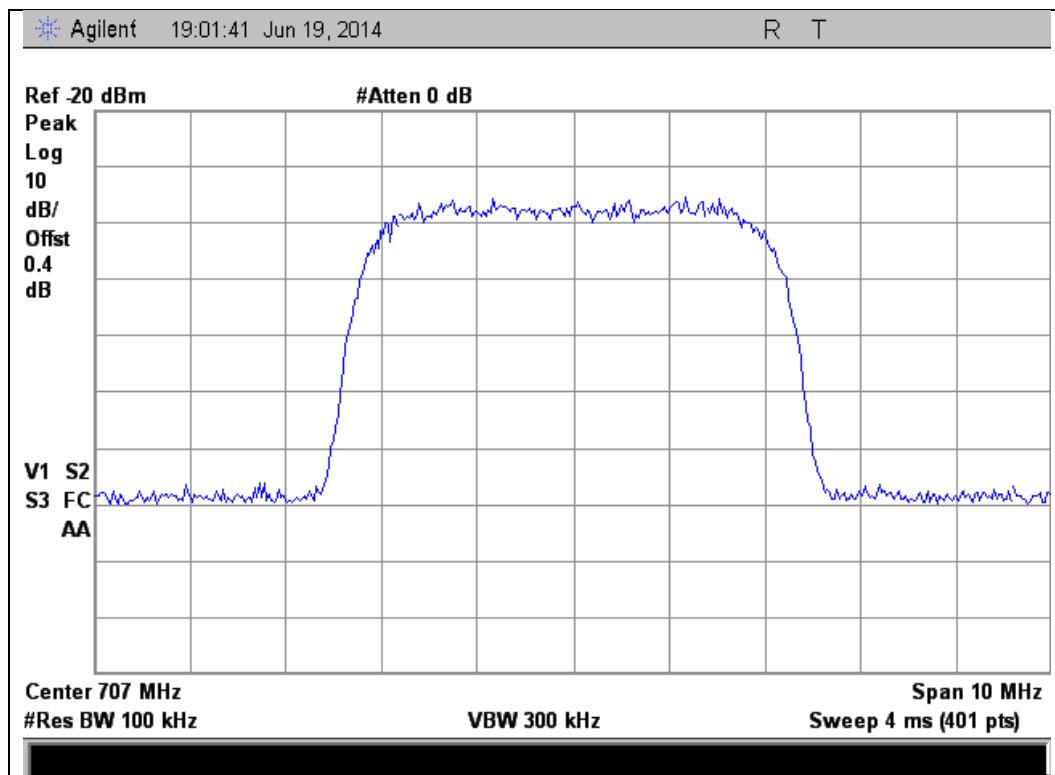


Output

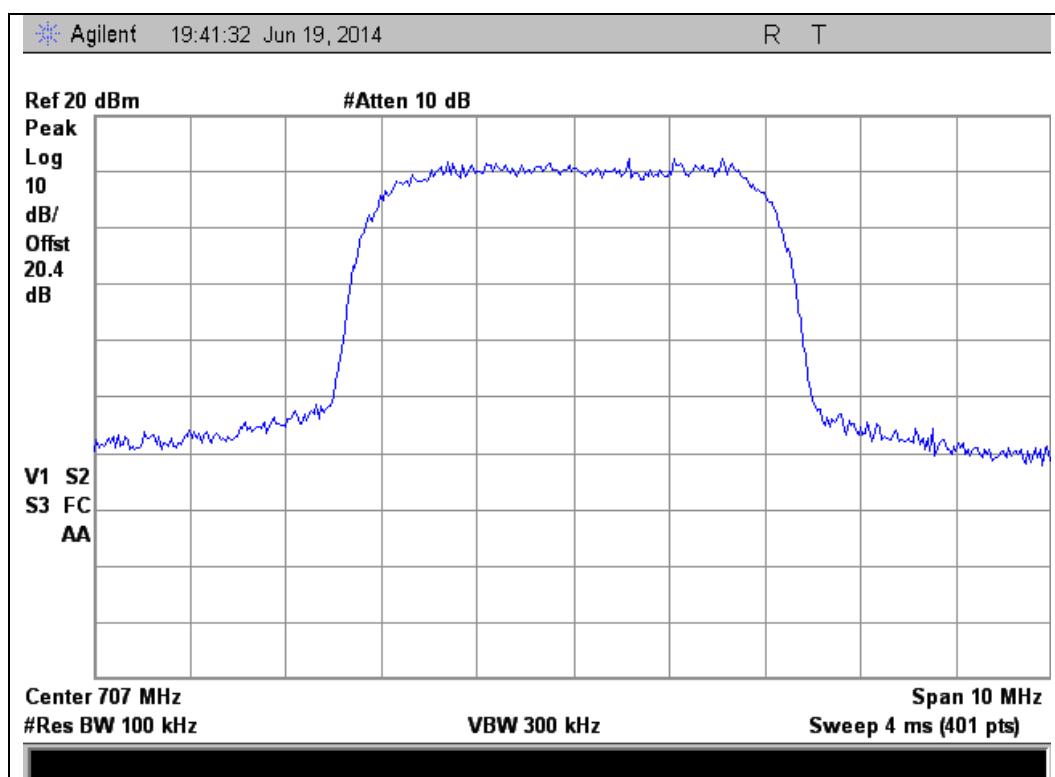




776 - 787 MHz Band

Input

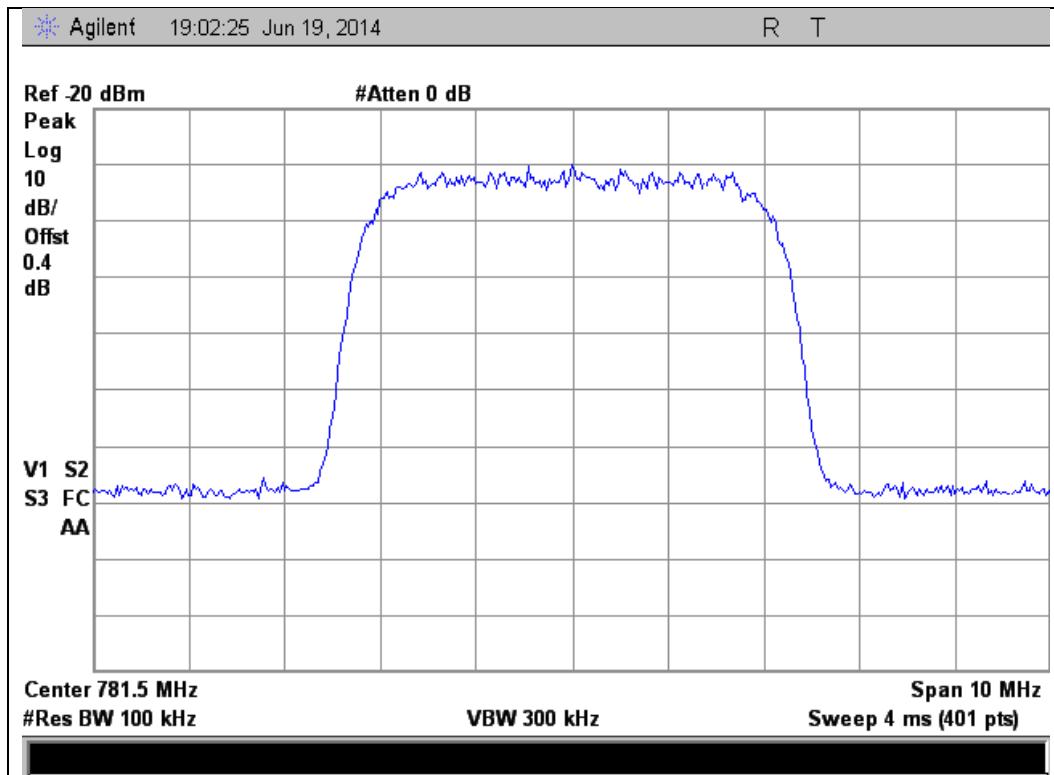


Output

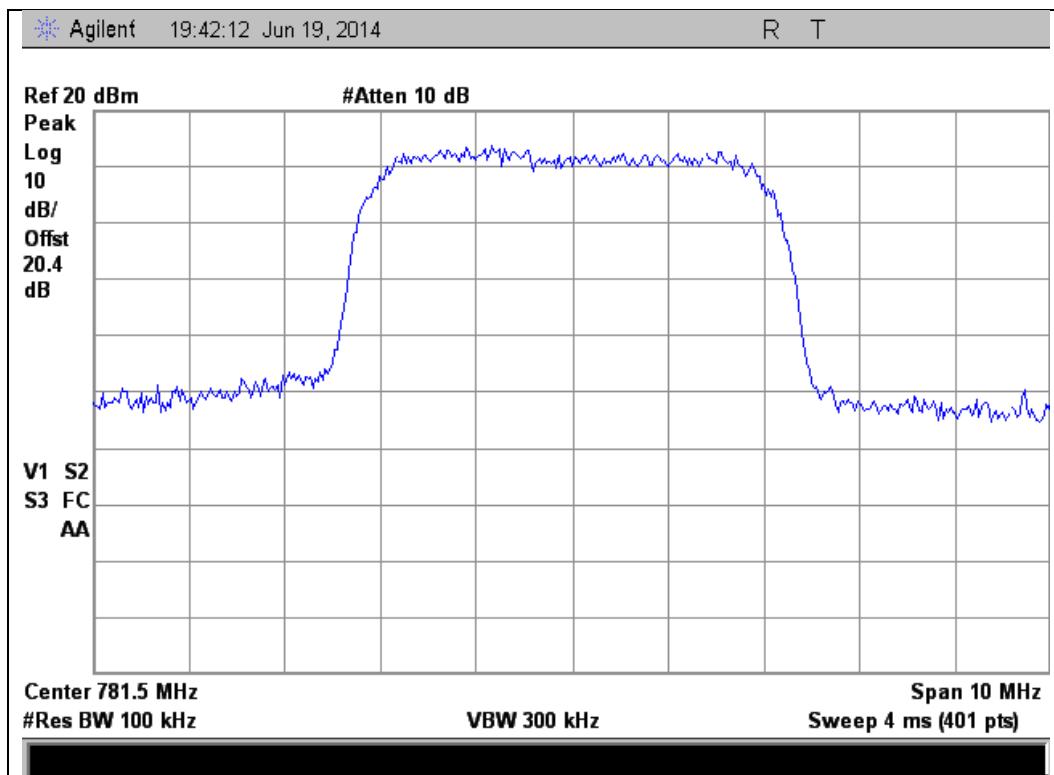




824 - 849 MHz Band

Input

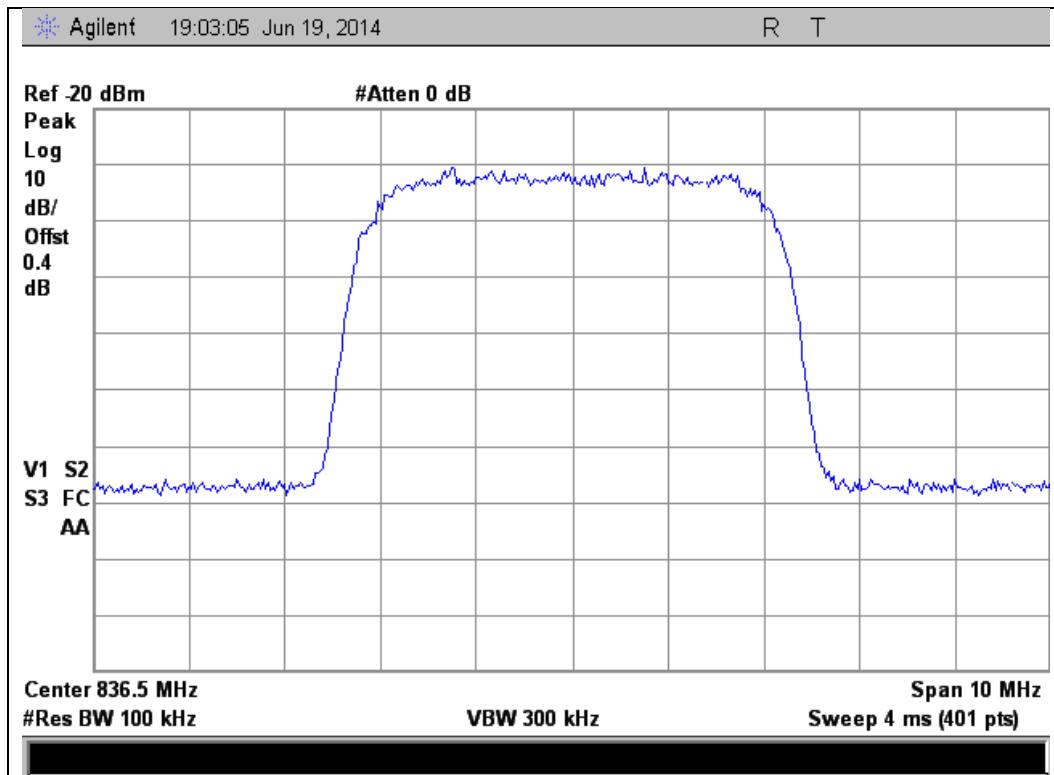


Output

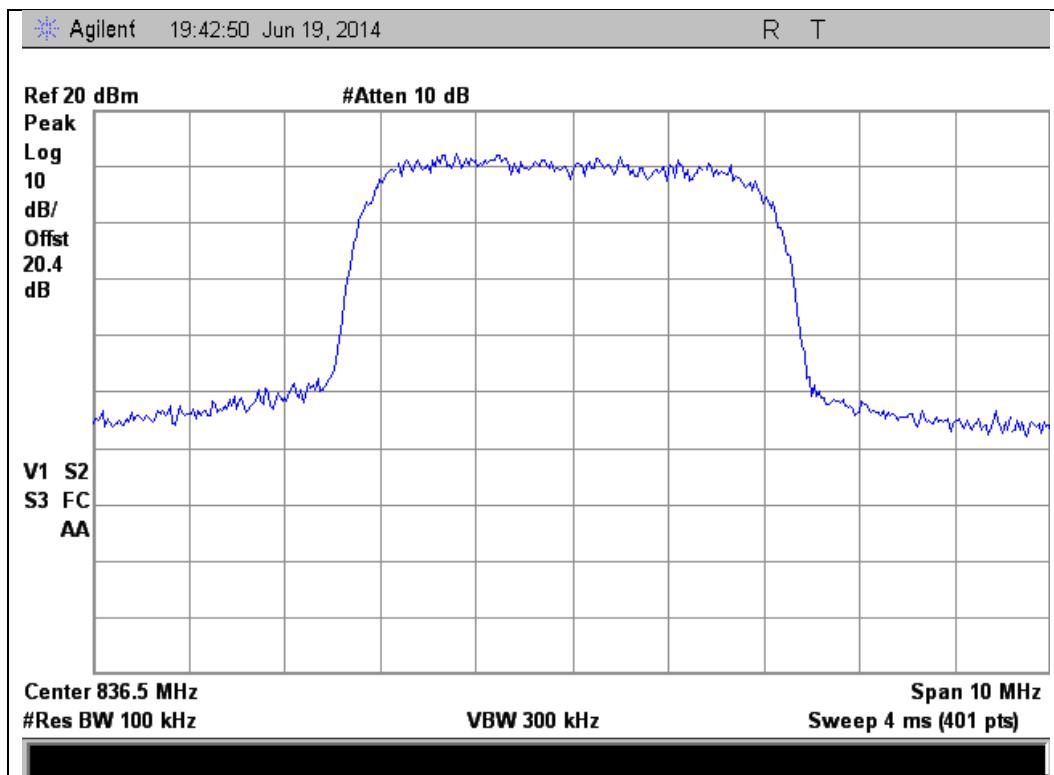




1710 - 1755 MHz Band

Input

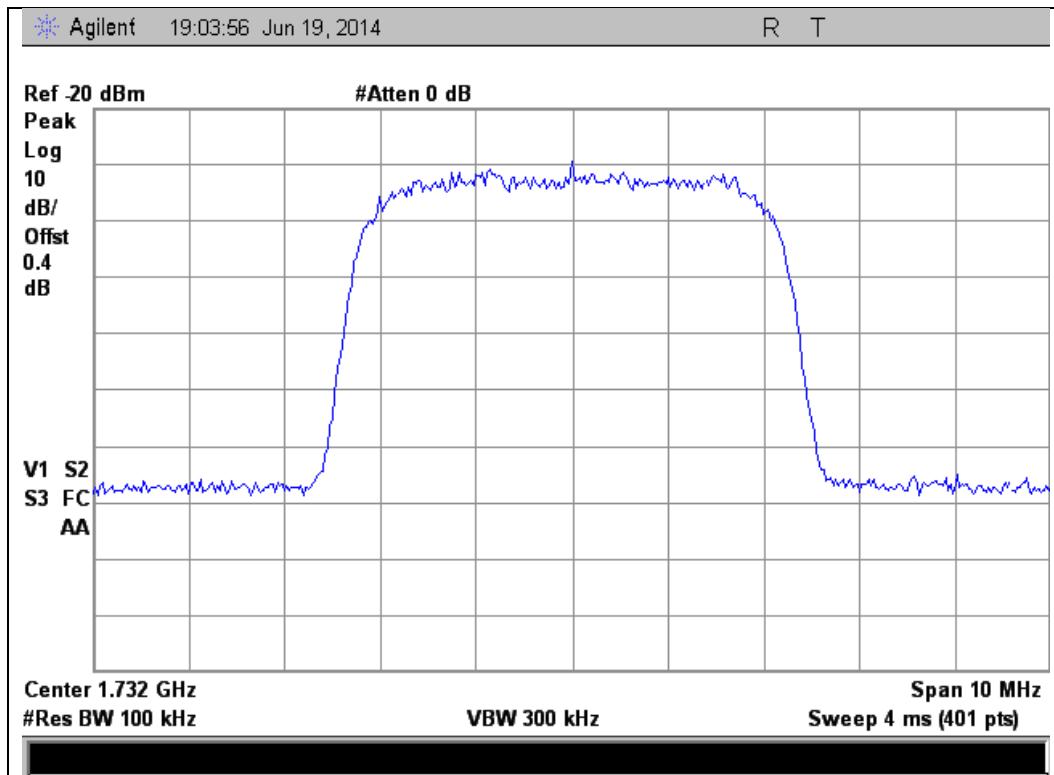


Output

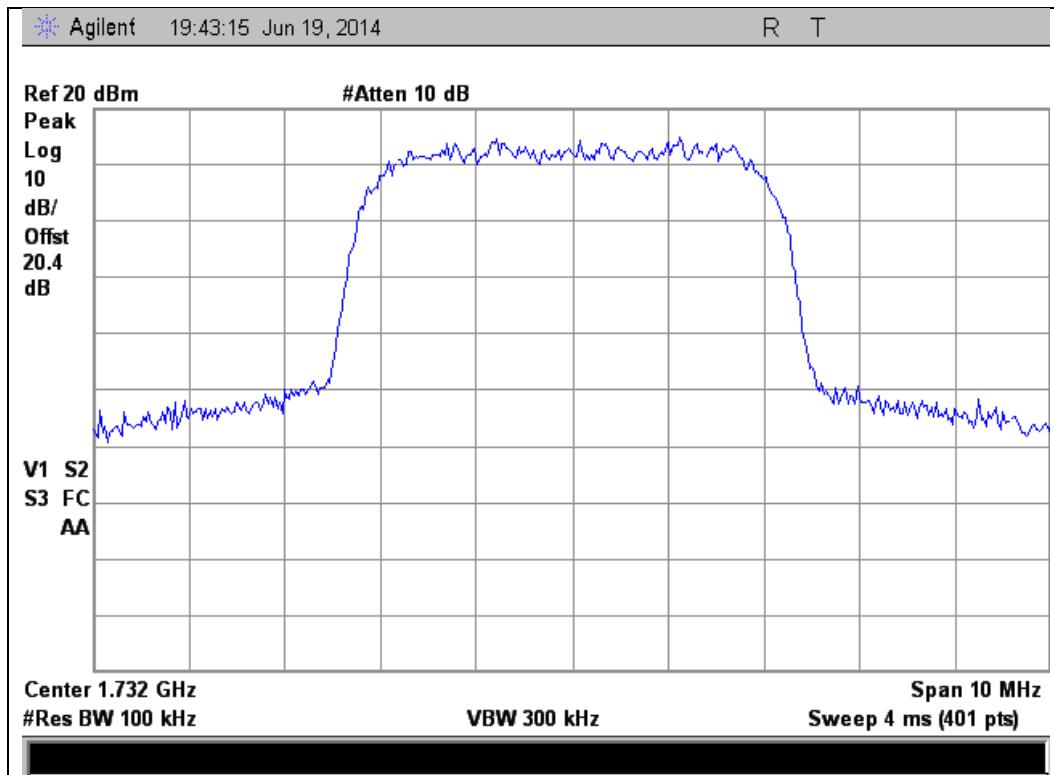




1850 - 1915 MHz Band

Input

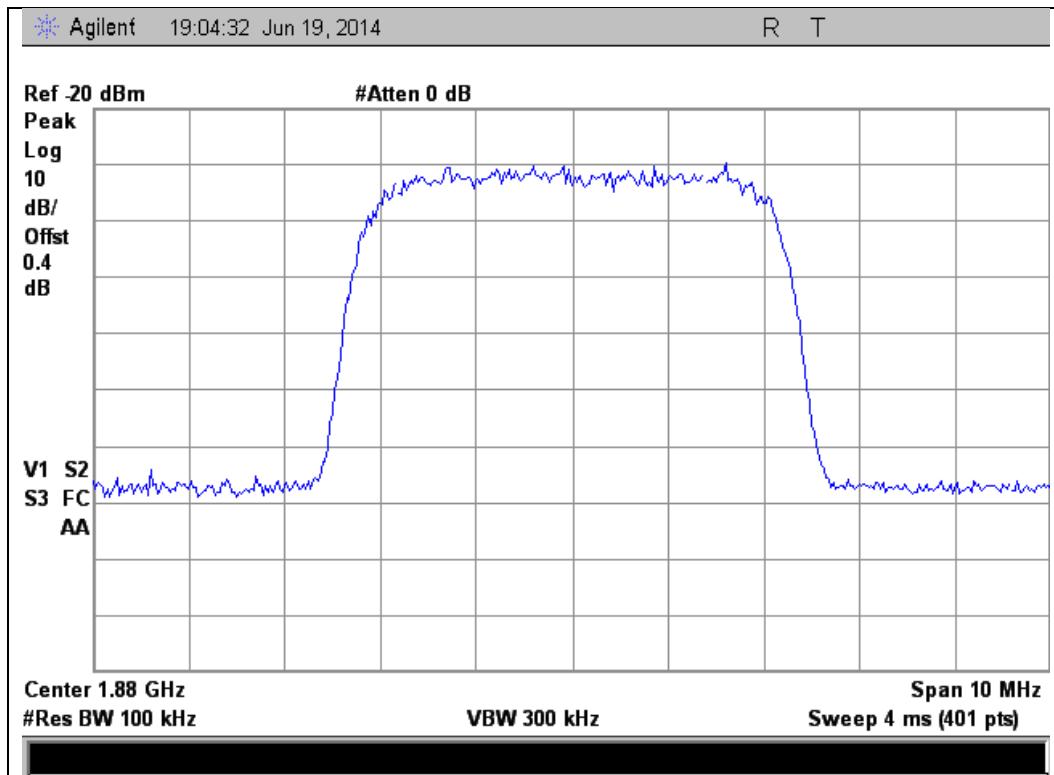

Output

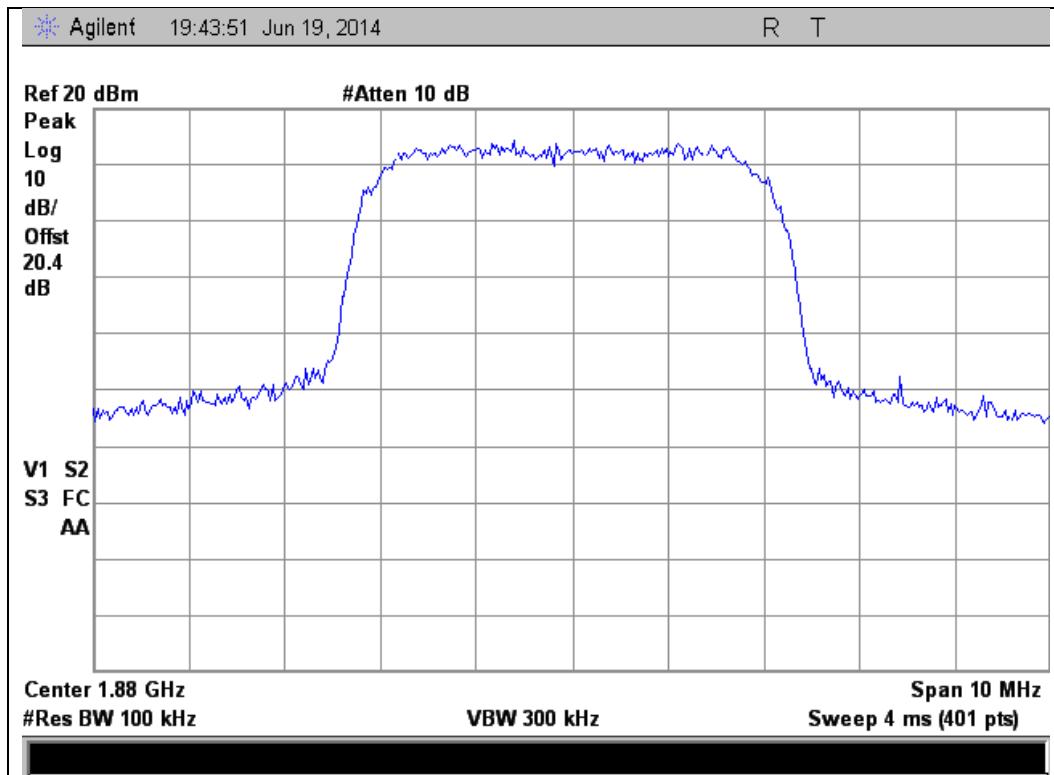





### WCDMA Downlink Test Plots

728 - 746 MHz Band

Input

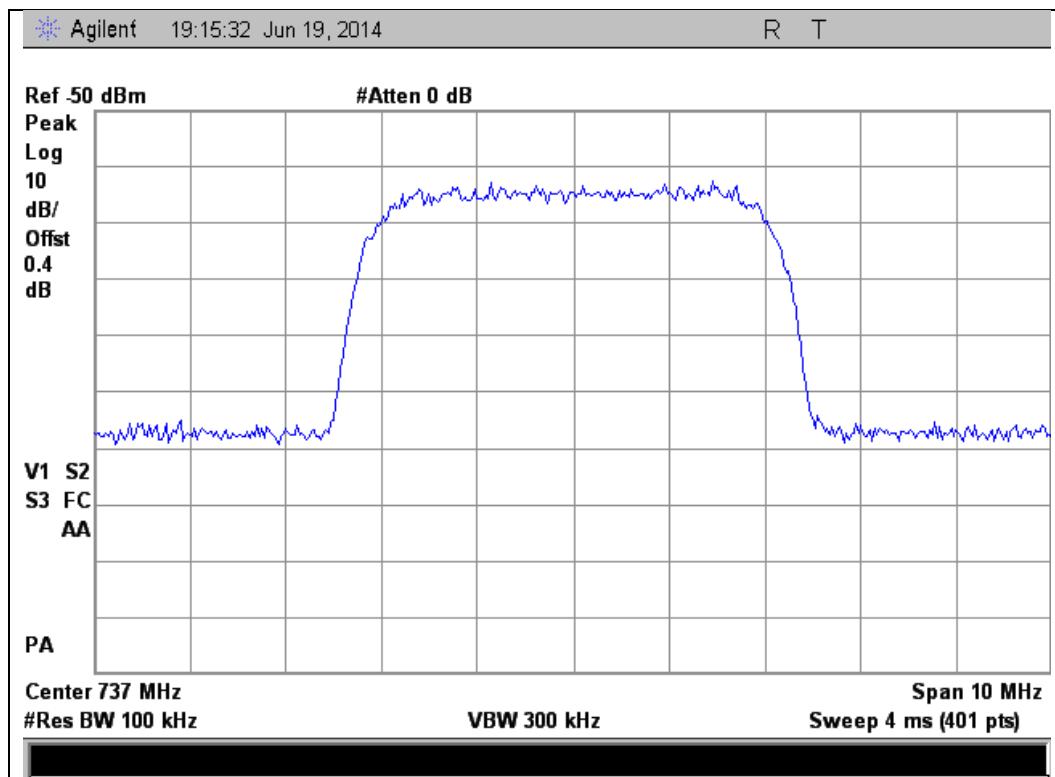


Output

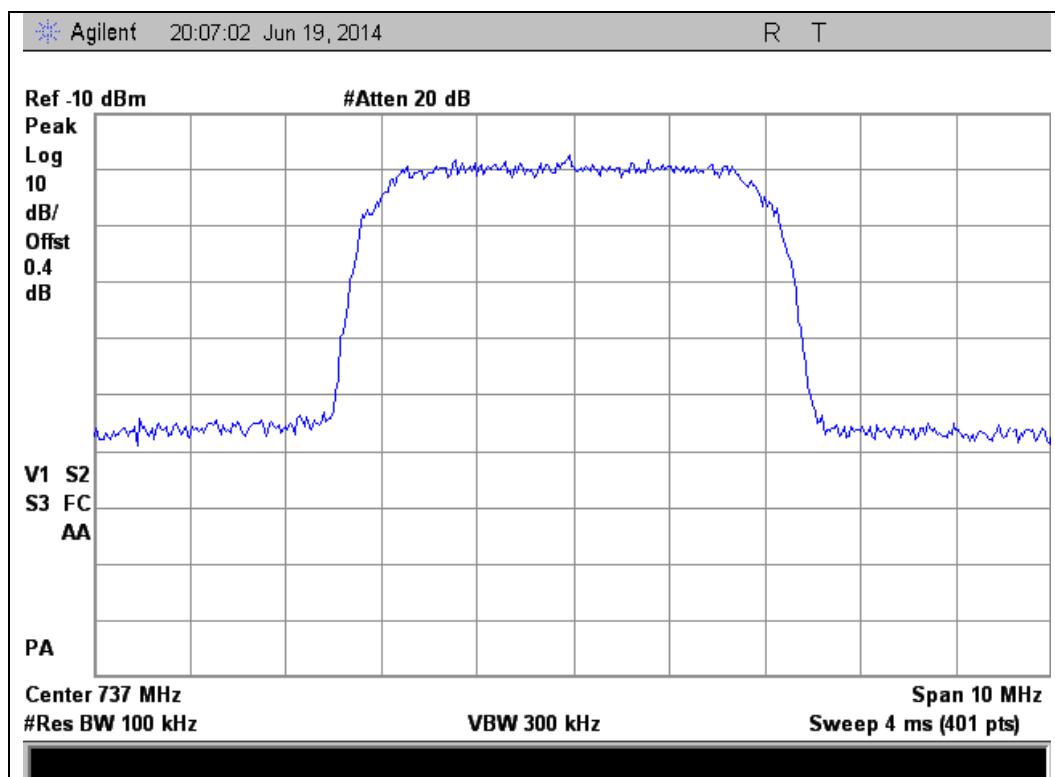




746 - 757 MHz Band

Input

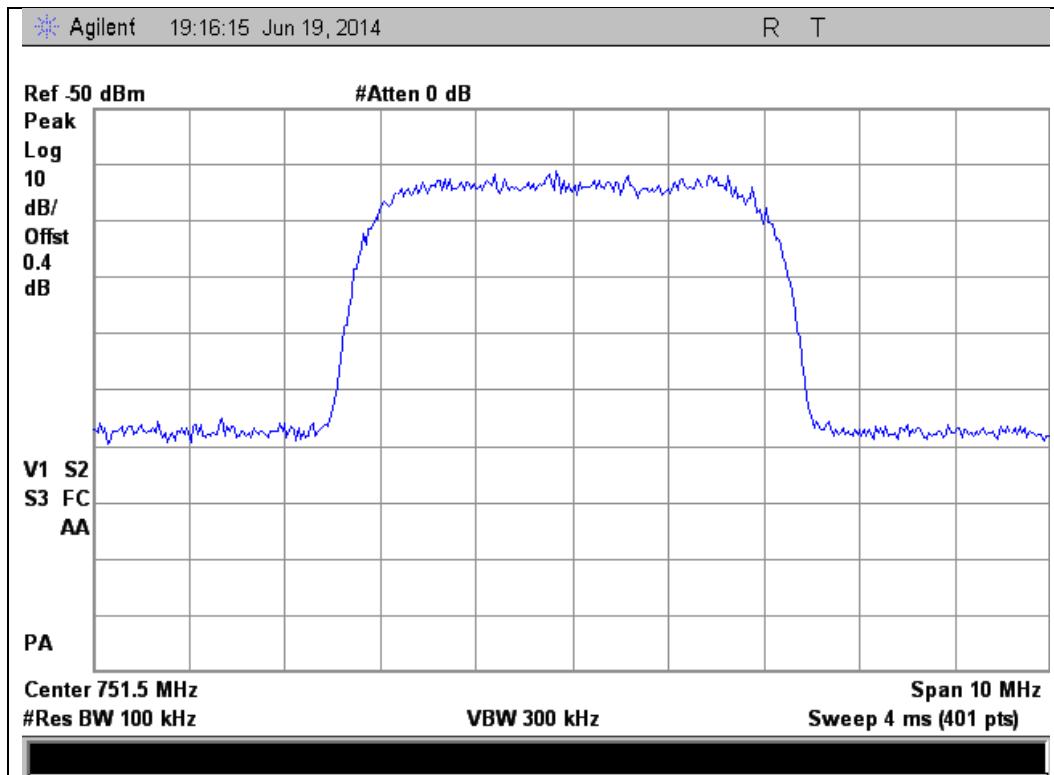


Output

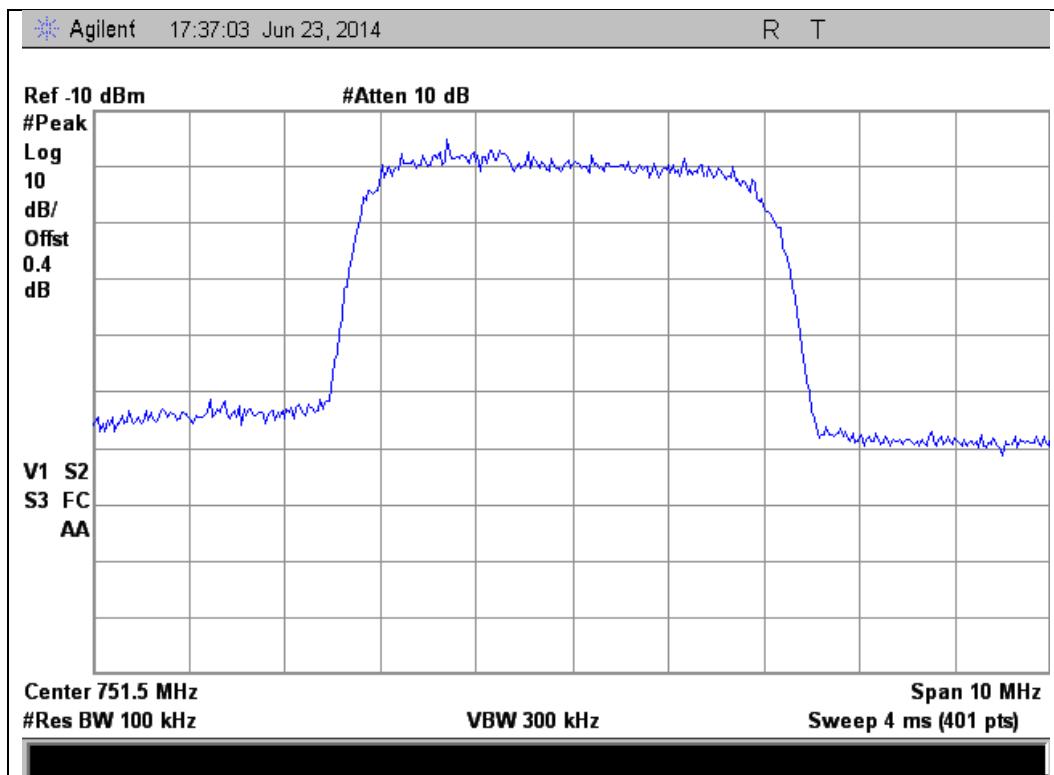




869 - 894 MHz Band

Input

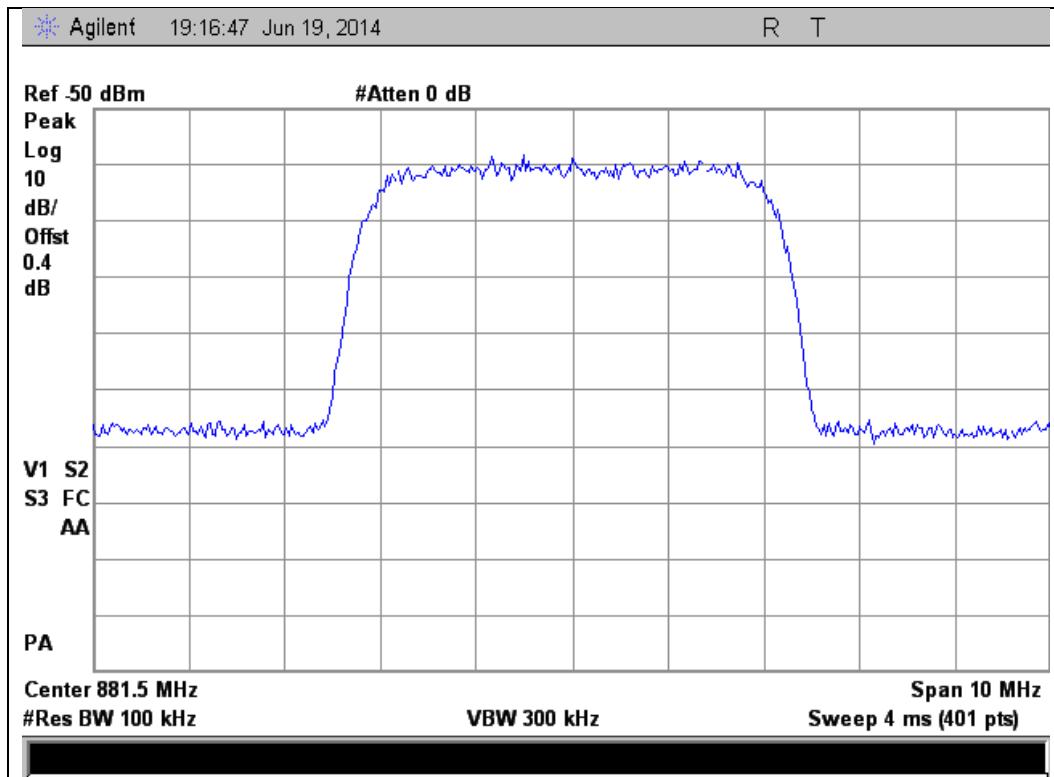


Output

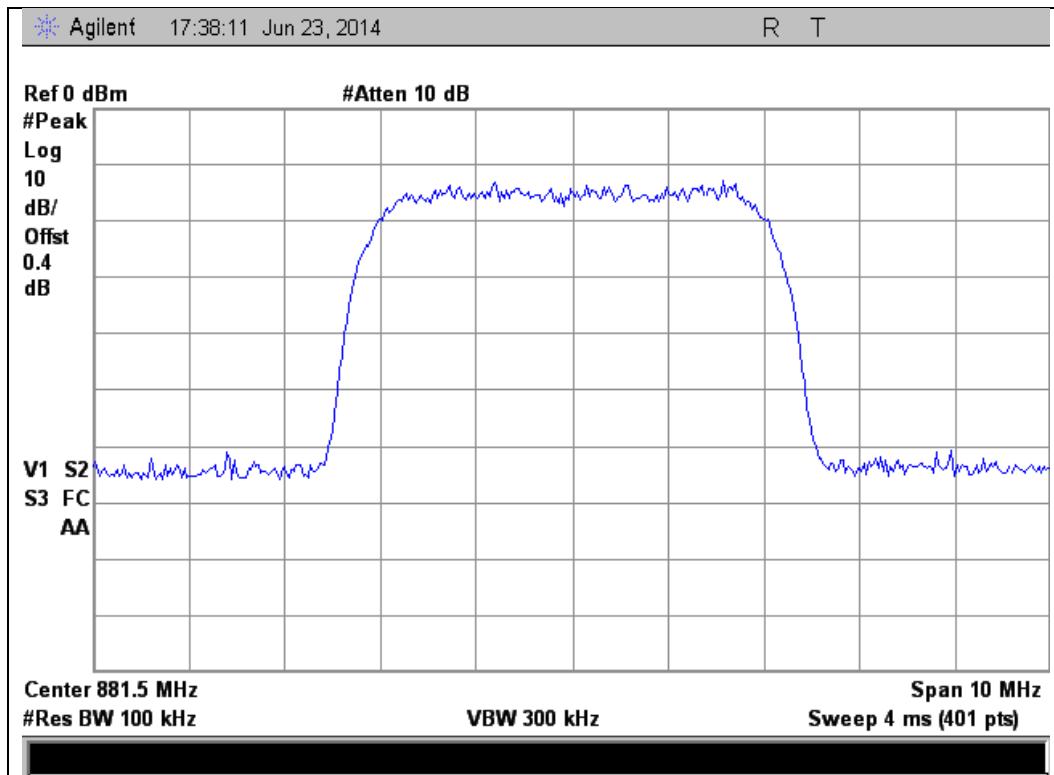




1930 - 1995 MHz Band

Input

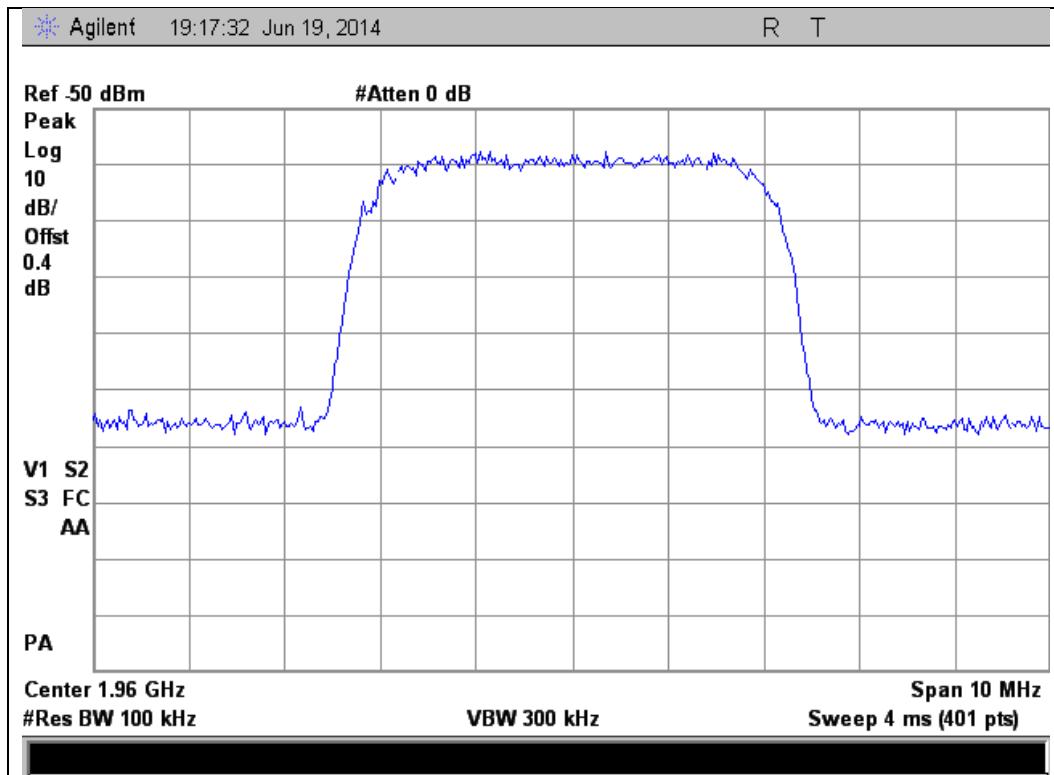


Output

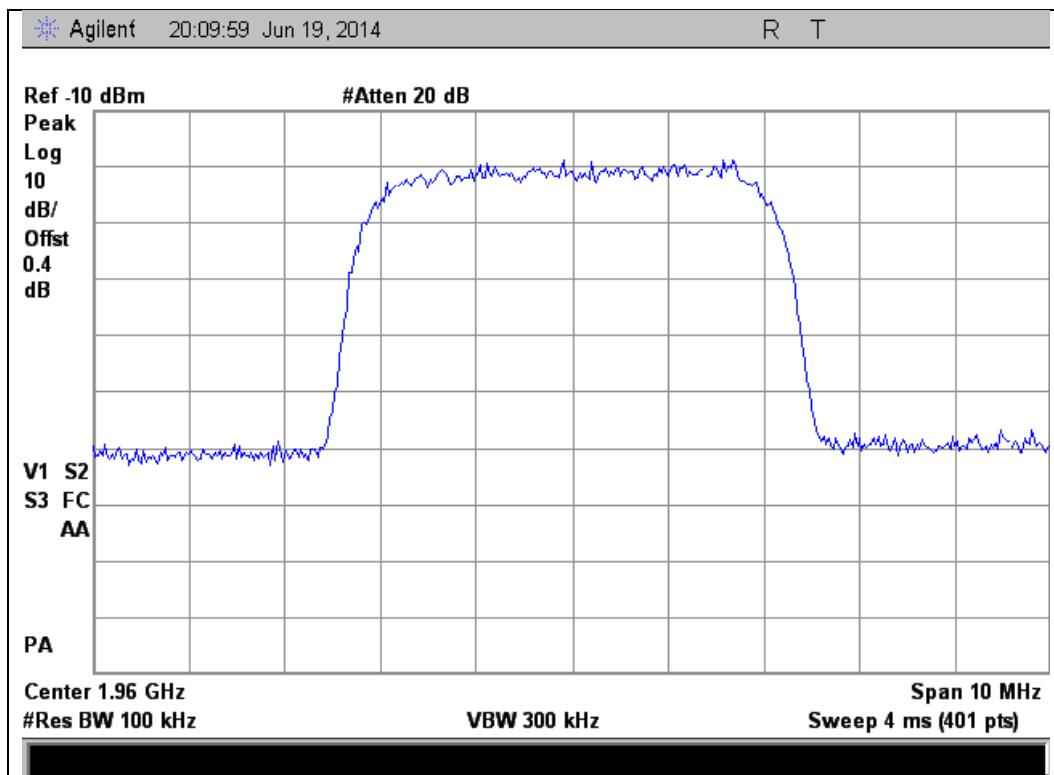




## 2110 - 2155 MHz Band

### Input

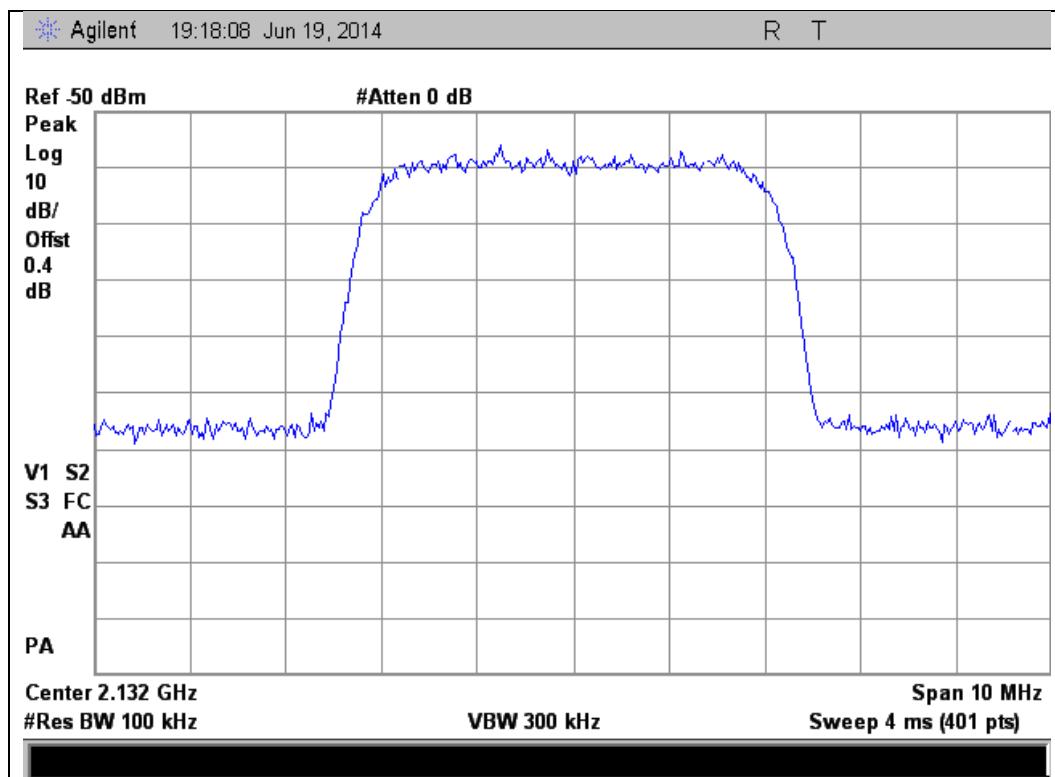

### Output

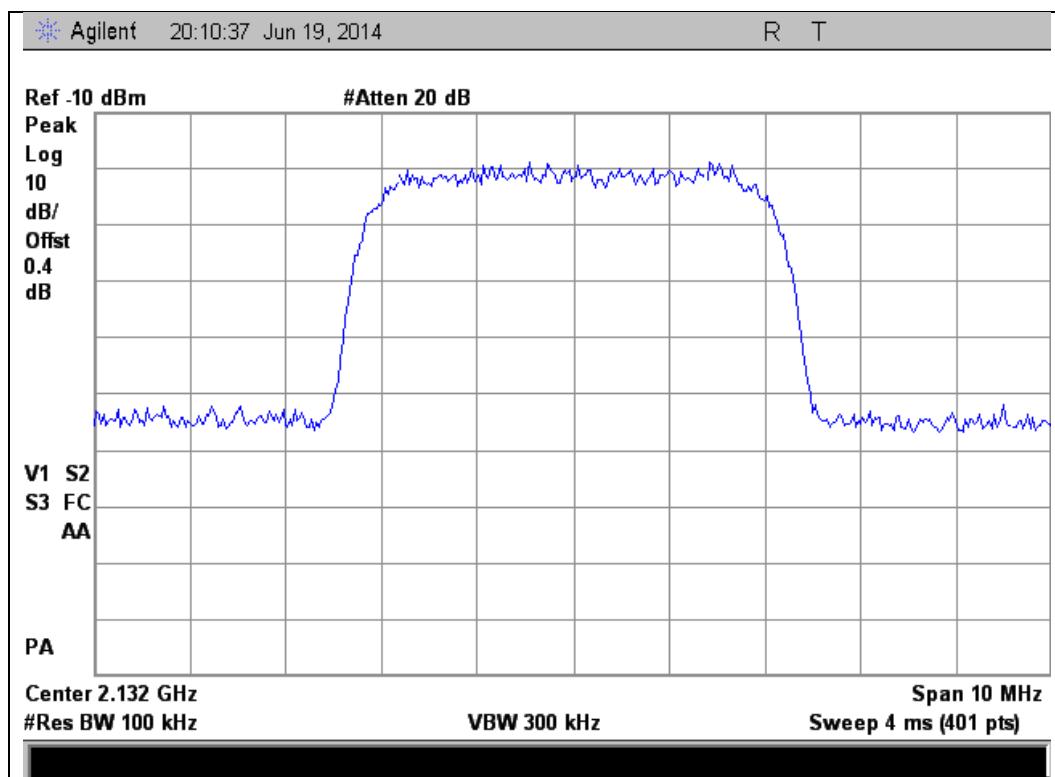



## Oscillation Detection


**Name of Test:** Oscillation Detection  
**Test Equipment Utilized:** i00379, i00405, i00412

**Engineer:** Mike Graffeo  
**Test Date:** 6/19/14

## Test Procedure

The EUT was connected to a spectrum analyzer set for 0 Hz operation. The EUT uplink and downlink were fed back upon each other through a selectable band pass filter and variable attenuator. The EUT uplink and downlink were tested to ensure that the presence of oscillation was detected and that the EUT output turned off within 300 mS for the Uplink and 1 second for the Downlink and remained off for 1 minute. A EUT with test software was utilized to ensure that the EUT only had a maximum of 5 attempts at restart from oscillation before permanently shutting off.

## Test Setup

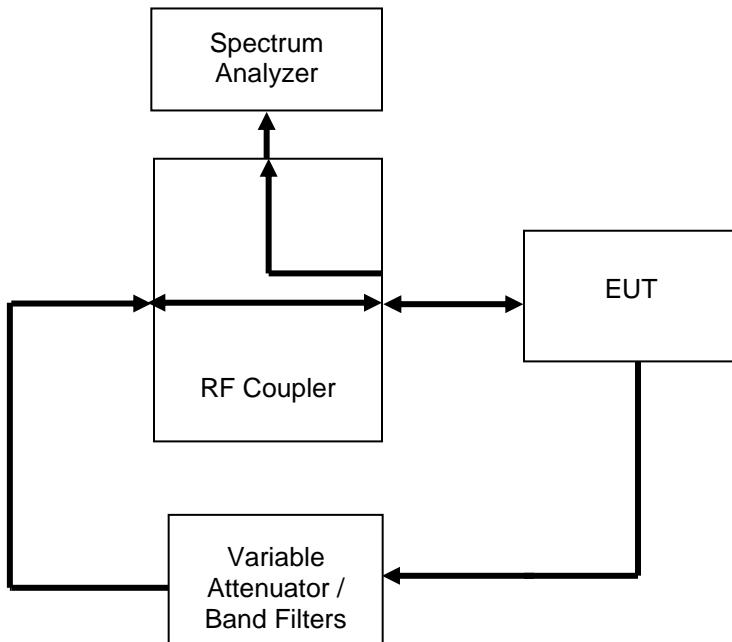



**Uplink Detection Time Test Results**

Frequency Band (MHz)	Measured Time (mS)	Limit (mS)	Result
698 - 716	9.5	300	Pass
776 - 787	12.5	300	Pass
824 - 849	7.0	300	Pass
1710 - 1755	16.0	300	Pass
1850 - 1915	19.0	300	Pass

**Downlink Detection Time Test Results**

Frequency Band (MHz)	Measured Time (mS)	Limit (mS)	Result
728 - 746	19.0	1000	Pass
746 - 757	8.0	1000	Pass
869 - 894	15.5	1000	Pass
1930 - 1995	20.5	1000	Pass
2110 - 2155	7.5	1000	Pass

**Uplink Restart Time Test Results**

Frequency Band (MHz)	Measured Time (S)	Limit (S)	Result
698 - 716	68.40	≥60	Pass
776 - 787	67.95	≥60	Pass
824 - 849	69.07	≥60	Pass
1710 - 1755	68.40	≥60	Pass
1850 - 1915	69.08	≥60	Pass



**Downlink Restart Time Test Results**

Frequency Band (MHz)	Measured Time (S)	Limit (S)	Result
728 - 746	69.08	≥60	Pass
746 - 757	69.30	≥60	Pass
869 - 894	68.62	≥60	Pass
1930 – 1995	68.40	≥60	Pass
2110 - 2155	68.17	≥60	Pass

**Uplink Restart Count Test Results**

Frequency Band (MHz)	Restarts	Limit	Result
698 - 716	3	≤5	Pass
776 - 787	2	≤5	Pass
824 - 849	2	≤5	Pass
1710 - 1755	2	≤5	Pass
1850 – 1915	2	≤5	Pass


**Downlink Restart Count Test Results**

Frequency Band (MHz)	Restarts	Limit	Result
728 - 746	2	≤5	Pass
746 - 757	2	≤5	Pass
869 - 894	2	≤5	Pass
1930 – 1995	2	≤5	Pass
2110 - 2155	2	≤5	Pass




**Uplink Detection Time Test Results**  
Note: Used 200ms was used to get more resolution

**698 - 716 MHz Band**

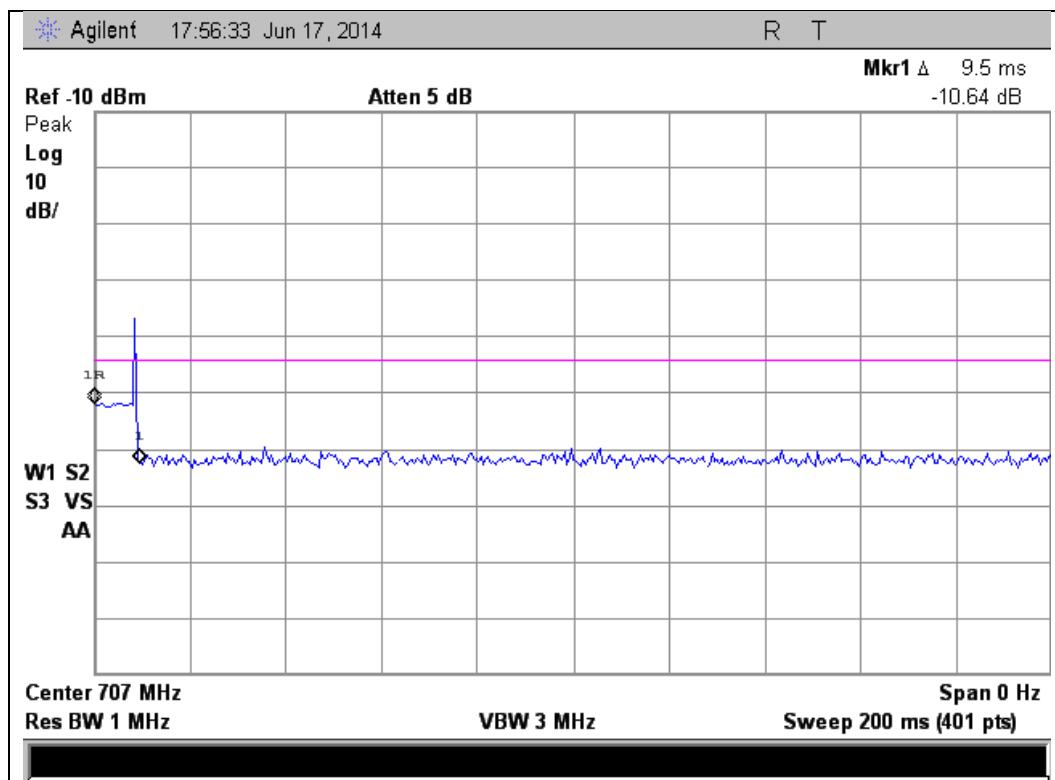


**776 - 787 MHz Band**

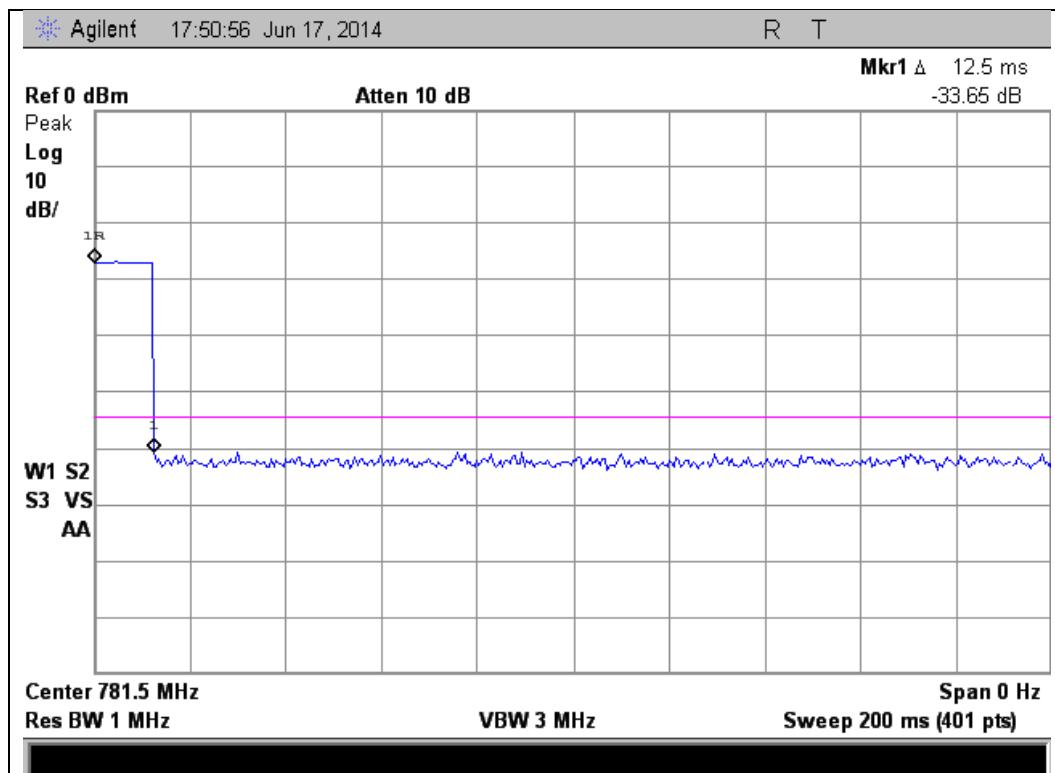




### 824 - 849 MHz Band

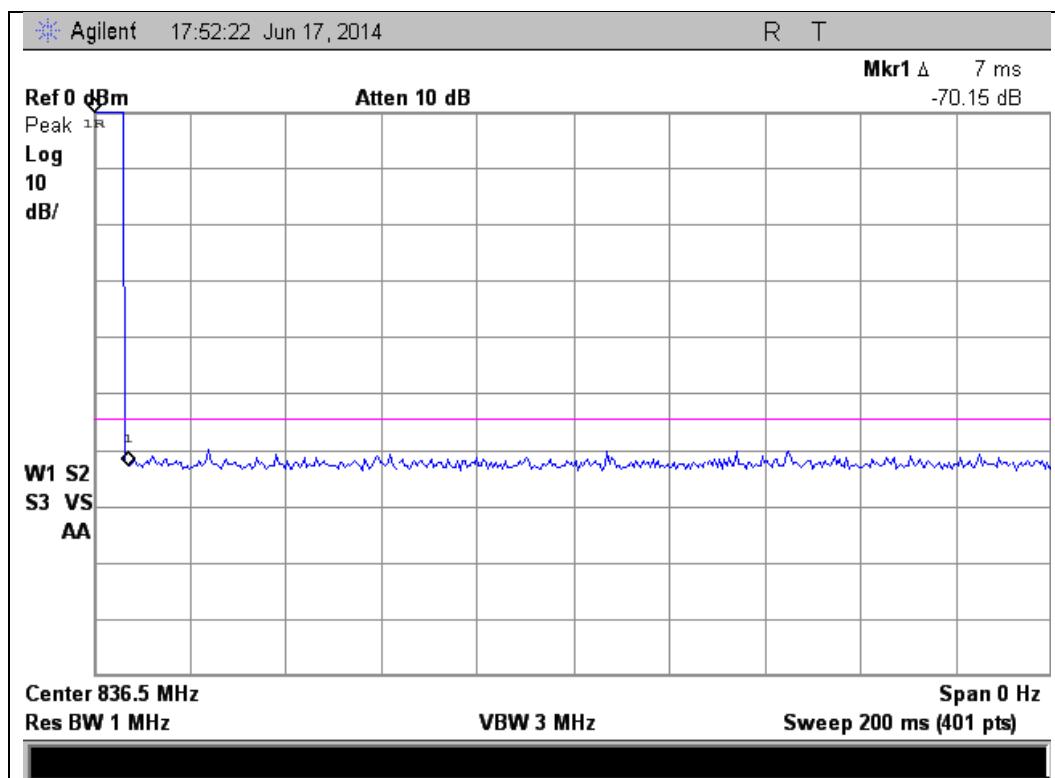


### 1710 - 1755 MHz Band

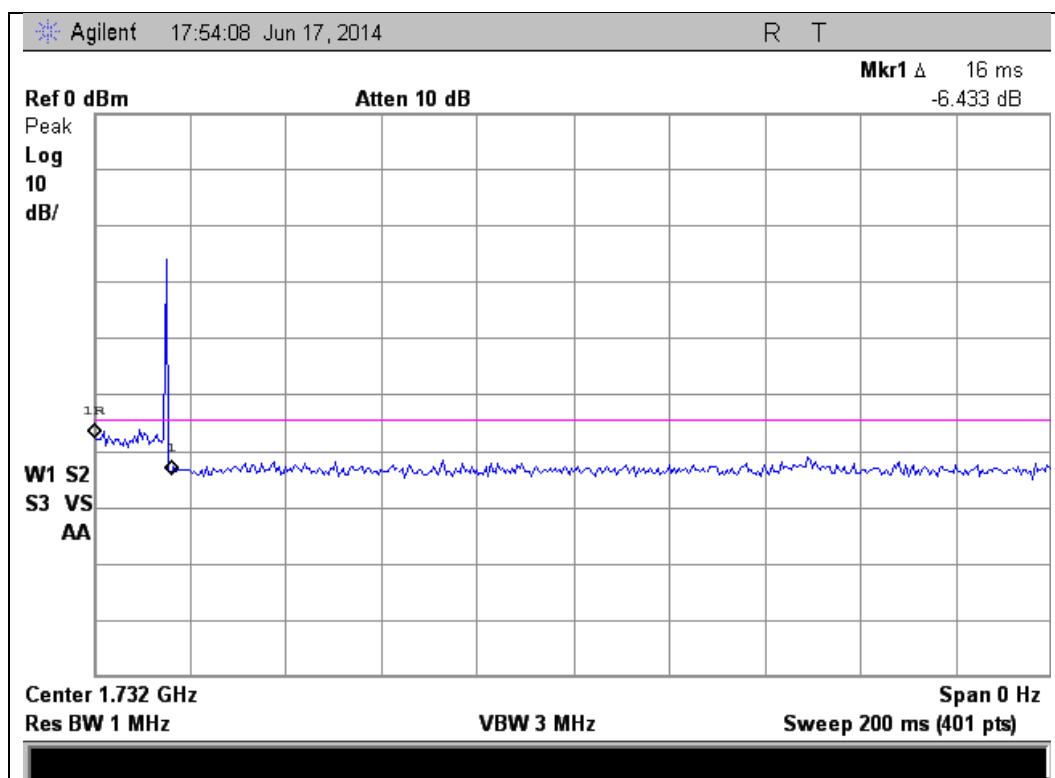




### 1850 - 1915 MHz Band

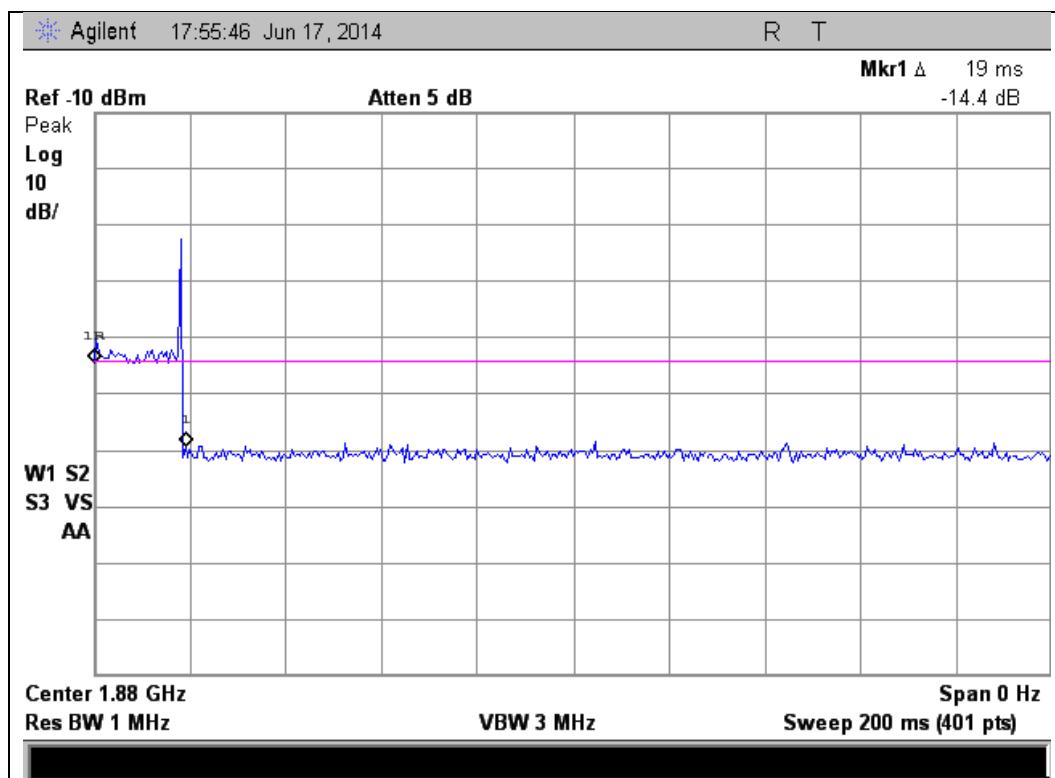


### Uplink Restart Time Test Results

#### 698 - 716 MHz Band

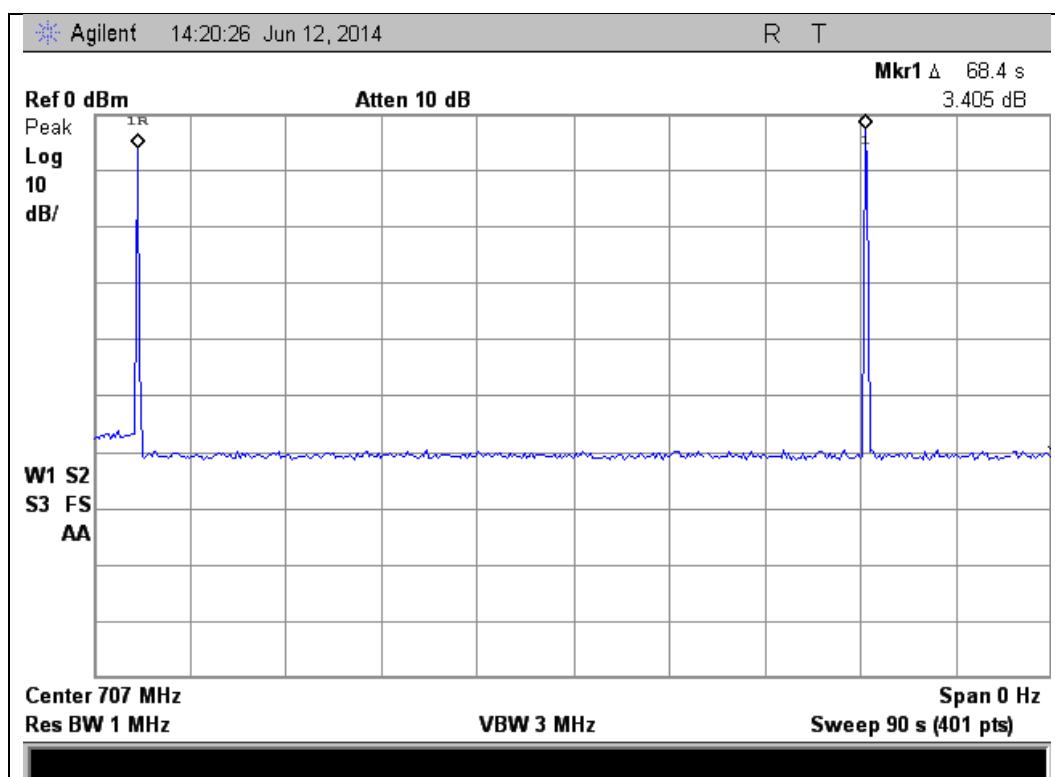




### 776 - 787 MHz Band

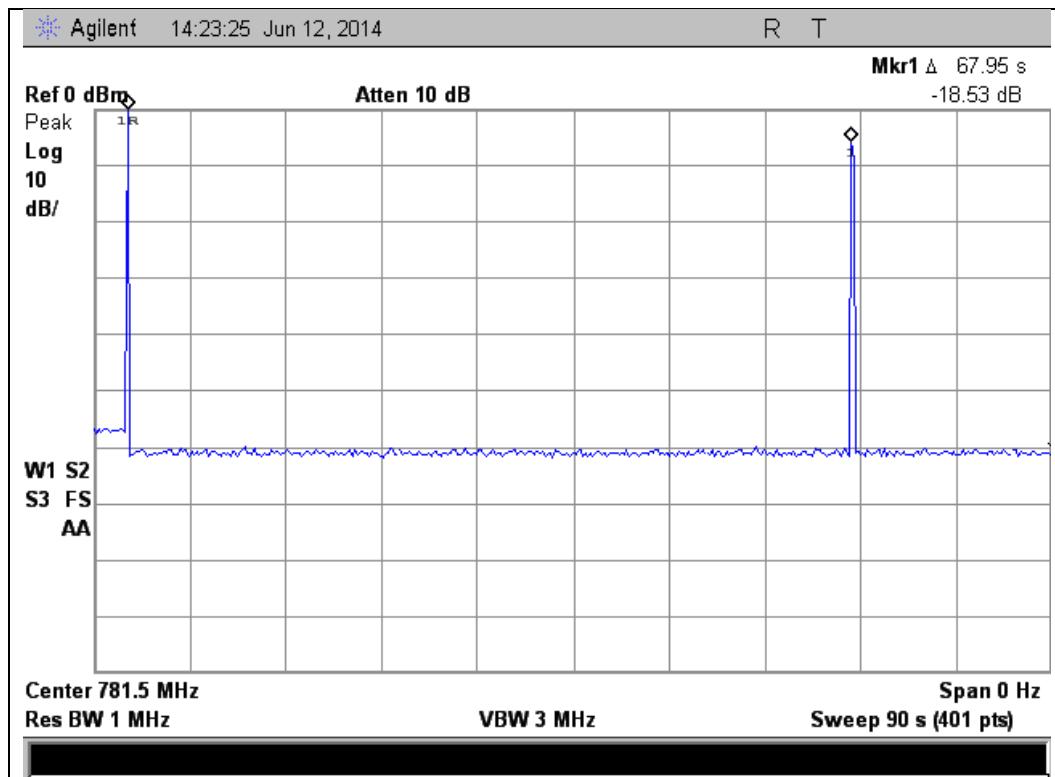


### 824 - 849 MHz Band

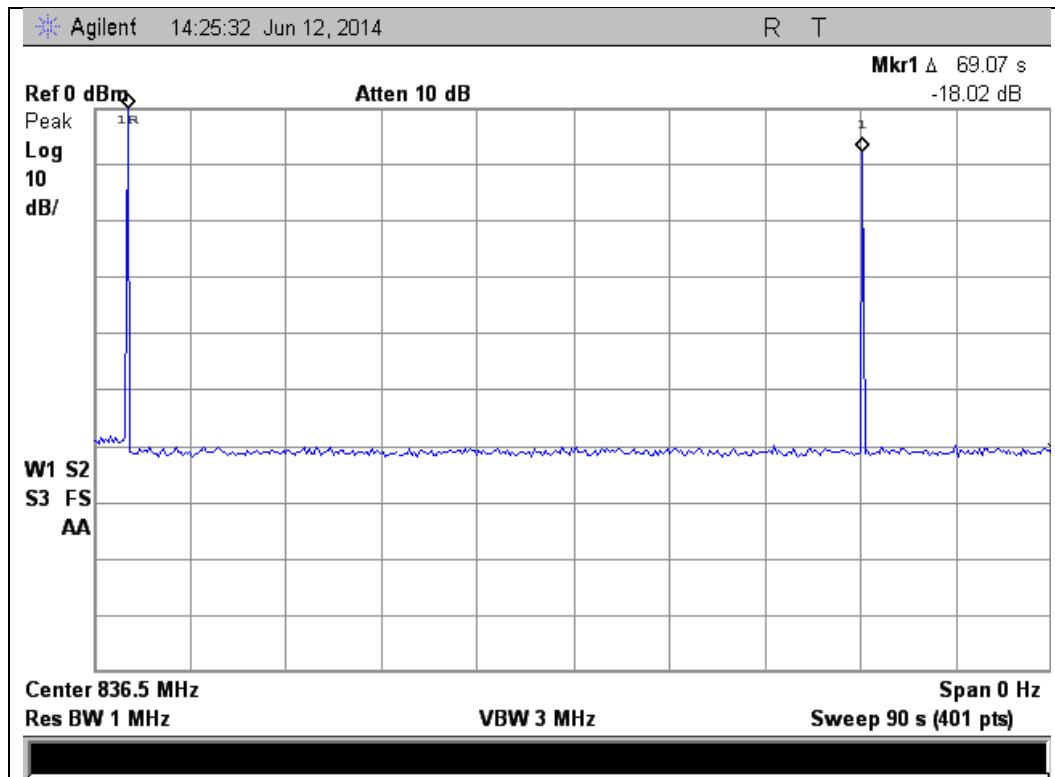




### 1710 - 1755 MHz Band

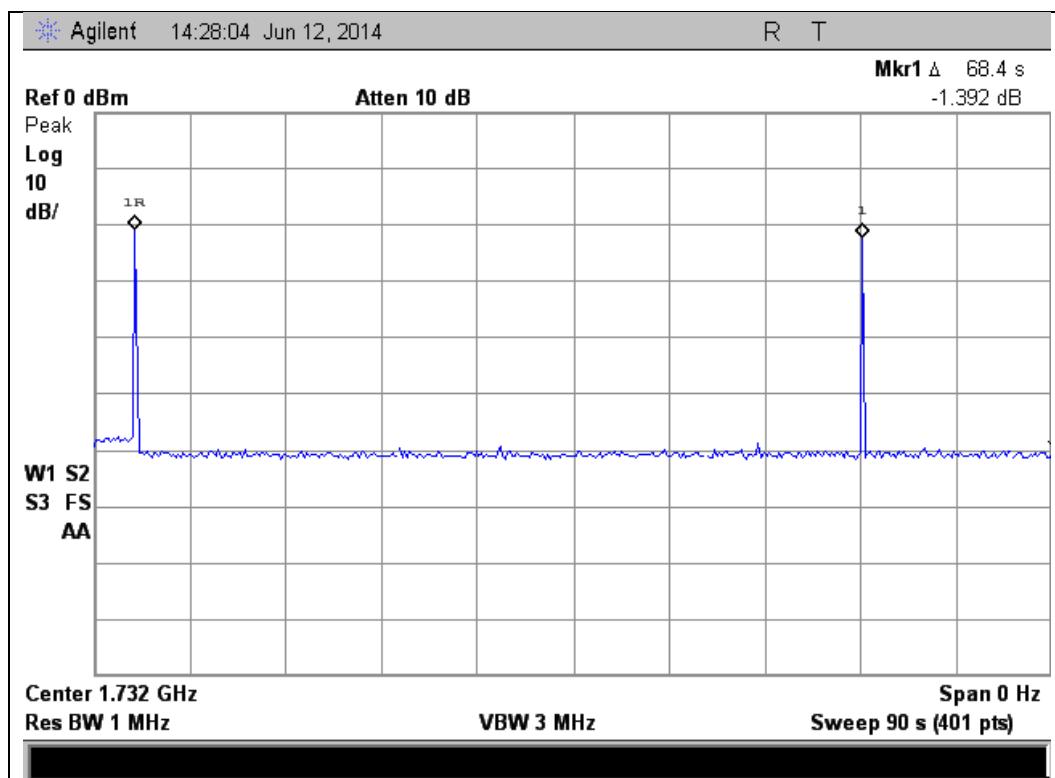


### 1850 - 1915 MHz Band

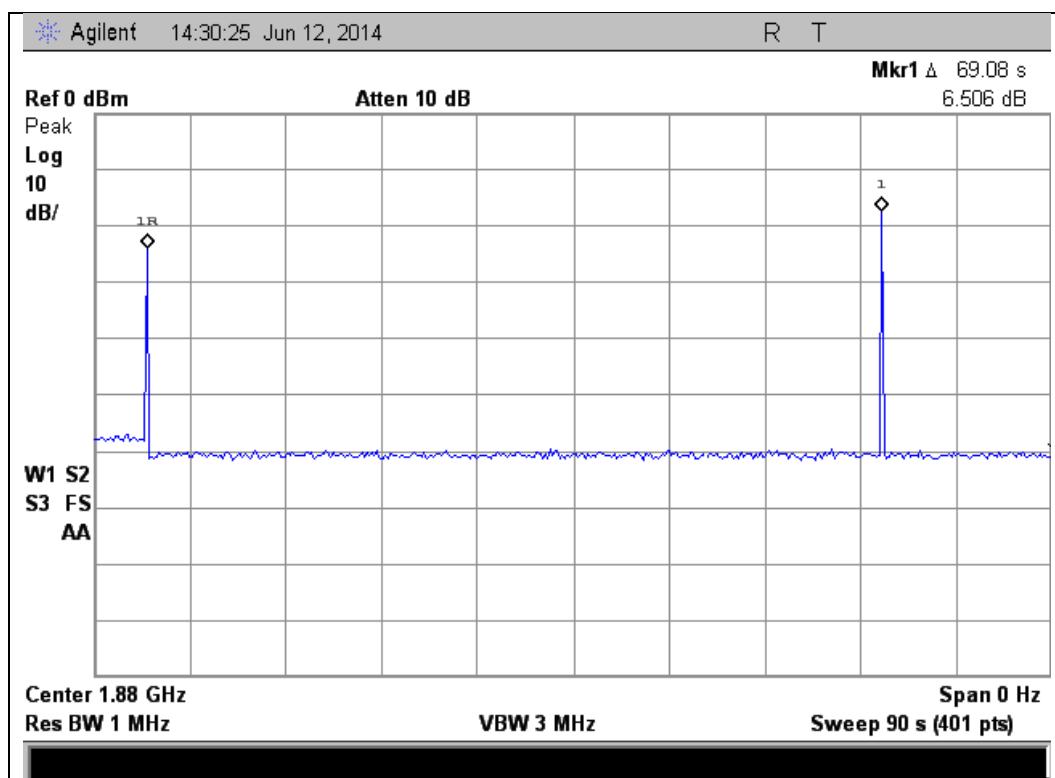




### Uplink Restart Count Test Results

#### 698 - 716 MHz Band

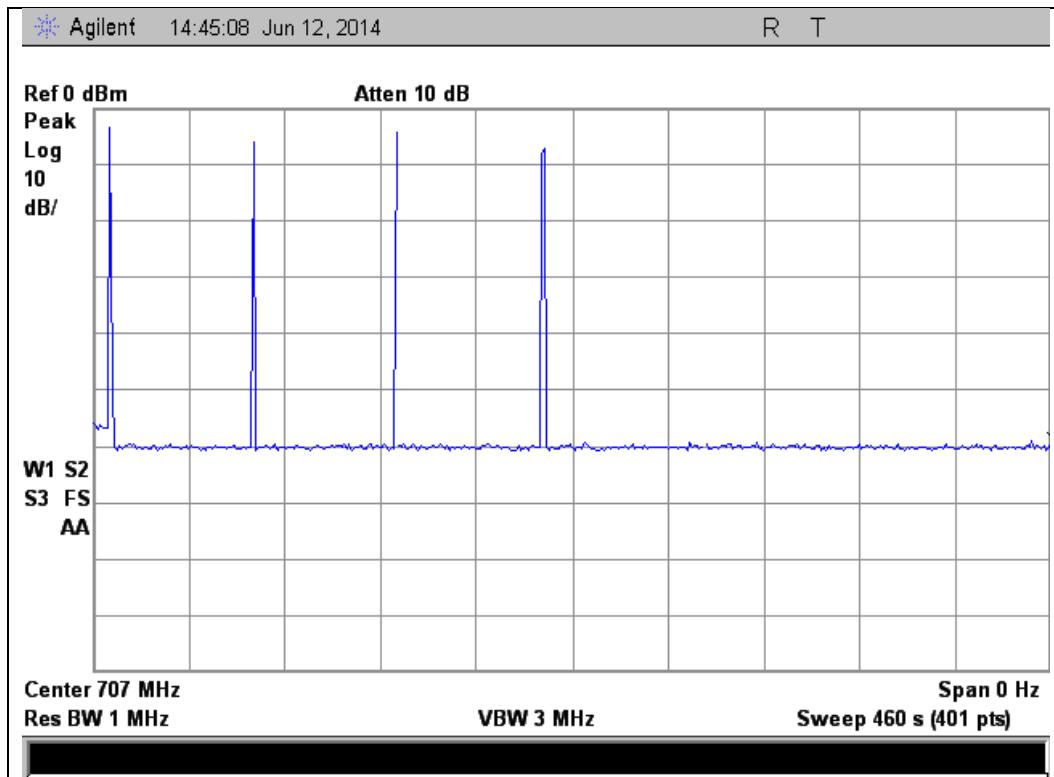


#### 776 - 787 MHz Band

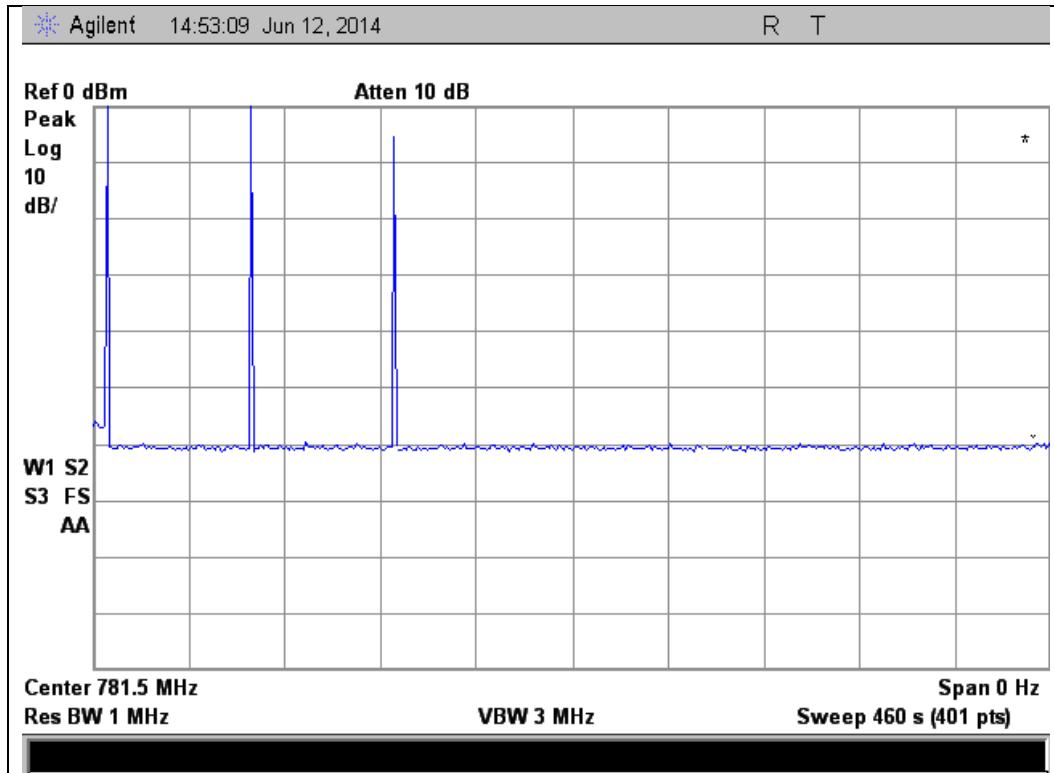




### 824 - 849 MHz Band

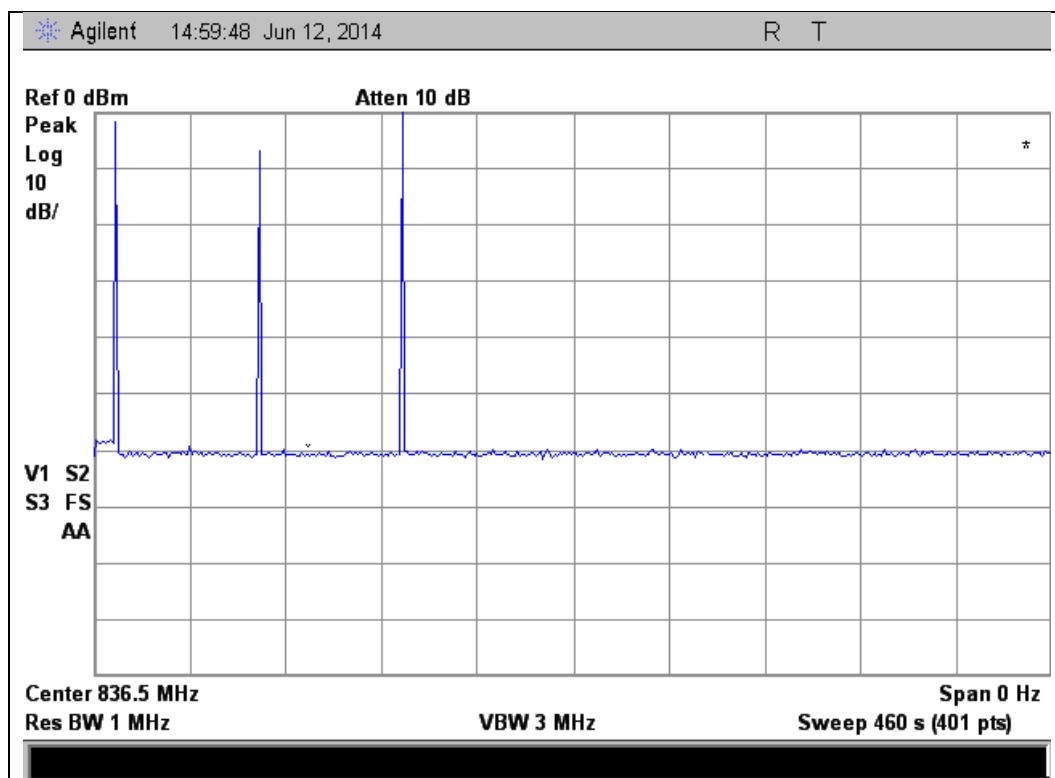


### 1710 - 1755 MHz Band

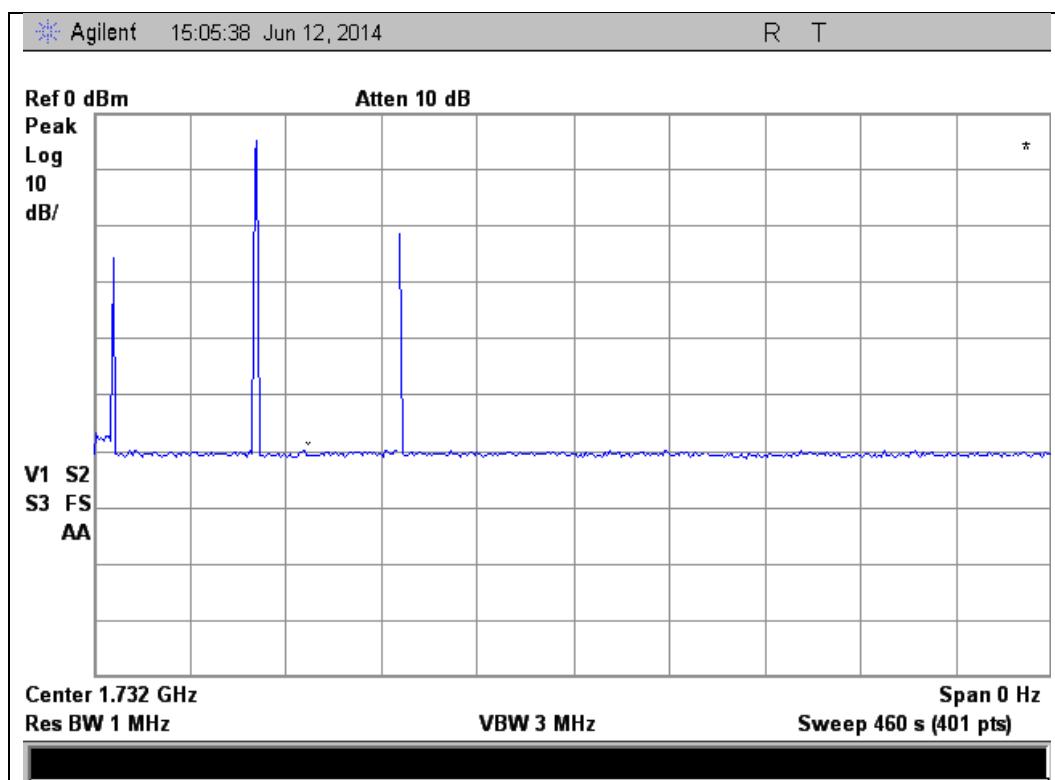




### 1850 - 1915 MHz Band

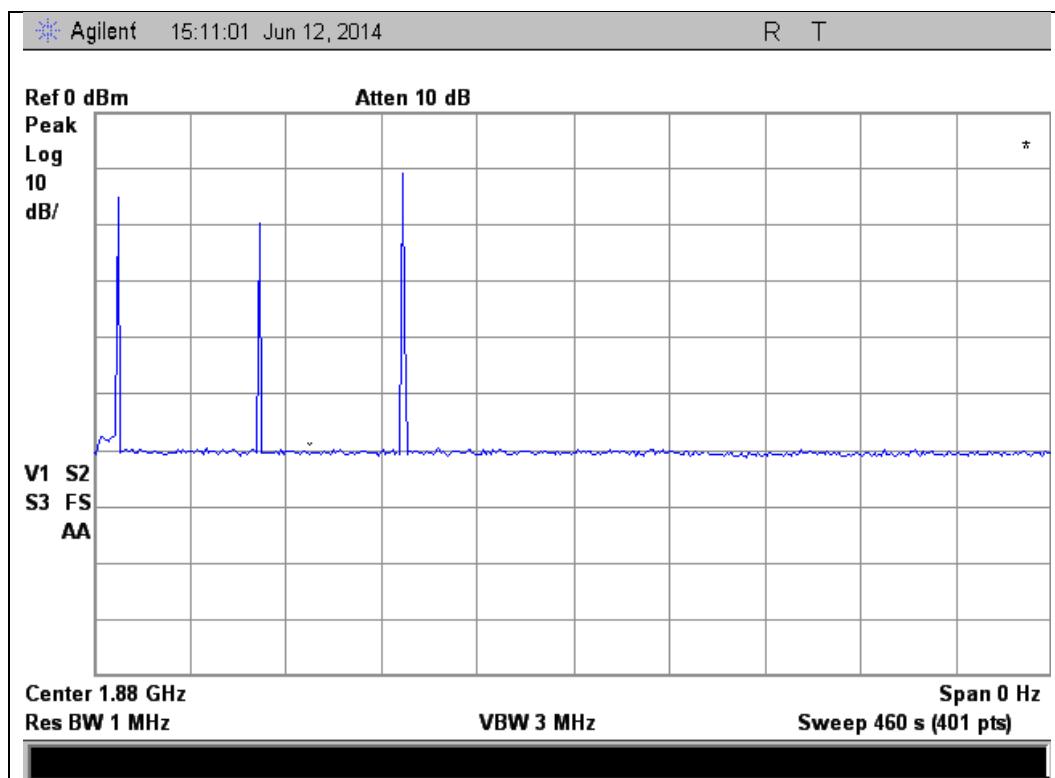

### Downlink Detection Time Test Results


Note: Used 200ms was used to get more resolution

### 728 - 746 MHz Band

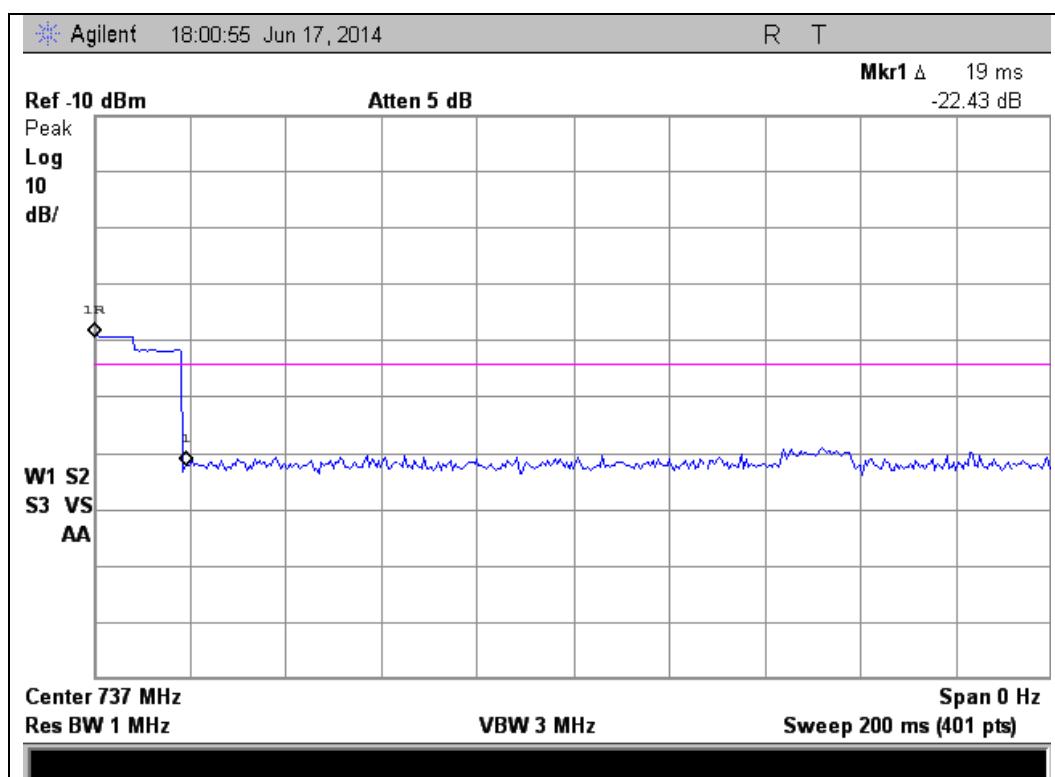




### 746 - 757 MHz Band

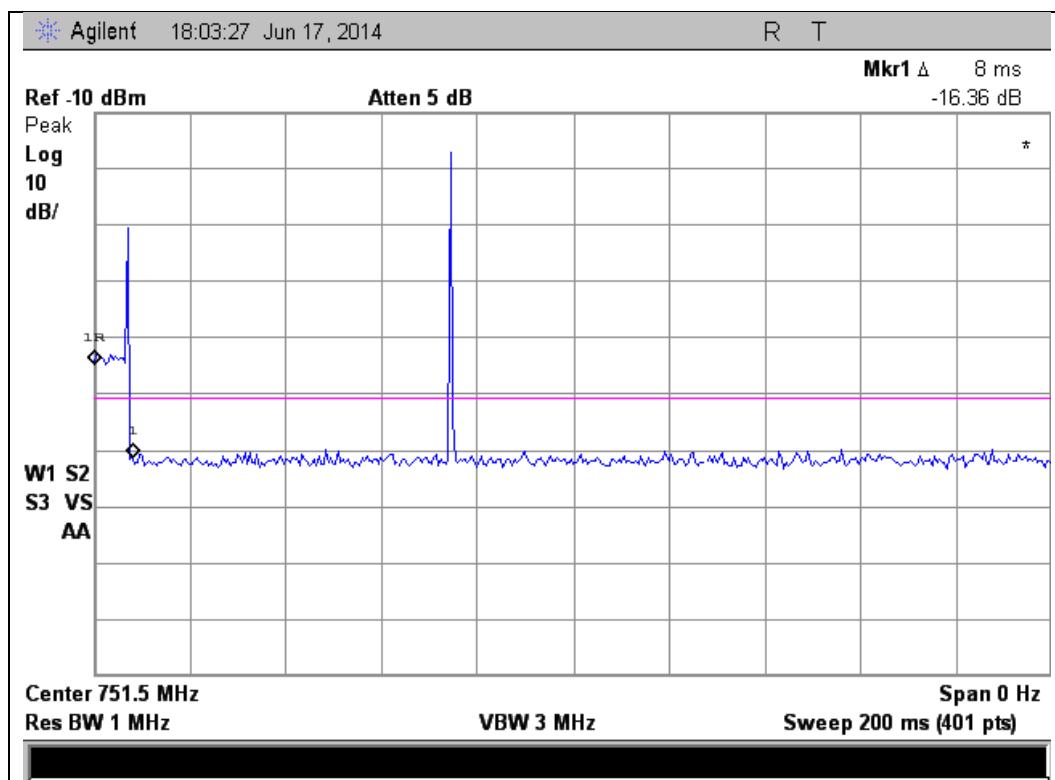


### 869 - 894 MHz Band

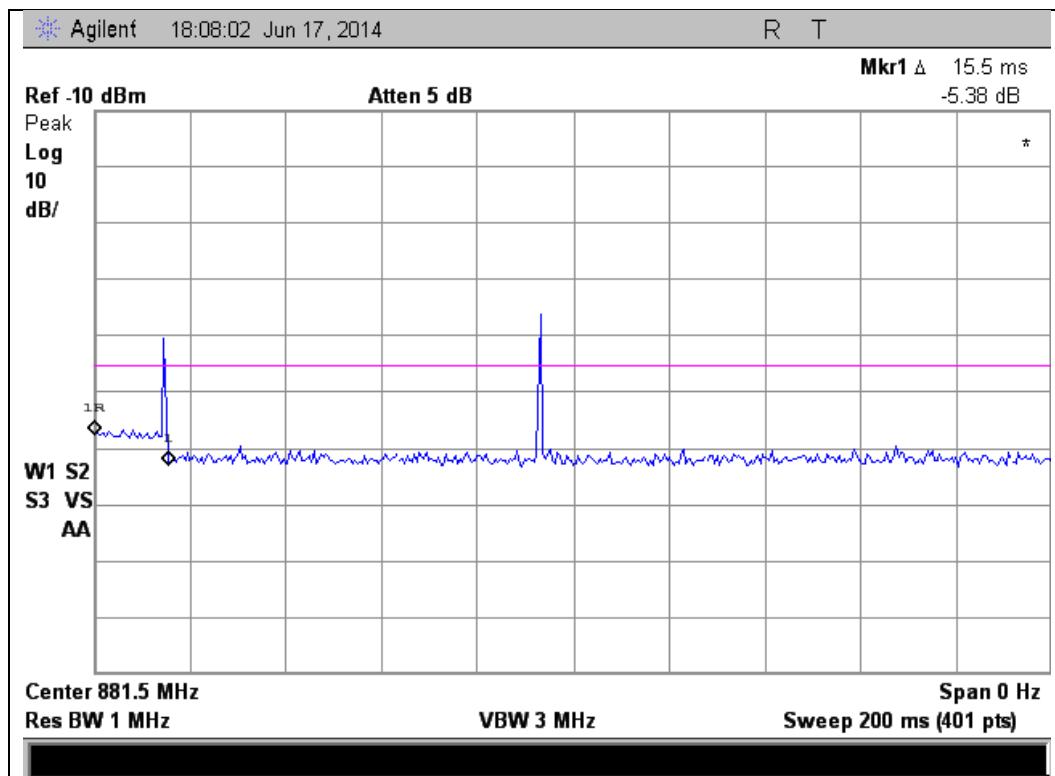




### 1930 - 1995 MHz Band

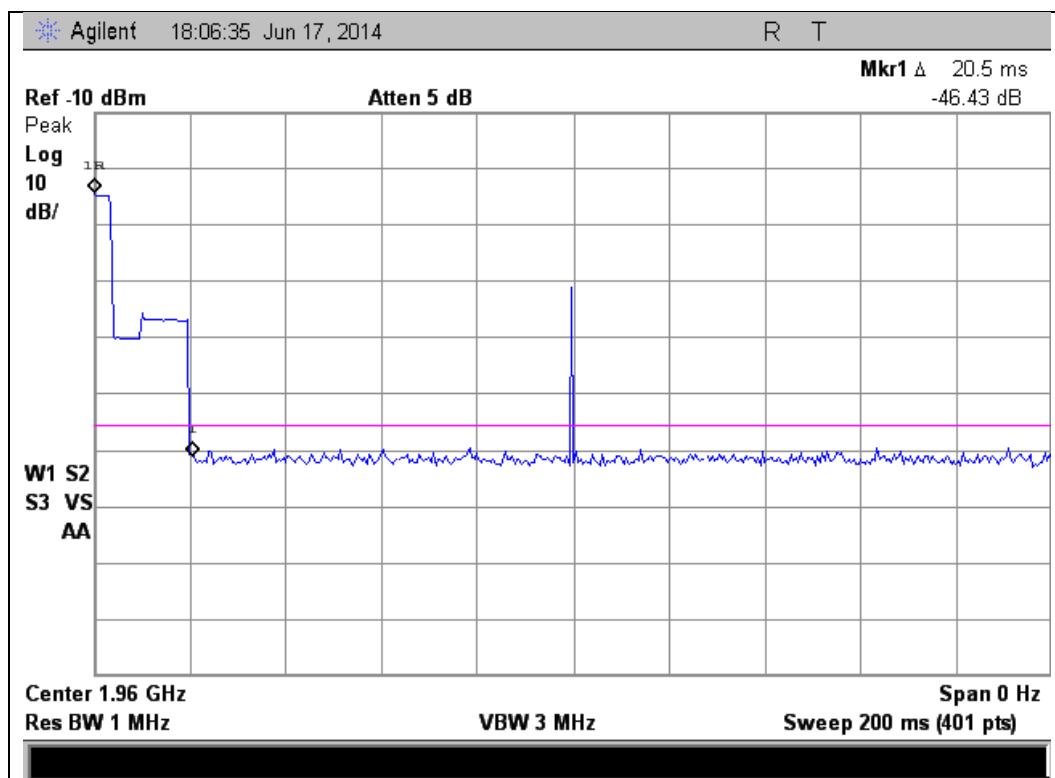


### 2110 - 2155 MHz Band

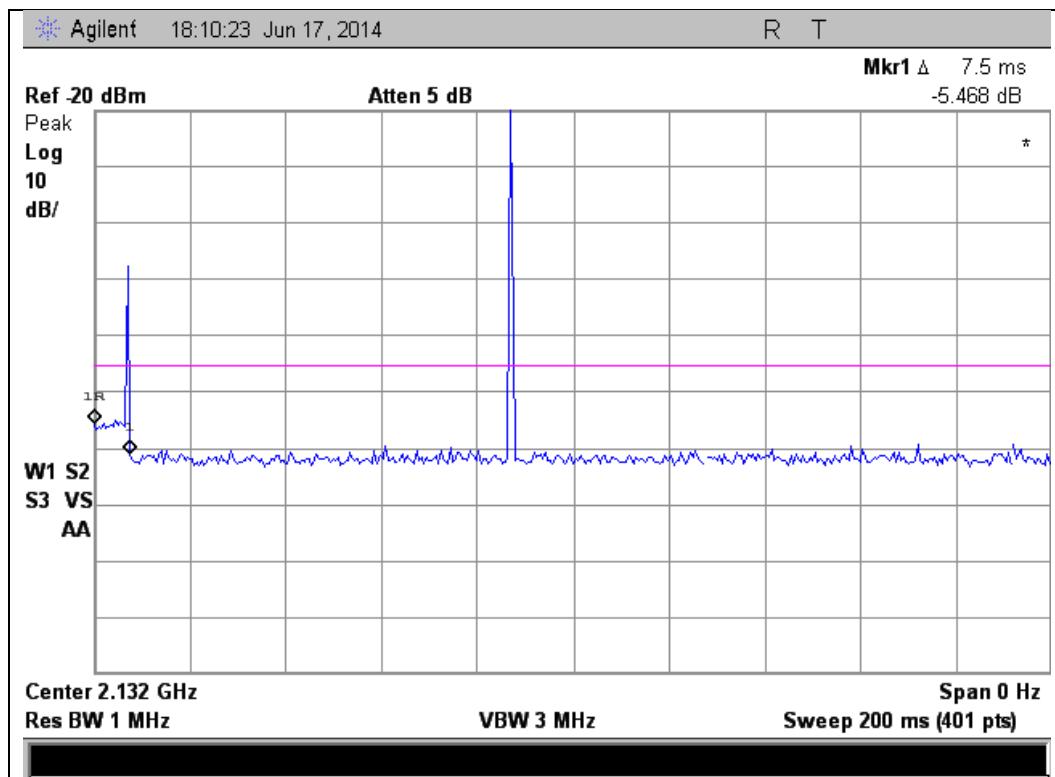




### Downlink Restart Time Test Results

#### 728 - 746 MHz Band

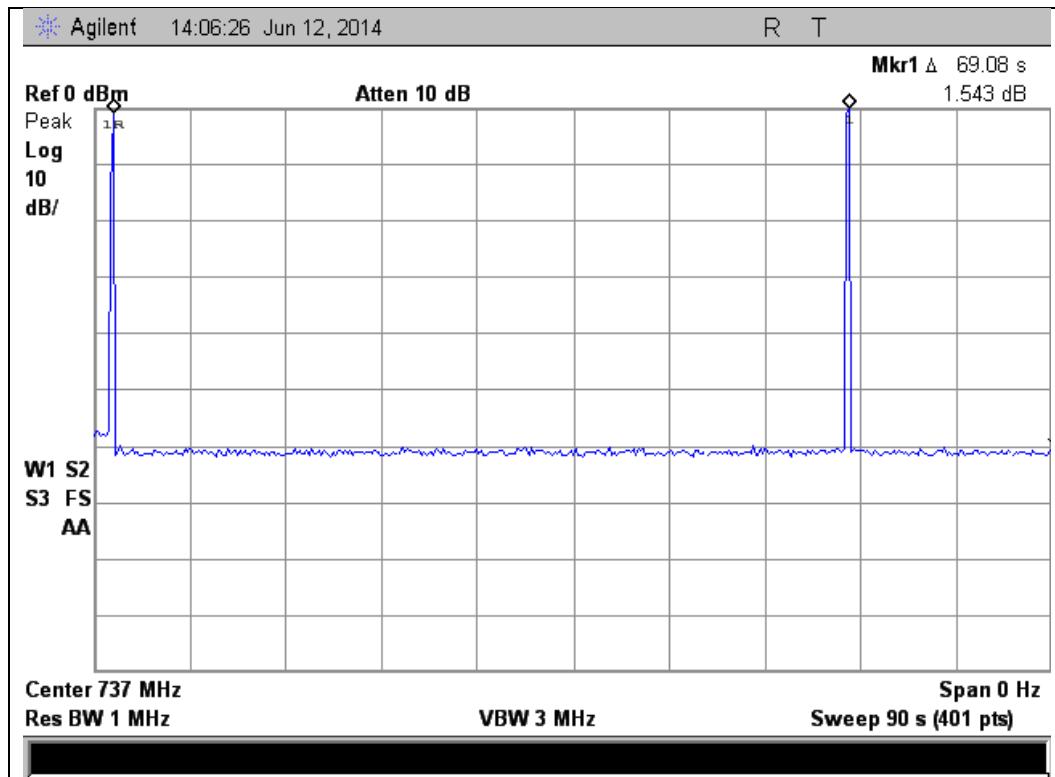


#### 746 - 757 MHz Band

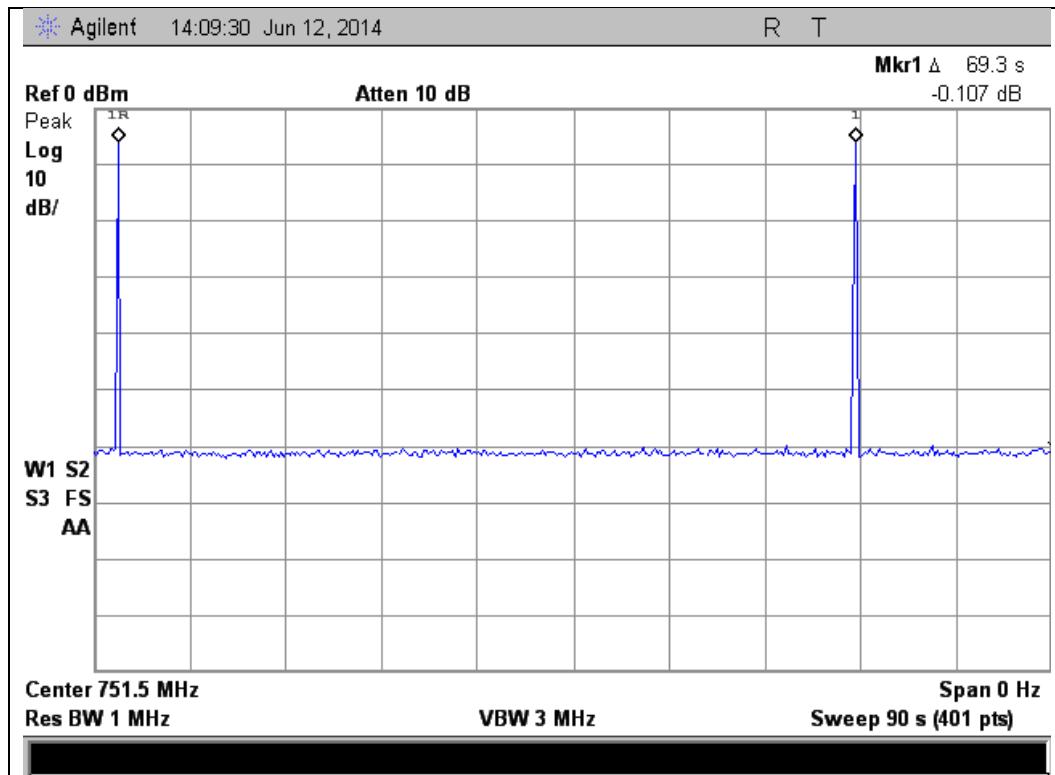




### 869 - 894 MHz Band

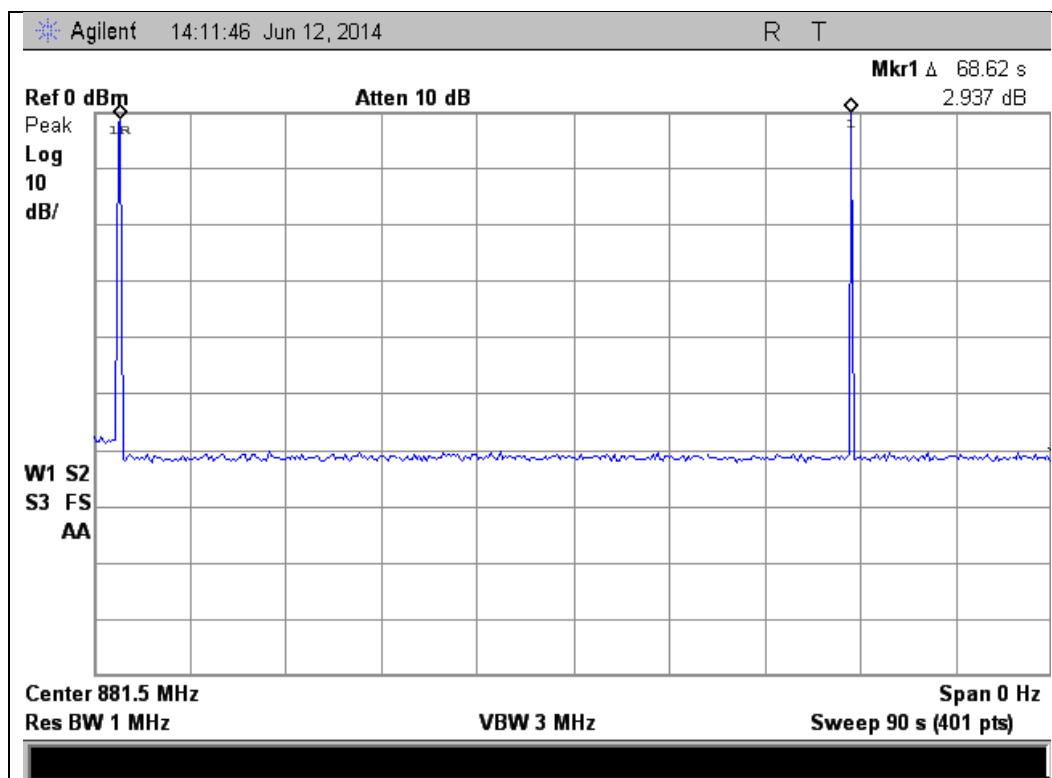


### 1930 - 1995 MHz Band

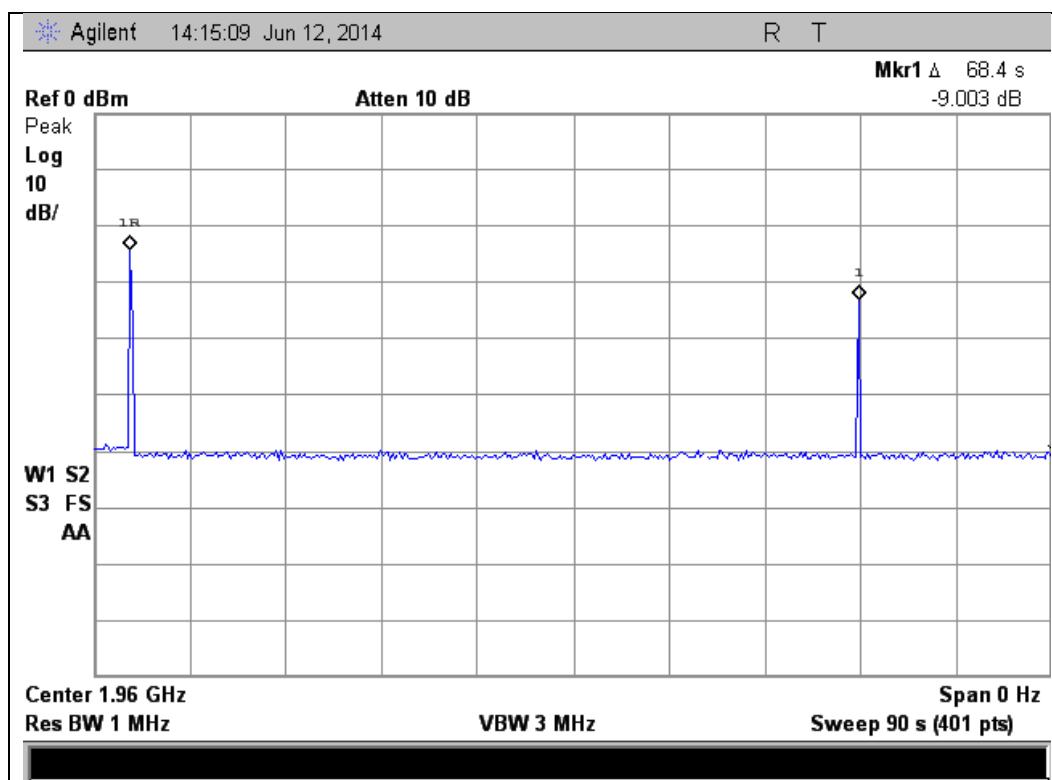




### 2110 - 2155 MHz Band

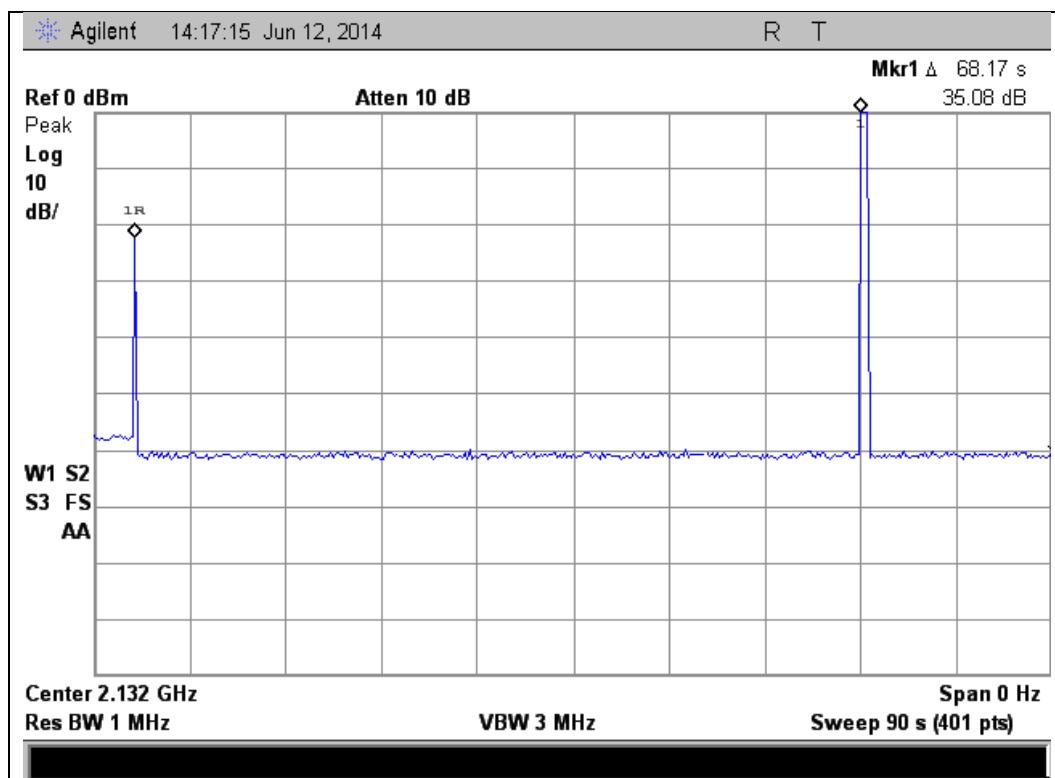


### Downlink Restart Count Test Results

#### 728 - 746 MHz Band

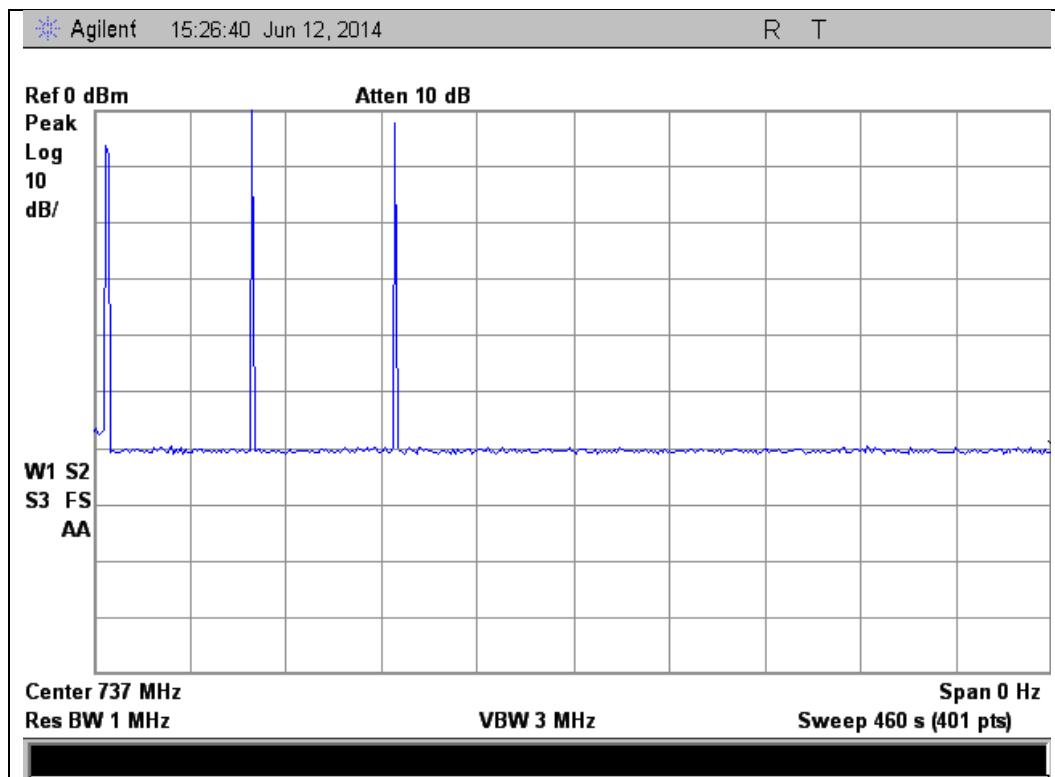




### 746 - 757 MHz Band

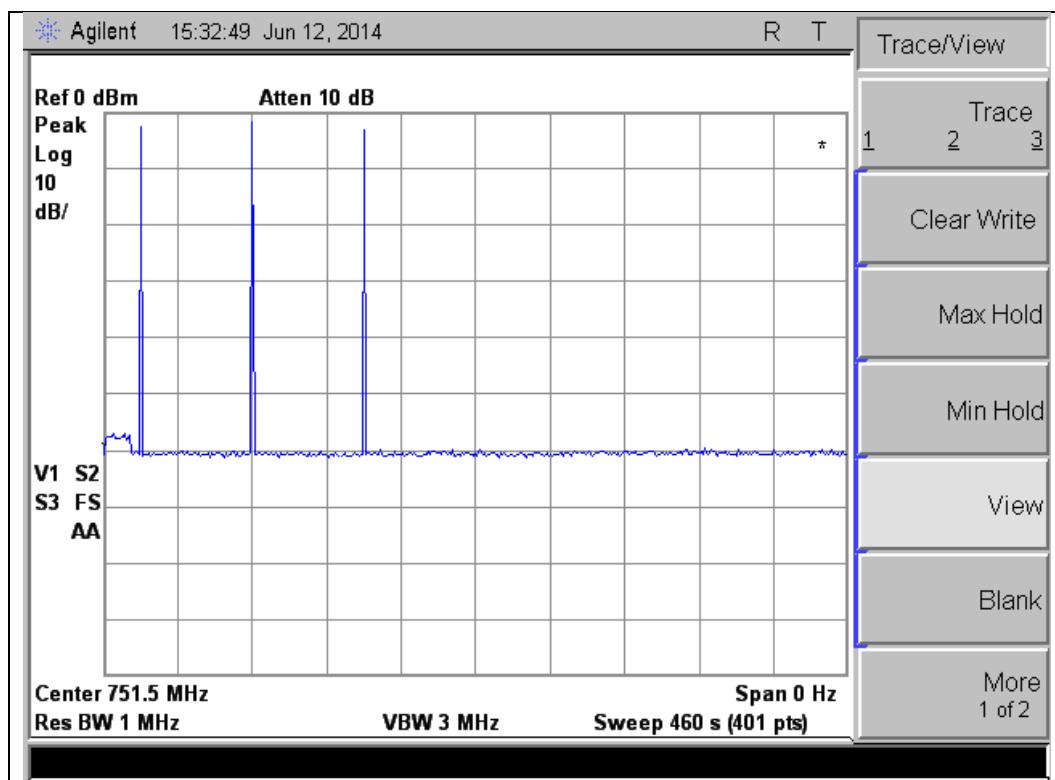


### 869 - 894 MHz Band

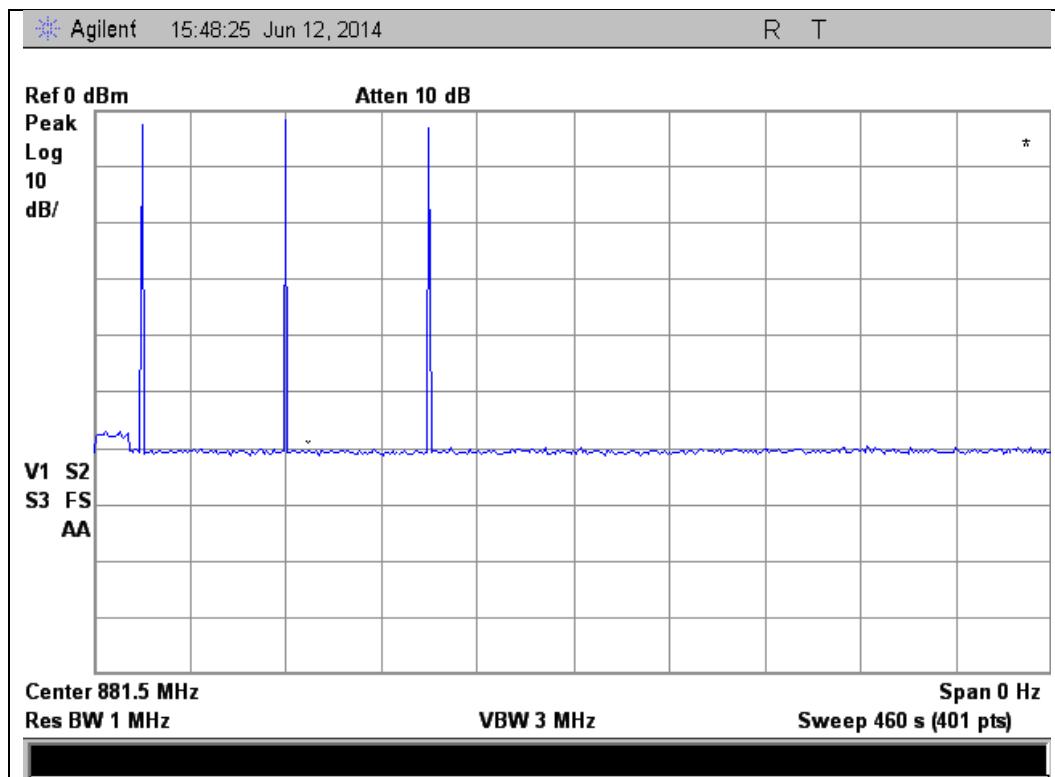




1930 - 1995 MHz Band

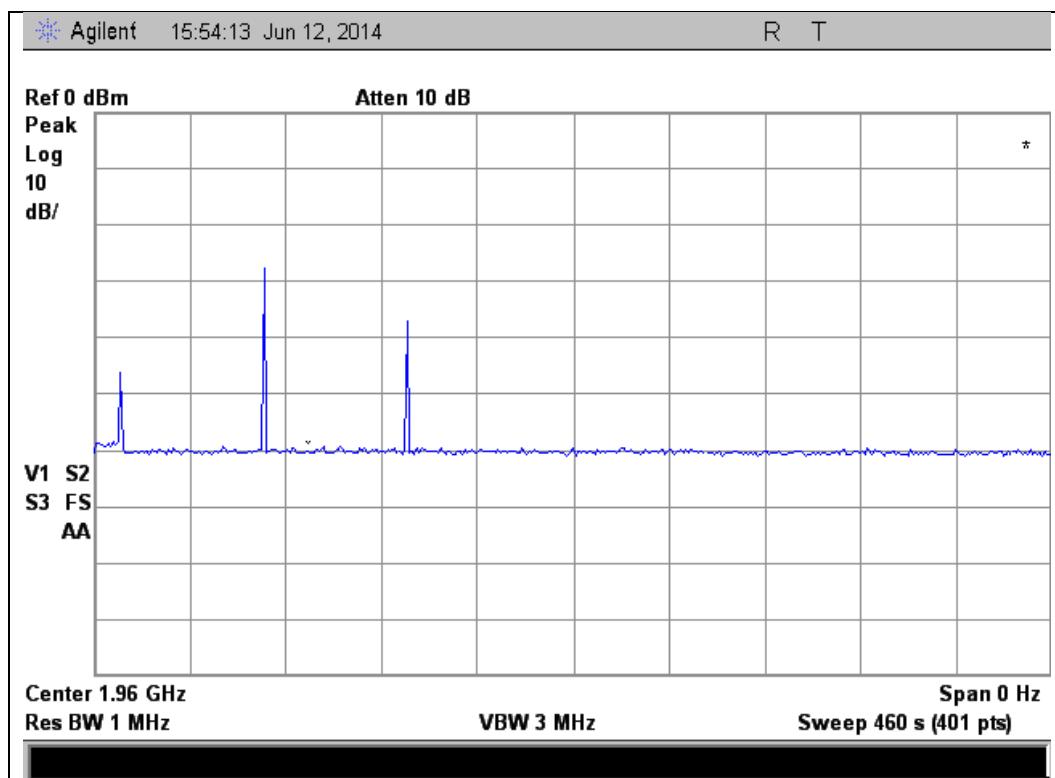

2110 - 2155 MHz Band

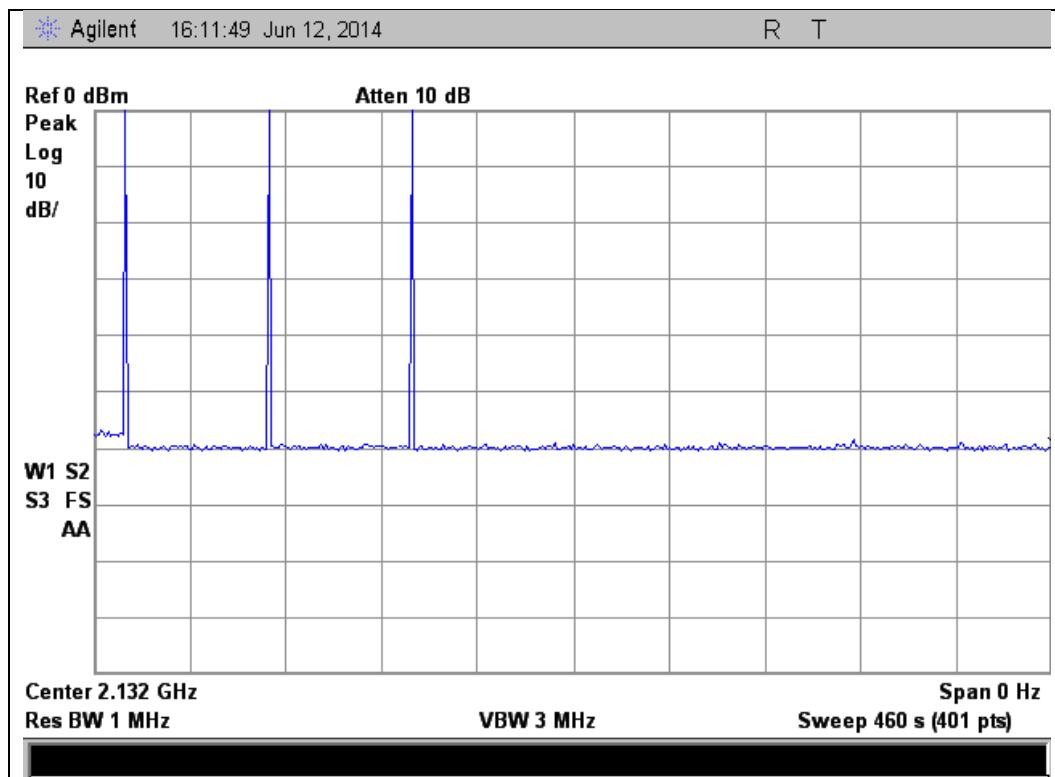



## Radiated Spurious

**Name of Test:** Radiated Spurious  
**Test Equipment Utilized:** i00271, i00379, i00334

**Engineer:** Mike Graffeo  
**Test Date:** 6/19/14


## Test Procedure

The EUT was tested in a semi-anechoic chamber with the turntable set 3m from the receiving antenna. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Emissions. The EUT was tested by rotating it 360 degrees with the antenna in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure that the signal levels were maximized. All cable and antenna correction factors were input into the spectrum analyzer ensuring an accurate measurement in ERP/EIRP with the resultant power in dBm. A signal generator was used to provide a CW signal centered in each operational uplink and downlink band. The EUT output was terminated into a 50 Ohm non-radiating load.

The following formula was used for calculating the limits:

Radiated Spurious Emissions Limit =  $P1 - (43 + 10\log(P2)) = -13\text{dBm}$   
P1 = power in dBm  
P2 = power in Watts

## Test Setup

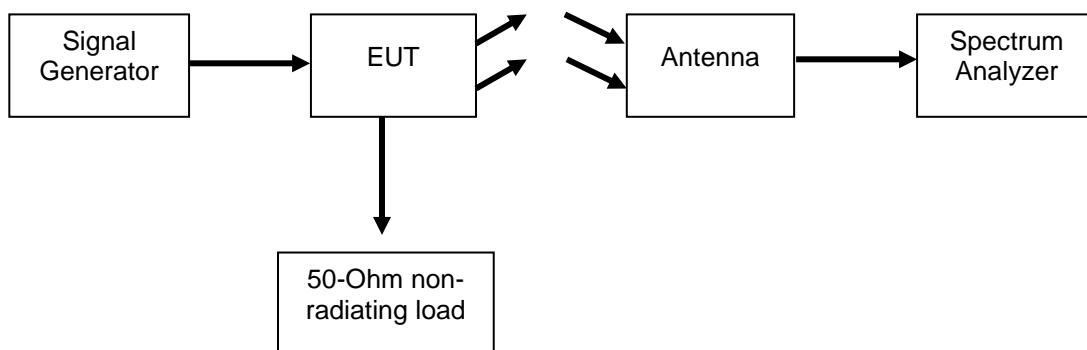



### Uplink Test Results

#### 698 - 716 MHz Band 707 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
1414	-77.17	-13	Pass
2121	-78.48	-13	Pass
2828	-79.33	-13	Pass

#### 776 - 787 MHz Band 781.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
1563	-79.6	-13	Pass
2344.5	-77.02	-13	Pass
3126	-75.79	-13	Pass

#### 824 - 849 MHz Band 836.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
1673	-80.48	-13	Pass
2509.5	-76.69	-13	Pass
3346	-74.37	-13	Pass

#### 1710 - 1755 MHz Band 1732.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
3465	-74.07	-13	Pass
5197.5	-74.16	-13	Pass
6930	-73.67	-13	Pass

#### 1850 - 1915 MHz Band 1880.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
3761	-77.56	-13	Pass
5641.5	-75.42	-13	Pass
7522	-71.68	-13	Pass



### Downlink Test Results

#### 728 - 746 MHz Band 737 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
1474	78.62	-13	Pass
2211	-76.89	-13	Pass
2948	-80.21	-13	Pass

#### 746 - 757 MHz Band 751.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
1503	-75.89	-13	Pass
2254.5	-78.72	-13	Pass
3006	-76.22	-13	Pass

#### 869 - 894 MHz Band 881.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
1763	-81.04	-13	Pass
2644.5	-75.97	-13	Pass
3526	-74.27	-13	Pass

#### 1930 - 1995 MHz Band 1960 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
3920	-76.83	-13	Pass
5880	-76.71	-13	Pass
7840	-71.92	-13	Pass

#### 2110 - 2155 MHz Band 2132.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
4265	-74.64	-13	Pass
6397.5	-76.07	-13	Pass
8530	-68.25	-13	Pass

No other emissions were detected. All emissions were lower than -13 dBm.  
All emissions were system noise floor.



**Test Equipment Utilized**

Description	Manufacturer	Model #	CT Asset #	Last Cal Date	Cal Due Date
Horn Antenna, Amplified	ARA	DRG-118/A	i00271	5/8/14	5/8/15
Humidity / Temp Meter	Newport	IBTHX-W-5	i00282	3/24/14	3/24/15
Voltmeter	Fluke	75III	i00320	3/24/14	3/24/15
EMI Analyzer	Agilent	E7405A	i00379	1/14/14	1/14/15
Spectrum Analyzer	Tektronix	RSA5126A	i00424	9/22/13	9/22/14
Non-radiating load	Termaline	8201	i00334	Verified on: 1/16/14	
Signal Generator	Rohde & Schwarz	SMU200A	i00405	12/11/13	12/11/14
RF Directional Coupler	Meca	CS06-1.500V	i00412	Verified on: 1/16/14	

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

**END OF TEST REPORT**