

Test of Wistron 802.11 a/b/g/n Wireless Module

To: FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: CBIS10-A4 Rev A



# TEST REPORT

FROM



Test of Wistron 802.11 a/b/g/n Wireless Module  
to

To: FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: CBIS10-A4 Rev A

This report supersedes NONE

Applicant: Colubris Networks Inc  
200 West Street, Suite 300  
Waltham  
MA 02451, USA

Product Function: 802.11a/b/g/n Wireless Access Card

Copy No: pdf Issue Date: 1st October 2008

**This Test Report is Issued Under the Authority of;**

**MiCOM Labs, Inc.**  
440 Boulder Court, Suite 200  
Pleasanton, CA 94566 USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



CERTIFICATE #2381.01

**MiCOM Labs is an ISO 17025 Accredited Testing Laboratory**



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 3 of 198

---

This page has been left intentionally blank



## TABLE OF CONTENTS

|                                                                                                  |            |
|--------------------------------------------------------------------------------------------------|------------|
| <b>ACCREDITATION, LISTINGS &amp; RECOGNITION .....</b>                                           | <b>6</b>   |
| <b>1. TEST RESULT CERTIFICATE .....</b>                                                          | <b>9</b>   |
| <b>2. REFERENCES AND MEASUREMENT UNCERTAINTY .....</b>                                           | <b>10</b>  |
| 2.1. Normative References .....                                                                  | 10         |
| 2.2. Test and Uncertainty Procedures .....                                                       | 11         |
| <b>3. PRODUCT DETAILS AND TEST CONFIGURATIONS .....</b>                                          | <b>12</b>  |
| 3.1. Technical Details .....                                                                     | 12         |
| 3.2. Scope of Test Program .....                                                                 | 13         |
| 3.3. Equipment Model(s) and Serial Number(s) .....                                               | 16         |
| 3.4. Antenna Details .....                                                                       | 16         |
| 3.5. Cabling and I/O Ports .....                                                                 | 16         |
| 3.6. Test Configurations .....                                                                   | 17         |
| 3.7. Equipment Modifications .....                                                               | 20         |
| 3.8. Deviations from the Test Standard .....                                                     | 20         |
| 3.9. Subcontracted Testing or Third Party Data .....                                             | 20         |
| <b>4. TEST SUMMARY .....</b>                                                                     | <b>21</b>  |
| <b>5. TEST RESULTS .....</b>                                                                     | <b>24</b>  |
| 5.1. Device Characteristics .....                                                                | 24         |
| 5.1.1. 26 dB and 99 % Bandwidth .....                                                            | 24         |
| 5.1.2. Transmit Output Power .....                                                               | 43         |
| 5.1.3. Peak Power Spectral Density .....                                                         | 48         |
| 5.1.4. Peak Excursion Ratio .....                                                                | 65         |
| 5.1.5. Frequency Stability .....                                                                 | 84         |
| 5.1.6. Maximum Permissible Exposure .....                                                        | 85         |
| 5.1.7. Radiated Emissions .....                                                                  | 86         |
| 5.1.8. AC Wireline Conducted Emissions (150 kHz – 30 MHz) .....                                  | 165        |
| <b>6. Dynamic Frequency Selection (DFS) .....</b>                                                | <b>166</b> |
| 6.1. Test Procedure and Setup .....                                                              | 166        |
| 6.1.1. Interference Threshold values, Master or Client incorporating In-Service Monitoring ..... | 166        |
| 6.1.2. DFS Response requirement values .....                                                     | 166        |
| 6.1.3. Radar Test Waveforms .....                                                                | 167        |
| 6.1.4. Frequency Hopping Radar Test Waveform .....                                               | 170        |
| 6.1.5. Radar Waveform Calibration .....                                                          | 170        |
| 6.1.6. Test Set Up: .....                                                                        | 171        |
| 6.2. Dynamic Frequency Selection (DFS) Test Results .....                                        | 173        |
| 6.2.1. UNII Detection Bandwidth: .....                                                           | 173        |
| 6.2.2. Initial Channel Availability Check Time .....                                             | 176        |
| 6.2.3. Radar Burst at the Beginning of the Channel Availability Check Time: ....                 | 178        |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 5 of 198

---

|           |                                                                                                                    |            |
|-----------|--------------------------------------------------------------------------------------------------------------------|------------|
| 6.2.4.    | <i>Radar Burst at the End of the Channel Availability Check Time:</i>                                              | 180        |
| 6.2.5.    | <i>In-Service Monitoring for Channel Move Time, Channel Closing<br/>Transmission Time and Non-Occupancy Period</i> | 182        |
| 6.2.6.    | <i>Statistical Performance Check</i>                                                                               | 190        |
| <b>7.</b> | <b>PHOTOGRAPHS</b>                                                                                                 | <b>193</b> |
| 7.1.      | Radiated Emissions > 1GHz                                                                                          | 193        |
| 7.2.      | General Measurement Test Set-Up                                                                                    | 194        |
| 7.3.      | Dynamic Frequency Selection Test Set-Up                                                                            | 195        |
| <b>8.</b> | <b>TEST EQUIPMENT DETAILS</b>                                                                                      | <b>197</b> |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 6 of 198

## **ACCREDITATION, LISTINGS & RECOGNITION**

MiCOM Labs, Inc. an accredited laboratory complies with the international standard BS EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 7 of 198

---

## LISTINGS

MiCOM Labs test facilities are listed by the following organizations;

### North America

#### **United States of America**

Federal Communications Commission (FCC) Listing #: 102167

#### **Canada**

Industry Canada (IC) Listing #:4143A-2

## RECOGNITION

### **APEC MRA (Asia-Pacific Economic Community Mutual Recognition Agreement)**

#### **Conformity Assessment Body (CAB) – MiCOM Labs**

Test data generated by MiCOM Labs is accepted in the following countries under the APEC MRA.

| Country   | Recognition Body                                                                                        | Phase | CAB Identification No. |
|-----------|---------------------------------------------------------------------------------------------------------|-------|------------------------|
| Australia | Australian Communications and Media Authority (ACMA)                                                    | I     | US0159                 |
| Hong Kong | Office of the Telecommunication Authority (OFTA)                                                        | I     |                        |
| Korea     | Ministry of Information and Communication Radio Research Laboratory (RRL)                               | I     |                        |
| Singapore | Infocomm Development Authority (IDA)                                                                    | I     |                        |
| Taiwan    | Directorate General of Telecommunications (DGT)<br>Bureau of Standards, Metrology and Inspection (BSMI) | I     |                        |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 8 of 198

---

## DOCUMENT HISTORY

| Document History |                              |                  |
|------------------|------------------------------|------------------|
| Revision         | Date                         | Comments         |
| Draft            |                              |                  |
| Rev A            | 1 <sup>st</sup> October 2008 | Initial release. |
|                  |                              |                  |
|                  |                              |                  |
|                  |                              |                  |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 9 of 198

## 1. TEST RESULT CERTIFICATE

|               |                                                                                 |            |                                                                                            |
|---------------|---------------------------------------------------------------------------------|------------|--------------------------------------------------------------------------------------------|
| Applicant:    | Colubris Networks Inc<br>200 West Street, Suite 300<br>Waltham<br>MA 02451, USA | Tested By: | MiCOM Labs, Inc.<br>440 Boulder Court<br>Suite 200<br>Pleasanton<br>California, 94566, USA |
| EUT:          | Wireless Access Card                                                            | Telephone: | +1 925 462 0304                                                                            |
| Model:        | Wistron DNMA-83                                                                 | Fax:       | +1 925 462 0306                                                                            |
| S/N:          | D027814A010EC01                                                                 |            |                                                                                            |
| Test Date(s): | 12th August '08 to 16th<br>September 2008                                       | Website:   | www.micomlabs.com                                                                          |


| STANDARD(S)                         | TEST RESULTS       |
|-------------------------------------|--------------------|
| FCC 47 CFR Part 15.407 & IC RSS-210 | EQUIPMENT COMPLIES |


MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

### Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:

  
\_\_\_\_\_  
Graeme Grieve  
Quality Manager MiCOM Labs,

  
\_\_\_\_\_  
Gordon Hurst  
President & CEO MiCOM Labs, Inc.



CERTIFICATE #2381.01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 2. REFERENCES AND MEASUREMENT UNCERTAINTY

### 2.1. Normative References

| Ref.   | Publication                    | Year                                  | Title                                                                                                                                                                |
|--------|--------------------------------|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (i)    | FCC 47 CFR Part 15.407         | 2007                                  | Code of Federal Regulations                                                                                                                                          |
| (ii)   | FCC 06-96                      | June 2006                             | Memorandum Opinion and Order                                                                                                                                         |
| (iii)  | Industry Canada RSS-210        | Issue 7<br>June 2007                  | Low Power License-Exempt Radiocommunication Devices (All Frequency Bands): Category 1 Equipment                                                                      |
| (iv)   | Industry Canada RSS-Gen        | Issue 2<br>June 2007                  | General Requirements and Information for the Certification of Radiocommunication Equipment                                                                           |
| (v)    | ANSI C63.4                     | 2003                                  | American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| (vi)   | CISPR 22/<br>EN 55022          | 1997<br>1998                          | Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment                                                          |
| (vii)  | M 3003                         | Edition 1<br>Dec. 1997                | Expression of Uncertainty and Confidence in Measurements                                                                                                             |
| (viii) | LAB34                          | Edition 1<br>Aug 2002                 | The expression of uncertainty in EMC Testing                                                                                                                         |
| (ix)   | ETSI TR 100 028                | 2001                                  | Parts 1 and 2<br>Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics          |
| (x)    | A2LA                           | 14 <sup>th</sup><br>September<br>2005 | Reference to A2LA Accreditation Status – A2LA Advertising Policy                                                                                                     |
| (xi)   | FCC Public Notice – DA 02-2138 | 2002                                  | Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices                                                                              |



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 11 of 198

---

## **2.2. Test and Uncertainty Procedures**

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 12 of 198

### 3. PRODUCT DETAILS AND TEST CONFIGURATIONS

#### 3.1. Technical Details

| Details                                           | Description                                                                                                                                                                    |
|---------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Purpose:                                          | Test of the Wistron 802.11 a/b/g/n Wireless Module in the frequency ranges 5150 to 5350 MHz, and 5470 to 5,725 MHz to FCC Part 15.407 and Industry Canada RSS-210 regulations. |
| Applicant:                                        | Colubris Networks Inc<br>200 West Street, Suite 300<br>Waltham MA 02451, USA                                                                                                   |
| Manufacturer:                                     | Winstron NEWEB Corp                                                                                                                                                            |
| Laboratory performing the tests:                  | MiCOM Labs, Inc.<br>440 Boulder Court, Suite 200<br>Pleasanton, California 94566 USA                                                                                           |
| Test report reference number:                     | CBIS10-A4 Rev A                                                                                                                                                                |
| Date EUT received:                                | 12 <sup>th</sup> August 2008                                                                                                                                                   |
| Standard(s) applied:                              | FCC 47 CFR Part 15.407 & IC RSS-210                                                                                                                                            |
| Dates of test (from - to):                        | 12 <sup>th</sup> August to 16 <sup>th</sup> September 2008                                                                                                                     |
| No of Units Tested:                               | 1                                                                                                                                                                              |
| Type of Equipment:                                | 802.11a/b/g/n Wireless Access Card, 3x3 Spatial Multiplexing MIMO configuration                                                                                                |
| Applicants Trade Name:                            | WLAN a+b+g+n mini-PCI Module                                                                                                                                                   |
| Model(s):                                         | DNMA-83                                                                                                                                                                        |
| Software Release                                  | 5.3                                                                                                                                                                            |
| Hardware Release:                                 | -030                                                                                                                                                                           |
| Declared Frequency Range(s):                      | 5,250 to 5,350 MHz<br>5,470 to 5,725 MHz                                                                                                                                       |
| Type of Modulation:                               | Per 802.11 –CCK, BPSK, QPSK, DSSS, OFDM                                                                                                                                        |
| Declared Nominal Output Power:<br>(Average Power) | 802.11a: Legacy +17 dBm<br>802.11n: HT-20 +19 dBm<br>802.11n: HT-40 +19 dBm                                                                                                    |
| EUT Modes of Operation:                           | Legacy 802.11a/b/g, 802.11n HT-20, HT-40                                                                                                                                       |
| Transmit/Receive Operation:                       | Time Division Duplex                                                                                                                                                           |
| Rated Input Voltage and Current:                  | Power Supply 3.3 Vdc @ 1 A                                                                                                                                                     |
| Operating Temperature Range:                      | Declared range 0 to +40°C                                                                                                                                                      |
| ITU Emission Designator:                          | 802.11a Legacy 16M9W7D<br>802.11n HT-20 18M1W7D<br>802.11n HT-40 37M3W7D                                                                                                       |
| Frequency Stability:                              | ±20 ppm max                                                                                                                                                                    |
| Equipment Dimensions:                             | 2.5" x 2.5"                                                                                                                                                                    |
| Weight:                                           | 2oz                                                                                                                                                                            |
| Primary function of equipment:                    | Wireless Access Card for transmitting data and voice                                                                                                                           |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 13 of 198

---

### **3.2. Scope of Test Program**

#### **RF Testing**

The scope of the compliance program was to test the Wistron 802.11 a/b/g/n wireless module, 3x3 Spatial Multiplexing MIMO configurations in the frequency range 5250 - 5350 and 5470 – 5725 MHz for compliance against FCC 47 CFR Part 15.407 and Industry Canada RSS-210 specifications including Dynamic Frequency Selection (DFS) requirements.

The antennas used with the Wistron 802.11 a/b/g/n card are detailed in section 3.4 “Antenna Details”.

Although this is for a Limited Modular Approval (LMA) the module was tested in a host device (Colubris MAP-625). EMC Test Report NKR-DNMA83 FEE.pdf will be used for module emissions below 1 GHz and AC Wireline emissions.

#### **Dynamic Frequency Selection**

The scope of the test program was to test the Wistron 802.11 a/b/g/n wireless card in the frequency ranges 5,250 – 5,350 or 5,470 to 5,725 MHz as a Master device for compliance against DFS requirements of FCC 47 CFR Part 15.407 and the FCC specification Memorandum Opinion and Order FCC 06-96.


One frequency was chosen (5,500 MHz) from the operating channels of the UUT within the 5,250 – 5,350 MHz and 5,470 – 5,725 MHz bands for DFS testing per the requirements of FCC specification “Memorandum Opinion and Order FCC 06-96”, Section 7.8 “DFS Conformance Test Procedures”.

U-NII devices operating in the 5,250 – 5,350 MHz and 5,470 - 5,725 MHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.


The Wistron 802.11 a/b/g/n wireless card operates as a Master device with full radar detection and Dynamic Frequency Selection (DFS) capability.

The Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm.

**Wistron 802.11 a/b/g/n wireless card  
Wireless Access Card (Top)**

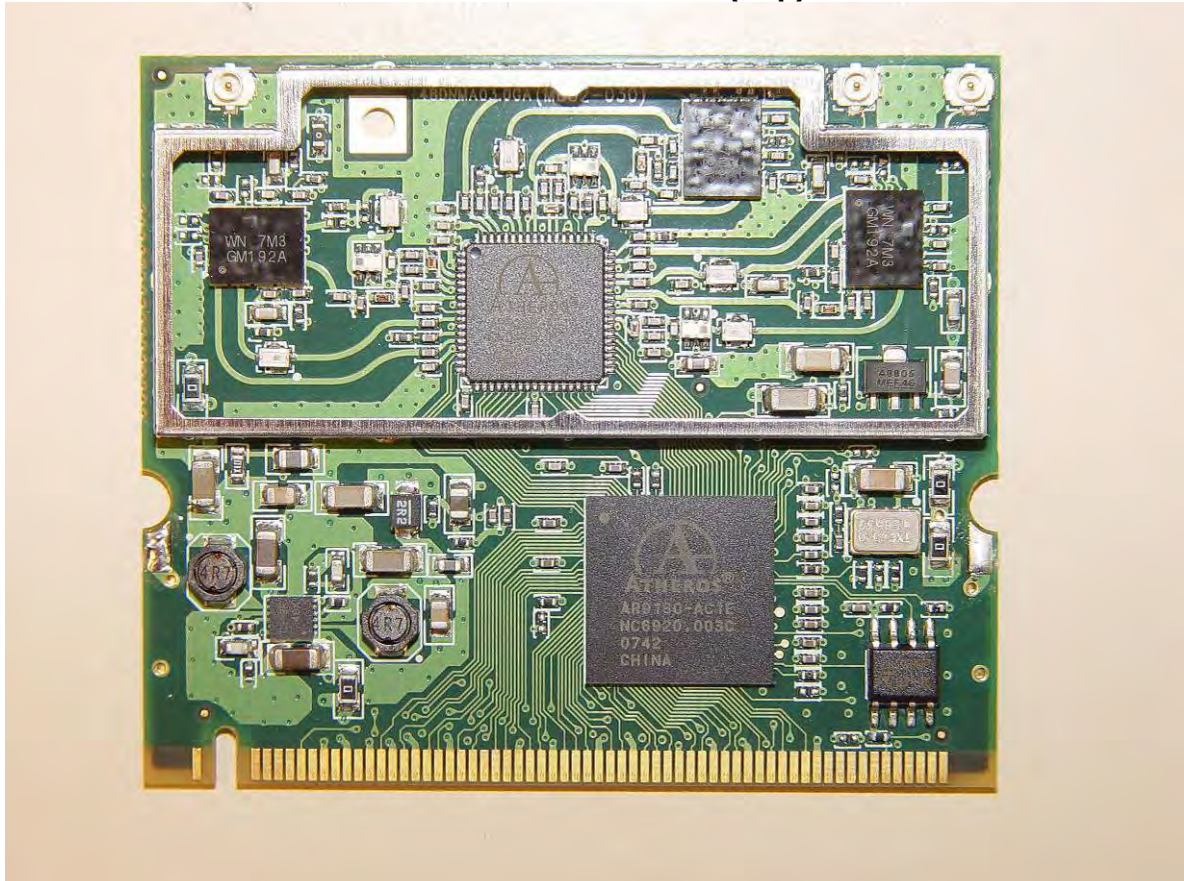

**Wistron 802.11 a/b/g/n wireless card  
Wireless Access Card (Bottom)**

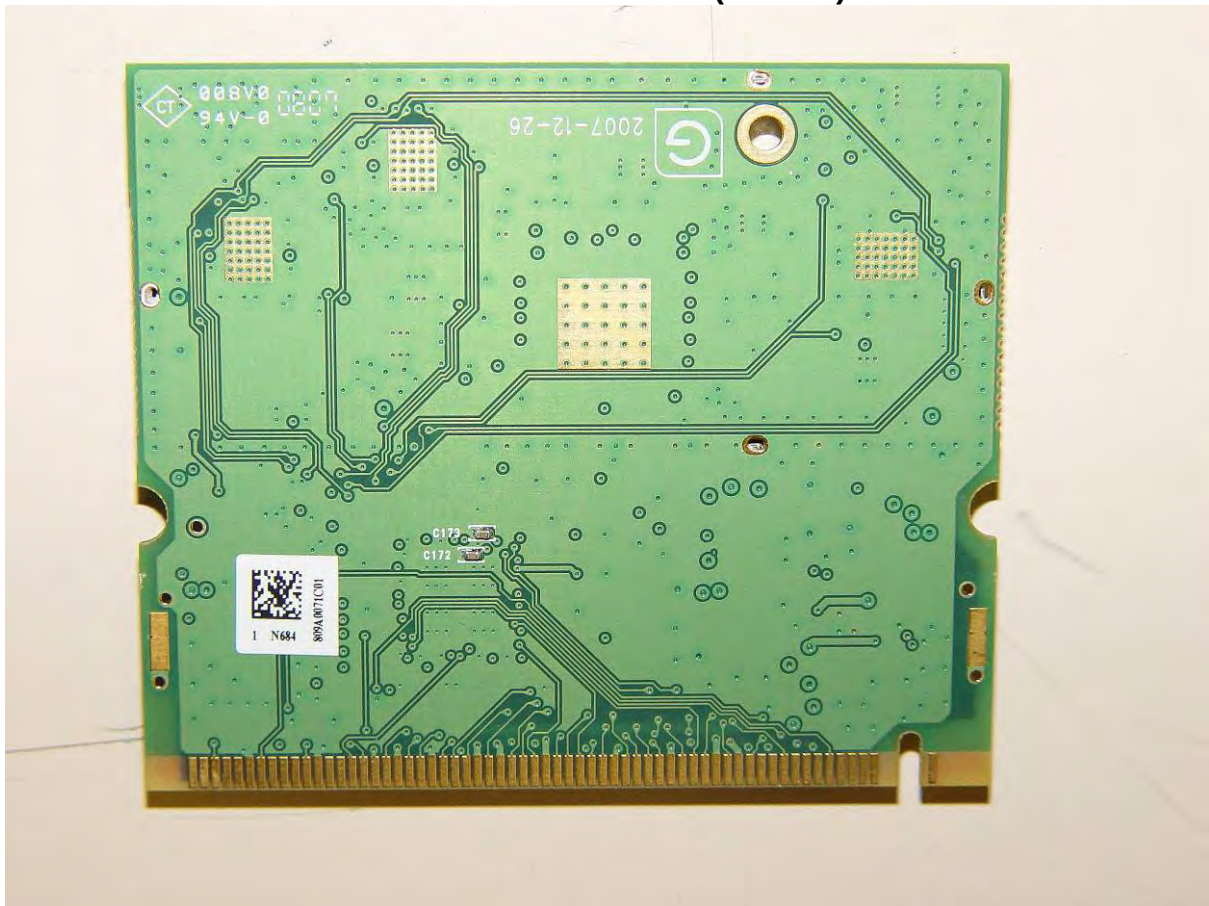



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 16 of 198

---

### 3.3. Equipment Model(s) and Serial Number(s)

| Type (EUT/Support) | Equipment Description (Including Brand Name) | Mfr               | Model No.     | Serial No.      |
|--------------------|----------------------------------------------|-------------------|---------------|-----------------|
| EUT                | Access Card                                  | Wistron           | DNMA-83       | D027814A010EC01 |
| Support            | Wireless Access Point                        | Colubris Networks | MAP-625       | KO64-00052      |
| Support            | Power Supply                                 | Wall Industries   | PSU30A-8      | EJ721305-731R   |
| Support            | Laptop PC                                    | IBM               | Thinkpad      | None            |
| Support            | Laptop PC                                    | Dell              | Inspiron 1100 |                 |
| Support            | Dual Band Wireless N-Adapter                 | LinkSys           | WPC600N       |                 |

### 3.4. Antenna Details

1. 5150 – 5725 MHz
  - a. Integral Centurion NanoBlade 5.1 dBi
  - b. External Centurion WTS2450-RPSMA, 2.6 dBi Omni-Directional

### 3.5. Cabling and I/O Ports

Number and type of I/O ports

1. 1 X RJ-45 , 10/100/1000 BASE-T Ethernet, Auto MDX
2. 1 x Female DB-9 connector (DCE)
3. 3 pin 48V DC female

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 17 of 198

### 3.6. Test Configurations

Testing was performed to determine the highest power level versus bit rate. The variant with the highest power was used to exercise the product.

Matrix of test configurations

| Operational Mode(s)<br>(802.11) | Variant | Data Rates with Highest<br>Power | Frequencies<br>(MHz)    |
|---------------------------------|---------|----------------------------------|-------------------------|
| a,n                             | Legacy  | 6 <sup>1</sup> MBit/s            | 5,260                   |
|                                 | HT-20   | 6.5 MCS                          | 5,300<br>5,320          |
|                                 | HT-40   | 13.5 MCS                         | 5,270<br>5,310          |
| a,n                             | Legacy  | 6 <sup>1</sup> MBit/s            | 5,500                   |
|                                 | HT-20   | 6.5 MCS                          | 5,600<br>5,700          |
|                                 | HT-40   | 13.5 MCS                         | 5,510<br>5,620<br>5,690 |

<sup>1</sup> – Except for DFS these data rates were used to test and exercise the EUT at all times

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 18 of 198

---

## Antenna Test Configurations for Radiated Emissions

### Spurious Emission and Band-Edge Test Strategy

When testing radiated spurious emissions and band-edge three identical antennae were connected to the EUT at all times. Transmission during this test process simulated a typical installation. Results for the following configurations are provided in this report.

#### Legacy

| NanoBlade 5.1 dBi<br>Integral Antenna | WTS2450-RPSMA 2.6 dBi<br>External Antenna |
|---------------------------------------|-------------------------------------------|
| a 5260                                | a 5260                                    |
| a 5300                                | a 5300                                    |
| a 5320                                | a 5320                                    |
| a 5500                                | a 5500                                    |
| a 5600                                | a 5600                                    |
| a 5700                                | a 5700                                    |
| Pk a 5260                             | Pk a 5260                                 |
| Pk a 5300                             | Pk a 5300                                 |
| Pk a 5320                             | Pk a 5320                                 |
| BE a 5350                             | BE a 5350                                 |
| BE a 5460                             | BE a 5460                                 |
| Pk a 5500                             | Pk a 5500                                 |
| Pk a 5600                             | Pk a 5600                                 |
| Pk a 5700                             | Pk a 5700                                 |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 19 of 198

---

#### HT-20

| <b>NanoBlade 5.1 dBi<br/>Integral Antenna</b> | <b>WTS2450-RPSMA 2.6 dBi<br/>External Antenna</b> |
|-----------------------------------------------|---------------------------------------------------|
| a 5260                                        | a 5260                                            |
| a 5300                                        | a 5300                                            |
| a 5320                                        | a 5320                                            |
| a 5500                                        | a 5500                                            |
| a 5600                                        | a 5600                                            |
| a 5700                                        | a 5700                                            |
| Pk a 5260                                     | Pk a 5260                                         |
| Pk a 5300                                     | Pk a 5300                                         |
| Pk a 5320                                     | Pk a 5320                                         |
| BE a 5350                                     | BE a 5350                                         |
| BE a 5460                                     | BE a 5460                                         |
| Pk a 5500                                     | Pk a 5500                                         |
| Pk a 5600                                     | Pk a 5600                                         |
| Pk a 5700                                     | Pk a 5700                                         |

#### HT-40

| <b>NanoBlade 5.1 dBi<br/>Integral Antenna</b> | <b>WTS2450-RPSMA 2.6 dBi<br/>External Antenna</b> |
|-----------------------------------------------|---------------------------------------------------|
| a 5270                                        | a 5270                                            |
| a 5310                                        | a 5310                                            |
| Pk a 5270                                     | Pk a 5270                                         |
| Pk a 5310                                     | Pk a 5310                                         |
| BE a 5350                                     | BE a 5350                                         |
| a 5510                                        | a 5510                                            |
| a 5620                                        | a 5620                                            |
| a 5690                                        | a 5690                                            |
| BE a 5460                                     | BE a 5460                                         |
| PK a 5510                                     | PK a 5510                                         |
| PK a 5620                                     | PK a 5620                                         |
| PK a 5690                                     | PK a 5690                                         |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 20 of 198

---

### 3.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

#### EUT Software Power Settings - Radiated Testing

1. Reduction in output power to meet band-edge requirements was required in certain circumstances per the following tables,

##### Integral Antenna

| Band Edge Freq (MHz) | Tx Frequency (MHz) | Mode     | ART Power Setting          |
|----------------------|--------------------|----------|----------------------------|
| 5350                 | 5320               | Legacy a | 15                         |
|                      | 5320               | HT-20    | 15                         |
|                      | 5310               | HT-40    | 11                         |
| 5460                 | 5500               | Legacy a | 17 (No reduction required) |
|                      | 5500               | HT-20    | 17 (No reduction required) |
|                      | 5510               | HT-40    | 16                         |

##### External Antenna

| Band Edge Freq (MHz) | Tx Frequency (MHz) | Mode     | ART Power Setting          |
|----------------------|--------------------|----------|----------------------------|
| 5350                 | 5320               | Legacy a | 18 (No reduction required) |
|                      | 5320               | HT-20    | 18 (No reduction required) |
|                      | 5310               | HT-40    | 18 (No reduction required) |
| 5460                 | 5500               | Legacy a | 18 (No reduction required) |
|                      | 5500               | HT-20    | 16                         |
|                      | 5510               | HT-40    | 17                         |

### 3.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. None

### 3.9. Subcontracted Testing or Third Party Data

1. NONE

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 21 of 198

#### 4. TEST SUMMARY

##### List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

| Section(s)                                                   | Test Items                         | Description                                                                   | Condition             | Result   | Test Report Section |
|--------------------------------------------------------------|------------------------------------|-------------------------------------------------------------------------------|-----------------------|----------|---------------------|
| <b>15.407(a)</b><br><b>A9.2(2)</b><br><b>4.4</b>             | 26dB and 99% Emission BW           | Emission bandwidth measurement                                                | Conducted             | Complies | 5.1.1               |
| <b>15.407(a)</b><br><b>A9.2(2)</b><br><b>4.6</b>             | Transmit Output Power              | Power Measurement                                                             | Conducted             | Complies | 5.1.2               |
| <b>15.407(a)</b><br><b>A9.2(2)</b>                           | Peak Power Spectral Density        | PPSD                                                                          | Conducted             | Complies | 5.1.3               |
| <b>15.407(a)(6)</b>                                          | Peak Excursion Ratio               | <13dB in any 1MHz bandwidth                                                   | Conducted             | Complies | 5.1.4               |
| <b>15.407(g)</b><br><b>15.31</b><br><b>2.1</b><br><b>4.5</b> | Frequency Stability                | Limits: contained within band of operation at all times.                      | Applicant declaration | Complies | 5.1.5               |
| <b>15.407(f)</b><br><b>5.5</b>                               | Radio Frequency Radiation Exposure | Exposure to radio frequency energy levels, Maximum Permissible Exposure (MPE) | Conducted             | Complies | 5.1.6               |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 22 of 198

### List of Measurements (continued)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

| Section(s)                                                                                                              | Test Items                                     | Description                  | Condition | Result                                  | Test Report Section |
|-------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------|-----------|-----------------------------------------|---------------------|
| <b>15.407(b)(2)</b><br><b>15.205(a)</b><br><b>15.209(a)</b><br><b>2.2</b><br><b>2.6</b><br><b>A9.3(2)</b><br><b>4.7</b> | Radiated Emissions                             |                              | Radiated  |                                         | 5.1.7               |
|                                                                                                                         | Transmitter Radiated Spurious Emissions        | Emissions above 1 GHz        |           | Complies                                | 5.1.7.1             |
|                                                                                                                         | Radiated Band Edge                             | Band edge results            |           | Complies                                | 5.1.7.1             |
| <b>RSS-GEN</b><br><b>6</b>                                                                                              | Receiver Radiated Spurious Emissions           | Emissions above 1 GHz        |           | Complies                                | 5.1.7.2             |
| <b>15.407(b)(6)</b><br><b>15.205(a)</b><br><b>15.209(a)</b><br><b>2.2</b>                                               | Radiated Emissions                             | Emissions <1 GHz (30M-1 GHz) |           | *See EMC Test Report NKR-DNMA83 FEE.pdf | 5.1.7.3             |
| <b>15.407(b)(6)</b><br><b>15.207</b><br><b>7.2.2</b>                                                                    | AC Wireline Conducted Emissions 150 kHz–30 MHz | Conducted Emissions          | Conducted | *See EMC Test Report NKR-DNMA83 FEE.pdf | 5.1.8               |

\* As a result of testing the wireless module in a host device an EMC Test Report for the module is submitted in lieu of testing Radiated Emissions below 1 GHz and AC Wireline Emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 23 of 198

## List of Measurements (cont'd)

### Dynamic Frequency Selection (DFS)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407(h)(2)** and **FCC Memorandum Opinion and Order FCC 06-96 (Compliance Measurement procedures for Unlicensed National Information Infrastructure devices operating in the 5250-5350 MHz and 5470-5725 MHz bands incorporating dynamic frequency selection)**.

### Tests performed on 802.11 A/B/G/N Master Device

| Section | Test Items                     | Description                                                                                             | Condition | Result   | Test Report Section |
|---------|--------------------------------|---------------------------------------------------------------------------------------------------------|-----------|----------|---------------------|
| 7.8.1   | Detection Bandwidth            | UNII Detection Bandwidth                                                                                | Conducted | Complies | 6.2.1               |
| 7.8.2.1 | Performance Requirements Check | Initial Channel Availability Check Time                                                                 | Conducted | Complies | 6.2.2               |
| 7.8.2.2 |                                | Radar Burst at the Beginning of the Channel Availability Check Time                                     | Conducted | Complies | 6.2.3               |
| 7.8.2.3 |                                | Radar Burst at the End of the Channel Availability Check Time                                           | Conducted | Complies | 6.2.4               |
| 7.8.3   | In-Service Monitoring          | In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period | Conducted | Complies | 6.2.5               |
| 7.8.4   | Radar Detection                | Statistical Performance Check                                                                           | Conducted | Complies | 6.2.6               |

**Note 1:** Test results reported in this document relate only to the items tested

**Note 2:** The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

**Note 3:** **Section 3.7** Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 5. TEST RESULTS

### 5.1. Device Characteristics


#### 5.1.1. 26 dB and 99 % Bandwidth

FCC, Part 15 Subpart C §15.407(a)  
Industry Canada RSS-210 § A9.2(2)  
Industry Canada RSS-Gen 4.4

#### Test Procedure

The bandwidth at 26 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal(s), while EUT is operating in transmission mode at the appropriate center frequency.

#### Test Measurement Set up

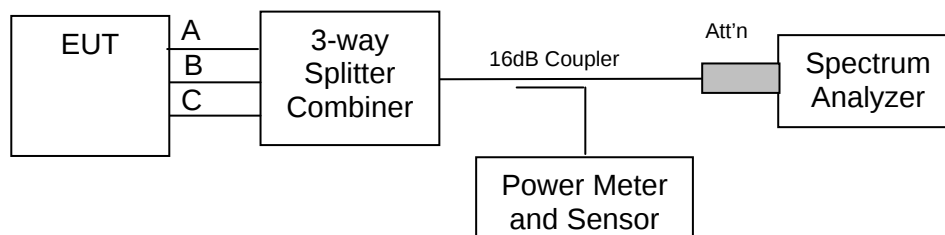


Measurement set up for 26 dB and 99 % bandwidth test

#### Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier


Power: Maximum Default Power

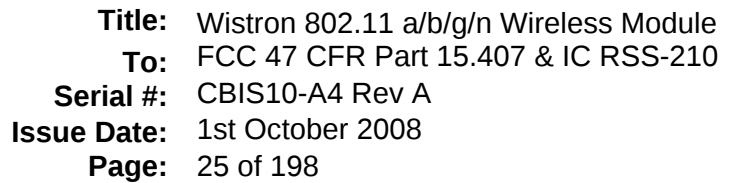



Title: Wistron 802.11 a/b/g/n Wireless Module  
To: FCC 47 CFR Part 15.407 & IC RSS-210  
Serial #: CBIS10-A4 Rev A  
Issue Date: 1st October 2008  
Page: 26 of 198

### 5,300 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

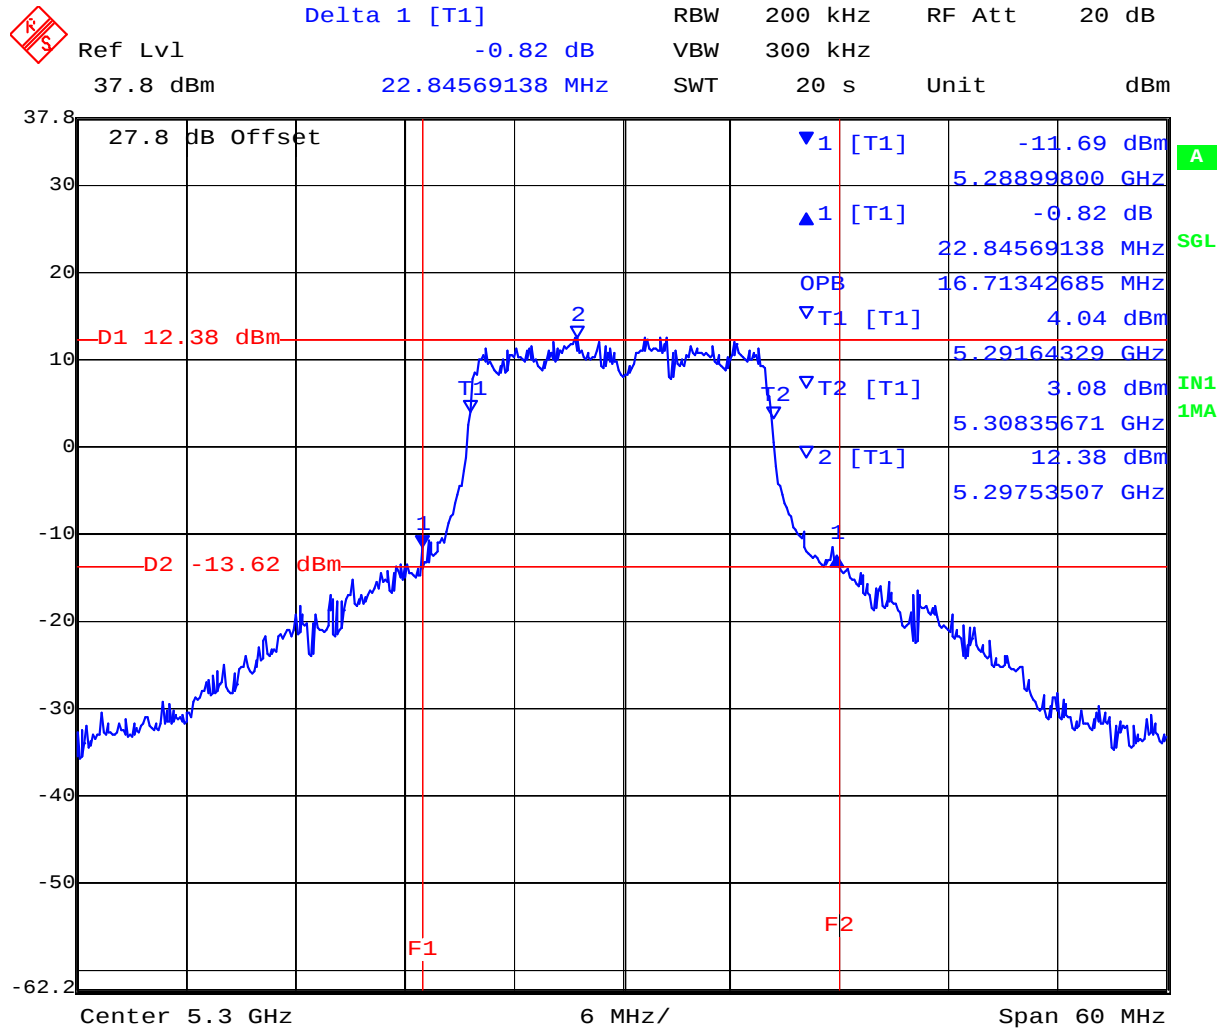


Date: 29.JUL.2008 18:31:49

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 27 of 198

### 5,320 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

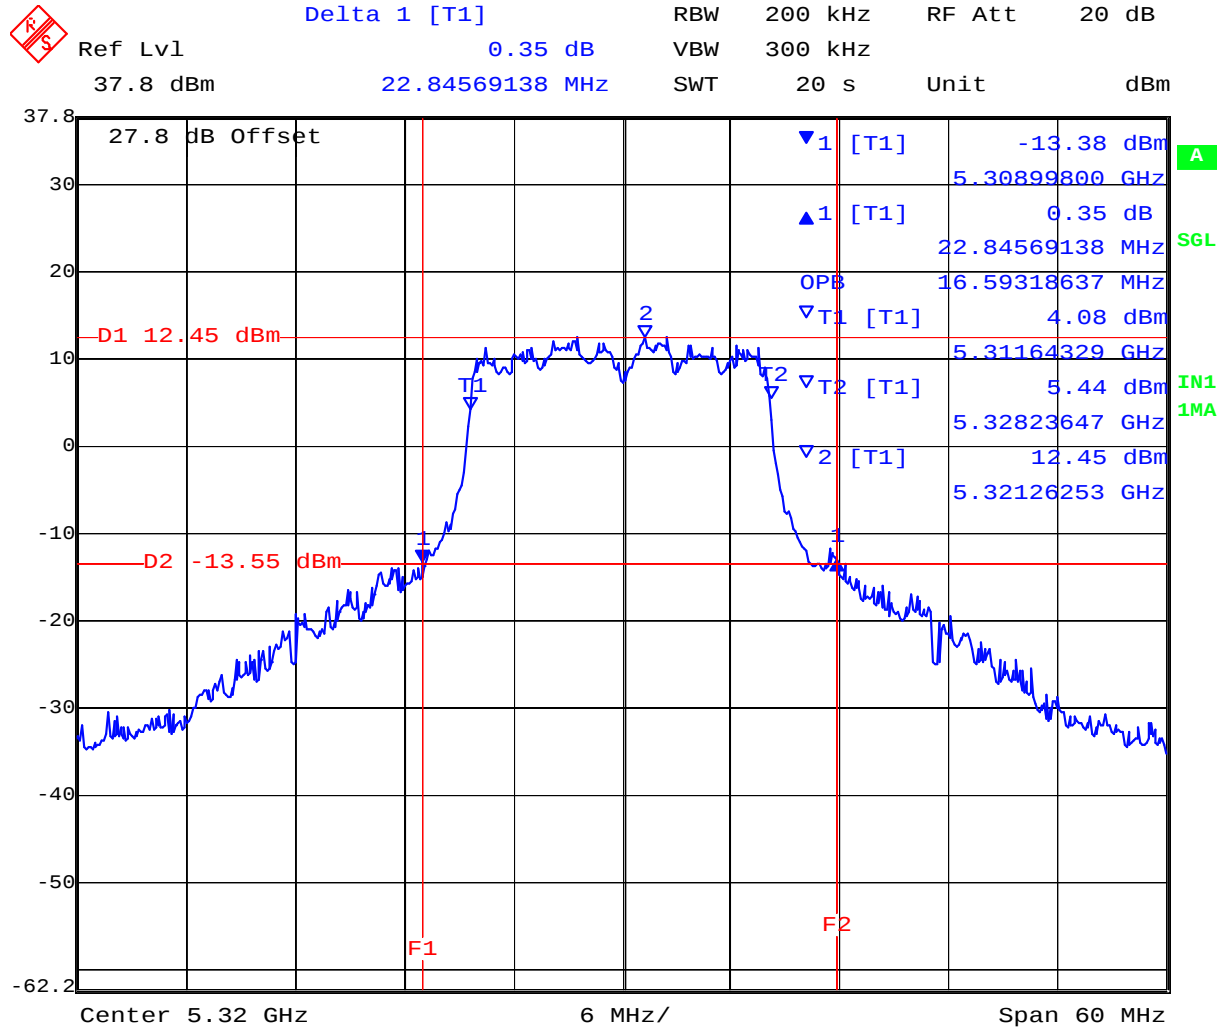

Date: 29.JUL.2008 18:35:28

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 28 of 198

# TABLE OF RESULTS – 802.11a Legacy

| Center Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % BW (MHz) |
|------------------------|-----------------------|---------------|
| 5,500                  | 22.725                | 16.593        |
| 5,600                  | 27.295                | 16.833        |
| 5,700                  | 25.731                | 16.834        |

## 5,500 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

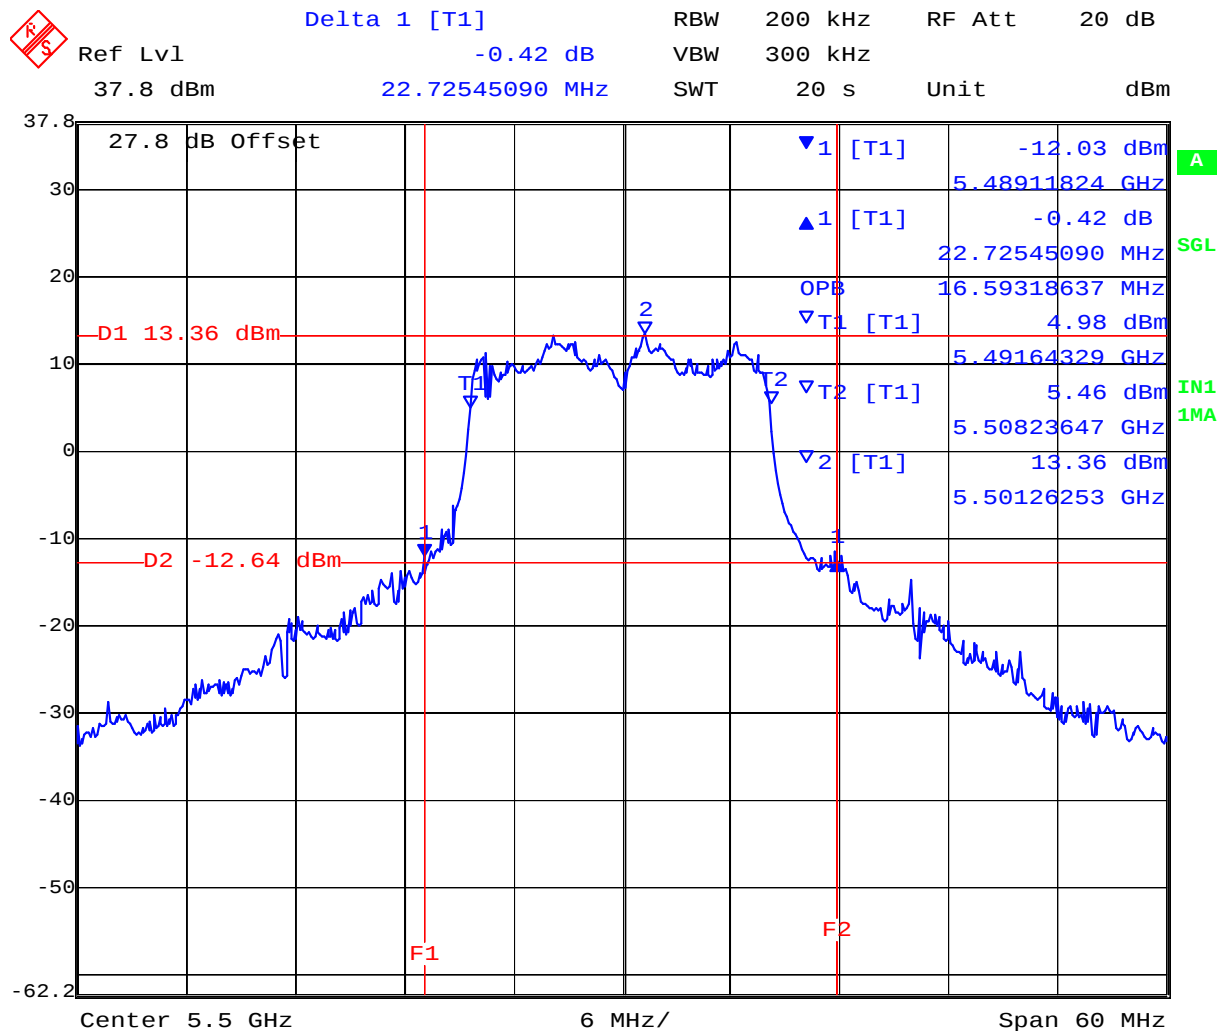


Date: 29.JUL.2008 19:01:05

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 29 of 198

### 5,600 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

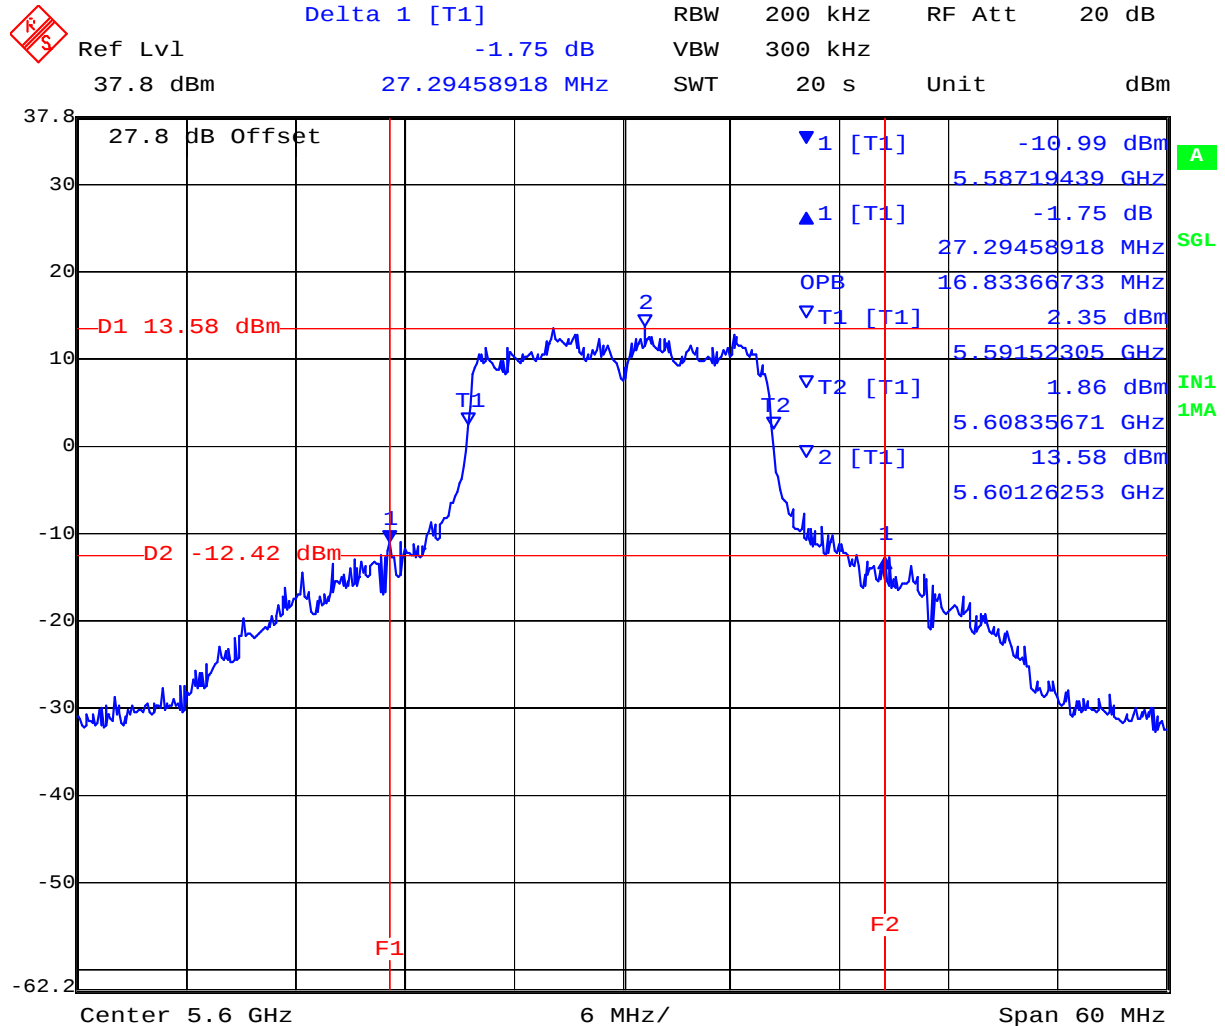


Date: 29.JUL.2008 19:03:25

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 30 of 198

### 5,700 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

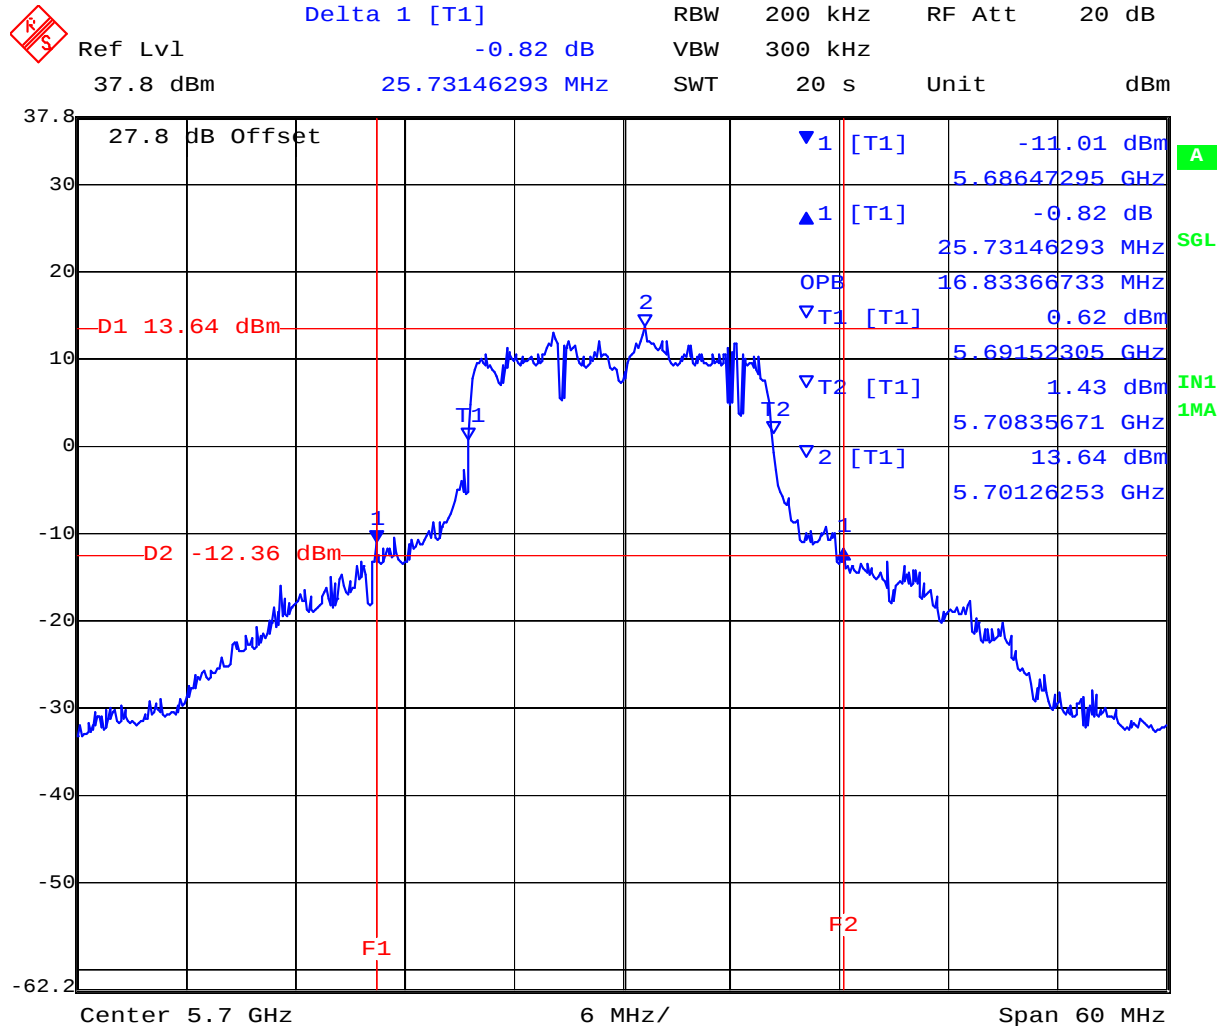

Date: 29.JUL.2008 19:05:04

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 31 of 198

## Measurement Results for 26 dB and 99 % Operational Bandwidth(s) -Continued

TABLE OF RESULTS – 802.11n HT20

| Center Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % BW (MHz) |
|------------------------|-----------------------|---------------|
| 5,260                  | 23.567                | 17.796        |
| 5,300                  | 24.649                | 17.796        |
| 5,320                  | 23.567                | 17.796        |

### 5,260 MHz 802.11n HT20 26 dB and 99 % Bandwidth

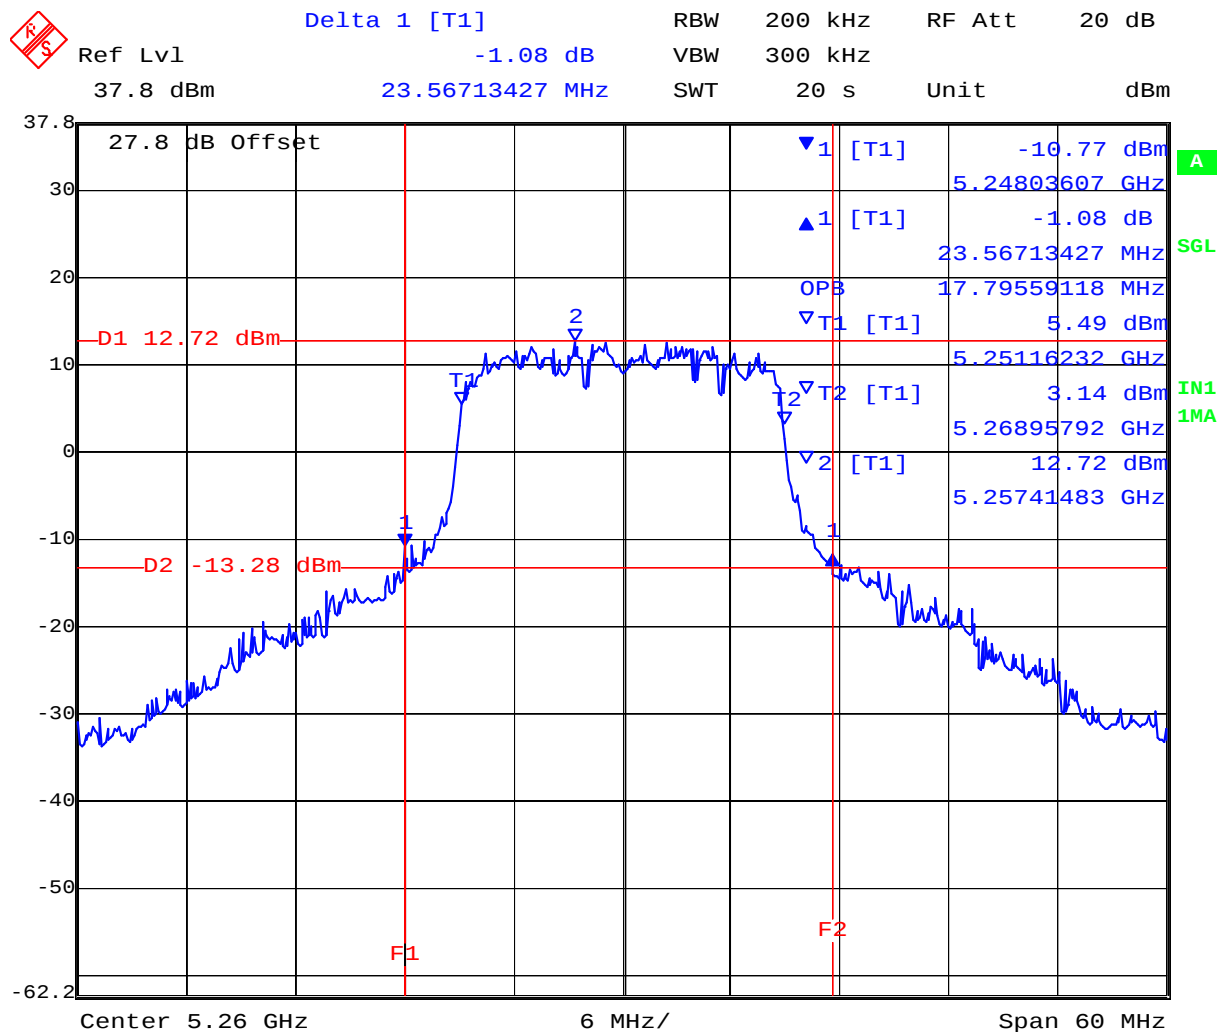


Date: 29.JUL.2008 18:43:40

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 32 of 198

### 5,300 MHz 802.11n HT20 26 dB and 99 % Bandwidth

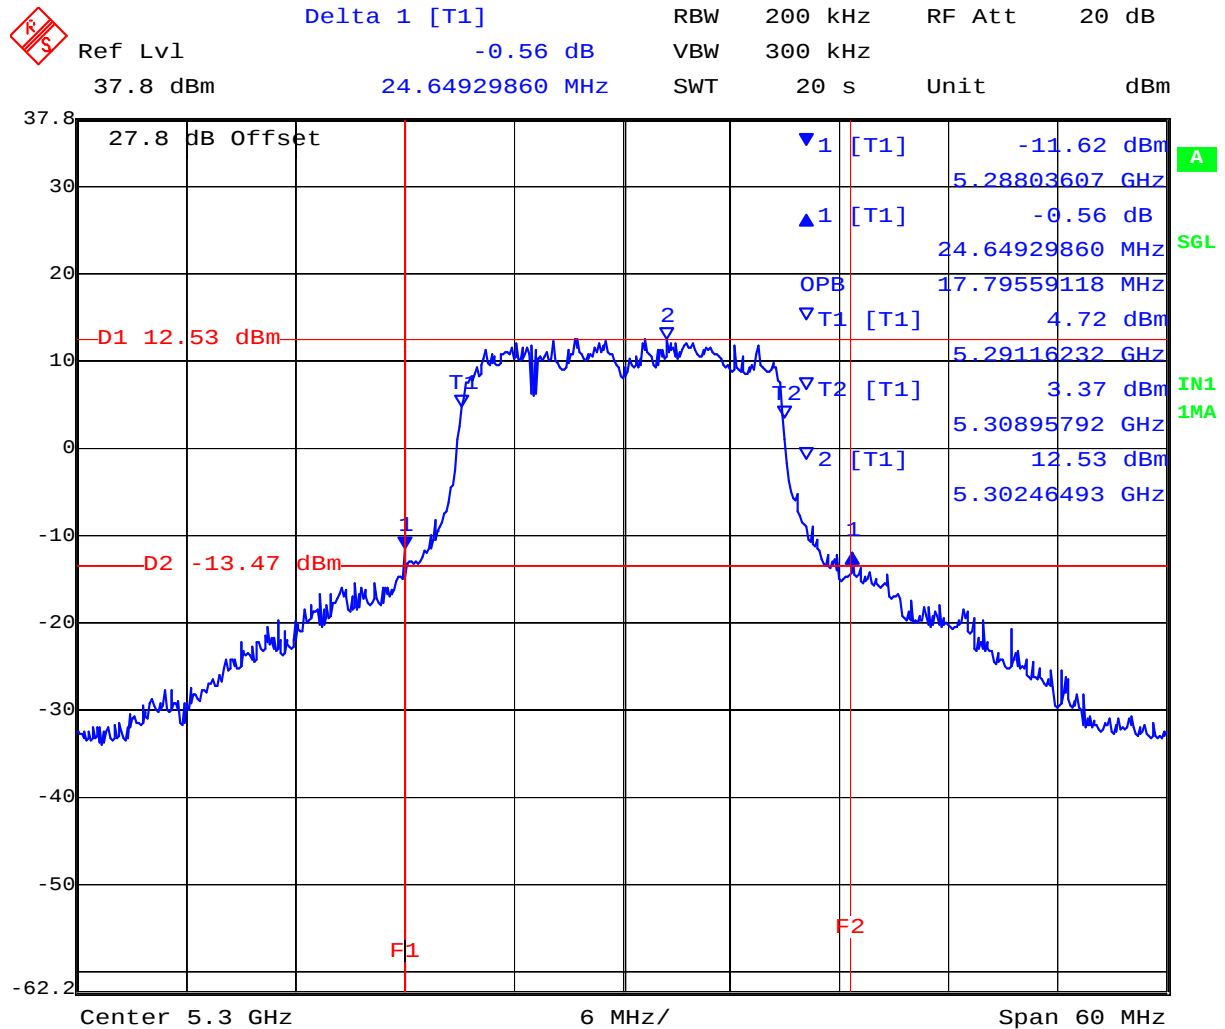


Date: 29.JUL.2008 18:41:47

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 33 of 198

### 5,320 MHz 802.11n HT20 26 dB and 99 % Bandwidth

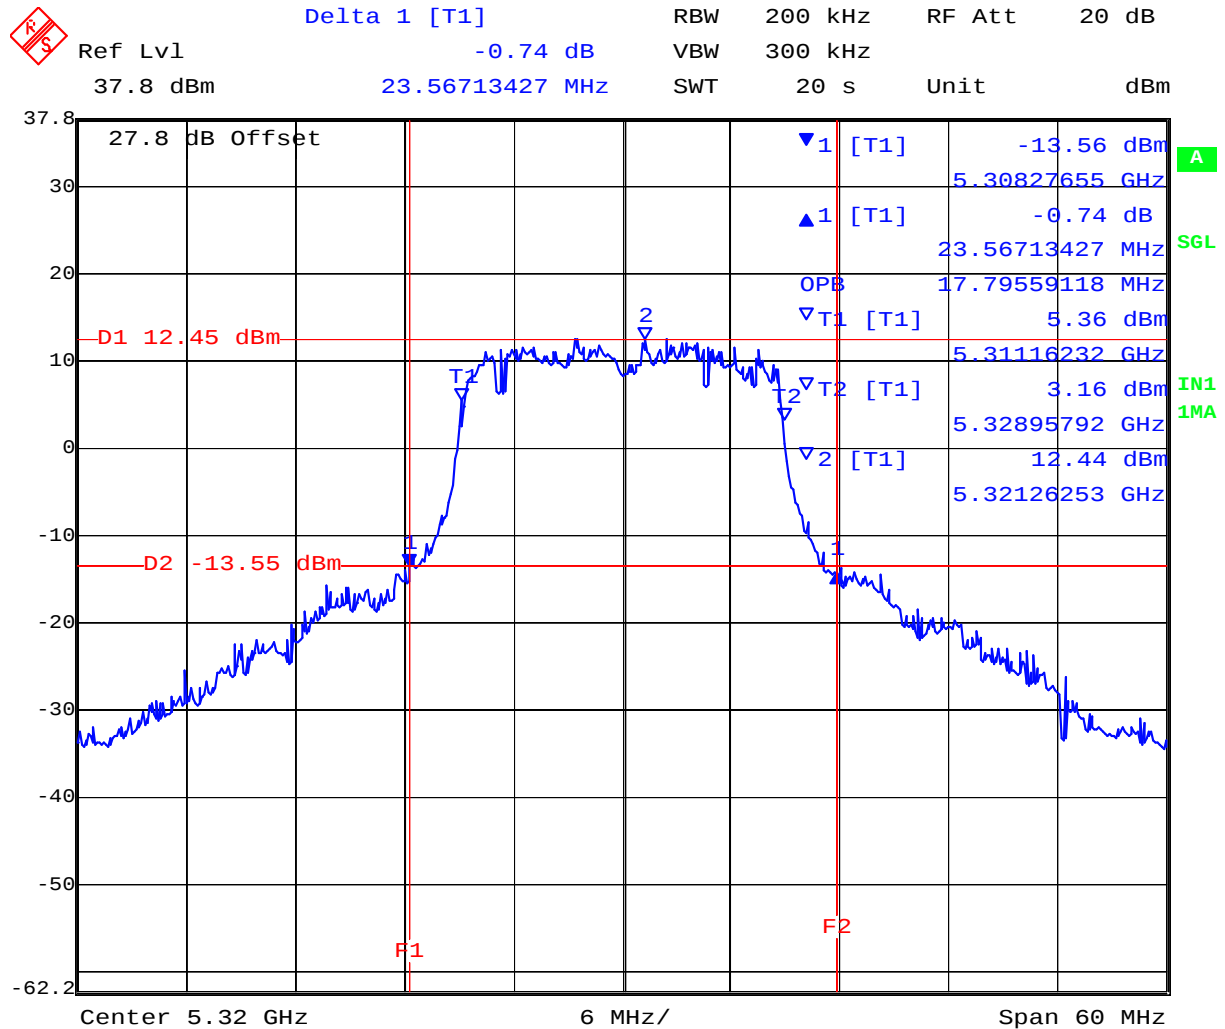

Date: 29.JUL.2008 18:39:05

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

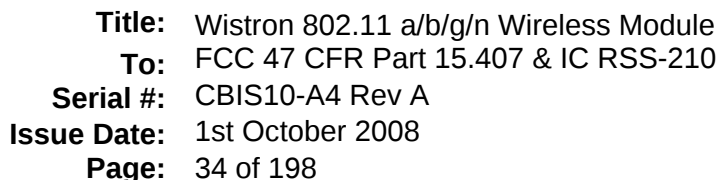

| Center Frequency<br>(MHz) | 26 dB Bandwidth<br>(MHz) | 99 % BW<br>(MHz) |
|---------------------------|--------------------------|------------------|
| 5,500                     | 24.529                   | 17.796           |
| 5,600                     | 27.295                   | 18.036           |
| 5,700                     | 29.339                   | 18.036           |

The figure shows a spectrum analyzer display with a blue trace representing the signal spectrum. The x-axis is labeled "Center 5.5 GHz" and "Span 60 MHz". The y-axis is labeled "dBm" and ranges from -62.2 to 37.8. The display includes several parameters and markers:


- Parameters:**
  - Ref Lvl: 37.8 dBm
  - Delta 1 [T1]: 0.90 dB
  - RBW: 200 kHz
  - VBW: 300 kHz
  - SWT: 20 s
  - RF Att: 20 dB
  - Unit: dBm
- Markers and Levels:**
  - D1:** 13.64 dBm (red horizontal line)
  - D2:** -12.36 dBm (red horizontal line)
  - F1:** 24.52905812 MHz (red vertical line)
  - F2:** 24.52905812 MHz (red vertical line)
  - T1:** 5.48827655 GHz (blue triangle marker)
  - T2:** 5.49104208 GHz (blue triangle marker)
  - T3:** 5.50883768 GHz (blue triangle marker)
  - T4:** 5.50126253 GHz (blue triangle marker)
  - T5:** 17.79559118 MHz (blue triangle marker)
  - T6:** 4.53 dBm (blue triangle marker)
  - T7:** 5.22 dBm (blue triangle marker)
  - T8:** 13.64 dBm (blue triangle marker)
  - T9:** -11.60 dBm (blue triangle marker)
- Other Labels:**
  - OPB:** 17.79559118 MHz
  - IN1:** 1MA
  - IN2:** 1MA

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 35 of 198

### 5,600 MHz 802.11n HT20 26 dB and 99 % Bandwidth

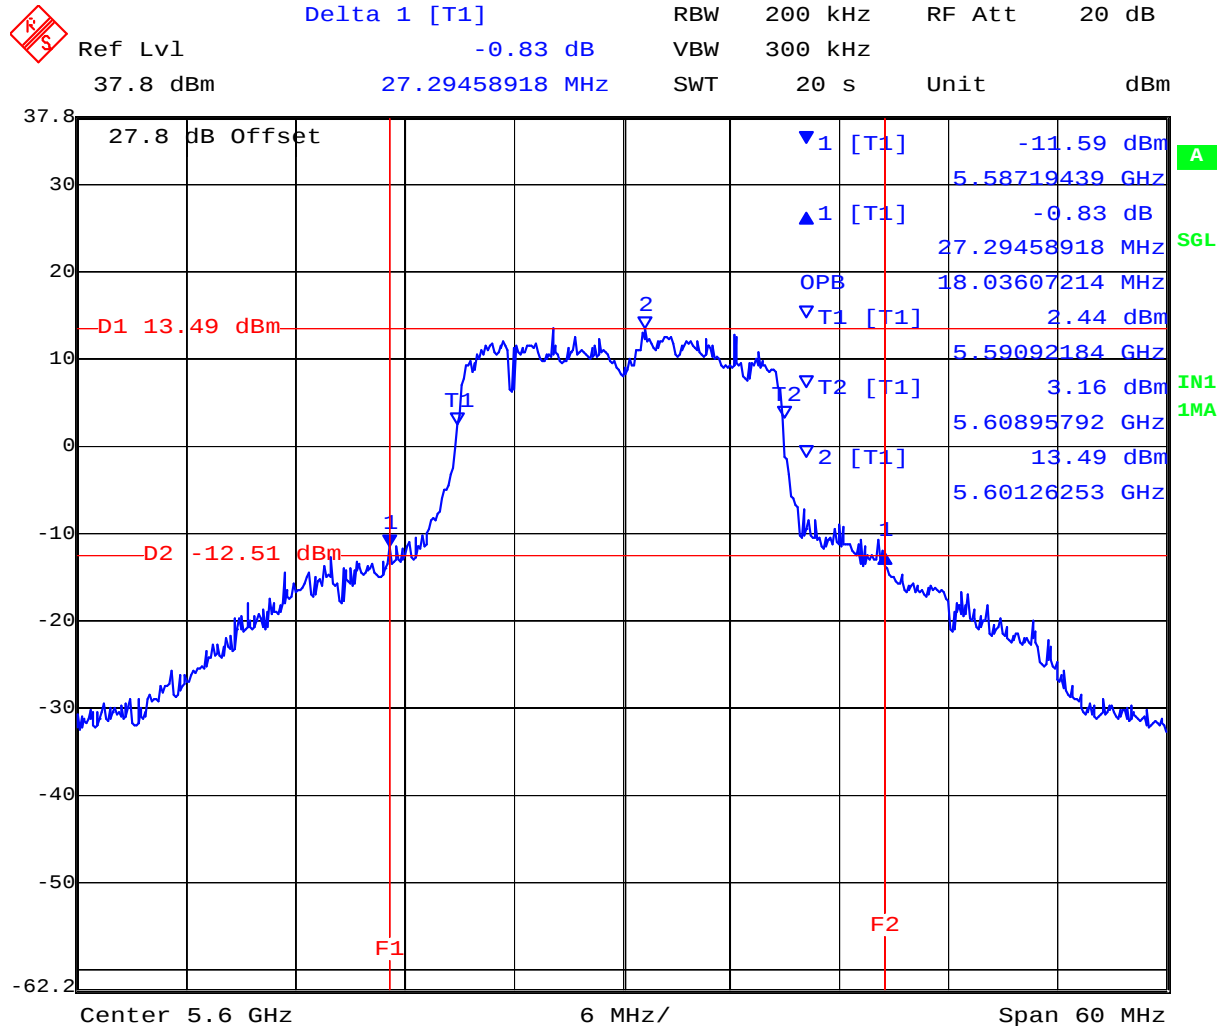


Date: 29.JUL.2008 19:09:55

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 36 of 198

### 5,700 MHz 802.11n HT20 26 dB and 99 % Bandwidth

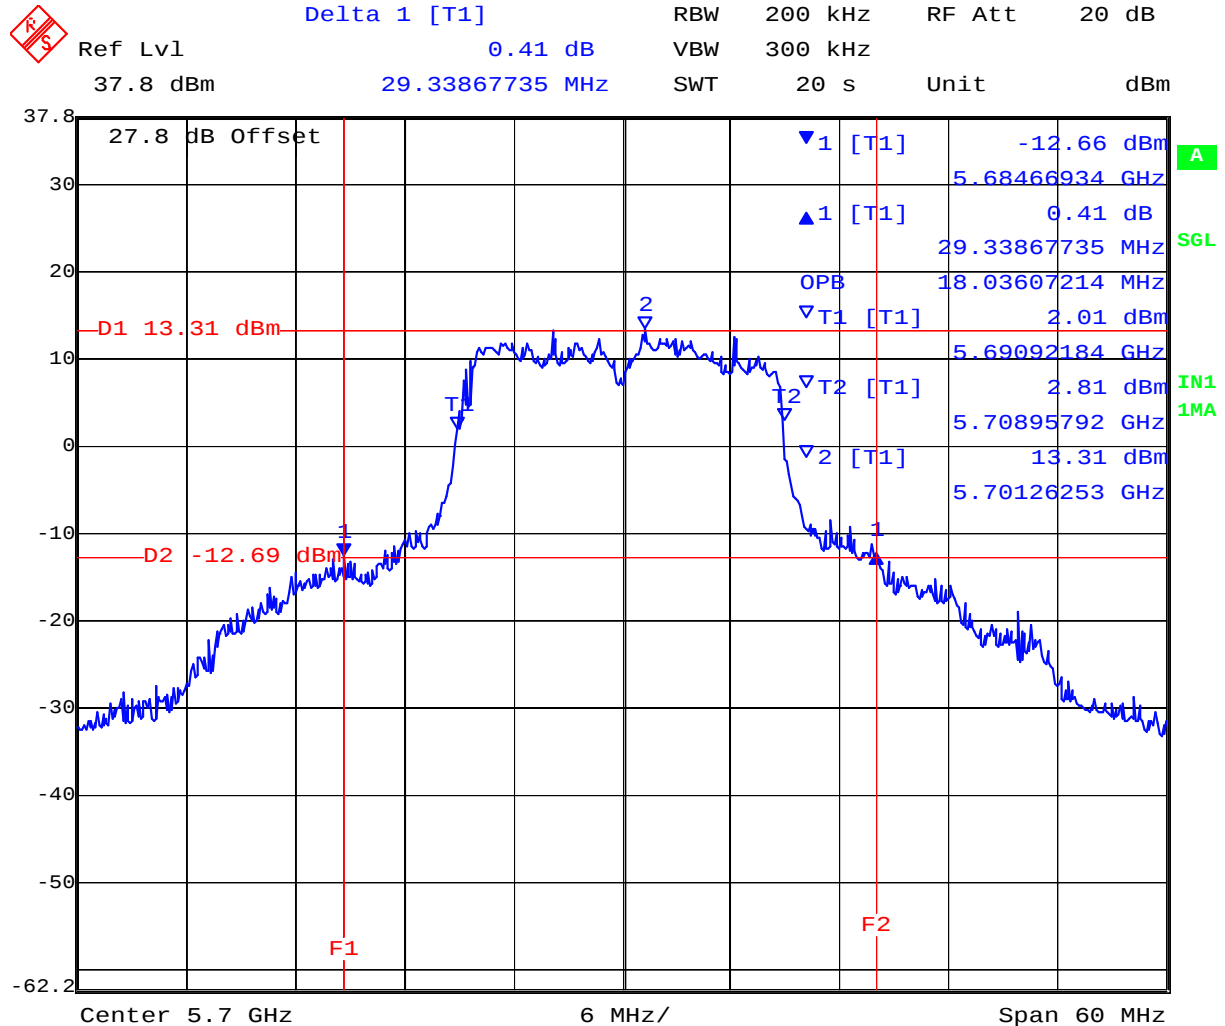

Date: 29.JUL.2008 19:07:04

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 37 of 198

### Measurement Results for 26 dB and 99 % Operational Bandwidth(s) -Continued

TABLE OF RESULTS – 802.11n HT40

| Center Frequency<br>(MHz) | 26 dB Bandwidth<br>(MHz) | 99 % BW<br>(MHz) |
|---------------------------|--------------------------|------------------|
| 5,270                     | 64.930                   | 37.034           |
| 5,310                     | 64.689                   | 36.794           |

### 5,270 MHz 802.11n HT40 26 dB and 99 % Bandwidth

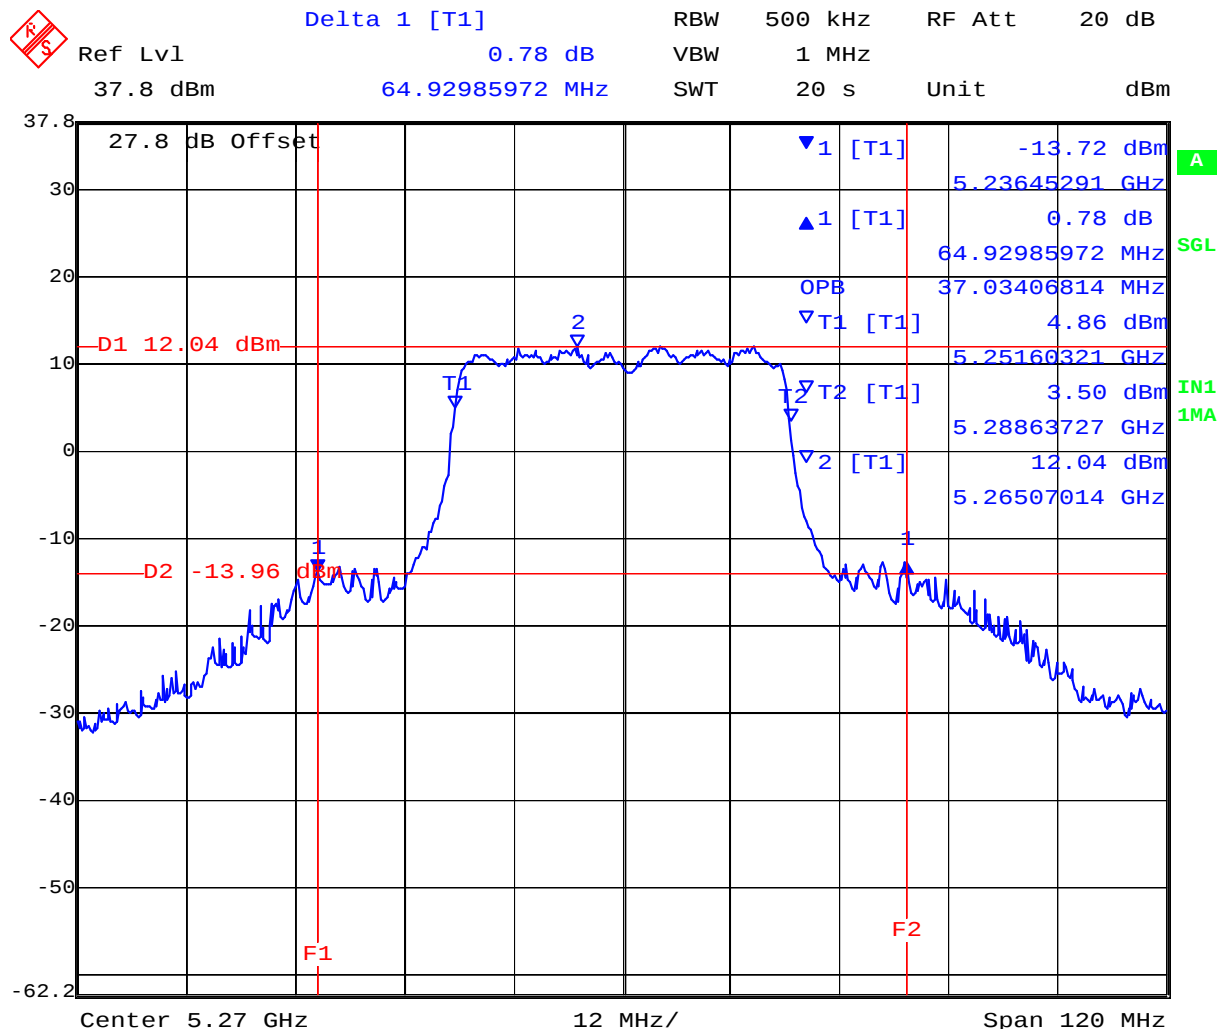


Date: 29.JUL.2008 18:48:24

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 38 of 198

### 5,310 MHz 802.11n HT40 26 dB and 99 % Bandwidth

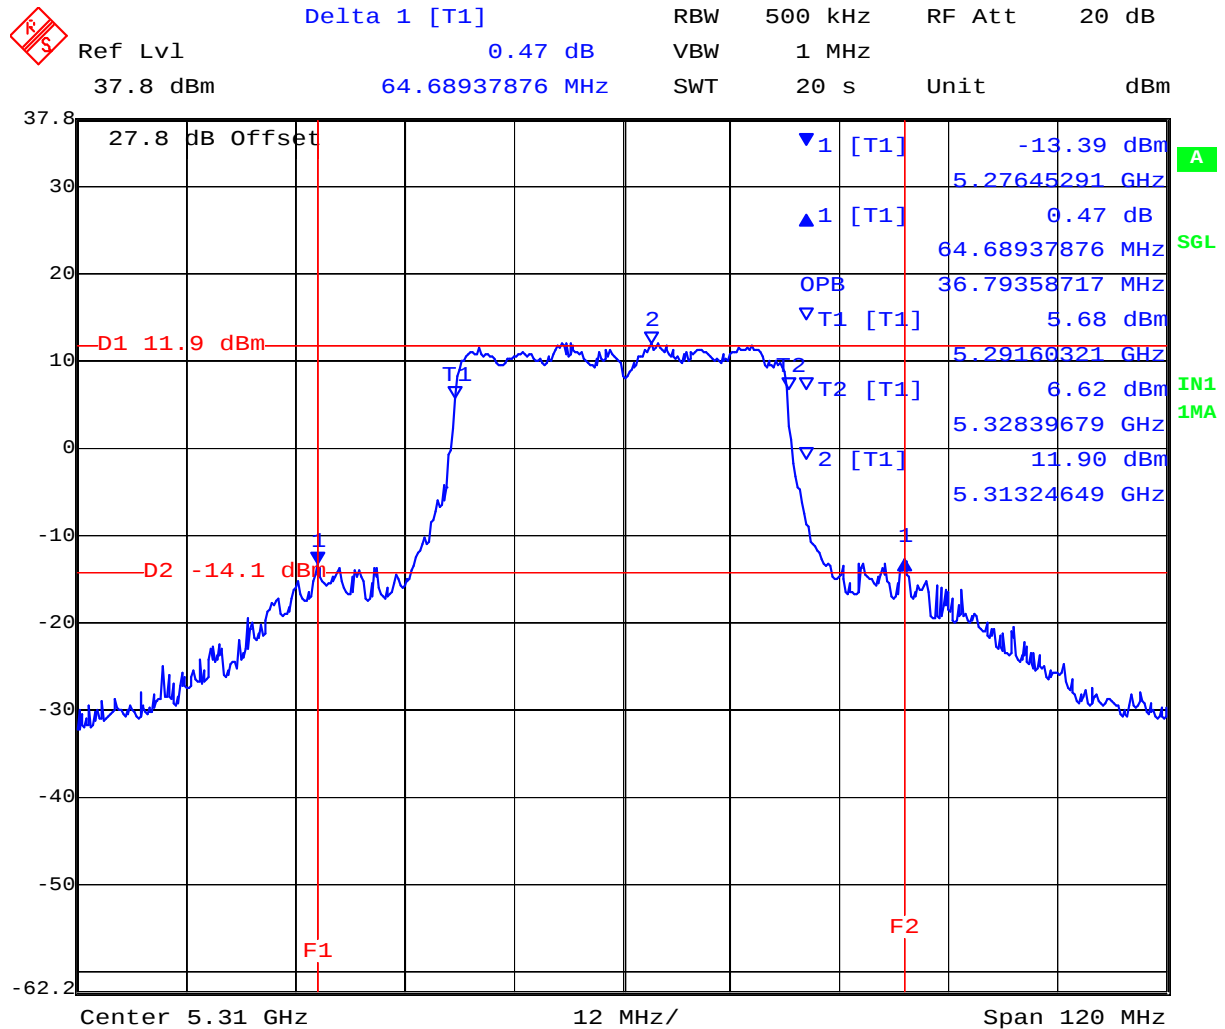

Date: 29.JUL.2008 18:50:52

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 39 of 198

TABLE OF RESULTS – 802.11n HT40

| Center Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % BW (MHz) |
|------------------------|-----------------------|---------------|
| 5,510                  | 64.930                | 37.034        |
| 5,620                  | 65.170                | 37.275        |
| 5,690                  | 64.689                | 37.275        |

5,510 MHz 802.11n HT40 26 dB and 99 % Bandwidth

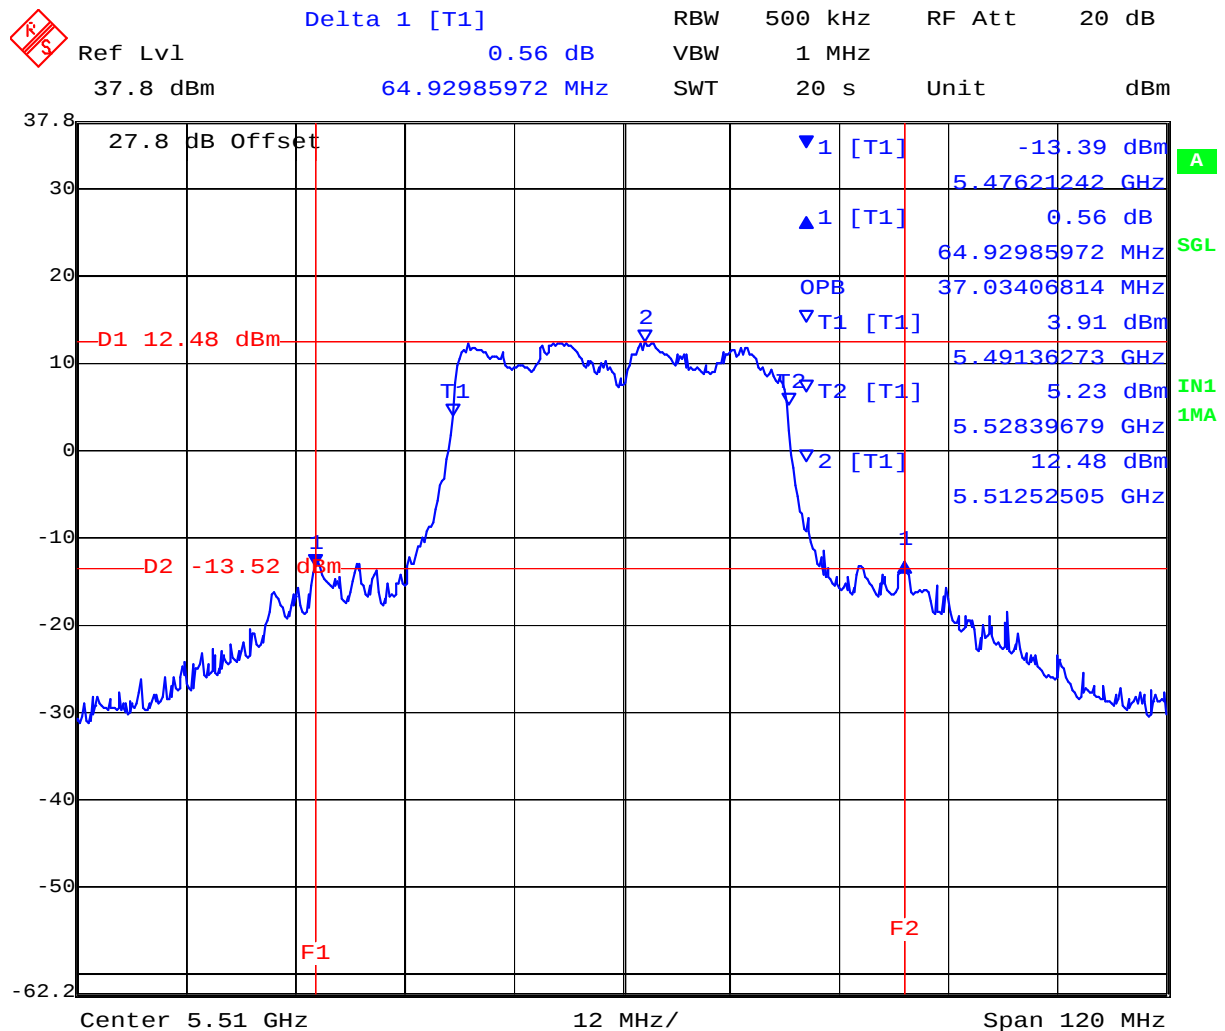


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 40 of 198

### 5,620 MHz 802.11n HT40 26 dB and 99 % Bandwidth

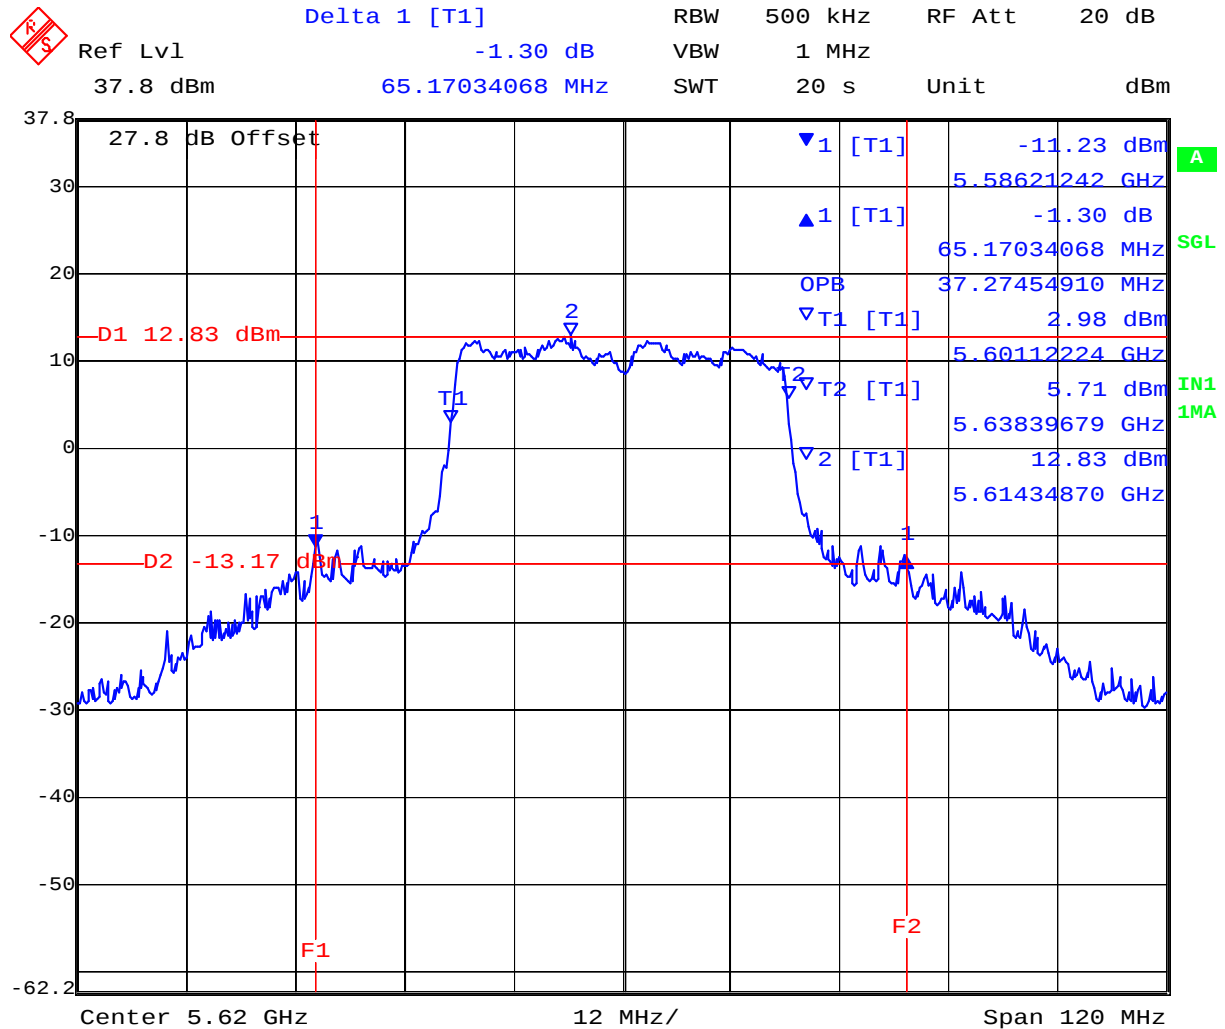


Date: 29.JUL.2008 18:54:34

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11n HT40 26 dB and 99 % Bandwidth  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 41 of 198

### 5,690 MHz 802.11n HT40 26 dB and 99 % Bandwidth

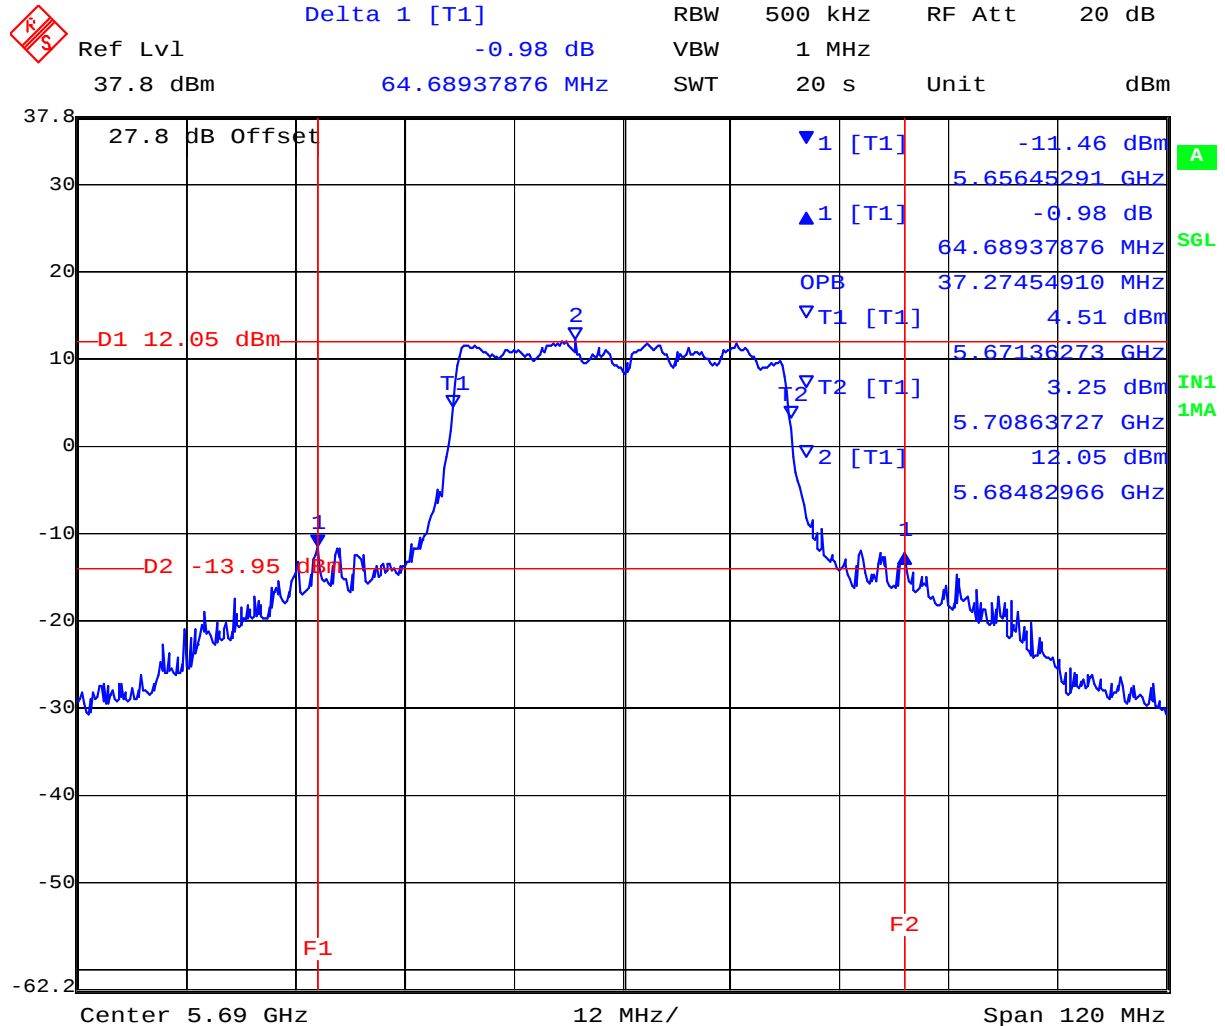

Date: 29.JUL.2008 18:57:35

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 42 of 198

## Specification

### Limits

#### FCC, Part 15 §15.407 (a)(1), (a)(2) and Industry Canada RSS-210 § A9.2(2)

**(a)(1)** For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or +4 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

**(a)(2)** For the 5.25-5.35 GHz band the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or +11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

#### Industry Canada RSS-Gen 4.4

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

## Laboratory Measurement Uncertainty for Spectrum Measurement

|                         |          |
|-------------------------|----------|
| Measurement uncertainty | ±2.81 dB |
|-------------------------|----------|

## Traceability

| Method                                                                              | Test Equipment Used                            |
|-------------------------------------------------------------------------------------|------------------------------------------------|
| Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask' | 0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### 5.1.2. Transmit Output Power

FCC, Part 15 Subpart C §15.407(a)  
Industry Canada RSS-210 §9.9(2)  
Industry Canada RSS-Gen 4.6

#### Test Procedure

The transmitter terminal of EUT was connected to the input of an average power meter. Measurements were made while EUT was operating in a continuous transmission mode i.e. 100 % duty cycle at the appropriate center frequency. All cable losses and offsets were taken into consideration in the measured result.

#### Test Measurement Set up

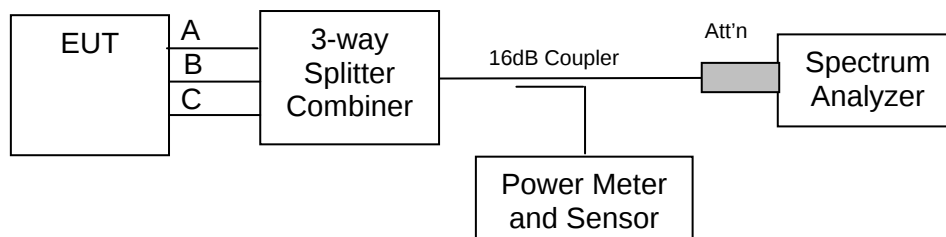

Measurement set up for Transmitter Output Power



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 44 of 198

---

### Measurement Results for Transmit Output Power

Ambient conditions.

Temperature: 17 to 23 °C      Relative humidity: 31 to 57 %      Pressure: 999 to 1012 mbar

EUT parameters.

Power Level: Maximum

Duty Cycle: 100%

TABLE OF RESULTS – 802.11a Legacy

| Center Frequency<br>(MHz) | Maximum Conducted Power<br>(dBm) |
|---------------------------|----------------------------------|
| 5,260                     | +18.8                            |
| 5,300                     | +18.7                            |
| 5,320                     | +18.7                            |

TABLE OF RESULTS – 802.11a Legacy

| Center Frequency<br>(MHz) | Maximum Conducted Power<br>(dBm) |
|---------------------------|----------------------------------|
| 5,500                     | +19.2                            |
| 5,600                     | +19.3                            |
| 5,700                     | +19.1                            |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 45 of 198

---

**TABLE OF RESULTS – 802.11n HT20**

| <b>Center Frequency<br/>(MHz)</b> | <b>Maximum Conducted Power<br/>(dBm)</b> |
|-----------------------------------|------------------------------------------|
| 5,260                             | +18.8                                    |
| 5,300                             | +18.7                                    |
| 5,320                             | +18.5                                    |

**TABLE OF RESULTS – 802.11n HT20**

| <b>Center Frequency<br/>(MHz)</b> | <b>Maximum Conducted Power<br/>(dBm)</b> |
|-----------------------------------|------------------------------------------|
| 5,500                             | +19.2                                    |
| 5,600                             | +19.2                                    |
| 5,700                             | +19.1                                    |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 46 of 198

---

**TABLE OF RESULTS – 802.11n HT40**

| <b>Center Frequency<br/>(MHz)</b> | <b>Maximum Conducted Power<br/>(dBm)</b> |
|-----------------------------------|------------------------------------------|
| 5,270                             | +17.6                                    |
| 5,310                             | +17.5                                    |

**TABLE OF RESULTS – 802.11n HT40**

| <b>Center Frequency<br/>(MHz)</b> | <b>Maximum Conducted Power<br/>(dBm)</b> |
|-----------------------------------|------------------------------------------|
| 5,510                             | +17.9                                    |
| 5,620                             | +18.1                                    |
| 5,690                             | +18.1                                    |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 47 of 198

## Specification

### Limits

#### **FCC, Part 15 §15.407 (a)(1), (a)(2) and Industry Canada RSS-210 § A9.2(2)**

**(a)(1)** For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or  $+4 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

**(a)(2)** For the 5.25-5.35 GHz band the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $+11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

#### **Industry Canada RSS-210 §A9.2(2)**

For the band 5150-5250 MHz, the maximum equivalent isotropically radiated power (e.i.r.p.) shall not exceed 200 mW or  $10 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

For the band 5250-5350 MHz and 5470-5725 MHz, the maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever power is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

#### **Industry Canada RSS-Gen 4.4**

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

## Laboratory Measurement Uncertainty for Power Measurements

|                         |                       |
|-------------------------|-----------------------|
| Measurement uncertainty | $\pm 1.33 \text{ dB}$ |
|-------------------------|-----------------------|

## Traceability

| Method                                                                        | Test Equipment Used                            |
|-------------------------------------------------------------------------------|------------------------------------------------|
| Measurements were made per work instruction WI-01 'Measuring RF Output Power' | 0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### 5.1.3. Peak Power Spectral Density

**FCC, Part 15 Subpart C §15.407(a)**  
**Industry Canada RSS-210 § A9.2(2)**

#### **Test Procedure**

The transmitter output was connected to a spectrum analyzer and the peak power spectral density measured. Method 2 Sample Detection and power averaging, specified in FCC document DA 02-2138 (Normative Reference (ix) Section 2.1 “Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices”) was used to determine the peak power spectral density of the emission. The Peak Power Spectral Density is the highest level found across the emission in a 1 MHz resolution bandwidth.

#### **Test Measurement Set up**

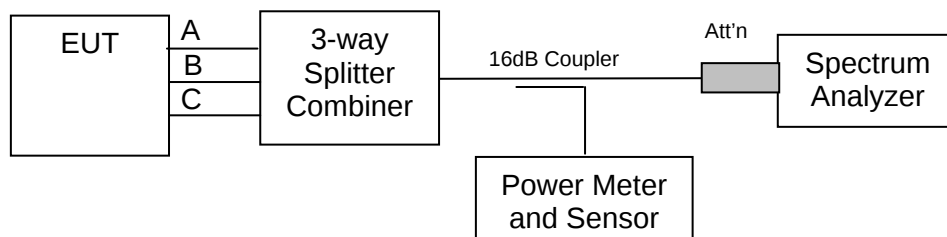

Measurement set up for Peak Power Spectral Density

#### **Measurement Results for Peak Power Spectral Density**

Ambient conditions.

Temperature: 17 to 23 °C      Relative humidity: 31 to 57 %      Pressure: 999 to 1012 mbar

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier

Power: Maximum Default Power




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 49 of 198

**TABLE OF RESULTS – 802.11a Legacy**

| Center Frequency (MHz) | Peak Frequency (MHz) | PPSD (dBm) |
|------------------------|----------------------|------------|
| 5,260                  | 5260.92184           | +5.09      |
| 5,300                  | 5297.95591           | +4.89      |
| 5,320                  | 5320.52104           | +4.55      |

**5,260 MHz 802.11a Legacy Peak Power Spectral Density**

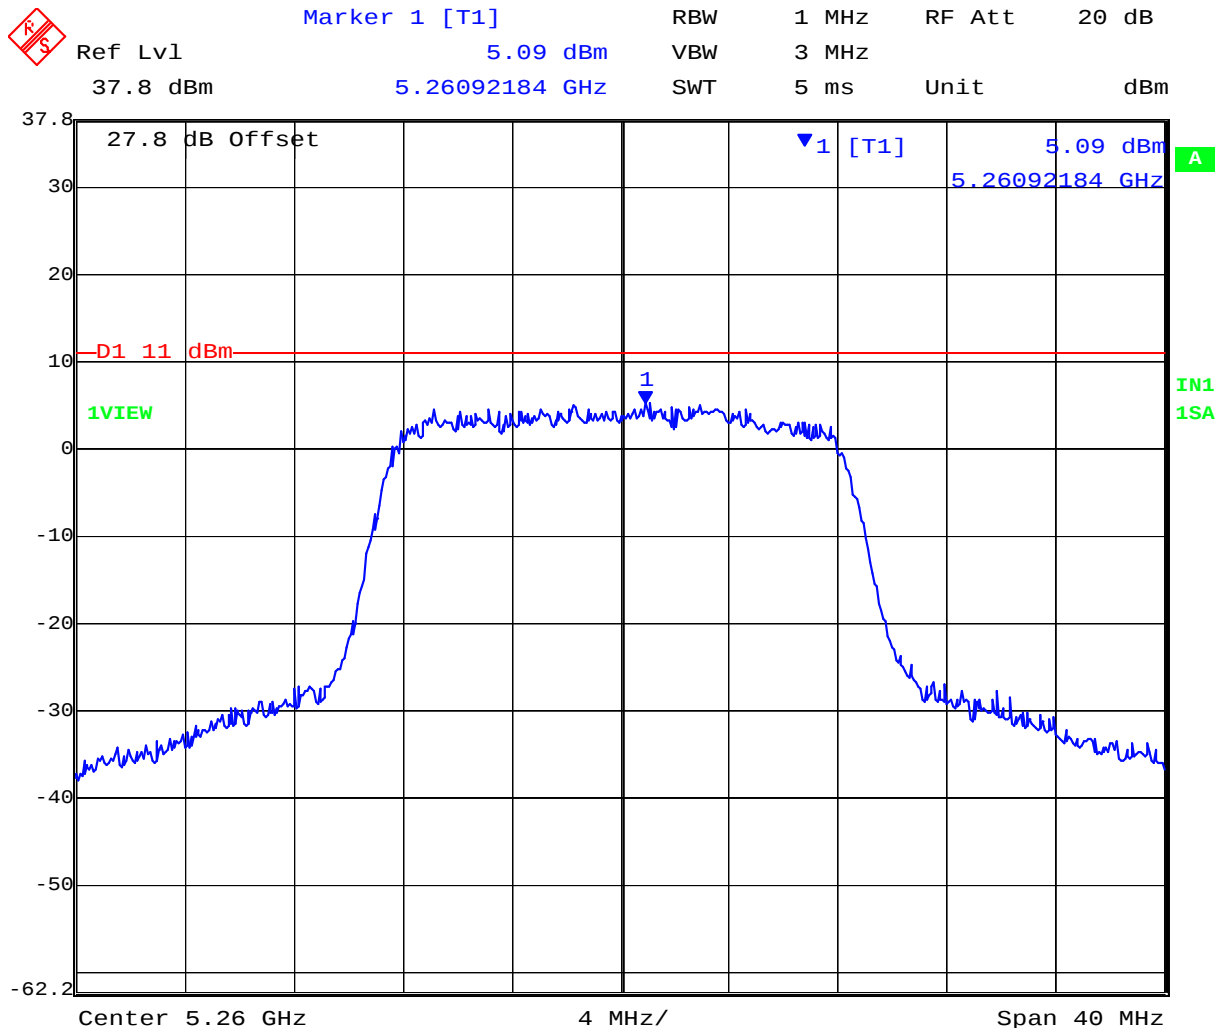


Date: 30.JUL.2008 12:31:28

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 50 of 198

### 5,300 MHz 802.11a Legacy Peak Power Spectral Density

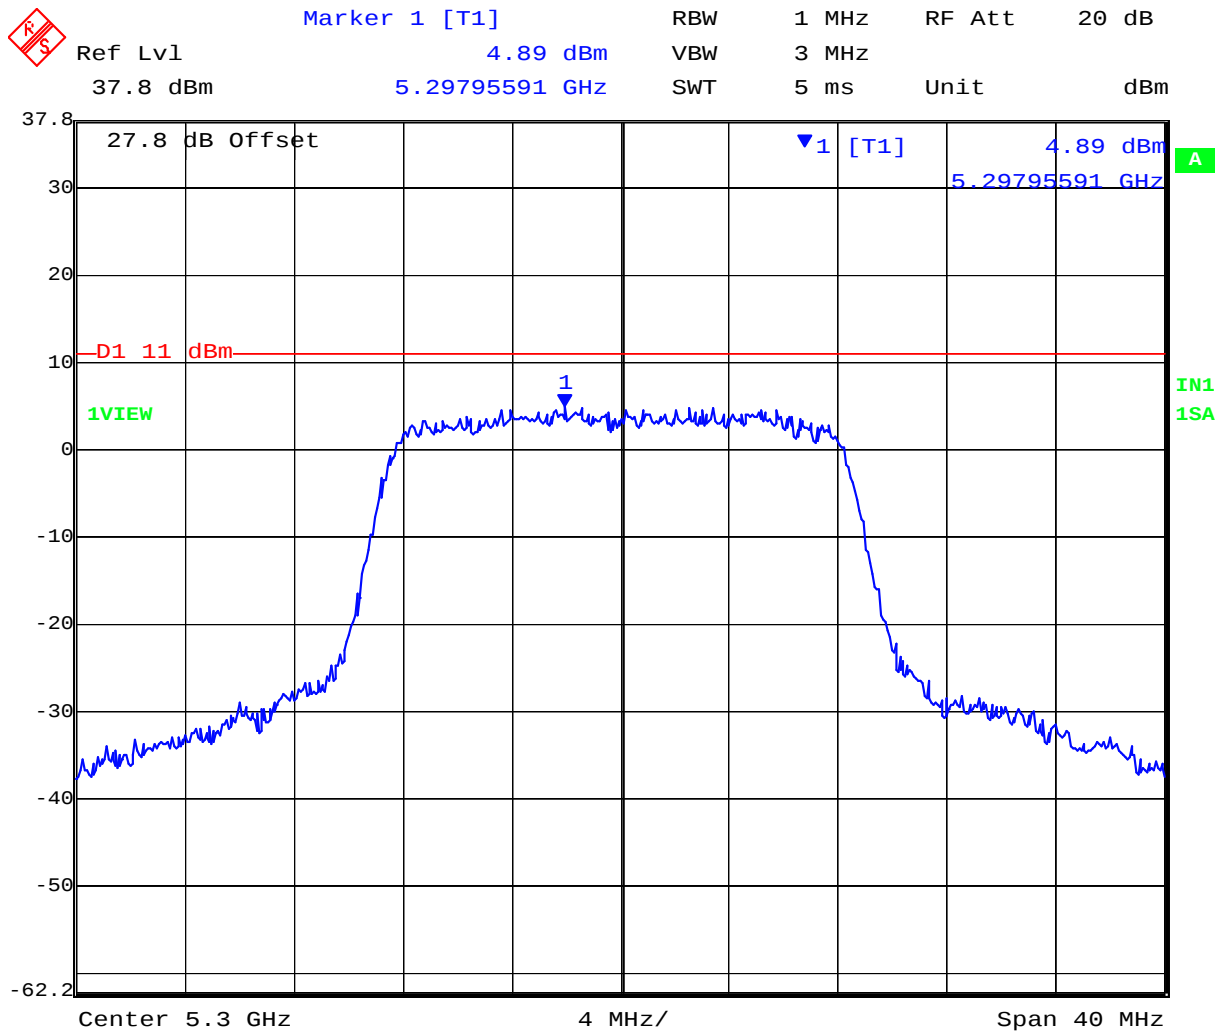


Date: 30.JUL.2008 12:30:47

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 51 of 198

### 5,320 MHz 802.11a Legacy Peak Power Spectral Density

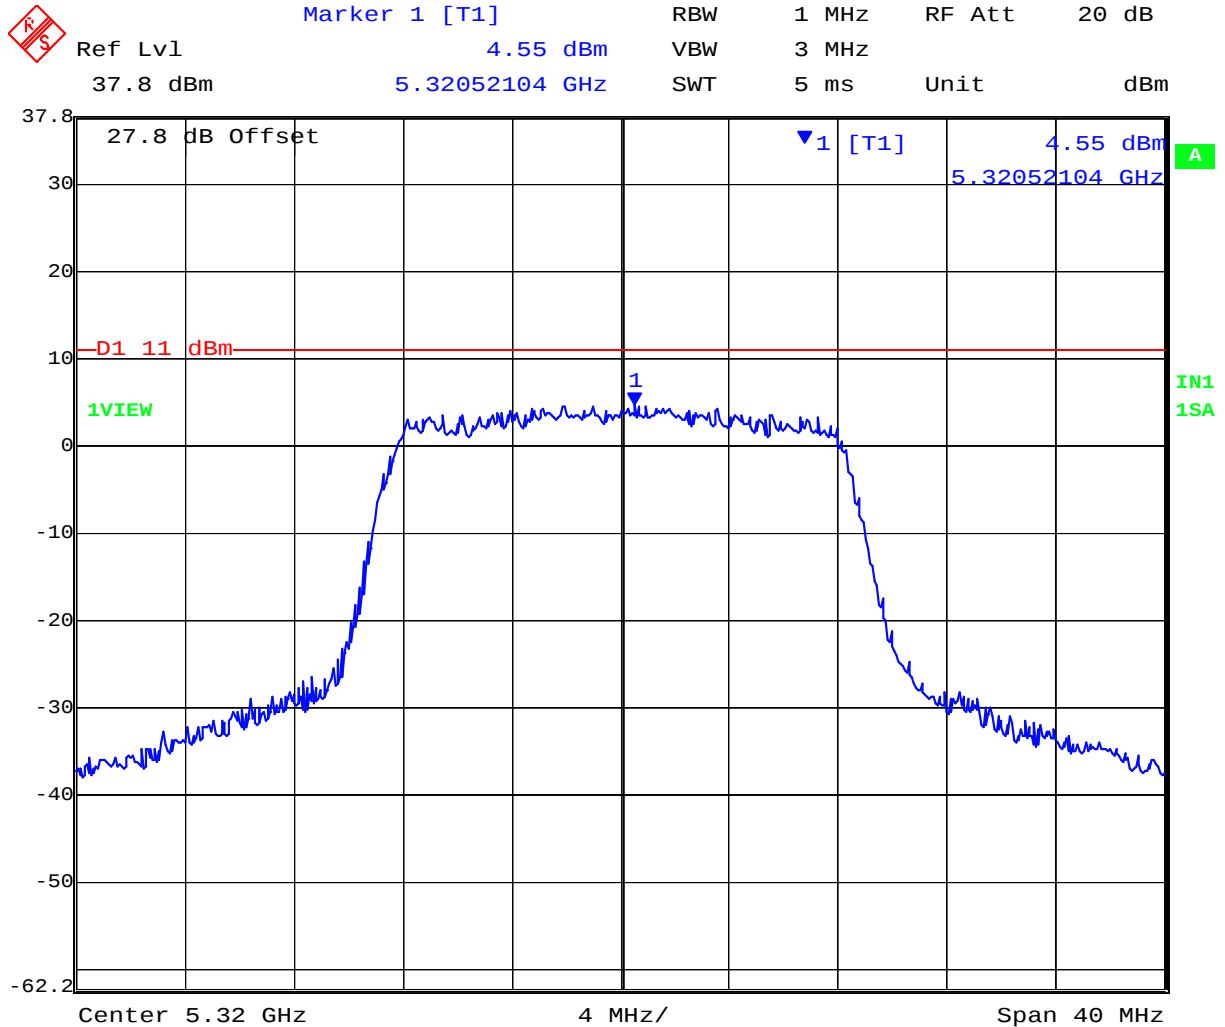

Date: 30. JUL. 2008 12:29:55

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 52 of 198

TABLE OF RESULTS – 802.11a Legacy

| Center Frequency (MHz) | Peak Frequency (MHz) | PPSD (dBm) |
|------------------------|----------------------|------------|
| 5,500                  | 5498.67735           | +5.14      |
| 5,600                  | 5597.71543           | +5.10      |
| 5,700                  | 5702.76553           | +4.61      |

5,500 MHz 802.11a Legacy Peak Power Spectral Density




Date: 30.JUL.2008 12:32:15

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 53 of 198

### 5,600 MHz 802.11a Legacy Peak Power Spectral Density

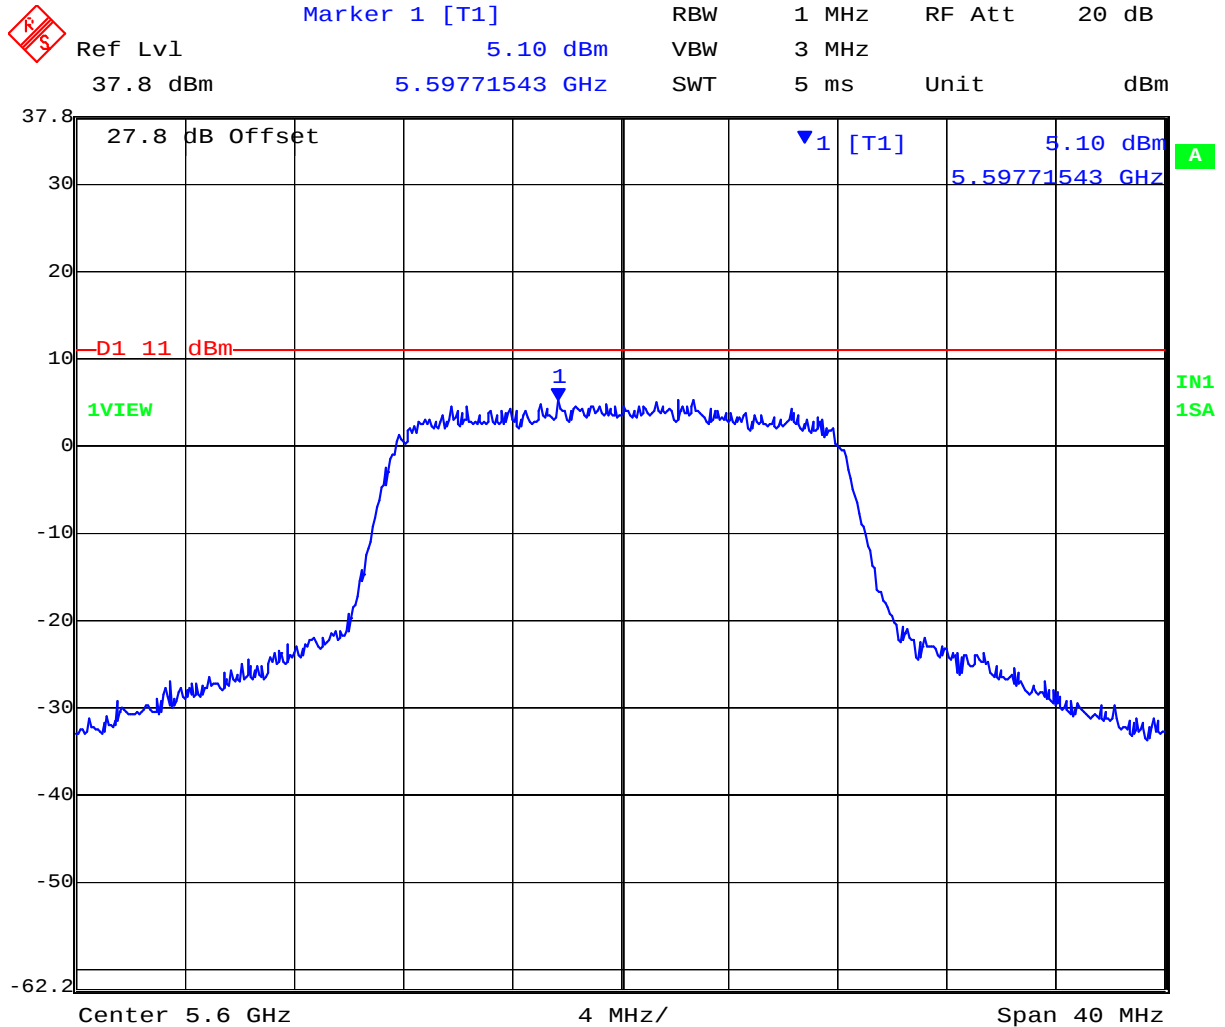


Date: 30.JUL.2008 12:32:53

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 54 of 198

### 5,700 MHz 802.11a Legacy Peak Power Spectral Density

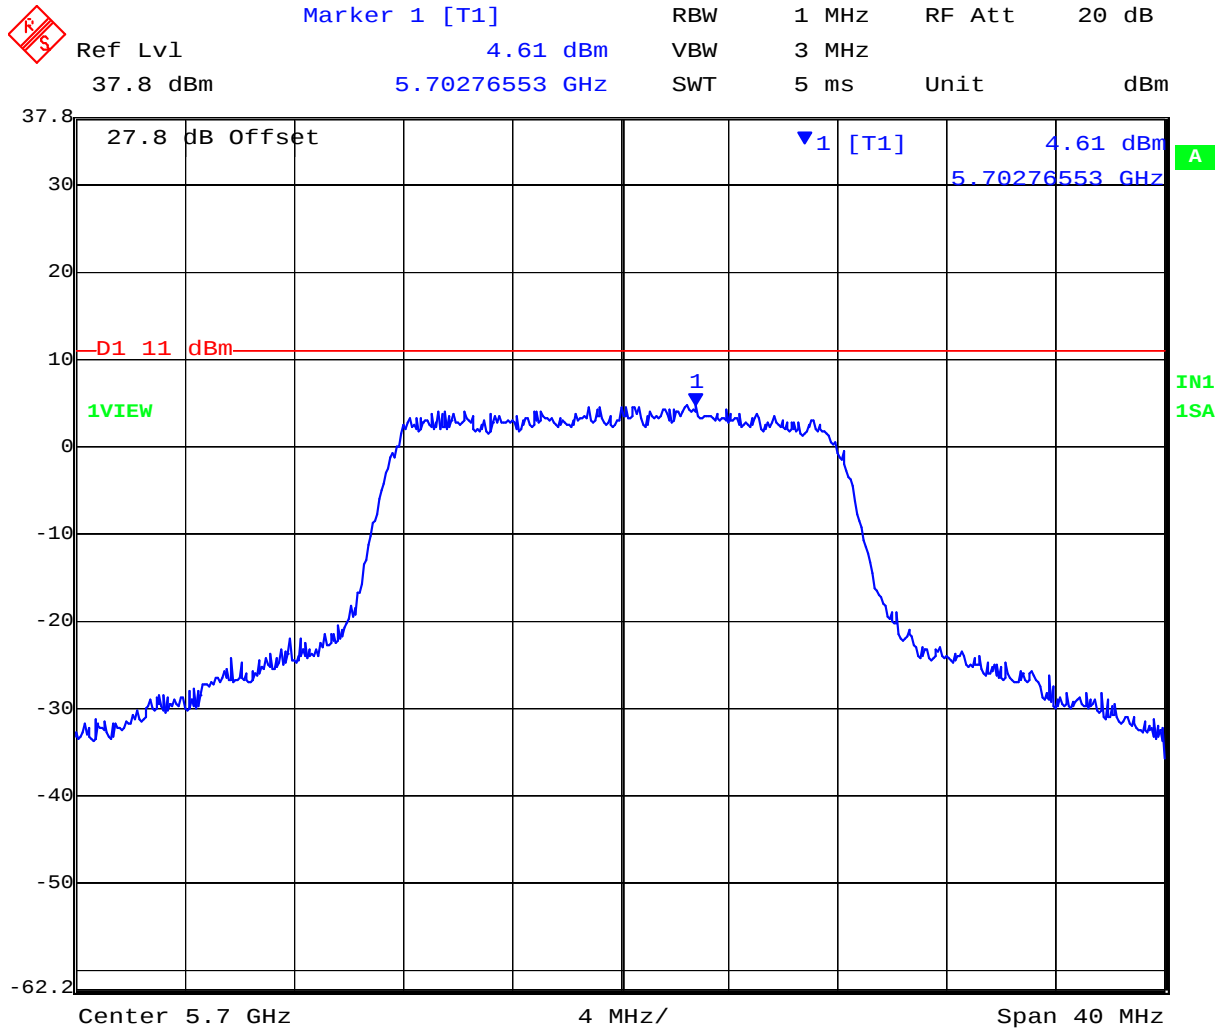

Date: 30.JUL.2008 12:33:29

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 55 of 198

---

**TABLE OF RESULTS – 802.11N HT20**

| <b>Center Frequency<br/>(MHz)</b> | <b>Peak Frequency<br/>(MHz)</b> | <b>PPSD<br/>(dBm)</b> |
|-----------------------------------|---------------------------------|-----------------------|
| 5,260                             | 5259.29731                      | +4.97                 |
| 5,300                             | 5299.62109                      | +4.63                 |
| 5,320                             | 5321.42931                      | +4.71                 |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 56 of 198

TABLE OF RESULTS – 802.11n HT20

| Center Frequency (MHz) | Peak Frequency (MHz) | PPSD (dBm) |
|------------------------|----------------------|------------|
| 5,500                  | 5499.23848           | +5.23      |
| 5,600                  | 5598.35671           | +4.96      |
| 5,700                  | 5700.92184           | +4.38      |

5,500 MHz 802.11n HT20 Peak Power Spectral Density

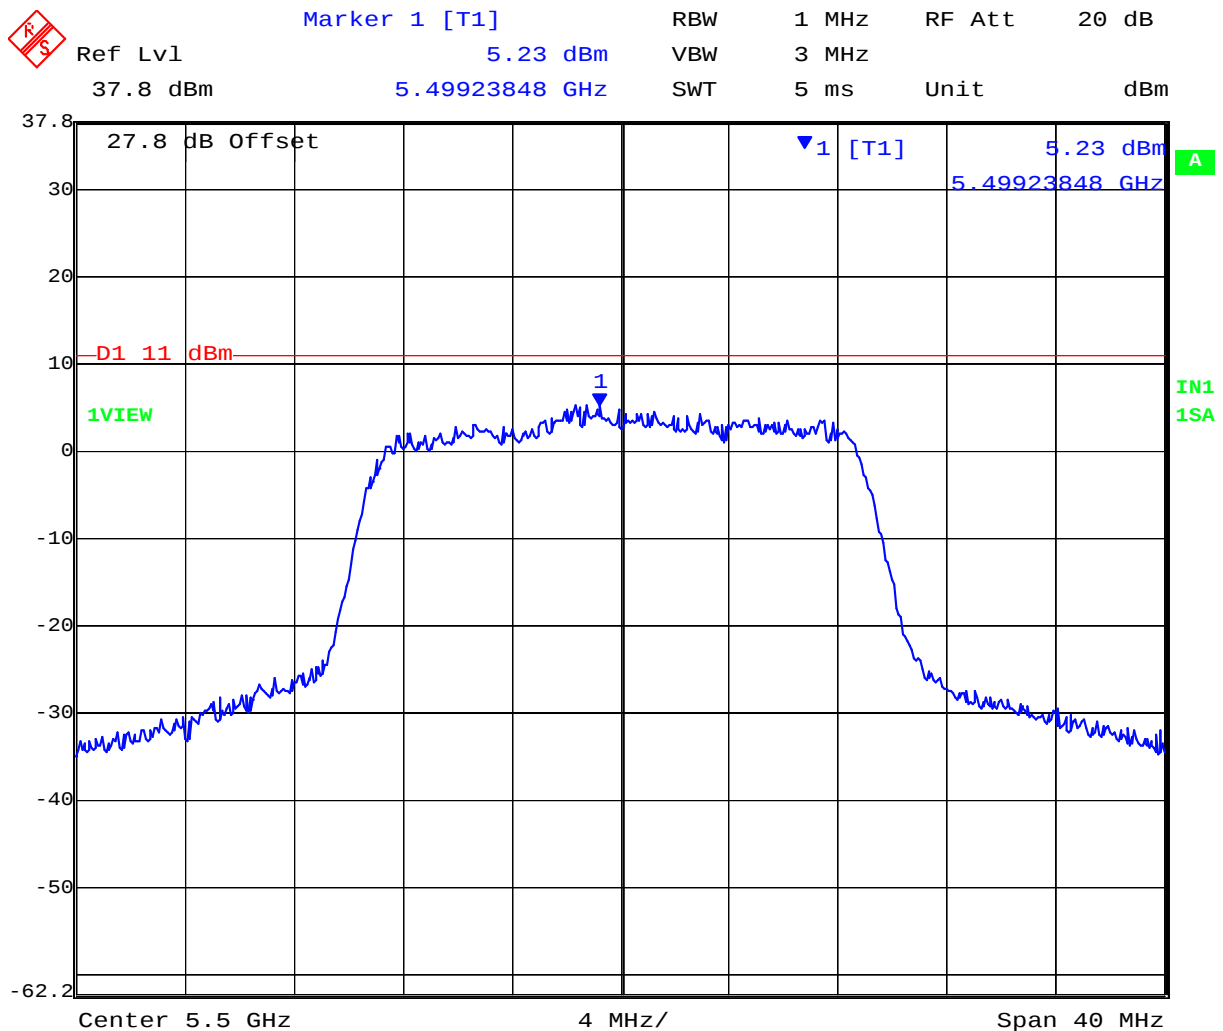


Date: 30.JUL.2008 12:35:27

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 57 of 198

### 5,600 MHz 802.11n HT20 Peak Power Spectral Density

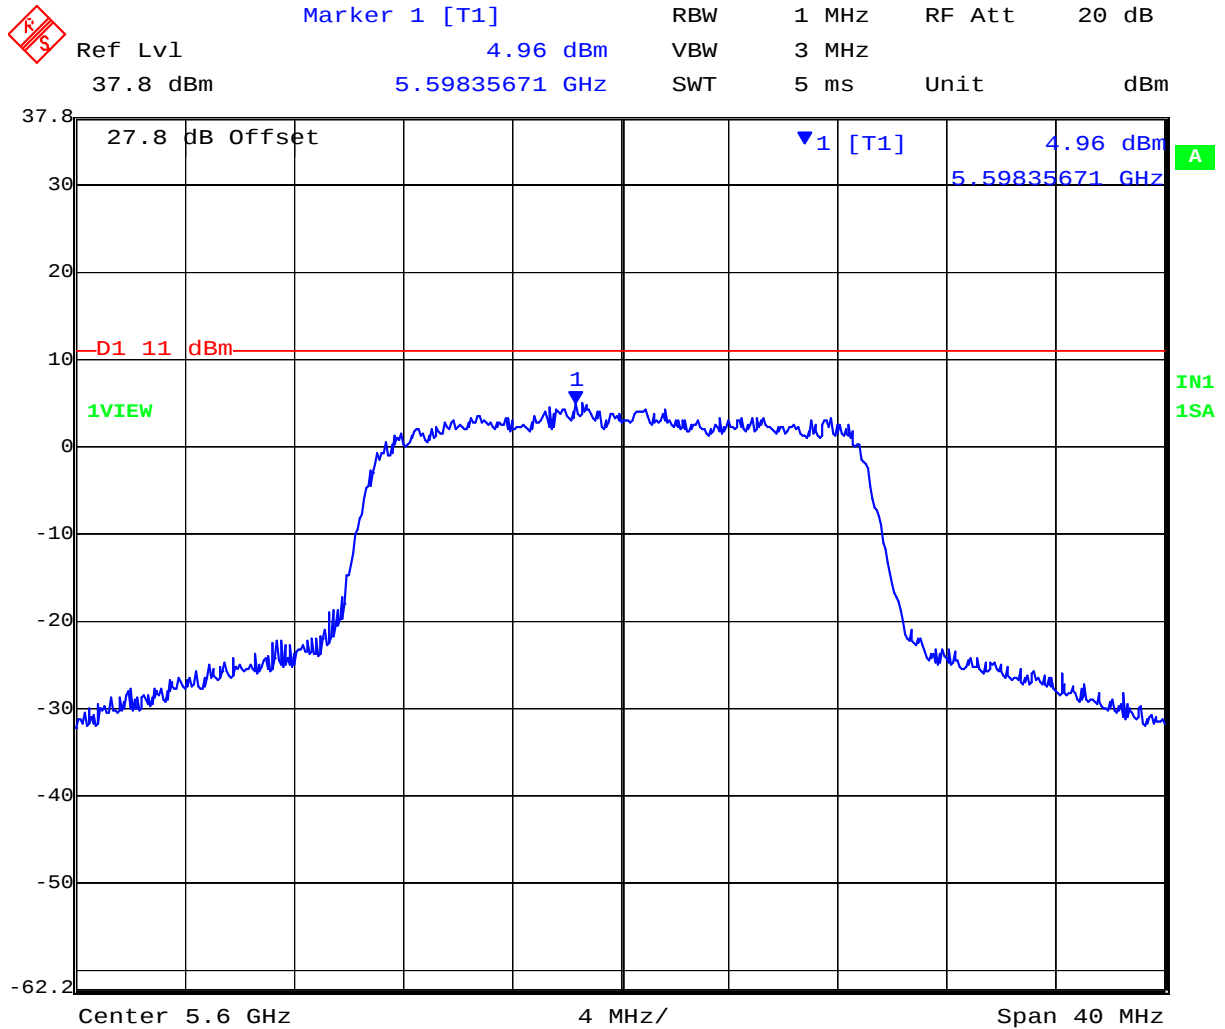


Date: 30.JUL.2008 12:34:49

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 58 of 198

### 5,700 MHz 802.11n HT20 Peak Power Spectral Density

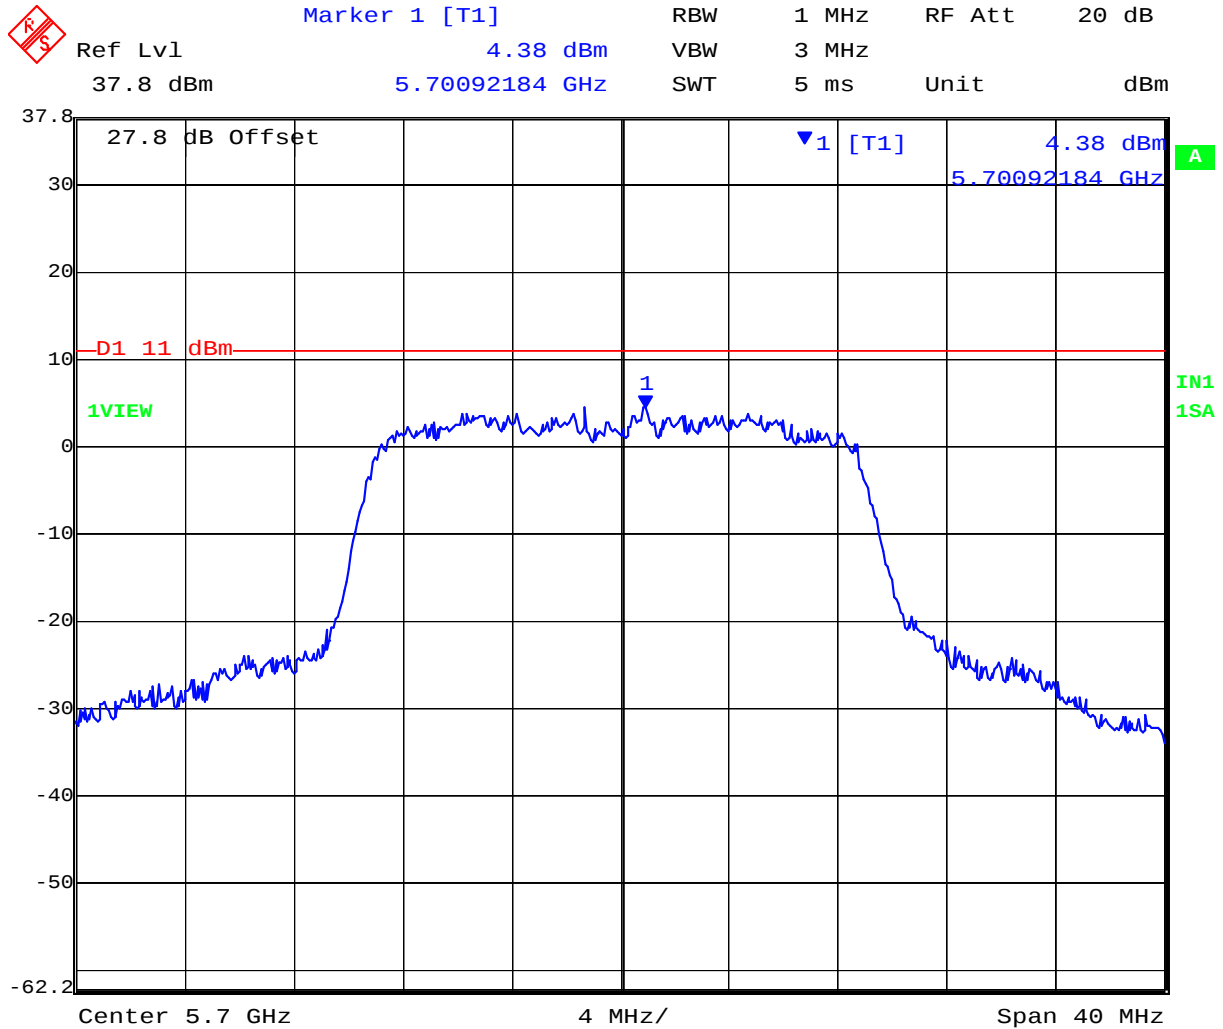

Date: 30.JUL.2008 12:34:06

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 59 of 198

**TABLE OF RESULTS – 802.11n HT40**

| Center Frequency (MHz) | Peak Frequency (MHz) | PPSD (dBm) |
|------------------------|----------------------|------------|
| 5,270                  | 5276.33267           | +0.24      |
| 5,310                  | 5316.33267           | -0.22      |

**5,270 MHz 802.11n HT40 Peak Power Spectral Density**

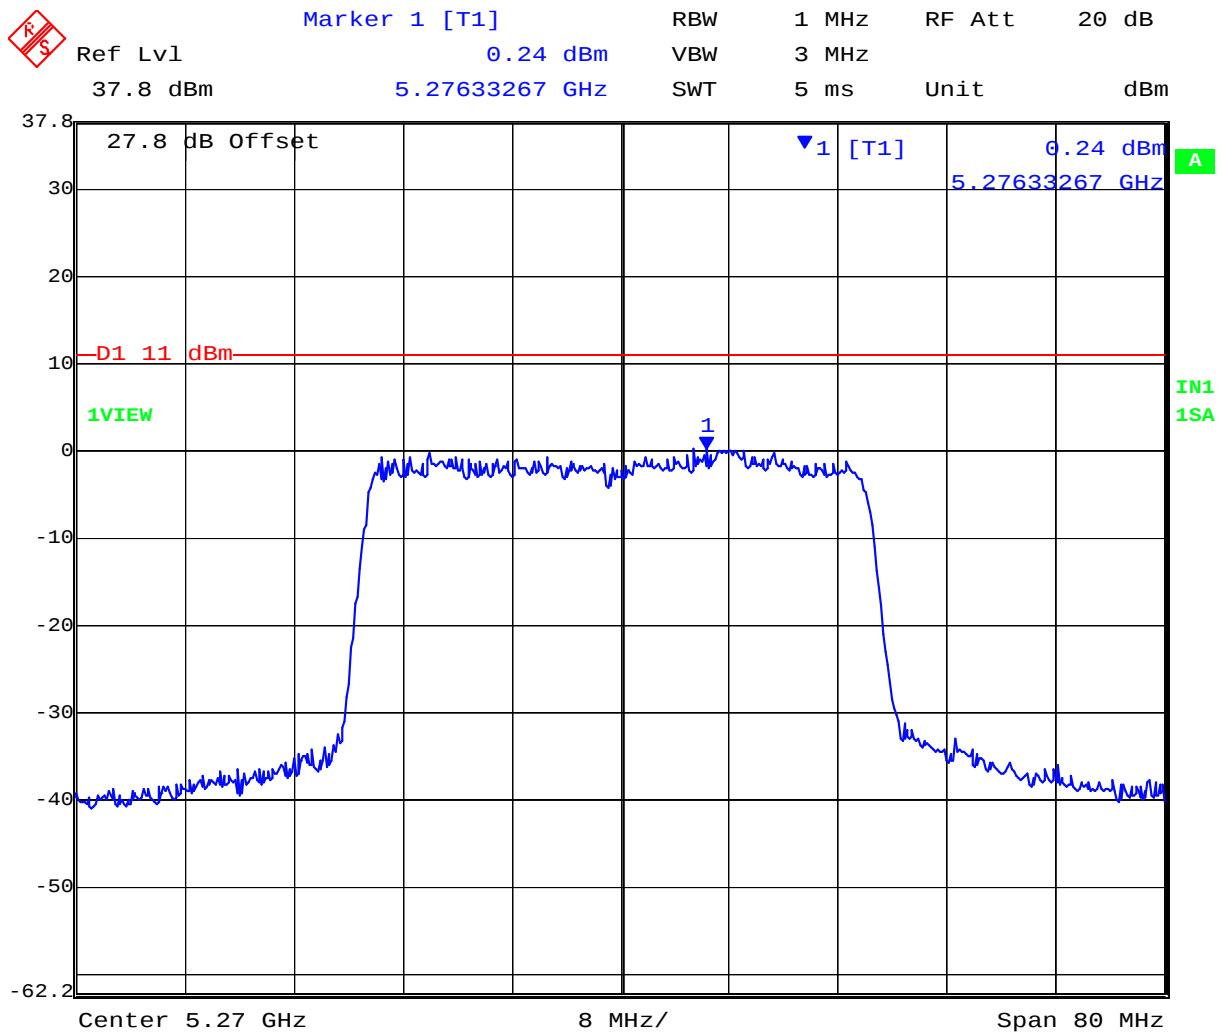


Date: 30.JUL.2008 12:25:16

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 60 of 198

### 5,310 MHz 802.11n HT40 Peak Power Spectral Density

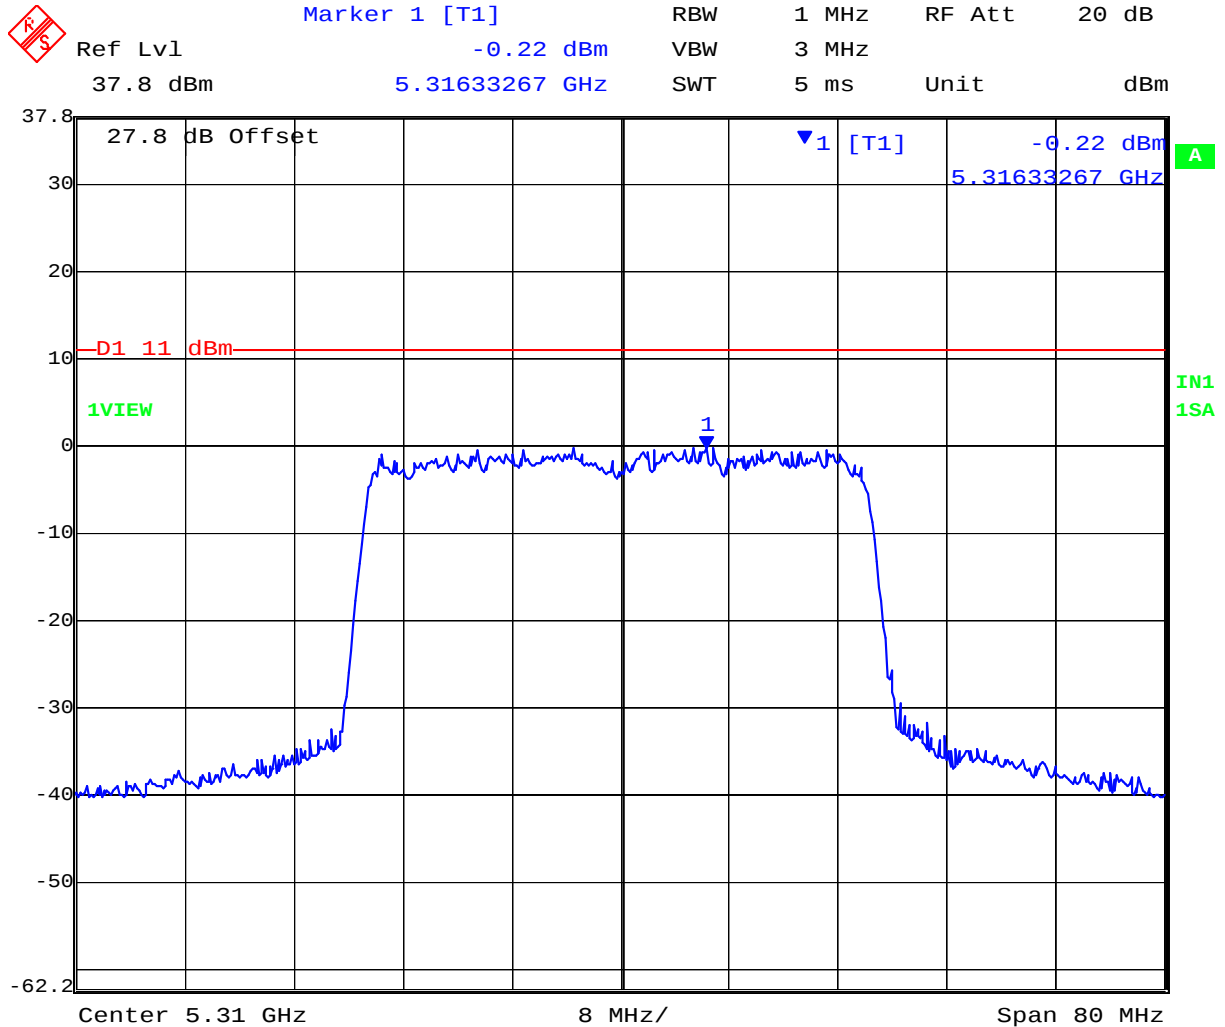

Date: 30.JUL.2008 12:26:21

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 61 of 198

TABLE OF RESULTS – 802.11n HT40

| Center Frequency (MHz) | Peak Frequency (MHz) | PPSD (dBm) |
|------------------------|----------------------|------------|
| 5,510                  | 5520.82164           | -0.18      |
| 5,620                  | 5605.81162           | +0.11      |
| 5,690                  | 5678.37675           | -0.32      |

5,510 MHz 802.11n HT40 Peak Power Spectral Density

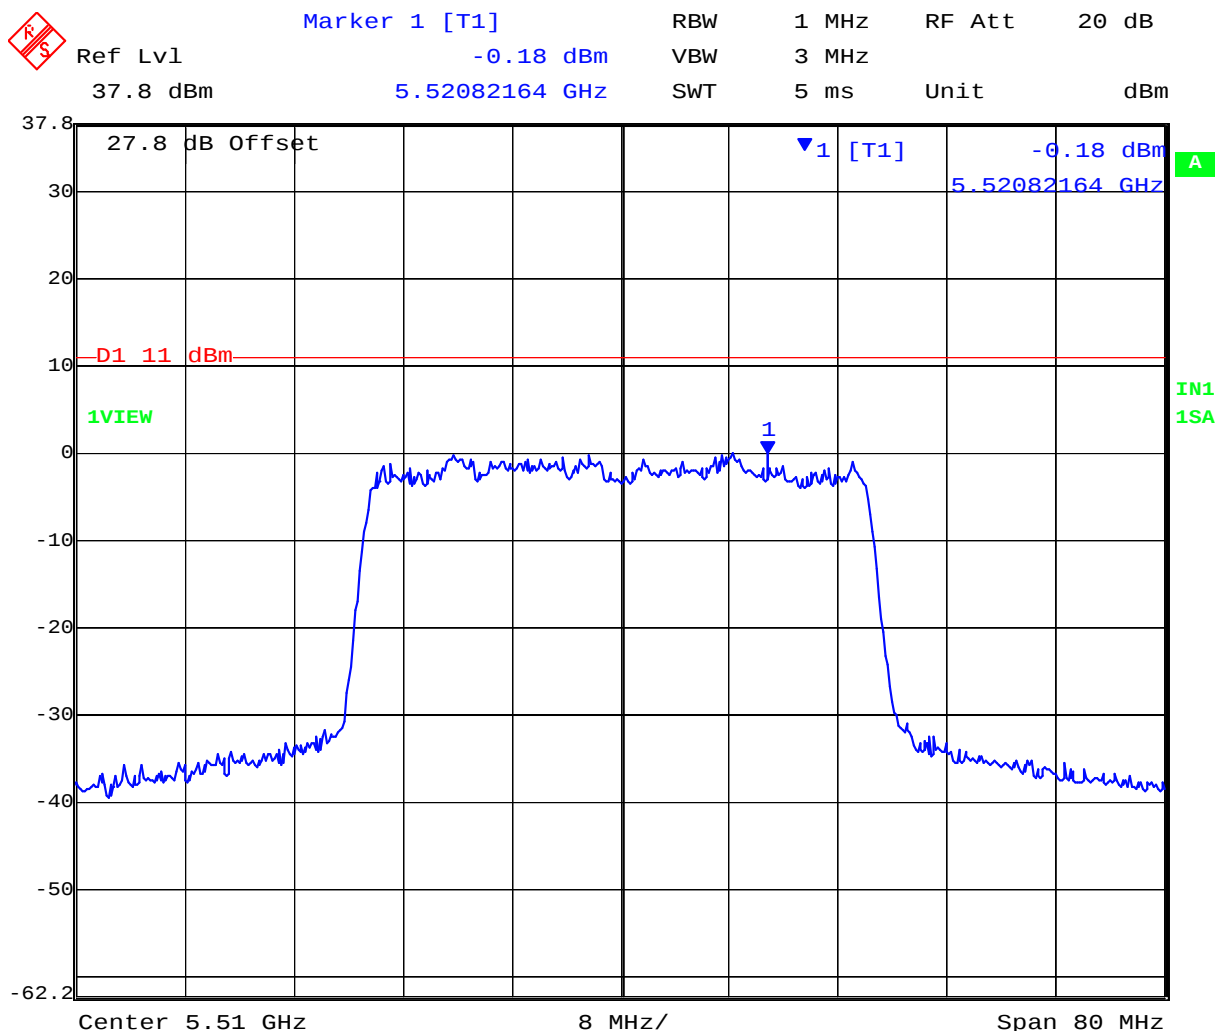


Date: 30.JUL.2008 12:27:08

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 62 of 198

### 5,620 MHz 802.11n HT40 Peak Power Spectral Density

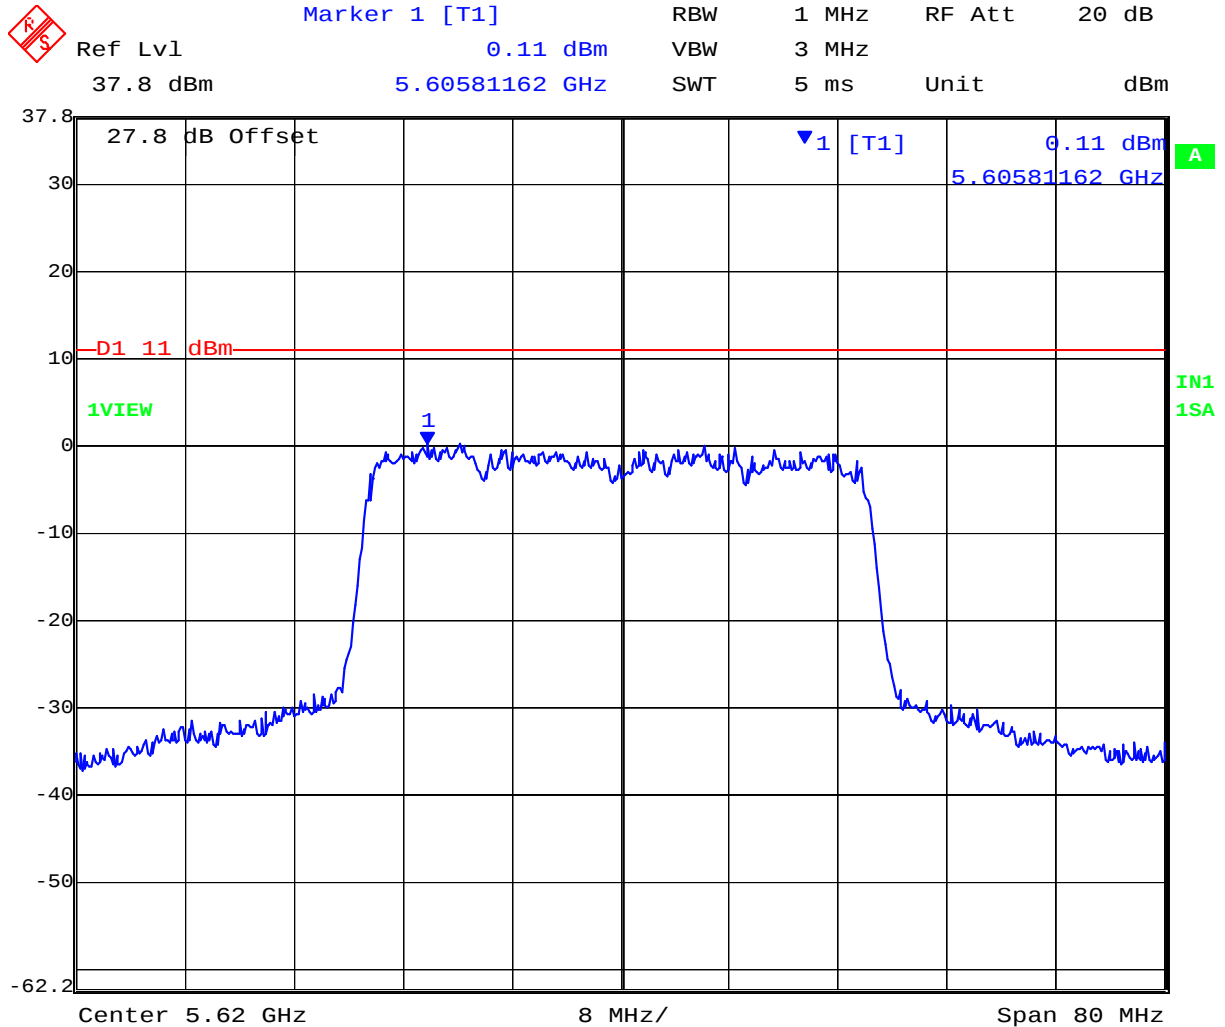


Date: 30.JUL.2008 12:27:42

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 63 of 198

### 5,690 MHz 802.11n HT40 Peak Power Spectral Density

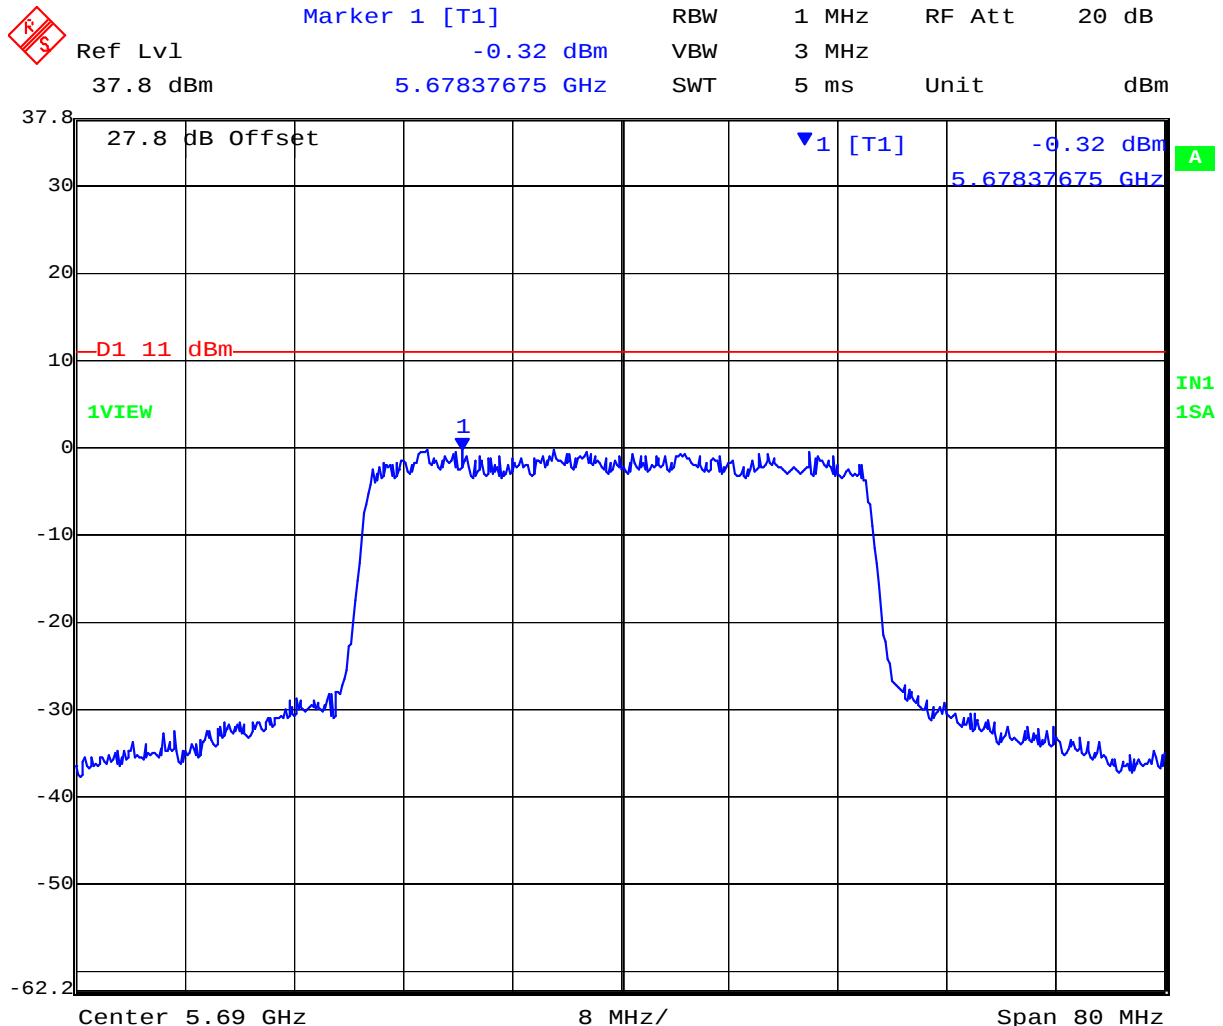

Date: 30.JUL.2008 12:28:39

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 64 of 198

## Specification

### **FCC, Part 15 §15.407 (a)(1), (a)(2)**

**(a)(1)** The peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

**(a)(2)** The peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

### **Industry Canada RSS-210 § A9.2(1), A9.2(2)**

§ **A9.2(1)** The eirp spectral density shall not exceed +10 dBm in any 1 MHz band

§ **A9.2(2)** The power spectral density shall not exceed +11 dBm in any 1 MHz band

## Laboratory Measurement Uncertainty for Spectral Density

|                         |          |
|-------------------------|----------|
| Measurement uncertainty | ±1.33 dB |
|-------------------------|----------|

## Traceability

| Method                                                                        | Test Equipment Used                            |
|-------------------------------------------------------------------------------|------------------------------------------------|
| Measurements were made per work instruction WI-01 'Measuring RF Output Power' | 0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


#### 5.1.4. Peak Excursion Ratio

##### FCC, Part 15 Subpart C §15.407(a)(6)

#### Test Procedure

Normative Reference (xi) Section 2.1 Measurement Procedure DA 02-2138 "Measurement Procedure Updated for Peak Transmit Power in the UNII Bands" was implemented to determine the Peak Excursion Ratio. This is a conducted measurement using a spectrum analyzer. The Peak Excursion Ratio is the difference in amplitude (dB) between the two traces.

#### Test Measurement Set up

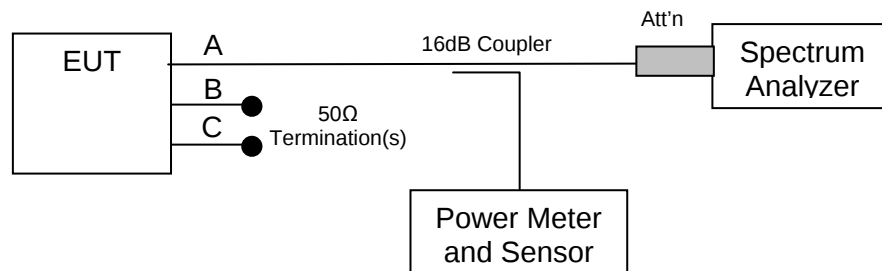

Measurement set up for Peak Excursion Ratio

#### Measurement Results for Peak Excursion Ratio

Ambient conditions.

Temperature: 17 to 23 °C    Relative humidity: 31 to 57%    Pressure: 999 to 1012 mbar

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier

Power: Maximum Default Power




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 66 of 198

TABLE OF RESULTS – 802.11a Legacy

| Centre Frequency<br>(MHz) | Peak Excursion Ratio<br>(dB) |
|---------------------------|------------------------------|
| 5,260                     | 12.04                        |
| 5,300                     | 11.72                        |
| 5,320                     | 12.26                        |

5,260 MHz 802.11a Legacy - Peak Excursion Ratio

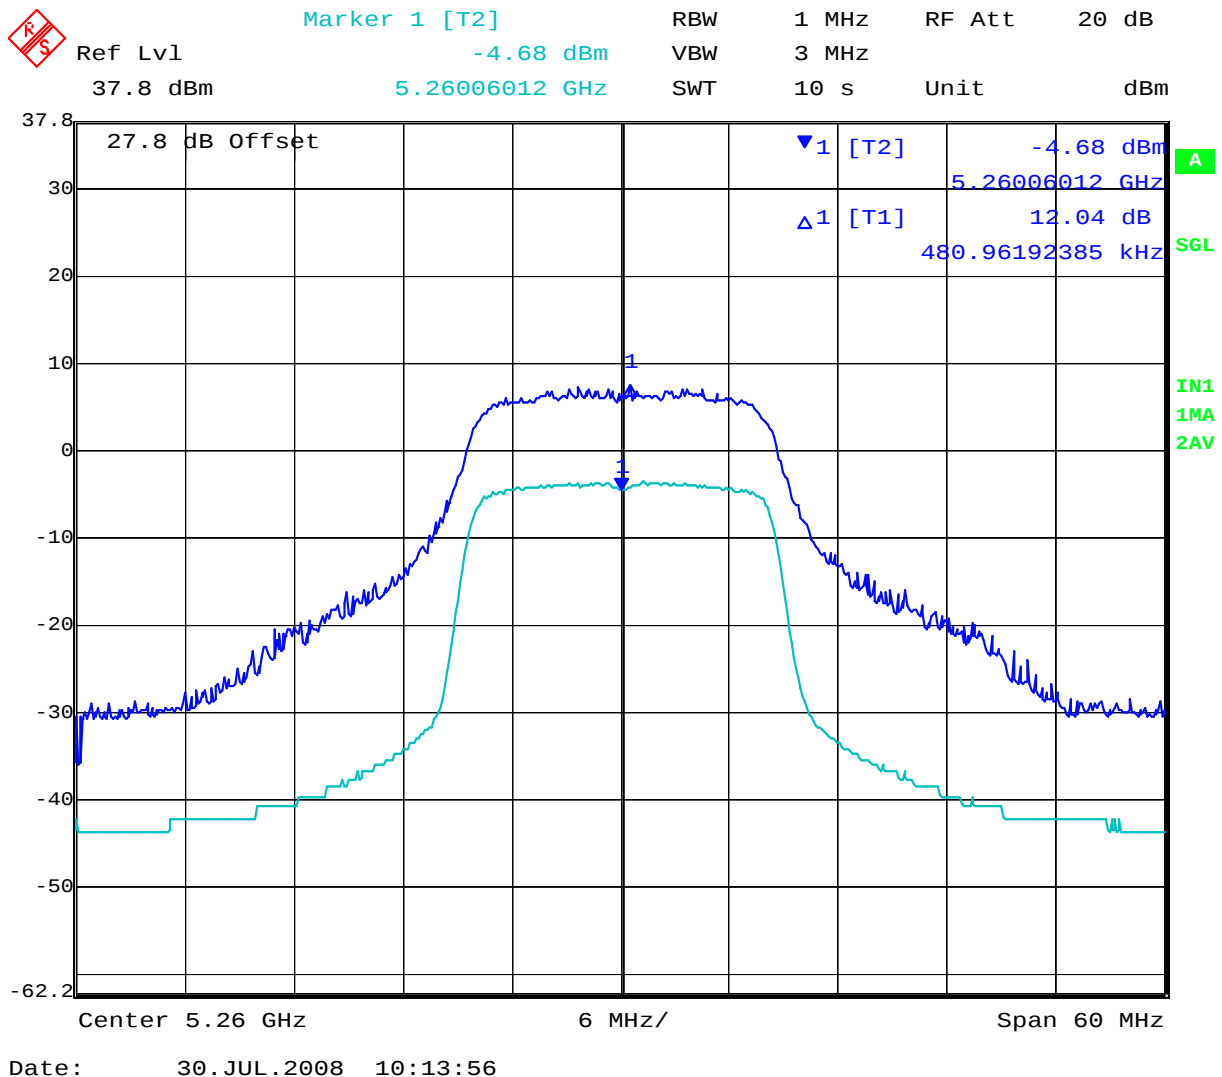


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 67 of 198

### 5,300 MHz 802.11a Legacy - Peak Excursion Ratio

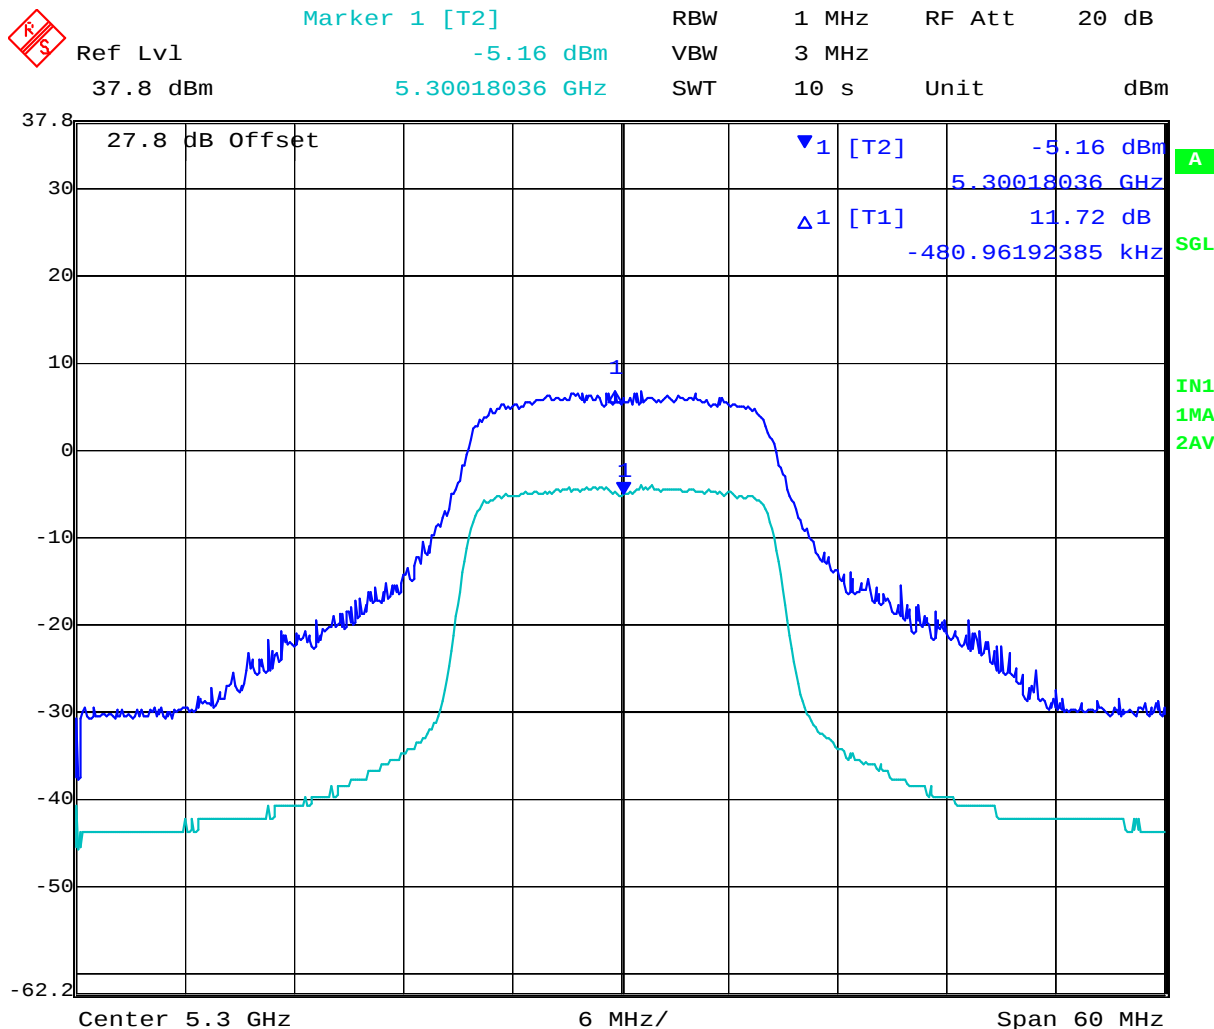

Date: 30.JUL.2008 10:16:09

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 68 of 198

### 5,320 MHz 802.11a Legacy - Peak Excursion Ratio



Ref Lvl 37.8 dBm  
Marker 1 [T2] -5.72 dBm  
5.32018036 GHz  
RBW 1 MHz RF Att 20 dB  
VBW 3 MHz  
SWT 10 s Unit dBm

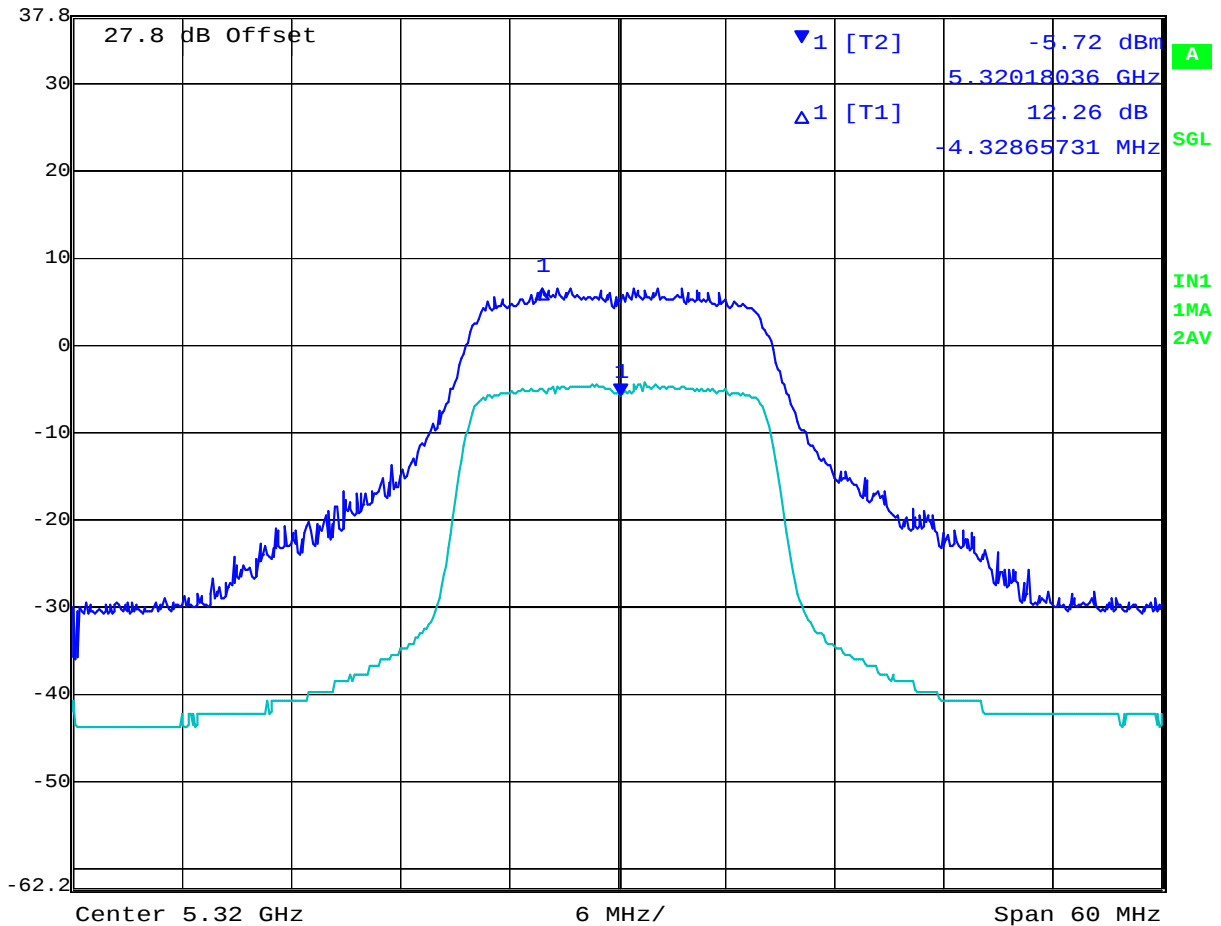

Date: 30.JUL.2008 10:17:27

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 69 of 198

# TABLE OF RESULTS – 802.11a Legacy

| Centre Frequency (MHz) | Peak Excursion Ratio (dB) |
|------------------------|---------------------------|
| 5,500                  | 12.43                     |
| 5,600                  | 11.73                     |
| 5,700                  | 12.05                     |

## 5,500 MHz 802.11a Legacy - Peak Excursion Ratio

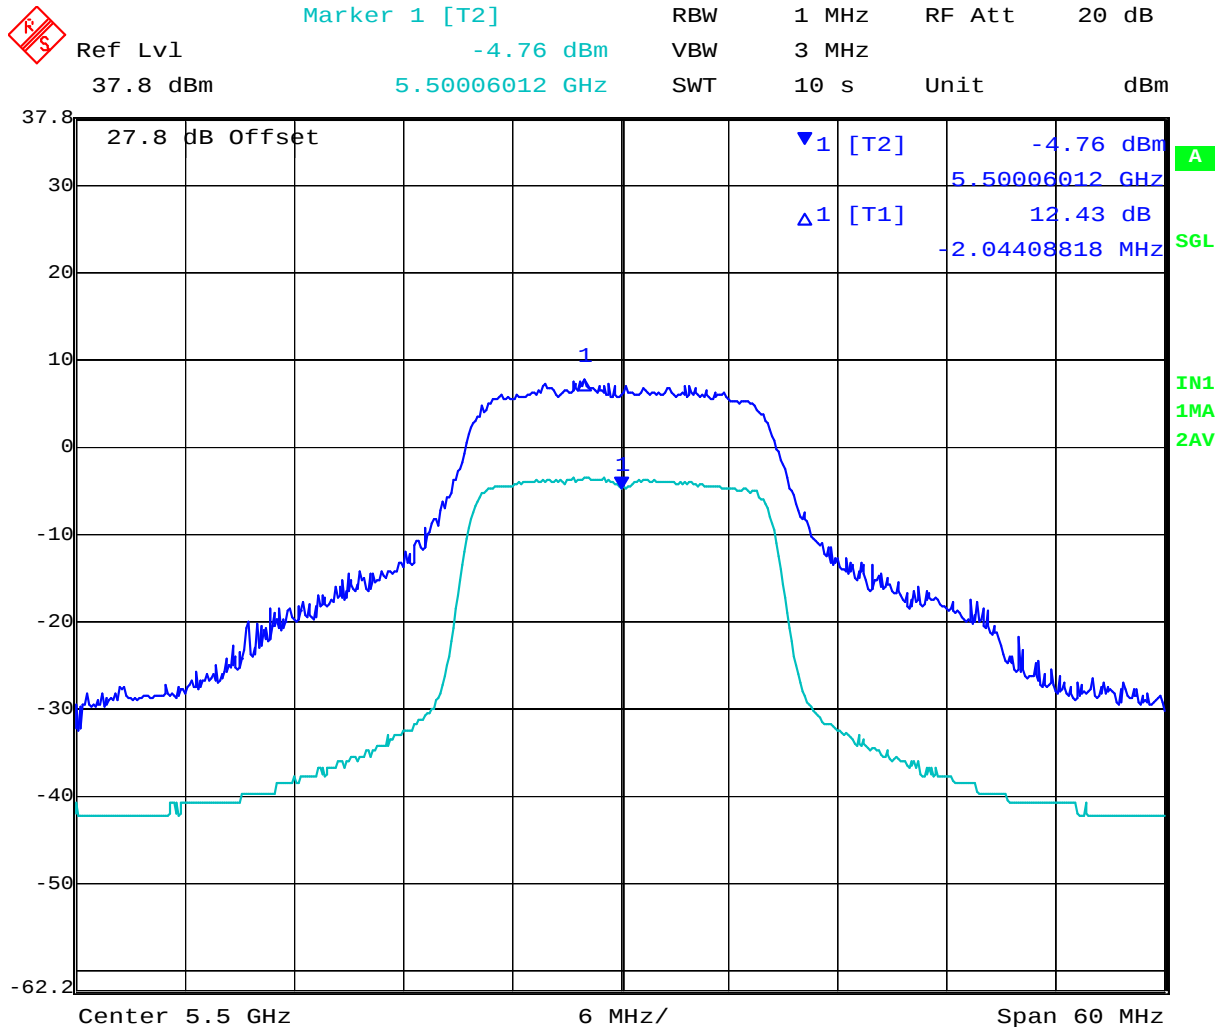

Date: 30.JUL.2008 10:35:45

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 70 of 198

### 5,600 MHz 802.11a Legacy - Peak Excursion Ratio



Ref Lvl  
37.8 dBm

Marker 1 [T2]


-4.42 dBm

5.60018036 GHz

RBW 1 MHz RF Att 20 dB

VBW 3 MHz

SWT 10 s Unit dBm

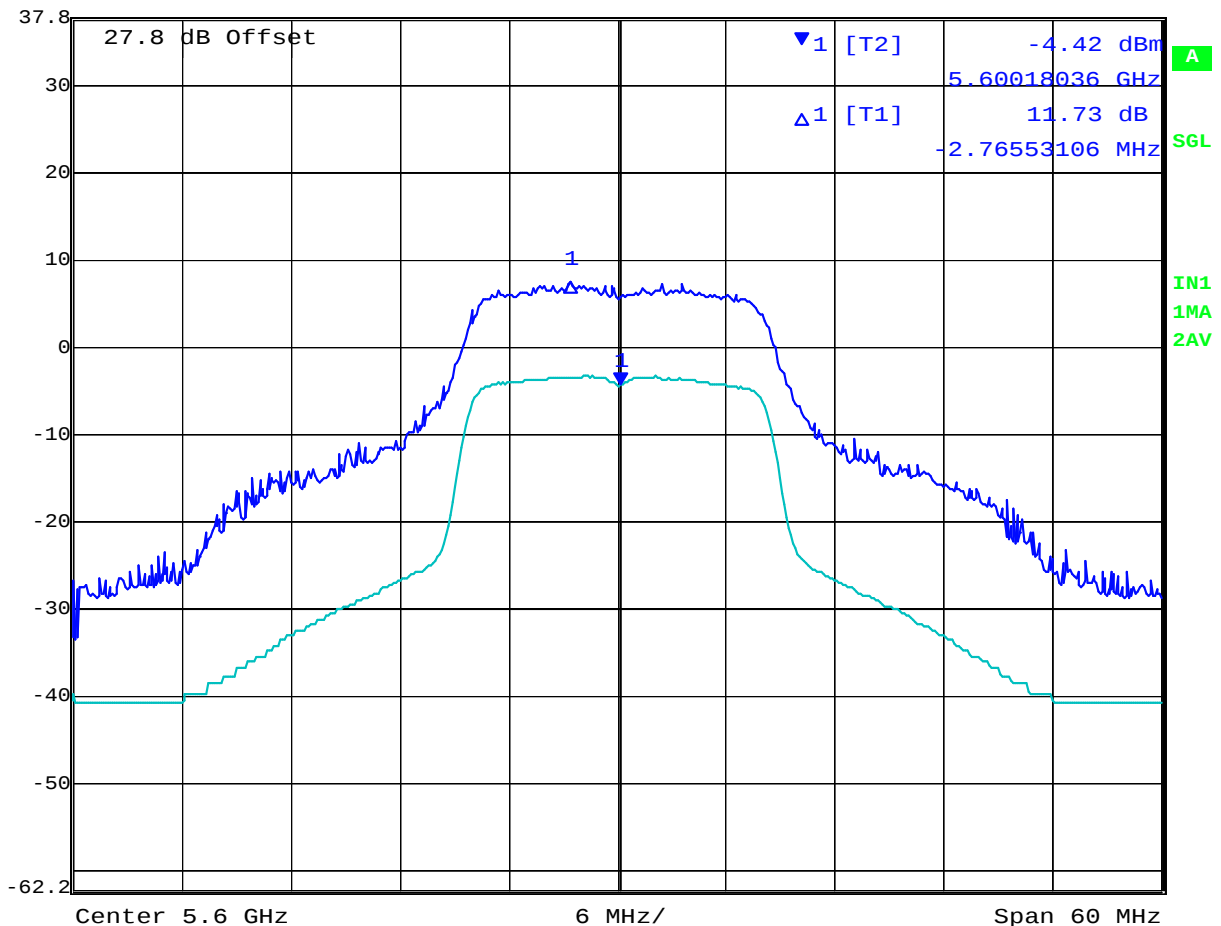

Date: 30.JUL.2008 10:35:05

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 71 of 198

### 5,700 MHz 802.11a Legacy - Peak Excursion Ratio



Ref Lvl 37.8 dBm  
Marker 1 [T2] -6.45 dBm  
5.70006012 GHz  
RBW 1 MHz RF Att 20 dB  
VBW 3 MHz  
SWT 10 s Unit dBm

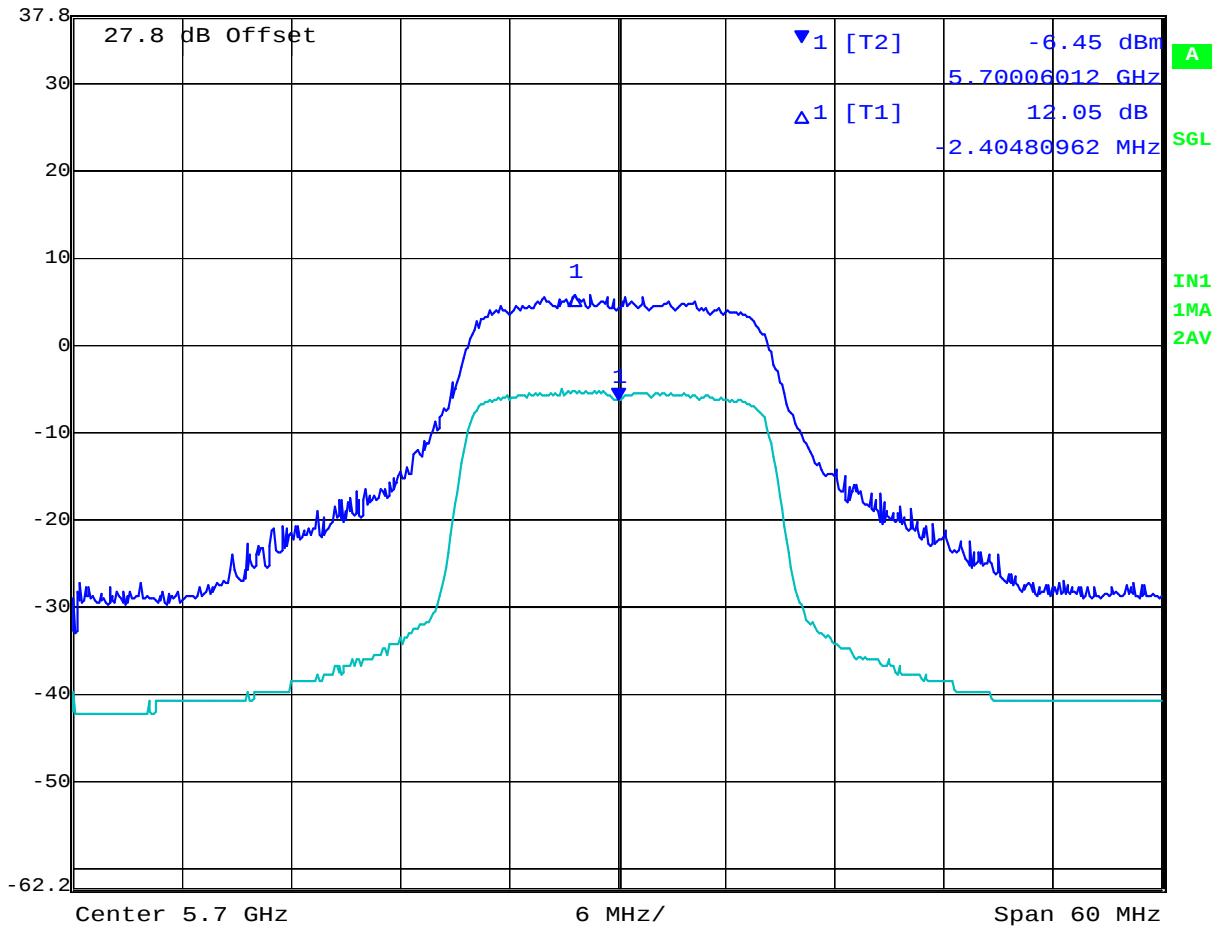

Date: 30.JUL.2008 10:34:08

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 72 of 198

TABLE OF RESULTS – 802.11n HT20

| Centre Frequency<br>(MHz) | Peak Excursion Ratio<br>(dB) |
|---------------------------|------------------------------|
| 5,260                     | 11.90                        |
| 5,300                     | 11.74                        |
| 5,320                     | 11.81                        |

5,260 MHz 802.11n HT20 - Peak Excursion Ratio

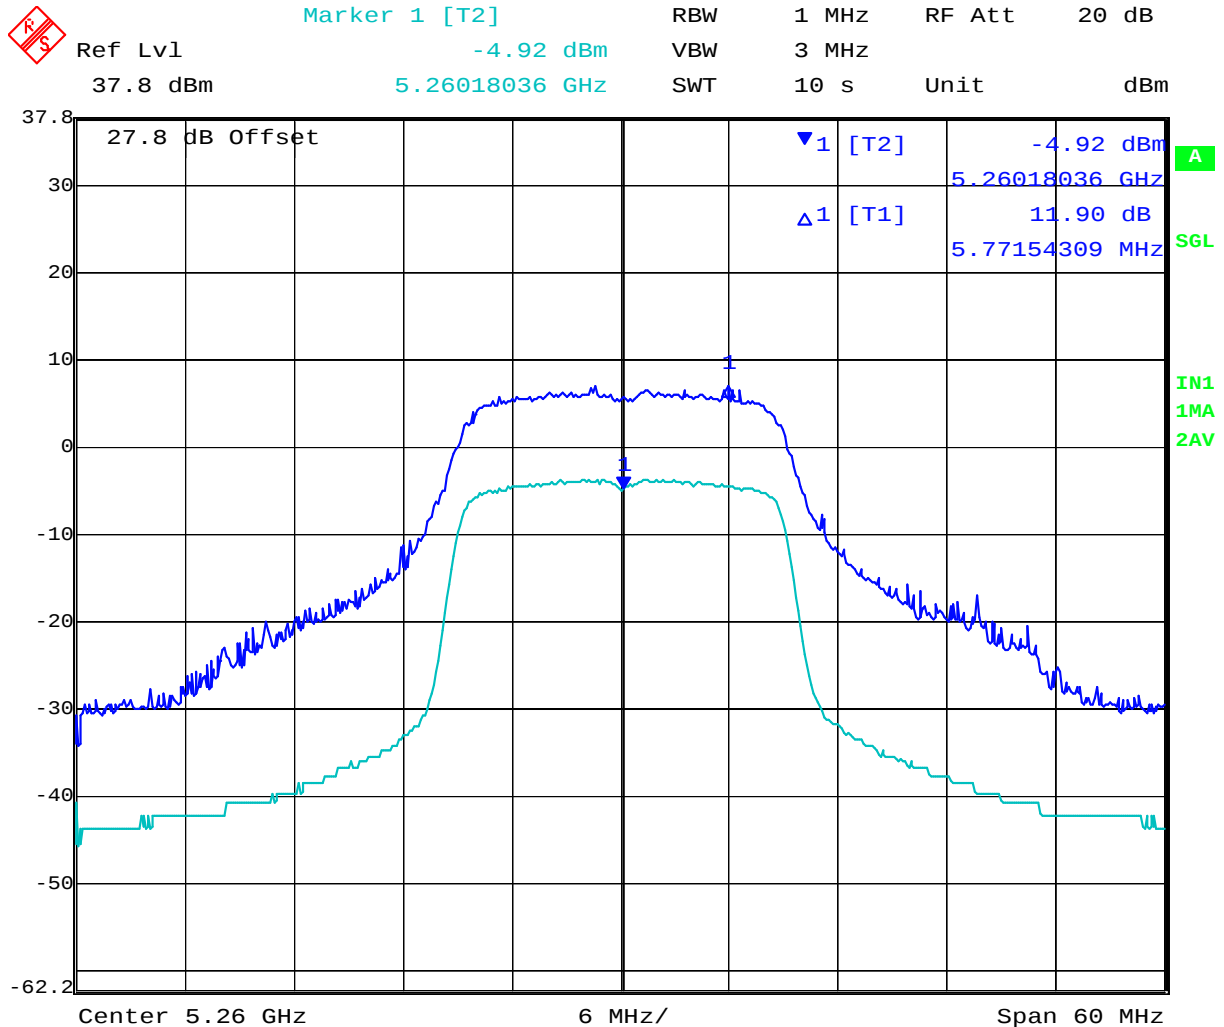

Date: 30.JUL.2008 10:23:44

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 73 of 198

### 5,300 MHz 802.11n HT20 - Peak Excursion Ratio



Ref Lvl  
37.8 dBm

Marker 1 [T2]


-5.47 dBm

5.30006012 GHz

RBW 1 MHz RF Att 20 dB

VBW 3 MHz

SWT 10 s Unit dBm

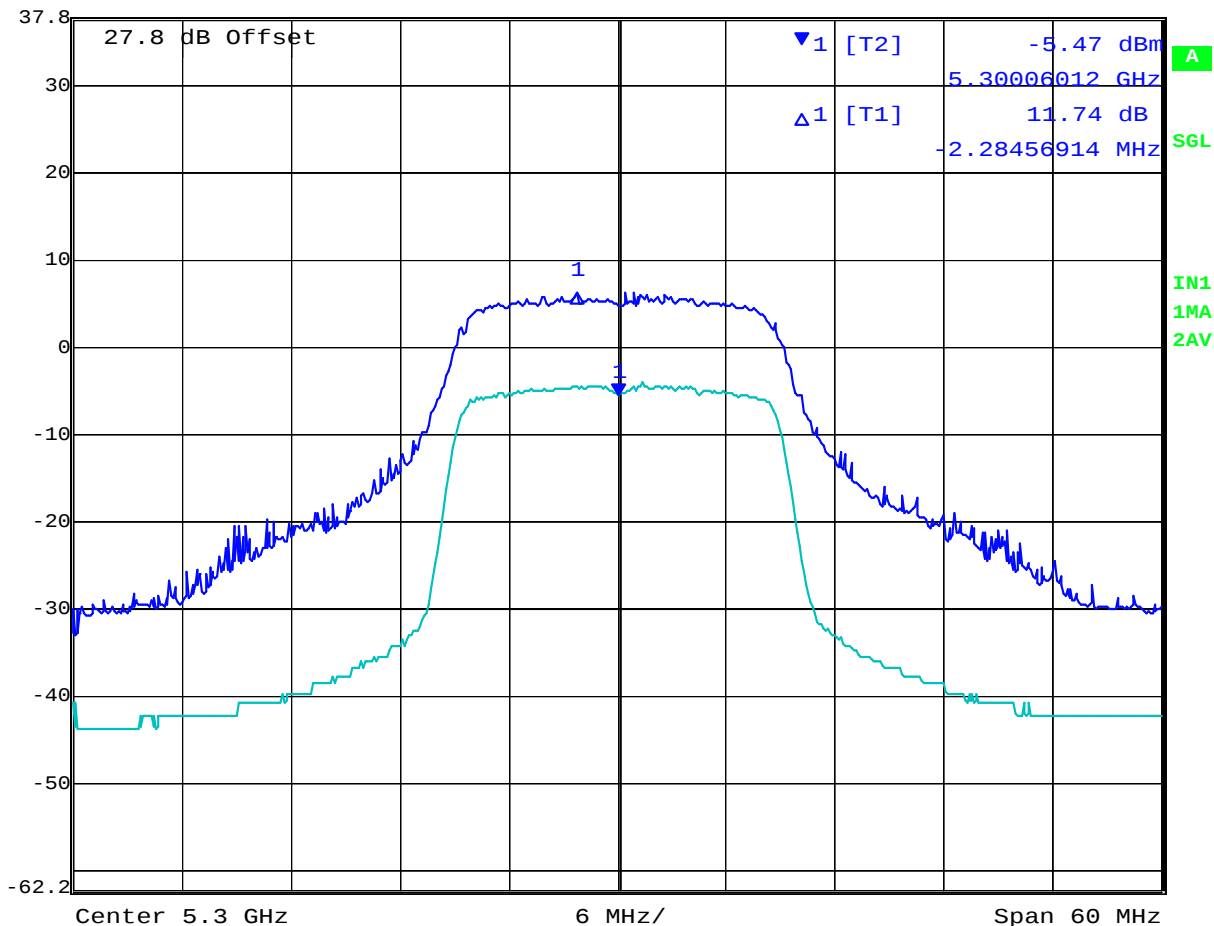

Date: 30.JUL.2008 10:22:43

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 74 of 198

### 5,320 MHz 802.11n HT20 - Peak Excursion Ratio



Ref Lvl 37.8 dBm  
Marker 1 [T2] -5.92 dBm  
5.32006012 GHz  
RBW 1 MHz RF Att 20 dB  
VBW 3 MHz  
SWT 10 s Unit dBm

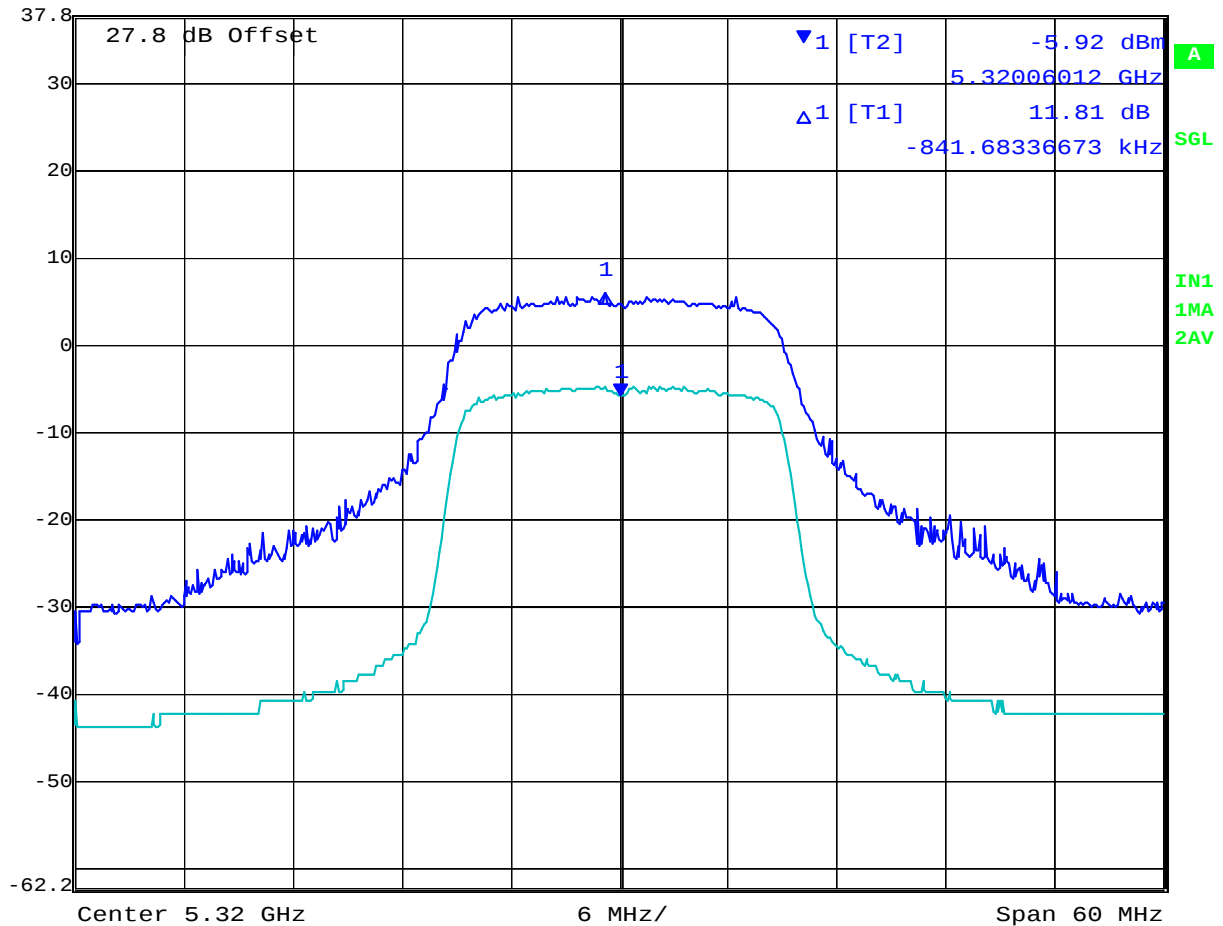

Date: 30.JUL.2008 10:18:27

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 75 of 198

TABLE OF RESULTS – 802.11n HT20

| Centre Frequency<br>(MHz) | Peak Excursion Ratio<br>(dB) |
|---------------------------|------------------------------|
| 5,500                     | 11.68                        |
| 5,600                     | 11.31                        |
| 5,700                     | 11.90                        |

5,500 MHz 802.11n HT20 - Peak Excursion Ratio

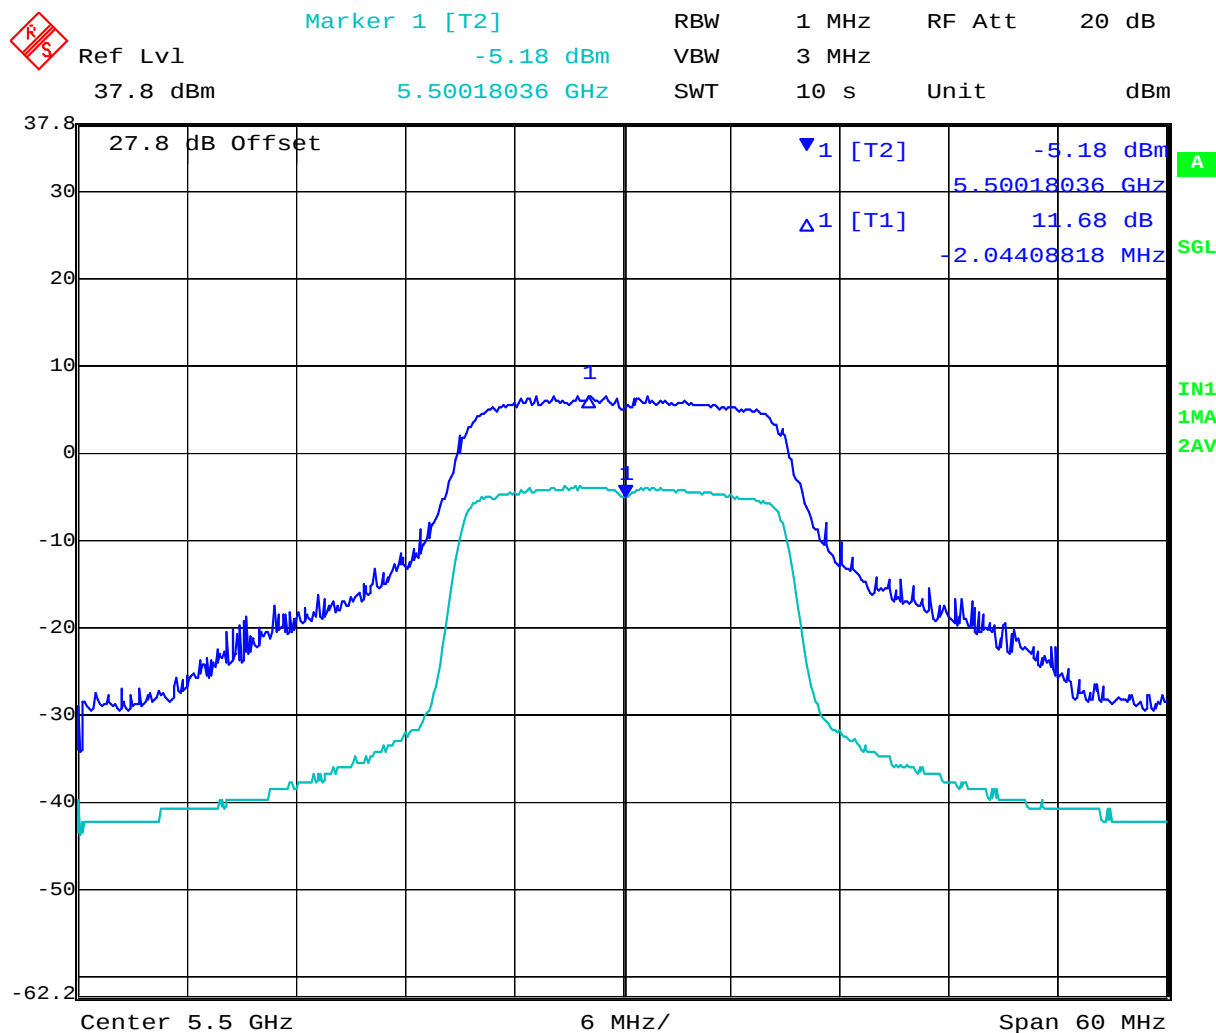

Date: 30.JUL.2008 10:31:40

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 76 of 198

### 5,600 MHz 802.11n HT20 - Peak Excursion Ratio



Ref Lvl

37.8 dBm

Marker 1 [T2]

-4.74 dBm

5.60006012 GHz

RBW

1 MHz

RF Att

20 dB

VBW


3 MHz

SWT

10 s

Unit

dBm

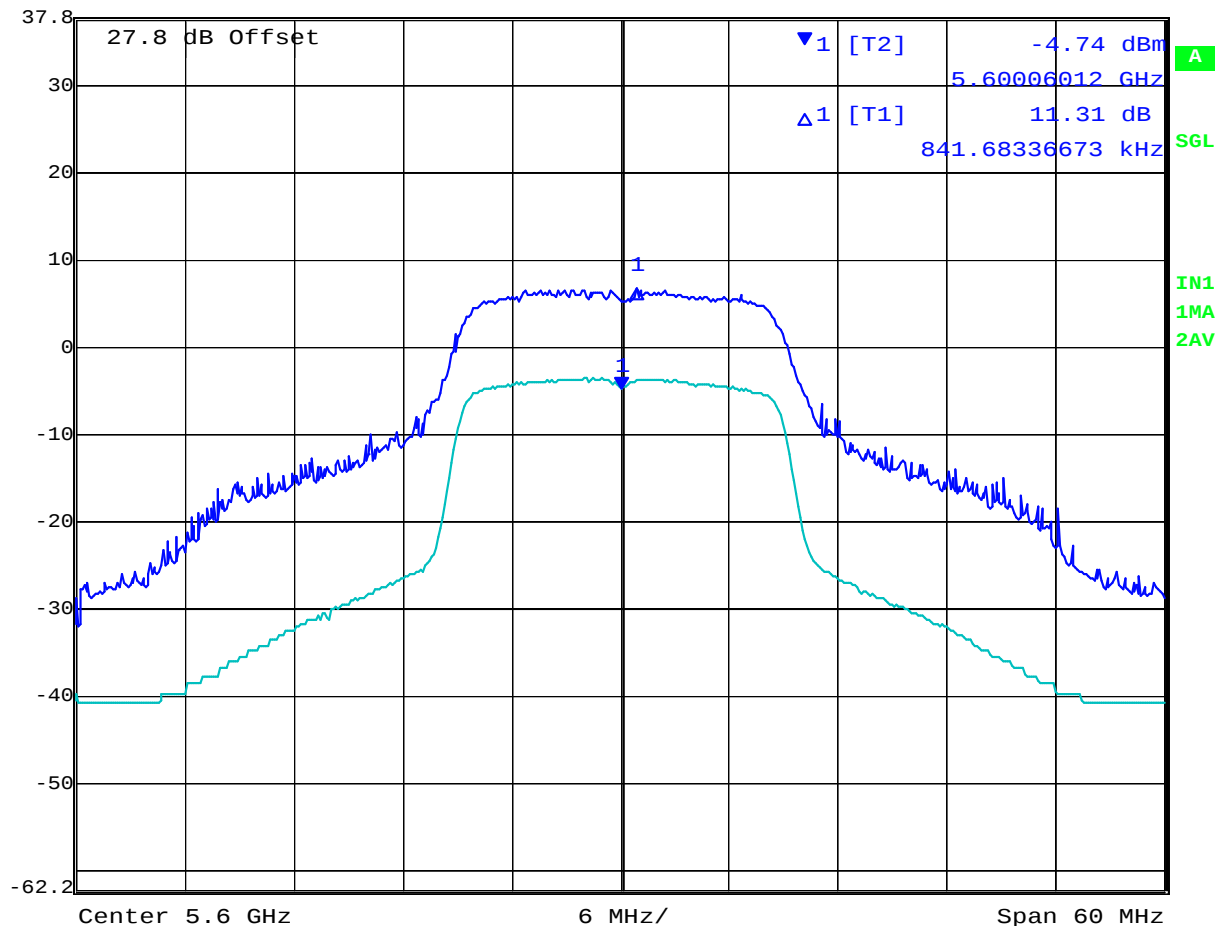

Date: 30.JUL.2008 10:32:28

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Wistron 802.11 a/b/g/n Wireless Module  
To: FCC 47 CFR Part 15.407 & IC RSS-210  
Serial #: CBIS10-A4 Rev A  
Issue Date: 1st October 2008  
Page: 77 of 198

### 5,700 MHz 802.11n HT20 - Peak Excursion Ratio



Ref Lvl 37.8 dBm  
Marker 1 [T2] -6.57 dBm  
5.69993988 GHz  
RBW 1 MHz RF Att 20 dB  
VBW 3 MHz  
SWT 10 s Unit dBm

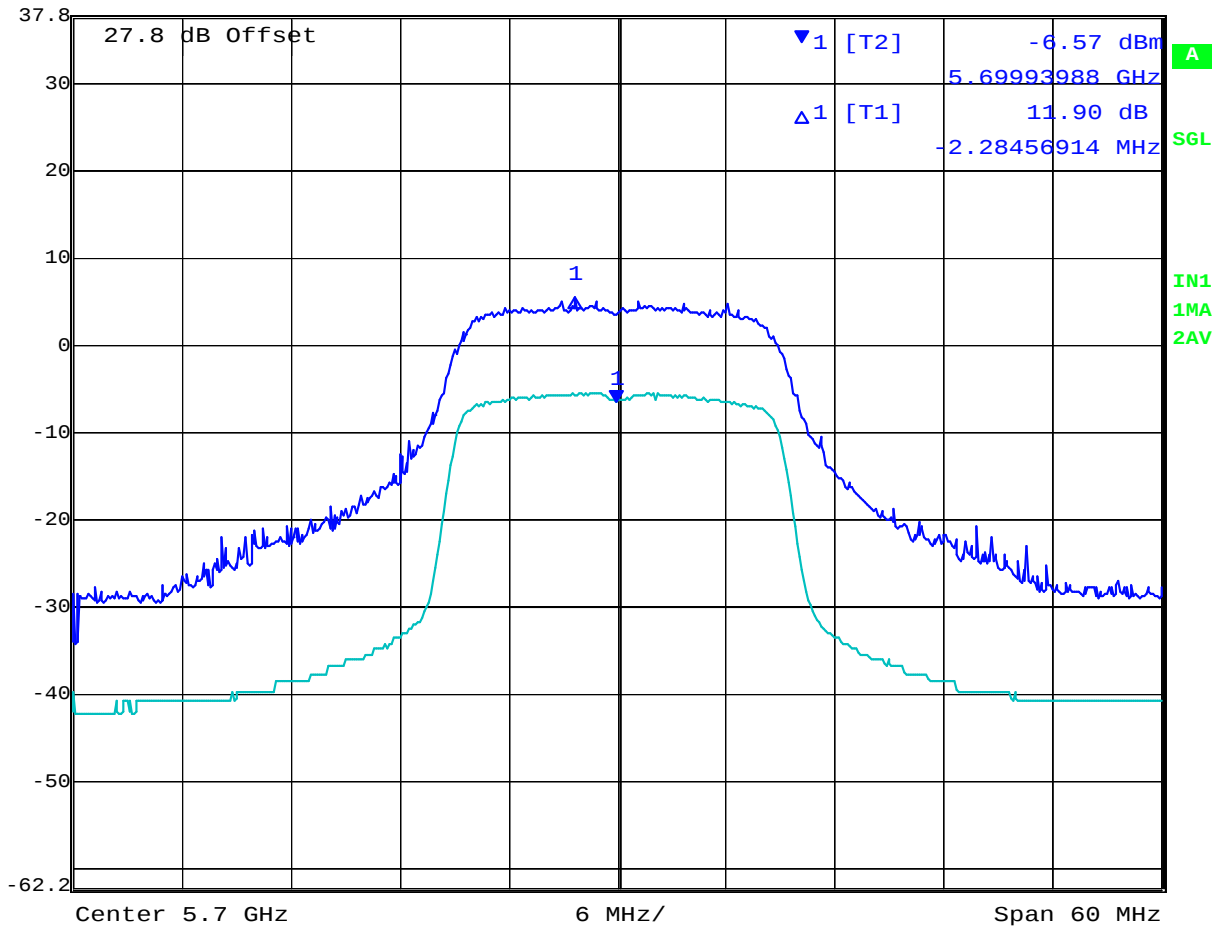

Date: 30.JUL.2008 10:33:21

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11n a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 78 of 198

TABLE OF RESULTS – 802.11n HT40

| Centre Frequency<br>(MHz) | Peak Excursion Ratio<br>(dB) |
|---------------------------|------------------------------|
| 5,270                     | 12.49                        |
| 5,310                     | 12.96                        |

5,270 MHz 802.11n HT40 - Peak Excursion Ratio

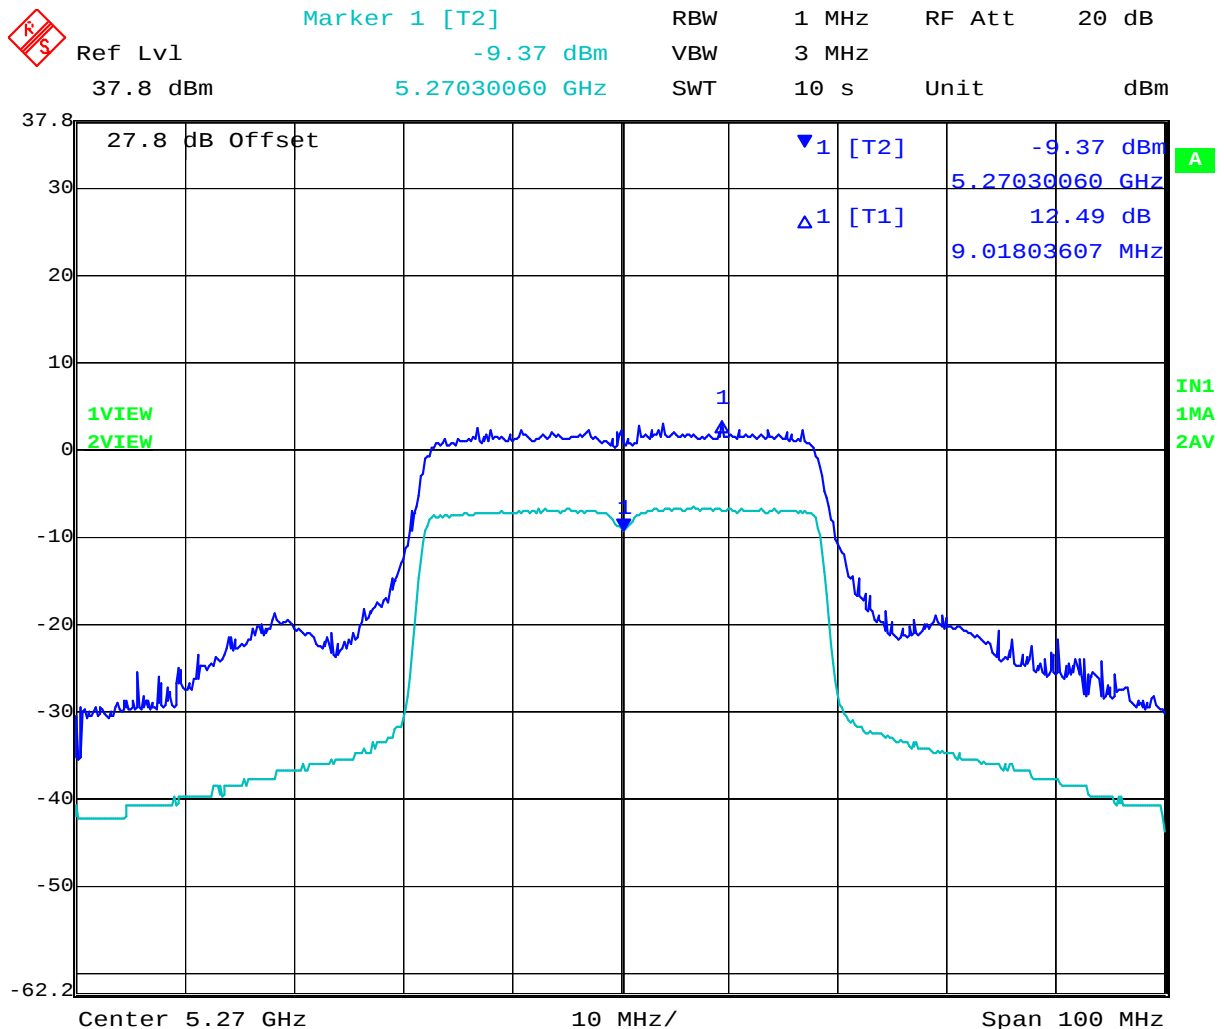

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 79 of 198

### 5,310 MHz 802.11n HT40 - Peak Excursion Ratio



Ref Lvl  
37.8 dBm

Marker 1 [T2]


-10.64 dBm

5.31010020 GHz

RBW 1 MHz RF Att 20 dB

VBW 3 MHz

SWT 10 s Unit dBm

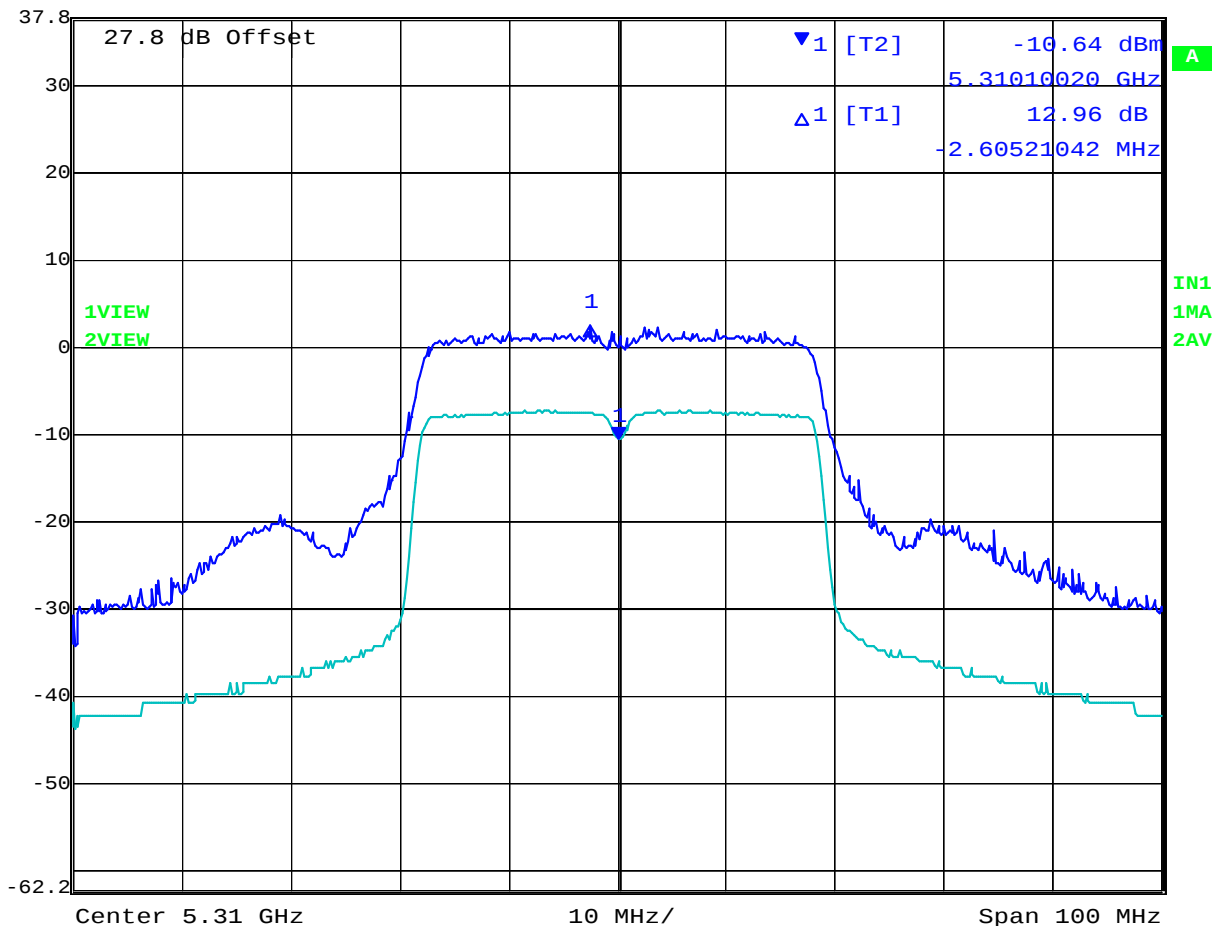

Date: 30.JUL.2008 11:06:42

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 80 of 198

#### TABLE OF RESULTS – 802.11n HT40

| Centre Frequency<br>(MHz) | Peak Excursion Ratio<br>(dB) |
|---------------------------|------------------------------|
| 5,510                     | 12.88                        |
| 5,620                     | 11.12                        |
| 5,690                     | 12.88                        |

#### 5,510 MHz 802.11n HT40 - Peak Excursion Ratio

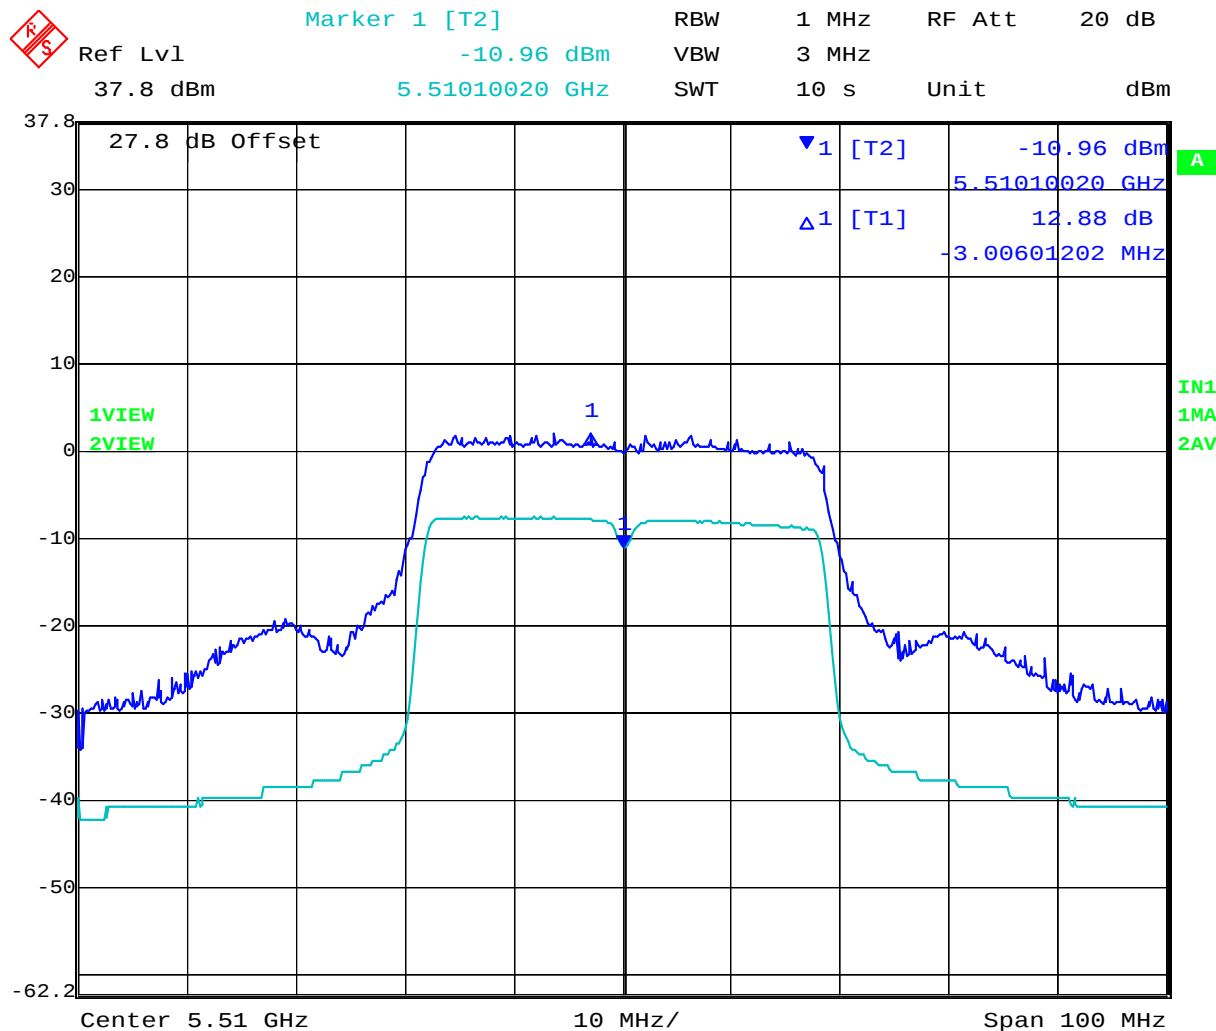

Date: 30.JUL.2008 11:55:18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Wistron 802.11 a/b/g/n Wireless Module  
To: FCC 47 CFR Part 15.407 & IC RSS-210  
Serial #: CBIS10-A4 Rev A  
Issue Date: 1st October 2008  
Page: 81 of 198

### 5,620 MHz 802.11n HT40 - Peak Excursion Ratio



Ref Lvl 37.8 dBm  
Marker 1 [T2] -7.21 dBm  
5.61989980 GHz  
RBW 1 MHz RF Att 20 dB  
VBW 3 MHz  
SWT 10 s Unit dBm

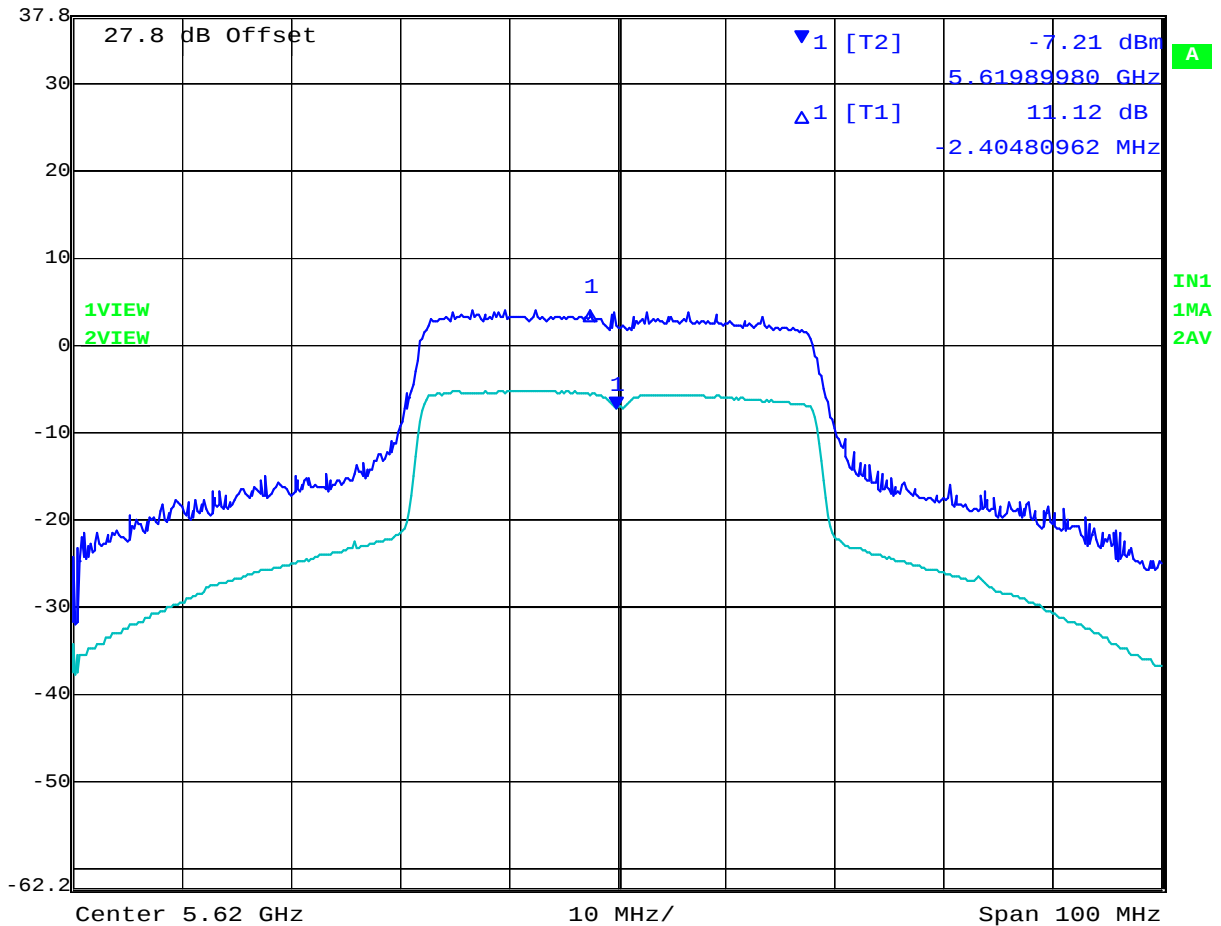

Date: 30.JUL.2008 12:12:56

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 82 of 198

### 5,690 MHz 802.11n HT40 - Peak Excursion Ratio



Ref Lvl 37.8 dBm  
Marker 1 [T2] -10.92 dBm  
5.69010020 GHz  
RBW 1 MHz RF Att 20 dB  
VBW 3 MHz  
SWT 10 s Unit dBm

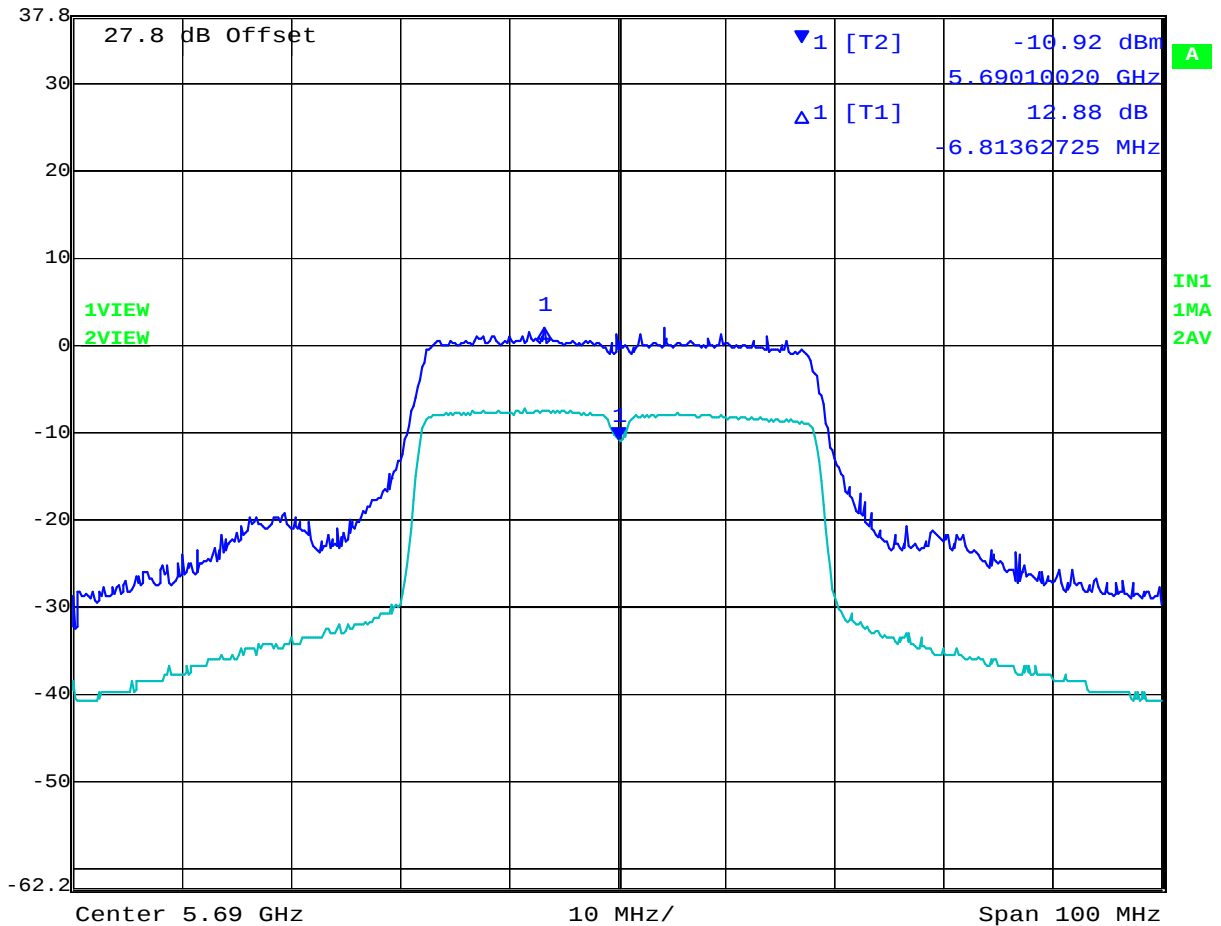

Date: 30.JUL.2008 12:16:08

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 83 of 198

---

## Specification

### Limits

**§15.407 (a)(6)** The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified in this paragraph) shall not exceed 13dB across any 1MHz bandwidth or the emission bandwidth whichever is less

## Laboratory Measurement Uncertainty for Spectrum Measurement

|                         |                     |
|-------------------------|---------------------|
| Measurement uncertainty | $\pm 2.81\text{dB}$ |
|-------------------------|---------------------|

### Traceability

| Method                                                                              | Test Equipment Used                            |
|-------------------------------------------------------------------------------------|------------------------------------------------|
| Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask' | 0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117 |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 84 of 198

---

#### **5.1.5. Frequency Stability**

**FCC, Part 15 Subpart C §15.407(g)**  
**Industry Canada RSS-210 §2.1**

#### **Test Procedure**

The manufacturer of the equipment is responsible for ensuring that the frequency stability is such that emissions are always maintained within the band of operation under all conditions.

#### **Manufacturer Declaration**

The frequency stability of the reference oscillator sets the frequency stability of the RF transceiver signals. Therefore all of the RF signals should have  $\pm 20$ ppm stability.

This stability accounts for room temp tolerance of the crystal oscillator circuit, frequency variation across temperature, and crystal ageing.

$\pm 20$ ppm at 5.250 GHz translates to a maximum frequency shift of  $\pm 105$  KHz. As the edge of the channels is at least one MHz from either of the band edges,  $\pm 105$  KHz is more than sufficient to guarantee that the intentional emission will remain in the band over the entire operating range of the EUT.

#### **Specification**

#### **Limits**

**§15.407 (g)** Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.



#### 5.1.6. Maximum Permissible Exposure

**FCC, Part 15 Subpart C §15.407(f)**  
**Industry Canada RSS-Gen §5.5**

#### Calculations for Maximum Permissible Exposure Levels

Power Density =  $P_d$  ( $\text{mW}/\text{cm}^2$ ) =  $\text{EIRP}/(4\pi d^2)$

$\text{EIRP} = P * G * 3$

$P$  = Peak output power (mW)

$G$  = Antenna numeric gain (numeric)

$d$  = Separation distance (cm)

Numeric Gain =  $10^{(G(\text{dBi})/10)}$

The Wistron a/b/g/n wireless module has three transmitters. The peak power in the table below is calculated by assuming a worst case scenario where the three transmitters are operating simultaneously in the same band. The Peak Power in mW is calculated by taking the maximum conducted power measured in each band and multiplying by 3.

Because the EUT belongs to the General Population/Uncontrolled Exposure the limit of power density is  $1.0 \text{ mW}/\text{cm}^2$

| Freq. Band (MHz) | Antenna Gain (dBi) | Numeric Gain (numeric) | Peak Output Power (dBm) | Peak Output Power (mW) | Calculated Safe Distance @ $1\text{mW}/\text{cm}^2$ Limit(cm) | Minimum Separation Distance (cm) |
|------------------|--------------------|------------------------|-------------------------|------------------------|---------------------------------------------------------------|----------------------------------|
| 5250 - 5350      | 5.1                | 3.24                   | +18.8                   | 227.6                  | 7.66                                                          | 20                               |
| 5470 - 5725      | 5.1                | 3.24                   | +19.3                   | 255.3                  | 8.11                                                          | 20                               |

**Note:** for mobile or fixed location transmitters the minimum separation distance is 20cm, even if calculations indicate the MPE distance to be less.

#### Specification

##### Maximum Permissible Exposure Limits

**FCC §1.1310** Limit =  $1\text{mW} / \text{cm}^2$  from 1.310 Table 1

**RSS-Gen §5.5** Before equipment certification is granted, the application requirements of RSS-102 shall be met.

#### Laboratory Measurement Uncertainty for Power Measurements

|                         |                       |
|-------------------------|-----------------------|
| Measurement uncertainty | $\pm 1.33 \text{ dB}$ |
|-------------------------|-----------------------|

### 5.1.7. Radiated Emissions

#### 5.1.7.1. Transmitter Radiated Spurious Emissions (above 1 GHz); Peak Field Strength Measurements; and Radiated Band Edge Measurements – Restricted Bands


**FCC, Part 15 Subpart C §15.407(b)(2), §15.205(a)/15.209(a)**  
**Industry Canada RSS-210 §A9.3(2); §2.2; §2.6; RSS-Gen §4.7**

#### Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

#### Test Measurement Set up

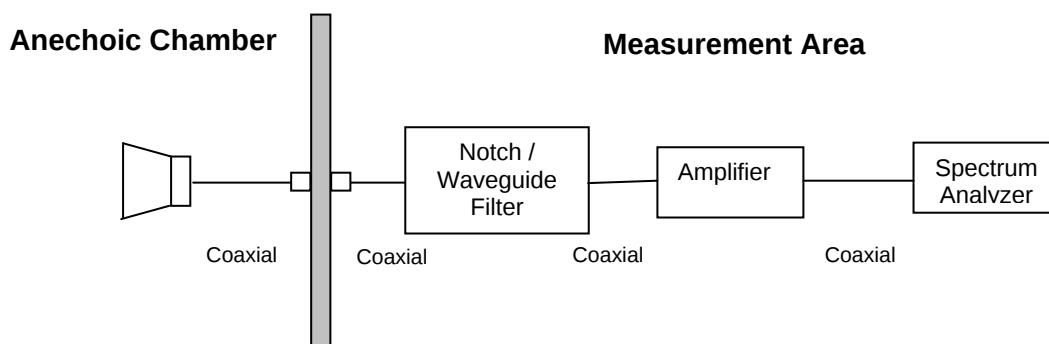

Measurement set up for Radiated Emission Test

#### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 87 of 198

---

For example:

Given receiver input reading of 51.5 dB $\mu$ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (}\mu\text{V/m))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dB $\mu$ V/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

$$\text{Therefore: } -27 \text{ dBm/MHz} = 68.23 \text{ dB}\mu\text{V/m}$$

**Note:** The data in this Section identifies that the EUT is in compliance with the -27dBm/MHz EIRP limit (68.23 dB $\mu$ V/m) for out of band emissions. All peak emissions are less than 68.23 dB  $\mu$ V/m.

### Measurement Results Transmitter Radiated Spurious Emissions above 1 GHz

Ambient conditions.

Temperature: 17 to 23°C

Relative humidity: 31 to 57 %

Pressure: 999 to 1012 mbar



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 88 of 198

### MAP-625 Integral Antenna

#### TABLE OF RESULTS – 802.11a Legacy 5,260 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Average Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-------------------------------------------|---------------------|-------------|
|             |            |                    |                        |                                           | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Average Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-------------------------------------------|------------------------|-------------|
|             |            |                    |                        |                                           | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

#### Radiated Emissions for 5,260 MHz Legacy

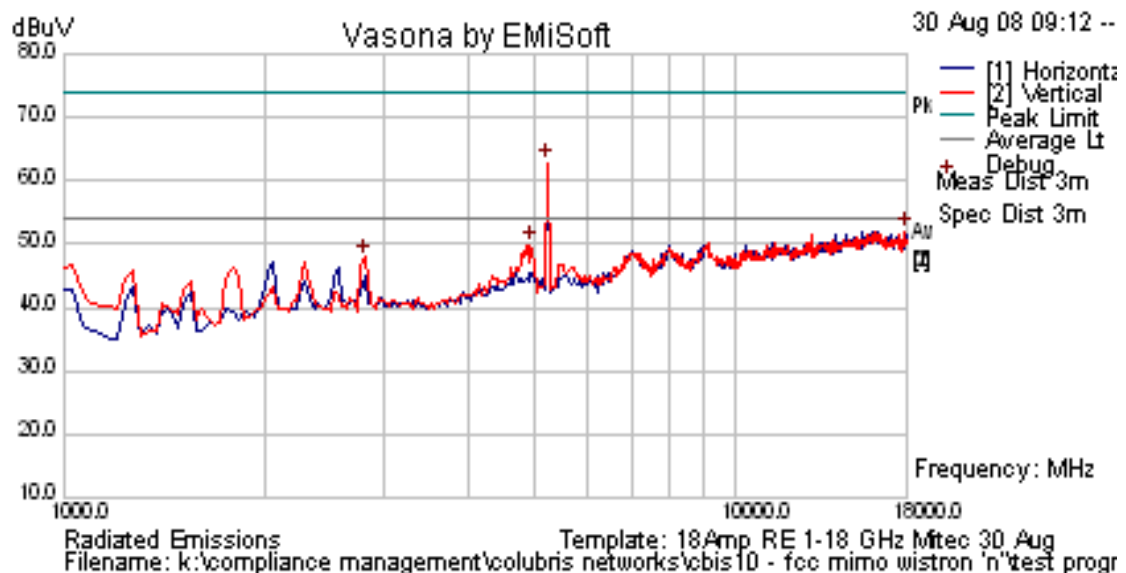

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 89 of 198

### MAP-625 Integral Antenna

#### TABLE OF RESULTS – 802.11a Legacy 5,300 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dB $\mu$ V) | Correction Factor (dB) | Corrected Average Field Strength (dB $\mu$ V/m) | Peak Limit (dB $\mu$ V/m) | Margin (dB) |
|-------------|------------|--------------------------|------------------------|-------------------------------------------------|---------------------------|-------------|
|             |            |                          |                        |                                                 | 74                        |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dB $\mu$ V) | Correction Factor (dB) | Corrected Average Field Strength (dB $\mu$ V/m) | Average Limit (dB $\mu$ V/m) | Margin (dB) |
|-------------|------------|--------------------------|------------------------|-------------------------------------------------|------------------------------|-------------|
|             |            |                          |                        |                                                 | 54                           |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

#### Radiated Emissions for 5,300 MHz Legacy

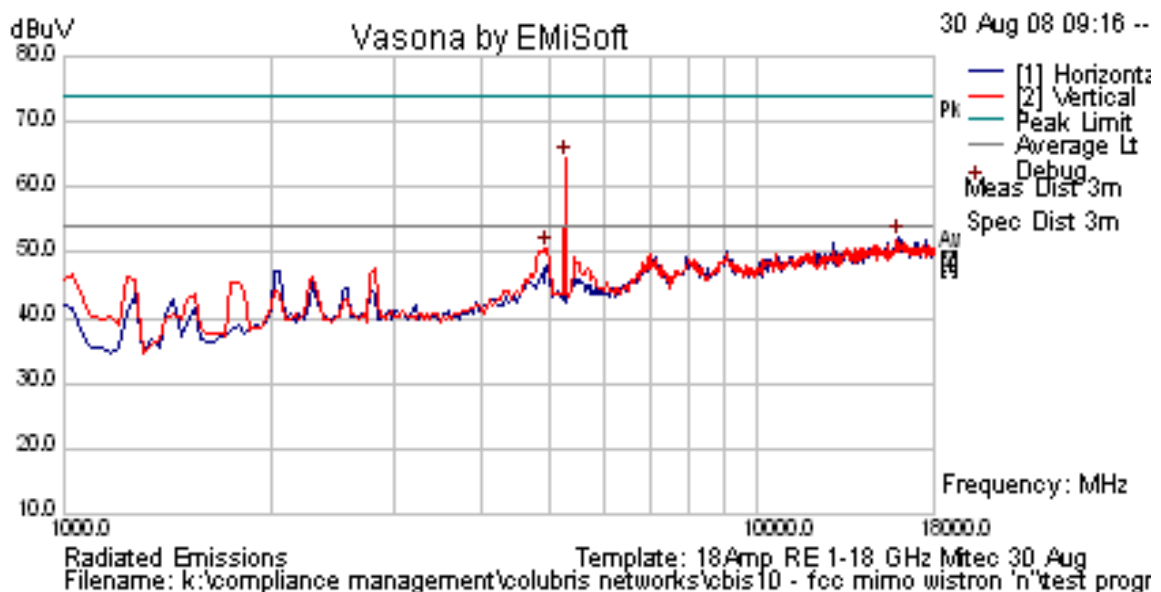

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 90 of 198

### MAP-625 Integral Antenna

#### TABLE OF RESULTS – 802.11a Legacy 5,320 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|---------------------|-------------|
|             |            |                    |                        |                                   | 74                  |             |
|             |            |                    |                        |                                   | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|------------------------|-------------|
|             |            |                    |                        |                                   | 54                     |             |
|             |            |                    |                        |                                   | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

#### Radiated Emissions for 5,320 MHz Legacy

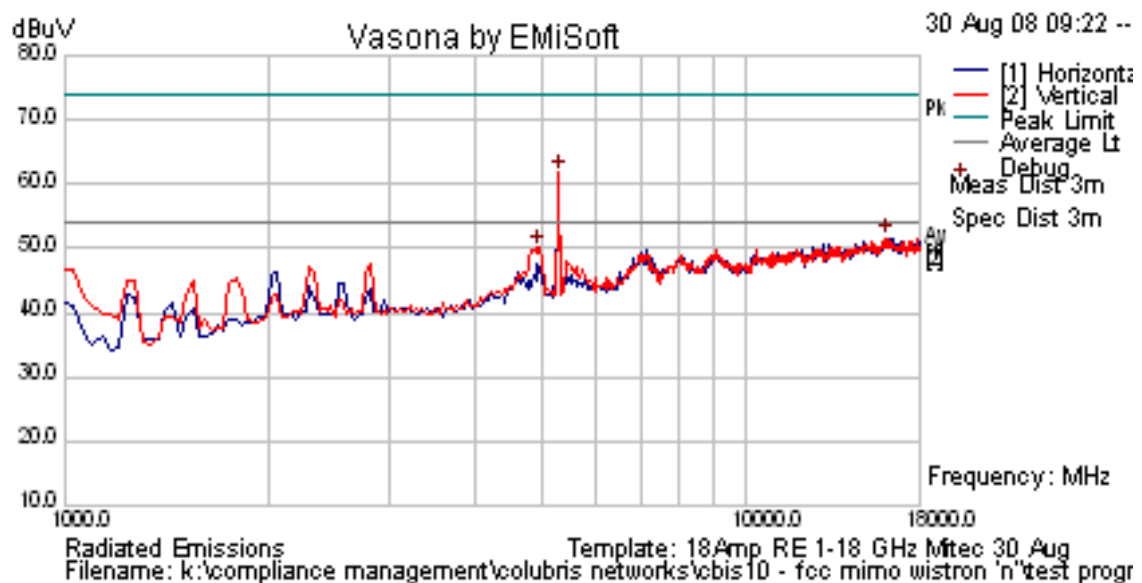

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## MAP-625 Integral Antenna

### Measurement Results Transmitter Radiated Spurious Emissions above 1 GHz

#### TABLE OF RESULTS – 802.11n HT-20 5,260 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Average Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-------------------------------------------|---------------------|-------------|
|             |            |                    |                        |                                           | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Average Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-------------------------------------------|------------------------|-------------|
|             |            |                    |                        |                                           | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

#### Radiated Emissions for 5,260 MHz HT-20

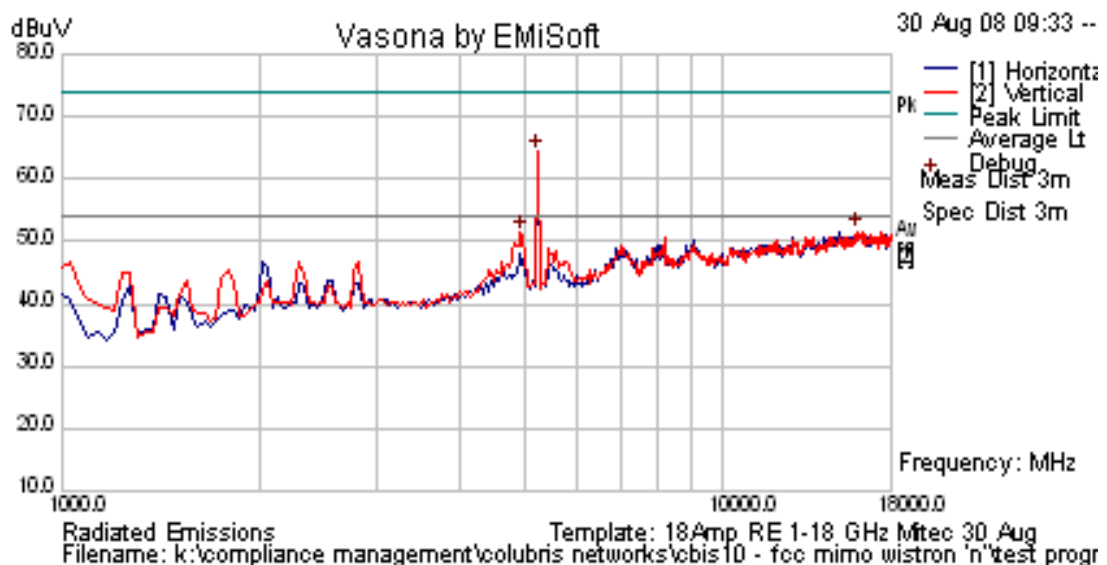

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## MAP-625 Integral Antenna

### Measurement Results Transmitter Radiated Spurious Emissions above 1 GHz

#### TABLE OF RESULTS – 802.11n HT-20 5,300 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Average Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-------------------------------------------|---------------------|-------------|
|             |            |                    |                        |                                           | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Average Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-------------------------------------------|------------------------|-------------|
|             |            |                    |                        |                                           | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

#### Radiated Emissions for 5,300 MHz HT-20

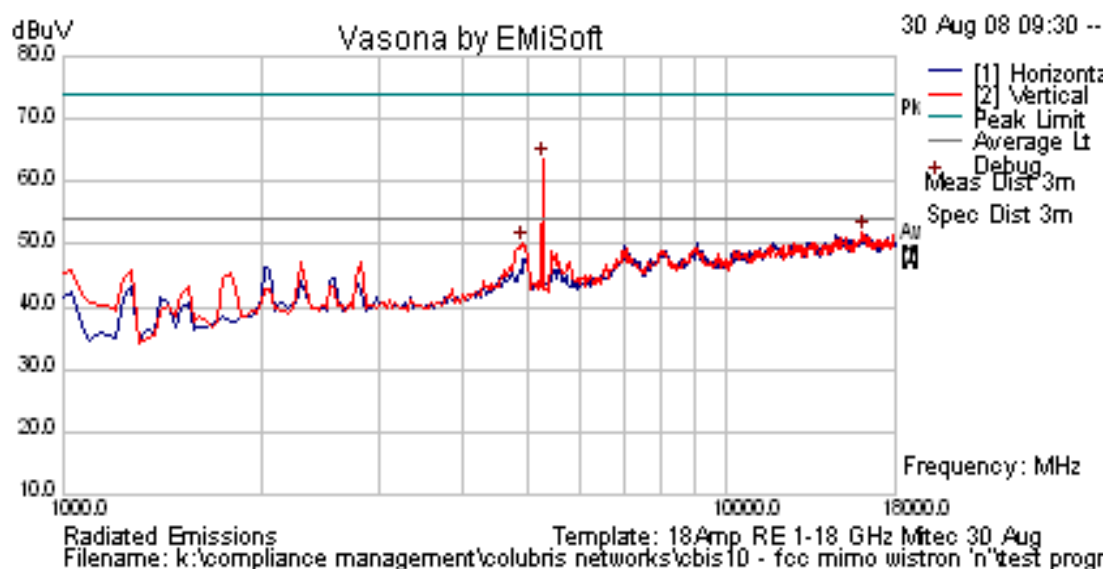

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 93 of 198

# MAP-625 Integral Antenna

## TABLE OF RESULTS – 802.11n HT-20 5,320 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|---------------------|-------------|
|             |            |                    |                        |                                   | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|------------------------|-------------|
|             |            |                    |                        |                                   | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

## Radiated Emissions for 5,320 MHz HT-20

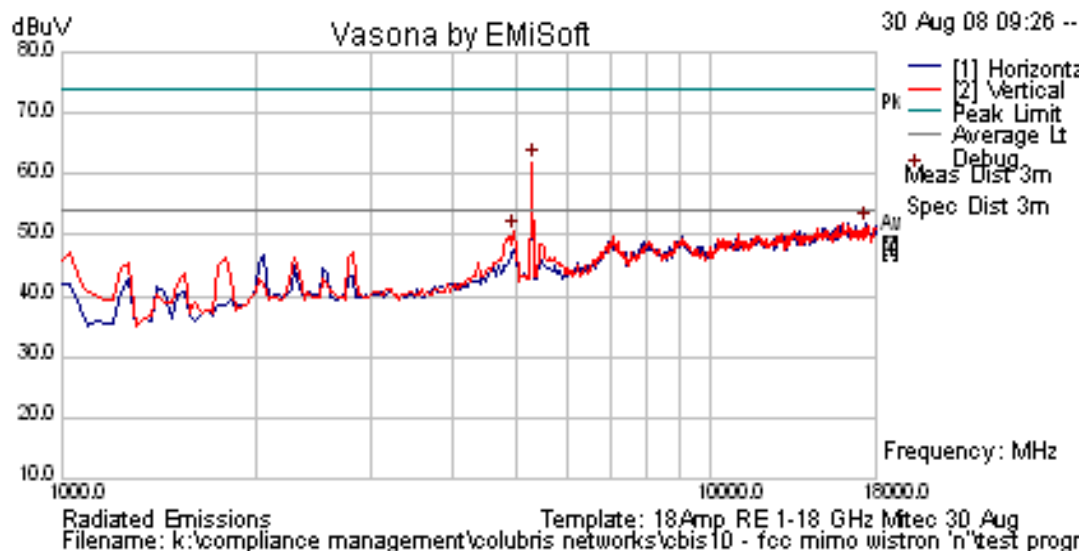

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 94 of 198

## MAP-625 Integral Antenna

### Measurement Results Transmitter Radiated Spurious Emissions above 1 GHz

#### TABLE OF RESULTS – 802.11n HT-40 5,270 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Average Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-------------------------------------------|---------------------|-------------|
|             |            |                    |                        |                                           | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Average Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-------------------------------------------|------------------------|-------------|
|             |            |                    |                        |                                           | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

#### Radiated Emissions for 5,270 MHz HT-40

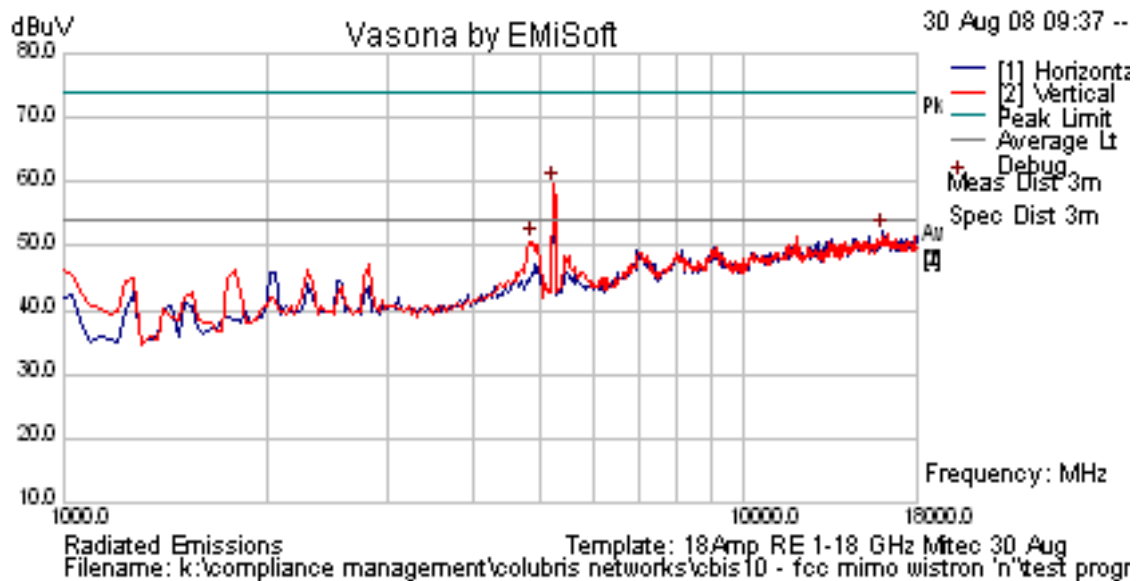

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 95 of 198

### MAP-625 Integral Antenna

### Measurement Results Transmitter Radiated Spurious Emissions above 1 GHz

#### TABLE OF RESULTS – 802.11n HT-40 5,310 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Average Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-------------------------------------------|---------------------|-------------|
|             |            |                    |                        |                                           | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Average Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-------------------------------------------|------------------------|-------------|
|             |            |                    |                        |                                           | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

#### Radiated Emissions for 5,310 MHz HT-40

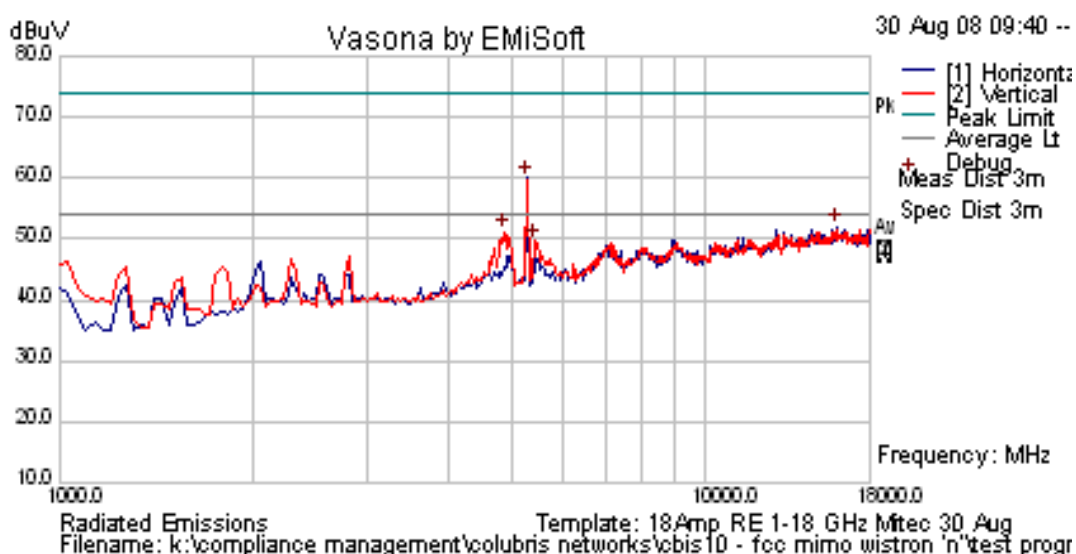

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 96 of 198

## MAP-625 Integral Antenna

### TABLE OF RESULTS – 802.11a Legacy 5,500 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dB $\mu$ V) | Correction Factor (dB) | Corrected Field Strength (dB $\mu$ V/m) | Peak Limit (dB $\mu$ V/m) | Margin (dB) |
|-------------|------------|--------------------------|------------------------|-----------------------------------------|---------------------------|-------------|
|             |            |                          |                        |                                         | 74                        |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dB $\mu$ V) | Correction Factor (dB) | Corrected Field Strength (dB $\mu$ V/m) | Average Limit (dB $\mu$ V/m) | Margin (dB) |
|-------------|------------|--------------------------|------------------------|-----------------------------------------|------------------------------|-------------|
|             |            |                          |                        |                                         | 54                           |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

### Radiated Emissions for 5,500 MHz Legacy

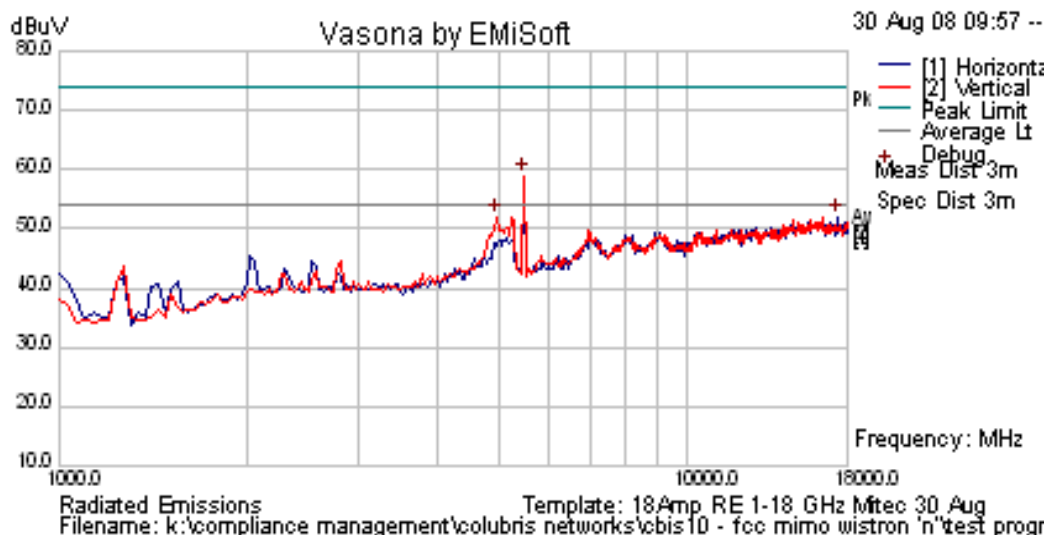

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 97 of 198

# MAP-625 Integral Antenna

## TABLE OF RESULTS – 802.11a Legacy 5,600 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|----------------|-------------|
|             |            |                    |                        |                                   | 74             |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|----------------|-------------|
|             |            |                    |                        |                                   | 54             |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

## Radiated Emissions for 5,600 MHz Legacy

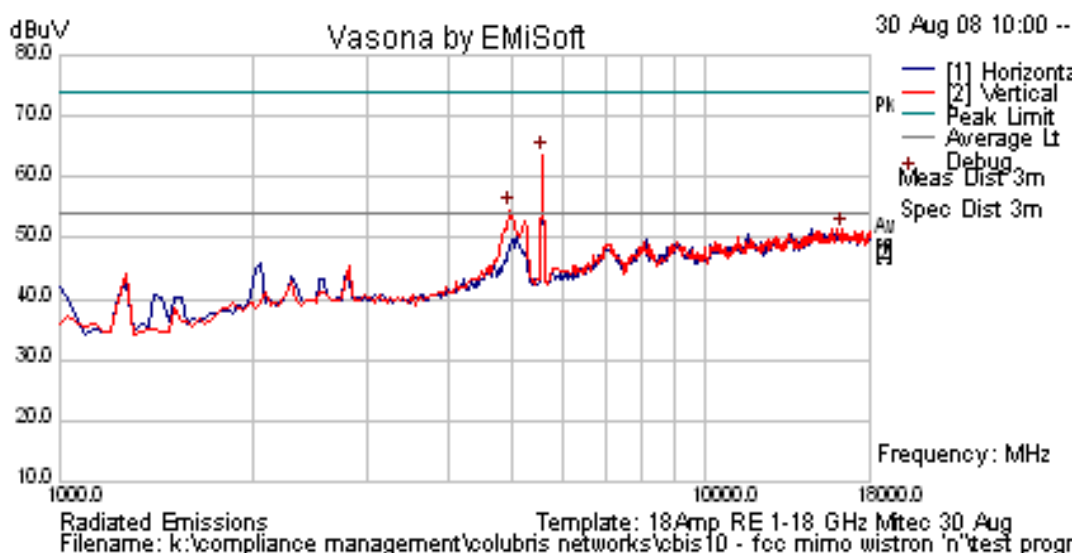

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 98 of 198

### MAP-625 Integral Antenna

#### TABLE OF RESULTS – 802.11a Legacy 5,700 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|---------------------|-------------|
|             |            |                    |                        |                                   | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|------------------------|-------------|
|             |            |                    |                        |                                   | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

#### Radiated Emissions for 5,700 MHz Legacy

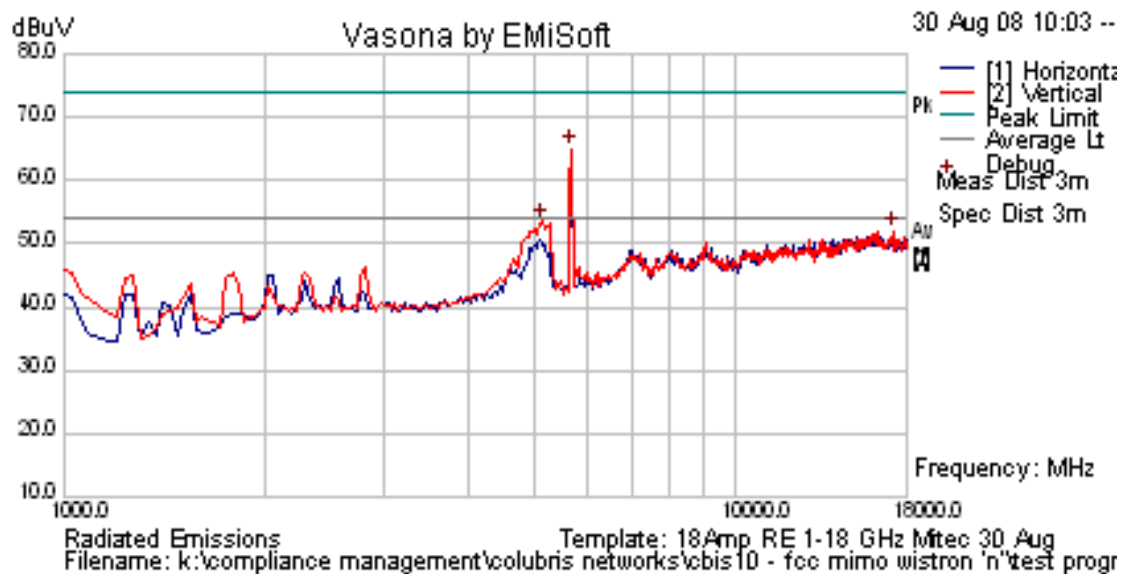

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 99 of 198

# MAP-625 Integral Antenna

## TABLE OF RESULTS – 802.11n HT-20 5,500 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|---------------------|-------------|
|             |            |                    |                        |                                   | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|------------------------|-------------|
|             |            |                    |                        |                                   | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

## Radiated Emissions for 5,500 MHz HT-20

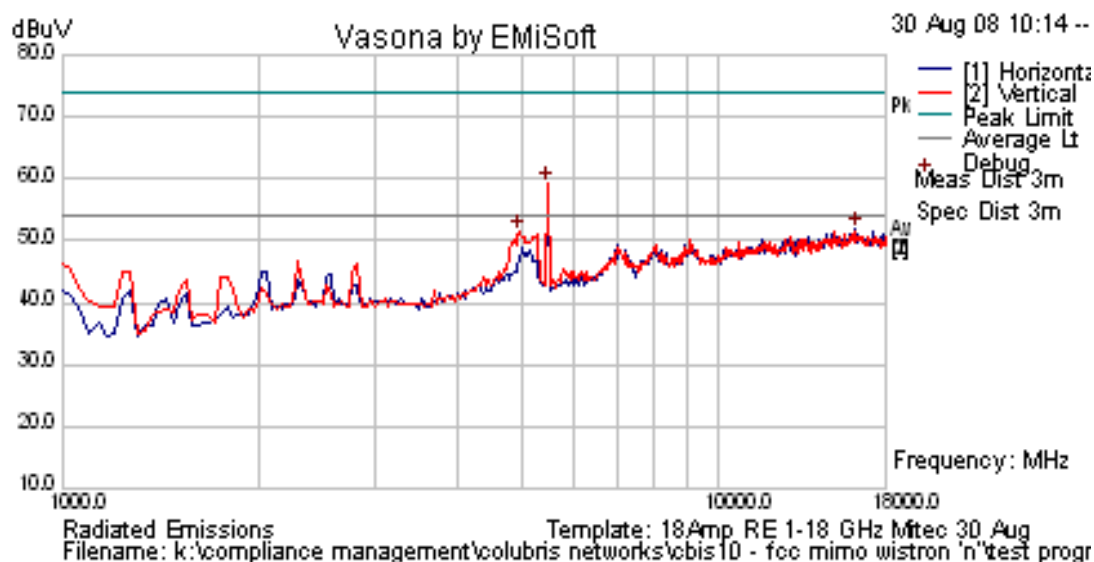

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 100 of 198

# MAP-625 Integral Antenna

## TABLE OF RESULTS – 802.11n HT-20 5,600 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|----------------|-------------|
|             |            |                    |                        |                                   | 74             |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|----------------|-------------|
|             |            |                    |                        |                                   | 54             |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

## Radiated Emissions for 5,600 MHz HT-20

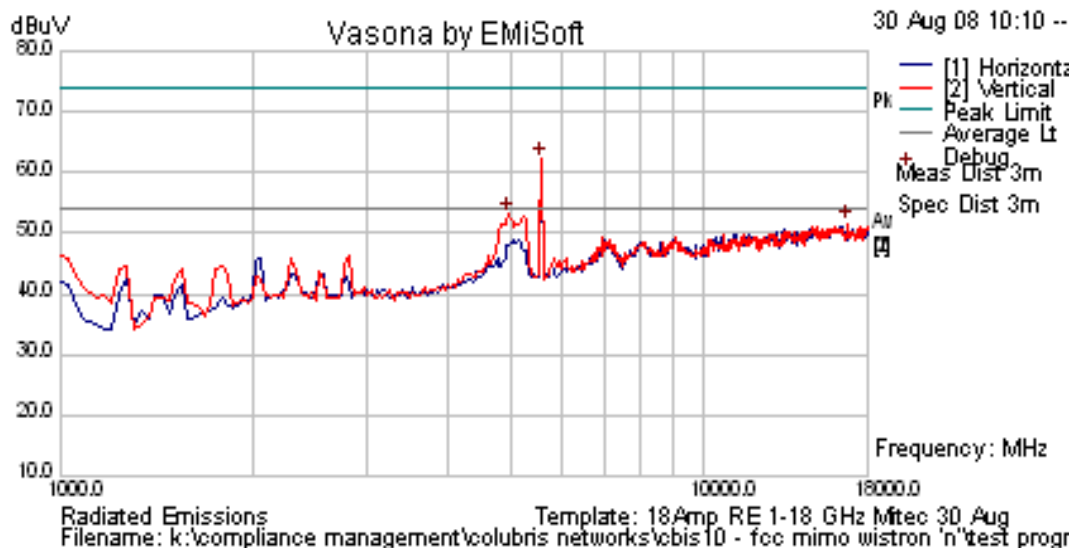

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 101 of 198

### MAP-625 Integral Antenna

#### TABLE OF RESULTS – 802.11n HT-20 5,700 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|---------------------|-------------|
|             |            |                    |                        |                                   | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|------------------------|-------------|
|             |            |                    |                        |                                   | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

#### Radiated Emissions for 5,700 MHz HT-20

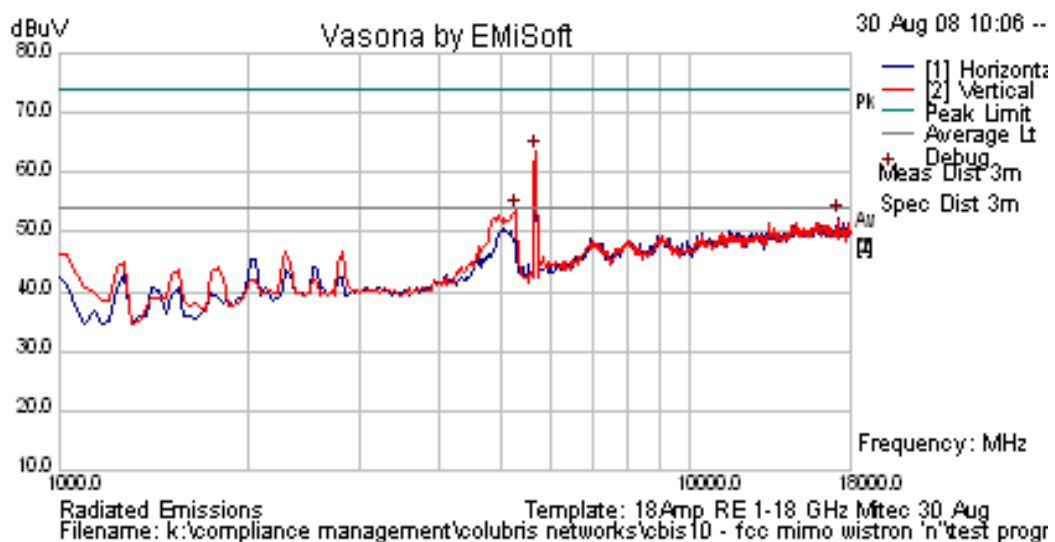

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 102 of 198

# MAP-625 Integral Antenna

## TABLE OF RESULTS – 802.11n HT-40 5,510 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|---------------------|-------------|
|             |            |                    |                        |                                   | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|------------------------|-------------|
|             |            |                    |                        |                                   | 54                     |             |


The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

## Radiated Emissions for 5,510 MHz HT-40

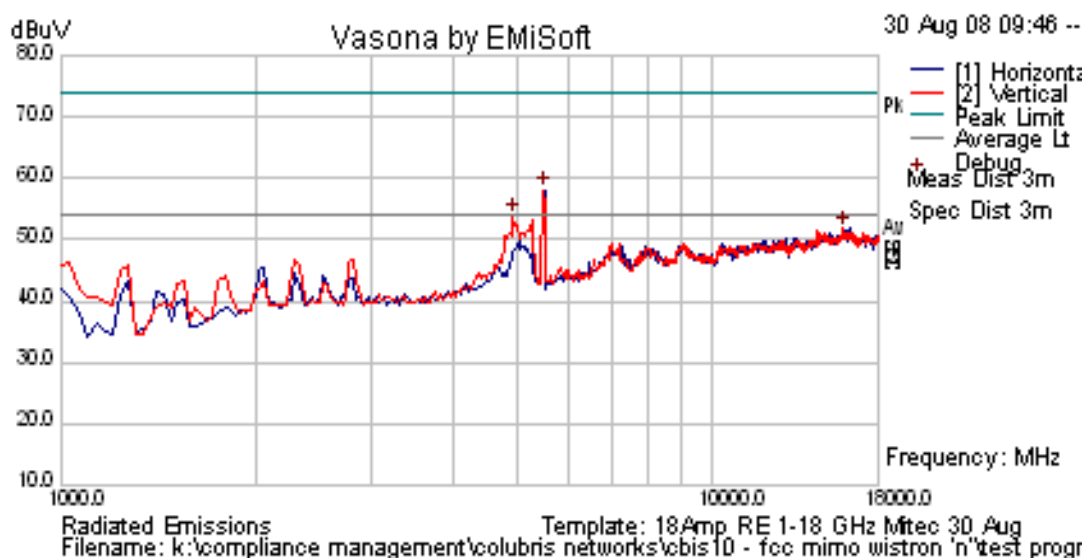

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

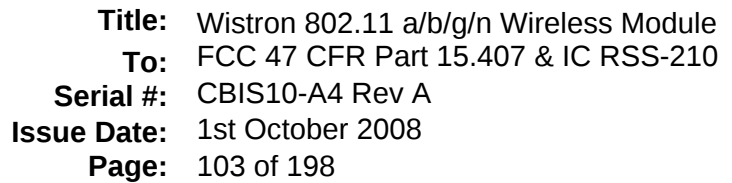



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 104 of 198

# MAP-625 Integral Antenna

## TABLE OF RESULTS – 802.11n HT-40 5,690 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|---------------------|-------------|
|             |            |                    |                        |                                   | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|------------------------|-------------|
|             |            |                    |                        |                                   | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

## Radiated Emissions for 5,690 MHz HT-40

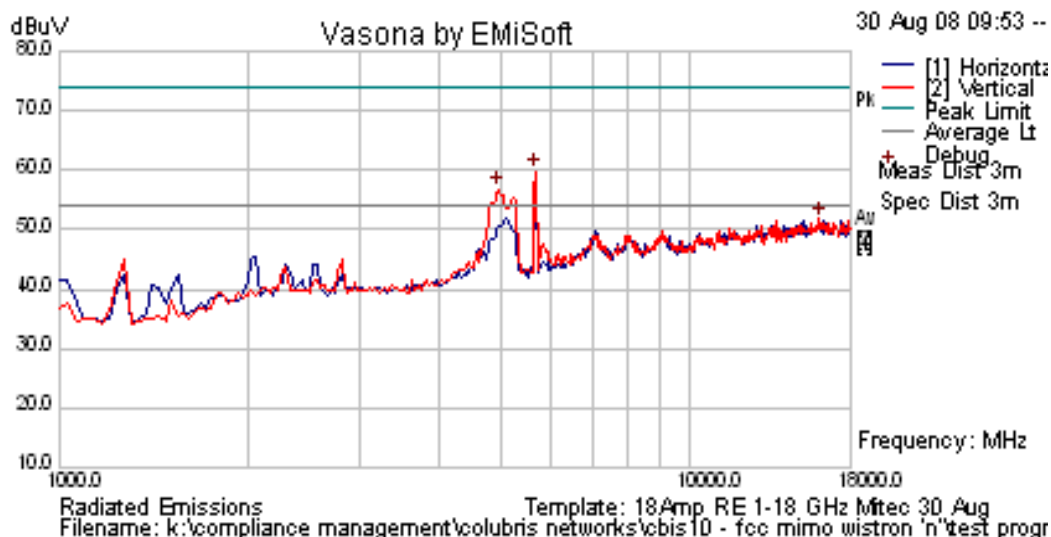

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 105 of 198

# MAP-625 External Antenna

## TABLE OF RESULTS – 802.11a Legacy 5,260 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Average Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-------------------------------------------|---------------------|-------------|
|             |            |                    |                        |                                           | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Average Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-------------------------------------------|------------------------|-------------|
|             |            |                    |                        |                                           | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

## Radiated Emissions for 5,260 MHz Legacy

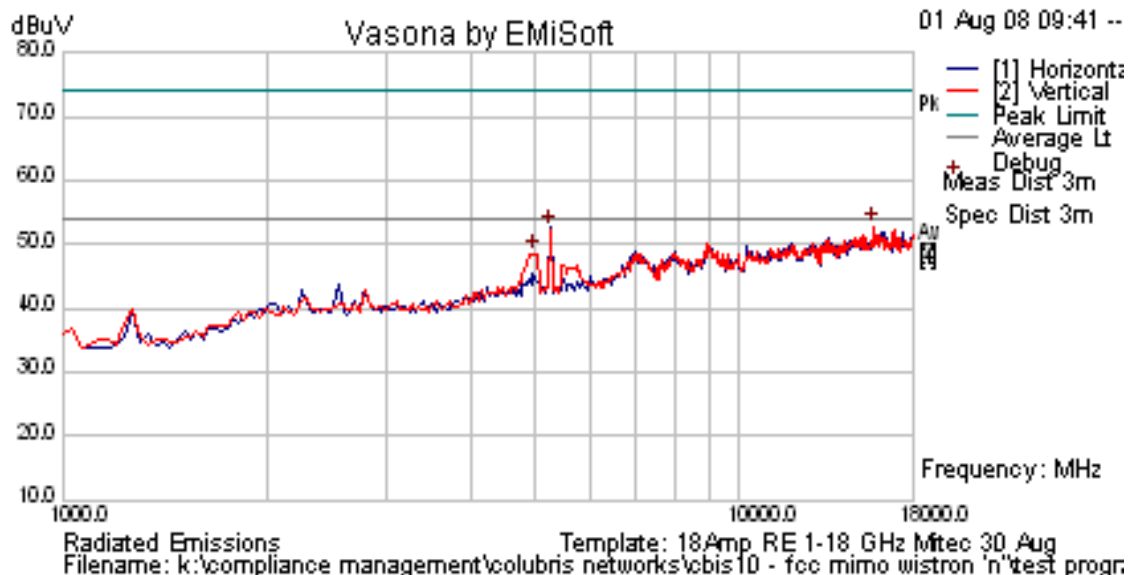

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 106 of 198

# MAP-625 External Antenna

## TABLE OF RESULTS – 802.11a Legacy 5,300 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Average Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-------------------------------------------|---------------------|-------------|
|             |            |                    |                        |                                           | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Average Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-------------------------------------------|------------------------|-------------|
|             |            |                    |                        |                                           | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

## Radiated Emissions for 5,300 MHz Legacy

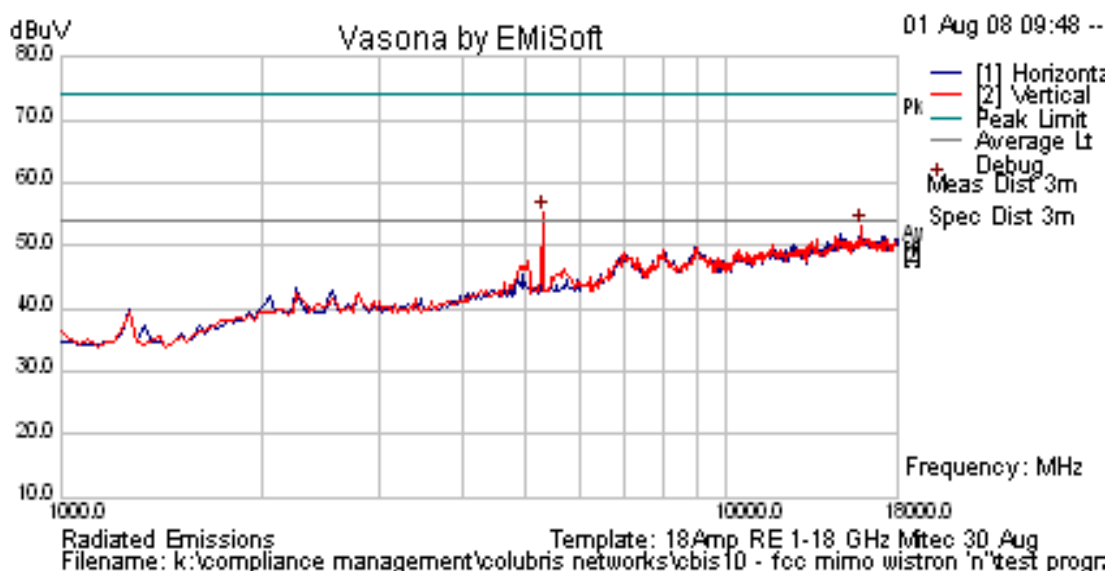

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 107 of 198

# MAP-625 External Antenna

## TABLE OF RESULTS – 802.11a Legacy 5,320 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|---------------------|-------------|
|             |            |                    |                        |                                   | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|------------------------|-------------|
|             |            |                    |                        |                                   | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

## Radiated Emissions for 5,320 MHz Legacy

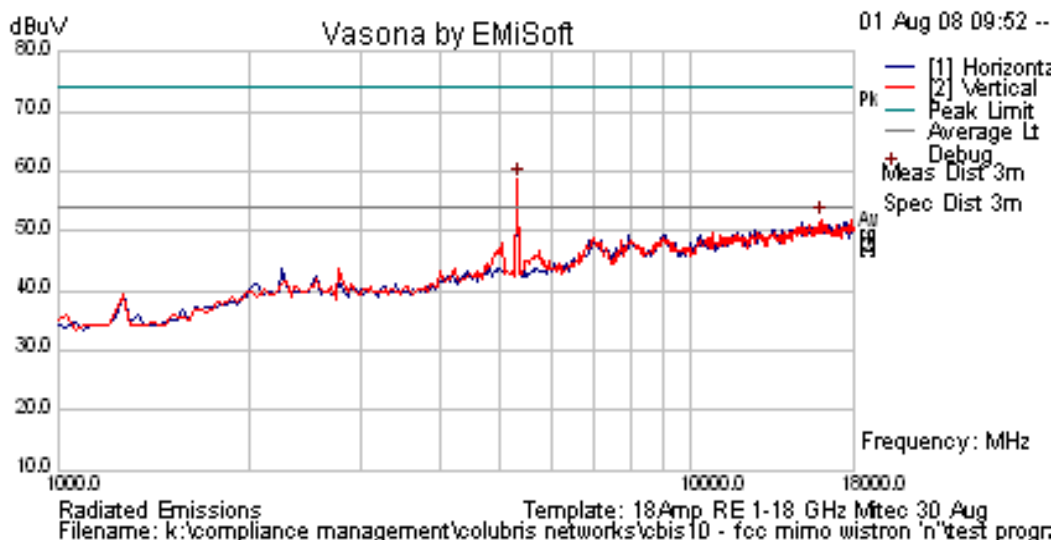

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 108 of 198

#### MAP-625 External Antenna

#### Measurement Results Transmitter Radiated Spurious Emissions above 1 GHz

#### TABLE OF RESULTS – 802.11n HT-20 5,260 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Average Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-------------------------------------------|---------------------|-------------|
|             |            |                    |                        |                                           | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Average Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-------------------------------------------|------------------------|-------------|
|             |            |                    |                        |                                           | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

#### Radiated Emissions for 5,260 MHz HT-20

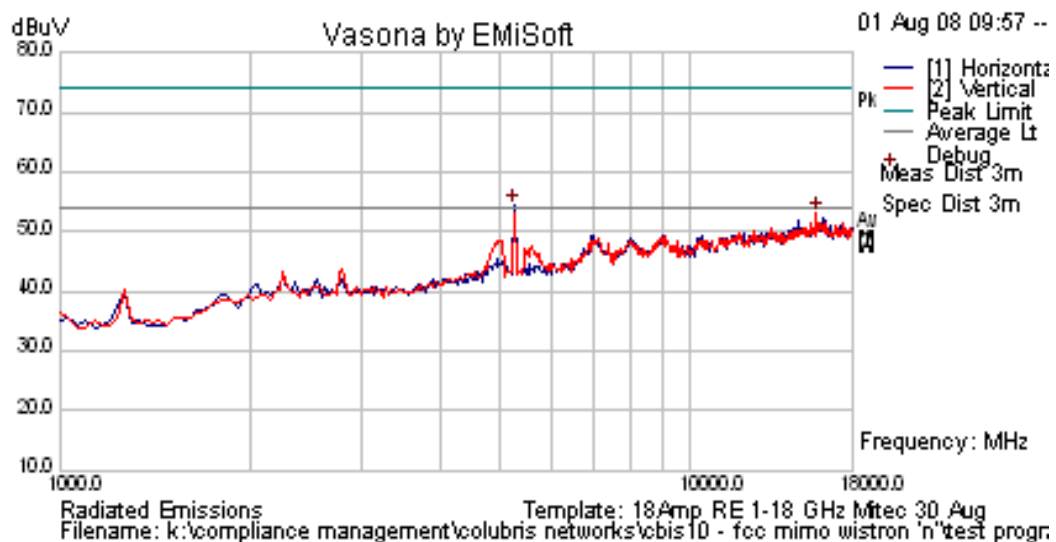

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



# MAP-625 External Antenna

## Measurement Results Transmitter Radiated Spurious Emissions above 1 GHz

### TABLE OF RESULTS – 802.11n HT-20 5,300 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Average Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-------------------------------------------|---------------------|-------------|
|             |            |                    |                        |                                           | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Average Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-------------------------------------------|------------------------|-------------|
|             |            |                    |                        |                                           | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

### Radiated Emissions for 5,300 MHz HT-20

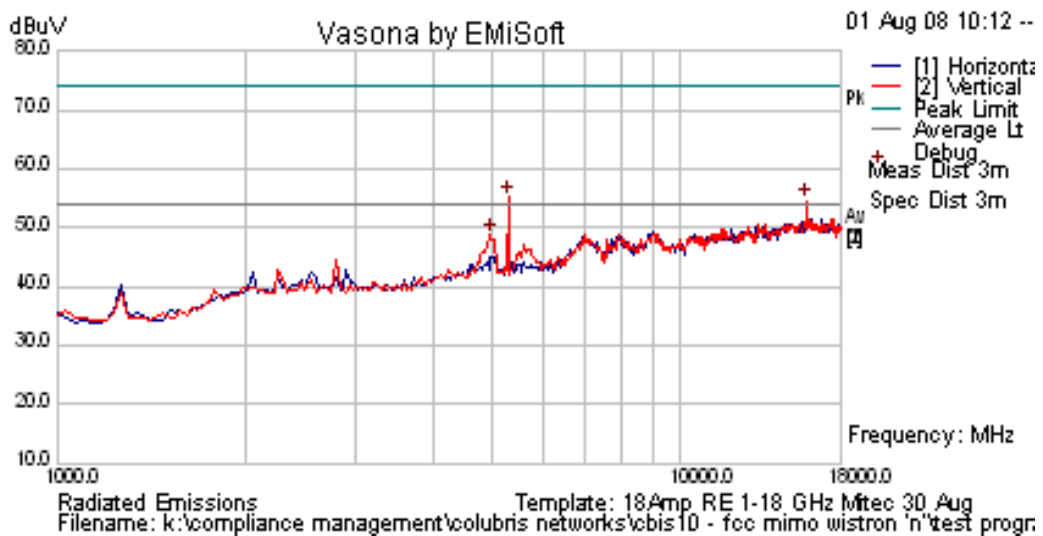

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 110 of 198

# MAP-625 External Antenna

## TABLE OF RESULTS – 802.11n HT-20 5,320 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|---------------------|-------------|
|             |            |                    |                        |                                   | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|------------------------|-------------|
|             |            |                    |                        |                                   | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

## Radiated Emissions for 5,320 MHz HT-20

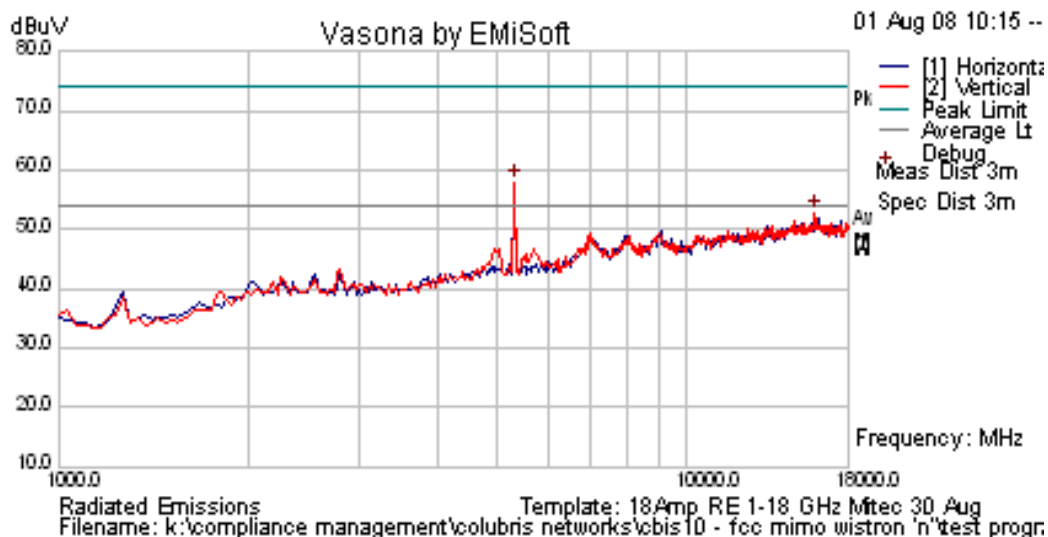

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 111 of 198

#### MAP-625 External Antenna

#### Measurement Results Transmitter Radiated Spurious Emissions above 1 GHz

#### TABLE OF RESULTS – 802.11n HT-40 5,270 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Average Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-------------------------------------------|---------------------|-------------|
|             |            |                    |                        |                                           | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Average Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-------------------------------------------|------------------------|-------------|
|             |            |                    |                        |                                           | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

#### Radiated Emissions for 5,270 MHz HT-40

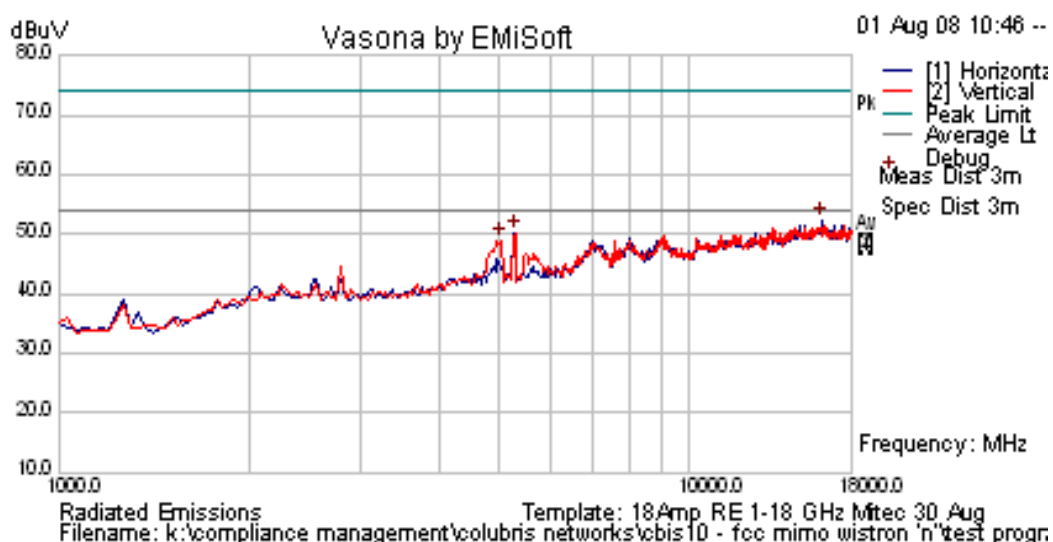

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 112 of 198

#### MAP-625 External Antenna

#### Measurement Results Transmitter Radiated Spurious Emissions above 1 GHz

#### TABLE OF RESULTS – 802.11n HT-40 5,310 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Average Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-------------------------------------------|---------------------|-------------|
|             |            |                    |                        |                                           | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Average Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-------------------------------------------|------------------------|-------------|
|             |            |                    |                        |                                           | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

#### Radiated Emissions for 5,310 MHz HT-40

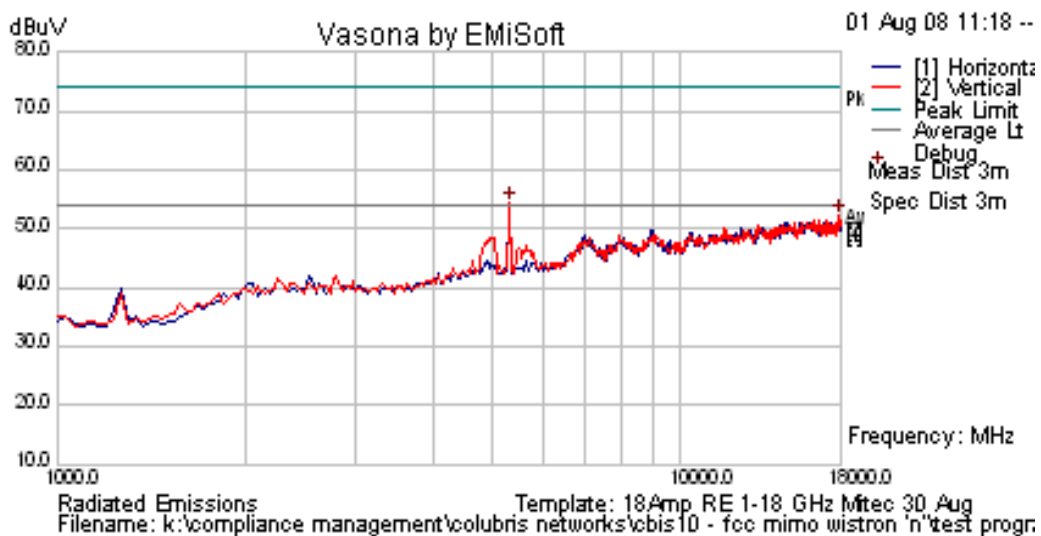

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 113 of 198

### MAP-625 External Antenna

### TABLE OF RESULTS – 802.11a Legacy 5,500 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|---------------------|-------------|
|             |            |                    |                        |                                   | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|------------------------|-------------|
|             |            |                    |                        |                                   | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

### Radiated Emissions for 5,500 MHz Legacy

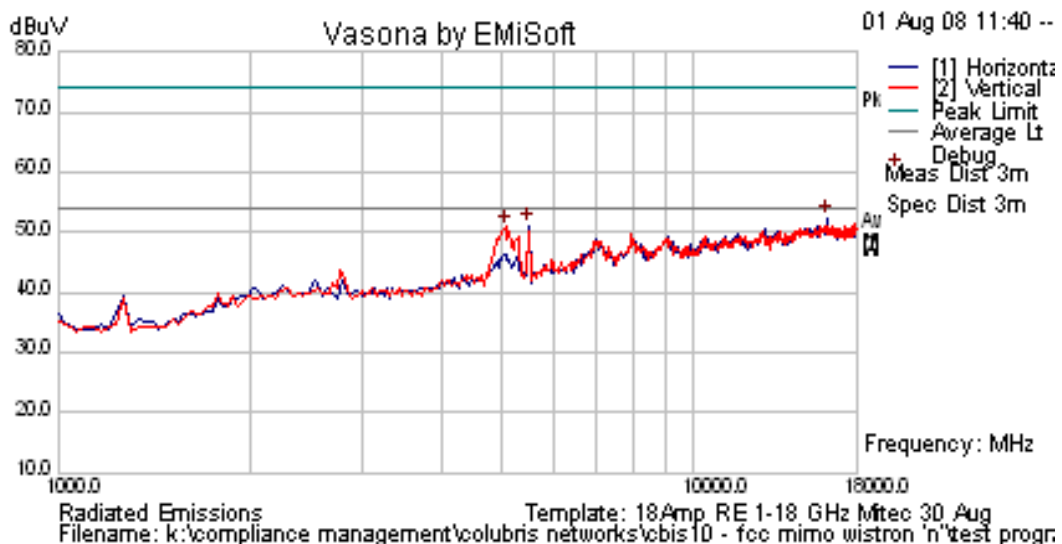

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 114 of 198

# MAP-625 External Antenna

## TABLE OF RESULTS – 802.11a Legacy 5,600 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|----------------|-------------|
|             |            |                    |                        |                                   | 74             |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|----------------|-------------|
|             |            |                    |                        |                                   | 54             |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

## Radiated Emissions for 5,600 MHz Legacy

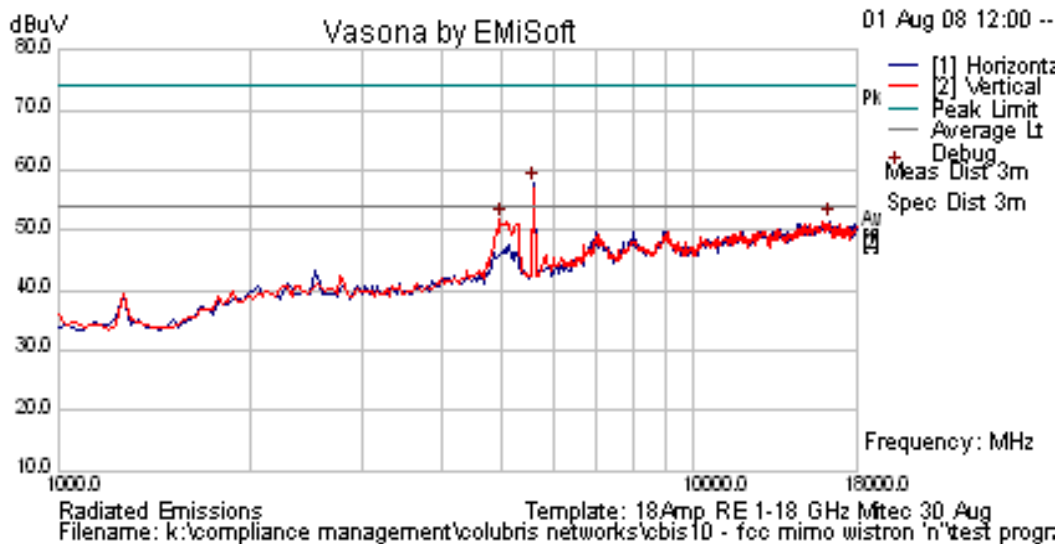

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 115 of 198

# MAP-625 External Antenna

## TABLE OF RESULTS – 802.11a Legacy 5,700 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|---------------------|-------------|
|             |            |                    |                        |                                   | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|------------------------|-------------|
|             |            |                    |                        |                                   | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

## Radiated Emissions for 5,700 MHz Legacy

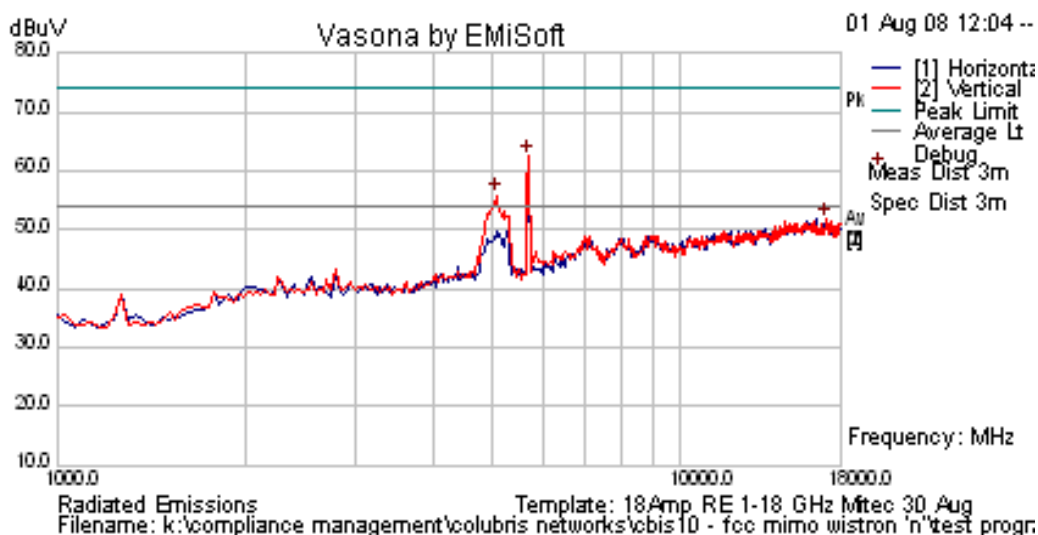

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 116 of 198

# MAP-625 External Antenna

## TABLE OF RESULTS – 802.11n HT-20 5,500 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|---------------------|-------------|
|             |            |                    |                        |                                   | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|------------------------|-------------|
|             |            |                    |                        |                                   | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

## Radiated Emissions for 5,500 MHz HT-20

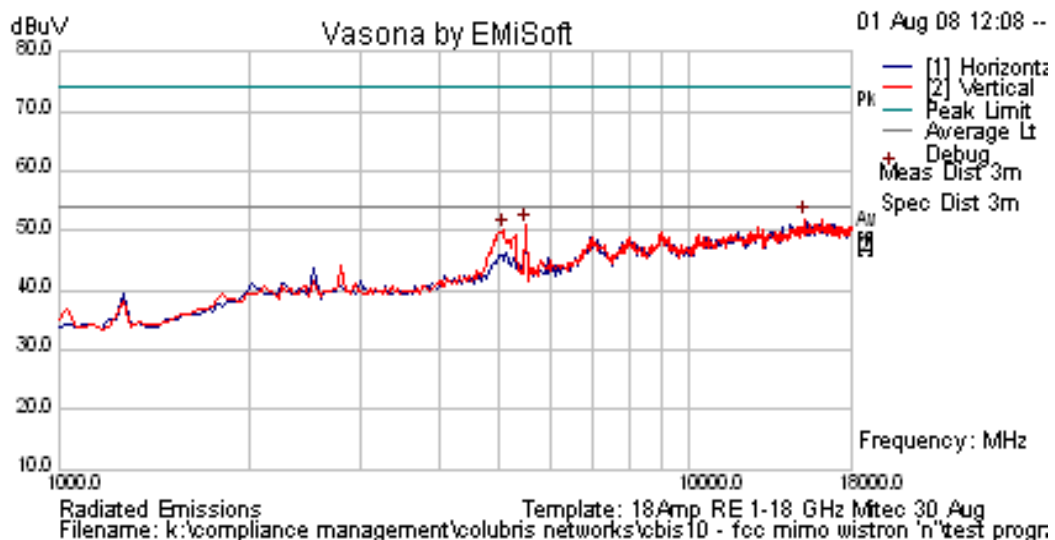

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 117 of 198

# MAP-625 External Antenna

## TABLE OF RESULTS – 802.11n HT-20 5,600 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|----------------|-------------|
|             |            |                    |                        |                                   | 74             |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|----------------|-------------|
|             |            |                    |                        |                                   | 54             |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

## Radiated Emissions for 5,600 MHz HT-20

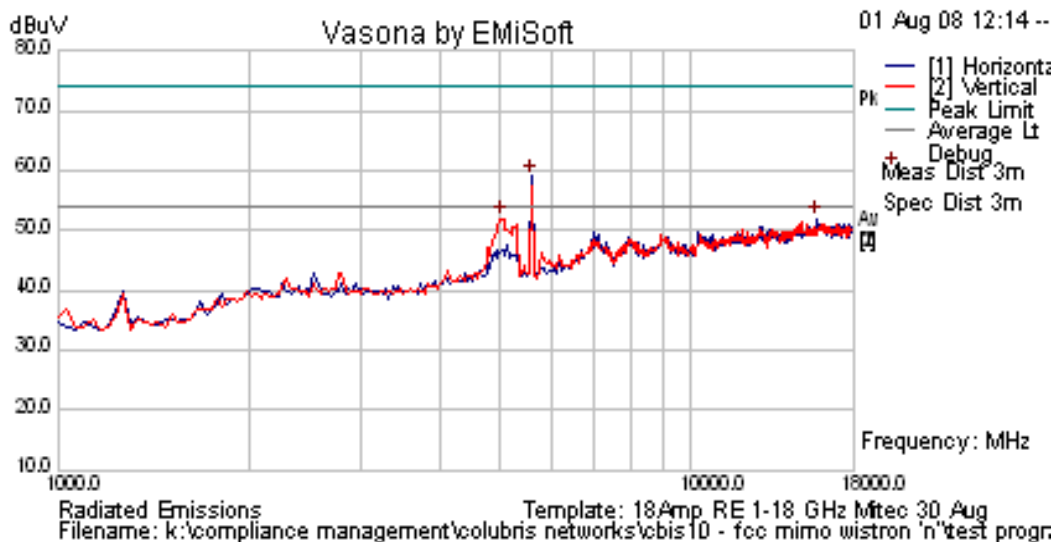

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 118 of 198

#### MAP-625 External Antenna

#### TABLE OF RESULTS – 802.11n HT-20 5,700 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|---------------------|-------------|
|             |            |                    |                        |                                   | 54                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|------------------------|-------------|
|             |            |                    |                        |                                   | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

#### Radiated Emissions for 5,700 MHz HT-20

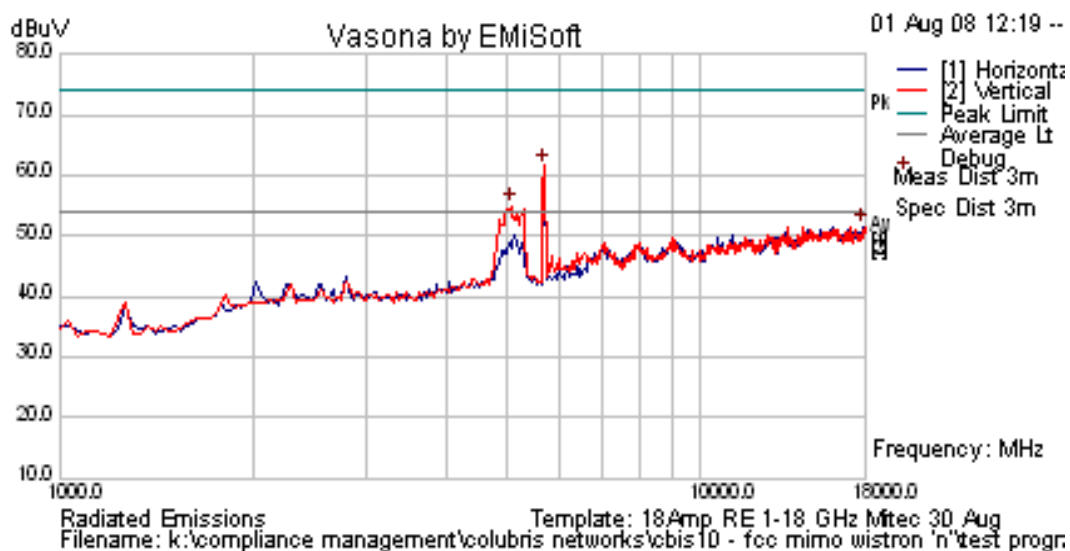

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 119 of 198

#### MAP-625 External Antenna

#### TABLE OF RESULTS – 802.11n HT-40 5,510 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Peak Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|---------------------|-------------|
|             |            |                    |                        |                                   | 74                  |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Average Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|------------------------|-------------|
|             |            |                    |                        |                                   | 54                     |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

#### Radiated Emissions for 5,510 MHz HT-40

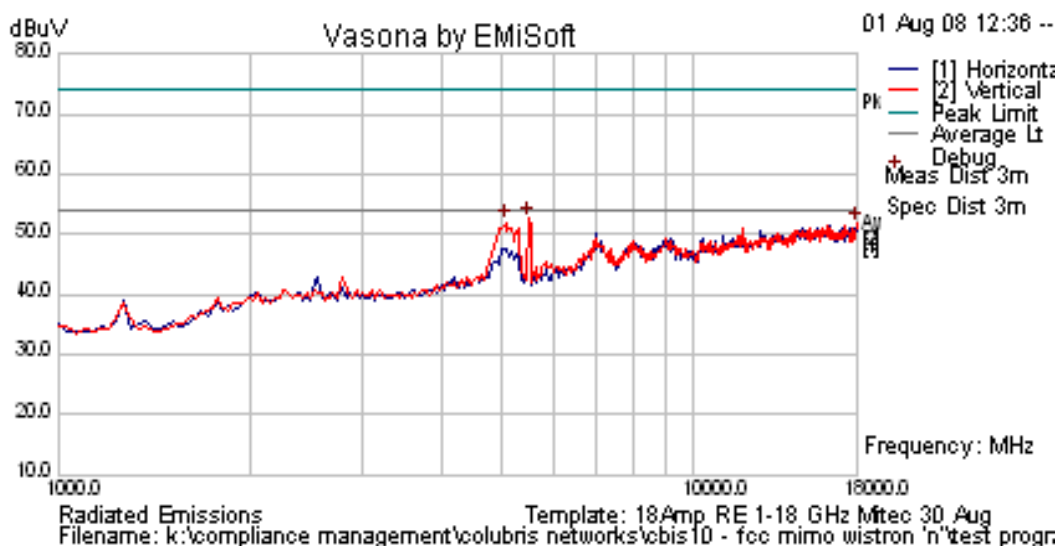

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 120 of 198

# MAP-625 External Antenna

## TABLE OF RESULTS – 802.11n HT-40 5,620 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|----------------|-------------|
|             |            |                    |                        |                                   | 74             |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dBμV) | Correction Factor (dB) | Corrected Field Strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-------------|------------|--------------------|------------------------|-----------------------------------|----------------|-------------|
|             |            |                    |                        |                                   | 54             |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

## Radiated Emissions for 5,620 MHz HT-40

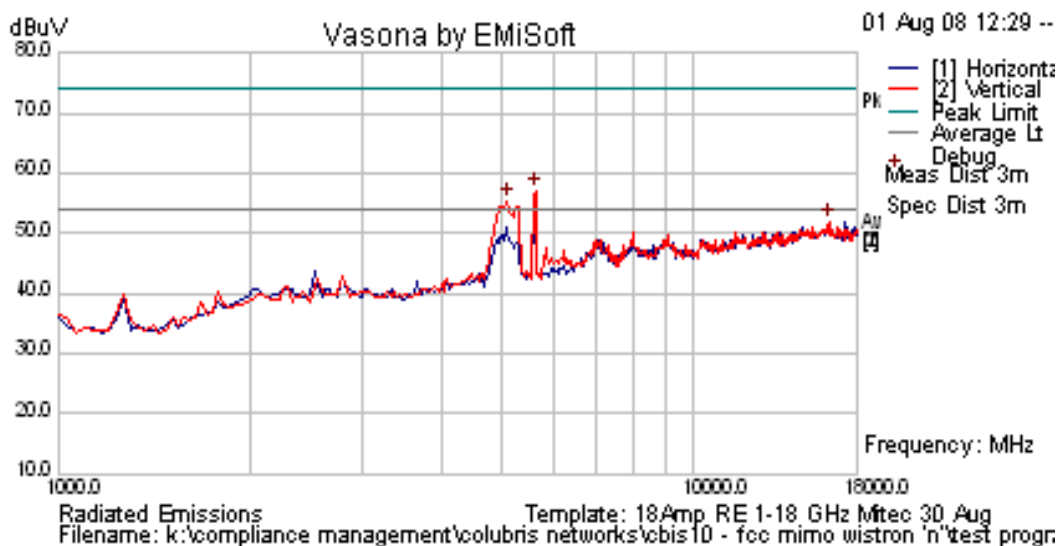

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 121 of 198

#### MAP-625 External Antenna

#### TABLE OF RESULTS – 802.11n HT-40 5,690 MHz Radiated Emissions above 1 GHz


| Freq. (MHz) | Pol. (H/V) | Raw Reading (dB $\mu$ V) | Correction Factor (dB) | Corrected Field Strength (dB $\mu$ V/m) | Peak Limit (dB $\mu$ V/m) | Margin (dB) |
|-------------|------------|--------------------------|------------------------|-----------------------------------------|---------------------------|-------------|
|             |            |                          |                        |                                         | 74                        |             |

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dB $\mu$ V) | Correction Factor (dB) | Corrected Field Strength (dB $\mu$ V/m) | Average Limit (dB $\mu$ V/m) | Margin (dB) |
|-------------|------------|--------------------------|------------------------|-----------------------------------------|------------------------------|-------------|
|             |            |                          |                        |                                         | 54                           |             |

The peak emission seen breaking the average limit line is the fundamental. No other emissions were observed within 6dB of the peak limit.

The energy immediately to the left and/or the right of the fundamental carrier will be measured under the restricted band-edge requirement.

#### Radiated Emissions for 5,690 MHz HT-40

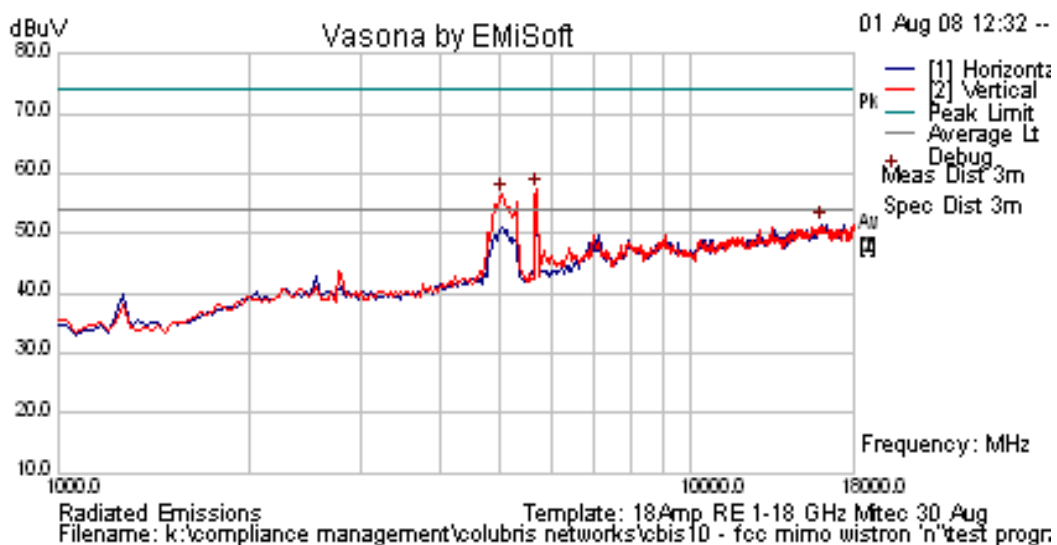

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wistron 802.11 a/b/g/n Wireless Module  
To: FCC 47 CFR Part 15.407 & IC RSS-210  
Serial #: CBIS10-A4 Rev A  
Issue Date: 1st October 2008  
Page: 122 of 198


### 5.1.7.2. Radiated Band-Edge – Restricted Bands

Integral Antenna Lower Sub Band - 5,250 MHz to 5,350 MHz

TABLE OF RESULTS - 802.11a Legacy -

| Tx Freq. (MHz)        | Restricted Band Frequency (MHz) | Measured (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------------|---------------------------------|-------------------|----------------|-------------|
| 5,320 <sub>PEAK</sub> | 5,350                           | 70.99             | 74.00          | -3.01       |
| 5,320 <sub>Ave</sub>  | 5,350                           | 45.01             | 54.00          | -8.99       |

#### 802.11a Legacy – 5,320 MHz

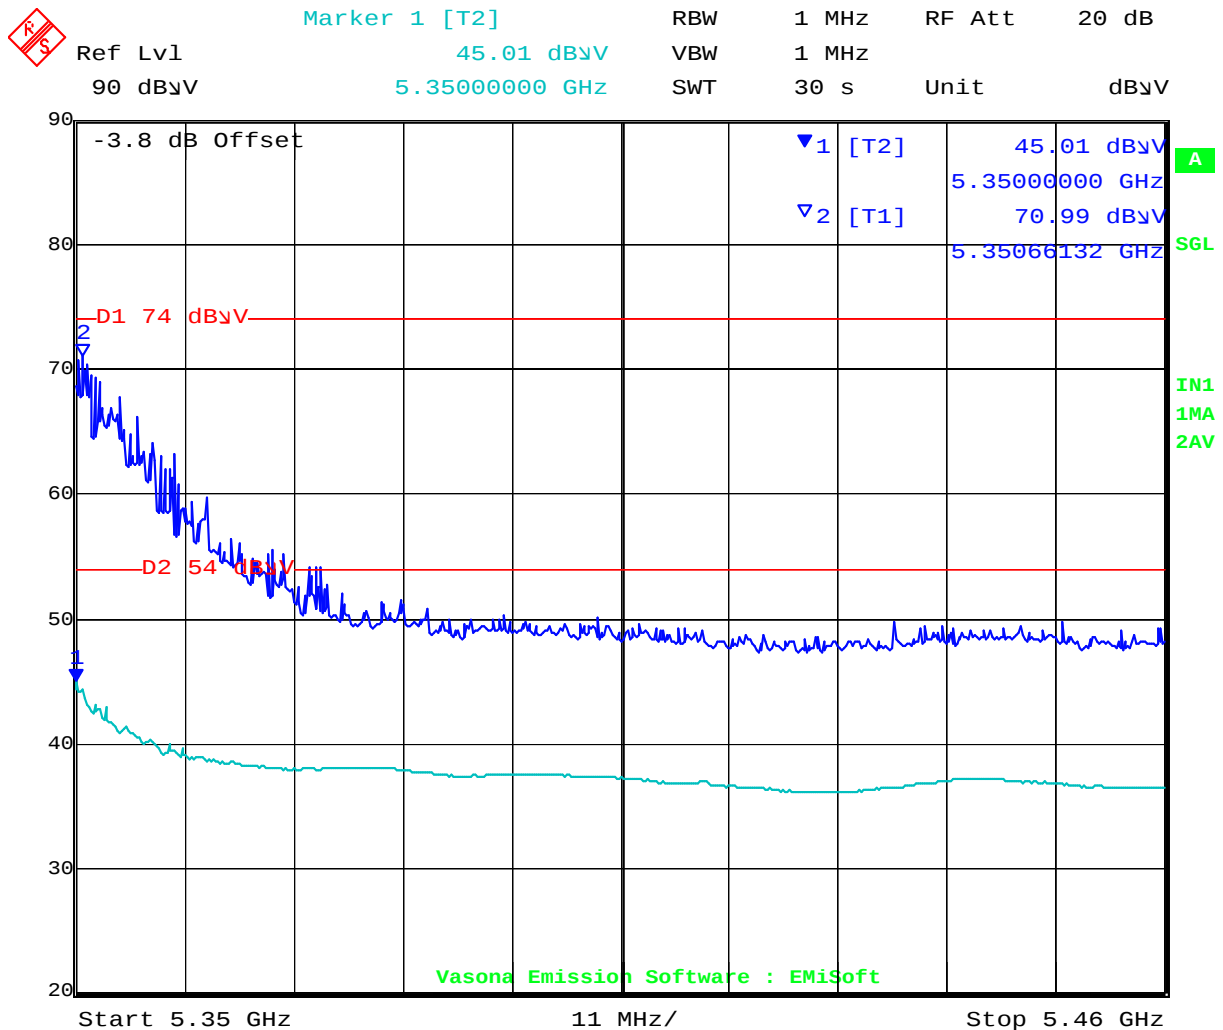

Date: 30.AUG.2008 10:48:28

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 123 of 198

### Integral antenna Upper Sub Band - 5,470 MHz to 5,725 MHz

#### TABLE OF RESULTS - 802.11a Legacy

| Tx Freq. (MHz)        | Restricted Band Frequency (MHz) | Measured (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------------|---------------------------------|-------------------|----------------|-------------|
| 5,500 <sub>PEAK</sub> | 5,460                           | 68.98             | 74.00          | -5.02       |
| 5,500 <sub>AVE</sub>  | 5,460                           | 44.01             | 54.00          | -9.99       |

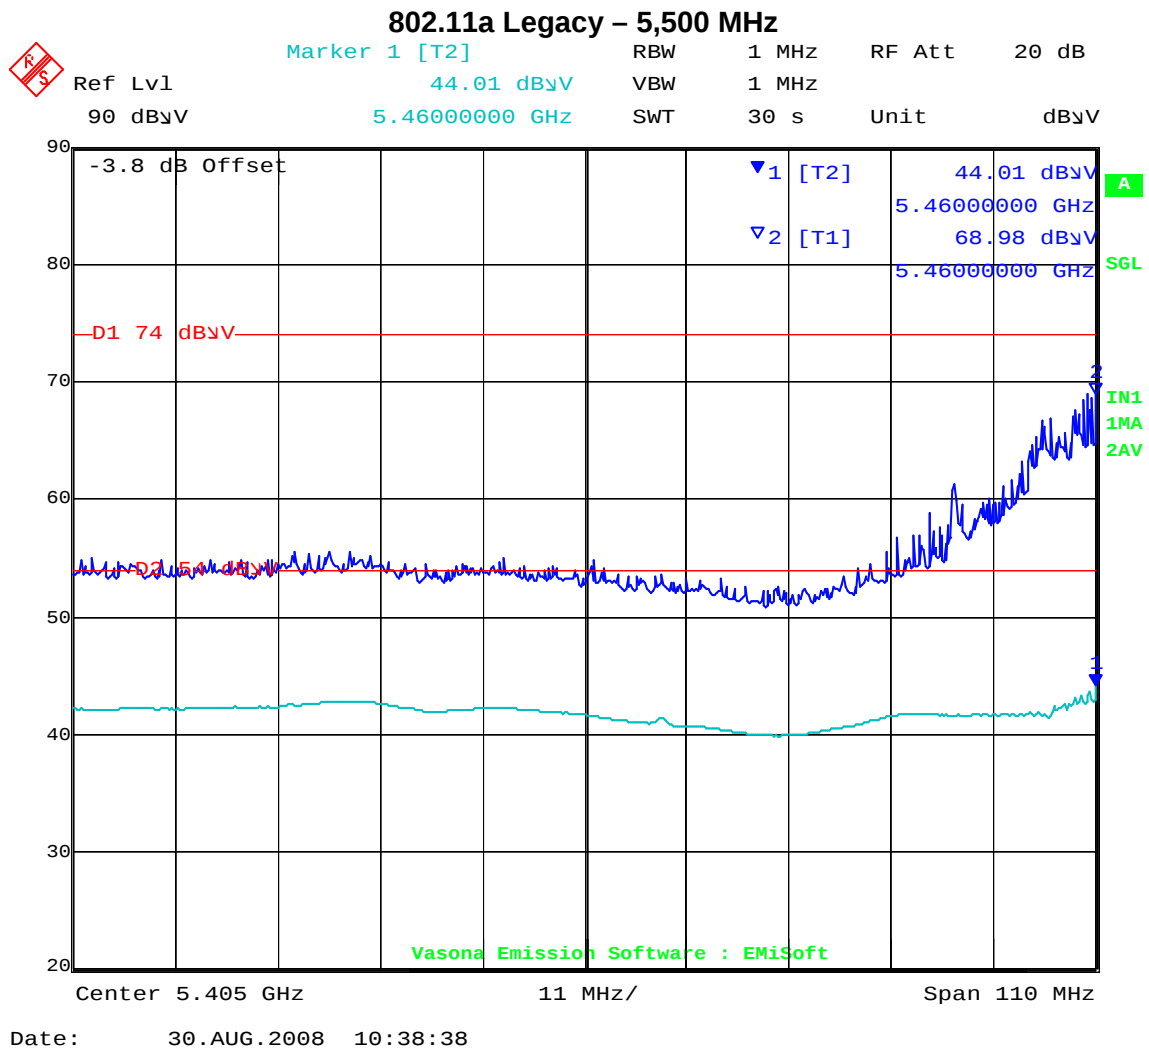

Note; No band edge measurements are required at the upper end of the 5,470 – 5,725 band.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Wistron 802.11 a/b/g/n Wireless Module  
To: FCC 47 CFR Part 15.407 & IC RSS-210  
Serial #: CBIS10-A4 Rev A  
Issue Date: 1st October 2008  
Page: 124 of 198

### Integral Antenna Lower Sub Band - 5,250 MHz to 5,350 MHz

#### TABLE OF RESULTS - 802.11n HT-20

| Tx Freq. (MHz)        | Restricted Band Frequency (MHz) | Measured (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------------|---------------------------------|-------------------|----------------|-------------|
| 5,320 <sub>PEAK</sub> | 5,350                           | 73.86             | 74.00          | -0.14       |
| 5,320 <sub>AVE</sub>  | 5,350                           | 44.01             | 54.00          | -9.99       |

#### 802.11n HT-20 – 5,320 MHz

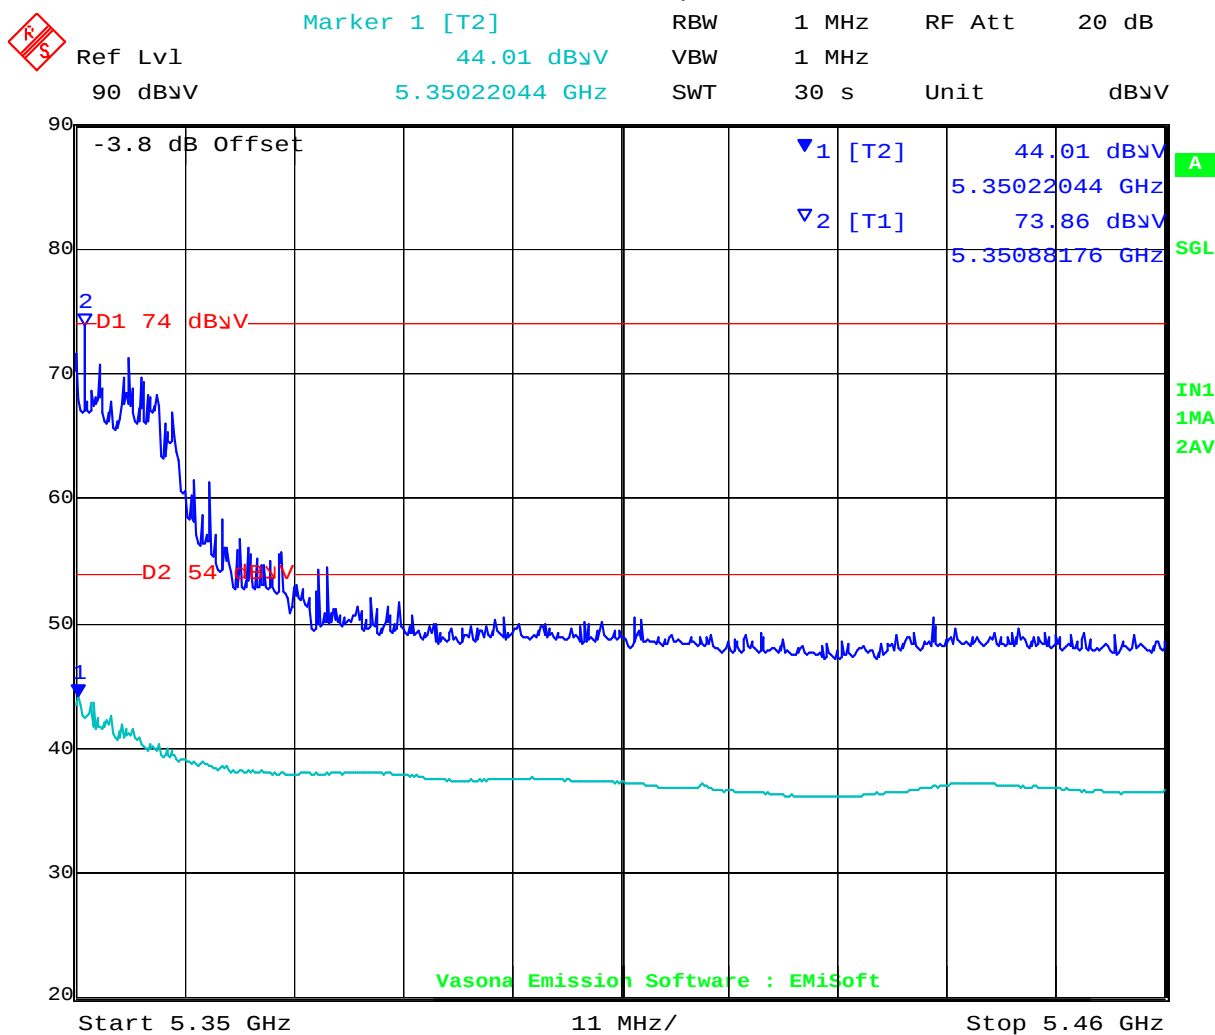

Date: 30.AUG.2008 10:49:44

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 125 of 198

**Integral antenna Upper Sub Band - 5,470 MHz to 5,725 MHz**

**TABLE OF RESULTS - 802.11n HT-20**

| Tx Freq. (MHz)        | Restricted Band Frequency (MHz) | Measured (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------------|---------------------------------|-------------------|----------------|-------------|
| 5,500 <sub>PEAK</sub> | 5,460                           | 70.77             | 74.00          | -3.23       |
| 5,500 <sub>Ave</sub>  | 5,460                           | 44.59             | 54.00          | -9.41       |

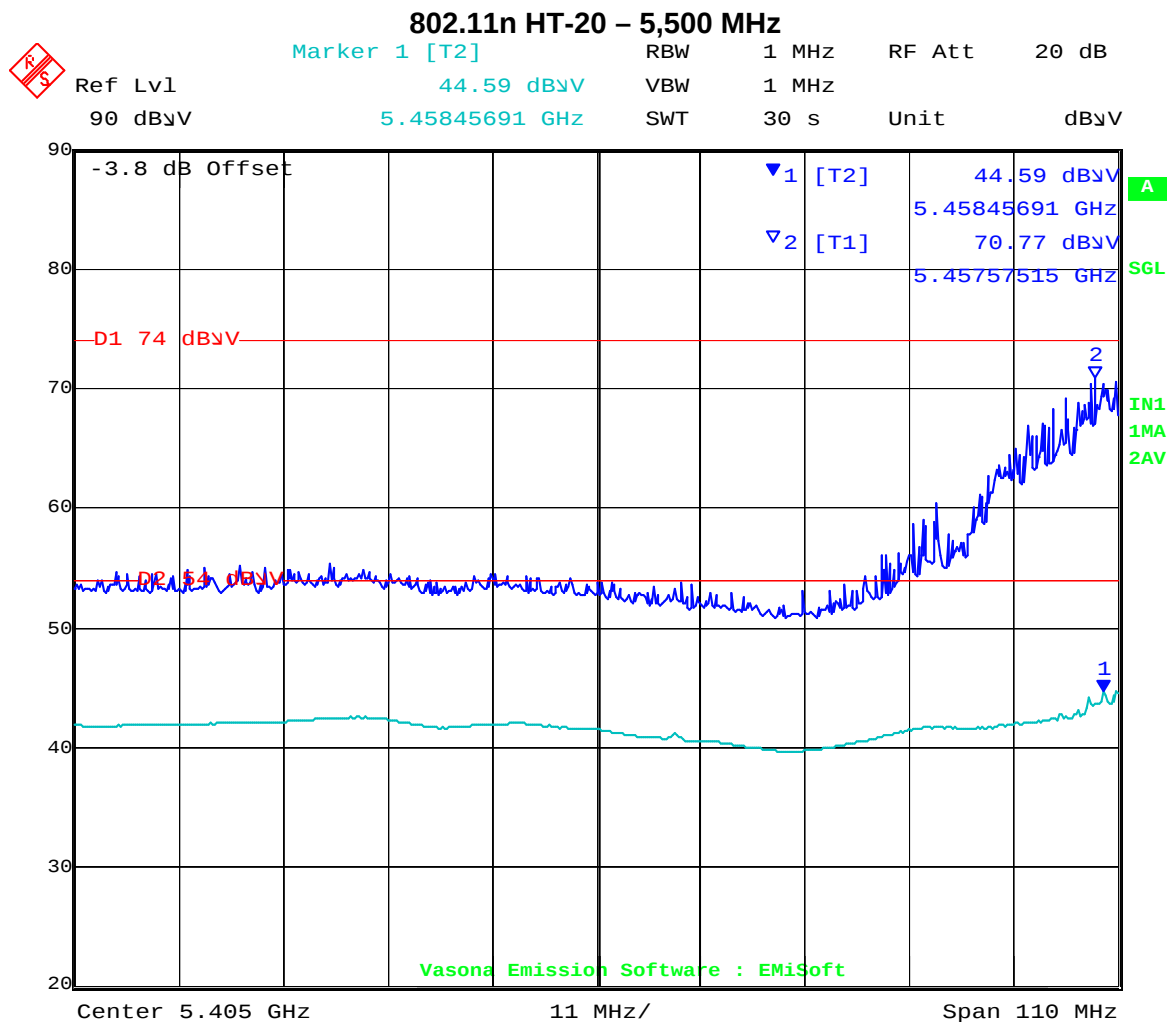

Date: 30.AUG.2008 10:35:25

Note; No band edge measurements are required at the upper end of the 5,470 – 5,725 band.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 126 of 198

### Integral Antenna Lower Sub Band - 5,250 MHz to 5,350 MHz

#### TABLE OF RESULTS - 802.11n HT-40

| Tx Freq. (MHz)        | Restricted Band Frequency (MHz) | Measured (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------------|---------------------------------|-------------------|----------------|-------------|
| 5,310 <sub>PEAK</sub> | 5,350                           | 71.11             | 74.00          | -2.89       |
| 5,310 <sub>AVE</sub>  | 5,350                           | 50.53             | 54.00          | -3.47       |

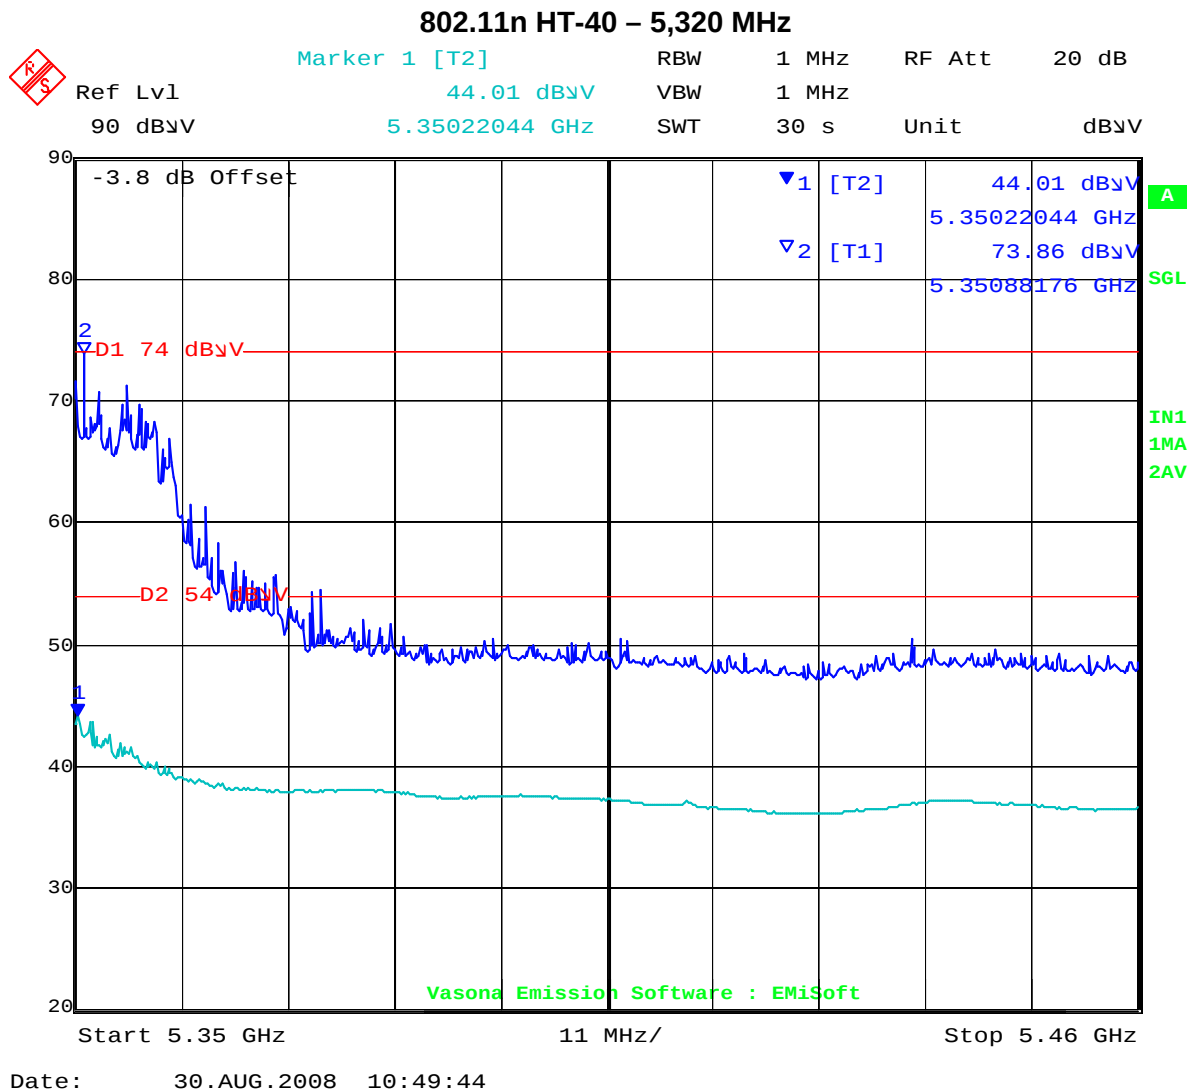

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 127 of 198

### Integral antenna Upper Sub Band - 5,470 MHz to 5,725 MHz

**TABLE OF RESULTS - 802.11n HT-40**

| Tx Freq. (MHz)        | Restricted Band Frequency (MHz) | Measured (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------------|---------------------------------|-------------------|----------------|-------------|
| 5,510 <sub>PEAK</sub> | 5,460                           | 73.12             | 74.00          | -0.88       |
| 5,510 <sub>AVE</sub>  | 5,460                           | 49.75             | 54.00          | -4.25       |

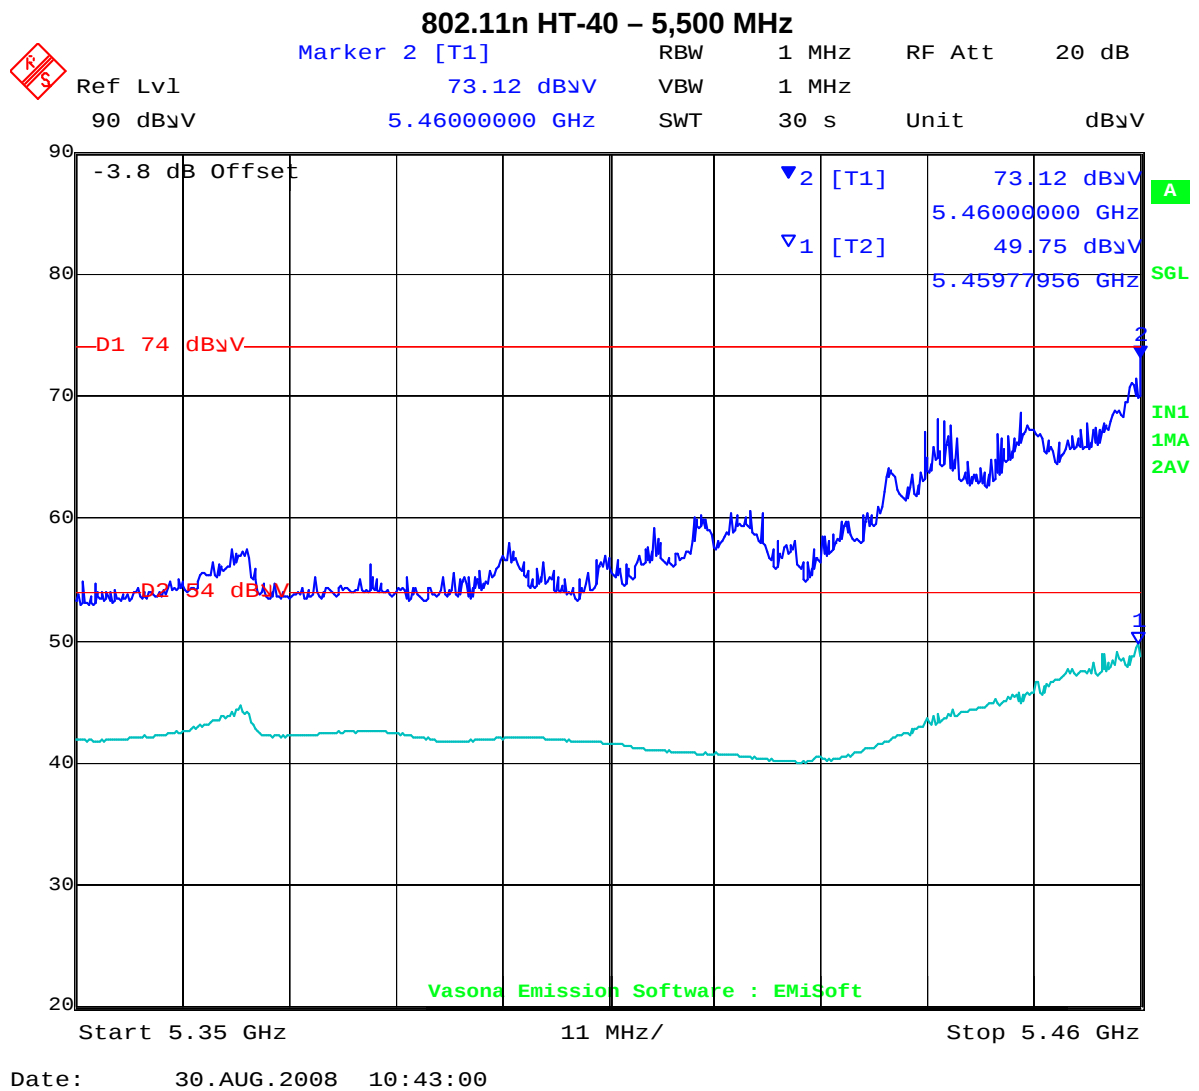

Note; No band edge measurements are required at the upper end of the 5,470 – 5,725 band.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Wistron 802.11 a/b/g/n Wireless Module  
To: FCC 47 CFR Part 15.407 & IC RSS-210  
Serial #: CBIS10-A4 Rev A  
Issue Date: 1st October 2008  
Page: 128 of 198

### External Antenna Lower Sub Band - 5,250 MHz to 5,350 MHz

#### TABLE OF RESULTS - 802.11a Legacy

| Tx Freq. (MHz)        | Restricted Band Frequency (MHz) | Measured (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------------|---------------------------------|-------------------|----------------|-------------|
| 5,320 <sub>PEAK</sub> | 5,350                           | 66.92             | 74.00          | -7.08       |
| 5,320 <sub>Ave</sub>  | 5,350                           | 47.23             | 54.00          | -6.77       |

#### 802.11a Legacy – 5,320 MHz

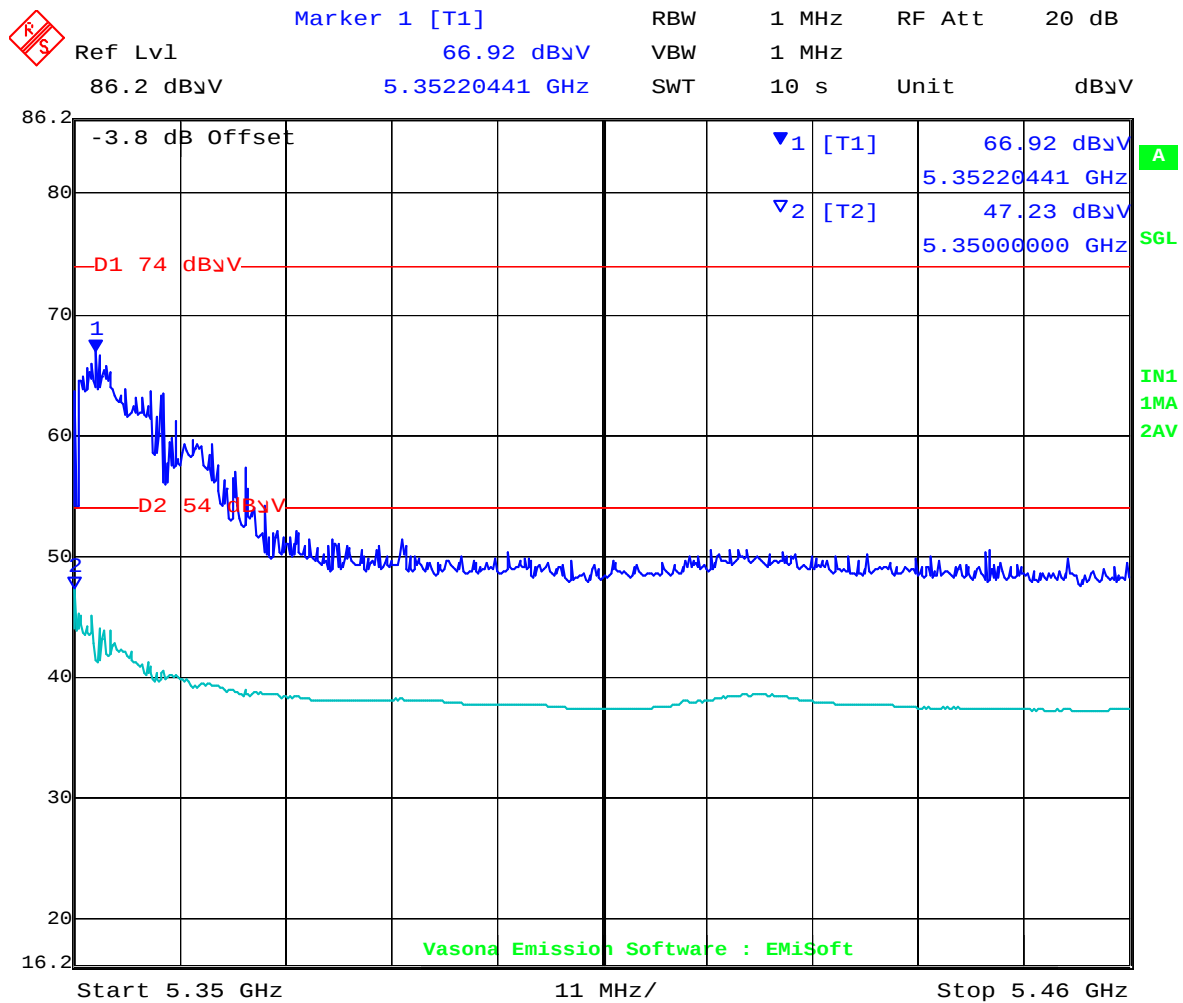

Date: 1.AUG.2008 14:10:06

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 129 of 198

**External antenna Upper Sub Band - 5,470 MHz to 5,725 MHz**

**TABLE OF RESULTS - 802.11a Legacy**

| Tx Freq. (MHz)        | Restricted Band Frequency (MHz) | Measured (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------------|---------------------------------|-------------------|----------------|-------------|
| 5,500 <sub>PEAK</sub> | 5,460                           | 61.82             | 74.00          | -12.18      |
| 5,500 <sub>Ave</sub>  | 5,460                           | 40.66             | 54.00          | -13.34      |

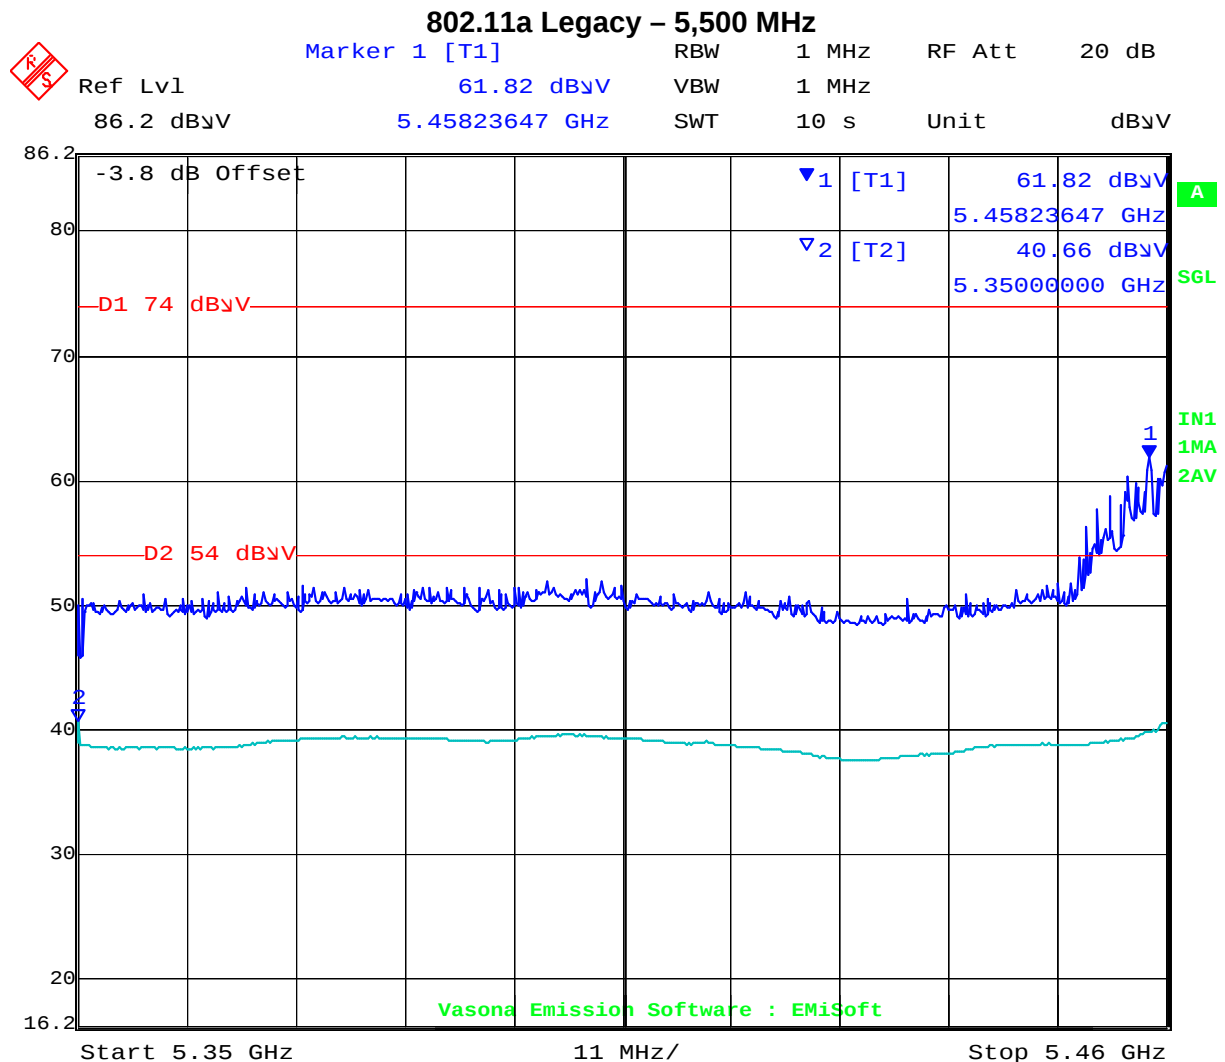

Date: 1.AUG.2008 14:04:21

Note; No band edge measurements are required at the upper end of the 5,470 – 5,725 band.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Wistron 802.11 a/b/g/n Wireless Module  
To: FCC 47 CFR Part 15.407 & IC RSS-210  
Serial #: CBIS10-A4 Rev A  
Issue Date: 1st October 2008  
Page: 130 of 198

### External Antenna Lower Sub Band - 5,250 MHz to 5,350 MHz

#### TABLE OF RESULTS - 802.11n HT-20

| Tx Freq. (MHz)        | Restricted Band Frequency (MHz) | Measured (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------------|---------------------------------|-------------------|----------------|-------------|
| 5,320 <sub>PEAK</sub> | 5,350                           | 66.43             | 74.00          | -7.57       |
| 5,320 <sub>AVE</sub>  | 5,350                           | 47.59             | 54.00          | -6.41       |

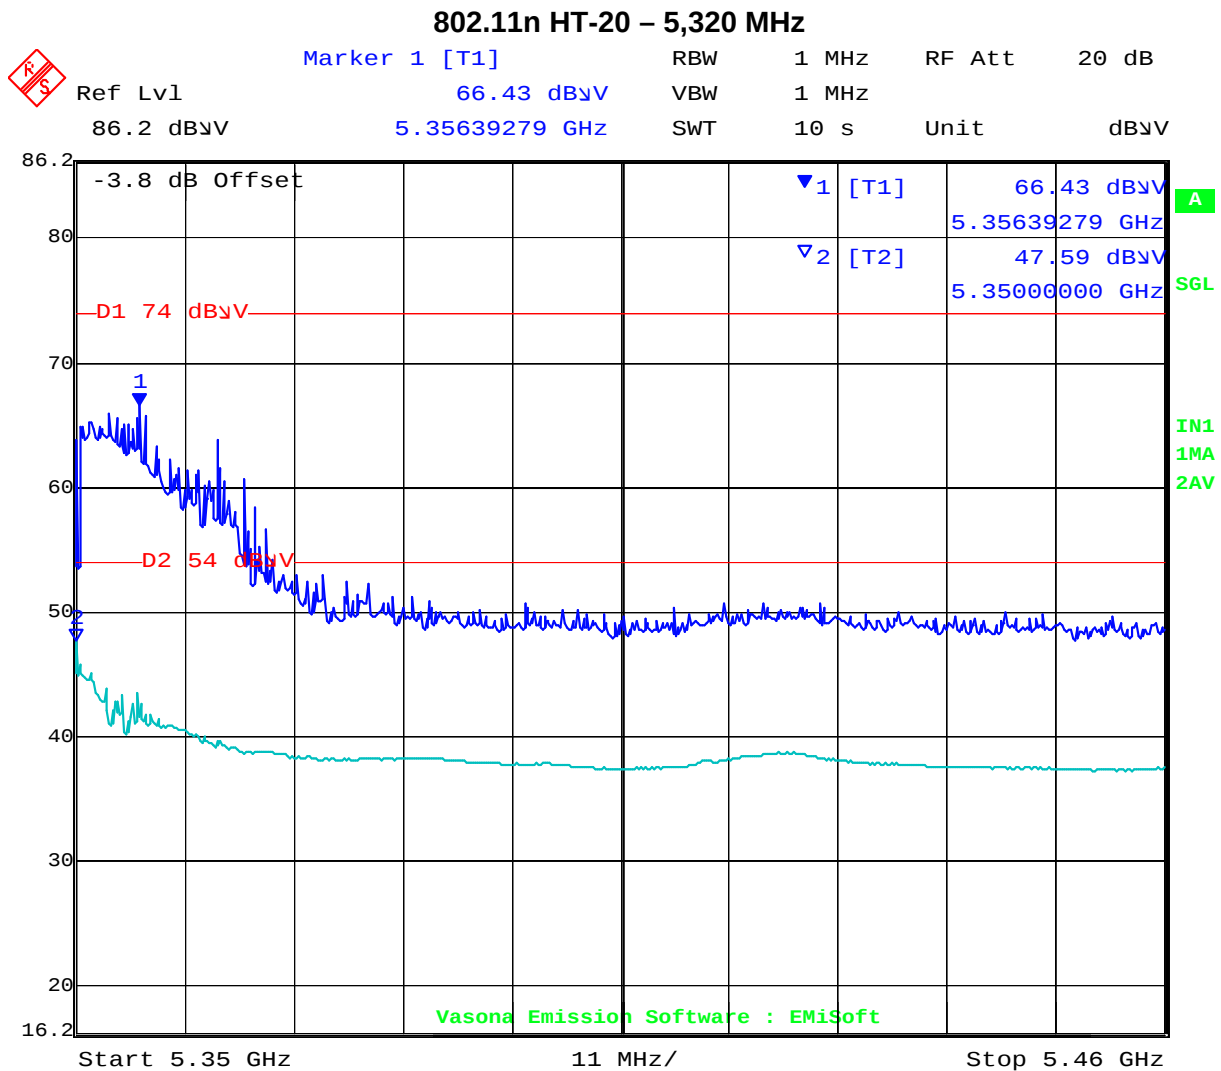

Date: 1.AUG.2008 14:11:18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 131 of 198

**External antenna Upper Sub Band - 5,470 MHz to 5,725 MHz**

**TABLE OF RESULTS - 802.11n HT-20**

| Tx Freq. (MHz)        | Restricted Band Frequency (MHz) | Measured (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------------|---------------------------------|-------------------|----------------|-------------|
| 5,500 <sub>PEAK</sub> | 5,460                           | 62.29             | 74.00          | -11.71      |
| 5,500 <sub>AVE</sub>  | 5,460                           | 41.29             | 54.00          | -12.71      |

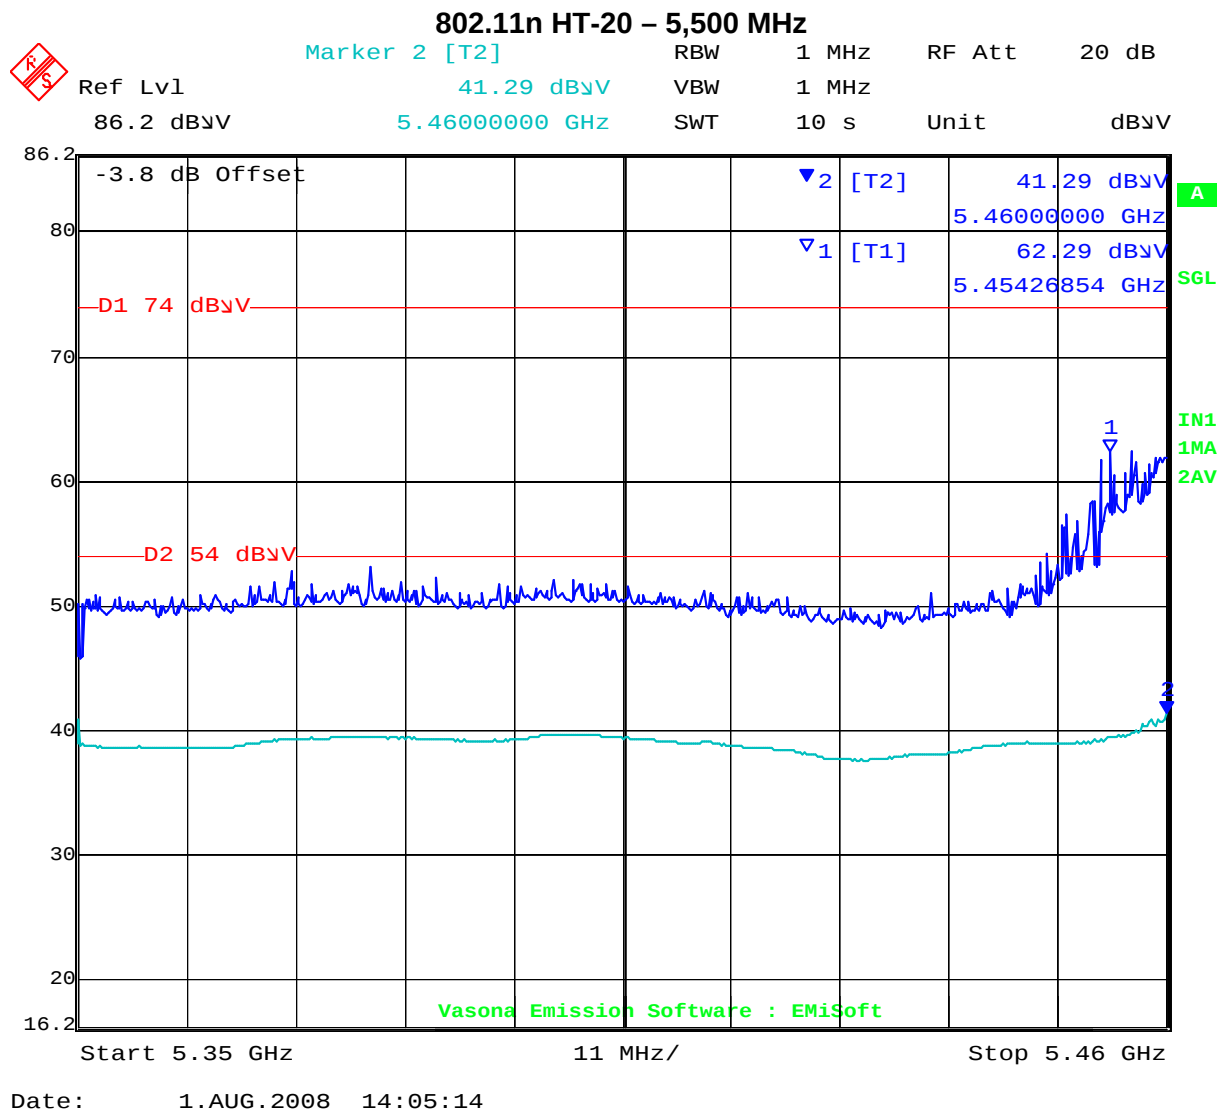

Note; No band edge measurements are required at the upper end of the 5,470 – 5,725 band.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Wistron 802.11 a/b/g/n Wireless Module  
To: FCC 47 CFR Part 15.407 & IC RSS-210  
Serial #: CBIS10-A4 Rev A  
Issue Date: 1st October 2008  
Page: 132 of 198

### External Antenna Lower Sub Band - 5,250 MHz to 5,350 MHz

TABLE OF RESULTS - 802.11n HT-40

| Tx Freq. (MHz)        | Restricted Band Frequency (MHz) | Measured (dBUV/m) | Limit (dBUV/m) | Margin (dB) |
|-----------------------|---------------------------------|-------------------|----------------|-------------|
| 5,320 <sub>PEAK</sub> | 5,350                           | 71.61             | 74.00          | -2.39       |
| 5,320 <sub>AVE</sub>  | 5,350                           | 49.05             | 54.00          | -4.95       |

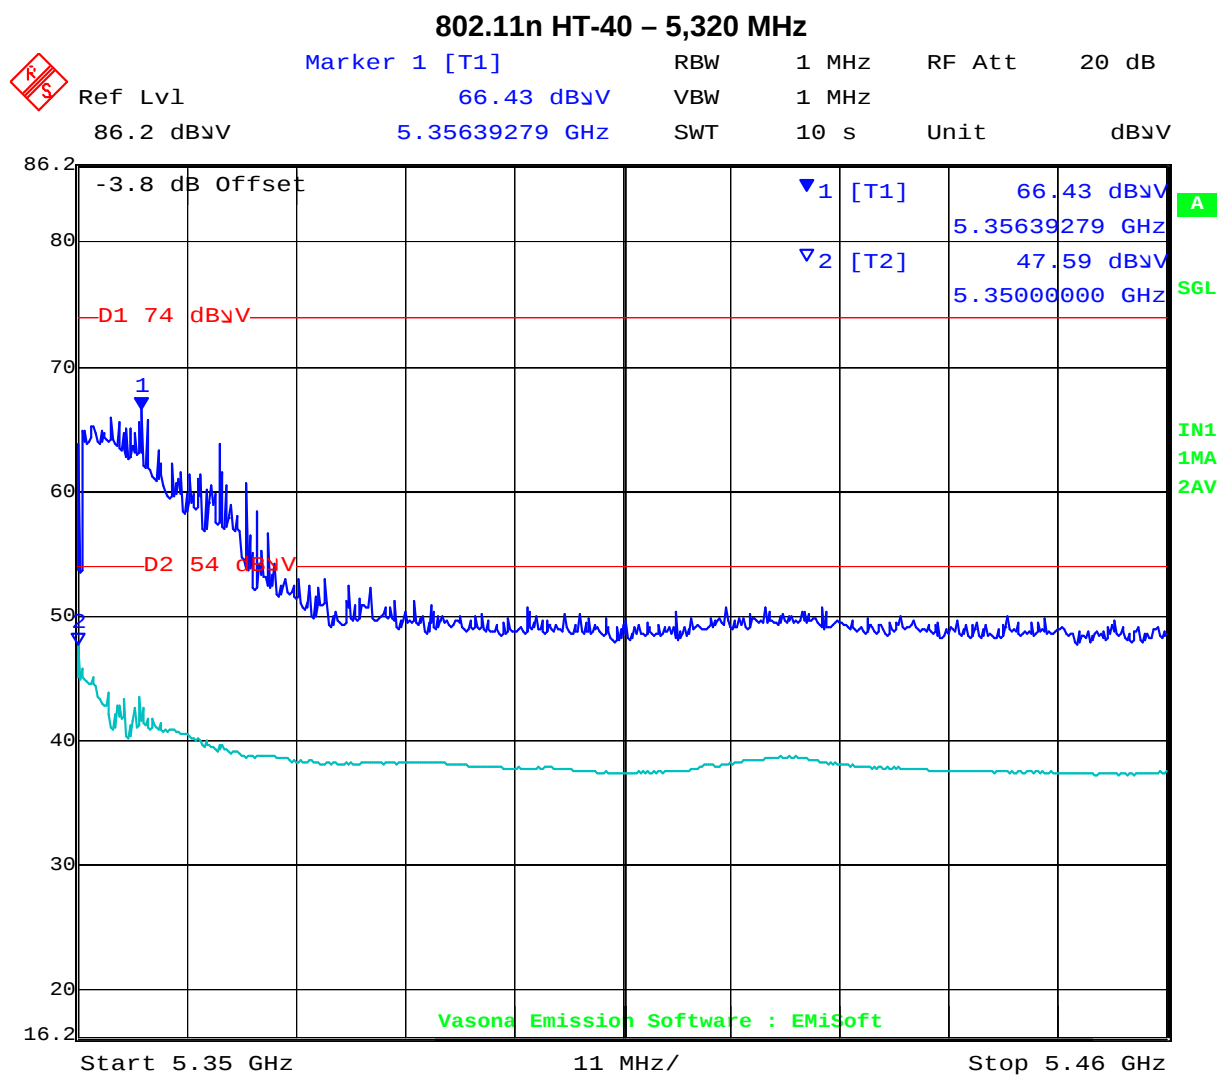

Date: 1.AUG.2008 14:11:18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Wistron 802.11 a/b/g/n Wireless Module  
To: FCC 47 CFR Part 15.407 & IC RSS-210  
Serial #: CBIS10-A4 Rev A  
Issue Date: 1st October 2008  
Page: 133 of 198

External antenna Upper Sub Band - 5,470 MHz to 5,725 MHz

TABLE OF RESULTS - 802.11n HT-40

| Tx Freq. (MHz)        | Restricted Band Frequency (MHz) | Measured (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------------|---------------------------------|-------------------|----------------|-------------|
| 5,500 <sub>PEAK</sub> | 5,460                           | 68.48             | 74.00          | -5.52       |
| 5,500 <sub>AVE</sub>  | 5,460                           | 49.26             | 54.00          | -4.74       |

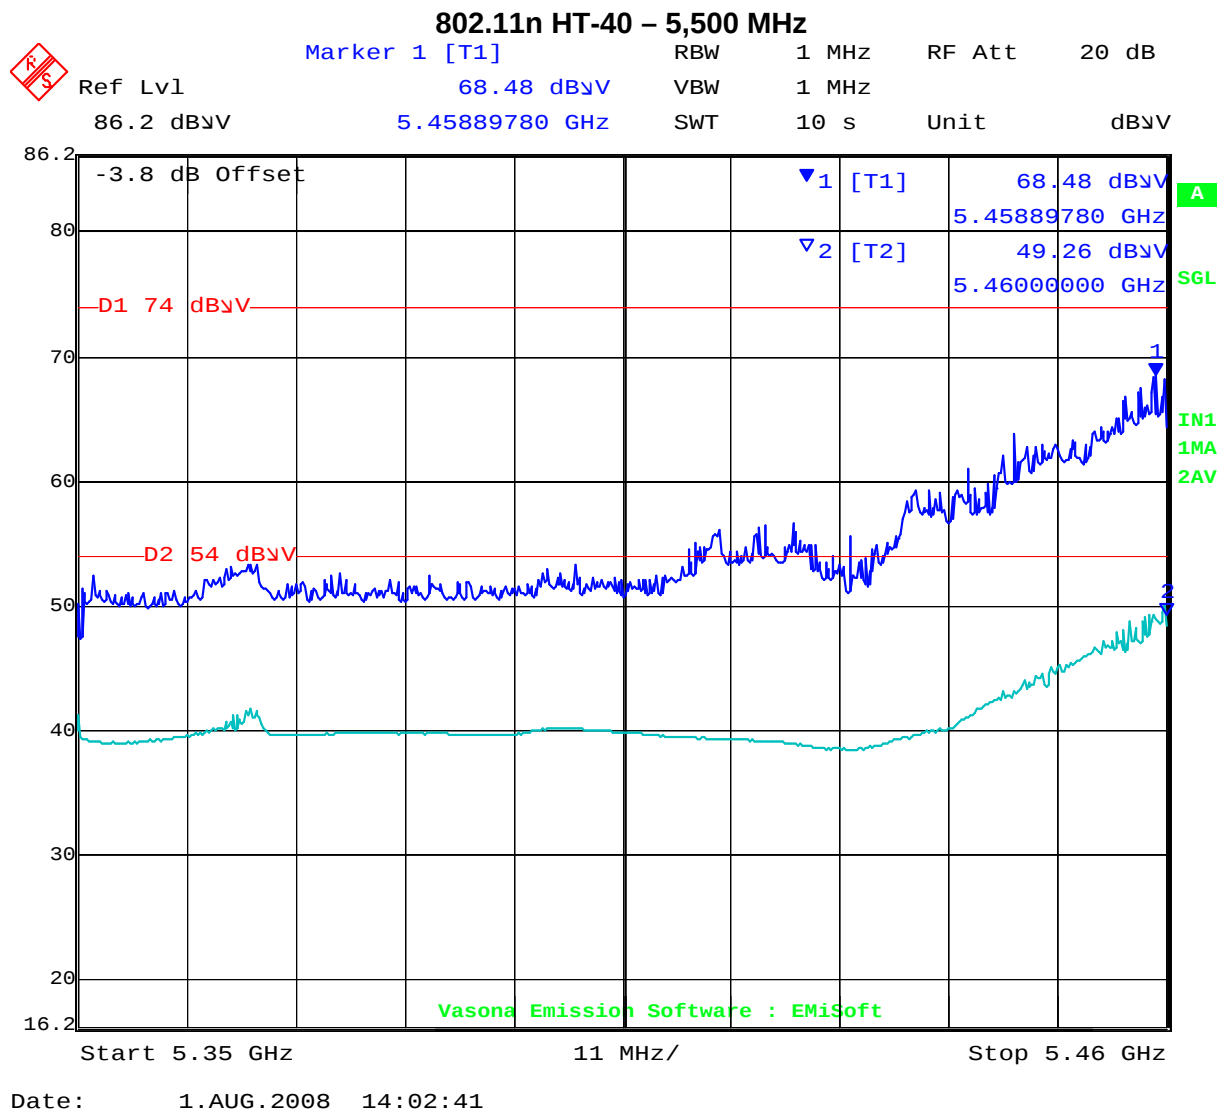

Note; No band edge measurements are required at the upper end of the 5,470 – 5,725 band.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 134 of 198


### 5.1.7.3. Peak Field Strength Measurements;

Lower sub-band 5,250 MHz to 5,350 MHz

**TABLE OF RESULTS - 802.11a Legacy – Integral Antenna**

| Tx Freq. (MHz) | Peak Field Strength (dBuV/m) |
|----------------|------------------------------|
| 5,260          | 115.17                       |
| 5,300          | 115.69                       |
| 5,320          | 115.45                       |

**802.11a Legacy – 5,260 MHz - Integral Antenna**  
**Lower Band Edge Peak Emission = 115.17 dBuV/m**

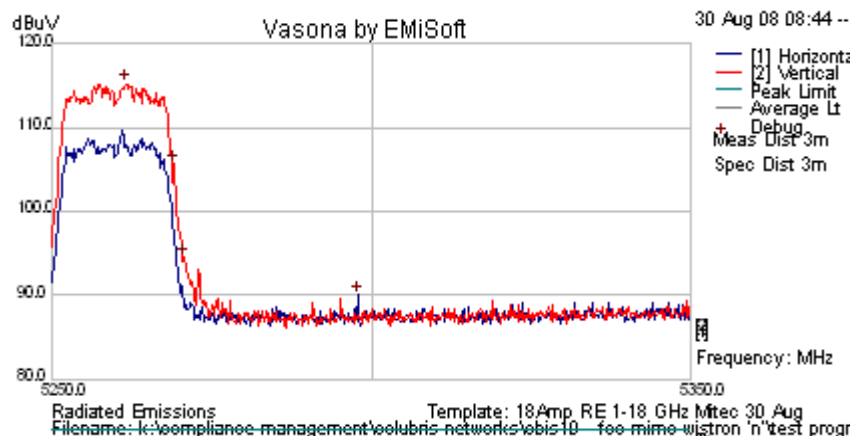


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 135 of 198

**802.11a Legacy – 5,300 MHz - Integral Antenna**  
**Lower Band Edge Peak Emission = 115.69 dB $\mu$ V/m**

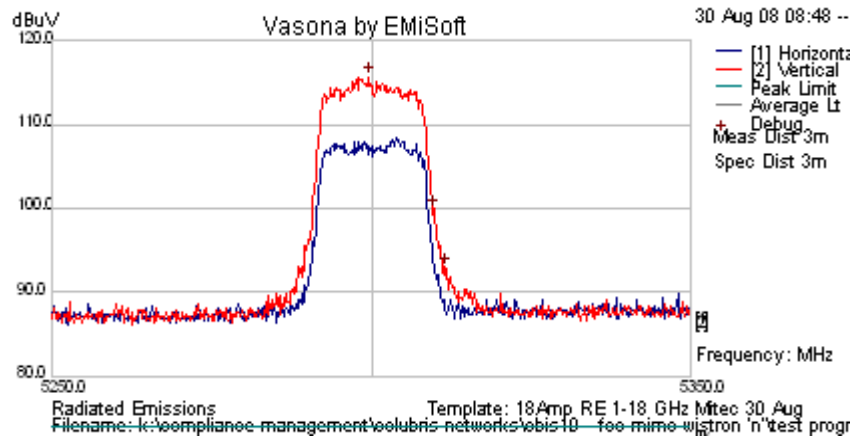

**802.11a Legacy – 5,320 MHz - Integral Antenna**  
**Lower Band Edge Peak Emission = 115.45 dB $\mu$ V/m**

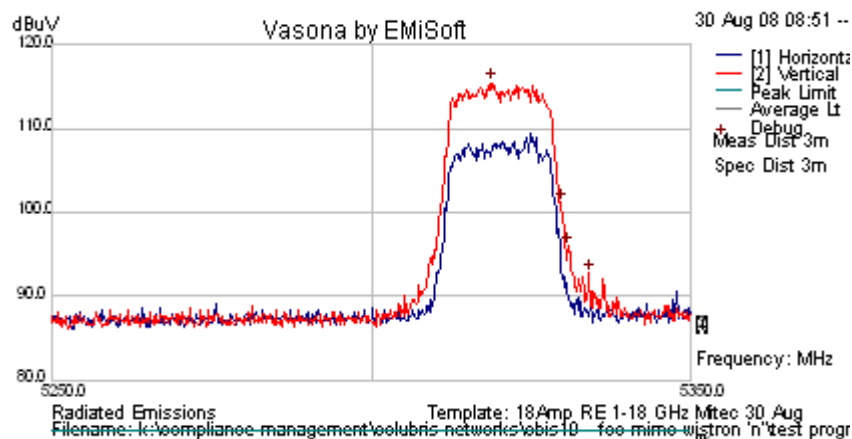

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 136 of 198

Lower sub-band 5,250 MHz to 5,350 MHz

TABLE OF RESULTS - 802.11a HT-20 – Integral Antenna

| Tx Freq. (MHz) | Peak Field Strength (dBuV/m) |
|----------------|------------------------------|
| 5,260          | 115.71                       |
| 5,300          | 115.61                       |
| 5,320          | 115.08                       |

802.11a HT-20 – 5,260 MHz - Integral Antenna  
Lower Band Edge Peak Emission = 115.71 dBuV/m

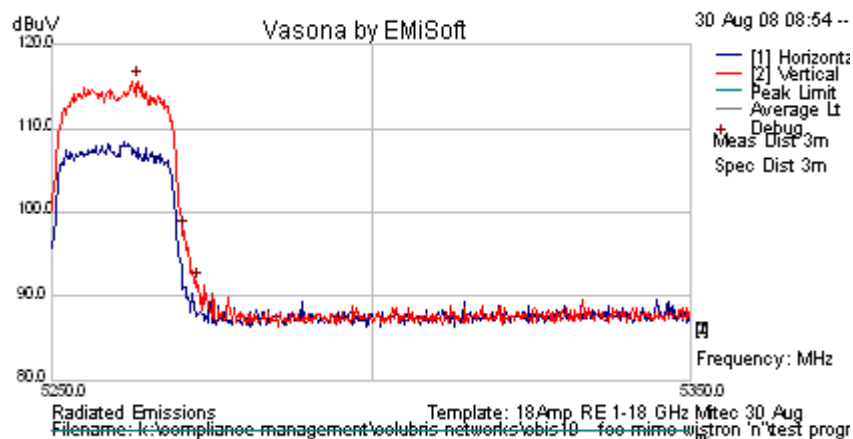


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 137 of 198

**802.11a HT-20 – 5,300 MHz - Integral Antenna**  
**Lower Band Edge Peak Emission = 115.61 dB $\mu$ V/m**

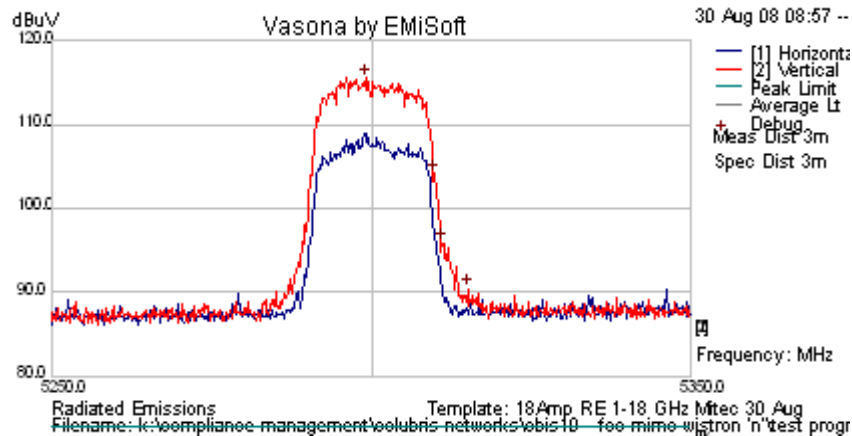

**802.11a HT-20 – 5,320 MHz - Integral Antenna**  
**Lower Band Edge Peak Emission = 115.08 dB $\mu$ V/m**

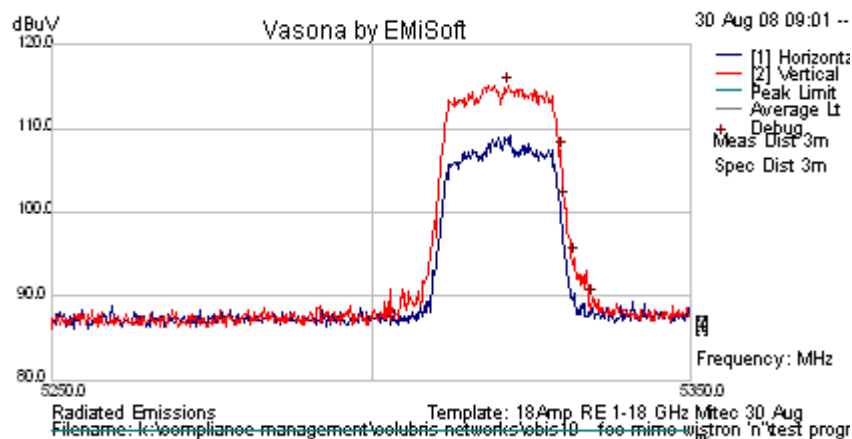

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 138 of 198

#### Lower sub-band 5,250 MHz to 5,350 MHz

#### TABLE OF RESULTS - 802.11a HT-40 – Integral Antenna

| Tx Freq. (MHz) | Peak Field Strength (dBuV/m) |
|----------------|------------------------------|
| 5,270          | 111.19                       |
| 5,310          | 110.91                       |

#### 802.11a HT-40 – 5,270 MHz - Integral Antenna Lower Band Edge Peak Emission = 111.19 dBuV/m

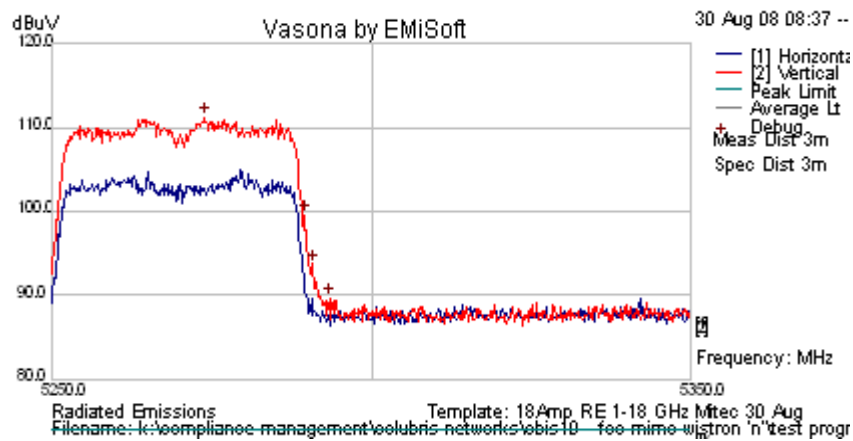


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 139 of 198

**802.11a HT-40 – 5,310 MHz - Integral Antenna**  
**Lower Band Edge Peak Emission = 110.91 dBμV/m**

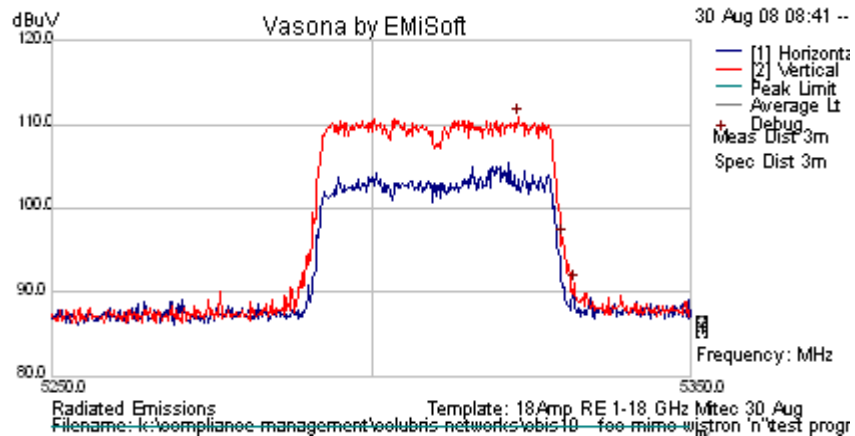

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 140 of 198

Lower sub-band 5,470 MHz to 5,725 MHz

TABLE OF RESULTS - 802.11a Legacy – Integral Antenna

| Tx Freq. (MHz) | Peak Field Strength (dBuV/m) |
|----------------|------------------------------|
| 5,500          | 114.98                       |
| 5,600          | 113.90                       |
| 5,700          | 113.46                       |

802.11a Legacy – 5,500 MHz - Integral Antenna  
Lower Band Edge Peak Emission = 114.98 dBuV/m

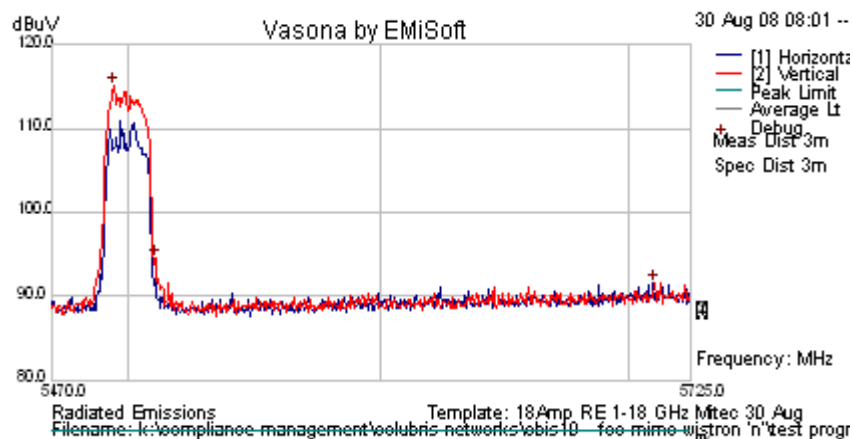


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 141 of 198

**802.11a Legacy – 5,600 MHz - Integral Antenna**  
**Lower Band Edge Peak Emission = 113.90 dB $\mu$ V/m**

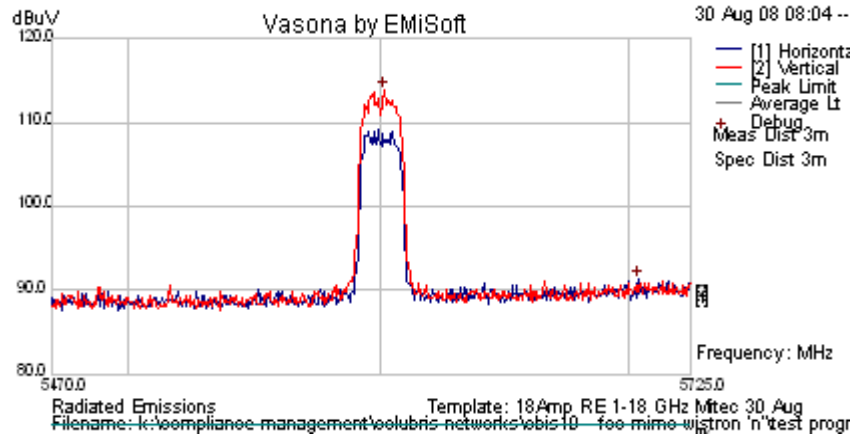

**802.11a Legacy – 5,700 MHz - Integral Antenna**  
**Lower Band Edge Peak Emission = 113.46 dB $\mu$ V/m**

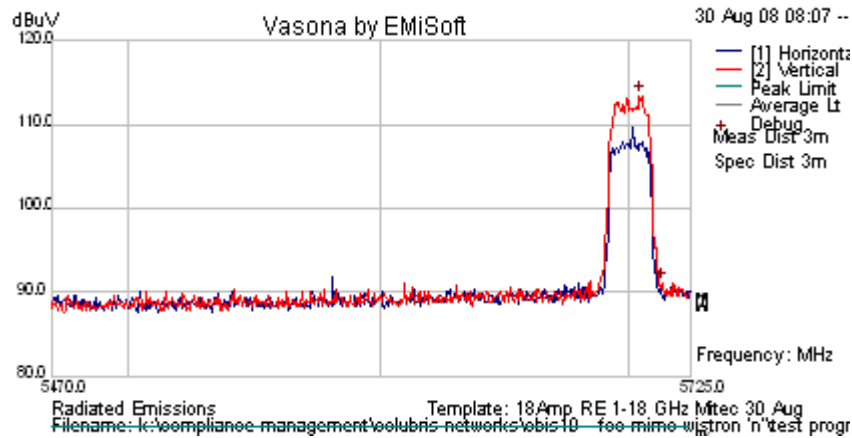

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 142 of 198

Lower sub-band 5,470 MHz to 5,725 MHz

TABLE OF RESULTS - 802.11a HT-20 – Integral Antenna

| Tx Freq. (MHz) | Peak Field Strength (dBuV/m) |
|----------------|------------------------------|
| 5,500          | 115.55                       |
| 5,600          | 114.06                       |
| 5,700          | 112.78                       |

802.11a HT-20 – 5,500 MHz - Integral Antenna  
Lower Band Edge Peak Emission = 115.55 dBuV/m

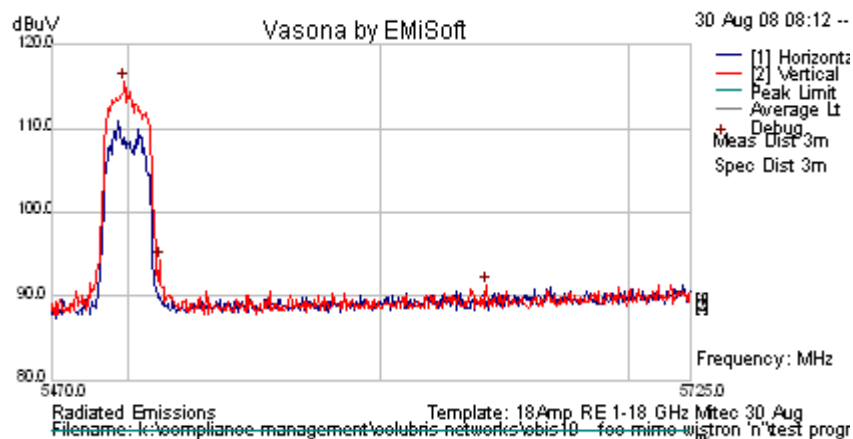


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 143 of 198

**802.11a HT-20 – 5,600 MHz - Integral Antenna**  
**Lower Band Edge Peak Emission = 114.06 dB $\mu$ V/m**

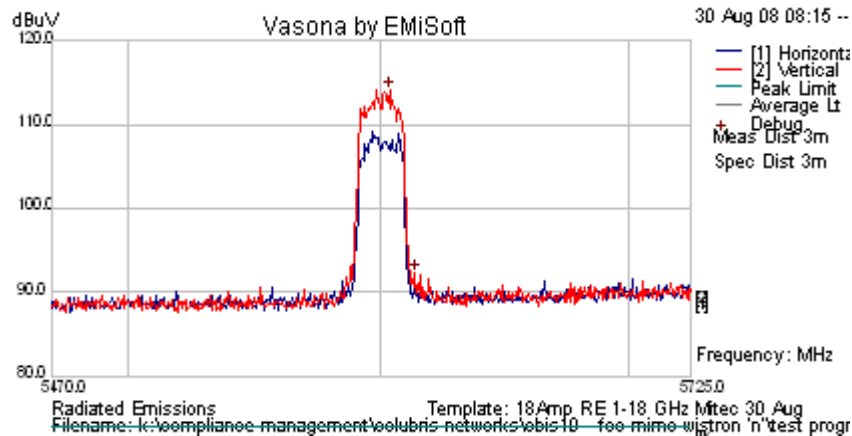

**802.11a HT-20 – 5,700 MHz - Integral Antenna**  
**Lower Band Edge Peak Emission = 112.78 dB $\mu$ V/m**

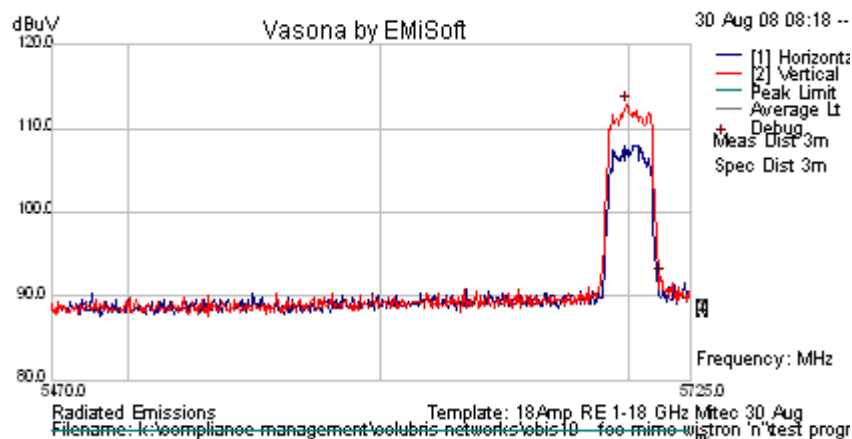

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 144 of 198

Lower sub-band 5,470 MHz to 5,725 MHz

**TABLE OF RESULTS - 802.11a HT-40 – Integral Antenna**

| Tx Freq. (MHz) | Peak Field Strength (dBuV/m) |
|----------------|------------------------------|
| 5,510          | 110.30                       |
| 5,620          | 109.02                       |
| 5,690          | 108.54                       |

**802.11a HT-40 – 5,510 MHz - Integral Antenna**  
**Lower Band Edge Peak Emission = 110.30 dBuV/m**

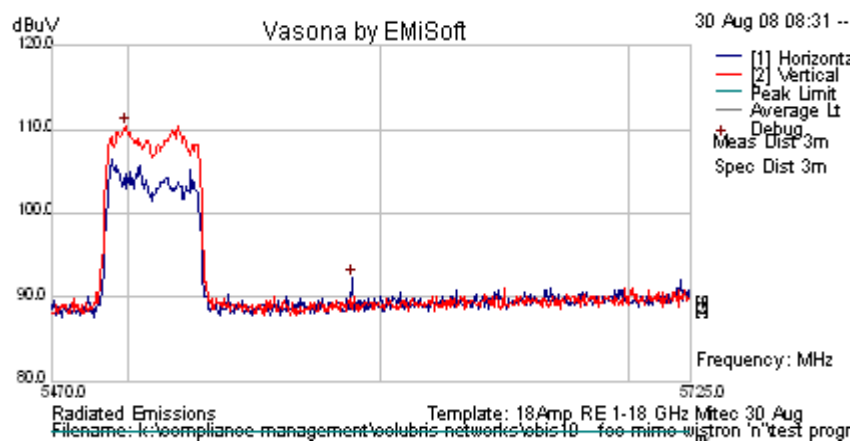


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 145 of 198

**802.11a HT-40 – 5,620 MHz - Integral Antenna**  
**Lower Band Edge Peak Emission = 109.02 dB $\mu$ V/m**

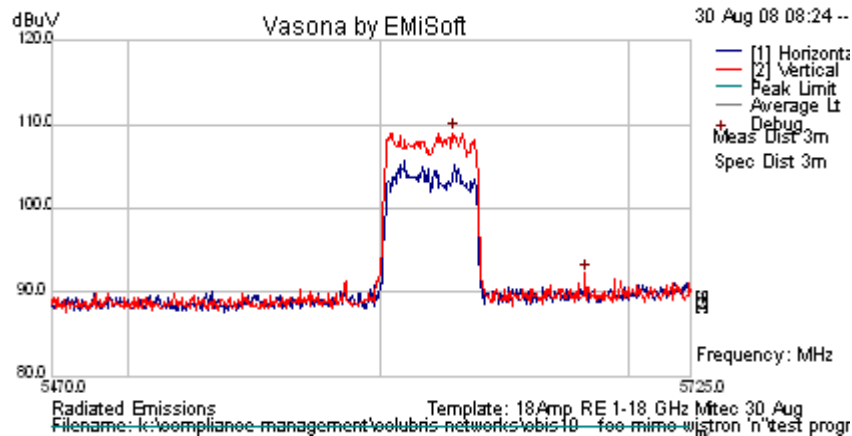

**802.11a HT-40 – 5,690 MHz - Integral Antenna**  
**Lower Band Edge Peak Emission = 108.54 dB $\mu$ V/m**

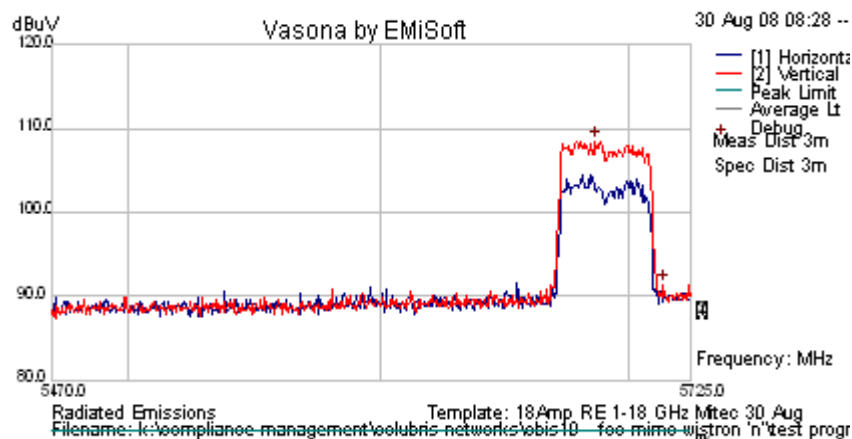

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 146 of 198

Lower sub-band 5,250 MHz to 5,350 MHz

**TABLE OF RESULTS - 802.11a Legacy – External Antenna**

| Tx Freq. (MHz) | Peak Field Strength (dBuV/m) |
|----------------|------------------------------|
| 5,260          | 112.40                       |
| 5,300          | 112.99                       |
| 5,320          | 112.08                       |

**802.11a Legacy – 5,260 MHz - External Antenna**  
**Lower Band Edge Peak Emission = 112.40 dBuV/m**

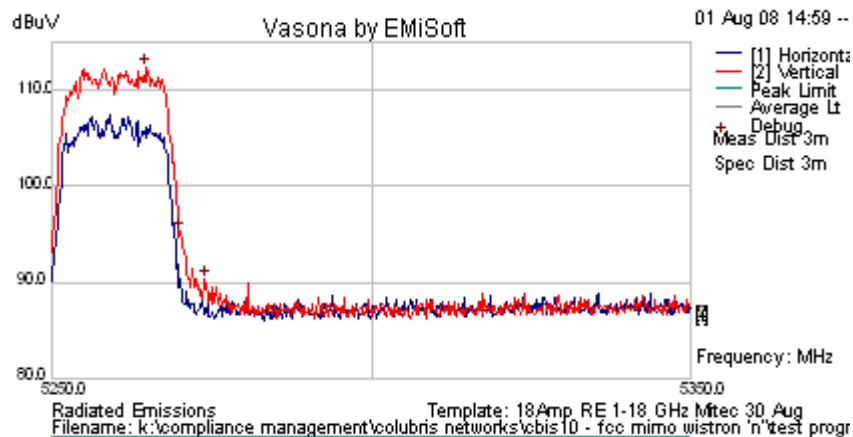


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 147 of 198

**802.11a Legacy – 5,300 MHz - External Antenna**  
**Lower Band Edge Peak Emission = 112.99 dB $\mu$ V/m**

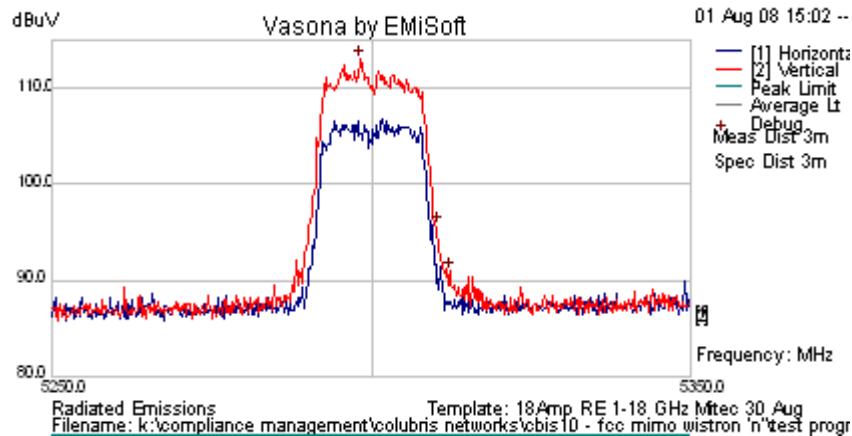

**802.11a Legacy – 5,320 MHz - External Antenna**  
**Lower Band Edge Peak Emission = 112.08 dB $\mu$ V/m**

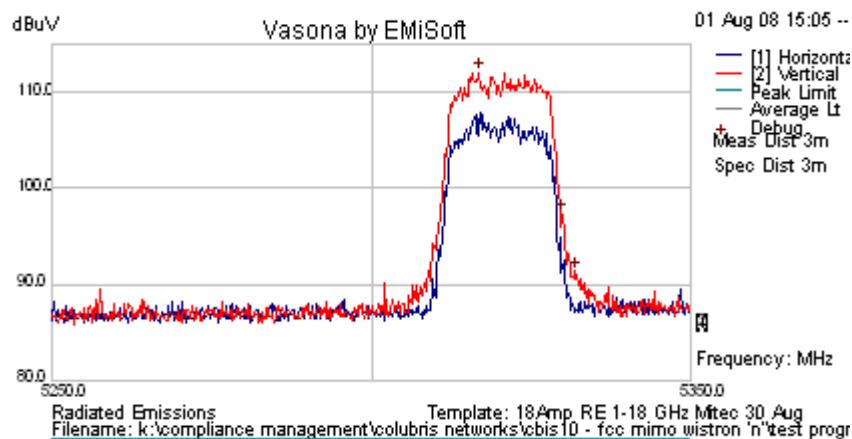

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 148 of 198

Lower sub-band 5,250 MHz to 5,350 MHz

TABLE OF RESULTS - 802.11a HT-20 – External Antenna

| Tx Freq. (MHz) | Peak Field Strength (dBuV/m) |
|----------------|------------------------------|
| 5,260          | 112.61                       |
| 5,300          | 112.39                       |
| 5,320          | 112.22                       |

802.11a HT-20 – 5,260 MHz - External Antenna  
Lower Band Edge Peak Emission = 112.61 dBuV/m

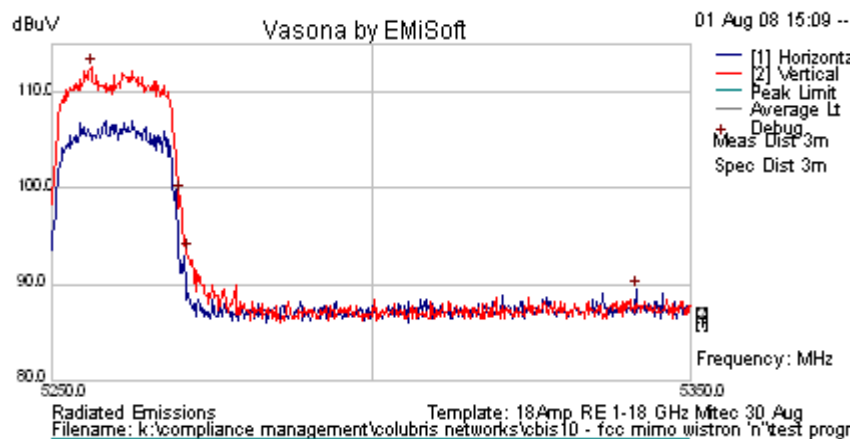


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 149 of 198

**802.11a HT-20 – 5,300 MHz - External Antenna**  
**Lower Band Edge Peak Emission = 112.39 dB $\mu$ V/m**

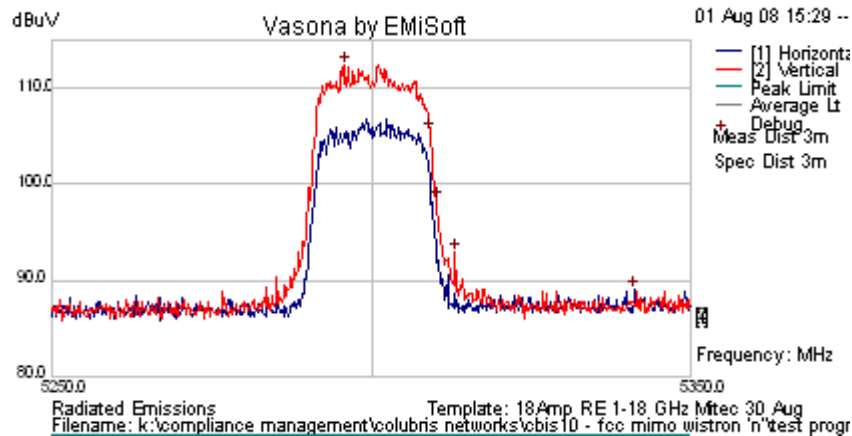

**802.11a HT-20 – 5,320 MHz - External Antenna**  
**Lower Band Edge Peak Emission = 112.22 dB $\mu$ V/m**

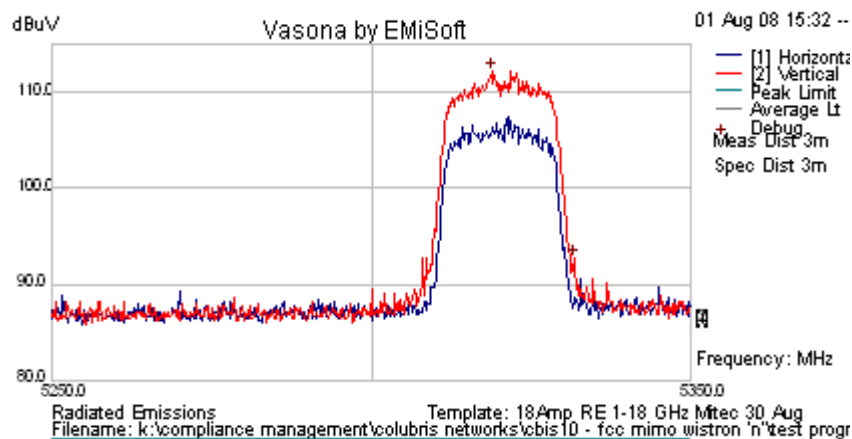

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 150 of 198

#### Lower sub-band 5,250 MHz to 5,350 MHz


**TABLE OF RESULTS - 802.11a HT-40 – External Antenna**

| Tx Freq. (MHz) | Peak Field Strength (dBuV/m) |
|----------------|------------------------------|
| 5,270          | 109.06                       |
| 5,310          | 107.56                       |

#### 802.11a HT-40 – 5,270 MHz - External Antenna Lower Band Edge Peak Emission = 109.06 dBuV/m

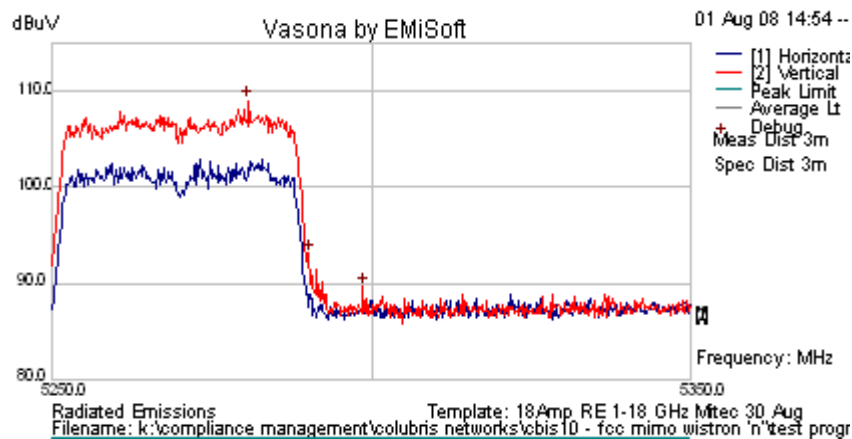

#### 802.11a HT-40 – 5,310 MHz - External Antenna Lower Band Edge Peak Emission = 107.56 dBuV/m

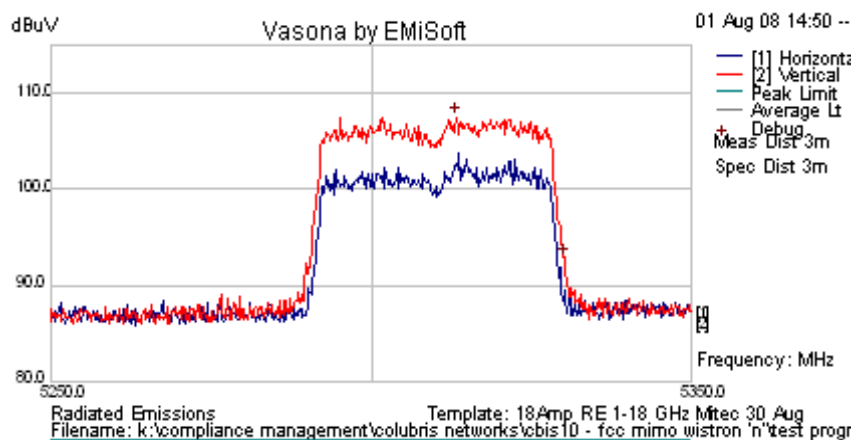

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 151 of 198

Lower sub-band 5,470 MHz to 5,725 MHz

TABLE OF RESULTS - 802.11a Legacy – External Antenna

| Tx Freq. (MHz) | Peak Field Strength (dBuV/m) |
|----------------|------------------------------|
| 5,500          | 112.99                       |
| 5,600          | 113.33                       |
| 5,700          | 113.23                       |

802.11a Legacy – 5,500 MHz - External Antenna  
Lower Band Edge Peak Emission = 112.99 dBuV/m

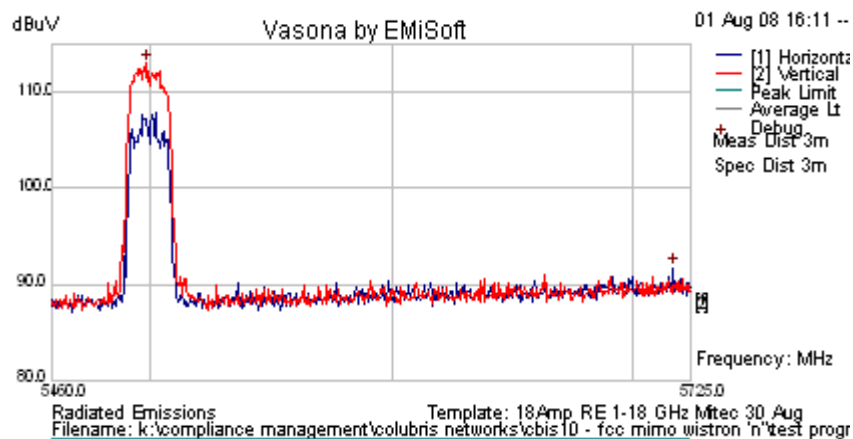


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 152 of 198

**802.11a Legacy – 5,600 MHz - External Antenna**  
**Lower Band Edge Peak Emission = 113.33 dB $\mu$ V/m**

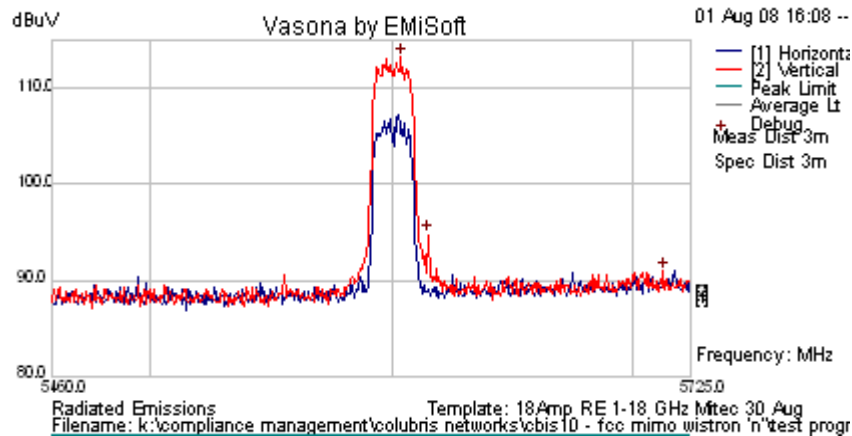

**802.11a Legacy – 5,700 MHz - External Antenna**  
**Lower Band Edge Peak Emission = 113.23 dB $\mu$ V/m**

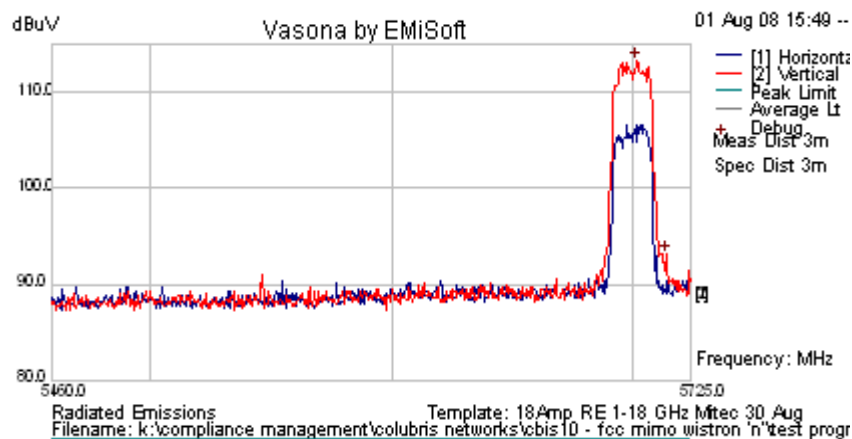

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 153 of 198

Lower sub-band 5,470 MHz to 5,725 MHz

TABLE OF RESULTS - 802.11a HT-20 – External Antenna

| Tx Freq. (MHz) | Peak Field Strength (dBuV/m) |
|----------------|------------------------------|
| 5,500          | 112.34                       |
| 5,600          | 113.05                       |
| 5,700          | 113.34                       |

802.11a HT-20 – 5,500 MHz - External Antenna  
Lower Band Edge Peak Emission = 112.34 dBuV/m

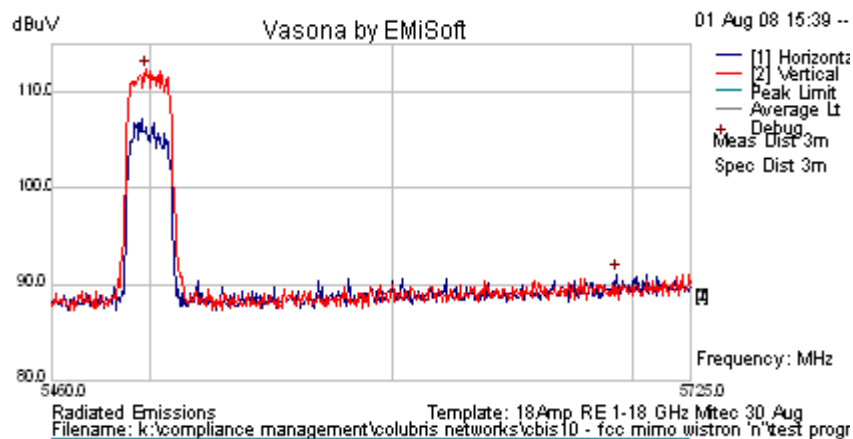


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 154 of 198

**802.11a HT-20 – 5,600 MHz - External Antenna**  
**Lower Band Edge Peak Emission = 113.05 dB $\mu$ V/m**

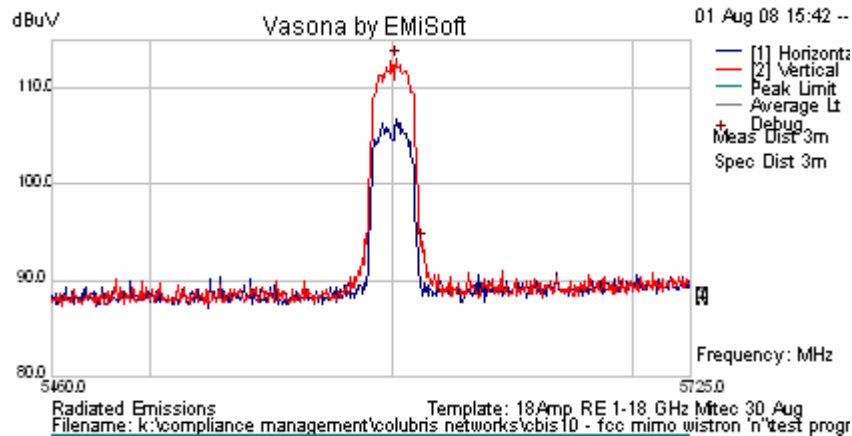

**802.11a HT-20 – 5,700 MHz - External Antenna**  
**Lower Band Edge Peak Emission = 113.34 dB $\mu$ V/m**

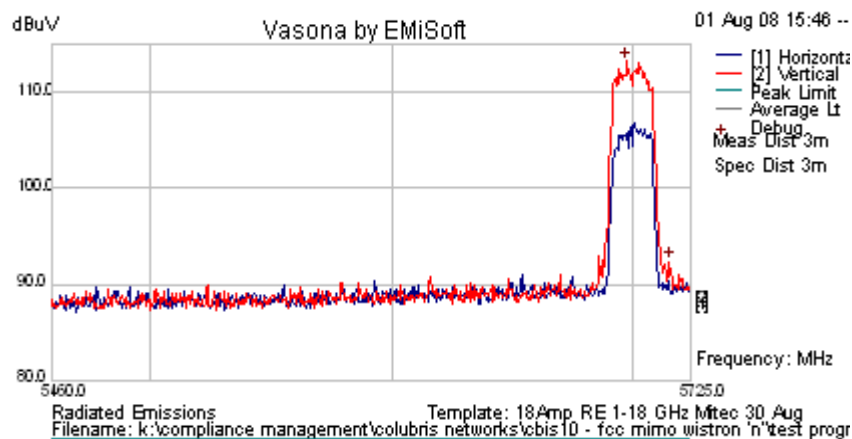

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 155 of 198

Lower sub-band 5,470 MHz to 5,725 MHz

TABLE OF RESULTS - 802.11a HT-40 – External Antenna

| Tx Freq. (MHz) | Peak Field Strength (dBuV/m) |
|----------------|------------------------------|
| 5,510          | 108.38                       |
| 5,620          | 109.58                       |
| 5,690          | 109.04                       |

802.11a HT-40 – 5,510 MHz - External Antenna  
Lower Band Edge Peak Emission = 108.38 dB $\mu$ V/m

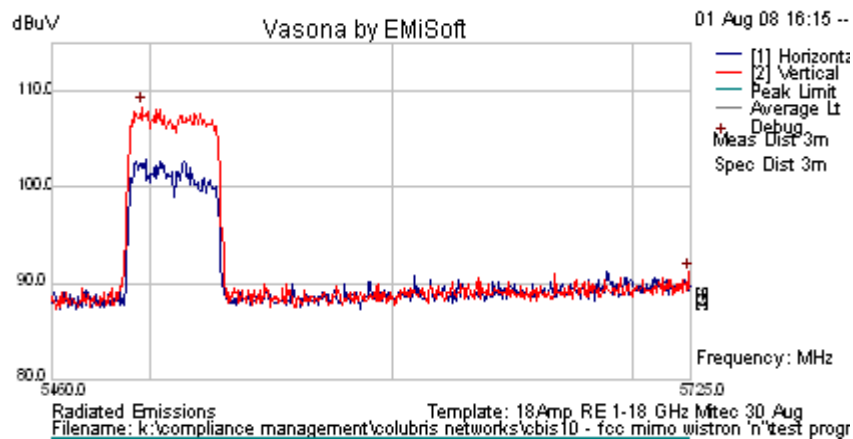


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 156 of 198

**802.11a HT-40 – 5,620 MHz - External Antenna**  
**Lower Band Edge Peak Emission = 109.58 dB $\mu$ V/m**

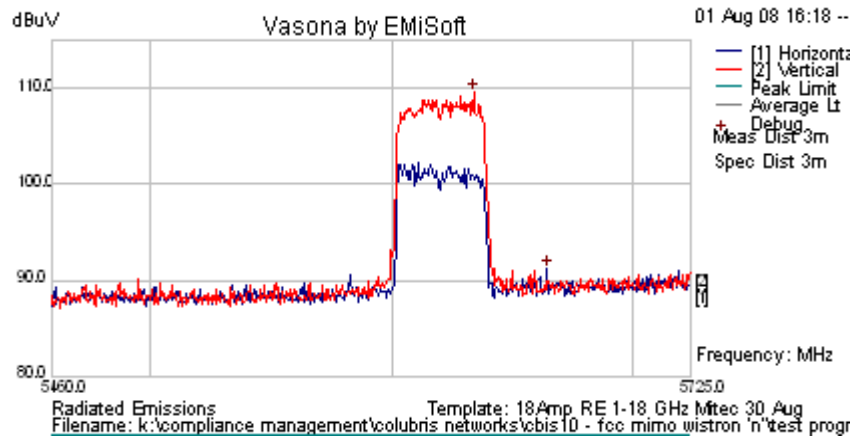

**802.11a HT-40 – 5,690 MHz - External Antenna**  
**Lower Band Edge Peak Emission = 109.54 dB $\mu$ V/m**

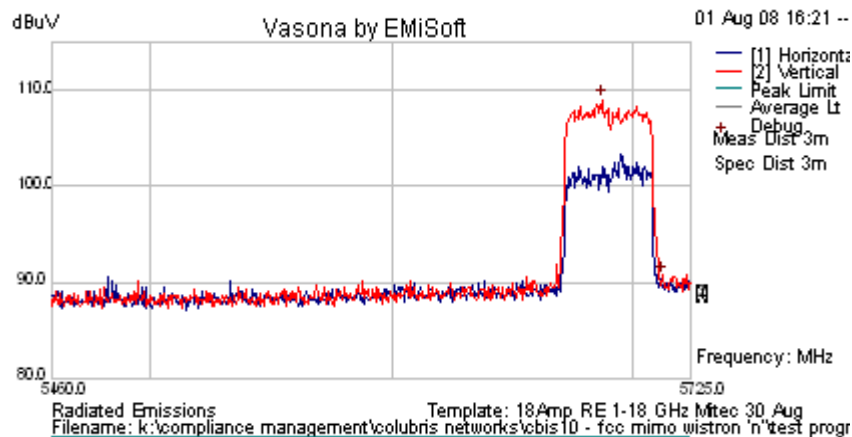

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 157 of 198

## Specification

### Limits

**15.407 (b)(2).** All emissions outside of the 5,150-5,350MHz band shall not exceed an EIRP of -27dBm/MHz.

**§15.205 (a)** Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

**§15.205 (a)** Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**§15.209 (a)** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

**RSS-210 §A9.3(2)** For transmitters operating in the 5250-5350 MHz band, all emissions outside the 5150-5350 MHz band shall not exceed -27 dBm/MHz e.i.r.p. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band shall not exceed out of band emission limit of 27 dBm/MHz e.i.r.p. in the 5150-5250 MHz band in order to operate indoor/outdoor, or alternatively shall comply with the spectral power density for operation within the 5150-5250 MHz band and shall be labeled "for indoor use only".

**RSS-Gen §4.7** The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate of carrier frequency), or from 30 MHz, whichever is the lowest frequency, to the 5<sup>th</sup> harmonic of the highest frequency generated without exceeding 40 GHz.

#### **RSS-Gen §6** Receiver Spurious Emission Standard

If a radiated measurement is made, all spurious emissions shall comply with the limits of the following Table. The resolution bandwidth of the spectrum analyzer shall be 100 kHz for spurious emission measurements below 1.0 GHz and 1.0 MHz for measurements above 1.0 GHz

#### **§15.209 (a)** Limit Matrix

| Frequency(MHz) | Field Strength<br>( $\mu$ V/m) | Field Strength<br>(dB $\mu$ V/m) | Measurement Distance<br>(meters) |
|----------------|--------------------------------|----------------------------------|----------------------------------|
| 30-88          | 100                            | 40.0                             | 3                                |
| 88-216         | 150                            | 43.5                             | 3                                |
| 216-960        | 200                            | 46.0                             | 3                                |
| Above 960      | 500                            | 54.0                             | 3                                |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 158 of 198

---

#### Laboratory Measurement Uncertainty for Radiated Emissions

|                         |               |
|-------------------------|---------------|
| Measurement uncertainty | +5.6/ -4.5 dB |
|-------------------------|---------------|

#### Traceability

| Method                                                                                | Test Equipment Used                            |
|---------------------------------------------------------------------------------------|------------------------------------------------|
| Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions' | 0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312 |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

#### 5.1.7.4. Receiver Radiated Spurious Emissions (above 1 GHz)

##### Industry Canada RSS-Gen §4.8, §6


##### Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

All Sectors of the EUT were tested simultaneously

##### Test Measurement Set up

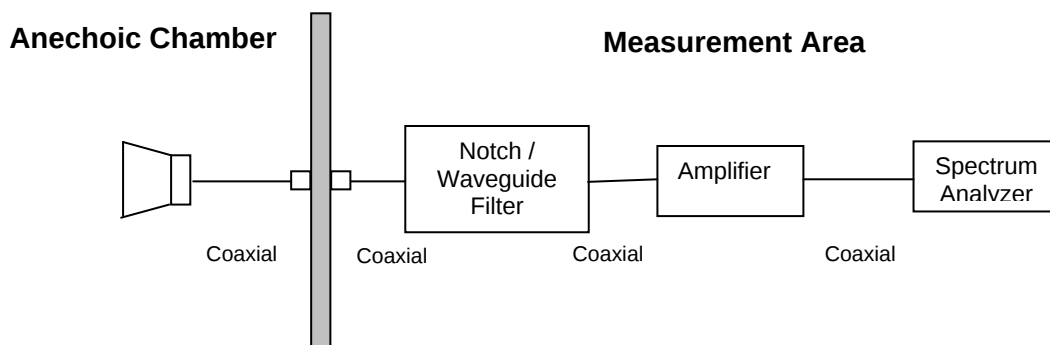

Measurement set up for Radiated Emission Test

##### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 160 of 198

---

For example:

Given receiver input reading of 51.5 dB $\mu$ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu V/m))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

Section 5.1.6.1 Transmitter Spurious above 1 GHz identifies that emissions peaking above 54 dB $\mu$ V/m emanate from the EUT and not transmitted through the antenna port. These (1 – 3.5 GHz) emissions were formally measured and characterized and are not considered when examining Receiver Radiated Spurious above 1 GHz.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 161 of 198


## Receiver Radiated Spurious Emissions above 1 GHz

Test Setup – Integral Antenna, 5300 MHz, all modes Legacy, HT-20, HT-40.

### TABLE OF RESULTS –

| Freq. (MHz) | Pol. (H/V) | Raw Reading (dB $\mu$ V/m) | Correction Factor (dB) | Corrected Field Strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-------------|------------|----------------------------|------------------------|-----------------------------------------|----------------------|-------------|
|             |            |                            |                        |                                         |                      |             |

### Channel 5300 MHz Receiver Radiated Emissions

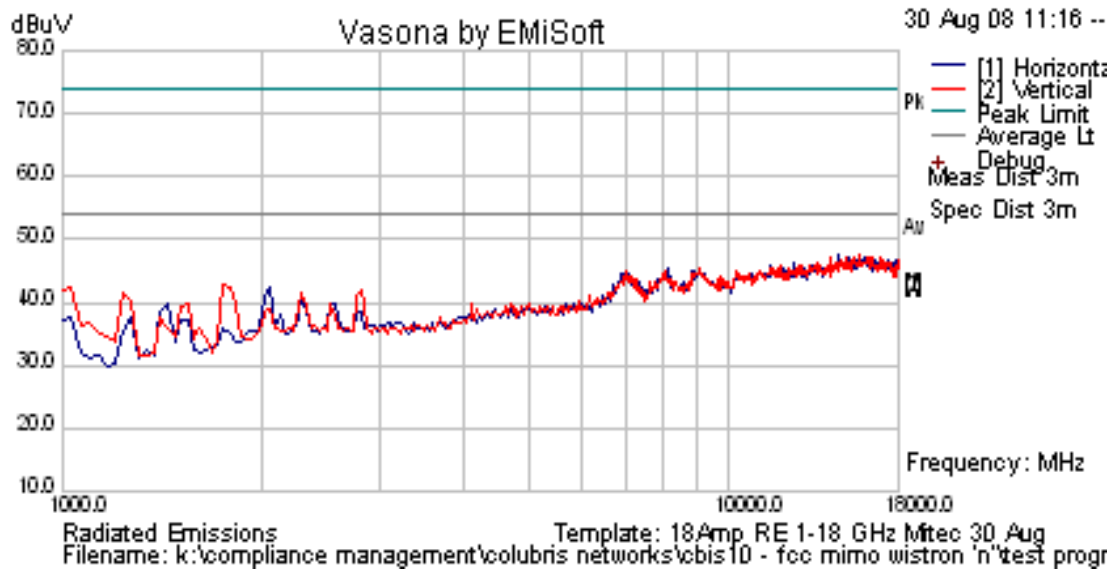

No receiver emissions were observed.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 162 of 198

## Receiver Radiated Spurious Emissions above 1 GHz

Test Setup – Integral Antenna, 5600 MHz, all modes Legacy, HT-20, HT-40.

### TABLE OF RESULTS –

| Freq.<br>(MHz) | Pol.<br>(H/V) | Raw<br>Reading<br>(dB $\mu$ V/m) | Correction<br>Factor<br>(dB) | Corrected<br>Field Strength<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|----------------|---------------|----------------------------------|------------------------------|-----------------------------------------------|-------------------------|----------------|
|                |               |                                  |                              |                                               |                         |                |

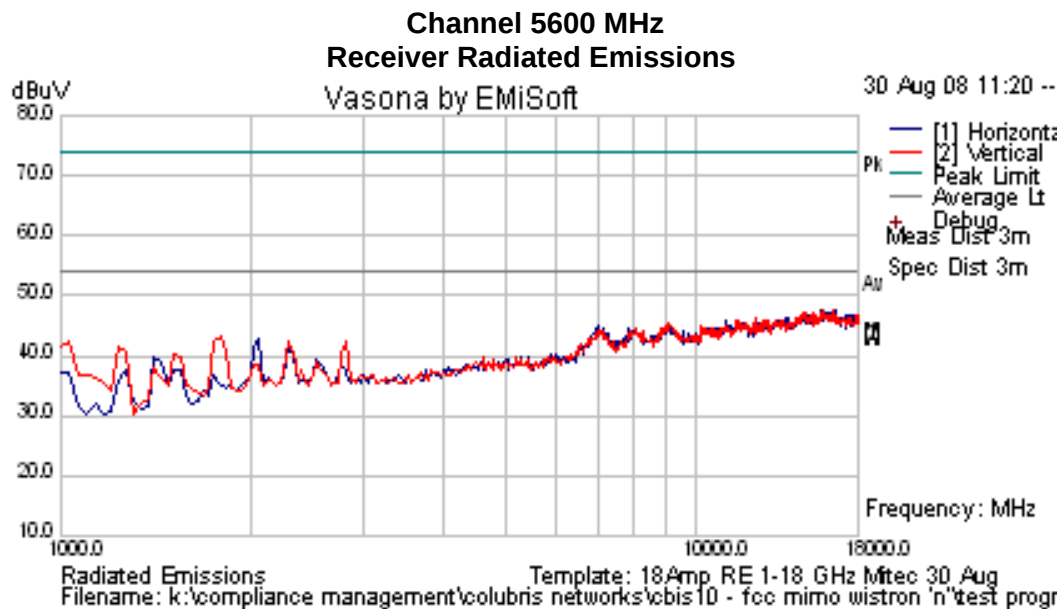

No receiver emissions were observed.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 163 of 198

## Specification

### Receiver Radiated Spurious Emissions

#### Industry Canada RSS-Gen §4.8,

The search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (e.g. local oscillator, intermediate or carrier frequency), or 30 MHz, whichever is the higher, to at least 3 times the highest tunable or local oscillator frequency, whichever is the higher, without exceeding 40 GHz.

#### RSS-Gen §6

The following receiver spurious emission limits shall be complied with;

(a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 1.

| Frequency<br>(MHz) | Field Strength<br>( $\mu$ V/m) | Field Strength<br>(dB $\mu$ V/m) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------|----------------------------------|----------------------------------|
| 30-88              | 100                            | 40.0                             | 3                                |
| 88-216             | 150                            | 43.5                             | 3                                |
| 216-960            | 200                            | 46.0                             | 3                                |
| Above 960          | 500                            | 54.0                             | 3                                |

### Laboratory Measurement Uncertainty for Radiated Emissions

|                         |               |
|-------------------------|---------------|
| Measurement uncertainty | +5.6/ -4.5 dB |
|-------------------------|---------------|

### Traceability

| Method                                                                                | Test Equipment Used                            |
|---------------------------------------------------------------------------------------|------------------------------------------------|
| Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions' | 0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 164 of 198

---

#### **5.1.7.5. Radiated Spurious Emissions (30M-1 GHz)**

**FCC, Part 15 Subpart C §15.407(b)(6); §15.205(a); §15.209(a)**  
**Industry Canada RSS-210 §2.2**

The test results are reported in test report number "EMC Test Report NKR-DNMA83 FEE.pdf"

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 165 of 198

---

**5.1.8. AC Wireline Conducted Emissions (150 kHz – 30 MHz)**

**FCC, Part 15 Subpart C §15.407(b)(6)/15.207**

**Industry Canada RSS-Gen §7.2.2**

The test results are reported in report number "EMC Test Report NKR-DNMA83 FEE.pdf"

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 166 of 198

## 6. Dynamic Frequency Selection (DFS)

### 6.1. Test Procedure and Setup

FCC, Part 15 Subpart C §15.407(h)  
FCC 06-96 Memorandum Opinion and Order  
Industry Canada RSS-210 A9.4

#### 6.1.1. Interference Threshold values, Master or Client incorporating In-Service Monitoring

| Maximum Transmit Power                                                                  | Value<br>(see note) |
|-----------------------------------------------------------------------------------------|---------------------|
| ≥ 200 milliwatt                                                                         | -64 dBm             |
| < 200 milliwatt                                                                         | -62 dBm             |
| Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna |                     |

#### 6.1.2. DFS Response requirement values

| Parameter                                | Value                                                                                                     |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| <i>Non-occupancy period</i>              | Minimum 30 minutes                                                                                        |
| <i>Channel Availability Check Time</i>   | 60 seconds                                                                                                |
| <i>Channel Move Time</i>                 | 10 seconds<br>See Note 1.                                                                                 |
| <i>Channel Closing Transmission Time</i> | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period.<br>See Notes 1 and 2. |
| <i>U-NII Detection Bandwidth</i>         | Minimum 80% of the 99% power bandwidth See Note 3.                                                        |

Note 1: The instant that the *Channel Move Time* and the *Channel Closing Transmission Time* begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the *Burst*.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar *Burst* generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate *Channel* changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.



### 6.1.3. Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

#### Short Pulse Radar Test Waveforms

| Radar Type                  | Pulse Width (μsec) | PRI (μsec) | Number of Pulses | Minimum Percentage of Successful Detection | Minimum Trials |
|-----------------------------|--------------------|------------|------------------|--------------------------------------------|----------------|
| 1                           | 1                  | 1428       | 18               | 60%                                        | 30             |
| 2                           | 1-5                | 150-230    | 23-29            | 60%                                        | 30             |
| 3                           | 6-10               | 200-500    | 16-18            | 60%                                        | 30             |
| 4                           | 11-20              | 200-500    | 12-16            | 60%                                        | 30             |
| Aggregate (Radar Types 1-4) |                    |            |                  | 80%                                        | 120            |

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

#### Long Pulse Radar Test Waveform

| Radar Type | Pulse Width (μsec) | Chirp Width (MHz) | PRI (μsec) | Number of Pulses per Burst | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Trials |
|------------|--------------------|-------------------|------------|----------------------------|------------------|--------------------------------------------|----------------|
| 5          | 50-100             | 5-20              | 1000-2000  | 1-3                        | 8-20             | 80%                                        | 30             |

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse radar test signal. If more than 30 waveforms are used for the Long Pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 168 of 198

---


Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 *Bursts* in the 12 second period, with the number of *Bursts* being randomly chosen. This number is *Burst Count*.
- 3) Each *Burst* consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each *Burst* within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a *Burst* will have the same pulse width. Pulses in different *Bursts* may have different pulse widths.
- 5) Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a *Burst* will have the same chirp width. Pulses in different *Bursts* may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a *Burst*, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a *Burst*, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to *Burst\_Count*. Each interval is of length  $(12,000,000 / \textit{Burst\_Count})$  microseconds. Each interval contains one *Burst*. The start time for the *Burst*, relative to the beginning of the interval, is between 1 and  $[(12,000,000 / \textit{Burst\_Count}) - (\textit{Total Burst Length}) + (\textit{One Random PRI Interval})]$  microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each *Burst* is chosen independently.

**A representative example of a Long Pulse radar test waveform:**

- 1) The total test signal length is 12 seconds.
- 2) 8 *Bursts* are randomly generated for the *Burst\_Count*.
- 3) *Burst* 1 has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) *Bursts* 2 through 8 are generated using steps 3 – 5.
- 7) Each *Burst* is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, *Burst* 1 is randomly generated (1 to 1,500,000 minus the total *Burst* 1 length + 1 random PRI interval) at the 325,001 microsecond step. *Bursts* 2 through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. *Burst* 2 falls in the 1,500,001 – 3,000,000 microsecond range).

**Graphical representation of the Long Pulse radar Test Waveform.**

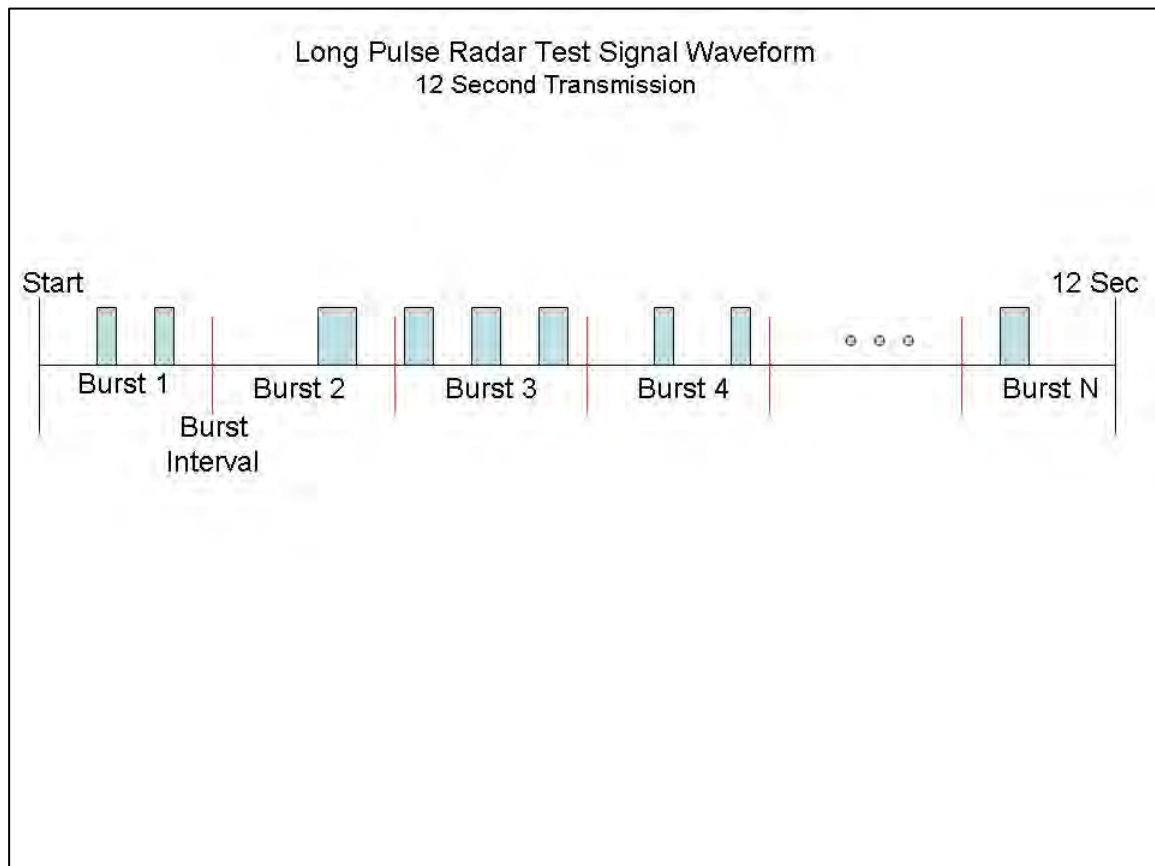

#### 6.1.4. Frequency Hopping Radar Test Waveform

**Frequency Hopping Radar Test Waveform**


| Radar Type | Pulse Width (μsec) | PRI (μsec) | Pulses per Hop | Hopping Rate (kHz) | Hopping Sequence Length (msec) | Minimum Percentage of Successful Detection | Minimum Trials |
|------------|--------------------|------------|----------------|--------------------|--------------------------------|--------------------------------------------|----------------|
| 6          | 1                  | 333        | 9              | .333               | 300                            | 70%                                        | 30             |

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

#### 6.1.5. Radar Waveform Calibration

The following equipment setup was used to calibrate the conducted Radar Waveform. A spectrum analyzer was used to establish the test signal level for each radar type. During this process there were no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) mode at the frequency of the Radar Waveform generator. Peak detection was utilized. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz.


The signal generator amplitude was set so that the power level measured at the spectrum analyzer was -61dBm (Ref Section 5.1). The 30dB amplifier gain was entered as an amplitude offset on the spectrum analyzer.

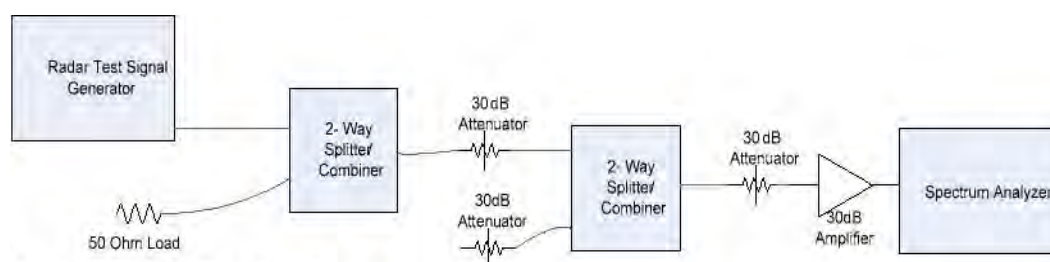

**Conducted Calibration Setup**

#### 6.1.6. Test Set Up:

##### Block Diagram(s) of Test Setup

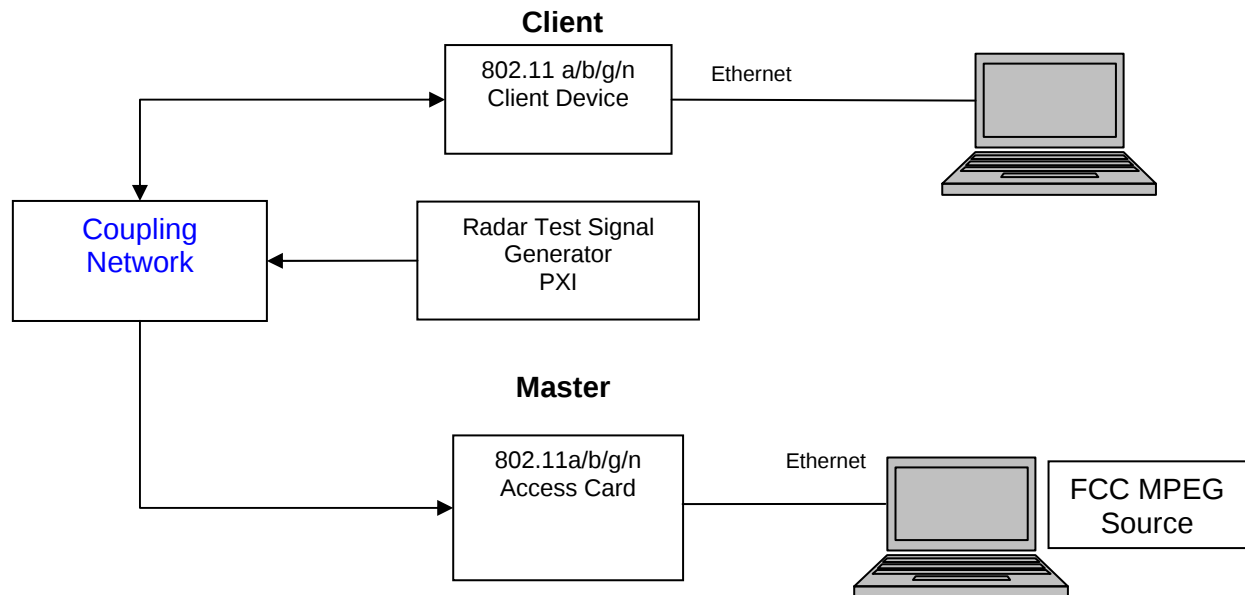



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 172 of 198

---

For the frequency band 5,470 – 5,725 MHz, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm.

Declared minimum antenna gain 2.6 dBi. ;

Radar receive signal level = -62 dBm + minimum antenna gain + 1 dB

$$= -62 + 2.6 + 1$$

Radar receive signal level = -58.4 dBm

#### Measurement Results - Dynamic Frequency Selection (DFS)

Ambient conditions.

Temperature: 17 to 23 °C      Relative humidity: 31 to 57%      Pressure: 999 to 1012 mbar

Radio parameters.

Test methodology: Conducted

Device Type: Master

Transmit Power: Maximum

#### Tests Performed with EUT configured as Master Device

| Requirement                       | Operational Mode |
|-----------------------------------|------------------|
|                                   | Master           |
| DFS Detection Threshold           | Yes              |
| Channel Closing Transmission Time | Yes              |
| Channel Move Time                 | Yes              |
| U-NII Detection Bandwidth         | Yes              |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 173 of 198

---

## **6.2. Dynamic Frequency Selection (DFS) Test Results**

### **6.2.1. UNII Detection Bandwidth:**

All UNII channels for this device have identical channel bandwidths and DFS testing was completed in HT-40 mode on channel 5,510 MHz.

The generating equipment is configured as shown in the Conducted Test Setup above. A single Burst of the short pulse radar Type 1 through 6 was produced at 5,510 MHz at a level of -58.4 dBm (Ref Section 5.1). The EUT is set up as a standalone device (no associated Client and no traffic).

A single radar Burst is generated for a minimum of 10 trials, and the response of the EUT is noted. The EUT must detect the Radar Waveform 90% or more of the time.

The radar frequency is increased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The highest frequency at which detection is greater than or equal to 90% is denoted as  $F_H$ .

The radar frequency is decreased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The lowest frequency at which detection is greater than or equal to 90% is denoted as  $F_L$ .

The U-NII Detection Bandwidth is calculated as follows:

$$\text{U-NII Detection Bandwidth} = F_H - F_L$$

The U-NII Detection Bandwidth must be at least 80% of the EUT transmitter 99% power



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 174 of 198

| EUT Frequency=5510MHz(TX) (√=Detection, 0= No Detection) |   |   |   |   |   |   |   |   |   |    |                    |
|----------------------------------------------------------|---|---|---|---|---|---|---|---|---|----|--------------------|
| Radar Frequency (MHz)                                    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | Detection Rate (%) |
| -21                                                      | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0  | 0%                 |
| -20                                                      | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| -19                                                      | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| -18                                                      | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| -17                                                      | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| -16                                                      | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| -15                                                      | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| -14                                                      | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| -13                                                      | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| -12                                                      | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| -11                                                      | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| -10                                                      | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| -9                                                       | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| -8                                                       | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| -7                                                       | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| -6                                                       | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| -5                                                       | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| -4                                                       | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| -3                                                       | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| -2                                                       | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| -1                                                       | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| F0                                                       | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |

Table of results are continued on the next page.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 175 of 198

| EUT Frequency=5510MHz(TX) (√=Detection, 0= No Detection)         |   |   |   |   |   |   |   |   |   |    |                    |
|------------------------------------------------------------------|---|---|---|---|---|---|---|---|---|----|--------------------|
| Radar Frequency (MHz)                                            | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | Detection Rate (%) |
| F0                                                               | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| +1                                                               | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| +2                                                               | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| +3                                                               | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| +4                                                               | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| +5                                                               | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| +6                                                               | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| +7                                                               | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| +8                                                               | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| +9                                                               | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| +10                                                              | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| +11                                                              | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| +12                                                              | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| +13                                                              | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| +14                                                              | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| +15                                                              | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| +16                                                              | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| +17                                                              | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| +18                                                              | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| +19                                                              | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| +20                                                              | √ | √ | √ | √ | √ | √ | √ | √ | √ | √  | 100%               |
| +21                                                              | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0  | 0%                 |
| Detection Bandwidth = $F_H - F_L = 5530 - 5490 = 40$ MHz         |   |   |   |   |   |   |   |   |   |    |                    |
| EUT 99% Bandwidth = 37.034 MHz (ref. bandwidth channel 5510 MHz) |   |   |   |   |   |   |   |   |   |    |                    |
| 37.034 MHz *80% = 29.627 MHz                                     |   |   |   |   |   |   |   |   |   |    |                    |

For each frequency step the minimum percentage detection is 90%

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 176 of 198

---

#### **6.2.2. Initial Channel Availability Check Time**

This test verifies that the EUT does not emit pulse, control, or data signals on the test Channel until the power-up sequence has been completed and the U-NII device checks for Radar Waveforms for one minute on the test Channel. This test does not use any Radar Waveforms.

The U-NII device is powered on and be instructed to operate at 5,500 MHz. At the same time the EUT is powered on, the spectrum analyzer is set for zero span with a 1 MHz resolution bandwidth at 5,500 MHz with a 250 second sweep time. The analyzer's sweep will be started the same time power is applied to the U-NII device.

The EUT should not transmit any pulse or data transmissions until at least 1 minute after the completion of the power-on cycle.

The first red marker line shown on the following plot denotes the instant when the EUT starts its power-up sequence i.e.  $T_0$  (as defined within the FCC's MO&O 06-96 Normative Reference 2 ). The power-up reference  $T_0$  is determined by the time it takes for the EUT to start "beaconing" i.e. initial beacon – 60 secs = end of power-up.

The Channel Availability Check Time commences at instant  $T_0$  and will end no sooner than  $T_0 + 60$  seconds.


The EUT Master device requires 100.701 seconds to complete its power-on cycle.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 177 of 198

### Initial Channel Availability Check Time during power up of EUT

#### Ch 5,500 MHz

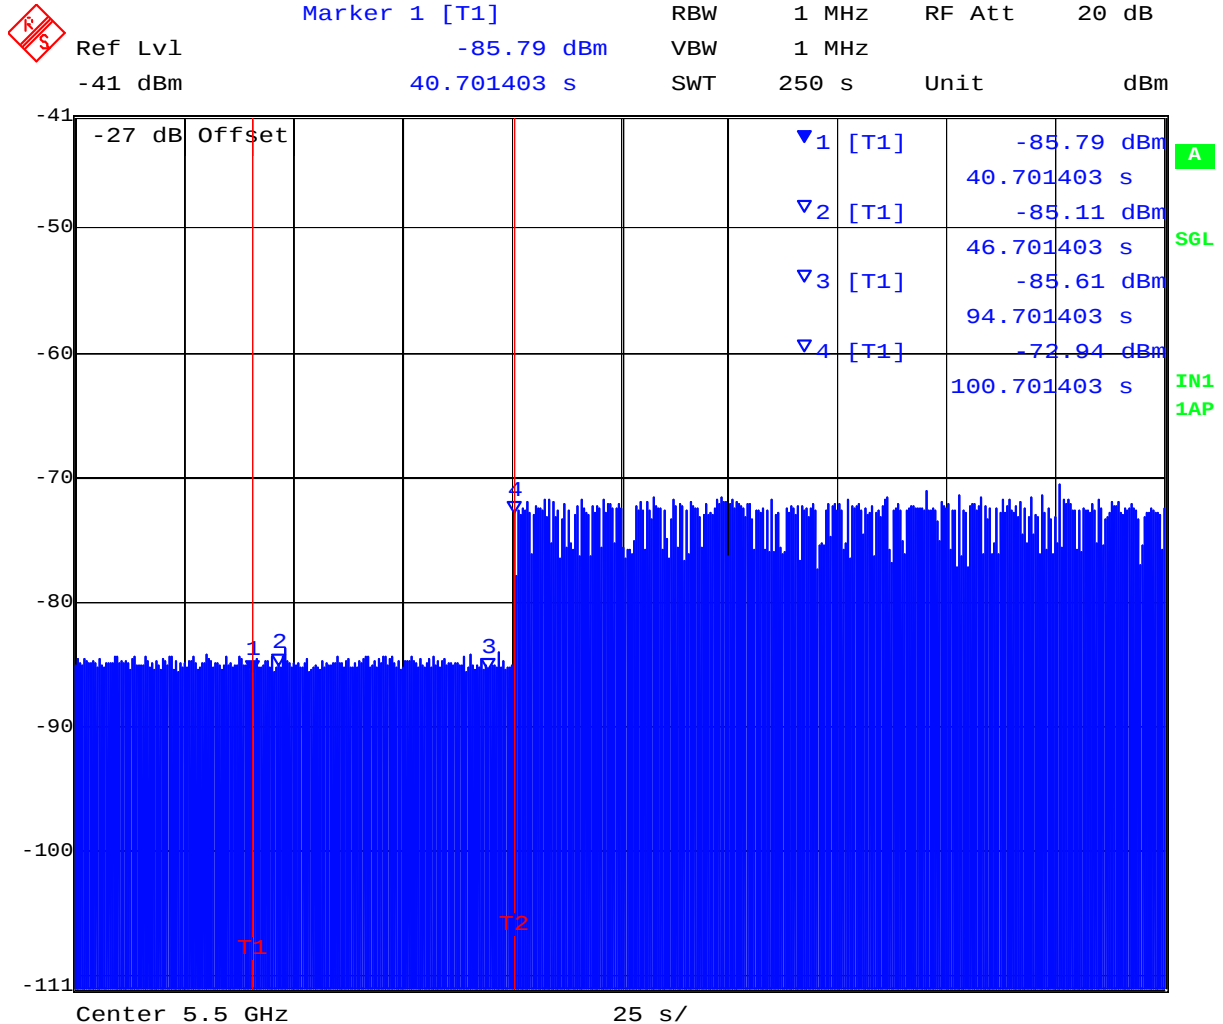

Date: 15.SEP.2008 11:55:51

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 178 of 198

---

### **6.2.3. Radar Burst at the Beginning of the Channel Availability Check Time:**

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold +6 dB (-58.4 dBm Ref Section 6.1.7) occurs at the beginning of the Channel Availability Check Time.


A single Burst of short pulse of radar Type 1 will commence within a 6 second window starting at  $T_0$  (first red marker line on the following plot).

Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5,500MHz will continue for 2.5 minutes after the radar burst has been generated.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 179 of 198

**Channel Availability Check Time at the start of the 60 second Check Time**  
**Ch 5,500 MHz**

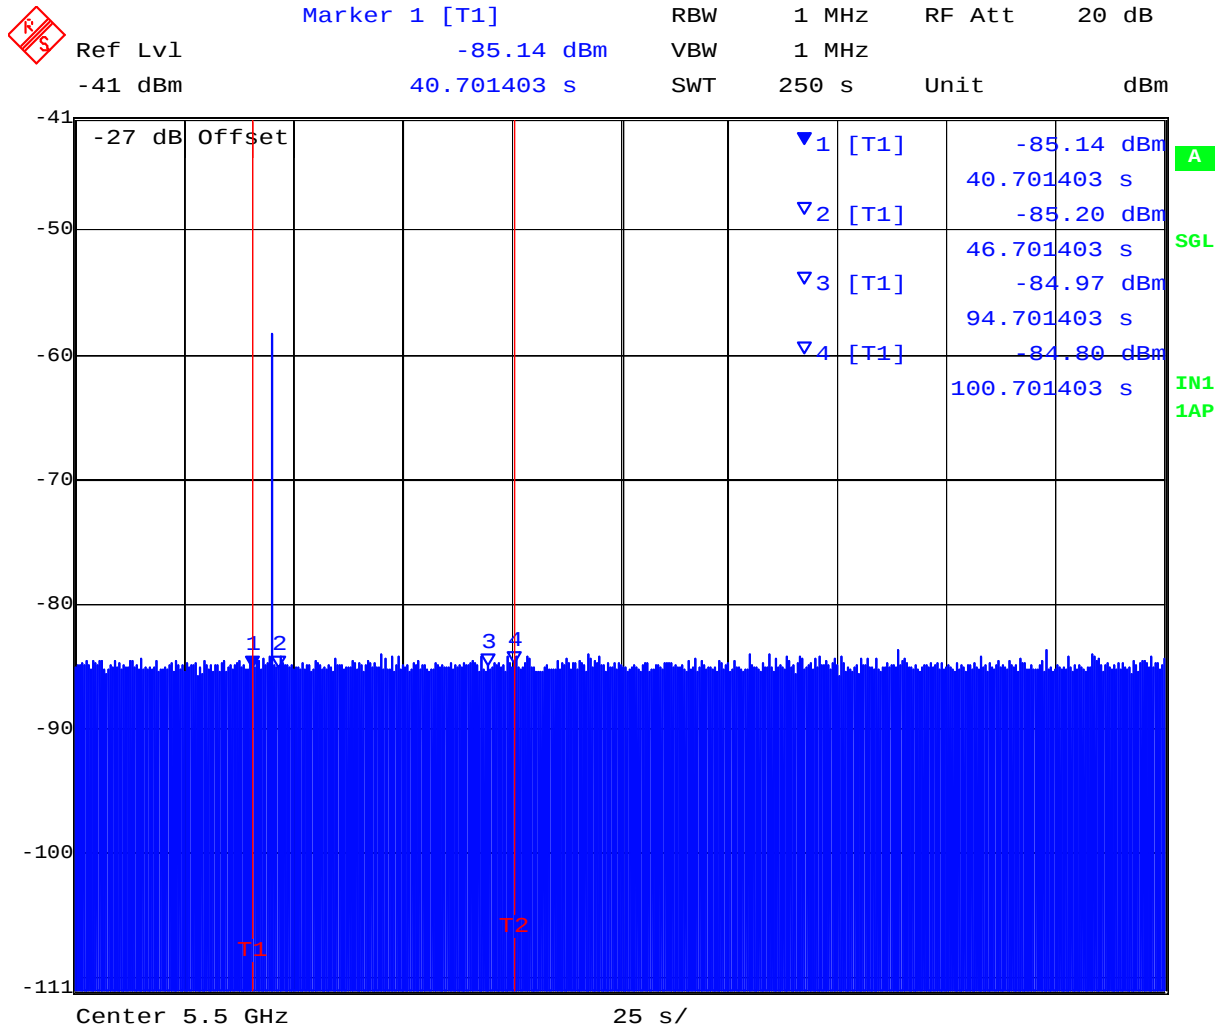

Date: 15.SEP.2008 12:23:29

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 180 of 198

---

#### **6.2.4. Radar Burst at the End of the Channel Availability Check Time:**

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold occurs at the end of the Channel Availability Check Time.


A single Burst of short pulse of radar type 1 will commence within a 6 second window starting at  $T_0 + 54$  seconds. The window will commence at marker 2 and end at the red frequency line  $T_2$ .

Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5,500MHz will continue for 2.5 minutes after the radar burst has been generated.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 181 of 198

**Channel Availability Check Time at the end of the 60 second Check Time**  
**Ch 5,500 MHz**

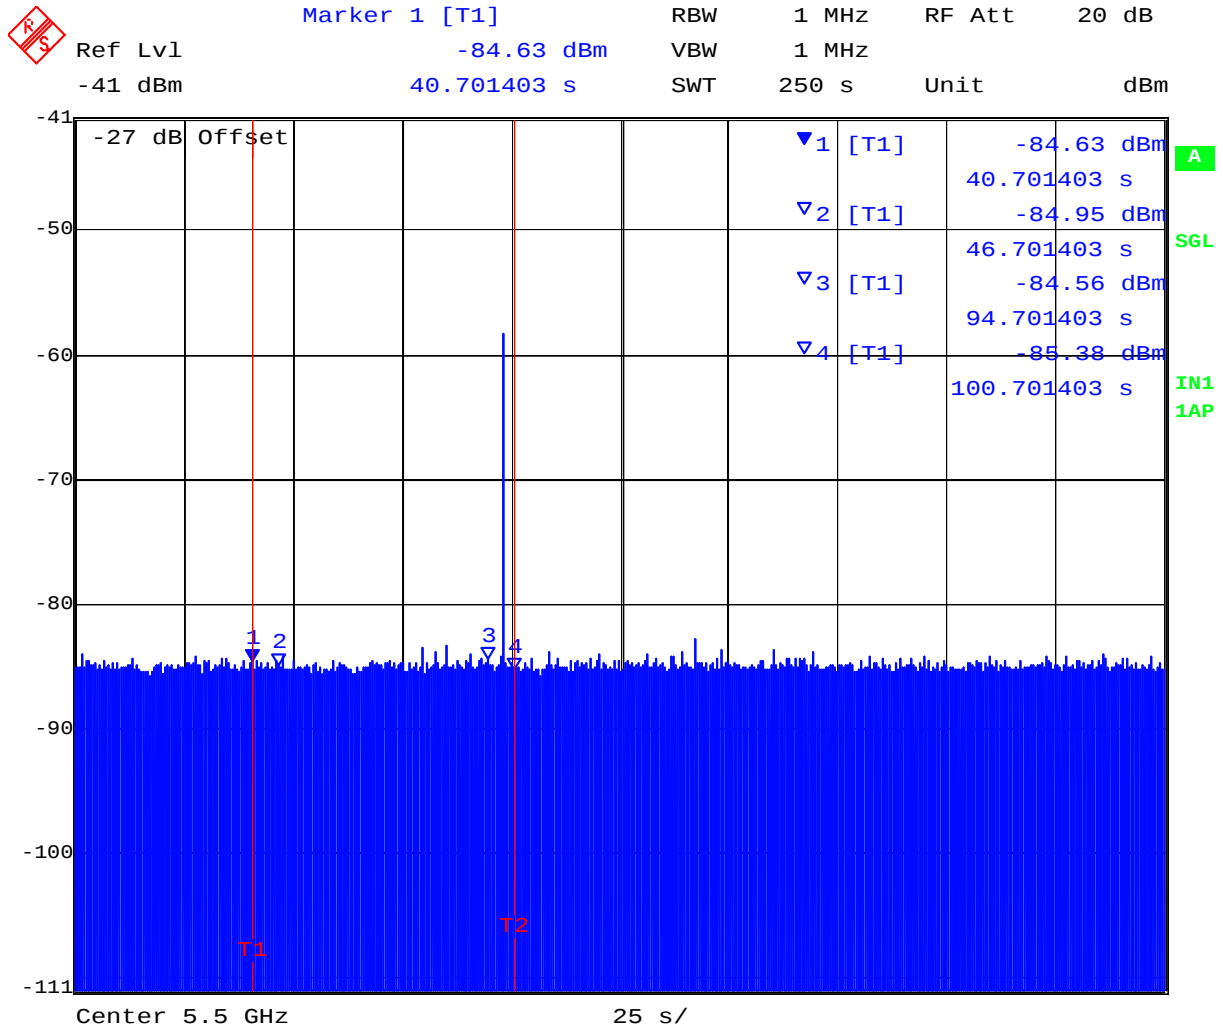

Date: 15.SEP.2008 12:29:11

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 182 of 198

---

**6.2.5. In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period**  
**FCC §15.407(h)(2)(iii)**

The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the EUT (Master). The requisite MPEG video file ("TestFile.mpg" available on the NTIA website at the following link <http://ntiacsd.ntia.doc.gov/dfs/>) is streamed from the master device (AP) to the client.

**Channel Closing Transmission Time - Measurement**

A Type 1 waveform was introduced to the EUT, from which a 12 second transmission record was digitally captured, collecting nearly 250M samples of data, which included in excess of 600 ms of pre-trigger data. This Type 1 waveform had an integral marker built into its construction, marking the start of the radar waveform play, which directly triggered the PXI digitizer's data capture via the PXI backplane trigger bus.

The test system was set-up to capture all transmission data for Access Card events above a threshold level of -50 dBm. The test equipment time stamps all captured events with respect to  $T_0$  (zero time indicating the start of the measurements sequence) starting the 612.1 ms pre-trigger period followed by the radar type 1 burst period.

Radar (Type 1) Pre-trigger period      612.1 ms

Type 1 burst period                      25.705 ms

(The period of the 18 pulse burst includes [18 pulses \* 1.428mS PRI] = 25.704 ms. Then add 1  $\mu$ s pulse width for the final pulse.)

Channel Closing Transmission Time starts immediately after the last radar pulse is transmitted i.e. 637.8 ms after the start of the trace capture period.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 183 of 198

Therefore, pulses seen after this 637.8 ms boundary are identified and totaled to provide an aggregate total of transmissions in order to determine whether the EUT is compliant with the Channel Closing Transmission Time requirements as described in MO&O FCC 06-96. In this case, it was found that an aggregate total of 5.945 ms of transmission time accrued. This value is found at the right hand side at the foot of the following plot (10s Total).

**Channel Closing Transmission Time = 5.945 mSecs (limit 260 mSecs)**

**Channel Move Time, Channel Closing Transmission Time for Type 1 Radar  
Captured by the Test System - 0 to 2 seconds**

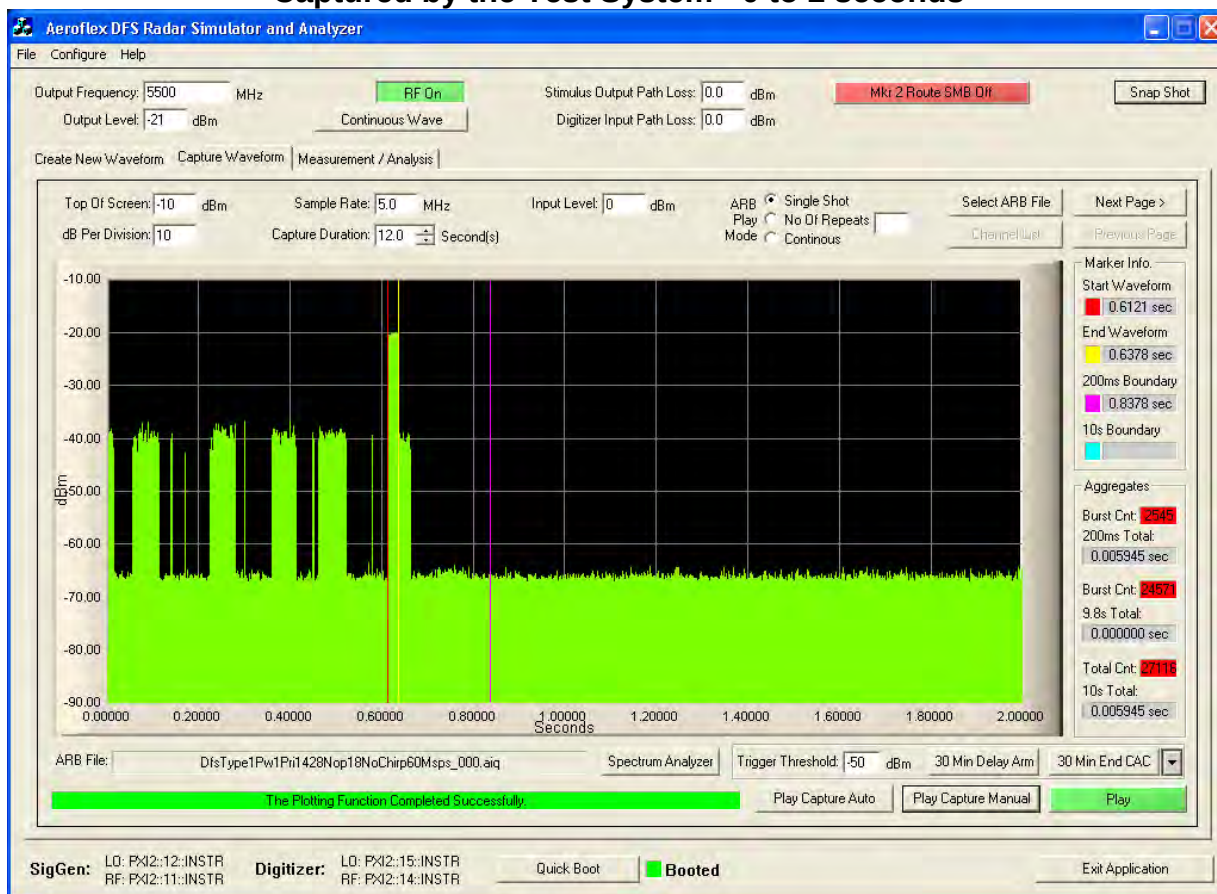

From the plot above it can be seen that the transmission activity within the 200 mS window is 5.945 mS (see 200 mS Total). From the following plots which shows all additional activity within the remainder of the 10 sec measurement window it can be determined that the aggregate transmission is 0.0 mS. This is less than the 60 mS limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 184 of 198


Last Transmitter Activity = 0.670 Seconds

Last Radar Activity = 0.6378 Seconds

Channel Move Time = Last Transmitter Activity – Last Radar Activity = 0.670 – 0.6378

Channel Move Time = 32.2 msecs (Limit 10 secs)

### Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 2 to 4 seconds

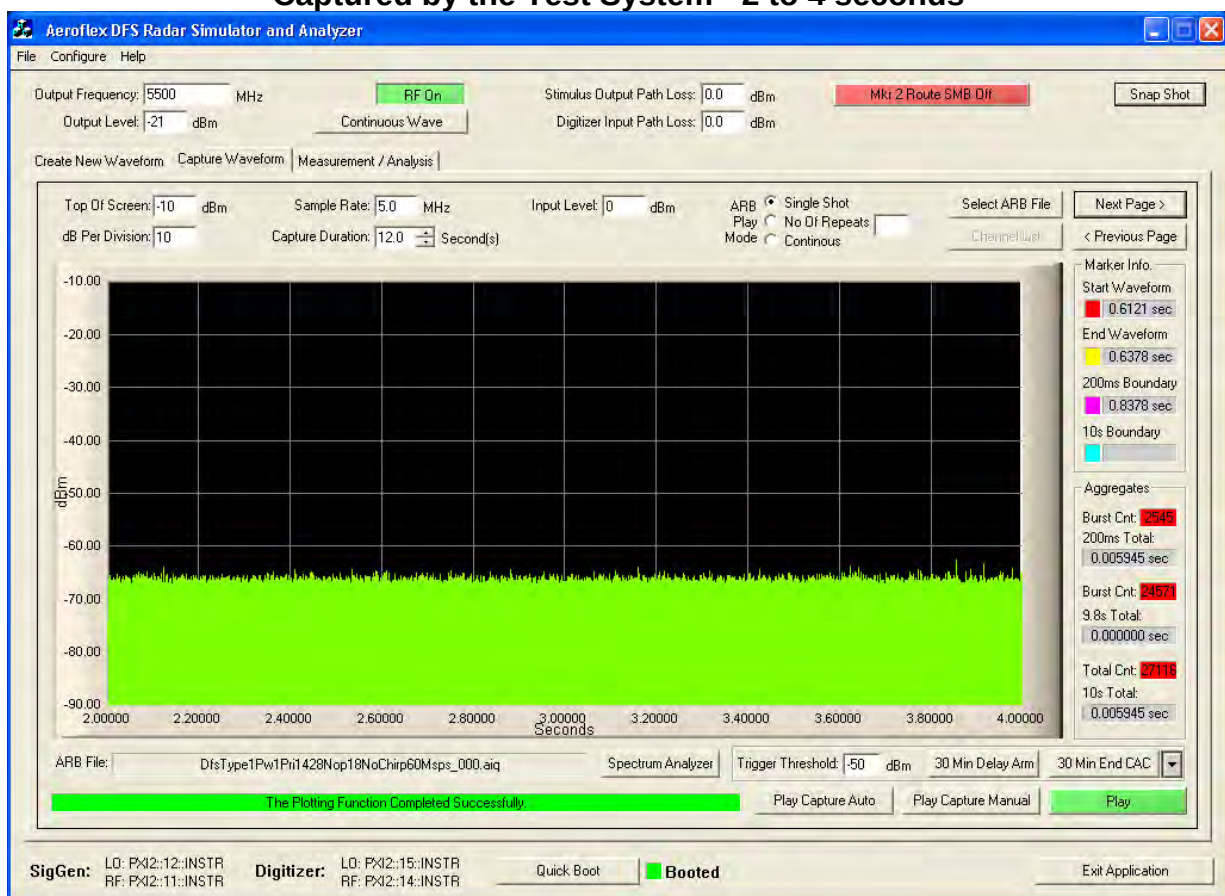


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 185 of 198

### Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 4 to 6 seconds

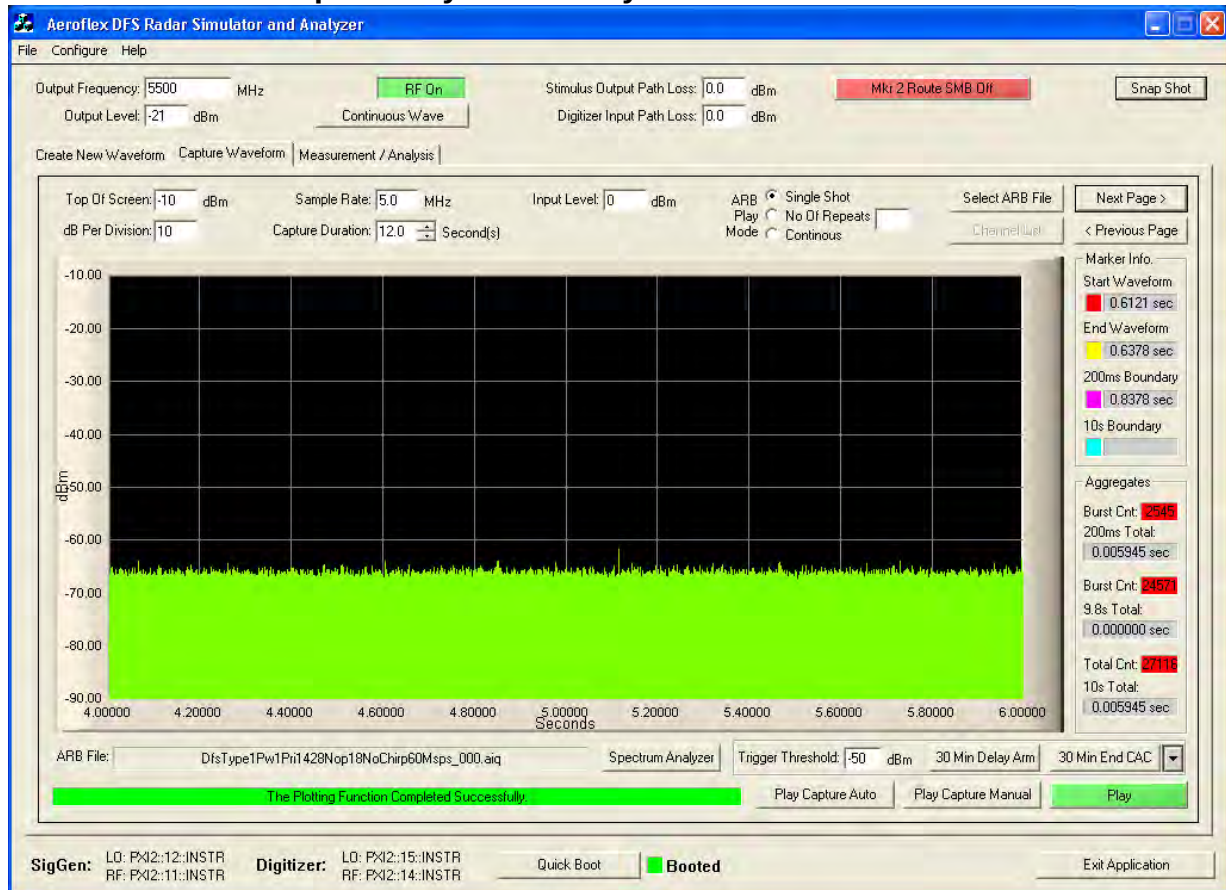


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 186 of 198

### Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 6 to 8 seconds

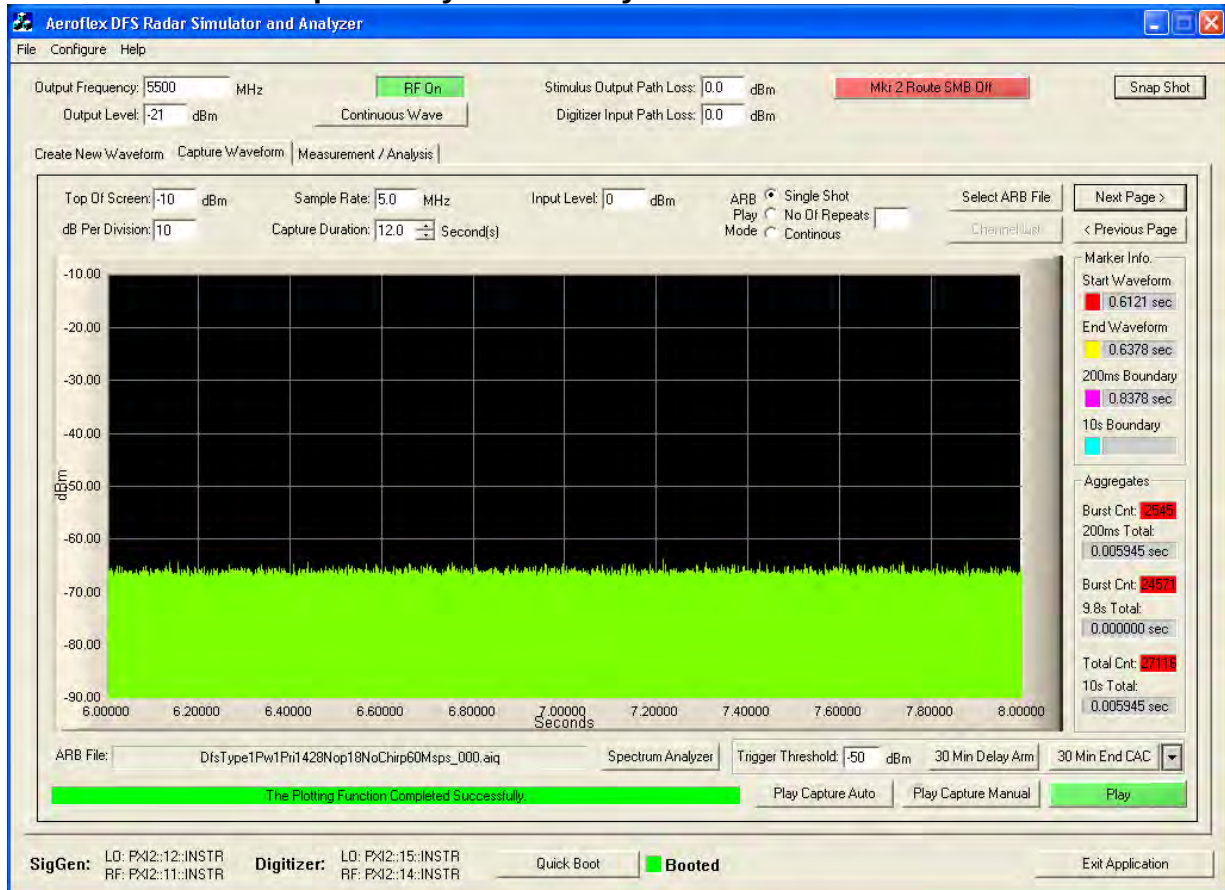


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 187 of 198

### Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 8 to 10 seconds

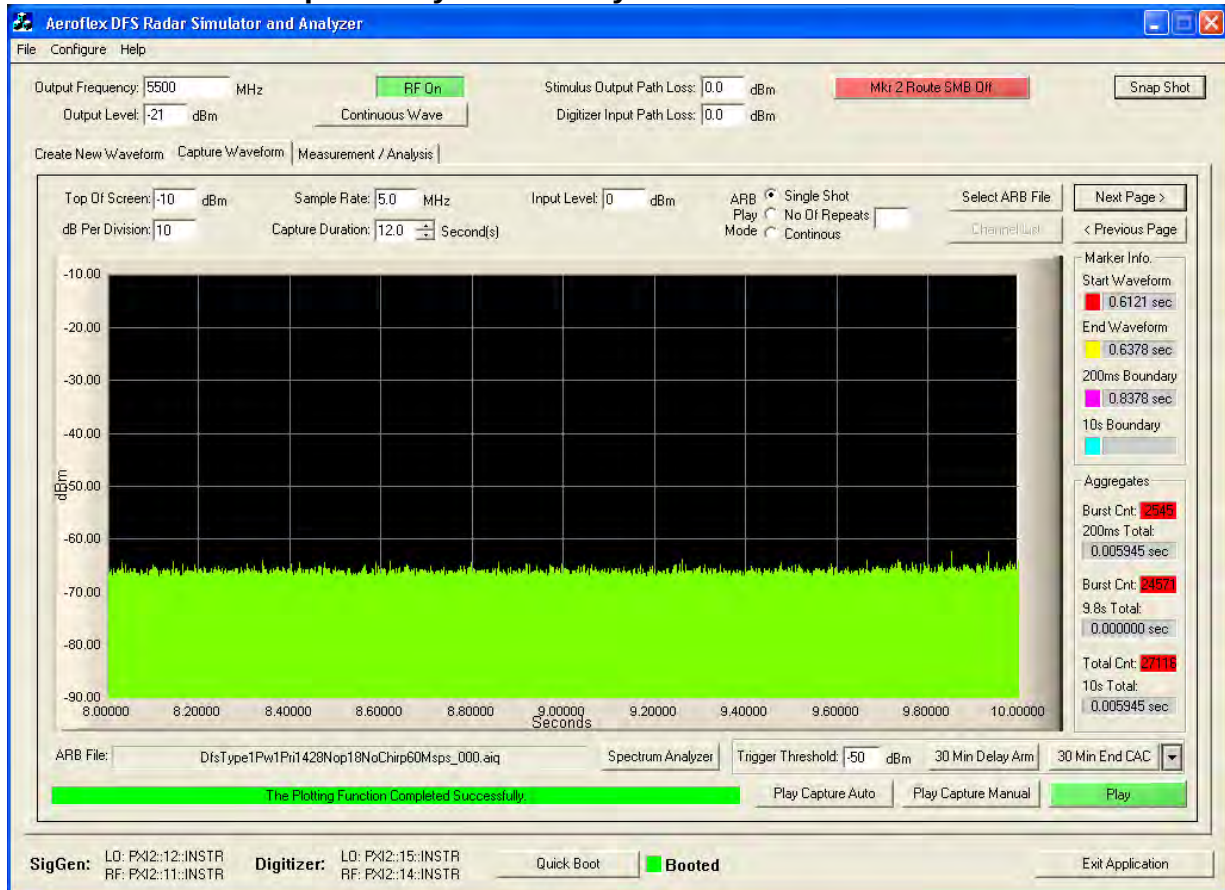


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 188 of 198

### Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 10 to 12 seconds

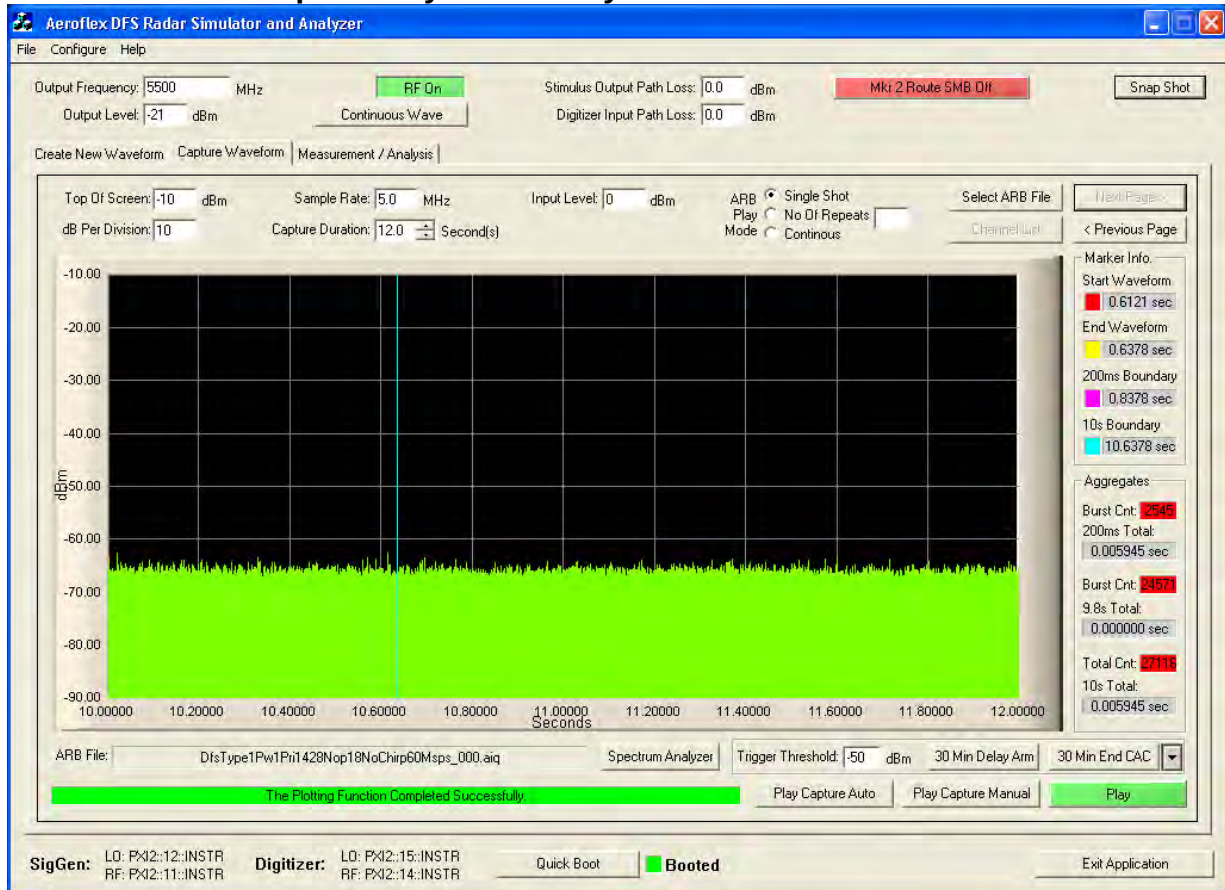


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 30 Minute Non-Occupancy Period

The EUT is monitored for more than 30 minutes following the channel close/move time to verify no transmissions resume on this Channel.

### 30 Minute Non-Occupancy Period Type 1 Radar Ch 5,500 MHz

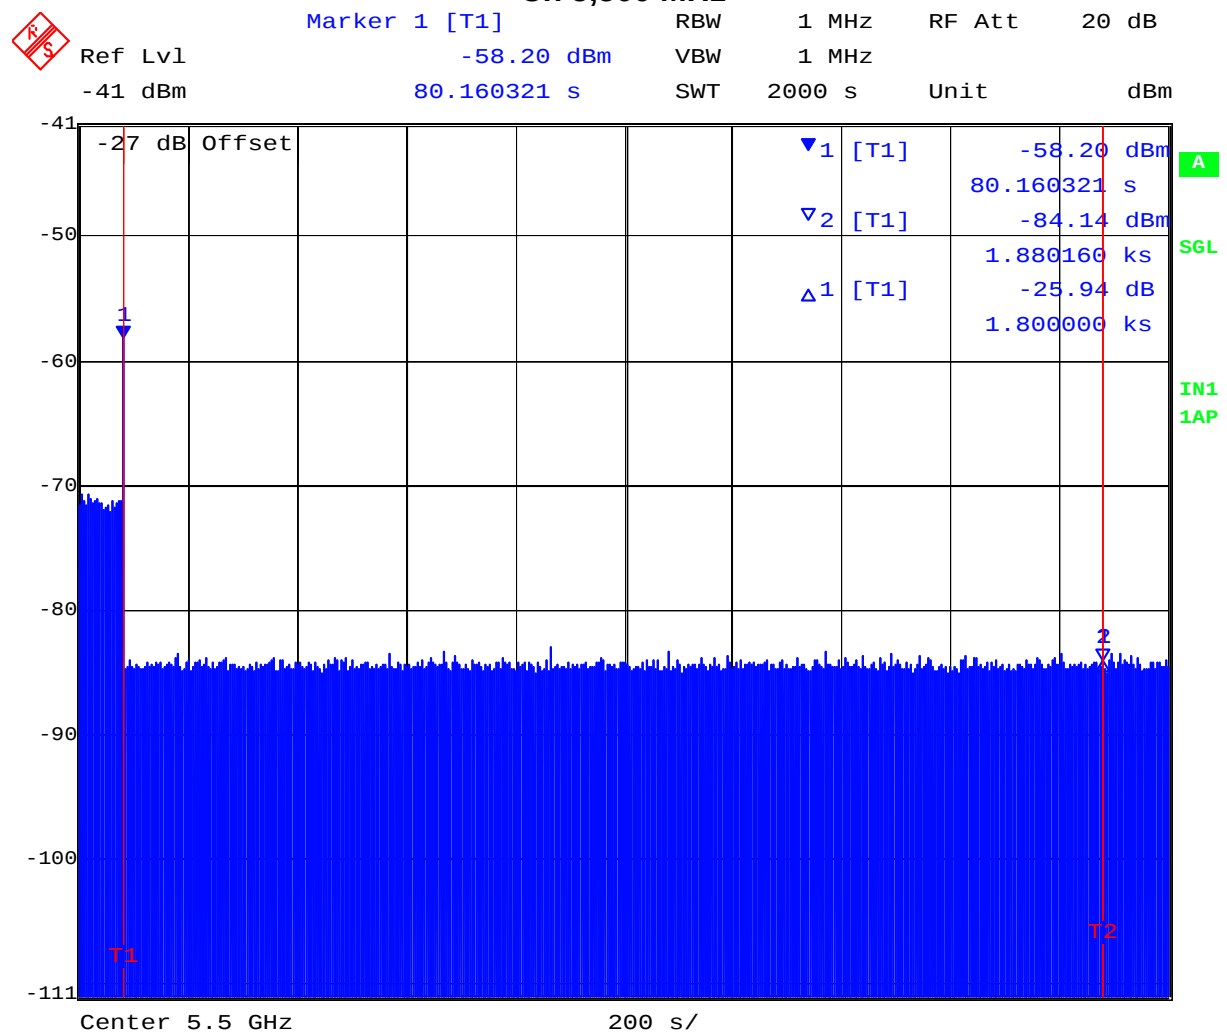

Date: 15.SEP.2008 13:32:31

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 190 of 198

---

#### **6.2.6. Statistical Performance Check**

The steps below define the procedure to determine the minimum percentage of detection when a radar burst with a level equal to the DFS Detection Threshold is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5,500 MHz. Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test.

The Radar Waveform generator sends the individual waveform for each of the radar types 1-6. Statistical data will be gathered to determine the ability of the device to detect the radar test waveforms. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs. The percentage of successful detection is calculated by:

$$\text{Total \# of detections} \div \text{Total \# of Trials} \times 100 = \text{Probability of Detection}$$

The Minimum number of trails, minimum percentage of successful detection and the average minimum percentage of successful detection are found in the Radar Test Waveforms section.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 191 of 198

### Verification of Detection

| Trial #                     | Detection = √, No Detection = 0 |               |               |               |               |               |
|-----------------------------|---------------------------------|---------------|---------------|---------------|---------------|---------------|
|                             | Type 1                          | Type 2        | Type 3        | Type 4        | Type 5        | Type 6        |
| 1                           | √                               | √             | √             | √             | √             | √             |
| 2                           | √                               | √             | √             | √             | 0             | √             |
| 3                           | √                               | 0             | √             | √             | √             | √             |
| 4                           | √                               | √             | √             | √             | √             | √             |
| 5                           | √                               | √             | √             | √             | √             | √             |
| 6                           | √                               | √             | √             | √             | √             | 0             |
| 7                           | √                               | √             | √             | √             | √             | √             |
| 8                           | √                               | √             | √             | √             | √             | √             |
| 9                           | √                               | 0             | √             | √             | √             | 0             |
| 10                          | 0                               | √             | √             | √             | √             | √             |
| 11                          | √                               | √             | 0             | √             | √             | √             |
| 12                          | √                               | √             | √             | √             | √             | √             |
| 13                          | √                               | √             | √             | √             | 0             | √             |
| 14                          | √                               | 0             | √             | √             | √             | √             |
| 15                          | √                               | √             | 0             | √             | √             | √             |
| 16                          | √                               | √             | √             | √             | √             | √             |
| 17                          | √                               | √             | √             | √             | √             | √             |
| 18                          | 0                               | √             | √             | √             | √             | √             |
| 19                          | √                               | √             | √             | √             | √             | √             |
| 20                          | √                               | √             | √             | √             | √             | √             |
| 21                          | √                               | √             | √             | √             | √             | √             |
| 22                          | √                               | √             | √             | √             | √             | √             |
| 23                          | √                               | √             | √             | 0             | √             | √             |
| 24                          | √                               | √             | √             | 0             | 0             | √             |
| 25                          | √                               | 0             | √             | 0             | √             | √             |
| 26                          | √                               | √             | √             | 0             | √             | √             |
| 27                          | √                               | √             | √             | √             | √             | √             |
| 28                          | √                               | √             | √             | √             | √             | √             |
| 29                          | √                               | 0             | √             | √             | √             | √             |
| 30                          | √                               | √             | √             | √             | √             | √             |
| <b>Detection Percentage</b> | 90%<br>(>60%)                   | 80%<br>(>60%) | 93%<br>(>60%) | 86%<br>(>60%) | 80%<br>(>80%) | 93%<br>(>80%) |

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is required and calculated as follows;

$$(P_{d1} + P_{d2} + P_{d3} + P_{d4}) / 4 = (90\% + 80\% + 93\% + 86\%) / 4 = 87.25 \% (> 80\%)$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 192 of 198

---

#### Measurement Uncertainty Time/Power

|                         |        |
|-------------------------|--------|
| Measurement uncertainty |        |
| - Time                  | 4%     |
| - Power                 | 1.33dB |

#### Traceability

| Test Equipment Used                                                                            |
|------------------------------------------------------------------------------------------------|
| 0072, 0083, 0098, 0116, 0132, 0158, 0313, 0314, 0193, 0223, 0252, 0253, 0251, 0256, 0328, 0329 |

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 7. PHOTOGRAPHS

### 7.1. Radiated Emissions > 1GHz



## 7.2. General Measurement Test Set-Up



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 7.3. Dynamic Frequency Selection Test Set-Up

**General DFS Test Setup**



**DFS Test Equipment**



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** CBIS10-A4 Rev A  
**Issue Date:** 1st October 2008  
**Page:** 197 of 198

## 8. TEST EQUIPMENT DETAILS

| Asset # | Instrument                | Manufacturer     | Part #                    | Serial #    |
|---------|---------------------------|------------------|---------------------------|-------------|
| 0088    | Spectrum Analyzer         | Hewlett Packard  | 8564E                     | 3410A00141  |
| 0134    | Amplifier                 | Com Power        | PA 122                    | 181910      |
| 0158    | Barometer<br>/Thermometer | Control Co.      | 4196                      | E2846       |
| 0193    | EMI Receiver              | Rhode & Schwartz | ESI 7                     | 838496/007  |
| 0252    | SMA Cable                 | Megaphase        | Sucoflex 104              | None        |
| 0310    | 2m SMA Cable              | Micro-Coax       | UFA210A-0-0787-<br>3G03G0 | 209089-001  |
| 0312    | 3m SMA Cable              | Micro-Coax       | UFA210A-1-1181-<br>3G0300 | 209092-001  |
| 0313    | Coupler                   | Hewlett Packard  | 86205A                    | 3140A01285  |
| 0314    | 30dB N-Type<br>Attenuator | ARRA             | N9444-30                  | 1623        |
| 0070    | Power Meter               | Hewlett Packard  | 437B                      | 3125U11552  |
| 0116    | Power Sensor              | Hewlett Packard  | 8485A                     | 3318A19694  |
| 0117    | Power Sensor              | Hewlett Packard  | 8487D                     | 3318A00371  |
| 0184    | Pulse Limiter             | Rhode & Schwartz | ESH3Z2                    | 357.8810.52 |
| 0190    | LISN                      | Rhode & Schwartz | ESH3Z5                    | 836679/006  |
| 0293    | BNC Cable                 | Megaphase        | 1689 1GVT4                | 15F50B001   |
| 0301    | 5.6 GHz Notch Filter      | Micro-Tronics    | RBC50704                  | 001         |
| 0302    | 5.25 GHz Notch Filter     | Micro-Tronics    | BRC50703                  | 002         |
| 0303    | 5.8 GHz Notch Filter      | Micro-Tronics    | BRC50705                  | 003         |
| 0304    | 2.4GHzHz Notch Filter     | Micro-Tronics    | --                        | 001         |
| 0307    | BNC Cable                 | Megaphase        | 1689 1GVT4                | 15F50B002   |
| 0335    | 1-18GHz Horn Antenna      | ETS- Lindgren    | 3117                      | 00066580    |
| 0337    | Amplifier                 | MiCOM Labs       | --                        | --          |
| 0338    | Antenna                   | Sunol Sciences   | JB-3                      | A052907     |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



440 Boulder Court, Suite 200  
Pleasanton, CA 94566, USA  
Tel: 1.925.462.0304  
Fax: 1.925.462.0306  
[www.micomlabs.com](http://www.micomlabs.com)