



香 港 標 準 及 檢 定 中 心  
**The Hong Kong Standards and Testing Centre Ltd.**

Date: 2005-09-06

No.: HM155009

**TEST REPORT**

Page 1 of 18

**Applicant:** NAMWAH ENTERPRISES CO., LTD.  
Unit B1, 2/F., Cheung Lung Industrial Bldg., 10  
Cheung Yee Street, Kowloon, Hong Kong

**Description of Samples:** Model name: Mercedes Benz SLR McLaren  
Model no.: 8338(27MHZ)  
Brand name: NEWCON  
FCC ID: RU2833827MHZ


**Date Samples Received:** 2005-08-24

**Date Tested:** 2005-09-02

**Investigation Requested:** FCC Part 15 Subpart C

**Conclusions:** The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

**Remarks:** ----

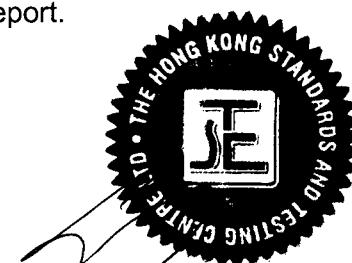

K C Lee, EMD  
for Chief Executive

This report shall not be reproduced unless with prior written approval from the Hong Kong Standards and Testing Centre.

香港新界大埔工業邨大宏街10號

10 Dai Wang Street, Taipo Industrial Estate, N. T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)  
For full text of "Conditions of Issuance of Test Reports", please refer to overleaf or refer to the website of  
HKSTC [www.hkstc.org](http://www.hkstc.org) (the section "Application and Quotation")

Date: 2005-09-06  
No.: HM155009

## TEST REPORT

Page 2 of 18

### CONTENT:

|         |                |
|---------|----------------|
| Cover   | Page 1 of 18   |
| Content | Page 2-3 of 18 |

#### **1.0 General Details**

|     |   |              |
|-----|---|--------------|
| 1.1 | Test Laboratory   | Page 4 of 18 |
| 1.2 | Applicant Details<br>Applicant<br>HKSTC Code Number for Applicant<br>Manufacturer | Page 4 of 18 |
| 1.3 | Equipment Under Test [EUT]<br>Description of EUT operation                        | Page 5 of 18 |
| 1.4 | Date of Order   | Page 5 of 18 |
| 1.5 | Submitted Samples   | Page 5 of 18 |
| 1.6 | Test Duration   | Page 5 of 18 |
| 1.7 | Country of Origin   | Page 5 of 18 |
| 1.8 | Additional Information of EUT   | Page 6 of 18 |

#### **2.0 Technical Details**

|     |                                    |              |
|-----|------------------------------------|--------------|
| 2.1 | Investigations Requested           | Page 7 of 18 |
| 2.2 | Test Standards and Results Summary | Page 7 of 18 |

#### **3.0 Test Results**

|     |                       |                  |
|-----|-----------------------|------------------|
| 3.1 | Emission              | Page 8-11 of 18  |
| 3.2 | Bandwidth Measurement | Page 12-13 of 18 |

Date: 2005-09-06  
No.: HM155009

## **TEST REPORT**

Page 3 of 18

### **Appendix A**

List of Measurement Equipment

Page 14 of 18

### **Appendix B**

Duty Cycle Correction During 100 msec

Page 15-16 of 18

### **Appendix C**

Photographs

Page 17-18 of 18

Date: 2005-09-06

## **TEST REPORT**

Page 4 of 18

No.: HM155009

### **1.0 General Details**

#### **1.1 Test Laboratory**

The Hong Kong Standards and Testing Centre Ltd.  
EMC Laboratory  
10 Dai Wang Street, Taipo Industrial Estate  
New Territories, Hong Kong

Telephone: 852 2666 1888  
Fax: 852 2664 4353

#### **1.2 Applicant Details**

##### **Applicant**

NAMWAH ENTERPRISES CO., LTD.  
Unit B1, 2/F., Cheung Lung Industrial Bldg., 10 Cheung Yee Street, Kowloon,  
Hong Kong

**HKSTC Code Number for Applicant**

NAE001

##### **Manufacturer**

Nan Hai Xin Zhong Toys Factory Co.,Ltd.  
Nanhai,Guicheng Shiken Industry,Exploit District,Foshan,China

Date: 2005-09-06

## **TEST REPORT**

Page 5 of 18

No.: HM155009

### **1.3 Equipment Under Test [EUT]**

#### **Description of Sample**

|                |  |
|----------------|--|
| Model Name:    | Mercedes Benz SLR McLaren                |
| Manufacturer:  | Nan Hai Xin Zhong Toys Factory Co., Ltd. |
| Brand Name:    | NEWCON                                   |
| Model Number:  | 8338(27MHZ)                              |
| Input Voltage: | 9Vd.c. ("6F22" size battery x 1)         |

#### **1.3.1 Description of EUT Operation**

The Equipment Under Test (EUT) is a NAMWAH ENTERPRISES CO., LTD., Mercedes Benz SLR McLaren. The transmitter is a 2 - Joystick transmitter. The EUT continues to transmit while joystick is being pressed. Modulation by IC, and type is pulse modulation.

### **1.4 Date of Order**

2005-08-24

### **1.5 Submitted Sample(s):**

2 Samples per model

### **1.6 Test Duration**

2005-09-02

### **1.7 Country of Origin**

China

Date: 2005-09-06

## TEST REPORT

Page 6 of 18

No.: HM155009

### 1.8 Additional Information of EUT

|                                    | Submitted                           | Not Available            |
|------------------------------------|-------------------------------------|--------------------------|
| User Manual                        | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Part List                          | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Circuit Diagram                    | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Printed Circuit Board [PCB] Layout | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Block diagram                      | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| FCC ID Label                       | <input checked="" type="checkbox"/> | <input type="checkbox"/> |

Date: 2005-09-06

## **TEST REPORT**

Page 7 of 18

No.: HM155009

### **2.0 Technical Details**

#### **2.1 Investigations Requested**

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 and ANSI C63.4:2003 for FCC Certification.

#### **2.2 Test Standards and Results Summary Tables**

| EMISSION<br>Results Summary  |                  |                 |                     |                                     |                          |                                     |
|--|------------------|-----------------|---------------------|-------------------------------------|--------------------------|-------------------------------------|
| Test Condition   | Test Requirement | Test Method     | Class /<br>Severity | Test Result                         |                          |                                     |
|  |                  |                 |                     | Pass                                | Failed                   | N/A                                 |
| Field Strength of<br>Fundamental Emissions<br>& Spurious Emissions | FCC 47CFR 15.227 | ANSI C63.4:2003 | N/A                 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            |
| Radiated Emissions   | FCC 47CFR 15.209 | ANSI C63.4:2003 | N/A                 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            |
| Conducted Emissions on<br>AC, 0.15MHz to 30MHz                     | FCC 47CFR 15.207 | ANSI C63.4:2003 | N/A                 | <input type="checkbox"/>            | <input type="checkbox"/> | <input checked="" type="checkbox"/> |

Note: N/A - Not Applicable


**3.0 Test Results****3.1 Emission****3.1.1 Radiated Emissions**

|                    |                  |
|--------------------|------------------|
| Test Requirement:  | FCC 47CFR 15.227 |
| Test Method:       | ANSI C63.4:2003  |
| Test Date:         | 2005-09-02       |
| Mode of Operation: | Tx mode          |

**Test Method:**

The sample was placed 0.8m above the ground plane on the OATS \*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\*: OATS [Open Area Test Site] located at HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

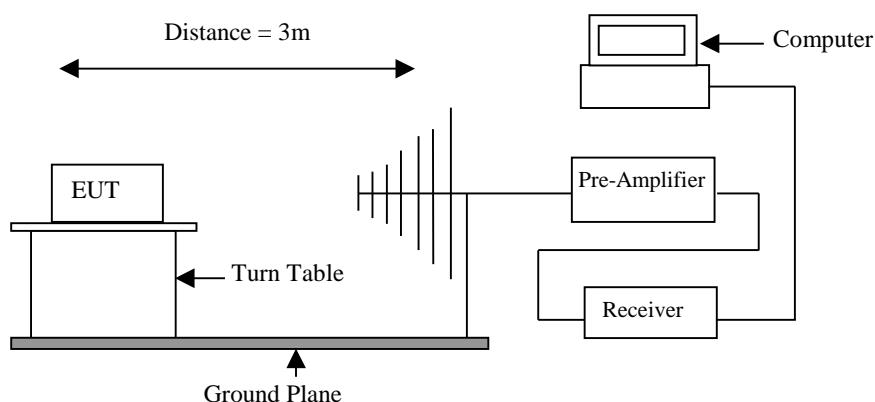**Test Setup:**

Date: 2005-09-06

## TEST REPORT

Page 9 of 18

No.: HM155009

### Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.227]:

| Frequency Range of Fundamental<br>[MHz] | Field Strength of Fundamental Emission<br>[Peak]<br>[ $\mu$ V/m] | Field Strength of Fundamental Emission<br>[Average]<br>[ $\mu$ V/m] |
|---|--|---|
| 26.96-27.28                             | 100,000  | 10,000  |

### Results:

| Field Strength of Fundamental Emissions<br>Peak Value |                                     |                              |                                   |                                |                        |                     |
|---|-------------------------------------|------------------------------|-----------------------------------|--------------------------------|------------------------|---------------------|
| Frequency<br>MHz                                      | Measured<br>Level @3m<br>dB $\mu$ V | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dB $\mu$ V/m | Field<br>Strength<br>$\mu$ V/m | Limit @3m<br>$\mu$ V/m | E-Field<br>Polarity |
| 27.15   | 60.3                                | 21.2                         | 81.5                              | 11,885.0                       | 100,000                | Vertical            |

| Field Strength of Fundamental Emissions<br>Average |                                     |                                 |                              |                                   |                                |                        |                     |
|--|-------------------------------------|---------------------------------|------------------------------|-----------------------------------|--------------------------------|------------------------|---------------------|
| Frequency<br>MHz                                   | Measured<br>Level @3m<br>dB $\mu$ V | Adjusted by<br>Duty Cycle<br>dB | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dB $\mu$ V/m | Field<br>Strength<br>$\mu$ V/m | Limit @3m<br>$\mu$ V/m | E-Field<br>Polarity |
| 27.15  | 56.6                                | -3.7                            | 21.2                         | 77.8                              | 7,762.5                        | 10,000                 | Vertical            |

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

### Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz  $\pm 4.1$ dB

Date: 2005-09-06

## TEST REPORT

Page 10 of 18

No.: HM155009

### Limits for Radiated Emissions [FCC 47 CFR 15.209]:

| Frequency Range<br>[MHz] | Quasi-Peak Limits<br>[ $\mu$ V/m] |
|--------------------------|-----------------------------------|
| 30-88                    | 100                               |
| 88-216                   | 150                               |
| 216-960                  | 200                               |
| Above 960                | 500                               |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

### Results :

| Radiated Emissions<br>Quasi-Peak |                                     |                              |                                   |                                |                        |                     |
|----------------------------------|-------------------------------------|------------------------------|-----------------------------------|--------------------------------|------------------------|---------------------|
| Frequency<br>MHz                 | Measured<br>Level @3m<br>dB $\mu$ V | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dB $\mu$ V/m | Field<br>Strength<br>$\mu$ V/m | Limit @3m<br>$\mu$ V/m | E-Field<br>Polarity |
| 54.29                            | < 1.0                               | 8.8                          | < 9.8                             | < 3.1                          | 100                    | Horizontal          |
| 81.44                            | < 1.0                               | 8.7                          | < 9.7                             | < 3.1                          | 100                    | Horizontal          |
| 108.58                           | < 1.0                               | 9.6                          | < 10.6                            | < 3.4                          | 150                    | Horizontal          |
| 135.73                           | < 1.0                               | 9.0                          | < 10.0                            | < 3.2                          | 150                    | Horizontal          |
| 162.87                           | < 1.0                               | 10.8                         | < 11.8                            | < 3.9                          | 150                    | Horizontal          |
| 190.02                           | 27.4                                | 11.7                         | 39.1                              | 90.2                           | 150                    | Horizontal          |
| 217.16                           | < 1.0                               | 12.5                         | < 13.5                            | < 4.7                          | 200                    | Horizontal          |
| 244.31                           | < 1.0                               | 13.5                         | < 14.5                            | < 5.3                          | 200                    | Horizontal          |
| 271.45                           | < 1.0                               | 14.0                         | < 15.0                            | < 5.6                          | 200                    | Horizontal          |

NO OTHER EMISSIONS WERE FOUND WITHIN 20dB OF THE LIMIT LINE.

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz  $\pm 4.1$ dB

Date: 2005-09-06  
No.: HM155009

## TEST REPORT

Page 11 of 18

### 3.1.1 Conducted Emissions (0.15MHz to 30MHz)

|                    |                  |
|--------------------|------------------|
| Test Requirement:  | FCC 47CFR 15.207 |
| Test Method:       | ANSI C63.4:2003  |
| Test Date:         | N/A              |
| Mode of Operation: | N/A              |

**Results:** N/A

The EUT is operated by a single source of internal battery power [located in the battery compartment], therefore power line conducted emission was deemed unnecessary.

Date: 2005-09-06

## TEST REPORT

Page 12 of 18

No.: HM155009

### 3.2 20dB Bandwidth of Fundamental Emission

Test Requirement:

FCC 47 CFR 15.227

Test Method:

ANSI C63.4:2003 (Section 13.1.7)

Test Date:

2005-09-02

Mode of Operation:

Tx mode

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.

Date: 2005-09-06

## TEST REPORT


Page 13 of 18

No.: HM155009

### Limits for 20dB Bandwidth of Fundamental Emission:

| Frequency Range<br>[MHz] | 20dB Bandwidth<br>[KHz] | FCC Limits<br>[MHz] |
|--------------------------|-------------------------|---------------------|
| 27.145                   | 23.1                    | within 26.96-27.28  |

### 20dB Bandwidth of Fundamental Emission

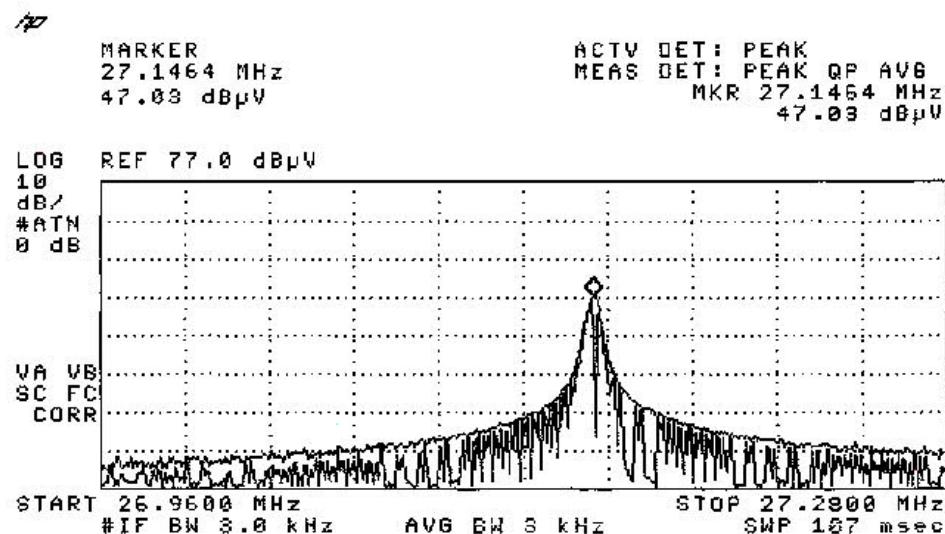

Date: 2005-09-06

# TEST REPORT

Page 14 of 18

No.: HM155009

## Appendix A

### List of Measurement Equipment

#### Radiated Emission

| EQP NO. | DESCRIPTION                | MANUFACTURER    | MODEL NO. | SERIAL NO. | LAST CAL |
|---------|----------------------------|-----------------|-----------|------------|----------|
| EM007   | SPECTRUM ANALYZER          | HEWLETT PACKARD | HP85660B  | 3144A21192 | 15/06/04 |
| EM008   | SPECTRUM ANALYZER DISPLAY  | HEWLETT PACKARD | HP85662A  | 3144A20514 | 15/06/04 |
| EM009   | QUASI PEAK ADAPTOR         | HEWLETT PACKARD | HP85650A  | 3303A01702 | 15/06/04 |
| EM010   | RF PRESELECTOR             | HEWLETT PACKARD | HP85685A  | 3221A01410 | 15/06/04 |
| EM011   | ATTENUATOR/SWITCH          | HEWLETT PACKARD | HP11713A  | 2508A10595 | 15/06/04 |
| EM012   | PRE-AMPLIFIER              | HEWLETT PACKARD | HP8449B   | 3008A00262 | 15/06/04 |
| EM020   | HORN ANTENNA               | ETS-Linggren    | 3115      | 4032       | 30/07/03 |
| EM022   | LOOP ANTENNA               | ETS-Linggren    | 6502      | 1189-2424  | 19/09/03 |
| EM072   | SIGNAL GENERATOR           | HEWLETT PACKARD | 8640B     | 1948A11892 | N/A      |
| EM083   | OPEN AREA TEST SITE        | HKSTC           | N/A       | N/A        | 08/02/03 |
| EM131   | EMC ANALYZER               | HEWLETT PACKARD | 8595EM    | 3710A00155 | 13/01/04 |
| EM145   | EMI TEST RECEIVER          | ROHDE & SCHWARZ | ESCS 30   | 830245/021 | 04/10/04 |
| EM195   | ANTENNA POSITIONING MAST   | ETS-Linggren    | 2075      | 2368       | N/A      |
| EM196   | MULTI-DEVICE CONTROLLER    | ETS-Linggren    | 2090      | 1662       | N/A      |
| EM215   | MULTIDEVICE CONTROLER      | ETS-Linggren    | 2090      | 00024676   | N/A      |
| EM216   | MINI MAST SYSTEM           | ETS-Linggren    | 2075      | 00026842   | N/A      |
| EM217   | ELECTRIC POWERED TURNTABLE | ETS-Linggren    | 2088      | 00029144   | N/A      |
| EM218   | ANECHOIC CHAMBER           | ETS-Linggren    | FACT-3    | --         | 19/03/04 |
| EM219   | BICONILOG ANTENNA          | ETS-Linggren    | 3142C     | 00029071   | 28/10/03 |
| EM218   | ETS ANECHOIC CHAMBER       | EMCO            | Fact-3    | N/A        | 15/03/04 |
| EM215   | MULTI-DEVICE CONTROLLER    | EMCO            | 2090      | 00024676   | N/A      |
| EM216   | ANTENNA POSITIONING MAST   | EMCO            | 2070      | 00024727   | N/A      |

#### Line Conducted

| EQP NO. | DESCRIPTION                       | MANUFACTURER                  | MODEL NO.  | SERIAL NO.      | LAST CAL |
|---------|-----------------------------------|-------------------------------|------------|-----------------|----------|
| EM078   | VARIAC                            | SHANGHAI VOLTAGE              | TDGC-3/0.5 | N/A             | CM       |
| EM081   | SMALL SCREENED ROOM               | MIKO INST HK                  | N/A        | N/A             | 27/01/05 |
| EM119   | LISN                              | ROHDE & SCHWARZ               | ESH3-Z5    | 0831.5518.52    | 14/10/04 |
| EM127   | ISOLATION TRANSFORMER 220 TO 300V | WING SUN                      | N/A        | N/A             | CM       |
| EM142   | PULSE LIMITER                     | ROHDE & SCHWARZ               | ESH3Z2     | 357.8810.52     | 04/08/04 |
| EM181   | EMI TEST RECEIVER                 | ROHDE & SCHWARZ               | ESIB7      | 100072          | 06/01/04 |
| EM154   | SHIELDING ROOM                    | SIEMENA MATSUSHITA COMPONENTS | N/A        | 803-740-057-99A | 27/01/05 |
| EM197   | LISN                              | ETS-Linggren                  | 4825/2     | 1193            | 05/06/04 |
| EM213   | DIGITAL POWER METER               | VICNOBL                       | VIP120     | 00277           | 14/09/04 |

#### Remarks:-

CM Corrective Maintenance

N/A Not Applicable or Not Available

TBD To Be Determined

**Appendix B****Duty Cycle Correction During 100msec**


Each function key sends a different series of characters, but each packet period (24.625msec) never exceeds a series of 4 long (2.125msec) and 10 short (750 $\mu$ sec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered  $4 \times 2.125\text{msec} + 10 \times 750\mu\text{sec} \text{ per } 24.625\text{msec} = 64.9\%$  duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction =  $20\log(0.649) = -3.7\text{dB}$

The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

**Figure A [Pulse Train]**

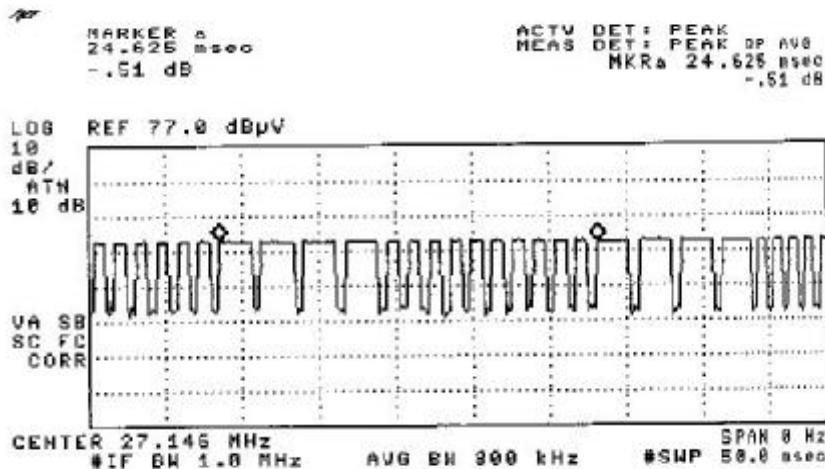

Date: 2005-09-06

## TEST REPORT

Page 16 of 18

No.: HM155009

Figure B [Long Pulse]


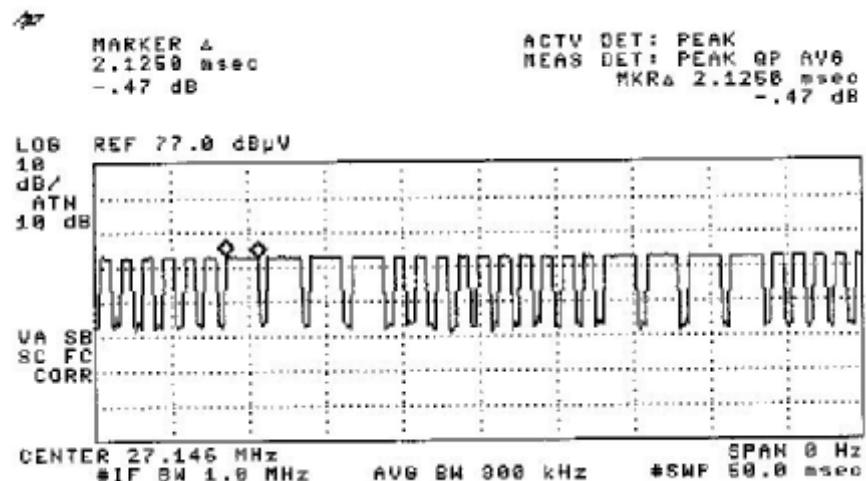


Figure C [Short Pulse]

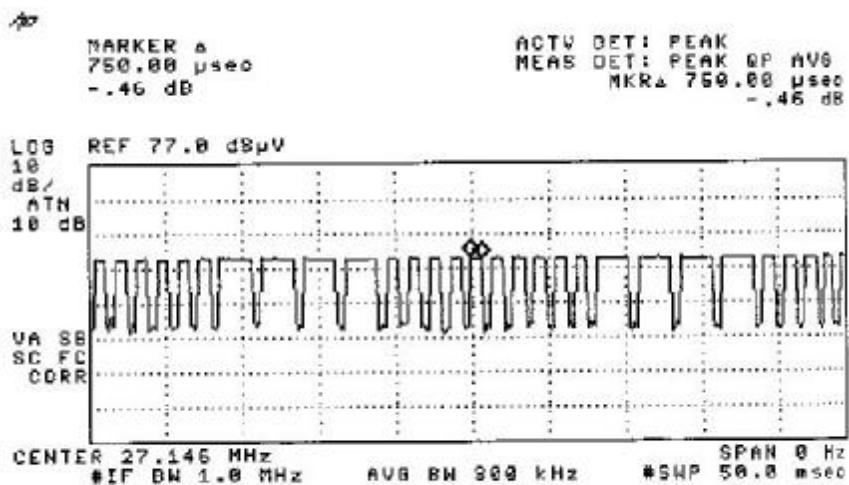

Date: 2005-09-06  
No.: HM155009

## TEST REPORT

Page 17 of 18

### Appendix C

#### Photographs of EUT

Front View of the product



Rear View of the product



Inner Circuit Top View



Inner Circuit Bottom View




Date: 2005-09-06  
No.: HM155009

## TEST REPORT

Page 18 of 18

### Photographs of EUT

Measurement of Radiated Emission Test Set Up

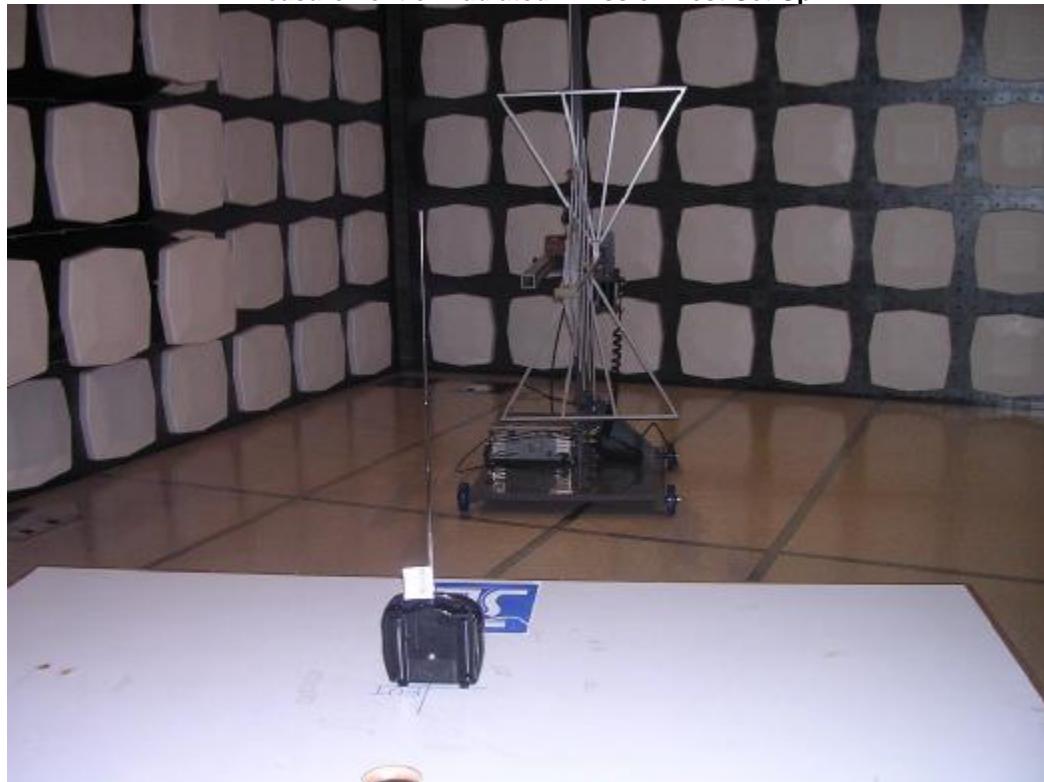

\*\*\*\*\* End of Test Report \*\*\*\*\*