

# TEST REPORT



Certification # 1367-01

Laboratory ID

PRODUCT SAFETY ENGINEERING, INC.  
12955 Bellamy Brothers Boulevard  
Dade City, Florida 33525 USA  
PH (352) 588-2209 FX (352) 588-2544

Report Issue Date: 29 Jul 05

Sample S/N: None

Sample Receipt Date: 21 Jul 05

Sample Test Date: see data sheets

Submitter ID

Shoreline Electronics Inc.  
2102-F Walsh Ave

Santa Clara, FL 95050

Test Report Number: 05F314B

Model Designation: GIFTD-1BL, OCDFTD-1BL

Product Description: 1 Button Dual Frequency  
Remote Control

Marketing Approval       

Description of non-standard test method or test practice: *None*

Estimated Measurement Uncertainty: *Not Applicable*

Special limitations of use: *None*

Traceability: *reference standards of measurement have been calibrated by a competent body using standards traceable to the NIST.*

According to testing performed at Product Safety Engineering, Inc., the above-mentioned unit is in compliance with the electromagnetic compatibility requirements defined in regulations indicated on page (3) of the test report. The test results contained herein relate only to the model(s) identified above. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Project Engineer, I hereby declare that the equipment tested as specified above conforms to the requirements indicated on page (3) of the test report.

Signature David Foerstner Name David Foerstner

Title Engineering Group Leader Date 29 Jul 05

Reviewed by: Shawn E. John Approved Signatory Date 29 Jul 05

This report may only be reproduced in full with written permission from Product Safety Engineering, Inc.

*Test Report Number 05F314B*

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525  
Tel (352) 588-2209 Fax (352) 588-2544

Page 1 of 11

## **DIRECTORY - EMISSIONS**

		<b>Page(s)</b>
<b>A) Documentation</b>		
Test report		1 - 10
Directory		2
Test Regulations		3
General Remarks		10
Test-setups (Photos)		11
<b>B) Test data</b>		
Conducted emissions	10/150 kHz - 30 MHz	5, 9
Radiated emissions	10 kHz - 30 MHz	5, 9
Radiated emissions	30 MHz - 1000 MHz	6, 9
Interference power	30 MHz - 300 MHz	6, 9
Equivalent Radiated emissions	1 GHz - 18 GHz	7, 9
Antenna Disturbance Voltage	30 MHz - 1,000 MHz	7,9
<b>C) Appendix A</b>		
Test Equipment Calibration Information		A2
Test Data Sheets		A3 - A5
<b>D) Appendix B</b>		
System Under Test Description		B2 - B4
<b>E) Appendix C</b>		
Measurement Protocol		C1 - C2

*Test Report Number 05F314B*

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525  
Tel (352) 588-2209 Fax (352) 588-2544

## EMISSIONS TEST REGULATIONS :

The emissions tests were performed according to following regulations:

- EN 61000-6-3:2001

- EN 61000-6-4:2001

- EN 55011 : 1998 / A1:1999

- Group 1

- Group 2

- Class A

- Class B

- EN 55013 : 1990 / A12:1994 / A13:1996 / A14:1999

- EN 55014 -1: 2001

- Household appliances and similar

- Portable tools

- Semiconductor devices

- EN 55022 : 1998

- Class A

- Class B

- AS/NZS 3548:1995

- Class A

- Class B

- ICES-003

- Class A

- Class B

- CNS 13438

- Class A

- Class B

- VCCI : 1999

- Class A

- Class B

- FCC Part 15

- Class A

- Class B

- Certification

- Verification

- Declaration of Conformity

- FCC Part 18

Test Report Number 05F314B

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525  
Tel (352) 588-2209 Fax (352) 588-2544

Page 3 of 11

### Environmental conditions during testing:

	LAB	OATS
Temperature: *	_____	_____
Relative Humidity: **	_____	_____
Power supply system	: <u>1.5</u> Volts <u>DC</u> <u>AAA Battery</u>	

### Sign Explanations:

- not applicable
- applicable

*Test Report Number 05F314B*

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525  
Tel (352) 588-2209 Fax (352) 588-2544

## Emissions Test Conditions: CONDUCTED EMISSIONS (Interference Voltage)

The **CONDUCTED EMISSIONS (INTERFERENCE VOLTAGE)** measurements were performed at the following test location:

■ - Test not applicable

- Darby Test Site (Open Area Test Site)
- Darby Laboratory

**Test equipment used :**

Model Number	Manufacturer	Description	Serial Number
□ - 8028-50	Solar	50 Ω LISN	829012, 829022
□ - 3825/2	Solar	50 Ω LISN	924840
□ - EMC-30	Electro-Metrics	EMI Receiver	191
□ - 8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
□ - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
□ - 85662A	Hewlett Packard	Analyzer Display	2403A07352
□ - 8028-50	Solar	50 Ω LISN	903725, 903726
□ - FCC-TLISN-T4	Fisher Custom Com.	Telecom ISN	20072

## Emissions Test Conditions: RADIATED EMISSIONS (Magnetic Field)

The **RADIATED EMISSIONS (MAGNETIC FIELD)** measurements were performed at the following test location:

- Darby Test Site (Open Area Test Site)
- 
- 

**at a test distance of :**

- 3 meters
- 30 meters

■ - Test not applicable

**Test equipment used :**

Model Number	Manufacturer	Description	Serial Number
□ - 96005	Eaton	Log Periodic Antenna	1099
□ - BIA-25	Electro-Metrics	Biconical Antenna	4283
□ - 8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
□ - 85662A	Hewlett-Packard	Analyzer Display	2403A07352
□ - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
□ - ALR-30M	Electro-Metrics	Loop Antenna	824
□ - 8447D	Hewlett Packard	Preamplifier	2944A06832
□ - EMC-30	Electro-Metrics	EMI Receiver	191
□ - ALA-130/A	Antenna Research	Loop Antenna	106

Test Report Number 05F314B

## Emissions Test Conditions: RADIATED EMISSIONS (Electric Field)

The **RADIATED EMISSIONS (ELECTRIC FIELD)** measurements, in the frequency range of 30 MHz-1000 MHz, were tested in a horizontal and vertical polarization at the following test location :

### - Test not applicable

- Darby Site (Open Area Test Site)
- Darby Lab
- 

at a test distance of :

- 3 meters
- 10 meters
- 30 meters

### Test equipment used :

Model Number	Manufacturer	Description	Serial Number
■ - LPA30	Electro-Metrics	Log Periodic Antenna	2280
■ - BIA-30	Electro-Metrics	Biconical Antenna	3852
■ - 8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
■ - 85662A	Hewlett-Packard	Analyzer Display	2403A07352
■ - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
■ - 8447D	Hewlett-Packard	Preamplifier (26dB)	2944A06832
□ - EMC-30	Electro-Metrics	EMI Receiver	191
□ - 8568B	Hewlett Packard	Spectrum Analyzer	2407A03213
□ - 85650A	Hewlett Packard	Quasi-Peak Adapter	2043A00358
□ - 85662A	Hewlett Packard	Analyzer Display	2340A05806
□ - 96005	Eaton	Log Periodic	1099
□ - BIA 25	Electro-Metrics	Biconical Antenna	4283

## Emissions Test Conditions): INTERFERENCE POWER

The **INTERFERENCE POWER** measurements were performed by using the absorbing clamp on the mains and interface cables in the frequency range 30 MHz - 300 MHz at the following test location :

### - Test not applicable

- Darby Lab
- 

### Test equipment used :

Model Number	Manufacturer	Description	Serial Number
□ - MDS-21	Rhode&Schwarz	Absorbing Clamp	8608447020
□ - 8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
□ - 85662A	Hewlett-Packard	Analyzer Display	2403A07352
□ - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
□ - 8447D	Hewlett-Packard	Amplifier (26 dB)	2944A06832
□ - EMC-30	Electro-Metrics	EMI Receiver	191

Test Report Number 05F314B

The **EQUIVALENT RADIATED EMISSIONS** measurements in the frequency range 1 GHz - 3.9 GHz were performed in a horizontal and vertical polarization at the following test location :

- - Darby Test Site (Open Area Test Site)
- 
- 
- 

at a test distance of:

- 1 meters
- - 3 meters
- 10 meters

- **Test not applicable**

**Test equipment used :**

<b>Model Number</b>	<b>Manufacturer</b>	<b>Description</b>	<b>Serial Number</b>
■ - 8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
■ - 85662A	Hewlett-Packard	Analyzer Display	2403A07352
■ - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
■ - 8449B	Hewlett-Packard	Preamplifier	3008A00320
■ - 3115	Electro-Mechanics	Double Ridge Guide Horn	3810

The **ANTENNA TERMINAL DISTURBANCE VOLTAGE** in the frequency range 30 MHz - 1,000 MHz were performed.

- Darby Test Site (Open Area Test Site)
- Laboratory
- 
- 

- **Test not applicable**

<b>Model Number</b>	<b>Manufacturer</b>	<b>Description</b>	<b>Serial Number</b>
□ - 2F9-3C4-3C5	Wavecom	UHF PAL TV Modulator	185879
□ - 2F1-3C4-3C5	Wavecom	VHF PAL TV Modulator	157728
□ - A-8000	IFR	Spectrum Analyzer	1306
□ - 8648B	Hewlett-Packard	Signal Generator	3623A01433
□ - 8648B	Hewlett-Packard	Signal Generator	3623A01477
□ - LMV-182A	Leader	RMS Milli-Voltmeter	8010091
□ - 3202	Krion-Hite	Active filter	5899
□ - FMT115	Leaming	FM Modulator	NONE
□ - 371	UDT	Optical power meter	06657
□ - TSG95	Tektronix	PAL video / Audio generator	B028883
□ -			

*Test Report Number 05F314B*

## **Equipment Under Test (EUT) Test Operation Mode - Emission tests :**

**The device under test was operated under the following conditions during emissions testing:**

- Standby
- Test program (H - Pattern)
- Test program (color bar)
- Test program (customer specific)
- Practice operation
- Normal Operating Mode
- Transmitting Continuously

### **Configuration of the device under test:**

- See System Under Test Information in Appendix B

### **Rationale for EUT setup / configuration:**

---

---

---

---

---

*Test Report Number 05F314B*

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd, Dade City, FL 33525  
Tel (352) 588-2209 Fax (352) 588-2544

## Emission Test Results:

### Conducted emissions 150 kHz - 30 MHz

The requirements are  - MET  - NOT MET  
Minimum limit margin dB at MHz  
Remarks:

### Radiated emissions (magnetic field) 10 kHz - 30 MHz

The requirements are  - MET  - NOT MET  
Minimum limit margin dB at MHz  
Remarks:

### Radiated emissions (electric field) 30 MHz - 1000 MHz

The requirements are  - MET  - NOT MET  
Minimum limit margin 8.2 dB at 945 MHz  
Remarks: Transmitting @ 315 MHz

### Interference Power at the mains and interface cables 30 MHz - 300 MHz

The requirements are  - MET  - NOT MET  
Minimum limit margin dB at MHz  
Remarks:

### Radiated emissions 1 GHz - 3.9 GHz

The requirements are  - MET  - NOT MET  
Minimum limit margin 1.9 dB at 1.17 GHz  
Remarks: Transmitting @ 390 MHz

### Antenna Terminal Disturbance Voltage 30 MHz - 1,000 MHz

The requirements are  - MET  - NOT MET  
Minimum limit margin dB at MHz  
Remarks:

Test Report Number 05F314B

## **GENERAL REMARKS:**

## **SUMMARY:**

The requirements according to the technical regulations are

- met

- **not** met.

The device under test does

- fulfill the general approval requirements mentioned on page 3.

- **not** fulfill the general approval requirements mentioned on page 3.

Testing Start Date July 22, 2005

Testing End Date: July 22, 2005

- PRODUCT SAFETY ENGINEERING INC -

*Test Report Number 05F314B*

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525  
Tel (352) 588-2209 Fax (352) 588-2544

Page 10 of 11

Test-setup photo(s):  
Radiated emission 30 MHz - 3900 MHz



*Test Report Number 05F314B*

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525  
Tel (352) 588-2209 Fax (352) 588-2544

Page 11 of 11

## **APPENDIX**

### **A**

# **Test Equipment Calibration Information**

**&**

# **Test Data Sheets**

Page A1 of A5

## TEST EQUIPMENT CALIBRATION INFORMATION

Manufacturer	Model	Description	Serial Number	Cal Due
Hewlett Packard	8566B	Spectrum Analyzer	2421A00526	08/12/05
Hewlett Packard	85662A	Display	2403A07352	08/12/05
Hewlett Packard	85650A	Quasi-Peak Adapter	2043A00209	08/12/05
Hewlett Packard	8447D	Preamp 0.1 - 1,000 MHz	2944A06832	12/13/05
Hewlett Packard	8568B	Spectrum Analyzer	2407A03213	08/12/05
Hewlett Packard	85662A	Display	2340A05806	08/12/05
Hewlett Packard	85650A	Quasi-Peak Adapter	2043A00358	08/12/05
Hewlett Packard	8447D	Preamp 0.1 - 1,000 MHz	2944A06901	08/12/05
Hewlett Packard	8447D	Preamp 0.1 - 1,000 MHz	1937A03247	08/12/05
Hewlett Packard	8449B	Preamp 1 - 26.5 GHz	3008A00320	12/13/05
Hewlett Packard	8648B	Signal Generator	3443U00312	05/26/06
Hewlett Packard	8672A	Signal Generator	2211A02426	12/13/05
Eaton	96005	Log Periodic Antenna	1099	01/26/06
Electro-Metrics	LPA 30	Log Periodic Antenna	2280	01/11/06
Electro-Metrics	BIA 30	Biconical Antenna	3852	01/11/06
Electro-Metrics	BIA 25	Biconical Antenna	4283	01/27/06
Electro-Mechanics	3115	Double Ridge Guide Ant.	3810	11/25/05
Electro-Metrics	ALR30M	Magnetic Loop Antenna	824	01/10/06
Solar	8012	LISN	924840	03/10/06
Solar	8028	LISN	829012/809022	12/15/05
Solar	8028	LISN	903725/903726	12/15/05
Schwartzbeck	MDS-21	Absorbing Clamp	02581	12/09/05
Leader	LFG1310	Function Generator	8060233	05/26/06
Electro-Metrics	EMC-30	EMI Receiver	191	05/26/06
Antenna Research	ALA-130/A	Loop Antenna	106	05/03/05
Radio Shack	63-867	Temp/Hygrometer	N/A	05/27/06
Radio Shack	63-867A	Temp/Hygrometer	N/A	05/27/06

G14

Fundamental = 315 MHz

Freq (MHz)	* Measured (dBuV/M)	**Corrected	Limit (dBuV/M)	Margin (dB)
315	75.9	75.9 - 12 = 63.9	75.6	-11.7
630	53.6	53.6 - 12 = 41.6	55.6	-14.0
945	59.4	59.4 - 12 = 47.4	55.6	-8.2
1260	48.0	48.0 - 12 = 36.0	55.6	-19.6
<b>1575</b>	<b>&lt; 40</b>	<b>40.0 - 12 = 28</b>	<b>54.0</b>	<b>&gt; 20</b>
1890	< 40	40.0 - 12 = 28	55.6	> 20
<b>2205</b>	<b>&lt; 40</b>	<b>40.0 - 12 = 28</b>	<b>54.0</b>	<b>&gt; 20</b>
2520	< 40	40.0 - 12 = 28	55.6	> 20
<b>2835</b>	<b>&lt; 40</b>	<b>40.0 - 12 = 28</b>	<b>54.0</b>	<b>&gt; 20</b>
3150	< 40	40.0 - 12 = 28	55.6	> 20

**Bold are in restricted bands**

G14

Fundamental = 390 MHz


Freq (MHz)	* Measured (dBuV/M)	**Corrected	Limit (dBuV/M)	Margin (dB)
390	79.3	79.3 - 12 = 67.3	79.2	-11.9
780	57.6	57.6 - 12 = 45.6	59.2	-13.6
<b>1170</b>	<b>64.1</b>	<b>64.1 - 12 = 52.1</b>	<b>54.0</b>	<b>- 1.9</b>
<b>1560</b>	<b>56.2</b>	<b>56.2 - 12 = 44.2</b>	<b>54.0</b>	<b>- 9.8</b>
1950	48.2	48.2 - 12 = 36.2	59.2	> 20
<b>2340</b>	<b>42.4</b>	<b>42.4 - 12 = 30.4</b>	<b>54.0</b>	<b>&gt; 20</b>
<b>2730</b>	<b>&lt; 40</b>	<b>40.0 - 12 = 28</b>	<b>54.0</b>	<b>&gt; 20</b>
3120	< 40	40.0 - 12 = 28	59.2	> 20
3510	< 40	40.0 - 12 = 28	59.2	> 20
<b>3900</b>	<b>&lt; 40</b>	<b>40.0 - 12 = 28</b>	<b>54.0</b>	<b>&gt; 20</b>

**Bold are in restricted bands**

\*Measured (dBuV/M) = Field Strength @ 3 Meters with Peak Detector

\*\*Corrected (dBuV/M) = Field Strength @ 3 Meters with Duty Cycle reduction applied (Average)



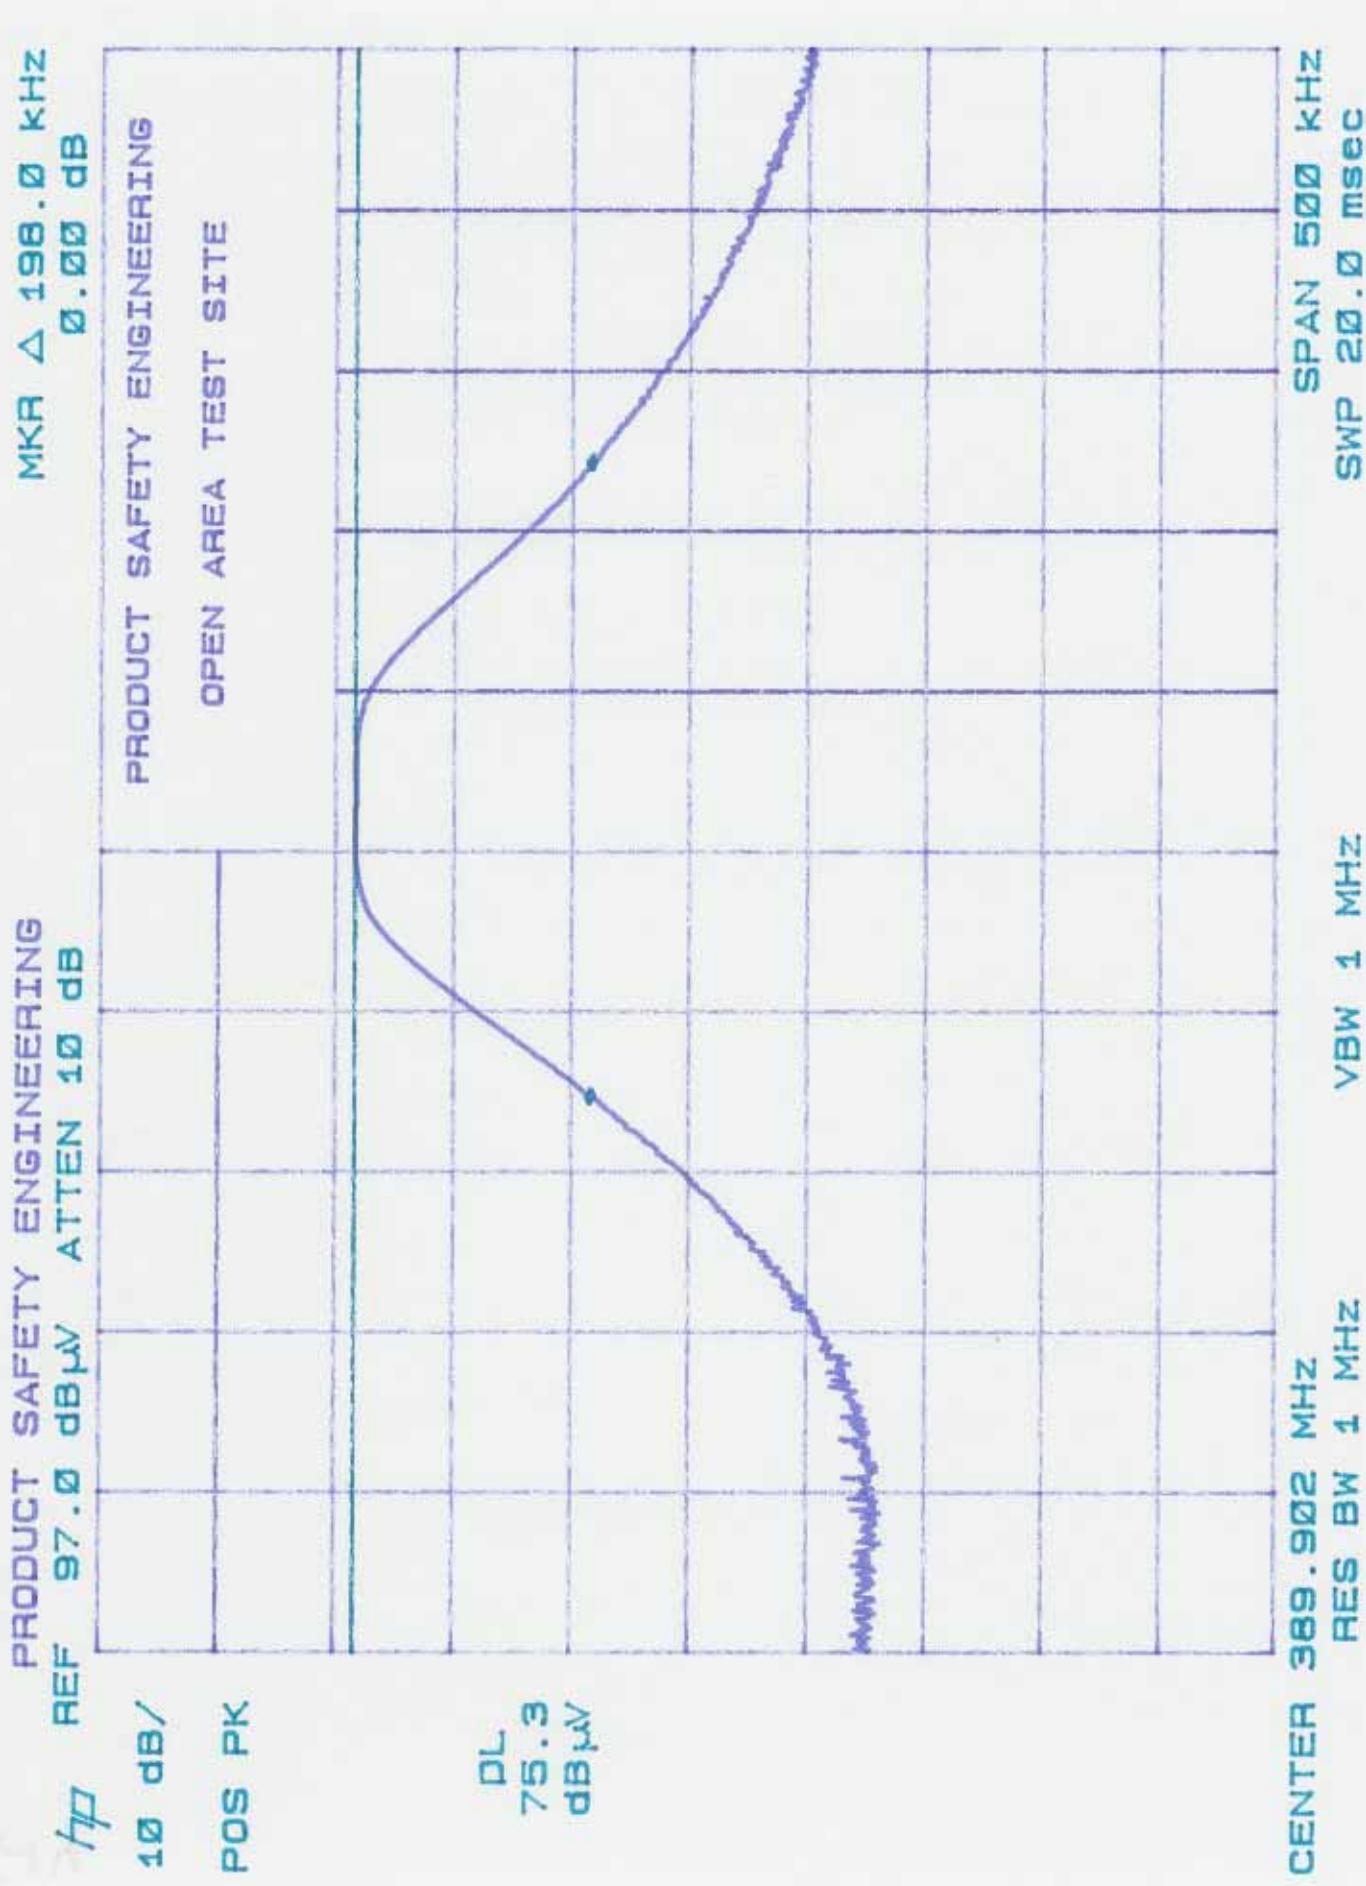

# **APPENDIX**

## **B**

### **System Under Test Description**

Page B1 of B4

## SYSTEM COMPONENTS

\*\*\*\*\*

DEVICE TYPE: EUT, SHORELINE G14 DUAL FREQUENCY REMOTE CONTROL

Genie Model Number GIFTD-1BL, Overhead Door Model Number OCDFTD-1BL

FCC ID: RUC - SE - G14J07 IC: 5062A-SEG14J07

\*\*\*\*\*

Page B2 of B4

## **INTERFACE CABLES**

\*\*\*\*\*

**DEVICE TYPE: EUT, NONE**

**SHIELD:**

**LENGTH:**

**CONNECTOR TYPE:**

**PORT:**

\*\*\*\*\*

## AC LINE CORDS

\*\*\*\*\*

DEVICE TYPE: EUT      **NONE**  
SHIELD:  
LENGTH:  
CONNECTOR TYPE:

\*\*\*\*\*

Page B4 of B4

# **APPENDIX**

## **C**

### **Measurement Protocol**

Page C1 of C2

The test methodology followed during the collection of the data included within this technical report was ANSI C63.4:1992.

The EUT was powered with 3 VDC during the collection of data included within.

The data is compared to the FCC Part 15 Class B limits.

The "EMI" instrumentation is capable of calculating the final emission level based on the following formula:

Level at the receiver (dB $\mu$ V) + Antenna Correction Factor (dB/M) + Cable Loss (dB) - Preamp Gain (dB) = Actual Level in dB $\mu$ V/M.

The sample calculation below is based on the actual test data collected:

Observed Level	<b>63.6</b>	dB $\mu$ V
ACF	<b>+</b>	<b>20.0</b> dB/M
Cable Loss	<b>+</b>	<b>9.6</b> dB
Preamp Gain	<b>-</b>	<b><u>26.0</u></b> dB
Actual Level	<b>67.2</b>	dB $\mu$ V/M @ 630 MHz

Please have a company official review this report and sign.

---