



DATE: 23 May 2004

I.T.L. (PRODUCT TESTING) LTD.
FCC EMC Test
for
EMTS Inc.

Equipment under test:
IntegrAlarm Control Panel
(Transmitter Section)

IA-CP1

Written by:

D. Shidowsky, Documentation

Approved by:

E. Pitt, Test Engineer

Approved by:

I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



Measurement/Technical Report for EMTS Inc.

IntegrAlarm Control Panel (For Transmitter Section)

IA-CP1

FCC ID:RUF150701

23 May 2004

This report concerns: Original Grant Class II change

Class B verification Class A verification Class I change

Equipment type: Radio Telemetry Transmitter

Request Issue of Grant:

Immediately upon completion of review

Limits used:

CISPR 22 Part 15

Measurement procedure used is ANSI C63.4-2001.

Application for Certification

prepared by:

Ishaishou Raz

ITL (Product Testing) Ltd.

Kfar Bin Nun

D.N. Shimshon 99780

Israel

e-mail: Sraz@itl.co.il

Applicant for this device:

(different from "prepared by")

Doron Lavee

EMTS Inc.

300 Alden Road

Markham, Ontario, L3R4C1

Canada

Tel: +1-905-946-8589

Fax: +1-905-947-0138

e-mail: doronl@aqi.co.il

TABLE OF CONTENTS

1. GENERAL INFORMATION -----	4
1.1 Administrative Information.....	4
1.2 List of Accreditations	5
1.3 Product Description	6
1.4 Test Methodology	6
1.5 Test Facility	6
1.6 Measurement Uncertainty	6
2. PRODUCT LABELING-----	7
3. SYSTEM TEST CONFIGURATION-----	8
3.1 Justification.....	8
3.2 EUT Exercise Software	8
3.3 Special Accessories	8
3.4 Equipment Modifications	8
3.5 Configuration of Tested System	8
4. BLOCK DIAGRAM -----	9
4.1 Schematic Block/Connection Diagram.....	9
4.2 Theory of Operation.....	9
5. SPURIOUS RADIATED EMISSION, BELOW 1 GHZ -----	10
5.1 Test Specification	10
5.2 Test Procedure	10
5.3 Test Data	11
5.4 Test Instrumentation Used, Radiated Measurements.....	13
5.5 Field Strength Calculation	14
6. SPURIOUS RADIATED EMISSION ABOVE 1 GHZ-----	15
6.1 Test Specification	15
6.2 Radiated Emission Above 1 GHz	15
6.3 Test Data	15
6.4 Test Instrumentation Used, Radiated Measurements Above 1 GHz.....	24



1. General Information

1.1 Administrative Information

Manufacturer: EMTS Inc.

Manufacturer's Address: 300 Alden Road
Markham, Ontario L3E4C1
Canada
Tel: +1-905-946-8589
Fax: +1-905-947-0138

Manufacturer's Representative: Doron Lavee

Equipment Under Test (E.U.T): IntegrAlarm Control Panel

Equipment Model No.: IA-CP1

Equipment Serial No.: Not designated

Date of Receipt of E.U.T: 02.05.04

Start of Test: 02.05.04

End of Test: 02.05.04

Test Laboratory Location: I.T.L (Product Testing) Ltd.
Kfar Bin Nun,
ISRAEL 99780

Test Specifications: FCC Part 15, Sub-part C



1.2 *List of Accreditations*

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), File No. IC 4025.
6. TUV Product Services, England, ASLLAS No. 97201.
7. Nemko (Norway), Authorization No. ELA 207.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.



1.3 *Product Description*

See details in ITL test report no. E52237.00

Description of change:

The dipole antenna of this unit was replaced by a loaded monopole antenna with -6db gain.

1.4 *Test Methodology*

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2001. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 *Test Facility*

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing December 12, 2003).

I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 *Measurement Uncertainty*

Radiated Emission

The Open Site complies with the ± 4 dB Normalized Site Attenuation requirements of ANSI C63.4-2001. In accordance with Paragraph 5.4.6.1 of this standard, this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.



2. Product Labeling

See ITL test report no. E52237.00.

3. System Test Configuration

3.1 *Justification*

See ITL test report no. E52237.00.

Spurious radiated emissions re-testing was performed according to correspondence with METLabs dated 05 April 2004.

3.2 *EUT Exercise Software*

See ITL test report no. E52237.00.

3.3 *Special Accessories*

See ITL test report no. E52237.00.

3.4 *Equipment Modifications*

See ITL test report no. E52237.00.

3.5 *Configuration of Tested System*

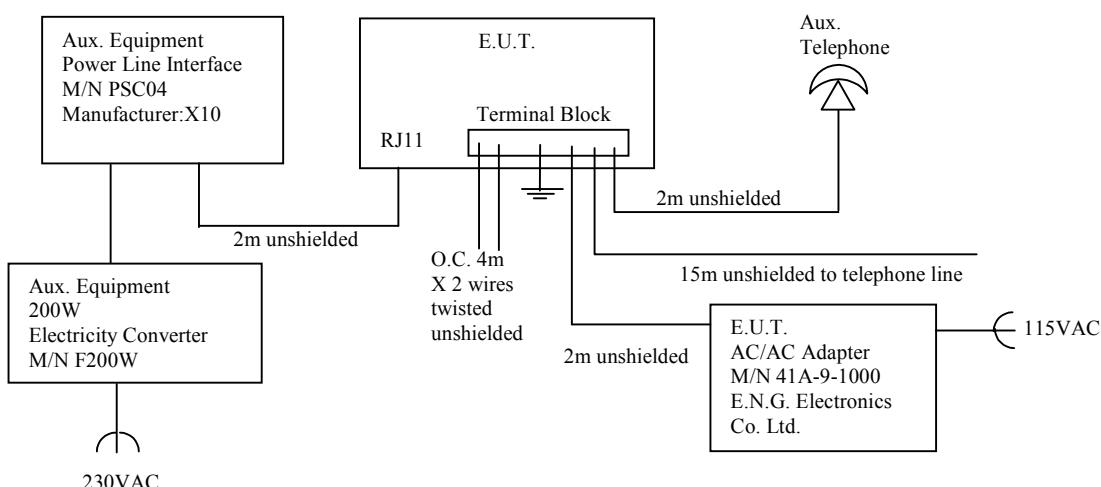


Figure 1. Configuration of Tested System



4. Block Diagram

4.1 *Schematic Block/Connection Diagram*

Intentionally Blank for Reasons of Confidentiality

4.2 *Theory of Operation*

See ITL test report no. E52237.00.

5. Spurious Radiated Emission, Below 1 GHz

5.1 ***Test Specification***

9kHz-1000 MHz, FCC, Part 15, Subpart C

5.2 ***Test Procedure***

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9kHz-1000 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter.

In the frequency range 30-1000MHz, the readings were maximized by adjusting the antenna height between 1-4 meters. The turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods:

Turning the E.U.T on and off.

Using a frequency span less than 10 MHz.

Observation of the signal level during turntable rotation. Background noise is not affected by the rotation of the E.U.T.

The E.U.T was tested in the operating frequencies of 916.5 and 926.5 MHz.

5.3 **Test Data**

JUDGEMENT: Passed by 6.3 dB

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification. The margin between the emission level and the specification limit is 6.3 dB in the worst case at the frequency of 133.29 MHz, horizontal and vertical polarizations for the operating frequencies of 916.5 and 926.5 MHz.

The signals in the band 9 kHz –30 MHz were below the spectrum analyzer noise level which is at least 6dB below the specification limit.

The details of the highest emissions are given in Figure 2.

TEST PERSONNEL:

Tester Signature: 

Date: 01.06.04

Typed/Printed Name: E. Pitt

Radiated Emission

E.U.T Description IntegrAlarm Control Panel
 Type IA-CP1
 Serial Number: Not designated

Specification: FCC Part 15, Subpart C

Antenna Polarization: Horizontal + Vertical Frequency range: 30 MHz to 1000 MHz
 Antenna: 3 meters distance Detectors: Peak, Quasi-peak
 Operating Frequencies: 916.5; 926.5 MHz

Frequency	Peak Amp	QP Amp	Correction	Specification	Margin
(MHz)	(dB μ V/m)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB)
114.64	29.9	27.1	13.3	43.5	-16.4
130.63	38.9	36.1	13.9	43.5	-7.4
133.29	39.9	37.2	14.1	43.5	-6.3
162.64	33.1	29.2	15.3	43.5	-14.3
242.65	34.4	26.5	19.8	46.0	-19.5
282.61	35.1	31.2	22.0	46.0	-14.8
400.57	32.5	30.0	18.5	46.0	-16.0
611.07	34.6	28.8	22.4	46.0	-17.2

Figure 2. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detectors: Peak, Quasi-peak

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

5.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3411A00102	February 28, 2004	1 year
RF Section	HP	85420E	3427A00103	February 28, 2004	1 year
Antenna Bioconical	ARA	BCD 235/B	1041	April 11, 2004	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 21, 2004	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 17, 2003	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	ThinkJet 2225	2738508357.0	N/A	N/A



5.5 **Field Strength Calculation**

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[\text{dB}\mu\text{v}/\text{m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF}$$

FS: Field Strength [dB μ v/m]
RA: Receiver Amplitude [dB μ v]
AF: Receiving Antenna Correction Factor [dB/m]
CF: Cable Attenuation Factor [dB]

No external pre-amplifiers are used.

6. Spurious Radiated Emission Above 1 GHz

6.1 Test Specification

1000-9500 MHz, FCC, Part 15, Subpart C

6.2 Radiated Emission Above 1 GHz

The E.U.T operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

In the frequency range 1-2.9 GHz, a computerized EMI receiver complying to CISPR 16 requirements was used. The test distance was 3 meters.

In the frequency range 2.9-9.5 GHz, a spectrum analyzer including a low noise amplifier was used. The test distance was 3 meters. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz. The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

6.3 Test Data

JUDGEMENT: Passed by 17.3 dB

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

The worst cases were:

for 916.5 MHz, 19.7dB margin at 3665.73 MHz frequency, horizontal polarization.

for 926.5 MHz, 17.3dB margin at 3705.80 MHz frequency, horizontal polarization

The details of the highest emissions are given in Figure 3 to Figure 10.

TEST PERSONNEL:

Tester Signature: 

Date: 01.06.04

Typed/Printed Name: E. Pitt

Radiated Emission Above 1 GHz

E.U.T Description IntegrAlarm Control Panel
 Type IA-CP1
 Serial Number: Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 1.0 GHz to 9.5 GHz
 Test Distance: 3 meters Detector: Peak
 Operating Frequency: 916.433 MHz

Freq. (MHz)	Peak Result (dB μ V/m)	Peak. Specification (dB μ V/m)	Peak. Margin (dB)
2749.30	51.2**	74.0	-22.8
3665.73	54.1*	74.0	-19.9
4582.10	53.6*	74.0	-20.4
7331.50	43.6*	74.0	-30.4
8247.90	44.8*	74.0	-29.2
9164.30	45.5*	74.0	-28.5

**Figure 3. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Peak**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Result” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Preamplifier Gain

** “Correction Factor” = Antenna Factor + Cable Loss

Radiated Emission Above 1 GHz

E.U.T Description IntegrAlarm Control Panel
 Type IA-CP1
 Serial Number: Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 1.0 GHz to 9.5 GHz
 Test Distance: 3 meters Detector: Average
 Operating Frequency: 916.433 MHz

Freq. (MHz)	Average Result (dB μ V/m)	Average Specification (dB μ V/m)	Avg. Margin (dB)
2749.30	31.2**	54.0	-22.8
3665.73	34.1*	54.0	-19.9
4582.10	33.6*	54.0	-20.4
7331.50	23.6*	54.0	-30.4
8247.90	24.8*	54.0	-29.2
9164.30	25.5*	54.0	-28.5

**Figure 4. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Result” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Preamplifier Gain

** “Correction Factor” = Antenna Factor + Cable Loss

$$\text{Duty Cycle Factor} = 20 \log \frac{10}{100} = -20 \text{dB}$$



Radiated Emission Above 1 GHz

E.U.T Description: IntegrAlarm Control Panel
Type: IA-CP1
Serial Number: Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Vertical Frequency range: 1.0 GHz to 9.5 GHz
Test Distance: 3 meters Detector: Peak
Operating Frequency: 916.433 MHz

Freq.	Peak Result	Peak Specification	Peak Margin
(MHz)	(dB μ V/m)	(dB μ V/m)	(dB)
2749.30	50.9**	74.0	-23.1
3665.73	54.3*	74.0	-19.7
4582.10	46.7*	74.0	-27.3
7331.50	43.2*	74.0	-30.8
8247.90	44.6*	74.0	-29.4
9164.30	45.5*	74.0	-28.5

Figure 5. Radiated Emission. Antenna Polarization: VERTICAL. Detector: Peak

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Result” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Preamplifier Gain

** "Correction Factor" = Antenna Factor + Cable Loss



Radiated Emission Above 1 GHz

E.U.T Description IntegrAlarm Control Panel
Type IA-CP1
Serial Number: Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Vertical Frequency range: 1.0 GHz to 9.5 GHz
Test Distance: 3 meters Detector: Average
Operating Frequency: 916.433 MHz

Freq. (MHz)	Average Result (dB μ V/m)	Average Specification (dB μ V/m)	Avg. Margin (dB)
2749.30	30.9**	54.0	-23.1
3665.73	34.3*	54.0	-19.7
4582.10	26.7*	54.0	-27.3
7331.50	23.2*	54.0	-30.8
8247.90	24.6*	54.0	-29.4
9164.30	25.5*	54.0	-28.5

**Figure 6. Radiated Emission. Antenna Polarization: VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Result” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Preamplifier Gain

** “Correction Factor” = Antenna Factor + Cable Loss

$$\text{Duty Cycle Factor} = 20 \log \frac{10}{100} = -20 \text{dB}$$

Radiated Emission Above 1 GHz

E.U.T Description IntegrAlarm Control Panel
 Type IA-CP1
 Serial Number: Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 1.0 GHz to 9.5 GHz
 Test Distance: 3 meters Detector: Peak
 Operating Frequency: 926.45 MHz

Freq. (MHz)	Peak Result (dB μ V/m)	Peak. Specification (dB μ V/m)	Peak. Margin (dB)
2779.40	52.2**	74.0	-21.8
3705.80	56.1*	74.0	-17.9
4632.30	54.6*	74.0	-19.4
7411.60	44.2*	74.0	-29.8
8338.10	46.1*	74.0	-27.9
9264.50	46.0*	74.0	-28.0

**Figure 7. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Peak**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Result” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Preamplifier Gain

** “Correction Factor” = Antenna Factor + Cable Loss

Radiated Emission Above 1 GHz

E.U.T Description IntegrAlarm Control Panel
 Type IA-CP1
 Serial Number: Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 1.0 GHz to 9.5 GHz
 Test Distance: 3 meters Detector: Average
 Operating Frequency: 926.45 MHz

Freq. (MHz)	Average Result (dB μ V/m)	Average Specification (dB μ V/m)	Avg. Margin (dB)
2779.40	32.2**	54.0	-21.8
3705.80	36.1*	54.0	-17.9
4632.30	34.6*	54.0	-19.4
7411.60	24.2*	54.0	-29.8
8338.10	26.1*	54.0	-27.9
9264.50	26.0*	54.0	-28.0

**Figure 8. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Result” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Preamplifier Gain

** “Correction Factor” = Antenna Factor + Cable Loss

$$\text{Duty Cycle Factor} = 20 \log \frac{10}{100} = -20 \text{dB}$$

Radiated Emission Above 1 GHz

E.U.T Description IntegrAlarm Control Panel
 Type IA-CP1
 Serial Number: Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Vertical Frequency range: 1.0 GHz to 9.5 GHz
 Test Distance: 3 meters Detector: Peak
 Operating Frequency: 926.45 MHz

Freq. (MHz)	Peak Result* (dB)	Peak. Specification (dB μ V/m)	Peak. Margin (dB)
2779.40	51.7**	74.0	-22.3
3705.80	56.7*	74.0	-17.3
4632.30	43.3*	74.0	-30.7
7411.60	43.8*	74.0	-30.2
8338.10	44.6*	74.0	-29.4
9264.50	46.0*	74.0	-28.0

**Figure 9. Radiated Emission. Antenna Polarization: VERTICAL.
Detector: Peak**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Result” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Preamplifier Gain

** “Correction Factor” = Antenna Factor + Cable Loss

Radiated Emission Above 1 GHz

E.U.T Description IntegrAlarm Control Panel
 Type IA-CP1
 Serial Number: Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Vertical Frequency range: 1.0 GHz to 9.5 GHz
 Test Distance: 3 meters Detector: Average
 Operating Frequency: 926.45 MHz

Freq. (MHz)	Average Result (dB μ V/m)	Average Specification (dB μ V/m)	Avg. Margin (dB)
2779.40	31.7**	54.0	-22.3
3705.80	36.7*	54.0	-17.3
4632.30	23.3*	54.0	-30.7
7411.60	23.8*	54.0	-30.2
8338.10	24.6*	54.0	-29.4
9264.50	26.0*	54.0	-28.0

**Figure 10. Radiated Emission. Antenna Polarization: VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Result” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Preamplifier Gain

** “Correction Factor” = Antenna Factor + Cable Loss

$$\text{Duty Cycle Factor} = 20 \log \frac{10}{100} = -20 \text{dB}$$

6.4 Test Instrumentation Used, Radiated Measurements Above 1 GHz

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Receiver	HP	85422E	3411A00102	February 28, 2004	1 year
RF Section	HP	85420E	3427A00103	February 28, 2004	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	ThinkJet2225	2738508357	N/A	N/A
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 31,2003	2 year
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 17, 2004	1 year
Horn Antenna	ARA	SWH-28	1007	October 28, 2003	1 year
Band Pass Filter	SERNO	22102-0001	322	August 15, 2003	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	October 14, 2003	1 year
Spectrum Analyzer	HP	8592L	3926A01204	February 28, 2004	1 year
Attenuator	MACOM	ATT-10	N/A	July 27, 2003	1 year
Attenuator	MACOM	ATT-10	N/A	July 27, 2003	1 year