

Test Report of FCC CFR 47 Part 15 Subpart B

On Behalf of

Shenzhen Lianxintai Technology Co., Ltd


FCC ID: RUL-LT70X
Product Description: Tablet PC
Model No.: LT704A
Supplementary Model: LT702, LT705 (Difference between these models are appearances color)
Brand Name: N/A

Prepared for: Shenzhen Lianxintai Technology Co., Ltd
A1818, Baohua Building, Huaqiang Road, Shenzhen, China


Prepared by: Bontek Compliance Testing Laboratory Co., Ltd
1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China
Tel: 86-755-86337020
Fax: 86-755-86337028

Report No.: BCT13AR-0057E-2
Issue Date: January 23, 2013
Test Date: January 17~23, 2013

Tested by:


Lion Cai

Reviewed by:


Kerdy Wang

Approved by:



Tony Wu

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	4
1.3 TEST FACILITY	4
2. SYSTEM TEST CONFIGURATION	5
2.1 EUT CONFIGURATION	5
2.2 SUPPORT EQUIPMENTS	5
2.3 GENERAL TEST PROCEDURES	5
2.4 MEASUREMENT UNCERTAINTY	5
2.5 LIST OF MEASURING EQUIPMENTS USED	6
3. SUMMARY OF TEST RESULTS.....	7
4. TEST OF AC POWER LINE CONDUCTED EMISSION	8
4.1 LIMIT OF AC POWER LINE CONDUCTED EMISSION	8
4.2 EUT SETUP	8
4.3 INSTRUMENT SETUP	9
4.4 TEST PROCEDURE	9
4.5 TEST RESULT	9
5 - RADIATED DISTURBANCES	14
5.1 LIMIT OF RADIATED DISTURBANCES	14
5.2 EUT SETUP	14
5.3 TEST RECEIVER SETUP	15
5.4 TEST PROCEDURE	15
5.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	15
5.6 RADIATED EMISSIONS TEST RESULT	15

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant:	Shenzhen Lianxintai Technology Co., Ltd
Address of Applicant:	A1818,Baohua Building,Huaqiang Road,Shenzhen,China
Manufacturer:	Shenzhen Lianxintai Technology Co., Ltd
Address of Manufacturer:	A1818,Baohua Building,Huaqiang Road,Shenzhen,China

General Description of E.U.T

Items	Description
EUT Description:	Tablet PC
Trade Name:	NA
Model No.:	LT704A
Supplementary Model:	LT702, LT705 (Difference between these models are appearances color)
Frequency Band:	IEEE 802.11b/g, IEEE 802.11n HT20 (ISM Band) : 2412MHz~2462MHz, IEEE 802.11n HT40 (ISM Band) : 2422MHz~2452MHz
Channel Spacing:	IEEE 802.11b/g, 802.11n HT20/HT40: 5MHz
Number of Channels:	IEEE 802.11b/g, 802.11n HT20:11 Channels IEEE 802.11n HT40 :7 Channels
Transmit Data Rate:	maximum of 150Mbps
Type of Modulation:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20/40: OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Type:	Built-in Antenna
Antenna Gain:	0dBi
Power Supply:	AC/DC Adapter and build-in battery with DC3.7V 1100mAh
Adapter Information:	Model:LA-520W Input:100-240V 50/60Hz 0.3A Max Output: 5VDC 2000mA

* The test data gathered are from the production sample provided by the manufacturer.

* Supplementary models have the same circuit, but with different color.

1.2 Test Standards

The report of EUT is prepared in accordance with FCC Rules and Regulations Part 15 Subpart B 2006. The objective of the manufacturer is to demonstrate compliance with the described above standards.

1.3 Test Facility

All measurement required was performed at laboratory of Bontek Compliance Testing Laboratory Ltd at 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China.

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 338263

BONTEK COMPLIANCE TESTING LABORATORY LTD. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 03, 2011.

IC Registration No.: 7631A

The 3m alternate test site of BONTEK COMPLIANCE TESTING LABORATORY LTD. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on January 25, 2011.

CNAS - Registration No.: L3923

BONTEK COMPLIANCE TESTING LABORATORY LTD. to ISO/IEC 17025:25 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. The acceptance letter from the CNAS is maintained in our files: Registration: L3923, March 22, 2012.

TUV - Registration No.: UA 50203122-0001

BONTEK COMPLIANCE TESTING LABORATORY LTD. An assessment of the laboratory was conducted according to the "Procedures and Conditions for EMC Test Laboratories" with reference to EN ISO/IEC 17025 by a TUV Rheinland auditor. Audit Report NO. 17010783-002.

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 Support Equipments

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

Support equipments or special accessories in test configuration:

AUX Description:	Manufacturer	Model No.	Certificate	CABLE
Host Computer	Dell	78MD82X	CE, FCC	1.5m Unshielded Power Cord
Monitor	Dell	E178Pc	CE, FCC	1.5m Unshielded Power Cord 1.8m shielded data Cable with core
Keyboard	Dell	L100	CE, FCC	1.8m shielded data Cable with core
LCD Colour TV	SHARP	LCD-32Z330A	CE, FCC	1.2m Unshielded Power Cord 1.5m shielded data Cable with core

2.3 General Test Procedures

Conducted Emissions: The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

Radiated Emissions: The EUT is placed on a turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

2.4 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

2.5 List of Measuring Equipments Used

Test equipments list of Shenzhen Bontek Compliance Testing Laboratory Co., Ltd.

No.	Equipment	Manufacturer	Model No.	S/N	Calibration date	Calibration due date
1	EMI Test Receiver	R&S	ESCI	100687	2012-4-6	2013-4-5
2	EMI Test Receiver	R&S	ESPI	100097	2012-7-25	2013-7-24
3	Amplifier	HP	8447D	1937A02492	2012-4-6	2013-4-5
4	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07101	2012-4-6	2013-4-5
5	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07102	2012-4-6	2013-4-5
6	Positioning Controller	C&C	CC-C-1F	MF7802113	N/A	N/A
7	Signal generator	Rhode & Schwarz	SMIQ 03HD + option SM-B1, SMIQB11, SMIQB12, SMIQB14, SMIQB17, SMIQB20	1125.5555.46	2012-4-6	2013-4-5
8	GSM system simulator	Rhode & Schwarz	CMU200 + option K20, K21, K22, K23, K24, K27, K28, K29, K42, K65, B12, B41, B52, B66, B56	1100.0008.34	2012-4-6	2013-4-5
9	GSM system simulator	Agilent	8960 Series 10 E1985A + GSM_AMPS	B.01.76 GB42450443	2012-4-6	2013-4-5
10	Spectrum Analyzer	Agilent	E4404B	US41192833	2012-4-6	2013-4-5
11	6dB Attenuator	Atten	Attenuator	DC-4GHz	2012-4-6	2013-4-5
12	Digital Multimeter	Fluke	15B	91280239	2012-4-6	2013-4-5
13	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9163	9163-324	2012-4-10	2013-4-9
14	Horn Antenna	SCHWARZBECK	BBHA9120A	0499	2012-11-27	2013-11-26
15	Active Loop Antenna	DAZE	ZN30900A	1200	2012-4-6	2013-4-6
16	9kHz-2.4GHz signal generator 2024	MARCONI	10S/6625-99-457-8730	112260/042	2012-4-6	2013-4-5
17	10dB attenuator	ELECTRO-METRICS	EM-7600	836	2012-4-6	2013-4-5
18	Spectrum Analyzer	R&S	FSP	100397	2012-11-2	2013-11-1
19	Broadband preamplifier	SCHWARZBECK	BBV9718	9718-182	2012-4-6	2013-4-5
20	Temperature & Humidity Chamber	TOPSTAT	TOS-831A	3438A05208	2012-4-6	2013-4-5

3. SUMMARY OF TEST RESULTS

Standard	Test Items	Result
FCC Part 15 Subpart B	Conduction Emission, 0.15MHz to 30MHz	Pass
FCC Part 15 Subpart B	Radiation Emission, 30MHz to 1000MHz	Pass

4. TEST OF AC POWER LINE CONDUCTED EMISSION

4.1 Limit of AC Power Line Conducted Emission

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

4.2 EUT Setup


The setup of EUT is according with ANSI C63.4-2003 measurement procedure. The specification used was the FCC Rules and Regulations Part 15 Subpart B limits.

The EUT was placed center and the back edge of the test table.

The AV cables were draped along the test table and bundled to 30-40cm in the middle.

The spacing between the peripherals was 10 cm.

Maximum emission emitted from EUT was determined by manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation and the levels in the final result of the test were recorded with the EUT running in the operating mode that maximum emission was emitted.

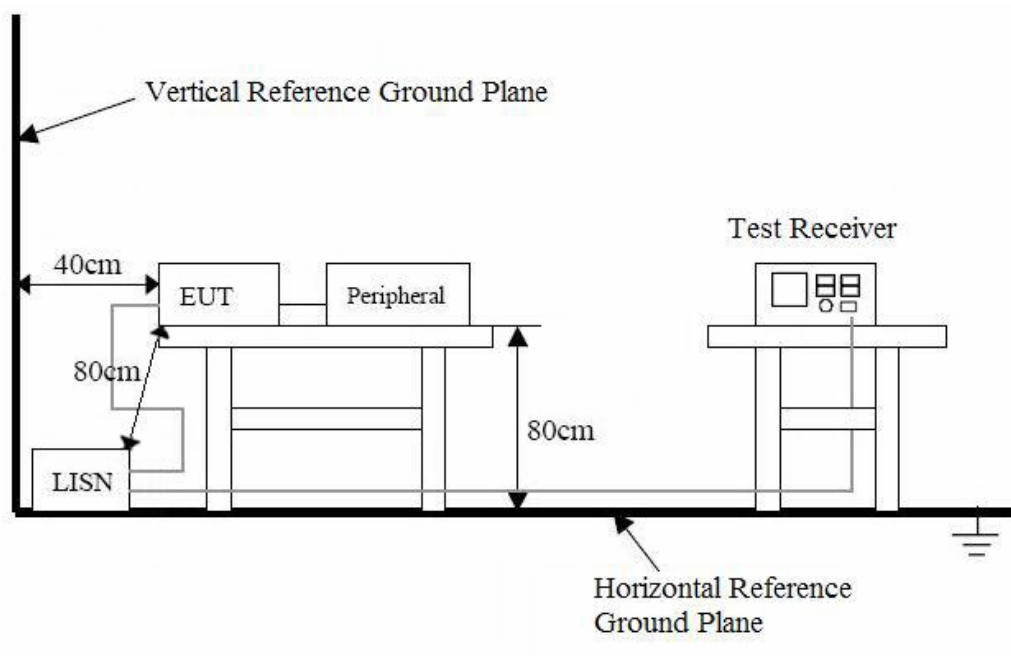

Remark: The EUT was connected to a 120VAC/ 60Hz power source.

4.3 Instrument Setup

The test receiver was set with the following configurations:

Test Receiver Setting:

Frequency Range.....150 KHz to 30 MHz
Detector.....Peak & Quasi-Peak & Average
Sweep Speed.....Auto
IF Band Width.....9 KHz

4.4 Test Procedure

During the conducted emission test, the EUT power cord was connected to the auxiliary outlet of the first Artificial Mains.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance using all installation combination.

All data was recorded in the peak detection mode. Quasi-peak and Average readings were only performed when an emission was found to be marginal (within -10 dB μ V of specification limits). Quasi-peak readings are distinguished with a "QP". Average readings are distinguished with a "AV".

4.5 Test Result


Temperature (°C) : 22~23	EUT: Tablet PC
Humidity (%RH) : 50~54	M/N: LT704A
Barometric Pressure (mbar) : 950~1000	Operation Condition: Normal operation(refer to test data)

Conducted Emission:

EUT: Tablet PC
M/N: LT704A
Operating Condition: Charging Mode
Test Site: Shielded Room
Operator: Yang
Test Specification: AC 120V/60Hz for adapter
Comment: L Line

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

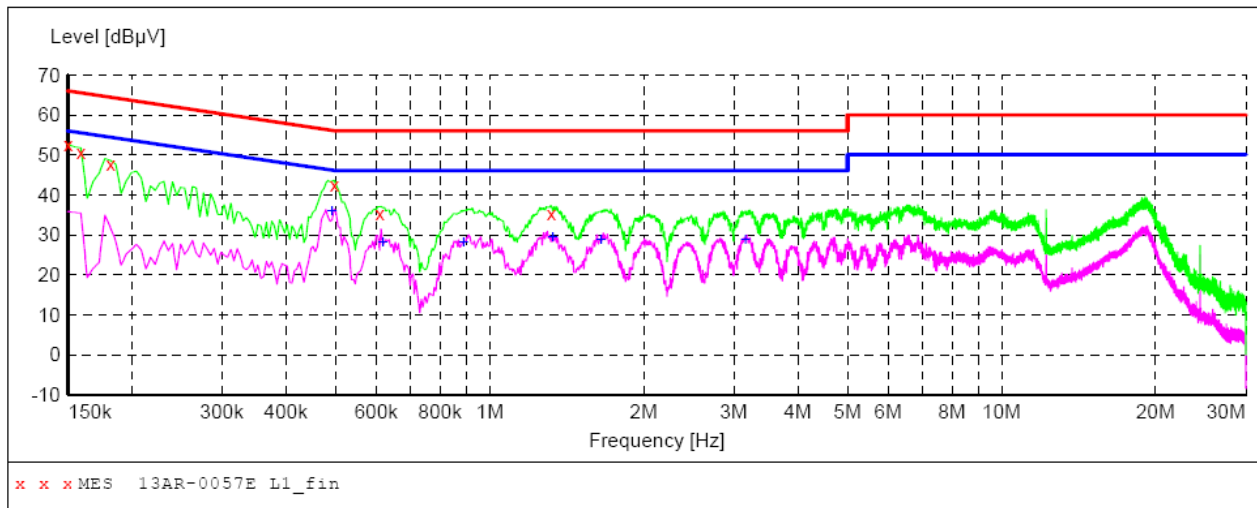

MEASUREMENT RESULT: "13AR-0057E L1_fin"

2/25/2013 6:31PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	52.70	11.4	66	13.3	QP	L1	GND
0.159000	50.70	11.3	66	14.8	QP	L1	GND
0.181500	47.70	11.0	64	16.7	QP	L1	GND
0.496500	42.50	10.3	56	13.6	QP	L1	GND
0.609000	35.30	10.2	56	20.7	QP	L1	GND
1.320000	35.20	10.2	56	20.8	QP	L1	GND

MEASUREMENT RESULT: "13AR-0057E L1_fin2"

2/25/2013 6:31PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.492000	36.00	10.3	46	10.1	AV	L1	GND
0.618000	28.30	10.2	46	17.7	AV	L1	GND
0.888000	28.00	10.2	46	18.0	AV	L1	GND
1.329000	29.30	10.2	46	16.7	AV	L1	GND
1.648500	28.90	10.2	46	17.1	AV	L1	GND
3.156000	28.90	10.3	46	17.1	AV	L1	GND

Conducted Emission:

EUT: Tablet PC
M/N: LT704A
Operating Condition: Charging Mode
Test Site: Shielded Room
Operator: Yang
Test Specification: AC 120V/60Hz for adapter
Comment: N Line

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

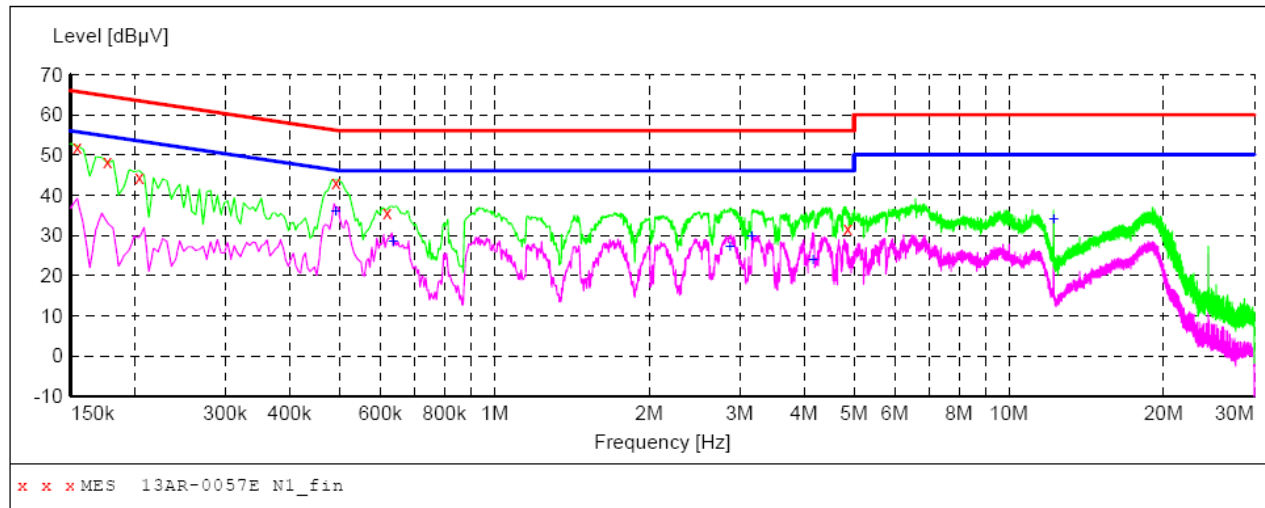

MEASUREMENT RESULT: "13AR-0057E N1_fin"

2/25/2013 6:28PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154500	52.00	11.4	66	13.8	QP	N	GND
0.177000	48.40	11.1	65	16.2	QP	N	GND
0.204000	44.50	10.8	63	18.9	QP	N	GND
0.492000	43.10	10.3	56	13.0	QP	N	GND
0.618000	35.60	10.2	56	20.4	QP	N	GND
4.866000	31.60	10.4	56	24.4	QP	N	GND

MEASUREMENT RESULT: "13AR-0057E N1_fin2"

2/25/2013 6:28PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.492000	35.90	10.3	46	10.2	AV	N	GND
0.636000	28.60	10.2	46	17.4	AV	N	GND
2.868000	27.30	10.2	46	18.7	AV	N	GND
3.160500	29.60	10.3	46	16.4	AV	N	GND
4.159500	23.90	10.3	46	22.1	AV	N	GND
12.210000	34.10	10.5	50	15.9	AV	N	GND

Conducted Emission:

EUT: Tablet PC
M/N: LT704A
Operating Condition: Connect to PC
Test Site: Shielded Room
Operator: Yang
Test Specification: AC 120V/60Hz for adapter
Comment: L Line

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

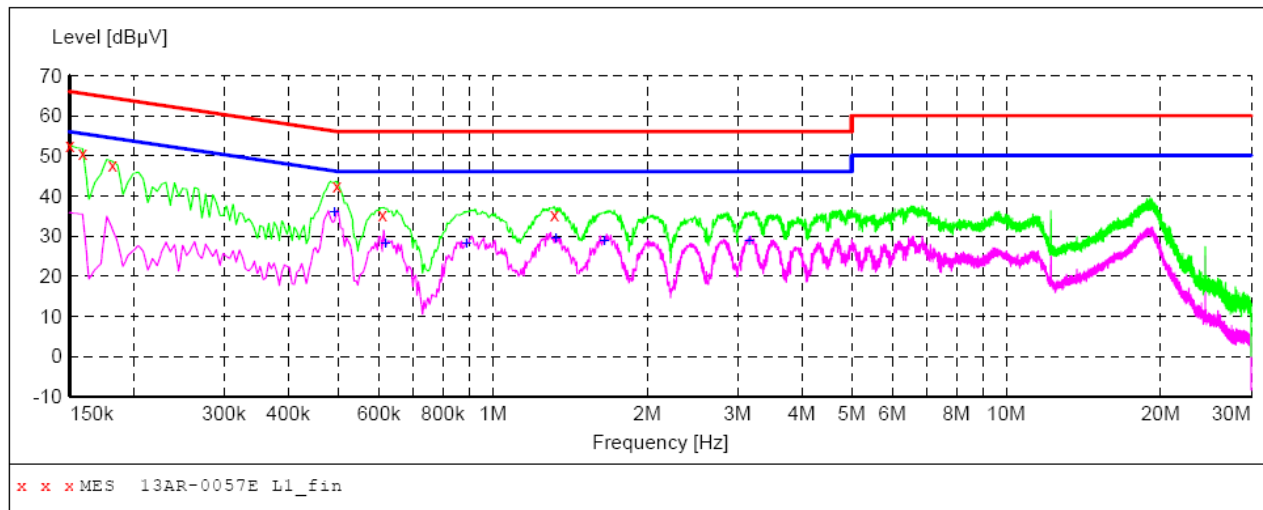

MEASUREMENT RESULT: "13AR-0057E L1_fin"

2/25/2013 6:31PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	52.70	11.4	66	13.3	QP	L1	GND
0.159000	50.70	11.3	66	14.8	QP	L1	GND
0.181500	47.70	11.0	64	16.7	QP	L1	GND
0.496500	42.50	10.3	56	13.6	QP	L1	GND
0.609000	35.30	10.2	56	20.7	QP	L1	GND
1.320000	35.20	10.2	56	20.8	QP	L1	GND

MEASUREMENT RESULT: "13AR-0057E L1_fin2"

2/25/2013 6:31PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.492000	36.00	10.3	46	10.1	AV	L1	GND
0.618000	28.30	10.2	46	17.7	AV	L1	GND
0.888000	28.00	10.2	46	18.0	AV	L1	GND
1.329000	29.30	10.2	46	16.7	AV	L1	GND
1.648500	28.90	10.2	46	17.1	AV	L1	GND
3.156000	28.90	10.3	46	17.1	AV	L1	GND

Conducted Emission:

EUT: Tablet PC
M/N: LT704A
Operating Condition: Connect to PC
Test Site: Shielded Room
Operator: Yang
Test Specification: AC 120V/60Hz for adapter
Comment: N Line

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

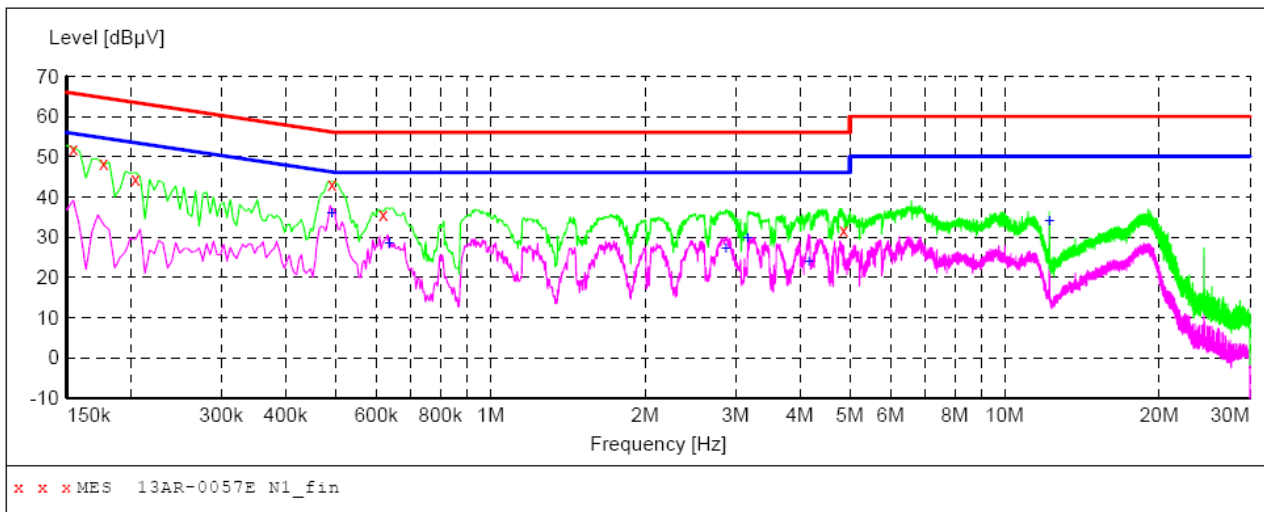

MEASUREMENT RESULT: "13AR-0057E N1_fin"

2/25/2013 6:28PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154500	52.00	11.4	66	13.8	QP	N	GND
0.177000	48.40	11.1	65	16.2	QP	N	GND
0.204000	44.50	10.8	63	18.9	QP	N	GND
0.492000	43.10	10.3	56	13.0	QP	N	GND
0.618000	35.60	10.2	56	20.4	QP	N	GND
4.866000	31.60	10.4	56	24.4	QP	N	GND

MEASUREMENT RESULT: "13AR-0057E N1_fin2"

2/25/2013 6:28PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.492000	35.90	10.3	46	10.2	AV	N	GND
0.636000	28.60	10.2	46	17.4	AV	N	GND
2.868000	27.30	10.2	46	18.7	AV	N	GND
3.160500	29.60	10.3	46	16.4	AV	N	GND
4.159500	23.90	10.3	46	22.1	AV	N	GND
12.210000	34.10	10.5	50	15.9	AV	N	GND

5 - RADIATED DISTURBANCES

5.1 Limit of Radiated Disturbances

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dB μ V/m)
30 ~ 88	3	40
88~216	3	43.5
216 ~ 960	3	46
960 ~ 1000	3	54

Note:

(1) The tighter limit shall apply at the edge between two frequency bands.

(2) Distance refers to the distance in meters between the test instrument antenna and the closest point of any part of the E.U.T.


5.2 EUT Setup

The radiated emission tests were performed in the in the 3-meter anechoic chamber, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part 15 Subpart B limits.

The EUT was placed on the center of the test table.

Maximum emission emitted from EUT was determined by manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation and the levels in the final result of the test were recorded with the EUT running in the operating mode that maximum emission was emitted.

Below 1 GHz

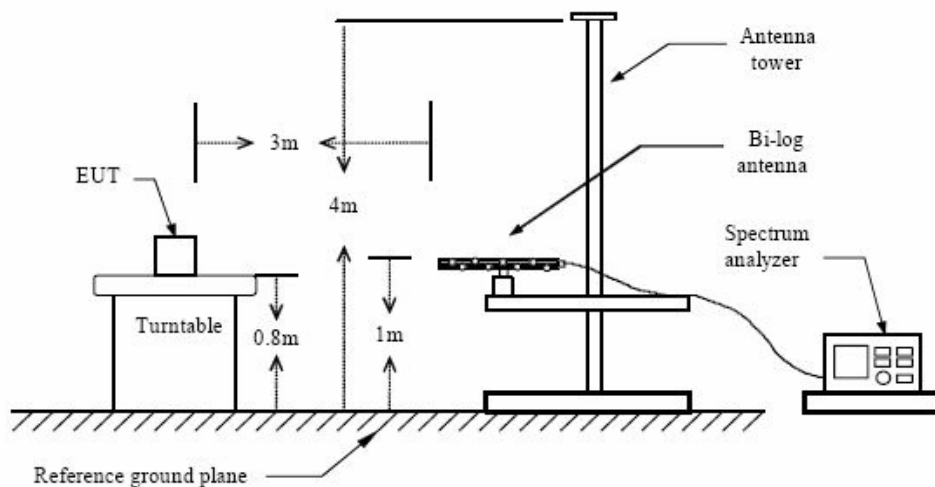

5.3 Test Receiver Setup

According to FCC Part 15 rule, the frequency was investigated from 30 to 1000 MHz. During the radiated emission test, the test receiver was set with the following configurations:

Test Receiver Setting:

Detector.....Peak & Quasi-Peak
IF Band Width.....120KHz
Frequency Range.....30MHz to 1000MHz
Turntable Rotated.....0 to 360 degrees

Antenna Position:

Height.....1m to 4m
Polarity.....Horizontal and Vertical

5.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the peak detection mode. Quasi-peak readings performed only when an emission was found to be marginal (within -10 dB μ V of specification limits), and are distinguished with a "QP" in the data table.

5.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

Corr. Ampl. = Indicated Reading + Antenna Factor + Cable Factor - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Subpart B. The equation for margin calculation is as follows:

Margin = Limit – Corr. Ampl.

5.6 Radiated Emissions Test Result


Temperature (°C) : 22~23	EUT: Tablet PC
Humidity (%RH) : 50~54	M/N: LT704A
Barometric Pressure (mbar) : 950~1000	Operation Condition: Normal operation(refer to test data)

Radiated Emission Test Data:

EUT: Tablet PC
M/N: LT704A
Operating Condition: Charging with Normal Operation
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: AC 120V/60Hz for adapter
Comment: Polarization: Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

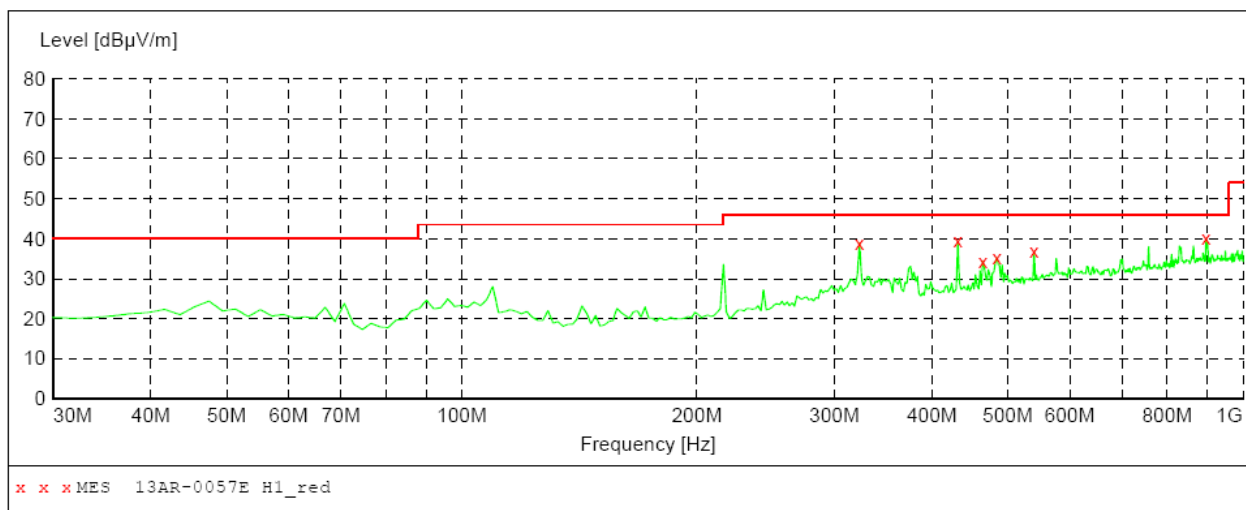

MEASUREMENT RESULT: "13AR-0057E H1_red"

1/23/2013 11:39AM


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
322.940000	39.00	19.3	46.0	7.0	---	100.0	0.00	HORIZONTAL
431.580000	39.50	22.0	46.0	6.5	---	300.0	0.00	HORIZONTAL
464.560000	34.40	22.5	46.0	11.6	---	300.0	0.00	HORIZONTAL
483.960000	35.30	23.2	46.0	10.7	---	100.0	0.00	HORIZONTAL
540.220000	36.80	24.8	46.0	9.2	---	100.0	0.00	HORIZONTAL
897.180000	40.10	29.2	46.0	5.9	---	100.0	0.00	HORIZONTAL

Radiated Emission Test Data:

EUT: Tablet PC
M/N: LT704A
Operating Condition: Charging with Normal Operation
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: AC 120V/60Hz for adapter
Comment: Polarization: Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

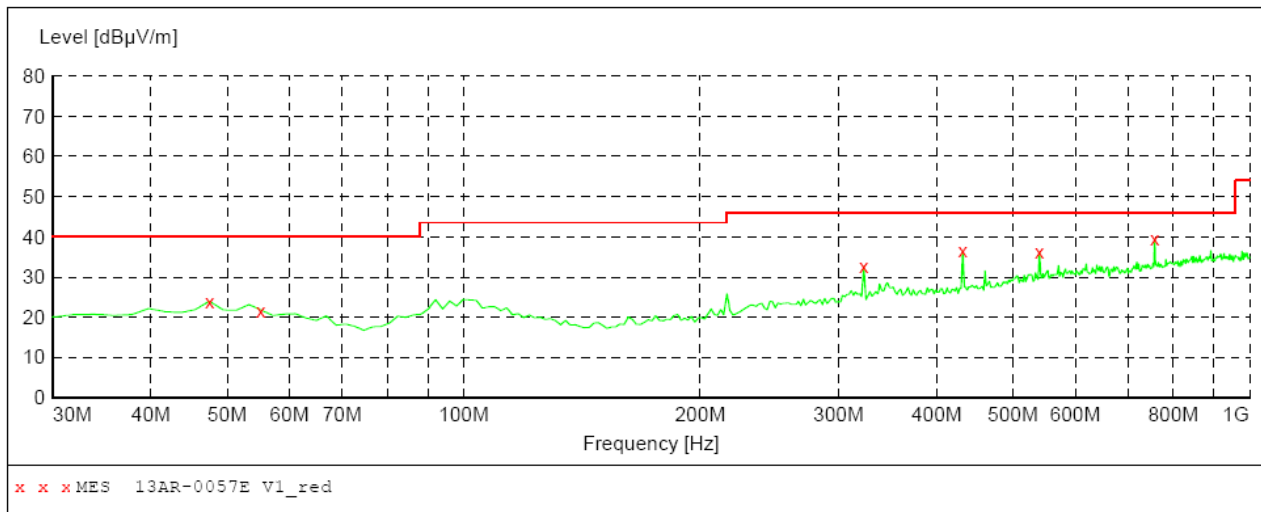

MEASUREMENT RESULT: "13AR-0057E V1_red"

1/23/2013 12:06PM


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	24.00	15.8	40.0	16.0	---	100.0	0.00	VERTICAL
55.220000	21.80	15.6	40.0	18.2	---	100.0	0.00	VERTICAL
322.940000	32.60	19.3	46.0	13.4	---	100.0	0.00	VERTICAL
431.580000	36.50	22.0	46.0	9.5	---	100.0	0.00	VERTICAL
540.220000	36.20	24.8	46.0	9.8	---	100.0	0.00	VERTICAL
757.500000	39.50	27.4	46.0	6.5	---	100.0	0.00	VERTICAL

Radiated Emission Test Data:

EUT: Tablet PC
M/N: LT704A
Operating Condition: Connect to PC
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: AC 120V/60Hz for adapter
Comment: Polarization: Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

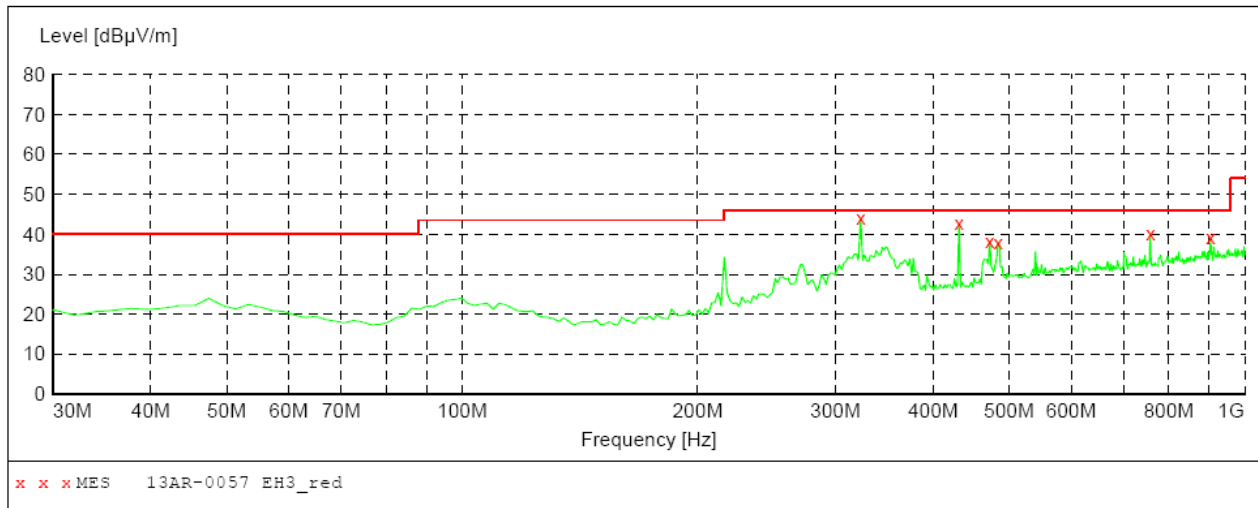

MEASUREMENT RESULT: "13AR-0057E H3_red"

1/23/2013 12:02PM


Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
322.940000	44.00	19.3	46.0	2.0	---	100.0	0.00	HORIZONTAL
431.580000	42.70	22.0	46.0	3.3	---	100.0	0.00	HORIZONTAL
472.320000	38.40	22.8	46.0	7.6	---	100.0	0.00	HORIZONTAL
483.960000	38.00	23.2	46.0	8.0	---	100.0	0.00	HORIZONTAL
757.500000	40.20	27.4	46.0	5.8	---	100.0	0.00	HORIZONTAL
904.940000	39.30	29.2	46.0	6.7	---	100.0	0.00	HORIZONTAL

Radiated Emission Test Data:

EUT: Tablet PC
M/N: LT704A
Operating Condition: Connect to PC
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: AC 120V/60Hz for adapter
Comment: Polarization: Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

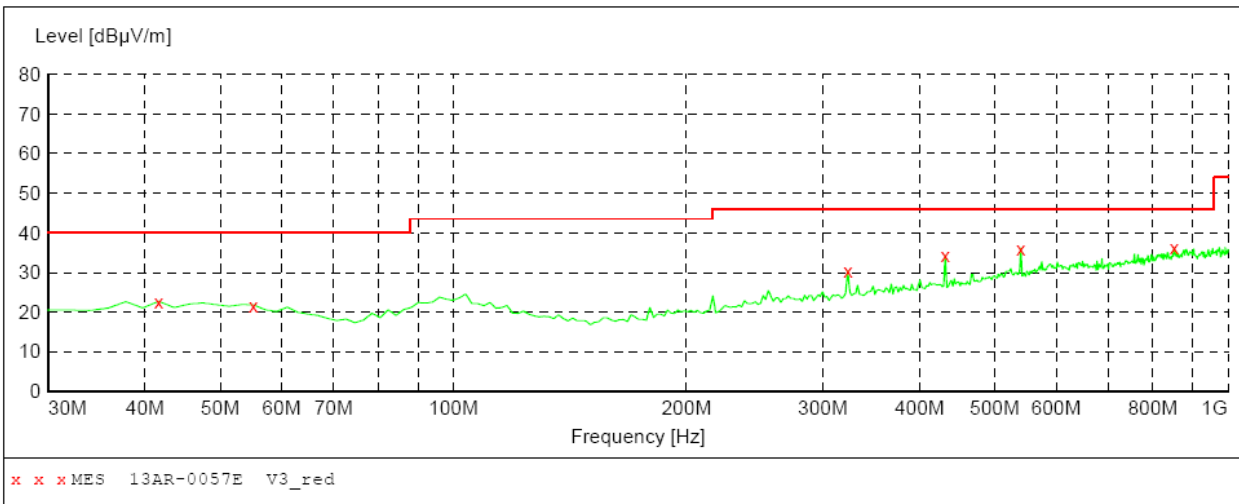

MEASUREMENT RESULT: "13AR-0057E V3_red"

1/23/2013 12:04PM


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
41.640000	22.70	15.9	40.0	17.3	---	100.0	0.00	VERTICAL
55.220000	21.80	15.6	40.0	18.2	---	100.0	0.00	VERTICAL
322.940000	30.40	19.3	46.0	15.6	---	100.0	0.00	VERTICAL
431.580000	34.40	22.0	46.0	11.6	---	100.0	0.00	VERTICAL
540.220000	36.10	24.8	46.0	9.9	---	100.0	0.00	VERTICAL
852.560000	36.20	28.7	46.0	9.8	---	100.0	0.00	VERTICAL

Radiated Emission Test Data:

EUT: Tablet PC
M/N: A089,A710,VN7018,VN7019
Operating Condition: Camera and SD Card Playing
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: AC 120V/60Hz for adapter
Comment: Polarization: Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

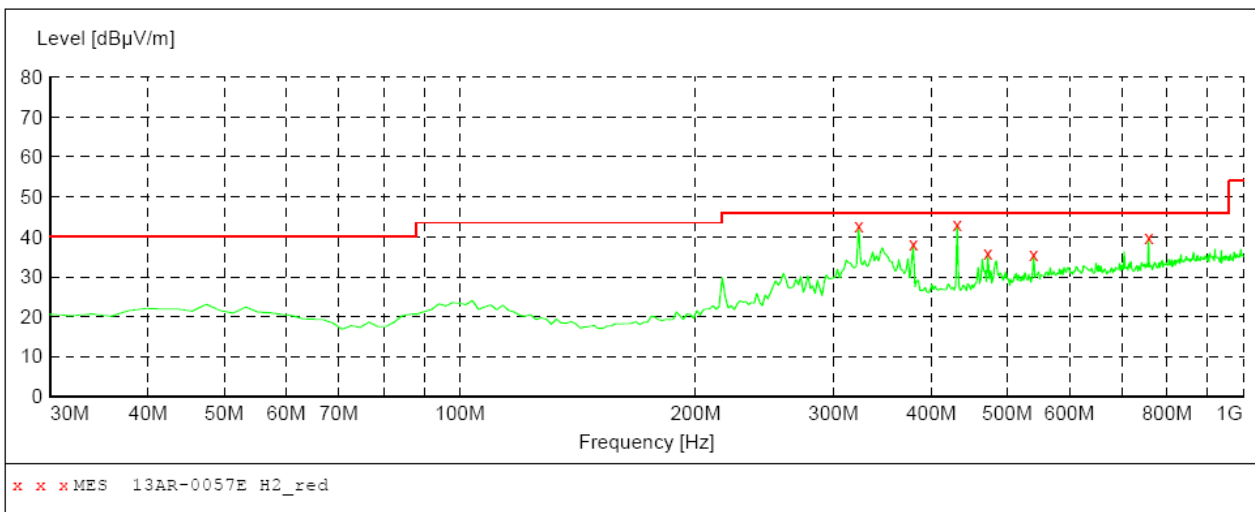

MEASUREMENT RESULT: "13AR-0057E H2_red"

1/23/2013 11:57AM


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
322.940000	42.70	19.3	46.0	3.3	---	100.0	0.00	HORIZONTAL
379.200000	38.30	20.9	46.0	7.7	---	100.0	0.00	HORIZONTAL
431.580000	43.10	22.0	46.0	2.9	---	100.0	0.00	HORIZONTAL
472.320000	35.90	22.8	46.0	10.1	---	100.0	0.00	HORIZONTAL
540.220000	35.60	24.8	46.0	10.4	---	100.0	0.00	HORIZONTAL
757.500000	39.80	27.4	46.0	6.2	---	100.0	0.00	HORIZONTAL

Radiated Emission Test Data:

EUT: Tablet PC
M/N: LT704A
Operating Condition: Camera and SD Card Playing
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: AC 120V/60Hz for adapter
Comment: Polarization: Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:	Field Strength
Start Stop Detector Meas. IF Transducer	
Frequency Frequency Time Bandw.	
30.0 MHz 1.0 GHz MaxPeak Coupled 100 kHz VULB9163 NEW	

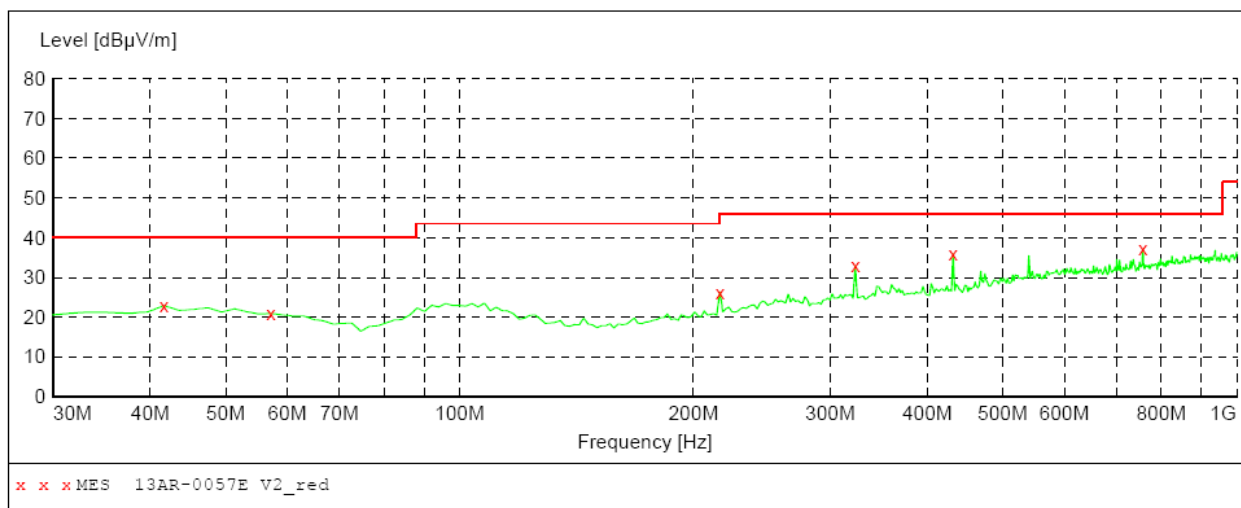

MEASUREMENT RESULT: "13AR-0057E V2_red"

1/23/2013 11:51AM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
41.640000	22.90	15.9	40.0	17.1	---	100.0	0.00	VERTICAL
57.160000	20.90	15.1	40.0	19.1	---	100.0	0.00	VERTICAL
216.240000	26.30	15.2	46.0	19.7	---	100.0	0.00	VERTICAL
322.940000	33.00	19.3	46.0	13.0	---	100.0	0.00	VERTICAL
431.580000	36.00	22.0	46.0	10.0	---	100.0	0.00	VERTICAL
757.500000	37.10	27.4	46.0	8.9	---	100.0	0.00	VERTICAL