

This report cancels and replaces RG-06-91111-4A Ed. 1

RADIO TESTS REPORT

According to standard:

FCC Part. 15 subpart C, 15.231

Equipment under test:

RF Module 315MHz
MC33696MOD315EV (Echo)
FCC ID: RUNMC33696MOD315E

Company:

FREESCALE

Diffusion: Mr GAUTHIER

(Company: FREESCALE)

Number of pages: 10 including 1 annex

Ed.	Date	Modified page(s)	Written by		Technical verification		Quality approval	
			Name	Visa	Name	Visa	Name	Visa
2	05-Feb-07	5	David MONTAULON		Régis GONZALEZ		Olivier HEYER	

Duplication of this report is only permitted for an integral photographic facsimile. It includes the number of pages referenced above. This document is the result of testing a specimen or a sample of the product submitted. It does not imply an assessment of the conformity of the whole production of the item tested.

NAME OF THE EQUIPMENT UNDER TEST (E.U.T) : RF Module 315MHz
MC33696MOD315EV (Echo)

Serial number : None

Part number : None

Software Version : None

MANUFACTURER'S NAME : FREESCALE

APPLICANT'S ADDRESS:

Company: FREESCALE

Address: Semi conducteurs France SAS
Centre Electronique de Toulouse
134 avenue Général Eisenhower - BP 72329
31023 TOULOUSE CEDEX 1
FRANCE

Person(s) present during the tests: Mr GAUTHIER

Responsible: Mr GAUTHIER

DATE(S) OF TEST(S) : July, 4th 5th 6th 7th 10th 11th and 12th of 2006
and November, the 15th of 2006

TESTS LOCATION : Emitech Grand Sud Laboratory in Vendargues (34)
Open area test site in Salinelles (30) Registration number 8127-19

TEST(S) SUPERVISOR : Nobody

TEST(S) OPERATOR(S) : David MONTAULON

CONTENTS

1. INTRODUCTION4

2. REFERENCE DOCUMENT4

3. EQUIPMENT UNDER TEST CONFIGURATION AND DESCRIPTION4

4. SUMMARY OF TEST RESULTS5

5. RADIATED ELECTRIC EMISSION6

ANNEX: PHOTOGRAPHS8

1. INTRODUCTION

This document submits the results of Electromagnetic Compatibility tests performed on the equipment **RF Module 315MHz - MC33696MOD315EV (Echo)** according to the document listed below.

2. REFERENCE DOCUMENT

FCC Part 15 (February 2006)

Code of Federal Regulations
Title 47 – Telecommunications
Chapter 1 – Federal Communications Commission
Part 15 – Radio frequency devices
Subpart C – Intentional Radiators


ANSI C 63.4 (2003)

American National Standard for Methods of measurement of Radio-Noise from low-voltage
Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3. EQUIPMENT UNDER TEST CONFIGURATION AND DESCRIPTION

Product description:	FCC ID:	RUNMC33696MOD315E
	ITU emission code:	14K0A1DAN
	Utilization:	RF transceiver module used for customer evaluation of ISM band transceiver at lab.
	Antenna type:	Incorporated antenna
	Antenna gain:	Unknown
	Operating frequency range:	315.00 MHz
	Number of channels:	1
	Channel spacing:	-
	Frequency generation:	P.L.L. synthesizer
	Modulation:	ASK 100 % with Manchester code at 4800 bit per second
	Power source:	9 V battery
	Power level and frequency range are not user adjustable	

Cycle and operating mode during emission tests: Permanent emission/reception

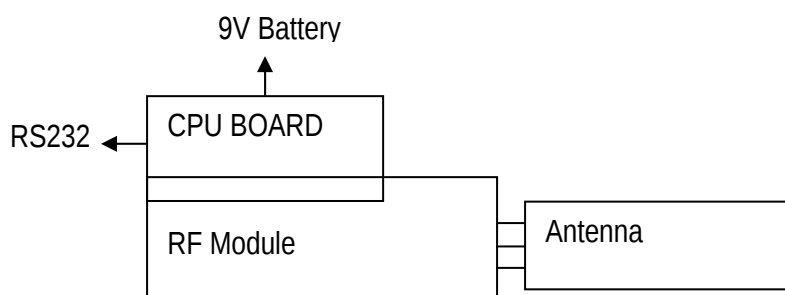

Equipment modifications applied before tests: No

4. SUMMARY OF TEST RESULTS

Tests designation or section		Results satisfying?	Comments
15.33	Frequency range of radiated measurement	-	Considered
15.35	Measurement detector functions and bandwidths	-	Considered
15.203	Antenna requirement	YES	Nota 1
15.205	Restricted bands of operation	YES	
15.207	Conducted limits	N.A.	Powered by internal batteries
15.209	Radiated emission limits, general requirements	YES	Considered
15.231	Periodic operation in the band 40.66 40.70 MHz and above 70 MHz		
	a) Transmission requirements	YES	Nota 2
	b) Radiated emission	YES	
	c) Occupied bandwidth	YES	Nota 3
	d) Frequency tolerance	N.A.	E.U.T. does not transmit in the band 40.60 – 40.70 MHz
	e) Periodic alternate field strength measurement	N.A.	Requirements of b) are considered

N.P.: Not Performed.

N.A.: Not Applicable.

Sample submitted to the tests complies with the regulations of the standard FCC part 15 (02/2006) according to limits specified in this tests report.

Nota 1: Internal antenna without connector

Nota 2: (1) of the 15.231(a) is considered

Each time order is done by user, product sends a word. This word can't be bigger than 128 bits and transmission speed can't be lower than 2400 bits per second. Then TX time can't be longer than 54 ms between each manually operation.

Nota 3: The bandwidth of the emission at 20 dBc is less than 15 kHz (see **Photo** in annex), less than 0.25 % of the center frequency (787.5 kHz)

5. RADIATED ELECTRIC EMISSION

Standard: FCC Part. 15 subpart C (06), 15.231 (b) and 15.209 (a)

Test method: ANSI C64-3 (03)

Resolution bandwidth and test configuration:

Frequency band	Resolution Bandwidth	Detection mode
25MHz-1GHz	120kHz	Quasi-peak
1GHz-4GHz	1MHz	Average

Measure applies on open area test site (**registration number 8127-19**). Test antenna is oriented in vertical and horizontal polarization. Product is rotated through 360° in the horizontal plane only. Highest levels are recorded in the worst configuration (see photo in annex). All other disturbances are very lower than limit. To ensure easiest measure conditions, E.U.T. is placed in specific permanent emission mode.

Instrumentation test List:

CATEGORY	BRAND	TYPE	N° EMITECH
Antenna	Electro-Metrics	BIA-30HF	0824
Antenna	Emco	3115	1053
Antenna	Rohde & Schwarz	HL223	3126
Cable		N-6m	3610
Cable		N-17m	3620
Open Area Test Site	Emitech	Open area test site	3482
Preamplifier	Microwave	HF	2165
Preamplifier	MINI-CIRCUITS	RF	1321
Receiver	Agilent Technologies	Agilent E7405A	2161

Results: See **Boards** hereafter

VERTICAL POLARIZATION: PERMANENT TRANSMITTER MODE

Frequency (MHz)	Azimut (degrees)	Antenna height (cm)	Measure (dBμV/m)	Standard limit (dBμV/m)	Comments
315.00	315	125	37.16	74.09	C

C: Compliant

N.C: Not Compliant

VERTICAL POLARIZATION: RECEIVER MODE

Frequency (MHz)	Azimut (degrees)	Antenna height (cm)	Measure (dBμV/m)	Standard limit (dBμV/m)	Comments
57.43	0	100	8.9	40	C

C: Compliant

N.C: Not Compliant

HORIZONTAL POLARIZATION: PERMANENT TRANSMITTER MODE

Frequency (MHz)	Azimut (degrees)	Antenna height (cm)	Measure (dBμV/m)	Standard limit (dBμV/m)	Comments
315.00	176	187	36.12	74.09	C
629.99	330	190	27.11	54.09	C

C: Compliant

N.C: Not Compliant

HORIZONTAL POLARIZATION: RECEIVER MODE

Frequency (MHz)	Azimut (degrees)	Antenna height (cm)	Measure (dBμV/m)	Standard limit (dBμV/m)	Comments
38.59	0	100	24.12	40	C
57.43	0	100	8.90	40	C

C: Compliant

N.C: Not Compliant


□□□ End of report – 1 annex to be forwarded □□□

ANNEX: PHOTOGRAPHS

Equipment Under Test (E.U.T.) PHOTOGRAPHS

RF Module 315MHz - MC33696MOD315EV (Echo)

Radiated electric measurement.

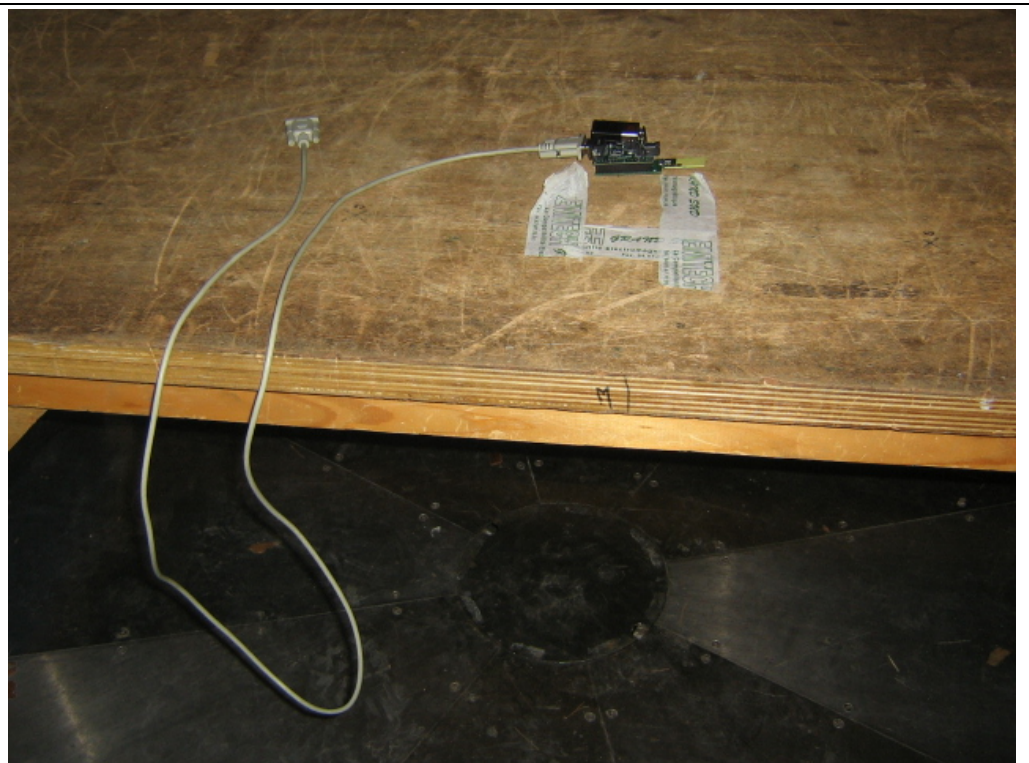

Emission
bandwidth

