




FCC TEST REPORT

for

47 CFR Part 22H, Part 24E

Equipment : GPS + GSM
Model No. : GC-101 / GC-102 / CT-24 / CT-58 / GX-101 / MT-101 /
MT-123 / MT-007 / Mini-7 / Mini-11
FCC ID : RUU-GC1010611
Tx Frequency Range : GSM850 : 824~849 MHz
PCS1900 : 1850.2~1909.8MHz
Max. ERP/EIRP Power : GSM850 : 0.21W
PCS1900 : 0.22W
Emission Designator : 300 KGXW
Applicant : SAN JOSE NAVIGATION, INC.
9F, No. 105, Shi-Chong Road, Pan Chiao City, Taipei
Hsien, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**
- The data shown in this test report were carried out on Dec. 11, 2006 at Sporton International Inc. LAB.
- Report No.: FG6N0109, Report Version: Rev. 01.


Roy Wu
Deputy Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.



Table of Contents

History of this test report.....	ii
1. General Information	1
1.1. Applicant	1
1.2. Manufacturer	1
1.3. Basic Description of Equipment under Test	1
1.4. Feature of Equipment under Test	2
1.5. Report Date	2
2 Test Configuration of Equipment under Test	3
2.1. Test Manner	3
2.2. Test Mode	3
2.3. Connection Diagram of Test System	3
2.4. Ancillary Equipment List	3
3. General Information of Test Site	4
3.1. Test Voltage	4
3.2. Test in Compliance with	4
3.3. Frequency Range Investigated	4
3.4. Test Distance	4
4. Test Data and Test Result.....	5
4.1. List of Measurements and Examinations	5
4.2. RF Output Power	6
4.3. ERP / EIRP Measurement	7
4.4. Occupied Bandwidth and Band Edge Measurement	10
4.5. Conducted Emission	19
4.6. Field Strength of Spurious Radiation	29
4.7. Frequency Stability (Temperature Variation)	47
4.8. Frequency Stability (Voltage Variation)	49
5 List of Measurement Equipments	50
6 Uncertainty Evaluation.....	51
Appendix A. Photographs of EUT External	
Appendix B. Photographs of EUT Internal	
Appendix C. Photographs of Setup	



History of this test report

Report Issue Date: Jan. 03, 2007

Report No.	Description



1. General Information

1.1. Applicant

SAN JOSE NAVIGATION, INC.

9F, No. 105, Shi-Chong Road, Pan Chiao City, Taipei Hsien, Taiwan, R.O.C.

1.2 Manufacturer

SAN JOSE NAVIGATION, INC.

9F, No. 105, Shi-Chong Road, Pan Chiao City, Taipei Hsien, Taiwan, R.O.C.

1.3 Basic Description of Equipment under Test

Equipment : GPS + GSM
Model No. : GC-101 / GC-102 / CT-24 / CT-58 / GX-101 / MT-101 / MT-123 / MT-007 / Mini-7 / Mini-11
FCC ID : RUU-GC1010611
AC Power Cord : AC 120V, Wall-mount, 1.8 meter, 2 pin
Battery : Sanyo, UF553450
Adapter : JLD-0605WU

**1.4 Feature of Equipment under Test**

DUT Type :	GPS + GSM
Model Name :	GC-101 / GC-102 / CT-24 / CT-58 / GX-101 / MT-101 / MT-123 / MT-007 / Mini-7 / Mini-11
FCC ID :	RUU-GC1010611
Tx Frequency :	GSM850 : 824 ~ 849 MHz PCS1900 : 1850 ~1910 MHz
Rx Frequency :	GSM850 : 869 ~ 894 MHz PCS1900 : 1930 ~ 1990 MHz
Antenna Type :	Fixed Internal
Maximum Output Power to Antenna :	GSM850 : 33.3 dBm PCS1900 : 29.4 dBm
Maximum ERP/EIRP :	GSM850 : 0.21 W (23.17 dBm) PCS1900 : 0.22 W (23.34 dBm)
HW Version :	C2
SW Version :	1.62T
Power Rating (DC/AC , Voltage and Current of RF element or PA) :	DC 3.7V, 15mA
Digital Modulation Emission :	GMSK
Type of Emission :	300 KGXW
DUT Stage :	Production Unit

1.5 Report Date

EUT Received : Nov. 01, 2006

Report Date : Jan. 03, 2007

2 Test Configuration of Equipment under Test


2.1 Test Manner

- The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range.
- During all testings, EUT is in link mode with base station emulator at maximum power level. (PCL=0 for PCS 1900)
- Frequency range investigated: radiated emission 30MHz to 19000 MHz for PCS 1900.

2.2 Test Mode

Application	GSM850	PCS1900
Radiated Emission	☒ Mode 1: GSM850 Link Mode_CH189	☒ Mode 1: PCS1900 Link Mode_CH661
Conducted Measurement	☒ Mode 1: GSM850 Link Mode_CH189	☒ Mode 1: PCS1900 Link Mode_CH661

2.3 Connection Diagram of Test System

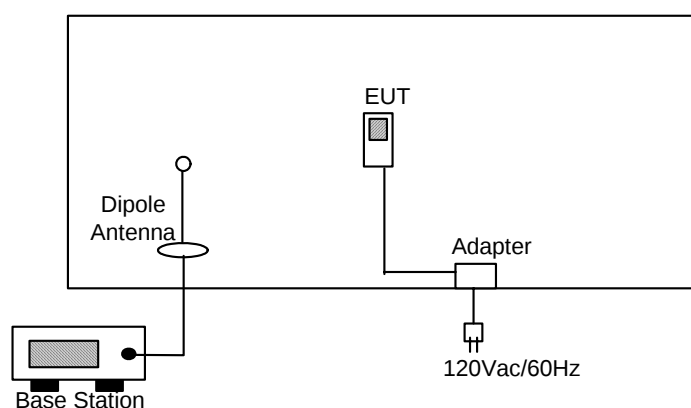

2.4 Ancillary Equipment List

Item	Equipment	Model No.	Power Cord
1.	Base Station (R&S)	CMU200	AC 100-240V
2.	Adapter	JLD-0605WU	AC 100-240V



3. General Information of Test Site

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-328-4978

Test Site No : TH02-HY, 03CH06-HY

The chamber meets the characteristics of ANSI C63.4-2003. This site is on file with the FCC.

3.1 Test Voltage

AC 120V / 60Hz

3.2 Test in Compliance with

47 CFR Part 22H, 24E and Part 2.

3.3 Frequency Range Investigated

- a. Radiation: from 30 MHz to 9000 MHz for GSM850.
- b. Radiation: from 30 MHz to 19000 MHz for PCS1900.

3.4 Test Distance

The test distance of radiated emission from antenna to EUT is 3 m.

4. Test Data and Test Result

4.1 List of Measurements and Examinations

FCC Rule	DESCRIPTION OF TEST	Result	Section
§2.1046	RF Output Power	Passed	4.2
§22.913 §24.232	ERP / EIRP	Passed	4.3
§2.1049 §22.917 § 24.238(b)	Occupied Bandwidth & Band Edge Measurement	Passed	4.4
§2.1051	Conducted Emission	Passed	4.5
§2.1053	Field Strength of Spurious Radiation	Passed	4.6
§2.1055 §22.355 §24.235	Frequency Stability vs. Temperature	Passed	4.7
§2.1055 §22.355 §24.235	Frequency Stability vs. Voltage	Passed	4.8

4.2 RF Output Power


4.2.1 Measurement Instruments :

As described in chapter 5 of this test report.

4.2.2 Test Procedure :

1. The transmitter output was connected to power meter and base station through power divider.
2. Set EUT at PCL=5 for GSM850 and PCL=0 for PCS 1900 through base station.
3. Select lowest, middle, and highest channels for each band.

4.2.3 Test Setup Layout :

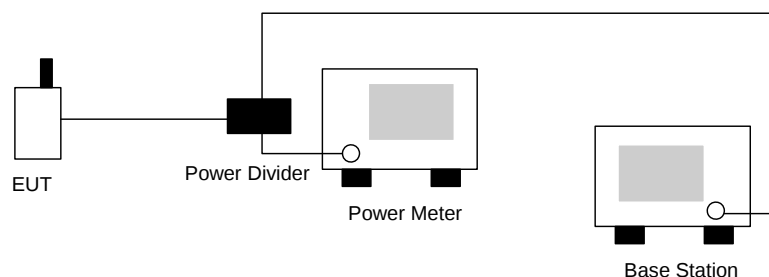

4.2.4 Test Result :

Bands	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
GSM850	128	824.2 (Low)	33.3	2.138
	189	836.4 (Mid)	33.2	2.089
	251	848.8 (High)	33.1	2.042
PCS 1900	512	1850.2 (Low)	29.0	0.794
	661	1880.0 (Mid)	28.3	0.676
	810	1909.8 (High)	29.4	0.871

4.3 ERP / EIRP Measurement

Equivalent isotropic radiated power measurements by substitution method according to ANSI/TIA/EIA-603-C.

4.3.1 Measurement Instruments

As described in chapter 5 of this test report.

4.3.2 Test Procedure

1. The EUT was placed on a rotatable table with 1.0 meter height in an fully anechoic chamber.
2. The EUT was set 1.2 meters from the receiving antenna which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiated power.
4. The height of the receiving antenna is also kept at 1.0M height.
5. Taking the record of maximum ERP/EIRP.
6. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
7. The conducted power at the terminal of the dipole antenna is measured.
8. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
9. $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

P_s (dBm) : Input power to substitution antenna.

G_s (dBi or dBd) : Substitution antenna Gain.

$E_t = R_t + AF$


$E_s + R_s + AF$

AF (dB/m) : Receive antenna factor

R_t : The highest received signal in Spectrum Analyzer for EUT.

R_s : The highest received signal in Spectrum Analyzer for substitution antenna.

4.3.3 Test Setup Layout of ERP/EIRP

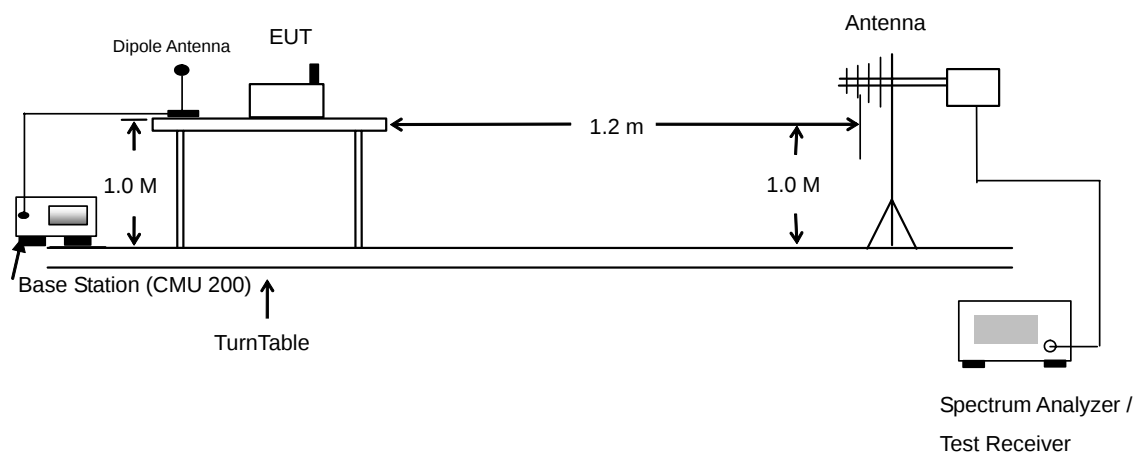



4.3.4 Test Result

GSM850 Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
824.20	-31.56	-48.12	0.00	-1.08	15.48	0.04
836.40	-30.96	-48.28	0.00	-0.93	16.39	0.04
848.80	-31.85	-48.35	0.00	-0.76	15.74	0.04
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
824.20	-24.87	-47.97	0.00	-1.08	22.02	0.16
836.40	-23.91	-48.01	0.00	-0.93	23.17	0.21
848.80	-25.76	-48.05	0.00	-0.76	21.53	0.14

PCS1900 Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-38.94	-51.88	0	1.96	14.9	0.03
1880.00	-40.15	-52.99	0	2	14.84	0.03
1909.80	-41.35	-54.28	0	1.98	14.91	0.03
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-30.75	-52.13	0	1.96	23.34	0.22
1880.00	-32.81	-53.17	0	2	22.36	0.17
1909.80	-34.17	-54.13	0	1.98	21.94	0.16

4.4 Occupied Bandwidth and Band Edge Measurement


4.4.1 Measurement Instruments

As described in chapter 5 of this test report.

4.4.2 Test Procedure


1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The occupied bandwidth of middle channel for the highest and lowest RF powers were measured.
3. The bandedge of low and high channels for the highest RF powers within the transmitting frequency band were measured. Setting RBW as roughly $BW/100$.

4.4.3 Test Setup Layout

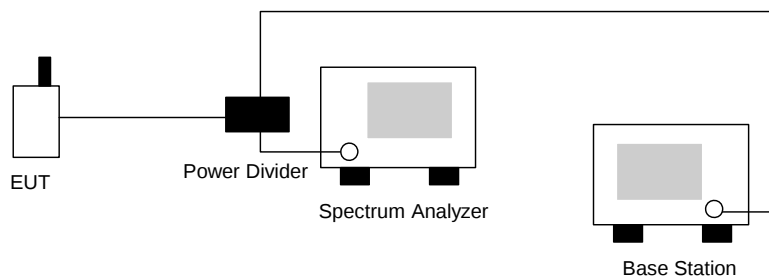

4.4.4 Test Result

- Mode 1
- Test Mode : GSM850 CH128 Lower Band Edge
- Power State : High

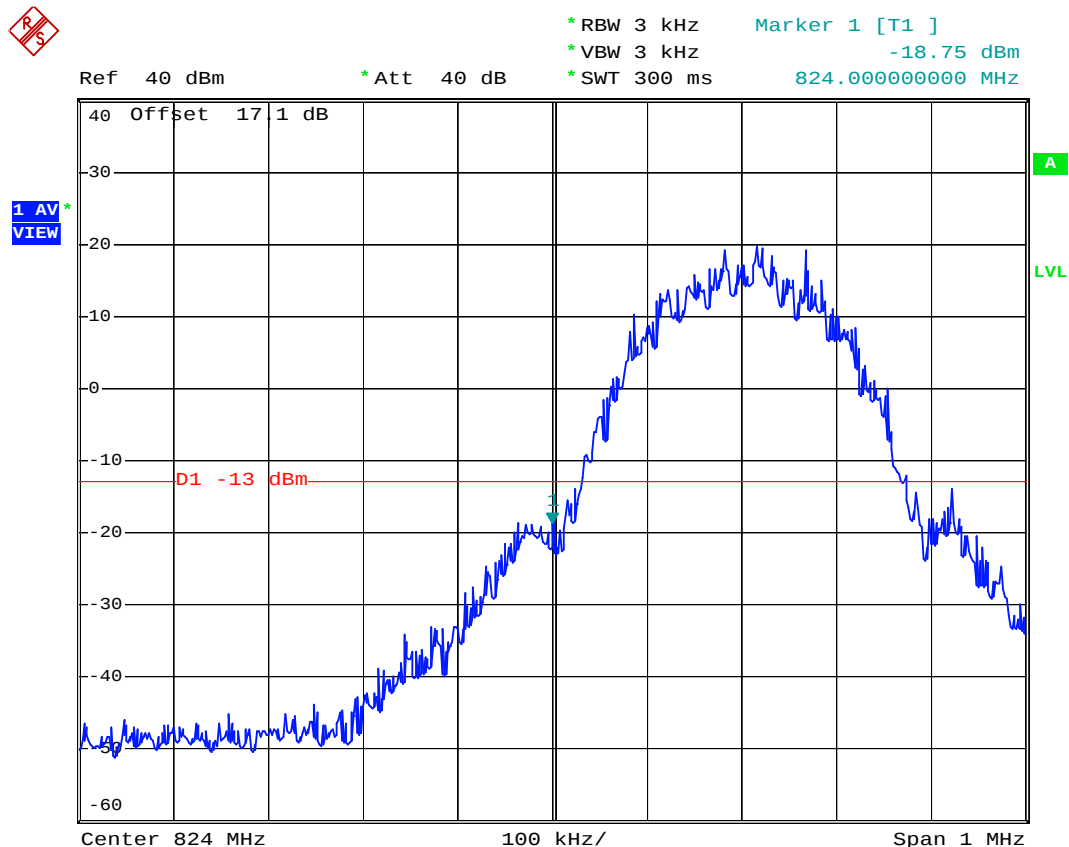


Date: 11.DEC.2006 11:05:43



FCC TEST REPORT

Report No. : FG6N0109

- Test Mode : GSM850 CH189 99% Occupied Bandwidth
- Power State : Low

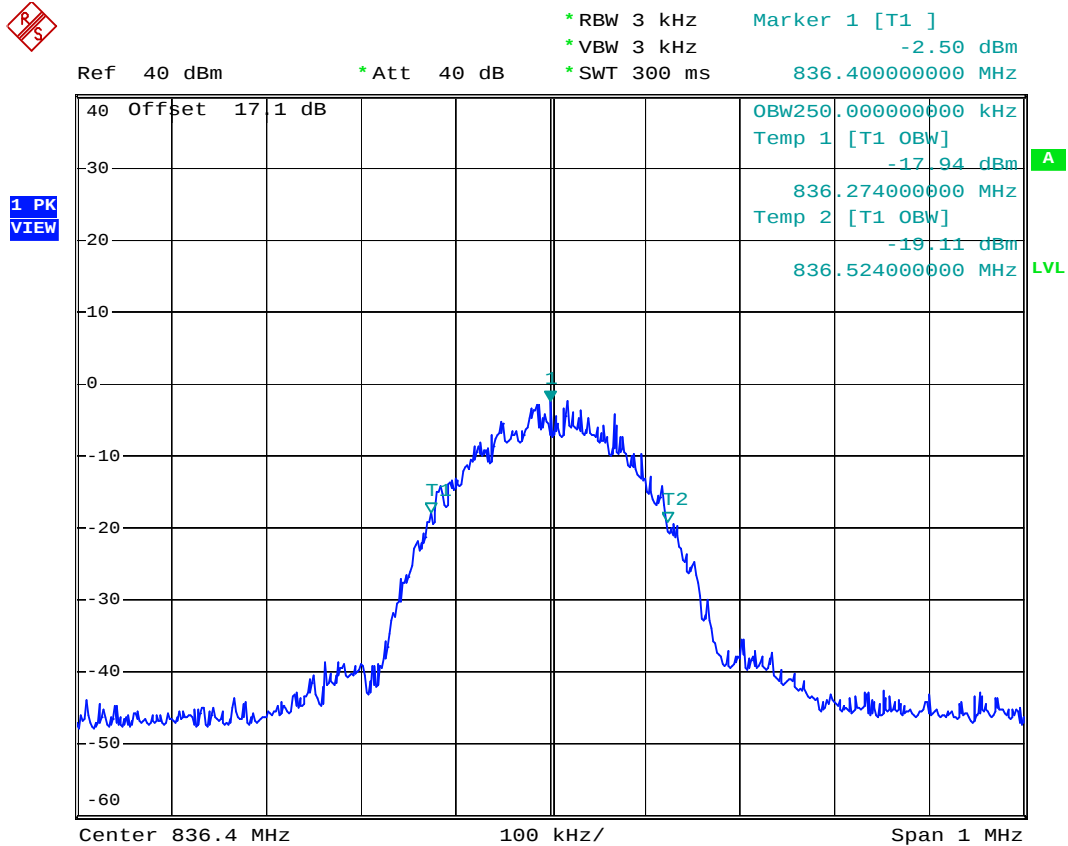


Date: 11.DEC.2006 10:52:42



FCC TEST REPORT

Report No. : FG6N0109

- Test Mode : GSM850 CH189 99% Occupied Bandwidth
- Power State : High

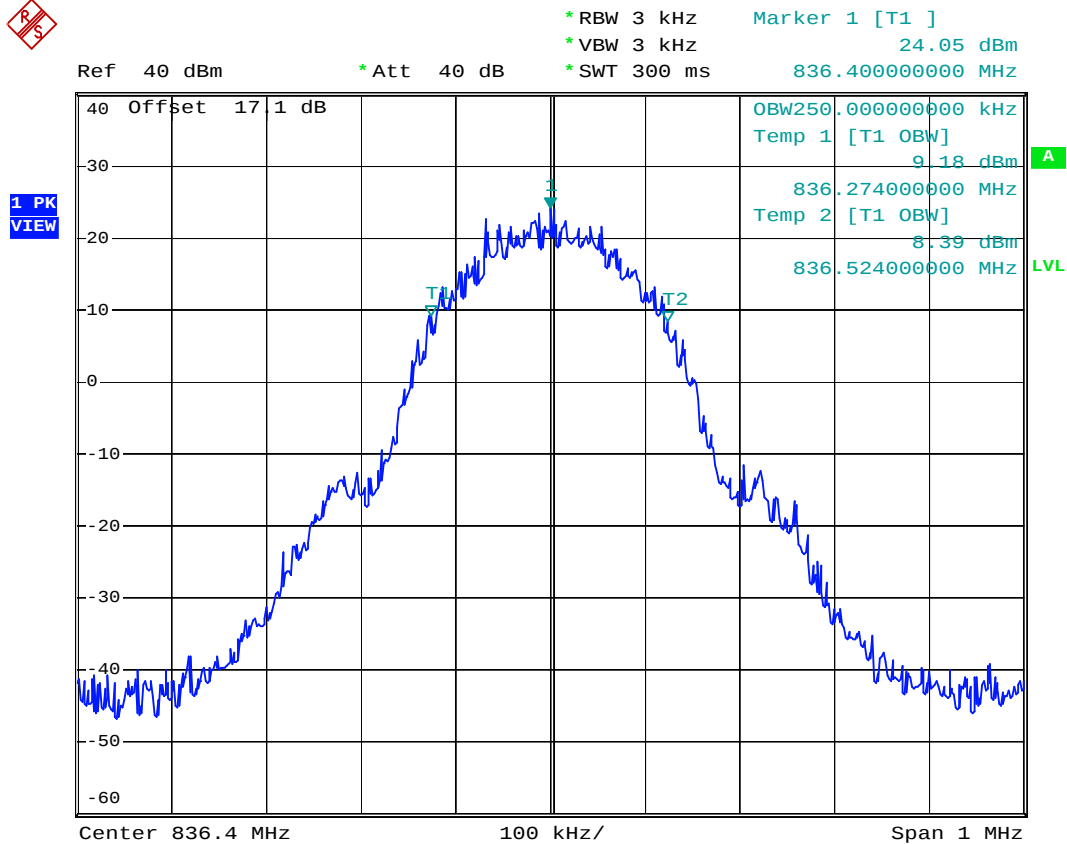

Date: 11.DEC.2006 10:51:59




FCC TEST REPORT

Report No. : FG6N0109

- Test Mode : GSM850 CH251 Higher Band Edge
- Power State : High




Ref 40 dBm * Att 40 dB * RBW 3 kHz Marker 1 [T1]
* VBW 3 kHz -15.74 dBm
* SWT 300 ms 849.022000000 MHz

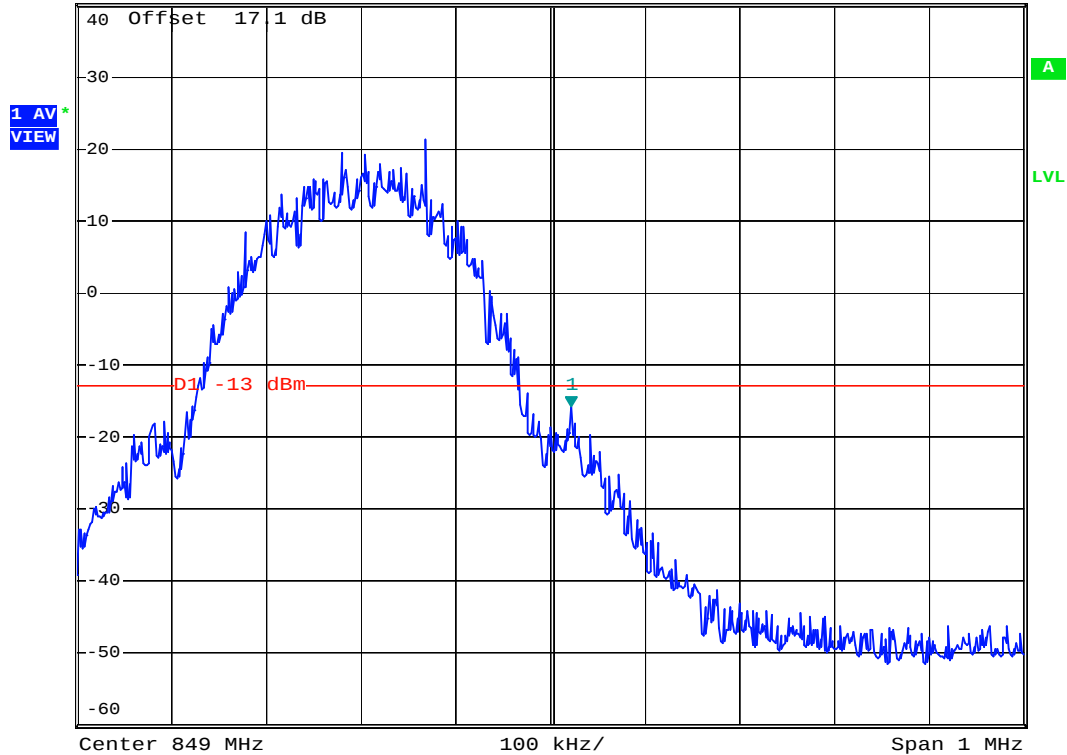

Date: 11.DEC.2006 11:06:27




- Mode 2
- Test Mode : PCS1900 CH512 Lower Band Edge
- Power State : High

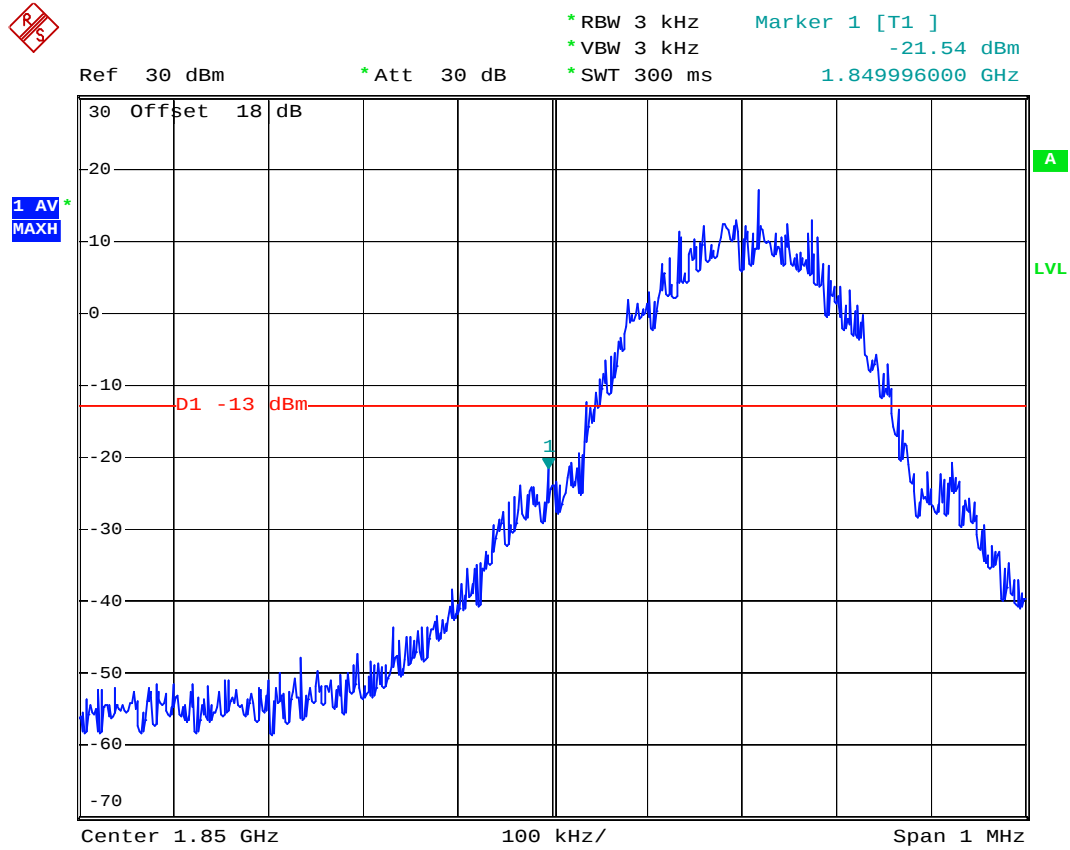

Date: 1.NOV.2006 20:02:22



- Test Mode : PCS1900 CH661 99% Occupied Bandwidth
- Power State : Low

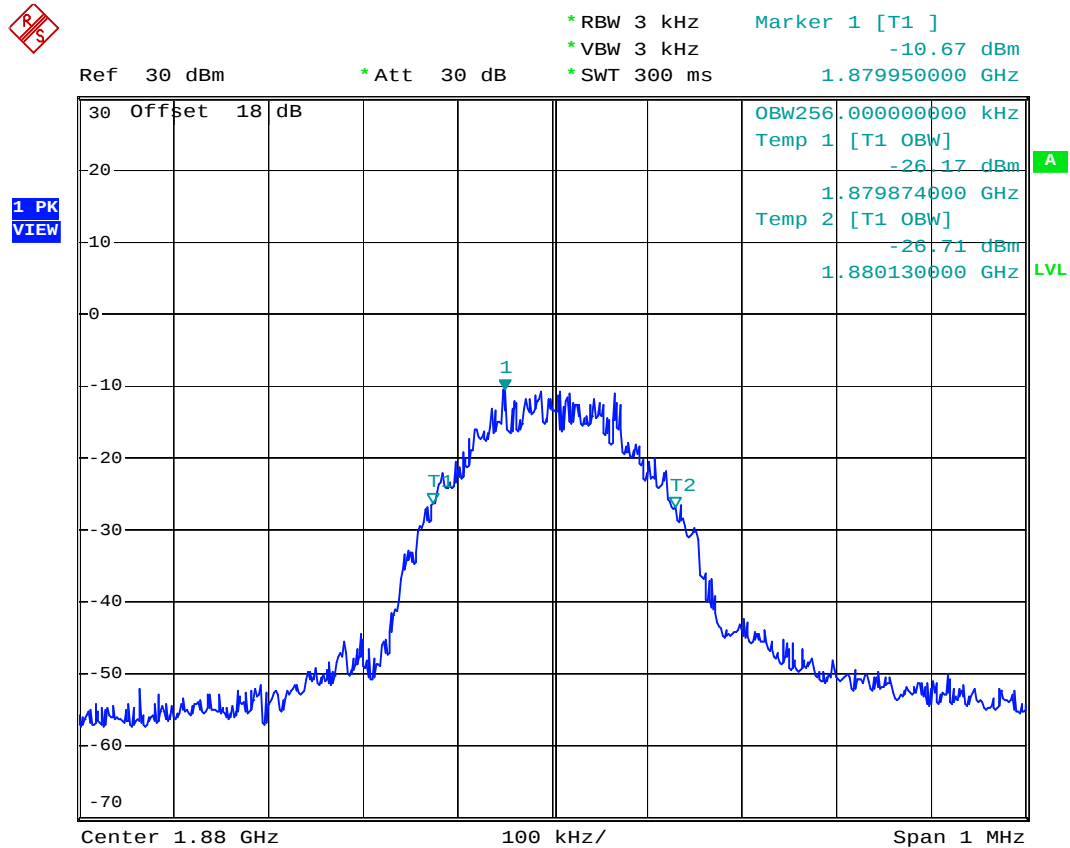


Date: 1.NOV.2006 19:59:20



FCC TEST REPORT

Report No. : FG6N0109

- Test Mode : PCS1900 CH661 99% Occupied Bandwidth
- Power State : High

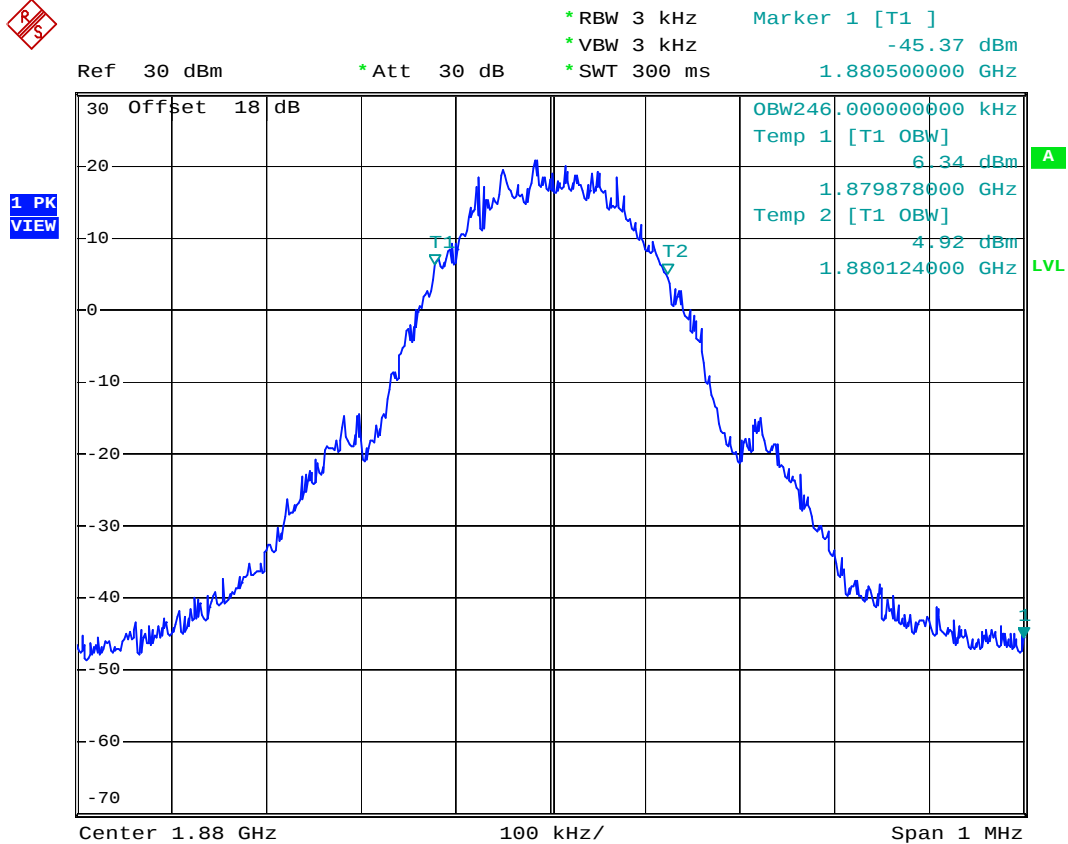


Date: 1.NOV.2006 19:57:39



FCC TEST REPORT

Report No. : FG6N0109

- Test Mode : PCS1900 CH810 Higher Band Edge
- Power State : High

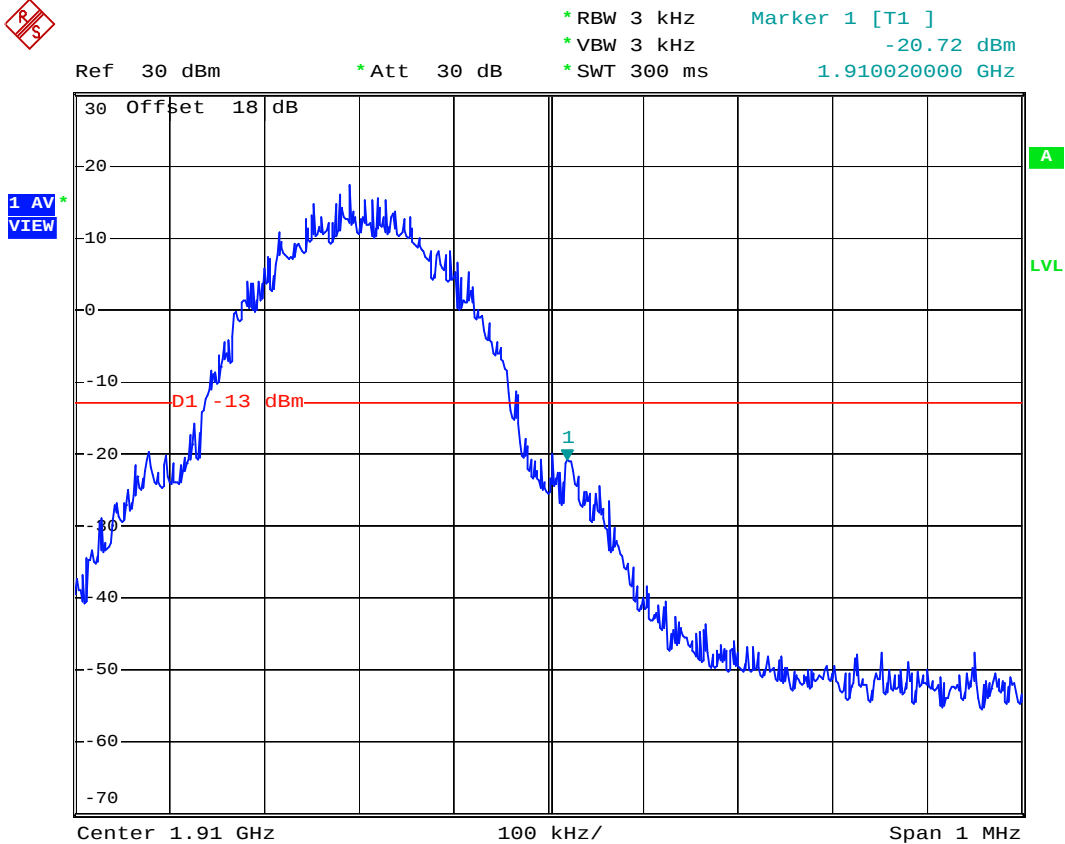

Date: 1.NOV.2006 20:03:37

4.5 Conducted Emission


4.5.1 Measurement Instruments

As described in chapter 5 of this test report.

4.5.2 Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.


4.5.3 Test Setup Layout

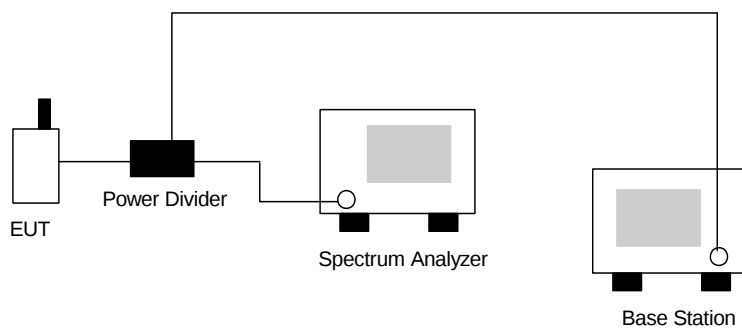



4.5.4 Test Result


- Test 1
- Test Mode : GSM850 CH189
- Frequency Range : 30M-1G

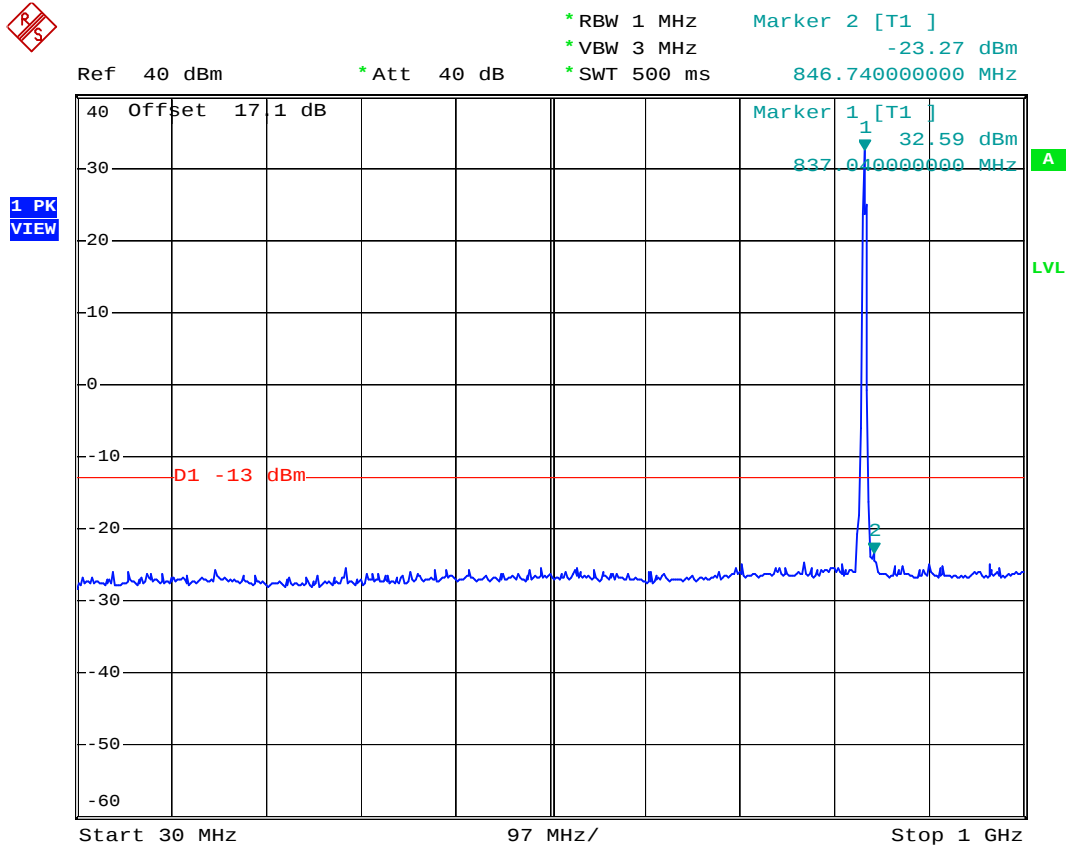

Date: 11.DEC.2006 10:56:41




- Test Mode : GSM850 CH189
- Frequency Range : 1G-3G

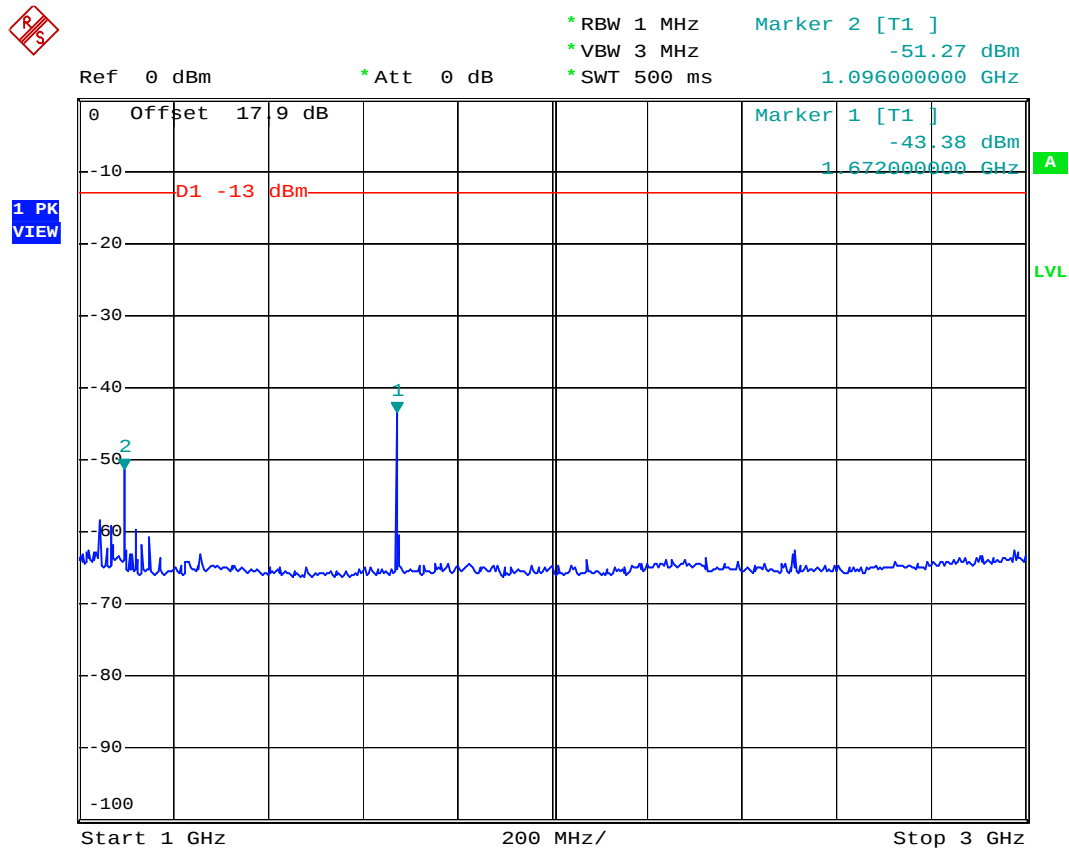

Date: 11.DEC.2006 10:58:40



- Test Mode : GSM850 CH189
- Frequency Range : 3G-7G

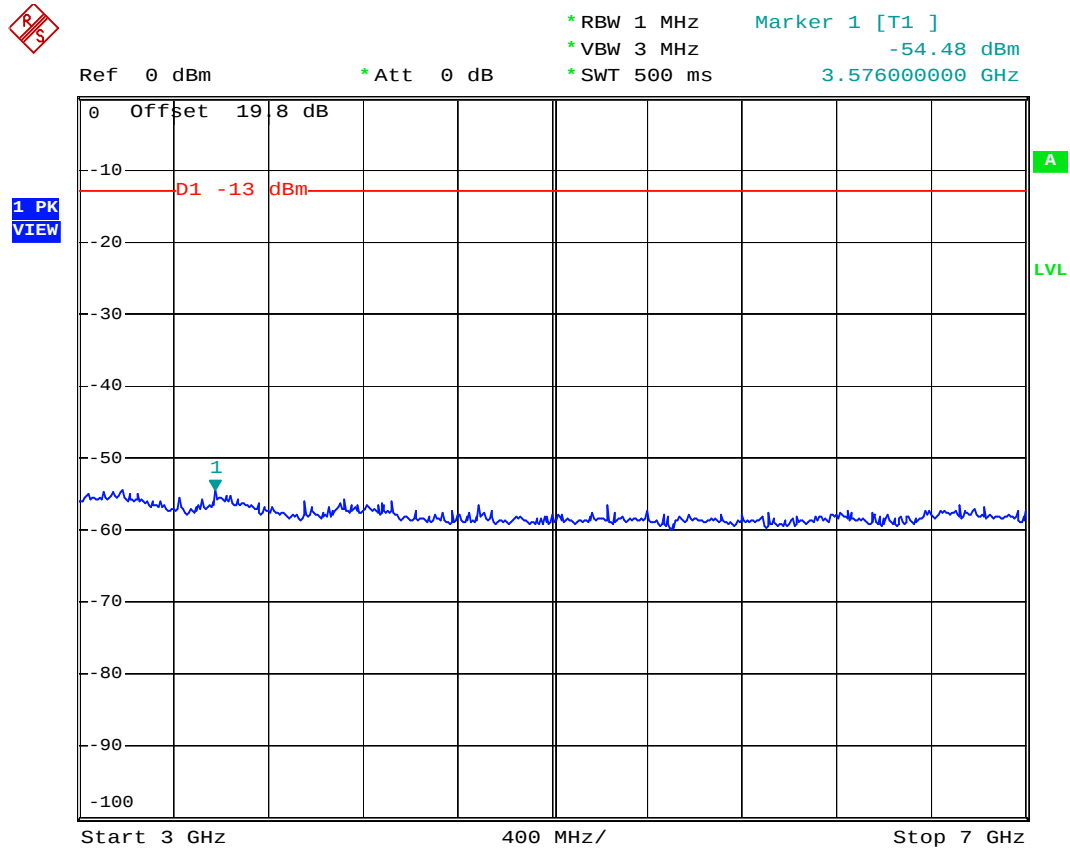


Date: 11.DEC.2006 11:00:15



FCC TEST REPORT

Report No. : FG6N0109


- Test Mode : GSM850 CH189
- Frequency Range : 7G-9G

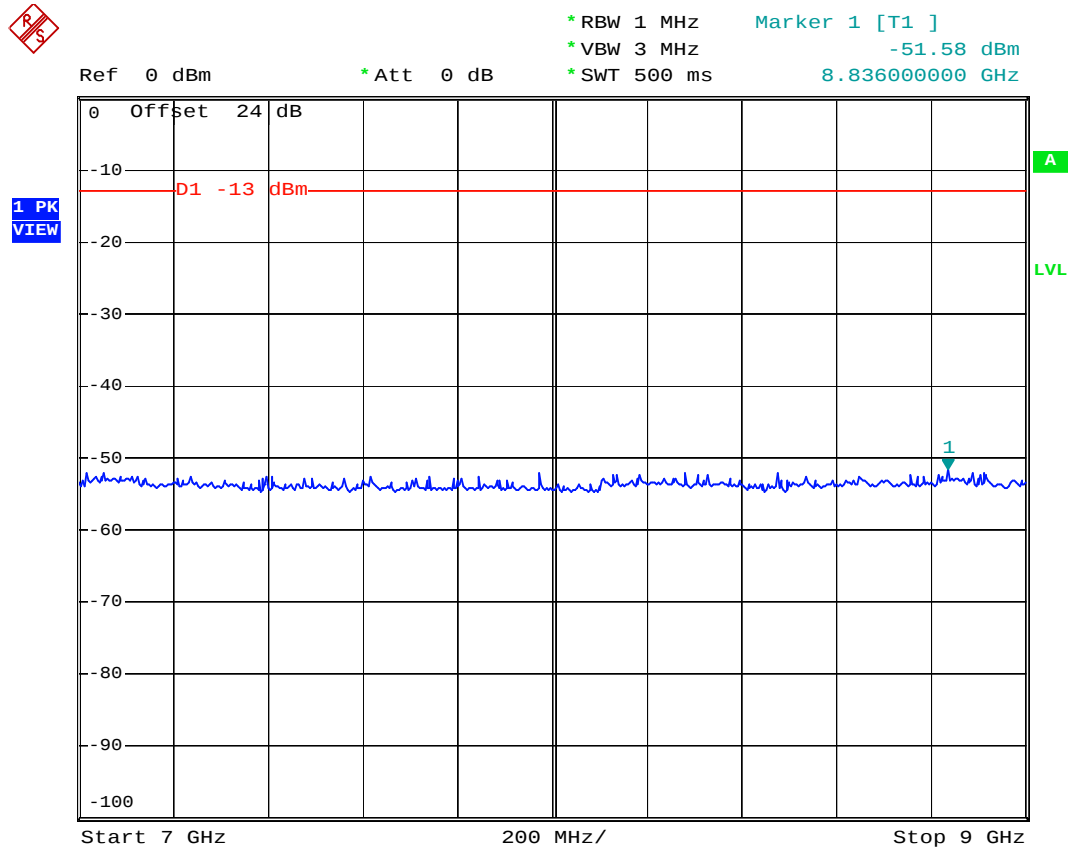

Date: 11.DEC.2006 11:01:05




- Test 2
- Test Mode : PCS1900 CH661
- Frequency Range : 30M-1G

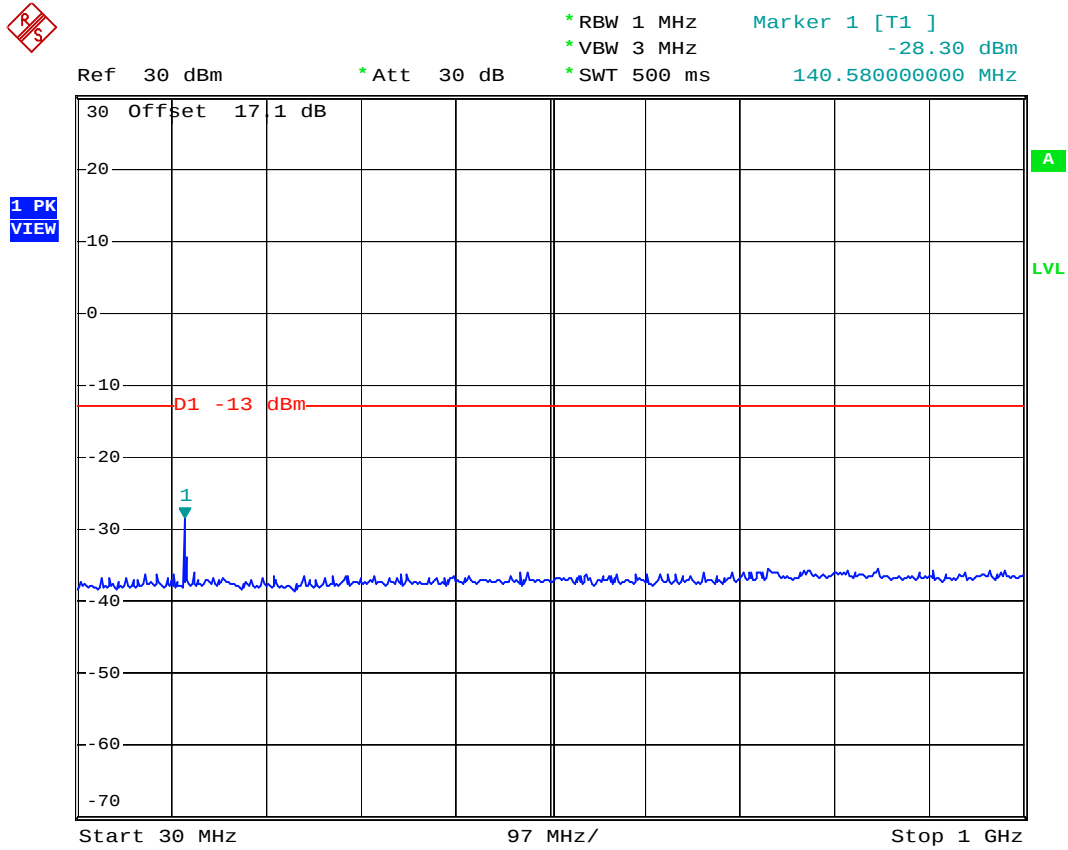

Date: 1.NOV.2006 20:06:06

- Test Mode : PCS1900 CH661
- Frequency Range : 1G-3G

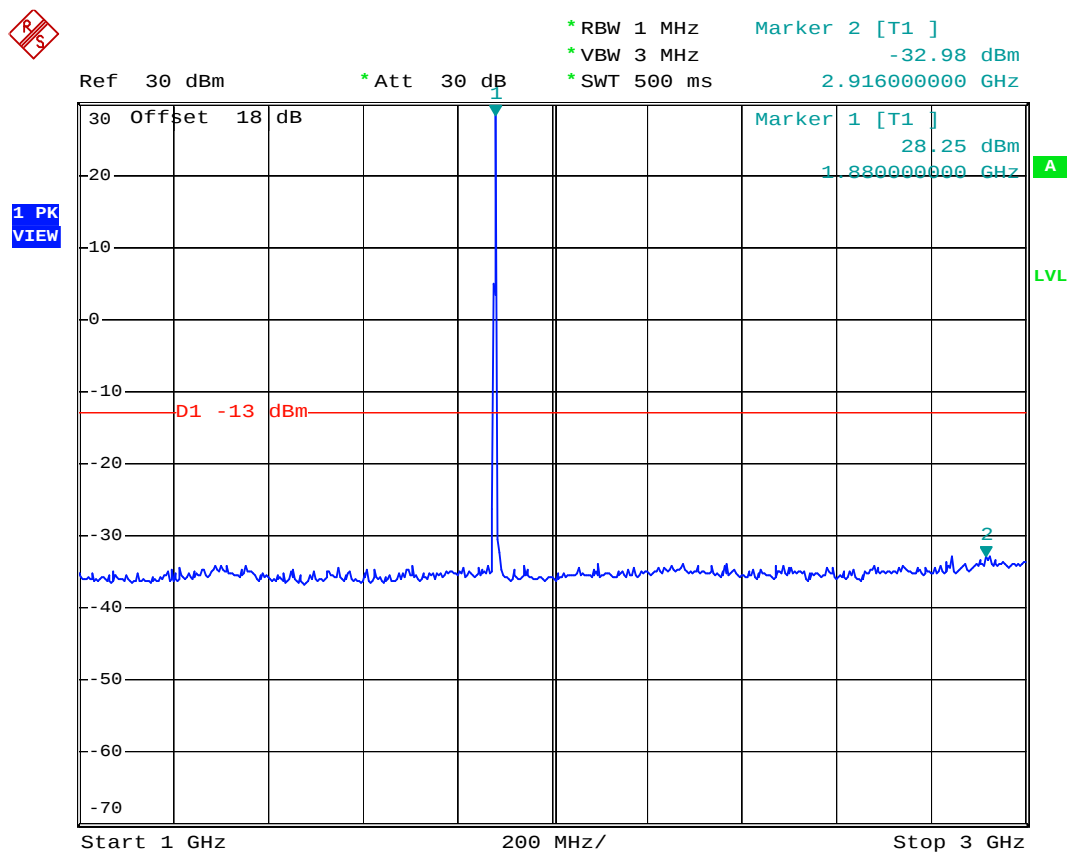


Date: 1.NOV.2006 20:08:19



FCC TEST REPORT

Report No. : FG6N0109

- Test Mode : PCS1900 CH661
- Frequency Range : 3G-7G

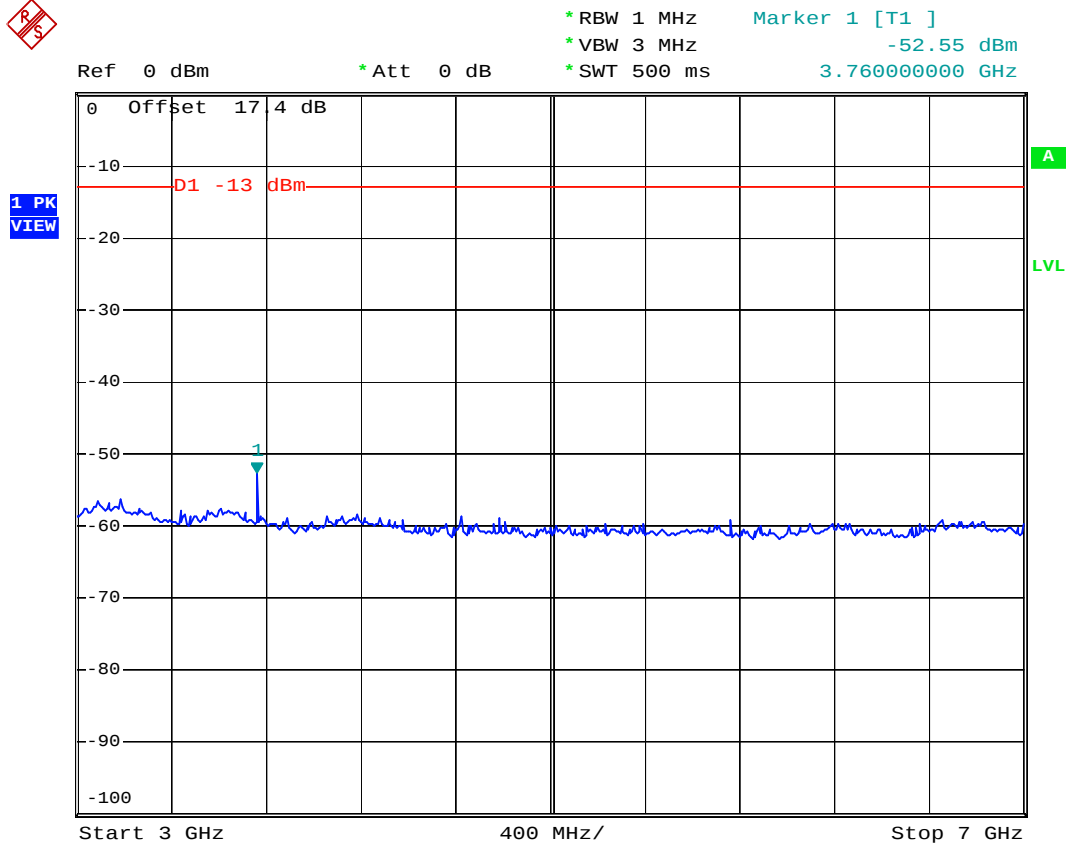


Date: 1.NOV.2006 20:11:04



FCC TEST REPORT

Report No. : FG6N0109

- Test Mode : PCS1900 CH661
- Frequency Range : 7G-13.6G

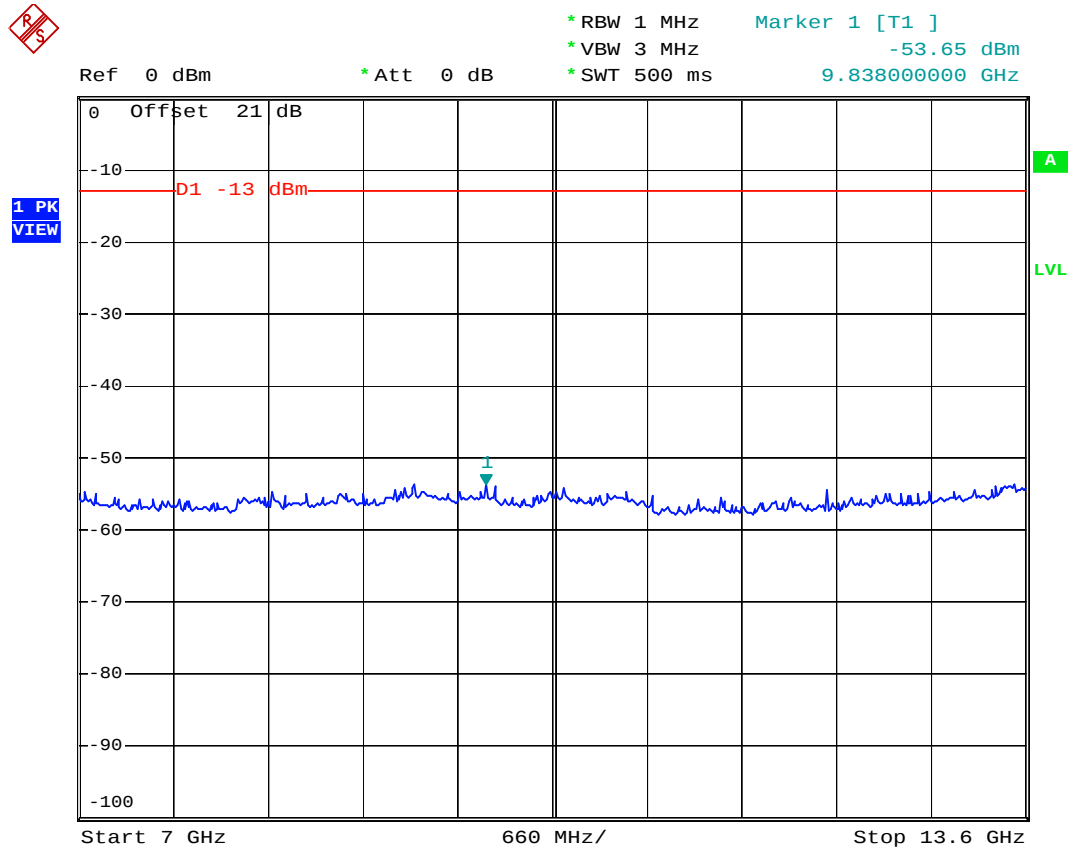


Date: 1.NOV.2006 20:12:05



FCC TEST REPORT

Report No. : FG6N0109

- Test Mode : PCS1900 CH661
- Frequency Range : 13.6G-19.1G

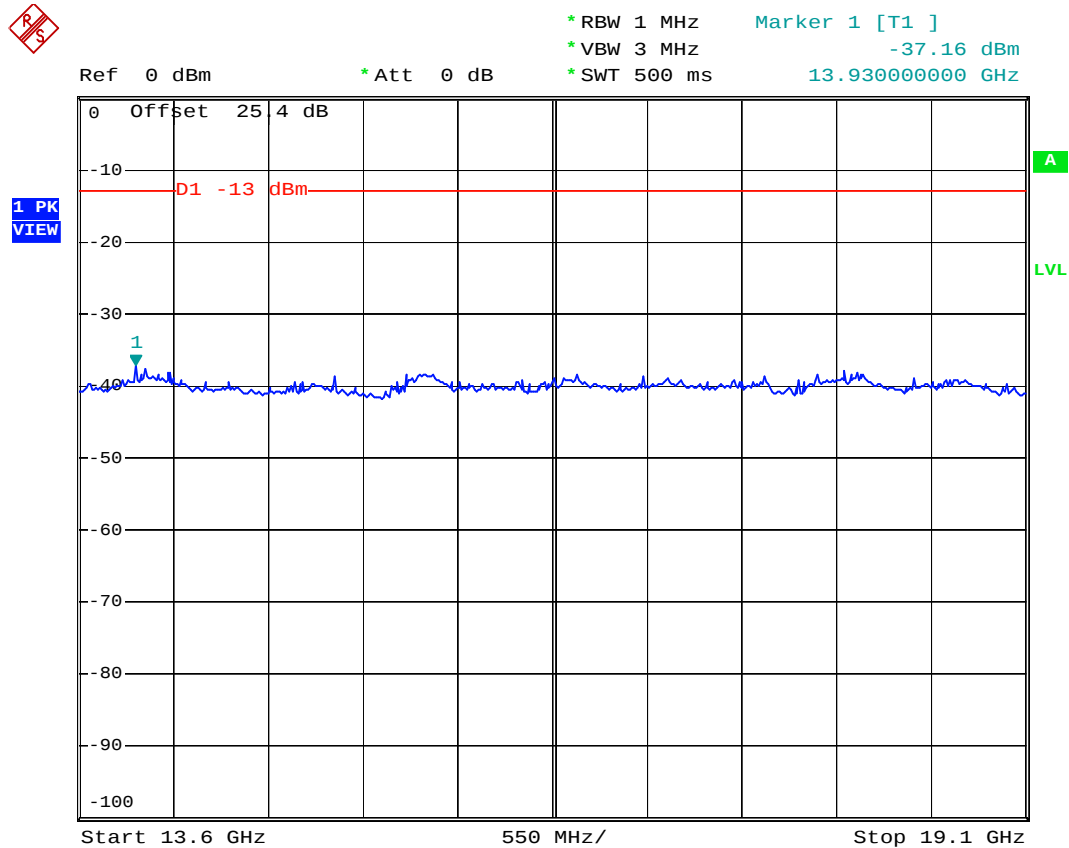

Date: 1.NOV.2006 20:14:07

4.6 Field Strength of Spurious Radiation

Equivalent isotropic radiated Power Measurements by substitution method according to ANSI/TIA/EIA-603-C.


4.6.1 Measurement Instruments

As described in chapter 5 of this test report.

4.6.2 Test Procedure

1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
2. The EUT was set 3 meters from the receiving antenna which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to reach the maximum spurious emission for both horizontal and vertical polarizations.
5. Taking the record of maximum spurious emission.
6. A Horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another substitution.
10. Emission level (dBm) = output power + substitution Gain.

4.6.3 Test Setup Layout

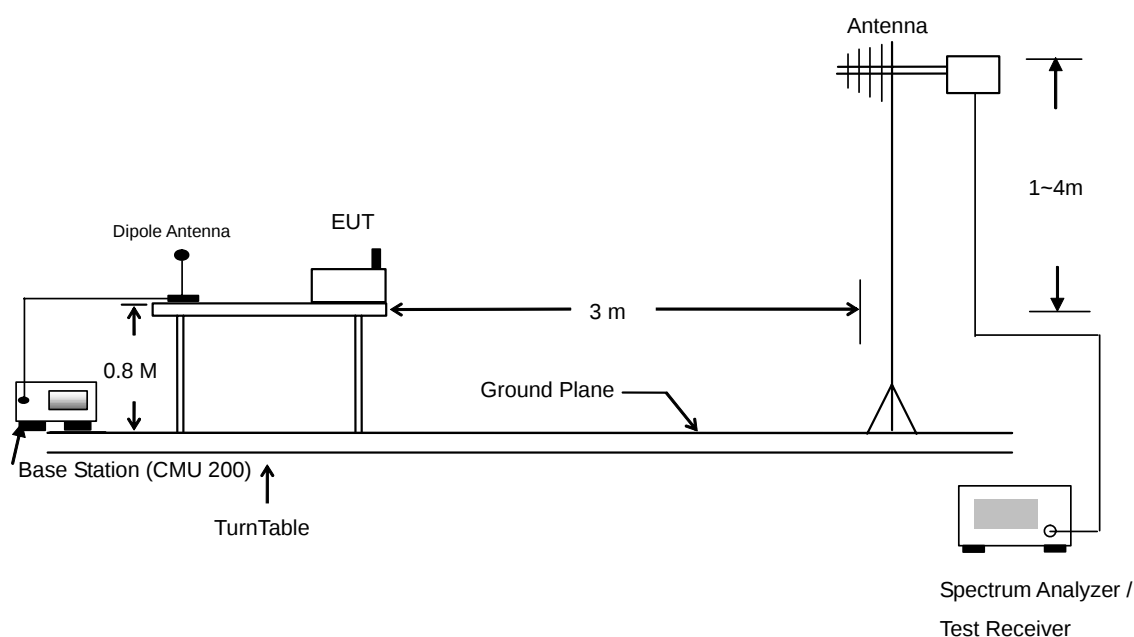

4.6.4 Test Result

- Test Mode : Mode 1

GSM850 Radiated Spurious ERP							
H Polarization				V Polarization			
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (Db)	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (Db)
30.000	-65.460	-13	-52.46	85.890	-60.360	-13	-47.36
80.490	-69.740	-13	-56.74	247.890	-67.780	-13	-54.78
279.480	-70.820	-13	-57.82	278.130	-68.330	-13	-55.33
939.800	-61.490	-13	-48.49	574.400	-60.040	-13	-47.04
1098.000	-56.590	-13	-43.59	1674.000	-32.370	-13	-19.37
1674.000	-35.290	-13	-22.29	2508.000	-53.220	-13	-40.22
2508.000	-56.420	-13	-43.42				

- Test Mode : Mode 2


PCS1900 Radiated Spurious EIRP							
H Polarization				V Polarization			
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (Db)	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (Db)
30.540	-63.310	-13	-50.31	52.680	-57.010	-13	-44.01
110.730	-67.600	-13	-54.60	102.090	-64.510	-13	-51.51
118.830	-67.410	-13	-54.41	172.830	-64.570	-13	-51.57
619.900	-66.230	-13	-53.23	619.900	-64.830	-13	-51.83
831.300	-63.890	-13	-50.89	826.400	-61.670	-13	-48.67
915.300	-63.630	-13	-50.63	960.800	-60.760	-13	-47.76
1618.000	-54.740	-13	-41.74	1674.000	-57.720	-13	-44.72
1644.000	-52.800	-13	-39.80	1728.000	-55.390	-13	-42.39
1684.000	-50.610	-13	-37.61	1824.000	-51.940	-13	-38.94
1724.000	-55.910	-13	-42.91	3698.000	-52.460	-13	-39.46
3698.000	-53.130	-13	-40.13	3758.000	-41.540	-13	-28.54
3758.000	-46.640	-13	-33.64	3778.000	-51.920	-13	-38.92
5638.000	-49.730	-13	-36.73	3814.000	-53.150	-13	-40.15
9398.000	-41.200	-13	-28.20	3874.000	-51.930	-13	-38.93
				5638.000	-46.580	-13	-33.58
				9398.000	-39.670	-13	-26.67



4.6.5 Test Data


4.6.5.1 Mode 1

Horizontal Polarization

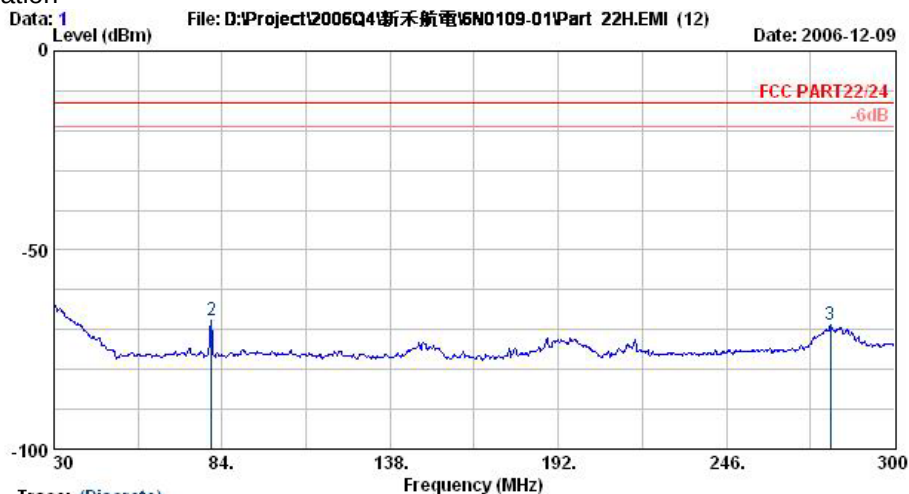

Site : 03CH06-HY
Condition : LF-SPURIOUS HORIZONTAL
EUT : GPS GSM
Power : 120Vac/60Hz
Model : FG 6N0109-01
Mode : GSM850 Link Mode;Ch189+Adaptor
Plane : E2

	Freq	Level	Over	Limit	Read		
	MHz	dBm	Limit	Line	Level	Factor	Remark
		dBm	dB	dBm	dBm	dB	
1	30.0	-63.31	-50.31	-13.00	-63.67	0.36	Peak
2	80.5	-67.59	-54.59	-13.00	-55.28	-12.31	Peak
3	279.5	-68.67	-55.67	-13.00	-58.02	-10.65	Peak

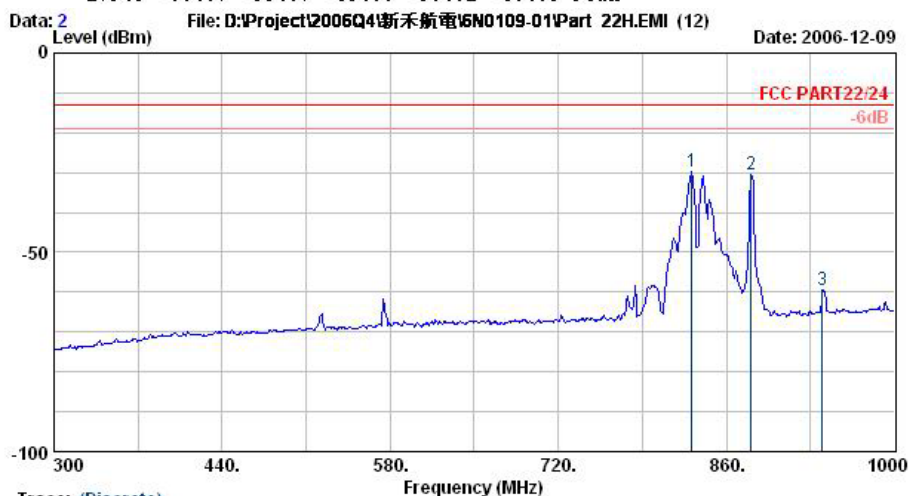

Site : 03CH06-HY
Condition : LF-SPURIOUS HORIZONTAL
EUT : GPS GSM
Power : 120Vac/60Hz
Model : FG 6N0109-01
Mode : GSM850 Link Mode;Ch189+Adaptor
Plane : E2

	Freq	Level	Over	Limit	Read		
	MHz	dBm	Limit	Line	Level	Factor	Remark
		dBm	dB	dBm	dBm	dB	
1 @	831.3	-29.88			-28.49	-1.39	Peak
2	880.3	-30.61			-29.70	-0.91	Peak
3	939.8	-59.34	-46.34	-13.00	-59.00	-0.34	Peak


Remark:

- #1: MS Signal
- #2: BS Signal




FCC TEST REPORT

Report No. : FG6N0109

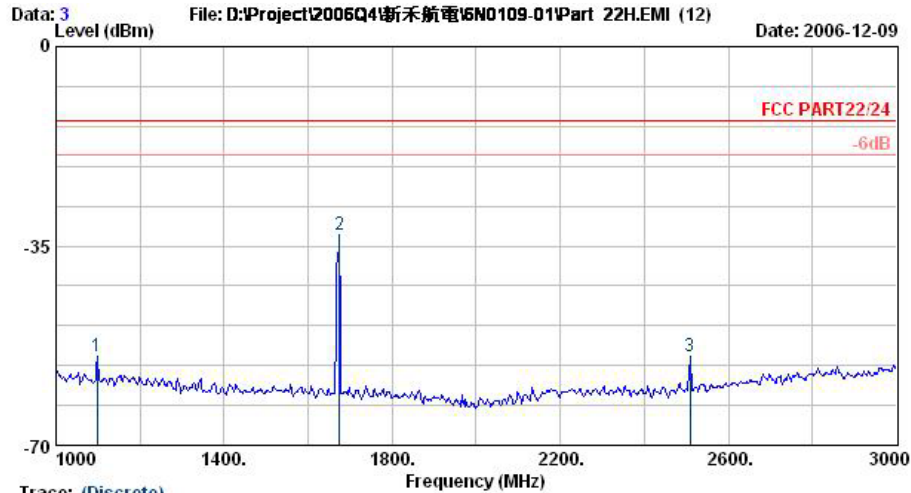

Site : 03CH06-HY
Condition : HP-SFURIOUS HORIZONTAL
EUT : GPS GSM
Power : 120Vac/60Hz
Model : FG 6N0109-01
Mode : GSM850 Link Mode;Ch189+Adaptor
Plane : E2

	Freq	Level	Over	Limit	Read		
	MHz	dBm	Limit	Line	Level	Factor	Remark
			dB	dBm	dBm	dB	
1	1098.0	-54.44	-41.44	-13.00	-56.05	1.61	Peak
2	1674.0	-33.14	-20.14	-13.00	-33.36	0.22	Peak
3	2508.0	-54.27	-41.27	-13.00	-55.47	1.20	Peak

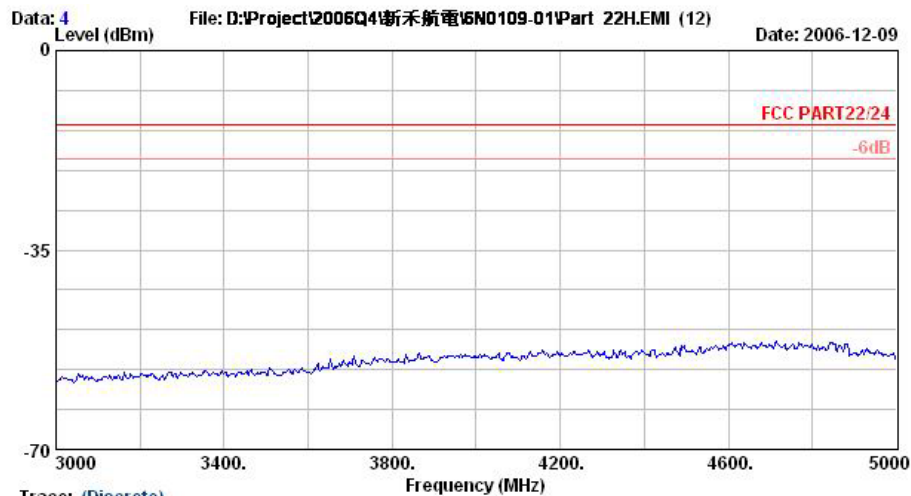


Site : 03CH06-HY
Condition : HP-SFURIOUS HORIZONTAL
EUT : GPS GSM
Power : 120Vac/60Hz
Model : FG 6N0109-01
Mode : GSM850 Link Mode;Ch189+Adaptor
Plane : E2



FCC TEST REPORT

Report No. : FG6N0109

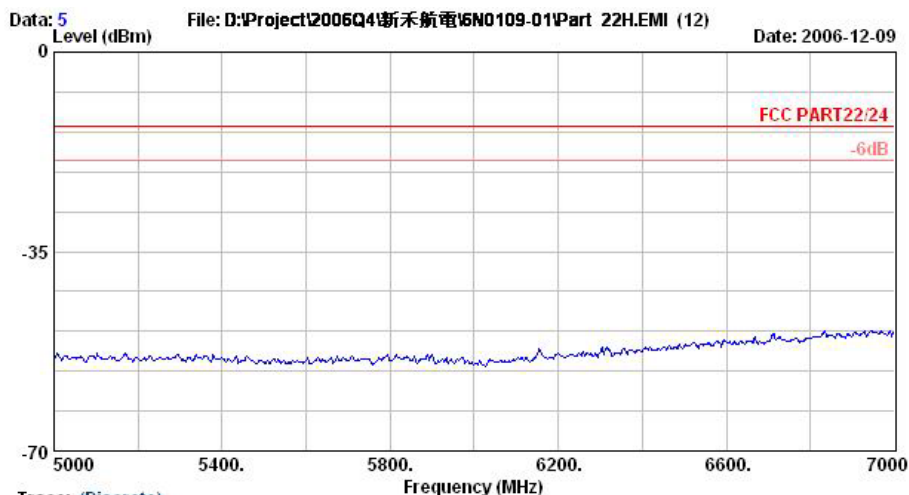

Trace: (Discrete)

Site : 03CH06-HY

Condition : HF-SPURIOUS HORIZONTAL


EUT : GPS GSM

Power : 120Vac/60Hz

Model : FG 6N0109-01

Mode : GSM850 Link Mode, CH189+ Adaptor

Plane : E2

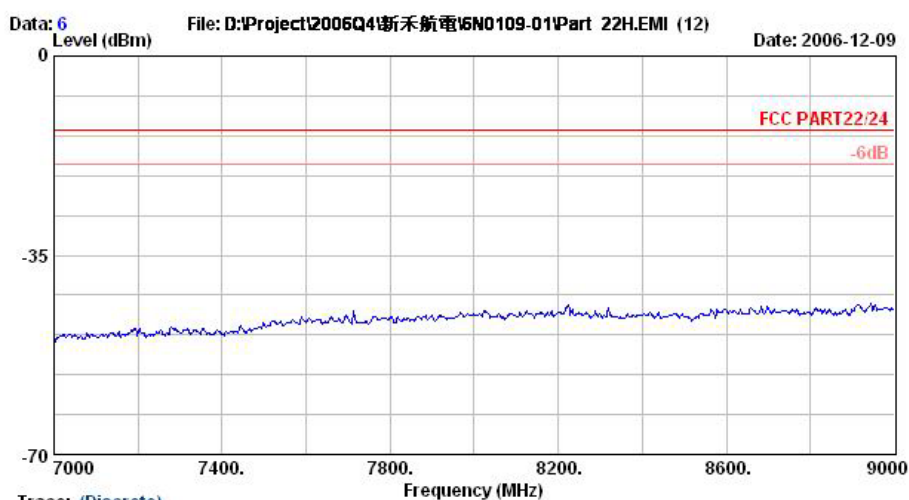

Trace: (Discrete)

Site : 03CH06-HY

Condition : HF-SPURIOUS HORIZONTAL

EUT : GPS GSM

Power : 120Vac/60Hz


Model : FG 6N0109-01

Mode : GSM850 Link Mode, CH189+ Adaptor

Plane : E2




Vertical Polarization

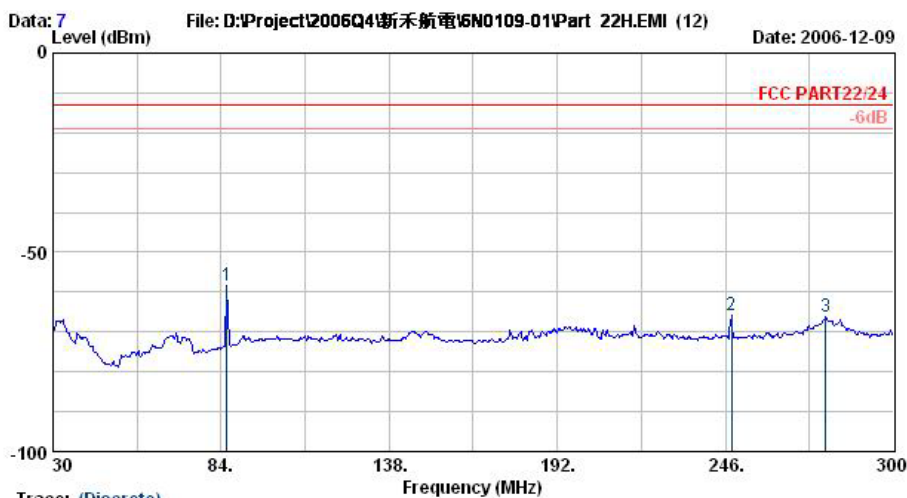

Trace: (Discrete)

Site : 08CH06-HY
Condition : LF-SPURIOUS VERTICAL
EUT : GFS GSM
Power : 120Wac/60Hz
Model : FG 6N0109-01
Mode : GSM850 Link Mode;Ch189+Adaptor
Plane : E2

	Freq	Level	Over	Limit	Read		
	MHz	dBm	Limit	Line	Level	Factor	Remark
			dB	dBm	dBm	dB	
1	85.9	-58.21	-45.21	-13.00	-48.57	-9.65	Peak
2	247.9	-65.63	-52.63	-13.00	-58.07	-7.56	Peak
3	278.1	-66.18	-53.18	-13.00	-59.27	-6.91	Peak

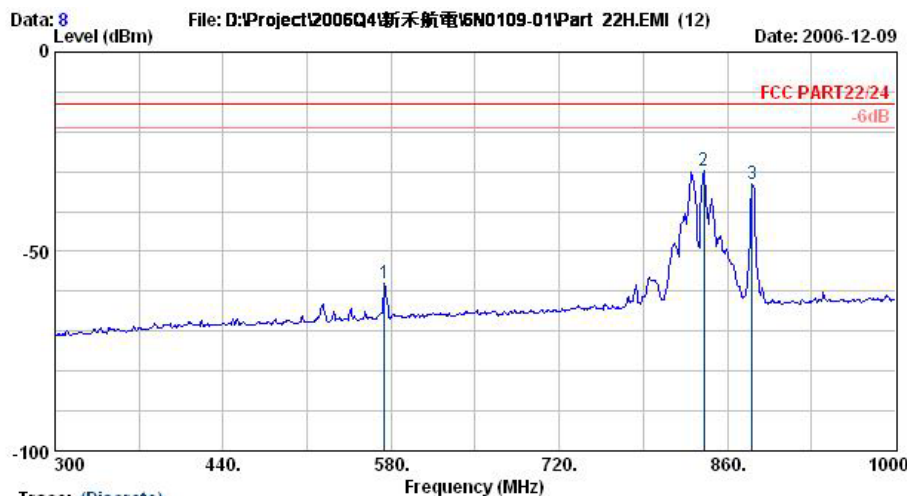

Trace: (Discrete)

Site : 08CH06-HY
Condition : LF-SPURIOUS VERTICAL
EUT : GFS GSM
Power : 120Wac/60Hz
Model : FG 6N0109-01
Mode : GSM850 Link Mode;Ch189+Adaptor
Plane : E2


	Freq	Level	Over	Limit	Read		
	MHz	dBm	Limit	Line	Level	Factor	Remark
			dB	dBm	dBm	dB	
1	574.4	-57.89	-44.89	-13.00	-55.65	-2.24	Peak
2 @	840.4	-29.81			-31.20	1.39	Peak
3	880.3	-32.97			-34.68	1.71	Peak

Remark:

1. #2: MS Signal
2. #3: BS Signal



Data: 9 File: D:\Project\2006Q4\新禾航電\6N0109-01\Part 22H.EMI (12) Date: 2006-12-09

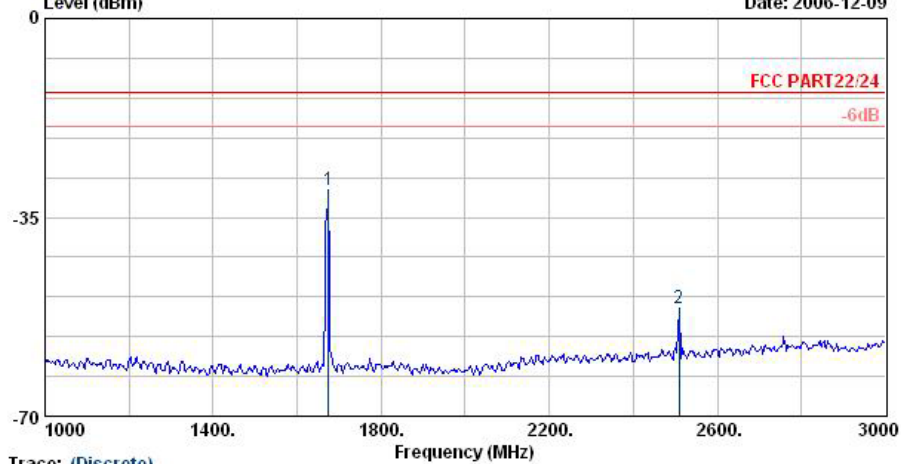


Trace: (Discrete)

Site : 08CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : GFS GSM
Power : 120Wac/60Hz
Model : FG 6N0109-01
Mode : GSM850 Link Mode;Ch189+Adaptor
Plane : E2

	Freq	Level	Over	Limit	Read	
	MHz	dBm	Limit	Line	Level	Factor Remark
		dBm	dB	dBm	dBm	dB
1	1674.0	-30.22	-17.22	-13.00	-29.74	-0.48 Peak
2	2508.0	-51.07	-38.07	-13.00	-53.34	2.27 Peak

Data: 10 File: D:\Project\2006Q4\新禾航電\6N0109-01\Part 22H.EMI (12) Date: 2006-12-09

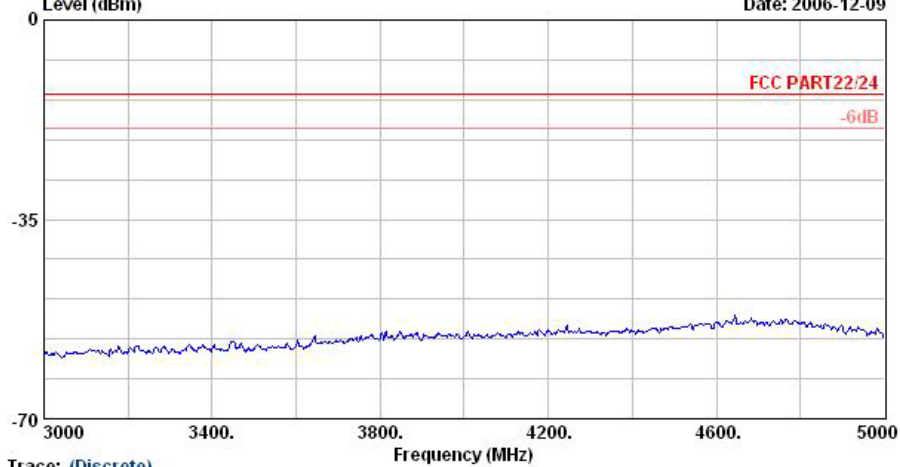


Trace: (Discrete)

Site : 08CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : GFS GSM
Power : 120Wac/60Hz
Model : FG 6N0109-01
Mode : GSM850 Link Mode;Ch189+Adaptor
Plane : E2



FCC TEST REPORT

Report No. : FG6N0109

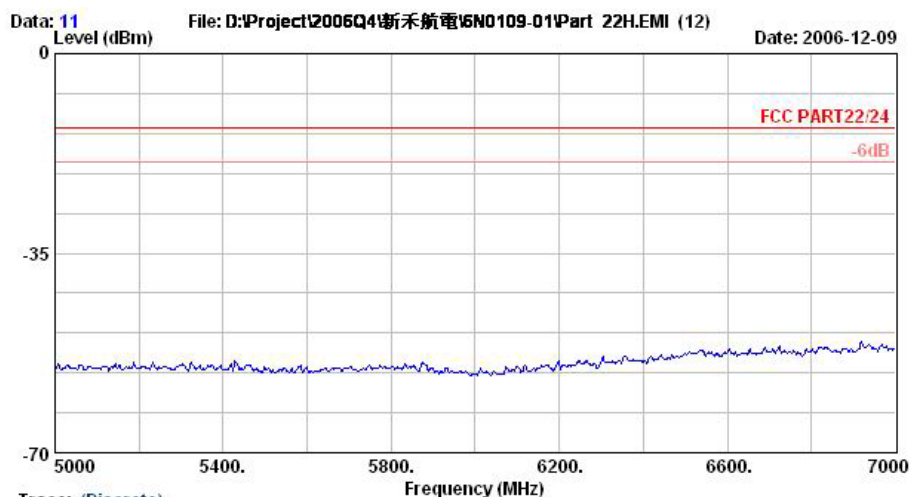

Trace: (Discrete)

Site : 03CH06-HY

Condition : HF-SPURIOUS VERTICAL


EUT : GPS GSM

Power : 120Vac/60Hz

Model : FG 6N0109-01

Mode : GSM850 Link Mode;Ch189+Adaptor

Plane : E2

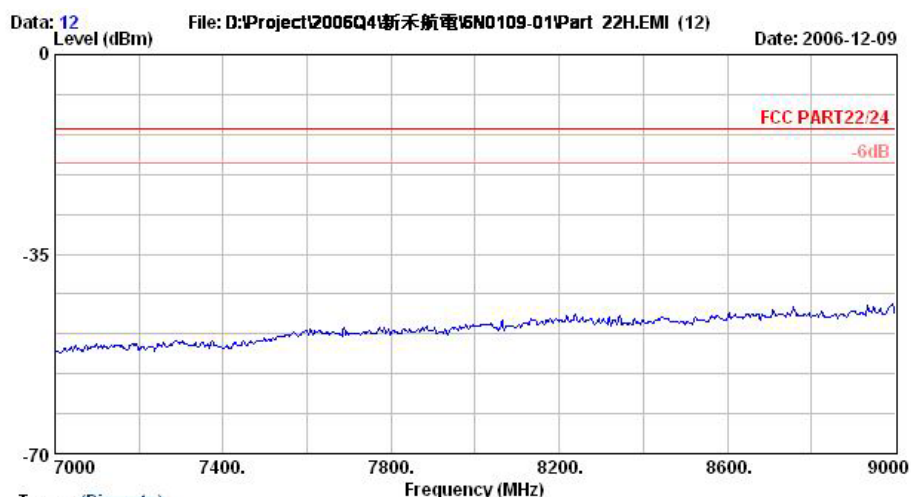

Trace: (Discrete)

Site : 03CH06-HY

Condition : HF-SPURIOUS VERTICAL

EUT : GPS GSM

Power : 120Vac/60Hz

Model : FG 6N0109-01


Mode : GSM850 Link Mode;Ch189+Adaptor

Plane : E2




4.6.5.2 Mode 2

Horizontal Polarization

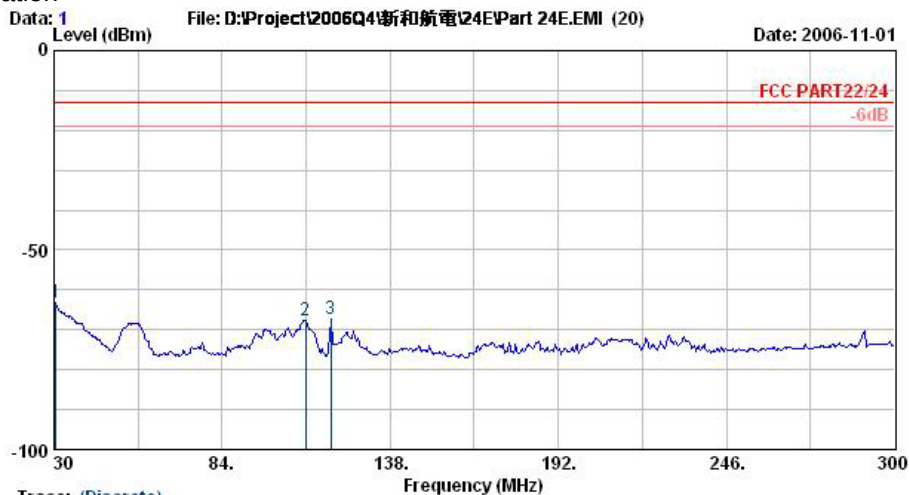


Site : 03CH06-HY
Condition : LF-SPURIOUS HORIZONTAL
EUT : GPS/GSM 車機
Power : 120Vac/60Hz
Model : FG 6N0109
Mode : PCS 1900 Link;1880MHz+Adaptor

	Freq	Level	Over	Limit			
	MHz	dBm	Limit	Line	Factor	Remark	Pol/Phase
		dBm	dB	dBm	dB		
1 @	30.5	-63.31	-50.31	-13.00	-0.25	Peak	HORIZONTAL
2 @	110.7	-67.60	-54.60	-13.00	-12.36	Peak	HORIZONTAL
3 @	118.8	-67.41	-54.41	-13.00	-12.46	Peak	HORIZONTAL

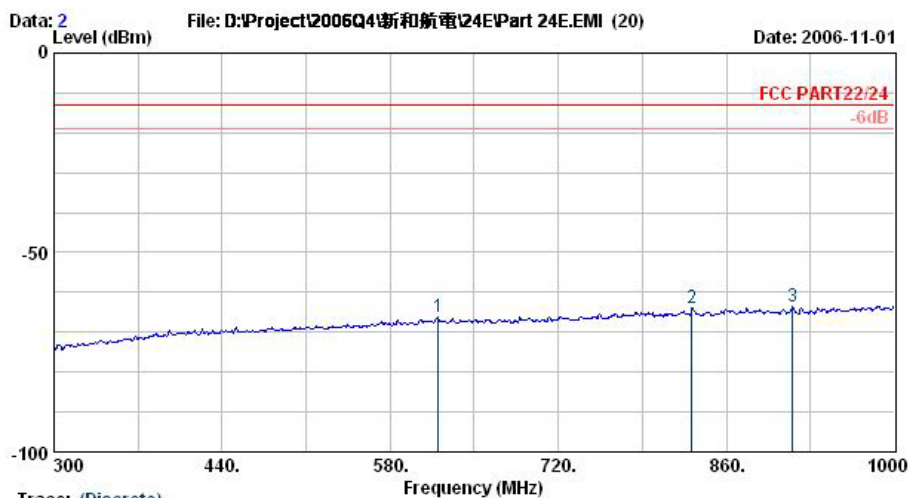

Site : 03CH06-HY
Condition : LF-SPURIOUS HORIZONTAL
EUT : GPS/GSM 車機
Power : 120Vac/60Hz
Model : FG 6N0109
Mode : PCS 1900 Link;1880MHz+Adaptor

	Freq	Level	Over	Limit			
	MHz	dBm	Limit	Line	Factor	Remark	Pol/Phase
		dBm	dB	dBm	dB		
1 @	619.9	-66.23	-53.23	-13.00	-3.54	Peak	HORIZONTAL
2 @	831.3	-63.89	-50.89	-13.00	-1.39	Peak	HORIZONTAL
3 @	915.3	-63.63	-50.63	-13.00	-0.58	Peak	HORIZONTAL

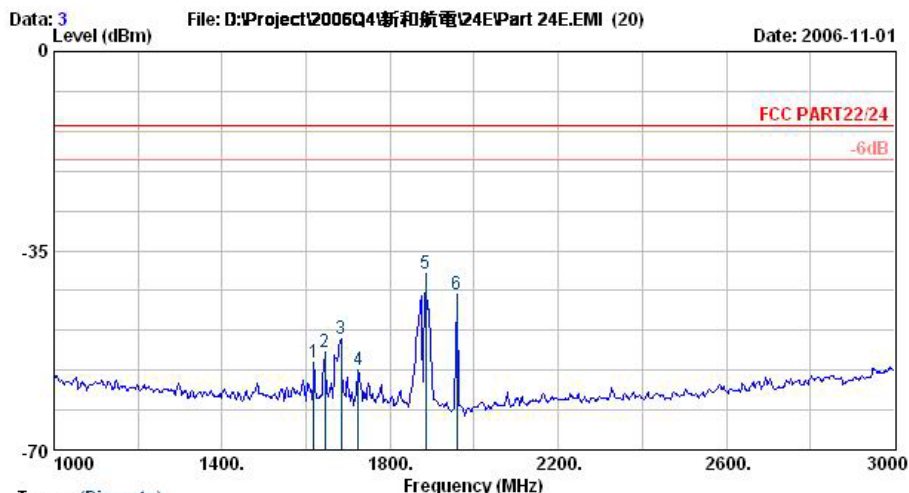


Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : GPS/GSM 車機
Power : 120Vac/60Hz
Model : FG 6N0109
Mode : PCS 1900 Link;1880MHz+Adaptor

	Freq	Level	Over	Limit	Line	Factor	Remark	Pol/Phase
	MHz	dBm	Limit	dB	dBm	dB		
1 @	1618.0	-54.74	-41.74	-13.00	0.37	Peak	HORIZONTAL	
2 @	1644.0	-52.80	-39.80	-13.00	0.31	Peak	HORIZONTAL	
3 @	1684.0	-50.61	-37.61	-13.00	0.13	Peak	HORIZONTAL	
4 @	1724.0	-55.91	-42.91	-13.00	0.08	Peak	HORIZONTAL	
5 @	1884.0	-39.15			-0.68	Peak	HORIZONTAL	
6 @	1958.0	-42.66			-1.11	Peak	HORIZONTAL	

Remark:

1. #5: MS TCH Signal
2. #6: BS TCH Signal

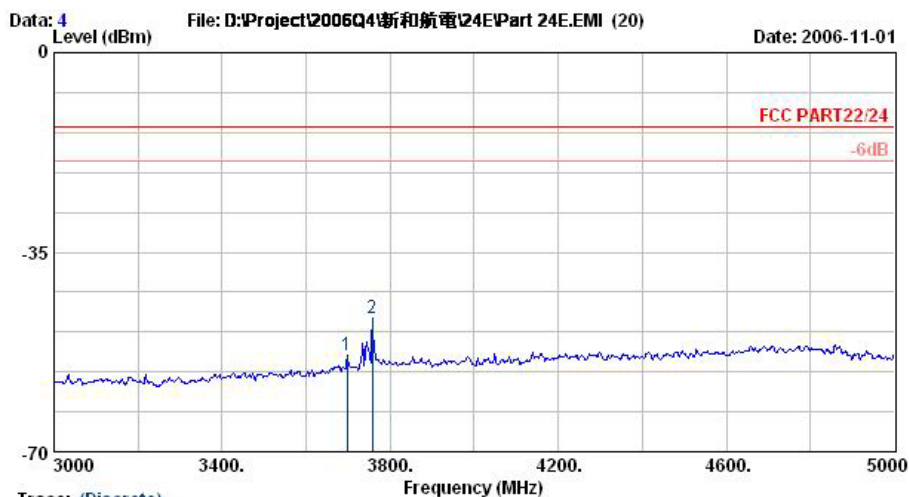

Trace: (Discrete)

Site : 03CH06-HY
Condition : HF-SPURIOUS HORIZONTAL
EUT : GPS/GSM 車機
Power : 120Vac/60Hz
Model : FG 6N0109
Mode : PCS 1900 Link;1880MHz+Adaptor


	Freq	Level	Over	Limit	Line	Factor	Remark	Pol/Phase
	MHz	dBm	Limit	dB	dBm	dB		
1 @	3698.0	-53.13	-40.13	-13.00	7.42	Peak	HORIZONTAL	
2 @	3758.0	-46.64	-33.64	-13.00	7.92	Peak	HORIZONTAL	



FCC TEST REPORT

Report No. : FG6N0109

Data: 5 File: D:\Project\2006Q4\新和航電\24E\Part 24E.EMI (20) Date: 2006-11-01

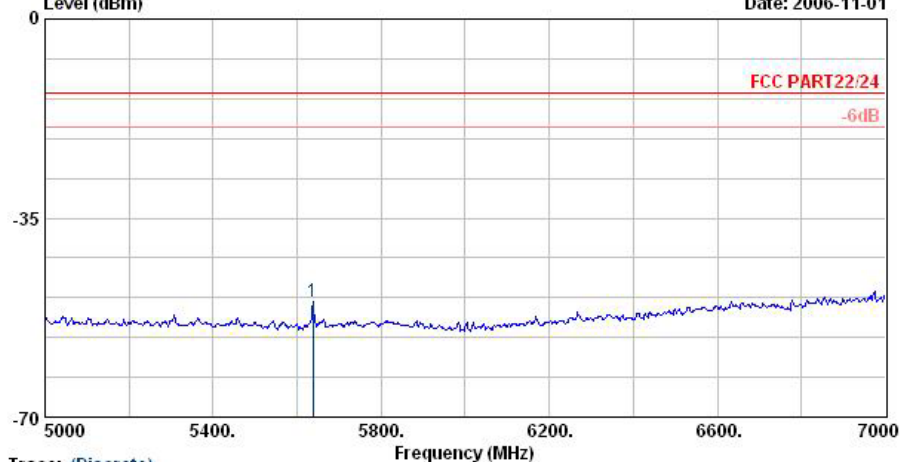


Site
Condition
EUT
Power
Model
Mode

Trace: (Discrete)
: 03CH06-HY
: HF-SFURIOUS HORIZONTAL
: GPS/GSM 串機
: 120Vac/60Hz
: FG 6N0109
: PCS 1900 Link;1880MHz+Adaptor

	Freq	Level	Over	Limit	Line	Factor	Remark	Pol/Phase
	MHz	dBm	dB	dBm	dB	dB		
1 @	5638.0	-49.73	-36.73	-13.00	9.97	Peak		HORIZONTAL

Data: 6 File: D:\Project\2006Q4\新和航電\24E\Part 24E.EMI (20) Date: 2006-11-01

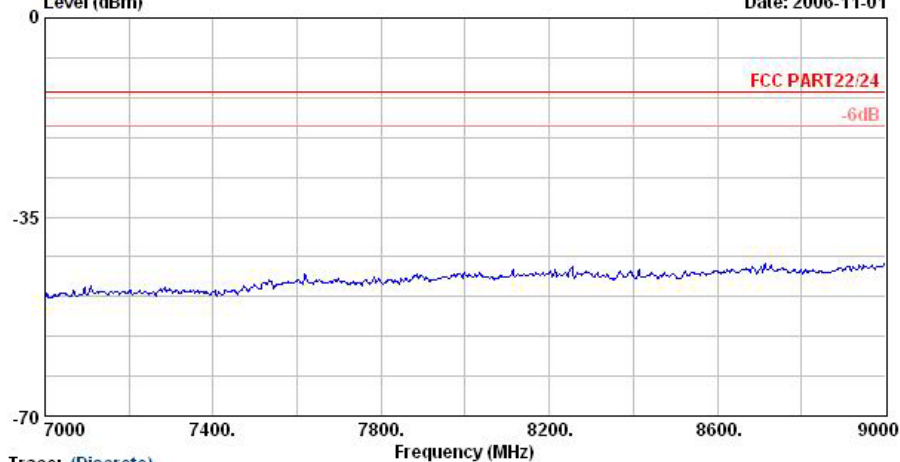

Site
Condition
EUT
Power
Model
Mode


Trace: (Discrete)
: 03CH06-HY
: HF-SFURIOUS HORIZONTAL
: GPS/GSM 串機
: 120Vac/60Hz
: FG 6N0109
: PCS 1900 Link;1880MHz+Adaptor



FCC TEST REPORT

Report No. : FG6N0109


Data: 7 File: D:\Project\2006Q4\新和航電\24E\Part 24E.EMI (20) Date: 2006-11-01

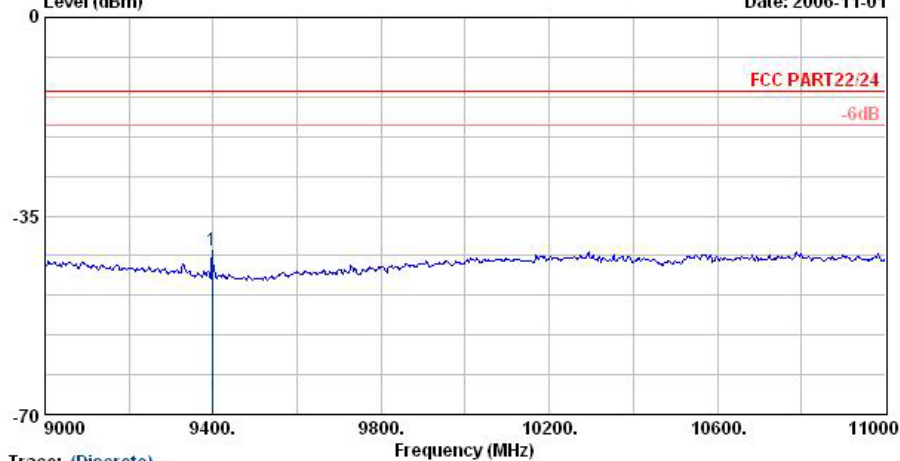

Site : 03CH06-HY
Condition : HF-SFURIOUS HORIZONTAL
EUT : GPS/GSM 車機
Power : 120Vac/60Hz
Model : FG 6N0109
Mode : PCS 1900 Link;1880MHz+Adaptor

	Freq	Level	Over	Limit	Line	Factor	Remark	Pol/Phase
	MHz	dBm	dB	dBm	dB			
1 @	9398.0	-41.20	-28.20	-13.00	18.22	Peak		HORIZONTAL

Data: 8 File: D:\Project\2006Q4\新和航電\24E\Part 24E.EMI (20) Date: 2006-11-01

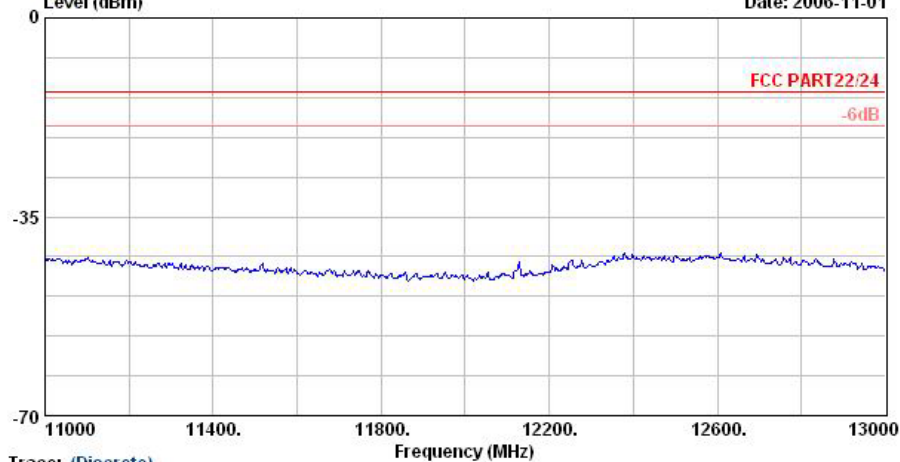


Site : 03CH06-HY
Condition : HF-SFURIOUS HORIZONTAL
EUT : GPS/GSM 車機
Power : 120Vac/60Hz
Model : FG 6N0109
Mode : PCS 1900 Link;1880MHz+Adaptor



FCC TEST REPORT

Report No. : FG6N0109

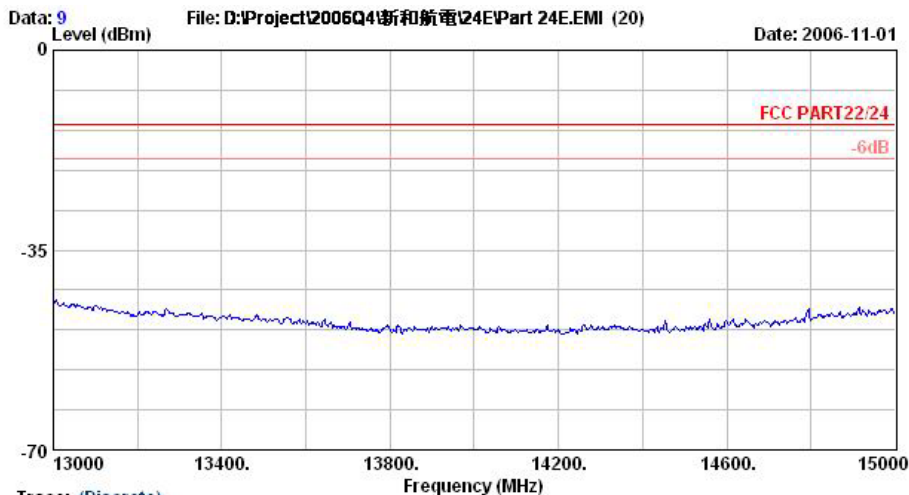

Trace: (Discrete)

Site : 03CHD6-HY


Condition : HF-SPURIOUS HORIZONTAL

EUT : GPS/GSM 車機

Power : 120Vac/60Hz

Model : FG 6N0109

Mode : PCS 1900 Link;1880MHz+Adaptor

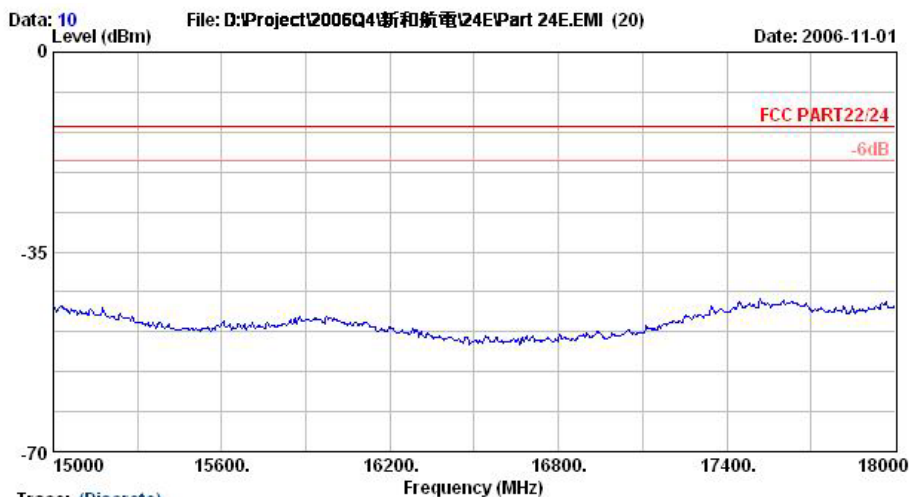

Trace: (Discrete)

Site : 03CHD6-HY

Condition : HF-SPURIOUS HORIZONTAL

EUT : GPS/GSM 車機


Power : 120Vac/60Hz

Model : FG 6N0109

Mode : PCS 1900 Link;1880MHz+Adaptor




Vertical Polarization

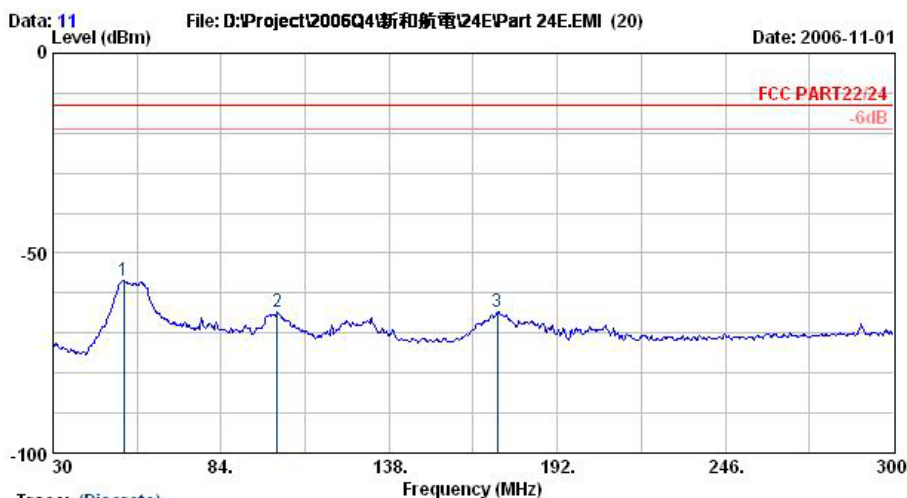

Trace: (Discrete)

Site : 08CH06-HY
Condition : LF-SPURIOUS VERTICAL
EUT : GPS/GSM 車機
Power : 120Vac/60Hz
Model : FG 6N0109
Mode : PCS 1900 Link;1880MHz+Adaptor


	Freq	Level	Over	Limit			
	MHz	dBm	Limit	Line	Factor	Remark	Pol/Phase
			dB	dBm	dB		
1 @	52.7	-57.01	-44.01	-13.00	-14.54	Peak	VERTICAL
2 @	102.1	-64.51	-51.51	-13.00	-7.71	Peak	VERTICAL
3 @	172.8	-64.57	-51.57	-13.00	-8.35	Peak	VERTICAL

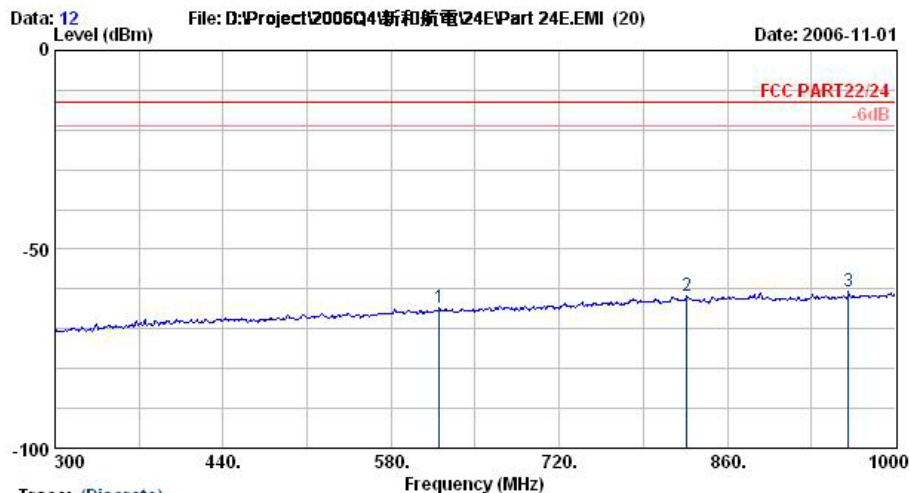

Trace: (Discrete)

Site : 08CH06-HY
Condition : LF-SPURIOUS VERTICAL
EUT : GPS/GSM 車機
Power : 120Vac/60Hz
Model : FG 6N0109
Mode : PCS 1900 Link;1880MHz+Adaptor

	Freq	Level	Over	Limit			
	MHz	dBm	Limit	Line	Factor	Remark	Pol/Phase
			dB	dBm	dB		
1 @	619.9	-64.83	-51.83	-13.00	-1.64	Peak	VERTICAL
2 @	826.4	-61.67	-48.67	-13.00	1.28	Peak	VERTICAL
3 @	960.8	-60.76	-47.76	-13.00	2.35	Peak	VERTICAL

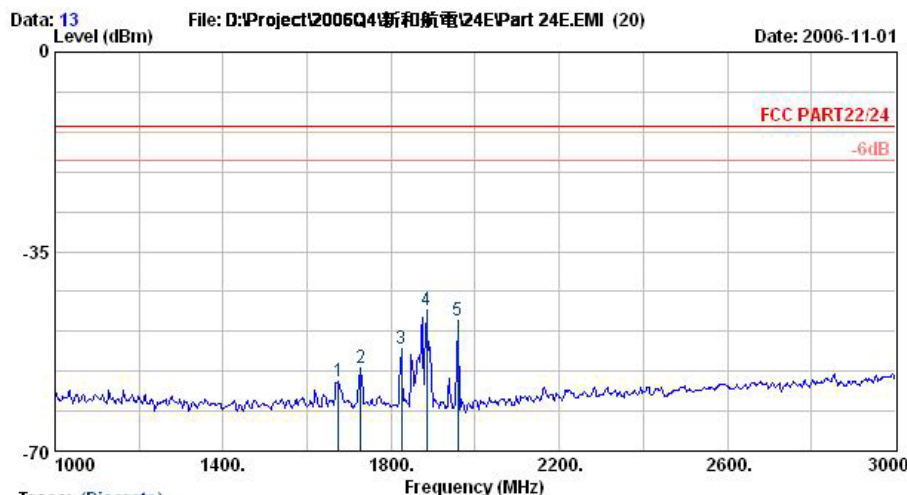

Trace: (Discrete)

Site : 08CH06-HY

Condition : HF-SPURIOUS VERTICAL

EUT : GPS/GSM 車機

Power : 120Wac/60Hz


Model : FG 6N0109

Mode : PCS 1900 Link;1880MHz+Adaptor

	Freq	Level	Over	Limit	Line	Factor	Remark	Pol/Phase
	MHz	dBm	dB	dBm	dB	dB		
1 @	1674.0	-57.72	-44.72	-13.00	-0.48	Peak	VERTICAL	
2 @	1728.0	-55.39	-42.39	-13.00	-0.34	Peak	VERTICAL	
3 @	1824.0	-51.94	-38.94	-13.00	-0.31	Peak	VERTICAL	
4 @	1884.0	-45.23			-0.50	Peak	VERTICAL	
5 @	1958.0	-46.99			-0.60	Peak	VERTICAL	

Remar:

1. #4: MS TCH Signal
2. #5: BS TCH Signal

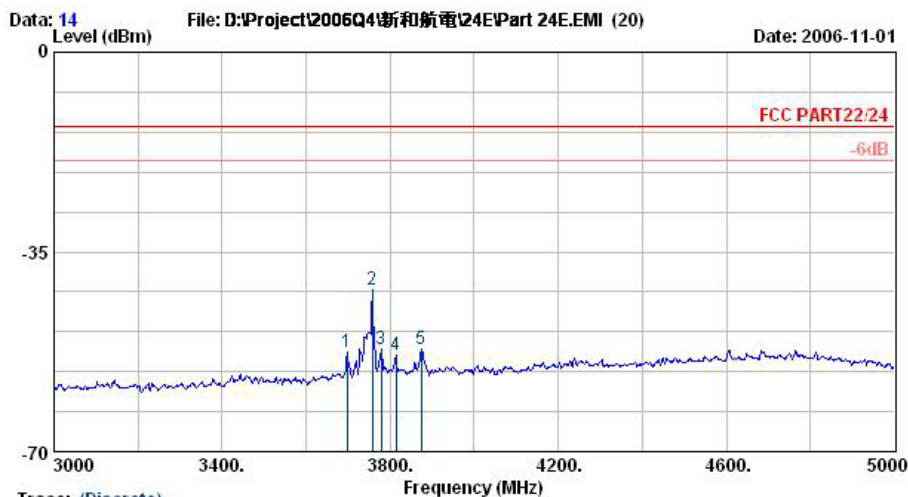

Trace: (Discrete)

Site : 08CH06-HY

Condition : HF-SPURIOUS VERTICAL

EUT : GPS/GSM 車機

Power : 120Wac/60Hz

Model : FG 6N0109


Mode : PCS 1900 Link;1880MHz+Adaptor

	Freq	Level	Over	Limit	Line	Factor	Remark	Pol/Phase
	MHz	dBm	dB	dBm	dB	dB		
1 @	3698.0	-52.46	-39.46	-13.00	6.20	Peak	VERTICAL	
2 @	3758.0	-41.54	-28.54	-13.00	6.64	Peak	VERTICAL	
3 @	3778.0	-51.92	-38.92	-13.00	6.91	Peak	VERTICAL	
4 @	3814.0	-53.15	-40.15	-13.00	6.93	Peak	VERTICAL	
5 @	3874.0	-51.93	-38.93	-13.00	7.21	Peak	VERTICAL	



FCC TEST REPORT

Report No. : FG6N0109

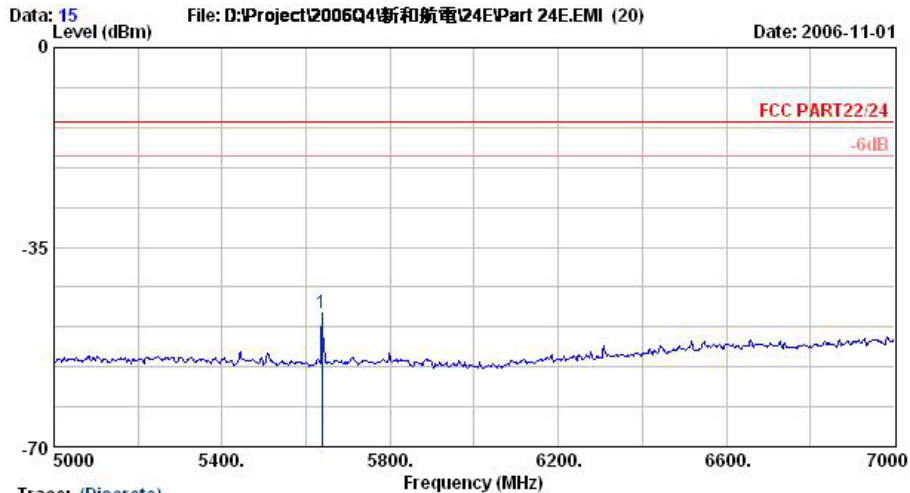

Trace: (Discrete)

Site : 08CHD6-HY

Condition : HF-SPURIOUS VERTICAL


EUT : GPS/GSM 車機

Power : 120Vac/60Hz

Model : FG 6N0109

Mode : PCS 1900 Link;1880MHz+Adaptor

	Freq	Level	Over	Limit	Line	Factor	Remark	Pol/Phase
	MHz	dBm	dB	dBm	dB	dB		
1 @	5638.0	-46.58	-33.58	-13.00	8.65	Peak	VERTICAL	

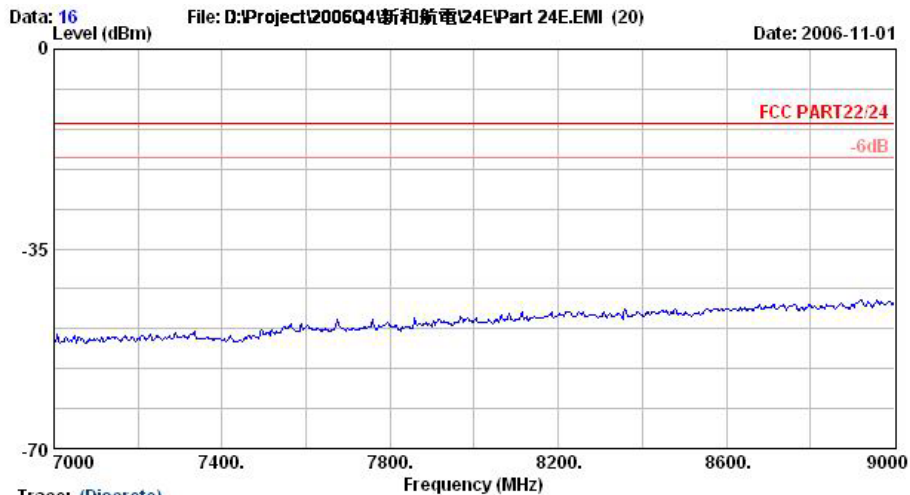

Trace: (Discrete)

Site : 08CHD6-HY

Condition : HF-SPURIOUS VERTICAL

EUT : GPS/GSM 車機

Power : 120Vac/60Hz

Model : FG 6N0109


Mode : PCS 1900 Link;1880MHz+Adaptor



FCC TEST REPORT

Report No. : FG6N0109

Data: 17 File: D:\Project\2006Q4\新和航電\24E\Part 24E.EMI (20) Date: 2006-11-01
Level (dBm)

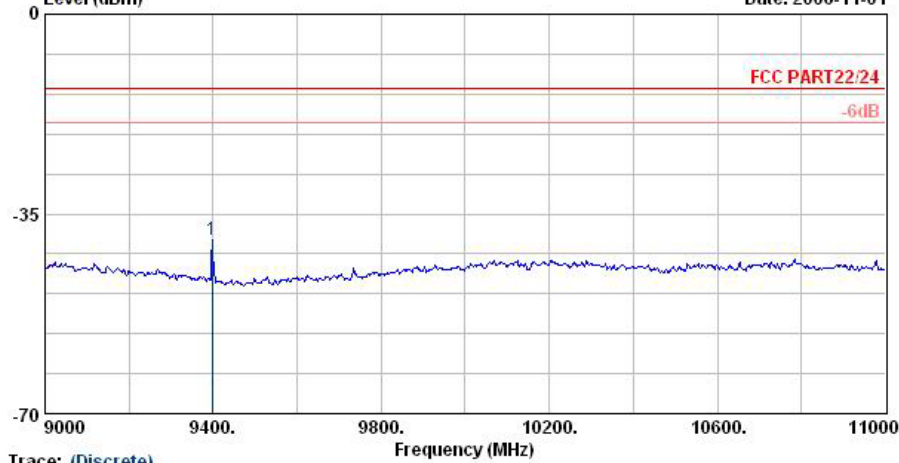


Trace: (Discrete)

Site : 08CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : GPS/GSM 車機
Power : 120Vac/60Hz
Model : FG 6N0109
Mode : PCS 1900 Link;1880MHz+Adaptor

	Over	Limit				
Freq	Level	Limit	Line	Factor	Remark	Pol/Phase
MHz	dBm	dB	dBm	dB		
1 @ 9398.0	-39.67	-26.67	-13.00	17.20	Peak	VERTICAL

Data: 18 File: D:\Project\2006Q4\新和航電\24E\Part 24E.EMI (20) Date: 2006-11-01
Level (dBm)

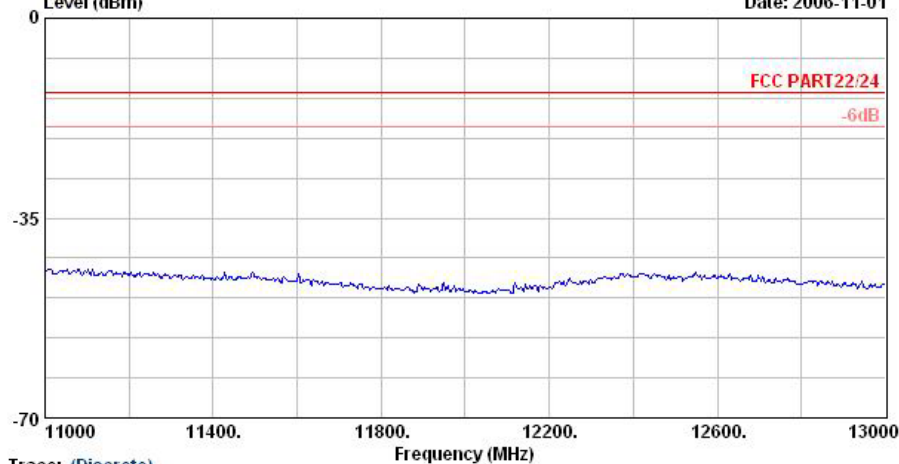



Trace: (Discrete)

Site : 08CH06-HY
Condition : HF-SPURIOUS VERTICAL
EUT : GPS/GSM 車機
Power : 120Vac/60Hz
Model : FG 6N0109
Mode : PCS 1900 Link;1880MHz+Adaptor



FCC TEST REPORT

Report No. : FG6N0109

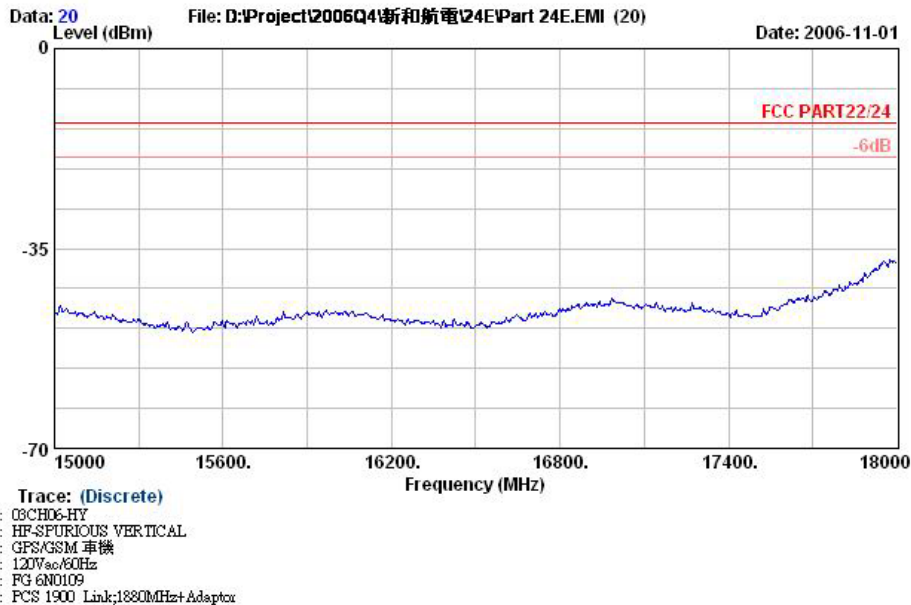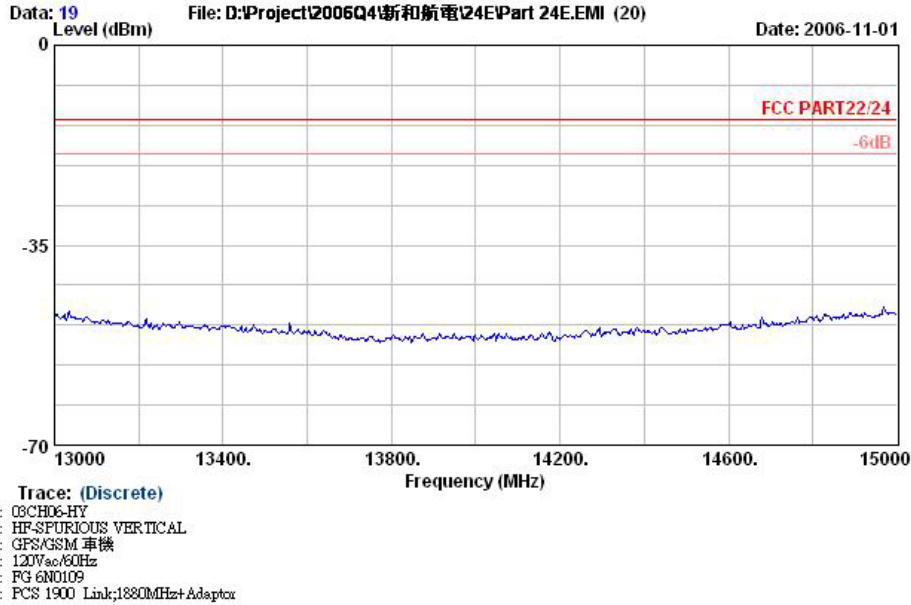

Remark: There is no more obvious spurious emission except the listings above.

4.7 Frequency Stability (Temperature Variation)


4.7.1 Measurement Instrument

As described in chapter 5 of this test report.

4.7.2 Test Procedure

- a. The EUT and test equipment were set up as shown on the following section.
- b. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
- c. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
- d. The temperature tests were performed for the worst case.
- e. Test data was recorded.

4.7.3 Test Setup Layout

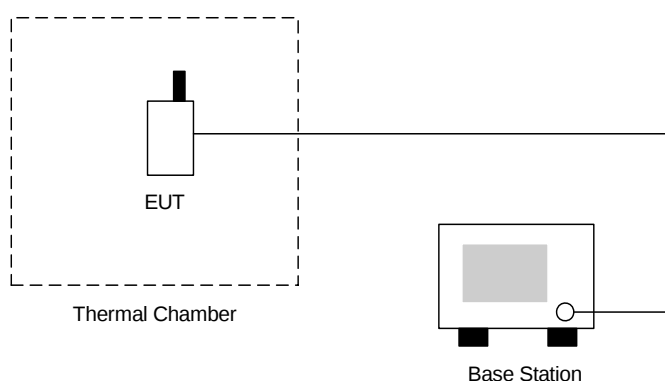

4.7.4 Test Result

▪ Test Mode : GSM850 CH189

Temperature(°C)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
-30	X	X	2.5	Passed
-20	-56	-0.03		
-10	-49	-0.03		
0	38	0.02		
10	-33	-0.02		
20	-42	-0.02		
30	37	0.02		
40	55	0.03		
50	62	0.03		

▪ Test Mode : PCS1900 CH661

Temperature(°C)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
-30	X	X	2.5	Passed
-20	-17	-0.01		
-10	-24	-0.01		
0	33	0.02		
10	24	0.01		
20	37	0.02		
30	24	0.01		
40	-20	-0.01		
50	-18	-0.01		

Remark:

“X” : The transmitter does no longer transmit when the EUT is subjected to a temperature of -20 degree C.

4.8 Frequency Stability (Voltage Variation)


4.8.1 Measurement Instrument

As described in chapter 5 of this test report.

4.8.2 Test Procedure

1. The EUT was placed in a temperature chamber at $25 \pm 5^{\circ}\text{C}$ and connected as the following section.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

4.8.3 Test Setup Layout

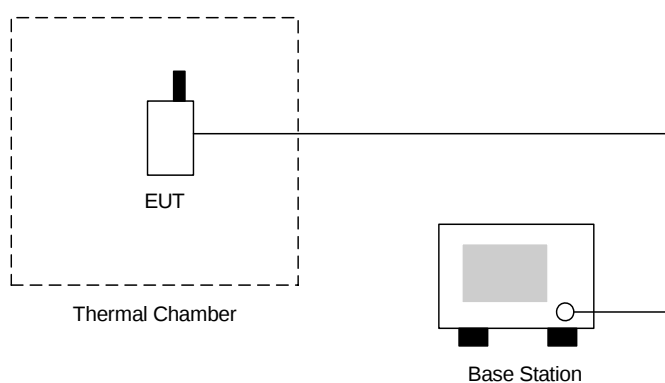

4.8.4 Test Result

Test Mode : GSM850 CH189

Voltage(Volt)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
3.7	22.0	0.01	2.5	Passed
BEP	-26.0	-0.01		
4.3	39.0	0.02		

Test Mode : PCS1900 CH661

Voltage(Volt)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
3.7	33.0	0.02	2.5	Passed
BEP	28.0	0.01		
4.3	36.0	0.02		

Remark:

1. Normal Voltage=3.7V.
2. Battery End Point (BEP)=3.4V.

5 List of Measurement Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum analyzer	Agilent	E4408B	MY44211030	9KHz-26.5GHz	Oct. 05, 2006	Oct. 04, 2007	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESCS30	100356	9KHz-2.75GHz	Jul. 13, 2006	Jul. 12, 2007	Radiation (03CH06-HY)
Controller	INN-CO	CO2000	N/A	N/A	N/A	N/A	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	Nov. 20, 2006	Nov. 19, 2007	Radiation (03CH06-HY)
Horn Antenna	Com-Power	AH118	071025	1G-18G	Mar. 29, 2006	Mar. 28, 2007	Radiation (03CH06-HY)
SHF-EHF Horn	SCHWARZBECK	BBHA 9170	9170-249	14G - 40G	Nov. 20, 2006	Nov. 19, 2008	Radiation (03CH06-HY)
Pre Amplifier	Agilent	8449B	3008A01917	1G - 26.5G	Nov. 15, 2006	Nov. 14, 2007	Radiation (03CH06-HY)
Pre Amplifier	Mini Circuits	ZKL-2	D092004-1	10~2500MHz	Nov. 15, 2006	Nov. 14, 2007	Radiation (03CH06-HY)
Turn Table	INN-CO	DS2000	420/650/00	0 ~ 360 degree	N/A	N/A	Radiation (03CH06-HY)
Antenna Mast	INN-CO	MM3000	114/8000604/ L	1 m - 4 m	N/A	N/A	Radiation (03CH06-HY)
Base Station Simulator	R & S	CMU200	106656	WCDMA	Nov. 20, 2006	Nov. 19, 2007	Radiation (03CH06-HY)

6 Uncertainty Evaluation

Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
combined standard uncertainty $U_c(y)$	1.27		
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$	2.54		

Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Contribution	Uncertainty of x_i		$u(x_i)$	C_i	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20 \log(1 - \Gamma_1^2 * \Gamma_2^2)$	+0.34/-0.35	U-shaped	0.244	1	0.244
Combined standard uncertainty $U_c(y)$	2.36				
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$	4.72				

END OF TEST REPORT