

ATTACHMENT O – SAR TEST PLOTS -1/2-

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 128

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9 °C

Date Tested : October 13, 2006

DUT: EZ1000 down; Type: Slide down; Serial: #1

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.864 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 128/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.403 mW/g


Left touch 128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.68 V/m; Power Drift = -0.157 dB

Peak SAR (extrapolated) = 0.512 W/kg

SAR(1 g) = 0.377 mW/g; SAR(10 g) = 0.269 mW/g

Maximum value of SAR (measured) = 0.417 mW/g

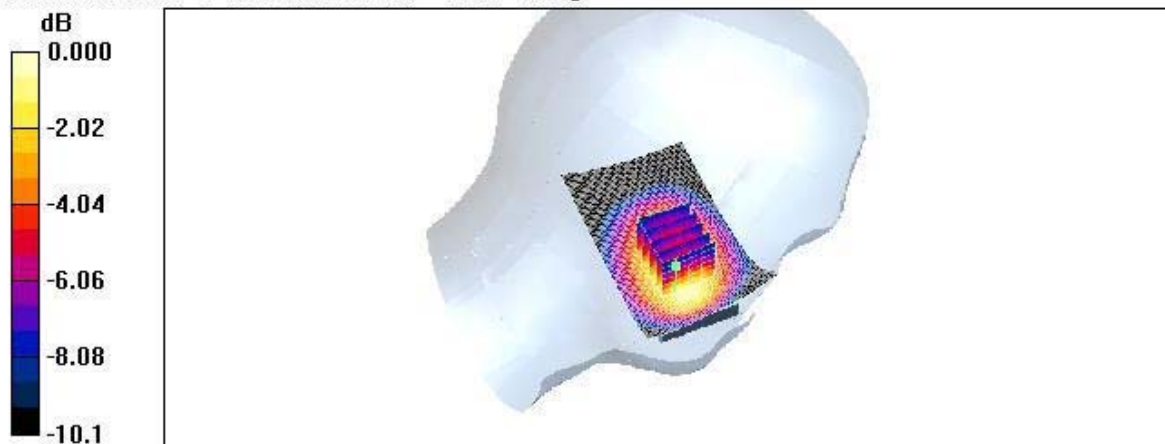

0 dB = 0.417 mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM850/Antenna : Fixed / Channel : 190

Liquid Temperature : 21.7°C/Ambient Temperature: 21.9°C

Date Tested : October 13, 2006

DUT:EZ1000down; Type: Slide down; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.874$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 190/Area Scan (51x81x1): Measurement grid: $\Delta x=15$ mm, $\Delta y=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.605 mW/g

Left touch 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x=8$ mm, $\Delta y=8$ mm, $\Delta z=5$ mm


Reference Value = 11.1 V/m; Power Drift = 0.140 dB

Peak SAR (extrapolated) = 0.680 W/kg

SAR(1 g) = 0.527 mW/g; SAR(10 g) = 0.373 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.555 mW/g

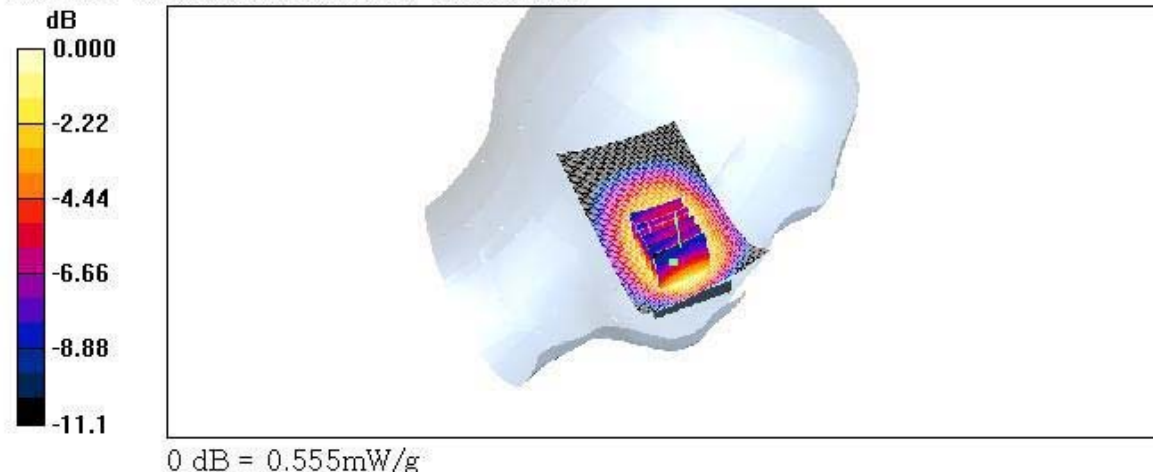

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM850/ Antenna : Fixed / Channel : 251

Liquid Temperature : 21.7 °C/Ambient Temperature: 21.9°C

Date Tested : October 13, 2006

DUT:EZ1000down; Type: Slide down; Serial: #1

Communication System: GSM 850; Frequency: 849.8 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 850$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 251/Area Scan (51x81x1): Measurement grid: $\Delta x=15$ mm, $\Delta y=15$ mm

Maximum value of SAR (interpolated) = 0.589 mW/g


Left touch 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x=8$ mm, $\Delta y=8$ mm, $\Delta z=5$ mm

Reference Value = 11.2 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.737 W/kg

SAR(1 g) = 0.572 mW/g; SAR(10 g) = 0.407 mW/g

Maximum value of SAR (measured) = 0.614 mW/g

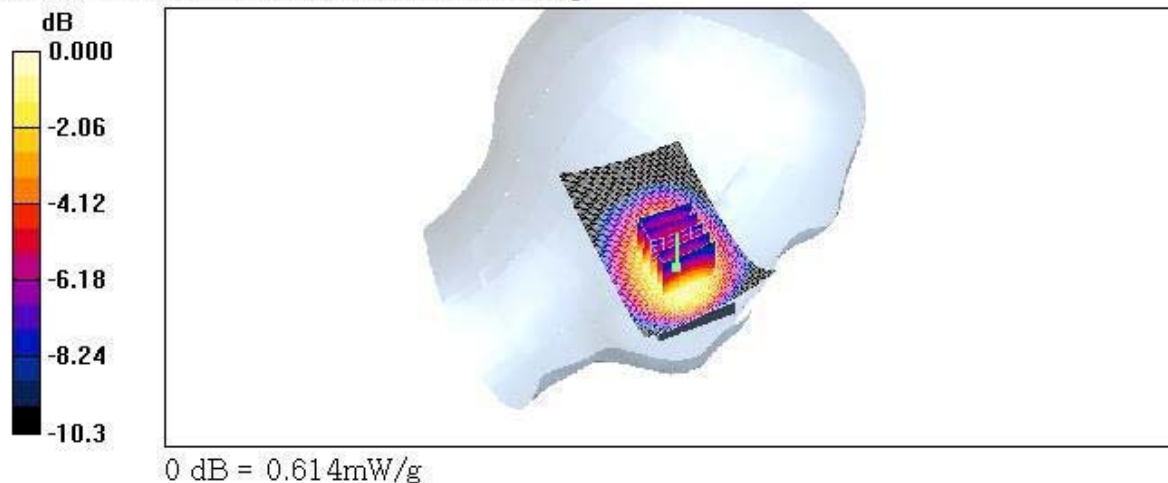

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 128

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9 °C

Date Tested : October 13, 2006

DUT: EZ1000 down; Type: Slide down; Serial: #1

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.864 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 128/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.475 mW/g


Right touch 128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.68 V/m; Power Drift = -0.156 dB

Peak SAR (extrapolated) = 0.569 W/kg

SAR(1 g) = 0.453 mW/g; SAR(10 g) = 0.328 mW/g

Maximum value of SAR (measured) = 0.477 mW/g

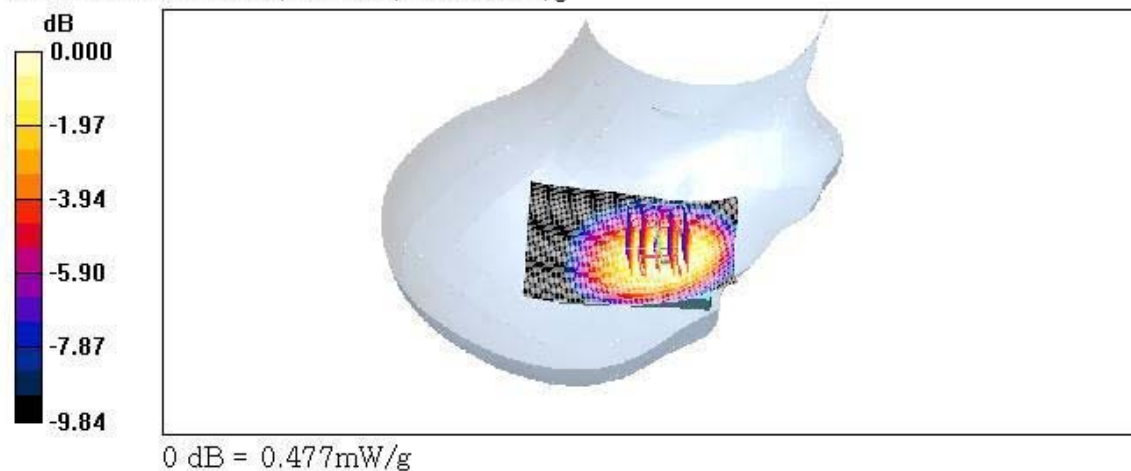

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM850/ Antenna : Fixed / Channel : 190

Liquid Temperature : 21.7 °C/Ambient Temperature: 21.9°C

Date Tested : October 13, 2006

DUT: EZ1000 down; Type: Slide down; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.874$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 190/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.601 mW/g

Right touch 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 11.2 V/m; Power Drift = 0.067 dB

Peak SAR (extrapolated) = 0.706 W/kg

SAR(1 g) = 0.567 mW/g; SAR(10 g) = 0.410 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.595 mW/g

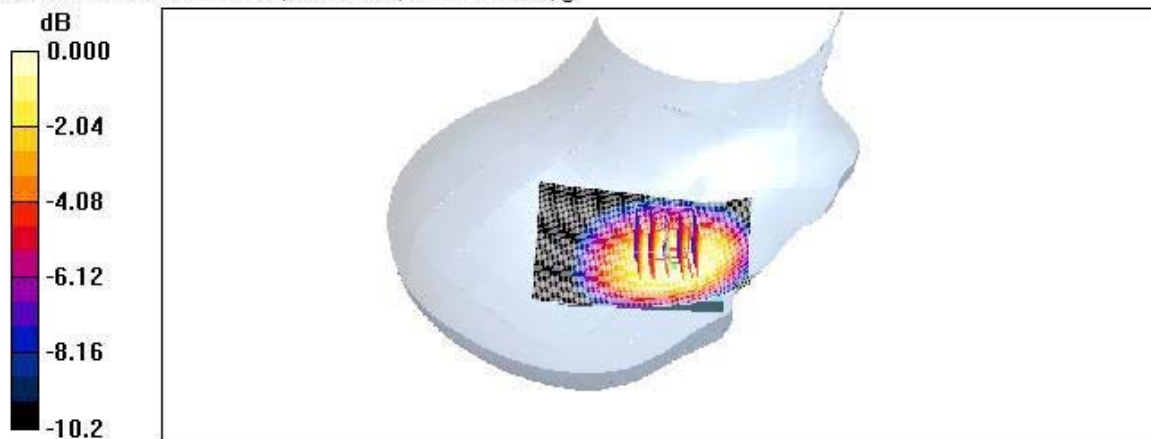

0 dB = 0.595mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850/ Antenna : Fixed / Channel : 251

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9 °C

Date Tested : October 13, 2006

DUT: EZ1000 down; Type: Slide down; Serial: #1

Communication System: GSM 850; Frequency: 849.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 850$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 251/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.634 mW/g


Right touch 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = -0.153 dB

Peak SAR (extrapolated) = 0.711 W/kg

SAR(1 g) = 0.565 mW/g; SAR(10 g) = 0.405 mW/g

Maximum value of SAR (measured) = 0.594 mW/g

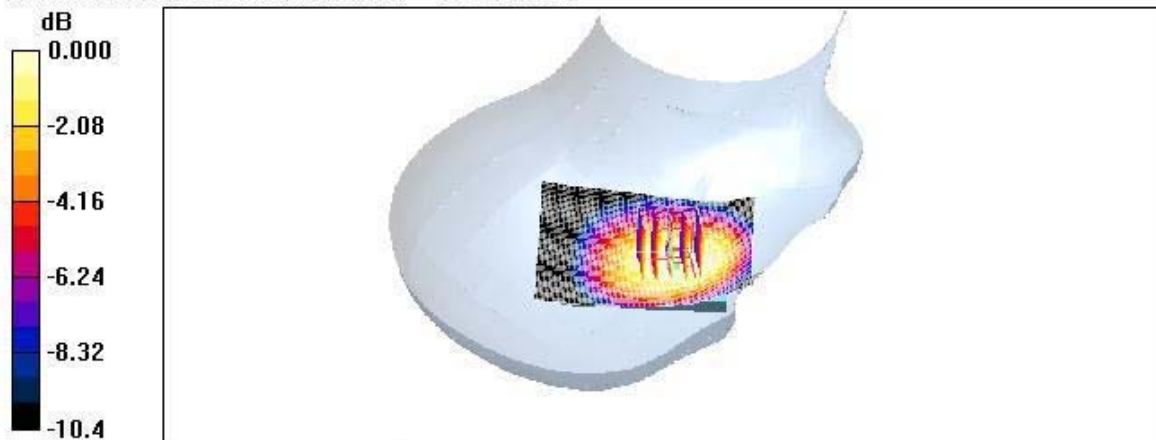

0 dB = 0.594mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM850/Antenna : Fixed / Channel: 190

Liquid Temperature : 21.7 °C/Ambient Temperature: 21.9 °C

Date Tested : October 13, 2006

DUT: EZ1000 down; Type: Slide down; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.874 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left tilt 190/Area Scan (51x81x1): Measurement grid: $\Delta x = 15 \text{ mm}$, $\Delta y = 15 \text{ mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.262 mW/g

Left tilt 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8 \text{ mm}$, $\Delta y = 8 \text{ mm}$, $\Delta z = 5 \text{ mm}$


Reference Value = 12.1 V/m; Power Drift = -0.156 dB

Peak SAR (extrapolated) = 0.350 W/kg

SAR(1 g) = 0.271 mW/g; SAR(10 g) = 0.192 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.294 mW/g

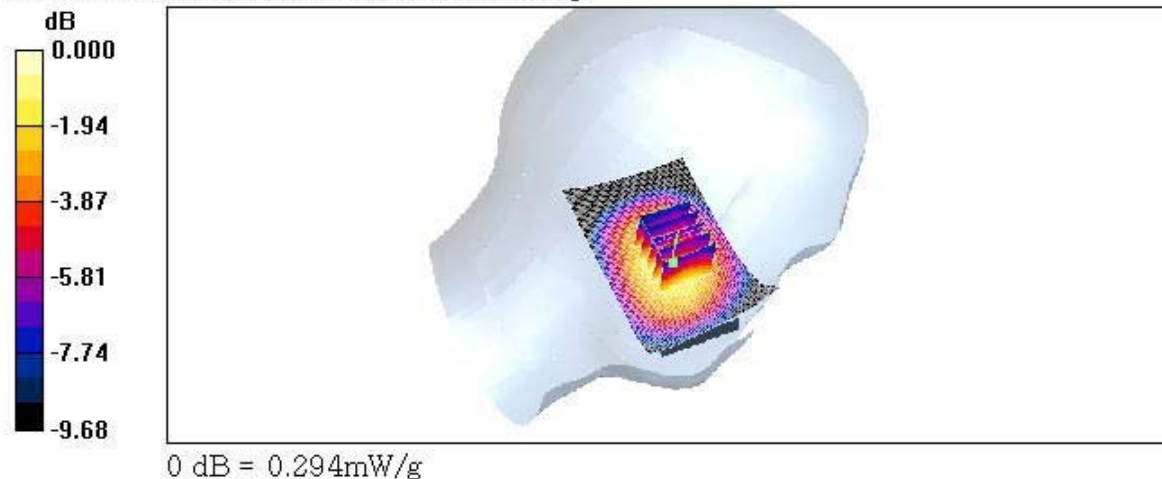

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM850/Antenna : Fixed / Channel: 190

Liquid Temperature : 21.7°C/Ambient Temperature: 21.9°C

Date Tested : October 13, 2006

DUT:EZ1000down; Type: Slide down; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.874$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right tilt 190/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.314 mW/g

Right tilt 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 13.5 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.371 W/kg

SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.218 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.309 mW/g

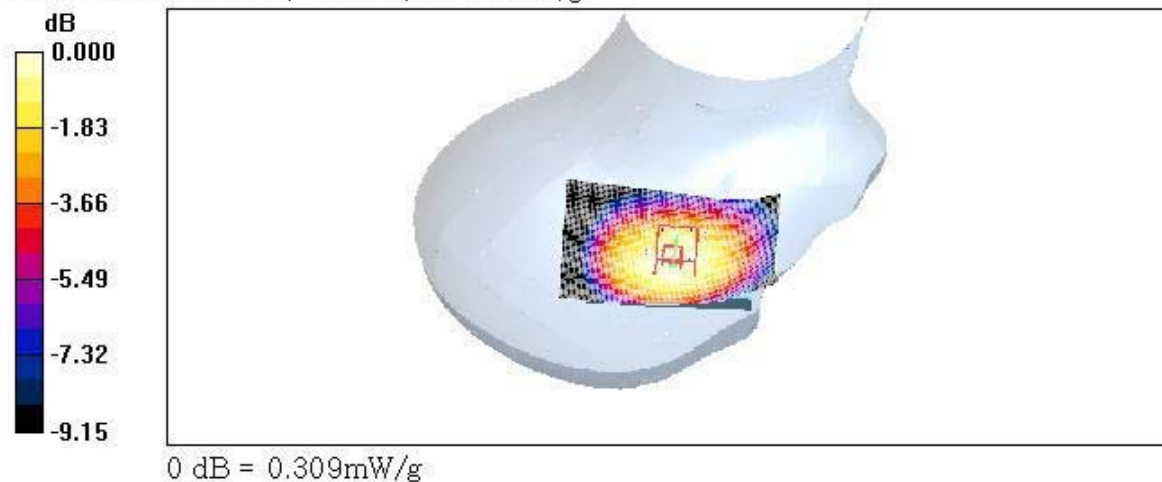

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 128

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9 °C

Date Tested : October 13, 2006

DUT: EZ1000up; Type: Slide up; Serial: #1

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 825$ MHz; $\sigma = 0.864$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 128/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.349 mW/g


Left touch 128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.64 V/m; Power Drift = -0.107 dB

Peak SAR (extrapolated) = 0.404 W/kg

SAR(1 g) = 0.316 mW/g; SAR(10 g) = 0.229 mW/g

Maximum value of SAR (measured) = 0.331 mW/g

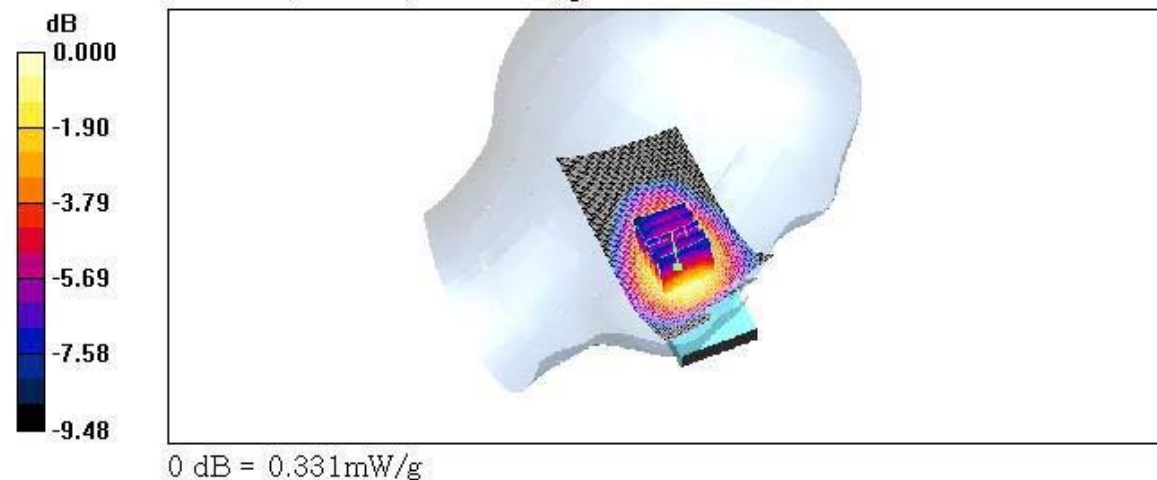

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM850/ Antenna : Fixed / Channel: 190

Liquid Temperature : 21.7 °C/Ambient Temperature: 21.9°C

Date Tested : October 13, 2006

DUT:EZ1000up; Type: Slide up; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.874$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 190/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.483 mW/g

Left touch 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 7.67 V/m; Power Drift = -0.168 dB

Peak SAR (extrapolated) = 0.583 W/kg

SAR(1 g) = 0.448 mW/g; SAR(10 g) = 0.323 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.477 mW/g

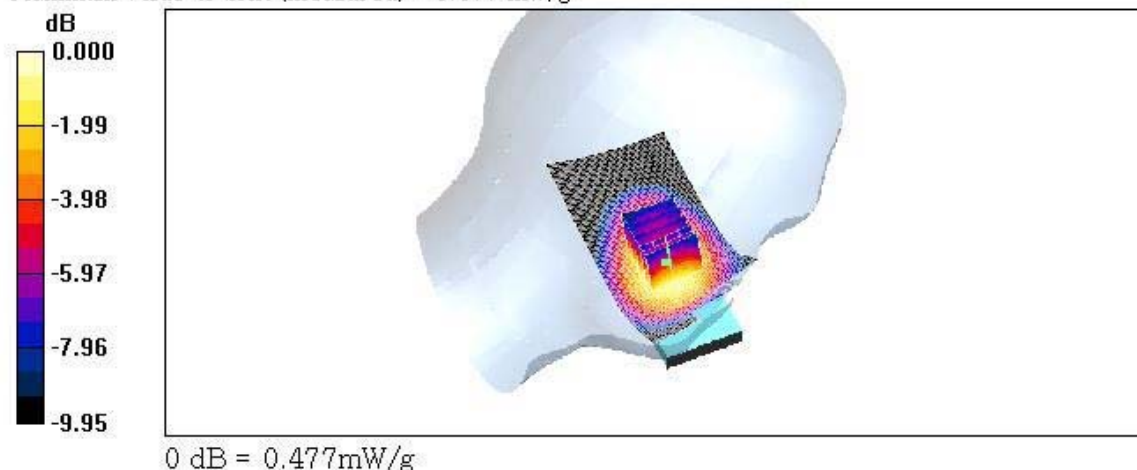

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM850/Antenna : Fixed / Channel : 251

Liquid Temperature : 21.7 °C/Ambient Temperature: 21.9 °C

Date Tested : October 13, 2006

DUT:EZ1000up; Type: Slide up; Serial: #1

Communication System: GSM 850; Frequency: 849.8 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 850$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 251/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.634 mW/g


Left touch 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.52 V/m; Power Drift = -0.078 dB

Peak SAR (extrapolated) = 0.754 W/kg

SAR(1 g) = 0.587 mW/g; SAR(10 g) = 0.422 mW/g

Maximum value of SAR (measured) = 0.624 mW/g

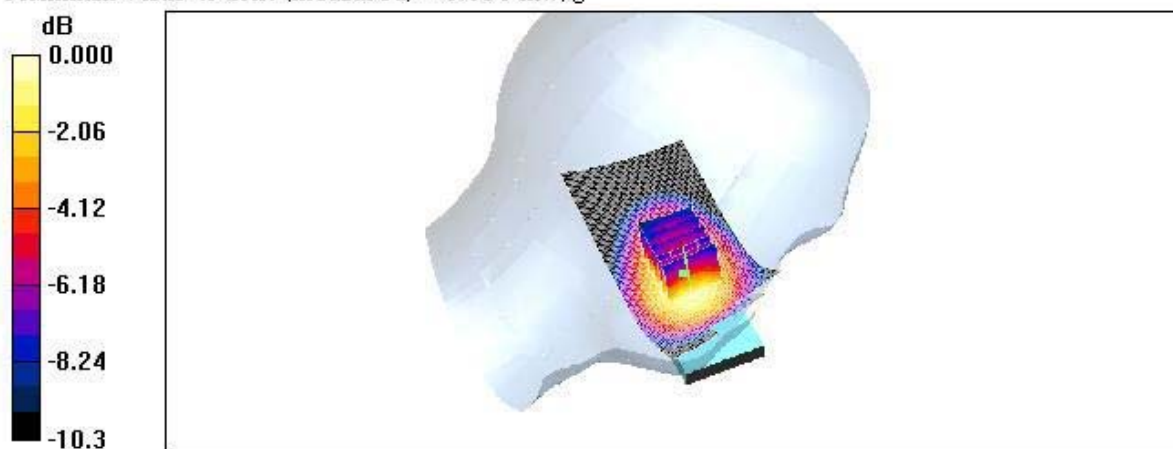

0 dB = 0.624mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 128

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9 °C

Date Tested : October 13, 2006

DUT: EZ1000up; Type: Slide up; Serial: #1

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 825$ MHz; $\sigma = 0.864$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 128/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Maximum value of SAR (interpolated) = 0.352 mW/g


Right touch 128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm

Reference Value = 6.34 V/m; Power Drift = -0.082 dB

Peak SAR (extrapolated) = 0.407 W/kg

SAR(1 g) = 0.314 mW/g; SAR(10 g) = 0.227 mW/g

Maximum value of SAR (measured) = 0.331 mW/g

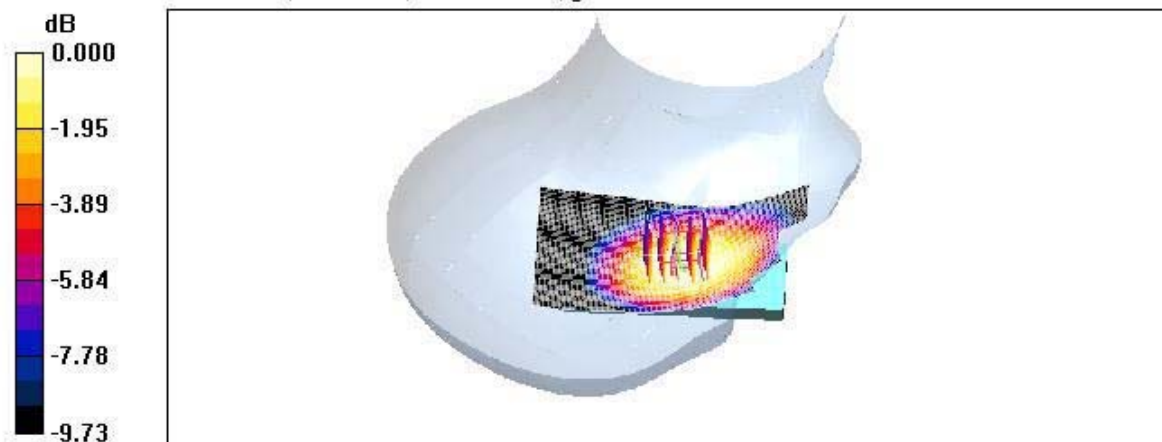

0 dB = 0.331mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM850/ Antenna : Fixed / Channel : 190

Liquid Temperature : 21.7 °C/Ambient Temperature: 21.9 °C

Date Tested : October 13, 2006

DUT: EZ1000up; Type: Slide up; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.874$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 190/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.482 mW/g

Right touch 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 7.39 V/m; Power Drift = -0.101 dB

Peak SAR (extrapolated) = 0.583 W/kg

SAR(1 g) = 0.451 mW/g; SAR(10 g) = 0.327 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.477 mW/g

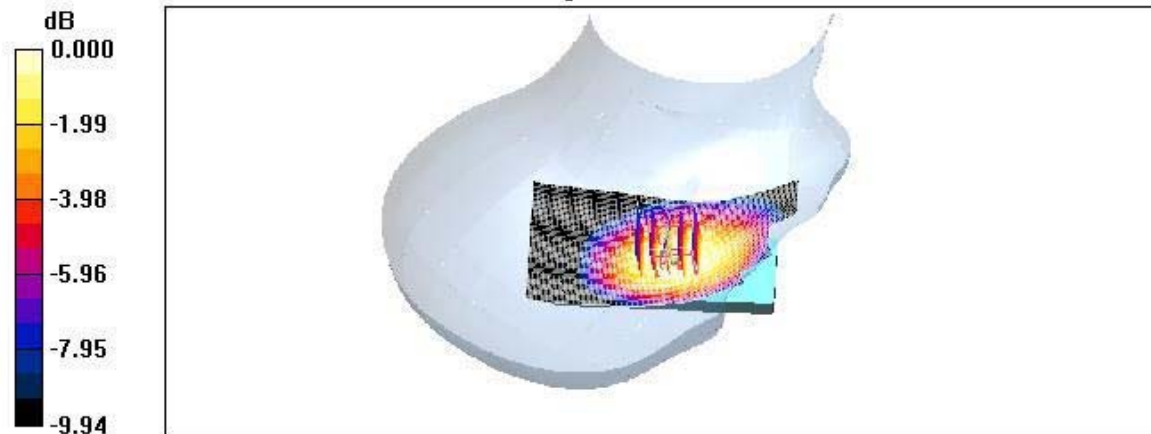

0 dB = 0.477mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850/ Antenna : Fixed / Channel : 251

Liquid Temperature : 21.7°C/Ambient Temperature: 21.9°C

Date Tested : October 13, 2006

DUT: EZ1000up; Type: Slide up; Serial: #1

Communication System: GSM 850; Frequency: 849.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 850$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 251/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.618 mW/g


Right touch 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.18 V/m; Power Drift = -0.134 dB

Peak SAR (extrapolated) = 0.745 W/kg

SAR(1 g) = 0.584 mW/g; SAR(10 g) = 0.421 mW/g

Maximum value of SAR (measured) = 0.621 mW/g

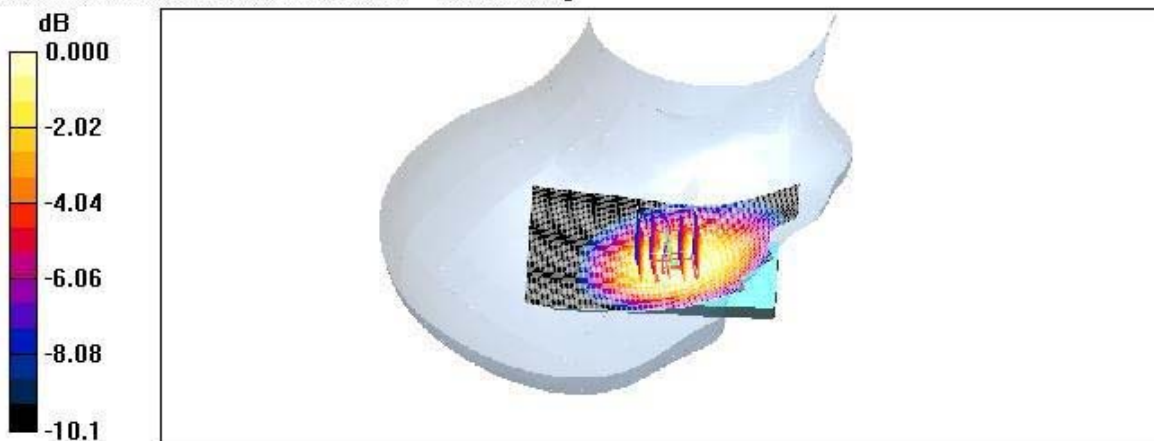

0 dB = 0.621mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM850/Antenna : Fixed / Channel: 190

Liquid Temperature : 21.7 °C/Ambient Temperature: 21.9 °C

Date Tested : October 13, 2006

DUT:EZ1000up; Type: Slide up; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz, $\sigma = 0.874$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left tilt 190/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.178 mW/g

Left tilt 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 8.75 V/m; Power Drift = -0.221 dB

Peak SAR (extrapolated) = 0.214 W/kg

SAR(1 g) = 0.167 mW/g; SAR(10 g) = 0.120 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.178 mW/g

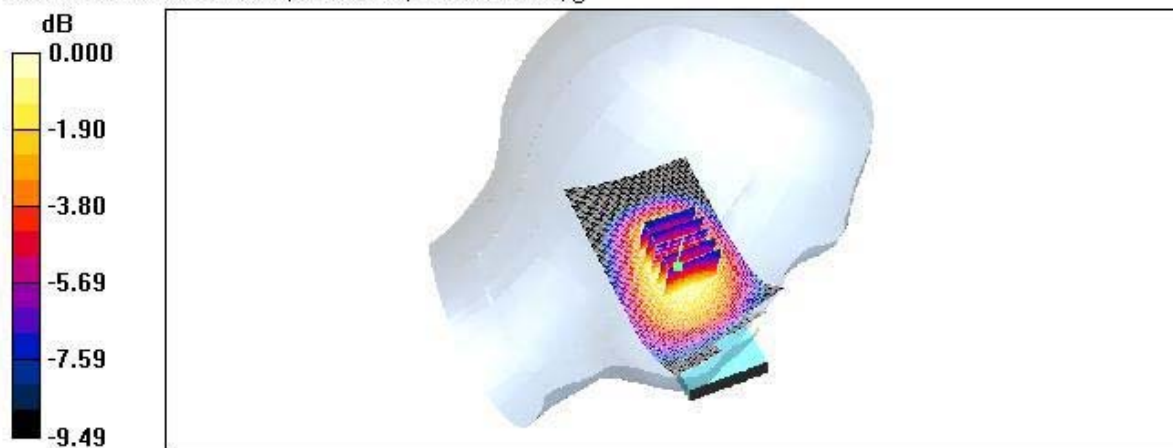

0 dB = 0.178mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM850(Body) / Antenna : Fixed / Channel : 190

Liquid Temperature : 21.7℃/Ambient Temperature: 21.9℃

Date Tested :October 13, 2006

DUT:EZ1000up; Type: Slide up; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz;Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.874 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right tilt 190/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.195 mW/g

Right tilt 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 9.50 V/m; Power Drift = -0.134 dB

Peak SAR (extrapolated) = 0.229 W/kg

SAR(1 g) = 0.182 mW/g; SAR(10 g) = 0.133 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.192 mW/g

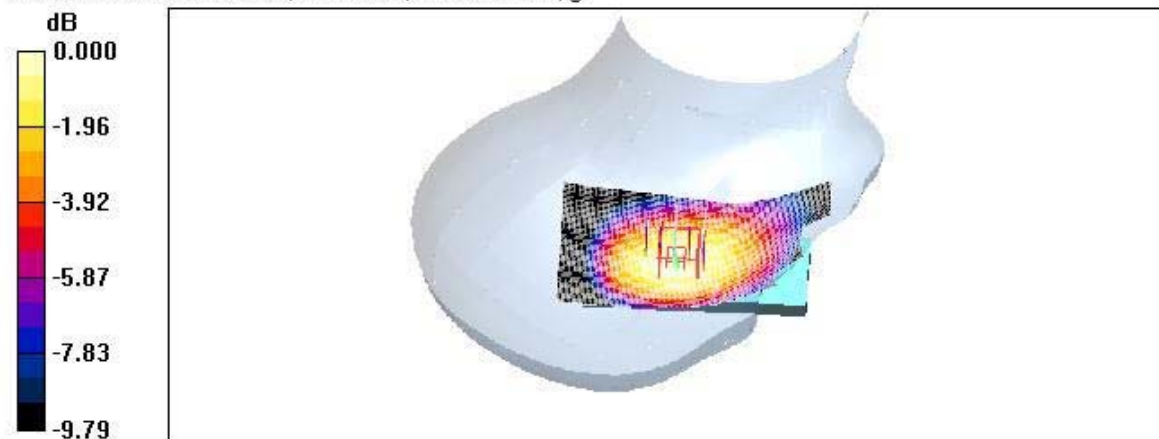

0 dB = 0.192mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900/ Antenna : Fixed / Channel : 512

Liquid Temperature : 21.6 °C/Ambient Temperature: 21.8 °C

Date Tested : October 14, 2006

DUT:EZ1000 down; Type: Slide down; Serial: #1

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 512/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.314 mW/g

Left touch 512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 13.1 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 0.415 W/kg

SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.179 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.318 mW/g

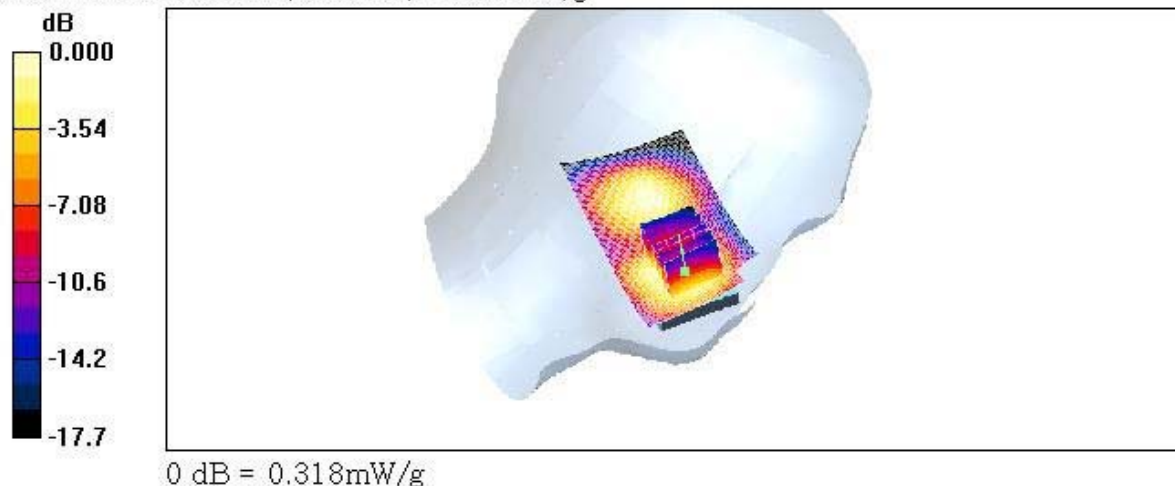

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900/ Antenna : Fixed / Channel : 661

Liquid Temperature : 21.6°C / Ambient Temperature: 21.8°C

Date Tested : October 14, 2006

DUT: EZ1000 down; Type: Slide down; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 661/Area Scan (51x81x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Maximum value of SAR (interpolated) = 0.446 mW/g


Left touch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$

Reference Value = 14.1 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.566 W/kg

SAR(1 g) = 0.401 mW/g; SAR(10 g) = 0.242 mW/g

Maximum value of SAR (measured) = 0.436 mW/g

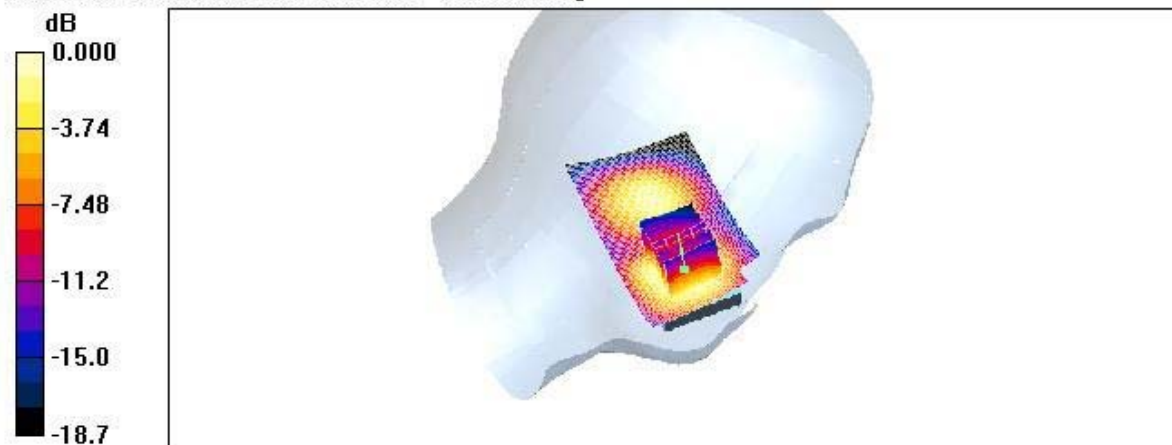

0 dB = 0.436mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900/ Antenna : Fixed / Channel : 810

Liquid Temperature : 21.6°C/Ambient Temperature: 21.8°C

Date Tested : October 14, 2006

DUT:EZ1000 down; Type: Slide down; Serial: #1

Communication System: GSM 1900; Frequency: 1909.8 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 810/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.636 mW/g


Left touch 810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = -0.125 dB

Peak SAR (extrapolated) = 0.802 W/kg

SAR(1 g) = 0.553 mW/g; SAR(10 g) = 0.333 mW/g

Maximum value of SAR (measured) = 0.595 mW/g

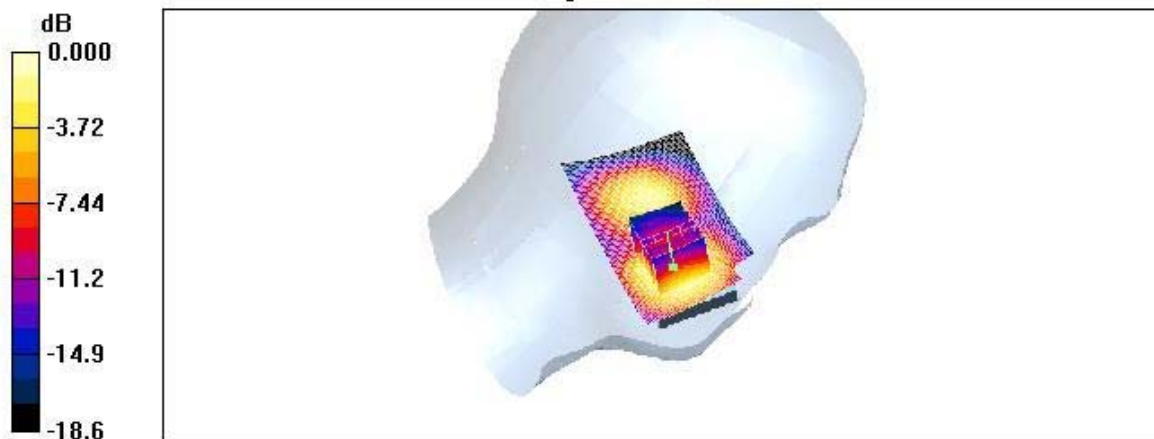

0 dB = 0.595mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900/ Antenna : Fixed / Channel : 512

Liquid Temperature : 21.6°C/Ambient Temperature: 21.8°C

Date Tested : October 14, 2006

DUT: EZ1000 down; Type: Slide down; Serial: #1

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 512/Area Scan (51x81x1): Measurement grid: $\Delta x = 15 \text{ mm}$, $\Delta y = 15 \text{ mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.320 mW/g

Right touch 512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8 \text{ mm}$, $\Delta y = 8 \text{ mm}$, $\Delta z = 5 \text{ mm}$


Reference Value = 11.6 V/m; Power Drift = 0.145 dB

Peak SAR (extrapolated) = 0.378 W/kg

SAR(1 g) = 0.259 mW/g; SAR(10 g) = 0.158 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.277 mW/g

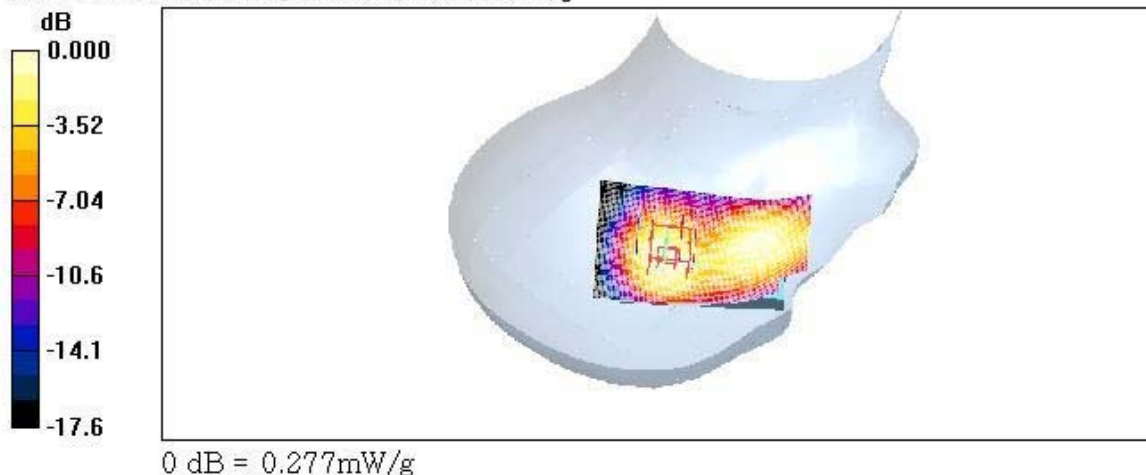

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900/ Antenna : Fixed / Channel : 661

Liquid Temperature : 21.6°C/Ambient Temperature: 21.8°C

Date Tested : October 14, 2006

DUT:EZ1000 down; Type: Slide down; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 661/Area Scan (51x81x1): Measurement grid: $\Delta x=15$ mm, $\Delta y=15$ mm

Maximum value of SAR (interpolated) = 0.375 mW/g


Right touch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x=8$ mm, $\Delta y=8$ mm, $\Delta z=5$ mm

Reference Value = 12.6 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 0.442 W/kg

SAR(1 g) = 0.301 mW/g; SAR(10 g) = 0.182 mW/g

Maximum value of SAR (measured) = 0.321 mW/g

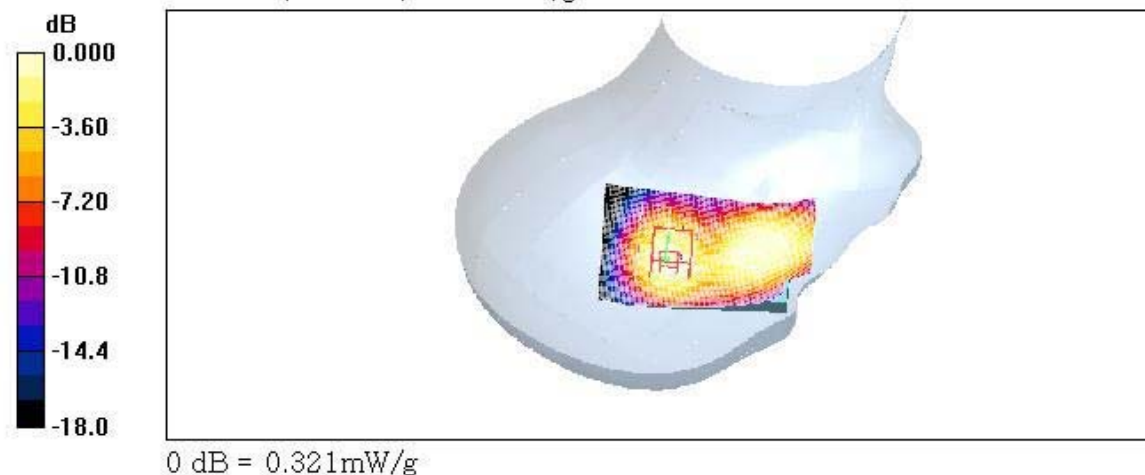

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900/ Antenna : Fixed / Channel : 810

Liquid Temperature : 21.6°C/Ambient Temperature: 21.8°C

Date Tested : October 14, 2006

DUT: EZ1000 down; Type: Slide down; Serial: #1

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 810/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.546 mW/g


Right touch 810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.5 V/m; Power Drift = -0.072 dB

Peak SAR (extrapolated) = 0.739 W/kg

SAR(1 g) = 0.489 mW/g; SAR(10 g) = 0.288 mW/g

Maximum value of SAR (measured) = 0.538 mW/g

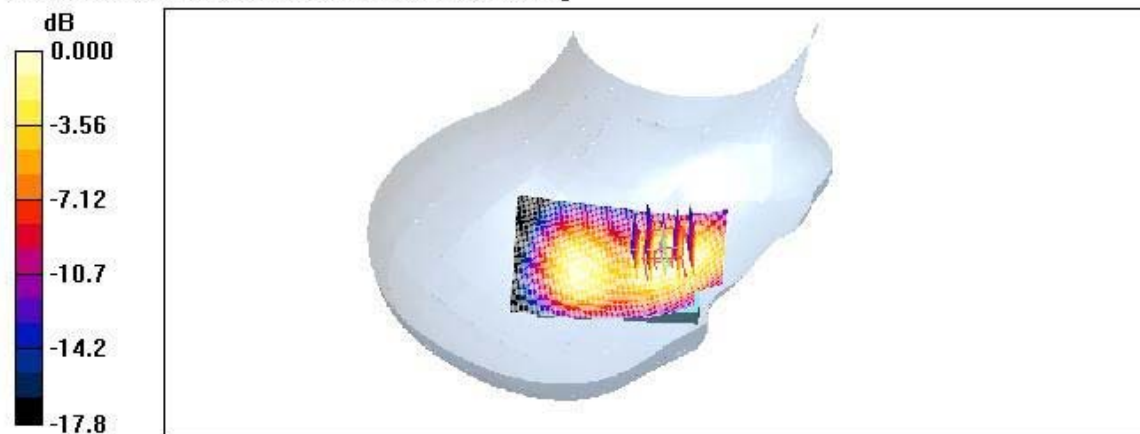

0 dB = 0.538mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM1900/ Antenna : Fixed / Channel : 661

Liquid Temperature : 21.6°C / Ambient Temperature: 21.8°C

Date Tested : October 14, 2006

DUT: EZ1000 down; Type: Slide down; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left tilt 661/Area Scan (51x81x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Maximum value of SAR (interpolated) = 0.283 mW/g


Left tilt 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm

Reference Value = 13.8 V/m; Power Drift = 0.058 dB

Peak SAR (extrapolated) = 0.382 W/kg

SAR(1 g) = 0.243 mW/g; SAR(10 g) = 0.145 mW/g

Maximum value of SAR (measured) = 0.255 mW/g

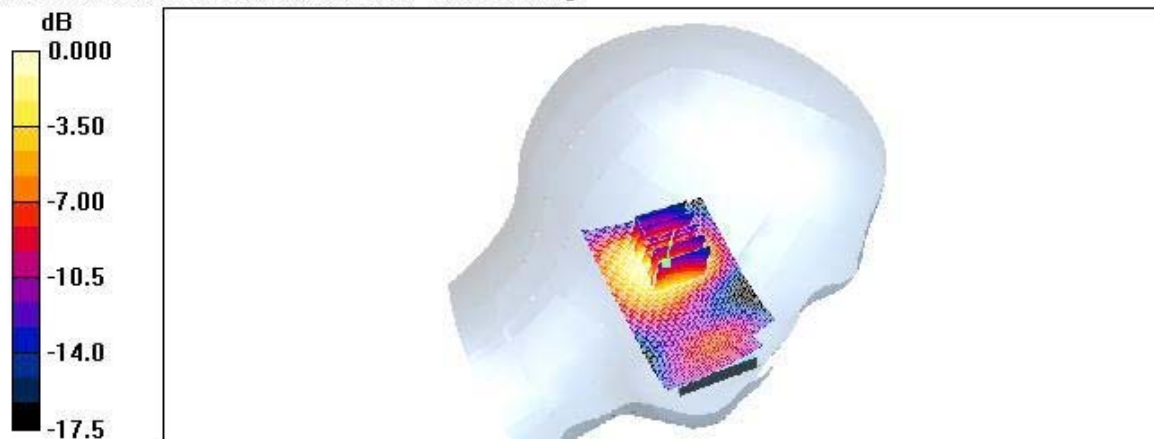

0 dB = 0.255mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900/ Antenna : Fixed / Channel : 661

Liquid Temperature : 21.6℃/Ambient Temperature: 21.8℃

Date Tested : October 14, 2006

DUT: EZ1000 down; Type: Slide down; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right tilt 661/Area Scan (51x81x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Maximum value of SAR (interpolated) = 0.321 mW/g

Right tilt 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$

Reference Value = 13.5 V/m; Power Drift = -0.077 dB

Peak SAR (extrapolated) = 0.419 W/kg

SAR(1 g) = 0.269 mW/g; SAR(10 g) = 0.158 mW/g

Maximum value of SAR (measured) = 0.291 mW/g



0 dB = 0.291mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900/ Antenna : Fixed / Channel : 512

Liquid Temperature : 21.6°C/Ambient Temperature: 21.8°C

Date Tested : October 14, 2006

DUT: EZ1000up; Type: Slide up; Serial: #1

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 512/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.397 mW/g

Left touch 512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 5.13 V/m; Power Drift = -0.089 dB

Peak SAR (extrapolated) = 0.539 W/kg

SAR(1 g) = 0.362 mW/g; SAR(10 g) = 0.221 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.391 mW/g

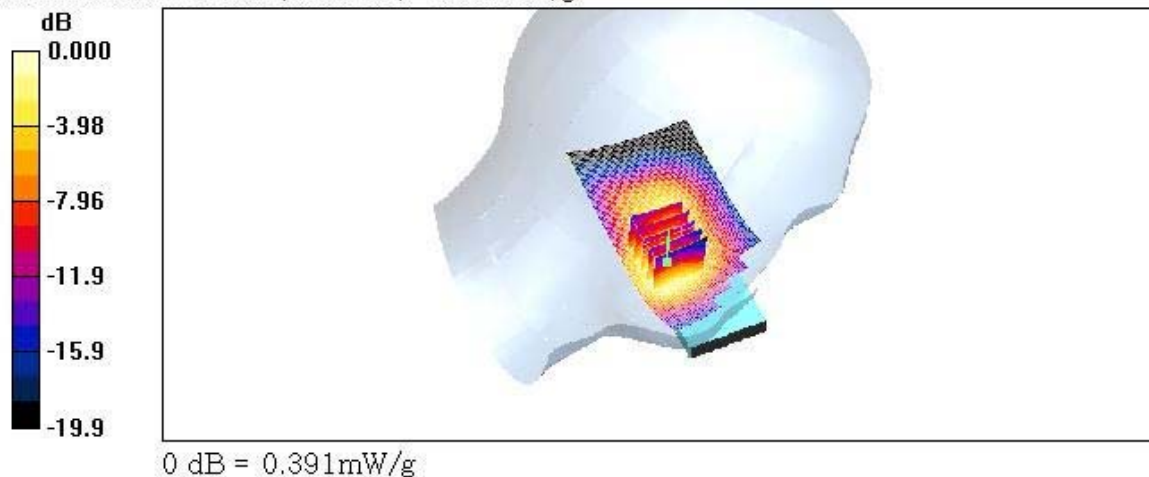

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM1900/ Antenna : Fixed / Channel : 661

Liquid Temperature : 21.6 °C / Ambient Temperature: 21.8 °C

Date Tested : October 14, 2006

DUT: EZ1000up; Type: Slide up; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 661/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.440 mW/g


Left touch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.56 V/m; Power Drift = 0.079 dB

Peak SAR (extrapolated) = 0.614 W/kg

SAR(1 g) = 0.396 mW/g; SAR(10 g) = 0.237 mW/g

Maximum value of SAR (measured) = 0.430 mW/g

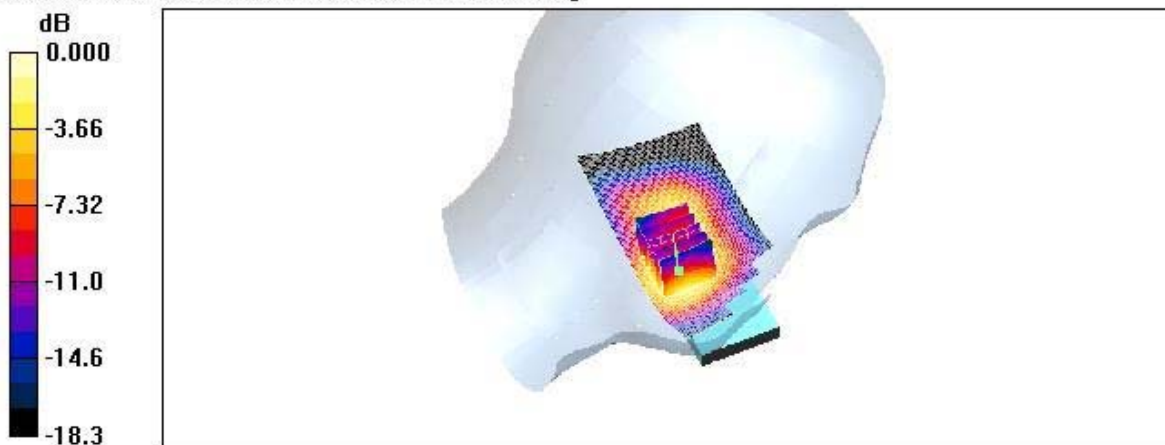

0 dB = 0.430mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900/ Antenna : Fixed / Channel : 810

Liquid Temperature : 21.6°C/Ambient Temperature: 21.8°C

Date Tested : October 14, 2006

DUT:EZ1000up; Type: Slide up; Serial: #1

Communication System: GSM 1900; Frequency: 1909.8 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 810/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.516 mW/g


Left touch 810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.25 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 0.715 W/kg

SAR(1 g) = 0.461 mW/g; SAR(10 g) = 0.276 mW/g

Maximum value of SAR (measured) = 0.496 mW/g

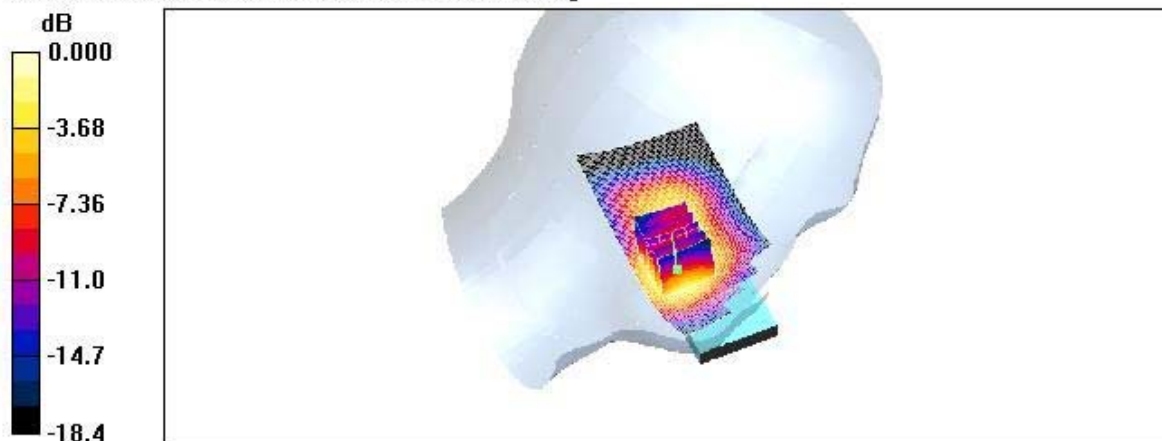

0 dB = 0.496mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900/ Antenna : Fixed / Channel : 512

Liquid Temperature : 21.6°C/Ambient Temperature: 21.8°C

Date Tested : October 14, 2006

DUT: EZ1000up; Type: Slide up; Serial: #1

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 512/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.285 mW/g

Right touch 512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 4.46 V/m; Power Drift = -0.151 dB

Peak SAR (extrapolated) = 0.388 W/kg

SAR(1 g) = 0.267 mW/g; SAR(10 g) = 0.175 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.282 mW/g

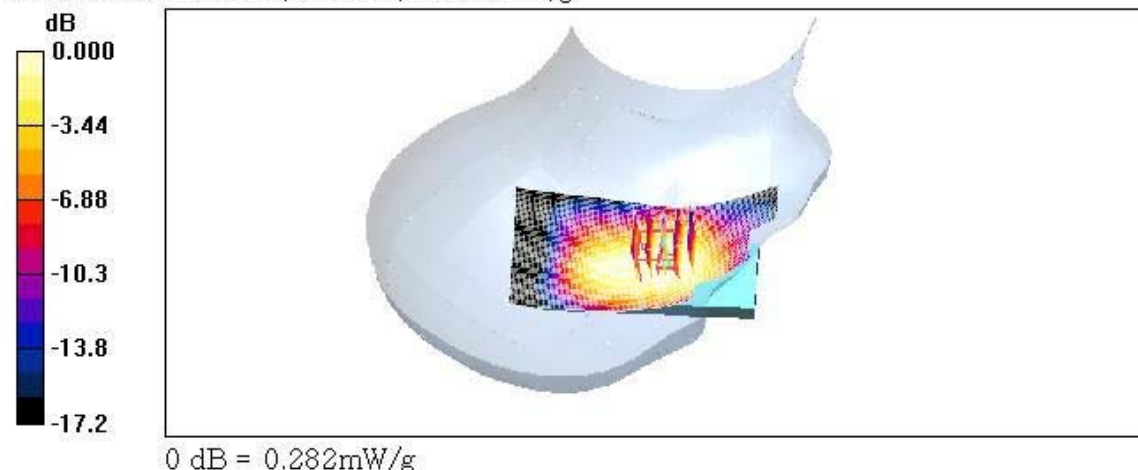

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900/ Antenna : Fixed / Channel : 661

Liquid Temperature : 21.6°C/Ambient Temperature: 21.8°C

Date Tested : October 14, 2006

DUT:EZ1000up; Type: Slide up; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 661/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.309 mW/g


Right touch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.63 V/m; Power Drift = -0.174 dB

Peak SAR (extrapolated) = 0.444 W/kg

SAR(1 g) = 0.297 mW/g; SAR(10 g) = 0.188 mW/g

Maximum value of SAR (measured) = 0.317 mW/g

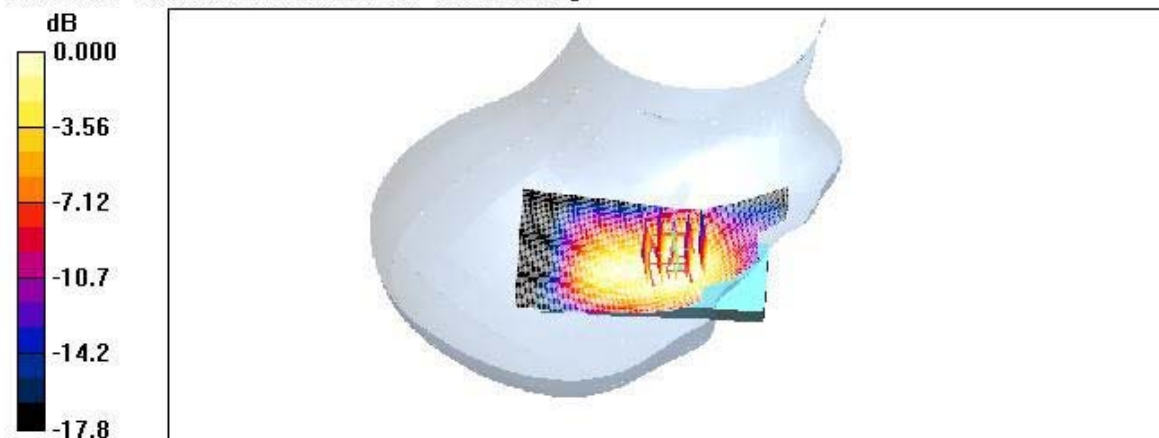

0 dB = 0.317mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900/ Antenna : Fixed / Channel : 810

Liquid Temperature : 21.6℃/Ambient Temperature: 21.8℃

Date Tested : October 14, 2006

DUT: EZ1000up; Type: Slide up; Serial: #1

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section ;Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 810/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.373 mW/g


Right touch 810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.73 V/m; Power Drift = 0.077 dB

Peak SAR (extrapolated) = 0.540 W/kg

SAR(1 g) = 0.353 mW/g; SAR(10 g) = 0.226 mW/g

Maximum value of SAR (measured) = 0.374 mW/g

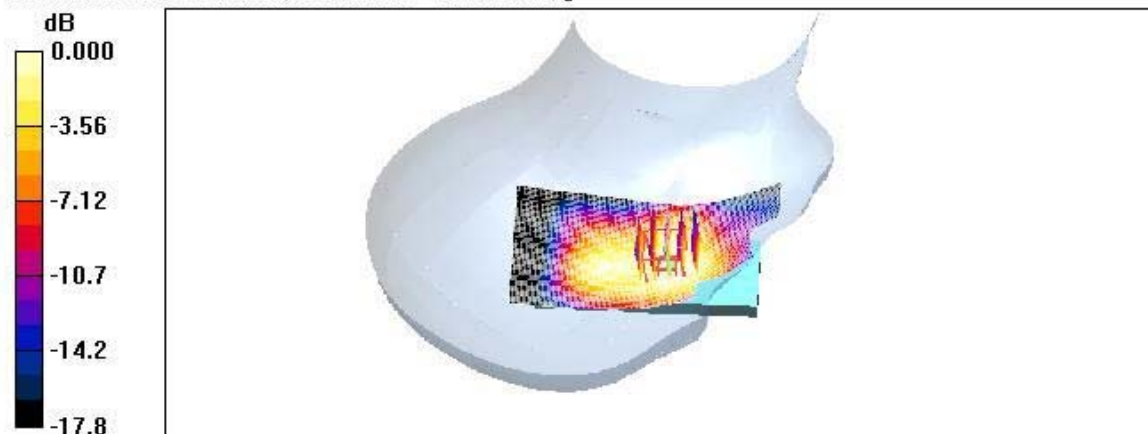

0 dB = 0.374mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM1900/ Antenna : Fixed / Channel : 661

Liquid Temperature : 21.6°C / Ambient Temperature: 21.8°C

Date Tested : October 14, 2006

DUT: EZ1000up; Type: Slide up; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left tilt 661/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Maximum value of SAR (interpolated) = 0.215 mW/g


Left tilt 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm

Reference Value = 8.29 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 0.261 W/kg

SAR(1 g) = 0.185 mW/g; SAR(10 g) = 0.120 mW/g

Maximum value of SAR (measured) = 0.197 mW/g

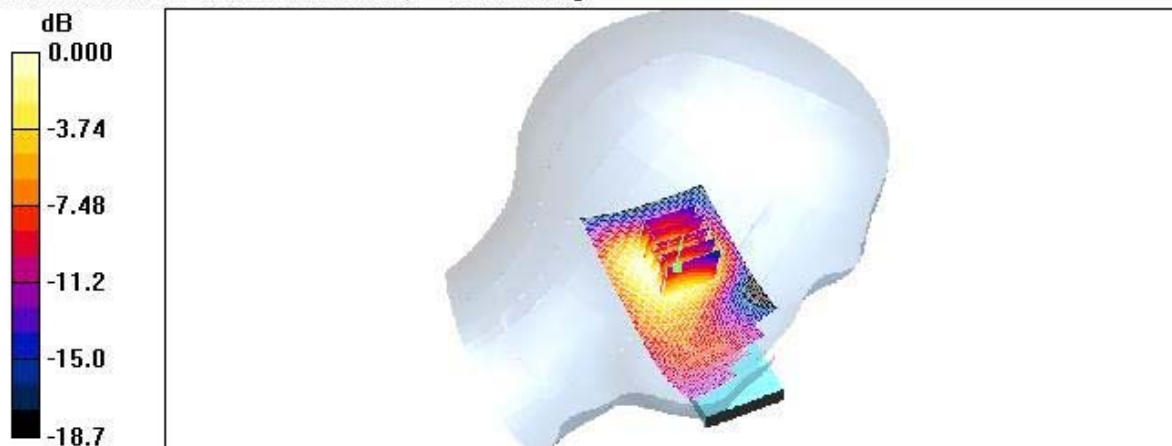

0 dB = 0.197mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode :GSM1900/ Antenna : Fixed / Channel : 661

Liquid Temperature : 21.6 °C / Ambient Temperature: 21.8 °C

Date Tested : October 14, 2006

DUT:EZ1000up; Type: Slide up; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right tilt 661/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.290 mW/g


Right tilt 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.58 V/m; Power Drift = -0.058 dB

Peak SAR (extrapolated) = 0.402 W/kg

SAR(1 g) = 0.259 mW/g; SAR(10 g) = 0.158 mW/g

Maximum value of SAR (measured) = 0.274 mW/g

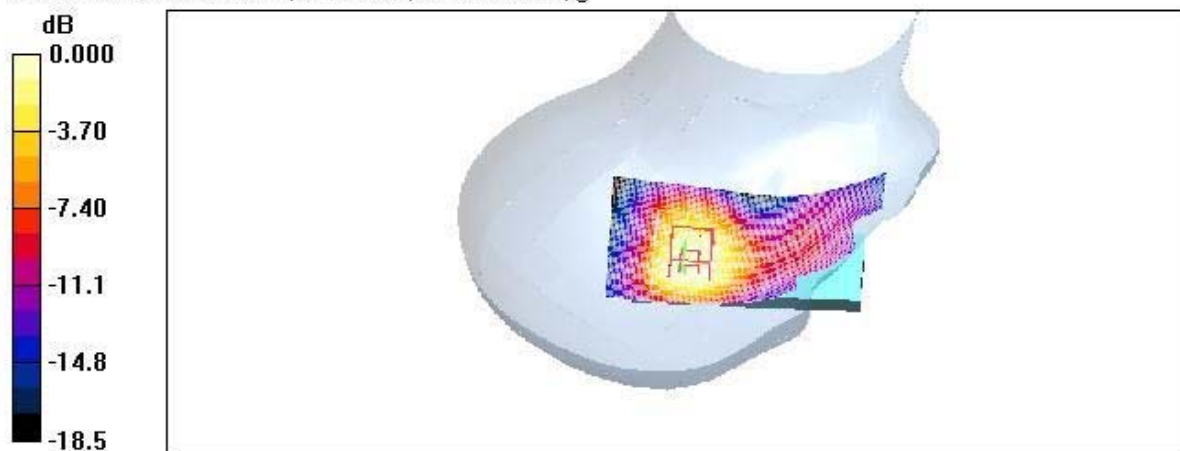

0 dB = 0.274mW/g