

TEST REPORT

REPORT NUMBER: I08GE4046-FCC-EMC

ON

Type of Equipment: GSM/GPRS Mobile phone

Type of Designation: MEGA3

Manufacturer: Ezze Mobile Tech

ACCORDING TO

**FCC CFR Part 2, FREQUENCY ALLOCATIONS AND RADIO
TREATY MATTERS; GENERAL RULES AND REGULATIONS;
e-CFR, March 23, 2006**

PART 22, PUBLIC MOBILE SERVICES (Oct 1, 02 Edition)

**PART 24, PERSONAL COMMUNICATIONS SERVICES (Oct 1, 97
Edition)**

China Telecommunication Technology Labs.

Month date, year

Feb, 4, 2008

Signature



**He Guili
Director**

FCC ID: RV2MEGA3

Report Date: 2008-2-4

Test Firm Name: China Telecommunication Technology Labs

Registration Number: 840587

Statement

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported tests were carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Parts 2, 22, and 24. The sample tested was found to comply with the requirements defined in the applied rules.

CONTENTS

1 GENERAL INFORMATION	4
1.1 NOTES	4
1.2 TESTERS	5
1.3 TESTING LABORATORY INFORMATION	7
1.4 DETAILS OF APPLICANT OR MANUFACTURER	8
2 TEST ITEM	9
2.1 GENERAL INFORMATION	9
2.2 OUTLINE OF EUT	9
2.3 MODIFICATIONS INCORPORATED IN EUT	9
2.4 EQUIPMENT CONFIGURATION	9
2.5 OTHER INFORMATION	10
3 SUMMARY OF TEST RESULTS	11
4 TEST RESULTS OF MODE	12
4.1 RADIATED SPURIOUS EMISSION	12
4.2 RADIATED RF POWER OUTPUT AND ERP	23
4.3 OCCUPIED BANDWIDTH	26
4.4 FREQUENCY STABILITY OVER TEMPERATURE VARIATION	34
4.5 FREQUENCY STABILITY OVER VOLTAGE VARIATION	37
4.6 CONDUCTED RF POWER OUTPUT	39
4.7 CONDUCTED SPURIOUS EMISSION	42
ANNEX A EXTERNAL PHOTOS	46
ANNEX B INTERNAL PHOTOS	49
ANNEX C DEVIATIONS FROM PRESCRIBED TEST METHODS	51

1 General Information

1.1 Notes

All reported tests were carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Parts 2, 22 and 24.

The test results of this test report relate exclusively to the item(s) tested as specified in section 2.

The following deviation from, additions to, or exclusions from the test specifications have been made. See Annex C.

China Telecommunication Technology Labs.(CTTL) authorizes the applicant or manufacturer (see section 1.4) to reproduce this report provided, and the test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTTL Mr. He Guili.


Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. CTTL accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.


FCC Parts 2, 22, 24
Equipment: MEGA3


REPORT NO.: I08GE4046-FCC-EMC

1.2 Testers

Name: Li Dongjin
Position: Engineer
Department: Department of EMC test
Signature: 

Name: Lv Ke
Position: Engineer
Department: Department of EMC test
Signature: 

Name: Yuan Yuan
Position: Engineer
Department: Department of EMC test
Signature: 

Name: An Shaogeng
Position: Engineer
Department: Department of EMC test
Signature: 

FCC Parts 2, 22, 24
Equipment: MEGA3

REPORT NO.: I08GE4046-FCC-EMC

Editor of this test report:

Name: Li Guoqing
Position: Engineer
Department: Department of EMC test
Date: 2008.2.4
Signature: 李国庆

Technical responsibility for area of testing:

Name: Zou Dongyi
Position: Manager
Department: Department of EMC test
Date: 2008.2.4
Signature: 邹东屹

1.3 Testing Laboratory information

1.3.1 Location

Name: China Telecommunication Technology Labs.

Address: No. 11, Yue Tan Nan Jie, Xi Cheng District
BEIJING

P. R. CHINA, 100083

Tel: +86 10 68094053

Fax: +86 10 68011404

Email: emc@chinattl.com

1.3.2 Details of accreditation status

Accredited by: China National Accreditation Service for Conformity
Assessment (CNAS)

Registration number: CNAS Registration No. CNAS L0570

Standard: ISO/IEC 17025

1.3.3 Test location, where different from section 1.3.1

Name: -----

Street: -----

City: -----

Country: -----

Telephone: -----

Fax: -----

Postcode: -----

1.4 Details of applicant or manufacturer

1.4.1 Applicant

Name: Ezze Mobile Tech

Address: 1F, Bubmusa Bldg., 151-31, Nonhyun-dong,
Kangnam-ku, Seoul

Country: Korea

Telephone: 82-2-519-7807

Fax: 82-2-519-7882

Contact: Han shin, Lee

Telephone: 82-19-543-3776

Email: leehs@ezzemobile.com

1.4.2 Manufacturer (if different from applicant in section 1.4.1)

Name: --

Address: --

City: --

Country: --

1.4.3 Manufactory (if different from applicant in section 1.4.1)

Name: Ezze Mobile Tech

Address: Rm. 204, Anyang Megavalley, 799,
Guanyang-dong, Dongan-gu, Anyang-city,
Gyeonggi-do, Korea, 431-767

2 Test Item

2.1 General Information

Manufacturer: Ezze Mobile Tech

Name: GSM/GPRS Mobile phone

Model Number: MEGA3

Serial Number: --

Production Status: Production

Receipt date of test item: 2008-1-7

2.2 Outline of EUT

E.U.T. is a GSM/GPRS Mobile phone.

2.3 Modifications Incorporated in EUT

The EUT has not been modified from what is described by the brand name and unique type identification stated above.

2.4 Equipment Configuration

Equipment configuration list:

Item	Generic Description	Manufacturer	Type	Serial No.	Remarks
A	handset	Ezze Mobile Tech	MEGA3	--	None
B	adapter	Yu Feng	YF-0510228	--	None
C	battery	ZHIYIN	MEGA3	--	None
D	Earphone	Rich star	Wire Type(stereo)	--	None

Cables:

Item	Cable Type	Manufacturer	Length	Shield	Quantity	Remarks
1	DC cable on Adapter	Unknown	1.0 m	No	1	None

2.5 Other Information

(a) Modulation is GMSK.

(b) Emission Designator is 281KGXW.

(c) Version of hardware and software

HW Version: V 0.1

SW Version: V 0.1

(d) Adaptor information:

Input: 100-240VAC 50-60Hz

Output: 5.0V

(e) Battery information:

3.7VDC 700mAh

China Test Report

3 Summary of Test Results

A brief summary of the tests carried out is shown as following.

GSM mode:		
Specification Clause	Name of Test	Result
2.1051, 24.238, 2.1053,22.917	Radiated Spurious Emission	Pass
2.1046,24.232	Radiated RF Power Output	Pass
22.913(a)	Effective Radiated Power (ERP)	Pass
2.1049,22.917(b), 24.238(b)	Occupied Bandwidth	*Note 1
2.1055,22.355, 24.235	Frequency Stability over Temperature Variation	Pass
2.1055,22.355, 24.235	Frequency Stability over Voltage Variation	Pass
2.1046,22.913(a), 24.232(c)	Conducted RF Power Output	Pass
2.1051,22.917,24. 238	Conducted spurious emissions	Pass
Note 1: No applicable performance criteria.		

GPRS mode:		
2.1051, 24.238, 2.1053,22.917	Radiated Spurious Emission	Pass
2.1046,24.232	Radiated RF Power Output	Pass
22.913(a)	Effective Radiated Power (ERP)	Pass
2.1049,22.917(b), 24.238(b)	Occupied Bandwidth	*Note 2
2.1055,22.355, 24.235	Frequency Stability over Temperature Variation	Pass
2.1055,22.355, 24.235	Frequency Stability over Voltage Variation	Pass
2.1046,22.913(a), 24.232(c)	Conducted RF Power Output	Pass
2.1051,22.917,24. 238	Conducted spurious emissions	Pass
Note 2: No applicable performance criteria.		

4 Test Results of mode

4.1 Radiated Spurious Emission

Specifications:	2.1051, 24.238, 2.1053, 22.917					
Date of Tests	2008-1-25					
Test conditions:	Ambient Temperature:15℃-35℃ Relative Humidity:30%-60% Air pressure: 86-106kPa					
Operation Mode	TX on, channel 190 and 661 for GSM and GPRS mode					
Test Results:	Pass					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2009-01-03	Normal
7330	Ultra Broadband Antenna	R/S	HL562	100013	2008-07-24	Normal
7330	Double-Ridged Horn Antenna	R/S	HF906	100037	2009-01-14	Normal
713	Fully-Anechoic Chamber	ETS	11.8m×6.5m×6.3m	--	2010-11-17	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2008-06-13	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal

Limit Level Construction:

According to Part 24.238 (a), i.e., Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB, so the limit level is:
 $P(\text{dBm}) - (43 + 10 \log(P)) \text{ dB} = -13\text{dBm}$

Limits for Radiated spurious emissions(UE)

Frequency range	Limit Level / Resolution Bandwidth
30 MHz to 20000 MHz	-13dBm/1MHz

Test Setup:

The EUT was placed in an anechoic chamber, see figure SP. The Wireless Communications Test Set was used to set the TX channel and power level and modulate the TX signal with different bit patterns. The test was done using an automated test system, where all test equipments were controlled by a computer.



Figure SP

Test Method:

The measurement was performed accordance with section 2.2.12 of ANSI/TIA-603-B-2002: *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*.

1 The maximum spurious emissions were searched by turning the azimuth of the turntable, shifting the polarization of the measuring antenna and changing the pose of the EUT.

2 Levels of EUT's transmitter harmonics and suspicious signals were recorded.

3 The recorded levels were corrected in the automated test system with the correction factors given by a substitution calibration made before the measurement. The calibration was made separately for vertical and horizontal polarization and the system uses different correction factors depending on the measuring antenna polarization.

4 The corrected values of radiated spurious emissions indicated as EIRP are reported.

Note:

1 The investigated ARFCNs are 190 (836.6 MHz) and 661 (1880.0 MHz).

2 The investigated frequency range is 30 MHz ~ 18 GHz, including out of band emission and band-edge emission measurements.

Test Results for GSM mode:

Out of band emission			
Frequency [MHz]	SPU emission [dBm]	EUT pose [H/V]	Antenna Polarization [H/V]
1665.731463	-38.61	V	V
2487.374749	-43.17	V	V
3341.883768	-47.25	V	V
1665.731463	-50.38	V	H
2487.374749	-47.57	V	H
2487.374749	-47.75	H	V
1665.731463	-50.55	H	H
3742.484970	-33.33	H	V
4999.599198	-51.41	H	V
5643.486974	-42.15	H	V
3742.484970	-39.18	H	H
5643.486974	-37.55	H	H


Band-edge emission		
EUT Channel	Frequency [MHz]	Level [dBm]
128 Left band edge	823.98196393	-14.70
251 Right band edge	849.01803607	-14.87
512 Left band edge	1849.96994	-14.83
810 Right band edge	1910.01603	-13.60

Test Results for GPRS mode:


Out of band emission			
Frequency [MHz]	SPU emission [dBm]	EUT pose [H/V]	Antenna Polarization [H/V]
2487.374749	-39.63	V	V
2487.374749	-38.71	V	H

Band-edge emission		
EUT Channel	Frequency [MHz]	Level [dBm]
128 Left band edge	823.98196393	-13.56
251 Right band edge	849.01603206	-14.87
512 Left band edge	1849.98196	-14.24
810 Right band edge	1910.01603	-14.49


Graphical results:**Graphical results of GSM mode:**

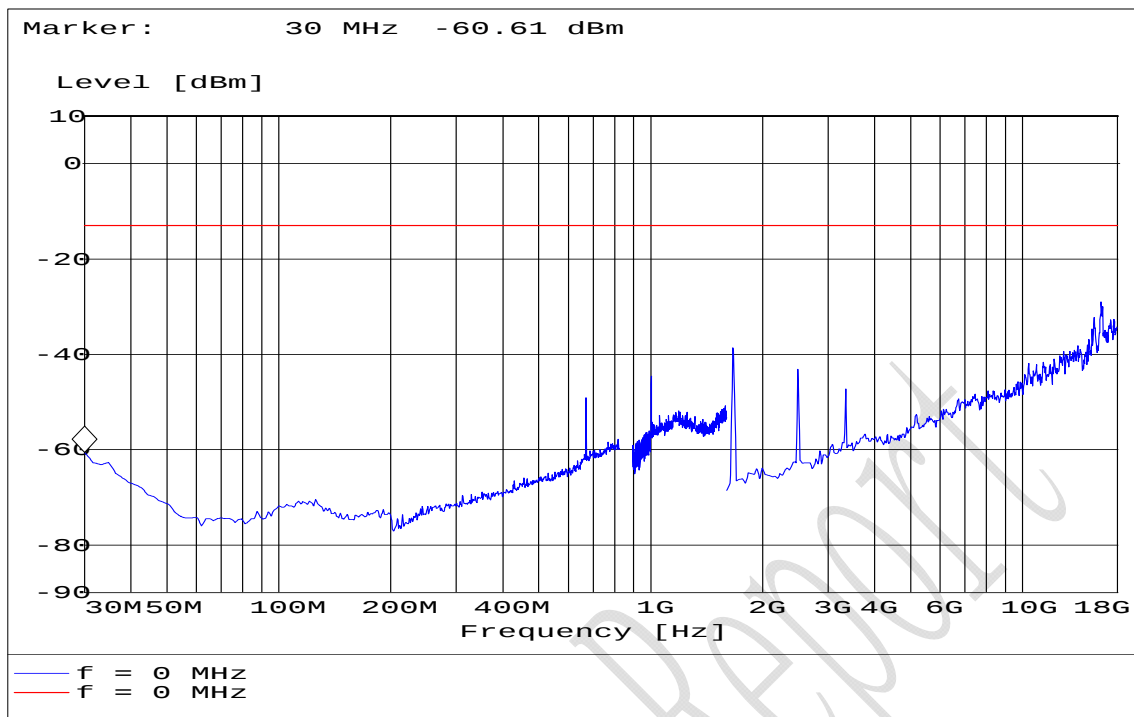


S190VF for GSM mode

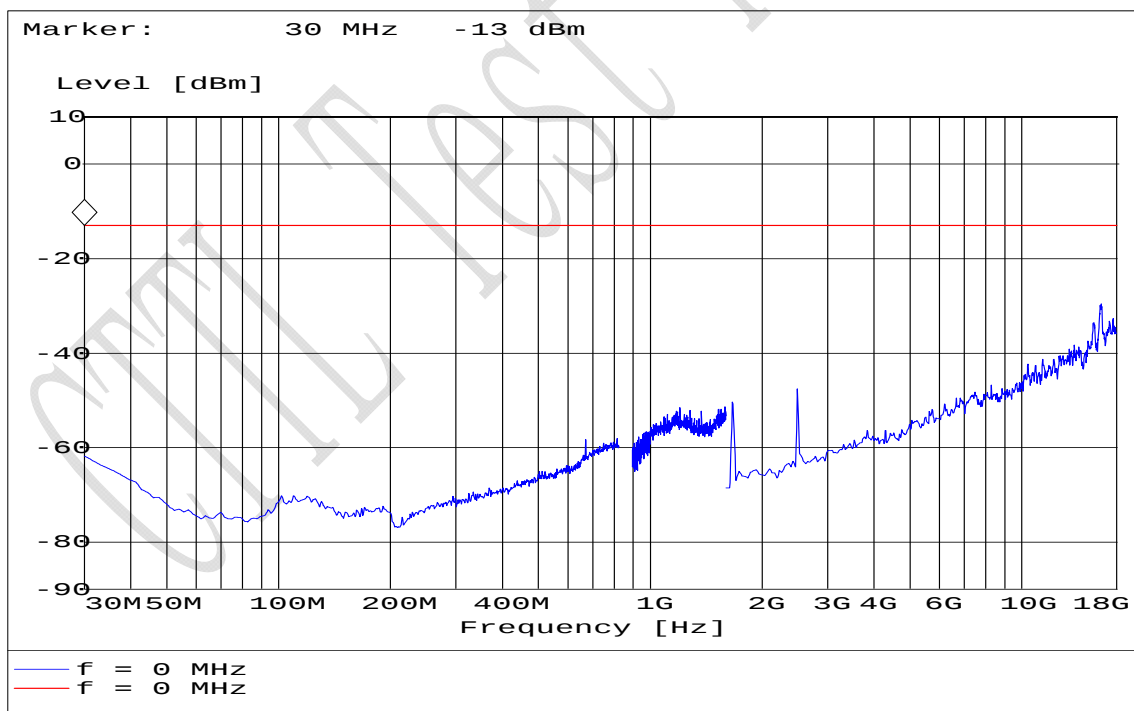


S190HF for GSM mode

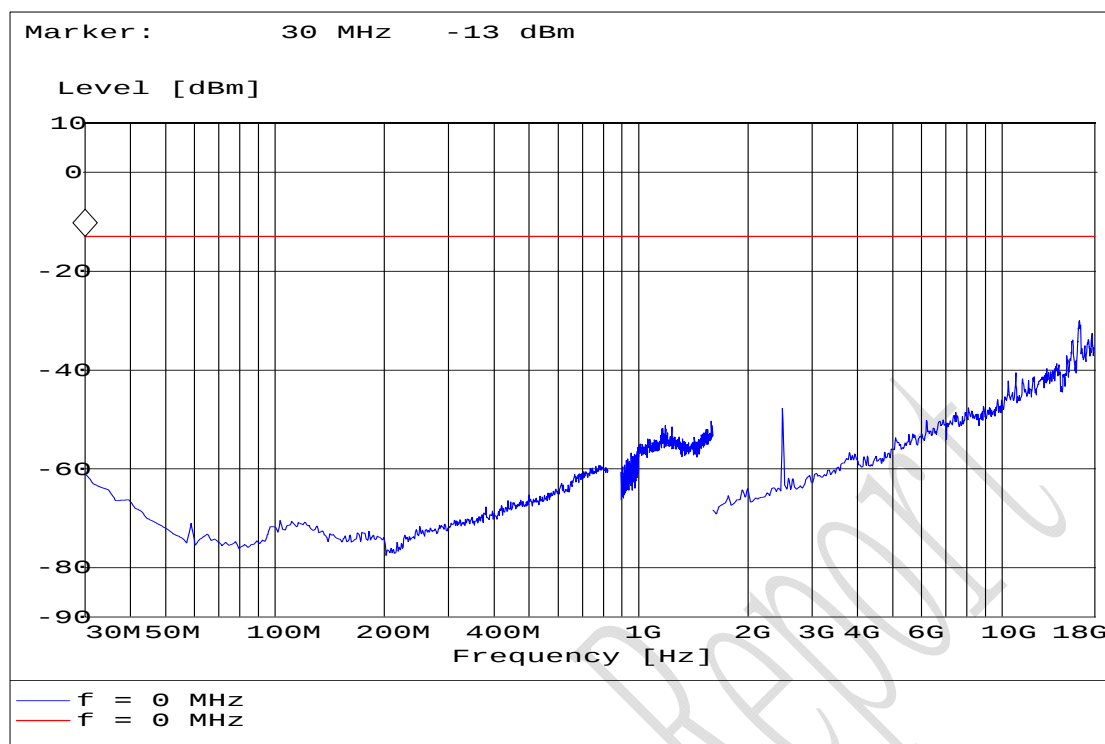


S190VT for GSM mode

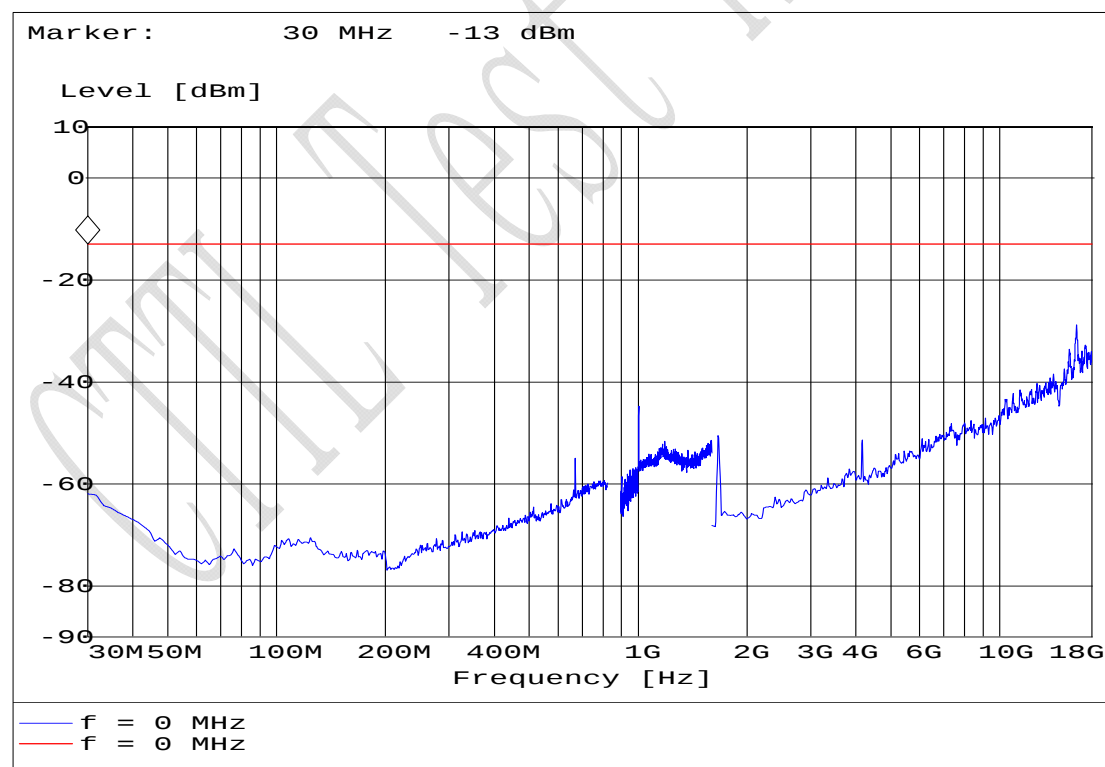


S190HT for GSM mode

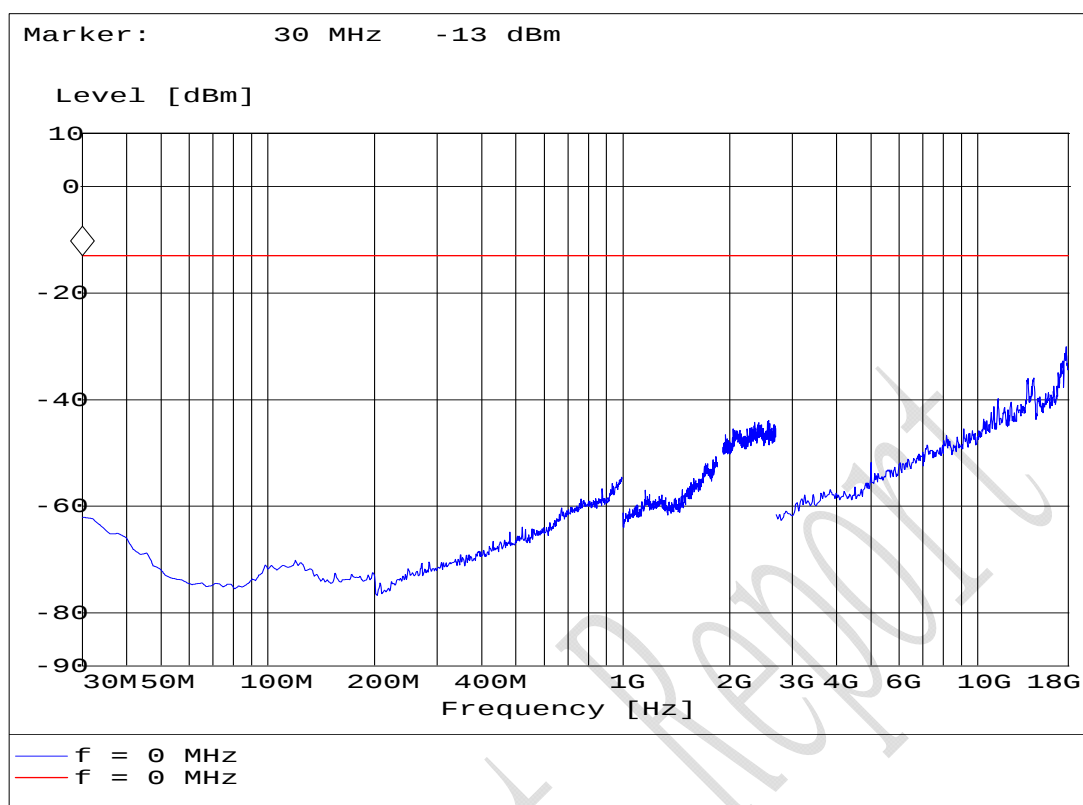


S661VF for GSM mode

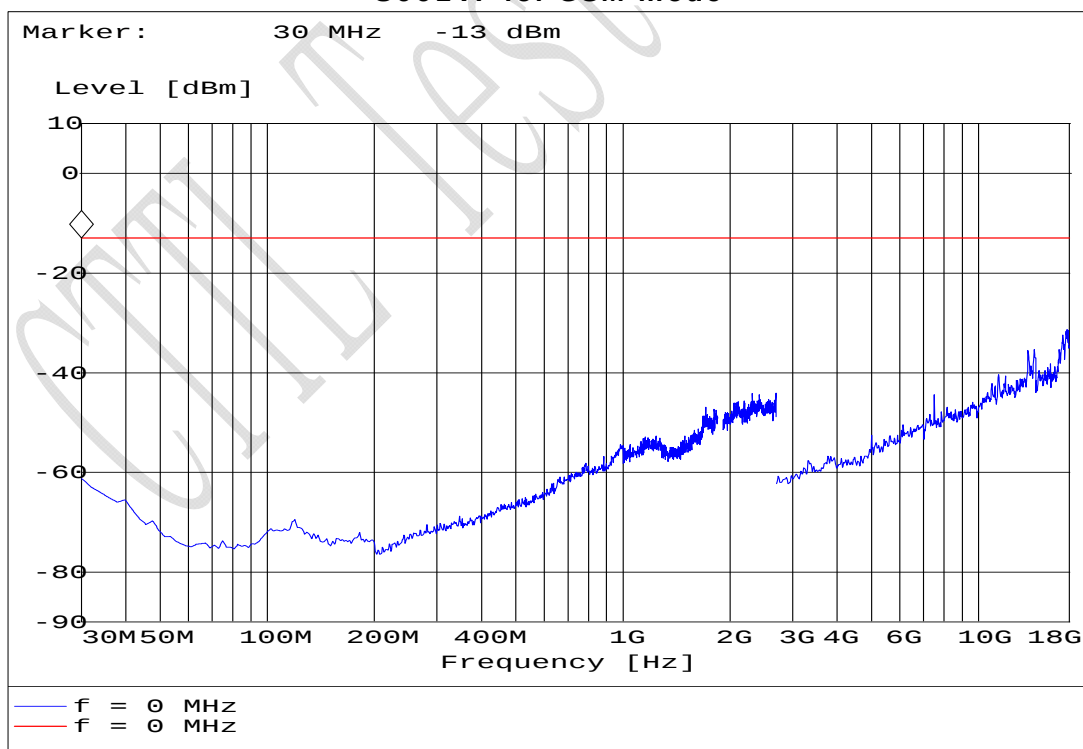

S661HF for GSM mode

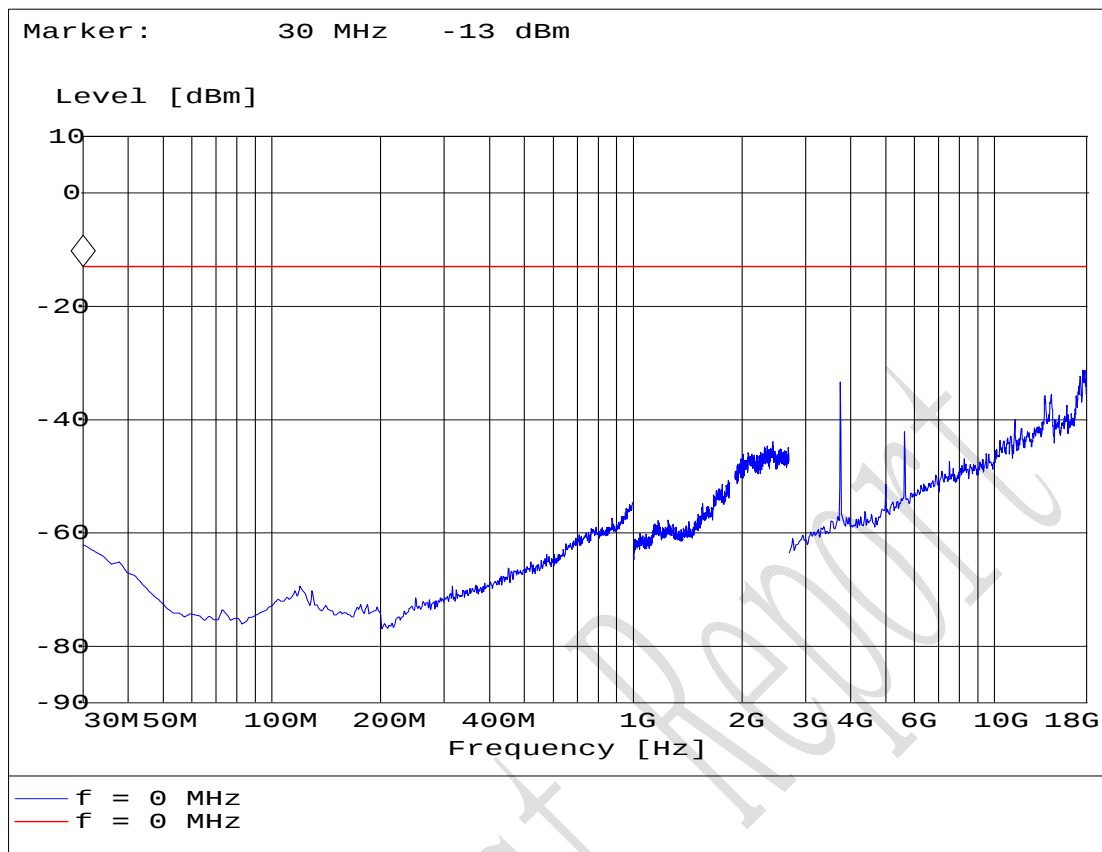


S661VT for GSM mode

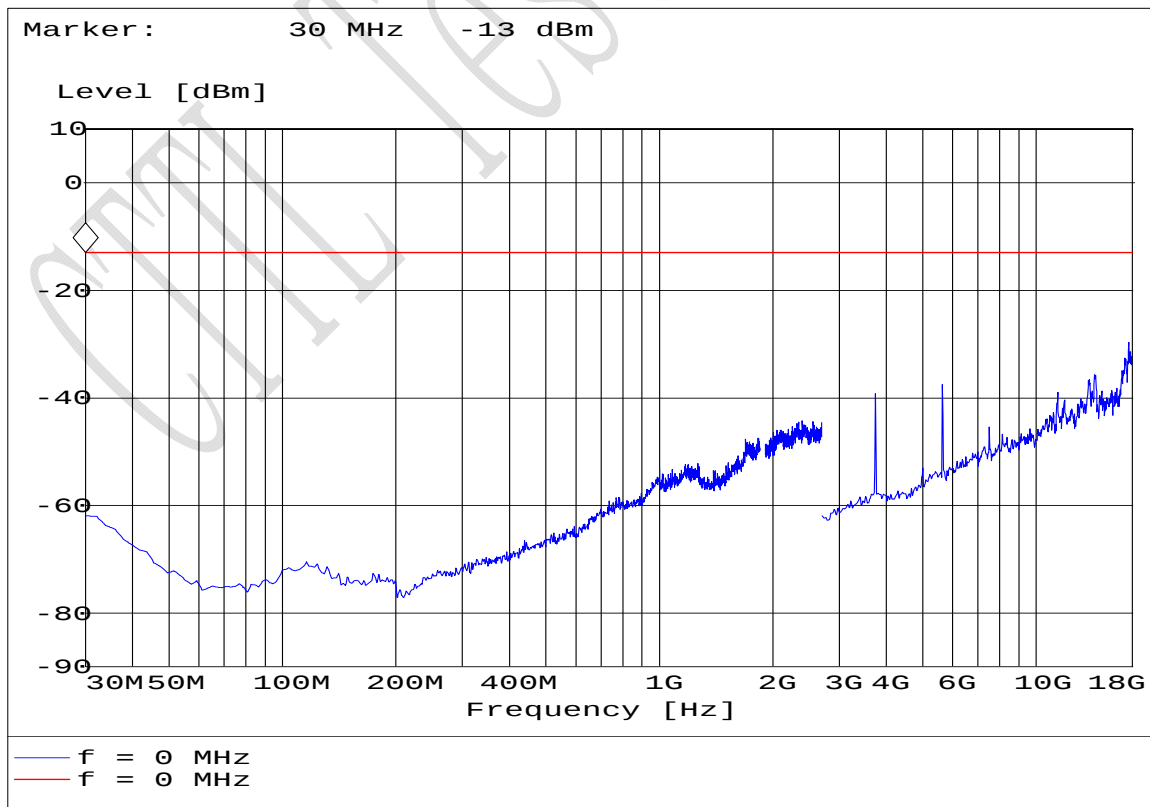


S661HT for GSM mode


Graphical results of GPRS mode:

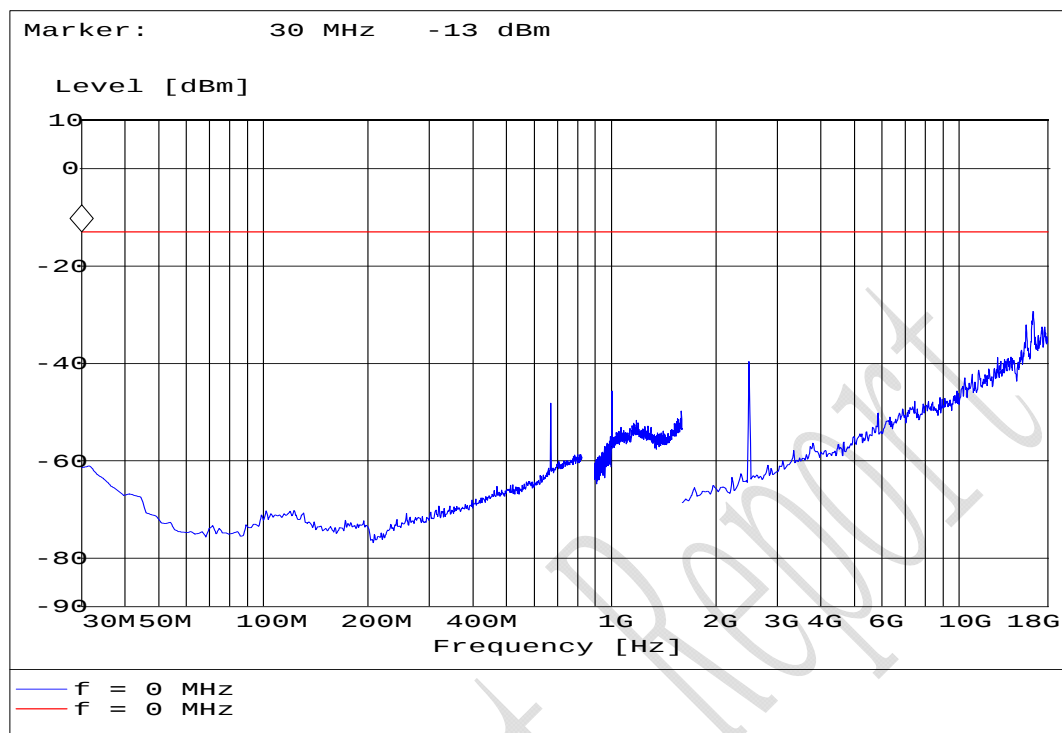


S190VF for GPRS mode

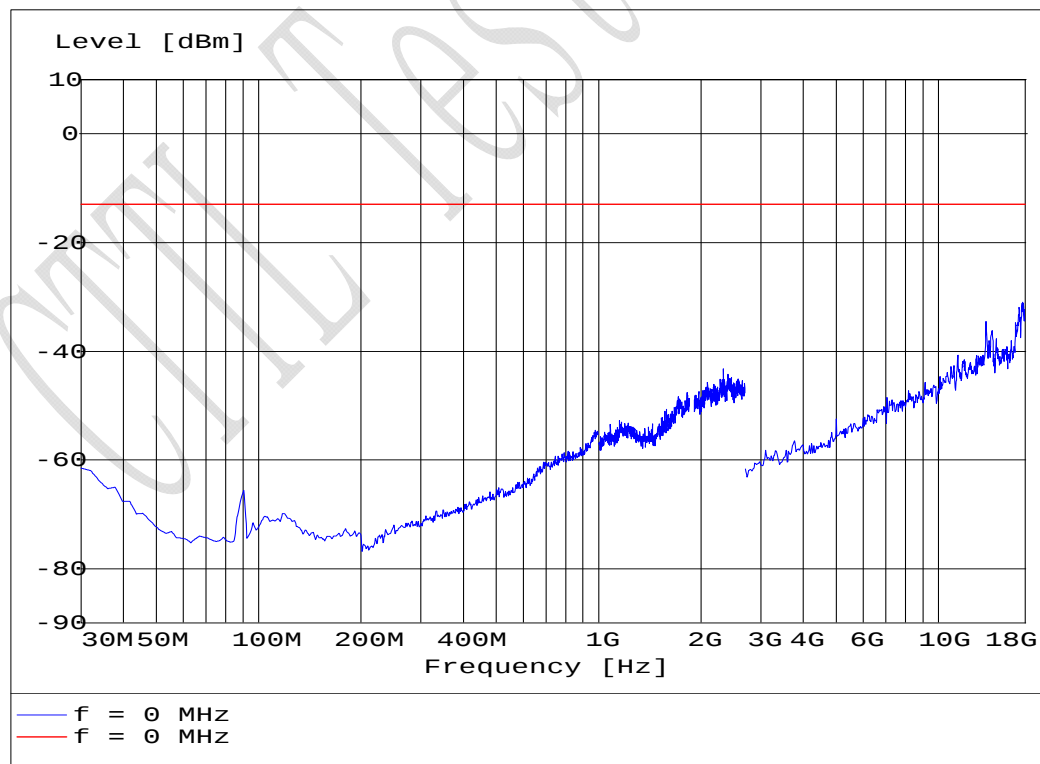


S190HF for GPRS mode

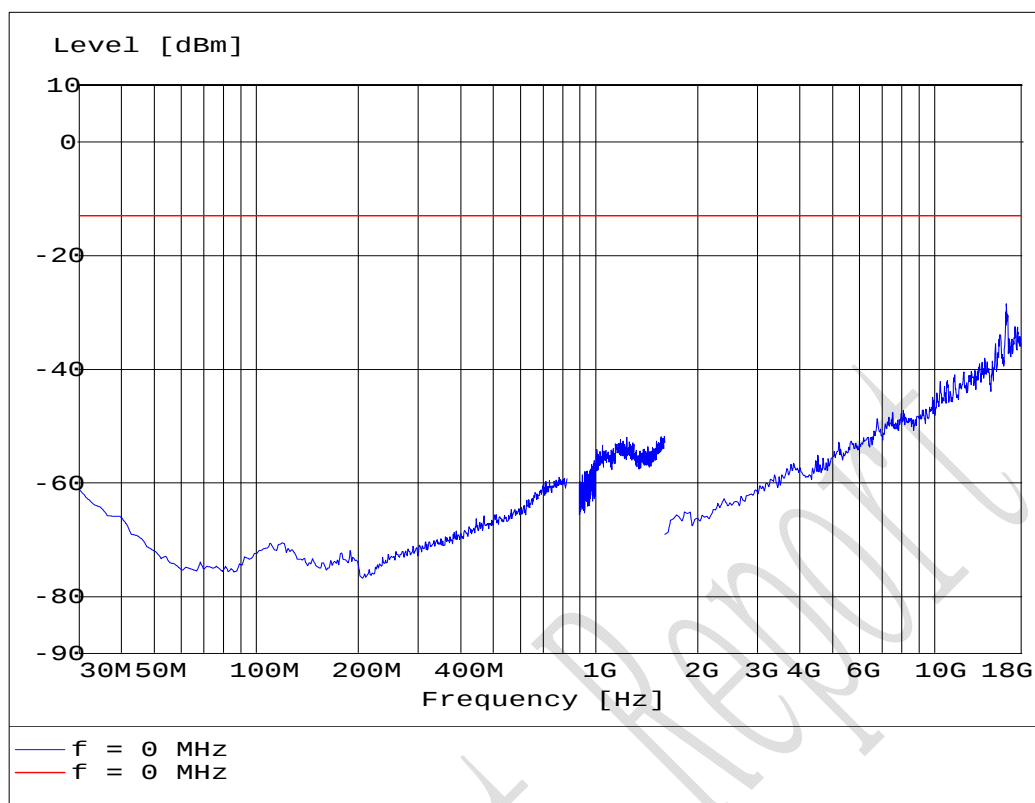


S190VT for GPRS mode

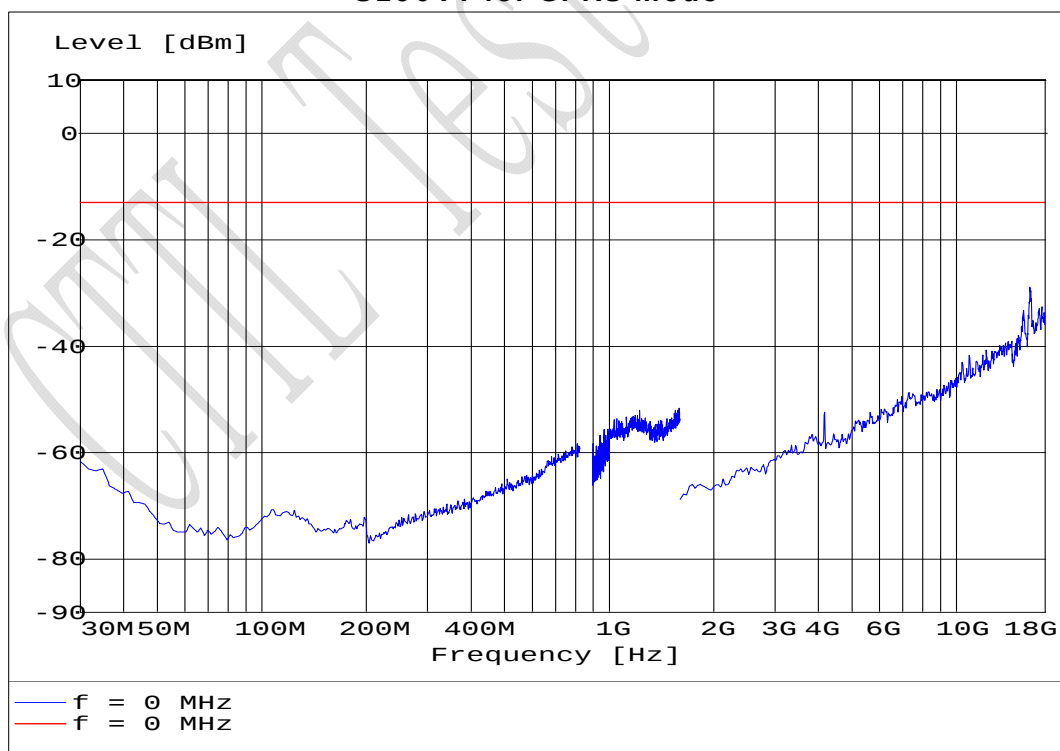


S190HT for GPRS mode

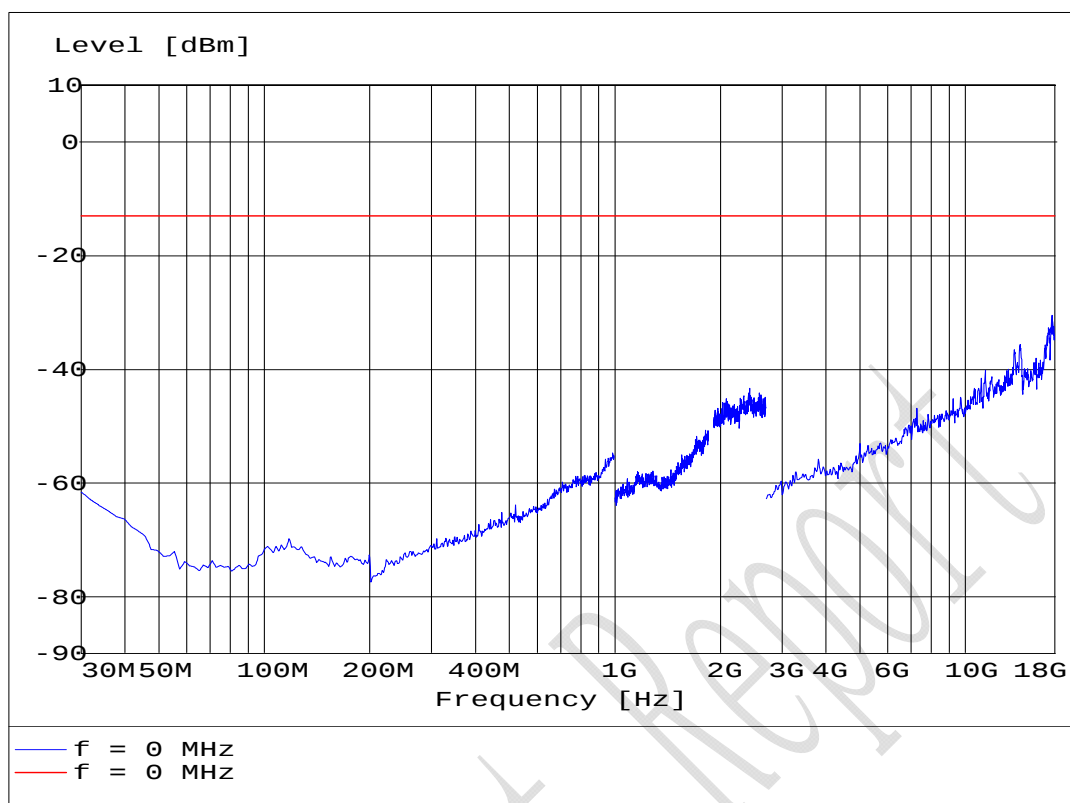


S661VF for GPRS mode

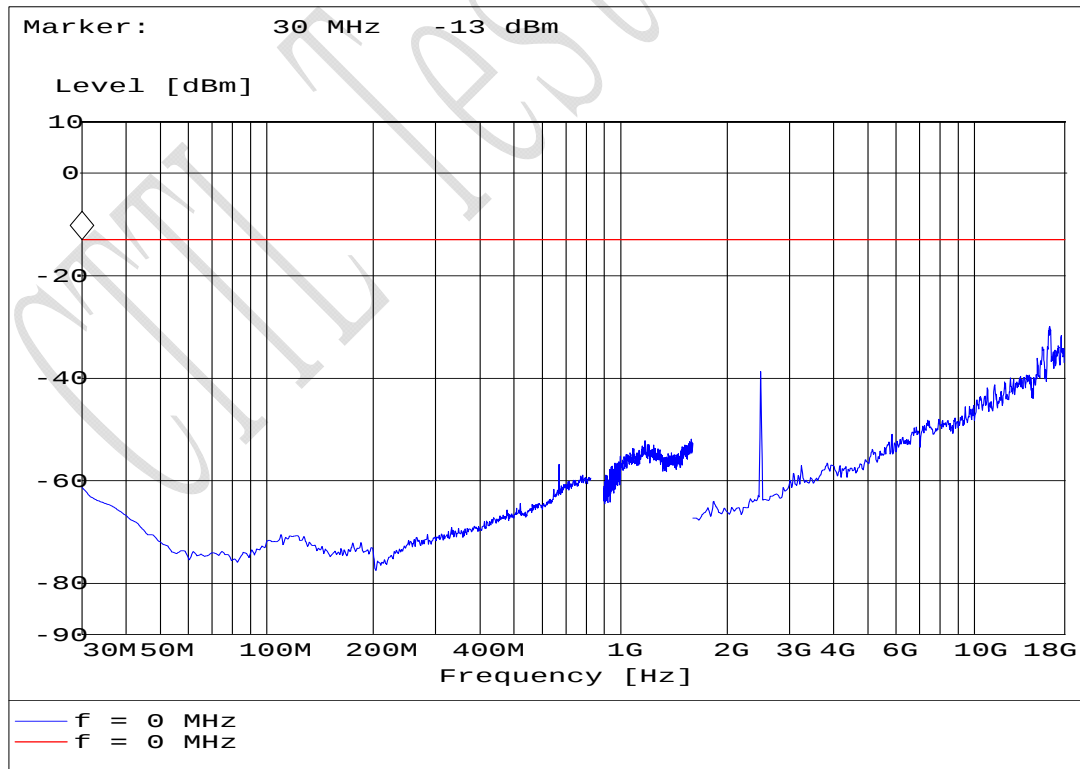

S661HF for GPRS mode

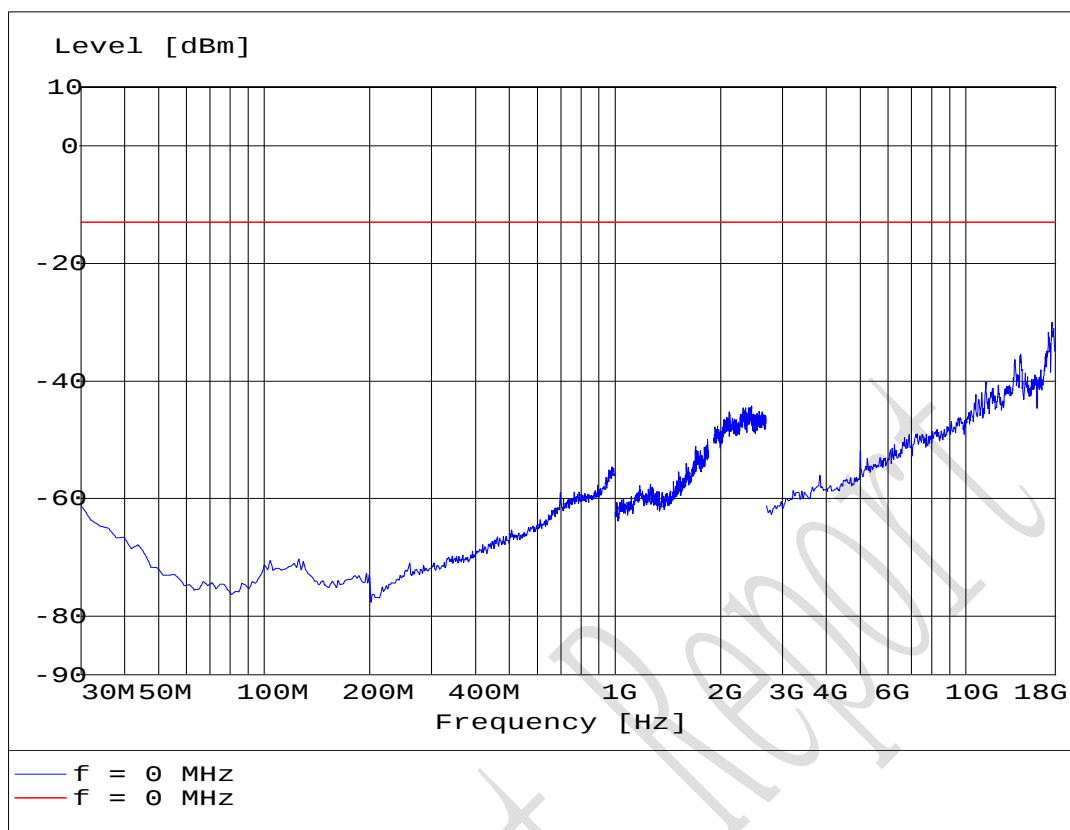

S661VT for GPRS mode

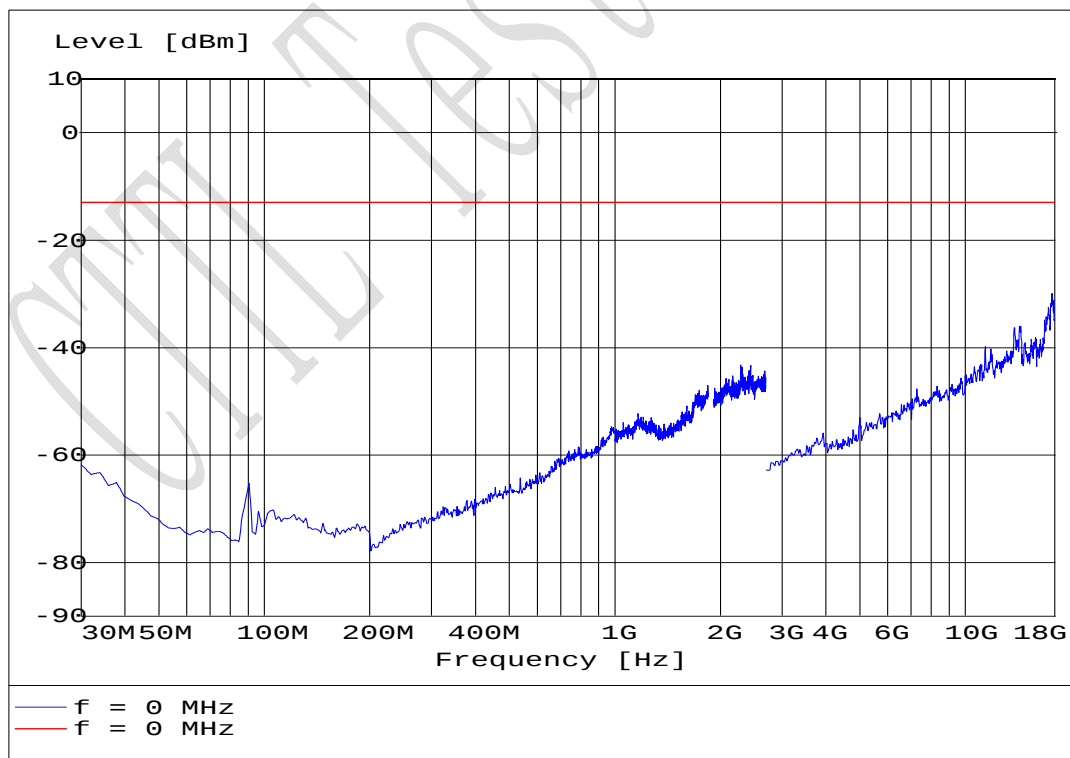

S661HT for GPRS mode

4.2 Radiated RF Power Output and ERP

Specifications:		2.1046,24.232,22.913(a)				
Date of Tests		2008-1-27				
Test conditions:		Ambient Temperature:15℃-35℃ Relative Humidity:30%-60% Air pressure: 86-106kPa				
Operation Mode		TX on, channel 128, 190, 251, 512, 661 and 810				
Test Results:		Pass				
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2009-01-04	Normal
7330	Ultra Broadband Antenna	R/S	HL562	100013	2008-07-24	Normal
7330	Double-Ridged Horn Antenna	R/S	HF906	100037	2009-01-14	Normal
713	Fully-Anechoic Chamber	ETS	11.8m×6.5m×6.3m	--	2010-11-17	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2008-06-13	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal

Limit Level Construction:

(a) Radiated RF Power Output

According to Part 24.232(b), i.e., Mobile/portable stations are limited to 2 watts EIRP peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications, so the limit level is 2 W or 33 dBm.

(b) ERP

According to Part 22.913(a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

Limits for Radiated RF Power Output

Frequency range	Limit Level (EIRP) / Resolution Bandwidth
TX channel	33dBm/1MHz

Limits for ERP

Frequency range	Limit Level (ERP)
TX channel	7W

Test Setup:

The EUT was set in an anechoic chamber, which is connected to the Wireless Communications Test Set located outside the chamber over the air. The test was done using an automated test system, where all test equipments were controlled by a computer.

Test Method

The measurement was performed accordance with section 2.2.17 of ANSI/TIA-603-B-2002: *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*.

1 The maximum power was searched by turning the azimuth of the turntable, shifting the polarization of the measuring antenna and changing the pose of the EUT.

2 The measured levels are EIRP values corrected in the automated test system with the correction factors given by a substitution calibration made before the measurement. The calibration is made separately for vertical and horizontal polarization and the system uses different correction factors depending on the measuring antenna polarization.

3 The corrected maximum levels were reported for EIRP values, and ERP values can be calculated from EIRP values.

Note:

$ERP\text{ dBm} = EIRP\text{ dBm} - 2.15\text{dB}$.

ERP Value for GSM 850 band mode:

ARFCN	Frequency [MHz]	ERP [dBm]
128	824.128	25.56
190	836.635	26.30
251	848.777	26.39

EIRP Value for GSM 1900 band mode:

ARFCN	Frequency [MHz]	EIRP [dBm]
512	1850.100	24.08
661	1879.920	24.34
810	1909.739	24.45

ERP Value for GPRS 850 band mode:

ARFCN	Frequency [MHz]	ERP [dBm]
128	824.228	27.22
190	836.653	27.34
251	848.877	27.64

EIRP Value for GPRS 1900 band mode:

ARFCN	Frequency [MHz]	EIRP [dBm]
512	1850.260	23.26
661	1879.920	24.11
810	1909.739	24.26

4.3 Occupied bandwidth

Specifications:	2.1049,22.917(b),24.238(b)					
Date of Test	2008-1-15					
Test conditions:	Ambient Temperature:15℃-35℃ Relative Humidity:30%-60% Air pressure: 86-106kPa					
Operation Mode	TX on, channel 128, 190, 251, 512, 661 and 810					
Test Results:	--					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2009-01-03	Normal
7330	Ultra Broadband Antenna	R/S	HL562	100013	2008-07-24	Normal
7330	Double-Ridged Horn Antenna	R/S	HF906	100037	2009-01-14	Normal
713	Fully-Anechoic Chamber	ETS	11.8m×6.5m×6.3m	--	2010-11-17	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2008-06-13	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal

Test Setup

The situation under which maximum EIRP values were found in the measurement of the radiated RF power output was used to determine the 99% occupied bandwidth. The Wireless Communications Test Set was used to set the TX channel, power level and modulation.

Test Method


The 99% occupied bandwidth was calculated from the spectrum analyzer. Markers in the spectrum analyzer were then placed between the calculated frequencies to show the calculated 99% power band.

Note: --

Results data of GSM mode:

EUT channel	99% occupied bandwidth [kHz]
128	251
190	261
251	251
512	281
661	271
810	281

Graphical results for GSM mode:

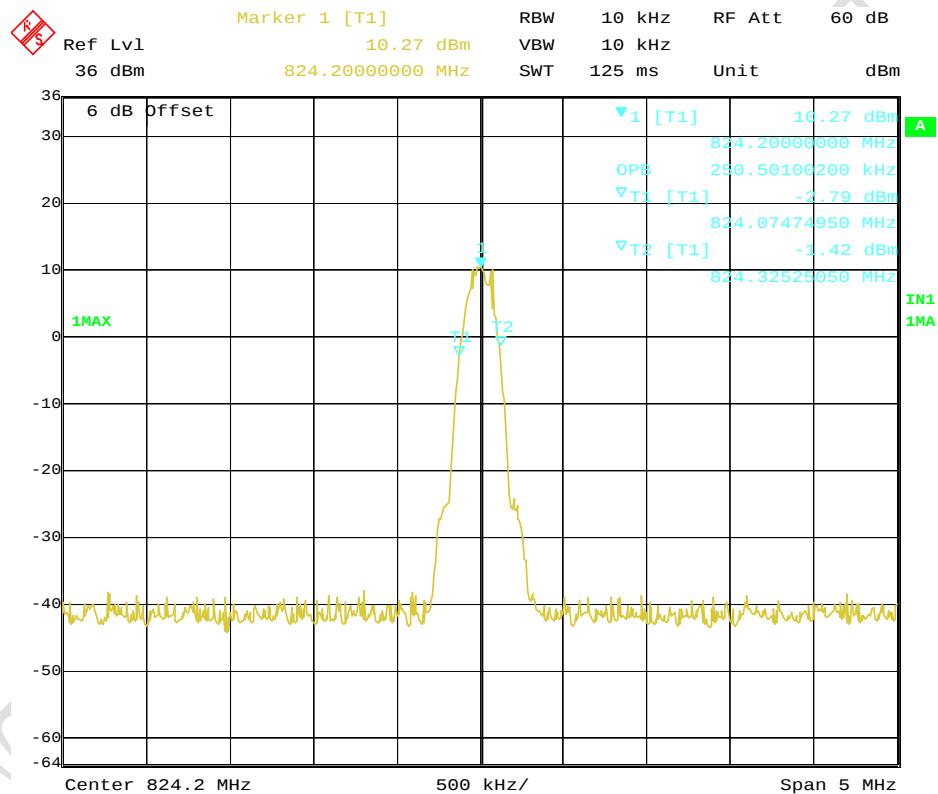


Date: 15.JAN.2008 11:37:02


Channel 128

FCC Parts 2, 22, 24
Equipment: MEGA3

REPORT NO.: I08GE4046-FCC-EMC

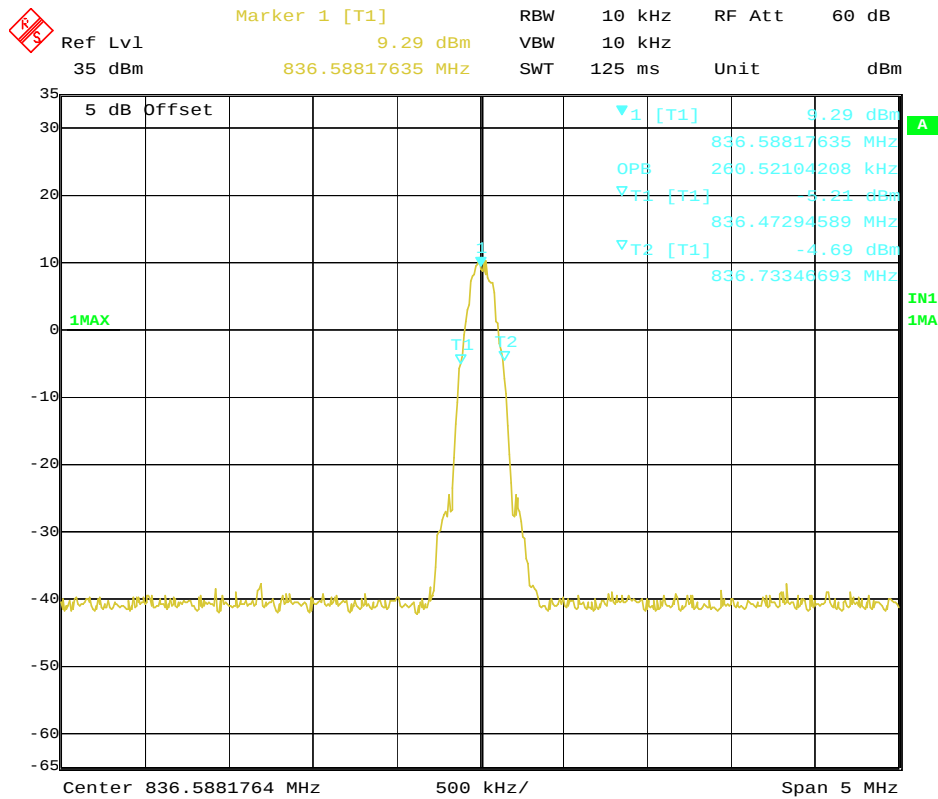


Channel 190

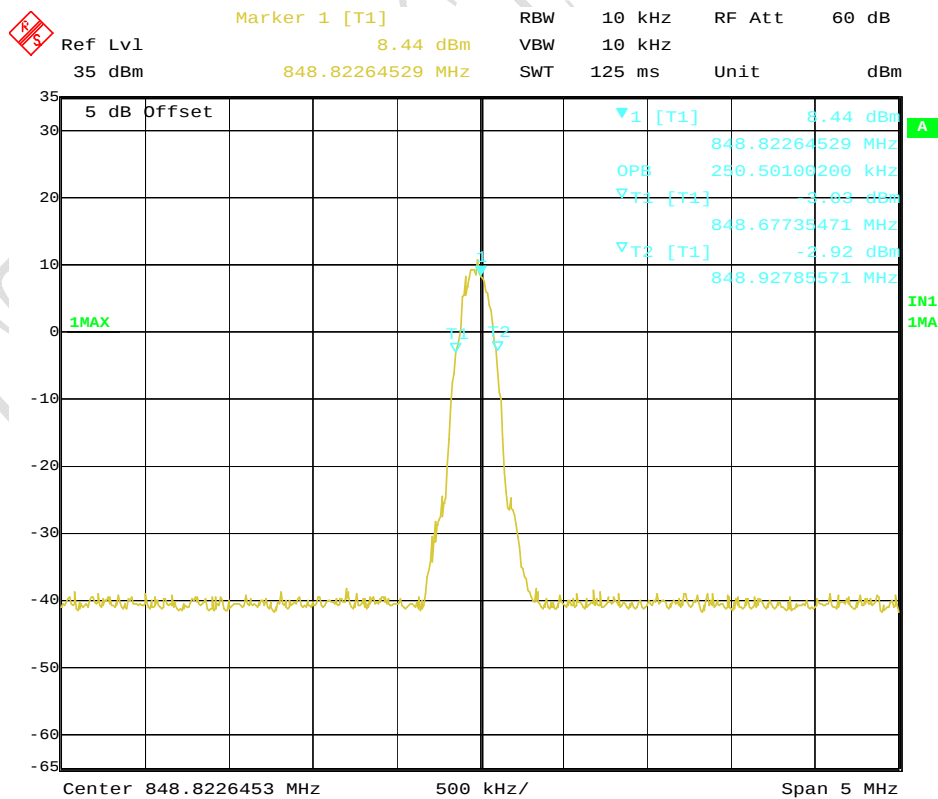

Channel 251


FCC Parts 2, 22, 24
Equipment: MEGA3

REPORT NO.: I08GE4046-FCC-EMC

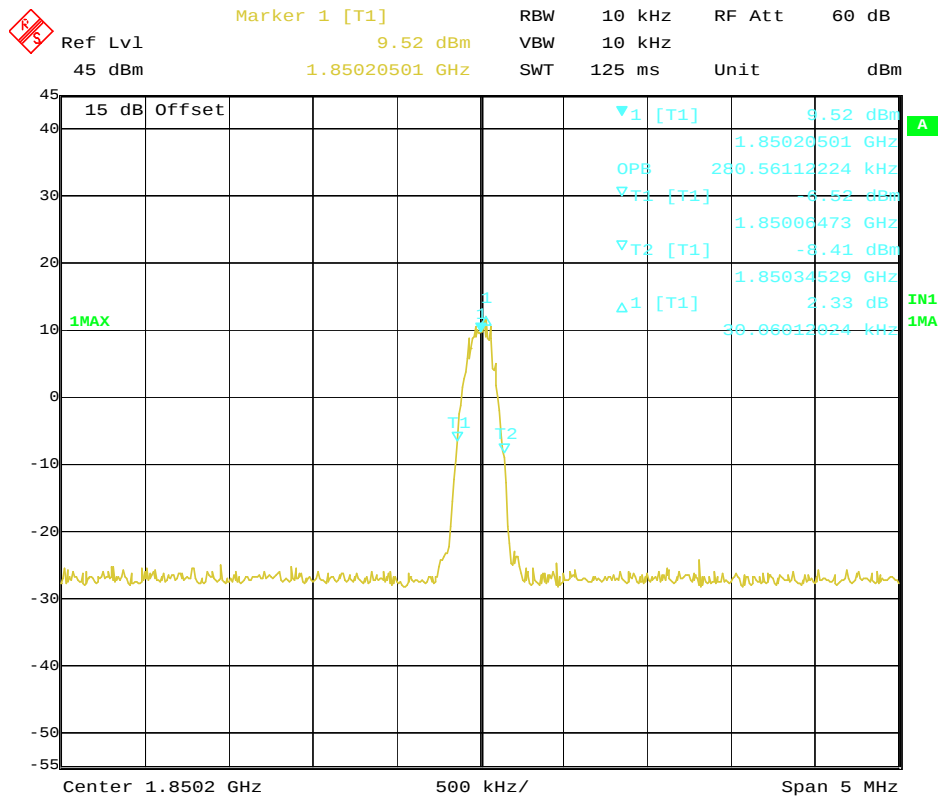

Date: 15.JAN.2008 11:19:42

Channel 512

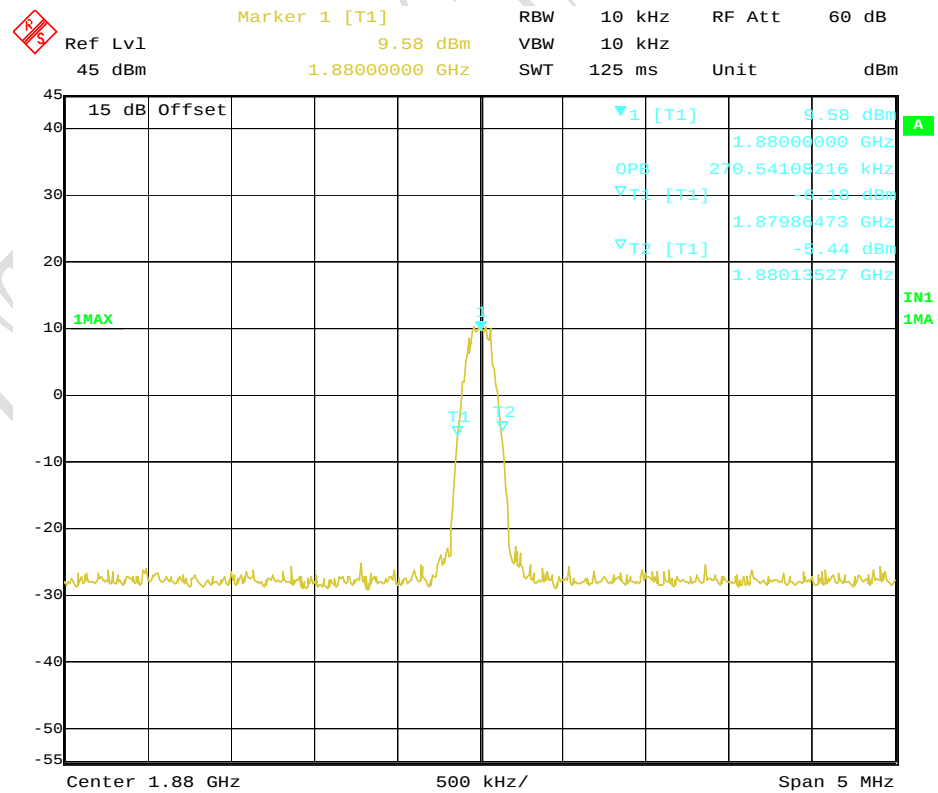


Date: 15.JAN.2008 11:22:43

Channel 661

FCC Parts 2, 22, 24
Equipment: MEGA3

REPORT NO.: I08GE4046-FCC-EMC

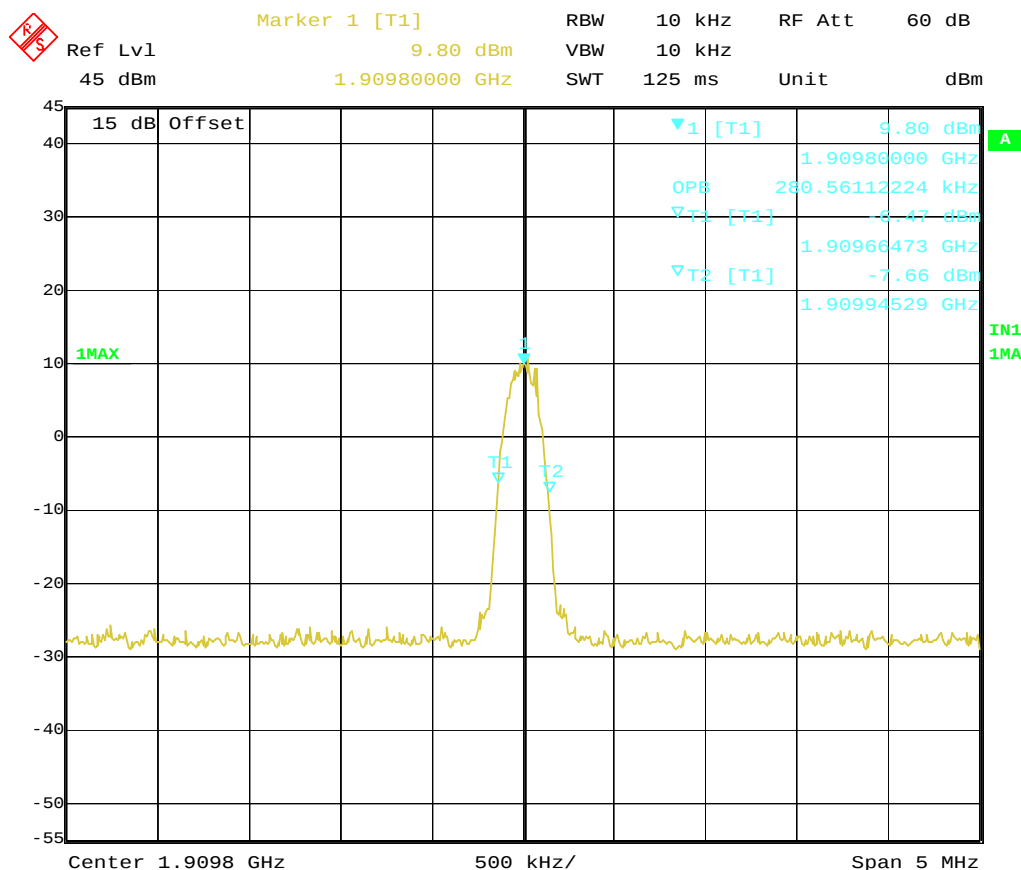

Date: 15.JAN.2008 11:25:15

Channel 810


Results data of GPRS mode:

EUT channel	99% occupied bandwidth [kHz]
128	261
190	251
251	251
512	251
661	261
810	251

Graphical results for GPRS mode:


FCC Parts 2, 22, 24
Equipment: MEGA3

REPORT NO.: I08GE4046-FCC-EMC

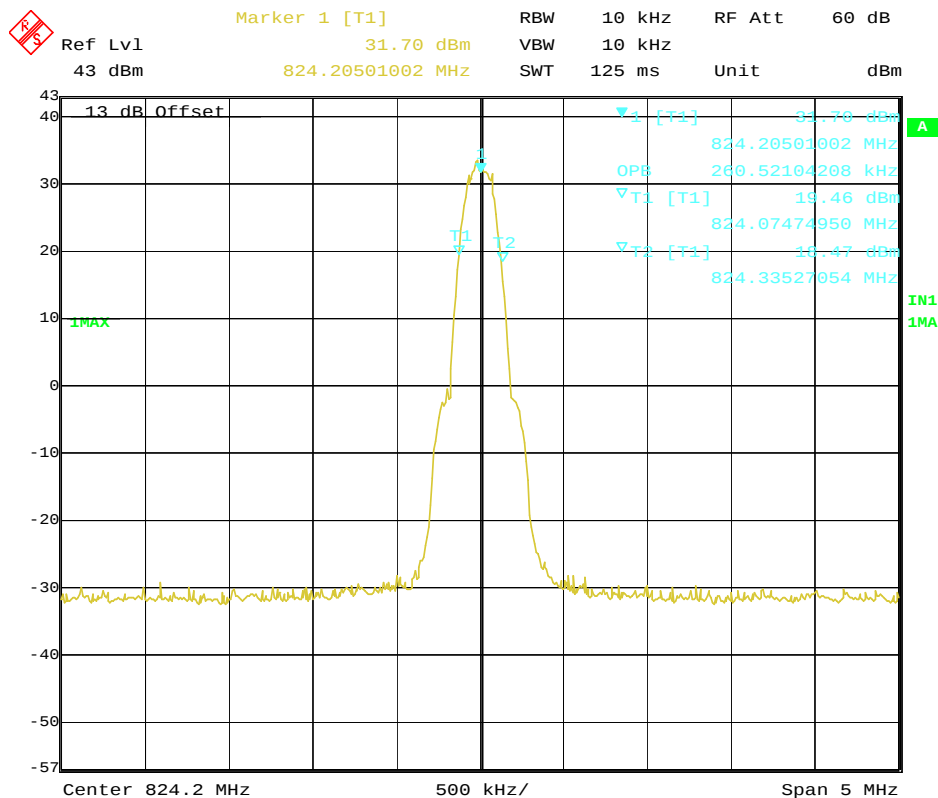

Date: 15. JAN. 2008 14:08:14

Channel 128

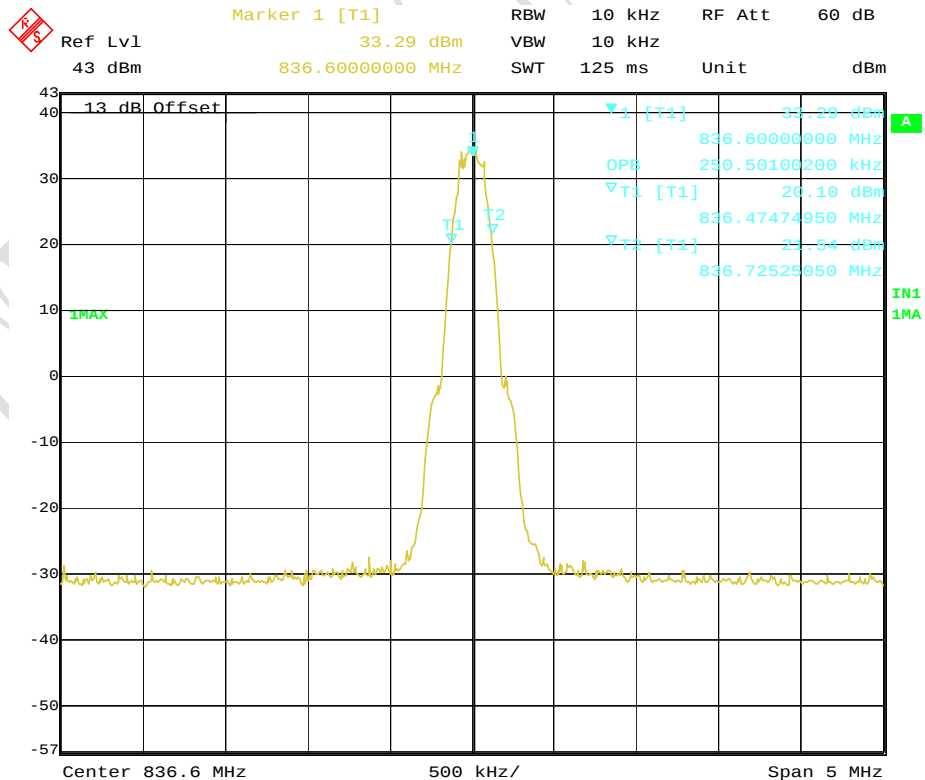


Date: 15. JAN. 2008 14:28:02

Channel 190


FCC Parts 2, 22, 24
Equipment: MEGA3

REPORT NO.: I08GE4046-FCC-EMC

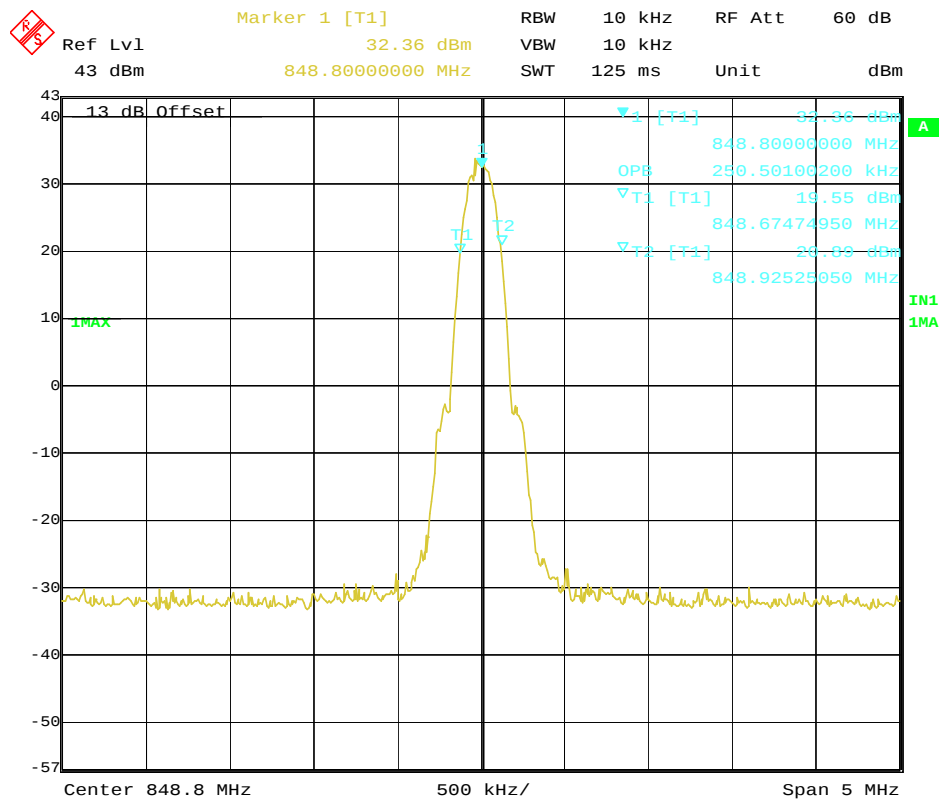

Date: 15. JAN. 2008 14:51:41

Channel 251

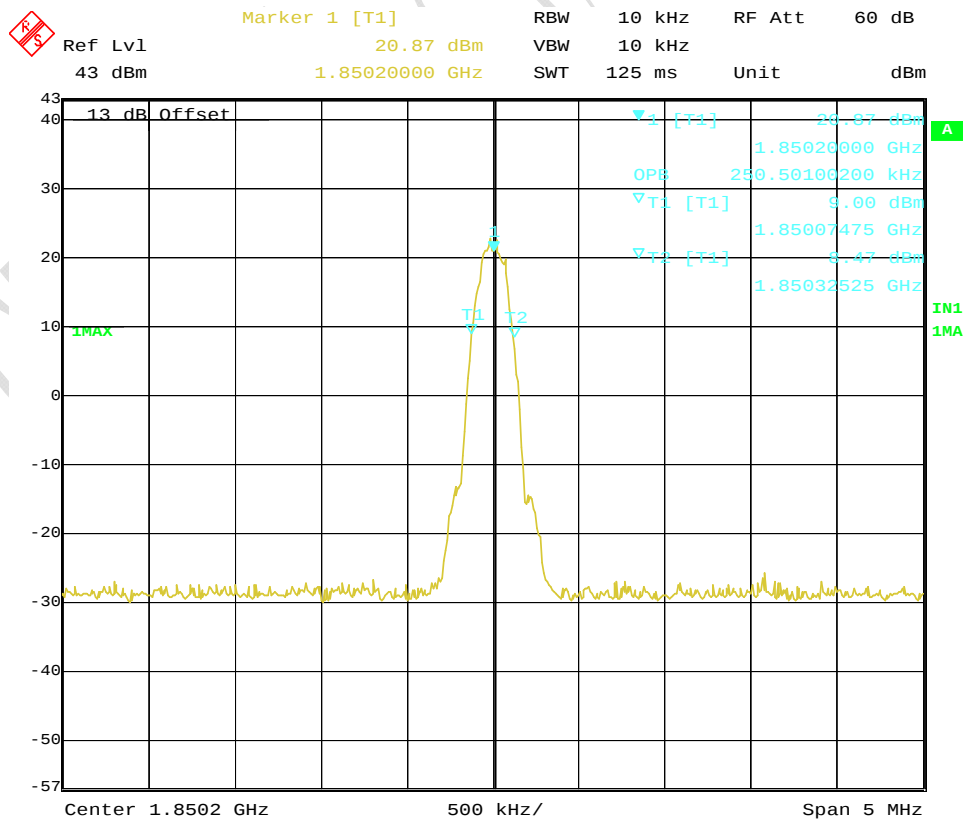


Date: 15. JAN. 2008 15:06:34

Channel 512


FCC Parts 2, 22, 24
Equipment: MEGA3

REPORT NO.: I08GE4046-FCC-EMC

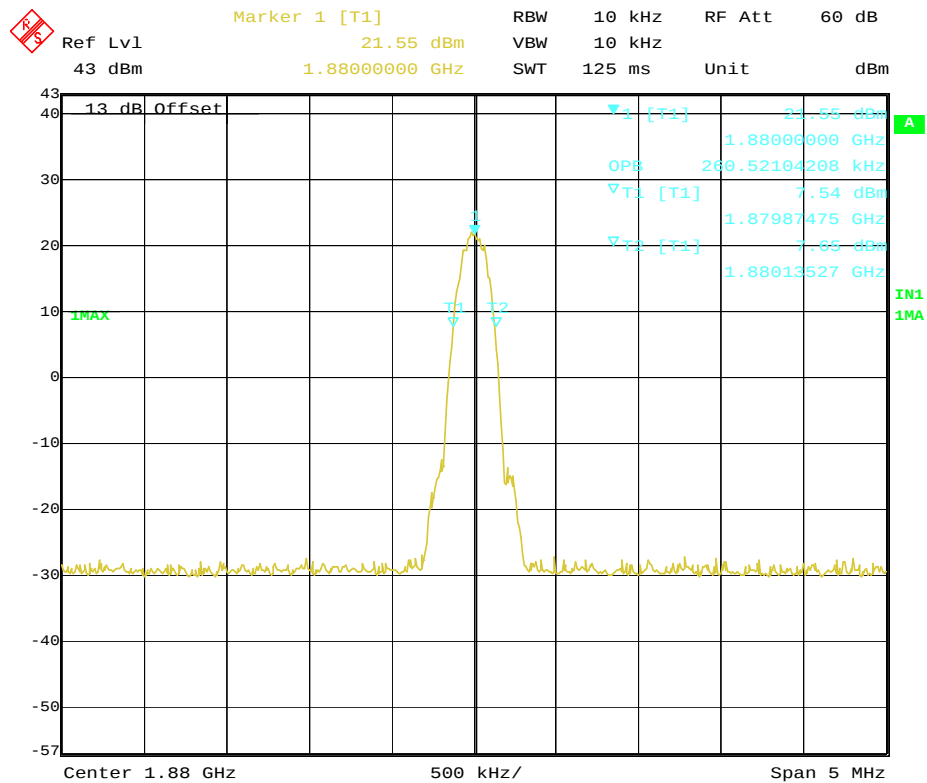

Date: 15.JAN.2008 15:12:32

Channel 661

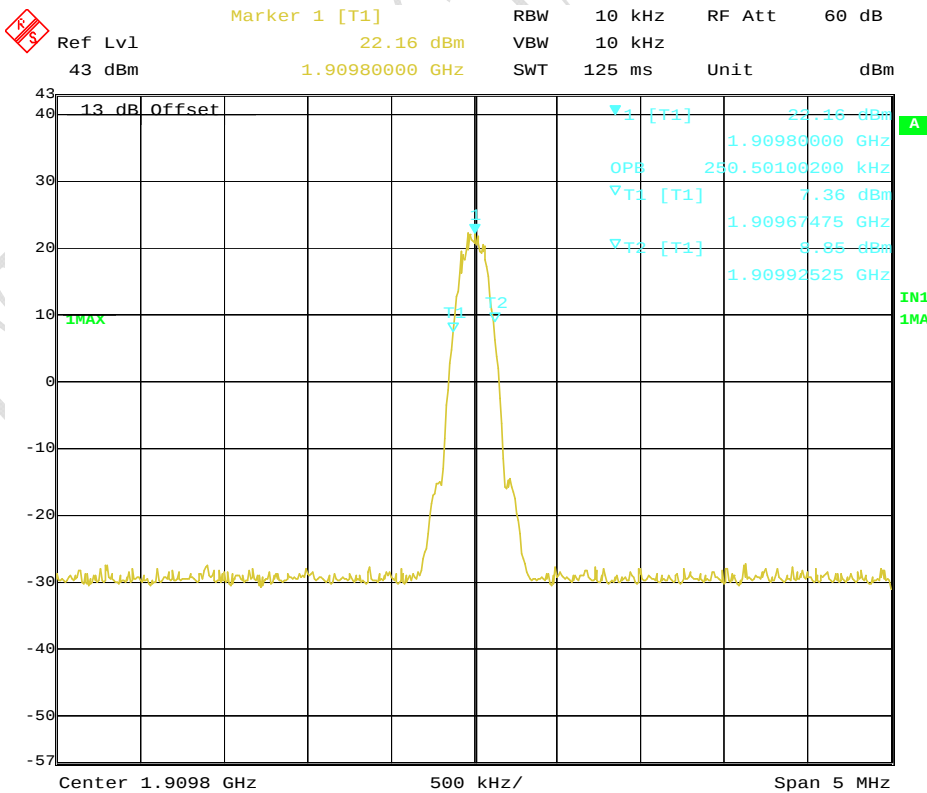

Date: 15.JAN.2008 15:21:36

Channel 810

4.4 Frequency Stability over Temperature Variation

Specifications:	2.1055,22.355,24.235					
Date of Test	2008-1-29, 2008-1-23					
Test conditions:	Ambient Temperature:-30℃-50℃ Relative Humidity:30%-60% Air pressure: 86-106kPa					
Operation Mode	TX on, channel 190 and 661					
Test Results:	Pass					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
023	Wireless Communication s Test Set	Agilent	8960(E5515C)	GB41450323	2008-06-13	Normal
561	Temperature Chamber	Terchy Environmental Technology LTD.	MHU-800SR	84121202	2008-05-06	Normal
111835	Wireless Communication s Test Set	R&S	CMU200	1100000802	--	Normal
Limit						
Frequency deviation [ppm]		±2.5				

Test Setup

The EUT was placed in a temperature chamber, demonstrated as figure T. The wireless communications test set (test simulator) was used to set the TX channel and power levels, modulate the TX signal with different bit patterns and measure the frequency of TX.

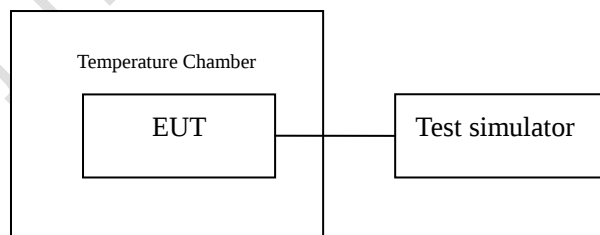


Figure T: setup for measurement of frequency stability over temperature variation

Test Method

1. The EUT was turned off and placed in the temperature chamber.
2. The temperature of the chamber was set to -30°C and allowed to stabilize.
3. The EUT temperature was allowed to stabilize for 45 minutes.
4. The EUT was turned on and set to transmit with 8960.
5. The maximum transmit frequency deviation during one minute period was measured by Wireless Communications Test Set.
6. The steps 3-5 were repeated for -20°C, -10°C, 0°C, 10°C, 20°C, 30°C, 40°C and 50°C.

Test results data for GSM mode:

Table T1: frequency deviation over temperature variation for channel 190

Temperature[°C]	Deviation[Hz]	Deviation[ppm]	Remarks
-30	-18	-0.022	Pass
-20	-24	-0.029	Pass
-10	-25	-0.030	Pass
0	-22	-0.026	Pass
10	-19	-0.023	Pass
20	-18	-0.022	Pass
30	-21	-0.025	Pass
40	-24	-0.029	Pass
50	-19	-0.023	Pass

Table T2: frequency deviation over temperature variation for channel 661

Temperature[°C]	Deviation[Hz]	Deviation[ppm]	Remarks
-30	-30	-0.016	Pass
-20	-43	-0.023	Pass
-10	-47	-0.025	Pass
0	-34	-0.018	Pass
10	-34	-0.018	Pass
20	-40	-0.021	Pass
30	-45	-0.024	Pass
40	-52	-0.028	Pass
50	-54	-0.029	Pass

Test results data for GPRS mode:

Table T3: frequency deviation over temperature variation for channel 190

Temperature[°C]	Deviation[Hz]	Deviation[ppm]	Remarks
-30	77	0.092	Pass
-20	77	0.092	Pass
-10	67	0.080	Pass
0	68	0.081	Pass
10	52	0.062	Pass
20	31	0.037	Pass
30	34	0.041	Pass
40	39	0.047	Pass
50	44	0.053	Pass

Table T4: frequency deviation over temperature variation for channel 661

Temperature[°C]	Deviation[Hz]	Deviation[ppm]	Remarks
-30	87	0.046	Pass
-20	85	0.045	Pass
-10	76	0.040	Pass
0	62	0.033	Pass
10	38	0.020	Pass
20	34	0.018	Pass
30	37	0.020	Pass
40	39	0.021	Pass
50	46	0.024	Pass

4.5 Frequency Stability over Voltage Variation

Specifications:	2.1055,22.355,24.235					
Date of Test	2008-1-29, 2008-1-23					
Test conditions:	Ambient Temperature:15℃-35℃ Relative Humidity:30%-60% Air pressure: 86-106kPa					
Operation Mode	TX on, channel 190 and 661					
Test Results:	Pass					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
023	Wireless Communication s Test Set	Agilent	8960(E5515C)	GB41450323	2008-06-13	Normal
111835	Wireless Communication s Test Set	R&S	CMU200	1100000802	--	Normal
7982	DC Power Source	4NIC	DH1715A-3	004224	--	Normal
Limit						
Frequency deviation [ppm]		±2.5				

Test Setup

The EUT was placed in a shielding chamber and powered by the dummy battery which is connected to a DC power source, demonstrated as figure V. The wireless communications test set was used to set the TX channel and power level, modulate the TX signal with different bit patterns and measure the frequency of TX.

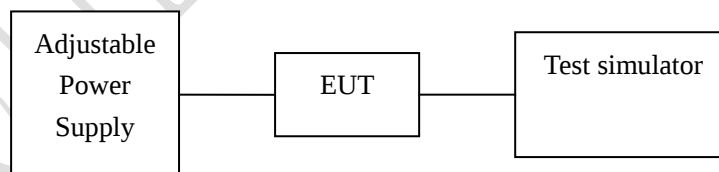


Figure V: test setup for measurement of frequency stability over voltage variation

Test Results data for GSM mode:

Table V1: frequency deviation over voltage variation for channel 190

Level	Voltage[V]	Deviation[Hz]	Deviation[ppm]	Remarks
Nominal	3.9	-10	-0.012	Pass
Cut-off point	3.5	-16	-0.019	Pass

Table V2: frequency deviation over voltage variation for channel 661

Level	Voltage[V]	Deviation[Hz]	Deviation[ppm]	Remarks
Nominal	3.9	-30	-0.016	Pass
Cut-off point	3.5	-39	-0.021	Pass

Test Results data for GPRS mode:

Table V3: frequency deviation over voltage variation for channel 190

Level	Voltage[V]	Deviation[Hz]	Deviation[ppm]	Remarks
Nominal	3.9	18	0.022	Pass
Cut-off point	3.5	36	0.043	Pass

Table V4: frequency deviation over voltage variation for channel 661

Level	Voltage[V]	Deviation[Hz]	Deviation[ppm]	Remarks
Nominal	3.9	17	0.009	Pass
Cut-off point	3.5	41	0.022	Pass


4.6 Conducted RF Power Output

Specifications:	2.1046,22.913(a),24.232(c)					
Date of Tests	2008-1-15					
Test conditions:	Ambient Temperature:15℃-35℃ Relative Humidity:30%-60% Air pressure: 86-106kPa					
Operation Mode	TX on, channel 128, 190, 251, 512, 661 and 810					
Test Results:	Pass					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2009-01-04	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2008-06-13	Normal
---	Power splitter	Jie sai	---	1000132	2009-01-04	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal

Limits for Radiated RF Power Output	
Frequency range	Limit Level (EIRP) /Resolution Bandwidth
TX channel	33dBm/1MHz
Limits for ERP	
Frequency range	Limit Level (ERP)
TX channel	7W

Test Setup:

During the process of testing, the EUT was controlled via the Wireless Communications Test Set to ensure max power transmission and proper modulation and measured by Rhode & Schwarz EMI test receiver (ESI26).

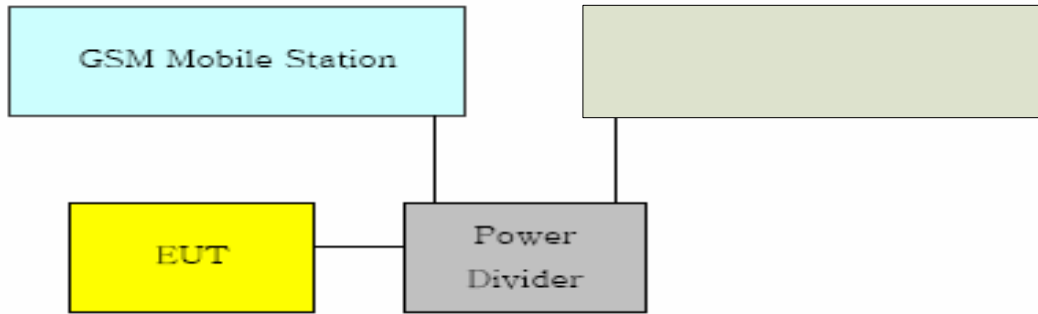

Test Method

- 1) The EUT was coupled to the EMI test receiver analyzer mode and the base station simulator through a power divider. The radio frequency load attached to the EUT antenna terminal was 50 Ohm. The loss of the cables the test system is calibrated to correct the readings.
- 2) The spectrum analyzer was set to Maxpeak Detector function and Maximum hold mode.
- 3) The resolution bandwidth of the spectrum analyzer was comparable to the emission bandwidth.

Note: --

Test Results for GSM mode:

ERP Value for GSM 850 band:

ARFCN	Peak output power [dBm]
128	30.15
190	30.25
251	29.75

EIRP Value for GSM 1900 band:

ARFCN	Peak output power [dBm]
512	29.7
661	29.7
810	29.9

Test Results for GPRS mode:

ERP Value for GPRS 850 band:

ARFCN	Peak output power [dBm]
128	29.86
190	29.99
251	30.15

EIRP Value for GPRS 1900 band:

ARFCN	Peak output power [dBm]
512	28.47
661	28.93
810	29.31

4.7 Conducted Spurious Emission

Specifications:	2.1051,22.917,24.238					
Date of Tests	2008-1-15					
Test conditions:	Ambient Temperature:15℃-35℃ Relative Humidity:30%-60% Air pressure: 86-106kPa					
Operation Mode	TX on, channel 190 and 661					
Test Results:	Pass					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2009-01-04	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2008-06-13	Normal
---	Power splitter	Jie sai	---	1000132	2009-01-04	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal

Limit Level Construction:


According to Part 24.238 (a), i.e., Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB, so the limit level is:
 $P(\text{dBm}) - (43 + 10 \log(P)) \text{ dB} = -13\text{dBm}$

Limits for Radiated spurious emissions(UE)

Frequency range	Limit Level / Resolution Bandwidth
30 MHz to 20000 MHz	-13dBm/1MHz

Test Setup:

During the process of testing, the EUT was controlled via Wireless Communications Test Set to ensure max power transmission and proper modulation and measured by Rhode & Schwarz EMI test receiver (ESI26)

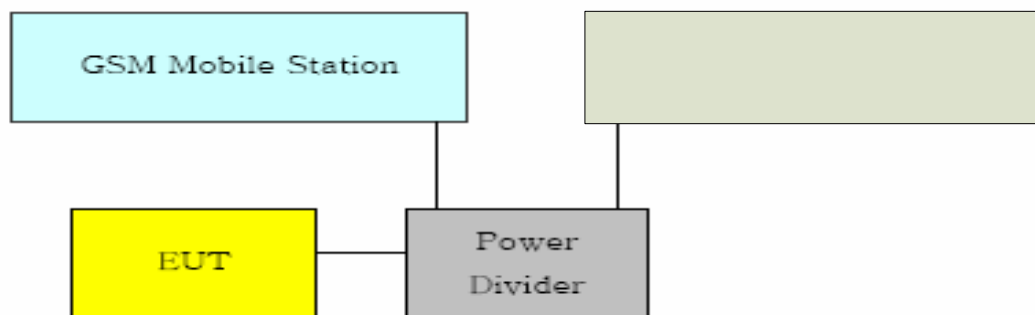

Test Method

The measurement was performed accordance with section 2.2.13 of ANSI/TIA-603-B-2002: *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*.

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment under test, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

Note: --


Test Results for GSM mode:

Out of band emission	
Frequency [MHz]	Level (dBm)
3271.62325	-36.22
6633.30661	-34.74
12796.39279	-34.73
12636.31263	-35.57
nf: noise floor	


Graphical results for GSM mode:

FCC Parts 2, 22, 24
Equipment: MEGA3

REPORT NO.: I08GE4046-FCC-EMC

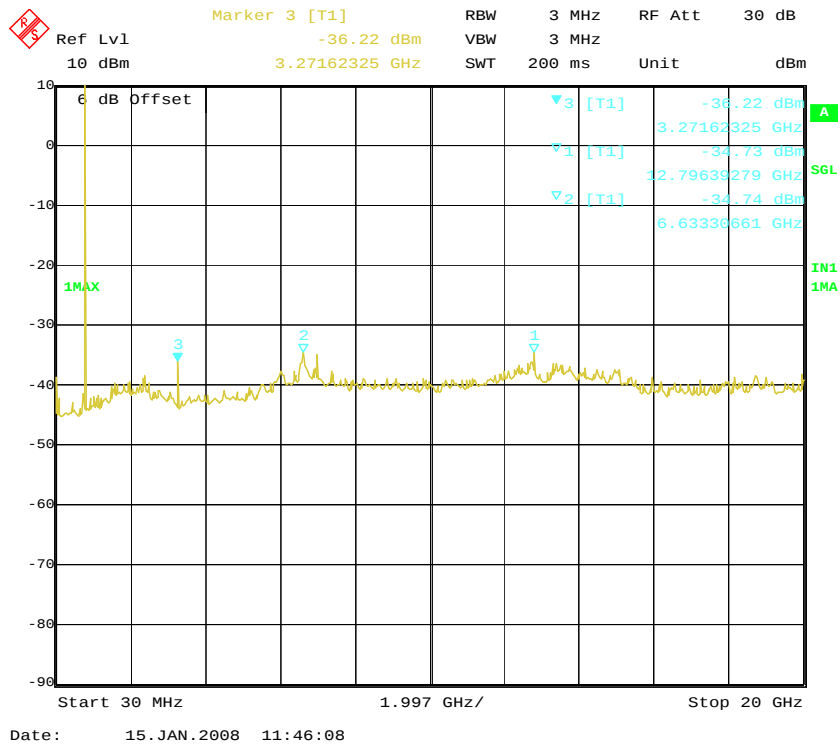

Channel 190

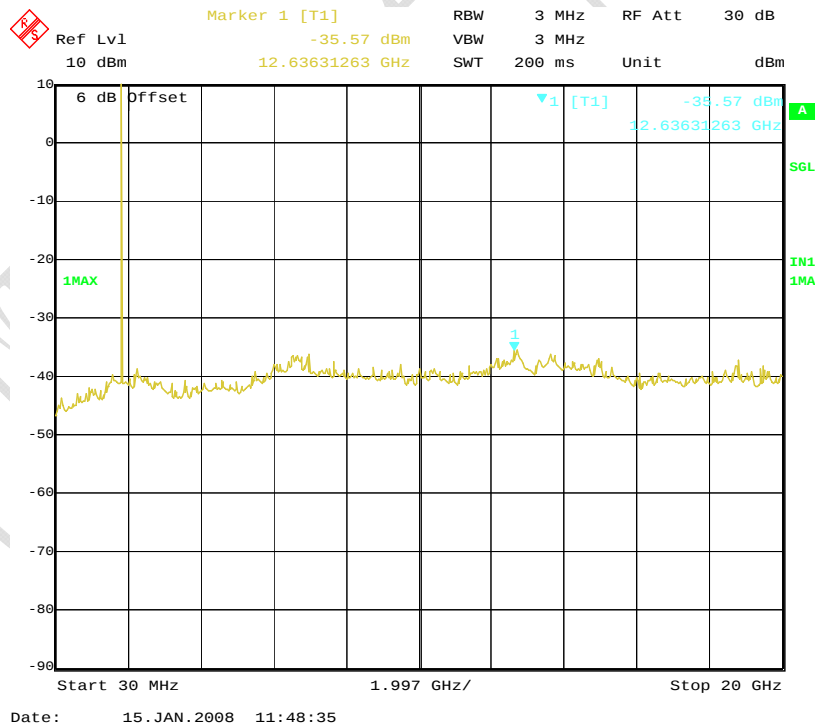

Channel 661

FCC Parts 2, 22, 24
Equipment: MEGA3



REPORT NO.: I08GE4046-FCC-EMC

Test Results for GPRS mode:

Out of band emission

Frequency [MHz]	Level (dBm)
6673.32665	-37.18
6713.34669	-38.01

Graphical results for GPRS mode:

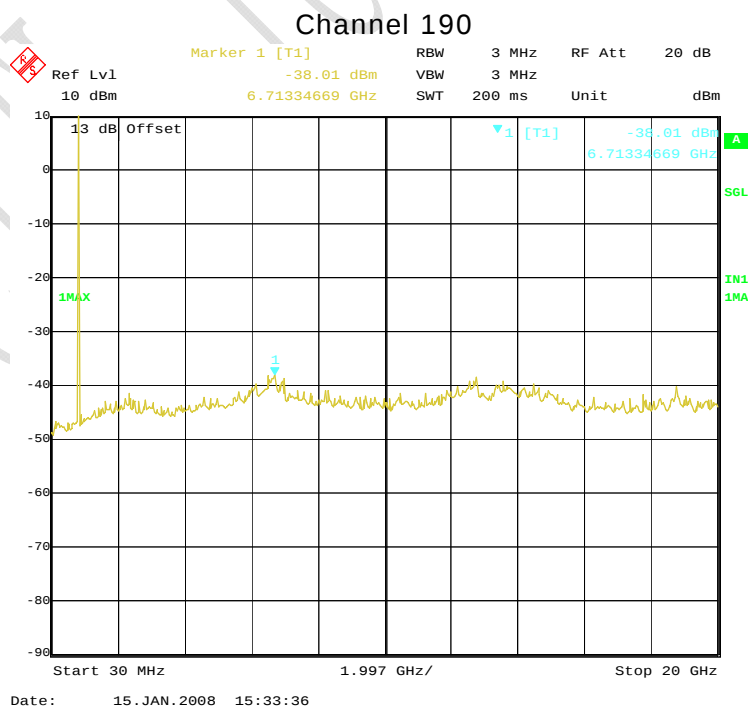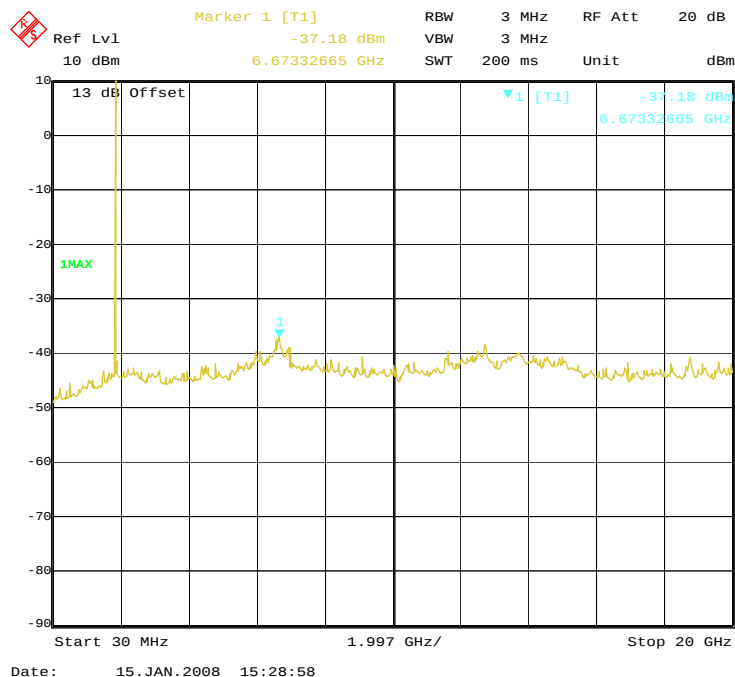

Channel 661

Annex A External Photos



Front view with flip close



Front view with flip open



back view




Back view without battery




Adaptor and cable

Annex B Internal Photos

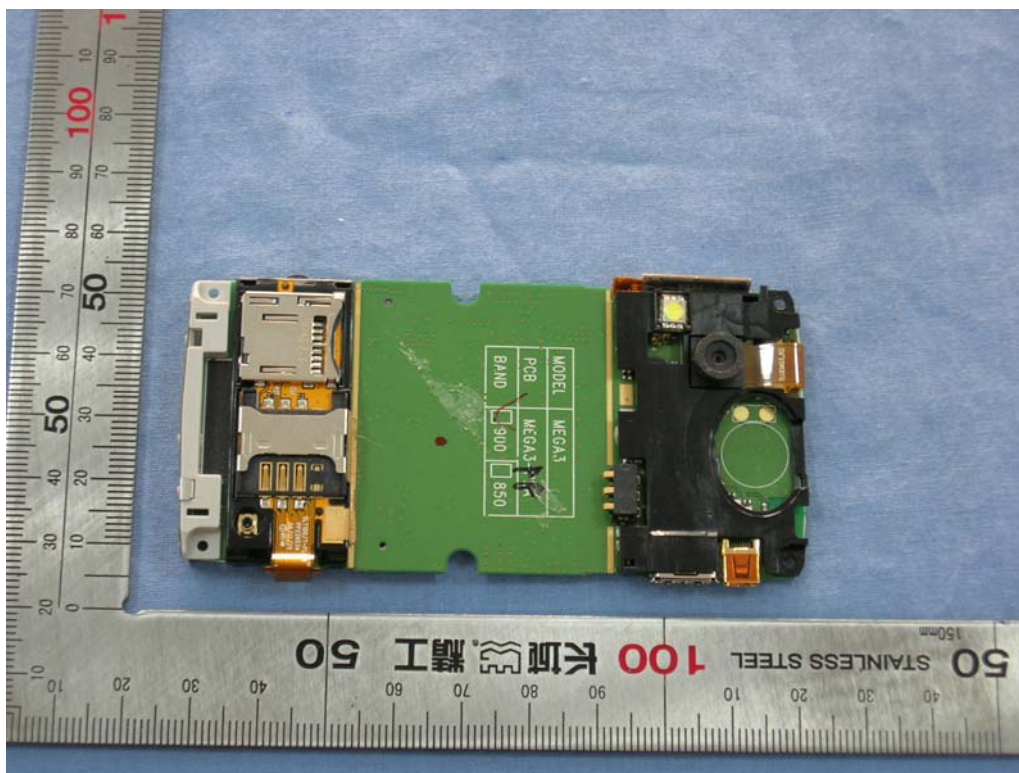

Front view of the internal structure

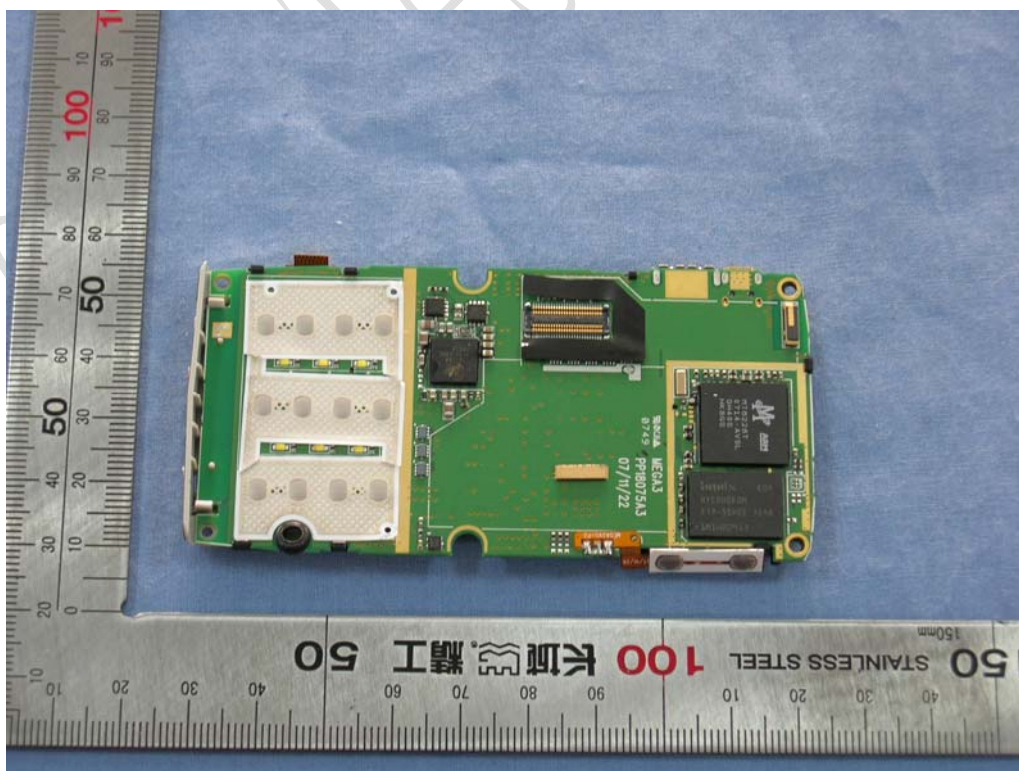

Back view of the internal structure



Face view of internal structure of adaptor



back view of internal structure of adaptor

ANNEX C Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

———— The End of this Report ————

CTL Test Report