

FCC Part 22H & 24E Test Report

FCC ID:RVU-ZJ-6000

Product Name:	Handheld POS Terminal
Trademark:	N/A
Model Name :	ZJ-6000 POS-6000
Prepared For :	SHENZHEN ZIJIANG ELECTRONICS CO., LTD
Address :	4 Floor of No.2 Building of Donglongxing Science Park, Huaning Road, Dalang Street, Longhua Distric Shenzhen China 518110
Prepared By :	Shenzhen BCTC Testing Co., Ltd.
Address :	BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Test Date:	Jun. 11, 2020 – Aug. 04, 2020
Date of Report :	Aug. 05, 2020
Report No.:	BCTC2005000147-4E

TEST RESULT CERTIFICATION**Applicant's name**: SHENZHEN ZIJIANG ELECTRONICS CO., LTD

Address: 4 Floor of No.2 Building of Donglongxing Science Park, Huaning Road, Dalang Street, Longhua Distric Shenzhen China 518110

Manufacture's Name: SHENZHEN ZIJIANG ELECTRONICS CO., LTD

Address: 4 Floor of No.2 Building of Donglongxing Science Park, Huaning Road, Dalang Street, Longhua Distric Shenzhen China 518110

Product description

Product name: Handheld POS Terminal

Trademark: N/A

Model and/or type reference : ZJ-6000
POS-6000**Standards**: FCC Part 22H & 24E

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer): Willem Wang



Reviewer(Supervisor): Eric Yang



Approved(Manager): Zero Zhou

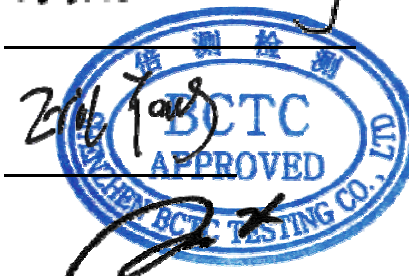


Table of Contents**page**

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS.....	6
1.3TEST METHODOLOGY	6
1.4TEST FACILITY	6
1.5 EUT SETUP AND TEST MODE	7
1.6 MEASUREMENT UNCERTAINTY	9
1.7 TEST EQUIPMENT LIST AND DETAILS	10
2. SUMMARY OF TEST RESULTS.....	12
3. RF OUTPUT POWER.....	13
3.1 STANDARD APPLICABLE	13
3.2TEST PROCEDURE.....	13
3.3ENVIRONMENTAL CONDITIONS.....	13
3.4SUMMARY OF TEST RESULTS/PLOTS	14
4. PEAK-TO-AVERAGE RATIO(PAR) OF TRANSMITTER	22
4.1 STANDARD APPLICABLE	22
4.2 TEST PROCEDURE	22
4.3 ENVIRONMENTAL CONDITIONS	22
4.4SUMMARY OF TEST RESULTS.....	23
WCDMA BAND 2 MIDDLE CHANNEL:	24
5. EMISSION BANDWIDTH.....	25
5.1 STANDARD APPLICABLE	25
5.2TEST PROCEDURE.....	25
5.3ENVIRONMENTAL CONDITIONS.....	25
5.4SUMMARY OF TEST RESULTS/PLOTS	26
6. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL	46
6.1 STANDARD APPLICABLE	46
6.2TEST PROCEDURE.....	46
6.3ENVIRONMENTAL CONDITIONS.....	46
6.4SUMMARY OF TEST RESULTS/PLOTS	47
7. SPURIOUS RADIATED EMISSIONS	95
7.1STANDARD APPLICABLE	95
7.2TEST PROCEDURE.....	95
7.3ENVIRONMENTAL CONDITIONS.....	95
7.4SUMMARY OF TEST RESULTS/PLOTS	95
8. FREQUENCY STABILITY	100
8.1 STANDARD APPLICABLE	100
8.2TEST PROCEDURE.....	100
8.3ENVIRONMENTAL CONDITIONS.....	100
8.4SUMMARY OF TEST RESULTS/PLOTS	101
9. EUT PHOTO	111
10. EUT TEST PHOTO	112

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT:	
Equipment	Handheld POS Terminal
Trade Name	N/A
Model Name	ZJ-6000 POS-6000
Model Difference	All the model are the same circuit and RF module, except model names.
Ratings	DC3.7V
Connecting I/O Port(s)	Please refer to the User's Manual
Note: The test data is gathered from a production sample provided by the manufacturer.	

Technical Characteristics of EUT:	
2G	
Support Networks:	GSM, GPRS, EGPRS
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS/ EGPRS 850: 824~849MHz GSM/GPRS/ EGPRS 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS/ EGPRS 850: 869~894MHz GSM/GPRS/ EGPRS 1900: 1930~1990MHz
MaxRF Output Power:	GSM850: 32.71dBm, GSM1900: 29.62dBm EDGE850: 26.98dBm, EDGE1900: 29.91dBm
Type of Emission:	GSM850: 247KGXW, GSM1900: 247KGXW EDGE850: 254KG7W, EDGE1900: 246KG7W
Type of Modulation:	GMSK, 8PSK
Type of Antenna:	FPC Antenna
Antenna Gain:	GSM850: 0.05dBi; GSM1900: 0.6dBi
GPRS/EDGE Class:	Class 12
3G	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 2, WCDMA Band 5
Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 5: 869~894MHz
RF Output Power:	WCDMA Band 2: 22.17dBm, WCDMA Band 5: 22.43dBm
Type of Emission:	WCDMA Band 2: 4M22F9W WCDMA Band 5: 4M22F9W
Type of Modulation:	BPSK
Antenna Type:	FPC Antenna
Antenna Gain:	WCDMA Band 2: 0.8dBi, WCDMA Band 5: 0.05dBi

1.2 Test Standards

The following report is prepared on behalf of the Michley Electronics Inc.in accordance withFCC Part 2 subpart J, FCC Part 22 subpart H and FCC Part 24 subpart of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 2 subpart J, FCC Part 22 subpart H and FCC Part 24 subpart of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3Test Methodology

All measurements contained in this report were conducted withANSI/TIA-603-D: 2010 andANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.The measurement guide KDB 971168 D01 Power Meas License Digital Systems v03r01 shall be performed also.

1.4Test Facility

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

Shenzhen BCTC Testing Co., Ltd.

Add. : BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest

possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	GSM 850	Low, Middle, High Channels
TM2	GPRS 850	Low, Middle, High Channels
TM3	GSM 1900	Low, Middle, High Channels
TM4	GPRS 1900	Low, Middle, High Channels
TM5	WCDMA Band 5	Low, Middle, High Channels
TM6	HSDPA Band 5	Low, Middle, High Channels
TM7	HSUPA Band 5	Low, Middle, High Channels
TM8	WCDMA Band 2	Low, Middle, High Channels
TM9	HSDPA Band 2	Low, Middle, High Channels
TM10	HSUPA Band 2	Low, Middle, High Channels

Testing Configure

Support Band	Support Standard	Channel Frequency	Channel Number
GSM 850	GSM/GPRS	824.2 MHz	128
		836.6 MHz	190
		848.8 MHz	251
PCS 1900	GSM/GPRS	1850.2 MHz	512
		1880.0 MHz	661
		1909.8 MHz	810
WCDMA Band 5	WCDMA/HSDPA/HSUPA	826.4 MHz	4132
		836.6 MHz	4183
		846.6 MHz	4233
WCDMA Band 2	WCDMA/HSDPA/HSUPA	1852.4 MHz	9262
		1880.0 MHz	9400
		1907.6 MHz	9538

Note: the transmitter has been tested on the communications mode of GSM, GPRS, WCDMA, HSDPA, HSUPA compliance test and record the worst case.

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/
/	/	/	/

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	$U=4.3\text{dB}$
2	3m chamber Radiated spurious emission(1GHz-18GHz)	$U=4.5\text{dB}$
3	3m chamber Radiated spurious emission(18GHz-40GHz)	$U=3.34\text{dB}$
4	Conducted Adjacent channel power	$U=1.38\text{dB}$
5	Conducted output power uncertainty Above 1G	$U=1.576\text{dB}$
6	Conducted output power uncertainty below 1G	$U=1.28\text{dB}$
7	humidity uncertainty	$U=5.3\%$
8	Temperature uncertainty	$U=0.59^{\circ}\text{C}$

1.7 Test Equipment List and Details

For radiated emission test

tem	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45109572	Jun. 08, 2020	Jun. 07, 2021
2	Test Receiver (9kHz-7GHz)	R&S	ESR7	101154	Jun. 08, 2020	Jun. 07, 2021
3	Bilog Antenna (30MHz-3GHz)	SCHWARZBEC K	VULB9163	VULB9163-942	Jun. 08, 2020	Jun. 07, 2021
4	Horn Antenna (1GHz-18GHz)	SCHWARZBEC K	BBHA9120D	1541	Jun. 10, 2020	Jun. 09, 2021
5	Horn Antenna (18GHz-40GHz)	SCHWARZBEC K	BBHA9170	822	Jun. 10, 2020	Jun. 09, 2021
6	Amplifier (9KHz-6GHz)	SCHWARZBEC K	BBV9744	9744-0037	Jun. 04, 2020	Jun. 03, 2021
7	Amplifier (0.5GHz-18GHz)	SCHWARZBEC K	BBV9718	9718-309	Jun. 04, 2020	Jun. 03, 2021
8	Amplifier (18GHz-40GHz)	MITEQ	TTA1840-35-H G	2034381	Jun. 08, 2020	Jun. 07, 2021
9	Loop Antenna (9KHz-30MHz)	SCHWARZBEC K	FMZB1519B	014	Jun. 08, 2020	Jun. 07, 2021
10	RF cables1 (9kHz-30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-0008	Jun. 08, 2020	Jun. 07, 2021
11	RF cables2 (30MHz-1GHz)	Huber+Suhnar	30MHz-1GHz	1486150	Jun. 08, 2020	Jun. 07, 2021
12	RF cables3 (1GHz-40GHz)	Huber+Suhnar	1GHz-40GHz	1607106	Jun. 08, 2020	Jun. 07, 2021
13	Power Metter	Keysight	E4419B	\	Jun. 08, 2020	Jun. 07, 2021
14	Power Sensor (AV)	Keysight	E9300A	\	Jun. 08, 2020	Jun. 07, 2021
15	Signal Analyzer 20kHz-26.5GHz	KEYSIGHT	N9020A	MY49100060	Jun. 04, 2020	Jun. 03, 2021
16	Spectrum Analyzer 9kHz-40GHz	Agilent	FSP40	100363	Jun. 08, 2020	Jun. 07, 2021
17	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
18	Software	Frad	EZ-EMC	FA-03A2 RE	\	\

For conducted emission test

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESR3	102075	Jun. 08, 2020	Jun. 07, 2021
2	LISN	SCHWARZBECK	NSLK8127	8127739	Jun. 04, 2020	Jun. 03, 2021
3	LISN	R&S	ENV216	101375	Jun. 04, 2020	Jun. 03, 2021
4	RF cables	Huber+Suhnar	9kHz-30MHz	B1702988-0008	Jun. 08, 2020	Jun. 07, 2021
5	Software	Frad	EZ-EMC	EMC-CON 3A1	\	\

RF Conducted Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Signal Analyzer	KEYSIGHT	N9020A	MY49100060	Jun. 04, 2020	Jun. 03, 2021
2	Universal Radio Communi cation Tester	R&S	CMU200	119435	Jun. 04, 2020	Jun. 03, 2021
3	RF cables	Huber+Suhnar	30MHz-1GHz	F02-170707-010	\	\
4	RF cables	Huber+Suhnar	1GHz-40GHz	SFL402-105FLEX		
5	D.C. Power Supply	LongWei	TPR-6405D	\	\	\

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§1.1307, §2.1093	RF Exposure	Compliant
§22.913 (a), §24.232 (c),	RF Output Power	Compliant
§24.51,	Peak-to-average Ratio(PAR) of Transmitter	Compliant
§22.917 (b), §24.238 (b),	Emission Bandwidth	Compliant
§22.917 (a), §24.238 (a)	Spurious Emissions at Antenna Terminal	Compliant
§22.917 (a), §24.238 (a)	Spurious Radiation Emissions	Compliant
§22.917 (a), §24.238 (a),	Out of Band Emissions	Compliant
§22.355, §24.235	Frequency Stability	Compliant

3. RF Output Power

3.1 Standard Applicable


According to §22.913(a)(2), The ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232 (c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d)(4), Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

3.2 Test Procedure

Conducted output power test method:



Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

3.3 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

3.4 Summary of Test Results/Plots

Max. Radiated Power

ERP For GSM Mode GSM850

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
824.2	30.15	1.5	0	H	1.5	0	28.65	38.45
824.2	30.22	1.5	0	V	1.5	0	28.72	38.45
Middle Channel								
836.4	29.71	1.5	0	H	1.5	0	28.21	38.45
836.4	28.55	1.5	0	V	1.5	0	27.05	38.45
High Channel								
848.8	28.71	1.5	0	H	1.5	0	27.21	38.45
848.8	28.65	1.5	0	V	1.5	0	27.15	38.45

EIRP For GSM Mode PCS1900

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1850.2	22.28	1.5	0	H	1.9	7.7	28.48	33.00
1850.2	22.14	1.5	0	V	1.9	7.7	28.34	33.00
Middle Channel								
1880.0	21.38	1.5	0	H	1.9	7.7	27.58	33.00
1880.0	21.19	1.5	0	V	1.9	7.7	27.39	33.00
High Channel								
1909.8	21.29	1.5	0	H	1.9	7.7	27.49	33.00
1909.8	21.30	1.5	0	V	1.9	7.7	27.50	33.00

ERP For EGPRS Mode GSM850

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
824.2	28.42	1.5	0	H	1.5	0	26.92	38.45
824.2	28.39	1.5	0	V	1.5	0	26.89	38.45
Middle Channel								
836.6	27.85	1.5	0	H	1.5	0	26.92	38.45
836.6	27.64	1.5	0	V	1.5	0	26.89	38.45
High Channel								
848.8	27.81	1.5	0	H	1.5	0	26.31	38.45
848.8	27.97	1.5	0	V	1.5	0	26.47	38.45

EIRP For EGPRS Mode PCS1900

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1850.2	21.98	1.5	0	H	1.9	7.7	28.18	33.00
1850.2	22.17	1.5	0	V	1.9	7.7	28.37	33.00
Middle Channel								
1880.0	21.36	1.5	0	H	1.9	7.7	27.56	33.00
1880.0	22.29	1.5	0	V	1.9	7.7	28.49	33.00
High Channel								
1909.8	21.55	1.5	0	H	1.9	7.7	27.75	33.00
1909.8	20.97	1.5	0	V	1.9	7.7	27.17	33.00

ERP For WCDMA Mode Band 5

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	21.35	1.5	0	H	1.5	0	19.85	38.45
826.4	21.45	1.5	0	V	1.5	0	19.95	38.45
Middle Channel								
836.6	21.87	1.5	0	H	1.5	0	20.37	38.45
836.6	22.09	1.5	0	V	1.5	0	20.59	38.45
High Channel								
846.6	21.69	1.5	0	H	1.5	0	20.19	38.45
846.6	22.47	1.5	0	V	1.5	0	20.97	38.45

ERP For HSDPA Mode Band 5

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	21.33	1.5	0	H	1.5	0	19.83	38.45
826.4	21.45	1.5	0	V	1.5	0	19.95	38.45
Middle Channel								
836.6	20.69	1.5	0	H	1.5	0	19.19	38.45
836.6	21.74	1.5	0	V	1.5	0	20.24	38.45
High Channel								
846.6	20.39	1.5	0	H	1.5	0	18.89	38.45
846.6	21.25	1.5	0	V	1.5	0	19.75	38.45

ERP For HSUPA Mode Band 5

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	21.64	1.5	0	H	1.5	0	20.14	38.45
826.4	21.62	1.5	0	V	1.5	0	20.12	38.45
Middle Channel								
836.6	20.55	1.5	0	H	1.5	0	19.05	38.45
836.6	21.97	1.5	0	V	1.5	0	20.47	38.45
High Channel								
846.6	20.77	1.5	0	H	1.5	0	19.27	38.45
846.6	21.05	1.5	0	V	1.5	0	19.55	38.45

EIRP For WCDMA Mode Band 2

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	14.21	1.5	0	H	1.9	7.7	20.41	33
1852.4	14.83	1.5	0	V	1.9	7.7	21.03	33
Middle Channel								
1880.0	14.47	1.5	0	H	1.9	7.7	20.67	33
1880.0	14.98	1.5	0	V	1.9	7.7	21.18	33
High Channel								
1907.6	14.65	1.5	0	H	1.9	7.7	20.85	33
1907.6	14.79	1.5	0	V	1.9	7.7	20.99	33

EIRP For HSDPA Mode Band 2

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	13.96	1.5	0	H	1.9	7.7	20.16	33
1852.4	14.15	1.5	0	V	1.9	7.7	20.35	33
Middle Channel								
1880.0	13.86	1.5	0	H	1.9	7.7	20.06	33
1880.0	14.29	1.5	0	V	1.9	7.7	20.49	33
High Channel								
1907.6	13.85	1.5	0	H	1.9	7.7	20.05	33
1907.6	14.52	1.5	0	V	1.9	7.7	20.72	33

EIRP For HSUPA Mode Band 2

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	13.58	1.5	0	H	1.9	7.7	19.78	33
1852.4	14.17	1.5	0	V	1.9	7.7	20.37	33
Middle Channel								
1880.0	14.06	1.5	0	H	1.9	7.7	20.26	33
1880.0	14.32	1.5	0	V	1.9	7.7	20.52	33
High Channel								
1907.6	13.82	1.5	0	H	1.9	7.7	20.02	33
1907.6	14.21	1.5	0	V	1.9	7.7	20.41	33

Note: Result = Substitute - Cable loss + Antenna Gain

Max. Conducted Output Power

For Cellular Band (GSM850)

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 22.913 Limit (dBm)
GSM	Low Channel	824.2	32.71	38.45
	Middle Channel	836.6	32.67	38.45
	High Channel	848.8	32.53	38.45
GPRS	Low Channel	824.2	32.64	38.45
	Middle Channel	836.6	32.64	38.45
	High Channel	848.8	32.53	38.45
EGPRS	Low Channel	824.2	26.11	38.45
	Middle Channel	836.6	26.31	38.45
	High Channel	848.8	26.98	38.45

For PCS Band (GSM1900)

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 24.232 Limit (dBm)
GSM	Low Channel	1850.2	29.31	33.0
	Middle Channel	1880.0	29.34	33.0
	High Channel	1909.8	29.62	33.0
GPRS	Low Channel	1850.2	29.49	33.0
	Middle Channel	1880.0	29.51	33.0
	High Channel	1909.8	29.63	33.0
EGPRS	Low Channel	1850.2	29.46	33.0
	Middle Channel	1880.0	29.03	33.0
	High Channel	1909.8	29.91	33.0

For WCDMA Band 5

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 22.913 Limit (dBm)
WCDMA	Low Channel	826.4	22.01	38.45
	Middle Channel	836.6	22.43	38.45
	High Channel	846.6	22.09	38.45
HSDPA	Low Channel	826.4	21.03	38.45
	Middle Channel	836.6	21.25	38.45
	High Channel	846.6	21.25	38.45
HSUPA	Low Channel	826.4	20.96	38.45
	Middle Channel	836.6	21.19	38.45
	High Channel	846.6	21.19	38.45

For WCDMA Band 2

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 24.232 Limit (dBm)
WCDMA	Low Channel	1852.4	21.35	33.00
	Middle Channel	1880.0	22.04	33.00
	High Channel	1907.6	22.17	33.00
HSDPA	Low Channel	1852.4	21.08	33.00
	Middle Channel	1880.0	21.19	33.00
	High Channel	1907.6	21.23	33.00
HSUPA	Low Channel	1852.4	21.18	33.00
	Middle Channel	1880.0	21.30	33.00
	High Channel	1907.6	21.19	33.00

4. Peak-to-average Ratio(PAR) of Transmitter

4.1 Standard Applicable


According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

4.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the peak-to-average ratio (PAR) of the transmission was recorded. Record the maximum PAPR level associated with a probability of 0.1%.

Test Configuration for the emission bandwidth testing:

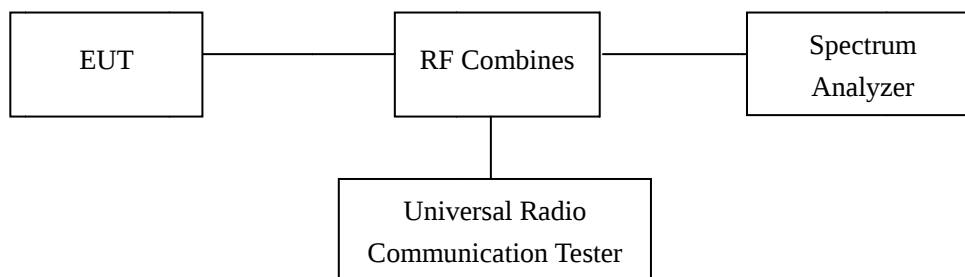

4.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

4.4 Summary of Test Results

Only the worst case was selected to record


For PCS Band

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
GSM	512	1850.2	9.60	13
GPRS	512	1850.2	9.68	13
EGPRS	512	1850.2	12.70	13


For WCDMA Band 2

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	9262	1852.4	2.69	13
HSDPA	9400	1880.0	3.87	13
HSUPA	9400	1880.0	3.80	13

GSM Middle Channel:

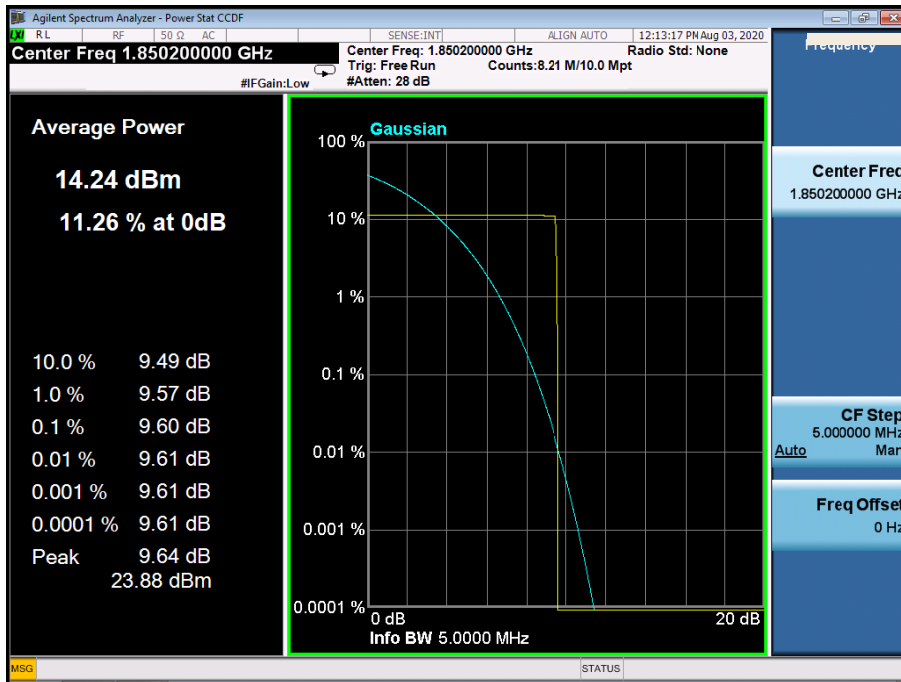

WCDMA Band 2 Middle Channel:

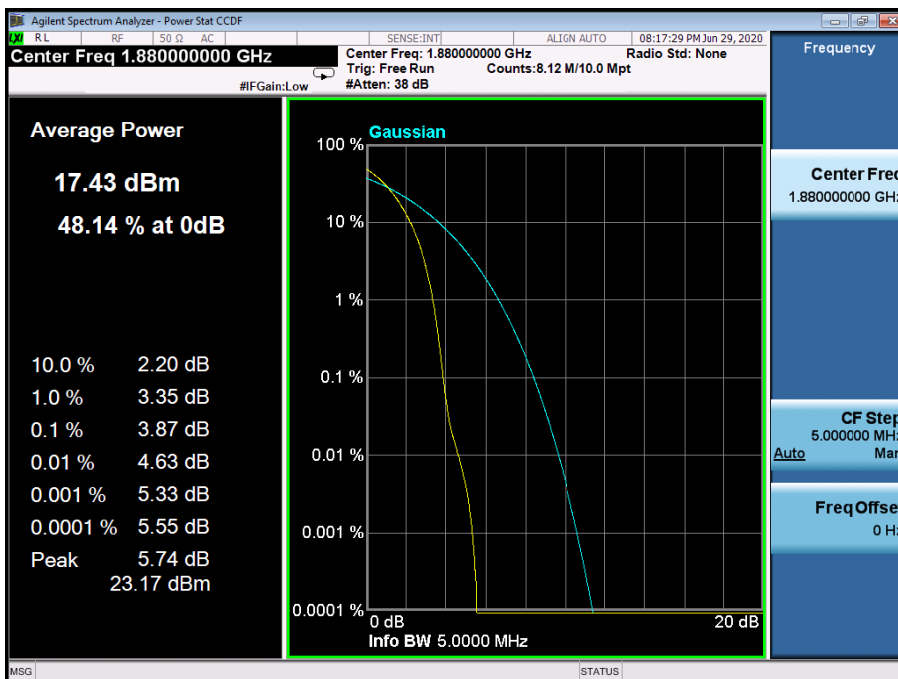

5. Emission Bandwidth

5.1 Standard Applicable

According to §22.917(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


According to §24.238(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §27.53, The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

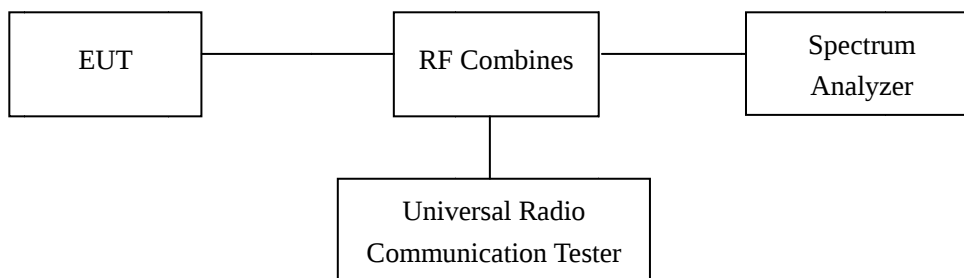

5.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

5.4 Summary of Test Results/Plots

For Cellular Band

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM	128	824.2	244.54	319.4
	190	836.6	246.81	318.7
	251	848.8	243.26	320.6
GPRS	128	824.2	242.97	320.3
	190	836.6	245.72	323.9
	251	848.8	246.41	321.3
EGPRS	128	824.2	250.49	323.1
	190	836.6	254.05	325.6
	251	848.8	247.13	318.6

For PCS Band

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM	512	1850.2	245.25	320.8
	661	1880.0	244.15	321.4
	810	1909.8	246.70	316.1
GPRS	512	1850.2	246.33	322.1
	661	1880.0	245.13	318.5
	810	1909.8	244.34	314.6
EGPRS	512	1850.2	245.97	315.2
	661	1880.0	246.40	317.4
	810	1909.8	245.74	316.7


For Band 5

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA	4132	826.4	4.147	4.683
	4183	836.6	4.161	4.699
	4233	846.6	4.174	4.702
HSDPA	4132	826.4	4.158	4.699
	4183	836.6	4.164	4.707
	4233	846.6	4.162	4.709
HSUPA	4132	826.4	4.166	4.708
	4183	836.6	4.184	4.692
	4233	846.6	4.168	4.697


For Band 2

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA	9262	1852.4	4.180	4.737
	9400	1880.0	4.174	4.727
	9538	1907.6	4.145	4.685
HSDPA	9262	1852.4	4.195	4.721
	9400	1880.0	4.144	4.696
	9538	1907.6	4.168	4.702
HSUPA	9262	1852.4	4.165	4.713
	9400	1880.0	4.176	4.731
	9538	1907.6	4.150	4.714


For Cellular Band
GSM Low Channel

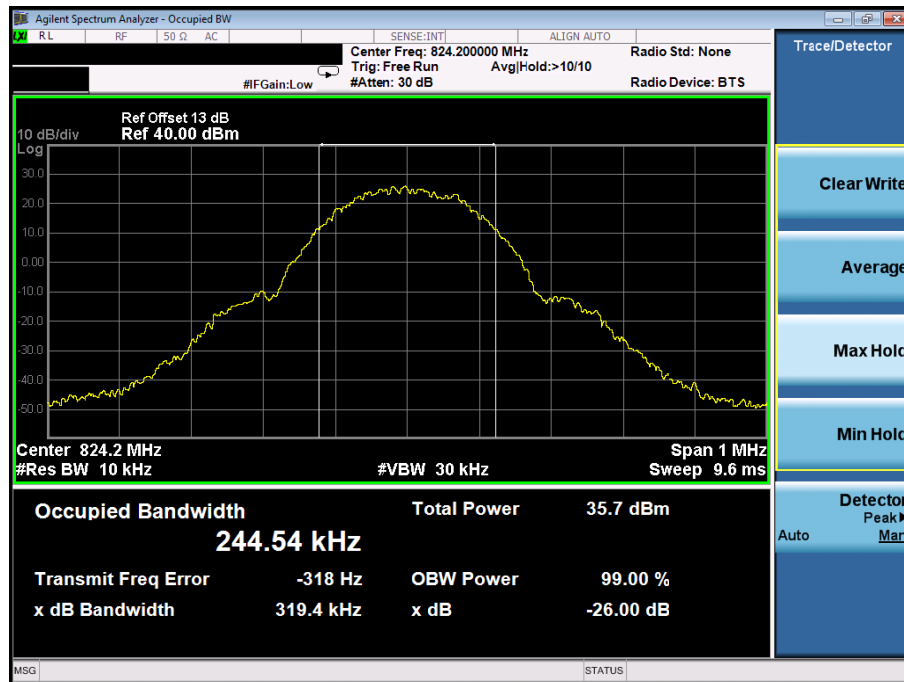


GSM Middle Channel

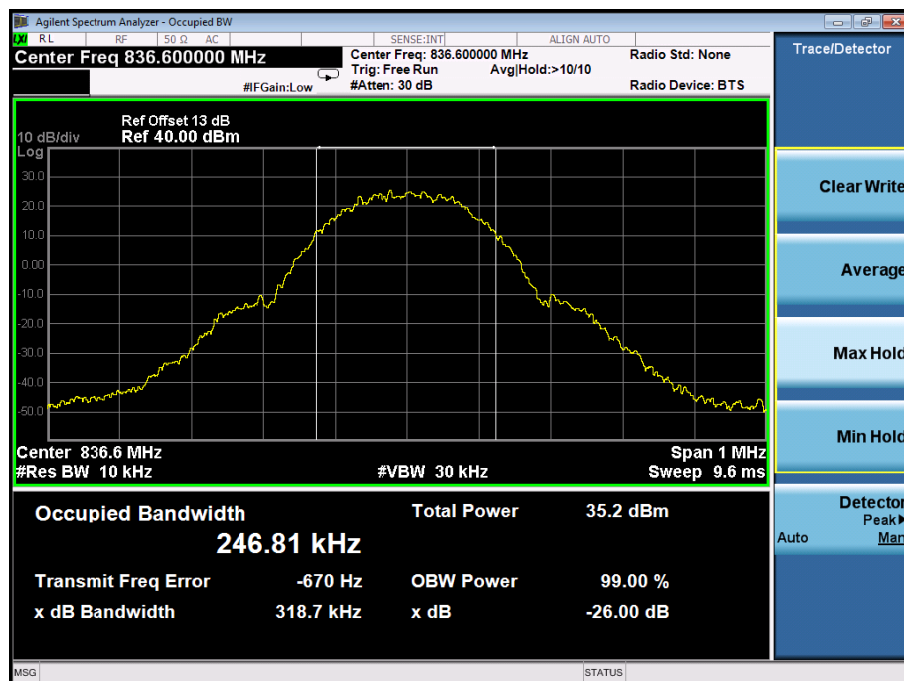


GSM High channel

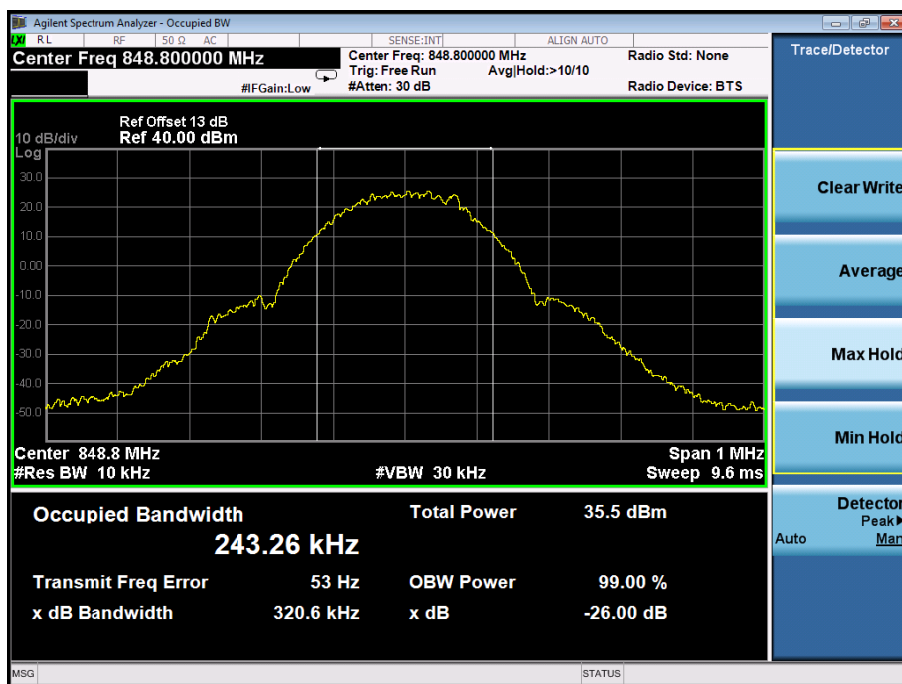


GPRS Low Channel

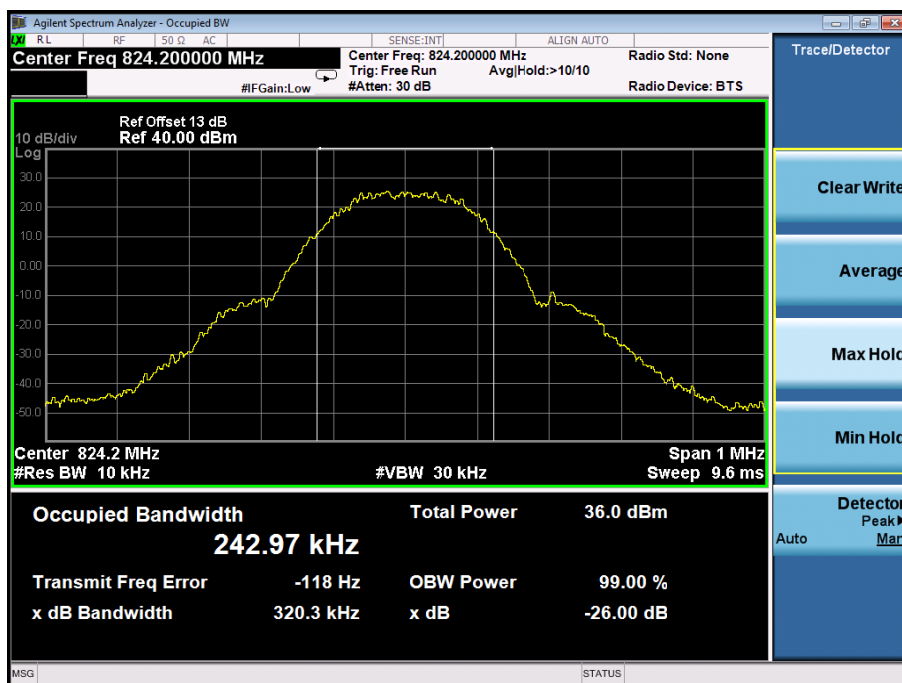


GPRS Middle Channel

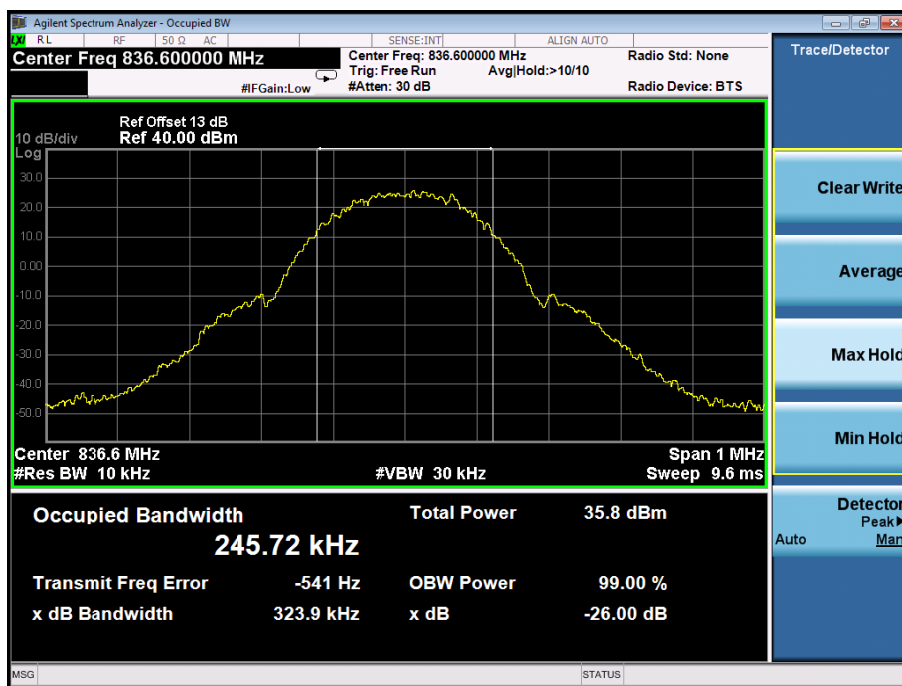


GPRS High Channel

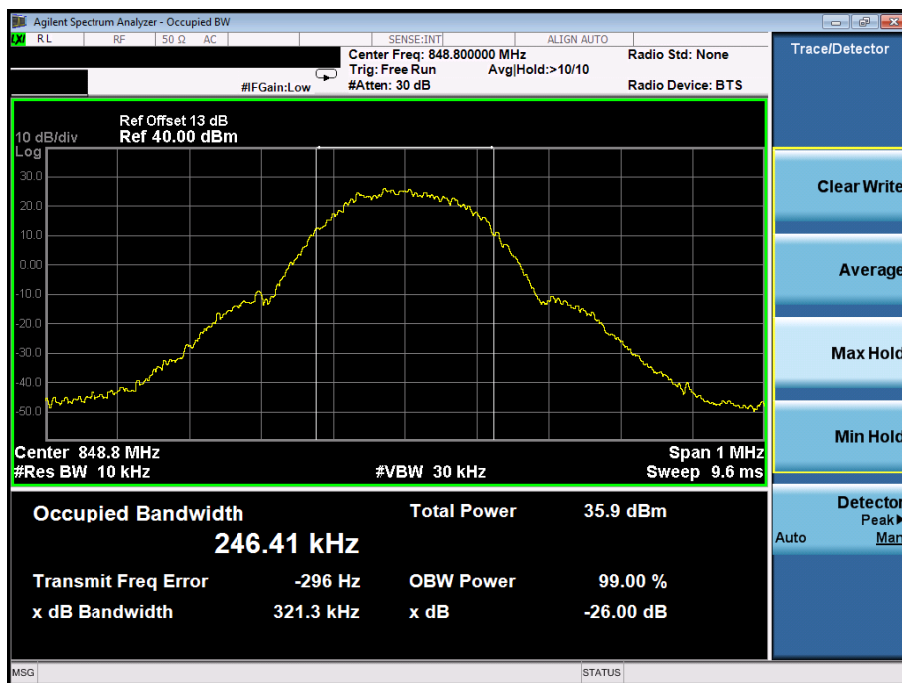


EGPRS Low Channel

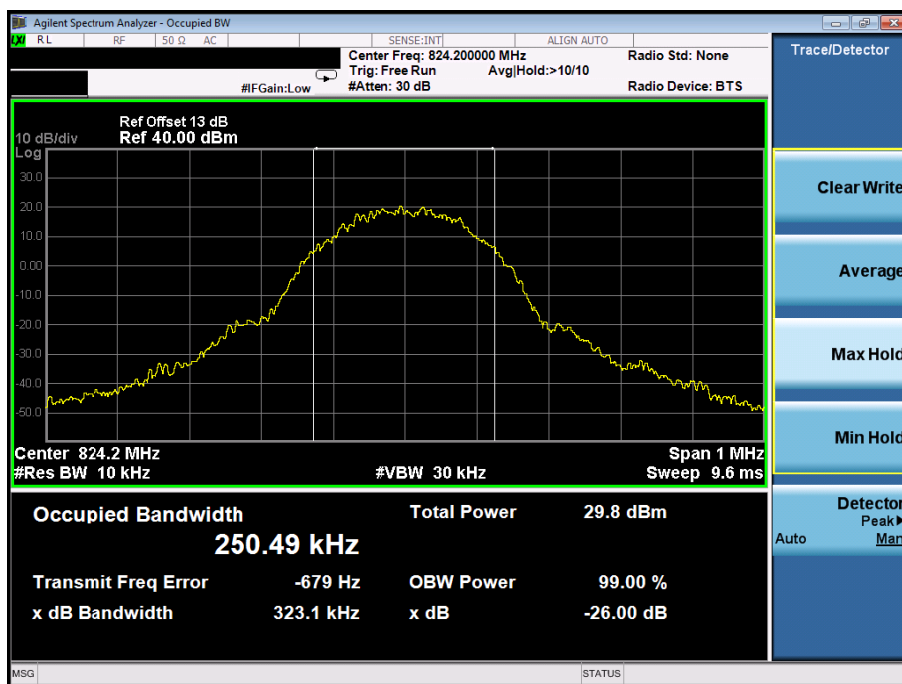


EGPRS Middle Channel

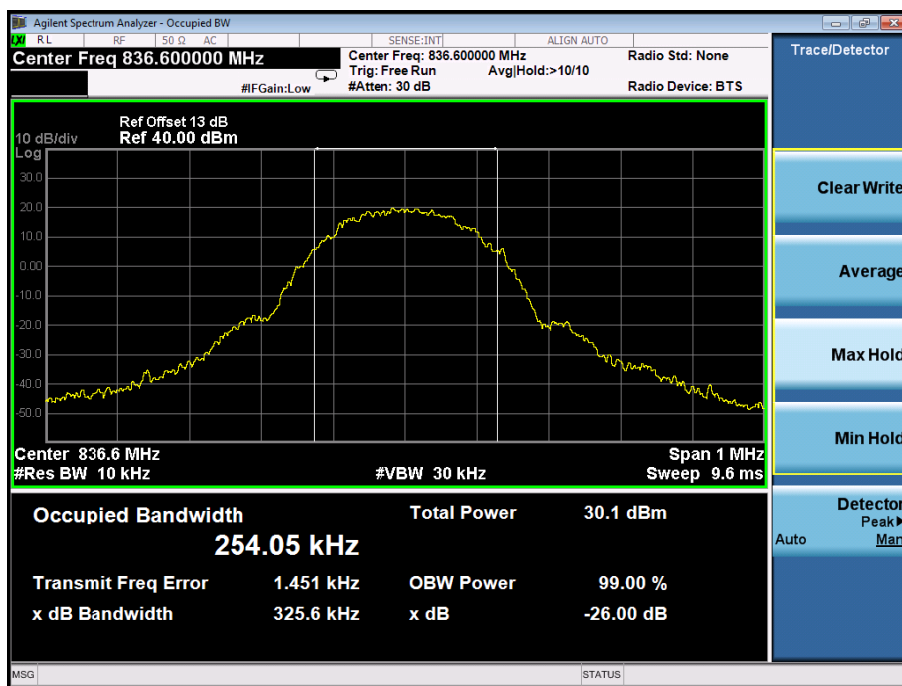


EGPRS High Channel

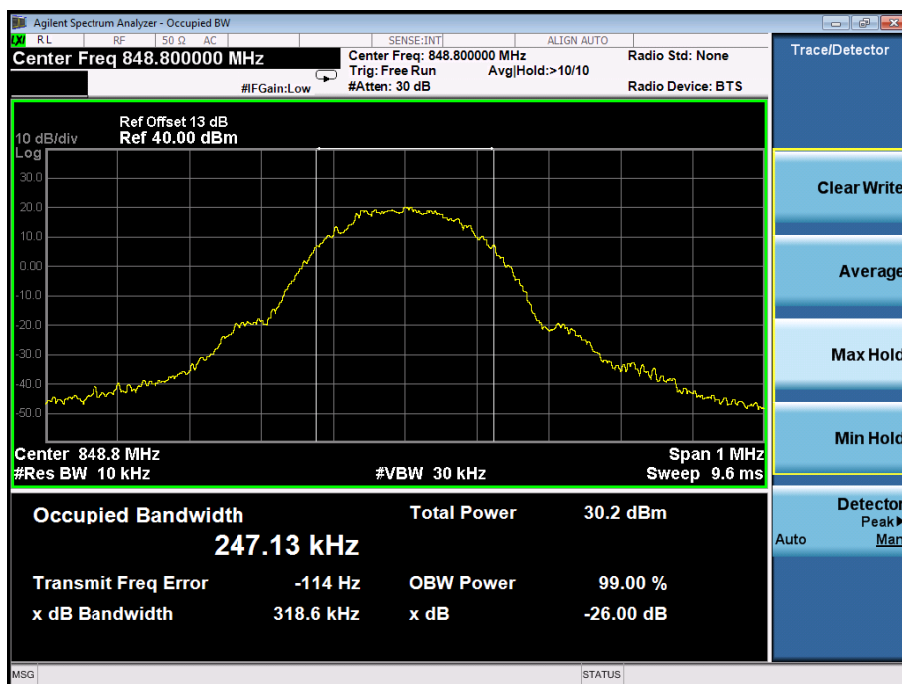


For PCS Band GSM Low Channel

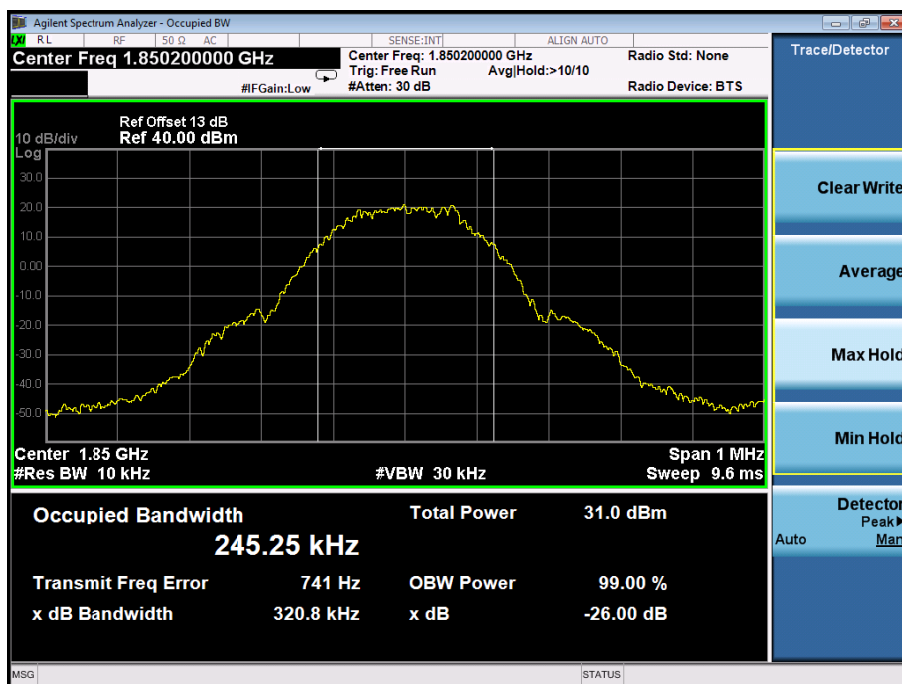


GSM Middle Channel

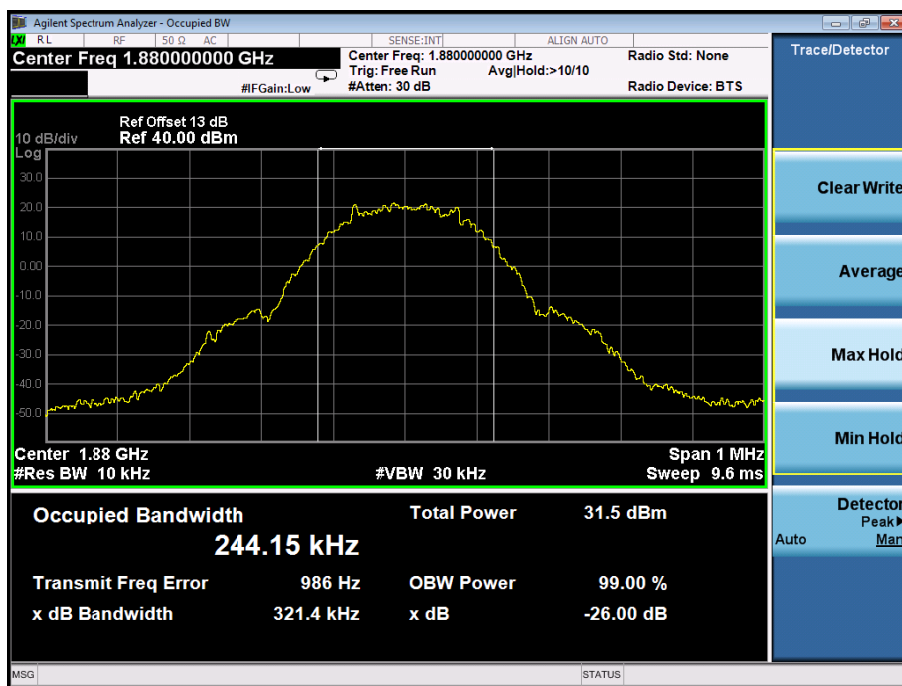


GSM High channel

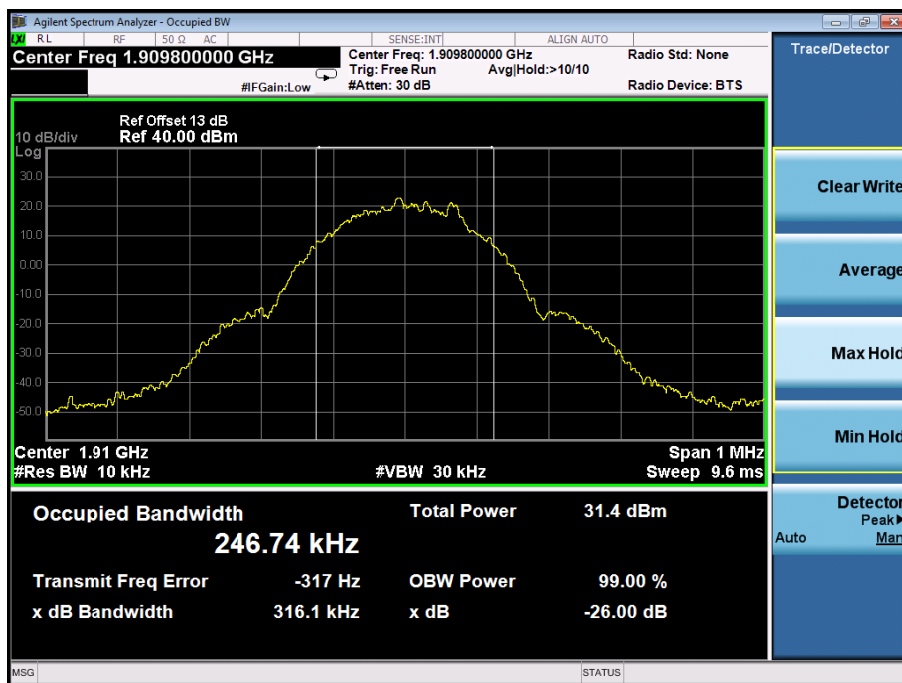


GPRS Low Channel

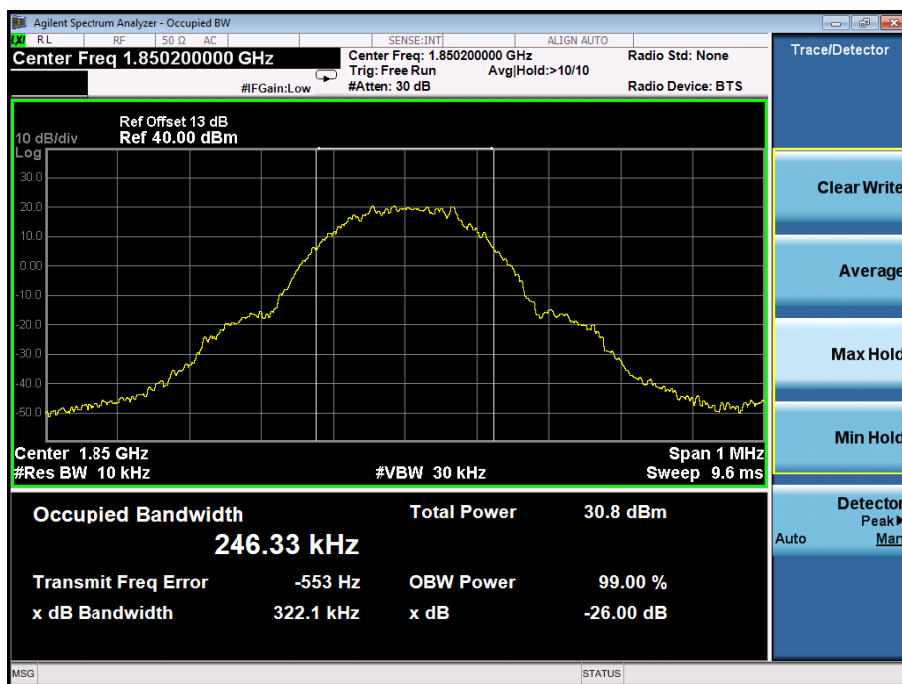


GPRS Middle Channel

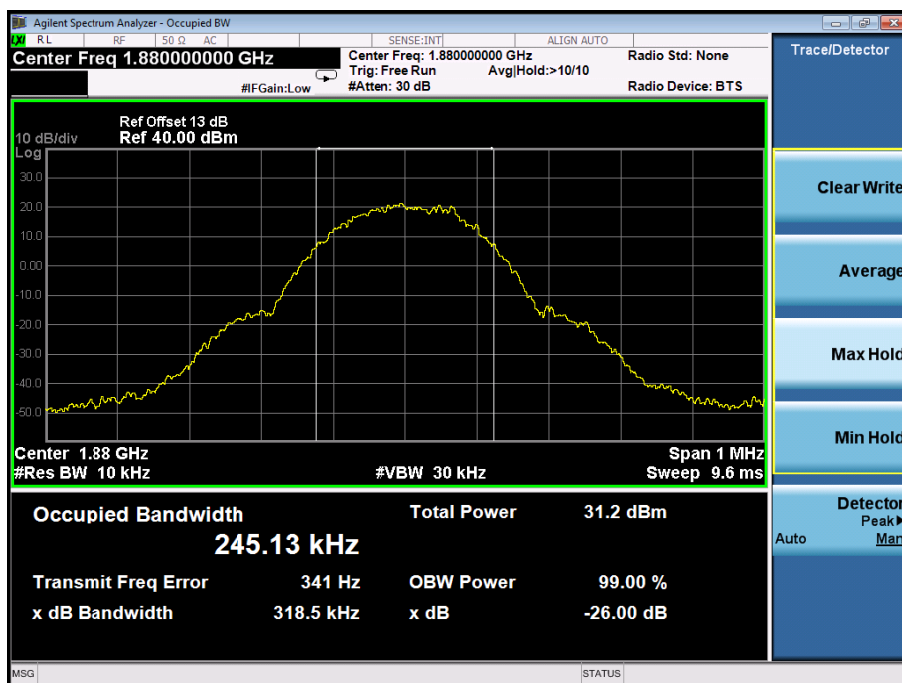


GPRS High Channel

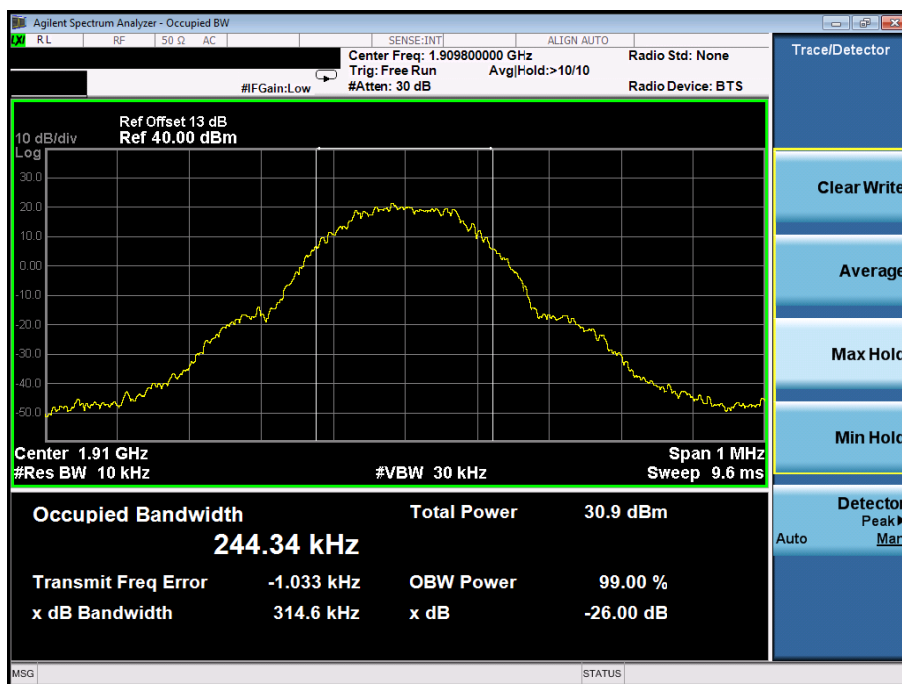


EGPRS Low Channel

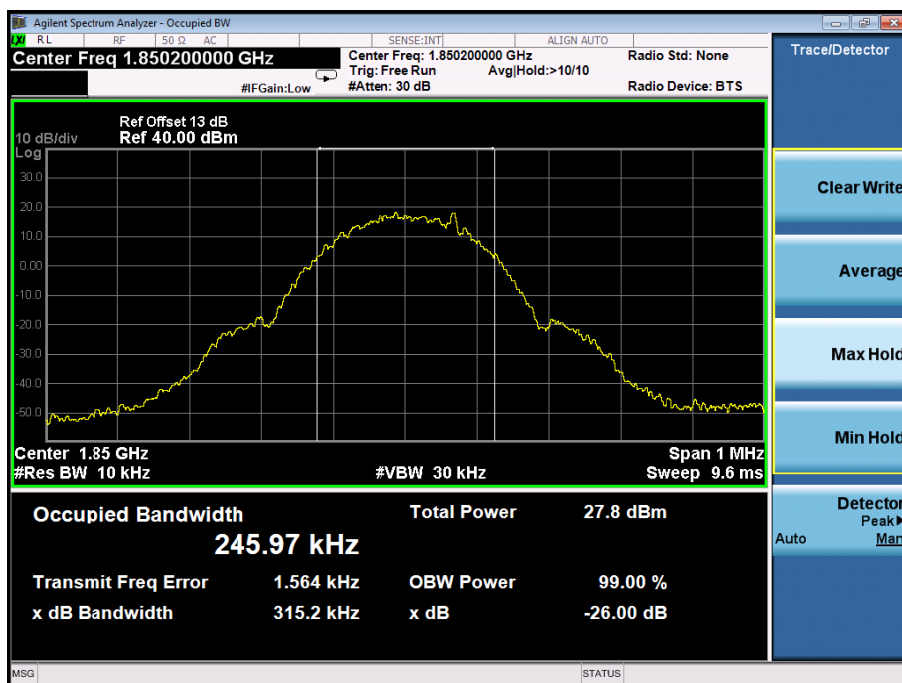


EGPRS Middle Channel

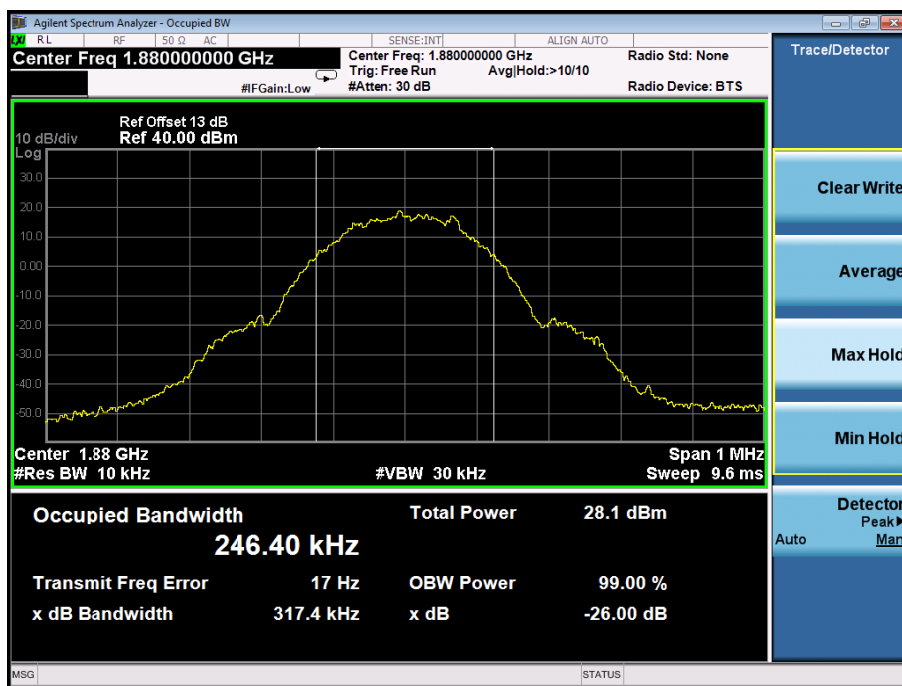


EGPRS High Channel

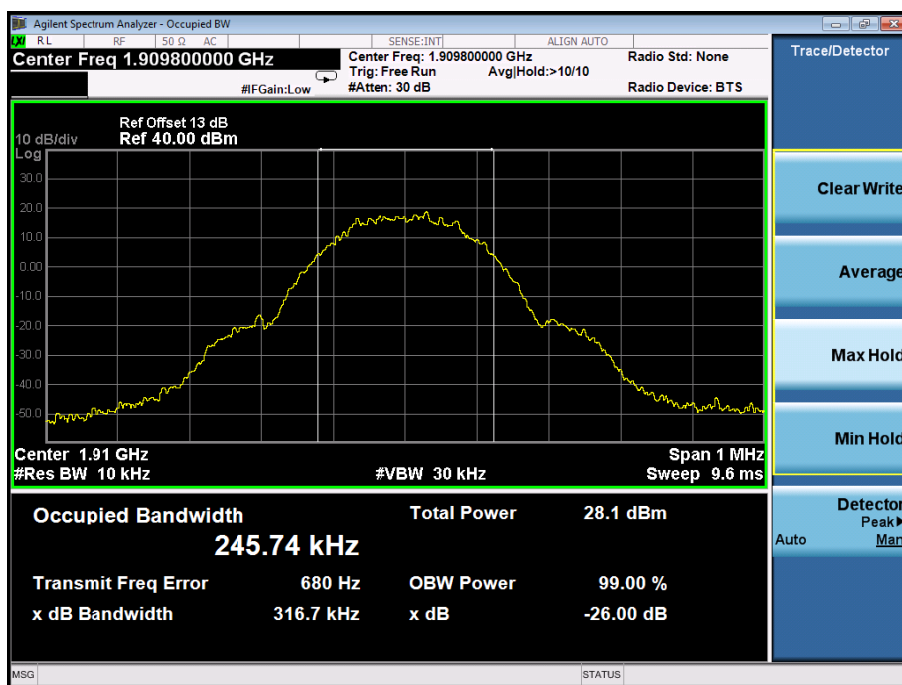


For Band V
WCDMA Low Channel

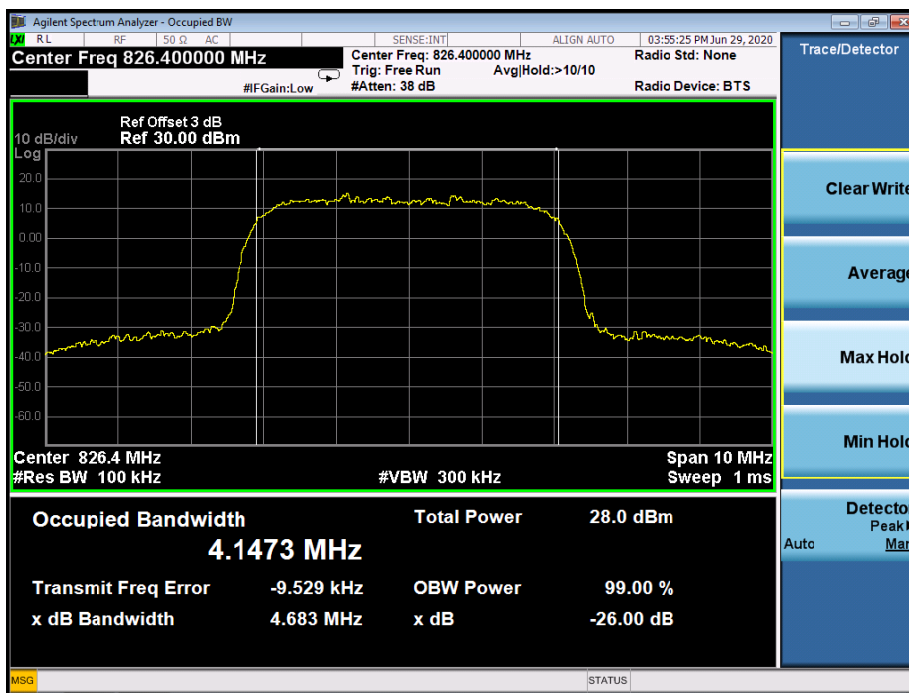


WCDMA Middle Channel

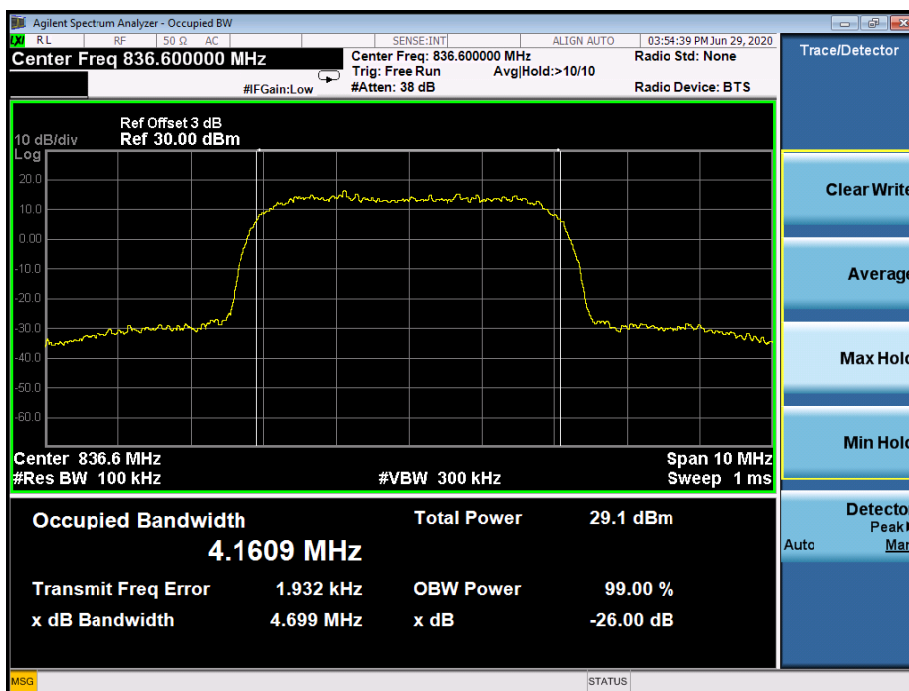


WCDMA High Channel

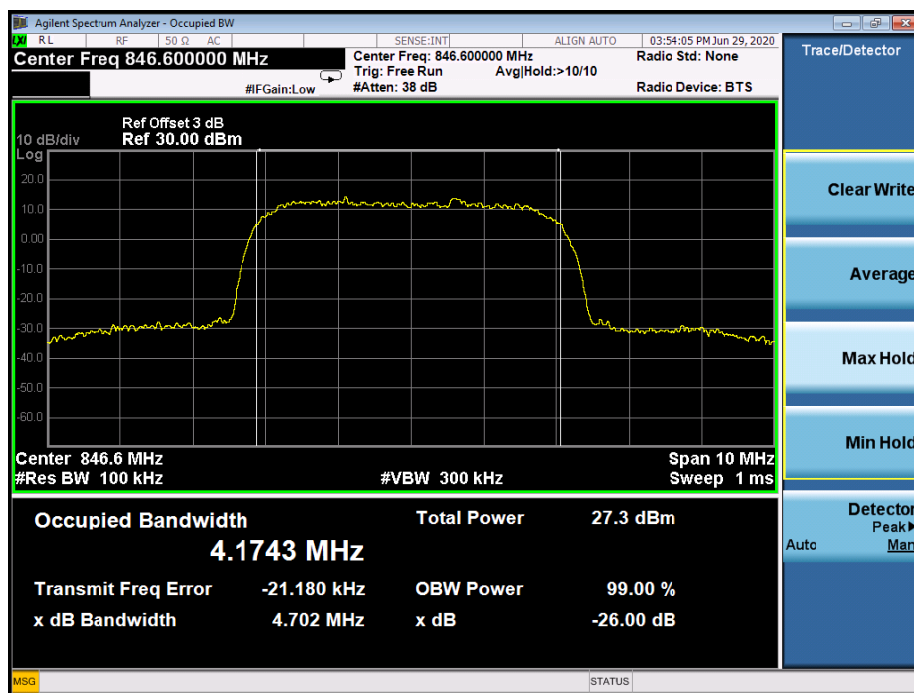


HSDPA Low Channel

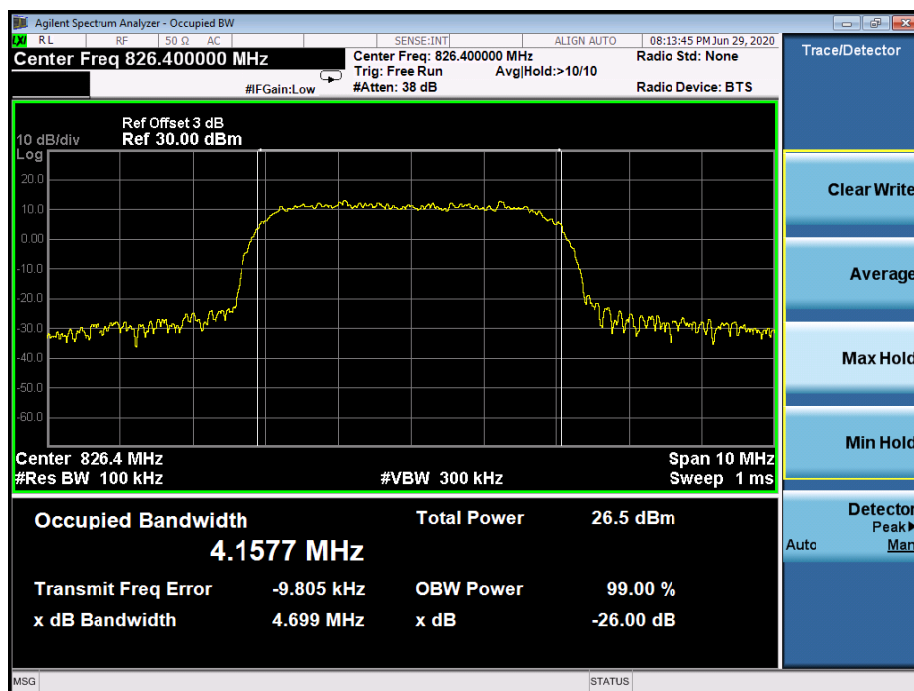


HSDPA Middle Channel

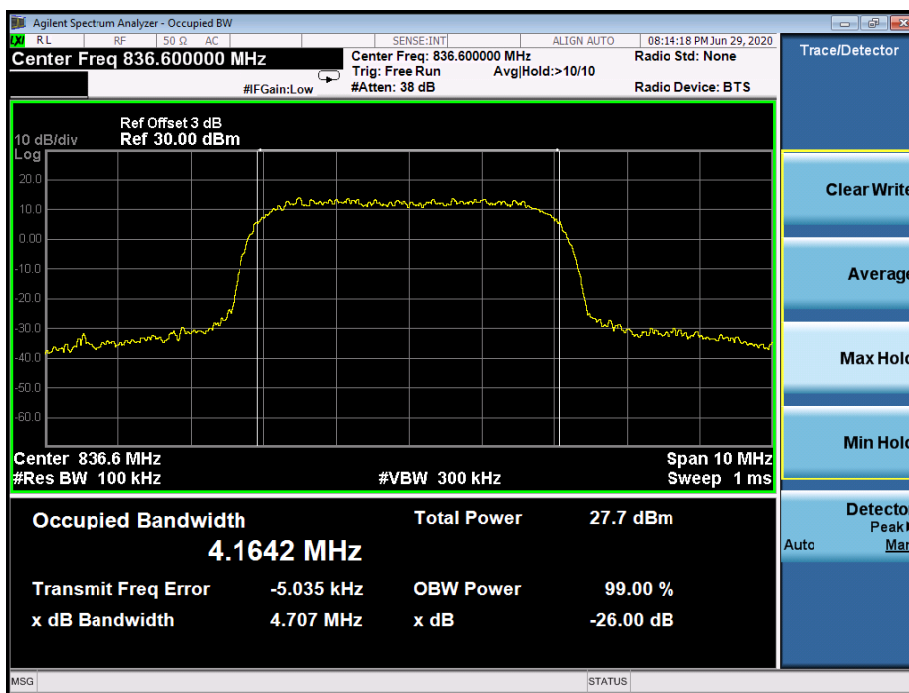


HSDPA High Channel

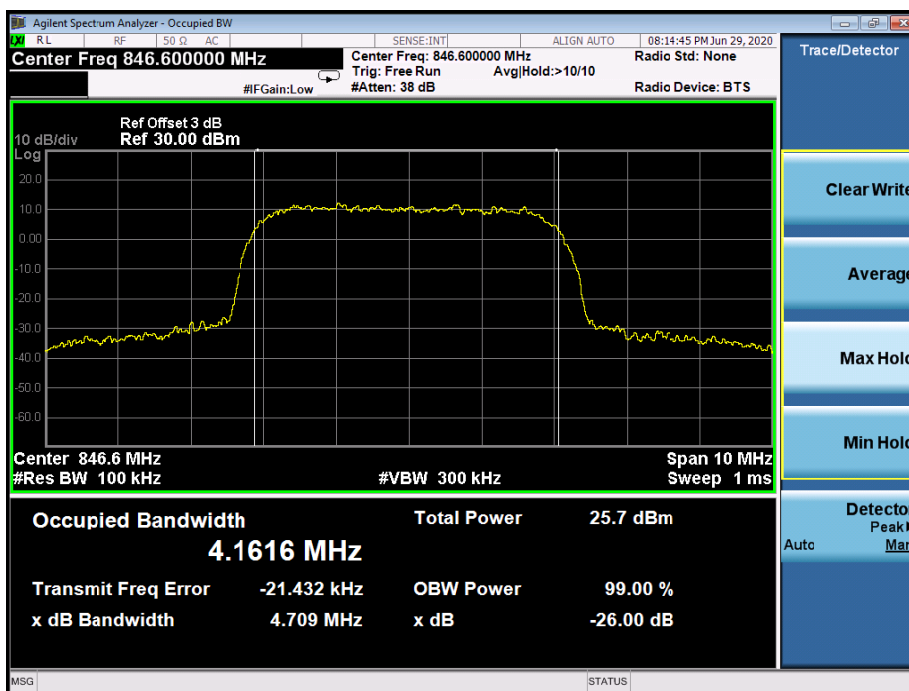


HSUPA Low Channel

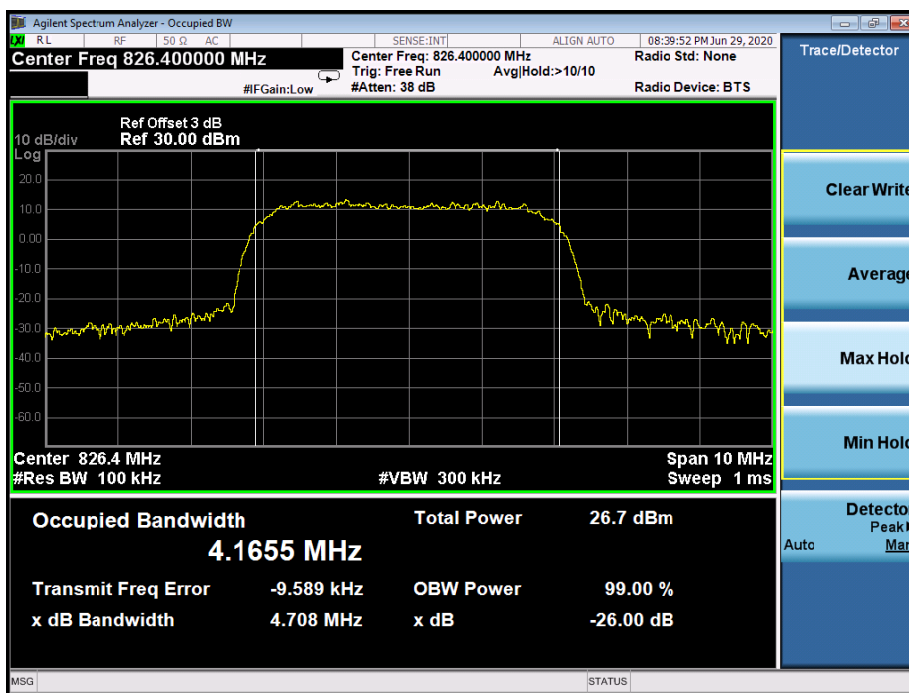

HSUPA Middle Channel

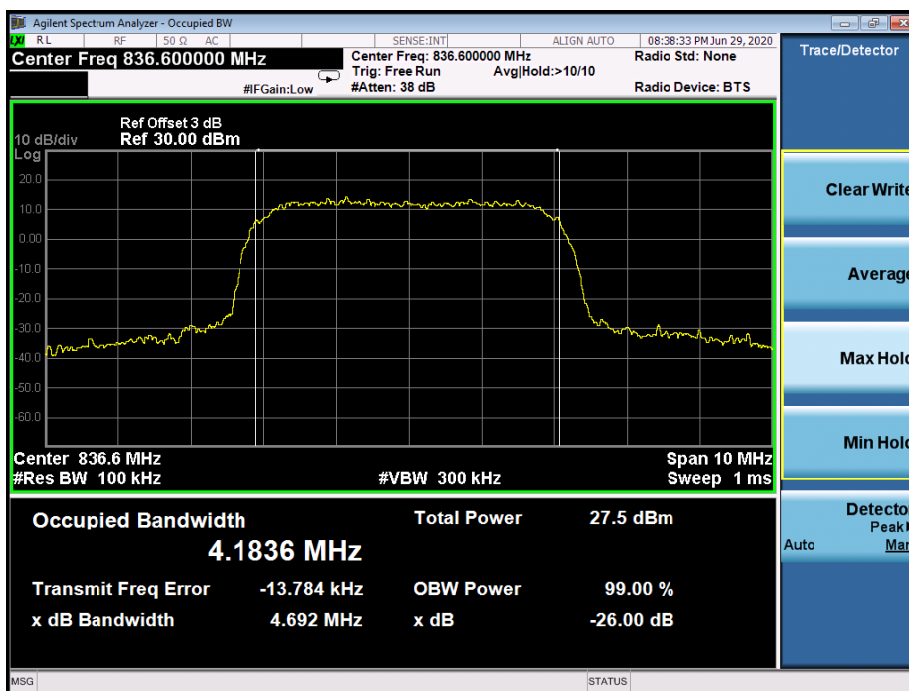


HSUPA High Channel

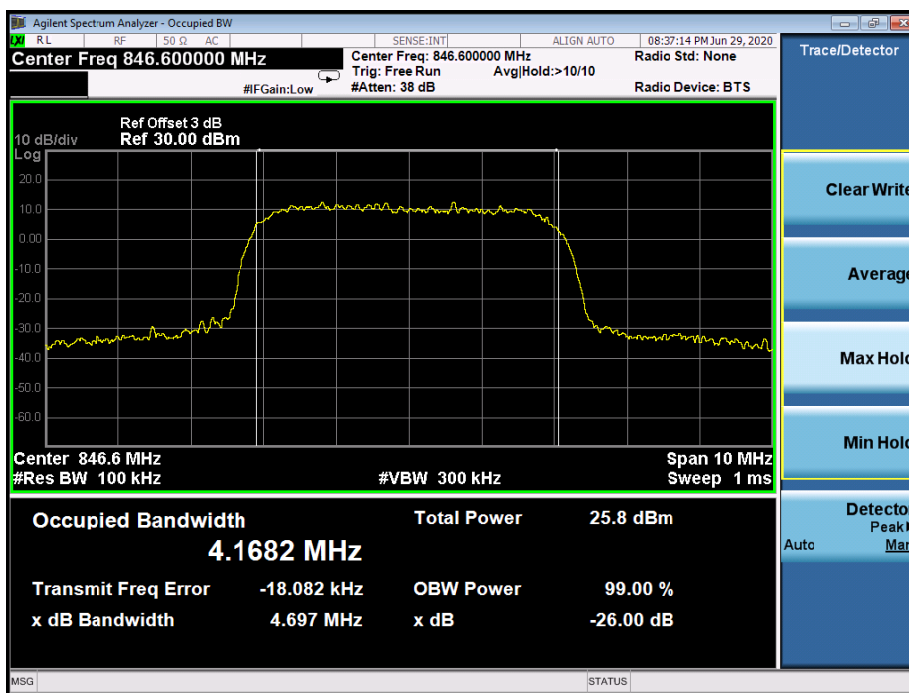


For Band II


WCDMA Low Channel

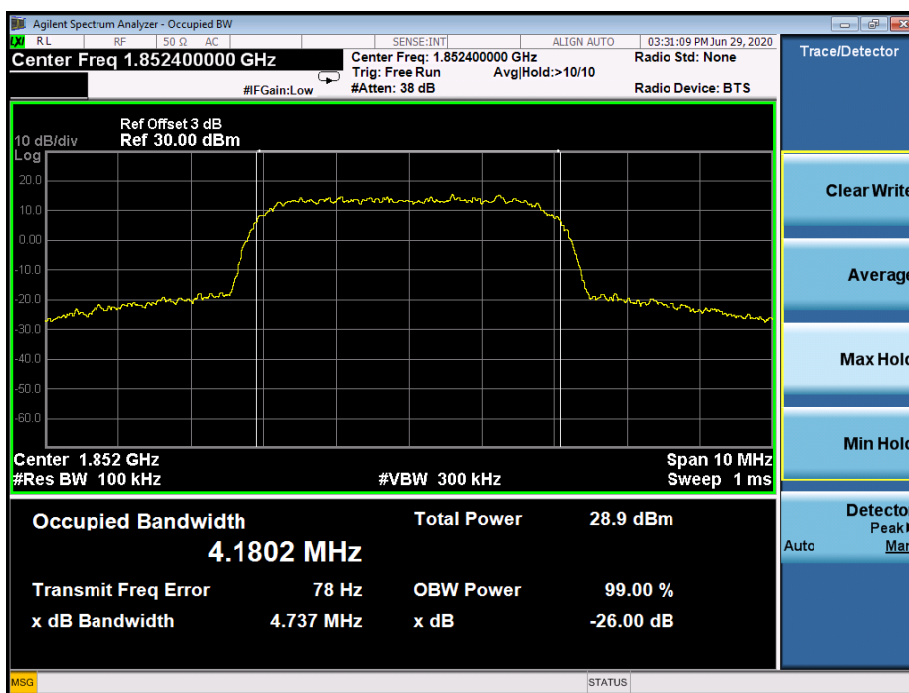


WCDMA Middle Channel

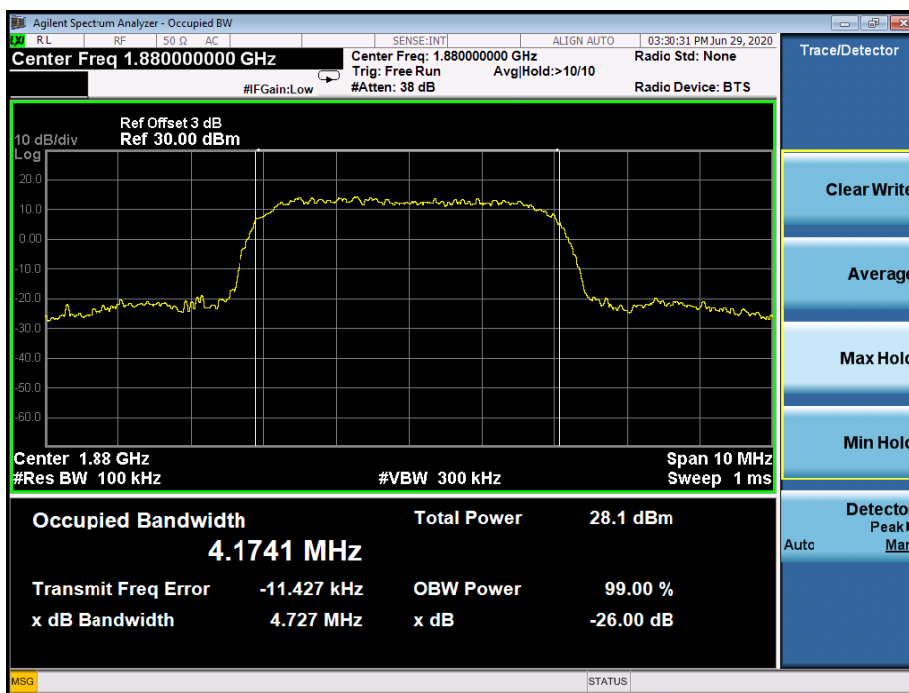


WCDMA High Channel

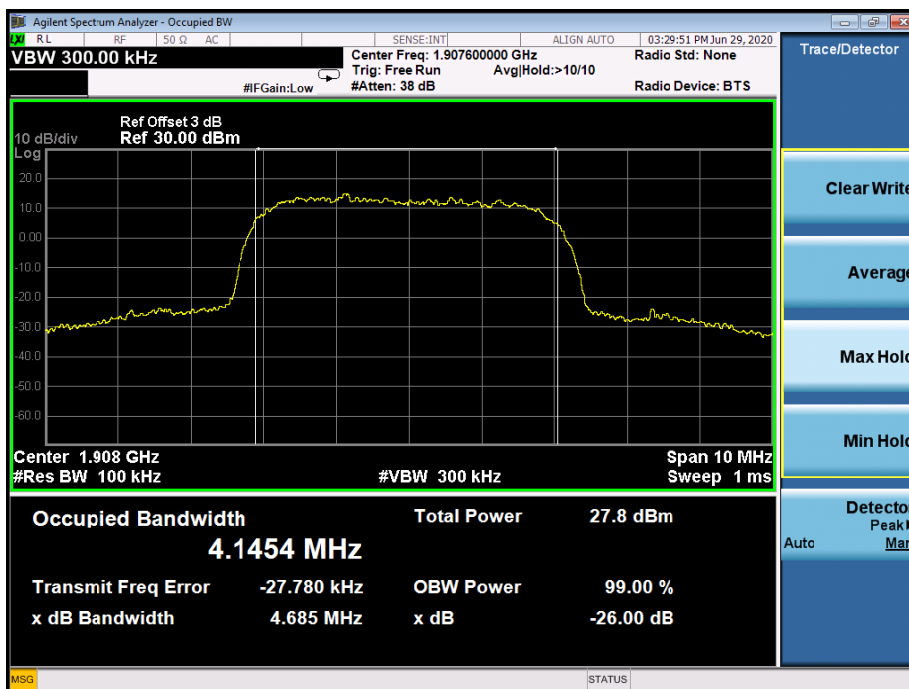


HSDPA Low Channel

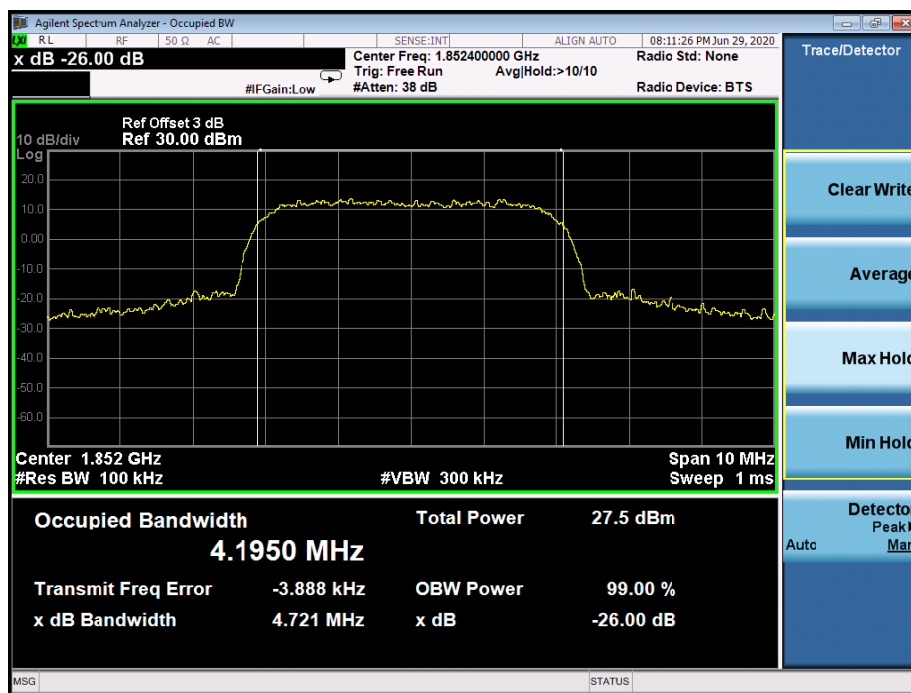


HSDPA Middle Channel

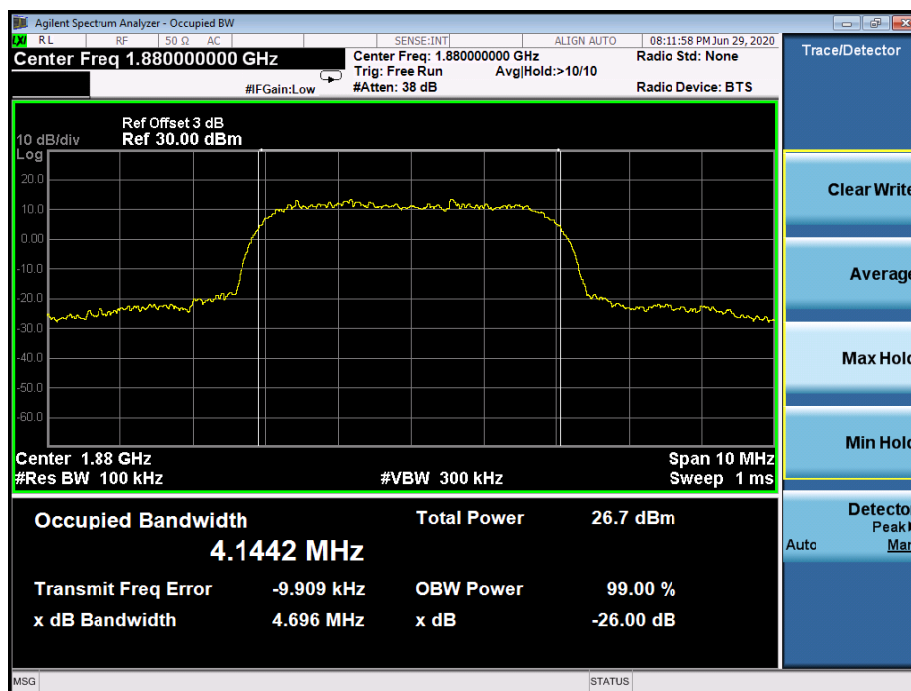


HSDPA High Channel

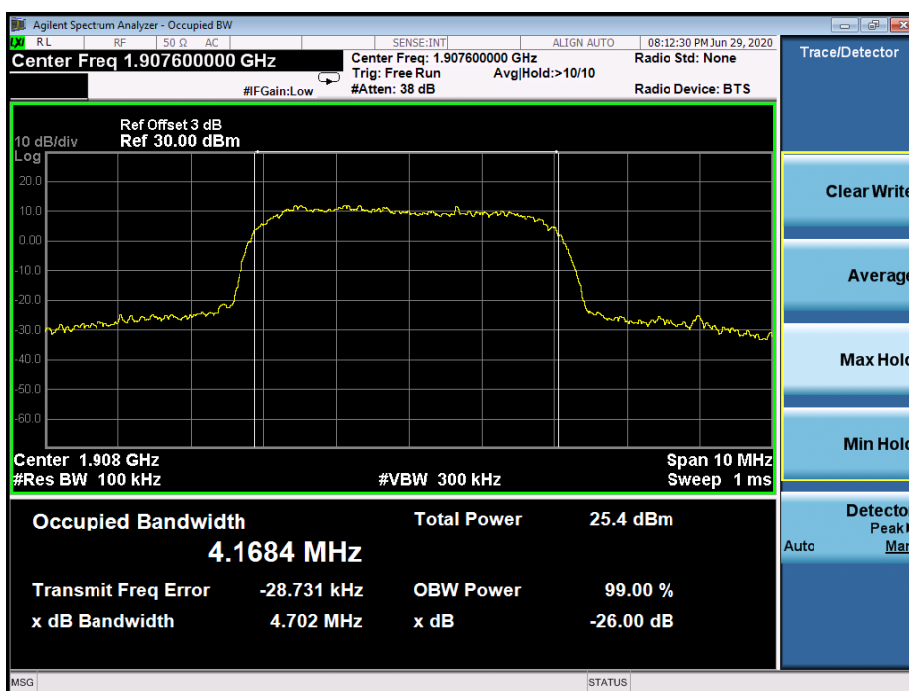


HSUPA Low Channel

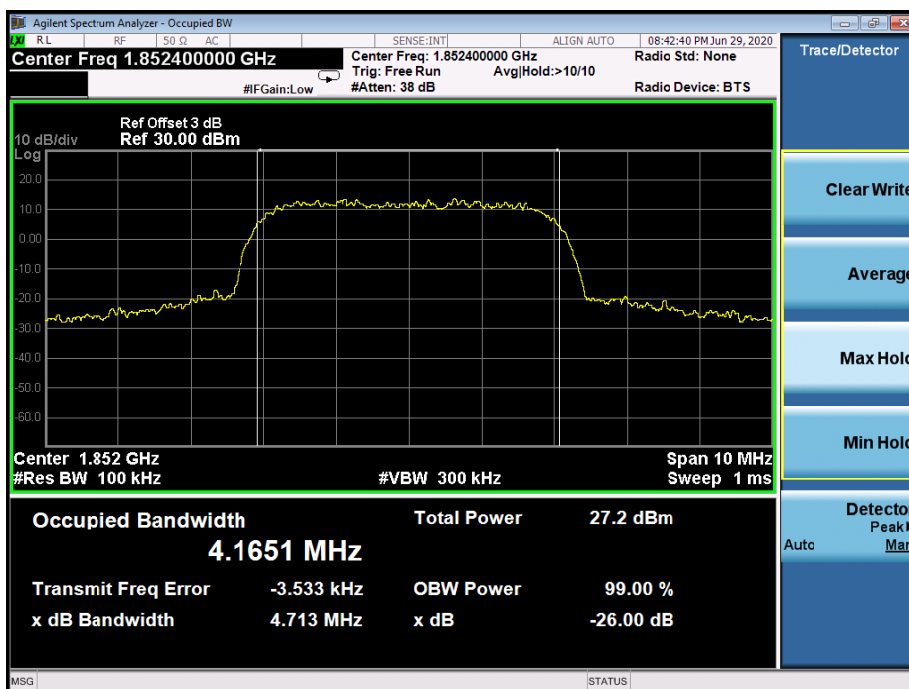

HSUPA Middle Channel

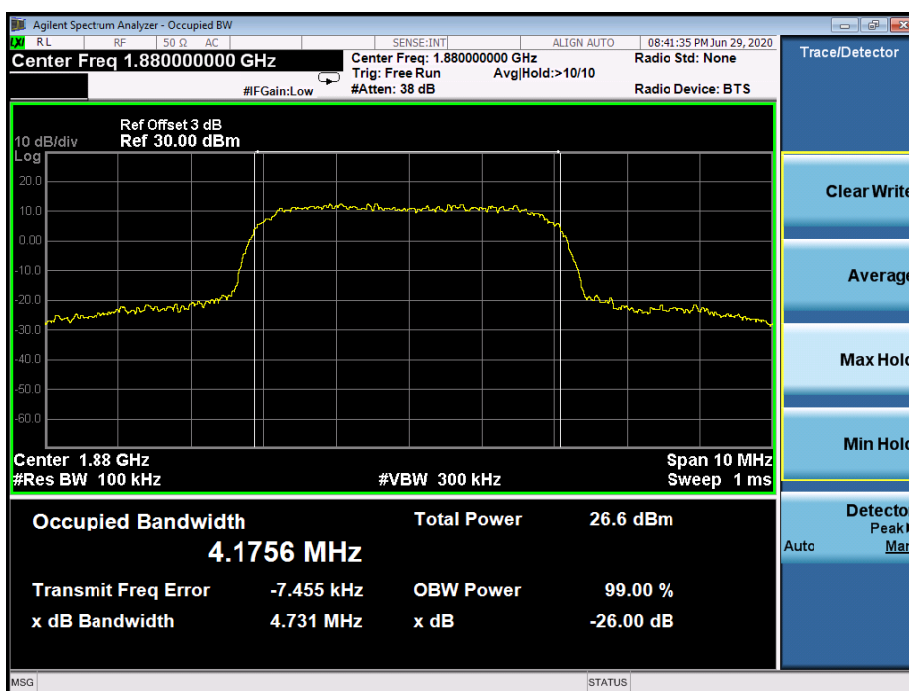

HSUPA High Channel

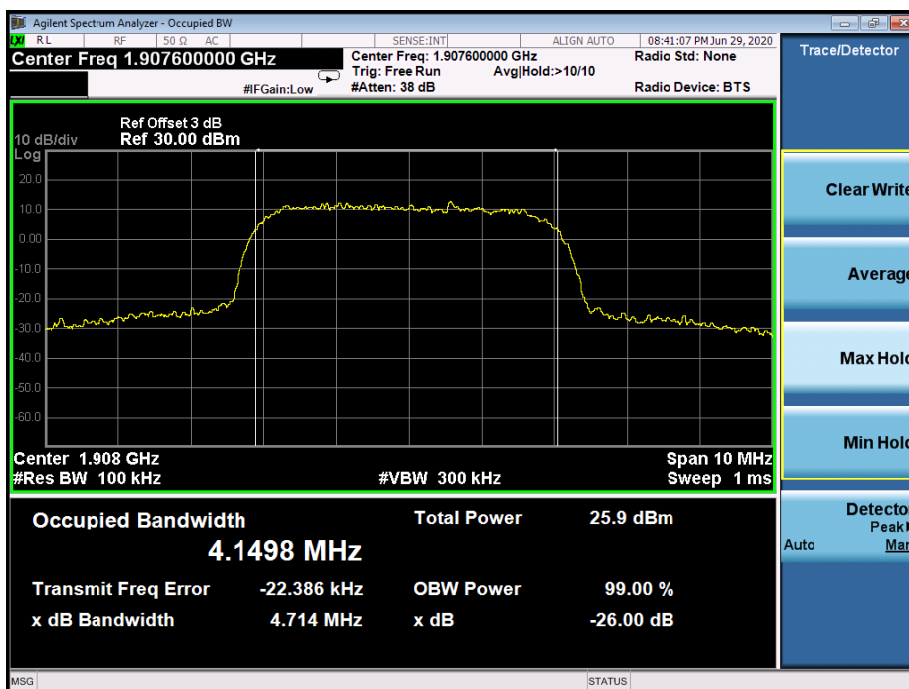

6. Out of Band Emissions at Antenna Terminal

6.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

6.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10th harmonic.

Test Configuration for the out of band emissions testing:

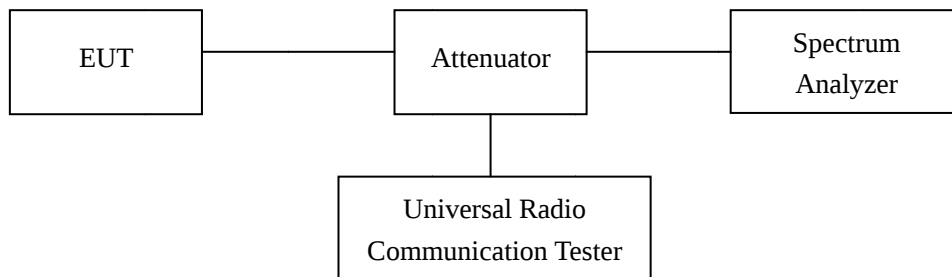


6.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar


6.4 Summary of Test Results/Plots

Please refer to the following test plots For Cellular Band


GSM Low Channel

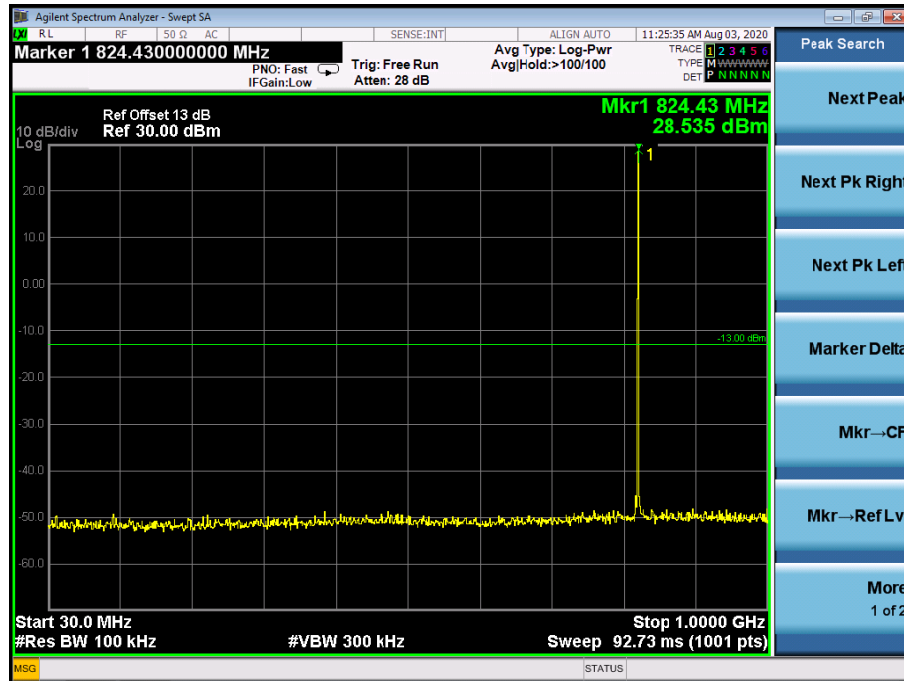


GSM Middle Channel

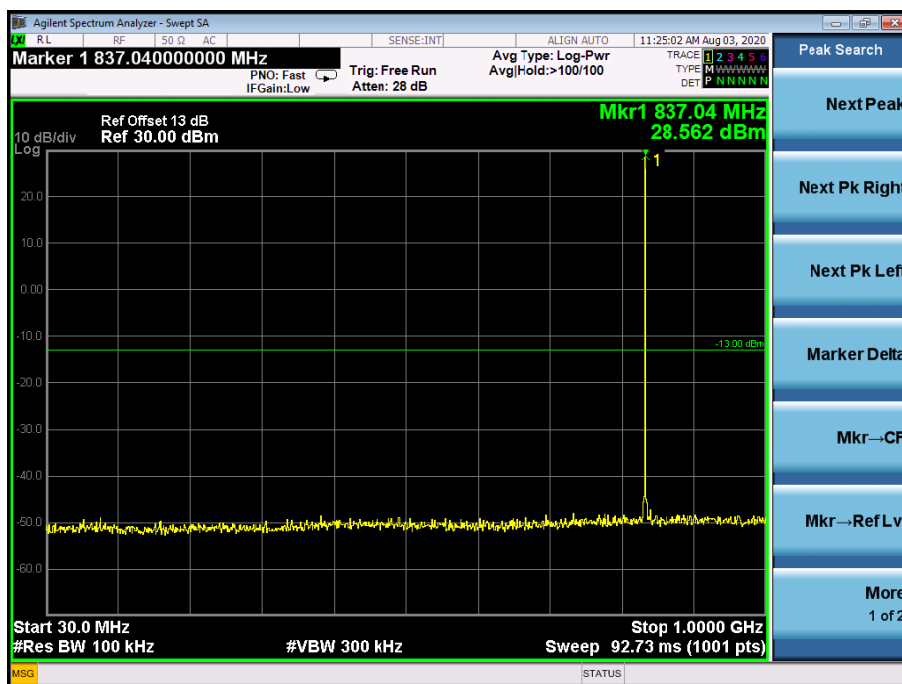


GSM High Channel

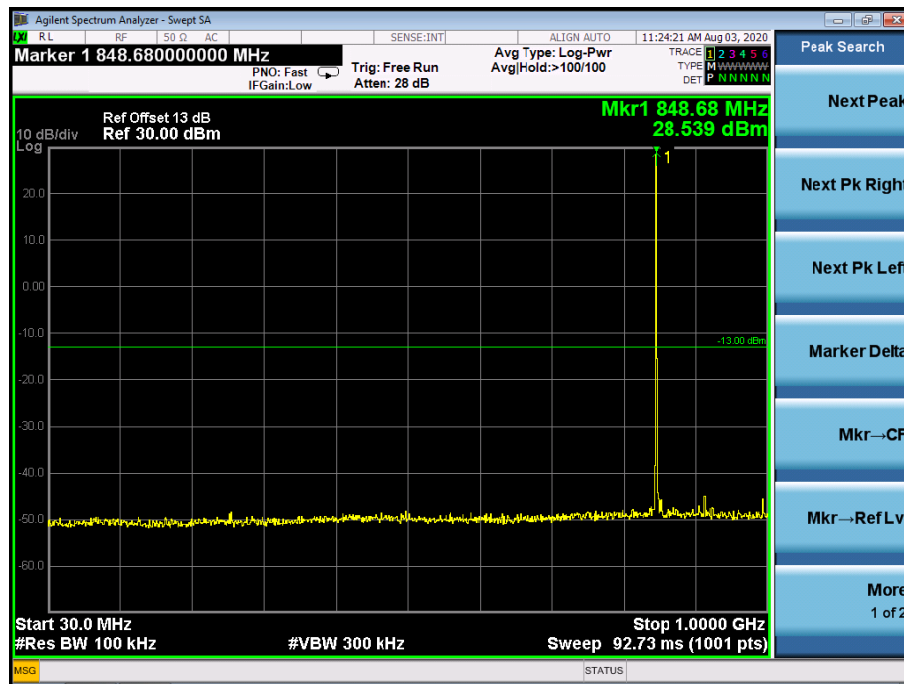


GSM Low Band Emission

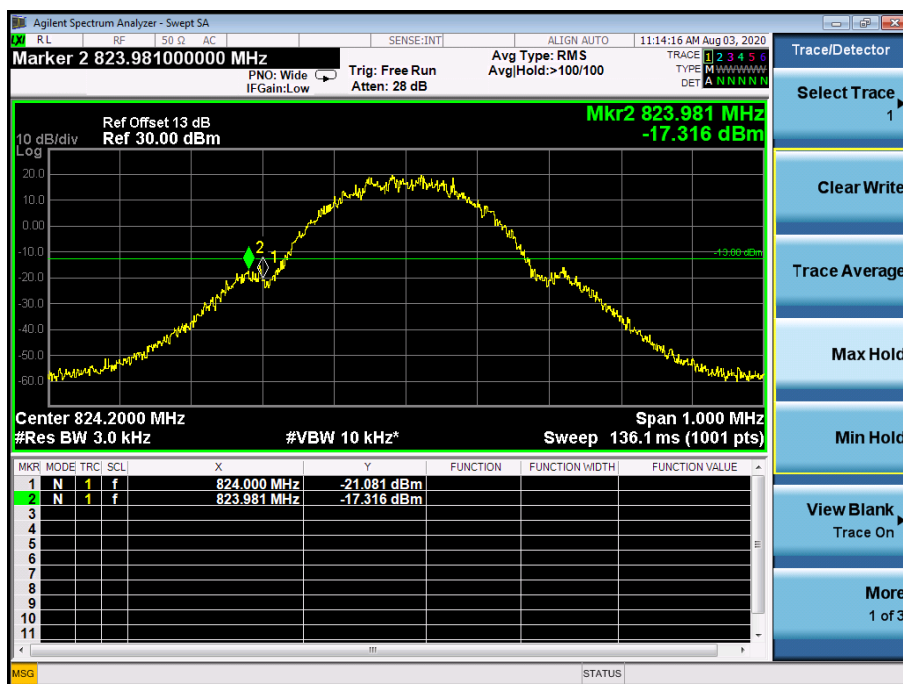


GSM High Band Emission

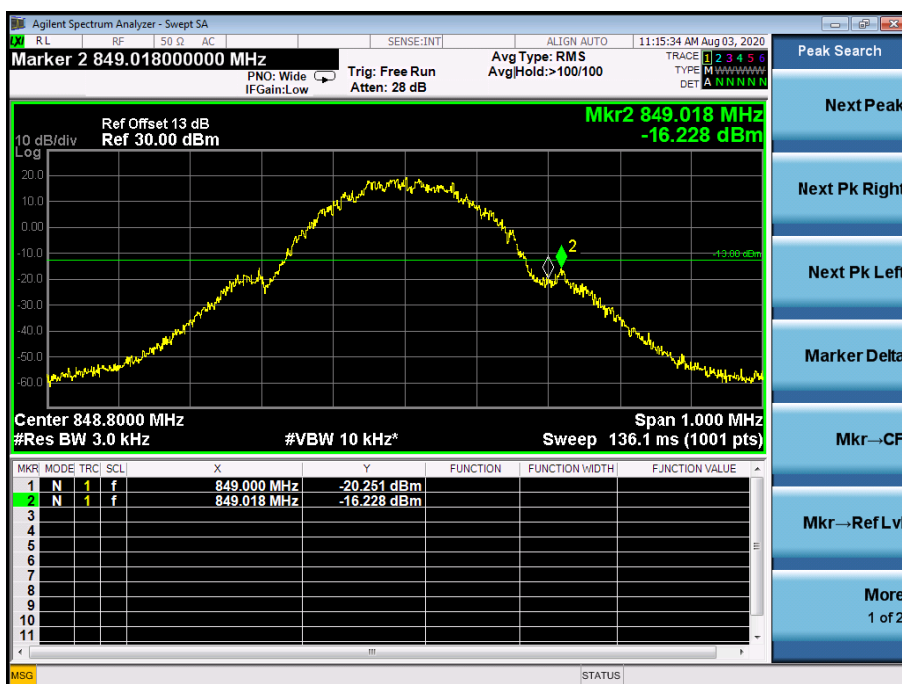


GPRS Low Channel

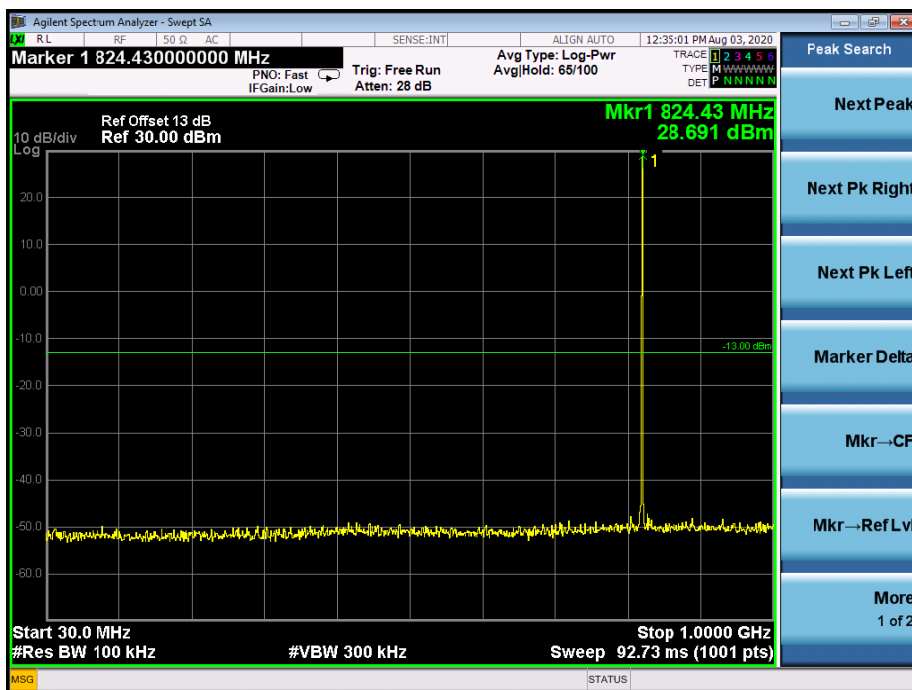


GPRS Middle Channel

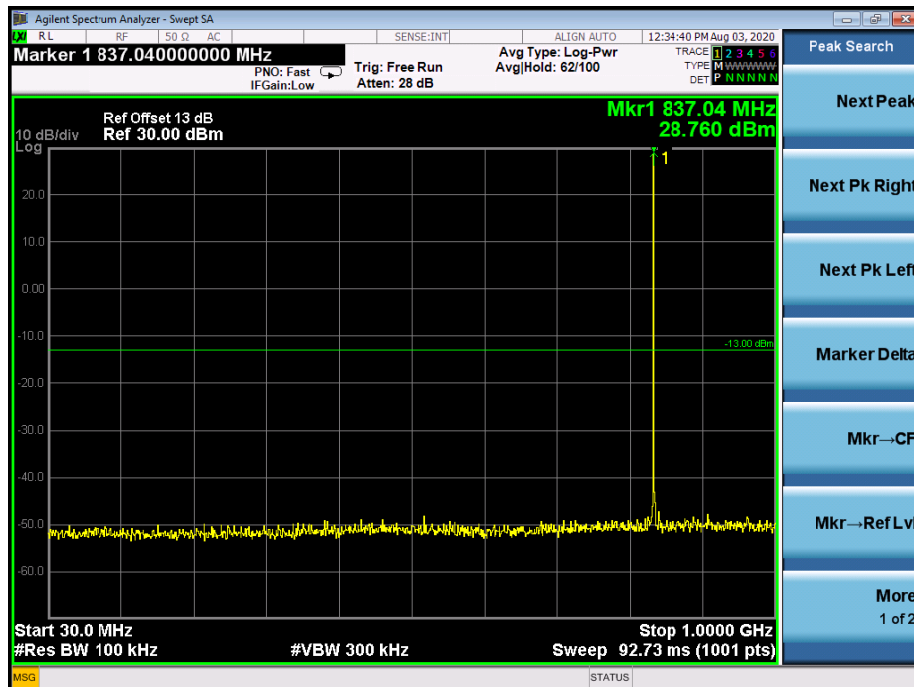


GPRS High Channel

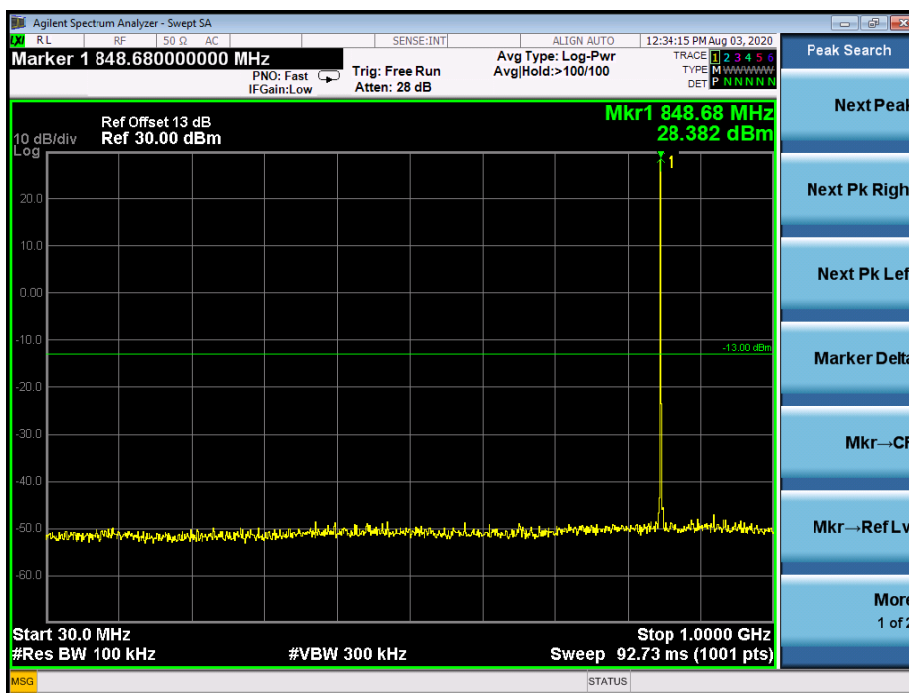


GPRS Low Band Emission

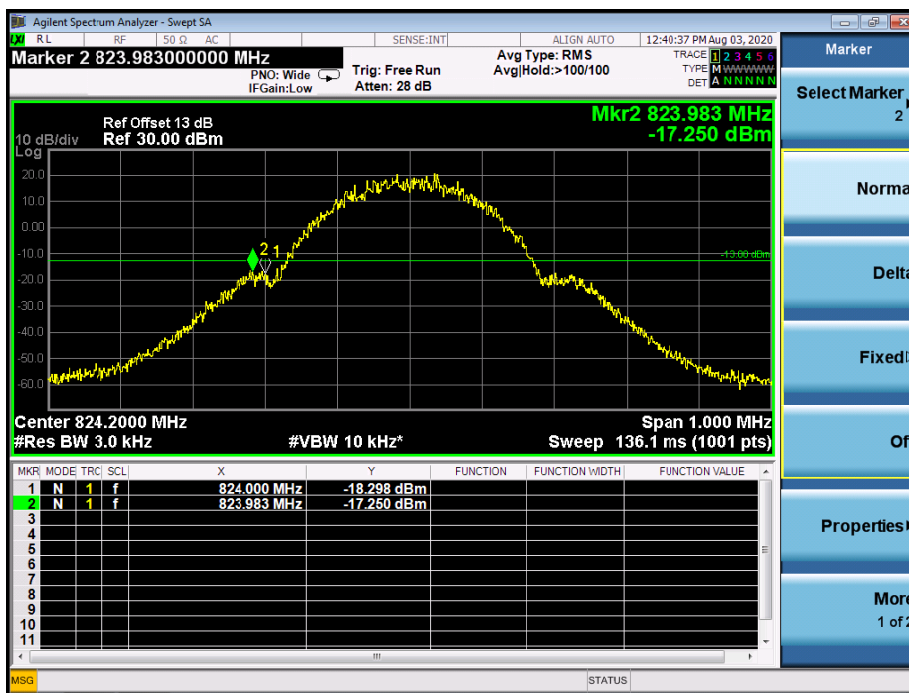


GPRS High Band Emission

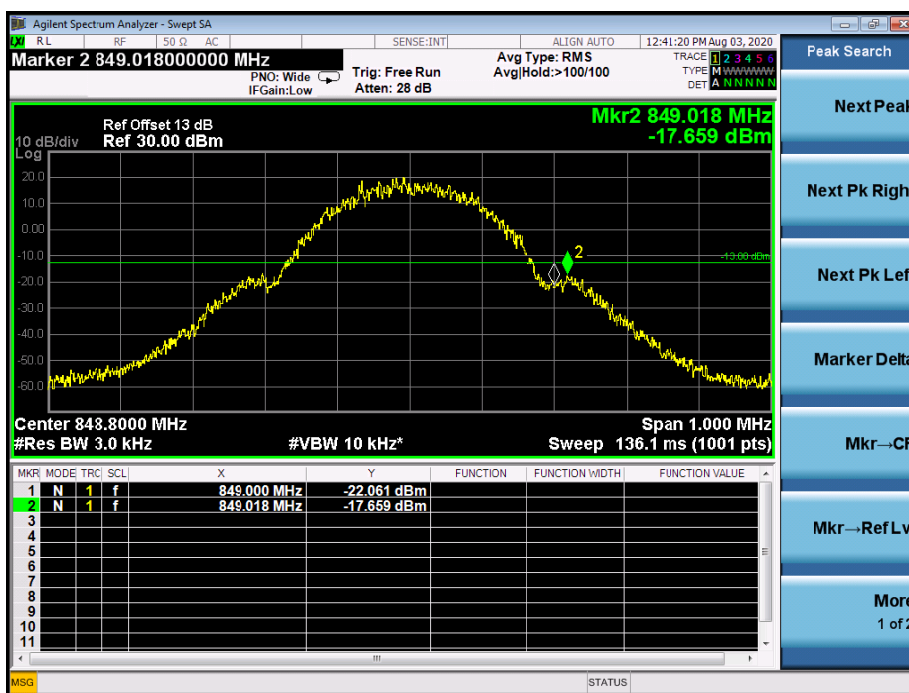


EGPRS Low Channel

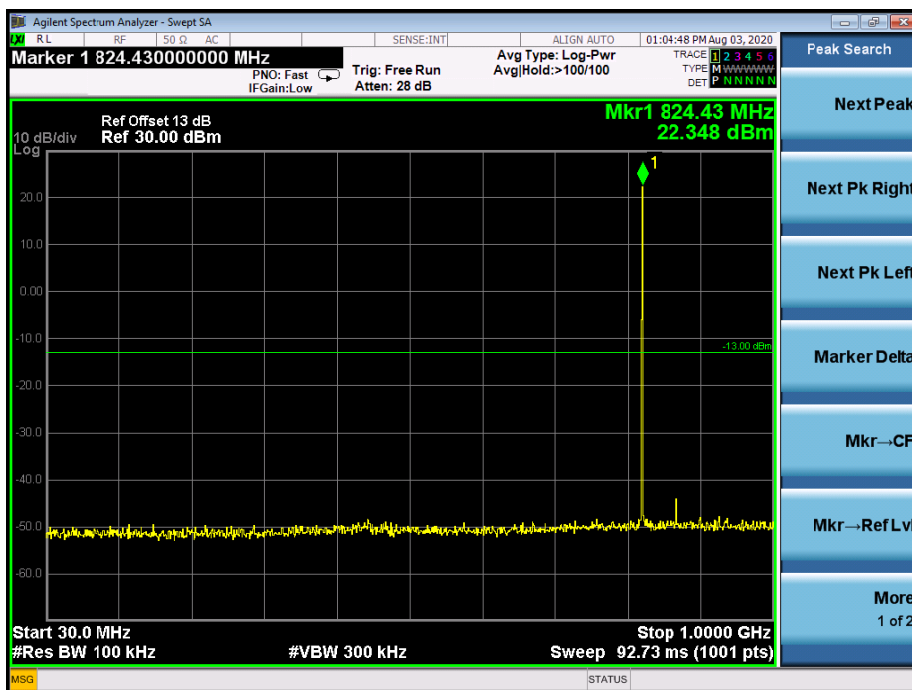


EGPRS Middle Channel

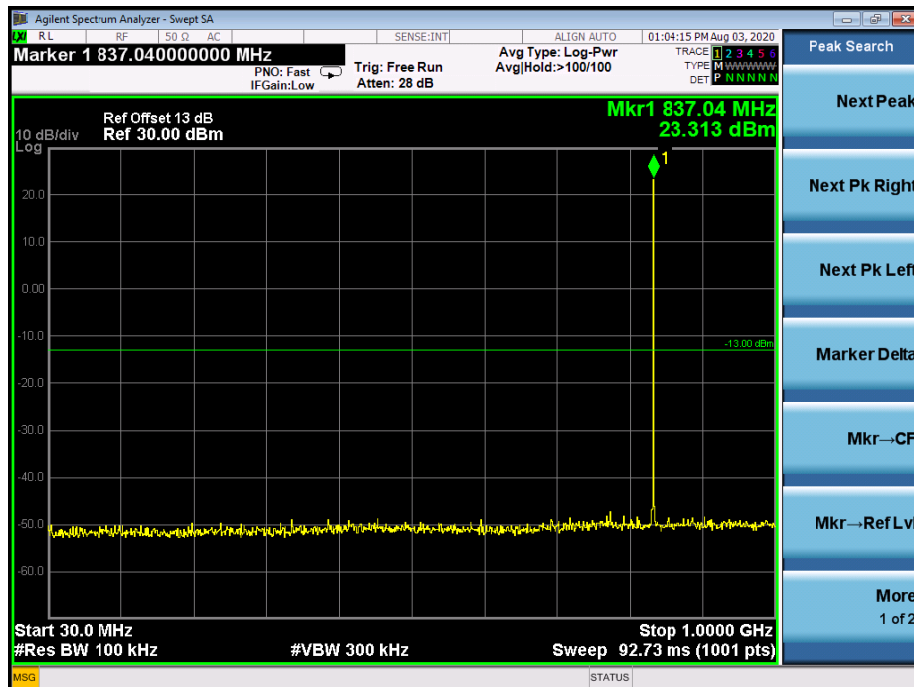


EGPRS High Channel

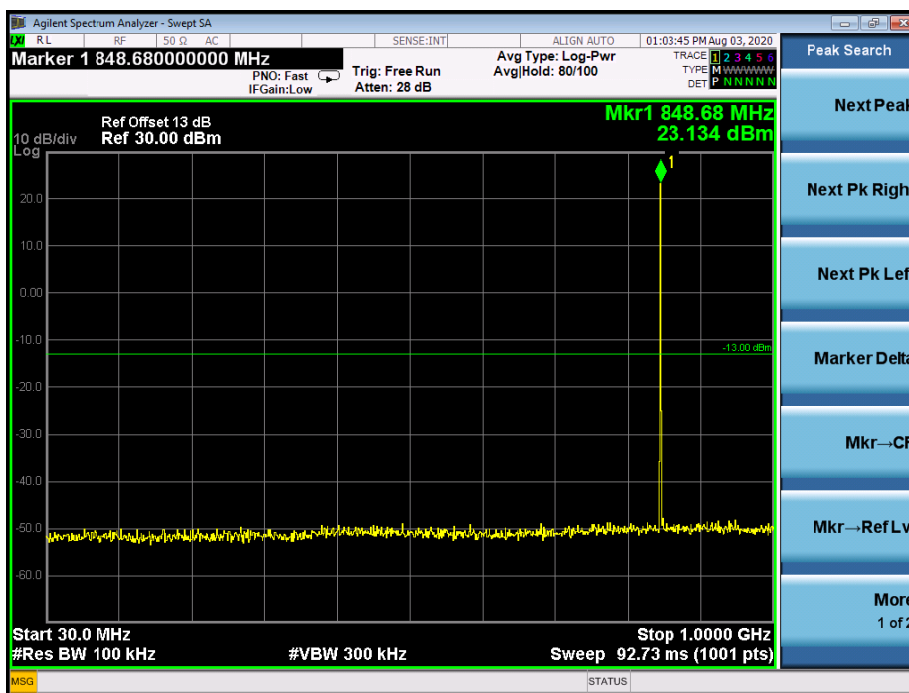


EGPRS Low Band Emission

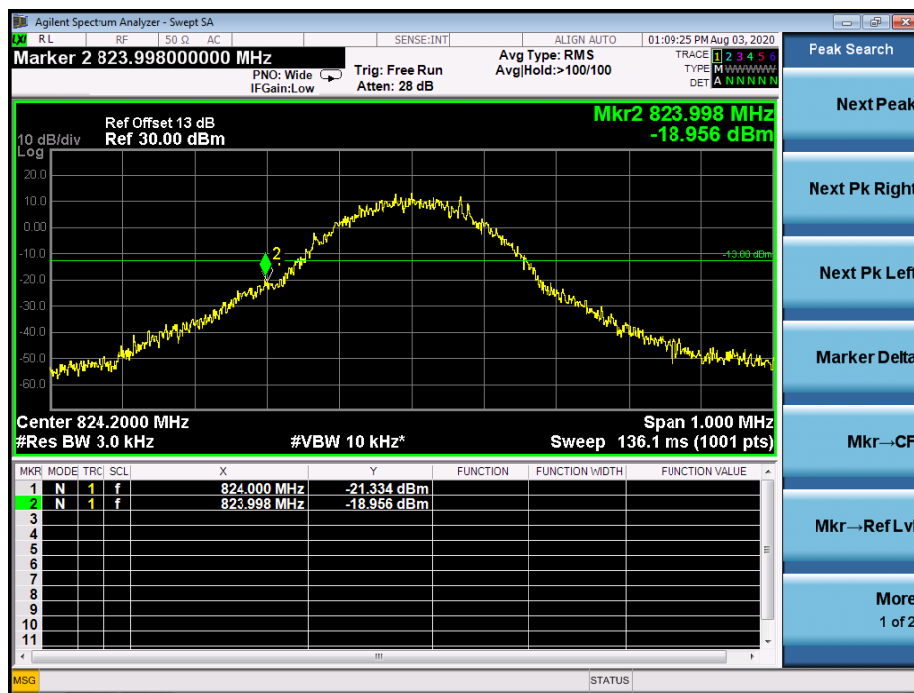


EGPRS High Band Emission

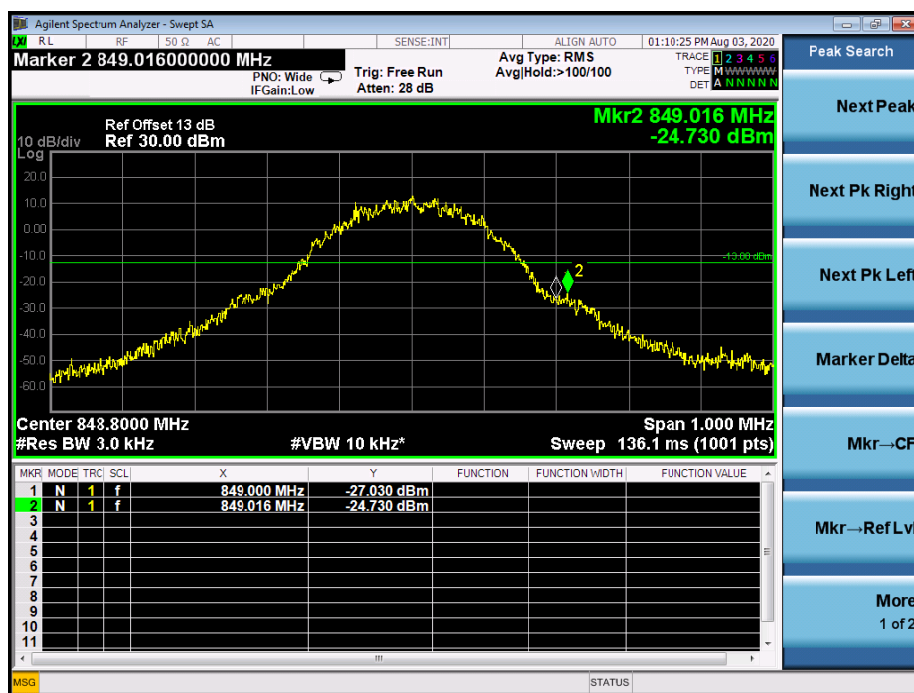



For PCS Band
GSM Low Channel

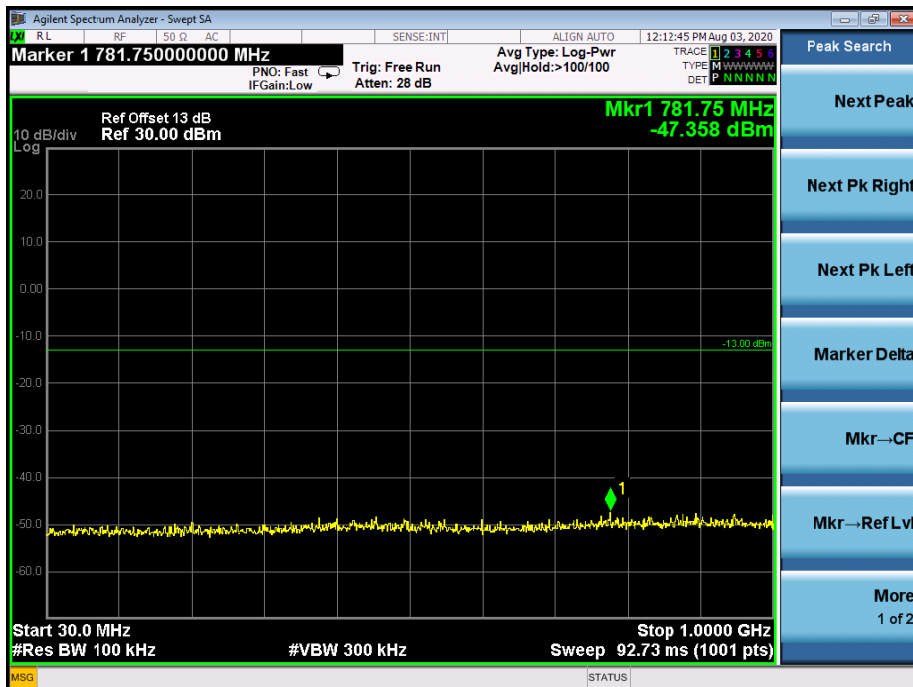


GSM Middle Channel

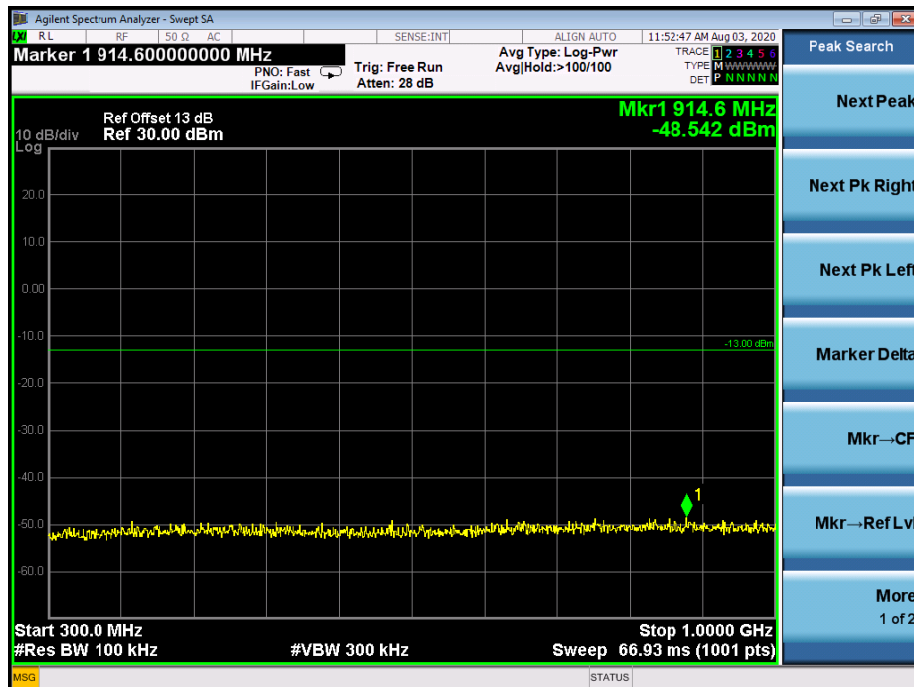


GSM High Channel

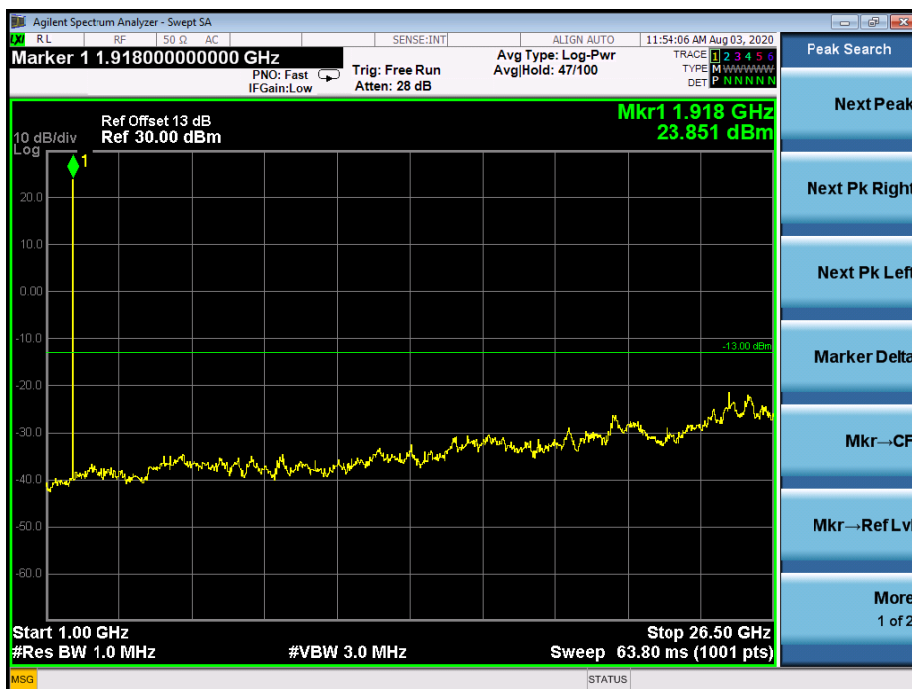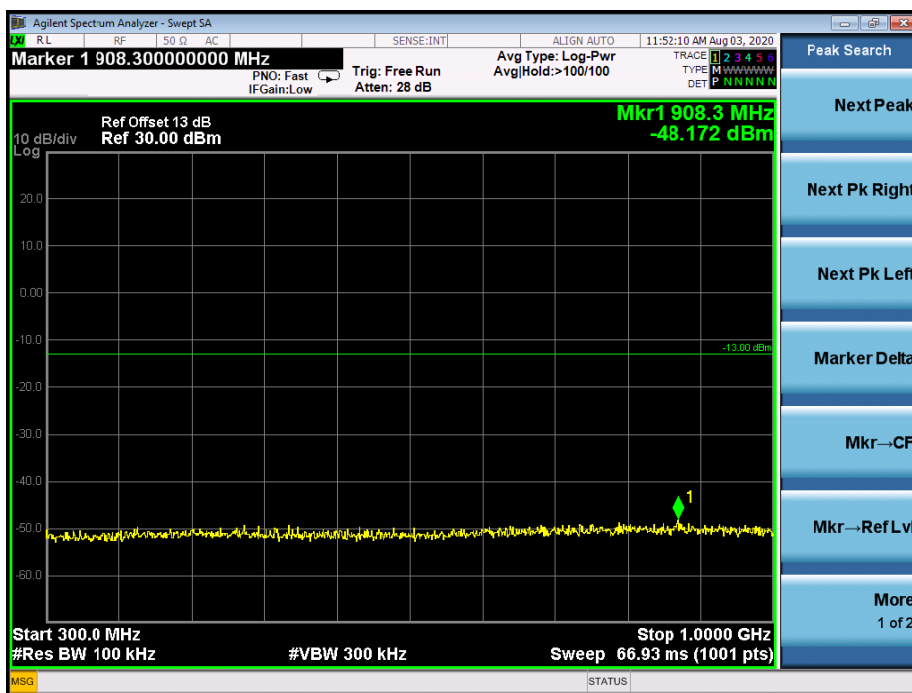


GSM Low Band Emission

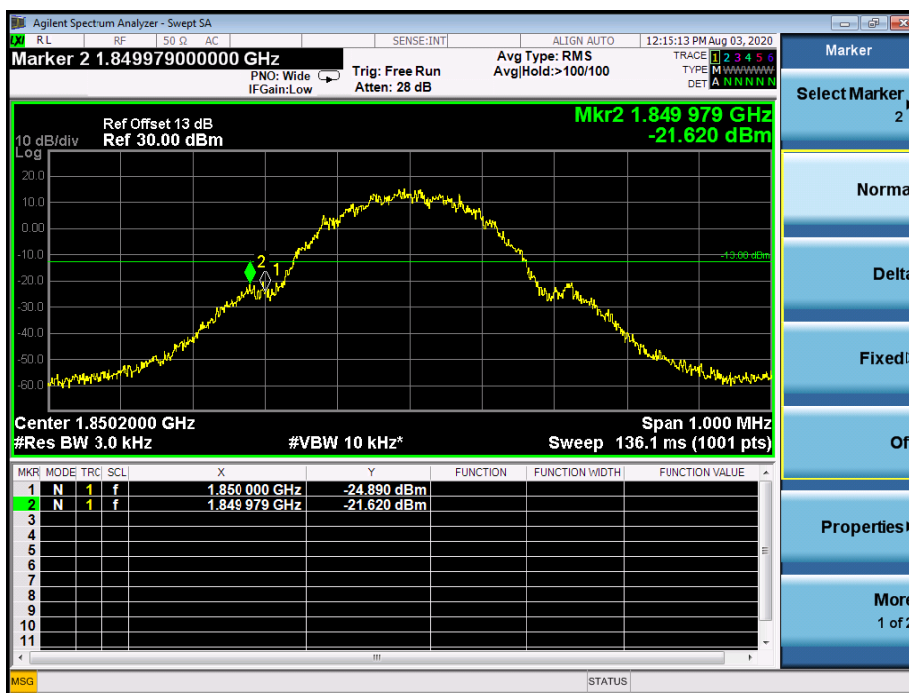


GSM High Band Emission

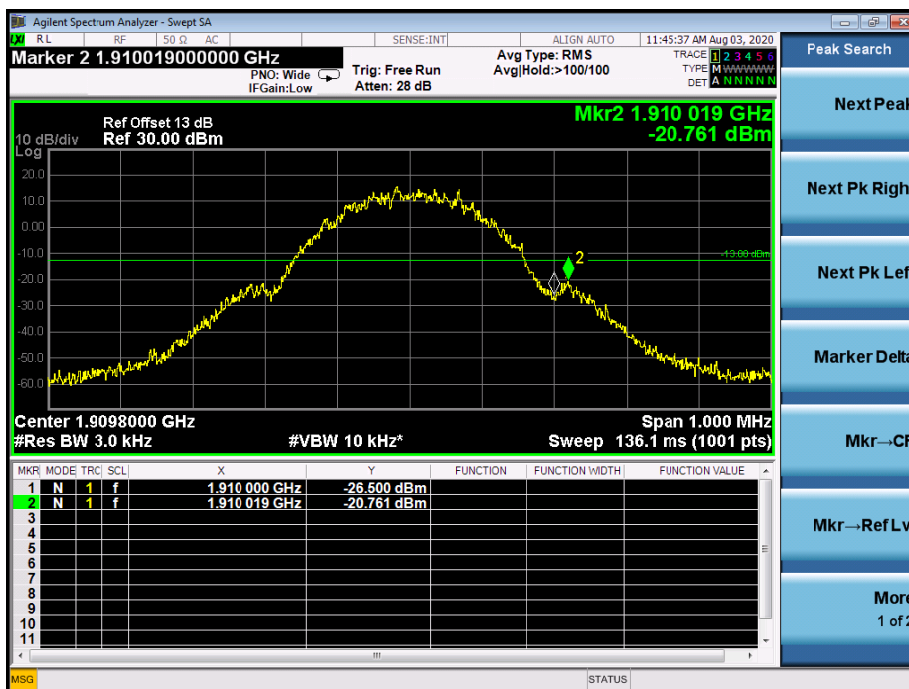


GPRS Low Channell

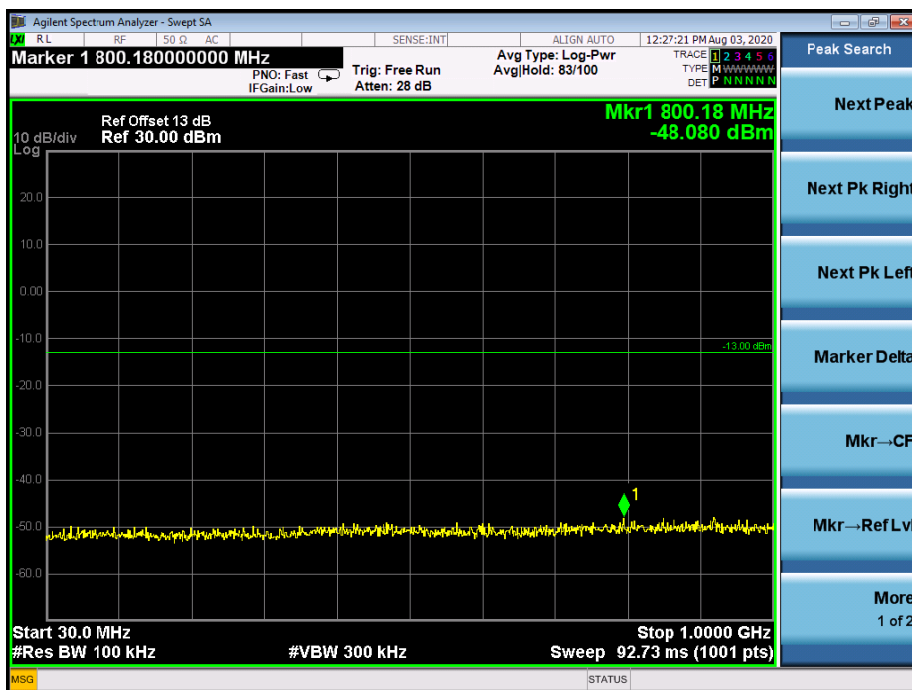


GPRS Middle Channel

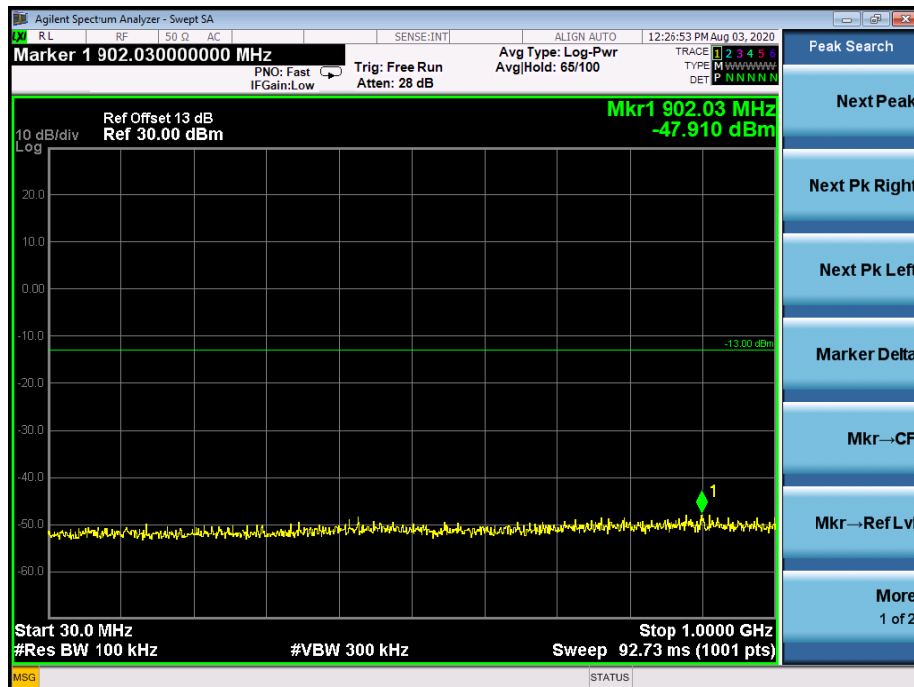


GPRS High Channel

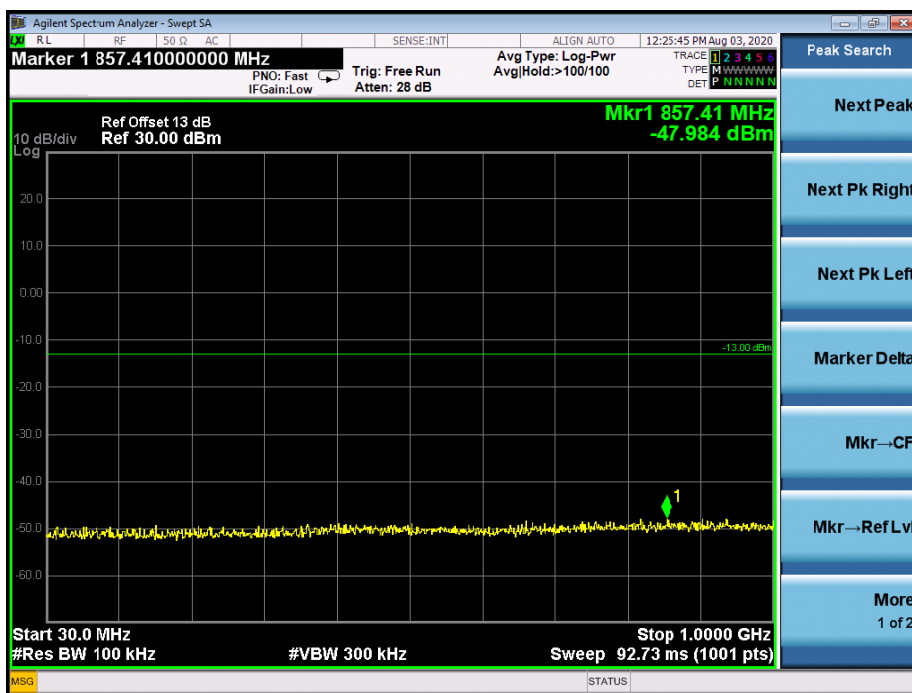


GPRS Low Band Emission

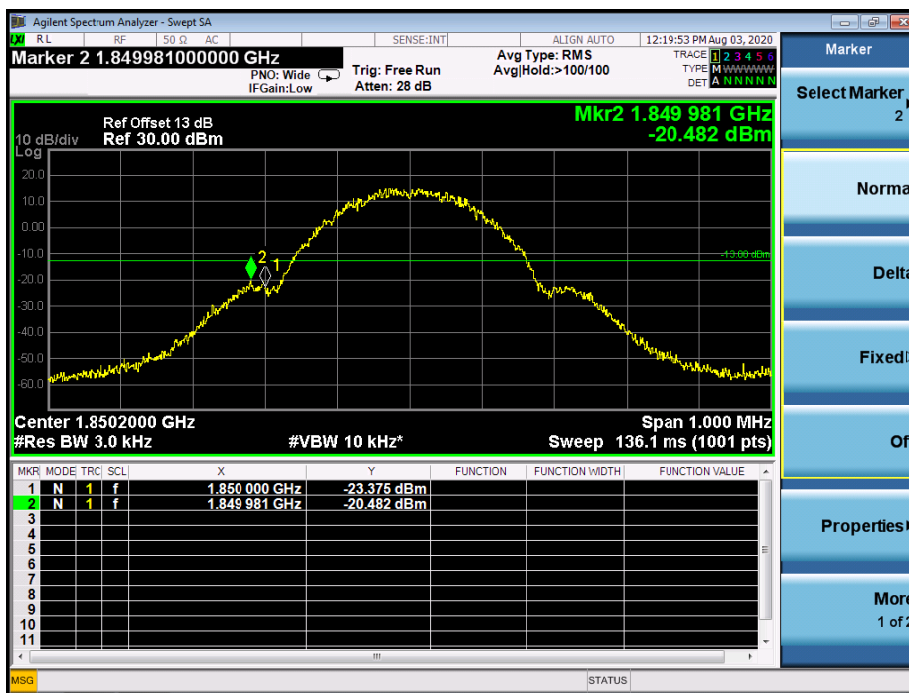


GPRS High Band Emission

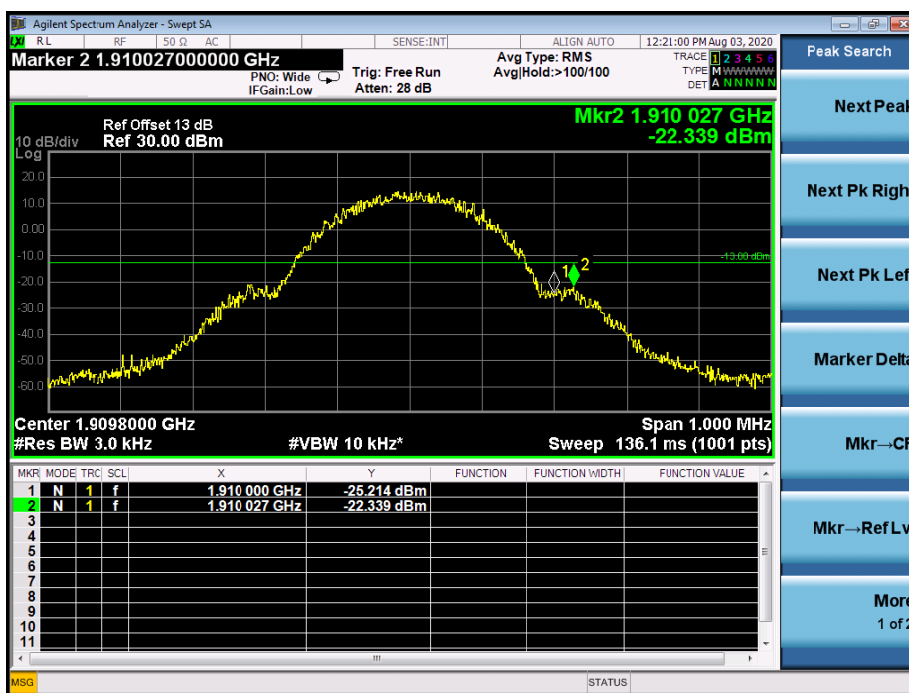


EGPRS Low Channel

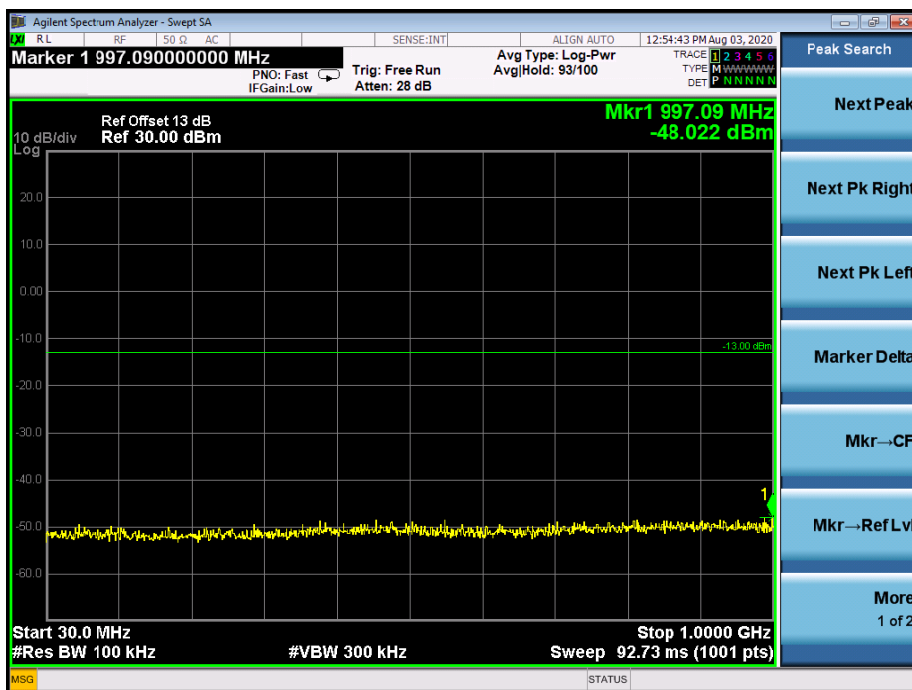


EGPRS Middle Channel

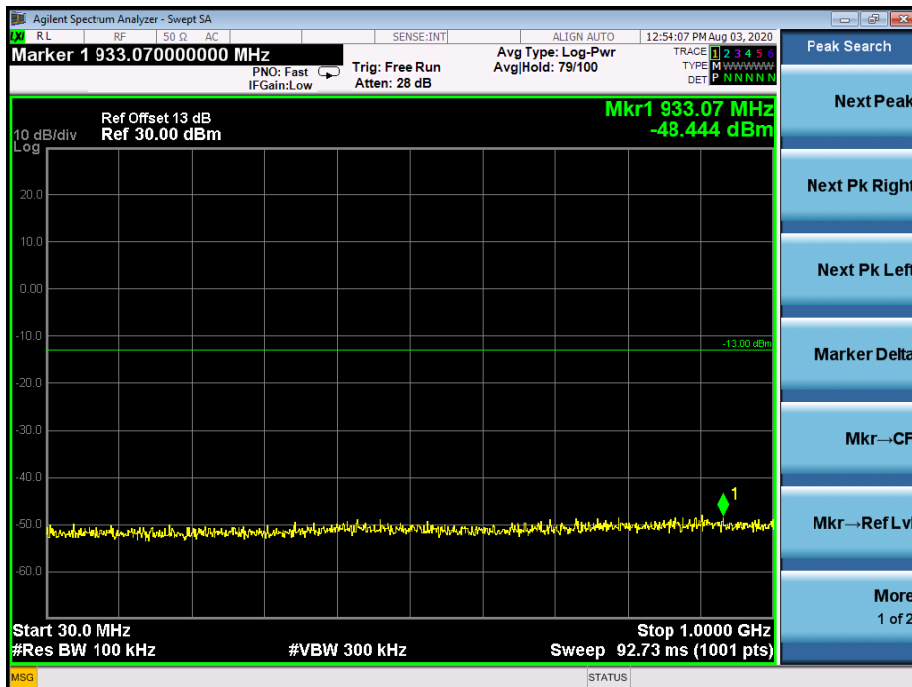


EGPRS High Channel

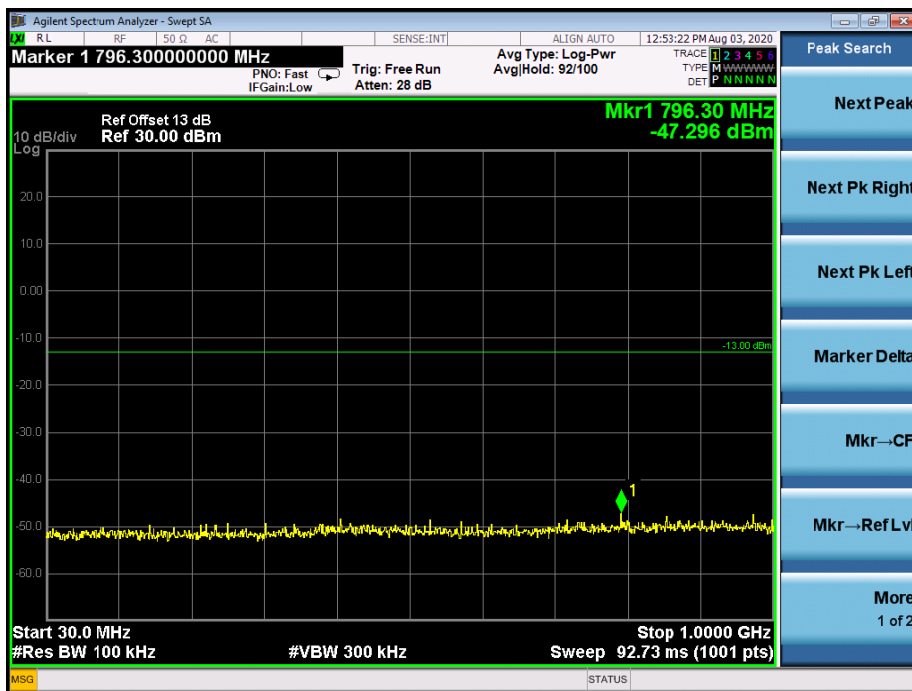

EGPRS Low Band Emission

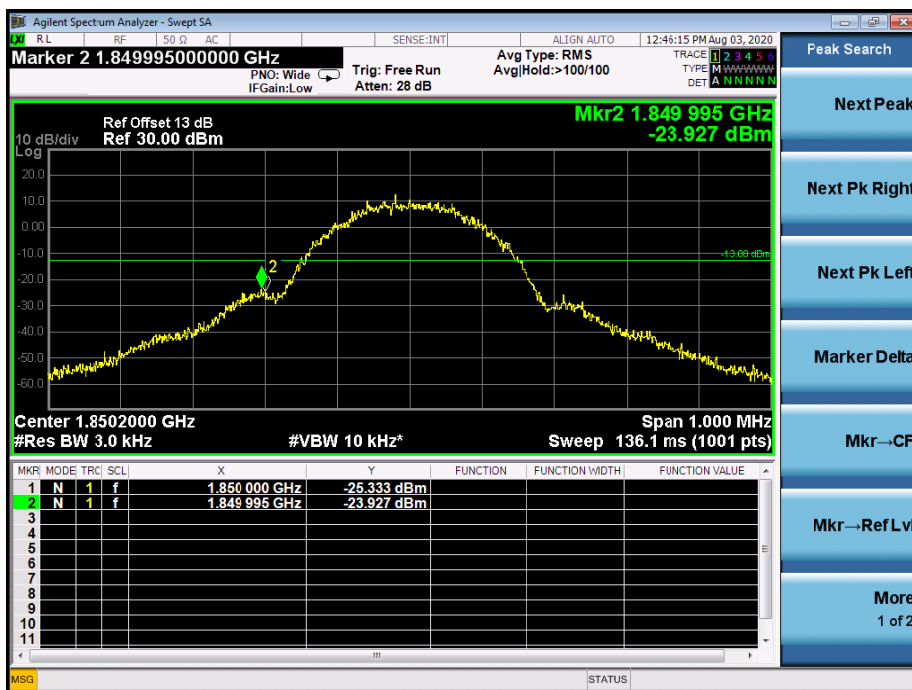


EGPRS High Band Emission

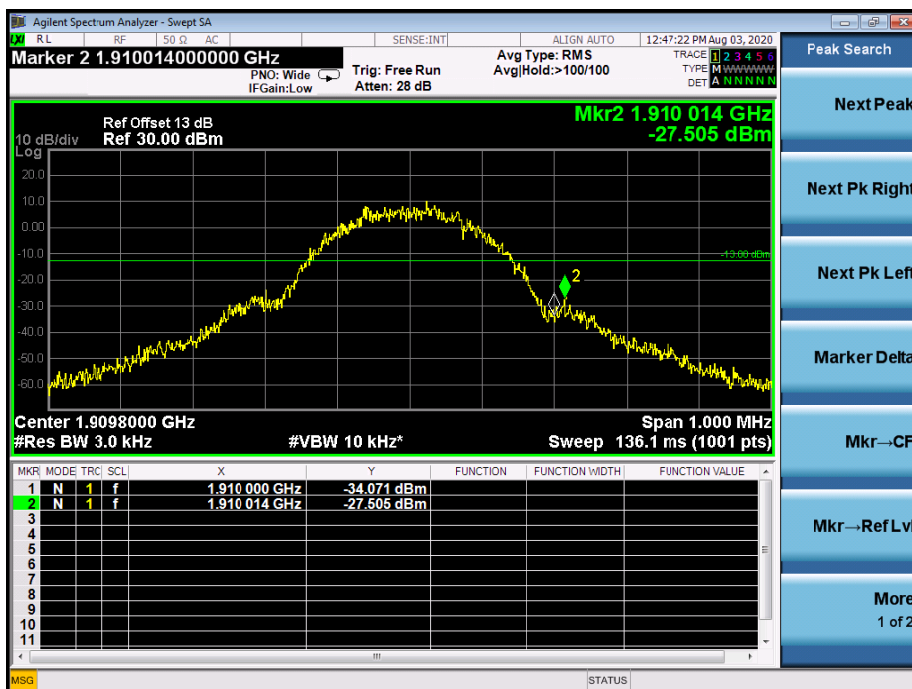


For Band V


WCDMA Low Channel

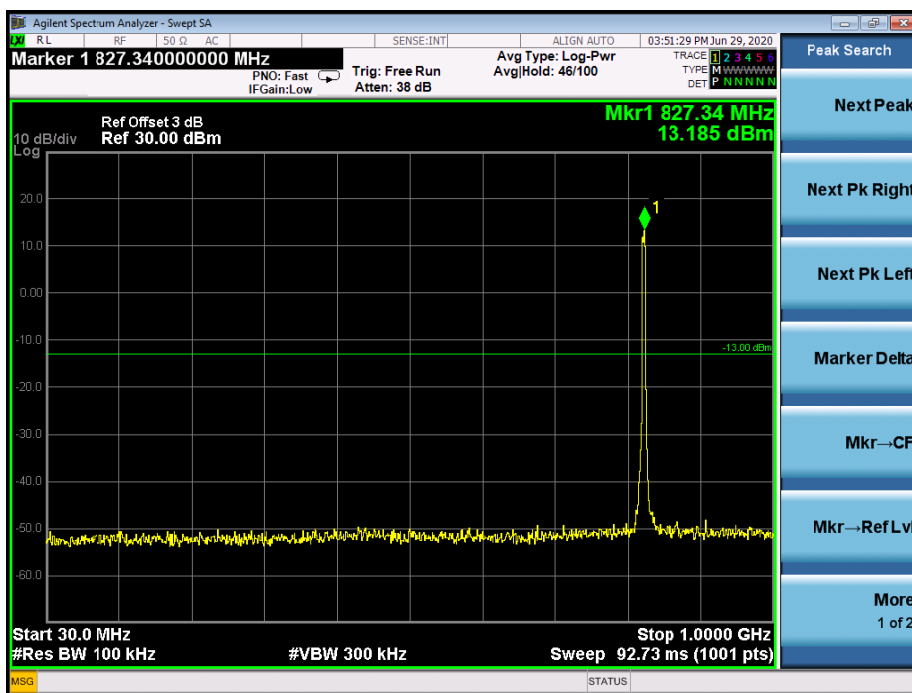


WCDMA Middle Channel

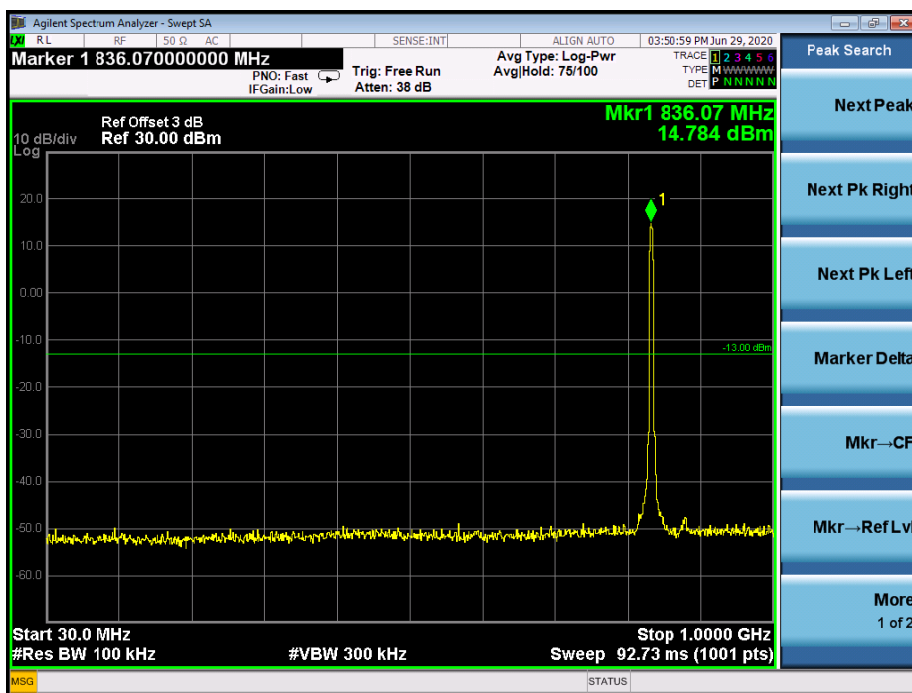


WCDMA High Channel

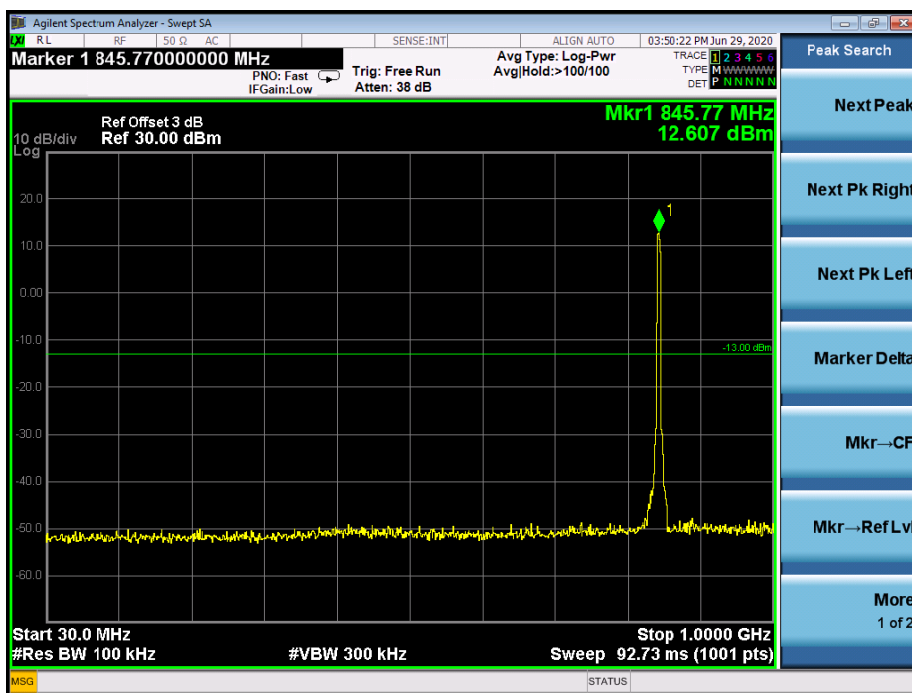


WCDMA Low Band Spurious Emission

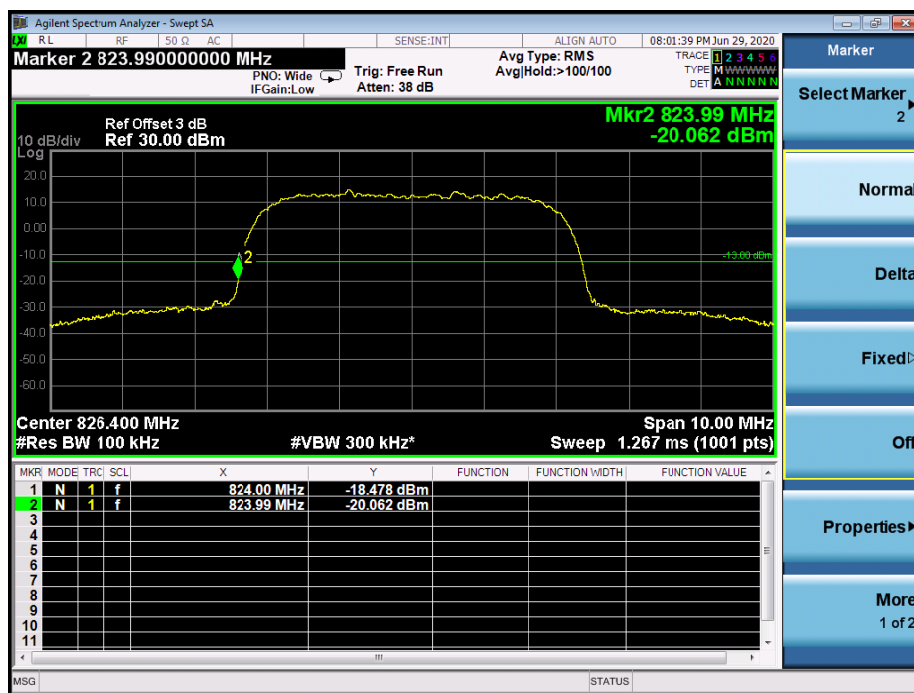


WCDMA High Band Spurious Emission

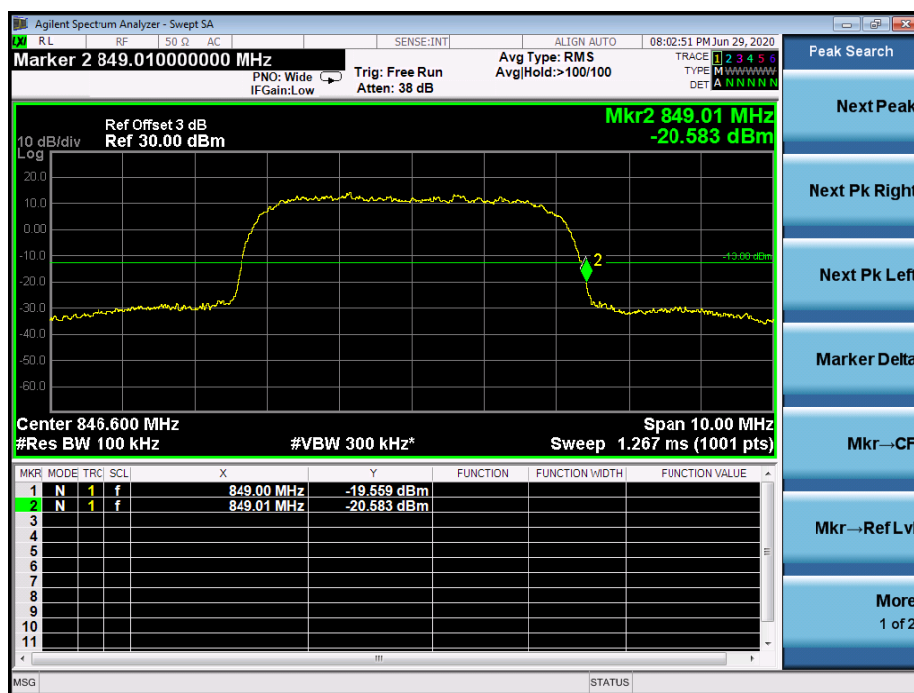


HSDPALow Channel

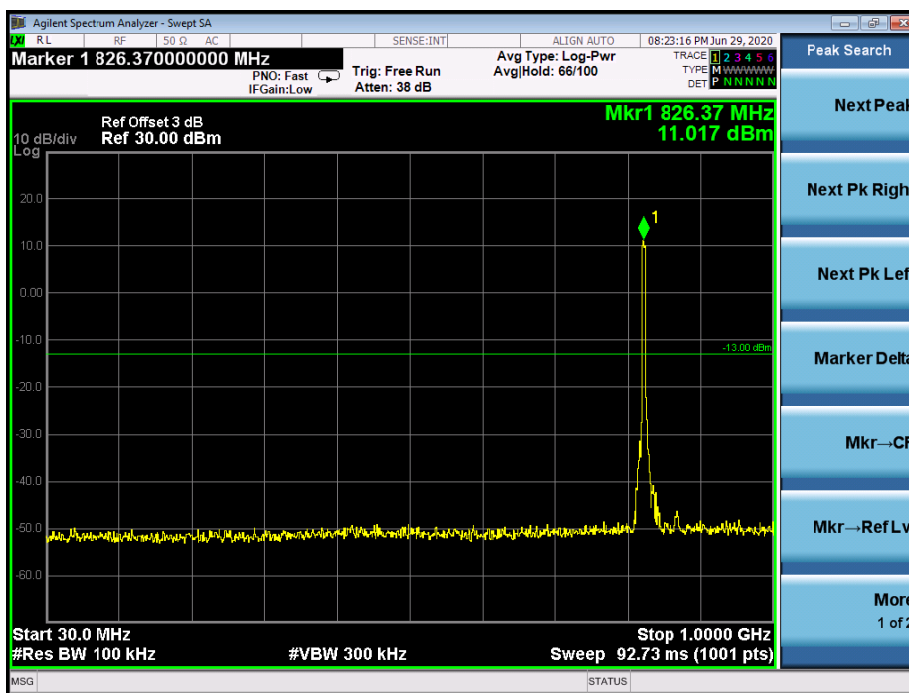


HSDPA Middle Channel

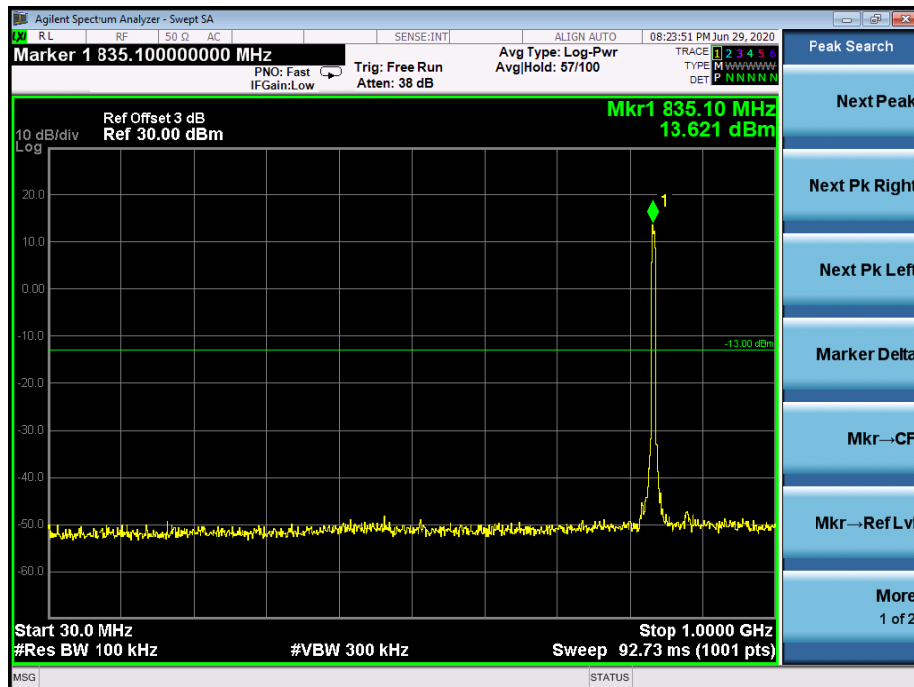


HSDPA High Channel

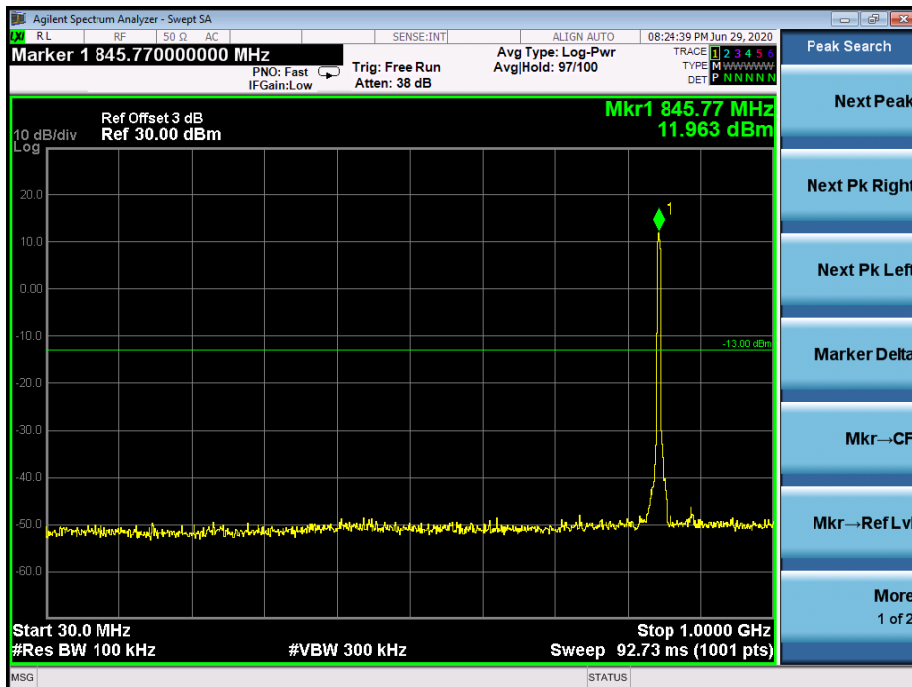


HSDPA Low Band Spurious Emission

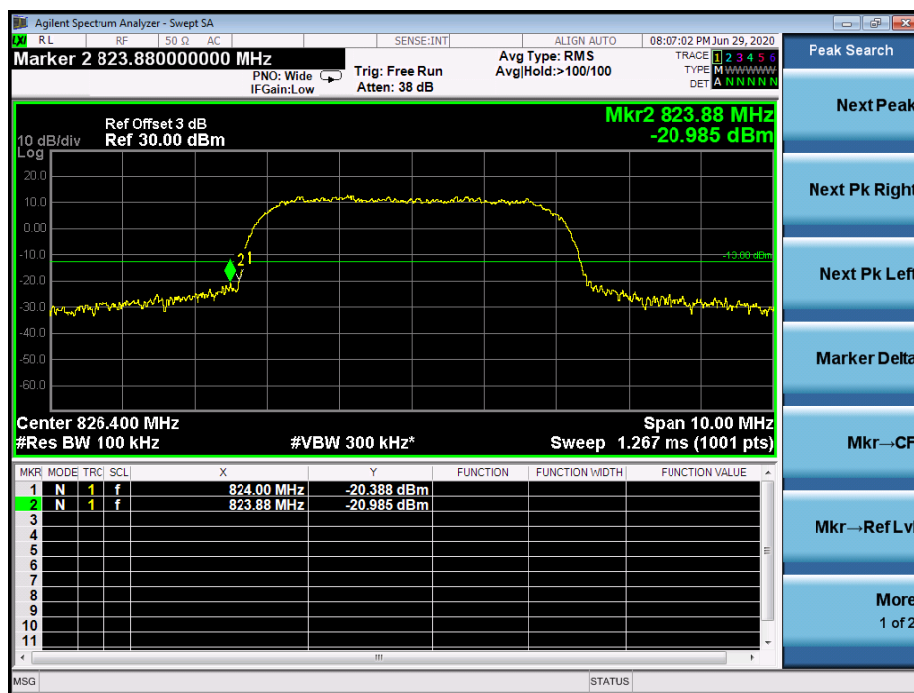


HSDPA High Band Spurious Emission

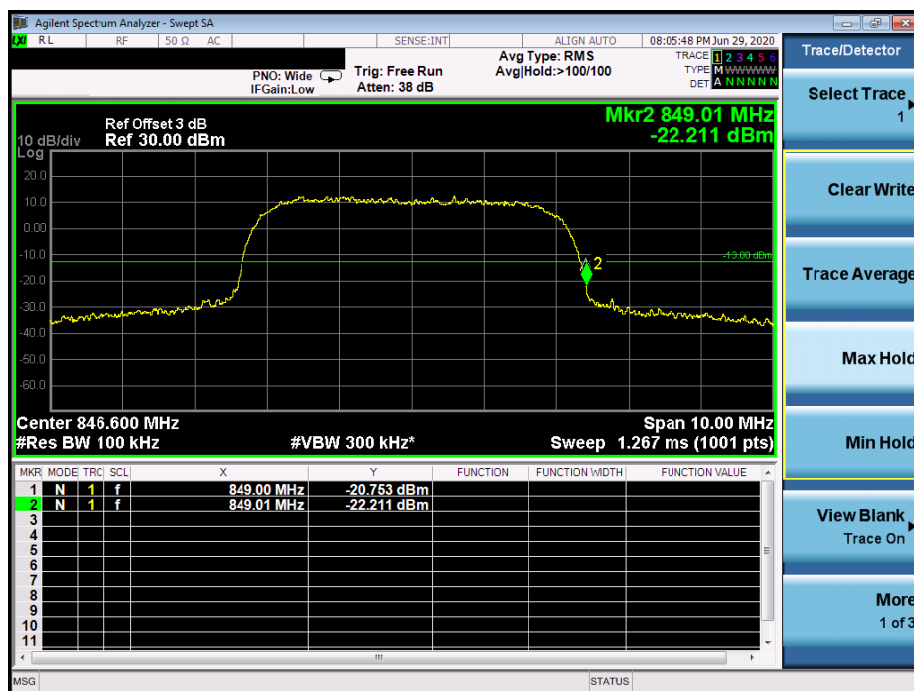


HSUPALow Channel

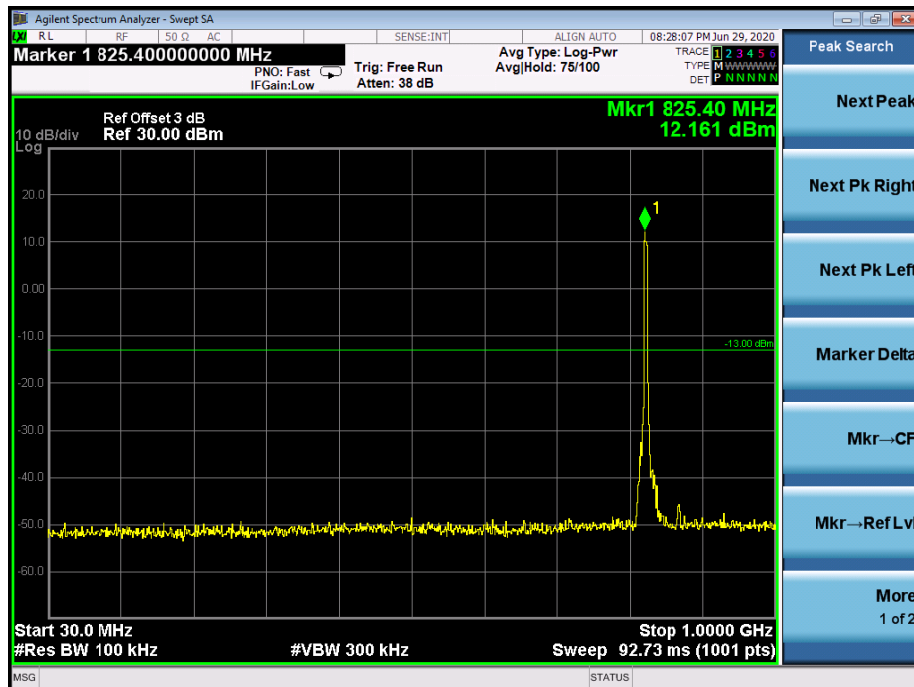


HSUPA Middle Channel

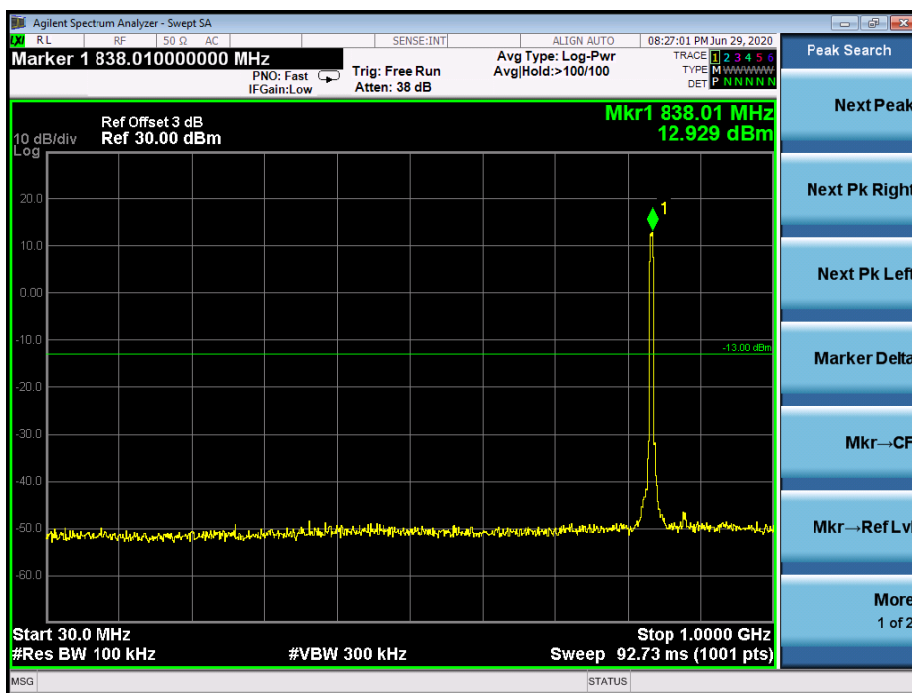


HSUPA High Channel

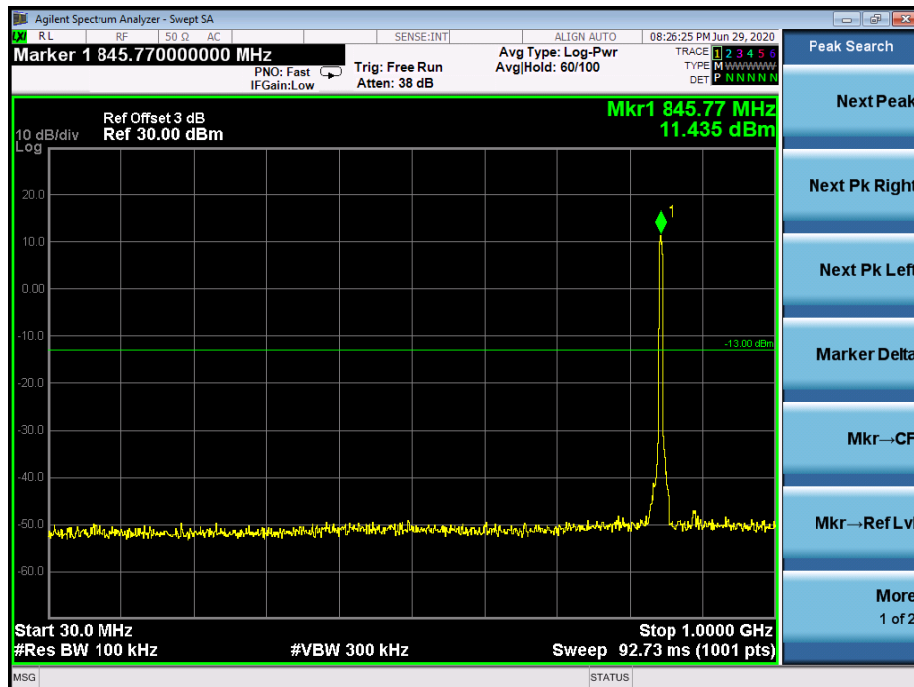

HSUPA Low Band Spurious Emission

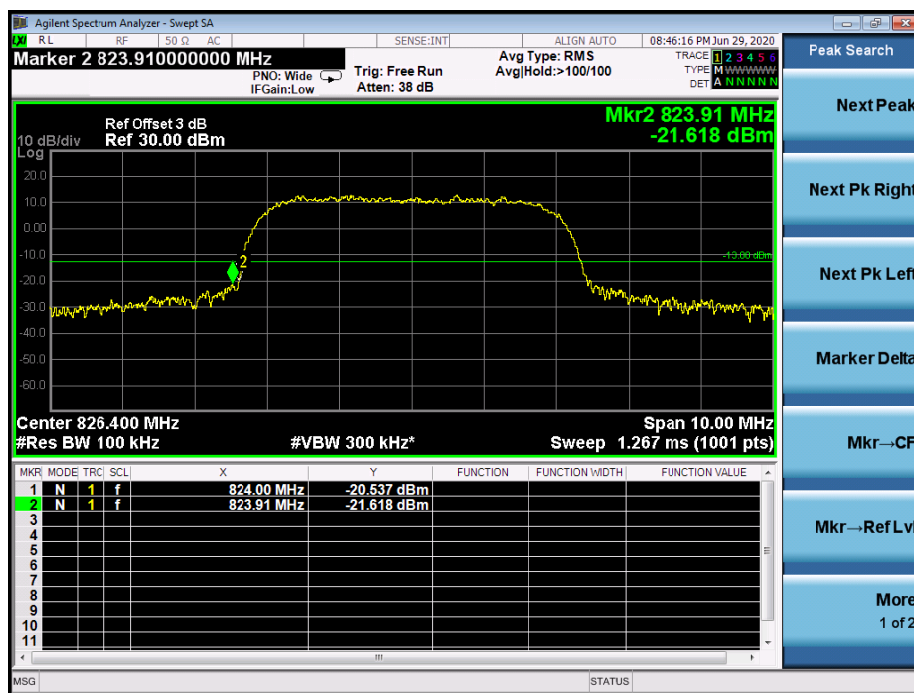


HSUPA High Band Spurious Emission

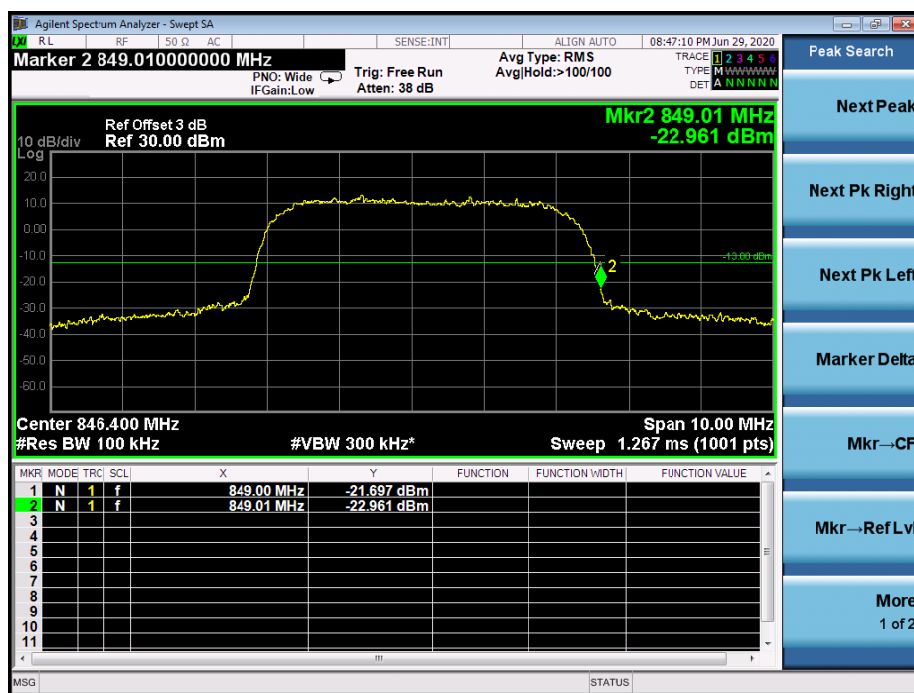


For Band II


WCDMA Low Channel

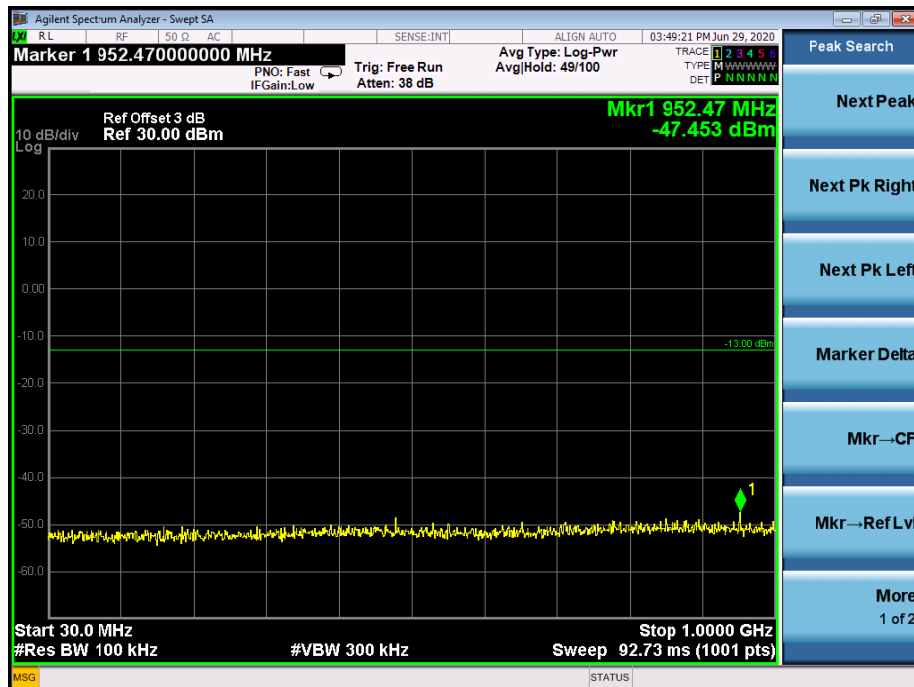


WCDMA Middle Channel

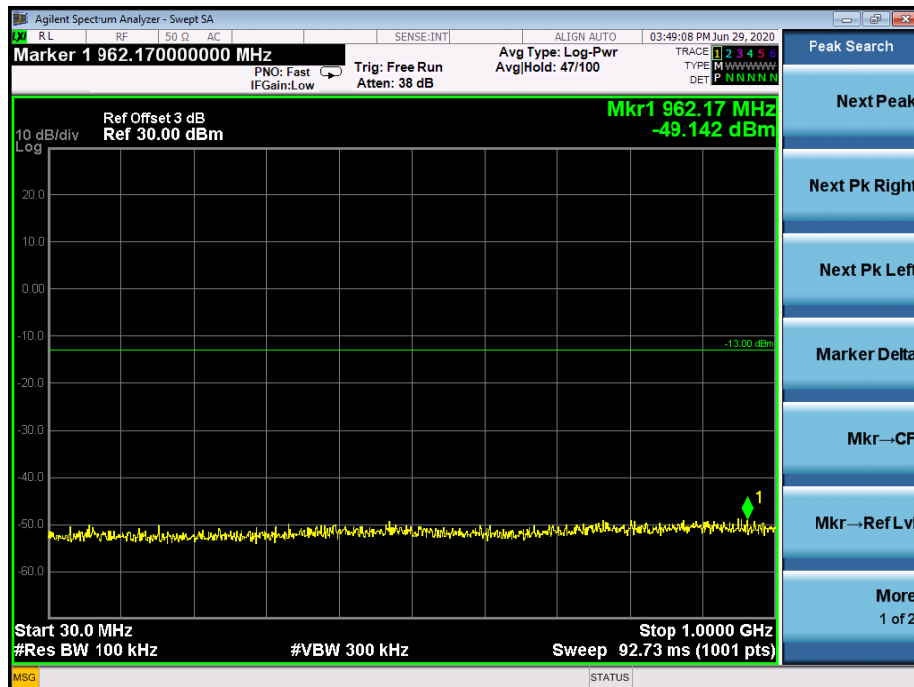


WCDMA High Channel

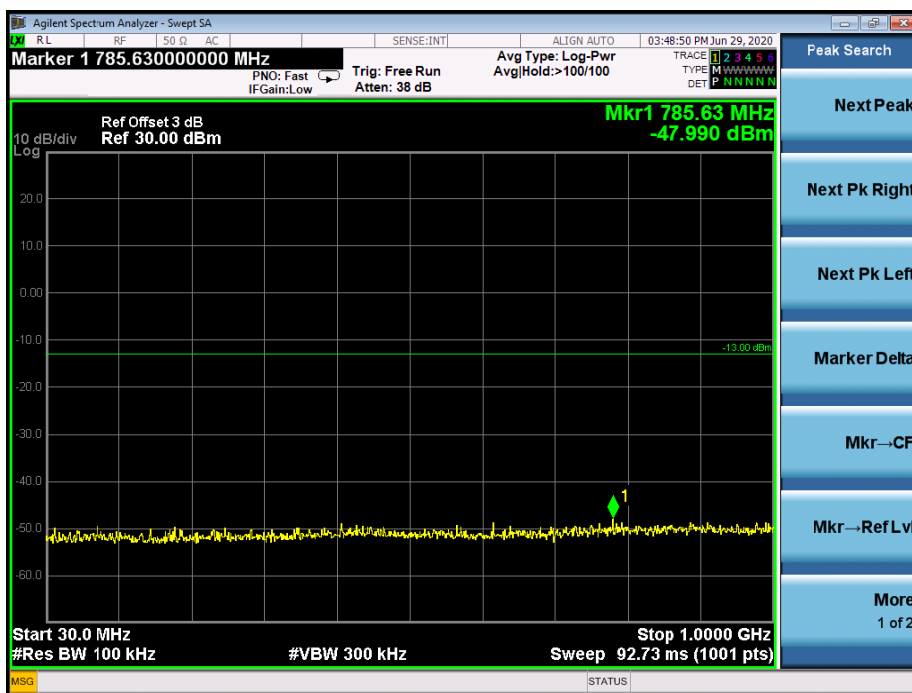


WCDMA Low Band Spurious Emission

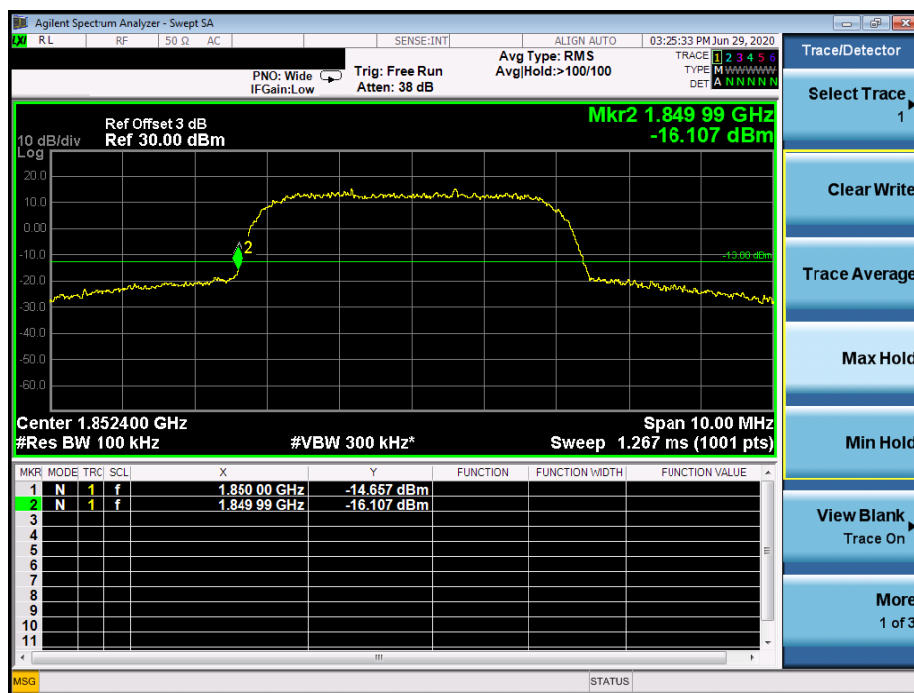


WCDMA High Band Spurious Emission

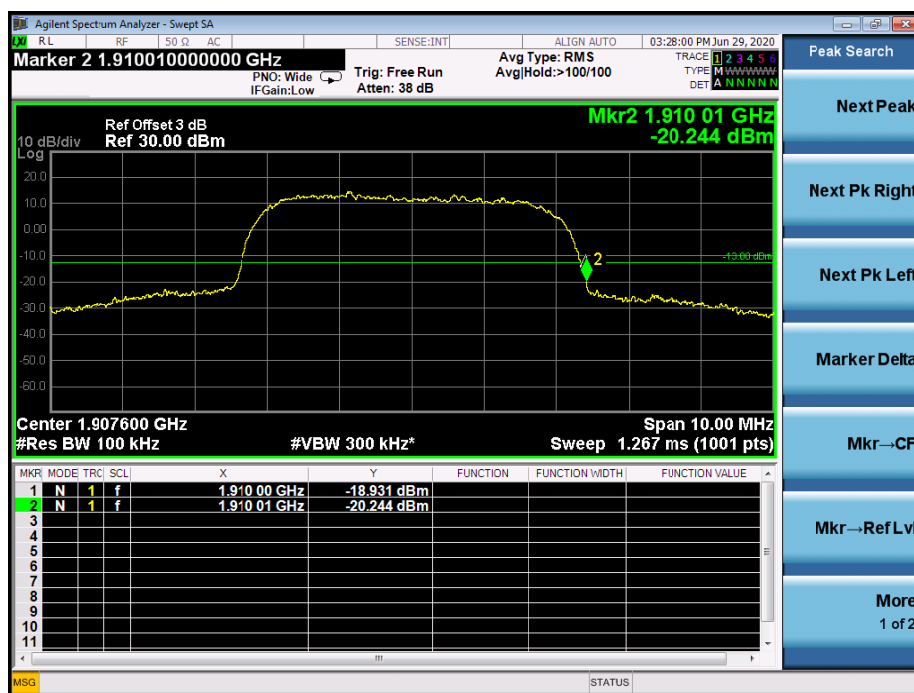


HSDPALow Channel

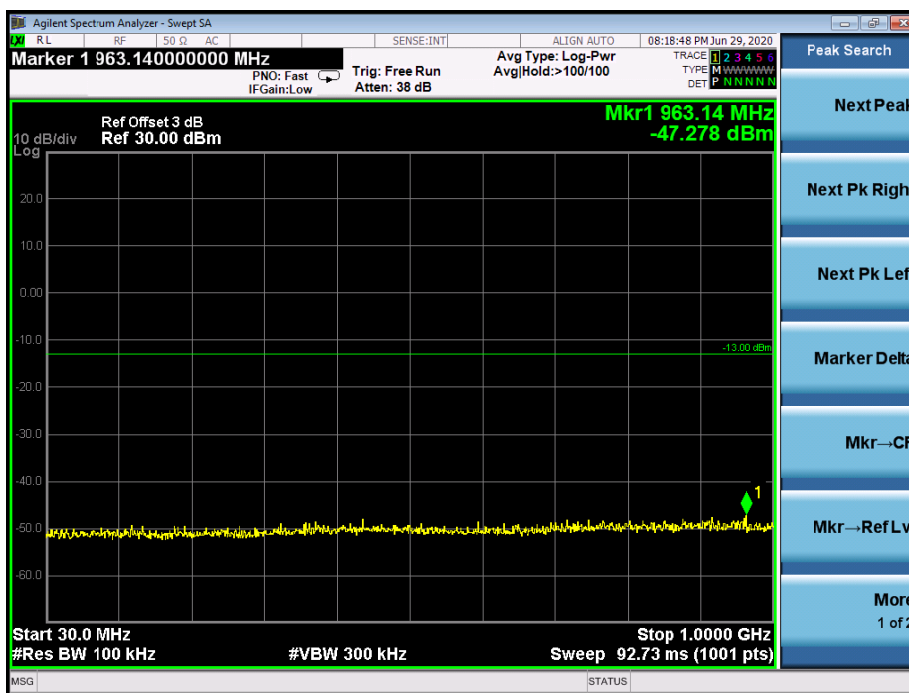


HSDPA Middle Channel

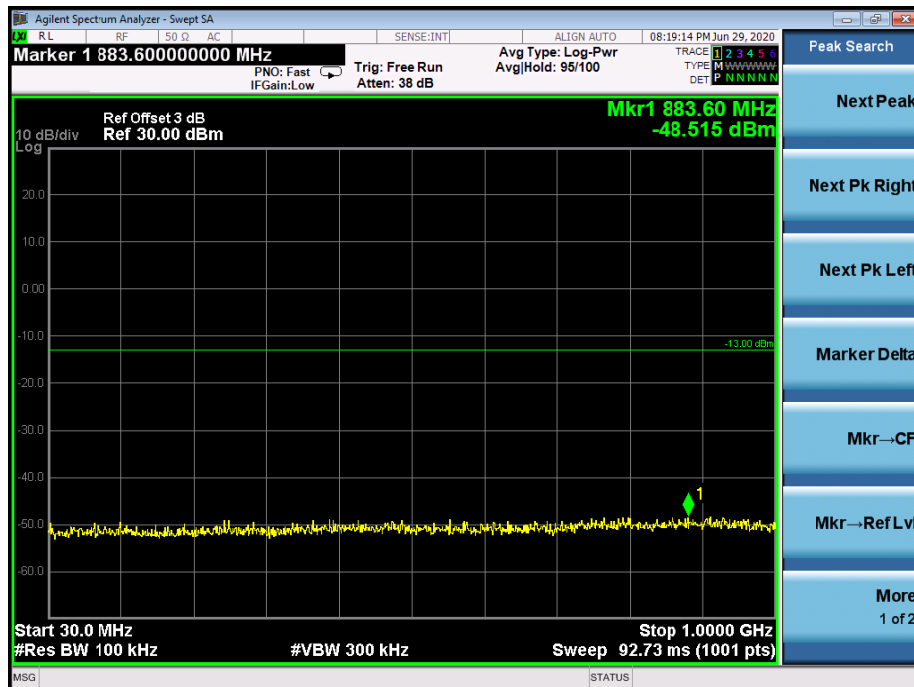


HSDPA High Channel

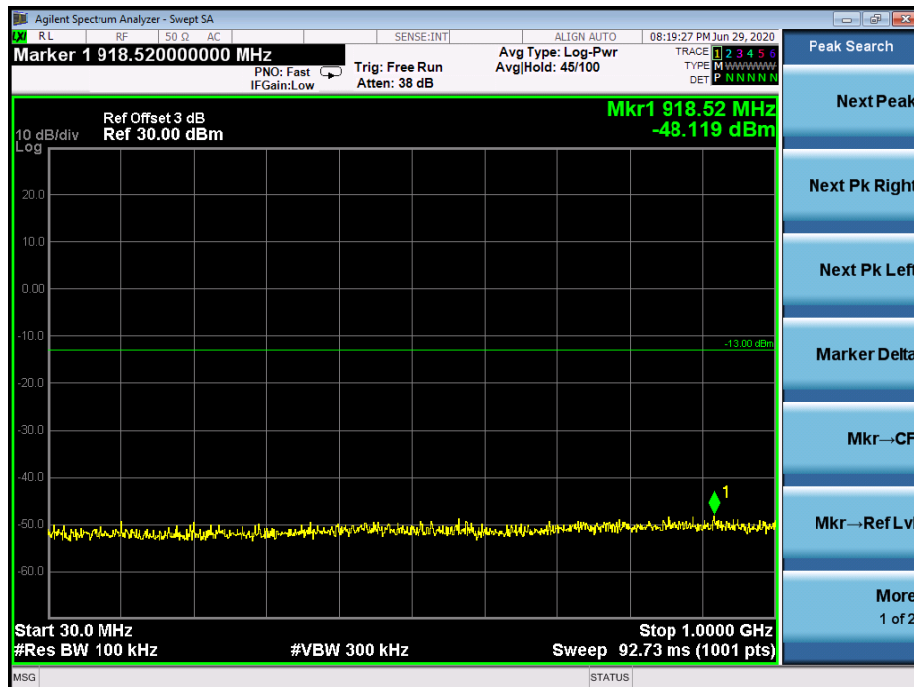


HSDPA Low Band Spurious Emission

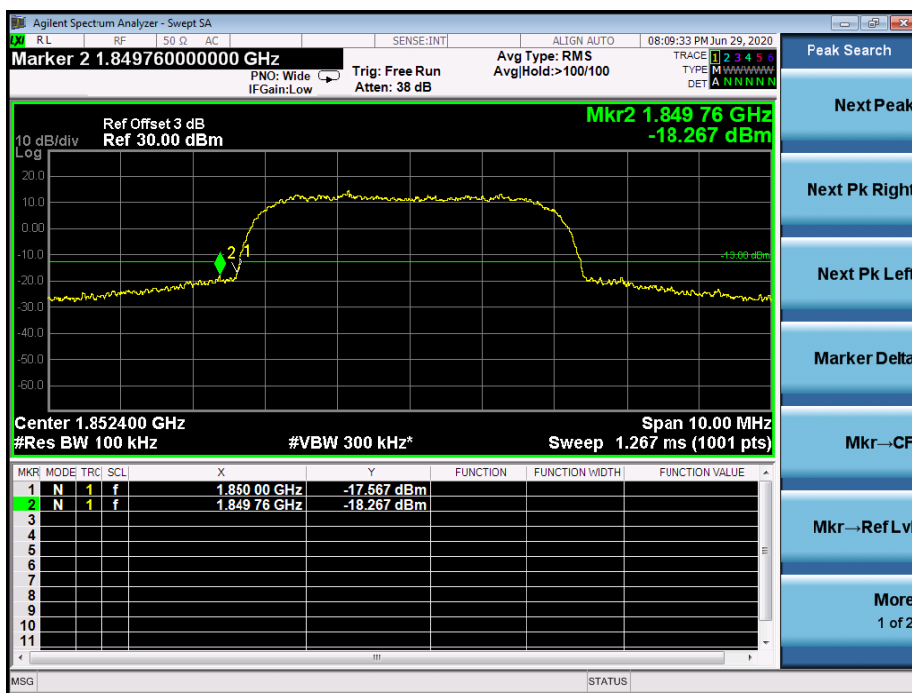


HSDPA High Band Spurious Emission

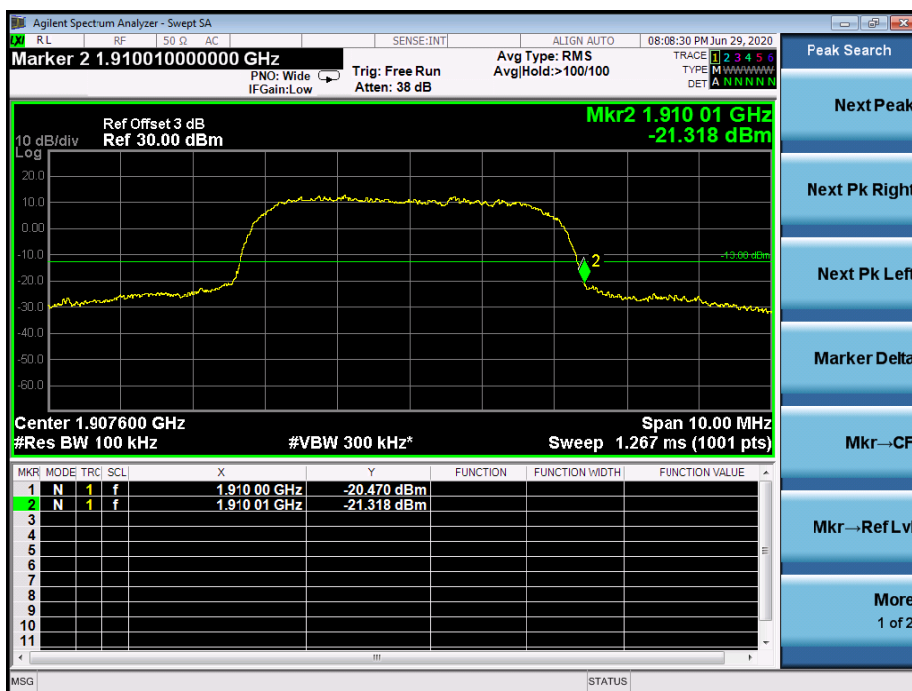


HSUPALow Channel

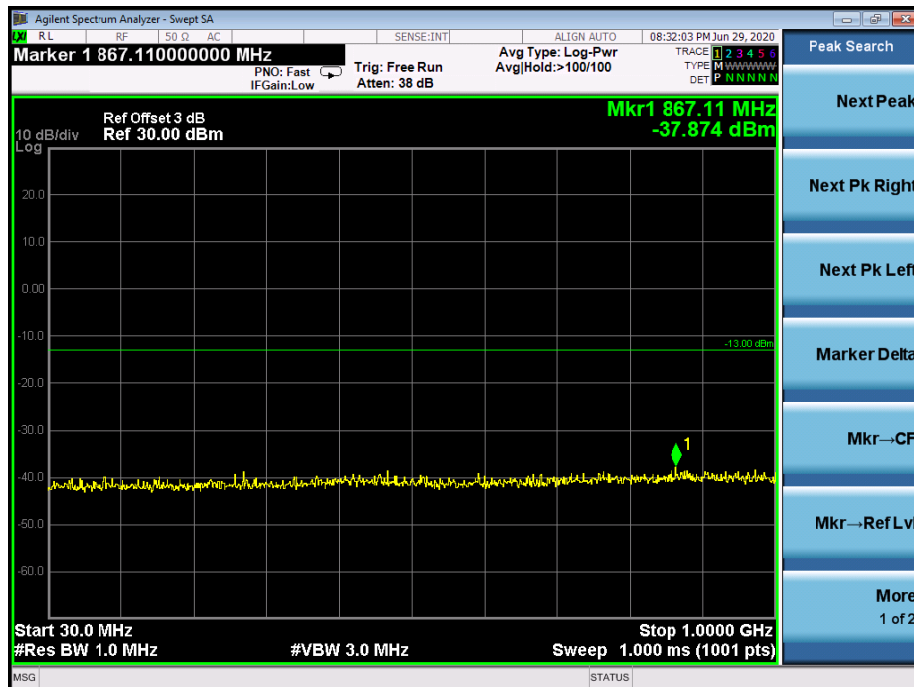


HSUPA Middle Channel

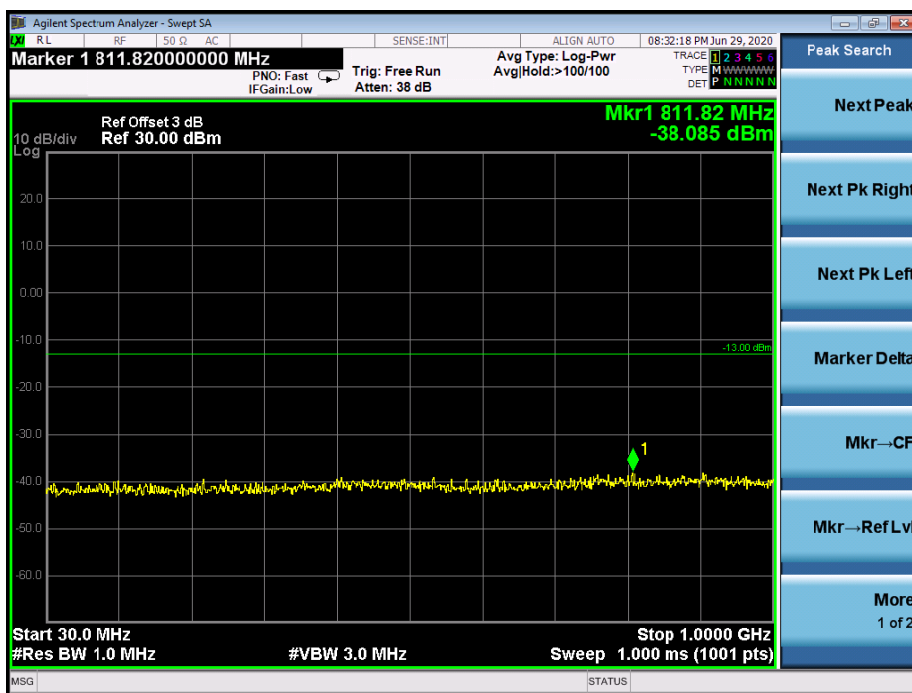


HSUPA High Channel

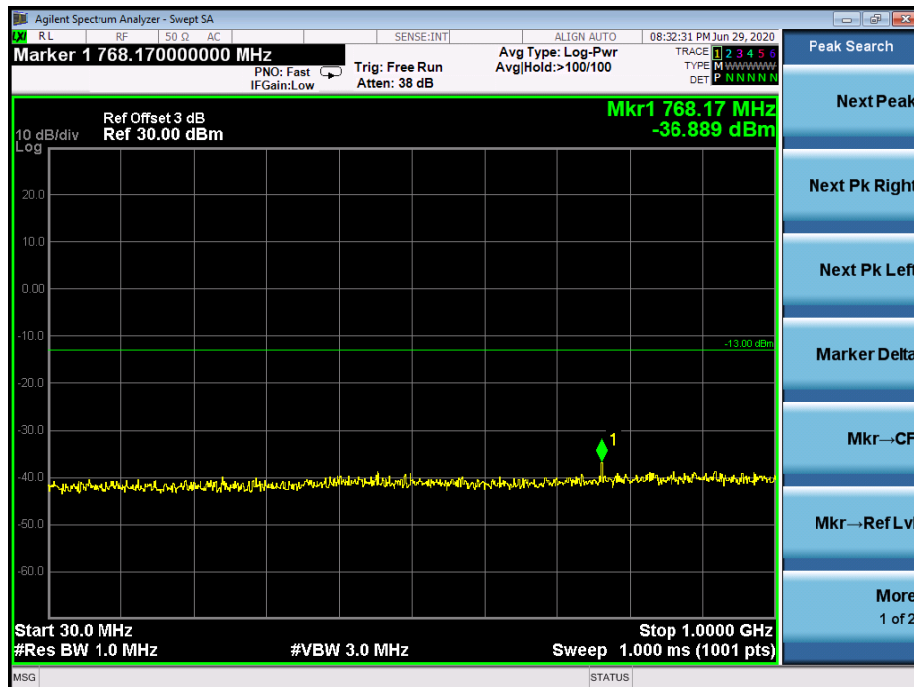

HSUPA Low Band Spurious Emission

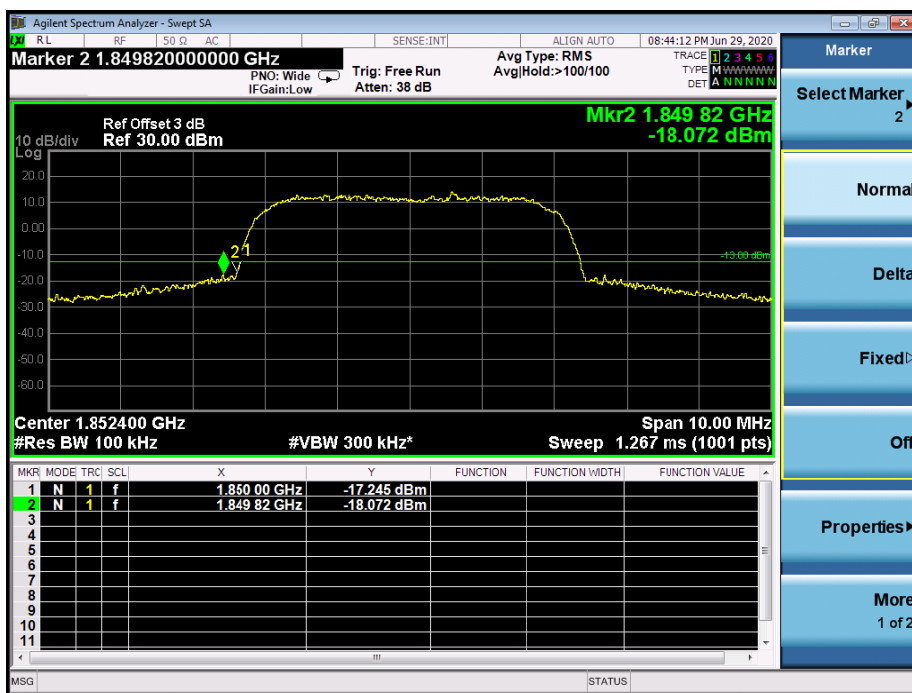

HSUPA High Band Spurious Emission

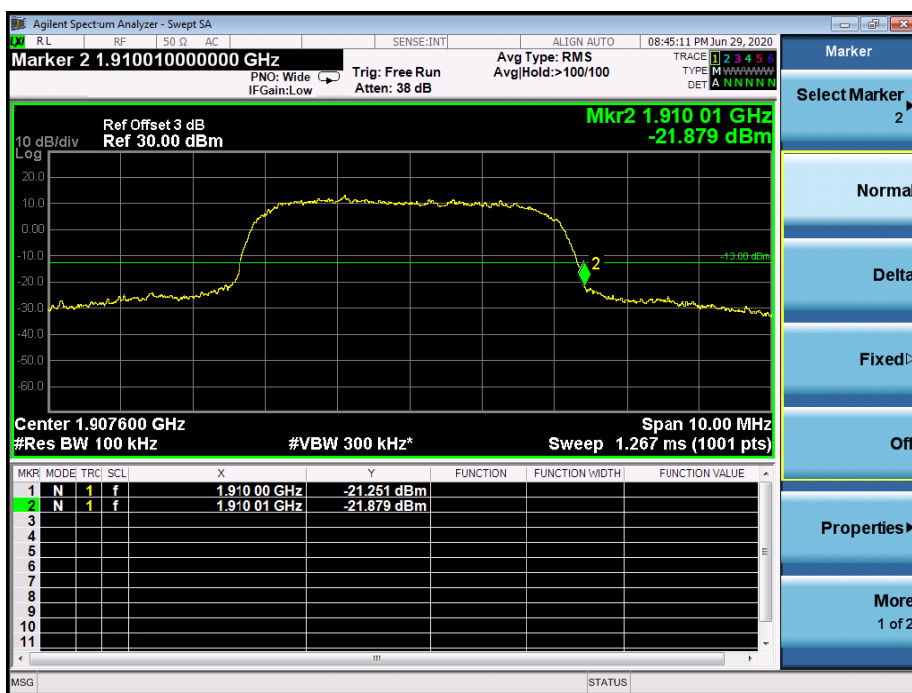

7. Spurious Radiated Emissions

7.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

7.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$

7.3 Environmental Conditions

Temperature:	26 °C
Relative Humidity:	54%
ATM Pressure:	101 kPa
Test Voltage	DC3.7V

7.4 Summary of Test Results/Plots

According to the data below, the FCC Part 22.917 and 24.238 standards, and had the worst margin of:

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

All test modes are performed, but only the worst case is recorded in this report.

For Cellular Band GSM850 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (824.2MHz)						
46.34	-69.52	4.34	-65.18	-13	-52.18	H
1648.4	-53.43	4.94	-48.49	-13	-35.49	H
2472.6	-53.23	8.46	-44.77	-13	-31.77	H
46.34	-69.17	4.34	-64.83	-13	-51.83	V
1648.4	-50.6	4.94	-45.66	-13	-32.66	V
2472.6	-50.55	8.46	-42.09	-13	-29.09	V
Middle Channel (836.6MHz)						
46.34	-68.53	4.34	-64.19	-13	-51.19	H
1673.2	-53.43	5.11	-48.32	-13	-35.32	H
2509.8	-52.67	8.54	-44.13	-13	-31.13	H
46.34	-68.66	4.34	-64.32	-13	-51.32	V
1673.2	-50.15	5.11	-45.04	-13	-32.04	V
2509.8	-50.47	8.54	-41.93	-13	-28.93	V
High Channel (848.8MHz)						
46.34	-69.23	4.34	-64.89	-13	-51.89	H
1697.6	-49.25	5.29	-43.96	-13	-30.96	H
2546.4	-51.39	8.59	-42.8	-13	-29.8	H
46.34	-69.22	4.34	-64.88	-13	-51.88	V
1697.6	-50.01	5.29	-44.72	-13	-31.72	V
2546.4	-51.82	8.59	-43.23	-13	-30.23	V

For PCS Band_GSM1900 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1850.2MHz)						
46.34	-69.26	4.34	-64.92	-13	-51.92	H
3700.4	-53.27	10.54	-42.73	-13	-29.73	H
5550.6	-55.34	13.37	-41.97	-13	-28.97	H
46.34	-68.25	4.34	-63.91	-13	-50.91	V
3700.4	-51.35	10.54	-40.81	-13	-27.81	V
5550.6	-55.35	13.37	-41.98	-13	-28.98	V
Middle Channel (1880MHz)						
46.34	-68.81	4.34	-64.47	-13	-51.47	H
3760	-52.25	10.64	-41.61	-13	-28.61	H
5640	-55.36	13.54	-41.82	-13	-28.82	H
46.34	-69.25	4.34	-64.91	-13	-51.91	V
3760	-52.53	10.64	-41.89	-13	-28.89	V
5640	-54.25	13.54	-40.71	-13	-27.71	V
High Channel (1909.8MHz)						
46.34	-69.65	4.34	-65.31	-13	-52.31	H
3819.6	-52.25	10.74	-41.51	-13	-28.51	H
5729.4	-55.56	13.71	-41.85	-13	-28.85	H
46.34	-68.35	4.34	-64.01	-13	-51.01	V
3819.6	-53.54	10.74	-42.8	-13	-29.8	V
5729.4	-55.25	13.71	-41.54	-13	-28.54	V

For Band 5 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (826.4MHz)						
46.34	-69.25	4.34	-64.91	-13	-51.91	H
1652.8	-58.51	4.94	-53.57	-13	-40.57	H
2479.2	-58.36	8.46	-49.9	-13	-36.9	H
46.34	-69.35	4.34	-65.01	-13	-52.01	V
1652.8	-57.46	4.94	-52.52	-13	-39.52	V
2479.2	-57.36	8.46	-48.9	-13	-35.9	V
Middle Channel (836.6MHz)						
46.34	-69.54	4.34	-65.2	-13	-52.2	H
1672.8	-56.62	5.11	-51.51	-13	-38.51	H
2509.2	-58.41	8.54	-49.87	-13	-36.87	H
46.34	-69.25	4.34	-64.91	-13	-51.91	V
1672.8	-57.56	5.11	-52.45	-13	-39.45	V
2509.2	-58.32	8.54	-49.78	-13	-36.78	V
High Channel (846.6MHz)						
46.34	-69.31	4.34	-64.97	-13	-51.97	H
1693.2	-58.67	5.29	-53.38	-13	-40.38	H
2539.8	-59.35	8.59	-50.76	-13	-37.76	H
46.34	-68.66	4.34	-64.32	-13	-51.32	V
1693.2	-58.25	5.29	-52.96	-13	-39.96	V
2539.8	-58.26	8.59	-49.67	-13	-36.67	V

For Band 2 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1852.4MHz)						
46.34	-69.78	4.34	-65.44	-13	-52.44	H
3704.8	-56.31	4.94	-51.37	-13	-38.37	H
5557.2	-57.32	8.46	-48.86	-13	-35.86	H
46.34	-65.54	4.34	-61.2	-13	-48.2	V
3704.8	-56.33	4.94	-51.39	-13	-38.39	V
5557.2	-56.31	8.46	-47.85	-13	-34.85	V
Middle Channel (1880MHz)						
46.34	-69.55	4.34	-65.21	-13	-52.21	H
3760.8	-56.36	5.11	-51.25	-13	-38.25	H
5640	-58.25	8.54	-49.71	-13	-36.71	H
46.34	-69.55	4.34	-65.21	-13	-52.21	V
3760.8	-57.63	5.11	-52.52	-13	-39.52	V
5640	-58.36	8.54	-49.82	-13	-36.82	V
High Channel (1907.6MHz)						
46.34	-69.26	4.34	-64.92	-13	-51.92	H
3815.2	-58.75	5.29	-53.46	-13	-40.46	H
5722.8	-59.52	8.59	-50.93	-13	-37.93	H
46.34	-68.38	4.34	-64.04	-13	-51.04	V
3815.2	-58.69	5.29	-53.4	-13	-40.4	V
5722.8	-58.54	8.59	-49.95	-13	-36.95	H

Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Frequency Stability

8.1 Standard Applicable

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Cellular Band

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	N/A	N/A
929 to 960	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

According to §27.54 The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

8.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm

is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode

8.3 Environmental Conditions

Temperature:	26°C
Relative Humidity:	54%
ATM Pressure:	101kPa

8.4 Summary of Test Results/Plots

For Cellular Band GSM Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	67	0.080
40	3.7	56	0.067
30	3.7	84	0.100
20	3.7	56	0.067
10	3.7	84	0.100
0	3.7	71	0.085
-10	3.7	81	0.097
-20	3.7	67	0.080
-30	3.7	89	0.106

For PCS Band GSM Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	75	0.040
40	3.7	56	0.030
30	3.7	58	0.031
20	3.7	83	0.044
10	3.7	85	0.045
0	3.7	62	0.033
-10	3.7	71	0.038
-20	3.7	62	0.033
-30	3.7	63	0.034

For Cellular Band GPRS Mode

Reference Frequency(Middle Channel): 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	58	0.069
40	3.7	57	0.068
30	3.7	85	0.102
20	3.7	65	0.078
10	3.7	47	0.056
0	3.7	95	0.114
-10	3.7	21	0.025
-20	3.7	68	0.081
-30	3.7	82	0.098

For PCS Band GPRS Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	58	0.031
40	3.7	64	0.034
30	3.7	85	0.045
20	3.7	39	0.021
10	3.7	57	0.030
0	3.7	37	0.020
-10	3.7	69	0.037
-20	3.7	57	0.030
-30	3.7	66	0.035

For Cellular Band EGPRS Mode

Reference Frequency(Middle Channel): 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	45	0.054
40	3.7	75	0.090
30	3.7	57	0.068
20	3.7	63	0.075
10	3.7	55	0.066
0	3.7	74	0.088
-10	3.7	62	0.074
-20	3.7	85	0.102
-30	3.7	81	0.097

For PCS Band EGPRS Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	46	0.024
40	3.7	80	0.043
30	3.7	83	0.044
20	3.7	75	0.040
10	3.7	56	0.030
0	3.7	70	0.037
-10	3.7	38	0.020
-20	3.7	76	0.040
-30	3.7	61	0.032

For WCDMA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	71	0.085
40	3.7	52	0.062
30	3.7	65	0.078
20	3.7	54	0.065
10	3.7	63	0.075
0	3.7	52	0.062
-10	3.7	81	0.097
-20	3.7	63	0.075
-30	3.7	51	0.061

For WCDMA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	62	0.033
40	3.7	78	0.041
30	3.7	36	0.019
20	3.7	25	0.013
10	3.7	74	0.039
0	3.7	38	0.020
-10	3.7	53	0.028
-20	3.7	28	0.015
-30	3.7	72	0.038

For HSDPA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	28	0.033
40	3.7	63	0.075
30	3.7	69	0.082
20	3.7	65	0.078
10	3.7	75	0.090
0	3.7	72	0.086
-10	3.7	38	0.045
-20	3.7	77	0.092
-30	3.7	27	0.032

For HSDPA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	39	0.021
40	3.7	87	0.046
30	3.7	63	0.034
20	3.7	52	0.028
10	3.7	47	0.025
0	3.7	83	0.044
-10	3.7	35	0.019
-20	3.7	82	0.044
-30	3.7	27	0.014

For HSUPA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	27	0.032
40	3.7	36	0.043
30	3.7	67	0.080
20	3.7	61	0.073
10	3.7	72	0.086
0	3.7	67	0.080
-10	3.7	59	0.071
-20	3.7	70	0.084
-30	3.7	26	0.031

For HSUPA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	83	0.044
40	3.7	73	0.039
30	3.7	36	0.019
20	3.7	59	0.031
10	3.7	81	0.043
0	3.7	91	0.048
-10	3.7	55	0.029
-20	3.7	64	0.034
-30	3.7	77	0.041

So, Frequency Stability Versus Input Voltage is:

Reference Frequency(Middle Channel): GSM 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	4.07	75	0.090
	3.7	86	0.103
	3.33	77	0.092
Reference Frequency(Middle Channel): GSM 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	4.07	62	0.033
	3.7	74	0.039
	3.33	64	0.034
Reference Frequency(Middle Channel): GPRS 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	4.07	82	0.098
	3.7	87	0.104
	3.33	62	0.074
Reference Frequency(Middle Channel): GPRS 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	4.07	75	0.040
	3.7	87	0.046
	3.33	73	0.039

Reference Frequency(Middle Channel): EGPRS 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	4.07	86	0.103
	3.7	84	0.100
	3.33	66	0.079
Reference Frequency(Middle Channel): EGPRS 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	4.07	76	0.040
	3.7	85	0.045
	3.33	73	0.039

Reference Frequency(Middle Channel): WCDMA 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	4.07	64	0.077
	3.7	93	0.111
	3.33	72	0.086
Reference Frequency(Middle Channel): WCDMA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	4.07	63	0.034
	3.7	75	0.040
	3.33	59	0.031
Reference Frequency(Middle Channel): HSDPA 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	4.07	46	0.055
	3.7	57	0.068
	3.33	53	0.063
Reference Frequency(Middle Channel): HSDPA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	4.07	63	0.034
	3.7	74	0.039
	3.33	55	0.029
Reference Frequency(Middle Channel): HSUPA 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	4.07	57	0.068
	3.7	83	0.099
	3.33	65	0.078

Reference Frequency(Middle Channel): HSUPA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	4.07	56	0.030
	3.7	77	0.041
	3.33	63	0.034

9. EUT PHOTO

EUT Photo 1




EUT Photo 2



10. EUT TEST PHOTO

Radiated Measurement Photos

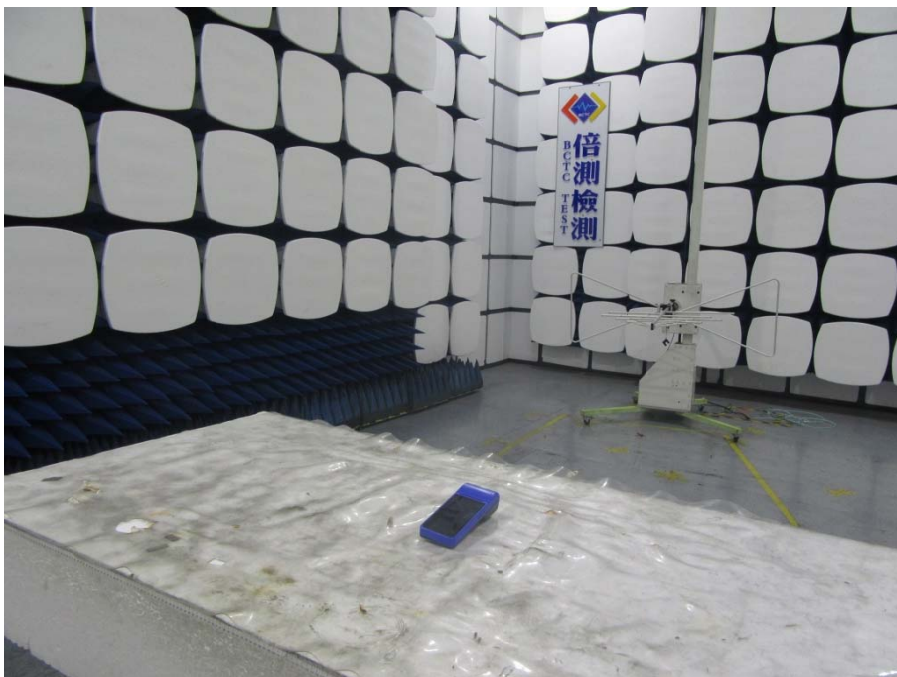

***** END OF REPORT *****